EN

General Catalogue

50 YEARS 1967•2017

METAL WORK® PNEUMATIC

*"We work together for a purpose.
There's nothing that can't be done better
today than yesterday."*
Erminio Bonatti

A worldwide company

Metal Work was founded in 1967 and produced push-in fittings for compressed air systems. Since then the company has gradually extended its structure and production range to become a market leader in pneumatic fittings for automation systems.

The main production plant in Concesio, near Brescia, now has a total workforce of over 500. The Italian and worldwide sales network has a further 800 employees.

Product distribution and technical assistance are entrusted to more than 50 Italian and worldwide branches that offer an extensive pre and after sales service. Product quality and an efficient commercial organisation are the basis of the Metal Work model. These qualities enable the company to meet all possible requirements in terms of pneumatic automation.

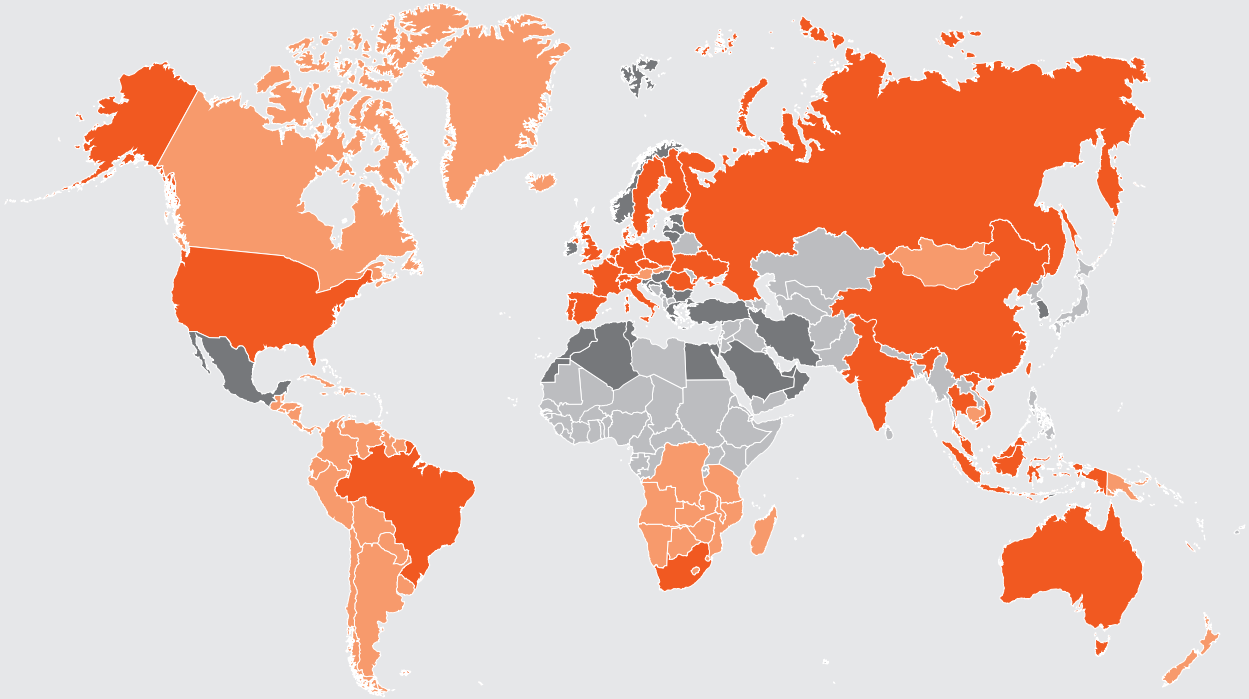

Subsidiaries
Commercial Areas
Dealers

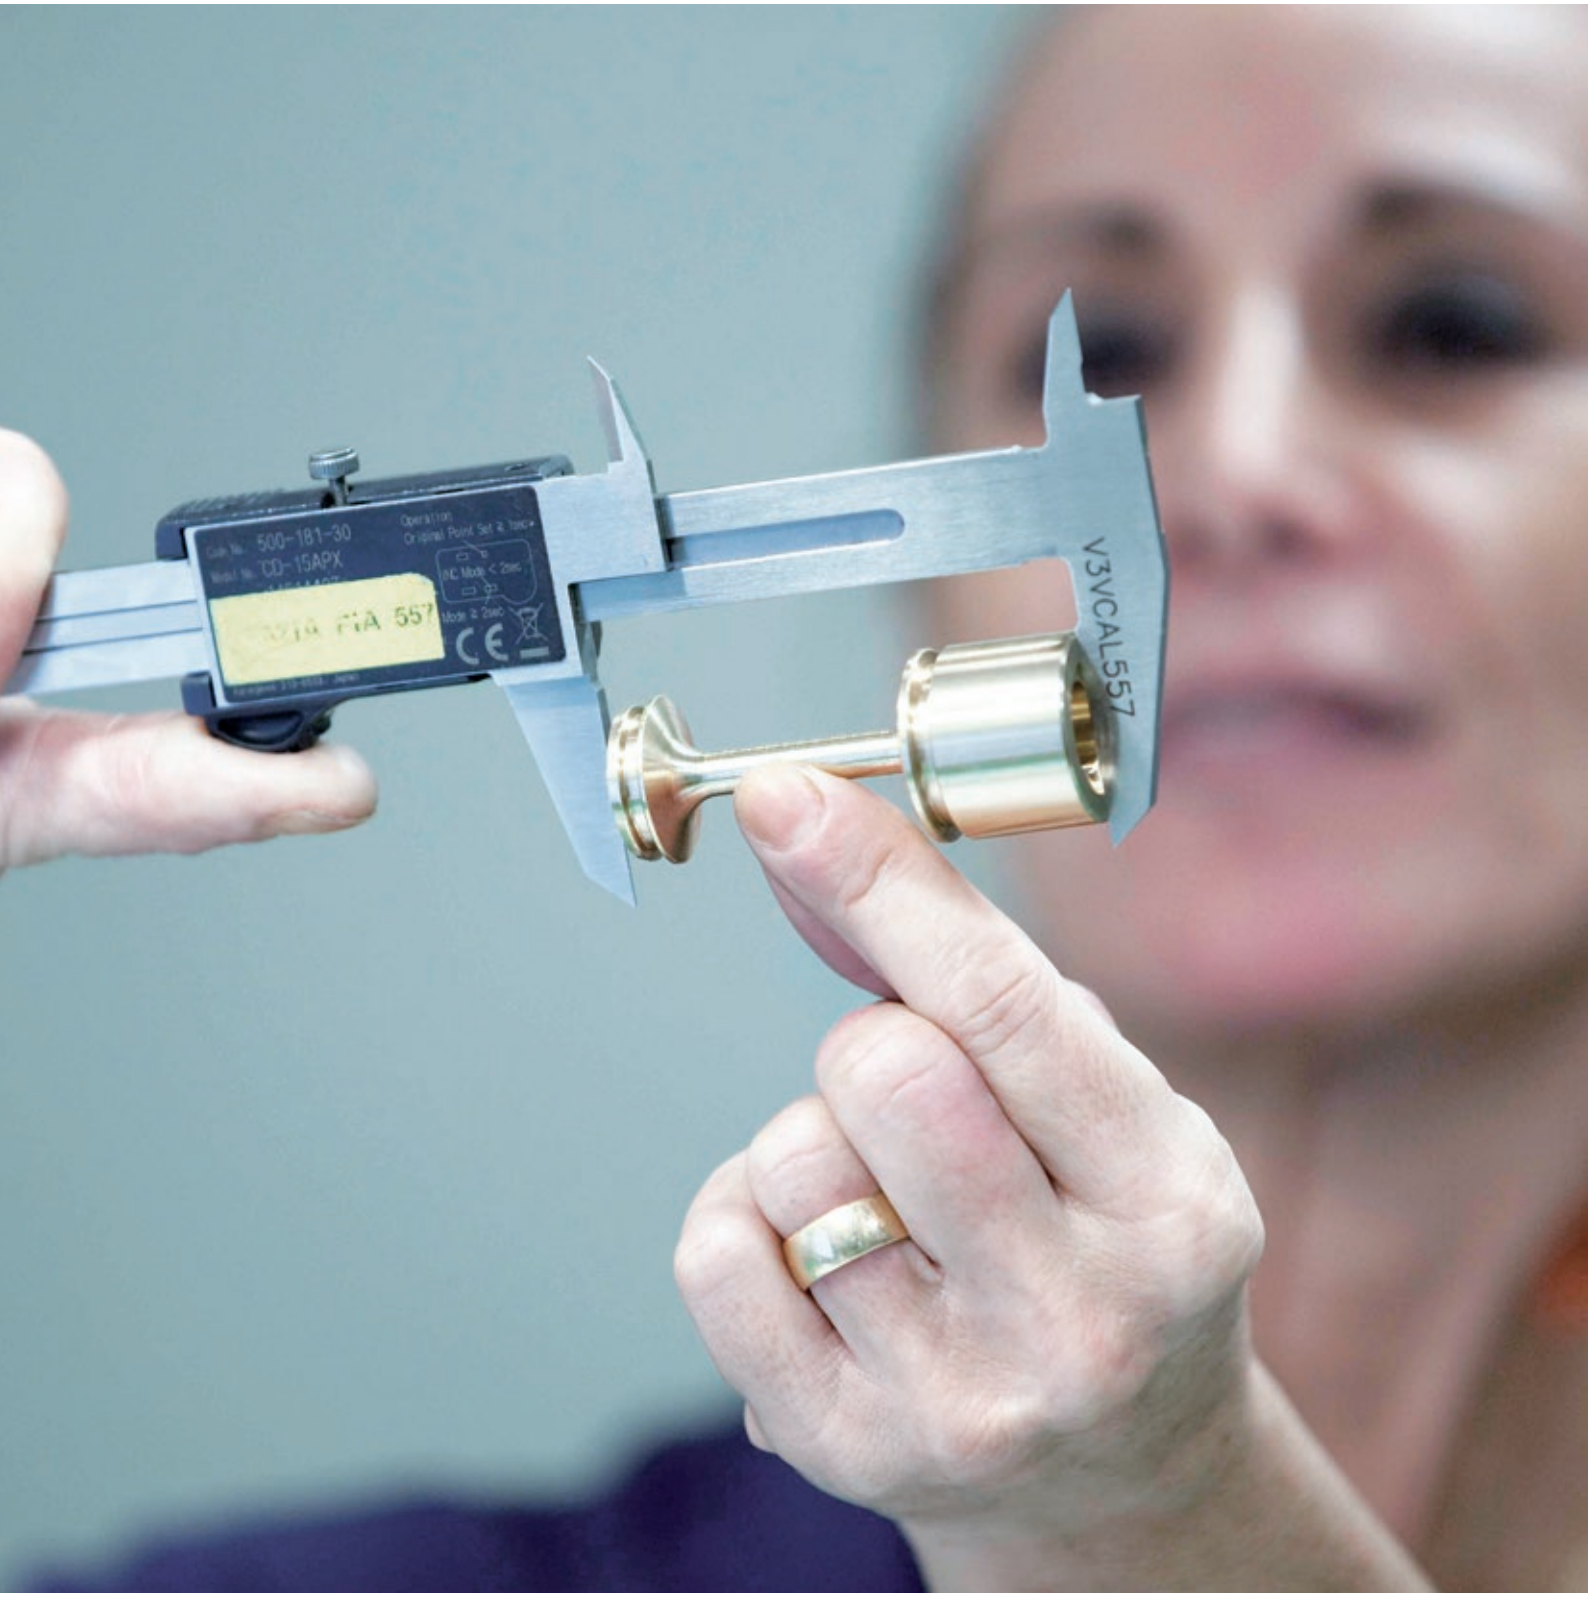
500-181-30
CD-15APX
V3VCAL557

Design, produce and distribute quality

Metal Work is a vertically integrated company. This model controls the entire production cycle, from process to product engineering in a constant search for perfection. Almost the entire range is made internally starting from the choice of raw materials to final assembly. This reduces waste and shortens lead times. A critical analysis of production and testing data is carried out which brings continuous improvements to the product and the production process. "Company Wide Quality Control" is established in the company as a guarantee of continuous improvement.

Total quality

Metal Work has been ISO 9001 certified since 1992, along with ISO 14001 certification in 2000 and OHSAS 1800 certification in 2007, the moving to ISO 45001 in 2019. These awards confirm a total quality philosophy and not just for the product. An example is the attention given to energy saving starting from the design phase.The electric power needed to operate our valves has decreased in recent years by 75 percent. The certifications are not just for the parent company but are extended to all Group companies, spreading
our philosophy worldwide. All products comply with the main regulations, particularly those of the European community, such as the EMC certificate for electromagnetic compatibility. Metal Work specialists are actively involved in the ISO, UNI, ASSOFLUID committees because they are always a customer guarantee of quality.

Close to the customer

Metal Work's strength lies not only in the product but in service and assistance which provides customer solutions that are suitable for every need, while meeting deadline and quality standards. The sales technicians of Metal Work Group are the client's trusted advisors: they help him solve every kind of problem, be it technical, material retrieval or information. Metal Work also dedicates attention and resources to customer training.

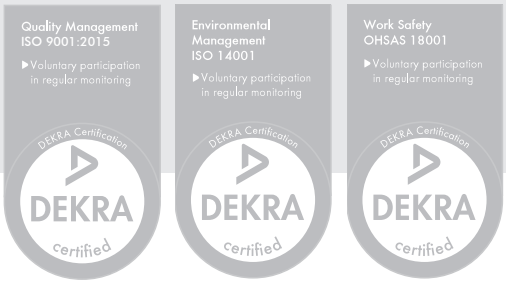

Metal Work in Italy

Headquarter: Via Segni, 5/7/9 - 25062 Concesio (BS) - Italy
Local unit Warehouse and Shipping: Via Borsellino, 25/27/29 - 25062 Concesio (BS) - Italy
Tel. 030 218711 - metalwork@metalwork.it - metalwork.it

METAL WORK SERVICE

BARI
Metal Work Service S.r.l.
Via S. Magno km 0,400
(zona industriale)
70033 Corato BA
Tel. 080 898 73 94 r.a.
info.ba@metalworkservice.com
metalworkservice.com/bari
Basilicata, Calabria, Molise, Puglia, Sicilia

BERGAMO
Metal Work Service S.r.l.
Via Vienna, 28
Loc. Verdellino Zingonia
24040 Verdellino BG
Tel. 035 88 53 79
info.bg@metalworkservice.com
metalworkservice.com/bergamo
Bergamo

BOLOGNA
Metal Work Service S.r.l.
Via del Fresatore, 7
40138 Bologna BO
Tel. 051 70 27 11
info.bo@metalworkservice.com
metalworkservice.com/bologna
Bologna, Ferrara, Ravenna

BRESCIA
Metal Work Service S.r.l.
Via del Mella, 37 - Z.I. Fornaci
25131 Brescia BS
Tel. 030 35 855 r.a.
info.bs@metalworkservice.com
metalworkservice.com/brescia
Brescia

CREMONA
Metal Work Service S.r.l.
Via Sesto, 62
26100 Cremona CR
Tel. 0372 27 64 8
info.cr@metalworkservice.com
metalworkservice.com/cremona
Cremona, Piacenza

LECCO
Metal Work Service S.r.l.
Via per Dolzago, 39
23848 Oggiono LC
Tel. 0341 26 67 11
info.lc@metalworkservice.com
metalworkservice.com/lecco
Como, Lecco, Sondrio

FILIALE DI VARESE
Via Gasparoli, 197
21012 Cassano Magnago VA
Tel. 0331 28 09 20
info.va@metalworkservice.com
metalworkservice.com/lecco
Varese

MANTOVA
Metal Work Service S.r.l.
Viale d/Libertà, 9
46051 San Giorgio
Bigarello MN
Tel. 0376 37 41 81
info.mn@metalworkservice.com
metalworkservice.com/mantova
Mantova

MODENA
Metal Work Service S.r.l.
Via S. Giovanni Bosco, 267
41122 Modena MO
Tel. 059 23 98 06
info.mo@metalworkservice.com
metalworkservice.com/modena
Modena

MONZA BRIANZA
Metal Work Service S.r.l.
Via Altiero Spinelli, 57
20862 Arcore MB
Tel. 039 61 80 056
info.mi@metalworkservice.com
metalworkservice.com/brianza
Lodi, Milano, Monza-Brianza

NOVARA
Metal Work Service S.r.l.
Piazzale A. Antonelli, 8
28060 S. Pietro Mosezzo
Fr. Nibbia NO
Tel. 0321 43 79 86
info.no@metalworkservice.com
metalworkservice.com/novara
Biella, Novara, Pavia, Verbano-Cusio, Vercelli

PARMA
Metal Work Service S.r.l.
P.za Lunardi 27/A
43100 Parma PR
Tel. 0521 24 09 64
info.pr@metalworkservice.com
metalworkservice.com/parma
Parma, Reggio Emilia

PRATO
Metal Work Service S.r.l.
Via O. Vannucchi, 17/10
59100 Prato PO
Tel. 0574 757298
info.po@metalworkservice.com
metalworkservice.com/prato
Toscana, Umbria

RIMINI
Metal Work Service S.r.l.
Via Piane, 23/A
47853 Coriano RN
Tel. 0541 65 87 15
info.rn@metalworkservice.com
metalworkservice.com/rimini
Ascoli Piceno, Cesena, Fermo, Forlì, Pesaro, Rimini, Urbino

Abruzzo

TORINO
Metal Work Service S.r.l.
Via Bruino, 22/2
10040 Rivalta di Torino TO
Tel. 011 90 32 666
metalwto@metalworkservice.com
metalworkservice.com/torino
Alessandria, Asti, Cuneo, Torino,

Liguria, Sardegna, Valle d'Aosta

TREVISO
Metal Work Service S.r.l.
Via P. A. Gemelli, 34/d
31038 Postioma di Paese TV
Tel. 0422 48 45 78 r.a.
info.tv@metalworkservice.com
metalworkservice.com/treviso
Belluno, Treviso, Venezia

Friuli Venezia Giulia

VERONA
Metal Work Service S.r.l.
Via Evangelista Torricelli, 71/a
37136 Verona VR
Tel. 045 50 31 23
info.vr@metalworkservice.com
metalworkservice.com/verona
Verona, Trentino Alto Adige

VICENZA
Metal Work Service S.r.l.
Via Progresso, 70
36035 Marano Vicentino VI
Tel. 0445 56 05 90
info.vi@metalworkservice.com
metalworkservice.com/vicenza
Padova, Rovigo, Vicenza

Authorized Dealers

North

PADOVA
ATI Compressori S.r.l.
Via Padre Nicolini, 23
35013 Cittadella PD
Tel. 049 9401777
info@aticompressori.it
aticompressori.it
Padova

Centre

FROSINONE
R.C.A. S.r.l.
Via San Giovanni Battista, 22
03037 Pontecorvo FR
Tel. 0775 29 23 17
info@rcafrosinone.it
rcafrosinone.it
Frosinone

LATINA
Atilsystem S.r.l.
Via Pantanaccio, 76
04100 Latina LT
Tel. 0773 48 80 08
info@atilsystem.com
atilsystem.com
Latina, Rieti, Roma, Viterbo

MACERATA
Torresi Raffaele & C S.r.l.
Via Sandro Pertini, 51
62012 Civitanova Marche MC
Tel. 0733 80 11 20
info@torresiraffaele.it
torresiraffaele.it
Ancona, Macerata

South

AVELLINO
A.R.A. S.a.s.
di C. Argenziano & C.
Via Appia, 123/125
83042 Atripalda AV
Tel. 0825 62 56 03
info@araforniture.it
araforniture.it
Avellino, Benevento

NAPOLI
Oleodinamica e Pneumatica
Ardolino S.r.l.
Via M.le Manfredi, 24
80039 Saviano NA
Tel. 081 82 11 468
opardolino@gmail.com
Napoli (provincia)

R.C.P. Service S.r.l.
Via Nuova delle brecce, 176
80147 Napoli NA
Tel. 081 75 24 238
info@rcpservicesrl.it
rcpservicesrl.it
Caserta, Napoli (città), Salerno

Metal Work worldwide

Europe

BELGIUM
Metal Work België/Belgique
Mechelsesteenweg 277
B-1800 Vilvoorde - Belgium
Tel. 0032 02 75 16 120
metalwork@metalwork.be
metalwork.be

CZECH REPUBLIC
Metal Work Pneumatic CZ, s.r.o.
Průmyslový park 312
742 21 Kopřivnice - Vlčovice
Czech Republic
Tel. 420 596 748 577
info@metalwork.cz
metalwork.cz

DENMARK
Metal Work Danmark A/S
Korskildelund 1
2670 Greve - Denmark
Tel. 0045 70 22 23 11
metalwork@metalwork.dk
metalwork.dk

FINLAND
Metal Work Finland OY
Puurtajankatu 15A
04440 Järvenpää - Finland
Tel. 00358 10 836 5700
metalwork@metalwork.fi
metalwork.fi

FRANCE
Metal Work France SAS
Parc d'Activités de l'Esplanade
14 Rue Enrico Fermi
77400 Saint Thibault des Vignas - France
Tel. 0033 01 60 94 00 00
info@metalwork.fr
metalwork.fr

GERMANY
Metal Work Deutschland GmbH
GERMAN OFFICE
Rankinestraße 2
D-86899 Landsberg am Lech
Germany
Tel. 0049 08191 42894-0
metalwork@metalwork.de
metalwork.de
AUSTRIAN OFFICE
A-4010 Linz
Tel. 0043 732 991731
metalwork@metalwork.at

HOLLAND
Metal Work Nederland B.V.
Postbus 90 - 6710 BB EDE
Voltastraat 9 - 6716 AJ EDE
Holland
Tel. 0031 0318 66 51 11
metalwork@metalwork.nl
metalwork.nl

POLAND
Metal Work Polska Sp. z o.o.
ul. Szamotulska 1, Baranowo
62-081 - Przezmierowo
Poland
Tel. 0048 61 65 01 840
metalwork@metalwork.pl
metalwork.pl

PORTUGAL
Metal Work Portugal Lda
Estrada Nacional, 1
P.C. Emiauto Pav-D Sobreiro
Torio 3850 -184
Albergariaa Velha - Portugal
Tel. 00351 23 45 25 425
metalwork.eu

ROMANIA
Metal Work Pneumatic S.r.l.
Str. Copenhaga, Nr.1,
Moşniţa Nouă, Timiş, 307285
Romania
Tel. 0040 374 62 22 60
Fax 0040 374 09 15 47
metalwork@metalworkpneumatic.ro
metalworkpneumatic.ro

RUSSIA
OOO Metal Work Pneumatic
121354, Moscow,
Dorogobuzhskaya str., 14 build. 6 - Russia
Tel. 007 499 558 10 40
007 499 995 12 19
info@metalworkpneumatic.ru
metalworkpneumatic.ru

SPAIN
Metal Work Iberica S.A.
Pol. Ind. Can Magí
c/Can Magí, 9
08210 Barbera del Valles
(Barcelona) - Spain
Tel. 0034 937 180 244
metalwork@metalwork.es
metalwork.es

SWEDEN
Metal Work Sverige AB
Modemgatan, 7
235 39 Vellinge - Sweden
Tel. 0046 040 42 07 00
metalwork@metalwork.se
metalwork.se

SWITZERLAND
Metal Work Pneumatik GmbH
Technoramastrasse 15
8404 Winterthur - Switzerland
Tel. 0041 052 369 40 40
metalwork@metalwork.ch
metalwork.ch

UK
Metal Work Pneumatic UK Ltd
Featherstone House,
Featherstone Road
Wolverton Mill South
Milton Keynes - MK12 5TH
Uk
Tel. 0044 01908 22 22 88
sales@metalwork.co.uk
metalwork.co.uk

UKRAINE
Metal Work Ukraine TOV
54-B, Chornovola str.,
Sofiivska Borschagivka
Kiev region, 08131- Ukraine
Tel. 00380 44 502 95 71
metalwork@metalwork.ua
metalwork.ua

Africa

SOUTH AFRICA
Metal Work Pneumatic South Africa (Pty) Ltd
Unit 15, Heron Park - 80
Corobrick Road Riverhorse Valley
(East) - Durban - Kwa-Zulu Natal
4017 - South Africa
Tel. 0027 (0) 64 9004900
metalwork@metalworkpneumatic.co.za
metalworkpneumatic.co.za

Americas

BRAZIL
Metal Work Pneumática do Brasil Ltda
Rua Otacílio Jacinto Homem,
415 CEP 93120-590
São Leopoldo - RS - Brazil
Tel. 0055 51 3590 7100
metalwork@metalwork.com.br
metalwork.com.br

USA
Metal Work Pneumatic USA, Inc.
1120 Eden Road, Suite 106
Arlington, TX 76001 - USA
Tel. 001 817 701 4000
metalwork@metalwork.org
metalwork.org

Asia/ Oceania

AUSTRALIA
Metal Work Pneumatic AUSTRALIA Pty Limited
P.O. Box 4209
Dandenong South VIC 3164
93-97 Remington Drive
Dandenong South VIC 3175
Australia
Tel. 0061 03 97 06 67 18
vicsales@metalwork.com.au
metalwork.com.au

CHINA
Metal Work Pneumatic Components (Shanghai) Co., Ltd.
Building 15, No.198,
Chang Jian Road,
200949 - Bao Shan District,
Shanghai - China
Tel. 0086 21 36043088
info@metalworkchina.cn
metalworkchina.cn

INDIA
Metal Work Pneumatic India Private Limited
No. 18-20, 1St Cross,
Bilekahalli Industrial Area
Adj. IIMB Compound, - India
Bannerghatta Road
Bangalore - 560 076
Tel. 0091 80 26480076
sales@metalwork.in
metalwork.in

INDONESIA
PT. Metal Work Pneumatic (INDONESIA)
The Icon Horizon Broadway
M2 No.5
Bumi Serpong Damai,
Tangerang 15345 - Indonesia
Tel. 0062 21 55691440
sales.admin@metalwork.id
metalwork.id

MALAYSIA
Metal Work Pneumatic (Malaysia) Sdn. Bhd. (439984-V)
21, Jalan Permata 9A/KS09,
Taman Perindustrian Air Hitam,
41200 Klang,
Selangor Darul Ehsan
Malaysia
Tel. 0060 03 3081 5666
Mob. 0060 016 6656 872
metalwork@metalwork.my
metalwork.my

SINGAPORE
Metal Work Pneumatic Pte. Ltd.
11 Lorong 3, Toa Payoh,
Block D, Jackson Square, #01-41,
Room 2, Singapore 319579
Tel. 0065 8823 2338
keithlim@metalwork.sg
metalwork.sg

THAILAND
Metal Work Pneumatic (Thailand) Co. Ltd
55/289 Moo.3, 345 Road,
Lumpo, Bangbuathong,
Nonthaburi 11110
Thailand
Tel. 00662 961 7000
metalwork@metalwork.co.th
metalwork.co.th

VIETNAM
Metal Work Pneumatic Vietnam Company Limited
SH-73 of Centa City Project
VSIP Bac Ninh Urban and
Service Area
(land plot 186, map sheet 83),
Tu Son Ward, Bac Ninh
Province - Vietnam
Tel. 0084 222 3636028
metalwork@metalworkpneumatic.vn
metalworkpneumatic.vn

Authorized Dealers

Europe

BULGARIA
Ka Matic Ltd.
9N Kuklensko shose
4004 Plovdiv - Bulgaria
Tel. 00359 32 677 772
info@kamatic.com
kamatic.com

CYPRUS
Andrew Chr. - Demetriades Ltd.
Corner Aiakos Nemeseos ST
Pollouriotissa
1620 Nicosia - Cyprus
Tel. 00357 22 43 14 50
a.c.demetriades@cablenet.com.cy

GREECE
AIRBLOCK HELLAS S.A.
Sindos Industrial Zone,
Block 56C,
P.C. 57022, Thessaloniki,
Greece
Tel: 0030 23 10 72 25 55
info@airblock.gr
airblock.gr

Unitair Ltd
20, Sp. Patsi Str.
10447 - Votanikos
El-099013125 Athens
Greece
Tel. 0030 21 03 41 65 62
supplies@unitair.gr
unitair.gr

HUNGARY
ENTRA-SYS Kft.
Fonógyári út 2.
H-6728, Szeged - Hungary
Tel. 0036 62 468 478
entra-sys@entra-sys.hu
www.entra-sys.hu

IRELAND
Pneumatics Ltd
Old Naas Road - Bluebell
Dublin 12 - Ireland
Tel. 0035 31 45 68 111
sales@flomax.ie
flomax.ie

NORWAY
Servi AS
P.O. Box 3230
1402 Ski - Norway
Tel. 0047 64 97 97 97
post@pmcservi.no
servi.no

REPUBLIC OF MACEDONIA
DEVIT TECH Skopje
ul. MANAPO br. 2/118
1000 Skopje
Republic of Macedonia
Tel.: 00389 2 3091 660
devit@devit.com.mk

SERBIA
Shift d.o.o.
Mileševska 52/5
11000 Beograd - Serbia
Tel. 00381 11 3961 195
shift@shift.rs - office@shift.rs
shift.rs

SLOVENIA AND CROATIA
Tio Pnevmatika d.o.o.
Alpska cesta 43
4248 Lesce - Slovenia
Tel. 00386 4 537 09 20
info@tio-pnevmatika.si
tio-pnevmatika.si

TURKEY
HPA Teknoloji Geliştirme Ltd.Şti.
10040 Sokak No: 4
Yeni Parseller İ.A.O.S.B Çiğli İzmir
Turkey
Tel. 0090 232 328 19 21
info@hpa.com.tr
hpa.com.tr

Africa

EGYPT
Hydrotech S.A.E
25 Taha Hussen Rd.
New Nozha (Cairo) - Egypt
Tel. 0020 26 200 414
info@hydrotechegypt.com
hydrotechegypt.com

MOROCCO
Sofimed S.a.r.l.
137, Boulevard Moulay Ismail
20290 Casablanca - Morocco
Tel. 00212 (0) 522 240 101
contact@sofimedmaroc.com
sofimedmaroc.com

TUNISIA
C2A Industriels S.a.r.l.
05 Street Arbi Zarrouk
Megrine - 2033 (Ben Arous)
Tel: 0021 6 31 402 447
contact@c2a-tn.com

Americas

MESSICO
Herzager Pneumatics S.A. de C.V.
Creta edif. 2, Col. Hab Rosario Ceylan
Tlalnepantla de Baz - 54092
Messico
Tel. 0052 55 628 583 93
ventas@herzager.com
herzager.com

Asia/ Oceania

IRAN
Era Feat Sanaat Qeshm Trading Co
Flat 3 - Building 1
Southern Iranshahr Ave.
P.O. BOX 17445-4
Tehran - Iran
Tel. 00982 1 88140957-9
info@erafeatco.com
erafeatco.com

ISRAEL
R.e.p. Automation Ltd
Haamelim St, 2
2611002 - HAIFA BAY
Israel
Tel. 00972 48403012
rep@repac.co.il
repac.co.il

KINGDOM OF SAUDI ARABIA
Bariq Al Emdadat Trading Establishment
Rasa Bin Ali Street (Behind Mutanabi Street)
Post Box: 27001
11653 Malaz - Riyadh
Kingdom of Saudi Arabia
Tel. 009661 4728782
info@bariqarabia.com
bariqarabia.com

OMAN
Muscat Pneumatic System & Project Llc
P.o.box 105 Pc 120
Muscat Sultanate of Oman
Oman
Tel. 0096 82 44 37 144
sales@muscat-pneumatic.com
muscat-pneumatic.com

SOUTH KOREA
Seowon Corporation
1001 Ilsan Technotown
1141-1 Beksuk-Dong
Ilsandong-Gu, Goyang City
Gyunggi-Do 410-722
South Korea
Tel. 0082 31 90 61 100
mail@seowoncorp.com
seowoncorp.com

TAIWAN
Century Automatiom Corporation
5F8, no.1 Wu-Chuan
1 St.Road Hsin
Taipei Hsien - Taiwan
Tel. 00886 22 29 88 436
century@cenauto.com.tw

UNITED ARAB EMIRATES
ACME Industrial Hardware Trading L.L.C.
Office No. 2405,
Iris Bay Tower,
Business Bay
P.O. Box 3636 - Dubai
United Arab Emirates
Tel. 00971 437 69 000
pneumatics@acme-world.com
acme-world.com

NRG

INDEX

ACTUATORS	CYLINDERS	A1
	GRIPPERS, ROTARY ACTUATORS, SLIDES	A2
	V-Lock	A3
	HYDRAULIC-PNEUMATIC	A4
	ELECTRICAL ACTUATORS	A5
	SENSORS, POSITION SENSOR, T-SLOT ACCESSORIES	A6
VALVES	VALVES	B1
	VALVES ISLANDS AND FIELDBUS	B2
	PROCESS VALVES MULTIPLE FLUIDS	B3
UNITS	SYNTESI	C1
	BIT	C2
	SKILLAIR	C3
	NEW DEAL	C4
	ONE	C5
	PRECISION REGULATORS AND PRESSURE CONTROL	C6
	FLOW AND PRESSURE SENSORS	C7
FITTINGS	PUSH-IN FITTINGS	D1
	FITTING SERIES A, B, C, D	D2
	STAINLESS STEEL FITTINGS	D3
	PUSH-IN FITTINGS UNF or NPT THREAD AND INCH PIPES	D4
ACCESSORIES	LINE ON LINE	E1
	COUPLINGS	E2
	FLOW REGULATOR	E3
	AUXILIARY VALVES	E4
	VARIOUS ACCESSORIES	E5
	STAINLESS STEEL ACCESSORIES	E6
	ACCESSORIES UNF or NPT THREAD AND INCH PIPES	E7
CUSTOM PRODUCTS	KIT PNEUMATIC MOTION®	G1
	CUSTOM ACTUATORS	G2
	CUSTOM VALVES	G3
	CUSTOM UNITS	G4
	CUSTOM FITTINGS AND ACCESSORIES	G5
DOCUMENTATION	TECHNICAL DOCUMENTATION	Z1

METAL WORK®
PNEUMATIC

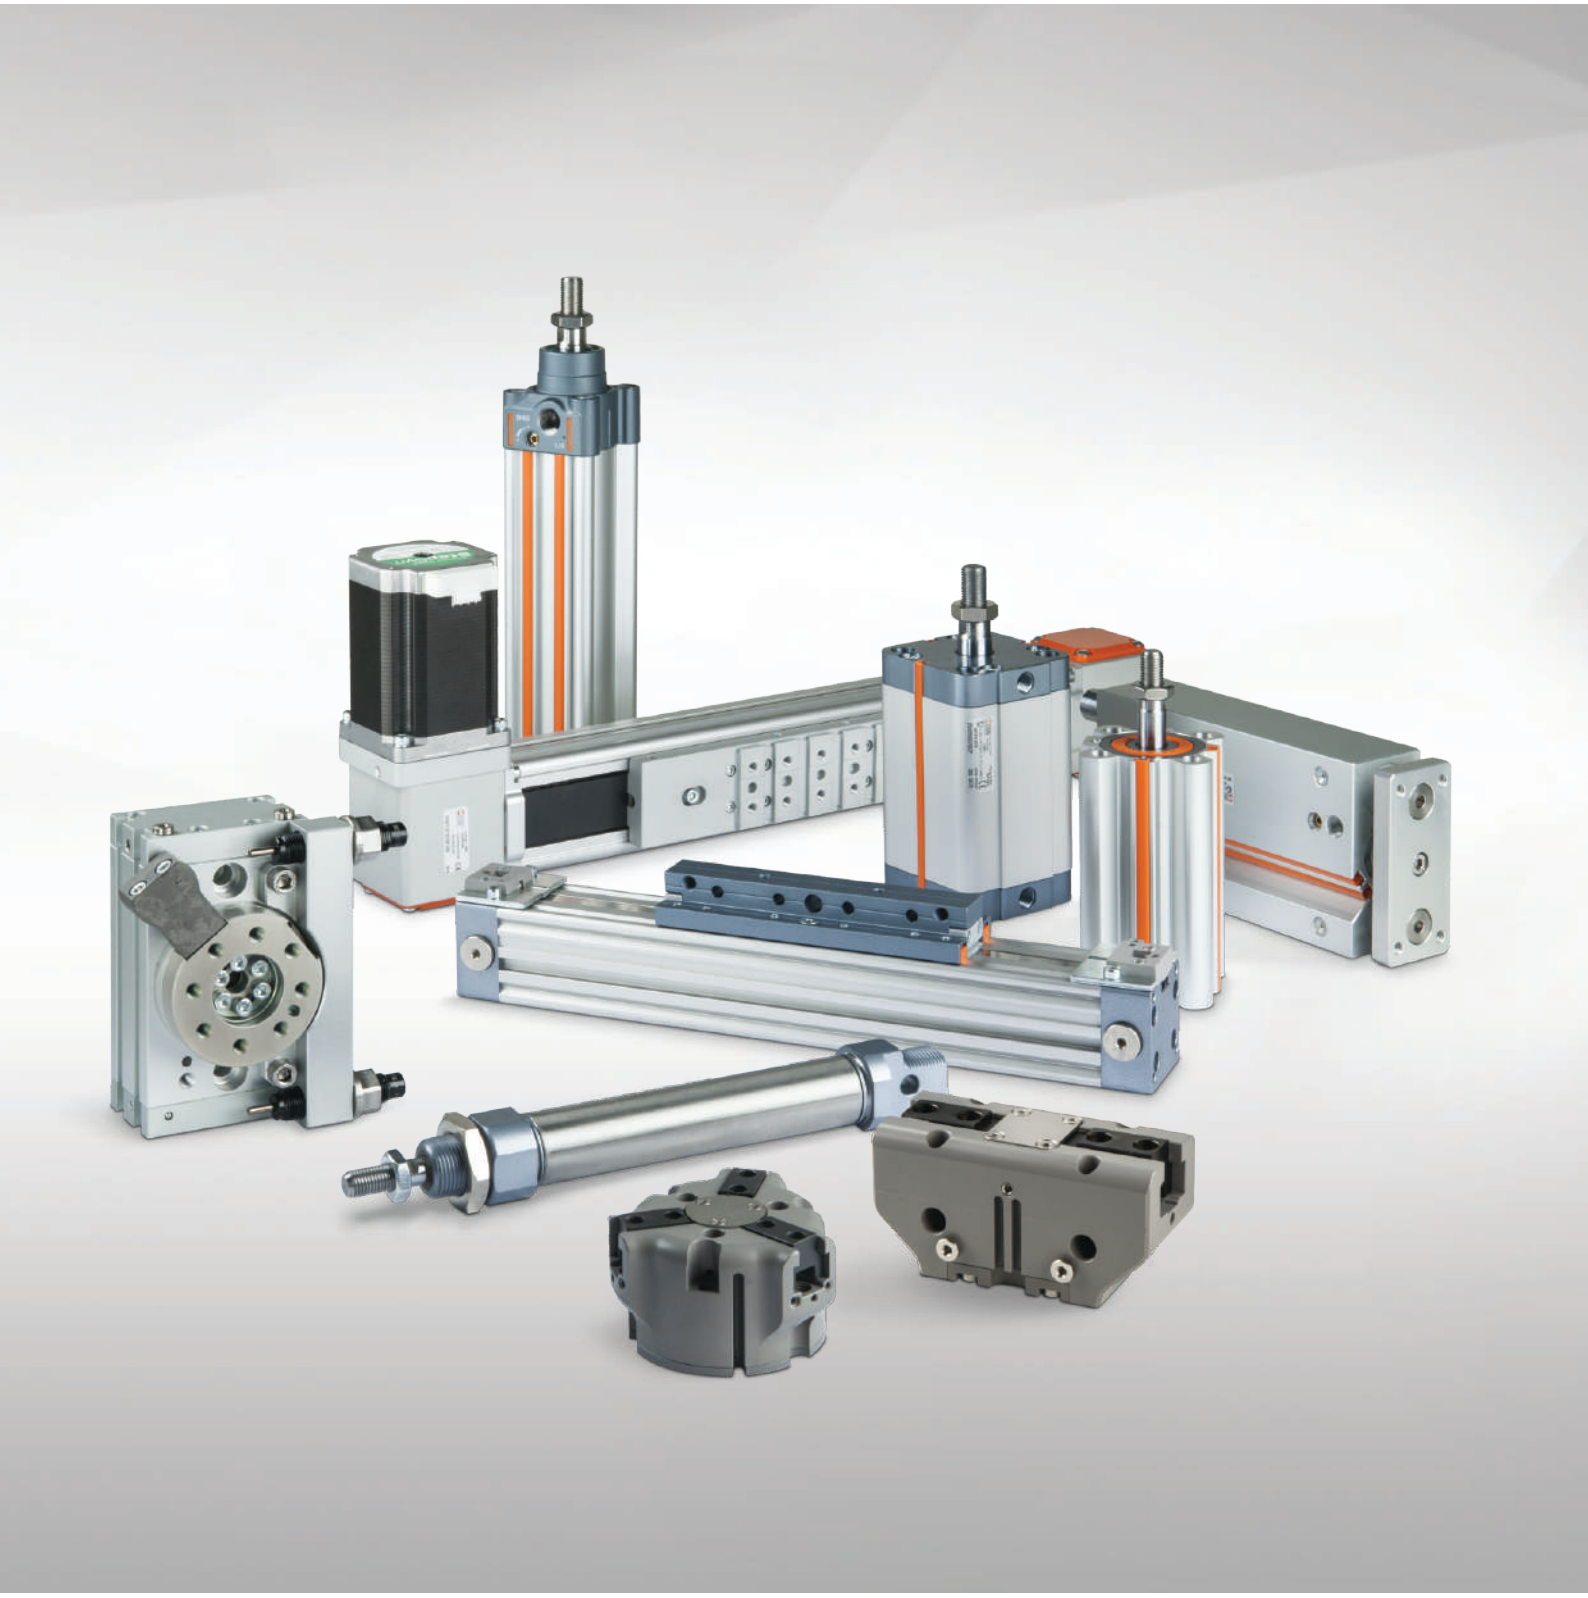

ACTUATORS

- CYLINDERS A1
- GRIPPERS, ROTARY ACTUATORS, SLIDES A2
- V-Lock A3
- HYDRAULIC-PNEUMATIC A4
- ELECTRICAL ACTUATORS A5
- SENSORS, POSITION SENSOR, T-SLOT ACCESSORIES A6

CYLINDERS SUMMARY

- GENERAL TECHNICAL DATA — A1.4

CYLINDERS ACCORDING TO STANDARDS AND VARIANTS

ISO 6432 MINI-CYLINDERS

- ISO 6432 MINI-CYLINDER – SERIES STD — A1.12

- ISO 6432 MINI-CYLINDER – SERIES TP — A1.17

- ACCESSORIES FOR ISO 6432 MINI-CYLINDERS — A1.19

ISO 15552 CYLINDERS

- ISO 15552 CYLINDER — A1.26

- ISO 15552 CYLINDER – SERIES STD — A1.28

- ISO 15552 CYLINDER – TYPE A — A1.30

- ISO 15552 CYLINDER – SERIES 3 — A1.32

- ISO 15552 LOW FRICTIONS CYLINDER — STD TYPE A — A1.33

- ISO 15552 ULTRA-LOW FRICTIONS CYLINDER — A1.34

- ISO 15552 CYLINDER – DIMENSIONS — A1.36

- ISO 15552 TWO-FLAT CYLINDER — STD TYPE A SERIES 3 — A1.40

- ISO 15552 CYLINDER WITH END-OF-STROKE STOP — A1.42

- CILINDRO ISO 15552 SERIE ILT (Internal Linear Transducer) — A1.47

- ACCESSORIES AND SPARE PARTS FOR ISO 15552 CYLINDERS — A1.51

- ISO 15552 CYLINDER – SERIES MCR (Medium Corrosion Resistance) — A1.69

- ISO 15552 CYLINDER – SERIES HCR (High Corrosion Resistance) — A1.73

- TWIN-ROD CYLINDER – SERIES TWNC — A1.78

- ISO 15552 CYLINDER Ø 160-200 — A1.86

- ISO 15552 CYLINDER Ø 250-320 — A1.94

COMPACT CYLINDERS

- ISO 21287 CYLINDER – SERIES LINER — A1.99

- COMPACT CYLINDER – SERIES CMPC — A1.111

METAL WORK PNEUMATIC

- COMPACT CYLINDER – SERIES CMPC TWO-FLAT — A1.123

- COMPACT STOPPER CYLINDER — A1.126

- COMPACT CYLINDER WITH INTEGRATED VALVE, SERIES CCIV — A1.132

- ACCESSORIES AND SPARE PARTS FOR CMPC, TWO-FLAT, STOPPER AND CCIV COMPACT CYLINDERS — A1.138

OTHER CYLINDER

- ROUND CYLINDER – SERIES RNDC — A1.145

- SHORT-STROKE CYLINDER – SERIES SSCY — A1.151

- CARTRIDGE MICRO-CYLINDER – SERIES CRTC — A1.159

- COMPACT GUIDED CYLINDER SERIES MULTIFIX — A1.160

- COMPACT GUIDED CYLINDER – SERIES CMPG — A1.170
- COMPACT GUIDED CYLINDER – SERIES CMPGK — A3.63

- ROTOLINEAR SWING CLAMP CYLINDERS SERIES SWC AND SWH — A1.176

RODLESS CYLINDERS


- RODLESS CYLINDER – SERIES STD — A1.184

- RODLESS CYLINDER WITH "V" GUIDE — A1.189

- RODLESS CYLINDER WITH BALL RECIRCULATING GUIDE — A1.193
- RODLESS CYLINDER WITH BALL RECIRCULATING GUIDE SERIES V-Lock — A3.37

- RODLESS CYLINDER – SERIES DOUBLE — A1.198

- ACCESSORIES AND SPARE PARTS FOR RODLESS STD, "V" GUIDE, WITH BALL CIRCULATION GUIDE AND DOUBLE CYLINDERS — A1.199

- RODLESS CYLINDER – SERIES PU — A1.205

- RODLESS CYLINDER WITH "V" GUIDE SERIES PU — A1.209

- RODLESS CYLINDER WITH BALL RECIRCULATING GUIDE SERIES PU — A1.213

- ACCESSORIES AND SPARE PARTS FOR RODLESS CYLINDER SERIES PU — A1.217

- RODLESS CYLINDER WITH MAGNETIC SLIDING – SERIES MAGNETIC SLIDE — A1.220

STAINLESS STEEL CYLINDERS

- STAINLESS STEEL ISO 6432 MINI-CYLINDER — A1.224

- STAINLESS STEEL ROUND CYLINDER RNDC — A1.228

- STAINLESS STEEL ISO 15552 CYLINDER — A1.232

GENERAL TECHNICAL DATA

Compressed air
The cylinders have been designed for use with unlubricated air, in which case no maintenance is required. If lubricated air is used, lubrication must be continuous because the additional lubrication removes the lubricant applied at the factory.
With reference to ISO/DIN 8573-1, the compressed air to use is class 4-7-4, i.e.:
- Solid particles/m^3, classe 4: max 10.000 1 < d < 5 µm
- Humidity classe 7: $C_W \leq 0.5$ g/m^3
- Oil classe 4: Concentration total oil ≤ 5 mg/m^3

In low temperature applications the air must be properly dried in order to avoid the formation of ice inside the cylinder.

Gasket material
For compatibility data, please refer to **chapter Z1**.
Some families of Metal Work cylinders are available with gaskets made of different materials.
Polyurethane: the best in terms of long-life, resistance to wear and reduced friction.
Chemically compatible with:
- Pure aliphatic hydrocarbons (butane, propane, gasoline)
  Any impurities (moisture, alcohol, acid or alkaline compounds) can chemically attack polyurethane
- Mineral oil and grease (some additives can chemically attack the material)
- Silicone oil and grease
- Water up to +50°C
- Resistance to ozone and ageing

Not compatible with:
- Ketones, esters, ethers
- Alcohos, glycols
- Hot water, steam, alkali, amines, acids.
- Good elasticity down to –35°C (for low temperature PU version only).

NBR: These gaskets have a shorter life than polyurethane gaskets.
However, they are recommended for use in environments causing the formation of water condensate, such as tropical climates, where polyurethane gaskets may tend to deteriorate quickly due to hydrolysis.
Chemically compatible with:
- Methane, butane, propane, oily acids
- Aliphatic hydrocarbons
- Lubrication oils
- Gasoline

Not compatible with:
- Ozone and exposure to sunlight
- Good elasticity down to –40°C (for low temperature NBR version only)

FKM/FPM: Can withstand temperatures as high as 150°C.
This makes them ideal for use on rodless cylinders, high-speed applications, involving high temperatures at the sliding lips.
Chemically compatible with:
- Mineral oil and grease, slight swelling with oil grade ASTM no. 1and 3
- Silicon oil and grease
- Animal and vegetable oil and fat
- Aliphatic hydrocarbons (gasoline, butane, propane, natural gas)
- Aromatic hydrocarbons (benzol, toluene)
- Chlorinated hydrocarbons (tetrachloroethylene)
- Fuels
- Ozone, atmospheric agents, ageing

Not compatible with:
- Polar solvents (acetone, methylethylchetone, diethyl ether, dioxane)
- Glycol-based brake fluids
- Ammonia gas, amines, alkali
- Superheated water vapour
- Low molecular organic acids (formic and acetic acid)

No stick-slip cylinders
Standard cylinders are designed to ensure trouble-free operation under any conditions, particularly at high speed. Operation tends to be irregular and jerky at very low speeds in the presence of side loads. In this case, No stick-slip cylinders are recommended as they allow smooth operation. These versions feature specific tribological properties and preferably polyurethane gaskets.

Radial oscillation of the piston rod
These cylinders have been designed to apply forces in the direction of the axis and not to withstand side loads. If you intend to use the cylinder piston rod with side loads, the play between the piston rod and guide bushing must be taken into account. Indicatively, each 100-mm stroke corresponds to 1-mm radial oscillation measured at the end of the piston rod.
This indication refers to ISO 15552, ISO 6432 and RNDC cylinders.

Cylinder operating life
The life of cylinders depends on numerous factors including axial and radial loads, speed, frequency of use, temperature, shocks, air loss (limits).
Below are a few factors that must be taken purely as a reference.
They are not binding or guaranteed due to the variability of different factors.
Without radial load:
ISO 15552 cylinders and round cylinders with polyurethane gaskets: 15.000 km.
ISO 15552 cylinders and round cylinders with NBR gaskets: 8.000 km.
ISO 6432 cylinders, SSC cylinders and compact cylinders with polyurethane gaskets: 30 million cycles.
ISO 6432 cylinders and SSC cylinders with NRB gaskets: 15 million cycles.
Rodless cylinders: 5.000 km.

Stroke tolerances
The actual cylinder stroke has a tolerance with respect to the nominal stroke, in compliance with any applicable laws, within the following ranges:

• ISO 15552 cylinders	32 - 50	-0	+2	mm
	63 - 200	-0	+2.5	mm
	250 - 320	-0	+ 4	mm
• ISO 6432	8 - 25	-1	+1	mm
• Round cylinders	32 - 50	-0.5	+1.5	mm
• SSC cylinders	12 - 50	-1	+1	mm
	63 - 100	-1	+1.5	mm
• Compact cylinders	12 - 100	-0.5	+1.5	mm
• Compact cylinders ISO 21287	20 - 100	-0.5	+1.5	mm
• Rodless cylinders	16 - 63	-1	+2	mm

Air loss
All the cylinders have air losses, mainly around the gaskets.
ISO 10099 establishes the maximum loss allowed in a new cylinder (see table below):

Cylinder diameter	8-10-12	16-20-25	32-40-50	63-80-100	125-160-200	250-320
Loss (Nl/hour)	0.6	0.8	1.2	2	3	5

Metal Work's own standards are more rigorous than ISO standards, but air loss still occurs.

Strokes exceeding the maximum value specified in the catalogue
Metal Work can supply cylinders with strokes greater than those specified in the catalogue, considering the production technological limits. The Metal Work Sales Department can provide you will full details. However, it is up to the end user to use these special cylinders properly, by guiding the piston rod, avoiding peak loads, etc.

Magnetic sensors
The magnetic field generated by permanent magnets housed in the piston assembly changes in shape and intensity depending on the presence of magnetic metal masses in the vicinity of the cylinder. These masses may prevent the sensors from switching correctly, in which case non-magnetic materials should be used. In particular, the tie rods of short-stroke and compact cylinders should preferably be made of stainless steel.
N.B.: for actuators having a stroke lower than 5 mm, reading difficulties may occur due to sensor hysteresis.

METAL WORK PNEUMATIC

CALCULATING PEAK LOAD ON THE PISTON ROD

During operation, the piston rod of the cylinder behaves like a rod subjected to peak load (bending + compression).
In the case of long strokes, it is necessary to make sure the diameter of the piston rod is correct for the load applied and the type of cylinder and piston rod mounting.
The following formulae can be used to do this.

A. Calculating the maximum force with a given stroke and piston rod diameter:

$$F_{cr} \leq \frac{99800\ Ø^4}{C^2 \cdot K^2}$$

$$F_{amm} = \frac{F_{cr}}{K_s}$$

B. Calculating the minimum acceptable piston rod diameter with a given stroke and force:

$$Ø \geq \sqrt[4]{\frac{F_{amm} \cdot C^2 \cdot K^2}{99800}}$$

Where:

F_{cr}	Critical force	[N]
F_{amm}	Admissable force	[N]
Ø	Diameter of the piston rod	[mm]
C	Stroke	[mm]
K	Free length coefficient depending on the mounting – see diagrams	
K_s	3 ÷ 5 safety coefficient	

CONSTRAINT	K
	2
	0.7
	0.5
	2
	1
	1.5

CHART OF SPEED / MAXIMUM ABSORBABLE LOAD

For the cylinder to reach the end-of-stroke position without suffering damaging impact due to intensity and repetition, it is necessary to annul the kinetic energy of the moving mass and the relative work generated. The maximum absorbable load depends on the transference speed and the absorption capacity of the standard pneumatic cushion in the various cylinders. The chart gives the speed and absorbable mass in various diameters at a pressure of 6 bar, under the best regulation conditions and in a horizontal direction.

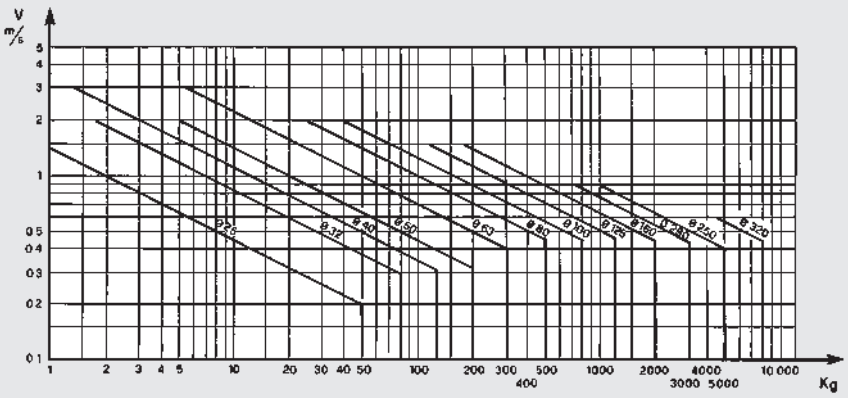

CONSUMPTION OF AIR IN THE CYLINDERS

Cylinder bore D mm	Piston rod diameter d mm	Motion	Useful area cm²	Air consumption during thrust and traction in Nl/cm of stroke, depending on the working pressure P in bar at 20°C									
				1 bar	2 bar	3 bar	4 bar	5 bar	6 bar	7 bar	8 bar	9 bar	10 bar
8	4	thrust	0.50	0.0010	0.0015	0.0020	0.0025	0.0030	0.0035	0.0040	0.0045	0.0050	0.0055
		traction	0.38	0.0008	0.0011	0.0015	0.0019	0.0023	0.0026	0.0030	0.0034	0.0038	0.0041
10	4	thrust	0.79	0.0016	0.0024	0.0031	0.0039	0.0047	0.0055	0.0063	0.0071	0.0079	0.0086
		traction	0.66	0.0013	0.0020	0.0026	0.0033	0.0040	0.0046	0.0053	0.0059	0.0066	0.0073
12	6	thrust	1.13	0.0023	0.0034	0.0045	0.0057	0.0068	0.0079	0.0090	0.0102	0.0113	0.0124
		traction	0.85	0.0017	0.0025	0.0034	0.0042	0.0051	0.0059	0.0068	0.0076	0.0085	0.0093
16	6	thrust	2.01	0.0040	0.0060	0.0080	0.0101	0.0121	0.0141	0.0161	0.0181	0.0201	0.0221
		traction	1.73	0.0035	0.0052	0.0069	0.0086	0.0104	0.0121	0.0138	0.0156	0.0173	0.0190
16	8	thrust	2.01	0.0040	0.0060	0.0080	0.0101	0.0121	0.0141	0.0161	0.0181	0.0201	0.0221
		traction	1.51	0.0030	0.0045	0.0060	0.0075	0.0090	0.0106	0.0121	0.0136	0.0151	0.0166
20	8	thrust	3.14	0.0063	0.0094	0.0126	0.0157	0.0188	0.0220	0.0251	0.0283	0.0314	0.0346
		traction	2.64	0.0053	0.0079	0.0106	0.0132	0.0158	0.0185	0.0211	0.0237	0.0264	0.0290
20	10	thrust	3.14	0.0063	0.0094	0.0126	0.0157	0.0188	0.0220	0.0251	0.0283	0.0314	0.0346
		traction	2.36	0.0047	0.0071	0.0094	0.0118	0.0141	0.0165	0.0188	0.0212	0.0236	0.0259
25	10	thrust	4.91	0.0098	0.0147	0.0196	0.0245	0.0295	0.0344	0.0393	0.0442	0.0491	0.0540
		traction	4.12	0.0082	0.0124	0.0165	0.0206	0.0247	0.0289	0.0330	0.0371	0.0412	0.0454
32	12	thrust	8.04	0.0161	0.0241	0.0322	0.0402	0.0483	0.0563	0.0643	0.0724	0.0804	0.0885
		traction	6.91	0.0138	0.0207	0.0276	0.0346	0.0415	0.0484	0.0553	0.0622	0.0691	0.0760
40	12	thrust	12.57	0.0251	0.0377	0.0503	0.0628	0.0754	0.0880	0.1005	0.1131	0.1257	0.1382
		traction	11.44	0.0229	0.0343	0.0457	0.0572	0.0686	0.0800	0.0915	0.1029	0.1144	0.1258
40	16	thrust	12.57	0.0251	0.0377	0.0503	0.0628	0.0754	0.0880	0.1005	0.1131	0.1257	0.1382
		traction	10.56	0.0211	0.0317	0.0422	0.0528	0.0633	0.0739	0.0844	0.0950	0.1056	0.1161
50	16	thrust	19.63	0.0393	0.0589	0.0785	0.0982	0.1178	0.1374	0.1571	0.1767	0.1963	0.2160
		traction	17.62	0.0352	0.0529	0.0705	0.0881	0.1057	0.1234	0.1410	0.1586	0.1762	0.1939
50	20	thrust	19.63	0.0393	0.0589	0.0785	0.0982	0.1178	0.1374	0.1571	0.1767	0.1963	0.2160
		traction	16.49	0.0330	0.0495	0.0660	0.0825	0.0990	0.1155	0.1319	0.1484	0.1649	0.1814
63	16	thrust	31.17	0.0623	0.0935	0.1247	0.1559	0.1870	0.2182	0.2494	0.2805	0.3117	0.3429
		traction	29.16	0.0583	0.0875	0.1166	0.1458	0.1750	0.2041	0.2333	0.2624	0.2916	0.3208
63	20	thrust	31.17	0.0623	0.0935	0.1247	0.1559	0.1870	0.2182	0.2494	0.2805	0.3117	0.3429
		traction	28.03	0.0561	0.0841	0.1121	0.1402	0.1682	0.1962	0.2242	0.2523	0.2803	0.3083
80	20	thrust	50.26	0.1005	0.1508	0.2011	0.2513	0.3016	0.3518	0.4021	0.4524	0.5026	0.5529
		traction	47.12	0.0942	0.1414	0.1885	0.2356	0.2827	0.3299	0.3770	0.4241	0.4712	0.5183
80	25	thrust	50.26	0.1005	0.1508	0.2011	0.2513	0.3016	0.3518	0.4021	0.4524	0.5026	0.5529
		traction	45.36	0.0907	0.1361	0.1814	0.2268	0.2721	0.3175	0.3628	0.4082	0.4536	0.4989
100	25	thrust	78.54	0.1571	0.2356	0.3142	0.3927	0.4712	0.5498	0.6283	0.7068	0.7854	0.8639
		traction	73.63	0.1473	0.2209	0.2945	0.3681	0.4418	0.5154	0.5890	0.6627	0.7363	0.8099
125	32	thrust	122.71	0.2454	0.3681	0.4909	0.6136	0.7363	0.8590	0.9817	1.1044	1.2271	1.3499
		traction	114.67	0.2293	0.3440	0.4587	0.5734	0.6880	0.8027	0.9174	1.0321	1.1467	1.2614
160	40	thrust	201.06	0.4021	0.6032	0.8042	1.0053	1.2063	1.4074	1.6084	1.8095	2.0106	2.2116
		traction	188.49	0.3770	0.5655	0.7540	0.9425	1.1309	1.3194	1.5079	1.6964	1.8849	2.0734
200	40	thrust	314.15	0.6283	0.9425	1.2566	1.5708	1.8849	2.1991	2.5132	2.8274	3.1415	3.4557
		traction	301.58	0.6032	0.9048	1.2063	1.5079	1.8095	2.1111	2.4127	2.7143	3.0158	3.3174
250	50	thrust	490.87	0.9817	1.4726	1.9635	2.4544	2.9452	3.4361	3.9270	4.4178	4.9087	5.3996
		traction	471.24	0.9425	1.4137	1.8850	2.3562	2.8274	3.2987	3.7699	4.2412	4.7124	5.1836
320	63	thrust	804.25	1.6085	2.4128	3.2170	4.0213	4.8255	5.6298	6.4340	7.2383	8.0425	8.8468
		traction	773.08	1.5462	2.3192	3.0923	3.8654	4.6385	5.4116	6.1846	6.9577	7.7308	8.5039

FORCE OF SPRINGS IN SINGLE-ACTING CYLINDERS (THEORETICAL)

ISO 15552 single-acting cylinders			
Bore mm	Force with spring compressed N	Max. stroke mm	Force with spring extended N
32	63	250	35
40	88	250	51
50	102	250	64
63	102	250	64

Round single-acting cylinders			
Bore mm	Force with spring compressed N	Max. stroke mm	Force with spring extended N
32	86	250	34
40	95	250	50
50	108	250	62

ISO 6432 single-acting cylinders			
Bore mm	Force with spring compressed N	Max. stroke mm	Force with spring extended N
8	3	50	1
10	5	50	1
12	7	50	3
16	21	100	5
20	25	100	12
25	25	100	18

SSC single-acting cylinders			
Bore mm	Force with spring compressed N	Max. stroke mm	Force with spring extended N
12	6	25	1.5
16	7	25	3
20	12	25	4
25	14	25	5
32	33	50	6
40	45	50	15
50	70	50	20
63	81	50	25

$$P = P_1 + \frac{(P_2 - P_1)}{C_{max}} \cdot C_x$$

P_1 = Force with spring extended

P_2 = Force with spring compressed

C_x = Required stroke

C_{max} = Max stroke

Single-acting cartridge cylinders			
Bore mm	Force with spring compressed N	Max. stroke mm	Force with spring extended N
6	3.7	5	–
10	7.8	5	–
16	7.2	5	–
6	3.9	10	–
10	9.6	10	–
16	13.3	10	–
6	3.9	15	–
10	9.1	15	–
16	13.3	15	–

FORCES GENERATED DURING THRUST AND TRACTION (THEORETICAL)

Cylinder bore D mm	Piston rod diameter d mm	Motion	Useful area cm²	Thrust and traction force in daN depending on the operating pressure in bar									
				1 bar	2 bar	3 bar	4 bar	5 bar	6 bar	7 bar	8 bar	9 bar	10 bar
8	4	thrust	0.50	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0
		traction	0.38	0.4	0.8	1.1	1.5	1.9	2.3	2.6	3.0	3.4	3.8
10	4	thrust	0.79	0.8	1.6	2.4	3.1	3.9	4.7	5.5	6.3	7.1	7.9
		traction	0.66	0.7	1.3	2.0	2.6	3.3	4.0	4.6	5.3	5.9	6.6
12	6	thrust	1.13	1.1	2.3	3.4	4.5	5.7	6.8	7.9	9.0	10.2	11.3
		traction	0.85	0.8	1.7	2.5	3.4	4.2	5.1	5.9	6.8	7.6	8.5
16	6	thrust	2.01	2.0	4.0	6.0	8.0	10.1	12.1	14.1	16.1	18.1	20.1
		traction	1.73	1.7	3.5	5.2	6.9	8.6	10.4	12.1	13.8	15.6	17.3
16	8	thrust	2.01	2.0	4.0	6.0	8.0	10.1	12.1	14.1	16.1	18.1	20.1
		traction	1.51	1.5	3.0	4.5	6.0	7.5	9.0	10.6	12.1	13.6	15.1
20	8	thrust	3.14	3.1	6.3	9.4	12.6	15.7	18.8	22.0	25.1	28.3	31.4
		traction	2.64	2.6	5.3	7.9	10.6	13.2	15.8	18.5	21.1	23.8	26.4
20	10	thrust	3.14	3.1	6.3	9.4	12.6	15.7	18.8	22.0	25.1	28.3	31.4
		traction	2.36	2.4	4.7	7.1	9.4	11.8	14.1	16.5	18.8	21.2	23.6
25	10	thrust	4.91	4.9	9.8	14.7	19.6	24.5	29.5	34.4	39.3	44.2	49.1
		traction	4.12	4.1	8.2	12.4	16.5	20.6	24.7	28.9	33.0	37.1	41.2
32	12	thrust	8.04	8.0	16.1	24.1	32.2	40.2	48.3	56.3	64.3	72.4	80.4
		traction	6.91	6.9	13.8	20.7	27.6	34.6	41.5	48.4	55.3	62.2	69.1
40	12	thrust	12.57	12.6	25.1	37.7	50.3	62.8	75.4	88.0	100.5	113.1	125.7
		traction	11.44	11.4	22.9	34.3	45.7	57.2	68.6	80.0	91.5	102.9	114.4
40	16	thrust	12.57	12.6	25.1	37.7	50.3	62.8	75.4	88.0	100.5	113.1	125.7
		traction	10.56	10.6	21.1	31.7	42.2	52.8	63.3	73.9	84.4	95.0	105.6
50	16	thrust	19.63	19.6	39.3	58.9	78.5	98.2	117.8	137.4	157.1	176.7	196.3
		traction	17.62	17.6	35.2	52.9	70.5	88.1	105.7	123.4	141.0	158.6	176.2
50	20	thrust	19.63	19.6	39.3	58.9	78.5	98.2	117.8	137.4	157.1	176.7	196.3
		traction	16.49	16.5	33.0	49.5	66.0	82.5	99.0	115.5	131.9	148.4	164.9
63	16	thrust	31.17	31.2	62.3	93.5	124.7	155.9	187.0	218.2	249.4	280.6	311.7
		traction	29.16	29.2	58.3	87.5	116.6	145.8	175.0	204.1	233.3	262.5	291.6
63	20	thrust	31.17	31.2	62.3	93.5	124.7	155.9	187.0	218.2	249.4	280.6	311.7
		traction	28.03	28.0	56.1	84.1	112.1	140.2	168.2	196.2	224.2	252.3	280.3
80	20	thrust	50.27	50.3	100.5	150.8	201.1	251.3	301.6	351.9	402.1	452.4	502.7
		traction	47.12	47.1	94.2	141.4	188.5	235.6	282.7	329.9	377.0	424.1	471.2
80	25	thrust	50.27	50.3	100.5	150.8	201.1	251.3	301.6	351.9	402.1	452.4	502.7
		traction	45.36	45.4	90.7	136.1	181.4	226.8	272.1	317.5	362.9	408.2	453.6
100	25	thrust	78.54	78.5	157.1	235.6	314.2	392.7	471.2	549.8	628.3	706.9	785.4
		traction	73.63	73.6	147.3	220.9	294.5	368.2	441.8	515.4	589.0	662.7	736.3
125	32	thrust	122.72	122.7	245.4	368.2	490.9	613.6	736.3	859.0	981.7	1104.5	1227.2
		traction	114.68	114.7	229.4	344.0	458.7	573.4	688.1	802.7	917.4	1032.1	1146.8
160	40	thrust	201.06	201.1	402.1	603.2	804.2	1005.3	1206.4	1407.4	1608.5	1809.6	2010.6
		traction	188.50	188.5	377.0	565.5	754.0	942.5	1131.0	1319.5	1508.0	1696.5	1885.0
200	40	thrust	314.16	314.2	628.3	942.5	1256.6	1570.8	1885.0	2199.1	2513.3	2827.4	3141.6
		traction	301.59	301.6	603.2	904.8	1206.4	1508.0	1809.6	2111.1	2412.7	2714.3	3015.9
250	50	thrust	490.87	490.9	981.7	1472.6	1963.5	2454.4	2945.2	3436.1	3927.0	4417.8	4908.7
		traction	471.24	471.2	942.5	1413.7	1885.0	2356.2	2827.4	3298.7	3769.9	4241.2	4712.4
320	63	thrust	804.25	804.3	1608.5	2412.8	3217.0	4021.3	4825.5	5629.8	6434.0	7238.3	8042.5
		traction	773.08	773.1	1546.2	2319.2	3092.3	3865.4	4638.5	5411.6	6184.6	6957.7	7730.8

METAL WORK PNEUMATIC

WEIGHT OF CYLINDERS

Mini-cylinders series ISO 6432

Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
8	40	0.234	55	0.334
10	41	0.257	59	0.371
12	77	0.419	111	0.635
16	93	0.491	133	0.708
20	181	0.732	233	1.121
25	241	1.100	334	1.722

Mini-cylinders ISO 6432 series TP

Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
16	66	0.377	101	0.604
20	94	0.628	131	1.03
25	144	0.908	207	1.536

Cylinder series ISO 15552, ISO 15552 TWO-FLAT

Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
32	433	2.20	494	3.09
40	660	3.15	783	4.73
50	1087	4.57	1348	7.04
63	1443	5.03	1718	7.44
80	2815	7.49	3260	10.16
100	3897	8.79	4425	12.33
125	6988	13.42	8040	18.00
160	12979	22.92	13800	30.00
200	17000	28.00	18000	39.00
250	29285	39.00	32640	51.00
320	49100	62.00	58000	71.00

Cylinder series ISO 15552 type A, ISO 15552 type A TWO-FLAT

Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
32	460	3.09	576	3.98
40	716	4.08	916	5.66
50	1155	5.86	1513	8.33
63	1524	5.92	1945	8.33
80	2886	9.07	3520	11.74
100	3965	9.48	4779	13.02
125	7093	14.11	8642	18.69

Cylinder ISO 15552 series 3

Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
32	434	2.30	495	3.19
40	660	3.22	783	4.80
50	1079	4.50	1340	6.97
63	1427	4.78	1702	7.24
80	2774	6.73	3219	10.58
100	3836	7.73	4364	11.58
125	6529	11.63	7581	17.94

Cylinder ISO 15552 Ultra-low frictions

Ø	Single-rod	
	Weight [g] Stroke = 0	Weight [g] each mm
32	504	2.30
40	774	3.22
50	1245	4.50
63	1697	4.78

Twin-rod cylinder TWNC series STD

Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
32	706	2.61	771	3.79
40	920	2.79	1040	4.03
50	1466	4.00	1704	5.72
63	2340	6.10	2608	8.85
80	4752	10.36	5182	15.52
100	6278	12.19	6783	16.80

Twin-rod cylinder TWNC series 3

Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
32	711	2.64	776	3.82
40	923	2.81	1043	4.05
50	1443	3.84	1681	5.56
63	2295	5.78	2563	8.52
80	4633	9.42	5063	14.58
100	6114	10.87	6619	15.48

Guide unit

Ø	Type GDS		Type GDH and GDM	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
12	150	0.78	374	0.78
16	150	0.78	374	0.78
20	420	1.22	759	1.22
25	420	1.22	759	1.22
32	772	1.76	1200	1.76
40	1000	1.76	2000	3.13
50	1900	3.13	3300	4.90
63	2300	3.13	4750	4.90
80	3800	4.90	8500	7.26
100	7000	4.90	12000	7.26

ISO 21287 cylinder series LINER

Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
20	98	2.49	110	3.10
25	119	2.63	133	3.24
32	182	3.62	197	4.50
40	228	4.09	243	4.98
50	330	5.67	355	7.25
63	461	6.52	487	8.10
80	991	10.11	1066	12.58
100	1869	13.78	2029	17.63

Compact cylinder series CMPC								
Ø	Single-rod		Through-rod		Non-ratating		Through-rod non-rotating	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
12	96	1.59	104	1.82	105	1.90	114	2.12
16	105	1.51	124	1.90	109	1.81	129	2.20
20	171	2.35	204	2.95	181	2.78	214	3.39
25	201	2.73	233	3.32	220	3.15	252	3.76
32	246	3.17	282	4.05	306	3.96	343	4.84
40	370	4.41	408	5.29	457	5.20	495	6.08
50	552	6.42	605	7.98	709	7.64	768	9.21
63	779	7.34	656	8.90	977	8.56	1054	10.13
80	1468	12.57	1624	15.02	1851	14.33	2027	16.78
100	2988	16.11	3100	19.93	3710	17.87	3850	21.70

Compact cylinder series CMPC TWO-FLAT				
Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
32	261	3.17	297	4.05
40	394	4.41	432	5.29
50	595	6.42	648	7.98
63	845	7.34	129	8.90
80	1524	12.57	1680	15.02

Compact Stopper cylinder		
Ø x Stroke	Trunnion version	Roller version
	Weight [g]	Weight [g]
20x15	210	220
32x20	420	460
50x30	1190	1300
80x30	-	4500
80x40	-	4750

Round cylinder series RNDC				
Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
32	404	1.44	455	2.04
40	660	1.58	808	3.14
50	1235	3.59	1507	6.03

Compact guided cylinder				
Ø	Non-cushioned (approximate)		Cushioned (approximate)	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
16	295	4.77	414	4.77
20	486	6.38	543	6.38
25	550	10.01	735	10.01
32	942	16.51	1354	16.51
40	1028	18.04	1479	18.04
50	1355	23.76	1949	23.76
63	1900	32.56	2714	32.56
80	3910	55.77	-	-
100	5710	73.48	-	-

Short-stroke cylinder series SSCY								
Ø	Single-rod		Through-rod		Non-ratating		Oscillating	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
12	45	1.24	52	1.47	64	1.35	-	-
16	63	1.65	72	2.05	88	1.6	-	-
20	91	2.14	104	2.75	126	2.37	-	-
25	144	3.04	167	3.65	189	3.25	-	-
32	185	4.14	200	4.72	260	4.56	272	4.14
40	275	5.05	295	5.94	373	5.49	386	5.05
50	412	7.09	437	8.9	592	7.89	620	7.09
63	587	9.32	621	10.91	854	10.57	889	9.32
80	393	14.41	1485	16.9	1740	25.87	-	-
100	673	21.94	2841	25.9	2692	30.77	-	-

Rodless cylinder								
Ø	Standard		Series Double		with ball recirculating Guide		with Guida "V"	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
16	244	0.86	561	1.72	460	1.79	-	-
25	746	1.79	1607	3.58	1421	2.99	953	1.98
32	1707	3.84	3737	7.68	3025	5.04	2150	3.21
40	2911	5.55	–	–	4434	6.75	3210	4.67
63 (Std)	7280	9.22	–	–	10860	10.65	9230	9.27
63 (Heavy)	–	–	–	–	13275	14.02	-	-

METAL WORK PNEUMATIC

Rodless cylinder series PU						
Ø	Standard		with ball recirculating Guide		with Guida "V"	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
25	1009	2.54	-	-	-	-
32	1535	3.72	-	-	-	-
40	2702	4.78	-	-	-	-
50	4875	7.50	7550	8.90	7450	7.50

Rodless cylinder series MAGNETIC SLIDE		
Ø	Weight [g] Stroke = 0	Weight [g] each mm
16	490	0.262
20	795	0.325
25	1250	0.487

Stainless steel ISO 6432 Mini-cylinders				
Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
16	140	0.50	150	0.90
20	310	0.70	335	1.20
25	410	1.10	445	1.90

Stainless steel round cylinders RNDC				
Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
32	825	1.50	880	2.70
40	1460	2.40	1590	4.50
50	2250	4.10	2670	7.00
63	3280	4.60	3530	7.50

Stainless steel ISO 15552 cylinders				
Ø	Single-rod		Through-rod	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
32	1366	2.4	1467	3.3
40	1885	3.2	203	4.8
50	2837	5.5	3103	8.0
63	4347	5.9	4647	8.4
80	7485	10.8	799	16.3
100	11332	13.9	12033	17.8
125	18259	20.9	19432	27.2

ISO 6432 MINI-CYLINDER SERIES STD

Mini-cylinders to ISO 6432 with a chamfered stainless steel barrel.
Can be used with different types of sensors.
Available in various versions with a wide range of accessories:

- with or without magnet
- single acting extended, retracted or through piston rod
- double acting, single or through piston rod
- with pneumatic cushioning (Ø 16-20-25)
- gaskets made of NBR, POLYURETHANE, and FKM/FPM (for high temperatures), and low-temperature gaskets
- special executions on request
- fixing accessories, guide units and mechanical rod lock.

TECHNICAL DATA			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25
Max operating pressure		bar	10					
		MPa	1					
		psi	145					
Temperature range	POLYURETHANE	°C	–20 to +80					
	NBR	°C	–10 to +80					
	FKM/FPM	°C	–10 to +150 (non-magnetic cylinder)					
	Low temperature	°C	–35 to +80					
Design			Chamfered stainless steel barrel					
Fluid			Unlubricated air. Lubrication, if used, must be continuous					
Standard strokes ✚	double-acting	mm	1 to 100	1 to 100	1 to 200	1 to 200	1 to 500	1 to 500
	double-acting, cushioned	mm	-	-	-	1 to 300	1 to 500	1 to 500
	double-acting with spring extended or retracted piston rod	mm	-	-	-	1 to 100	1 to 100	1 to 100
	single-acting extended or retracted piston rod	mm	1 to 50	1 to 50	1 to 50	1 to 100	1 to 100	1 to 100
Versions			Double-acting, Double-acting cushioned, Double-acting with spring extended or retracted piston rod, Single-acting extended or retracted rod, Through-rod, Through-rod cushioned, Version suitable for rod lock, No stick-slip					
Magnet for sensors			All versions come complete with magnet. Supplied without magnet on request.					
Inrush pressure	single piston rod	bar	0.8			0.6		
	through-rod	bar	1			0.8		
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter					
Weights			See cylinder "**General technical data**" at the beginning of the chapter					
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**					
			✚ Maximum recommended strokes. Higher values can create operating problems					

COMPONENTS

① PISTON ROD: C45 steel or stainless steel, thick chromed
② HEAD: anodized aluminium alloy
③ PISTON ROD GASKET: polyurethane, NBR or FKM/FPM
④ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑤ BARREL: AISI 304 steel
⑥ HALF-PISTON: acetal resin
⑦ PISTON GASKET: polyurethane, NBR or FKM/FPM
⑧ MAGNET: plastoneodymium
⑨ CUSHIONING GASKET: NBR or FKM/FPM
⑩ NEEDLE: OT 58 with needle out movement safety system even when fully open
⑪ BUSHING (optional): self-lubricating bronze

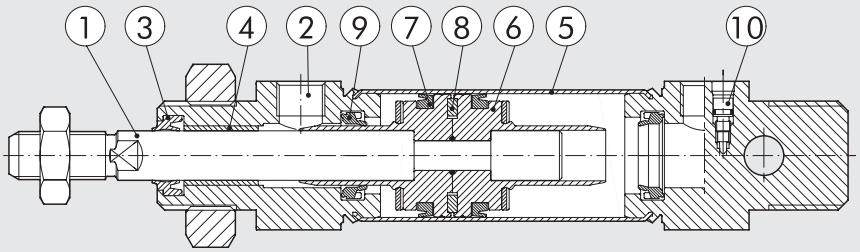



METAL WORK PNEUMATIC

DIMENSIONS OF DOUBLE-ACTING VERSIONS

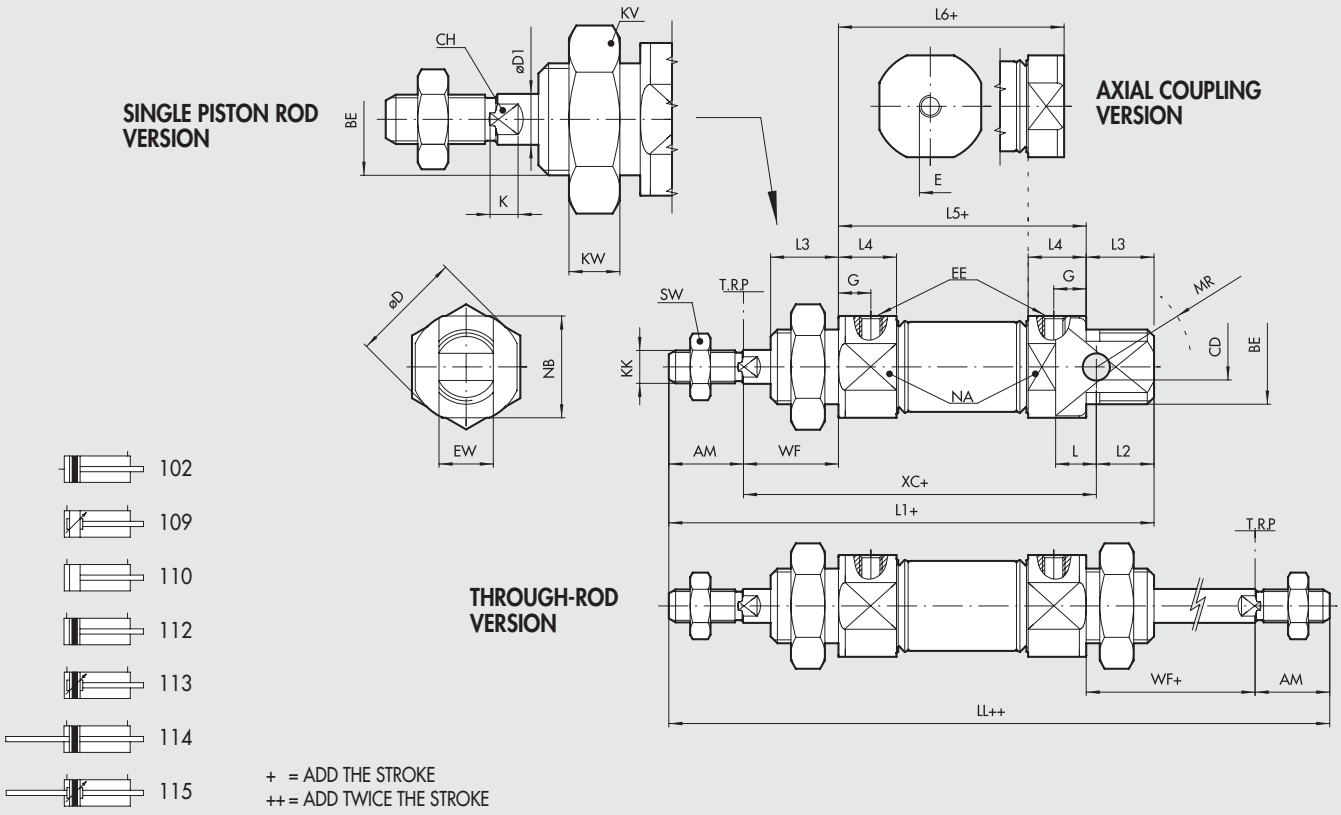

Ø	AM $^{+0}_{-2}$	BE	øCD H9	øD	øD1	E	G	EE	EW d13	L	LL	L1	L2	L3	L4	L5	L6	KK	XC ±1	WF ±1,2	KW	KV	MR	NA	NB	SW	CH	K
8	12	M12x1.25	4	16.7	4	M5	6	M5	8	6.5	102	86	10	12	10	46	46	M4	64	16	7	19	12	15	15	7	3	3
10	12	M12x1.25	4	16.7	4	M5	6	M5	8	6.5	102	86	10	12	10	46	46	M4	64	16	7	19	12	15	15	7	3	3
12	16	M16x1.5	6	19	6	M5	6	M5	12	9	125	104	13	17	10	49	47	M6	75	22	8	24	16	17	17	10	5	3.5
16	16	M16x1.5	6	19.7	6	1/8	6	M5	12	9	132	111	13	17	10	56	53	M6	82	22	8	24	16	18	18	10	5	3.5
20	20	M22x1.5	8	27.9	8	1/8	8	G 1/8	16	12	156	129	14	17	15.5	68	61	M8	95	24	7	32	18	24	24	13	7	4.6
25	22	M22x1.5	8	33	10	1/8	9	G 1/8	16	12	173	143	17	20	17.1	73	66.5	M10x1.25	104	28	7	32	21	30	30	17	8	5

NOTES

DIMENSIONS OF DOUBLE-ACTING WITH SPRING, RETRACTED PISTON ROD VERSIONS
DIMENSIONS OF SINGLE-ACTING WITH SPRING, RETRACTED PISTON ROD VERSIONS

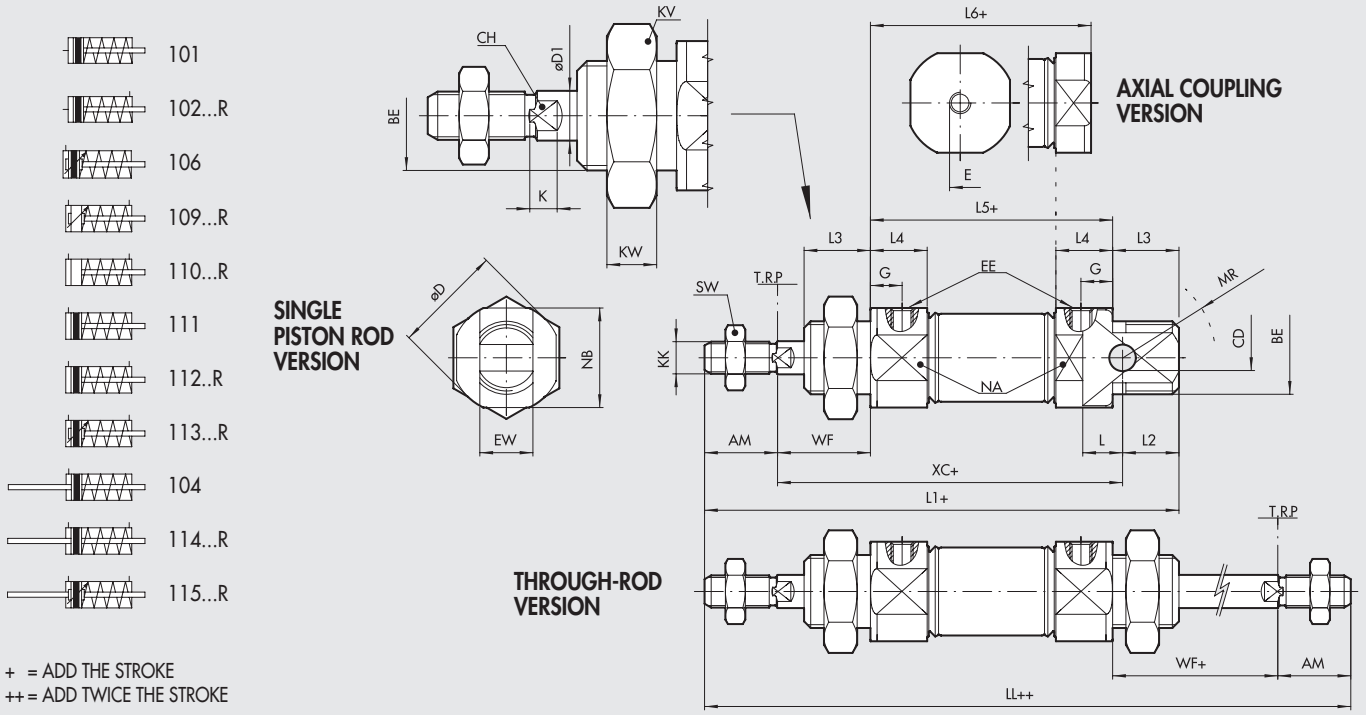

+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

VERSION 101... / 104... / 106... / 111... (Stroke 0-50)

Ø	AM $^{+0}_{-2}$	BE	øCD H9	øD	øD1	E	G	EE	EW d13	L	LL	L1	L2	L3	L4	L5	L6	KK	XC ±1	WF ±1,2	KW	KV	MR	NA	NB	SW	CH	K
8	12	M12x1.25	4	16.7	4	M5	6	M5	8	6.5	102	86	10	12	10	46	46	M4	64	16	7	19	12	15	15	7	3	3
10	12	M12x1.25	4	16.7	4	M5	6	M5	8	6.5	102	86	10	12	10	46	46	M4	64	16	7	19	12	15	15	7	3	3
12	16	M16x1.5	6	19	6	M5	6	M5	12	9	125	104	13	17	10	49	47	M6	75	22	8	24	16	17	17	10	5	3.5
16	16	M16x1.5	6	19.7	6	1/8	6	M5	12	9	132	111	13	17	10	56	53	M6	82	22	8	24	16	18	18	10	5	3.5
20	20	M22x1.5	8	27.9	8	1/8	8	G 1/8	16	12	156	129	14	17	15.5	68	61	M8	95	24	7	32	18	24	24	13	7	4.6
25	22	M22x1.5	8	33	10	1/8	9	G 1/8	16	12	173	143	17	20	17.1	73	66.5	M10x1.25	104	28	7	32	21	30	30	17	8	5

VERSION 101... (single-acting retracted piston rod)

Ø	Dimension	Stroke 51-75	Stroke 76-100
16	L6	101.8	126.2
20	L6	111.8	137.2
25	L6	118.5	144.5

VERSION 102...R (double-acting retracted piston rod)

Ø	Dimension	Stroke 0-25	Stroke 26-50	Stroke 51-75	Stroke 76-100
16	L6	63.4	83.4	107.8	132.2
20	L6	72.4	93.4	118.8	144.2
25	L6	77.6	100.5	126.5	152.5

VERSION 104... (single-acting through-rod)

Ø	Dimension	Stroke 51-75	Stroke 76-100
16	LL	180.8	205.2
	L5	104.8	129.2
20	LL	206.8	232.2
	L5	118.8	144.2
25	LL	225	251
	L5	125	151

VERSION 106... (single-acting cushioned, retracted piston rod)
VERSION 111... (single-acting retracted piston rod)

Ø	Dimension	Stroke 51-75	Stroke 76-100
16	L1	159.8	184.2
	L5	104.8	129.2
	XC ±1	130.8	155.2
20	L1	179.8	205.2
	L5	118.8	144.2
	XC ±1	145.8	171.2
25	L1	195	221
	L5	125	151
	XC ±1	156	182

VERSION 109...R / 113...R (double-acting cushioned, with spring, retracted piston rod)
VERSION 110...R / 112...R (double-acting with spring, retracted piston rod)

Ø	Dimension	Stroke 0-25	Stroke 26-50	Stroke 51-75	Stroke 76-100
16	L1	121.4	141.4	165.8	190.2
	L5	66.4	86.4	110.8	135.2
	XC ±1	92.4	112.4	136.8	161.2
20	L1	140.4	161.4	186.8	212.2
	L5	79.4	100.4	125.8	151.2
	XC ±1	106.4	127.4	152.8	178.2
25	L1	154.1	177	203	229
	L5	84.1	107	133	159
	XC ±1	115.1	138	164	190

VERSION 114...R (double-acting cushioned, with spring, through-rod)
VERSION 115...R (double-acting with spring, through-rod)

Ø	Dimension	Stroke 0-25	Stroke 26-50	Stroke 51-75	Stroke 76-100
16	LL	142.4	162.4	186.8	211.2
	L5	66.4	86.4	110.8	135.2
20	LL	167.4	188.4	213.8	239.2
	L5	79.4	100.4	125.8	151.2
25	LL	184.1	207	233	259
	L5	84.1	107	133	159

METAL WORK PNEUMATIC

DIMENSIONS OF DOUBLE-ACTING WITH SPRING, EXTENDED PISTON ROD VERSIONS
DIMENSIONS OF SINGLE-ACTING WITH SPRING, EXTENDED PISTON ROD VERSIONS



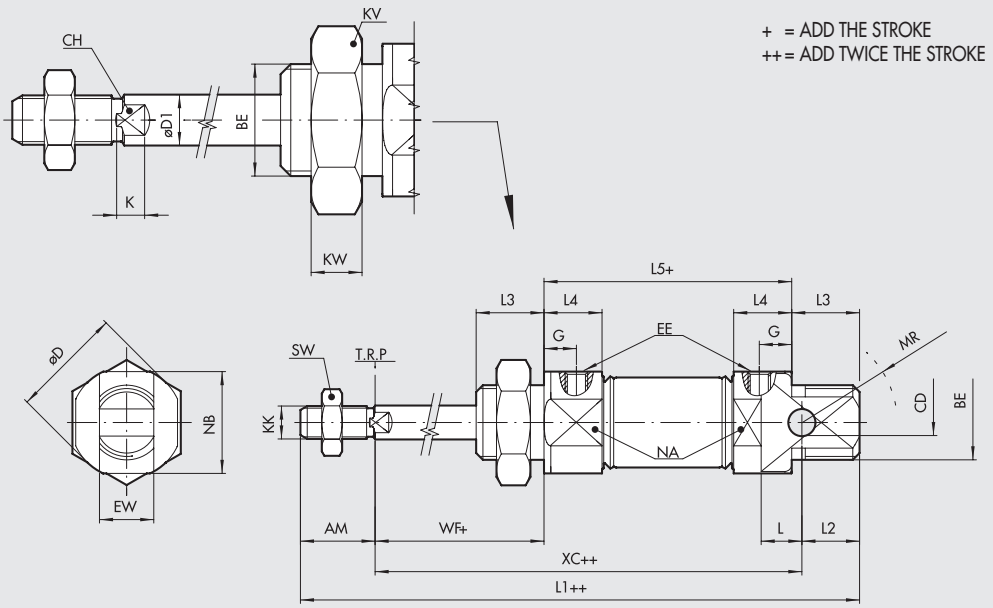

Ø	AM $^{+0}_{-2}$	BE	øCD ^{H9}	øD	øD1	G	EE	EW ^{d13}	L	L2	L3	L4	KK	WF $^{\pm1,2}$	KW	KV	MR	NA	NB	SW	CH	K
16	16	M16x1.5	6	19.7	6	6	M5	12	9	13	17	10	M6	22	8	24	16	18	18	10	5	3.5
20	20	M22x1.5	8	27.9	8	8	G 1/8	16	12	14	17	15.5	M8	24	7	32	18	24	24	13	7	4.6
25	22	M22x1.5	8	33	10	9	G 1/8	16	12	17	20	17.1	M10x1.25	28	7	32	21	30	30	17	8	5

VERSION 106...E (single-acting cushioned, extended piston rod)
VERSION 111...E (single-acting extended piston rod)

Ø	Dimension	Stroke 0-25	26-50	51-75	76-100
16	**L1**	115.4	135.4	159.8	184.2
	L5	60.4	80.4	104.8	129.2
	XC $^{\pm1}$	86.4	106.4	130.8	155.2
20	**L1**	133.4	154.4	179.8	205.2
	L5	72.4	93.4	118.8	144.2
	XC $^{\pm1}$	99.4	120.4	145.8	171.2
25	**L1**	146.1	169	195	221
	L5	76.1	99	125	151
	XC $^{\pm1}$	107.1	130	156	182

VERSION 109...E / 113...E (double-acting cushioned, with spring, extended piston rod)
VERSION 110...E / 112...E (double-acting with spring, extended piston rod)

Ø	Dimension	Stroke 0-25	26-50	51-75	76-100
16	**L1**	121.4	141.4	165.8	190.2
	L5	66.4	86.4	110.8	135.2
	XC $^{\pm1}$	92.4	112.4	136.8	161.2
20	**L1**	140.4	161.4	186.8	212.2
	L5	79.4	100.4	125.8	151.2
	XC $^{\pm1}$	106.4	127.4	152.8	178.2
25	**L1**	154.1	177	203	229
	L5	84.1	107	133	159
	XC $^{\pm1}$	115.1	138	164	190

NOTES

KEY TO CODES

CYL	1 1 2 TYPE	0 VERSION	16 BORE	0020 STROKE	C MATERIAL	P GASKETS	E
	▷ **101** SA axial coupling ▽ **102** DAM axial coupling ◀ ▷ **104** SA through-rod ■ △ **106** SA cushioned ■ **109** DAC **110** DA △ **111** SA **112** DAM ■ **113** DAMC ✱ ◇ **114** DAM through-rod ✱ ◇ ■ **115** DAMC through-rod ◆ ▷ **116** DAM suitable for rod lock ■ ▷ **117** DAMC suitable for rod lock	**0** Standard ✚ **U** Bronze rear head bushing **V** Without head nut **S** Non-magnetic ▲ **G** No stick-slip	▼ 08 ▼ 10 ▼ 12 16 20 25	For the maximum suppliable strokes, look at the technical data	**A** C45 chrome piston rod, aluminium piston **C** C45 chrome piston rod,technopolymer piston □ **Z** Stainless steel piston rod and nut aluminium piston **X** Stainless steel piston rod and nut technopolymer piston	**P** Polyurethane **N** NBR ● **V** FKM/FPM ● **B** Low temperature	▶ ■ **E** Single-acting extended rod or double-acting with spring, extended piston rod ✖ **R** Double-acting with spring, retracted piston rod

DA: Double-acting (non-cushioned, not magnetic)
DAM: Magnetic double-acting (non-cushioned)
DAMC: Magnetic double-acting (cushioned)
DAC: Cushioned double-acting (non-magnetic)
SA: Single-acting (magnetic). The versions without the final "E" are to be considered with retracted piston rod.

● Only available for non-magnetic versions (S) and with aluminium piston (A or Z)
▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only**
▼ Stainless steel piston rod
■ Available from Ø 16
◆ Available from Ø 12
▷ Not available for versions with final letter E or R
△ Not available for versions with final letter R
▽ Not available for versions with final letter E
◇ Stainless steel piston rod. Not available for versions with final letter E
✱ For Ø 16 to 25 aluminium piston, stainless stell piston rod
▶ Letter to be added only to the single acting extended rod version or double-acting with spring, extended piston rod
✖ Letter to be added only for the double-acting version with retracted piston rod spring
✚ Not available for types 101, 102, 104, 114, 115
◀ For Ø 16 to 25 stroke from 51 to 100 aluminium piston
□ For Ø 8 to 12 DEM and SE, material Z is only available for nonmagnetic versions (S)

ISO 6432 MINI-CYLINDER SERIES TP

Minicylinders manufactured according to the ISO 6432 regulation having high resistance technopolymer heads and anodized aluminium liner.
Available in various versions with a wide range of accessories:

- with or without magnet
- double acting, single or through rod
- gaskets made of POLYURETHANE
- fixing accessories and guide units.

TECHNICAL DATA			Ø16	Ø20	Ø25
Max operating pressure		bar	10		
		MPa	1		
		psi	145		
Temperature range	POLYURETHANE	°C	–10 to +60		
Design			Aluminium liner chamfered on the heads		
Fluid			Unlubricated air. Lubrication, if used, must be continuous		
Standard strokes ✚		mm	1 to 200	1 to 500	
Versions			Double-acting, Double Through-rod		
Sensor magnet			Available magnetic and non-magnetic versions.		
Inrush pressure	single piston rod	bar	0.6		
	through-rod	bar	0.8		
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter		
Weights			See cylinder "**General technical data**" at the beginning of the chapter		
Notes			The standard version is lacking of the head nut.		
			Use of fittings with a taper thread is NOT recommended.		
			✚ Maximum recommended strokes. Higher values can create operating problems		

COMPONENTS

① PISTON ROD: C45 steel or stainless steel, thick chromed
② HEADS: high resistance technopolymer
③ PISTON ROD GASKET: polyurethane
④ GUIDE OPERATOR: technopolymer
⑤ BARREL: drawn anoside aluminium alloy
⑥ PISTON GASKET: polyurethane
⑦ MAGNET: plastoneodymium
⑧ STATIC O-RINGS: NBR
⑨ COVER PLATE: technopolymer

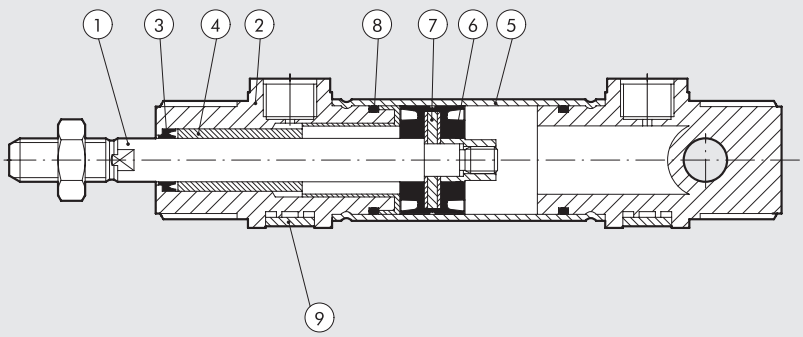

DIMENSIONS OF STANDARD VERSIONS

+ = ADD STROKE

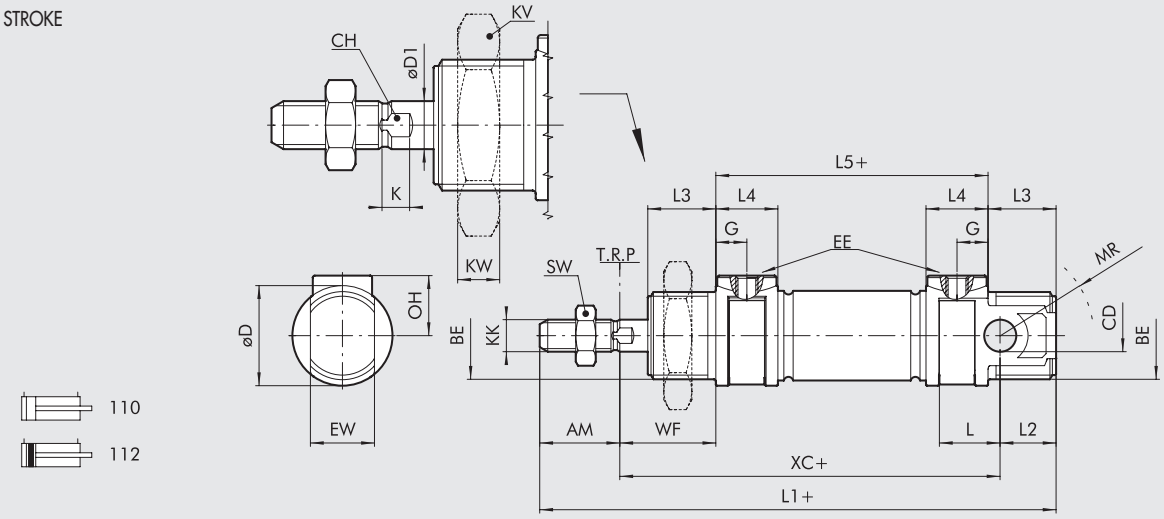

Ø	AM	BE	CD (H9)	øD	øD1	G	EE	EW (d13)	OH	L	L1	L2	L3	L4	L5	KK	XC(±1)	WF	KW	KV	MR	SW	CH	K
16	16	M16x1.5	6	21	6	4.7	M5	12	12	11	111	13	17	9.5	56	M6	82	22	8	24	16	10	5	3.5
20	20	M22x1.5	8	25	8	7.7	1/8"	16	16	15	129	14	17	15.5	68	M8	95	24	7	32	18	13	7	4.6
25	22	M22x1.5	8	30	10	7.7	1/8"	16	17	15	143	17	20	15.5	73	M10x1.25	104	28	7	32	21	17	8	5.5

MAX LOCKING TORQUE [Nm]		
Ø	BE (front/rear)	EE
16	12/8	1.2
20	22/15	3
25	22/15	3

DIMENSIONS OF STANDARD VERSIONS WITH THROUGH-ROD

+ = ADD STROKE
++ = ADD TWICE THE STROKE

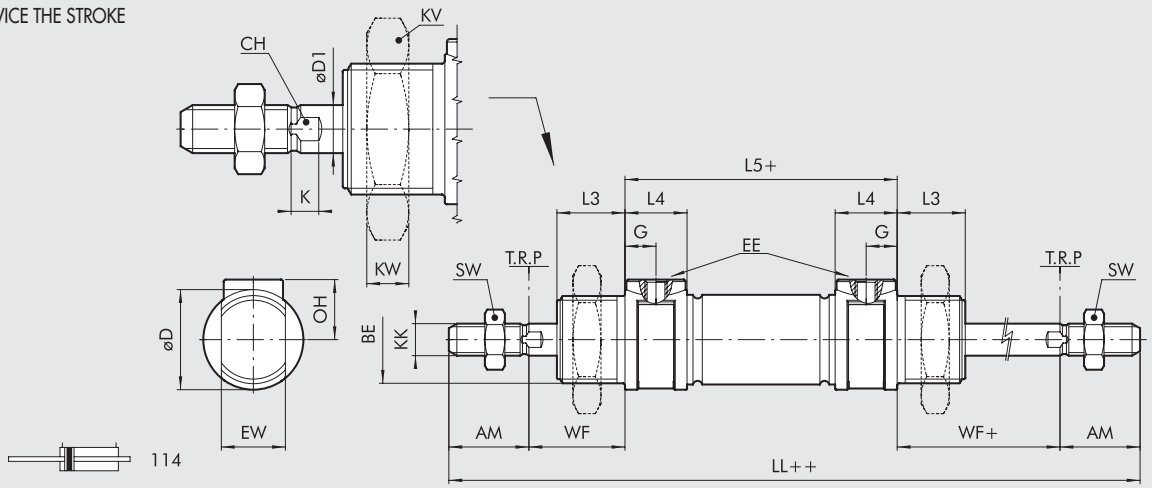

Ø	AM	BE	øD	øD1	G	EE	OH	LL	L3	L4	L5	KK	WF	KW	KV	SW	CH	K
16	16	M16x1.5	21	6	4.7	M5	12	132	17	9.5	56	M6	22	8	24	10	5	3.5
20	20	M22x1.5	25	8	7.7	1/8"	16	156	17	15.5	68	M8	24	7	32	13	7	4.6
25	22	M22x1.5	30	10	7.7	1/8"	17	173	20	15.5	73	M10x1.25	28	7	32	17	8	5.5

MAX LOCKING TORQUE [Nm]		
Ø	BE	EE
16	12	1.2
20	22	3
25	22	3

KEY TO CODES

CYL	1 1 0 TYPE	3	16 BORE	0	020 STROKE	C MATERIAL	P GASKETS
	110 DA non-magnetic minicylinder **112** DAM minicylinder **114** DAM through-rod minicylinder	● **3** TP heads (standard) **4** TP heads (standard) + head nut	■ 16 20 25	**0** Standard **S** Non-magnetic	For the maximum suppliable strokes, look at the technical data	**C** C45 chrome piston rod **X** Stainless piston rod	**P** Polyurethane

DA: Double-acting (non-cushioned, not magnetic).
DAM: Double action magnetic (unless otherwise specified) not cushioned.

As standard the cylinders are already No stick-slip version.
● This version don't provide the nut on the head.
■ Ø 16 will be only in version with stainless rod (X).

ACCESSORIES FOR ISO 6432 MINI-CYLINDERS

FIXINGS

FOOT MODEL A

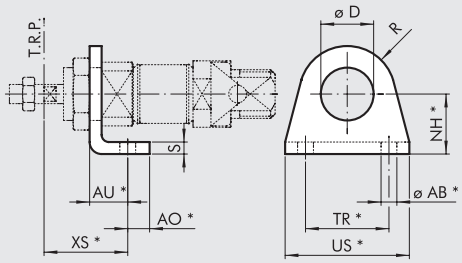

Code	Ø	ø D	XS ±1.4	AU	AO	NH ±0.3	TR Js14	US	ø AB H13	R	S	Weight [g]
W0950080001	8	12	24	11	5	16	25	35	4.5	10	3	22
W0950080001	10	12	24	11	5	16	25	35	4.5	10	3	22
W0950120001	12	16	32	14	6	20	32	42	5.5	13	4	42
W0950120001	16	16	32	14	6	20	32	42	5.5	13	4	42
W0950200001	20	22	36	17	8	25	40	54	6.5	20	5	90
W0950200001	25	22	40	17	8	25	40	54	6.5	20	5	90

*ISO 6432 values

Note: Individually packed

FLANGE MODEL C

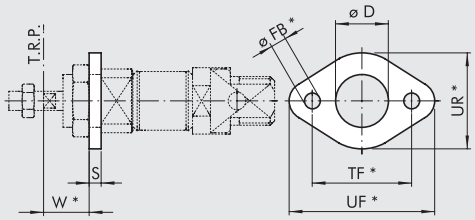

Code	Ø	ø D	W ±1.4	ø FB H13	TF Js14	UF	UR	S	Weight [g]
W0950080002	8	12	13	4.5	30	40	22	3	10
W0950080002	10	12	13	4.5	30	40	22	3	10
W0950120002	12	16	18	5.5	40	52	30	4	26
W0950120002	16	16	18	5.5	40	52	30	4	26
W0950200002	20	22	19	6.5	50	66	40	5	52
W0950200002	25	22	23	6.5	50	66	40	5	52

*ISO 6432 values

Note: Individually packed

COUNTER-HINGE MODEL BC

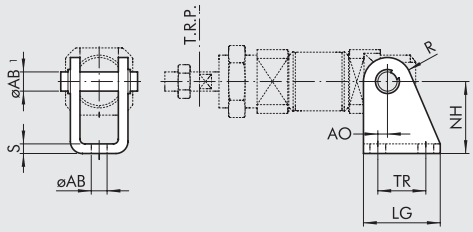

Code	Ø	AO	LG	TR Js13	NH ±0.2	MO	ø AB1	ø AB H13	R	S	Weight [g]
W0950080005	8	2.5	22	12.5	24	18	4	4.5	6	2.5	24
W0950080005	10	2.5	22	12.5	24	18	4	4.5	6	2.5	24
W0950120005	12	2	25	15	27	25	6	5.5	7	3	40
W0950120005	16	2	25	15	27	25	6	5.5	7	3	40
W0950200005	20	4	32	20	30	30	8	6.5	10	4	78
W0950200005	25	4	32	20	30	30	8	6.5	10	4	78

Note: Supplied complete with 1 pin and 2 snap rings

NUT FOR HEADS MODEL D



Code	Ø	F	CH	H	Weight [g]
0950080010	8	M12x1.25	19	7	12
0950080010	10	M12x1.25	19	7	12
0950120010	12	M16x1.5	24	8	20
0950120010	16	M16x1.5	24	8	20
0950200010	20	M22x1.5	32	7	44
0950200010	25	M22x1.5	32	7	44

Note: Individually packed

NUT FOR PISTON RODS MODEL DA



Code	Ø	F	CH	H	Weight [g]
0950080011	8	M4	7	3	0.6
0950080011	10	M4	7	3	0.6
0950120011	12	M6	10	4	1
0950120011	16	M6	10	4	1
0950200011	20	M8	13	5	3
0950322010	25	M10x1.25	17	6	7

Note: Individually packed

FORK MODEL GK-M



Code	Ø	øM	C	B	A	L	F	D	N	Weight [g]
W0950080020	8	4	8	4	8	21	16	M4	11	8
W0950080020	10	4	8	4	8	21	16	M4	11	8
W0950120020	12	6	12	6	12	31	24	M6	16	20
W0950120020	16	6	12	6	12	31	24	M6	16	20
W0950200020	20	8	16	8	16	42	32	M8	22	48
W0950322020	25	10	20	10	20	52	40	M10x1.25	26	92

Note: Individually packed

ROD EYE MODEL GA-M

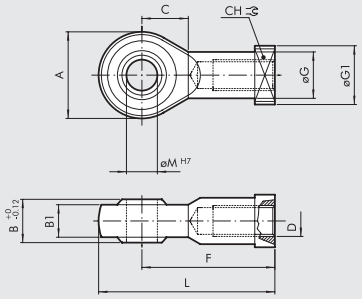

Code	Ø	øM	C	B	B1	A	L	F	D	øG	øG1	CH	Weight [g]
W0950080025	8	5	10	8	6	18	36	27	M4	9	11	9	18
W0950080025	10	5	10	8	6	18	36	27	M4	9	11	9	18
W0950120025	12	6	11	9	6.5	20	40	30	M6	10	13	11	22
W0950120025	16	6	11	9	6.5	20	40	30	M6	10	13	11	22
W0950200025	20	8	13	12	9	24	48	36	M8	12.5	16	14	45
W0950322025	25	10	15	14	10.5	28	57	43	M10x1.25	15	19	17	70

Note: Individually packed

ACCESSORIES FOR ISO 6432 MINI-CYLINDERS: MAGNETIC SENSORS

Ⓔ RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

Ⓕ SENSOR BRACKET MOD. DSW

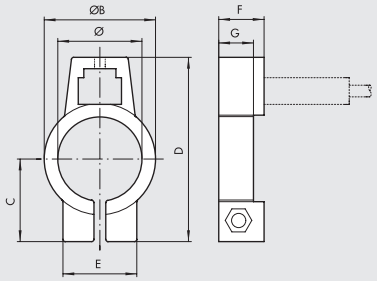

Code	Bore	Model	Ø	ØB	C	D	E	F	G
W0950000608	8	BEF-KHZ-RT-08F23	9.3	12.3	11	24.7	12.2	10	-
W0950000610	10	BEF-KHZ-RT-10F23	11.3	14.3	12	26.7	12.2	10	-
W0950000612	12	BEF-KHZ-RT-12F23	13.3	16.3	13.3	29	12.2	10	-
W0950000616	16	BEF-KHZ-RT-16F23	17.7	20.5	15.5	33.2	12.2	10	7.8
W0950000620	20	BEF-KHZ-RT-20F23	21.7	24.5	17.6	37.3	12.2	10	7.5
W0950000625	25	BEF-KHZ-RT-25F23	26.7	29.5	20.2	42.4	12.2	10	7.5

Note: Individually packed

Ⓖ UNIVERSAL SENSOR BRACKET



Code	Bore	Model
W0950001103	8 to 25	Sensor bracket 8 to 63

Note: Individually packed
MATERIAL
Bracket: stainless steel
Sensor holder: zamak

METAL WORK PNEUMATIC

Ⓐ SENSOR SERIES DSM

For codes and technical data, see **chapter A6**.



Ⓑ SENSOR BRACKET MOD. DXF FOR STAINLESS STEEL BARREL



Code	Bore	Model	Ø	A	B
W0950000508	8	Bracket DXF - 09	9.3	15	10
W0950000510	10	Bracket DXF - 11	11.3	16.5	10
W0950000512	12	Bracket DXF - 13	13.3	17.5	10
W0950000516	16	Bracket DXF - 17	17.3	18.5	10
W0950000520	20	Bracket DXF - 21	21.3	21	10
W0950000525	25	Bracket DXF - 26	26.3	23.5	10

Note: Individually packed

Ⓒ SENSOR BRACKET MOD. DXF FOR ALUMINIUM BARREL



Code	Bore	Model	Ø	A	B
W0950000108	8	Bracket DXF 12- 8	12	17	10
W0950000110	10	Bracket DXF 14-10	14	18	10
W0950000112	12	Bracket DXF 16-12	16	19	10
W0950000116	16	Bracket DXF 20-16	20	21	10
W0950000120	20	Bracket DXF 24-20	24	23	10
W0950000125	25	Bracket DXF 29-25	29	28	10

Note: Individually packed. For the Ø16 in addition to the bracket 2 reduction rings, for the Ø20 and Ø25 1 reduction ring.

USE SENSORS

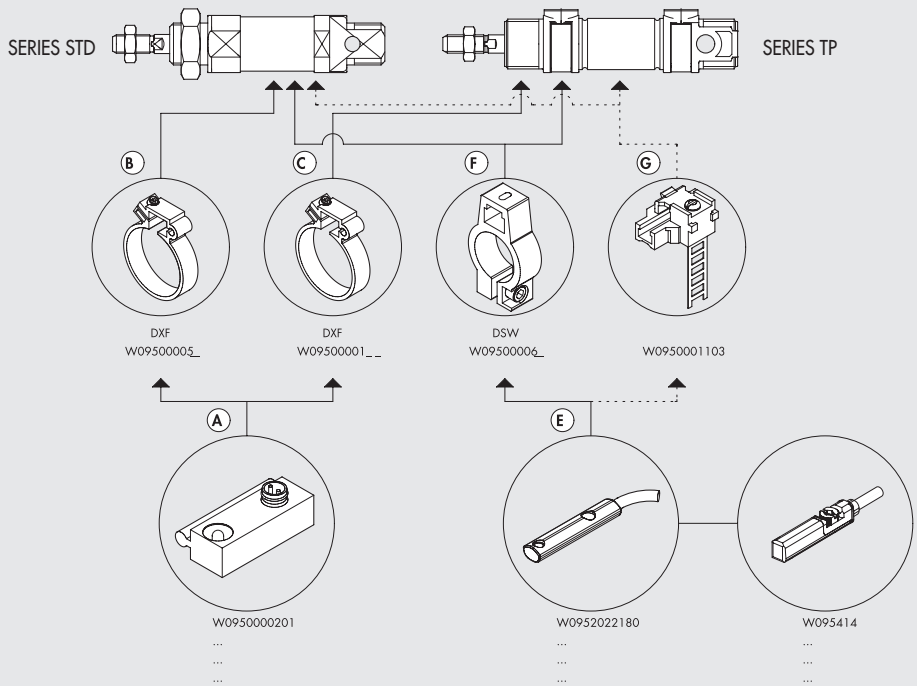

ACCESSORIES FOR ISO 6432 MINI-CYLINDERS: MECHANICAL ROD LOCK

TECHNICAL DATA

Operating pressure	bar	3 to 6
	MPa	0.3 to 0.6
Temperature range	°C	-10 to +80
Installation		In any position
Mechanics		Double pad with mechanical locking
		Mechanical stick-slip
Operation		NC bidirectional
Fluid		Lubricated or unlubricated compressed air
Locking force		Ø 12-16: 180 N / Ø 20: 250 N
		Ø 25: 400 N
Pilot port		M5
MATERIALS		
body		Aluminium
pad		Brass
spring		NBR
piston		Synthetic, with added teflon®
gasket		NBR

OPERATING PRINCIPLE

The mechanical rod lock is a normally-closed mechanism.
In the absence of pneumatic piloting, the two pads (A) lock the cylinder rod in both directions (Fig. 1). With pneumatic piloting, the piston rod guide forces the pads to come right up to each other and overcome the counter spring (B) force and the piston rod can slide (Fig. 2).
It is important to remember that the mechanical rod lock is a static type, which means that it is necessary to stop the cylinder piston rod pneumatically before locking the part mechanically.

Fig. 1



Fig. 2



DIMENSIONS

+ = ADD STROKE

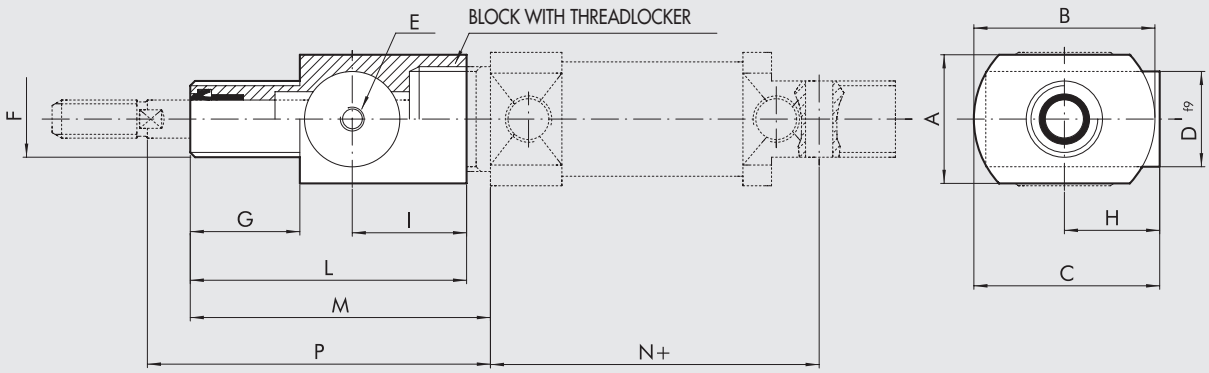

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	P(±1.2)	Weight [g]
W5010001099	12	⍁ 25	⍁ 25	31.5	20	M5	M16x1.5	12	19	23	47	52	53	57	100
W5010001099	16	⍁ 25	⍁ 25	31.5	20	M5	M16x1.5	12	19	23	47	52	60	57	100
W5010001100	20	27	38	40	20	M5	M22x1.5	23	21	24	58	65	71	72	100
W5010001101	25	27	38	40	20	M5	M22x1.5	23	21	24	58	68	76	76	100

ACCESSORIES FOR ISO 6432 MINI-CYLINDERS: GUIDE UNIT

Guide units series DS-DH-DM ensure optimal alignment and anti-rotation effect of the pneumatic cylinder connected to it. The guide units can be used separately or combined in order to get complete handling units: in which case the guide units can be coupled using the type A and C anchorage (foot and flange).
The guide unit can be coupled to ISO 6432 cylinders (Ø 12 - Ø 25).
The following versions are available:
U PROFILE (GDS)*: for limited loads and speeds
H PROFILE (GDH)*: for high loads
H PROFILE (GDM)**: for high speeds

* With bronze guide bushing
** With ball guide bushing

STANDARD STROKES: 50 - 100 - 150 - 200 - 250 - 320 - 400 - 500

For weights, see cylinder "**General technical data**" at the beginning of the chapter.

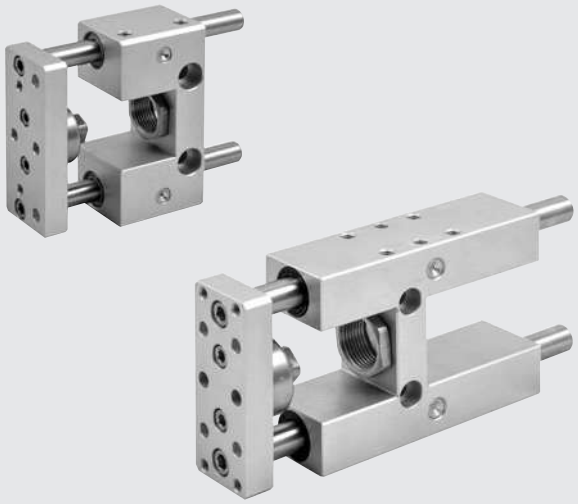

GUIDE ELEMENTS

SERIES GDS-GDH	Body:	aluminium alloy
	Guide bushing:	self-lubricating syntered bronze and wiper rings
	Piston rod:	grinded chromed steel
SERIES GDM	Body:	aluminium alloy
	Guide bushing:	linear guide ball bearings and wiper rings
	Piston rod:	hardened, chromed and grinded steel

GUIDE UNIT LOAD DIAGRAM

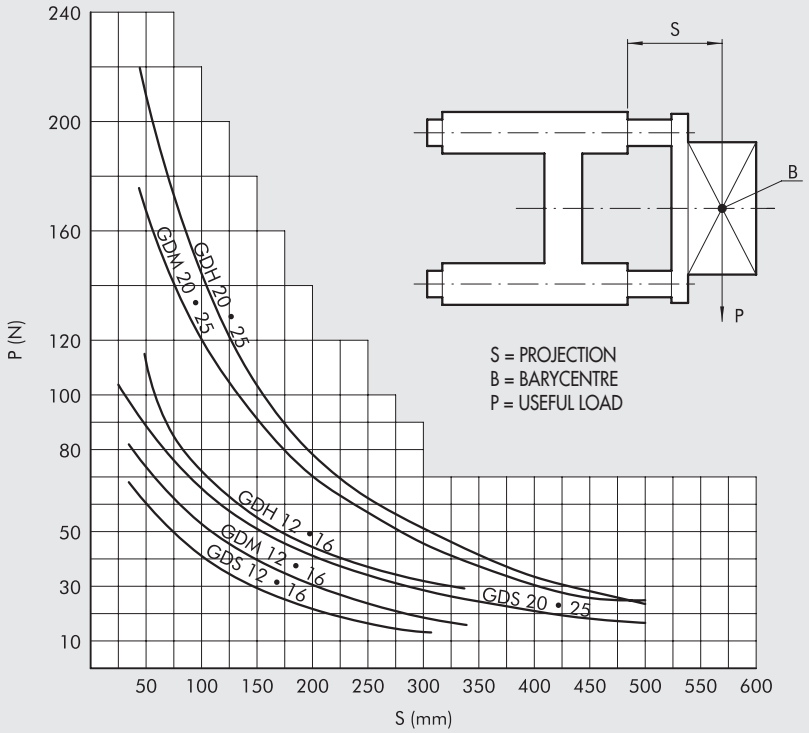

DIMENSIONS OF TYPE GDH-GDM

+ = ADD THE STROKE
✱ = CENTERING PINHOLES

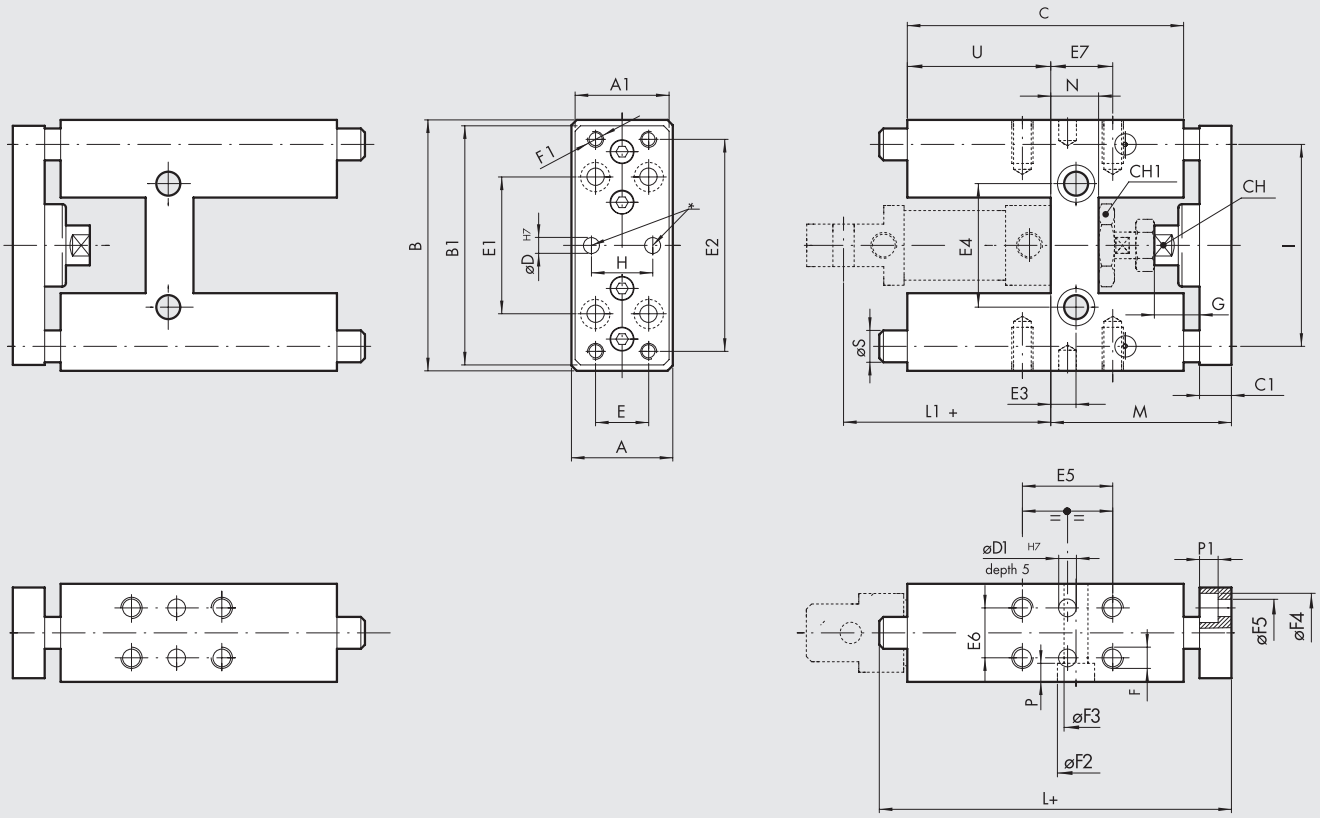

Ø	A	A_1	B	B_1	C	C_1	Ch	Ch_1	D	D_1	E	E_1	E_2	E_3	E_4	E_5	E_6	E_7	F	F_1	F_2	F_3	F_4	F_5	G	H	I	L	L_1	M	N	P	S	U
12	30	27	65	63	75	10	8	19	4	-	15	32	54	6.5	24	32.5	22	11	M4	M4	8.5	5.1	7.5	4.5	15	15	46	130	53	54	15	5.5	10	37
16	30	27	65	63	75	10	8	19	4	-	15	32	54	6.5	24	32.5	22	11	M4	M4	8.5	5.1	7.5	4.5	15	15	46	130	60	54	15	5.5	10	37
20	34	32	79	76	108	12	13	27	6	5	20	40	68	8.5	38	32.5	23	15	M6	M5	10.5	6.5	9	5.5	22	20	58	160	71	65	15	7	12	58
25	34	32	79	76	108	12	13	27	6	5	20	40	68	8.5	38	32.5	23	15	M6	M5	10.5	6.5	9	5.5	22	20	58	160	76	65	15	7	12	58

GDH (BRONZE GUIDE BUSHING)

Code	Bore	Type
W0700122...	**12**	UNIT MW DH 012
W0700162...	**16**	UNIT MW DH 016
W0700202...	**20**	UNIT MW DH 020
W0700252...	**25**	UNIT MW DH 025

...Enter the stroke in 3 digits (e.g. 50 = 050).
Also available in V-Lock version (see **chapter A3**).

GDM (BALL GUIDE BUSHING)

Code	Bore	Type
W0700123...	**12**	UNIT MW DM 012
W0700163...	**16**	UNIT MW DM 016
W0700203...	**20**	UNIT MW DM 020
W0700253...	**25**	UNIT MW DM 025

...Enter the stroke in 3 digits (e.g. 50 = 050).
Also available in V-Lock version (see **chapter A3**).

STROKE

Cylinder stroke [mm]		Guide stroke [mm]
from	**to**	
0	75	50
75	125	100
125	175	150
175	225	200
225	275	250
275	345	320
345	425	400
425	525	500

Note:
Thanks to the dimensional features, it is possible to extend the use of GDH/GDM guides to cylinders with strokes up to 25 mm above the nominal guide stroke. The table here shows the stroke/cylinder range that can be used depending on the nominal stroke of the guide.

METAL WORK PNEUMATIC

DIMENSIONS OF TYPE GDS

+ = ADD THE STROKE
✱ = CENTERING PINHOLES

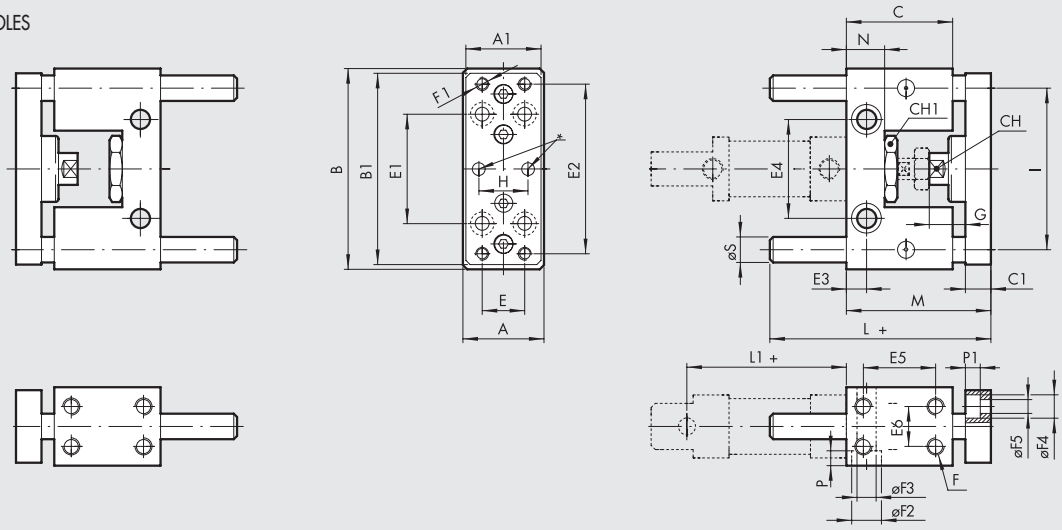

Ø	A	A_1	B	B_1	C	C_1	Ch	Ch_1	D	E	E_1	E_2	E_3	E_4	E_5	E_6	F	F_1	F_2	F_3	F_4	F_5	G	H	I	L	L_1	M	N	P	P_1	S
12	30	27	65	63	38	10	8	19	4	15	32	54	6.5	24	25	22	M4	M4	8.5	5.1	7.5	4.5	15	15	46	70	53	54	13	5.5	4.5	10
16	30	27	65	63	38	10	8	19	4	15	32	54	6.5	24	25	22	M4	M4	8.5	5.1	7.5	4.5	15	15	46	70	60	54	13	5.5	4.5	10

+ = ADD THE STROKE
✱ = CENTERING PINHOLES

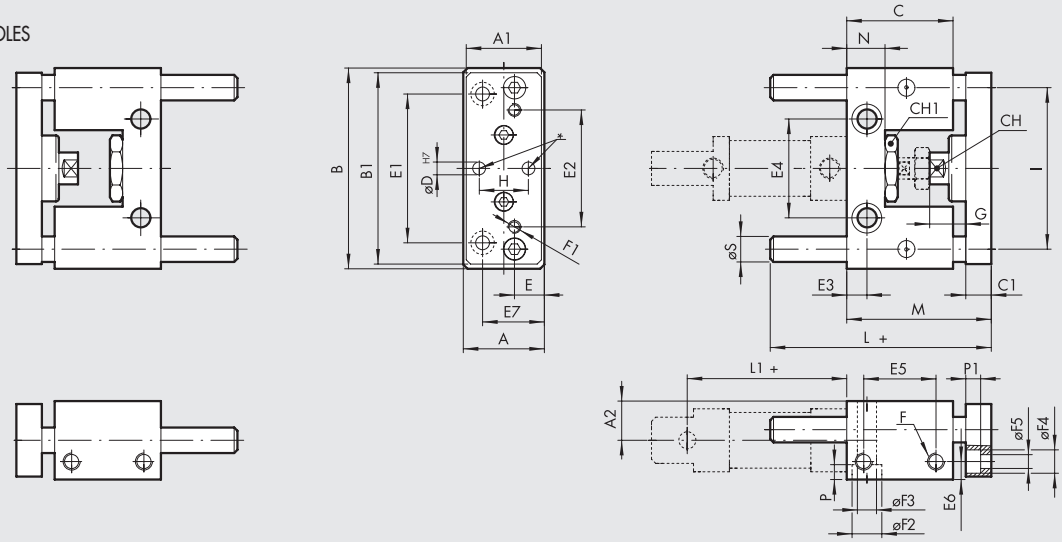

Ø	A	A_1	A_2	B	B_1	C	C_1	Ch	Ch_1	D	E	E_1	E_2	E_3	E_4	E_5	E_6	E_7	F	F_1	F_2	F_3	F_4	F_5	G	H	I	L	L_1	M	N	P	P_1	S
20	40	38	20	100	90	48	12	13	27	6	15	70	55	8.5	46.5	32	10	30	M8	M6	14	9	11	6.5	22	20	76	77	71	65	17	9	6.5	12
25	40	38	20	100	90	48	12	13	27	6	15	70	55	8.5	46.5	32	10	30	M8	M6	14	9	11	6.5	22	20	76	77	76	71	17	9	6.5	12

GDS (BRONZE GUIDE BUSHING)

Code	Bore	Type
W0700121...	**12**	UNIT MW DS 012
W0700161...	**16**	UNIT MW DS 016
W0700201...	**20**	UNIT MW DS 020
W0700251...	**25**	UNIT MW DS 025

...Enter the stroke in 3 digits (e.g. 50 = 050).

STROKE

Cylinder stroke [mm]		Guide stroke [mm]
from	to	
0	50	50
51	100	100
101	150	150
151	200	200
201	250	250

Note:
Thanks to the dimensional features, it is possible to use the range of strokes - cylinders, as shown in the table here, without the guide piston rods projecting beyond the cylinder fixing value (L1 +).

ISO 15552 CYLINDER

Cylinders made to ISO 15552 available in various versions and with a wide range of accessories:

- Configuration with or without magnet
- Single-or double acting – single-or through-rod
- Wide choice of NBR, POLYURETHANE and FKM/FPM gaskets (for high temperatures), for LOW TEMPERATURE
- Piston rod scrapers for use in hostile environments available
- Special versions on request
- Fixing accessories, guide units and mechanical rod lock.

They are available in three versions, series STD, type A, series 3, which differ according to the shape of the barrel and, consequently, the type of sensors and accessories that can be mounted.

TECHNICAL DATA			Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125
Max operating pressure		bar	10						
		MPa	1						
		psi	145						
Temperature range	POLYURETHANE	°C	–25 to +80						
	NBR	°C	–10 to +80						
	FKM/FPM	°C	–10 to +150 (non-magnetic cylinders)						
	Low Temperature	°C	–40 to +80						
	Other piston rod gasket	°C	See next page						
Design			Heads with Tap Tite screws						
Fluid			Unlubricated air. Lubrication, if used, must be continuous						
Standard stroke ✚	single-acting	mm	1 to 250	1 to 250	1 to 250	1 to 250	-	-	-
	double-acting with spring	mm	1 to 250	1 to 250	1 to 250	1 to 250	-	-	-
	double-acting	mm	1 to 2800	1 to 2800	1 to 2800	1 to 2800	1 to 2800	1 to 2600	1 to 2600
Versions			Double-acting cushioned, Double-acting cushioned with spring, extended or retracted piston rod, Single-acting extended or retracted rod cushioned, Through-rod cushioned, Long cushioning, High-temperature, Protective bellows, Rod lock, Oil seal, Through-rod oil seal, Low friction, No stick-slip.						
Sensor magnet			All versions come complete with magnet. Supplied without magnet on request.						
Inrush pressure		bar	0.4	0.4	strokes < 1500 mm: 0.3		strokes < 1500 mm: 0.2		
		bar			strokes > 1500 mm: 0.4		strokes > 1500 mm: 0.4		
	for type-R gasket	bar	1.5	1	1	0.8	0.5	0.5	0.5
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter						
Weights			See cylinder "**General technical data**" at the beginning of the chapter						
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**						
			✚ Maximum recommended strokes. Higher values can create operating problems						

COMPONENTS

① PISTON ROD: C45 steel or stainless steel, thick chromed
② HEAD: die cast aluminium
③ PISTON ROD GASKET: polyurethane, NBR, FKM/FPM, FKM/FPM with metal scraper
④ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑤ BARREL: drawn anodized calibrated aluminium
⑥ HALF-PISTON: self-lubricating technopolymer with built-in cushioning ogives (aluminium with PTFE pad for diameters 80-100-125)
⑦ PISTON GASKET: polyurethane, NBR or FKM/FPM
⑧ MAGNET: plastoferrite
⑨ BUFFER + Static O-rings: NBR or FKM/FPM
⑩ CUSHIONING GASKET: polyurethane, NBR or FKM/FPM
⑪ CUSHIONING NEEDLE: OT 58 with needle out movement safety system even when fully open
⑫ SCREWS: Tap Tite for assembly

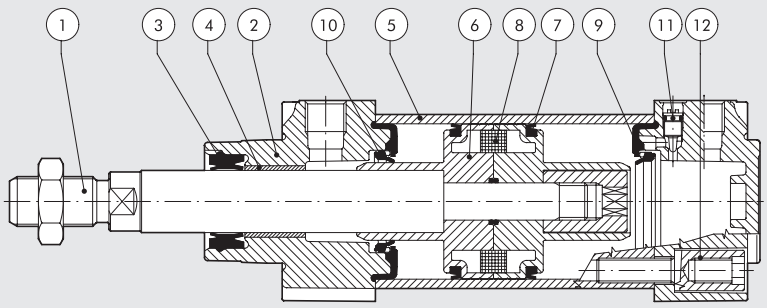

METAL WORK PNEUMATIC

OVERVIEW OF SEALS AND SCRAPERS

		Code identifier	Key feature	Applications	Gasket material	Temperature range	Notes
①		....N	General use.	Standard applications, also with humidity.	NBR	-10 to +80 °C	
②		....P	Long life.	Applications with long strokes or high number of cycles.	Polyurethane	-25 ÷ +80 °C	
③		V	High temperatures - chemicals.	Industrial applications with chemical agents and/or at high temperatures.	FPM/FKM	-10 to +150 °C (non magnetic cylinders)	
④		....B	Low temperatures.	Applications in presence of low temperature such as in cold environments.	NBR	-40 to +80 °C	
⑦		C	Dirt and dust. Reference name: COMBI	Applications in dirty and dusty environments.	Scraper made of technopolymer, the other seals are made of NBR.	-10 to +80 °C	Maximum recommended speed: 1 m/s
⑧		....R	Dirt and low temperatures. Reference name: HARD PU	Medium-Heavy duty applications, with presence of dirt and low temperatures, such as in agricolture or in transport sector.	Piston rod seal made of hard polyurethane, the other seals are made of polyurethane.	-25 to +80 °C	Low temperature versions for a minimum temperature of -35°C are available on request.
⑨		....M	Dirt and high temperature. Reference name: METAL	Heavy duty applications, in presence of hard dirt and high temperatures, like in cement plants, foundries or in transport sector.	Metal scraper, the other seals are made of FKM/FPM.	-10 to +150 °C	Not available in Ø 32. The scraper is housed in a special head.
SEALS USED IN OTHER FAMILIES OF ISO 15552 CYLINDERS							
①		**123....** only for series 3	Ultra low friction.	Textile industry, dandy devices, pneumatic springs.	NBR	-10 to +80 °C	
⑩		**....BL** and **....WL**	HCR (High Corrosion Resistance)	Food and Beverage sector, such as dairy industry.	Anti-stagnation scraper made of special polyurethane, the other seals are made of NBR.	-10 to +60 °C	
②		**W184...** **W185...**	INOX	Industrial applications with aggressive chemical agents.	Polyurethane	-20 to +80 °C	
③		**W184V...** **W185V...**	Stainless steel high temperature.	Industrial applications, in presence of chemicals and high temperatures requested, such as in chemical plants.	FKM/FPM	-10 to +150 °C	
SEALS AVAILABLE ON REQUEST							
⑥		**Only on request**	Self lubricated.	Applications where the lubricants in the cylinder could be removed, such as in car washing plants.	Self lubricated tecnopolymer.	-30 to +80 °C	

Anti-contamination Effect Indicators

An index of protection against the dirt that settles and adheres to the piston rod is provided for each version, on a 1 to 100 scale.



OVERVIEW DEGREE OF RESISTANCE TO CORROSION OF ISO 15552 CYLINDERS

Degree		Family	
MW S	STANDARD		ISO 15552 cylinder (STD, type A, series 3)
MW M	MEDIUM		ISO 15552 cylinder - series MCR
MW H	HIGH		ISO 15552 cylinder - series HCR
MW X	EXTRA		Stainless steel ISO 15552 cylinder

ISO 15552 CYLINDER
SERIES STD

ISO 15552 cylinders, featuring a smooth barrel with no longitudinal slots.
This means it is easier to clean the cylinder and there are fewer points where dirt can collect.
Specific brackets are required for mounting magnetic sensors.

BARREL CROSS SECTION

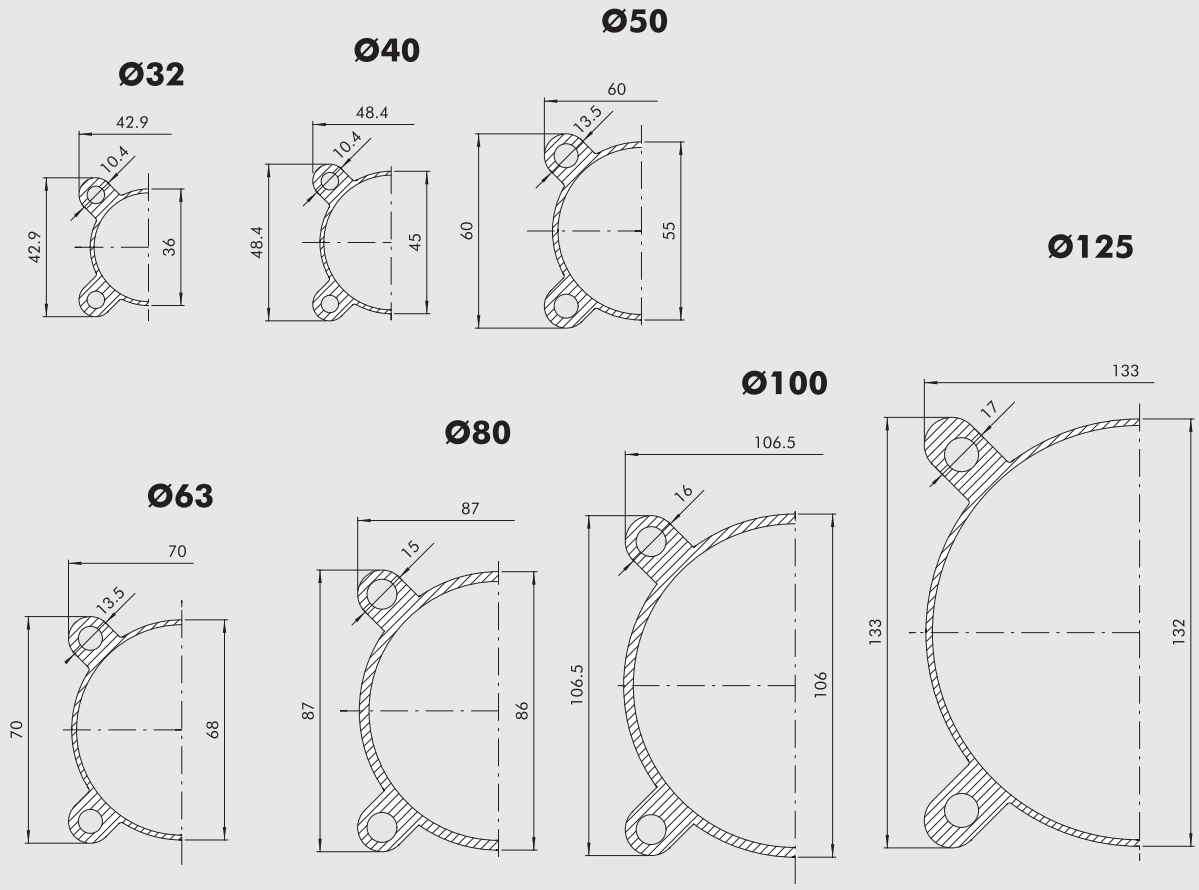

METAL WORK PNEUMATIC

KEY TO CODES

CYL	1 2 1	0	3 2	0 0 5 0	C	P	E
	TYPE	VERSION	BORE	STROKE	MATERIAL	GASKETS	
	120 Double-acting, cushioned, non-magnetic	**0** Diameter	32	For the maximum suppliable strokes, look at the technical data	**A** C45 chromed piston rod, aluminium piston: standard for all cylinders with ≥ 1000 mm-stroke cylinders and for cylinder with Ø 80 mm and over	**N** NBR gaskets	✚ ▼ **E** Single-acting extended rod or double-acting with spring, extended piston rod
	121 Double-acting, cushioned	**S** Non-magnetic	40			**P** Polyurethane gaskets	
●	**122** Through-rod	▲ **G** No stick-slip	50			**V** FKM/FPM gaskets	
	124 Double-acting, non-cushioned		63			● **B** Low temperature	✚ ✖ **R** Double-acting with spring, retracted piston rod
	125 Opposed		80		**C** C45 chromed piston rod, technopolymer piston: standard for cylinders of Ø 32 to 63 mm with <1000 mm strokes	**C** "Combi" piston rod gasket	
✚	**126** Single-acting		■ 100			▶ **R** "Hard PU" piston rod gasket	★ **1** + Secure Lock with manual control
	127 Tandem		■ 125		**Z** Stainless steel piston rod and nut aluminium piston	● ◘ **M** "Metal" piston rod gasket	
▷	**134** Version suitable for rod lock				**X** Stainless steel piston rod and nut technopolymer piston		★ **2** + Secure Lock without manual control
✱ ▷	**136** Version with rod lock						
✱ ◆ ▷	**137** Version suitable for rod lock + guide unit						
✱ ▷ ◇	**154** Version suitable for bellow						
✱ ▷ ◇	**156** Version with mounted bellow						

■ In the code of cylinder with letter in fourth position Ø 100 becomes A1; Ø 125 becomes A2
● Only available for versions with aluminium piston (A or Z)
✚ Available until Ø 63 and only the versions with piston in aluminum (A or Z). The versions without the final "E" are to be considered with retracted piston rod
◘ Not available in Ø 32
▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.**
◆ Available up to Ø 100
✱ Not available for gaskets V or B
▷ Not available for single-acting and double-acting with spring versions
▼ Letter to be added only to the single acting extended piston rod version or double-acting with spring, extended piston rod
✖ Letter to be added only for the double-acting version with spring, retracted piston rod
★ Extra digit to be added only for types 136 with the "Secure Lock" device
◇ Maximum suppliable strokes: Ø 32 to 63: from 1 to 720 mm; Ø 80 to 125: from 1 to 840 mm
▶ The 126 (single-action) type and the (No-stick-slip) version G are not available

KEY TO CODES VERSION LOW-FRICTION

CYL	1 2 3	A	3 2	0 0 5 0	C	P
		TYPE	BORE	STROKE	MATERIAL	GASKETS
		A Low friction, type A	32	Ø 32 to 80 stroke 1 to 2800 mm Ø 100 to 125 stroke 1 to 2600 mm	**A** C45 chromed piston rod, aluminium piston: standard for all cylinders with ≥ 1000 mm-stroke cylinders and for cylinder with Ø 80 mm and over	**N** NBR gaskets
		B Low friction, type B	40			**P** Polyurethane gaskets
		C Low friction, type C	50			**V** FKM/FPM gaskets
		D Low friction, type D	63		**C** C45 chromed piston rod, technopolymer piston: standard for cylinders of Ø 32 to 63 mm with <1000 mm strokes	
		E Low friction, type E	80		**Z** Stainless steel piston rod and nut aluminium piston	
		F Low friction, type F	A1 = Ø 100 A2 = Ø 125		**X** Stainless steel piston rod and nut technopolymer piston	

KEY TO CODES VERSION LONG-CUSHIONING

CYL	1 3 1	A	3 2	0 0 5 0	A	P
		TYPE	BORE	STROKE	MATERIAL	GASKETS
		A 200 mm front/rear cushioning cone – 200 mm ext.	32	1 to 2600 mm	**A** C45 chromed rod, aluminium piston rod for all sizes	**N** NBR gaskets
		B 150 mm front/rear cushioning cone – 150 mm ext.	40			**P** Polyurethane gaskets
		C 100 mm front/rear cushioning cone – 100 mm ext.	50		**Z** Stainless steel piston rod and nut aluminium piston	✱ **V** FKM/FPM gaskets
		D 150 mm front/rear cushioning cone – 200 mm ext.	63			
		E 100 mm front/rear cushioning cone – 200 mm ext.				
		F 50 mm front/rear cushioning cone – 100 mm ext.				
		G 100 mm front/rear cushioning cone – 150 mm ext.				
		H 200 mm front cushioning cone – 200 mm ext.				
		I 150 mm front cushioning cone – 150 mm ext.				
		L 100 mm front cushioning cone – 100 mm ext.				
		M 150 mm front cushioning cone – 200 mm ext.				
		N 100 mm front cushioning cone – 150 mm ext.				
		O 50 mm front cushioning cone – 100 mm ext.				
		Q 200 mm rear cushioning cone – 200 mm ext.				
		R 150 mm rear cushioning cone – 150 mm ext.				
		S 100 mm rear cushioning cone – 100 mm ext.				
		T 150 mm rear cushioning cone – 200 mm ext.				
		U 100 mm rear cushioning cone – 200 mm ext.				
		V 50 mm rear cushioning cone – 100 mm ext.				

✱ Version valid only for types: Q, R, S, T, U and V.

ISO 15552 CYLINDER
TYPE A

ISO 15552 cylinders, featuring a barrel with longitudinal slots
on three sides for inserting and securing retractable sensors.
The same slots can also be used for valves and other mechanical parts.

BARREL CROSS SECTION

① SLOTS FOR RETRACTABLE SENSOR

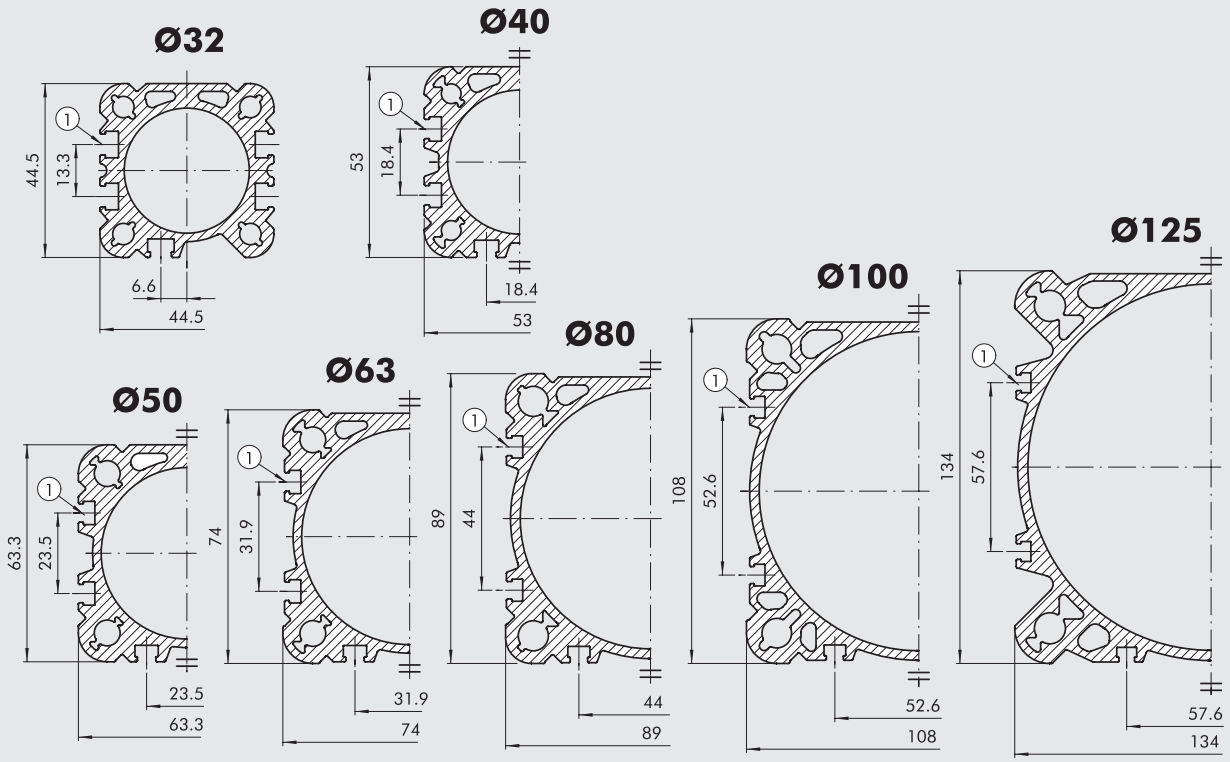

METAL WORK PNEUMATIC

KEY TO CODES

CYL	121 TYPE	A VERISION	32 BORE	0050 STROKE	C MATERIAL	P GASKETS	E
	121 Double-acting, cushioned ● 122 Through-rod 124 Double-acting, non-cushioned 125 Opposed ✚ 126 Single-acting 127 Tandem ▷ 134 Version suitable for rod lock ✱ ▷ 136 Version with rod lock ✱ ◆ ▷ 137 Version suitable for rod lock + guide unit ✱ ▷ ◇ 154 Version suitable for bellow ✱ ▷ ◇ 156 Version with mounted bellow	A Standard ▲ B No stick-slip C Non-magnetic	32 40 50 63 80 A1 = Ø 100 A2 = Ø 125	For the maximum suppliable strokes, look at the technical data	A C45 chromed piston rod, aluminium piston: standard for all cylinders with ≥ 1000 mm-stroke cylinders and for cylinder with Ø 80 mm and over C C45 chromed piston rod, technopolymer piston: standard for cylinders of Ø 32 to 63 mm with <1000 mm strokes Z Stainless steel piston rod and nut aluminium piston X Stainless steel piston rod and nut technopolymer piston	N NBR gaskets P Polyurethane gaskets V FKM/FPM gaskets ● B Low temperature C "Combi" piston rod gasket ▶ R "Hard PU" piston rod gasket ● ◘ M "Metal" piston rod gasket	✚ ▼ E Single-acting extended rod or double-acting with spring, extended piston rod ✚ ✖ R Double-acting with spring, retracted piston rod ★ 1 + Secure Lock with manual control ★ 2 + Secure Lock without manual control

● Only available for versions with aluminium piston (A or Z)
✚ Available until Ø 63 and only the versions with piston in aluminum (A or Z). The versions without the final "E" are to be considered with retracted piston rod.
◘ Not available in Ø 32
▼ Letter to be added only to the single acting extended piston rod version or double-acting with spring, extended piston rod
✖ Letter to be added only for the double-acting version with spring, retracted piston rod
★ Extra digit to be added only for types 136 with the "Secure Lock" device
◇ Maximum suppliable strokes: Ø 32 to 63: from 1 to 720 mm; Ø 80 to 125: from 1 to 840 mm
▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.**
◆ Available up to Ø 100
✱ Not available for gaskets V or B
▷ Not available for single-acting and double-acting with spring versions
▶ The 126 (single-action) type and the (No-stick-slip) version B are not available

KEY TO CODES VERSION LOW-FRICTION

CYL	129	A TYPE	32 BORE	0050 STROKE	C MATERIAL	P GASKETS
		A Low friction, type A B Low friction, type B C Low friction, type C D Low friction, type D E Low friction, type E F Low friction, type F	32 40 50 63 80 A1 = Ø 100 A2 = Ø 125	Ø 32 to 80 stroke 1 to 2800 mm Ø 100 to 125 stroke 1 to 2600 mm	A C45 chromed piston rod, aluminium piston: standard for all cylinders with ≥ 1000 mm-stroke cylinders and for cylinder with Ø 80 mm and over C C45 chromed piston rod, technopolymer piston: standard for cylinders of Ø 32 to 63 mm with <1000 mm strokes Z Stainless steel piston rod and nut aluminium piston X Stainless steel piston rod and nut technopolymer piston	N NBR gaskets P Polyurethane gaskets V FKM/FPM gaskets

KEY TO CODES VERSION LONG-CUSHIONING

CYL	130	A TYPE	32 BORE	0050 STROKE	A MATERIAL	P GASKETS
		A 200 mm front/rear cushioning cone – 200 mm ext. B 150 mm front/rear cushioning cone – 150 mm ext. C 100 mm front/rear cushioning cone – 100 mm ext. D 150 mm front/rear cushioning cone – 200 mm ext. E 100 mm front/rear cushioning cone – 200 mm ext. F 50 mm front/rear cushioning cone – 100 mm ext. G 100 mm front/rear cushioning cone – 150 mm ext. H 200 mm front cushioning cone – 200 mm ext. I 150 mm front cushioning cone – 150 mm ext. L 100 mm front cushioning cone – 100 mm ext. M 150 mm front cushioning cone – 200 mm ext. N 100 mm front cushioning cone – 150 mm ext. O 50 mm front cushioning cone – 100 mm ext. Q 200 mm rear cushioning cone – 200 mm ext. R 150 mm rear cushioning cone – 150 mm ext. S 100 mm rear cushioning cone – 100 mm ext. T 150 mm rear cushioning cone – 200 mm ext. U 100 mm rear cushioning cone – 200 mm ext. V 50 mm rear cushioning cone – 100 mm ext.	32 40 50 63	1 to 2600 mm	A C45 chromed piston rod, aluminium piston for all sizes Z Stainless steel piston rod and nut aluminium piston	N NBR gaskets P Polyurethane gaskets ✱ V FKM/FPM gaskets

✱ Version valid only for types: Q, R, S, T, U and V.

ISO 15552 CYLINDER SERIES 3

ISO 15552 cylinders, featuring specially-shaped barrels designed to reduce weight to a minimum.
Two T-slots on the same side as the threaded fittings can take retractable sensors.
The other three sides of the barrel are smooth, with no slots, and hence easy to clean.

BARREL CROSS SECTION

① SLOTS FOR RETRACTABLE SENSOR

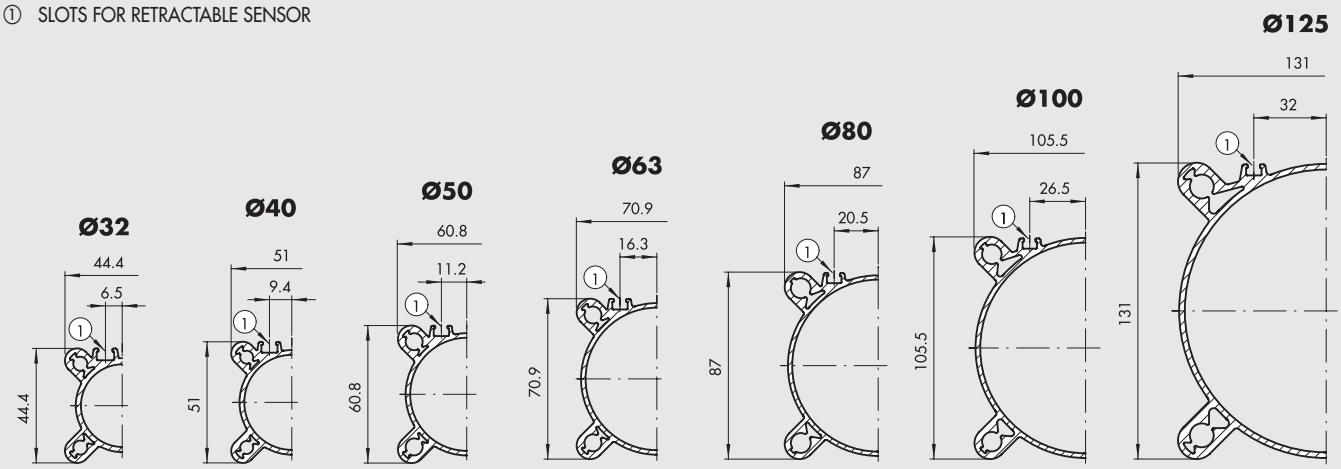

KEY TO CODES

CYL	1 2 1 TYPE	3 VERSION	3 2 BORE	0 0 5 0 STROKE	C MATERIAL	P GASKETS	E
	121 Double-acting, cushioned	3 Series 3	32	For the maximum suppliable strokes, look at the technical data	A C45 chromed piston rod, aluminium piston: standard for all cylinders with ≥ 1000 mm-stroke cylinders and for cylinder with Ø 80 mm and over	N NBR gaskets	✚ ▼ E Single-acting extended rod or double-acting with spring, extended piston rod
●	122 Through-rod	◆ 4 Series 3 No stick slip	40		C C45 chromed piston rod, technopolymer piston: standard for cylinders of Ø 32 to 63 mm with <1000 mm strokes	P Polyurethane gaskets	✚ ✖ R Double-acting with spring, retracted piston rod
	124 Double-acting, non-cushioned	5 Series 3 Non-magnetic	50		Z Stainless steel piston rod and nut aluminium piston	V FKM/FPM gaskets	★ 1 + Secure Lock with manual control
	125 Opposed		63		X Stainless steel piston rod and nut technopolymer piston	● B Low temperature	★ 2 + Secure Lock without manual control
✚	126 Single-acting		80			C "Combi" piston rod gasket	
	127 Tandem		A1 = Ø 100			▶ R "Hard PU" piston rod gasket	
▷	134 Version suitable for rod lock		A2 = Ø 125			● ◘ M "Metal" piston rod gasket	
■ ▷	136 Version with rod lock						
■ ✱ ▷	137 Version suitable for rod lock + guide unit						
■ ▷ ◇	154 Version suitable for bellow						
■ ▷ ◇	156 Version with mounted bellow						

● Only available for versions with aluminium piston (A or Z)
✚ Available until Ø 63 and only the versions with piston in aluminum (A or Z). The versions without the final "E" are to be considered with retracted piston rod.
▼ Letter to be added only to the single acting extended piston rod version or double-acting with spring, extended piston rod
✖ Letter to be added only for the double-acting version with spring, retracted piston rod
★ Extra digit to be added only for types 136 with the "Secure Lock" device
◇ Maximum suppliable strokes: Ø 32 to 63: from 1 to 720 mm; Ø 80 to 125: from 1 to 840 mm
◆ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.**
✱ Available until Ø 100
▷ Not available for single-acting and double-acting with spring versions
■ Not available for gasket V or B
◘ Not available in Ø 32
▶ The 126 (single-action) type and the (No-stick-slip) version 4 are not available

ISO 15552 LOW-FRICTION CYLINDER CODE 123 FOR SERIES STD CODE 129 FOR TYPE A

The low-friction cylinder is typically used as a dandy or tensioning cylinder since it is a single-acting cylinder without a return spring.
The configurations are shown below:

1) The best type is A as it involves less friction.
2) Type B should be used when the cylinder is working under normal conditions outside the pneumatic cushioning area.
   Cushioning is only for emergency use. It acts as a shock absorber in the case of malfunction.
3) Type C differs from type A due to the presence of a piston rod gasket that prevents dirt getting in when operating in dirty environments.
4) Type D differs from type B due to the presence of a piston rod gasket that prevents dirt getting in when operating in dirty environments.
5) Type E should be used when the pressurized chamber is the front one.
6) For type F, see point 2.

NB. THE CYLINDER IS ALWAYS SINGLE-ACTING WITHOUT A RETURN SPRING.

	TYPE	GASKETS
Rear chamber pressure	A	1
Rear chamber pressure and cushioning in case of impact	B	1+3
Rear chamber pressure and piston rod gasket	C	1+5
Rear chamber pressure, cushioning in case of impact and piston rod gasket	D	1+3+5
Front chamber pressure	E	2+5
Front chamber pressure and cushioning in case of impact	F	2+5+4

COMPONENTS

① Rear chamber piston gasket made of polyurethane, NBR or FKM/FPM
② Front chamber piston gasket made of polyurethane, NBR or FKM/FPM
③ Rear chamber cushioning gasket made of polyurethane, NBR or FKM/FPM
④ Front chamber cushioning gasket made of polyurethane, NBR or FKM/FPM
⑤ Piston rod gasket made of polyurethane, NBR or FKM/FPM

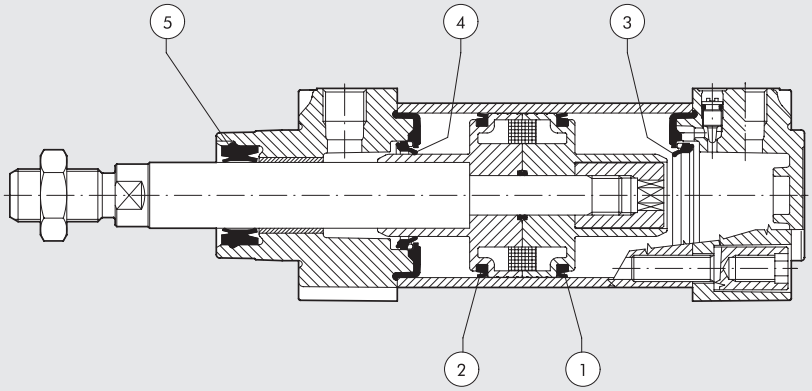

ISO 15552 ULTRA-LOW FRICTIONS CYLINDER

A typical ultra-low friction cylinder is generally used as an oscillating or tensioning cylinder. It is single acting, in the sense that compressed air is normally fed into one of the two chambers only. An external force acts on the other side. Metal Work's ultra-low friction cylinder is designed as a double-acting one, which means the compressed air can be fed into the rear or either the front chamber. They are built to comply with ISO 15552 and are available with or without a magnet.
Supplied with a series 3 barrel.
A through-rod version is not available.
These cylinders are always non-cushioned.
The gaskets are made of NBR.
A full range of accessories is available.

TECHNICAL DATA			Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125
Max operating pressure		bar	10						
		MPa	1						
		psi	145						
Temperature range	NBR	°C	–10 to +80						
Design			Heads with Tap Tite screws						
Fluid			Unlubricated air						
Standard strokes		mm	1 to 1200						
Versions			Double-acting magnetic, Double-acting non-magnetic (always "No stick-slip" cylinder)						
Sensor magnet			Available magnetic and non-magnetic versions.						
Inrush pressure		bar	0.08	0.06	0.05	0.04	0.03	0.03	0.03
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter						
Weights			See cylinder "**General technical data**" at the beginning of the chapter						
Notes			There may be leakage between the two chambers in the presence of low pressures (up to 1 bar).						

COMPONENTS

① PISTON ROD: C45 steel or stainless steel, thick chromed
② HEAD: die cast aluminium
③ PISTON ROD GASKET: NBR
④ GUIDE BUSHING: steel strip with bronze insert
⑤ BARREL: drawn anodized calibrated aluminium
⑥ PISTON GASKET: NBR
⑦ HALF-PISTON: aluminium alloy
⑧ MAGNET: plastoferrite
⑨ GUIDE RING: special technopolymer
⑩ BUFFER + Static O-rings: NBR
⑪ CUSHIONING NEEDLE: OT 58 with needle out movement safety system even when fully open
⑫ SCREWS: Tap Tite for assembly

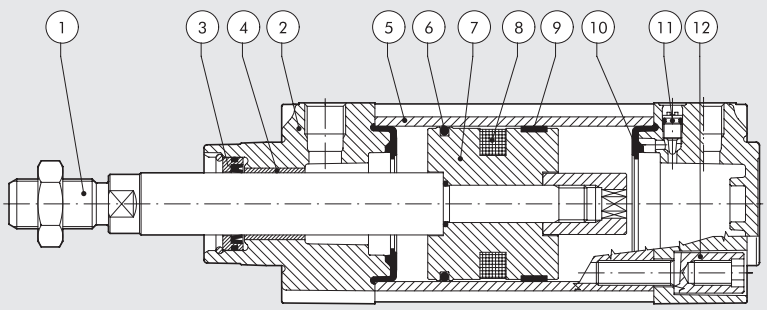

METAL WORK PNEUMATIC

DIAGRAM OF THE CLEAN FRICTIONS

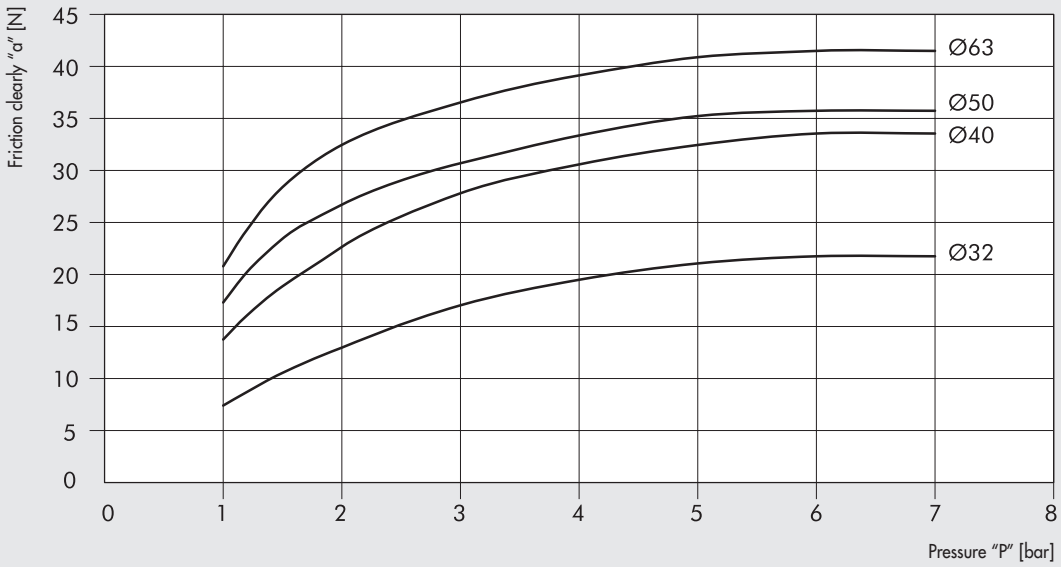

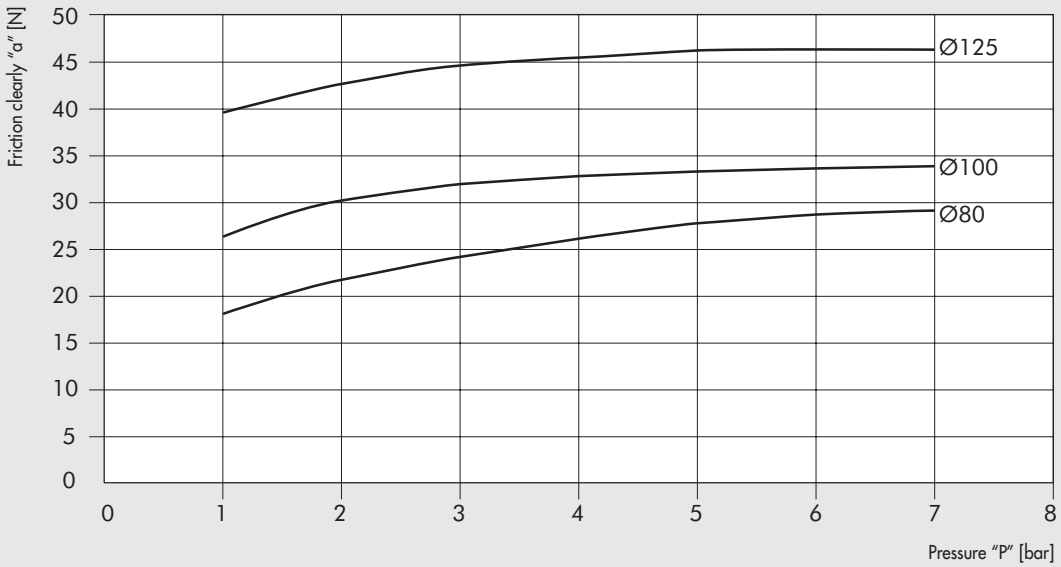

The clean friction values "a" in N have been obtained by inserting in the back chamber the pressure "P" in bars, and simultaneously by detecting the necessary force "F" in N to make the rod re-enter, applying the following formula:

$a = F - [(P \times S) \times 9.81]$

where "S" is the thrust section in cm^2

KEY TO CODES

CYL	1 2 3 TYPE	3	3 2 BORE	0 1 0 0 STROKE	A MATERIAL	N GASKETS
	123 Ultra-low friction	**3** Double-acting magnetic **5** Double-acting not magnetic	32 40 50 63 80 A1 = 100 A2 = 125	From 1 to 1200 mm	**A** C45 chromed piston rod, aluminium piston rod **Z** Stainless steel piston rod and nut aluminium piston	**N** NBR gaskets

ALL the cylinders are No stick-slip.
ALL the cylinders are non-cushioned.
Ultra-low friction cylinders are not available in the through-rod version.

ISO 15552 CYLINDER DIMENSIONS

DIMENSIONS SINGLE PISTON ROD VERSIONS

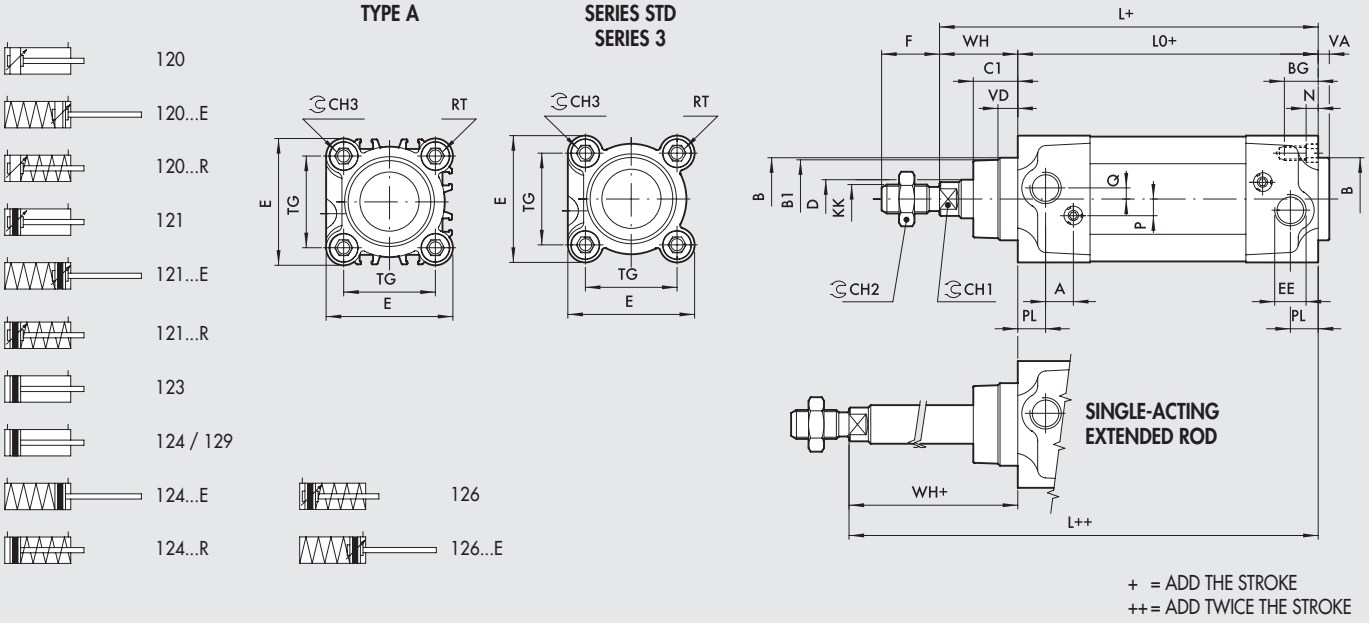

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

VERSION 120... / 121... (double-acting cushioned)
VERSION 123... / 124... / 129... (double-acting)

Ø	PL	VD	A	B	B_1	WH	C_1	CH_1	CH_2	KK	CH_3	D	TG	VA	F	EE	RT	E	L	L_0	BG	N	P	Q
32	10	6.5	10	30	28	26	16	10	17	M10x1.25	6	12	32.5	4	22	G1/8	M6	46	120	94	14.5	4.5	6	4
40	12	8	10	35	33	30	20	13	19	M12x1.25	6	16	38	4	24	G1/4	M6	54	135	105	14.5	4.5	6	4
50	14	13	10	40	38	37	25	17	24	M16x1.5	8	20	46.5	4	32	G1/4	M8	64.5	143	106	17.5	5.5	6	6
63	16	14	10	45	40	37	25	17	24	M16x1.5	8	20	56.5	4	32	G3/8	M8	75.5	158	121	17.5	5.5	6	6
80	18	12	12	45	43	46	33	22	30	M20x1.5	10	25	72	4	40	G3/8	M10	94	174	128	21.5	5.5	10	7
100	20	14	12	55	49	51	38	22	30	M20x1.5	10	25	89	4	40	G1/2	M10	111	189	138	21.5	5.5	10	7
125	25	20	10	60	54	65	45	27	41	M27x2	12	32	110	6	54	G1/2	M12	135	225	160	25.5	6.5	12	8

VERSION 126... (single-acting cushioned retracted piston rod)
VERSION 126...E (single-acting cushioned extended piston rod)

	LO								L							
	Ø 32		Ø 40		Ø 50		Ø 63		Ø 32		Ø 40		Ø 50		Ø 63	
Stroke	**126...**	**126...E**	**126...**	**126...E**	**126...**	**126...E**	**126...**	**126...E**	**126...**	**126...E**	**126...**	**126...E**	**126...**	**126...E**	**126...**	**126...E**
0 - 25	94 •	94•	105 •	105 •	106 •	106•	121•	121 •	120 •	120•	135 •	135 •	143 •	143 •	158 •	158 •
26 - 50	94 •	115	105 •	129.5	106 •	130.5	121•	145.5	120 •	141	135 •	159.5	143 •	167.5	158 •	182.5
51 - 75	115	136	129.5	154	130.5	155	145.5	170	141	162	159.5	184	167.5	192	182.5	207
76 - 100	136	157	154	178.5	155	179.5	170	194.5	162	183	184	208.5	192	216.5	207	231.5
101 - 125	157	178	178.5	203	179.5	204	194.5	219	183	204	208.5	233	216.5	241	231.5	256
126 - 150	178	199	203	227.5	204	228.5	219	243.5	204	225	233	257.5	241	265.5	256	280.5
151 - 175	199	220	227.5	252	228.5	253	243.5	268	225	246	257.5	282	265.5	290	280.5	305
176 - 200	220	241	252	276.5	253	277.5	268	292.5	246	267	282	306.5	290	314.5	305	329.5
201 - 225	241	262	276.5	301	277.5	302	292.5	317	267	288	306.5	331	314.5	339	329.5	354
226 - 250	262	283	301	325.5	302	326.5	317	341.5	288	309	331	355.5	339	363.5	354	378.5

• Dimensions according to ISO 15552

VERSION 12....R (double-acting with spring, retracted piston rod)
VERSION 12....E (double-acting with spring, extended piston rod)

	LO								L							
	Ø 32		Ø 40		Ø 50		Ø 63		Ø 32		Ø 40		Ø 50		Ø 63	
Stroke	**12...R**	**12...E**	**12...R**	**12...E**	**12...R**	**12...E**	**12...R**	**12...E**	**12...R**	**12...E**	**12...R**	**12...E**	**12...R**	**12...E**	**12...R**	**12...E**
0 - 25	104	104	117	117	106 •	106 •	121 •	121 •	130	130	147	147	143 •	143 •	158 •	158 •
26 - 50	104	125	117	141.5	106 •	130.5	121 •	145.5	130	151	147	171.5	143 •	167.5	158 •	182.5
51 - 75	125	146	141.5	166	130.5	155	145.5	170	151	172	171.5	196	167.5	192	182.5	207
76 - 100	146	167	166	190.5	155	179.5	170	194.5	172	193	196	220,5	192	216.5	207	231.5
101 - 125	167	188	190.5	215	179.5	204	194.5	219	193	214	220,5	245	216.5	241	231.5	256
126 - 150	188	209	215	239.5	204	228.5	219	243.5	214	235	245	269.5	241	265.5	256	280.5
151 - 175	209	230	239.5	264	228.5	253	243.5	268	235	256	269.5	294	265.5	290	280.5	305
176 - 200	230	251	264	288.5	253	277.5	268	292.5	256	277	294	318.5	290	314.5	305	329.5
201 - 225	251	272	288.5	313	277.5	302	292.5	317	277	298	318.5	343	314.5	339	329.5	354
226 - 250	272	293	313	337.5	302	326.5	317	341.5	298	319	343	367.5	339	363.5	354	378.5

• Dimensions according to ISO 15552

METAL WORK PNEUMATIC

DIMENSIONS THROUGH-ROD VERSIONS

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

TYPE A



SERIES STD
SERIES 3



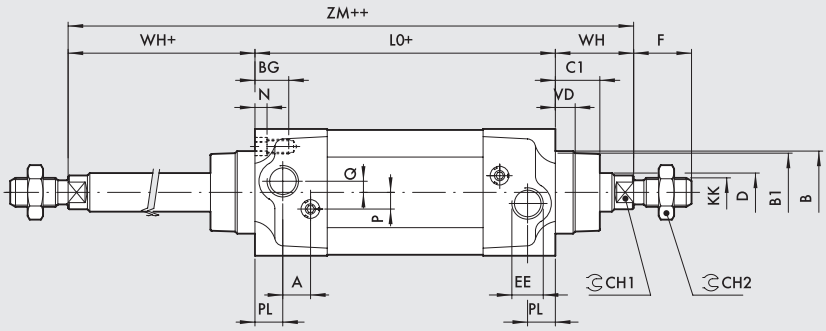



VERSION 122... (double-acting cushioned)

Ø	PL	VD	A	B	B_1	WH	C_1	CH_1	CH_2	CH_3	KK	D	TG	VA	F	EE	RT	E	L	L_0	ZM	BG	N	P	Q
32	10	6.5	10	30	28	26	16	10	17	6	M10x1.25	12	32.5	4	22	G1/8	M6	46	120	94	146	14.5	4.5	6	4
40	12	8	10	35	33	30	20	13	19	6	M12x1.25	16	38	4	24	G1/4	M6	54	135	105	165	14.5	4.5	6	4
50	14	13	10	40	38	37	25	17	24	8	M16x1.5	20	46.5	4	32	G1/4	M8	64.5	143	106	180	17.5	5.5	6	6
63	16	14	10	45	40	37	25	17	24	8	M16x1.5	20	56.5	4	32	G3/8	M8	75.5	158	121	195	17.5	5.5	6	6
80	18	12	12	45	43	46	33	22	30	10	M20x1.5	25	72	4	40	G3/8	M10	94	174	128	220	21.5	5.5	10	7
100	20	14	12	55	49	51	38	22	30	10	M20x1.5	25	89	4	40	G1/2	M10	111	189	138	240	21.5	5.5	10	7
125	25	20	10	60	54	65	45	27	41	12	M27x2	32	110	6	54	G1/2	M12	135	225	160	290	25.5	6.5	12	8

VERSION 122...R (double-acting cushioned with spring, retracted piston rod)

	L0				ZM			
Stroke	**Ø 32**	**Ø 40**	**Ø 50**	**Ø 63**	**Ø 32**	**Ø 40**	**Ø 50**	**Ø 63**
0 - 25	104	117	106 •	121 •	156	177	180	195
26 - 50	104	117	106 •	121 •	156	177	180	195
51 - 75	125	141.5	130.5	145.5	177	201.5	204.5	219.5
76 - 100	146	166	155	170	198	226	229	244
101 - 125	167	190.5	179.5	194.5	219	250.5	253.5	268.5
126 - 150	188	215	204	219	240	275	278	293
151 - 175	209	239.5	228.5	243.5	261	299.5	302.5	317.5
176 - 200	230	264	253	268	282	324	327	342
201 - 225	251	288.5	277.5	292.5	303	348.5	351.5	366.5
226 - 250	272	313	302	317	324	373	376	391

• Dimensions according to ISO 15552

NOTES

DIMENSIONS LONG-CUSHIONING VERSION

SERIES STD



TYPE A



FRONT CUSHIONING

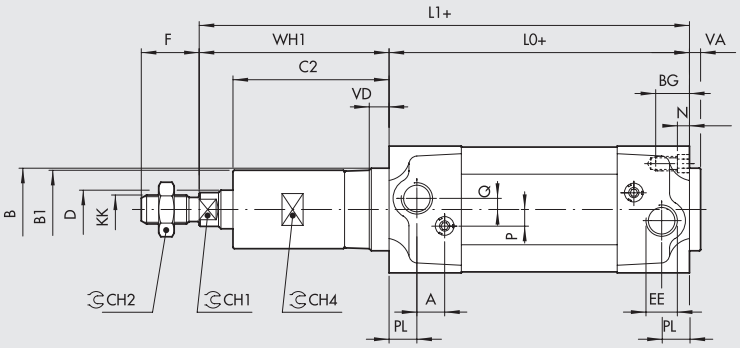

REAR CUSHIONING

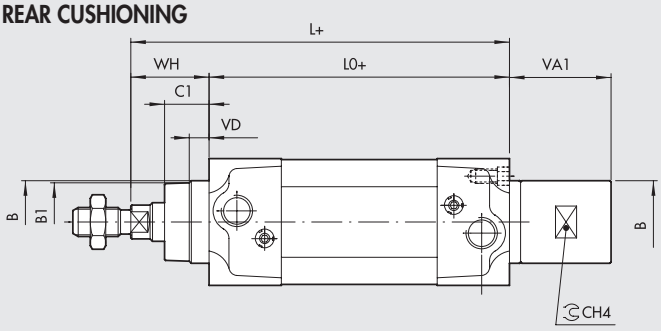

FRONT/REAR CUSHIONING

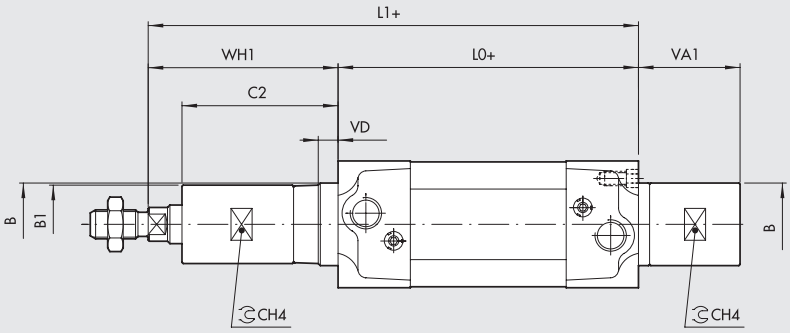

\+ = ADD THE STROKE

130 / 131

Ø	PL	VD	A	B	B_1	CH_1	WH	C_1	CH_2	CH_3	CH_4	KK	D	TG	VA	F	EE	RT	E	L_0	BG	N	P	Q
32	10	6.5	10	30	29	10	26	16	17	6	27	M10x1.25	12	32.5	4	22	G1/8	M6	46	94	14.5	4.5	6	4
40	12	8	10	35	34	13	30	20	19	6	30	M12x1.25	16	38	4	24	G1/4	M6	54	105	14.5	4.5	6	4
50	14	13	10	40	38	17	37	25	24	8	35	M16x1.5	20	46.5	4	32	G1/4	M8	64.5	106	17.5	5.5	6	6
63	16	14	10	45	38	17	37	25	24	8	35	M16x1.5	20	56.5	4	32	G3/8	M8	75.5	121	17.5	5.5	6	6

100 mm LONG-CUSHIONING

Ø	WH_1	C_2	VA_1	L_1
32	106	96	79	200
40	107	97	76.5	212
50	113.5	101.5	76.5	219.5
63	113.5	101.5	76.5	234.5

150 mm LONG-CUSHIONING

Ø	WH_1	C_2	VA_1	L_1
32	156	146	129	250
40	157	147	121.5	262
50	162.5	150.5	119.5	268.5
63	162.5	150.5	123.5	283.5

200 mm LONG-CUSHIONING

Ø	WH_1	C_2	VA_1	L_1
32	206	196	179	300
40	207	197	176.5	312
50	213.5	201.5	176.5	319.5
63	213.5	201.5	176.5	334.5

METAL WORK PNEUMATIC

DIMENSIONS TANDEM VERSION

++ = ADD TWICE THE STROKE

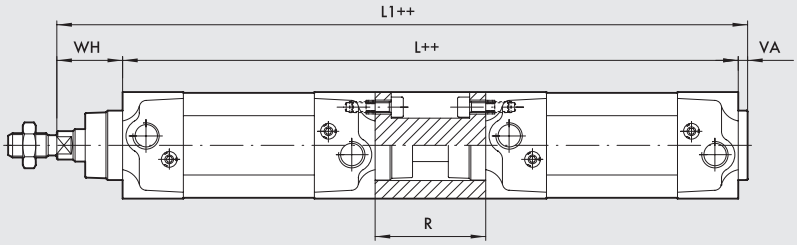

127

Ø	WH	VA	R	L	L_1
32	26	4	55	243	273
40	30	4	55	265	299
50	37	4	68	280	321
63	37	4	68	310	351
80	46	4	92	348	398
100	51	4	92	368	423
125	65	6	120	440	511

Refer to standard cylinders for other values.

DIMENSIONS OPPOSED VERSION

X1 = STROKE CYLINDER 1
X2 = STROKE CYLINDER 2

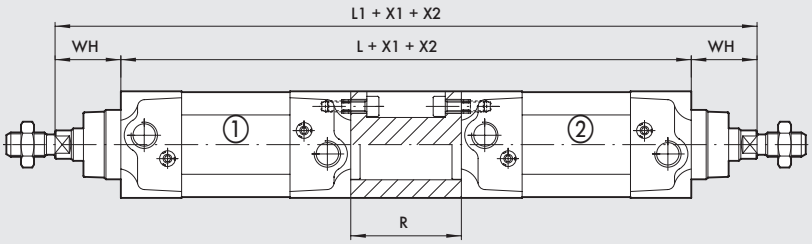

125

Ø	WH	R	L	L_1
32	26	55	243	295
40	30	55	265	325
50	37	68	280	354
63	37	68	310	384
80	46	92	348	440
100	51	92	368	470
125	65	120	440	570

Refer to standard cylinders for other values.

NOTE

ISO 15552 TWO-FLAT CYLINDER

This version of cylinder is used to keep the parts fixed to the piston rod at an angle and to apply torques within the specified limits.
The piston rod of the Two-Flat has two opposing longitudinal surfaces; it is made of stainless steel.
The front cylinder head includes a sintered bronze bush that matches the profile of the piston rod and prevents it from rotating on its own axis.
A special polyurethane gasket ensures pneumatic seal and prevents the accumulation of dirt. This technical solution is more reliable and gives a better pneumatic seal than with square or hexagonal piston rods.
Supplied in series STD, with a smooth barrel, and type A or series 3, with a barrel with slots for retractable sensors.
They are available in several versions and with a wide range of accessories:

- with or without magnet
- double acting, single piston rod
- double acting, through rod; one piston rod is Two-Flat, the other cylindrical
- fixing accessories.

TECHNICAL DATA			Ø32	Ø40	Ø50	Ø63
Max operating pressure		bar	10			
		MPa	1			
		psi	145			
Temperature range	POLYURETHANE	°C	–25 to +80			
Design			Heads with Tap Tite screws			
Fluid			Unlubricated air. Lubrication, if used, must be continuous			
Maximun stroke		mm	300	400	500	
Versions			Double-acting cushioned, Through-rod cushioned, No stick-slip			
Sensor magnet			Available magnetic and non-magnetic versions.			
Inrush pressure		bar	0.4	0.4	0.3	0.3
Max torque on piston rod		Nm	0.2	0.4	1	1
Maximum rotation on the rod		degrees	1° 30′	1° 30′	1°	1°
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter			
Weights			See cylinder "**General technical data**" at the beginning of the chapter			
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**			

KEY TO CODES FOR ISO 15552 TWO-FLAT STD CYLINDERS

CYL	1 2 1 TYPE	0	3 2 BORE	0 0 5 0 STROKE	F MATERIAL	P GASKETS
	120 Double-acting, cushioned, non-magnetic	**0** Diameter	32	✚ Ø 32 stroke 1 to 300 mm	**F** "Two-Flat" piston rod AISI 303, stainless steel nut, technopolymer piston	**P** Polyurethane gaskets
	121 Double-acting, cushioned	**S** Non-magnetic	40	✚ Ø 40 stroke 1 to 400 mm		
	● **122** Through-rod	▲ **G** No stick-slip	50	✚ Ø 50 to 63 stroke 1 to 500 mm		
			63			

● Supplied with aluminium piston
▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only**
✚ Maximum recommended strokes. Higher values can create operating problems

KEY TO CODES FOR ISO 15552 TWO-FLAT TYPE A CYLINDERS

CYL	1 2 1 TYPE	A	3 2 BORE	0 0 5 0 STROKE	F MATERIAL	P GASKETS
	121 Double-acting, cushioned	**A** Standard	32	✚ Ø 32 stroke 1 to 300 mm	**F** "Two-Flat" piston rod AISI 303, stainless steel nut, technopolymer piston	**P** Polyurethane gaskets
	● **122** Through-rod	▲ **B** No stick-slip	40	✚ Ø 40 stroke 1 to 400 mm		
		C Non-magnetic	50	✚ Ø 50 to 63 stroke 1 to 500 mm		
			63			

● Supplied with aluminium piston
▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only**
✚ Maximum recommended strokes. Higher values can create operating problems

METAL WORK PNEUMATIC

KEY TO CODES FOR ISO 15552 TWO-FLAT SERIES 3 CYLINDERS

CYL	1 2 1 TYPE	3	3 2 BORE	0 0 5 0 STROKE	F MATERIAL	P GASKETS
	121 Double-acting cushioned	**3** Series 3	32	✚ Ø 32 stroke 1 to 300 mm	**F** "Two-Flat" piston rod AISI 303, stainless steel nut, technopolymer piston	**P** Polyurethane gaskets
	● **122** Through-rod	▲ **4** Series 3 No stick-slip	40	✚ Ø 40 stroke 1 to 400 mm		
		5 Series 3 Non-magnetic	50	✚ Ø 50 to 63 stroke 1 to 500 mm		
			63			

● Supplied with aluminium piston

▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only**

✚ Maximum recommended strokes. Higher values can create operating problems

DIMENSIONS

STANDARD VERSION

+ = ADD THE STROKE

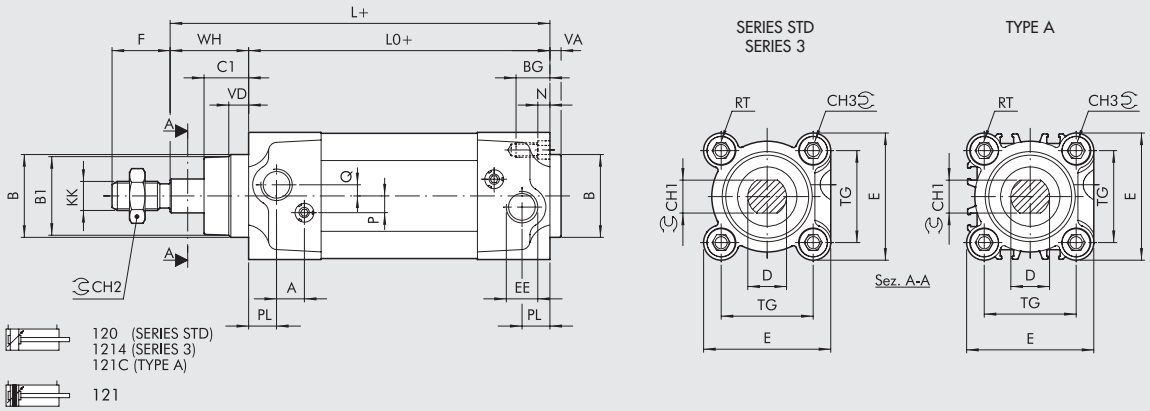

THROUGH-ROD VERSION

+ = ADD THE STROKE

++ = ADD TWICE THE STROKE

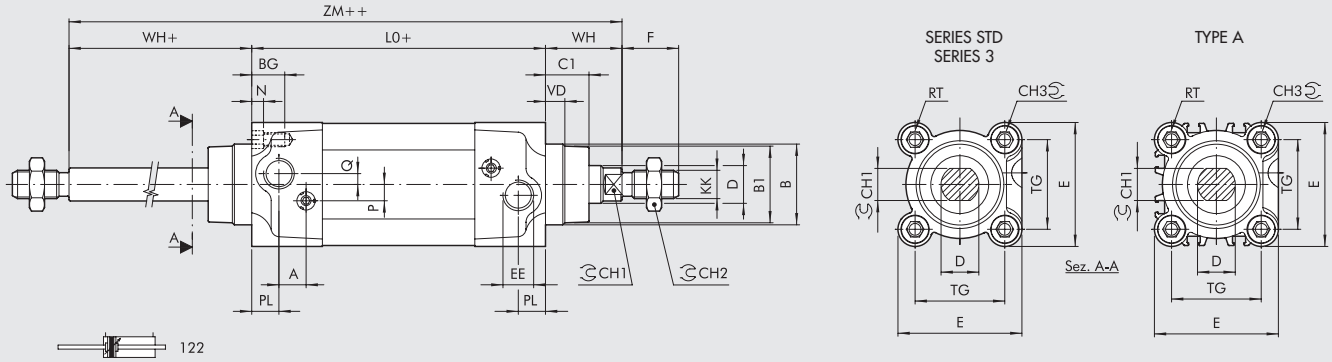

Ø	PL	VD	A	B	B_1	WH	C_1	CH_1	CH_2	CH_3	KK	D	TG	VA	F	EE	RT	E	L	L_0	ZM	BG	N	P	Q
32	10	6.5	10	30	28	26	16	10	17	6	M10x1.25	12	32.5	4	22	G1/8	M6	46	120	94	146	14.5	4.5	6	4
40	12	8	10	35	33	30	20	13	19	6	M12x1.25	16	38	4	24	G1/4	M6	54	135	105	165	14.5	4.5	6	4
50	14	13	10	40	38	37	25	17	24	8	M16x1.5	20	46.5	4	32	G1/4	M8	64.5	143	106	180	17.5	5.5	6	6
63	16	14	10	45	40	37	25	17	24	8	M16x1.5	20	56.5	4	32	G3/8	M8	75.5	158	121	195	17.5	5.5	6	6

ISO 15552 CYLINDER WITH END-OF-STROKE STOP

The cylinders in this series are designed with a unit that mechanically locks the piston rod at the end of stroke.
When extended, the piston rod can be locked at the front head; when retracted, it is locked either at the rear head or in both positions.
With the cylinder pneumatically powered, the locking unit releases automatically, so no additional piloting is required.
The locking unit can be released manually by inserting a screw into a thread.
This cylinder complies with ISO 15552, except for the length, which is greater than the standard.

TECHNICAL DATA			Ø32	Ø40	Ø50	Ø63	Ø80	Ø100
Max operating pressure		bar	10					
		MPa	1					
		psi	145					
Temperature range	POLYURETHANE	°C	-25 to +80					
	NBR	°C	-10 to +80					
	FKM/FPM	°C	-10 to +150					
	Low Temperature	°C	-40 to +80					
Design			Heads with Tap Tite screws					
Fluid			Unlubricated air. Lubrication, if used, must be continuous					
Standard stroke ✚		mm	30 to 2800				35 to 2600	
Versions			Double-acting cushioned, Through-rod cushioned, No stick-slip.					
Sensor magnet			YES					
Static retention force		N	500	500	2000	2000	5000	5000
Maximum axial clearance in the lock position		mm	1.5	1.5	1.5	1.5	1.5	1.5
Minimum release pressure		bar	≥ 2.5	≥ 2.5	≥ 2.5	≥ 2.5	≥ 2	≥ 2
Maximum locking pressure		bar	≤ 0.5					
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter					
Weights								
Only one stop, with piston rod extended or retracted, stroke = 0		g	573	860	1367	1793	3515	5197
Stops either with piston rod extended or retracted, stoke = 0		g	713	1060	1647	2143	4215	6497
Every mm of stroke, cylinder with piston rod cylinder		g	2.20	2.15	4.57	5.03	7.49	8.79
Every mm of stroke, through-rod cylinder		g	3.09	4.73	7.04	7.44	10.16	12.33
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**					
			✚ Maximum recommended strokes. Higher values can create operating problems					

FUNCTIONING DIAGRAM

LOCKED VERSION WITH EXTENDED PISTON ROD

When the piston rod extends at the end of stroke, the spring-actuated locking piston enters the slot of the coupling bushing.
When the piston rod retracts, the pressure inside the front chamber overcomes the force of the spring and causes the locking piston to move away; the piston rod can now move freely and retracts.

N.B.: The rear chamber must be pressurized before activating piston rod retraction, otherwise the locking unit will not be disengaged. When the control valve is switched over, by the time the rear chamber relieves, sufficient pressure is created in the front chamber to release the locking unit before the piston rod starts retracting.

The version with locking with piston rod retracted works in the same way.

Precautions: Do not use 3-position solenoid valves. Use MRF flow regulators that choke the output (type C). Do not use with multiple cylinders moving in a synchronized sequence. Pneumatic cushioning must be adjusted properly; it must not be closed, neither fully nor partially.

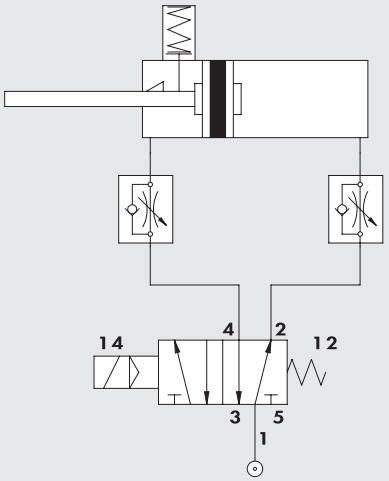

METAL WORK PNEUMATIC

MANUAL RELEASE (WITH NO PRESSURE)

Remove the silencer ①. Tighten one of the screws ② into the locking piston ③.



Pull it upwards to release the locking piston.



You can disengage the locking unit permanently by fitting a nut ④ to the screw ② and tightening it until the piston is disengaged.



COMPONENTS

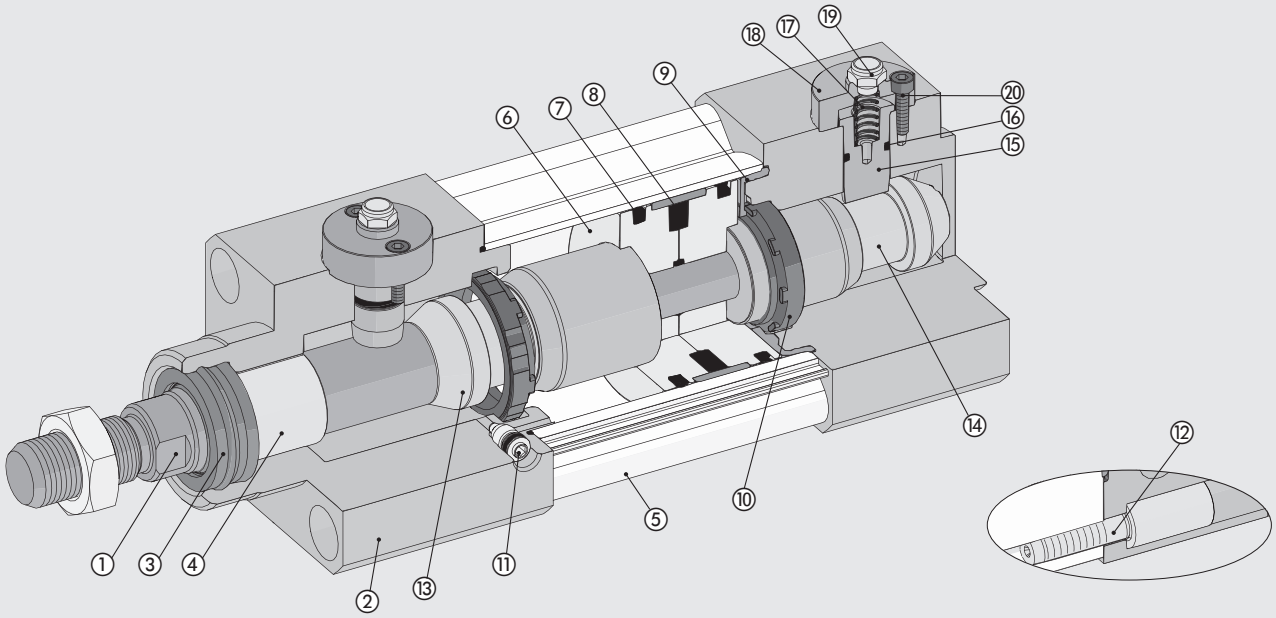

① PISTON ROD: C45 steel or stainless steel, thick chromed
② HEAD: aluminium
③ PISTON ROD GASKET: polyurethane, NBR or FKM/FPM
④ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑤ BARREL: drawn anodized calibrated aluminium
⑥ SEMI-PISTON: made of self-lubricating technopolymer with built-in cushioning ogives or in aluminum
⑦ PISTON GASKET: polyurethane, NBR or FKM/FPM
⑧ MAGNET: plastoferrite
⑨ BUFFER + Static O-rings: NBR or FKM/FPM
⑩ CUSHIONING GASKET: polyurethane, NBR or FKM/FPM
⑪ CUSHIONING NEEDLE: OT 58 with needle out movement safety system even when fully open
⑫ SCREWS: Tap Tite for assembly
⑬ FRONT COUPLING BUSHING: hardened alloy steel
⑭ REAR COUPLING BUSHING: hardened alloy steel
⑮ LOCKING PISTON: tempered and chromed alloy steel
⑯ GASKET: NBR or FKM/FPM
⑰ SPRING: stainless steel
⑱ COVER: anodized aluminium
⑲ SILENCER: nickel-plated brass with stainless steel wire
⑳ SCREWS: zinc-plated steel

DIMENSIONS OF SINGLE PISTON ROD VERSIONS

LOCKING WITH EXTENDED PISTON ROD

* = THREADING FOR MANUAL RELEASE SCREW
+ = ADD STROKE

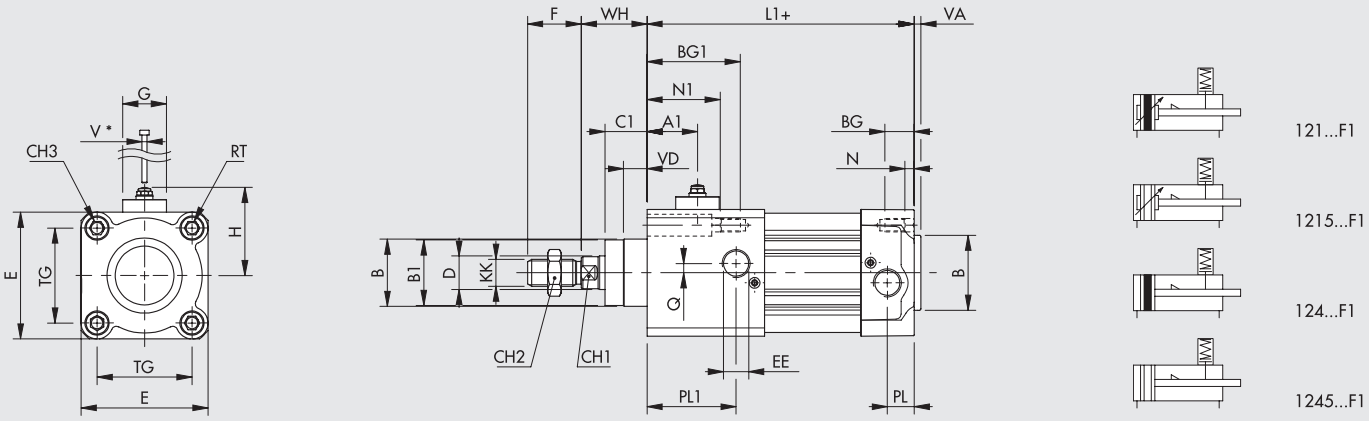

LOCKING WITH RETRACTED PISTON ROD

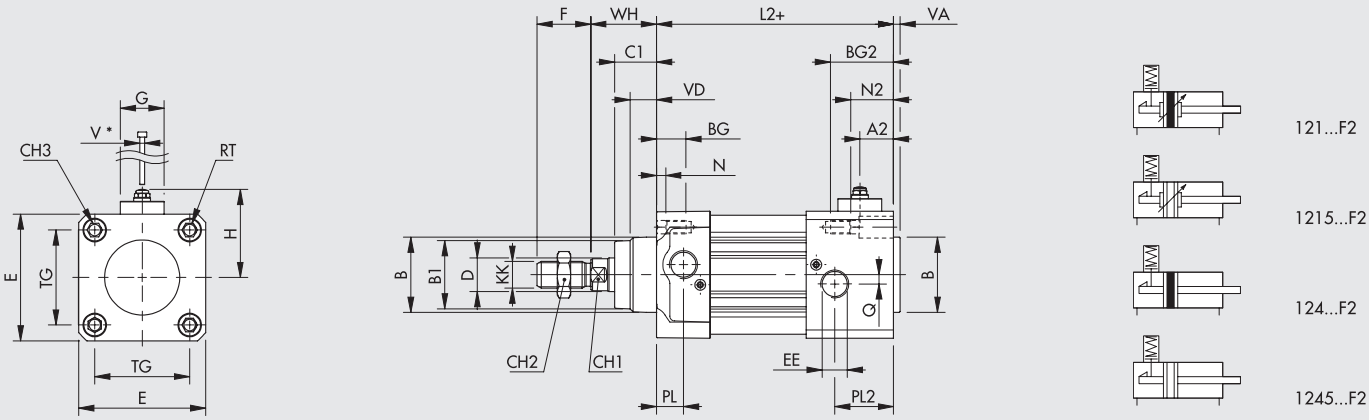

LOCKING WITH EXTENDED AND RETRACTED PISTON ROD

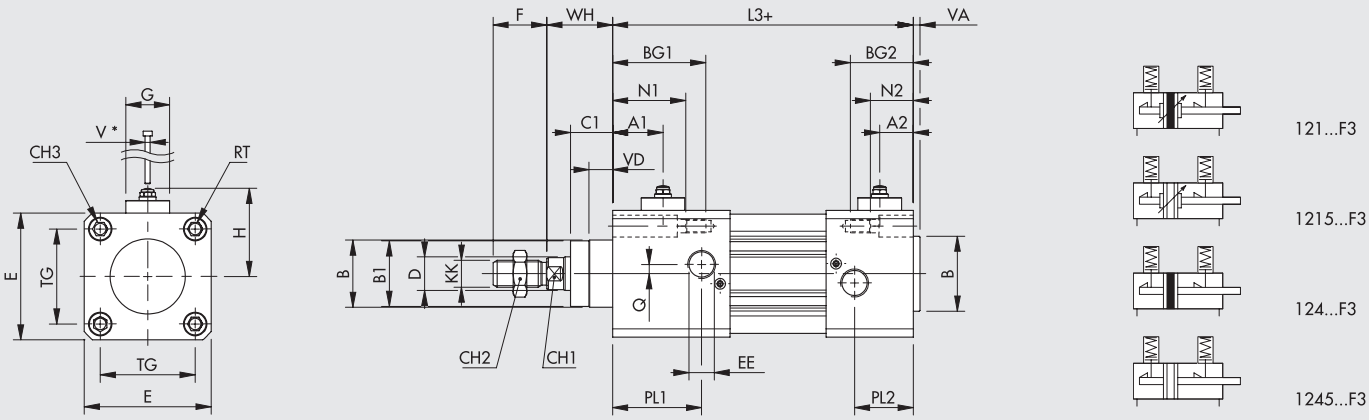

Ø	A1	A2	B	B1	BG	BG1	BG2	C1	CH1	CH2	CH3	D	E	EE	F	G	H	KK	L1	L2	L3	N	N1	N2	PL	PL1	PL2	Q	RT	TG	V*	VA	VD	WH
32	24	15	30	28	14.5	25.5	25.5	16	10	17	6	12	46	1/8	22	24	40	M10x1.25	105	105	116	4.5	15.5	15.5	10	21	21	4	M6	32.5	M3	4	6.5	26
40	26	17	35	33	14.5	39.5	28.5	20	13	19	6	16	54	1/4	24	24	45	M12x1.25	129	119	143	4.5	29.5	18.5	12	35	26	4	M6	38	M3	4	8	30
50	28	20	40	38	17.5	44.5	35.5	25	17	24	8	20	64.5	1/4	32	26	48	M16x1.5	133	124	151	5.5	32.5	23.5	14	41	32	6	M8	46.5	M3	4	13	37
63	28	21	45	40	17.5	43.5	36.5	25	17	24	8	20	75.5	3/8	32	26	55	M16x1.5	147	140	166	5.5	31.5	24.5	16	42	35	6	M8	56.5	M3	4	14	37
80	31.5	24.5	45	43	21.5	50.5	45.5	33	22	30	10	25	94	3/8	40	29	63	M20x1.5	157	152	181	5.5	34.5	29.5	18	47	42	7	M10	72	M3	4	12	46
100	25.5	24.5	55	49	21.5	58.5	46.5	38	22	30	10	25	111	1/2	40	29	72	M20x1.5	161	162	185	5.5	42.5	30.5	20	43	44	7	M10	89	M3	4	14	51

METAL WORK PNEUMATIC

DIMENSIONS OF THROUGH-ROD VERSIONS

LOCKING ON ONE SIDE ONLY

* = THREADING FOR MANUAL RELEASE SCREW
+ = ADD STROKE

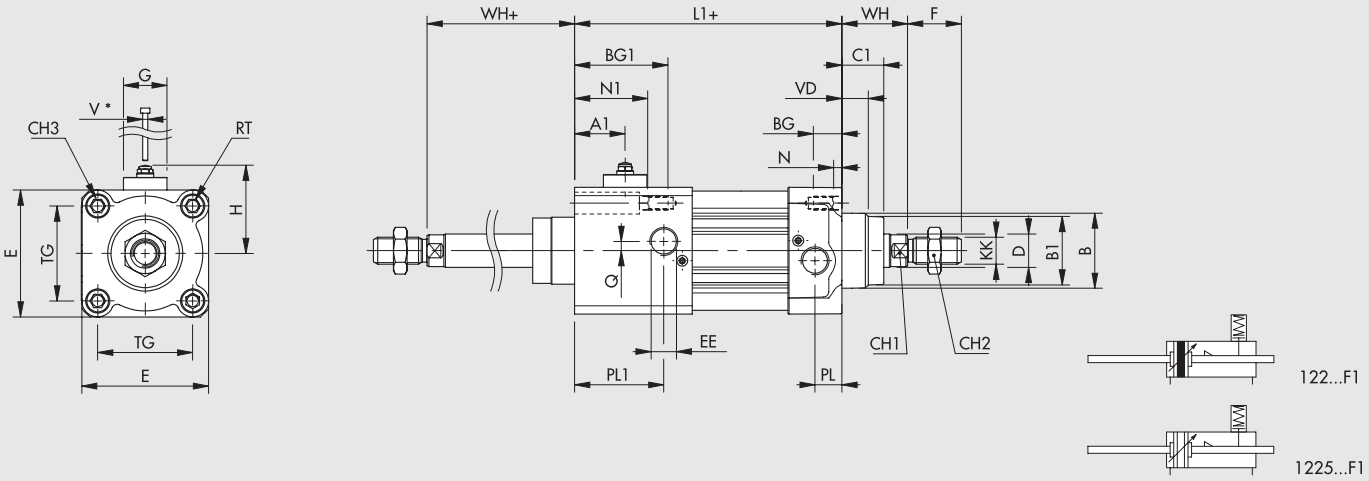

LOCKING WITH EXTENDED AND RETRACTED PISTON ROD

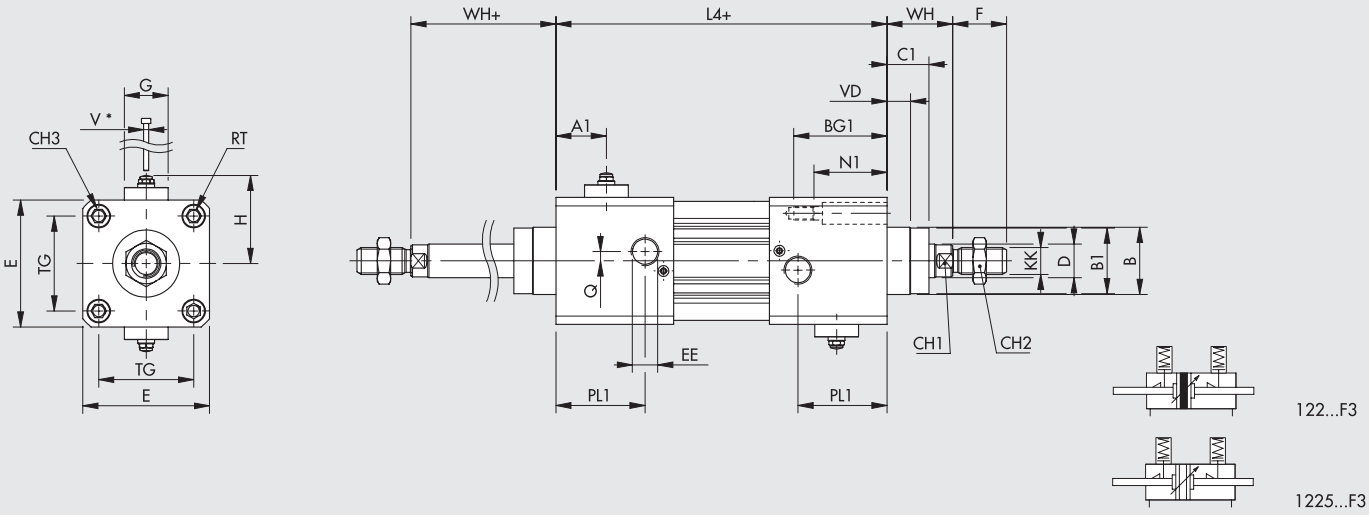

Ø	A1	B	B1	BG	BG1	C1	CH1	CH2	CH3	D	E	EE	F	G	H	KK	L1	L4	N	N1	PL	PL1	Q	RT	TG	V*	VD	WH
32	24	30	28	14.5	25.5	16	10	17	6	12	46	1/8	22	24	40	M10x1.25	105	116	4.5	15.5	10	21	4	M6	32.5	M3	6.5	26
40	26	35	33	14.5	39.5	20	13	19	6	16	54	1/4	24	24	45	M12x1.25	129	153	4.5	29.5	12	35	4	M6	38	M3	8	30
50	28	40	38	17.5	44.5	25	17	24	8	20	64.5	1/4	32	26	48	M16x1.5	133	160	5.5	32.5	14	41	6	M8	46.5	M3	13	37
63	28	45	40	17.5	43.5	25	17	24	8	20	75.5	3/8	32	26	55	M16x1.5	147	173	5.5	31.5	16	42	6	M8	56.5	M3	14	37
80	31.5	45	43	21.5	50.5	33	22	30	10	25	94	3/8	40	29	63	M20x1.5	157	186	5.5	34.5	18	47	7	M10	72	M3	12	46
100	25.5	55	49	21.5	58.5	38	22	30	10	25	111	1/2	40	29	72	M20x1.5	161	184	5.5	42.5	20	43	7	M10	89	M3	14	51

KEY TO CODES

CYL	1 2 1	3	3 2	0 0 5 0	C	P	F1
	TYPE		BORE	STROKE	MATERIAL	GASKETS	END-OF-STROKE STOP
	✚ ▲ **121** Double-acting cushioned ▲ ● **122** Through-rod cushioned **124** Double-acting, non-cushioned	**3** Series 3 ◆ **4** Series 3 No stick-slip **5** Series 3 Non-magnetic	**32** = Ø 32 **40** = Ø 40 **50** = Ø 50 **63** = Ø 63 **80** = Ø 80 **A1** = Ø 100	For the maximum suppliable strokes, look at the technical data	**A** C45 chromed piston rod, aluminium piston: standard for all cylinders with ≥ 1000 mm-stroke cylinders and for cylinder with Ø 80 mm and over **C** C45 chromed piston rod, technopolymer piston: standard for cylinders of Ø 32 to 63 mm with <1000 mm strokes **Z** Stainless steel piston rod and nut aluminium piston **X** Stainless steel piston rod and nut technopolymer piston	**N** NBR gaskets **P** Polyurethane gaskets **V** FKM/FPM gaskets ● **B** Low temperature	● **F1** Extended piston rod **F2** Retracting piston rod ● **F3** Retracting piston rod and extended piston rod

● Only available for versions with aluminium piston (A or Z)

◆ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only**

▲ Regarding the Ø32 cylinders, the heads with end-of-strocke stop hasn't the pneumatic csushoning

✚ Not available for Ø32 with "F3" end-of-strocke stop

ACCESSORIES

All the accessories of ISO 15552 cylinders (page **A1**.51) can be used, **except for the guide units (GDS, GDH, GDM)** since the protrusion of the locking piston interferes with the guide unit.

NB: The screws used to secure the accessory to the heads fitted with a stop must be longer than those supplied together with the accessories.
The screw length is calculated by summing up the catalogue-specified thickness of the accessory flange and the BG1 dimension, rounding down to -3 mm.



L = BG2 + H – (0 - 3) mm

NOTES

ISO 15552 CYLINDER – SERIES ILT (Internal Linear Transducer)

The cylinder in the Series ILT (Internal Linear Transducer) is a pneumatic actuator with an ISO 15552 standard interface containing a resistive linear transducer capable of detecting the position of the piston (and hence of the rod) throughout the stroke.
A magnetic cursor is fixed to the piston, while the resistive sensor is inside the hollow rod.
The signal detected is proportionate to the rod position.
The transducer is powered by a special M12 connector located in the rear head of the cylinder and the analogue position signal can be read via the same connector.
ILT-series cylinders are available in the dual-action version (neither cushioned nor magnetic) and are provided with an STD-series liner.

N.B.: We always suggest to use flow microregulators. During the setup of the actuator, start with CLOSE flow microregulators, and open gradually till the achievment of the required speed.

TECHNICAL DATA			Ø50	Ø63
Max operating pressure		bar	10	
		MPa	1	
		psi	145	
Temperature range	POLYURETHANE	°C	–25 to +80	
	NBR	°C	–10 to +80	
	FKM/FPM	°C	–10 to +100	
Design			Heads with Tap Tite screws	
Fluid			Unlubricated air. Lubrication, if used, must be continuous	
Standard strokes		mm	From 50 to 1000 with 50 mm intervals	
Actual resistance on electric stroke (±20%)		KOhm	5 (for strokes from 50 to 300)	
			10 (for strokes from 350 to 600)	
			20 (for strokes from 650 to 1000)	
Recommended sensor circuit current		µA	< 0.1	
Maximum allowable voltages		VDC	40 (for strokes 50)	
			60 (for strokes from 100 to 1000)	
Linearity			± 0.1% of the stroke	
Repeatability		mm	≤ 0.1	
Hysteresis		mm	≤ 0.25	
Maximum stroke speed		m/s	1	
Maximum stroke acceleration		m/s^2	10	
Electrical connection			IP67 4-pole M12 male connector	
DIN IEC 68T2-27 shock test			50 g - 11 ms single stroke	
DIN IEC 68T2-6 vibration			12 g - 10...2000 Hz	
Inrush pressure		bar	0.3	
Forces generated at 6 bar thrust/retraction		N	See cylinder "**General technical data**" at the beginning of the chapter	
Notes			The inner transducer is used as a voltage splitter and must be connected to a high impedance input.	

WEIGHTS [kg]

Bore	Strokes [mm]																			
	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
50	1.40	1.58	1.75	1.93	2.10	2.28	2.45	2.63	2.80	2.98	3.15	3.33	3.50	3.68	3.85	4.03	4.20	4.38	4.55	4.73
63	1.90	2.10	2.30	2.50	2.70	2.90	3.10	3.30	3.50	3.70	3.90	4.10	4.30	4.50	4.70	4.90	5.10	5.30	5.50	5.70

COMPONENTS

① PISTON ROD: grinded chromed steel
② FRONT CYLINDER HEAD: die cast aluminium
③ PISTON ROD GASKET: polyurethane, NBR, FKM/FPM
④ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑤ BARREL: drawn anodized calibrated aluminium
⑥ PISTON: aluminium
⑦ PISTON GASKET: polyurethane, NBR, FKM/FPM
⑧ CURSOR
⑨ GUIDE STRIP: self-lubricated calibrated technopolymer
⑩ BUFFER: NBR or FKM/FPM
⑪ POSITION SENSORS
⑫ TRANSDUCER LOCKING RING: aluminium
⑬ REAR CYLINDER HEAD: anodized aluminium
⑭ M12 4-PIN CONNECTOR
⑮ SCREWS: Tap Tite for assembly

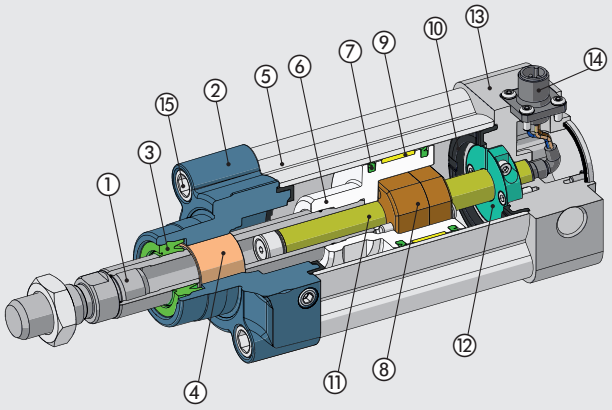

DIMENSIONS

① = Electrical connector
\+ = Add the stroke



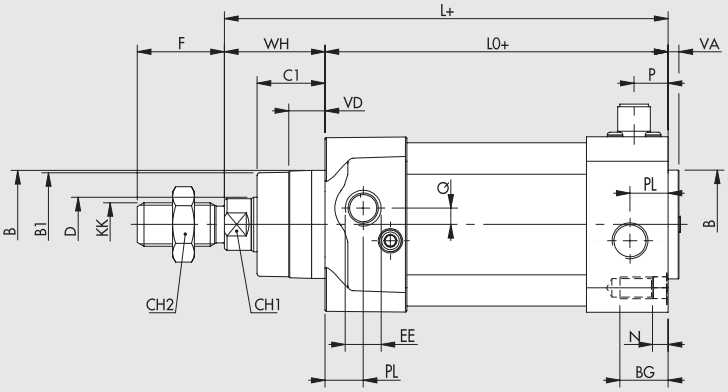



124...P

Ø	PL	VD	A	B	B1	WH	C1	CH1	CH2	KK	CH3	D	TG	VA	F	EE	RT	E	L	L0	BG	N	P	Q
50	14	13	12	40	38	37	25	17	24	M16x1.5	8	20	46.5	4	32	G1/4	M8	64.5	143	106	17.5	5.5	12.5	6
63	16	14	12	45	40	37	25	17	24	M16x1.5	8	20	56.5	4	32	G3/8	M8	75.5	158	121	17.5	5.5	12.5	6

ELECTRICAL CONNECTION



PIN	OPTION 1	OPTION 2
1	GND	+ VDC
2	Disconnect	Disconnect
3	+ VDC	GND
4	Output	Output

RETRACTED PISTON ROD SIGNAL



OPTION 1 ➔ Output = 0V
OPTION 2 ➔ Output = VDC

EXTENDED PISTON ROD SIGNAL



OPTION 1 ➔ Output = VDC
OPTION 2 ➔ Output = 0V

ACCESSORIES

KEY TO CODES

CYL	1 2 4	S	50	0050	T	N	P
	TYPE	**VERSION**	**BORE**	**STROKE**	**MATERIAL**	**GASKETS**	**TRANSDUCER TYPE**
	124 Double-acting, non-cushioned	**S** Non-magnetic ▲ **G** No Stick-slip	50 63	From 50 to 1000 mm with 50 mm intervals	**T** St 52 steel chrome-grinded piston rod and stainless steel nut	**N** NBR gaskets **P** Polyurethane gaskets **V** FKM/FPM gaskets	**P** Potentiometric

▲ **Non magnetic. For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.**

ACCESSORIES

All accessories compatible with ISO 15552 cylinders can be used, with **the exception** of:

- GDH-GDM guide units
- rod locks
- protective bellows
- magnetic sensors
- position transducers

CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, STRAIGHT



Code	Description
W0970513001	Connector M12x1, 5-PIN, A-coded, female, straight

CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, 90°



Code	Description
W0970513003	Connector M12x1, 5-PIN, A-coded, female, 90°

CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, STRAIGHT, WITH SHIELDED CABLE

Pin	Cable colour
1	Brown
2	White
3	Blue
4	Black
5	Grey



Code	Description
W0970513024	Connector M12x1, 5-pin, A-coded, female, straight, with shielded cable L = 3 m
W0970513025	Connector M12x1, 5-pin, A-coded, female, straight, with shielded cable L = 5 m

CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, 90°, WITH SHIELDED CABLE

Pin	Cable colour
1	Brown
2	White
3	Blue
4	Black
5	Grey



Code	Description
W0970513026	Connector M12x1, 5-PIN, A-coded, female, 90°, with shielded cable L = 3 m
W0970513027	Connector M12x1, 5-PIN, A-coded, female, 90°, with shielded cable L = 5 m

NOTES

ACCESSORIES FOR ISO 15552 STD, TYPE A, SERIES 3, TWO-FLAT:

FIXINGS

FOOT - MODEL A

+ = ADD THE STROKE

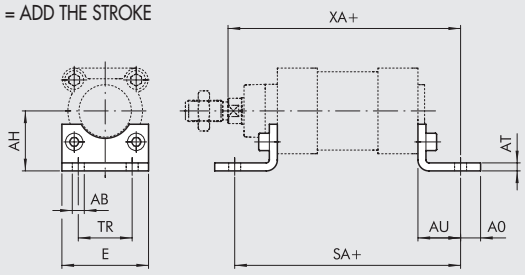

Code	Ø	Ø AB	AH	AO	AT	AU	TR	E	XA	SA	Weight [g]
W0950322001	32	7	32	11	4	24	32	45	144	142	76
W0950402001	40	9	36	15	4	28	36	52	163	161	100
W0950502001	50	9	45	15	5	32	45	65	175	170	162
W0950632001	63	9	50	15	5	32	50	75	190	185	266
W0950802001	80	12	63	20	6	41	63	95	215	210	456
W0951002001	100	14	71	25	6	41	75	115	230	220	572
W0951252001	125	16	90	15	8	45	90	140	270	250	1130

Note: Individually packed with 2 screws

FEMALE HINGE - MODEL B

+ = ADD THE STROKE

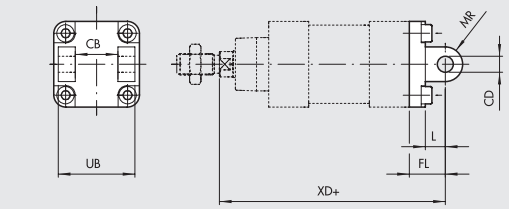

Code	Ø	UB	CB H14	FL	CD H9	XD	MR	L	Weight [g]
W0950322003	32	45	26	22	10	142	10	12	116
W0950402003	40	52	28	25	12	160	12	15	160
W0950502003	50	60	32	27	12	170	12	15	252
W0950632003	63	70	40	32	16	190	16	20	394
W0950802003	80	90	50	36	16	210	16	20	670
W0951002003	100	110	60	41	20	230	20	25	1085
W0951252003	125	130	70	50	25	275	25	30	2000

Note: Supplied with 4 screws, 4 washers, 2 snap-rings, 1 pin

MALE HINGE - MODEL BA

+ = ADD THE STROKE

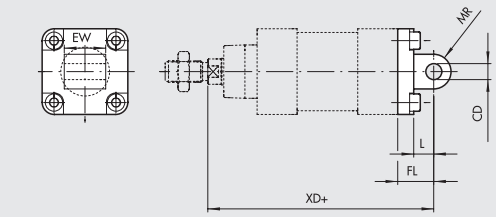

Code	Ø	EW	FL	MR	CD H9	L	XD	Weight [g]
W0950322004	32	26	22	10	10	13	142	94
W0950402004	40	28	25	12	12	16	160	124
W0950502004	50	32	27	12	12	16	170	220
W0950632004	63	40	32	16	16	22	190	316
W0950802004	80	50	36	16	16	22	210	578
W0951002004	100	60	41	20	20	27	230	850
W0951252004	125	70	50	25	25	30	275	1590

Note: Supplied with 4 screws

ARTICULATED MALE HINGE - MODEL BAS

+ = ADD THE STROKE

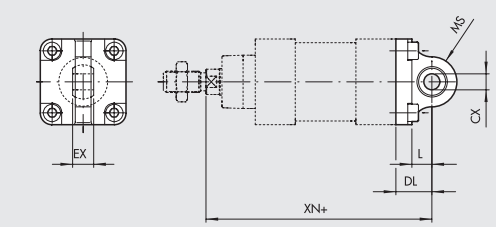

Code	Ø	DL	MS	L	XN	CX H9	EX	Weight [g]
W0950322006	32	22	16	12	142	10	14	106
W0950402006	40	25	18	15	160	12	16	142
W0950502006	50	27	21	15	170	12	16	236
W0950632006	63	32	23	20	190	16	21	336
W0950802006	80	36	28	20	210	16	21	572
W0951002006	100	41	30	25	230	20	25	840
W0951252006	125	50	40	30	275	25	31	1520

Note: Supplied with 4 screws

CETOP HINGE FOR MODEL B - MODEL GL

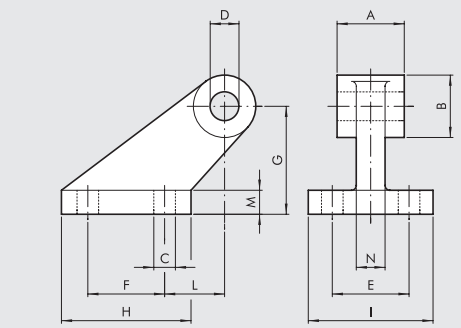

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]
W0950322008	32	26	19	7	10	25	20	32	37	41	18	8	10	96
W0950402008	40	28	26	9	12	32	32	45	54	52	25	10	12	216
W0950502008	50	32	26	9	12	32	32	45	54	52	25	10	12	212
W0950632008	63	40	33	11	16	40	50	63	75	63	32	12	15	440
W0950802008	80	50	33	11	16	40	50	63	75	63	32	12	15	464
W0951002008	100	60	44	14	20	50	70	90	103	80	40	16	22	985
W0951252008	125	70	44	14	25	50	70	90	103	80	40	16	22	1000

Note: Supplied with 4 screws, 4 washers

COUNTER-HINGE FOR MODEL B - MODEL GS

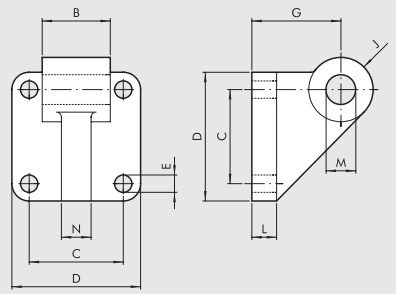

Code	Ø	B	C	D	E	G	J	L	M	N	Weight [g]
W0950322108	32	26	32.5	45	7	32	11	10	10	10	106
W0950402108	40	28	38	52	7	36	13	10	12	12	138
W0950502108	50	32	46.5	65	9	45	13	12	12	12	252
W0950632108	63	40	56.5	75	9	50	17	12	16	15	350
W0950802108	80	50	72	95	11	63	17	16	16	15	655
W0951002108	100	60	89	115	11	73	21	16	20	22	980

Note: Supplied with 4 screws, 4 washers

ISO 15552 COUNTER-HINGE FOR MODEL B - MODEL AB7



Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]
W0950322017	32	26	20	6.6	10	38	18	32	31	51	3	8	10	21	3	60
W0950402017	40	28	22	6.6	12	41	22	36	35	54	2	10	15*	21	3	85
W0950502017	50	32	26	9	12	50	30	45	45	65	3	12	16	21	3	162
W0950632017	63	40	30	9	16	52	35	50	50	67	2	14*	16	21	3	191
W0950802017	80	50	30	11	16	66	40	63	60	86	7	14	20	21	3	332
W0951002017	100	60	38	11	20	76	50	71	70	96	5	17*	20	11	3	522
W0951252017	125	70	45	14	25	94	60	90	90	124	10	20	30	21	3	960

* Dimensions not to ISO 15552

FRONT FLANGE - MODEL C

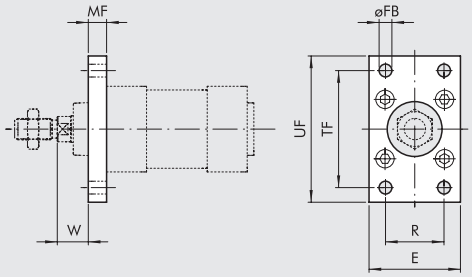

Code	Ø	TF	UF	E	MF	R	øFB	W	Weight [g]
W0950322002	32	64	80	50	10	32	7	16	246
W0950402002	40	72	90	55	10	36	9	20	290
W0950502002	50	90	110	65	12	45	9	25	522
W0950632002	63	100	120	75	12	50	9	25	670
W0950802002	80	126	150	95	15	63	12	30	1420
W0951002002	100	150	178	115	15	75	14	35	2040
W0951252002	125	180	220	140	20	90	16	45	4300

Note: Supplied with 4 screws

REAR FLANGE - MODEL C

+ = ADD THE STROKE

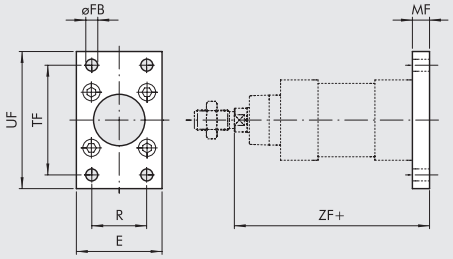

Code	Ø	TF	UF	E	MF	R	øFB	ZF	Weight [g]
W0950322002	32	64	80	50	10	32	7	130	246
W0950402002	40	72	90	55	10	36	9	145	290
W0950502002	50	90	110	65	12	45	9	155	522
W0950632002	63	100	120	75	12	50	9	170	670
W0950802002	80	126	150	95	15	63	12	190	1420
W0951002002	100	150	178	115	15	75	14	205	2040
W0951252002	125	180	220	140	20	90	16	245	4300

Note: Supplied with 4 screws.

ROD NUT - MODEL S



Code	Ø	F	H	CH	Weight [g]
0950322010	32	M10x1.25	6	17	6
0950402010	40	M12x1.25	7	19	12
0950502010	50/63	M16x1.5	8	24	20
0950802010	80/100	M20x1.5	9	30	32
0951252010	125	M27x2	12	41	74

Note: Individually packed

METAL WORK PNEUMATIC

FORK MODEL GK-M



Code	Ø	øM	C	B	A	L	F	D	N	Weight [g]
W0950322020	32	10	20	10	20	52	40	M10x1.25	26	92
W0950402020	40	12	24	12	24	62	48	M12x1.25	32	148
W0950502020	50	16	32	16	32	83	64	M16x1.5	40	340
W0950502020	63	16	32	16	32	83	64	M16x1.5	40	340
W0950802020	80	20	40	20	40	105	80	M20x1.5	48	690
W0950802020	100	20	40	20	40	105	80	M20x1.5	48	690
W0951252020	125	30	54	30	55	148	110	M27x2	65	1835

Note: Ø32÷100 Supplied complete with 1 pin and 1 clip; Ø125 Supplied complete with 1 pin and 2 seeger

ROD EYE - MODEL GA-M

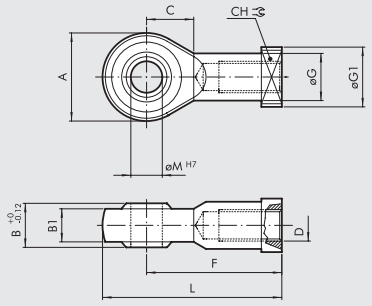

Code	Ø	øM	C	B1	B	A	L	F	D	øG	CH	øG1	Weight [g]
W0950322025	32	10	15	10.5	14	28	57	43	M10x1.25	15	17	19	70
W0950402025	40	12	17	12	16	32	66.5	50	M12x1.25	17.5	19	19	108
W0950502025	50	16	22	15	21	42	85	64	M16x1.5	22	22	27	216
W0950502025	63	16	22	15	21	42	85	64	M16x1.5	22	22	27	216
W0950802025	80	20	26	18	25	50	102.5	77	M20x1.5	27.5	30	34	396
W0950802025	100	20	26	18	25	50	102.5	77	M20x1.5	27.5	30	34	396
W0951252025	125	30	36	25	37	70	145	110	M27x2	40	41	49	1190

Note: Individually packed

SELF ALIGNING ROD COUPLER - MODEL GA-K

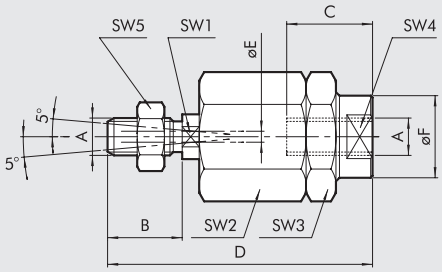

Code	Ø	A	B	C	D	øF	øE	SW_1	SW_2	SW_3	SW_4	SW_5	Weight [g]
W0950322030	32	M10x1.25	20	20	71	22	4	12	30	30	19	17	216
W0950402030	40	M12x1.25	24	20	75	22	4	12	30	30	19	19	220
W0950502030	50	M16x1.5	32	32	103	32	4	20	41	41	30	24	620
W0950502030	63	M16x1.5	32	32	103	32	4	20	41	41	30	24	620
W0950802030	80	M20x1.5	40	40	119	32	4	20	41	41	30	30	680
W0950802030	100	M20x1.5	40	40	119	32	4	20	41	41	30	30	680

Note: Individually packed

NOTES

ACCESSORIES FOR ISO 15552 CYLINDERS: INTERMEDIATE HINGE

INTERMEDIATE HINGE - MODEL EN, FOR STD AND STD TWO-FLAT SERIES

\+ = ADD THE STROKE
\+ 1/2 = ADD HALF THE STROKE

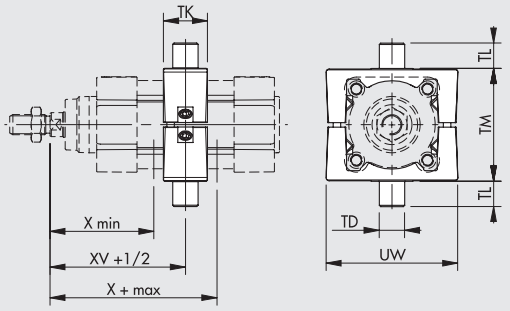

Code	Ø	X (min)	XV	X (max)	TM	TL	TD e 9	TK	UW	Weight [g]	T [Nm] ◆
0950322007	**32**	63	73	83	50	12	12	22	65	282	4
0950402007	**40**	72	82.5	93	63	16	16	28	75	582	10
0950502007	**50**	83	90	97	75	16	16	32	95	870	15
0950632007	**63**	86.5	97.5	108.5	90	20	20	35	105	1192	20
0950802007	**80**	104	110	116	110	20	20	40	130	1950	20
0951002007	**100**	113.5	120	126.5	132	25	25	45	145	2690	25
0951252007	**125**	135	145	155	160	25	25	50	175	3927	30

Note: Supplied with 4 grub screws, 2 pins
◆ Reccommended tightening torque of grub screws

INTERMEDIATE HINGE - MODEL EN, FOR TYPE A AND TYPE A TWO-FLAT SERIES

\+ = ADD THE STROKE
\+ 1/2 = ADD HALF THE STROKE

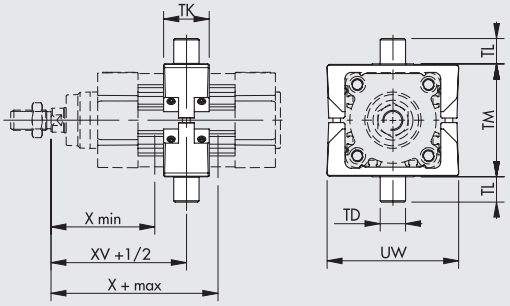

Code	Ø	X (min)	XV	X (max)	TM	TL	TD e 9	TK	UW	Weight [g]	T [Nm] ◆
0950322107	**32**	63	73	83	50	12	12	22	65	170	2
0950402107	**40**	72	82.5	93	63	16	16	28	75	360	5
0950502107	**50**	83	90	97	75	16	16	28	95	595	6
0950632107	**63**	86.5	97.5	108.5	90	20	20	36	105	960	10
0950802107	**80**	104	110	116	110	20	20	36	130	1530	10
0951002107	**100**	113.5	120	126.5	132	25	25	45	145	2417	20
0951252107	**125**	135	145	155	160	25	25	50	175	3480	25

Note: Supplied with 8 grub screws, 2 pins
◆ Reccommended tightening torque of grub screws

INTERMEDIATE HINGE - MODEL EN, FOR SERIES 3 AND TWO-FLAT SERIES 3

\+ = ADD THE STROKE
\+ 1/2 = ADD HALF THE STROKE

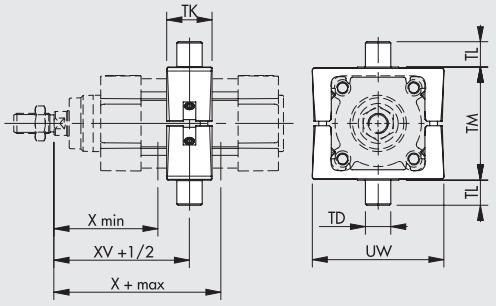

Code	Ø	X (min)	XV	X (max)	TM	TL	TD e 9	TK	UW	Weight [g]	T [Nm] ◆
0950322207	**32**	63	73	83	50	12	12	22	65	212	3
0950402207	**40**	72	82.5	93	63	16	16	28	75	440	8
0950502207	**50**	83	90	97	75	16	16	28	95	644	15
0950632207	**63**	86.5	97.5	108.5	90	20	20	36	105	1080	15
0950802207	**80**	104	10	116	110	20	20	36	130	1654	15
0951002207	**100**	113.5	120	126.5	132	25	25	45	145	2550	20
0951252207	**125**	135	145	155	160	25	25	50	175	3726	20

Note: Supplied with 4 grub screws, 2 pins
◆ Reccommended tightening torque of grub screws

COUNTER-HINGE FOR MODEL EN - MODEL EL



Code	Ø	A	A_1	B	C	C_1	D_1	D_2	D	E	H	øL	Weight [g]
W0950322009	**32**	46	32	18	30	15	11	7	12	6.5	10.5	22	162
W0950402009	**40**	55	36	21	36	18	15	9	16	8.5	12	28	278
W0950402009	**50**	55	36	21	36	18	15	9	16	8.5	12	28	278
W0950632009	**63**	65	42	23	40	20	18	11	20	10.5	13	35	414
W0950632009	**80**	65	42	23	40	20	18	11	20	10.5	13	35	414
W0951002009	**100**	75	50	28.5	50	25	20	13	25	12.5	16	40	715
W0951002009	**125**	75	50	28.5	50	25	20	13	25	12.5	16	40	715

Note: 2-pieces pack with 4 screws

ACCESSORIES FOR ISO 15552 CYLINDERS: PROTECTIVE BELLOWS

The protective bellows is designed to prevent the piston rod and gasket from coming into contact with external agents in applications characterised by the presence of pollutants such as dust, oils or other contaminants.
The design and material chosen (NBR) ensure a long service life of the bellows, compatibly with the operating conditions.
In addition to the bellows as such, other elements are also included in the supply to ensure correct assembly on the cylinder and a tight fit.
Depending on the cylinder size and stroke, three versions are available:
- single, consisting of one collar for the standard cylinder head, one collar for the piston rod (which must be special) and bellows;
- double, which in addition to the collars, includes two bellows and one gasket;
- triple made up of three bellows and two gaskets.

The range offered includes two sizes that cover all ISO 15552 Metal Work cylinders, with Ø32 to Ø125 bores, in versions with a suitably designed piston rod.

TECHNICAL DATA			SIZE 60			SIZE 83		
			SINGLE	DOUBLE	TRIPLE	SINGLE	DOUBLE	TRIPLE
Continuous duty temperature		°C	-10 to +50					
Cylinder strokes ✚	Ø32 to 63	mm	1 to 230	231 to 475	476 to 720	-	-	-
	Ø80 to 125	mm	-	-	-	1 to 270	271 to 555	556 to 840
Maximum recommended speed		m/s	1					
Weights		g	120	210	300	850	1020	1190
Notes			Can only be fitted to predisposed cylinders, code 154... to be purchased separately It's possible to order cylinder code 156... with already mounted bellows.					

✚ For higher stroke values, please contact our sales department.

COMPONENTS

① ROD COLLAR: NBR with stainless steel filter
② BELLOWS: NBR
③ JUNCTION: NBR with a POM core (only for double or triple kit)
④ HEAD COLLAR: NBR
⑤ ISO 15552 CYLINDER DESIGNED FOR BELLOWS

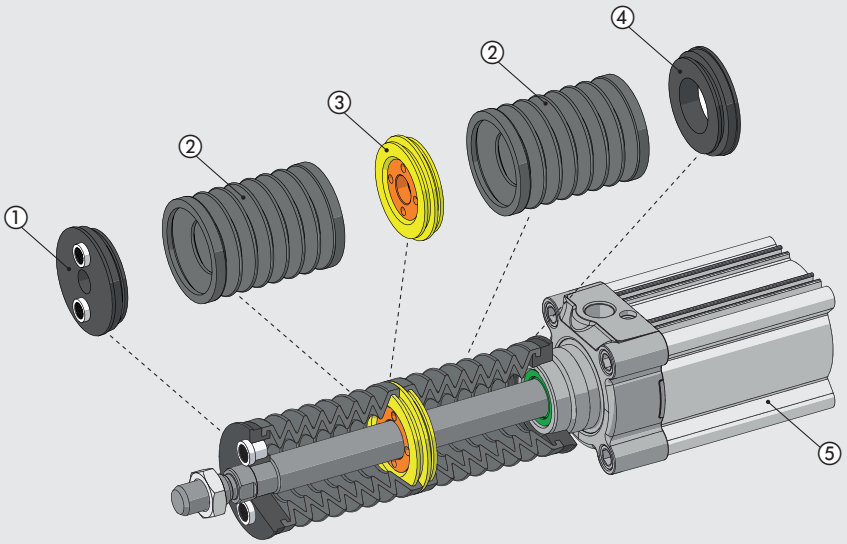

BELLOWS OVERALL DIMENSIONS AND ORDERING CODES

SINGLE



Code	Ø	Cylinder stroke	Ø D	Ø C	S	Ø D1	Ø D2	L1 closed	L1 open	WH1
0950322103	**32**	1 to 230	60	30	12	10	27	70	300	86
0950402103	**40**	1 to 230	60	30	12	13	32	70	300	86
0950502103	**50**	1 to 230	60	30	12	17	37	70	300	93
0950632103	**63**	1 to 230	60	30	12	17	39	70	300	94
0950802103	**80**	1 to 270	83	50	12	22	42	80	350	103
0951002103	**100**	1 to 270	83	50	12	22	48	80	350	105
0951252103	**125**	1 to 270	83	50	12	29	53	80	350	117

DOUBLE



Code	Ø	Cylinder stroke	Ø D	Ø C	S	Ø D1	Ø D2	L2 closed	L2 open	WH2
0950322203	**32**	231 to 475	60	30	12	10	27	125	600	141
0950402203	**40**	231 to 475	60	30	12	13	32	125	600	141
0950502203	**50**	231 to 475	60	30	12	17	37	125	600	148
0950632203	**63**	231 to 475	60	30	12	17	39	125	600	149
0950802203	**80**	271 to 555	83	50	12	22	42	145	700	168
0951002203	**100**	271 to 555	83	50	12	22	48	145	700	170
0951252203	**125**	271 to 555	83	50	12	29	53	145	700	182

TRIPLE



Code	Ø	Cylinder stroke	Ø D	Ø C	S	Ø D1	Ø D2	L3 closed	L3 open	WH3
0950322303	**32**	476 to 720	60	30	12	10	27	180	900	196
0950402303	**40**	476 to 720	60	30	12	13	32	180	900	196
0950502303	**50**	476 to 720	60	30	12	17	37	180	900	203
0950632303	**63**	476 to 720	60	30	12	17	39	180	900	204
0950802303	**80**	556 to 840	83	50	12	22	42	210	1050	233
0951002303	**100**	556 to 840	83	50	12	22	48	210	1050	235
0951252303	**125**	556 to 840	83	50	12	29	53	210	1050	247

Refer to standard cylinders for other values.

N.B.: Also order the cylinder designed for protective bellows (code 154...)

ASSEMBLY ONTO CYLINDERS Ø32 - Ø40 - Ø50

For fixing the cylinder through the front head, in case of bores 32, 40 and 50 the bellows can be mounted **only after having fixed the cylinder**.
For versions **156...** with mounted bellows:

① 

Cylinder supplied with already mounted bellows.

② 

Remove the bellows from the front head, acting on the head collar.

③ 

Fix the cylinder to the machine (for example with foot model A).

④ 

Reinsert the bellows on the front head, by pressing the head collar on the conical surface of the front cylinder head until it reaches the shoulder.

METAL WORK PNEUMATIC

FOOT MODEL A

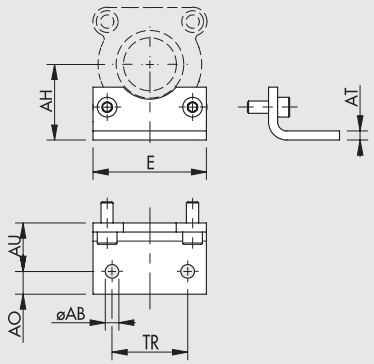

Code	Ø	Ø AB	AH	AO	AT	AU	TR	E	Weight [g]
W0950322507 *	32	7	32	11	4	24	32	45	76
W0950402507 *	40	9	36	15	4	28	36	52	100
W0950502001	50	9	45	15	5	32	45	65	162
W0950632001	63	9	50	15	5	32	50	75	266
W0950802001	80	12	63	20	6	41	63	95	456
W0951002001	100	14	71	25	6	41	75	115	572
W0951252001	125	16	90	15	8	45	90	140	1130

* Version with button head screws to be used in place of standard feet codes W0950322001 and W0950402001. They can be mounted only inwards.

Note: Individually packed with 2 screws

Ø32



In the case of the Ø32 bore, the foot must be raised to avoid rubbing the bellows on the support surface.

Ø40



Ø50 ... Ø125



FRONT FLANGE - MODEL C

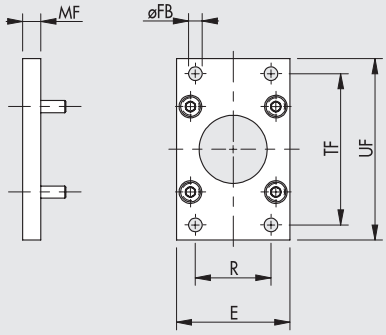

Code	Ø	TF	UF	E	MF	R	øFB	Weight [g]
W0950502002	50	90	110	65	12	45	9	522
W0950632002	63	100	120	75	12	50	9	670
W0950802002	80	126	150	95	15	63	12	1420
W0951002002	100	150	178	115	15	75	14	2040
W0951252002	125	180	220	140	20	90	16	4300

Note: Supplied with 4 screws

For bores Ø32 and Ø40 it's not possible to use the front flanges codes W0950322002 and W0950402002 because they prevent effective assembly of the collar on the cylinder head.

NOTES

Refer to ISO 15552 cylinders for other accessories.

ACCESSORIES FOR ISO 15552 CYLINDERS: "SECURE LOCK" ROD LOCK

A new series of in-line locking devices by Metal Work with superior characteristics. Performances are guaranteed by a system of springs and conical sliding and ball bearings which, combined with carefully selected materials, ensure reliable and accurate locking of the system, which can be released by supplying air through the relevant inlet.
A version with manual release is also available.
When "Secure Lock" devices are fitted to ISO 15552 cylinders, the piston rod can be locked in position when the system is turned off or an emergency stop occurs.
"Secure Lock" can withstand occasional situations of dynamic locking. It locks the rod and prevents it from moving. Since negligible play is created, it is ideal for high-precision applications.
With the optional cam-operated manual release function, the rod lock can be disengaged mechanically merely by rotating a pin using a standard Allen wrench. When the pin is released, it automatically returns to the "rod locked" position.

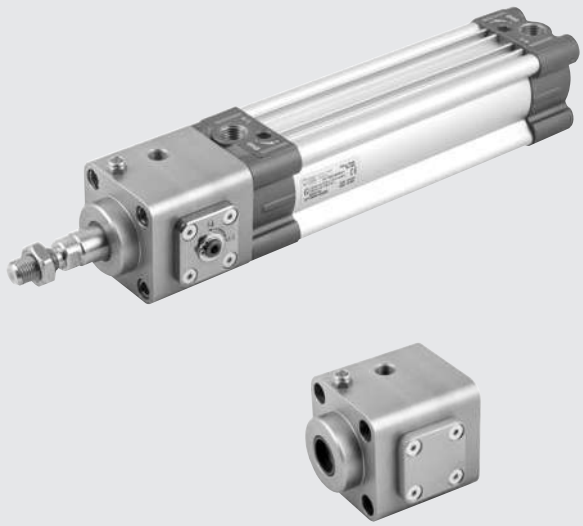

TECHNICAL DATA		Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125
Pilot pressure	bar	5 to 10						
	MPa	0.5 to 1						
	psi	72.5 to 145						
Temperature range	°C	−10 to +80						
Operation		NC - Bidirectional						
Mechanics		Locking gripper controlled by a bearing ball piston.						
Locking force	N	650	1100	1600	2500	4000	6300	8700
Notes		The piston rod must be clean and dry.						
		During assembly, do not rotate the piston rod if the Secure Lock device is locked.						
		The cylinder rod must be chromed and in f7 tolerance.						

COMPONENTS

① BODY: anodized aluminium
② WIPER RING: polyurethane
③ GUIDE RING: technopolymer
④ GRIPPER: hardened steel
⑤ SPRINGS: spring steel
⑥ BALLS: hardened steel
⑦ PISTON: hardened steel
⑧ MANUAL RELEASE PLATE: treated aluminum
⑨ MANUAL RELEASE PIN: hardened steel
⑩ PLUG: anodized aluminium
⑪ FALSE ROD: steel
⑫ TIE RODS: stainless steel
⑬ AIR SUPPLY FOR RELEASE
⑭ SILENCER: nickel-plated brass with stainless steel wire

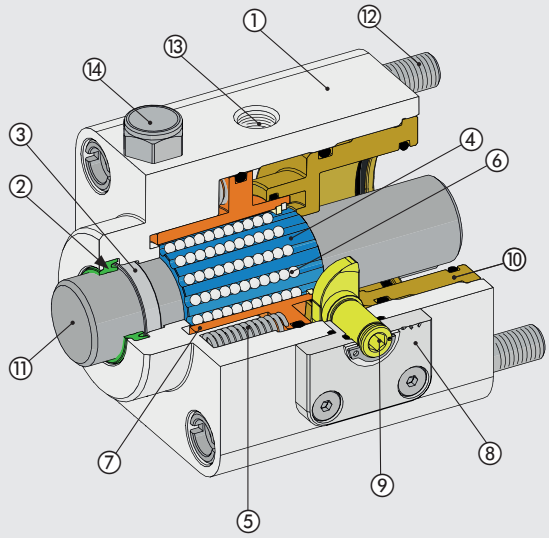

METAL WORK PNEUMATIC

MANUAL RELEASE

In the versions equipped with manual control it is possible to use an hex key to temporarily unlock the device.
The hex key must be inserted in the hexagonal seat of the pin for the manual control (component 9 in the list of components) and used for the rotation of the same as shown in the figure.
Once released, the pin will automatically return to its initial position.

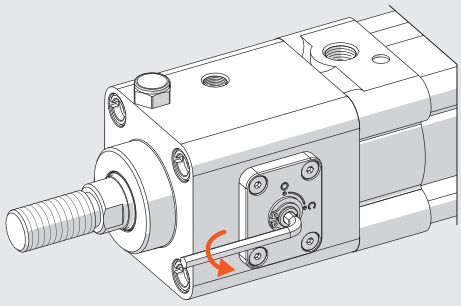

DIMENSIONS

\+ = ADD STROKE

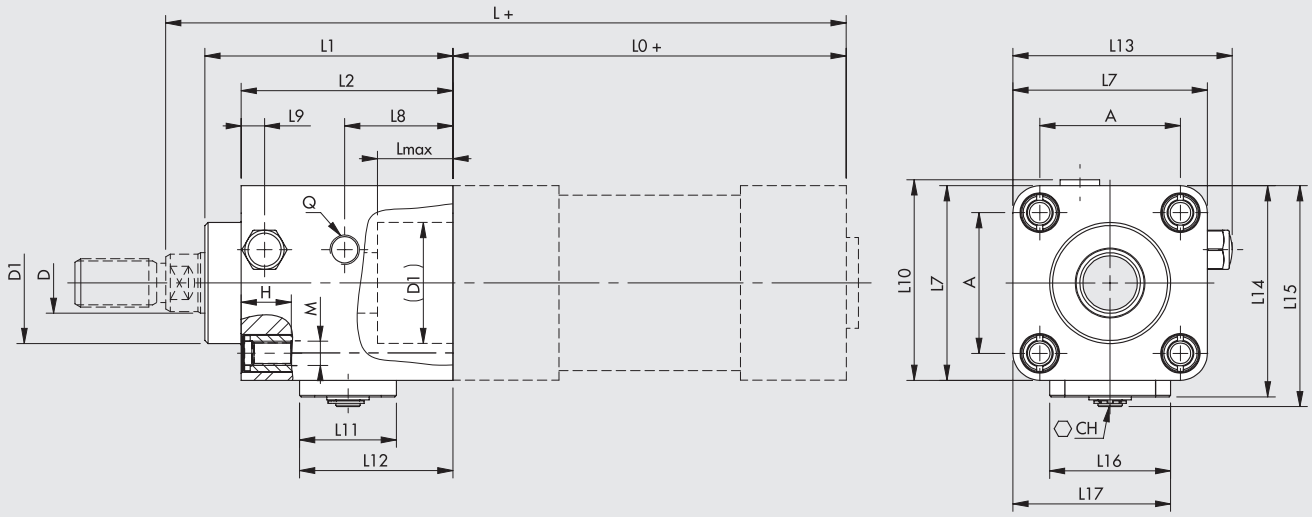

VERSION WITH MANUAL CONTROL

Code	Ø	Lmax	L1	L2	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	D	D1	A	H	M	Q	CH	L0	L	Weight [g] ◆
W5010010102	**32**	16	58	48	46	25.2	9.5	48	30	41.2	50.7	51.5	54.3	28	37	12	30	32.5	14.5	M6	M5	2.5	94	162	295
W5010010103	**40**	20	65	55	54	26.9	6	56.5	32	43.9	58.7	59.5	63	33	43.5	16	35	38	14.5	M6	G1/8	4	105	180	444
W5010010104	**50**	25	82	70	64.3	35.8	7.7	66.5	32	50.7	72.5	69.8	73	40	52.2	20	40	46.5	17.5	M8	G1/8	4	106	200	826
W5010010105	**63**	25	82	70	76	34.6	8.7	78.5	32	50.5	84.2	81.5	84.7	40	58	20	45	56.5	17.5	M8	G1/8	4	121	215	1060
W5010010106	**80**	33	110	90	94	41.3	14.7	96.5	47	66.1	102.2	103	106.3	65	79.5	25	45	72	21.5	M10	G1/8	6	128	251	2272
W5010010107	**100**	38	115	100	111	49.8	18.2	113.5	47	73.6	119.2	120	123.3	65	88.5	25	55	89	21.5	M10	G1/8	6	138	266	3410
W5010010108	**125**	45	167	122	135	67.5	23	137	54	90.2	143.2	148	151.8	84	109.5	32	60	110	25.5	M12	G1/8	10	160	347	6328

◆ Weight of the rod lock without the false rod

VERSION WITHOUT MANUAL CONTROL

Code	Ø	Lmax	L1	L2	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	D	D1	A	H	M	Q	CH	L0	L	Weight [g] ◆
W5010020102	**32**	16	58	48	46	25.2	9.5	48	30	41.2	50.7	51.5	-	28	37	12	30	32.5	14.5	M6	M5	-	94	162	290
W5010020103	**40**	20	65	55	54	26.9	6	56.5	32	43.9	58.7	59.5	-	33	43.5	16	35	38	14.5	M6	G1/8	-	105	180	432
W5010020104	**50**	25	82	70	64.3	35.8	7.7	66.5	32	50.7	72.5	69.8	-	40	52.2	20	40	46.5	17.5	M8	G1/8	-	106	200	814
W5010020105	**63**	25	82	70	76	34.6	8.7	78.5	32	50.5	84.2	81.5	-	40	58	20	45	56.5	17.5	M8	G1/8	-	121	215	1044
W5010020106	**80**	33	110	90	94	41.3	14.7	96.5	47	66.1	102.2	103	-	65	79.5	25	45	72	21.5	M10	G1/8	-	128	251	2220
W5010020107	**100**	38	115	100	111	49.8	18.2	113.5	47	73.6	119.2	120	-	65	88.5	25	55	89	21.5	M10	G1/8	-	138	266	3350
W5010020108	**125**	45	167	122	135	67.5	23	137	54	90.2	143.2	148	-	84	109.5	32	60	110	25.5	M12	G1/8	-	160	347	6120

◆ Weight of the rod lock without the false rod

ACCESSORIES FOR ISO 15552 CYLINDERS: MECHANICAL ROD LOCK SERIES RL

TECHNICAL DATA		Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125
Pilot pressure	bar	4 to 8						
	MPa	0.4 to 0.8						
	psi	58 to 118						
Temperature range	°C	–10 to +80						
Operation		NC - Bidirectional						
Mechanics		Double pad with mechanical lock						
		Mechanical stick-slip						
Locking force	N	650	1100	1600	2500	4000	6300	8700
MATERIAL								
body		Aluminium						
pad		Brass						
spring		NBR						
piston		Synthetic material with added Teflon®						
gasket		NBR						
pilot port		M5 o 1/8"						

OPERATING PRINCIPLE

The mechanical rod lock series RL is a normally-closed mechanism.
In the absence of pneumatic piloting, the two pads (A) lock the cylinder rod in both directions (Fig. 1). With pneumatic piloting, the piston rod guide forces the pads to come right up to each other and overcome the counter spring (B) force and the piston rod can slide (Fig. 2).
It is important to remember that the mechanical rod lock is a static type, which means that it is necessary to stop the cylinder piston rod pneumatically before locking the part mechanically.

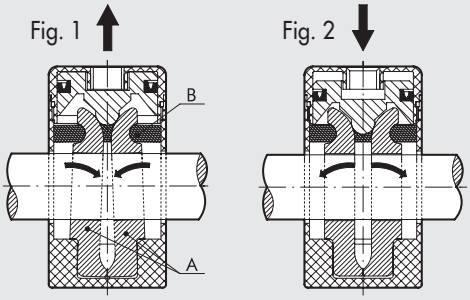

DIMENSIONS

+ = ADD THE STROKE

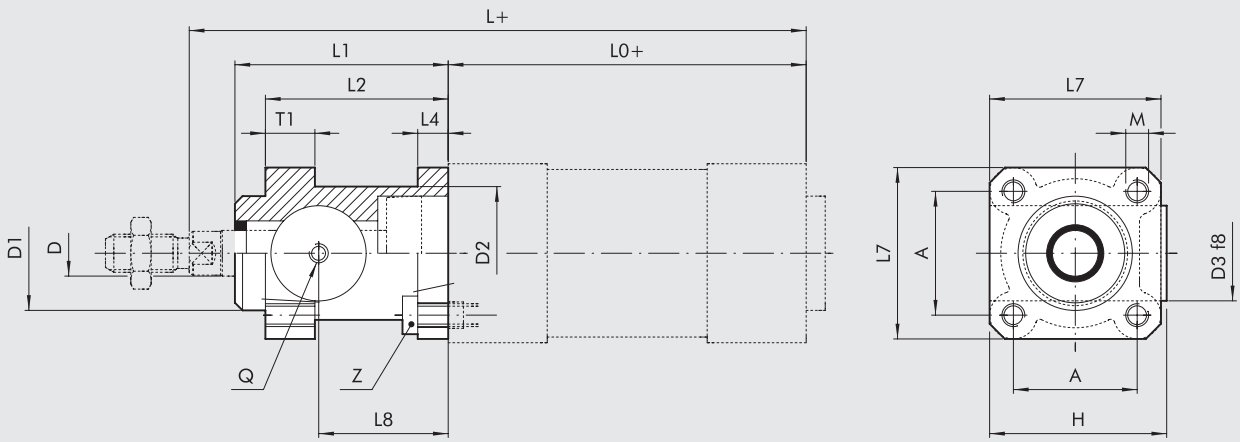

Code	Ø	L_1	L_2	L_4	L_7	L_8	D	D_1	D_2	D_3	H	A	T_1	M	Z	Q	L_0	L	Weight [g]
W5010001102	**32**	58	48	8	45	34	12	30	35	25	46.5	32.5	13	M6	M6x20	M5	94	162	150
W5010001103	**40**	65	55	8	50	38	16	35	40	28	53	38	13	M6	M6x20	G1/8	105	180	200
W5010001104	**50**	82	70	15	60	48	20	40	50	35	64	46.5	16	M8	M8x30	G1/8	106	200	500
W5010001109	**63**	82	70	15	70	49.5	20	45	60	38	75	56.5	16	M8	M8x30	G1/8	121	215	700
W5010001106	**80**	110	90	18	90	61	25	45	80	48	95	72	20	M10	M10x35	G1/8	128	251	1700
W5010001107	**100**	115	100	18	105	68	25	55	100	58	110.5	89	20	M10	M10x35	G1/8	138	266	2700
W5010001108	**125**	167	122	22	140	86.5	32	60	130	65	150	110	30	M12	M12x40	G1/8	160	347	5600

ACCESSORIES FOR ISO 15552 CYLINDERS: GUIDE UNITS

Guide units series DS-DH-DM ensure optimal alignment and anti-rotation effect of the pneumatic cylinder connected to it. The guide units can be used separately or combined in order to get complete handling units, in which case the guide units can be coupled using the type A and C anchorage (pin and flange).
The guide units can be coupled to ISO 15552 cylinders (Ø 32 to 100).
The following versions are available:
U PROFILE (GDS)*: for limited loads and speeds
H PROFILE (GDH)*: for high loads
H PROFILE (GDM)**: for high speeds

* With bronze guide bushing
** With ball guide bushing

STANDARD STROKES: 50 - 100 - 150 - 200 - 250 - 320 - 400 - 500

For weights, see cylinder "**General technical data**" at the beginning of the chapter.

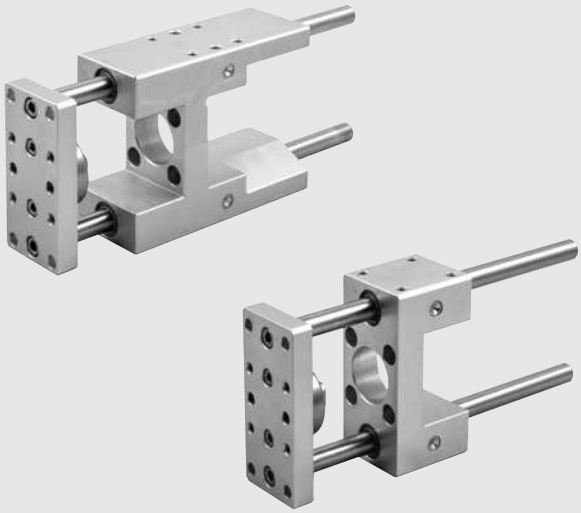

COMPONENTS

SERIES GDS-GDH	Body:	aluminium alloy
	Guide bushing:	self-lubricating sintered bronze and wiper rings
	Piston rod:	grinded chromed steel
SERIES GDM	Body:	aluminium alloy
	Guide bushing:	ball linear bearings and scraper ring
	Piston rod:	hardened, chromed and grinded steel

GRAPH OF GUIDE UNIT LOADS

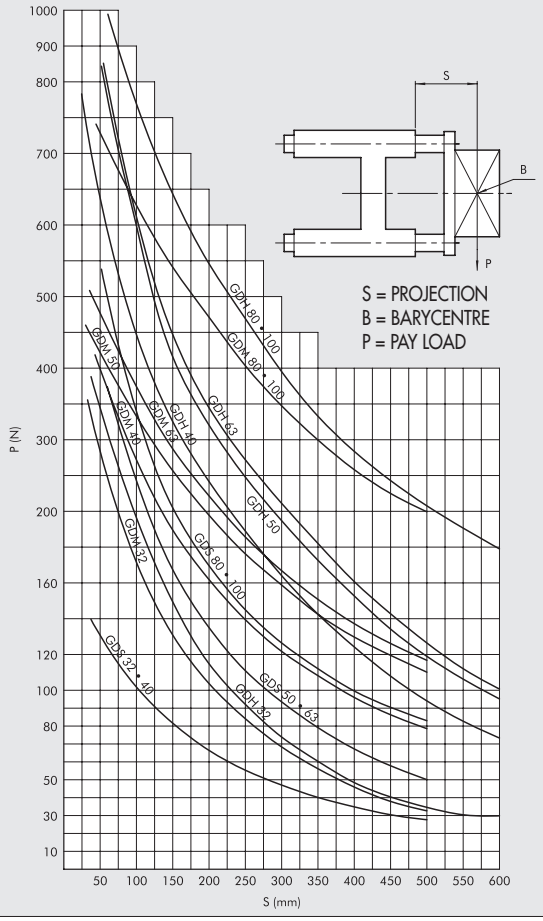

DIMENSIONS TYPE GDS

+ = ADD THE STROKE
✱ = CENTERING PINHOLES

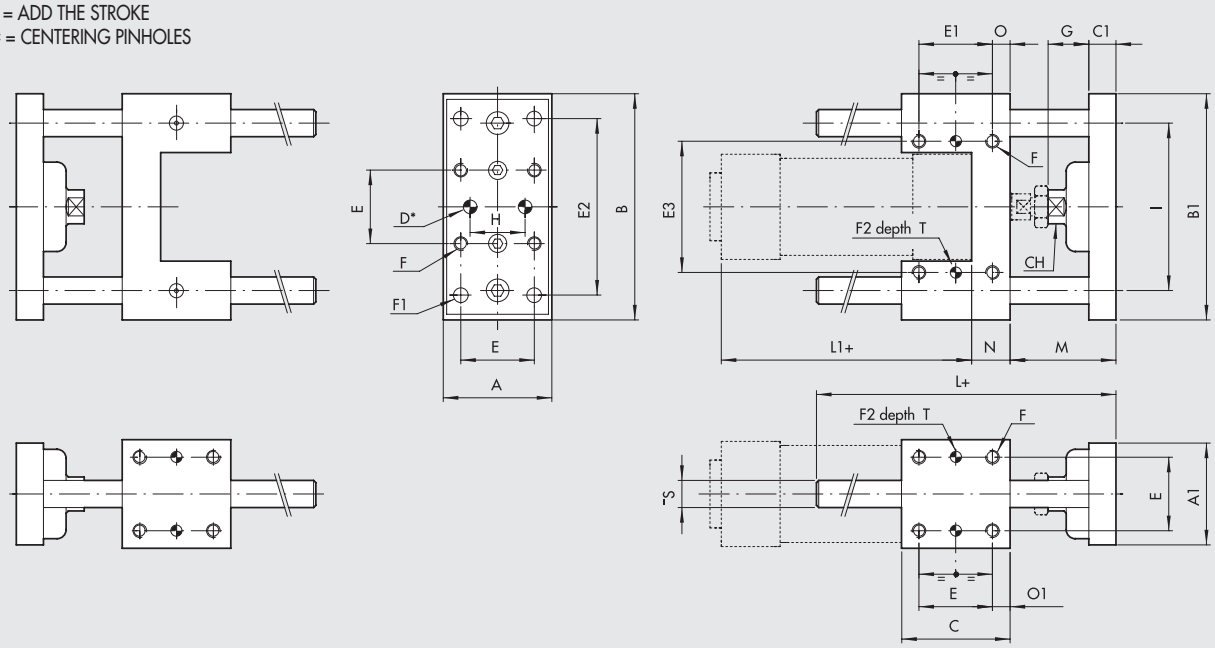

Ø	A	A_1	B	B_1	C	C_1	D^{H7}	E	E_1	E_2	E_3	F	F_1	F_2^{H7}	G	H	I	L	L_1	M	N	O	O_1	Ø S	CH	T
32	48	45	100	95	48	12	6	32.5	32.5	78	58	M6	6.5	6	18	31	74	108	94	46	17	7.8	7.8	12	15	7
40	56	53	106	101	58	15	6	38	38	84	64	M6	6.5	6	21	36	80	120	105	52	21	10	10	12	15	7
50	66	63	125	120	59	15	6	46.5	46.5	100	80	M8	8.5	6	24	45	96	130	106	65	25	6.3	6.3	16	22	7
63	76	73	132	127	76	15	6	56.5	56.5	105	95	M8	8.5	6	24	45	104	145	121	65	25	9.8	9.8	16	22	7
80	98	95	165	160	90	16	6	72	50	130	130	M10	11	6	31	56	130	170	128	71	34	20	9	20	27	10
100	118	115	185	180	110	16	6	89	70	150	150	M10	11	6	31	56	152	190	138	71	39	20	10.5	20	27	10

DIMENSIONS TYPE GDH-GDM

+ = ADD THE STROKE
✱ = CENTERING PINHOLES

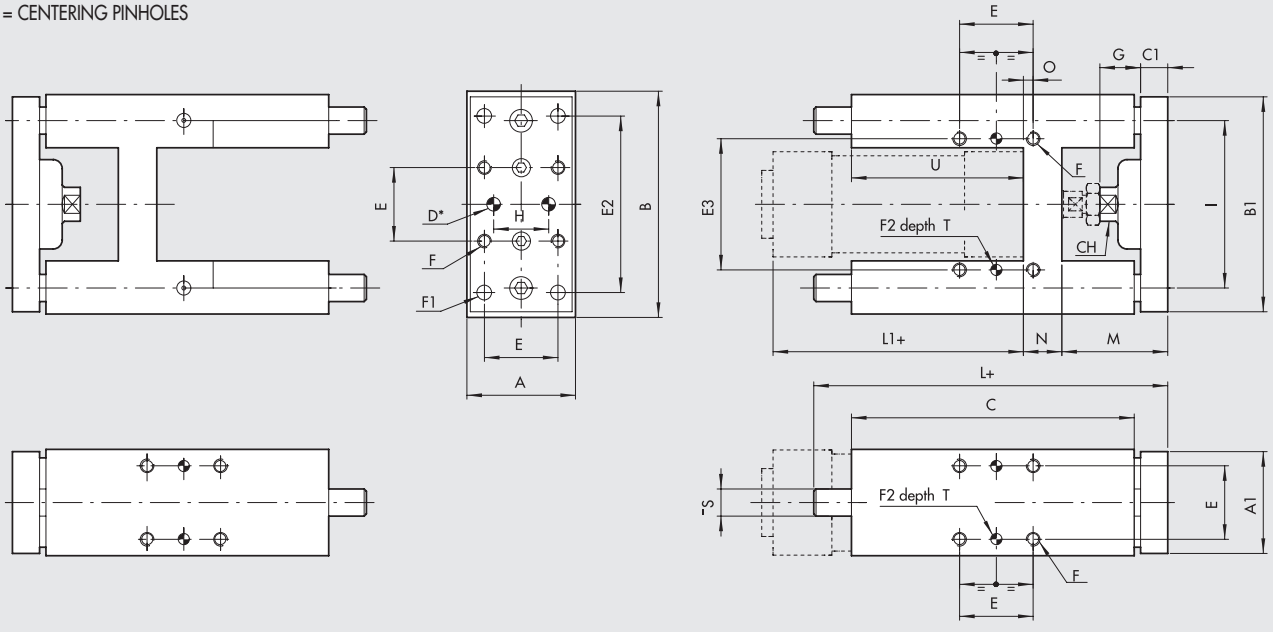

Ø	A	A_1	B	B_1	C	C_1	CH	D^{H7}	E	E_2	E_3	F	F_1	F_2^{H7}	G	H	I	L	L_1	M	N	O	Ø S	U	T
32	49	45	97	90	125	12	13	6	32.5	78	61	M6	6.5	6	18	31	74	177	94	48	17	4.3	12	76	7
40	58	54	115	110	139	15	15	6	38	84	69	M6	6.5	6	21	36	87	192	105	53	21	11	16	81	7
50	69	63	137	130	148	15	22	6	46.5	100	85	M8	8.5	6	24	45	104	205	106	63	26	18.5	20	78	7
63	85	79	152	145	182	15	22	6	56.5	105	100	M8	8.5	6	24	45	119	237	121	62	26	15.3	20	111	7
80	105	99	189	180	215	20	27	6	72	130	130	M10	11	6	31	56	148	280	128	76	34	21	25	128	10
100	129	120	213	200	220	20	27	6	89	150	150	M10	11	6	31	56	172	280	138	76	39	24.5	25	128	10

METAL WORK PNEUMATIC

ORDER CODE GUIDE UNIT

Version	Code	Bore	Type
Sliding on bronze bushings (GDS)	**W0700321...**	32	UNIT MW DS 032...
	W0700401...	40	UNIT MW DS 040...
	W0700501...	50	UNIT MW DS 050...
	W0700631...	63	UNIT MW DS 063...
	W0700801...	80	UNIT MW DS 080...
	W0701001...	100	UNIT MW DS 100...
Sliding on bronze bushings (GDH)	**W0700322...***	32	UNIT MW DH 032...
	W0700402...*	40	UNIT MW DH 040...
	W0700502...	50	UNIT MW DH 050...
	W0700632...	63	UNIT MW DH 063...
	W0700802...	80	UNIT MW DH 080...
	W0701002...	100	UNIT MW DH 100...
	* Also available in V-Lock version (see **chapter A3**).		
Sliding on ball bearing (GDM)	**W0700323...***	32	UNIT MW DM 032...
	W0700403...*	40	UNIT MW DM 040...
	W0700503...	50	UNIT MW DM 050...
	W0700633...	63	UNIT MW DM 063...
	W0700803...	80	UNIT MW DM 080...
	W0701003...	100	UNIT MW DM 100...
	* Also available in V-Lock version (see **chapter A3**).		

Note: To complete the type and code, add the 3-digit stroke (e.g. 50=050)

DIMENSIONS ROD LOCK + GUIDE UNIT COD. 137

Ø	C
32	74
40	85
50	107
63	107
80	136
100	143

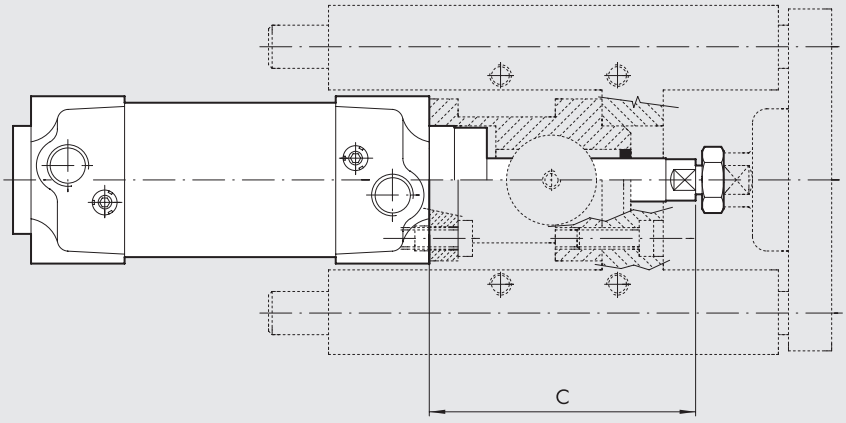

ACCESSORIES FOR ISO 15552 CYLINDERS: MAGNETIC SENSORS AND POSITION SENSOR

RETRACTABLE SENSOR

Ⓐ SENSOR, SQUARE TYPE
Latest generation, secure fixing



Ⓑ SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

Ⓓ SENSOR SUPPORT BRACKETS FOR SENSORS SQUARE TYPE AND OVAL TYPE

Ø 32 to 40



Code	Description
W0950001711	Bracket D.32-40

Ø 50 to 63



Code	Description
W0950001712	Bracket D.50-63

Ø 80 to 125



Code	Description
W0950001713	Bracket D.80-100-125-160

POSITION SENSOR

Ⓖ LTS



Ⓗ LTL



Model	For ISO 15552 cylinders
LTS	type A - series 3
LTL	type A

For technical data and usage strokes see **chapter A6**.

Ⓒ SENSOR SERIES DSM



Can be used on ISO 15552 cylinders in the STD series and series 3.
For codes and technical data, see **chapter A6**.

Ⓔ SENSOR SUPPORT BRACKETS FOR SENSORS DSM

Ø 32 to 40



Code	Description
W0950000711	Bracket D.32-40 DST 80

Ø 50 to 63



Code	Description
W0950000712	Bracket Bracket D.50-63 DST 81

Ø 80 to 125

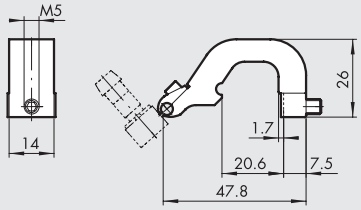

Code	Description
W0950000713	Bracket D.80-100-125 DST 82

Ⓕ ADAPTER FOR OVAL TYPE RETRACTABLE SENSORS

ASSEMBLY DIAGRAM

① ISO 15552 cylinder with serie STD or serie 3 barrel
② Sensor bracket mod. DST (Ø 32 to 125)
③ Adaptor
④ Retractable sensor "oval type"

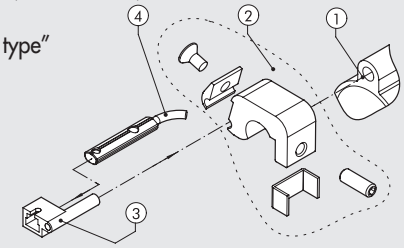

Code	Description
W0950001001	Adaptor DSS005 for DST/ST brackets

METAL WORK PNEUMATIC

USE SENSORS

SERIES STD

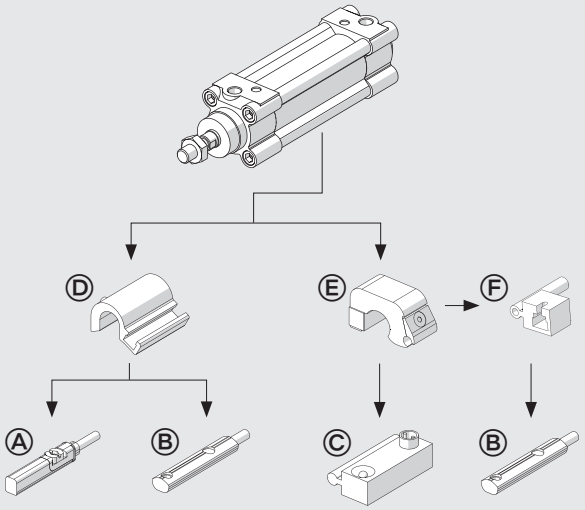

SERIES 3

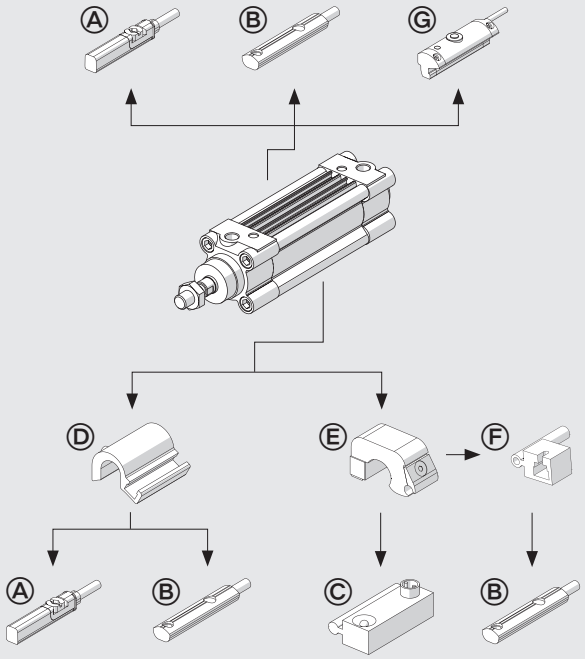

TYPE A

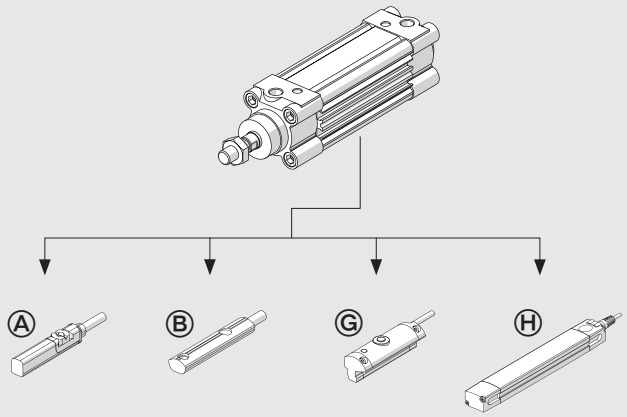

NOTES

VALVE ASSEMBLY ON CYLINDER FOR TYPE A AND SERIES 3 CYLINDERS

With this type of cylinder, the valves (D) can be mounted directly using the retracting sensor slot, without requiring the use of intermediate brackets.
This can be done using the special plates (A), which come with both the M3 and M4 threads, and screws (B) of the size, type and quantity shown in the table below.
For ISO 1 and ISO 2 valves, the kit on which the valve is to be mounted (codes shown in the tables) will be fitted to the cylinder using the special plates (A) and the screws (B) listed in the table.

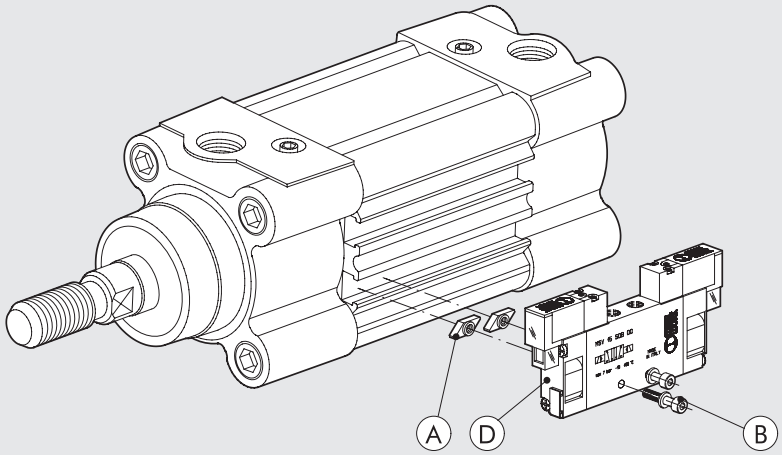

Type of valve to mount (D)	M3 fixing plate (A) code 0950003002	M4 fixing plate (A) code 0950003001	Screw (B) for connection to cylinder (one per plate)	Washer (B) (one per screw)	Valve assembly kit
MINIMACH	n° 2	–	M3x16 UNI 5931 (DIN 912)	A3.2 UNI 1751 (DIN 127A)	–
MACH 11	n° 2	–	M3x16 UNI 5931 (DIN 912)	A3.2 UNI 1751 (DIN 127A)	–
SERIE 70 1/8	–	n° 2	M4x25 UNI 5931 (DIN 912)	–	–
SERIE 70 1/4	–	n° 2	M4x30 UNI 5931 (DIN 912)	A4.3 UNI 1751 (DIN 127A)	–
SERIE 70 1/2	–	n° 2	M4x45 UNI 5931 (DIN 912)	A4.3 UNI 1751 (DIN 127A)	–
ISO 1	–	n° 2	M4x8 UNI 7688 (DIN 965A)	–	0950002001
ISO 2	–	n° 2	M4x8 UNI 7688 (DIN 965A)	–	0950002002

FIXING BRACKET SERIES KCV FOR TYPE STD AND SERIES 3 CYLINDERS

Fig. Ⓐ

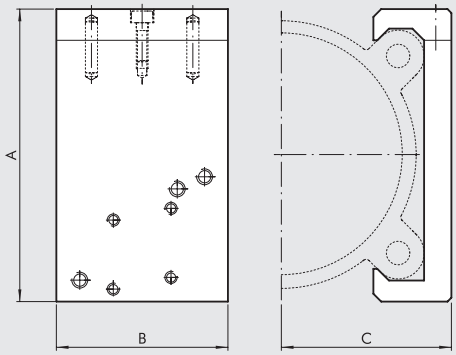

Fig. Ⓑ

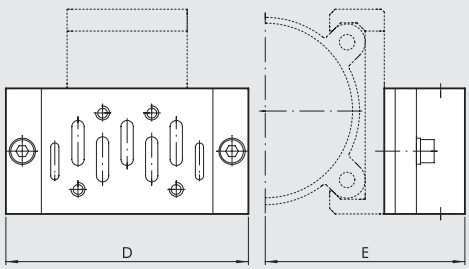

VALVE FIXING BRACKET - CYLINDER (Fig. A)

					ISO 1		ISO 2			
Code	Ø	A	B	C	D	E	D	E	Applicable valves	Weight [g]
0950322090	**32**	54	40	29.5	110	64.5	124	70.5	MACH 16 Series 70 1/8-1/4 ISO 1 - ISO 2	80
0950402090	**40**	59.5	40	32.2	110	67.2	124	73.2	MACH 16 Series 70 1/8-1/4 ISO 1 - ISO 2	86
0950502090	**50**	71.5	40	37	110	72	124	78	MACH 16 Series 70 1/8-1/4 ISO 1 - ISO 2	93
0950632090	**63**	81.5	40	42	110	77	124	83	MACH 16 Series 70 1/8-1/4 ISO 1 - ISO 2	101
0950802090	**80**	99	60	53.5	110	88.5	124	94.5	Series 70 1/8-1/4-1/2 ISO 1 - ISO 2	222
0951002090	**100**	119.5	60	63.5	110	98.5	124	104.5	Series 70 1/8-1/4-1/2 ISO 1 - ISO 2	258
0951252090	**125**	148	60	76.5	110	111.5	124	117.9	Series 70 1/8-1/4-1/2 ISO 1 - ISO 2	298

KIT FOR FIXING VALVES TO BRACKETS, FOR SERIES KCV BRACKETS

Code	Valve kit	Composition	Weight [g]
0950002003	MACH 16	2 hex. screws M3x25 with washer	4
0950002004	Series 70 1/8-1/4	2 hex. screws M4x30 with washer	8
0950002006	Series 70 1/2	2 hex. screws M5x50 with washer	20
0950002001	ISO 1	Adaptor + ISO 1 BASE SIDE + screws + washers (Fig.B)	230
0950002002	ISO 2	Adaptor + ISO 2 BASE SIDE + screws + washers (Fig.B)	350

METAL WORK PNEUMATIC

VALVE ASSEMBLY ON CYLINDER

FOR Ø 32-40-50-63



FOR Ø 80-100-125

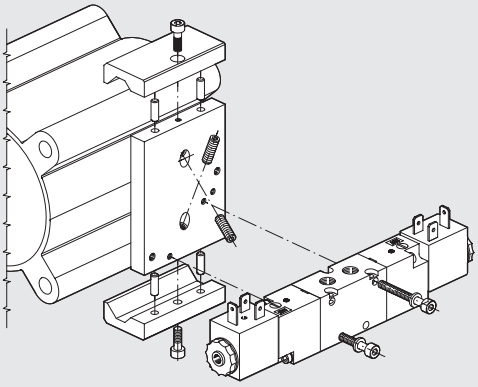

NOTES

SPARE PARTS

CYLINDERS ISO 15552

STD



TYPE A



SERIE 3



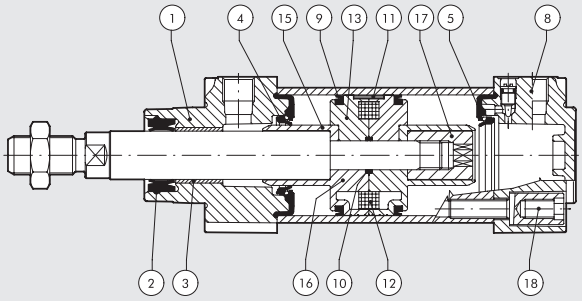

Code	Bore	Type	Parts
009 . . . 0101	Ø 32 to 125	Complete set of polyurethane gaskets	2-4-5-9-10
009 . . . 0103	Ø 32 to 125	Complete set of (high temperature) FKM/FPM gaskets	2-4-5-9-10
009 . . . 0502	Ø 32 to 125	Complete set of NBR gaskets	2-4-5-9-10
009 . . . 1651	Ø 32 to 125	Polyurethane piston rod gasket kit	2
009 . . . 1652	Ø 32 to 125	NBR piston rod gasket kit + seeger	2
009 . . . 1653	Ø 32 to 125	FKM/FPM piston rod gasket kit + seeger	2
009 . . . 0110N	Ø 32 to 125	Complete polyurethane front head kit	1-2-3-4-5-18
009 . . . 0304N	Ø 32 to 125	Complete NBR front head kit	1-2-3-4-5-18
009 . . . 0122N	Ø 32 to 125	Complete R front head kit	1-2-3-4-5-18
009 . . . 0120N	Ø 40 to 125	Complete M front head kit	1-2-3-4-5-18
009 . . . 0111N	Ø 32 to 125	Complete polyurethane rear head kit	4-5-8-18
009 . . . 0305N	Ø 32 to 125	Complete NBR rear head kit	4-5-8-18
009 . . . 0604	Ø 32 to 63	Complete polyurethane piston kit	9-10-16-17
009 . . . 0604	Ø 80 to 125	Complete polyurethane piston kit	9-10-11-13-15-17
009 . . . 0602	Ø 32 to 63	Complete NBR piston kit	9-10-16-17
009 . . . 0602	Ø 80 to 125	Complete NBR piston kit	9-10-11-13-15-17

Notes

Cylinders in the R and M versions do not come with the single piston rod gasket.
When replacing all the gaskets in the R version cylinders, use the complete set of the R front head, code 009...0122N and the complete set of polyurethane gaskets code 009...0101 (the front head gaskets are in excess).
When replacing all the gaskets in the M version cylinders, use the complete set of the M front head, code 009...0120N and the complete set of FKM/FPM, code 009...0103 (the front head gaskets are in excess).

CYLINDERS ISO 15552 TWO-FLAT

STD



TYPE A



SERIE 3



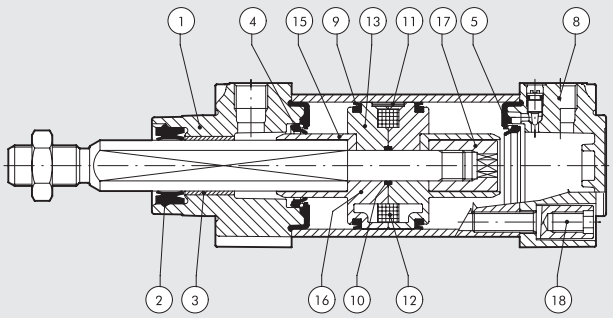

Code	Bore	Type	Parts
009 . . . 0101F	Ø 32 to 63	Set of polyurethane gaskets	4-5-9-10
009 . . . 0110FN	Ø 32 to 63	Complete polyurethane front head kit	1-2-3-4-5-18
009 . . . 0111N	Ø 32 to 63	Complete polyurethane rear head kit	4-5-8-18
009 . . . 0604	Ø 32 to 63	Complete polyurethane piston kit	9-10-16-17

ISO 15552 CYLINDER – SERIES MCR (Medium Corrosion Resistance)

In some applications, cylinders are exposed to certain environments that may shorten the life of surface treatments normally used for heads and screws. For example, this is the case in outdoor applications, where UV-rays, weathering and sometimes chemical agents cause damage to the coating of the cylinder heads and the screw zinc-plating.
MCR series cylinders have been designed for such applications, with a anodized head, chemically nickel-plated clamping screws and a stainless steel cushioning pin.
MCR cylinders are made to ISO 15552. They come either with a STD or Series 3 liner, chromium-plated and polished stainless steel piston rod, and are fitted with the main seals recommended for ISO 15552 cylinders.
They can be fitted with the accessories usually recommended for ISO 15552 cylinders and those specific to the HCR series.

TECHNICAL DATA			Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125
Max operating pressure		bar	10						
		MPa	1						
		psi	145						
Temperature range	POLYURETHANE	°C	–25 to +80						
	NBR	°C	–10 to +80						
	FKM/FPM	°C	-10 to +150 (non-magnetic cylinders)						
	Low temperature	°C	-40 to +80						
	Other piston rod gasket	°C	See page **A1**.27						
Resistance in corrosive environments at 20°C			Basic solution (sodium hydroxide - pH max 9)						
			Acid solution (hydrochloric acid - pH min. 5.5)						
			Salt mist testing to DIN 50021-SS, 300 hours						
Fluid			Unlubricated air. Lubrication, if used, must be continuous						
Standard strokes		mm	1 to 2800					1 to 2600	
Versions			Double-acting cushioned, Double-acting non-cushioned, Through-rod cushioned						
Sensor magnet			Available magnetic and non-magnetic versions						
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter						
Weights			See cylinder "**General technical data**" at the beginning of the chapter						

COMPONENTS

① PISTON ROD: stainless steel, thickness-chromed
② HEAD: anodized pressure die-cast aluminium
③ PISTON ROD GASKET: polyurethane, NBR or FKM/FPM
④ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑤ BARREL: drawn anodized calibrated aluminium
⑥ SEMI-PISTON: made of self-lubricating technopolymer with built-in cushioning ogives (aluminium with technopolymer pad for Ø 80, 100 and 125)
⑦ PISTON GASKET: polyurethane, NBR or FKM/FPM
⑧ MAGNET: plastoferrite
⑨ BUFFER + Static O-rings: NBR or FKM/FPM
⑩ CUSHIONING GASKET: polyurethane, NBR or FKM/FPM
⑪ CUSHIONING NEEDLE: stainless steel
⑫ SCREWS: tap Tite for assembly, chemically nickel-plated

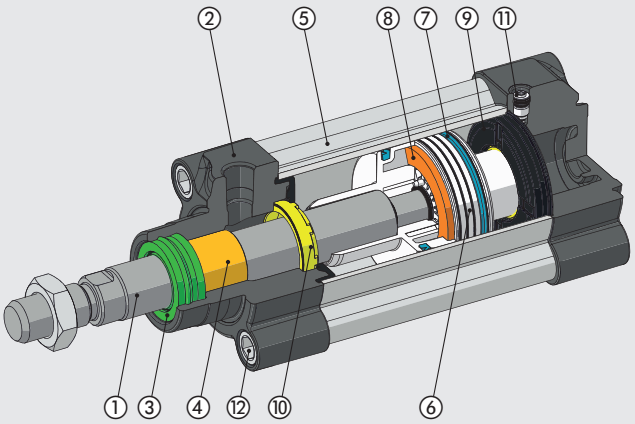

DIMENSIONS

STANDARD VERSION

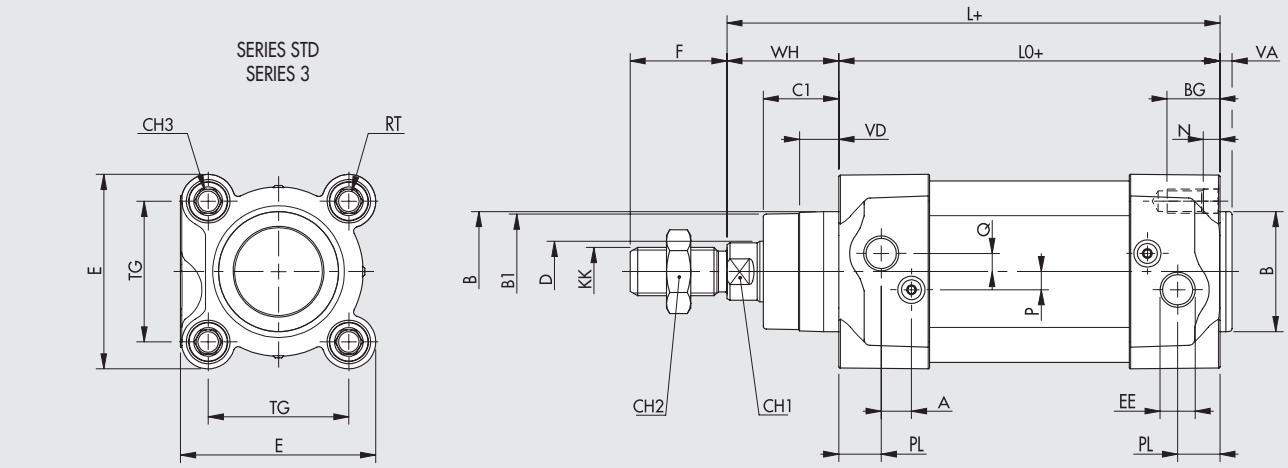

120

124

THROUGH-ROD VERSION

+ = ADD STROKE
++ = ADD TWICE THE STROKE

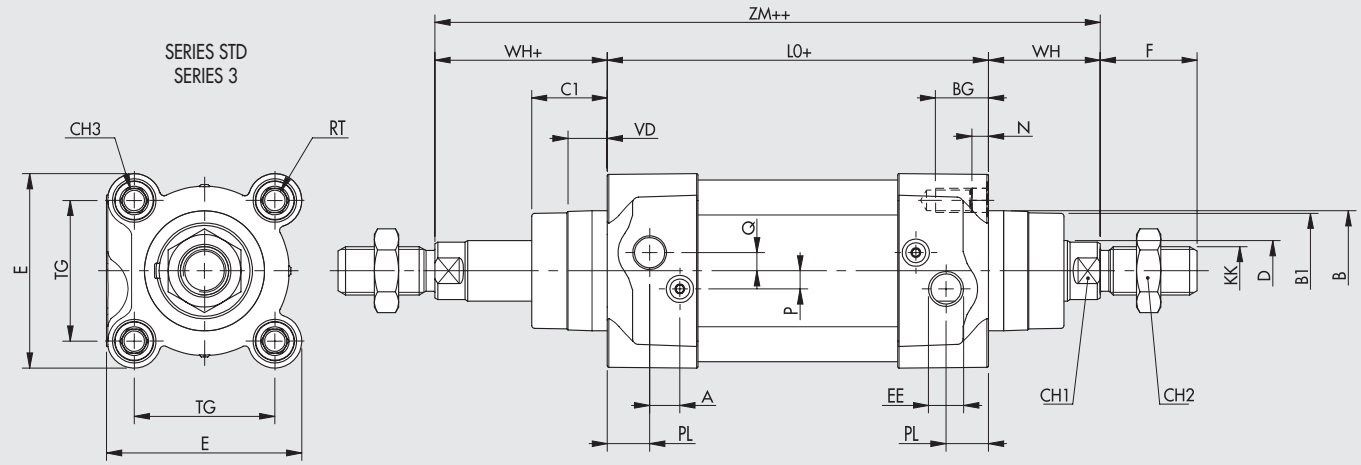


122

Ø	PL	VD	A	B	B_1	WH	C_1	CH_1	CH_2	CH_3	KK	D	TG	VA	F	EE	RT	E	L	L_0	ZM	BG	N	P	Q
32	10	6.5	10	30	28	26	16	10	17	6	M10x1.25	12	32.5	4	22	G1/8	M6	46	120	94	146	14.5	4.5	6	4
40	12	8	10	35	33	30	20	13	19	6	M12x1.25	16	38	4	24	G1/4	M6	54	135	105	165	14.5	4.5	6	4
50	14	13	10	40	38	37	25	17	24	8	M16x1.5	20	46.5	4	32	G1/4	M8	64.5	143	106	180	17.5	5.5	6	6
63	16	14	10	45	40	37	25	17	24	8	M16x1.5	20	56.5	4	32	G3/8	M8	75.5	158	121	195	17.5	5.5	6	6
80	18	12	12	45	43	46	33	22	30	10	M20x1.5	25	72	4	40	G3/8	M10	94	174	128	220	21.5	5.5	10	7
100	20	14	12	55	49	51	38	22	30	10	M20x1.5	25	89	4	40	G1/2	M10	111	189	138	240	21.5	5.5	10	7
125	25	20	10	60	54	65	45	27	41	12	M27x2	32	110	6	54	G1/2	M12	135	225	160	290	25.5	6.5	12	8

METAL WORK PNEUMATIC

KEY TO CODES

CYL	1 2 1 TYPE	0 BORE	32 STROKE	0050 MATERIAL	E GASKETS	P
	121 Double-acting, cushioned ▲ **122** Through-rod **124** Double-acting, non-cushioned	**0** Diameter **S** Standard Non-magnetic **3** Series 3 **5** Series 3 Non-magnetic	32 40 50 63 80 ■ 100 ■ 125	Ø 32 to 80 stroke 1 to 2800 mm Ø 100 to 125 stroke 1 to 2600 mm	**E** AISI 303 piston rod, technopolymer piston: standard for cylinders of Ø32 to Ø63 **Y** AISI 303 piston rod, aluminium piston: standard for all cylinders from Ø80 to Ø125, from Ø32 to Ø63 with strokes > 999 and Ø32 to 125 for through piston rod versions	**N** NBR gaskets **P** Polyurethane gaskets ▲ **V** FKM/FPM gaskets ▲ **B** Low temperature **C** "Combi" piston rod gasket **R** "Hard PU" piston rod gasket

▲ Only available for versions with aluminium piston (Y)
■ In the code of cylinder with digit S, 3 or 5 in fourth position bore 100 becomes A1; bore 125 becomes A2

ACCESSORIES

They can be fitted with the accessories recommended for ISO 15552 cylinders and those specific to HCR ISO 15552 cylinders.

SPARE PARTS

STD



SERIES 3



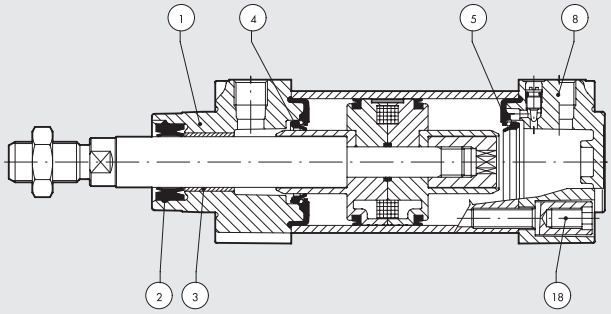

Code	Bore	Type	Parts
009 . . . 0129N	Ø 32 to 125	Complete polyurethane MCR front head kit	1-2-3-4-5-18
009 . . . 0131N	Ø 32 to 125	Complete NBR MCR front head kit	1-2-3-4-5-18
009 . . . 0130N	Ø 32 to 125	Complete polyurethane MCR rear head kit	4-5-8-18
009 . . . 0132N	Ø 32 to 125	Complete NBR MCR rear head kit	4-5-8-18

Notes
Cylinders in the R version do not come with the single piston rod gasket.

NOTES

ISO 15552 CYLINDER – SERIES HCR (High Corrosion Resistance)

In some applications, the cylinders are exposed to aggressive environments (e.g. the dairy, fruit & vegetable and food industry) or to substances and washings with aggressive detergents (e.g. caustic soda, hydrochloric acid and lactic acid).
Under these conditions, the HCR series cylinders ensure better corrosion resistance.
Cylinders made to ISO 15552, designed and built with materials and/or surface treatments that are highly resistant to corrosion.
They come in various versions and with a specific range of accessories:
- with or without magnet
- with single or through piston rod

Also available with liner in the STD series or series 3.

TECHNICAL DATA		Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125
Max operating pressure	bar	10						
	MPa	1						
	psi	145						
Temperature range	°C	–10 to +60						
Resistance in corrosive environments at 20°C		Basic solution (sodium hydroxide - pH max 12)						
		Acid solution (hydrochloric acid - pH min. 2.5)						
		Salt mist testing to DIN 50021-SS, 500 hours						
Fluid		Unlubricated air. Lubrication, if used, must be continuous						
Standard strokes	mm	1 to 2800					1 to 2600	
Versions		Double-acting, Double-acting cushioned, Through-rod cushioned						
Sensor magnet		Available magnetic and non-magnetic versions.						
Gaskets		Piston rod gaskets made of polyurethane, other gaskets in NBR						
Forces generated at 6 bar thrust/retraction		See cylinder "**General technical data**" at the beginning of the chapter						
Weights		See cylinder "**General technical data**" at the beginning of the chapter						

COMPONENTS

① PISTON ROD: AISI 316, thickness-chromed
② HEAD: anodized pressure die-cast aluminium, polyurethane coating
③ PISTON ROD GASKET: special polyurethane
④ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑤ BARREL: drawn anodized calibrated aluminium
⑥ SEMI-PISTON: made of self-lubricating technopolymer with built-in cushioning ogives (aluminium with technopolymer pad for Ø 80, 10 and 125)
⑦ PISTON GASKET: NBR
⑧ MAGNET: plastoferrite
⑨ BUFFER + Static O-rings: NBR
⑩ CUSHIONING GASKET: NBR
⑪ NEEDLE: AISI 316
⑫ SCREWS: AISI 316

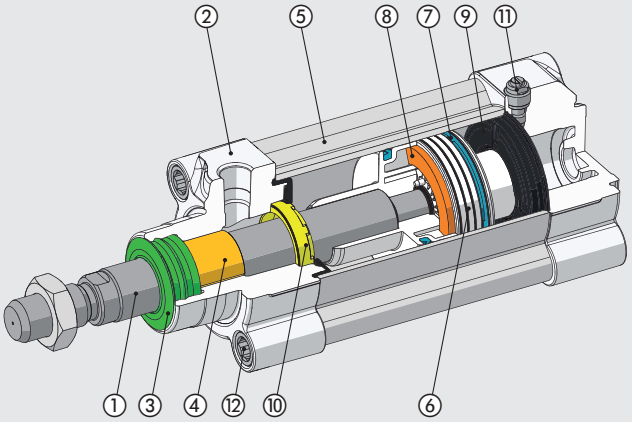

PISTON ROD GASKET FOR HYGIENICALLY-SENSITIVE APPLICATIONS

No fluid stagnation, not even with cylinder in upward direction.
This type of gasket is not available for Ø 125.



CUSHIONING PINS WITHOUT RECESSES

Anti-ejection pin and bushing made of AISI 316 stainless steel, protruding from the head and with a pass-through screwdriver slot to prevent fluid stagnation.



DOUBLE HEAD PROTECTION

POLYURETHANE COATING

ANODISATION

HEAD MADE OF PRESSURE DIE-CAST ALUMINIUM ALLOY

FOOD GRADE GREASE

NSF H1 certified.
Adhesive, waterproof.

DIMENSIONS

STANDARD VERSION

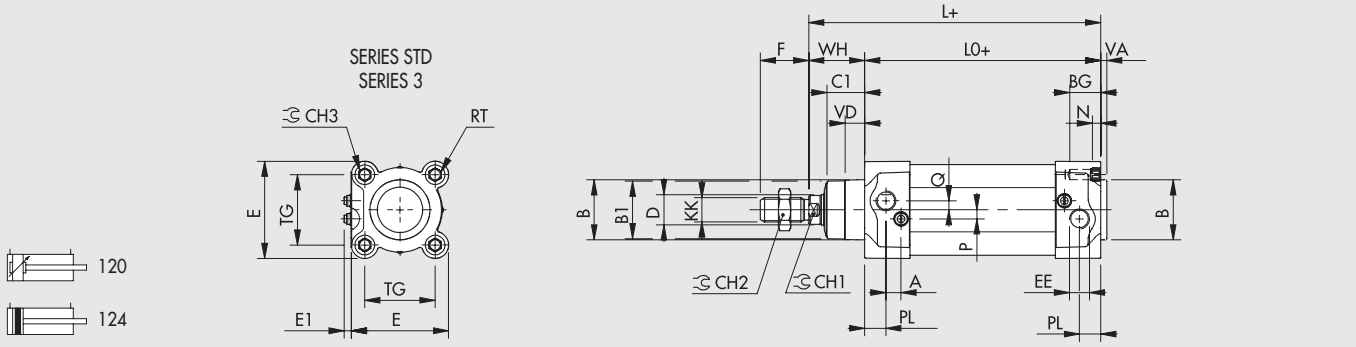

+ = ADD STROKE
++ = ADD TWICE THE STROKE

THROUGH-ROD VERSION

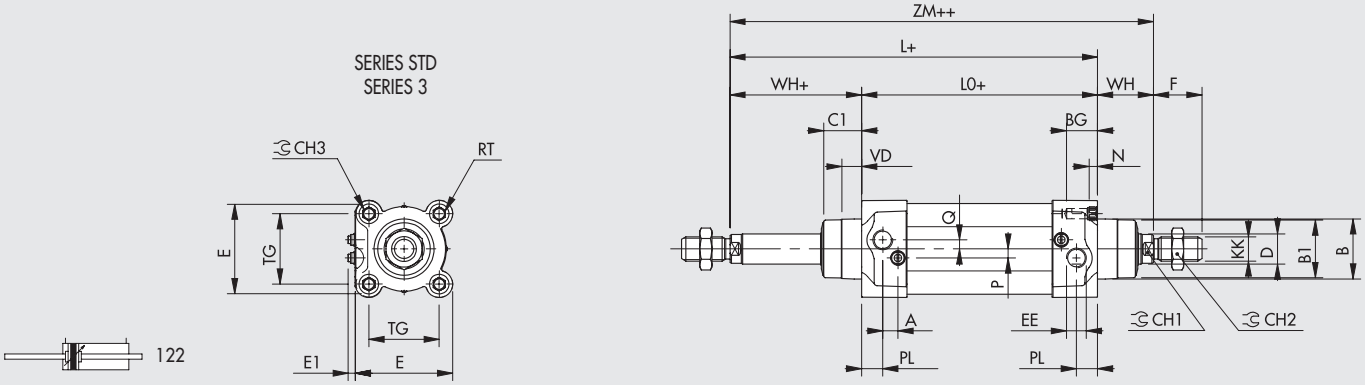

Ø	PL	VD	A	B	B1	WH	C1	CH1	CH2	CH3	KK	D	TG	VA	F	EE	RT	E	E1 min	E1 max	L	L0	ZM	BG	N	P	Q
32	10	6.5	10	30	28	26	16	10	17	6	M10x1.25	12	32.5	4	22	G1/8	M6	46	5.5	8.4	120	94	146	14.5	4.5	6	4
40	12	8	10	35	33	30	20	13	19	6	M12x1.25	16	38	4	24	G1/4	M6	54	4.5	8.4	135	105	165	14.5	4.5	6	4
50	14	13	10	40	38	37	25	17	24	8	M16x1.5	20	46.5	4	32	G1/4	M8	64.5	4.5	8.9	143	106	180	17.5	5.5	6	6
63	16	14	10	45	40	37	25	17	24	8	M16x1.5	20	56.5	4	32	G3/8	M8	75.5	4.1	9.5	158	121	195	17.5	5.5	6	6
80	18	12	12	45	43	46	33	22	30	10	M20x1.5	25	72	4	40	G3/8	M10	94	6.2	12.2	174	128	220	21.5	5.5	10	7
100	20	14	12	55	49	51	38	22	30	10	M20x1.5	25	89	4	40	G1/2	M10	111	6.7	12.2	189	138	240	21.5	5.5	10	7
125	25	20	10	60	54	65	45	27	41	12	M27x2	32	110	6	54	G1/2	M12	135	5.7	12.7	225	160	290	25.5	6.5	12	8

METAL WORK PNEUMATIC

KEY TO CODES

CYL	1 2 1 TYPE	0 BORE	32 STROKE	0050 MATERIAL	B GASKETS	L
	121 Double-acting, cushioned ▲ **122** Through-rod **124** Double-acting, non-cushioned	**0** Diameter **S** Standard Non-magnetic **3** Series 3 **5** Series 3 Non-magnetic	32 40 50 63 80 ■ 100 ■ 125	For the maximum suppliable strokes, look at the technical data	**B** AISI 316 piston rod, technopolymer piston: standard for cylinders of Ø32 to Ø63 **W** AISI 316 piston rod, aluminium piston: standard for all cylinders from Ø80 to 125, Ø32 to 63 with strokes > 999 and Ø32 to125 for through piston rod versions	**L** Piston rod gaskets made of special polyurethane; other gaskets made of NBR

▲ Only available for versions with aluminium piston (W)
■ In the code of cylinder with digit S, 3 or 5 in fourth position bore 100 becomes A1; bore 125 becomes A2

ACCESSORIES: FIXINGS

STAINLESS STEEL SHORT FOOT MOUNTING (AISI 304)

+ = ADD THE STROKE

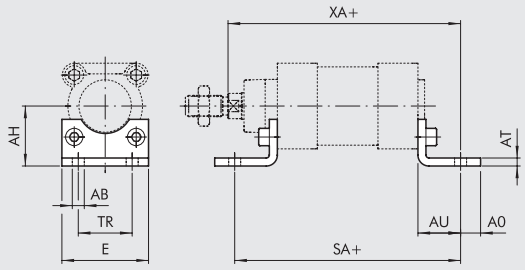

Code	Ø	øAB	AH	AO	AT	AU	TR	E	XA	SA	Weight [g]
W095X322001	32	7	32	11	4	24	32	45	144	142	85
W095X402001	40	10	36	8	4	28	36	52	163	161	95
W095X502001	50	10	45	15	5	32	45	65	175	170	200
W095X632001	63	10	50	13	5	32	50	75	190	185	225
W095X802001	80	12	63	14	6	41	63	95	215	210	435
W095XA12001	100	14.5	71	16	6	41	75	115	230	220	555
W095XA22001	125	16.5	90	25	8	45	90	140	270	250	1145

Note: Individually packed with 2 screws

STAINLESS STEEL FEMALE HINGE - MODEL B (AISI 304)

+ = ADD THE STROKE

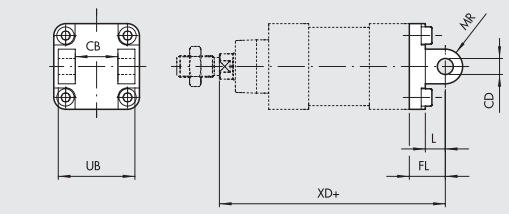

Code	Ø	UB	CB H14	FL	CD H9	XD	MR	L	Weight [g]
W095X322003	32	45	26	22	10	142	10	13	175
W095X402003	40	52	28	25	12	160	12	16	250
W095X502003	50	60	32	27	12	170	12	16	425
W095X632003	63	70	40	32	16	190	16	21	635
W095X802003	80	90	50	36	16	210	16	22	1270
W095XA12003	100	110	60	41	20	230	20	27	2000
W095XA22003	125	130	70	50	25	275	25	30	3715

Note: Supplied with 4 screws. **WITHOUT PIN**.

STAINLESS STEEL FEMALE HINGE PIN (AISI 304)

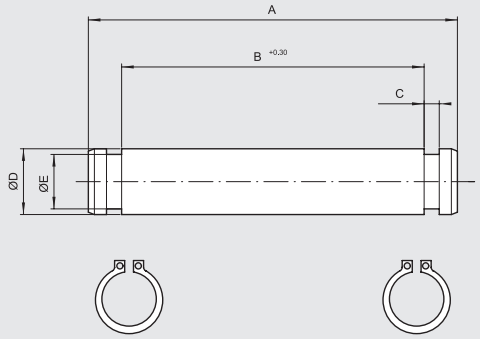

Code	Ø	A	B	C H13	ØD e8	ØE h11	Weight [g]
W095X322050	32	53	46	1.1	10	9.6	35
W095X402050	40	60	53	1.1	12	11.5	55
W095X502050	50	68	61	1.1	12	11.5	65
W095X632050	63	78	71	1.1	16	15.2	125
W095X802050	80	98	91	1.1	16	15.2	160
W095XA12050	100	118	111	1.3	20	19	295
W095XA22050	125	139	132	1.3	25	23.9	540

Note: Supplied with 2 snap-rings

STAINLESS STEEL MALE HINGE - MODEL BA (AISI 304)

+ = ADD THE STROKE

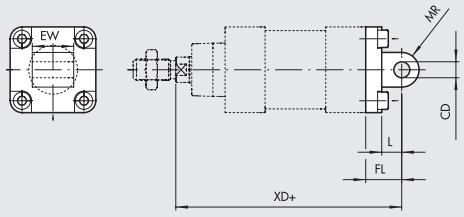

Code	Ø	EW	FL	MR	CD H9	L	XD	Weight [g]
W095X322004	32	26	22	10	10	13	142	195
W095X402004	40	28	25	12	12	16	160	265
W095X502004	50	32	27	12	12	16	170	445
W095X632004	63	40	32	16	16	21	190	715
W095X802004	80	50	36	16	16	22	210	1375
W095XA12004	100	60	41	20	20	27	230	2165
W095XA22004	125	70	50	25	25	30	275	3800

Note: Supplied with 4 screws.

STAINLESS STEEL ISO COUNTER-HINGE FOR MODEL B - MODEL GL (AISI 304)

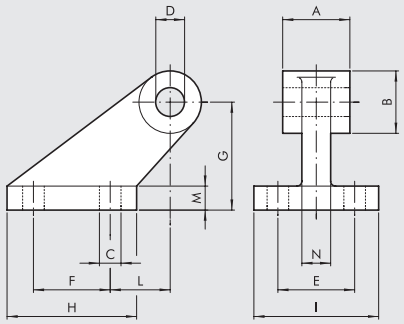

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]
W095X322008	32	26	20	6.6	10	38	18	32	31	51	3	8	10	165
W095X402008	40	28	22	6.6	12	41	22	36	35	54	2	10	15	235
W095X502008	50	32	26	9	12	50	30	45	45	65	3	12	16	460
W095X632008	63	40	30	9	16	52	35	50	50	67	2	14	16	590
W095X802008	80	50	30	11	16	66	40	63	60	86	7	14	20	1000
W095XA12008	100	60	38	11	20	76	50	71	70	96	5	17	20	1515
W095XA22008	125	70	45	14	25	94	60	90	90	124	10	20	30	3170

Note: Individually packed

STAINLESS STEEL FRONT FLANGE - MODEL C (AISI 304)

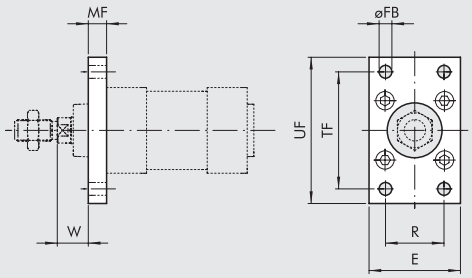

Code	Ø	UF	TF	E	R	MF	øFB	W	Weight [g]
W095X322002	32	80	64	45	32	10	7	16	220
W095X402002	40	90	72	52	36	10	9	20	280
W095X502002	50	110	90	65	45	12	9	25	540
W095X632002	63	120	100	75	50	12	9	25	680
W095X802002	80	150	126	95	63	16	12	30	1550
W095XA12002	100	170	150	115	75	16	14	35	2100
W095XA22002	125	205	180	140	90	20	16	45	3950

Note: Supplied with 4 screws

STAINLESS STEEL REAR FLANGE - MODEL C (AISI 304)

+ = ADD THE STROKE

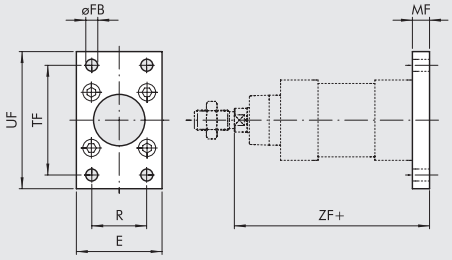

Code	Ø	UF	TF	E	R	MF	øFB	ZF	Weight [g]
W095X322002	32	80	64	45	32	10	7	105	220
W095X402002	40	90	72	52	36	10	9	115	280
W095X502002	50	110	90	65	45	12	9	118	540
W095X632002	63	120	100	75	50	12	9	133	680
W095X802002	80	150	126	95	63	16	12	144	1550
W095XA12002	100	170	150	115	75	16	14	154	2100
W095XA22002	125	205	180	140	90	20	16	245	3950

Note: Supplied with 4 screws

STAINLESS STEEL NUT FOR PISTON RODS (AISI 316)



Code	Ø	F	H	CH	Weight [g]
W095X322011	32	M10x1.25	6	17	8
W095X402011	40	M12x1.25	6	19	11
W095X502011	50	M16x1.5	8	24	18
W095X502011	63	M16x1.5	8	24	18
W095X802011	80	M20x1.5	10	30	31
W095X802011	100	M20x1.5	10	30	31
W095XA22011	125	M27x2	13.5	41	81

Note: Individually packed

STAINLESS STEEL FORK-MODEL GK-M (AISI 304)



Code	Ø	A	B	C	D	F	L	øM	Weight [g]
W095X322020	32	20	10	20	M10x1.25	40	52	10	90
W095X402020	40	24	12	24	M12x1.25	48	62	12	145
W095X502020	50	32	16	32	M16x1.5	64	83	16	325
W095X502020	63	32	16	32	M16x1.5	64	83	16	325
W095X802020	80	40	20	40	M20x1.5	80	105	20	680
W095X802020	100	40	20	40	M20x1.5	80	105	20	680

Note: Individually packed

ACCESSORIES: MAGNETIC SENSORS

RETRACTABLE SENSOR, SQUARE TYPE (FOR CORROSIVE ENVIRONMENTS)

For codes and technical data, see **chapter A6**.



SENSOR BRACKET

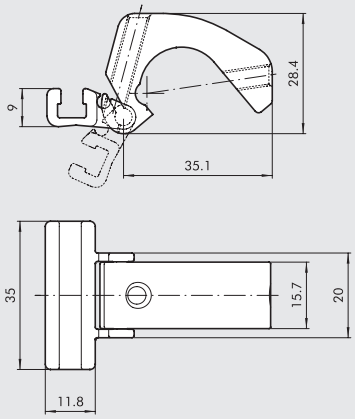

Code	Bore	Description
W0950001100	32 to 125	Sensor bracket

Note: Individually packed

MATERIAL

Bracket: aluminium
Sensor holder: aluminium
Fixing screw: stainless steel

TWIN-ROD CYLINDER SERIES TWNC

Anti-rotation cylinders with axial dimensions to ISO 15552.
- standard configuration with magnet
- double-acting cushioned
- twinner rods, twinner rods and single through-rod
- rods in C45 steel or stainless steel, thick chromed
- available with STD or series 3 barrel.

TECHNICAL DATA		Ø32	Ø40	Ø50	Ø63	Ø80	Ø100
Max operating pressure	bar	10					
	MPa	1					
	psi	145					
Temperature range	°C	–10 to +80					
Design		Extruded profile					
Fluid		Filtered, unlubricated air. Lubrication, if used, must be continuous.					
Standard strokes ✚	mm	25 to 500					
Versions		Double-acting cushioned, Double-acting cushioned single through-rod					
Sensor magnet		Available magnetic versions					
Forces generated at 6 bar thrust/retraction	N	434/350	678/597	1060/940	1683/1471	2714/2295	4241/3812
Weights		See cylinder "**General technical data**" at the beginning of the chapter					
Notes		✚ Maximum recommended strokes. Higher values can create operating problems					

COMPONENTS

① PISTON ROD: C45 steel or stainless steel, thick chromed
② HEAD: aluminium alloy
③ PISTON ROD GASKET: polyurethane
④ GUIDE BUSHING: sintered bronze
⑤ BARREL: drawn anodized aluminium alloy
⑥ PISTON: aluminium alloy
⑦ PISTON GASKET: polyurethane
⑧ MAGNET: plastoferrite
⑨ BUFFER+STATIC O-rings: NBR
⑩ CUSHIONING GASKET: front NBR, rear polyurethane
⑪ NEEDLE: OT 58 brass
⑫ SCREWS: Tap Tite for fixing and assembly
⑬ GUIDE RING: special technopolymer
⑭ REAR CUSHIONING CONE: OT58 brass
⑮ FRONT CUSHIONING CONE: aluminium
⑯ FLANGE: zinc-plated steel
⑰ GROVES FOR SQUARE AND OVAL SENSORS

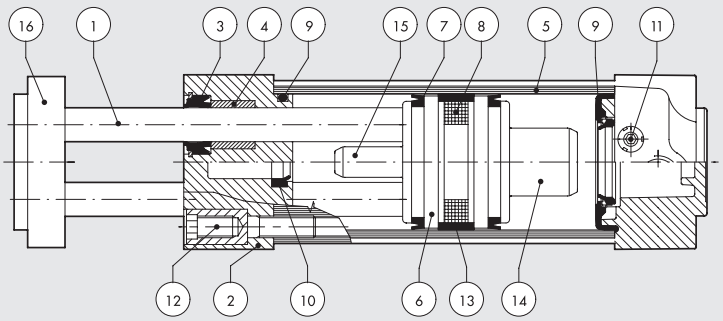

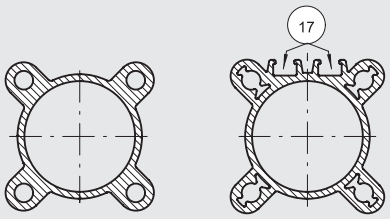

BARREL STD BARREL SERIES 3

METAL WORK PNEUMATIC

PERMISSIBLE LOADS

FLEXION LOADS

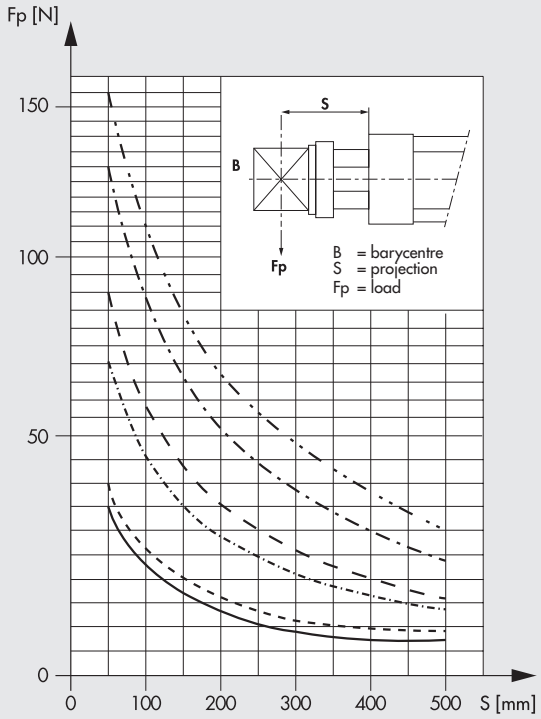

TWISTING MOMENTS

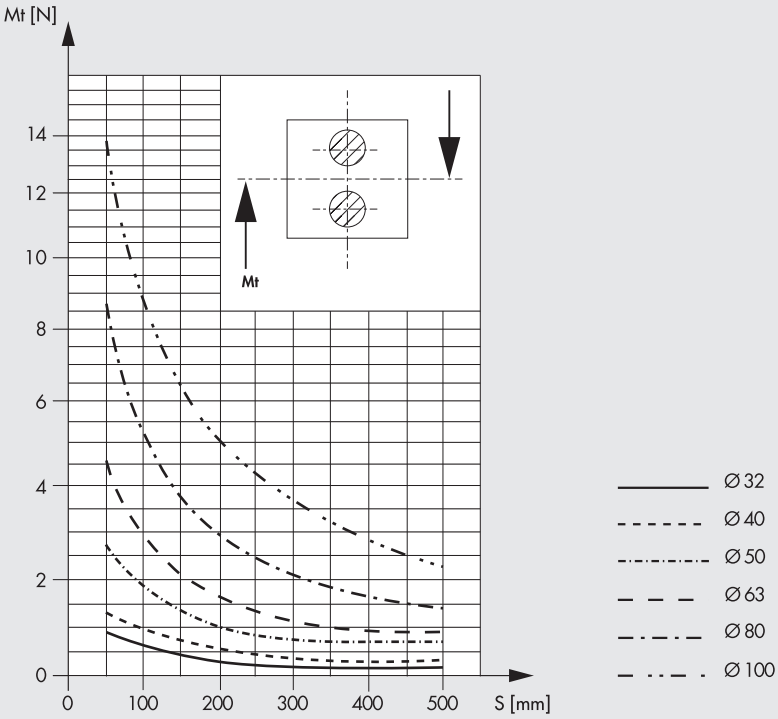

DIMENSIONS

TWIN ROD VERSION (W140)

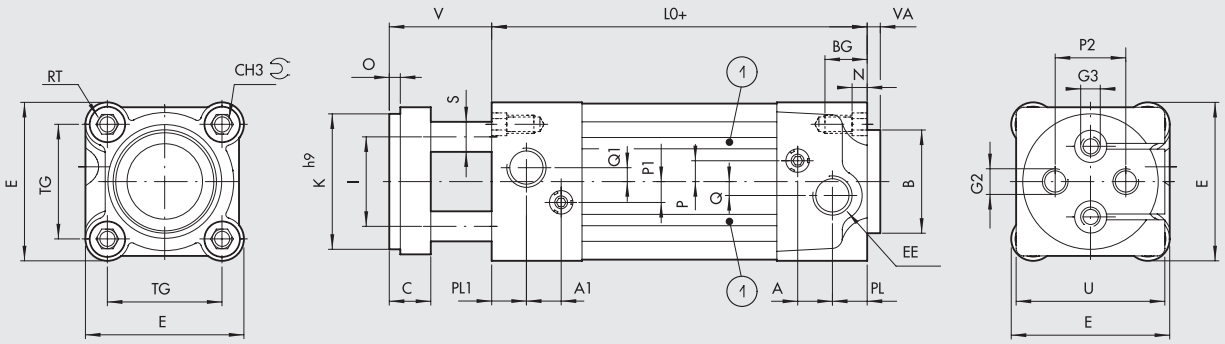



+ = ADD THE STROKE
1 = GROVES FOR SQUARE AND OVAL SENSORS (only for series 3)

SINGLE THROUGH-ROD VERSION (W142)

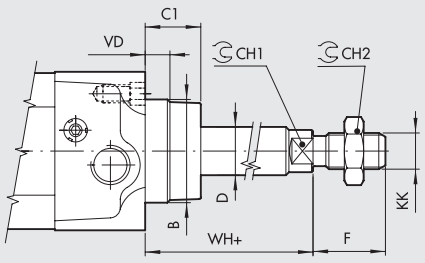

Ø	PL	PL1	A	A1	B	CH1	CH2	CH3	TG	VA	EE	RT	E	L0	BG	N	P	P1	P2	Q	Q1	C	C1	D	F	I	K h9	KK	S	O	V	VD	U	G2	G3	WH
32	10	13	10	10.5	30	10	17	6	32.5	4	G1/8	M6	46	100	14.5	4.5	6	8	19	4	-	15	16	12	22	18	32	M10x1.25	10	4	40	6.5	45	M6	-	26
40	12	12	10	10	35	13	19	6	38	4	G1/4	M6	54	100	14.5	4.5	6	6	22	4	4	15	20	16	24	22	40	M12x1.25	10	4	40	8	49	M8	-	30
50	14	14	10	10	40	17	24	8	46.5	4	G1/4	M8	64.5	106	17.5	5.5	6	6	30	6	6	18	25	20	32	30	50	M16x1.5	12	5	43	13	54	M8	M8	37
63	16	16	10	10	45	17	24	8	56.5	4	G3/8	M8	75.5	116	17.5	5.5	6	6	38	6	6	22	25	20	32	38	63	M16x1.5	16	5	47	14	69	M10	M10	37
80	18	18	12	12	45	22	30	10	72	4	G3/8	M10	94	131	21.5	5.5	10	10	50	7	7	25	33	25	40	48	80	M20x1.5	22	5	50	12	89	M12	M12	46
100	20	20	12	12	55	22	30	10	89	4	G1/2	M10	111	138	21.5	5.5	10	10	70	7	7	25	38	25	40	60	100	M20x1.5	22	5	50	14	109	M12	M12	51

KEY TO CODES VERSION STD

CYL	W 1 4 0 TYPE	0 3 2 BORES	0 0 2 5 STROKE	▶ X MATERIAL
	W140 Double-acting, magnetic, cushioned **W142** Double-acting, magnetic, cushioned single through-rod	032 040 050 063 080 100	✚ 0025 to 0500 mm	**X** Piston rod AISI 303

✚ Maximum recommended strokes. Higher values can create operating problems.
▶ Letter to be added only for the Stainless steel piston rod version

KEY TO CODES VERSION 3 SERIES

CYL	W 1 4 0 TYPE	3 EXECUTION	3 2 BORE	0 0 2 5 STROKE	▶ X MATERIAL
	W140 Double-acting, magnetic, cushioned **W142** Double-acting, magnetic, cushioned single through-rod	**3** Series 3	32 40 50 63 80 A1 = 100	✚ 0025 to 0500 mm	**X** Piston rod AISI 303

✚ Maximum recommended strokes. Higher values can create operating problems.
▶ Letter to be added only for the Stainless steel piston rod version

ACCESSORIES: FIXINGS

FOOT - MODEL A/S

+ = ADD THE STROKE

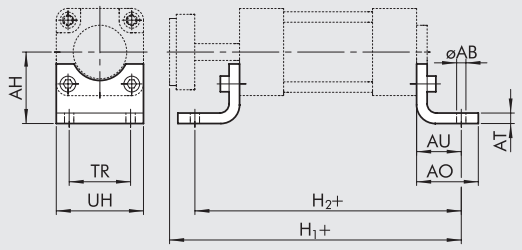

Code	Ø	AB	AH	AO	AT	AU	TR	UH	H_1	H_2	Weight [g]
W0950323001	**32**	7	32	35	4	24	32	45	164	148	76
W0950403001	**40**	9	36	43	4	28	36	52	168	156	98
W0950503001	**50**	9	45	47	4	32	45	65	181	170	156
W0950633001	**63**	9	50	47	6	32	50	75	195	180	246
W0950803001	**80**	12	63	61	6	41	63	95	222	213	406
W0951003001	**100**	14	71	66	6	41	75	115	229	220	540

Note: Individually packed with 2 screws
For fixing the leg to the supporting surface, it is advisable to use a DIN 7984 sunk-headed screw

FEMALE HINGE - MODEL B

+ = ADD THE STROKE

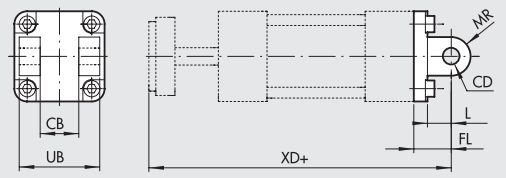

Code	Ø	CB H14	FL	MR	CD H9	L	XD	UB H14	Weight [g]
W0950322003	**32**	26	22	11	10	12	162	45	116
W0950402003	**40**	28	25	13	12	15	165	52	160
W0950502003	**50**	32	27	13	12	15	176	60	252
W0950632003	**63**	40	32	17	16	20	195	70	394
W0950802003	**80**	50	36	17	16	20	217	90	670
W0951002003	**100**	60	41	21	20	25	229	110	1085

Note: Supplied with 4 screws, 4 washers, 2 snap-rings and 1 pin

MALE HINGE - MODEL BA

+ = ADD THE STROKE

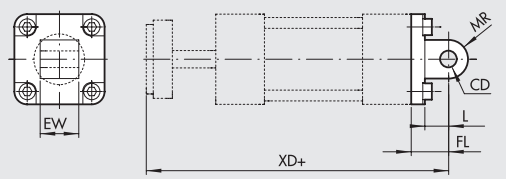

Code	Ø	EW	FL	MR	CD H9	L	XD	Weight [g]
W0950322004	**32**	26	22	10	10	13	162	94
W0950402004	**40**	28	25	12	12	16	165	124
W0950502004	**50**	32	27	12	12	16	176	220
W0950632004	**63**	40	32	16	16	22	195	316
W0950802004	**80**	50	36	16	16	22	217	578
W0951002004	**100**	60	41	20	20	27	229	850

Note: Supplied with 4 screws.

METAL WORK PNEUMATIC

ARTICULATED MALE HINGE - MODEL BAS

+ = ADD THE STROKE

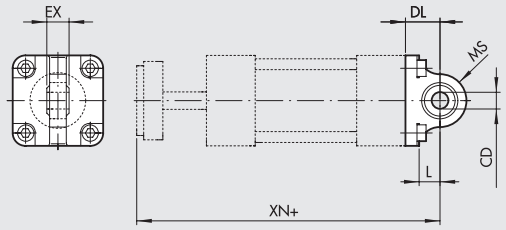

Code	Ø	EX	DL	MF	L	XN	CX H9	Weight [g]
W0950322006	32	14	22	16	12	162	10	106
W0950402006	40	16	25	18	15	165	12	142
W0950502006	50	16	27	21	15	176	12	236
W0950632006	63	21	32	23	20	195	16	336
W0950802006	80	21	36	28	20	217	16	572
W0951002006	100	25	41	30	25	229	20	840

Note: Supplied with 4 screws, 4 washers.

REAR FLANGE - MODEL C

+ = ADD THE STROKE

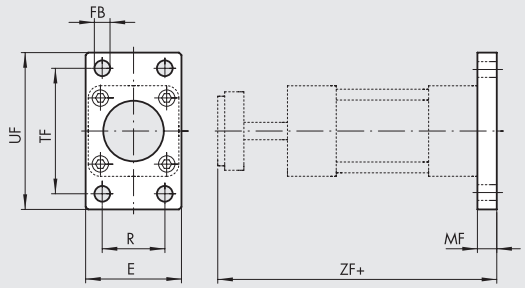

Code	Ø	TF	UF	E	MF	R	FB	ZF	Weight [g]
W0950322002	32	64	80	50	10	32	7	150	246
W0950402002	40	72	90	55	10	36	9	150	290
W0950502002	50	90	110	65	12	45	9	161	522
W0950632002	63	100	120	75	12	50	9	175	670
W0950802002	80	126	153	95	16	63	12	197	1420
W0951002002	100	150	178	115	16	75	14	204	2040

Note: Supplied with 4 screws.

FRONT FLANGE - MODEL C/S

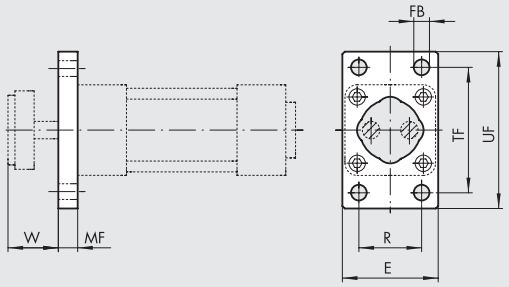

Code	Ø	TF	UF	E	MF	R	FB	W	Weight [g]
W0950323002	32	64	80	50	10	32	7	30	228
W0950403002	40	72	90	55	10	36	9	30	288
W0950503002	50	90	110	65	12	45	9	31	486
W0950633002	63	100	120	75	12	50	9	35	569
W0950803002	80	126	153	95	16	63	12	34	1145
W0951003002	100	150	178	115	16	75	14	34	1760

Note: Supplied with 4 screws.

INTERMEDIATE HINGE - MODEL EN, FOR SERIES STD

+ = ADD THE STROKE +1/2 = ADD HALF THE STROKE

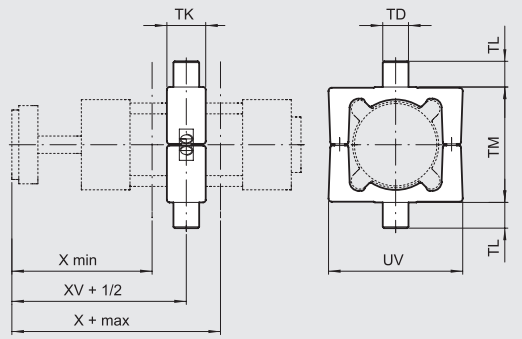

Code	Ø	TM	TL	TD e9	TK	UW	X (min)	XV	X (max)	Weight [g]	T [Nm] ◆
0950322007	32	50	12	12	22	65	79	91	103	282	4
0950402007	40	63	16	16	28	75	82	90	98	582	10
0950502007	50	75	16	16	32	95	91.5	97.5	103.5	870	15
0950632007	63	90	20	20	35	105	95.5	104.5	113.5	1192	20
0950802007	80	110	20	20	40	130	108	115.5	123	1950	20
0951002007	100	132	25	25	45	145	110.5	119	127.5	2690	25

Note: Supplied with 4 screws, 2 pin

◆ Reccommended tightening torque of grub screws

INTERMEDIATE HINGE - MODEL EN, FOR SERIES 3

\+ = ADD THE STROKE
\+ 1/2 = ADD HALF THE STROKE

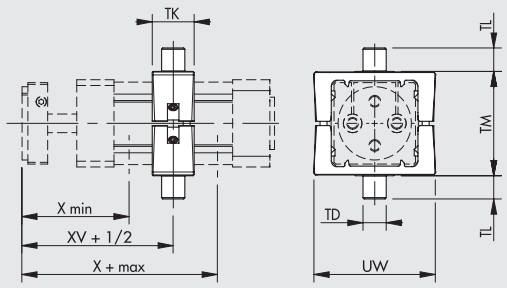

Code	Ø	X (min)	XV	X (max)	TM	TL	TD e 9	TK	UW	Weight [g]	T [Nm] ◆
0950322207	32	79	91	103	50	12	12	22	65	212	3
0950402207	40	82	90	98	63	16	16	28	75	440	8
0950502207	50	91.5	97.5	103.5	75	16	16	28	95	644	15
0950632207	63	95.5	104.5	113.5	90	20	20	36	105	1080	15
0950802207	80	108	115.5	123	110	20	20	36	130	1654	15
0951002207	100	110.5	119	127.5	132	25	25	45	145	2550	20

Note: Supplied with 4 grub screws, 2 pins
◆ Reccommended tightening torque of grub screws

COUNTER-HINGE FOR MODEL EN - MODEL EL

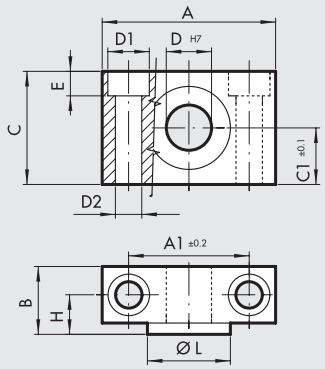

Code	Ø	A	A_1	B	C	C_1	D_1	D_2	D	E	H	ØL	Weight [g]
W0950322009	32	46	32	18	30	15	11	7	12	6.5	10.5	22	162
W0950402009	40	55	36	21	36	18	15	9	16	8.5	12	28	278
W0950402009	50	55	36	21	36	18	15	9	16	8.5	12	28	278
W0950632009	63	65	42	23	40	20	18	11	20	10.5	13	35	414
W0950632009	80	65	42	23	40	20	18	11	20	10.5	13	35	414
W0951002009	100	75	50	28.5	50	25	20	13	25	12.5	16	40	715

Note: 2-pieces pack with 4 screws

COUNTER-HINGE CETOP FOR MODEL B - MODEL GL

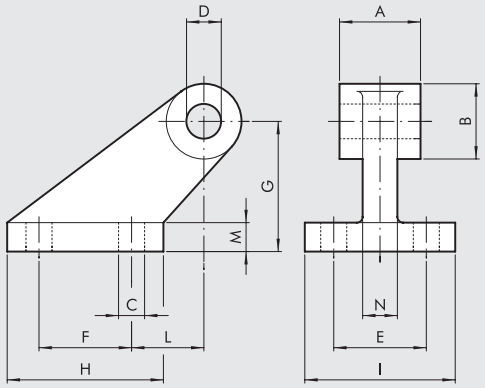

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]
W0950322008	32	26	19	7	10	25	20	32	37	41	18	8	10	96
W0950402008	40	28	26	9	12	32	32	45	54	52	25	10	12	216
W0950502008	50	32	26	9	12	32	32	45	54	52	25	10	12	212
W0950632008	63	40	33	11	16	40	50	63	75	63	32	12	15	440
W0950802008	80	50	33	11	16	40	50	63	75	63	32	12	15	464
W0951002008	100	60	44	14	20	50	70	90	103	80	40	16	22	985

Note: Supplied with 4 screws, 4 washers

COUNTER-HINGE FOR MODEL B - MODEL GS

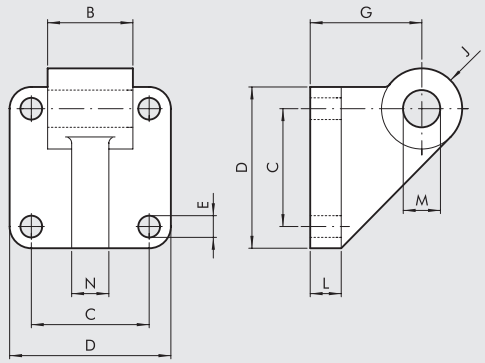

Code	Ø	B	C	D	E	G	J	L	M	N	Weight [g]
W0950322108	32	26	32.5	45	7	32	11	10	10	10	106
W0950402108	40	28	38	52	7	36	13	10	12	12	138
W0950502108	50	32	46.5	65	9	45	13	12	12	12	252
W0950632108	63	40	56.5	75	9	50	17	12	16	15	350
W0950802108	80	50	72	95	11	63	17	16	16	15	655
W0951002108	100	60	89	115	11	73	21	20	20	22	980

Note: Supplied with 4 screws, 4 washers

ACCESSORIES FOR TWIN-ROD CYLINDERS: MAGNETIC SENSORS AND POSITION SENSOR

RETRACTABLE SENSOR

Ⓐ SENSOR, SQUARE TYPE
Latest generation, secure fixing



Ⓑ SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

Ⓒ SENSOR SERIES DSM



Can be used on ISO 15552 cylinders in the STD series and series 3.
For codes and technical data, see **chapter A6**.

Ⓓ SENSOR SUPPORT BRACKETS FOR SENSORS SQUARE TYPE AND OVAL TYPE

Ø 32 to 40



Code	Description
W0950001711	Bracket D.32-40

Ø 50 to 63



Code	Description
W0950001712	Bracket D.50-63

Ø 80 to 100



Code	Description
W0950001713	Bracket D.80-100-125-160

Ⓔ SENSOR SUPPORT BRACKETS FOR SENSORS DSM

Ø 32 to 40



Code	Description
W0950000711	Bracket D.32-40 DST 80

Ø 50 to 63



Code	Description
W0950000712	Bracket D.50-63 DST 81

Ø 80 to 100

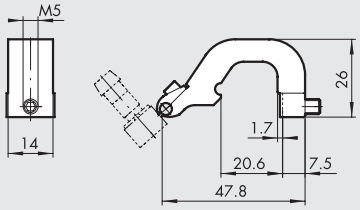

Code	Description
W0950000713	Bracket D.80-100-125 DST 82

Ⓖ POSITION SENSOR

LTS



For technical data and usage strokes see **chapter A6**.

Ⓕ ADAPTER FOR OVAL TYPE RETRACTABLE SENSORS

ASSEMBLY DIAGRAM

① Twin-rod cylinder with serie STD or serie 3 barrel
② Sensor bracket mod. DST (Ø 32 to 100)
③ Adaptor
④ Retractable sensor "oval type"

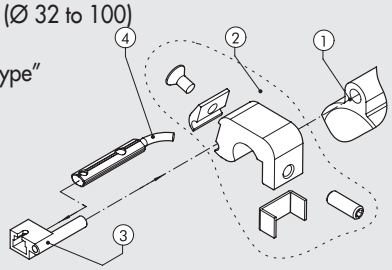

Code	Description
W0950001001	Adaptor DSS005 for DST/ST brackets

USE SENSORS

SERIES STD

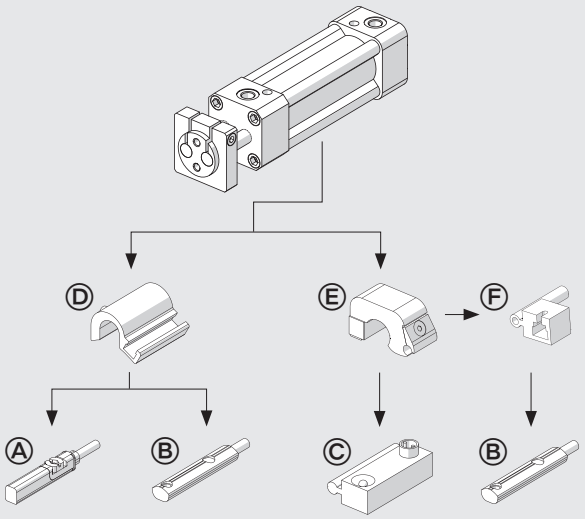

SERIES 3

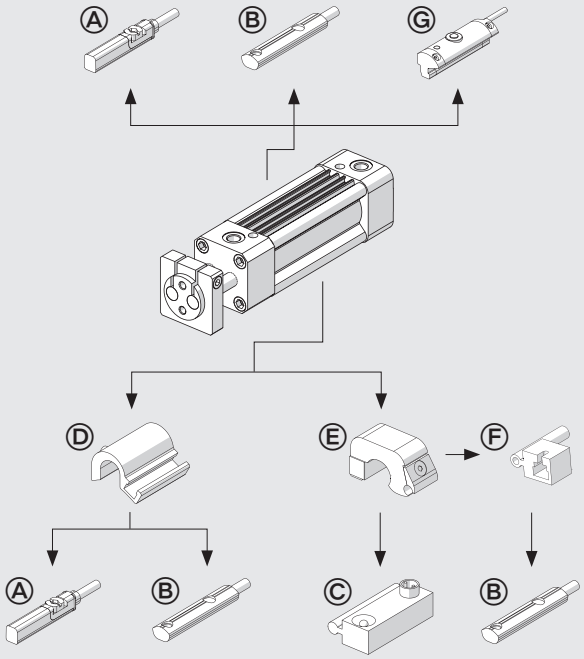

NOTES

METAL WORK PNEUMATIC

NOTES

ISO 15552 CYLINDER Ø 160-200 WITH ROUND BARREL

Cylinders made to ISO 15552 available in various versions and with a wide range of accessories:

- configuration with or without magnet
- double-acting – single-or through-rod
- wide choice of NBR and FKM/FPM (for high temperature)
- piston rod scrapers for use in hostile environments available
- available with mounted intermediate hinge
- special configurations on request

TECHNICAL DATA			Ø160	Ø200
Max operating pressure		bar	10	
		MPa	1	
		psi	145	
Temperature range	NBR	°C	–20 to +80	
	FKM/FPM	°C	–10 to +150	
	Other piston rod gasket	°C	See next page	
Design			Round barrel with tie rods	
Fluid			Unlubricated air. Lubrication, if used, must be continuous	
Standard strokes		mm	25 to 2800	
Versions			Double-acting, Cushioned or non-cushioned,	
			Single piston rod or cushioned through piston rod, High-temperature, No stick-slip	
Sensor magnet			Available magnetic and non-magnetic versions.	
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter	
Weights			See cylinder "**General technical data**" at the beginning of the chapter	
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**	

COMPONENTS

① PISTON ROD: C45 steel or stainless steel, thick chromed (rod nut in zinc-plated steel)
② HEAD: die cast aluminium
③ PISTON ROD GASKET: NBR, FKM/FPM, FKM/FPM with metal scraper
④ GUIDE BUSHING: sintered bronze
⑤ BARREL: drawn anodized aluminium alloy
⑥ PISTON: aluminium
⑦ PISTON GASKET: NBR or FKM/FPM
⑧ MAGNET: plastoferrite
⑨ CUSHIONING CAP: aluminium
⑩ CUSHIONING GASKET: polyurethane or FKM/FPM
⑪ CUSHIONING NEEDLE: OT 58 with needle out movement safety system even when fully open
⑫ SCREWS: zinc-plated steel
⑬ TIE RODS: stainless steel
⑭ GUIDE BELT: technopolimer
⑮ STATIC O-RINGS: NBR or FKM/FPM

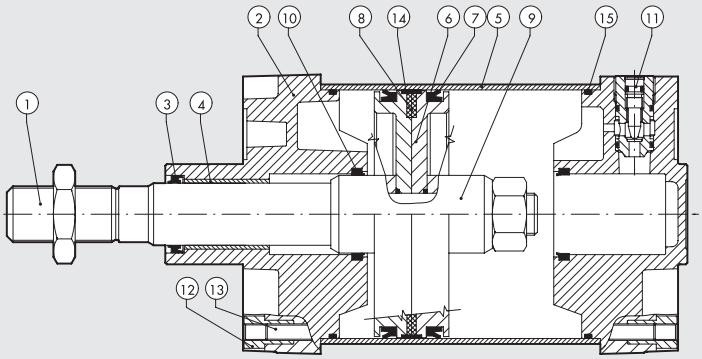

OVERVIEW OF SEALS AND SCRAPERS

	Code identifier	Key feature	Applications	Gasket material	Temperature range
①	.....	General use.	Standard applications, also with humidity.	NBR	-20 to + 80 °C
③	V	High temperatures - chemicals.	Industrial applications with chemical agents and/or at high temperatures.	FPM/FKM	-10 to + 150 °C
⑧	....R	Dirt and low temperatures. Reference name: HARD PU	Medium-Heavy duty applications, with presence of dirt and low temperatures, such as in agricolture or in transport sector.	Piston rod seal made of hard polyurethane, the other seals are made of NBR.	-20 to + 80 °C
⑨	....M	Dirt and high temperature. Reference name: METAL	Heavy duty applications, in presence of hard dirt and high temperatures, like in cement plants, foundries or in transport sector.	Metal scraper, the other seals are made of FKM/FPM.	-10 to + 150 °C

Anti-contamination Effect Indicators

An index of protection against the dirt that settles and adheres to the piston rod is provided for each version, on a 1 to 100 scale.



NOTES

DIMENSIONS OF STANDARD VERSION

+ = ADD THE STROKE







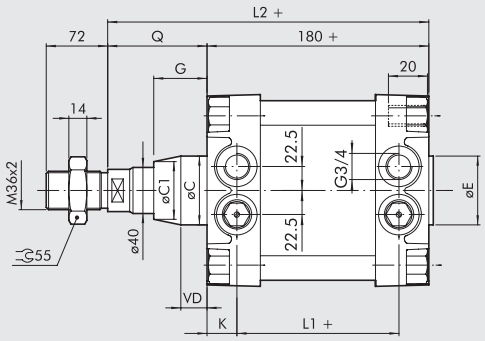

Ø	B	øC	øC1	øE	D	G	L_1	L_2	Q	VD	K
160	180	65	-	65	140	50	124	260	80	-	28
200	220	75	~ 65	75	175	60	122	275	95	~ 15	29

DIMENSIONS OF THROUGH-ROD VERSION

+ = ADD THE STROKE
++ = ADD TWICE THE STROKE







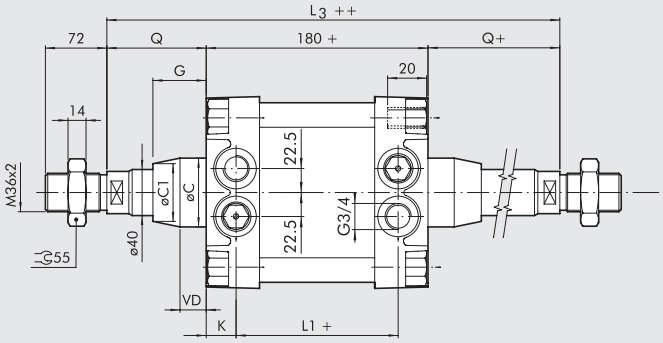

Ø	B	øC	øC1	D	G	L_1	L_3	Q	VD	K
160	180	65	-	140	50	124	340	80	-	28
200	220	75	~ 65	175	60	122	370	95	~ 15	29

DIMENSIONS OF VERSION WITH INTERMEDIATE HINGE

+ = ADD THE STROKE







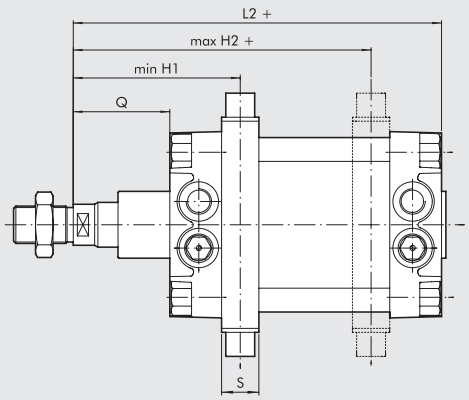

Ø	E	øF	H1	H2	I	L2	Q	S
160	200	32	150	190	32	260	80	40
200	250	32	165	205	32	275	95	40

For the missing values, refer to standard cylinders. **In your order, please specify the desired value for H1**

METAL WORK PNEUMATIC

KEY TO CODES FOR ROUND BARREL

CIL	W 1 2 1	1 6 0	0 0 5 0	▼ R
	TYPE	DIAMETER-EXECUTION	STROKE	SPECIAL SCRAPER
	W120 Double-acting, cushioned, non magnetic **W121** Double-acting, cushioned **W122** Double-acting, cushioned, through-rod **W123** Double-acting, cushioned, through-rod, non magnetic **W124** Double-acting, non-cushioned	**160** 160 **200** 200 **XA3** 160 stainless steel piston rod **XA4** 200 stainless steel piston rod **VA3** 160 FKM/FPM gasket, stainless steel piston rod **VA4** 200 FKM/FPM gasket, stainless steel piston rod **KA3** 160 FKM/FPM gasket, C45 piston rod **KA4** 200 FKM/FPM gasket, C45 piston rod ● **GA3** 160 No stick-slip ● **GA4** 200 No stick-slip	✚ 0025 to 2800 mm	◆ **R** Hard PU ■ **M** Metal

✚ Maximum recommended strokes. Higher values can create operating problems.
● **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.**
▼ Letter to be added only for versions with a special scraper.
◆ To be matched with NBR execution: 160, 200, XA3, XA4
■ To be matched with FKM/FPM execution: VA3, VA4, KA3, KA4

KEY TO CODES FOR CONFIGURATION WITH INTERMEDIATE HINGE

CIL	W 1 2 1	A A 3	0 0 5 0	0 2 0 0	▼ R
	TYPE	DIAMETER-EXECUTION	STROKE	EXECUTION	SPECIAL SCRAPER
	W120 Double-acting, cushioned, non magnetic **W121** Double-acting, cushioned **W122** Double-acting, cushioned, through-rod **W123** Double-acting, cushioned, through-rod, non magnetic **W124** Double-acting, non-cushioned	**AA3** 160 + intermediate hinge **AA4** 200 + intermediate hinge	✚ 0025 to 2800 mm	**H1 dimension** (hinge position, see drawing on the previous page)	**R** Hard PU

✚ Maximum recommended strokes. Higher values can create operating problems.
▼ Letter to be added only for versions with a special scraper.
Note: Type M scraper only on request.
For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only. For coding please contact our sales support department.

VERSION WITH SHAPED BARREL

An alternative to the round barrel version is a version with a shaped barrel.
The technical data, components and dimensions are the same as for the round barrel version.

Note: Type with intermediate hinge not available.

KEY TO CODES FOR SHAPED BARREL

CYL	1 2 1	1 6 0	0 0 5 0	A	N
	TYPE	DIAMETER-EXECUTION	STROKE	MATERIAL	GASKETS
	120 Double-acting, cushioned, non-magnetic **121** Double-acting, cushioned **122** Double-acting, cushioned, through-rod **124** Double-acting, non-cushioned	**160** 160 **200** 200 **SA3** 160 non magnetic **SA4** 200 non magnetic ● **GA3** 160 No stick-slip ● **GA4** 200 No stick-slip	✚ 0025 to 2800 mm	**A** C45 chromed, piston rod **Z** Stainless steel chromed, piston rod	**N** NBR gaskets **V** FKM/FPM gaskets

✚ Maximum recommended strokes. Higher values can create operating problems
● **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only**

ACCESSORIES FOR ISO 15552 CYLINDERS Ø 160-200: FIXINGS

FOOT - MODEL A

+ = ADD THE STROKE

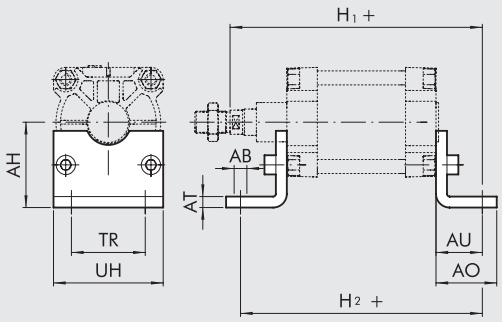

Code	Ø	AB	AH	AO	AT	AU	H_1	H_2	TR	UH	Weight [g]
W0951602001	160	18	115	80	10	60	319	300	115	180	2400
W0952002001	200	22	135	100	12	70	345	320	135	220	4000

Note: Individually packed with 2 screws

FEMALE HINGE - MODEL B

+ = ADD THE STROKE

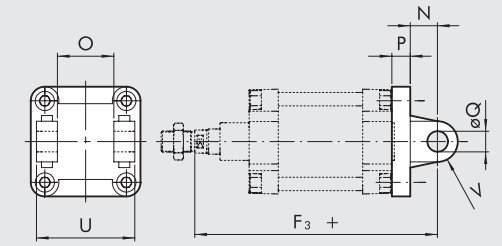

Code	Ø	U	O	øQ	P	N	F_3	V	Weight [g]
W0951602003	160	170	90	30	20	35	314	25	3300
W0952002003	200	170	90	30	25	35	335	25	4300

Note: Supplied complete with 4 screws, 2 snap rings and 1 pin

MALE HINGE - MODEL BA

+ = ADD THE STROKE

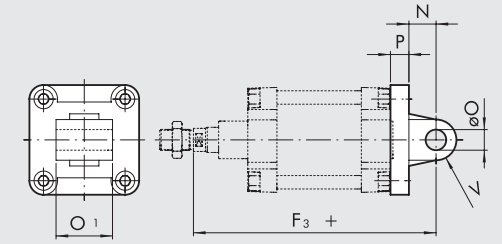

Code	Ø	O_1	øO	P	N	F_3	V	Weight [g]
W0951602004	160	90	30	20	35	314	25	2150
W0952002004	200	90	30	25	35	335	25	3550

Note: Supplied complete with 4 screws

FLANGE - MODEL C (FRONT AND REAR)

+ = ADD THE STROKE

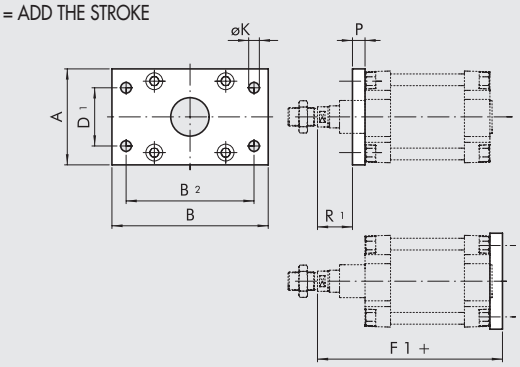

Code	Ø	A	B	B_2	D_1	øK	R_1	P	F_1	Weight [g]
W0951602002	160	180	270	230	115	18	59	20	279	6900
W0952002002	200	225	312	270	135	22	70	25	300	12800

Note: Individually packed with 4 screws

METAL WORK PNEUMATIC

CETOP COUNTER-HINGE - MODEL GL

+= ADD THE STROKE

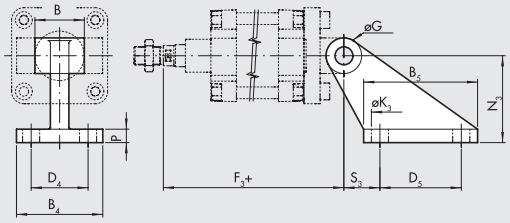

Code	Ø	B	B_4	B_5	D_4	D_5	øG	N_3	S_3	$øK_3$	P	F_3	Weight [g]
W0951602008	160	90	110	154	63	110	53	140	50	18	20	314	2300
W0951602008	200	90	110	154	63	110	53	140	50	18	20	335	2300

Note: Supplied complete with 4 screws, 4 washers

COUNTER-HINGE MODEL EL



Code	Ø	A	A_1	B	C	C_1	D_1	D_2	D	E	H	øL	Weight [g]
W0951602009	160	92	60	40	60	30	25	17	32	16.5	22.5	48	2740
W0951602009	200	92	60	40	60	30	25	17	32	16.5	22.5	48	2740

Note: 2-pieces pack with 4 screws

ROD EYE - MODEL GA-M



Code	Ø	øM	C	B_1	B	A	L	F	D	øG	CH	$øG_1$	Weight [g]
W0952002025	160	35	41	28	43	81	165	125	M36x2	45	50	57	1630
W0952002025	200	35	41	28	43	81	165	125	M36x2	45	50	57	1630

Note: Individually packed

FORK - MODEL GK-M



Code	Ø	øM	C	B	A	L	F	D	N	Weight [g]
W0951602020	160	35	72	35	70	188	144	M36x2	84	3850
W0951602020	200	35	72	35	70	188	144	M36x2	84	3850

Note: Individually packed

ROD NUT - MODEL S



Code	Ø	F	H	CH	Weight [g]
W0951602010	160	M36x2	14	55	170
W0951602010	200	M36x2	14	55	170

Note: Individually packed

ACCESSORIES FOR ISO 15552 CYLINDERS Ø 160-200: MAGNETIC SENSORS

RETRACTABLE SENSOR

Ⓐ SENSOR, SQUARE TYPE
Latest generation, secure fixing



Ⓑ SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

Ⓕ SENSOR SUPPORT BRACKETS FOR SENSORS SQUARE TYPE AND OVAL TYPE

Ø 160

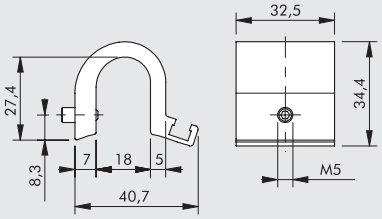

Code	Description
W0950001713	Bracket D.80-100-125-160

Ⓖ SENSOR SUPPORT BRACKETS FOR SENSORS SQUARE TYPE AND OVAL TYPE

Ø 160-200

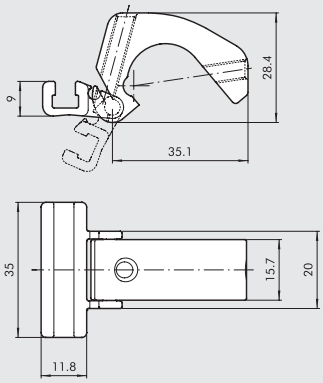

Code	Description
W0950001100	Sensor bracket

Note: Individually packed

NOTES

Ⓒ SENSOR SERIES DSM



For codes and technical data, see **chapter A6**.

Ⓓ SENSOR SUPPORT BRACKETS FOR SENSORS DSM (FOR ROUND BARREL VERSION)

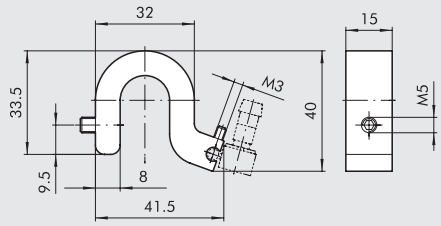

Code	Description
0951602093	Supporto sensore 160-200

Ⓔ SENSOR SUPPORT BRACKETS FOR SENSORS DSM (FOR SHAPED BARREL VERSION)

Ø 160



Code	Description
W0950000715	Bracket ST160

Ø 200



Code	Description
W0950000716	Bracket ST200

Ⓗ ADAPTER FOR OVAL TYPE RETRACTABLE SENSORS

ASSEMBLY DIAGRAM

① Sensor support bracket Ⓓ or Ⓔ
② Adaptor
③ Retractable sensor "oval type"

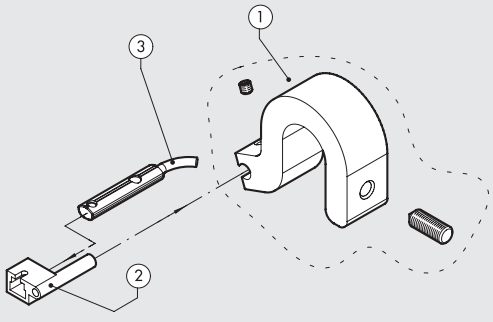

Code	Description
W0950001001	Adaptor DSS005 for DST/ST brackets

METAL WORK PNEUMATIC

USE SENSORS

ROUND BARREL

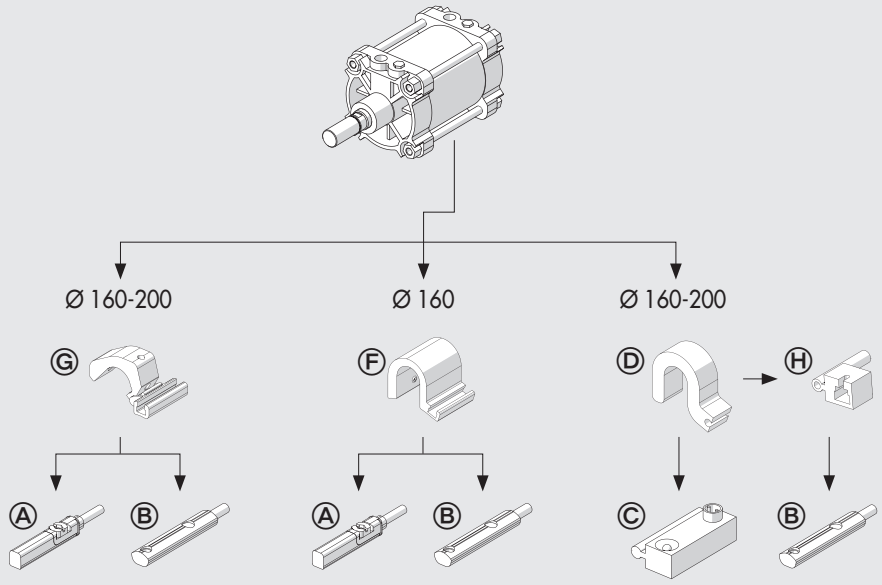

SHAPED BARREL

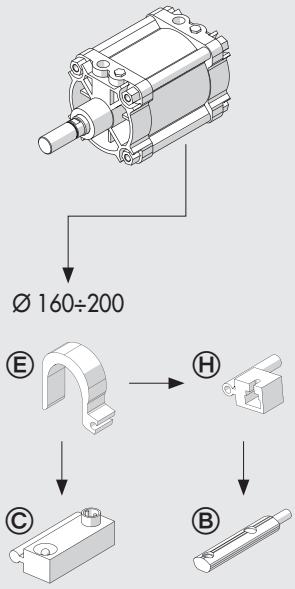

CYLINDERS ISO 15552 Ø 160-200: SPARE PARTS

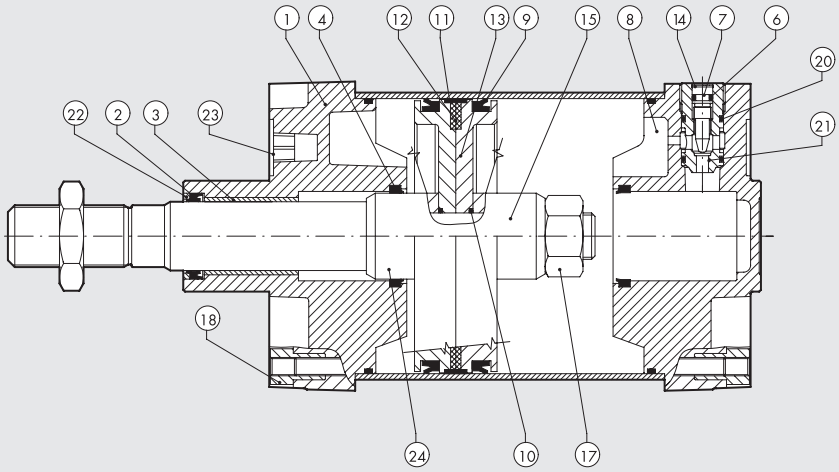

Code	Bores	Type	Parts
W095___2101	160 - 200	Complete set of gaskets	2-4-5-6-9-10-20-22
W0951602165	160 - 200	NBR piston rod gasket kit + seeger	2
W0951602166	160 - 200	FKM/FPM piston rod gasket kit + seeger	2
W095___2102	160 - 200	Complete set of (high temperature) FKM/FPM gaskets	2-4-5-6-9-10-20-22
W095___0104	160 - 200	Complete front head kit	1-2-3-4-5-6-7-14-18-20-21-22-23
W095___0122	160 - 200	Complete R front head kit	1-2-3-4-5-6-7-14-18-20-21-22-23
W095___0120	160 - 200	Complete M front head kit	1-2-3-4-5-6-7-14-18-20-21-22-23
W095___0105	160 - 200	Complete rear head kit	4-5-6-7-8-14-18-20-21-23
W095___2115	160 - 200	Complete magnetic piston kit	9-10-11-12-13-15-17-24
W095___2118	160 - 200	Complete non-magnetic piston kit	9-10-11-13-15-17-24

Notes

Cylinders in the R and M versions do not come with the single piston rod gasket.

When replacing all the gaskets in the R version cylinders, use the complete set of the R front head, code W095___0122, and the complete set of gaskets code W095___2101 (the front head gaskets are in excess).

When replacing all the gaskets in the M version cylinders, use the complete set of the M front head, code W095___0120 and the complete set of FKM/FPM, code W095___2102 (the front head gaskets are in excess).

ISO 15552 CYLINDER Ø 250-320

Cylinders made to ISO 15552 available in various versions and with a wide range of accessories:

- double-acting – single-or through-rod
- with or without cushioning
- configuration with or without magnet
- with NBR gaskets, and polyurethane gasket for the piston rod only
- with FKM/FPM gaskets (high temperature versions)
- available with mounted intermediate hinge
- special configurations on request

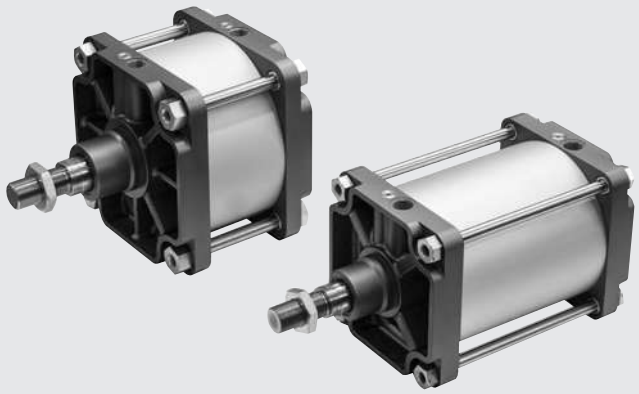

TECHNICAL DATA			Ø250	Ø320
Max operating pressure		bar	10	
		MPa	1	
		psi	145	
Temperature range	NBR	°C	–20 to +80	
	FKM/FPM	°C	–10 to +150	
Design			Round barrel with tie rods	
Fluid			Unlubricated air. Lubrication, if used, must be continuous	
Standard strokes		mm	1 to 2000	
Versions			Double-acting, Cushioned or non-cushioned,	
			Single piston rod or cushioned through piston rod, High-temperature, No stick-slip	
Sensor magnet			Available magnetic and non-magnetic versions.	
Inrush pressure		bar	0.2	0.15
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter	
Weights			See cylinder "**General technical data**" at the beginning of the chapter	
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**	

COMPONENTS

① PISTON ROD: High thickness C45 chrome steel or stainless steel (AISI 304)
② HEAD: fused aluminum painted
③ PISTON ROD GASKET: polyurethane or FKM/FPM
④ GUIDE BUSHING: sintered bronze
⑤ BARREL: anodized aluminium
⑥ PISTON: aluminium
⑦ PISTON GASKET: NBR or FKM/FPM
⑧ MAGNET: plastoferrite
⑨ CUSHIONING CAP: aluminium
⑩ CUSHIONING GASKET: NBR or FKM/FPM
⑪ CUSHIONING NEEDLE: OT 58
⑫ ONE-WAY VALVE for Ø 320 only: to speed up restart from end of stroke, bypassing the cushioning gasket
⑬ SCREWS: zinc-plated steel
⑭ TIE RODS: C45 steel, chromed
⑮ GUIDE BELT: PTFE
⑯ STATIC O-RINGS: NBR or FKM/FPM

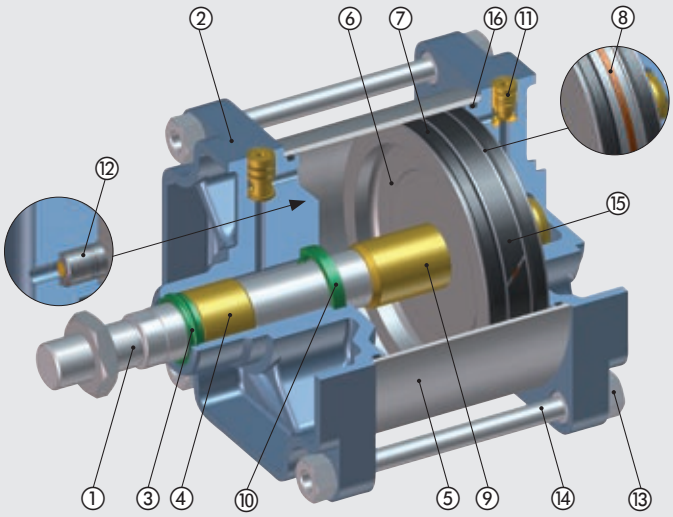

METAL WORK PNEUMATIC

DIMENSIONS

STANDARD VERSION

+ = ADD THE STROKE



W120

W121

W124

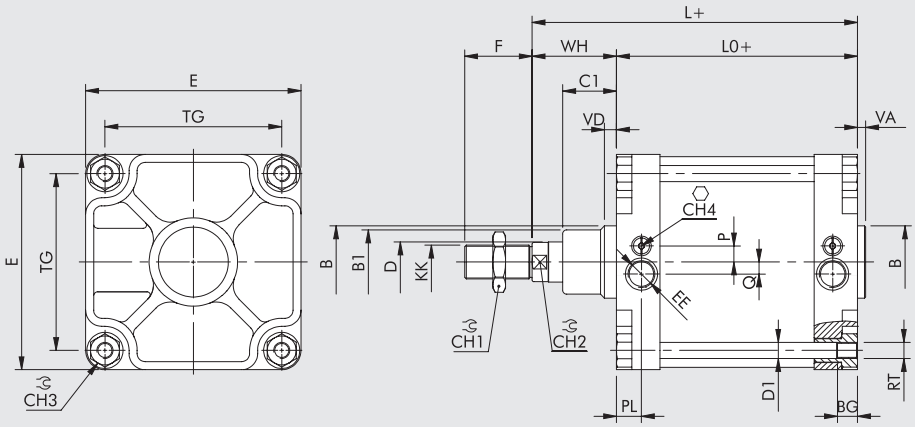

THROUGH-ROD VERSION

+ = ADD THE STROKE
++ = ADD TWICE THE STROKE




W122


W123

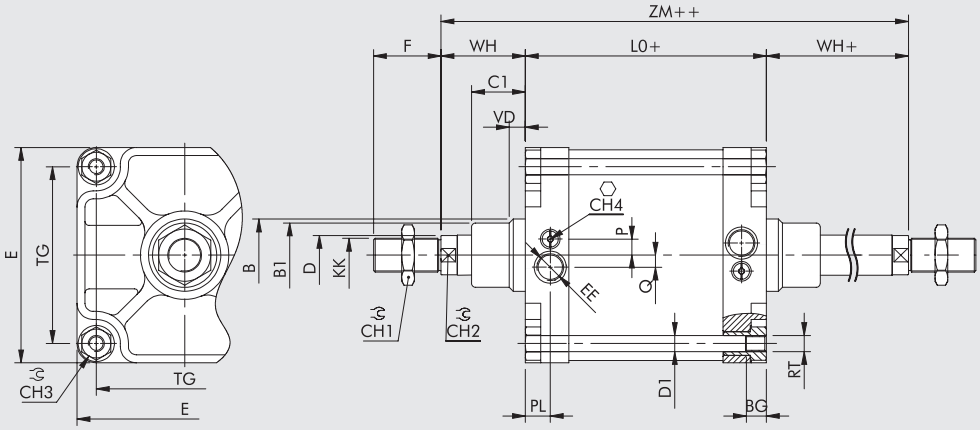

Ø	PL	VD	B	B_1	WH	C_1	CH_1	CH_2	CH_3	CH_4	KK	D	D_1	TG	VA	F	EE	RT	E	L	L_0	ZM	BG	P	Q
250	31	20	90	80	105	67	65	46	36	6	M42x2	50	20	220	10	84	G1	M20	268	305	200	410	25	15	20
320	31	20	110	100	120	82	75	55	46	6	M48x2	63	25	270	10	96	G1	M24	340	340	220	460	28	36	-

DIMENSIONS OF VERSION WITH INTERMEDIATE HINGE

+ = ADD THE STROKE



W120

W121

W124

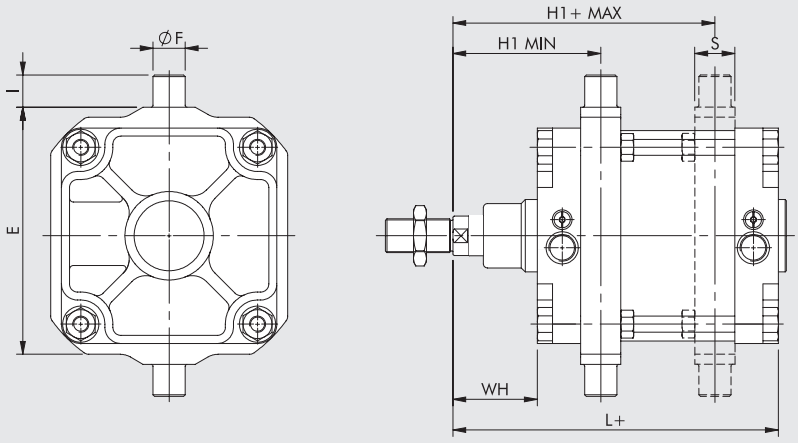

Ø	E	øF	$H1_{min}$	$H1_{max}$	I	L	WH	S
250	320	40	184	226	40	305	105	50
320	400	50	212	248	50	340	120	70

For the missing values, refer to standard cylinders. **In your order, please specify the desired value for H1**

KEY TO CODES

CIL	W 1 2 1 TYPE	2 5 0 DIAMETER-EXECUTION	0 3 0 0 STROKE	0 2 0 0 EXECUTION
	W120 Double-acting, cushioned, non magnetic **W121** Double-acting, cushioned **W122** Double-acting, cushioned, through-rod **W123** Double-acting, cushioned, through-rod, non magnetic **W124** Double-acting, non-cushioned	**250** 250 **320** 320 **XA5** 250 stainless steel piston rod and nut **XA6** 320 stainless steel piston rod and nut **KA5** 250 FKM/FPM gasket, C45 piston rod and nut **VA5** 250 FKM/FPM gasket, stainless steel piston rod and nut **AA5** 250 + intermediate hinge **AA6** 320 + intermediate hinge ● **GA5** 250 no stick-slip ● **GA6** 320 no stick-slip	0001 to 2000 mm	**Specify H1 value ONLY for version with intermediate hinge**

● **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.**

ACCESSORIES: FIXINGS

FEMALE HINGE - MODEL B

+ = ADD THE STROKE

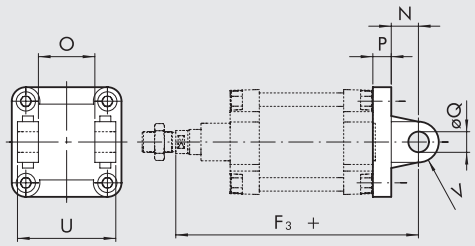

Code	Ø	U	O	øQ	P	N	F_3	V	Weight [g]
W0952502003	**250**	200	110	40	25	45	375	40	7600
W0953202003	**320**	220	120	45	30	50	420	45	13200

Note: Supplied complete with 4 screws, 2 snap rings and 1 pin

MALE HINGE - MODEL BA

+ = ADD THE STROKE

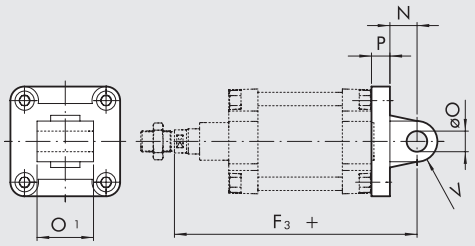

Code	Ø	O_1	øO	P	N	F_3	V	Weight [g]
W0952502004	**250**	110	40	25	45	375	40	5910
W0953202004	**320**	120	45	30	50	420	45	10900

Note: Supplied complete with 4 screws

ROD EYE - MODEL GA-M



Code	Ø	øM	C	B_1	B	A	L	F	D	øG	CH	$øG_1$	Weight [g]
W0952502025	**250**	40	45	33	49	91	187	142	M42x2	53	55	65	2400
W0953202025	**320**	50	60	46	60	122	220	160	M48x2	66	65	75	5500

Note: Individually packed

FORK - MODEL GK-M



Code	Ø	øM	C	B	A	L	F	D	N	Weight [g]
W0952502020	**250**	42	84	42	85	232	168	M42x2	102	6400
W0953202020	**320**	50	96	50	95	265	192	M48x2	113	9600

Note: invidually packed with 2 seeger and 1 pin

ROD NUT - MODEL S



ZINC-PLATED STEEL

Code	Ø	F	H	CH	Weight [g]
W0952502010	**250**	M42x2	16	65	285
W0953202010	**320**	M48x2	18	75	420

Note: Individually packed

STAINLESS STEEL (AISI 304)

Code	Ø	F	H	CH	Weight [g]
W095XA52011	**250**	M42x2	16	65	285
W095XA62011	**320**	M48x2	18	75	420

Note: Individually packed

ACCESSORIES: MAGNETIC SENSORS

RETRACTABLE SENSOR

SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

ADAPTOR FOR RETRACTABLE SENSOR



Code	Description
W0950001001	Adaptor DSS005 for DST/ST brackets

ASSEMBLY DIAGRAM

① ISO 15552 cylinder, round pipe with tie rods
② Sensor bracket mod. ST (Ø 250 and 320)
③ Adaptor for retractable sensor
④ Retractable sensor
⑤ Sensor DSM
⑥ Adaptor (only for Ø 250)

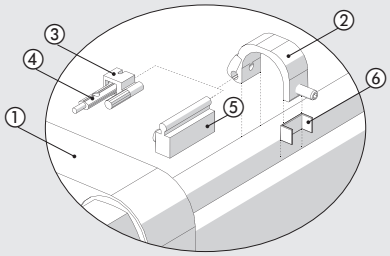

SENSOR SERIES DSM



For codes and technical data, see **chapter A6**.

SENSOR SUPPORT BRACKET

Ø 250



Code	Description
W0950000722	Bracket ST250

Ø 320



W0950000723	Bracket ST320

SPARE PARTS

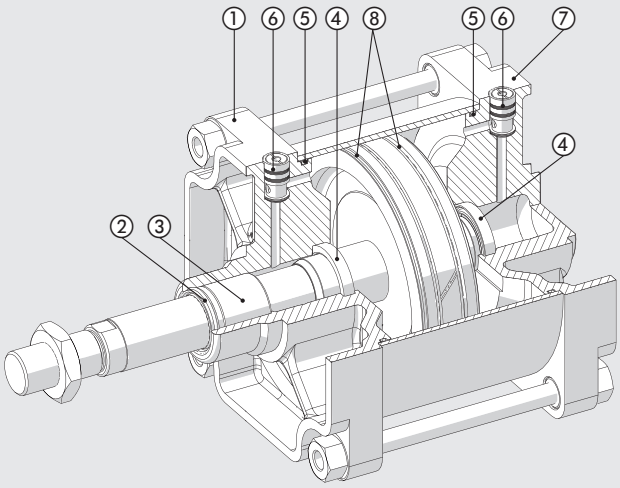

Code	Bores	Type	Parts
W095 . . . 2101	250 - 320	Complete set of gaskets	2-4-5-8
W0952502102	250	Complete set of (high temperature) FKM/FPM gaskets	2-4-5-8
W095 . . .0104	250 - 320	Complete front head kit	1-2-3-4-5-6
W095 . . .0105	250 - 320	Complete rear head kit	4-5-6-7

ISO 21287 CYLINDER SERIES LINER

Compact cylinder to ISO 21287, LINER series, available in different versions to meet all possible requirements:

- With or without magnet
- Double acting, single or through piston rod
- Double acting, perforated through piston rod
- Single acting, extended, retracted or through piston rod
- Single acting, perforated through rod
- Double acting anti-rotating version and double acting through piston rod
- Polyurethane or FKM/FPM gaskets (for high temperatures) also available
- Dimensions and centre distances to ISO 21287.

The heads have been eliminated for ease of installation, improved sturdiness and precision. The metal lining is designed to withstand heavy-duty work, tensile stress and impact. Technopolymer parts can withstand dynamic and pneumatic thrust. The lining virtually acts as a "bearing" to which most of user accessories are attached.
The wide range of anchors provide numerous fixing points.
Retractable magnetic limit switches can be mounted to identify the position in the cylinder grooves.

TECHNICAL DATA			Ø20	Ø25	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100
Max operating pressure		bar	10							
		MPa	1							
		psi	145							
Temperature range	POLYURETHANE	°C	–10 to +60						–10 to +80	
	FKM/FPM	°C	–10 to +150 (non-magnetic cylinders)							
Design			With profile							
Fixing centre distances			According to ISO 21287							
Fluid			Unlubricated air. Lubrication, if used, must be continuous							
Versions			Double-acting, Double-acting through-rod, Single-acting extended or retracted rod, Single-acting through-rod, Single-acting through piston rod perforated, Double-acting through-rod perforated, Double-acting non-rotating, Double-acting through-rod non-rotating, No stick-slip. All versions are available with male or female piston rod.							
Sensor magnet			Available magnetic and non-magnetic versions.							
Inrush pressure	single piston rod	bar	0.6	0.6	0.6	0.4	0.4	0.4	0.4	0.4
	through-rod	bar	0.8	0.8	0.6	0.4	0.4	0.4	0.4	0.4
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter							
Weights			See cylinder "**General technical data**" at the beginning of the chapter							
Notes			For correct operation, it is advisable to use 50 µm filtered air							
			For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.							

COMPONENTS Ø 20-25

① PISTON ROD: stainless steel, thick chromed
② END CAP: high-performance technopolymer
③ BARREL: drawn anodized and calibrated aluminium alloy
④ PISTON GASKET: polyurethane or FKM/FPM (for high temperature)
⑤ MAGNET: plastoneodimio
⑥ PISTON ROD GASKET: polyurethane or FKM/FPM (for high temperature)
⑦ GUIDE BUSHING: sintered bronze
⑧ STATIC O-RINGS: NBR or FKM/FPM (for high temperature)

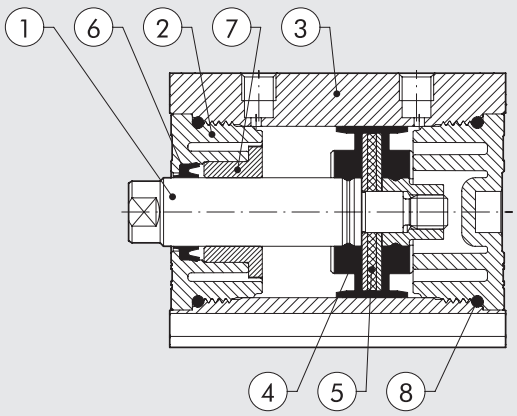

COMPONENTS Ø 32-63

① PISTON ROD: C45 stell or stainless steel, thick chromed
② END CAP: high-performance technopolymer
③ BARREL: drawn anodized and calibrated aluminium alloy
④ PISTON GASKET: polyurethane or FKM/FPM (for high temperature)
⑤ MAGNET: Ø 32 plastoneodimio - Ø 40 to 63 plastoferrite
⑥ PISTON ROD GASKET: polyurethane or FKM/FPM (for high temperature)
⑦ GUIDE BUSHING: sintered bronze
⑧ STATIC O-RINGS: NBR or FKM/FPM (for high temperature)

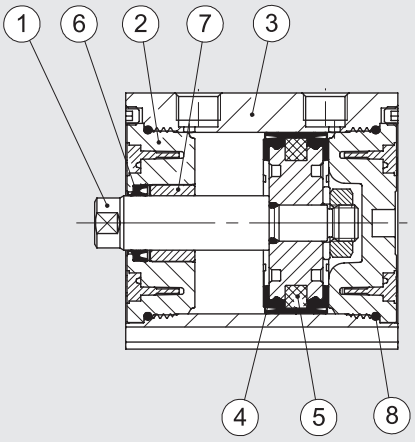

COMPONENTS Ø 80-100

① PISTON ROD: C45 stell or stainless steel, thick chromed
② END CAP: anodized aluminium alloy
③ BARREL: drawn anodized and calibrated aluminium alloy
④ PISTON GASKET: polyurethane or FKM/FPM (for high temperature)
⑤ MAGNET: plastoferrite
⑥ PISTON ROD GASKET: polyurethane or FKM/FPM (for high temperature)
⑦ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑧ STATIC O-RINGS: NBR or FKM/FPM (for high temperature)

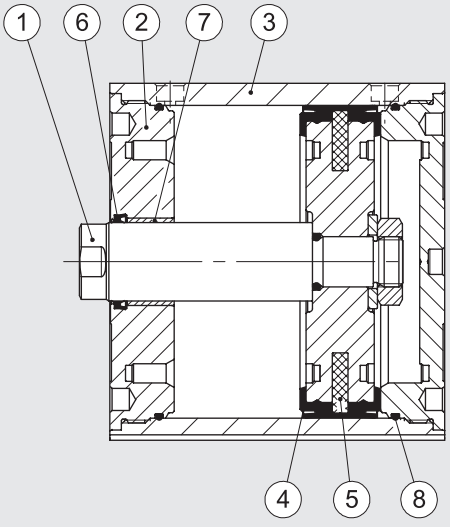

FIXING OPTIONS

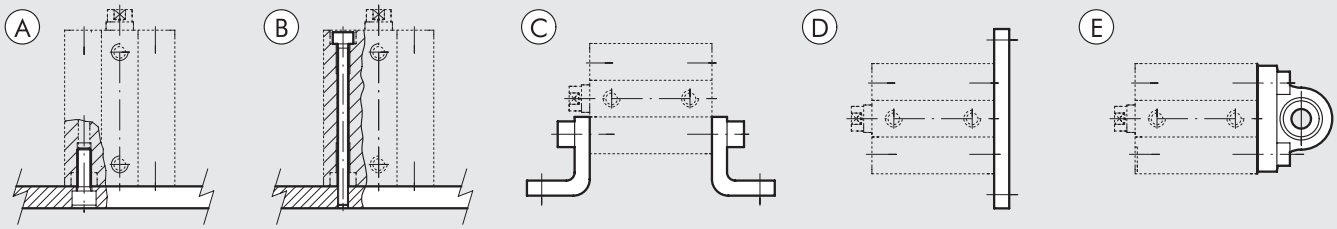

Ⓐ Fixing to structural work with a through screw, using the thread in the heads
Ⓑ Direct fixing from above using long through screws or tie rods. Non-magnetic stainless steel must be used (e.g. AISI 304)
Ⓒ Fixing with feet; the ordering code covers the supply of one foot and two screws for fixing to the cylinder
Ⓓ Fixing with a flange mounted on the front or rear head; the ordering code covers the supply of a flange and four screws for fixing to the cylinder
Ⓔ Fixing with articulated hinge to compensate for slight system misalignment and turn freely
The ordering code covers the supply of a hinge and four screws for fixing to the cylinder.

METAL WORK PNEUMATIC

FORCE OF SPRINGS IN SINGLE-ACTING CYLINDERS (THEORETICAL)

Bore	Ø 20	Ø 25	Ø 32	Ø 40	Ø 50	Ø 63	Ø 80	Ø 100
Min. load (N)	8.40	13.90	19.00	24.80	36.30	50.20	77.60	131.80
Max. load (N)	20.90	33.20	35.90	53.70	62.20	82.30	118.90	183.30

STROKES FOR COMPACT CYLINDERS ISO 21287

Standard stroke for single-acting cylinders	Standard stroke for other types	Max. recommended strokes for other types	Max. recommended strokes for non-rotating cylinders	Max recommended strokes for through-rod perforated
Ø 20 to 100 → from 1 to 25 mm	Ø 20 to 25 → from 1 to 60 mm	Ø 20 to 25 → 300 mm	Ø 20 to 63 → 120 mm	Ø 20 to 40 → from 1 to 80 mm
	Ø 32 to 100 → from 1 to 80 mm	Ø 32 to 63 → 400 mm	Ø 80 to 100 → 150 mm	Ø 50 to 63 → from 1 to 100 mm
		Ø 80 to 100 → 500 mm		Ø 80 to 100 → from 1 to 160 mm

Maximum recommended strokes. Higher values can create operating problems

MAXIMUM LOADS FOR NON-ROTATING VERSION

TRANSVERSAL FORCE FOR NON-ROTATING

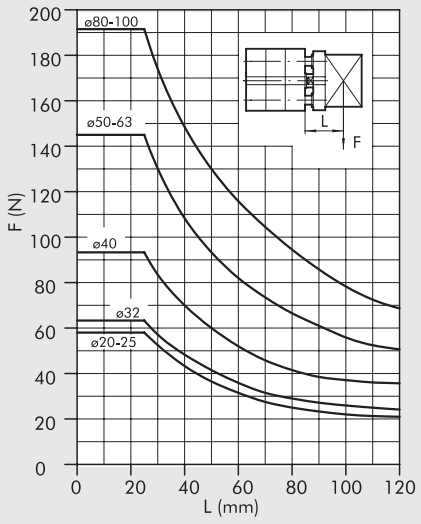

TRANSVERSAL FORCE FOR NON-ROTATING THROUGH-ROD

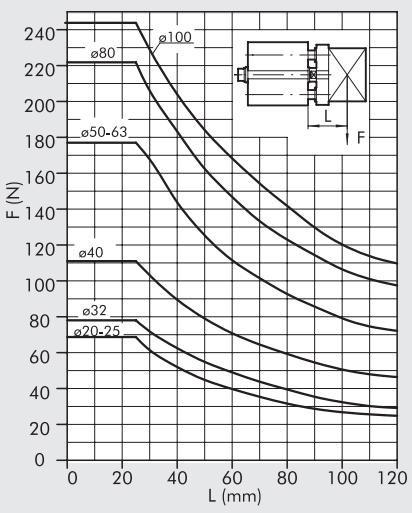

TORQUE DEPENDING ON STROKE

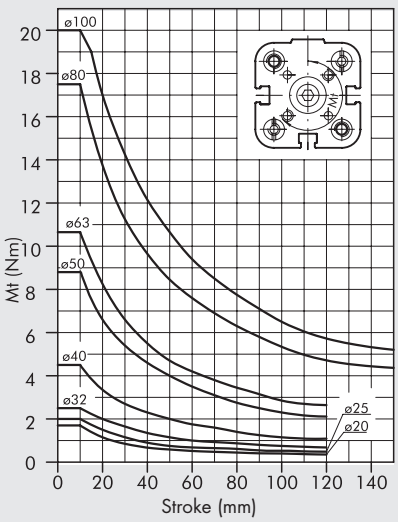

DIMENSIONS OF DOUBLE-ACTING Ø 20 to 50 AND SINGLE-ACTING Ø 20 to 50

SE-DE MALE PISTON ROD



SE EXTENDED PISTON ROD



SE MALE EXTENDED PISTON ROD



\+ = ADD THE STROKE
* = SECTION WITH TOLERANCE
1 = SENSOR SLOT
2 = SEAT FOR DIN 7984 SCREWS

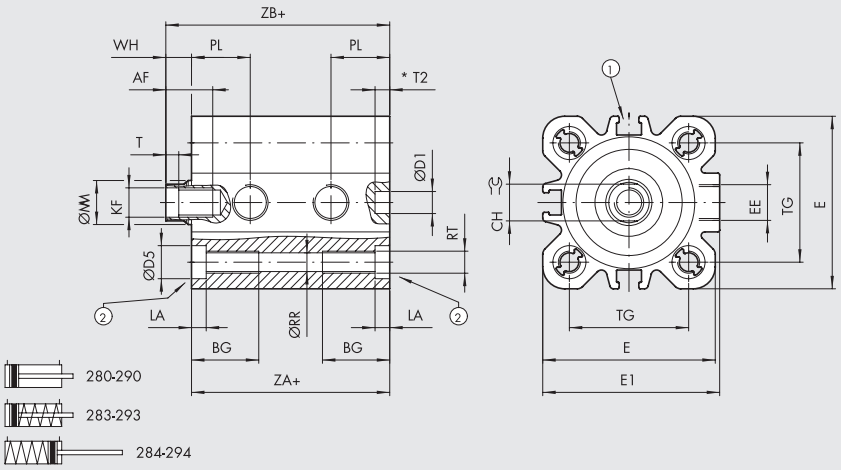

Ø	AF	AM	BG	CH	CH1	ØD1 H9	ØD5	E	E1	EE	KF	KK	LA	ØMM	PL	ØRR	RT	T	T2	TG ±0.2	WH	ZA $^{+0.3}_{0}$	ZB
20	14	16	17.5	8	13	6	7.5	35.5	36.5	M5	M6	M8	4.2	10	12	4.2	M5	2.5	3	22	6	37	43
25	14	16	17.5	8	13	6	7.5	39.5	40	M5	M6	M8	4.2	10	13	4.2	M5	2.5	3.5	26	6	39	45
32	16.5	19	21.5	10	17	6	9	47	48.2	G1/8	M8	M10x1.25	4	12	16	5.1	M6	3.5	4	32.5	7	44	51
40	16.5	19	21.5	10	17	6	9	55.5	56.5	G1/8	M8	M10x1.25	4	12	16	5.1	M6	3.5	4	38	7	45	52
50	17	22	21	13	19	6	10.5	66.5	67.8	G1/8	M10	M12x1.25	4.5	16	15.5	6.8	M8	4	3	46.5	8	45	53

DIMENSIONS OF DOUBLE-ACTING Ø 63 to 100 AND SINGLE-ACTING Ø 63 to 100

SE-DE MALE PISTON ROD



SE EXTENDED PISTON ROD



SE MALE EXTENDED PISTON ROD



\+ = ADD THE STROKE
* = SECTION WITH TOLERANCE
1 = SENSOR SLOT
2 = SEAT FOR DIN 7984 SCREWS

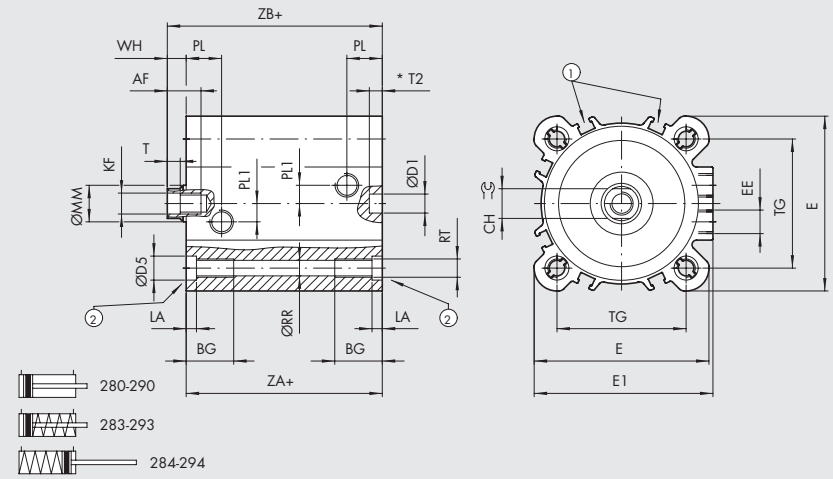

Ø	AF	AM	BG	CH	CH1	ØD1 H9	ØD5	E	E1	EE	KF	KK	LA	ØMM	PL1	PL	ØRR	RT	T	T2	TG ±0.2	WH	ZA $^{+0.4}_{0}$	ZB
63	17	22	21	13	19	8	10.5	76.5	78.3	G1/8	M10	M12x1.25	4.5	16	8	15.5	6.8	M8	4	3.5	56.5	8	49	57
80	22	28	22.5	17	24	8	14	95.5	95.5	G1/8	M12	M16x1.5	5	20	14	16.5	8.5	M10	5	4	72	10	54	64
100	24	28	25.5	22	30	8	14	114	114	G1/8	M12	M16x1.5	5	25	19	19.2	8.5	M10	5	4	89	10	67	77

METAL WORK PNEUMATIC

DIMENSIONS OF THROUGH-ROD Ø 20 to 50

SE-DE MALE PERFORATED THROUGH-ROD



\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE
1 = SENSOR SLOT
2 = SEAT FOR DIN 7984 SCREWS

SE-DE MALE PISTON ROD



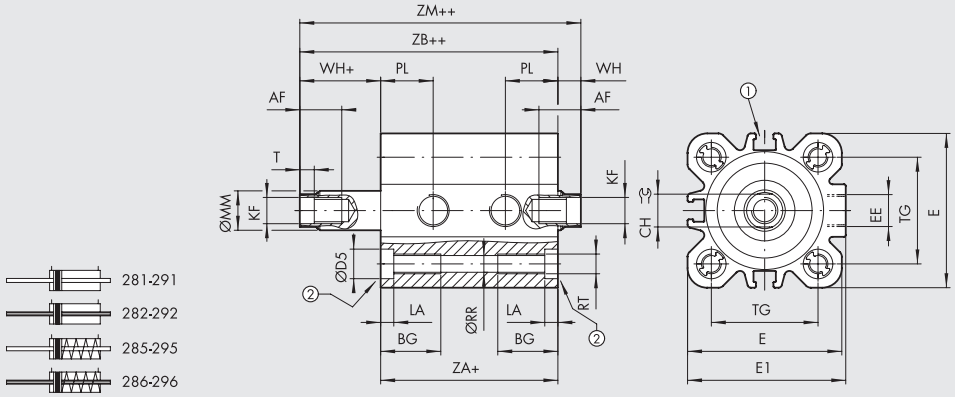

Ø	AF	AM	BG	CH	CH1	ØD5	E	E1	EE	KF	KK	LA	ØMM	ØP1	ØP2	PL	ØRR	RT	T	TG±0.2	WH	ZA0+0.3	ZB	ZM
20	14	16	17.5	8	13	7.5	35.5	36.5	M5	M6	M8	4.2	10	3	1.5	12	4.2	M5	2.5	22	6	37	43	49
25	14	16	17.5	8	13	7.5	39.5	40	M5	M6	M8	4.2	10	3	1.5	13	4.2	M5	2.5	26	6	39	45	51
32	16.5	19	21.5	10	17	9	47	48.2	G1/8	M8	M10x1.25	4	12	4	2.5	16	5.1	M6	3.5	32.5	7	44	51	58
40	16.5	19	21.5	10	17	9	55.5	56.5	G1/8	M8	M10x1.25	4	12	4	2.5	16	5.1	M6	3.5	38	7	45	52	59
50	17	22	21	13	19	10.5	66.5	67.8	G1/8	M10	M12x1.25	4.5	16	6	4	15.5	6.8	M8	4	46.5	8	45	53	61

DIMENSIONS OF THROUGH-ROD Ø 63 to 100

SE-DE MALE PERFORATED THROUGH-ROD



\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE
1 = SENSOR SLOT
2 = SEAT FOR DIN 7984 SCREWS

SE-DE MALE PISTON ROD



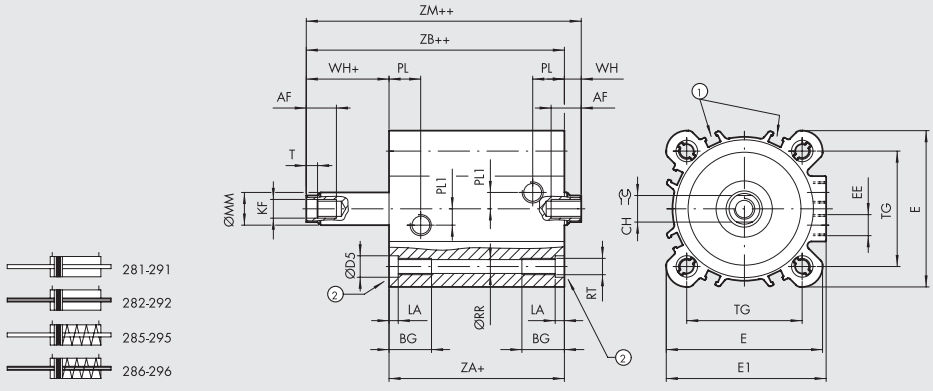

Ø	AF	AM	BG	CH	CH1	ØD5	E	E1	EE	KF	KK	LA	ØMM	ØP1	ØP2	PL1	PL	ØRR	RT	T	TG±0.2	WH	ZA0+0.4	ZB	ZM
63	17	22	21	13	19	10.5	76.5	78.3	G1/8	M10	M12x1.25	4.5	16	6	4	8	15.5	6.8	M8	4	56.5	8	49	57	65
80	22	28	22.5	17	24	14	95.5	95.5	G1/8	M12	M16x1.5	5	20	G1/8	5	14	16.5	8.5	M10	5	72	10	54	64	74
100	24	28	25.5	22	30	14	114	114	G1/8	M12	M16x1.5	5	25	G1/8	6	19	19.2	8.5	M10	5	89	10	67	77	87

DIMENSIONS OF NON-ROTATING Ø 20 to 50

\+ = ADD THE STROKE
* = SECTION WITH TOLERANCE
1 = SENSOR SLOT
2 = SEAT FOR DIN 7984 SCREWS

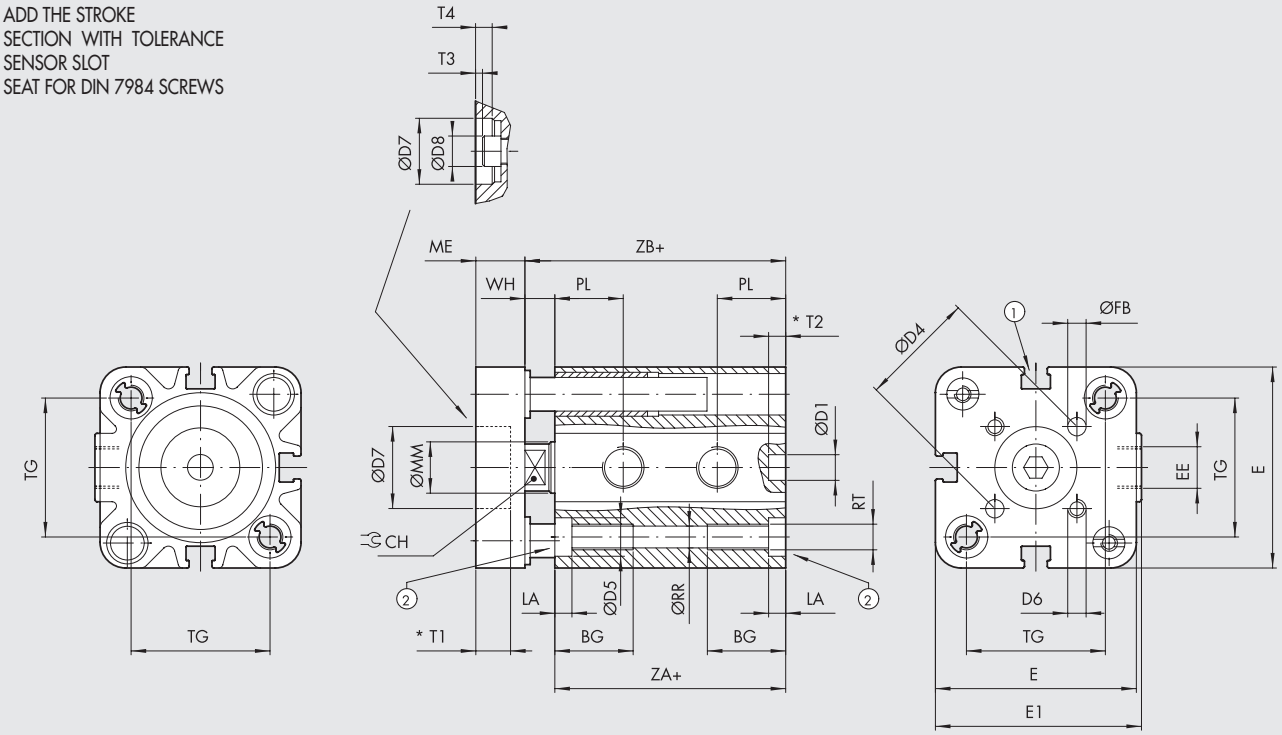

297

NON-ROTATING FEMALE THROUGH-ROD

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

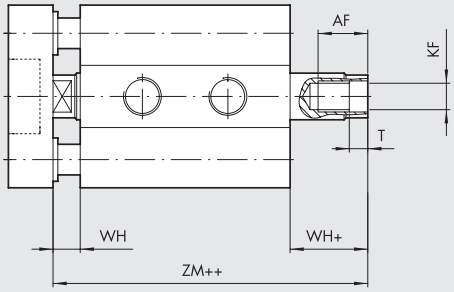

29A

NON-ROTATING MALE THROUGH-ROD

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

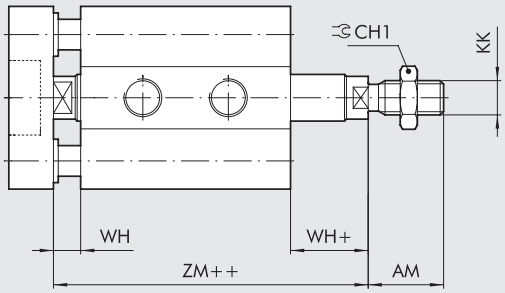

28A

Ø	AF	AM	BG	CH	CH1	ØD1 H9	ØD4	ØD5	D6	ØD7 H9	ØD8	E	E1	EE	ØFB	KF	KK	LA	ME	ØMM	PL	ØRR	RT	T	T1	T2	T3	T4
20	14	16	17.5	8	13	6	17	7.5	M4	-	-	35.5	36.5	M5	4	M6	M8	4.2	8	10	12	4.2	M5	2.5	-	3	-	-
25	14	16	17.5	8	13	6	22	7.5	M5	14	10	39.5	40	M5	5	M6	M8	4.2	8	10	13	4.2	M5	2.5	3.5	3.5	1	3.5
32	16.5	19	21.5	10	17	6	28	9	M5	17	13	47	48.2	G1/8	5	M8	M10x1.25	4	10	12	16	5.1	M6	3.5	3.5	4	1	3.5
40	16.5	19	21.5	10	17	6	33	9	M5	17	13	55.5	56.5	G1/8	5	M8	M10x1.25	4	10	12	16	5.1	M6	3.5	3.5	4	1	3.5
50	17	22	21	13	19	6	42	10.5	M6	22	16	66.5	67.8	G1/8	6	M10	M12x1.25	4.5	12	16	15.5	6.8	M8	4	5	3	1.5	5

Ø	TG ±0.2	WH	ZA +0.3 0	ZB	ZM
20	22	6	37	43	49
25	26	6	39	45	51
32	32.5	7	44	51	58
40	38	7	45	52	59
50	46.5	8	45	53	61

METAL WORK PNEUMATIC

DIMENSIONS OF NON-ROTATING Ø 63 to 100

\+ = ADD THE STROKE
* = SECTION WITH TOLERANCE
1 = SENSOR SLOT
2 = SEAT FOR DIN 7984 SCREWS

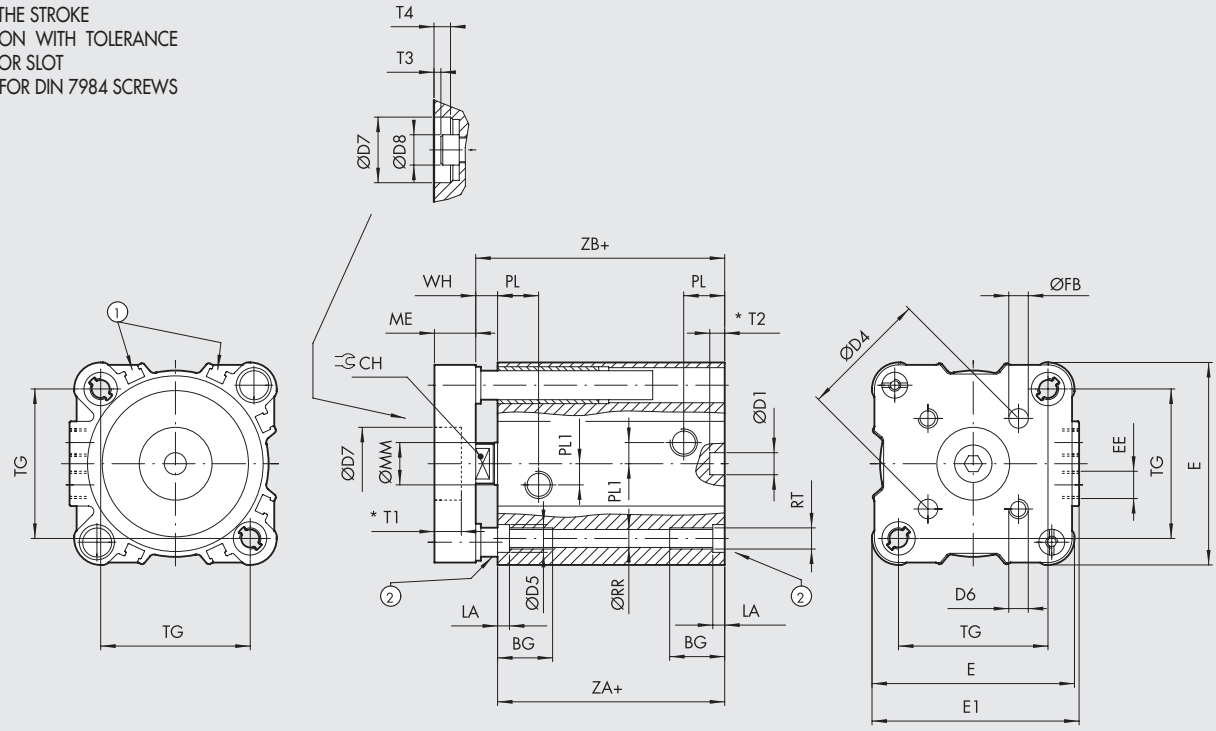

297

NON-ROTATING FEMALE THROUGH-ROD

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

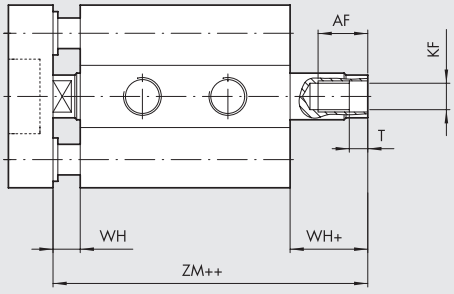

29A

NON-ROTATING MALE THROUGH-ROD

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

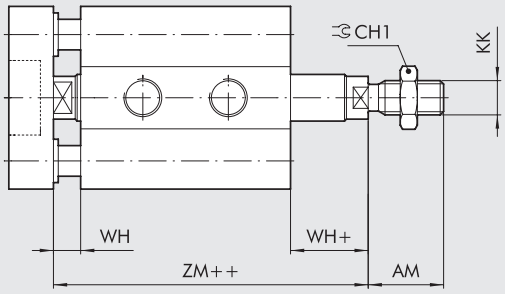



28A

Ø	AF	AM	BG	CH	CH1	ØD1 H9	ØD4	ØD5	D6	ØD7 H9	ØD8	E	E1	EE	ØFB	KF	KK	LA	ME	ØMM	PL1	PL	ØRR	RT	T	T1	T2	T3
63	17	22	21	13	19	8	50	10.5	M6	22	16	76.5	78.3	G1/8	6	M10	M12x1.25	4.5	12	16	8	15.5	6.8	M8	4	5	3.5	1.5
80	22	28	22.5	17	24	8	65	14	M8	24	18	95.5	95.5	G1/8	8	M12	M16x1.5	5	14	20	14	16.5	8.5	M10	5	7.5	4	3.5
100	24	28	25.5	22	30	8	80	14	M10	24	18	114	114	G1/8	10	M12	M16x1.5	5	14	25	19	19.2	8.5	M10	5	7.5	4	3.5

Ø	T4	TG ±0.2	WH	ZA +0.4 0	ZB	ZM
63	5	56.5	8	49	57	65
80	7.5	72	10	54	64	74
100	7.5	89	10	67	77	87

KEY TO CODE

CYL	28 TYPE	0	0	20 BORE	0	050 STROKE **	X MATERIAL	P GASKETS
	28 Compact cylinder ISO 21287 male piston rod **29** Compact cylinder ISO 21287 female piston rod	**0** Double-acting **1** Double-acting through-rod **2** Double-acting through-rod perforated ● **3** Single-acting retracting piston rod ● **4** Single-acting extended piston rod ● **5** Single-acting through-rod ● **6** Single-acting through piston rod perforated ▼ **7** Double-acting non-rotating **A** Double-acting through-rod non-rotating	**0** Magnetic □ **S** Non-magnetic ▲ **G** No stick-slip	20 25 32 40 50 63 80 ◆ 100	**0** Standard		✱ **C** C45 piston rod chromium-plated ▷ **X** Stainless steel piston rod and nut ◁ **A** C45 chromed piston rod, aluminium piston ○ **Z** Stainless steel piston rod and nut aluminium piston	**P** Polyurethane gaskets ▶ **V** FKM/FPM gaskets

** For the maximum suppliabe stroke, see page **A1**.101
● Can also be used as double-acting with spring return
▼ For versions 29 only (female piston rod)
▲ For Ø 12 to 25 the standard version (0 or S) it's already No stick-slip
For Ø 20 to 100 version with gaskets in FKM / FPM (0 or S) is already "No stick-slip"
For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only
◆ In the code of cylinder with letter in fourth position Ø 100 becomes A1
▶ Only for standard double acting and standard through rod double acting version (for Ø20 and Ø25 only "non-magnetic" version provided)
□ Compulsory for Ø 20 and Ø 25 version Z
✱ Only for Ø 32 to 63 P version (Polyurethane gaskets)
▷ Only for Ø 20 to 63 P version (Polyurethane gaskets)
◁ Only for Ø 32 to 100 V version (FKM/FPM gaskets) and for Ø 80 and 100 P version (Polyurethane gaskets)
○ Only for Ø 20 to 100 V version (FKM/FPM gaskets) and for Ø 80 and 100 P version (Polyurethane gaskets)

NOTES

ACCESSORIES FOR ISO 21287 CYLINDERS: FIXING

FOOT - MODEL A

+ = ADD THE STROKE

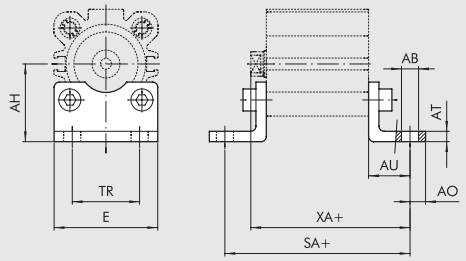

Code	Ø	ØAB	AH	AO	AT	AU	E	SA	TR	XA	Weight [g]
W0950206001	20	6.6	27	6	4	16	36	69	22	59	46
W0950256001	25	6.6	30*	6	4	16	40	71	26	61	52
W0950322001	32	7	32*	11*	4	24*	45	92*	32	75*	76
W0950402001	40	9	36*	15*	4	28*	52	101*	36	80*	100
W0950502001	50	9	45	15*	5	32*	65	109*	45	85*	162
W0950632001	63	9	50	15*	5	32*	75	113*	50	89*	266
W0950802001	80	12	63	20*	6	41*	95	136*	63	105*	456
W0951002001	100	14	71*	25*	6	41*	115	149*	75	118*	572

Note: Individually packed with 2 screws.

* **IMPORTANT:** Values not to ISO 21287. Cylinder pins to ISO 15552 are used.

FEMALE HINGE-MODEL B

+ = ADD THE STROKE

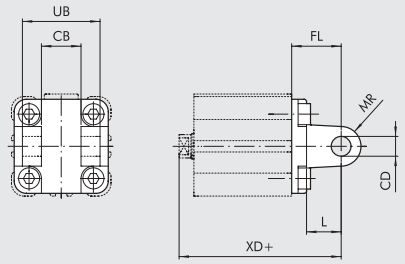

Code	Ø	CB H14	CD H9	FL	L	MR	UB H14	XD	Weight [g]
W0950322003	32	26	10	22	12	10	45	73	112
W0950402003	40	28	12	25	15	12	52	77	159
W0950502003	50	32	12	27	15	12	60	80	250
W0950632003	63	40	16	32	20	16	70	89	390
W0950802003	80	50	16	36	20	16	90	100	668
W0951002003	100	60	20	41	25	20	110	118	1047

Note: Supplied with 4 screws, 4 washers, 2 snap-rings and 1 pin

MALE HINGE-MODEL BA

+ = ADD THE STROKE

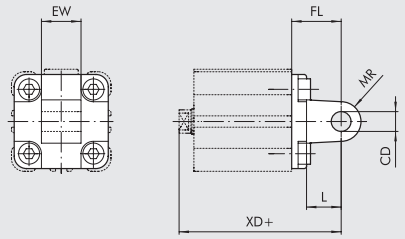

Code	Ø	CD H9	EW	FL	L	MR	XD	Weight [g]
W0950206004	20	8	16	20	12	8	63	44
W0950256004	25	8	16	20	12	8	65	48
W0950322004	32	10	26	22	13	10	73	94
W0950402004	40	12	28	25	16	12	77	124
W0950502004	50	12	32	27	16	12	80	220
W0950632004	63	16	40	32	22	16	89	316
W0950802004	80	16	50	36	22	16	100	578
W0951002004	100	20	60	41	27	20	118	850

Note: Supplied with 4 screws.

FLANGE Ø 20 to 25 - MODEL C (FRONT AND REAR)

+ = ADD THE STROKE

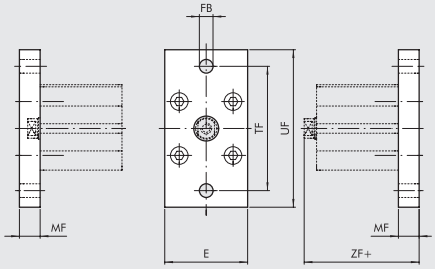

Code	Ø	E	ØFB	MF	TF	UF	ZF	Weight [g]
W0950206002	20	36	6.6	10*	55	70	53*	184
W0950256002	25	40	6.6	10*	60	76	55*	226

Note: Supplied with 4 screws.

* **IMPORTANT:** Non ISO 21287 norm fixing distance

FLANGE Ø 32 to 100 - MODEL C (FRONT AND REAR)

+ = ADD THE STROKE

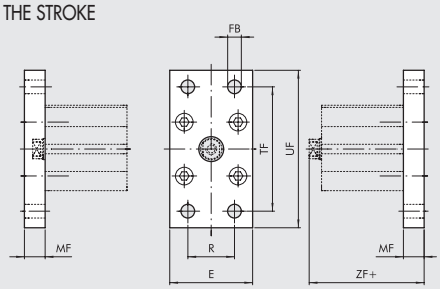

Code	Ø	E	ØFB	MF	R	TF	UF	ZF	Weight [g]
W0950322002	32	50	7	10	32	64	80	61	246
W0950402002	40	55	9	10	36	72	90	62	290
W0950502002	50	65	9	12	45	90	110	65	522
W0950632002	63	75	9	12	50	100	120	69	670
W0950802002	80	95	12	15	63	126	150	80	1420
W0951002002	100	115	14	15	75	150	178	93	2040

Note: Supplied with 4 screws.

ARTICULATED MALE HINGE - MODEL BAS

+ = ADD THE STROKE

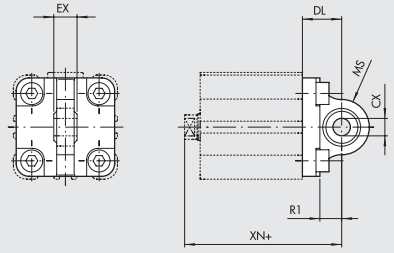

Code	Ø	CX H9	DL	EX	MS	R1	XN	Weight [g]
W0950322006	32	10	22	14	16	12	73	106
W0950402006	40	12	25	16	18	15	77	142
W0950502006	50	12	27	16	21	19	80	236
W0950632006	63	16	32	21	23	20	89	336
W0950802006	80	16	36	21	28	24	100	572
W0951002006	100	20	41	25	30	25	118	840

Note: Supplied with 4 screws, 4 washers

FLANGE FOR OPPOSITE CYLINDERS



Code	Ø	M	Weight [g]
0950203060	20	12.5	45
0950253060	25	13	57
0950323060	32	14.5	88
0950403061	40	14.5	106
0950503061	50	14.5	158
0950633061	63	14.5	258
0950803061	80	16.5	452
0951003061	100	19.5	801

Note: Supplied complete with 1 pin, 4 screws

ASSEMBLING OPPOSING CYLINDERS

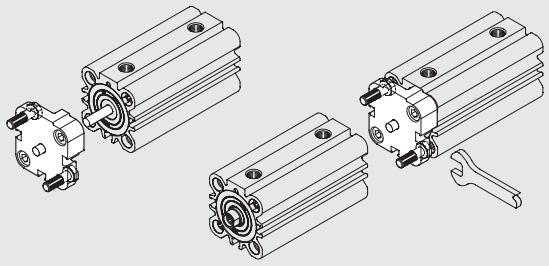

FORK - MODEL GK-M



Code	Ø	A	B	C	D	F	L	øM	N	Weight [g]
W0950200020	20	16	8	16	M8	32	42	8	22	48
W0950200020	25	16	8	16	M8	32	42	8	22	48
W0950322020	32	20	10	20	M10x1.25	40	52	10	26	92
W0950322020	40	20	10	20	M10x1.25	40	52	10	26	92
W0950402020	50	24	12	24	M12x1.25	48	62	12	32	148
W0950402020	63	24	12	24	M12x1.25	48	62	12	32	148
W0950502020	80	32	16	32	M16x1.5	64	83	16	40	340
W0950502020	100	32	16	32	M16x1.5	64	83	16	40	340

Note: Individually packed

ROD EYE - MODEL GA-M

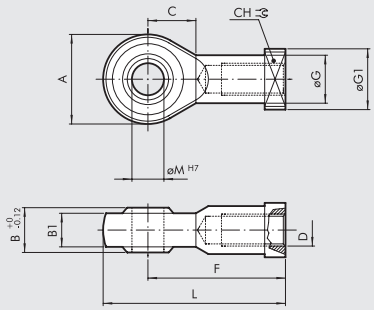

Code	Ø	A	B	B1	C	CH	D	F	øG	øG1	L	øM	Weight [g]
W0950200025	20	24	12	9	13	14	M8	36	12.5	16	48	8	45
W0950200025	25	24	12	9	13	14	M8	36	12.5	16	48	8	45
W0950322025	32	28	14	10.5	15	17	M10x1.25	43	15	19	57	10	70
W0950322025	40	28	14	10.5	15	17	M10x1.25	43	15	19	57	10	70
W0950402025	50	32	16	12	17	19	M12x1.25	50	17.5	22	66.5	12	108
W0950402025	63	32	16	12	17	19	M12x1.25	50	17.5	22	66.5	12	108
W0950502025	80	42	21	15	22	22	M16x1.5	64	22	27	85	16	216
W0950502025	100	42	21	15	22	22	M16x1.5	64	22	27	85	16	216

Note: Individually packed

METAL WORK PNEUMATIC

COMPENSATION JOINT - MODEL GA



Code	Ø	A	B	C	CH	øD	øD1	F	øG	ØG1	P	S	S1	Weight [g]
W0950326021	32	49	36	30	13	11	6.5	M10x1.25	39.5	17	6.5	12	10	172
W0950326021	40	49	36	30	13	11	6.5	M10x1.25	39.5	17	6.5	12	10	172
W0950406021	50	59	42	36	15	14	8.5	M12x1.25	44	19	8.5	15	13.5	286
W0950406021	63	59	42	36	15	14	8.5	M12x1.25	44	19	8.5	15	13.5	286
W0950506021	80	79	58	44	22	17	10.5	M16x1.5	59	26	10.5	20	15	628
W0950506021	100	79	58	44	22	17	10.5	M16x1.5	59	26	10.5	20	15	628

Note: Individually packed

COUNTER-HINGE CETOP Ø 32 to 100

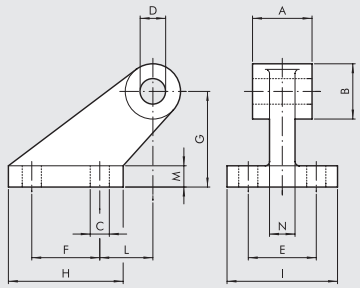

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]
W0950322008	32	26	19	7	10	25	20	32	37	41	18	8	10	96
W0950402008	40	28	26	9	12	32	32	45	54	52	25	10	12	216
W0950502008	50	32	26	9	12	32	32	45	54	52	25	10	12	212
W0950632008	63	40	33	11	16	40	50	63	75	63	32	12	15	440
W0950802008	80	50	33	11	16	40	50	63	75	63	32	12	15	464
W0951002008	100	60	44	14	20	50	70	90	103	80	40	16	22	985

Note: Supplied complete with 4 screws, 4 washers

COUNTER-HINGE Ø 16 to 25 - MODEL BC

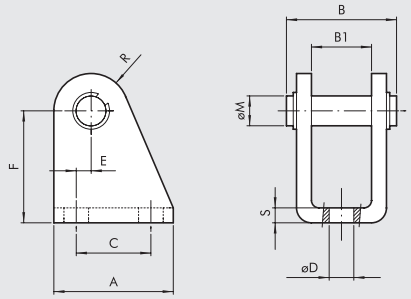

Code	Ø	A	B	B1	C	øD	E	F	øM	R	S	Weight [g]
W0950200005	20	32	30	16	20	6.5	4	30	8	10	4	78
W0950200005	25	32	30	16	20	6.5	4	30	8	10	4	78

Note: Supplied complete with 1 pin and and 2 snap rings

SELF ALIGNING ROD COUPLER - MODEL GA-K

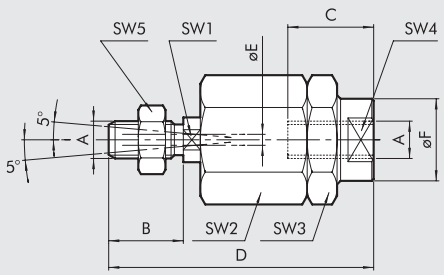

Code	Ø	A	B	C	D	øE	øF	SW1	SW2	SW3	SW4	SW5	Weight [g]
W0950200030	20	M8	20	20	57	4	12.5	7	17	17	11	13	56
W0950200030	25	M8	20	20	57	4	12.5	7	17	17	11	13	56
W0950322030	32	M10x1.25	20	20	71	4	22	12	30	30	19	17	216
W0950322030	40	M10x1.25	20	20	71	4	22	12	30	30	19	17	216
W0950402030	50	M12x1.25	24	20	75	4	22	12	30	30	19	19	220
W0950402030	63	M12x1.25	24	20	75	4	22	12	30	30	19	19	220
W0950502030	80	M16x1.5	32	32	103	4	32	20	41	41	30	24	620
W0950502030	100	M16x1.5	32	32	103	4	32	20	41	41	30	24	620

Note: Individually packed

RETRACTABLE SENSOR

For codes and technical data, see **chapter A6**.

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



POSITION SENSORS

LTS



For technical data and usage strokes see **chapter A6**.

SPARE PARTS FOR ISO 21287 CYLINDER

COMPACT CYLINDERS ISO 21287 (POLYURETHANE)

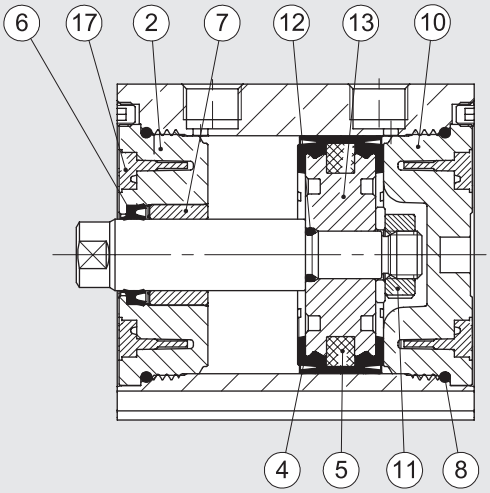

Code	Bores	Type	Parts
009 . . . L001	Ø 20, 25	Complete set of gaskets polyurethane	④⑥⑧
009 . . . L001	Ø 32 to 63	Complete set of gaskets polyurethane	④⑥⑧⑫⑰
009 . . . L001	Ø 80, 100	Complete set of gaskets polyurethane	④⑥⑧⑫
009 . . . L008	Ø 20, 25	Complete set of (high temperature) FKM/FPM gaskets	④⑥⑧
009 . . . L008	Ø 32 to 63	Complete set of (high temperature) FKM/FPM gaskets	④⑥⑧⑫⑰
009 . . . L008	Ø 80, 100	Complete set of (high temperature) FKM/FPM gaskets	④⑥⑧⑫
009 . . . 7013	Ø 20 to 100	Polyurethane piston rod gasket kit	⑥
009 . . . 7014	Ø 20 to 100	FKM/FPM piston rod gasket kit	⑥
009 . . . L101	Ø 20, 25, 80, 100	Front head kit	②⑥⑦⑧
009 . . . L101	Ø 32 to 63	Front head kit	②⑥⑦⑧⑰
009 . . . L201	Ø 20, 25, 80, 100	Rear head kit	⑧⑩
009 . . . L201	Ø 32 to 63	Rear head kit	⑧⑩⑰
009 . . . 7401	Ø 20, 25	Piston kit polyurethane	④⑤⑪
009 . . . L401	Ø 32 to 63	Piston kit polyurethane	④⑤⑪⑫⑬⑰
009 . . . 7401	Ø 80 to 100	Piston kit polyurethane	④⑤⑪⑫⑬

COMPACT CYLINDER SERIES CMPC

Compact cylinder series CMPC available in numerous versions to meet a full range of requirements:

- With or without magnet
- Single-acting extended rod, retracted or through-rod
- Dual-acting non-rotating and dual-acting through-rod versions
- Tandem with two, three or four stages
- Multi-position with two and three stages
- Fixing centre distances to ISO 15552 from Ø 32 to Ø 100 and from Ø 20 to Ø 100 complying with French standard NFE 49-004-1 and 2 (UNITOP). Ø 12 and Ø 16 have centre distances compatible with trade cylinders.

The special profile and outer heads locked onto the barrel by screws ensure optimal guiding of the cylinder and multiple fixing options with a wide range of mountings. To determine the position in the relevant cylinder slots, it is possible to mount retracting magnetic limit switches.
Available also in a version having FKM/FPM gaskets (for high temperature) from Ø 20 to Ø 100.

TECHNICAL DATA			Ø12	Ø16	Ø20	Ø25	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100
Max operating pressure		bar	10									
		MPa	1									
		psi	145									
Temperature range	POLYURETHANE	°C	–10 to +80									
	FKM/FPM	°C	–10 to +150 (non-magnetic cylinders)									
Design			With profile, heads with screws									
Fixing centre distances	ISO 15552		*	*	-	-	x	x	x	x	x	x
	NFE 49-004-1 e 2 (UNITOP)		*	*	x	x	x	x	x	x	x	x
Fluid			Unlubricated air. Lubrication, if used, must be continuous									
Versions			Double-acting, Double-acting through-rod, Single-acting extended or retracted rod, Single-acting through-rod, Single-acting through piston rod perforated, Double-acting through-rod perforated, Double-acting non-rotating, Double-acting through-rod non-rotating, No stick-slip.									
			All versions are available with male or female piston rod.									
Sensor magnet			Available magnetic and non-magnetic versions.									
Inrush pressure	single piston rod	bar	0.6	0.6	0.6	0.6	0.6	0.4	0.4	0.4	0.4	0.4
	through-rod	bar	1	0.8	0.8	0.8	0.6	0.4	0.4	0.4	0.4	0.4
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter									
Weights			See cylinder "**General technical data**" at the beginning of the chapter									
Notes			For correct operation, it is advisable to use 50 µm filtered air									
			For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.									
			* Interchangeable with similar products.									

COMPONENTS Ø 12 to 25

① PISTON ROD: stainless steel, thick chromed
② HEAD: extruded anodized aluminium alloy
③ BARREL: drawn anodized and calibrated aluminium alloy
④ PISTON GASKET: polyurethane or FKM/FPM
⑤ MAGNET: neodymium-plastic
⑥ PISTON ROD GASKET: polyurethane or FKM/FPM
⑦ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑧ STATIC O-RINGS: NBR or FKM/FPM
⑨ SECURING SCREWS: zinc-plated steel

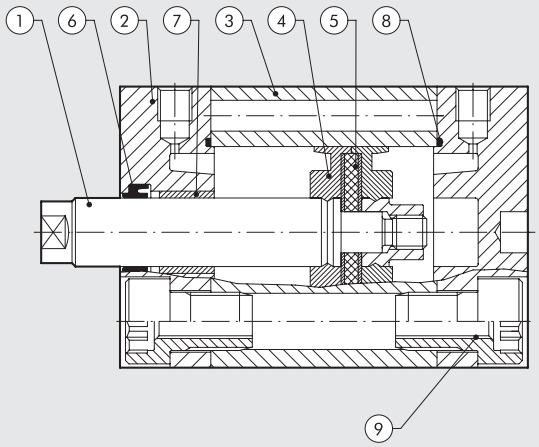

COMPONENTS Ø 32 to 100

① PISTON ROD: C45 steel or stainless steel, thick chromed
② HEAD: extruded anodized aluminium alloy
③ BARREL: drawn anodized and calibrated aluminium alloy
④ PISTON GASKET: polyurethane or FKM/FPM
⑤ MAGNET: Ø 12 to 32 neodymium-plastic
Ø 40 to 100 plastoferrite
⑥ PISTON ROD GASKET: polyurethane or FKM/FPM
⑦ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑧ STATIC O-rings: NBR or FKM/FPM
⑨ SECURING SCREWS: zinc-plated steel

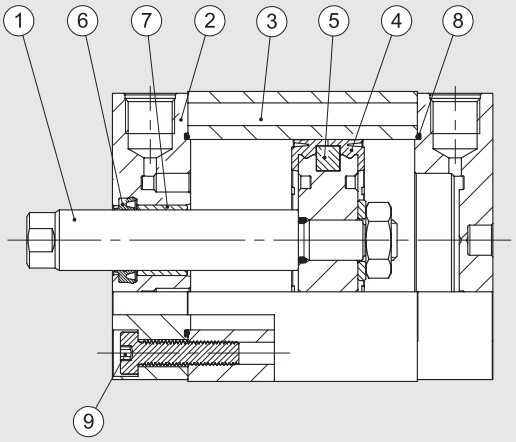

TECHNICAL DATA

① Compact cylinder available
with two separate fixing centre distances
• Ø 32 to 100 to ISO 15552
• Ø 20 to 100 to NFE 49-004-1 and 2
② Pre-wired retracting sensor
with or without connector
③ Plastic strip to keep out dirt and/or protect
the sensor wire cod. W0950000160
④ Ball-and-socket joint code W095_ _ _2030
⑤ Example of cylinder mounting
with feet code W095_ _ _6001.
All mountings come complete
with cylinder assembly screws
⑥ Sensor slot
⑦ Piston rod with male or female thread
as required

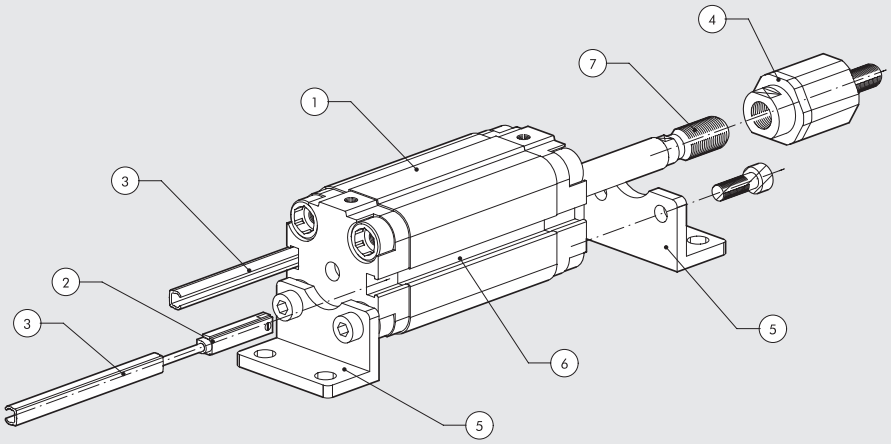

COMPACT CYLINDER FIXING OPTIONS

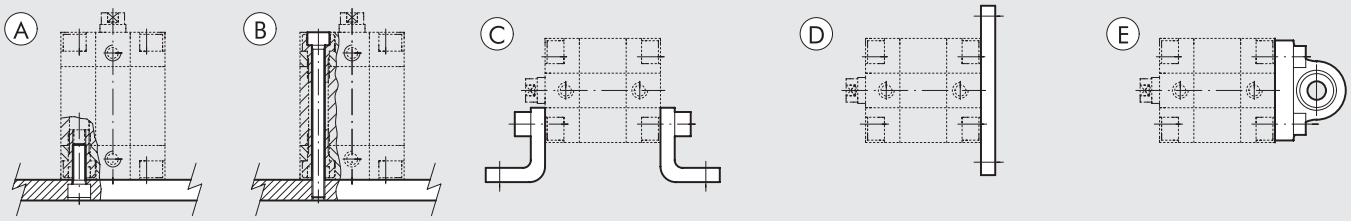

Ⓐ Fixing to structural work with a through screw, using the thread in the heads
Ⓑ Direct fixing from above using long through screws or tie rods. Non-magnetic stainless steel must be used (e.g. AISI 304)
Ⓒ Fixing with feet; the ordering code covers the supply of one foot and two screws for fixing to the cylinder
Ⓓ Fixing with a flange mounted on the front or rear head; the ordering code covers the supply of a flange and four screws for fixing to the cylinder
Ⓔ Fixing with articulated hinge to compensate for slight system misalignment and turn freely
The ordering code covers the supply of a hinge and four screws for fixing to the cylinder

METAL WORK PNEUMATIC

FORCE OF SPRINGS IN SINGLE-ACTING CYLINDERS (THEORETICAL)

Bore	Ø 12	Ø 16	Ø 20	Ø 25	Ø 32	Ø 40	Ø 50	Ø 63	Ø 80	Ø 100
Min. load (N)	4.40	4.90	8.40	13.90	19.00	24.80	36.30	50.20	77.60	131.80
Max. load (N)	9.80	14.20	20.90	33.20	35.90	53.70	62.20	82.30	118.90	183.30

STROKES FOR COMPACT CYLINDERS

Standard stroke for single-acting cylinders	Standard stroke for other types	Max. recommended strokes for other types	Max. recommended strokes for non-rotating cylinders	Max recommended strokes for through-rod perforated
Ø 12 → from 5 to 10 mm	Ø 12 to 16 → from 5 to 40 mm	Ø 12 to 25 → 200 mm	Ø 12 to 63 → 120 mm	Ø 20 to 40 → from 5 to 80 mm
Ø 16 to 100 → from 5 to 25 mm	Ø 20 to 25 → from 5 to 50 mm	Ø 32 to 40 → 300 mm	Ø 80 to 100 → 150 mm	Ø 50 to 63 → from 5 to 100 mm
	Ø 32 to 100 → from 5 to 80 mm	Ø 50 to 63 → 400 mm		Ø 80 to 100 → from 5 to 160 mm
		Ø 80 to 100 → 500 mm		

Maximum recommended strokes. Higher values can create operating problems

MAXIMUM LOADS FOR NON-ROTATING VERSION

TRANSVERSAL FORCE FOR NON-ROTATING

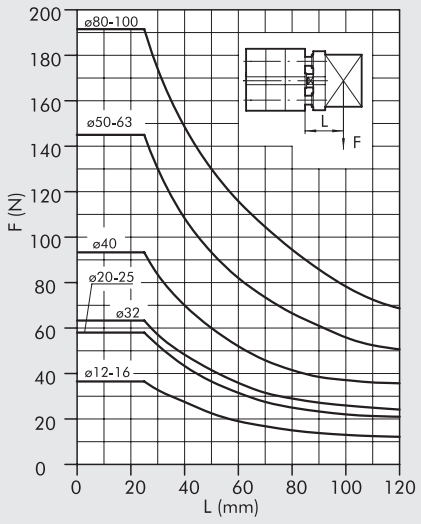

TRANSVERSAL FORCE FOR NON-ROTATING THROUGH-ROD

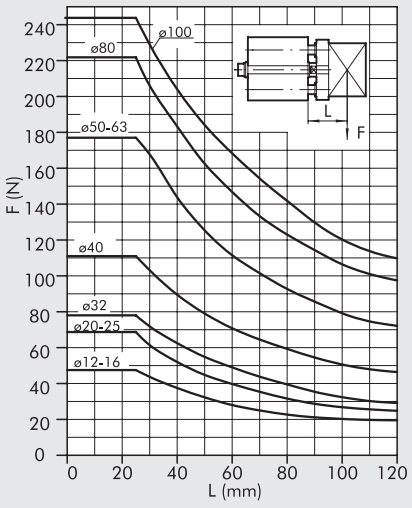

TORQUE DEPENDING ON STROKE

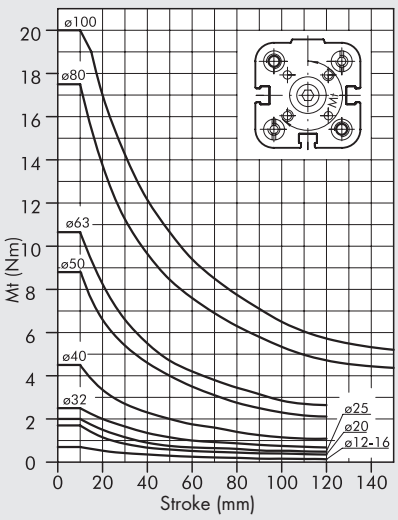

DIMENSIONS OF DOUBLE-ACTING Ø 12 to 25 AND SINGLE-ACTING Ø 12 to 25

SE-DE MALE PISTON ROD



SE EXTENDED PISTON ROD



SE MALE EXTENDED PISTON ROD



+ = ADD THE STROKE
1 = SENSOR SLOT

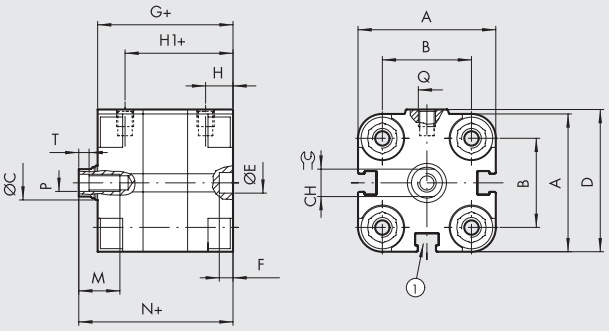



Ø	A	B	ØC	CH	CH1	D	ØE H9	F	G	H	H1	L	M	N	O	ØO1	P	Q	R	S	S1	T	NORM
12	29	18	6	5	10	30	6	4	38	8	30	18.5	8	42.5	M4	3.2	M3	M5	M6	16	4.5	2	-
16	29	18	8	7	13	30	6	4	38	8	30	18.5	10	42.5	M4	3.2	M4	M5	M8	20	4.5	2	-
20	36.5	22	10	8	17	37.5	6	4	38	8	30	18.5	12	42.5	M5	4.2	M5	M5	M10x1.25	22	4.5	2	UNITOP
25	40.5	26	10	8	17	41.5	6	4	39.5	8	31.5	19	12	45	M5	4.2	M5	M5	M10x1.25	22	5.5	2	UNITOP

DIMENSIONS OF DOUBLE-ACTING Ø 32 to 100 AND SINGLE-ACTING Ø 32 to 100

SE-DE MALE PISTON ROD



SE EXTENDED PISTON ROD



SE MALE EXTENDED PISTON ROD



+ = ADD THE STROKE
1 = SENSOR SLOT
7 = ONLY FOR Ø 63 to Ø 100
8 = SEAT FOR DIN 7984 SCREWS

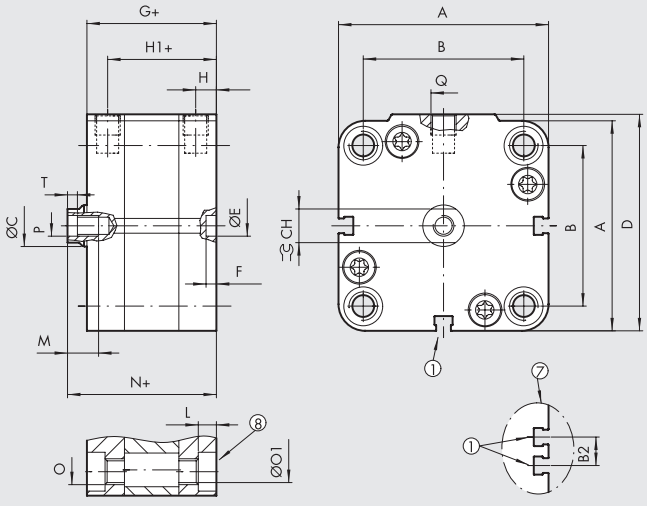



		B															O		ØO1							
Ø	A	ISO	UNITOP	B2	ØC	CH	CH1	D	ØE H9	F	G	H	H1	L	M	N	ISO	UNITOP	ISO	UNITOP	P	Q	R	S	S1	T
32	47	32.5 $^{+0.1}_{-0.4}$	32 $^{+0.4}_{-0.1}$	–	12	10	17	48.5	6	4	44.5	7.5	37	4	14	50.5	M6	M6	5.2	5.2	M6	G1/8	M10x1.25	22	6	2.5
40	56	38	42	–	12	10	17	57.5	6	4	45.5	7.5	38	4.5	14	52	M6	M6	5.2	5.2	M6	G1/8	M10x1.25	22	6.5	2.5
50	67	46.5	50	–	16	13	19	69	6	4	45.5	7.5	38	4.5	16	53	M8	M8	6.2	6.2	M8	G1/8	M12x1.25	24	7.5	3.5
63	80	56.5	62	13	16	13	19	82	8	4	50	7.5	42.5	5.5	16	57.5	M8	M10	6.2	8.5	M8	G1/8	M12x1.25	24	7.5	3.5
80	102	72	82	17	20	17	24	105	8	4	56	8.5	47.5	5.5	20	64	M10	M10	8.5	8.5	M10	G1/8	M16x1.5	32	8	4
100	123	89	103	21	25	22	30	126	8	4	66.5	10.5	56	5.5	24	76.5	M10	M10	8.5	8.5	M12	G1/4	M20x1.5	40	10	5

METAL WORK PNEUMATIC

DIMENSIONS OF NON-ROTATING Ø 12 to 25

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE
* = SECTION WITH TOLERANCE
1 = SENSOR SLOT

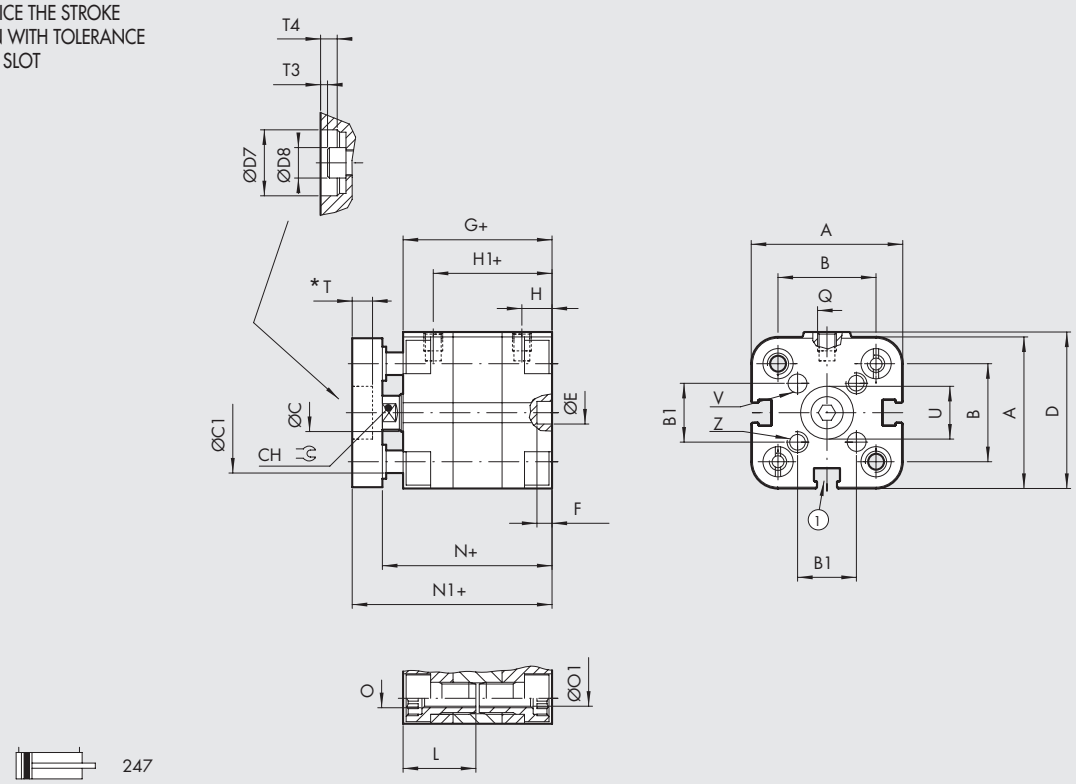

247

NON-ROTATING FEMALE THROUGH-ROD



24A

NON-ROTATING MALE THROUGH-ROD

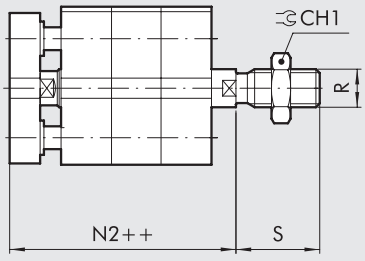

23A

Ø	A	B	B1	ØC	ØC1	CH	CH1	D	ØD7 H9	ØD8	ØE H9	F	G	H	H1	L	M1 x strokes < 5	M1 x strokes ≥ 5	N	N1	N2	O	ØO1	P	Q	R	S	T
12	29	18	9.9	6	5	5	10	30	6	5.5	6	4	38	8	30	18.5	5	8	42.5	48.5	53	M4	3.2	M3	M5	M6	16	2
16	29	18	9.9	8	5	7	13	30	8	7	6	4	38	8	30	18.5	5	10	42.5	48.5	53	M4	3.2	M4	M5	M8	20	2
20	36.5	22	12	10	6	8	17	37.5	10	8.5	6	4	38	8	30	18.5	7	12	42.5	50.5	55	M5	4.2	M5	M5	M10x1.25	22	3.5
25	40.5	26	15.6	10	6	8	17	41.5	14	8.5	6	4	39.5	8	31.5	19	7	12	45	53	58.5	M5	4.2	M5	M5	M10x1.25	22	4

Ø	T3	T4	T5	ØU H9	ØV H8	Z	NORM
12	1	2	2	6	3	M3	-
16	0.5	2	2	8	3	M3	-
20	1.7	3.5	2	10	4	M4	UNITOP
25	2.2	4	2	14	5	M5	UNITOP

DIMENSIONS OF NON-ROTATING Ø 32 to 100

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE
* = SECTION WITH TOLERANCE
1 = SENSOR SLOT
7 = ONLY FOR Ø 63 TO Ø 100
8 = SLOT FOR DIN 7984 SCREWS

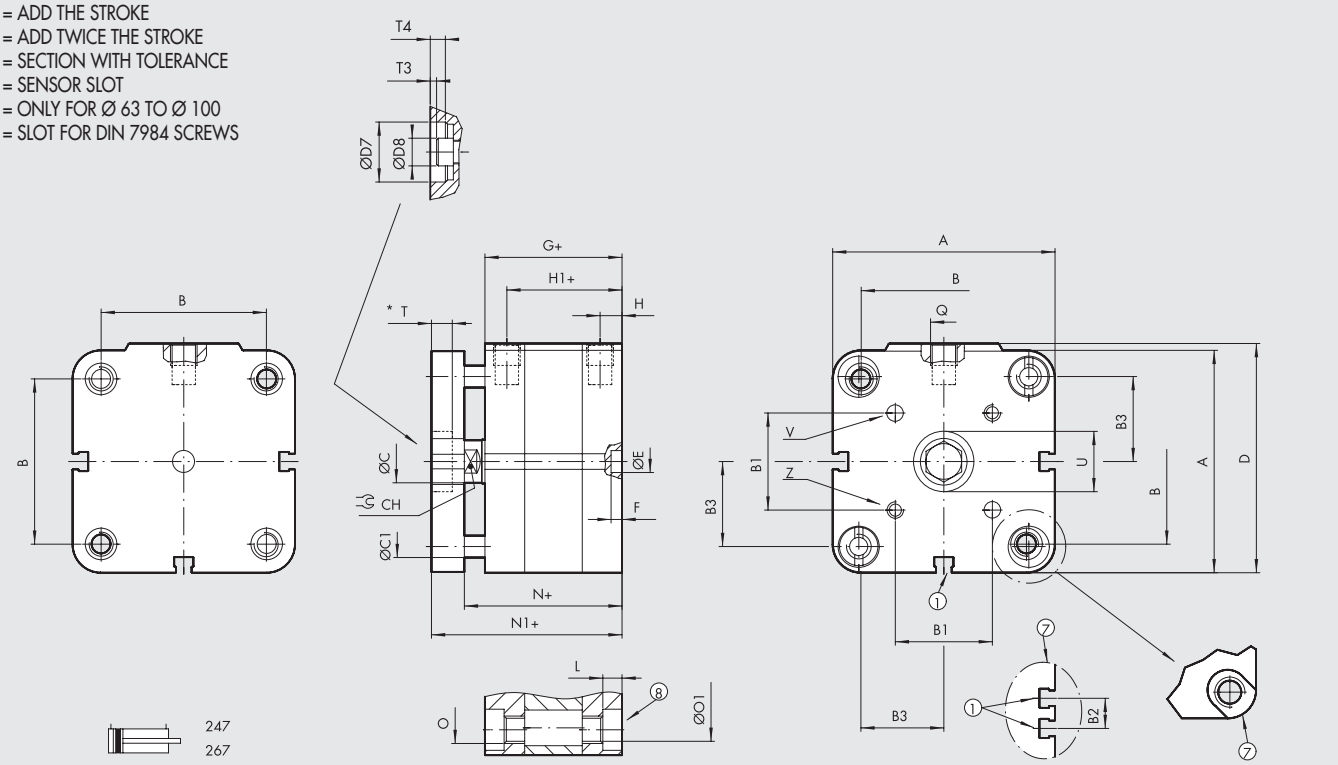

NON-ROTATING FEMALE THROUGH-ROD

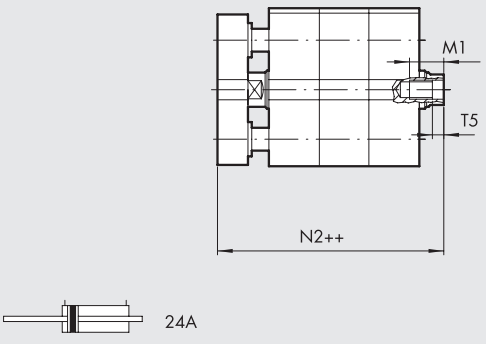

NON-ROTATING MALE THROUGH-ROD

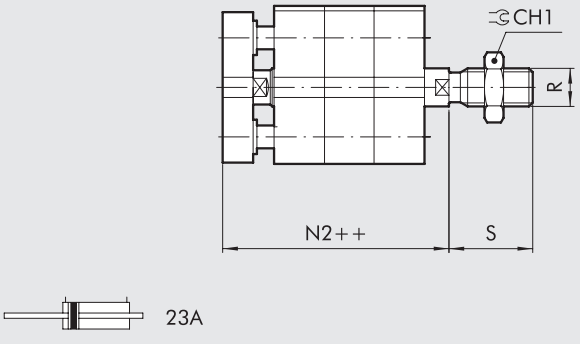

Ø	A	B ISO	B UNITOP	B1	B2	B3	ØC	ØC1	CH	CH1	D	ØD7 H9	ØD8	ØE H9	F	G	H	H1	L
32	47	32.5 +0.1 -0.4	32 +0.4 -0.1	19.8	–	16.1	12	8	10	17	48.5	17	11.5	6	4	44.5	7.5	37	4
40	56	38	42	23.3	–	20	12	8	10	17	57.5	17	11.5	6	4	45.5	7.5	38	4.5
50	67	46.5	50	29.7	–	24	16	10	13	19	69	22	15	6	4	45.5	7.5	38	4.5
63	80	56.5	62	35.4	13	30	16	10	13	19	82	22	15	8	4	50	7.5	42.5	5.5
80	102	72	82	46	17	38.5	20	12	17	24	105	28	18.5	8	4	56	8.5	47.5	5.5
100	123	89	103	56.6	21	48	25	12	22	30	126	30	21	8	4	66.5	10.5	56	5.5

Ø	M1 x strokes < 5	M1 x strokes ≥ 5	N	N1	N2	O ISO	O UNITOP	ØO1 ISO	ØO1 UNITOP	P	Q	R	S	T	T3	T4	T5	ØU H9	ØV H8	Z
32	9	14	50.5	60.5	66.5	M6	M6	5.2	5.2	M6	G1/8	M10x1.25	22	4.5	1	4.5	2.5	17	5	M5
40	9	14	52	62	68.5	M6	M6	5.2	5.2	M6	G1/8	M10x1.25	22	4.5	1	4.5	2.5	17	5	M5
50	11	16	53	65	72.5	M8	M8	6.2	6.2	M8	G1/8	M12x1.25	24	6	1	6	3.5	22	6	M6
63	11	16	57.5	69.5	77	M8	M10	6.2	8.5	M8	G1/8	M12x1.25	24	6	1	6	3.5	22	6	M6
80	15	20	64	78	86	M10	M10	8.5	8.5	M10	G1/8	M16x1.5	32	8	1	8	4	28	8	M8
100	19	24	76.5	90.5	100.5	M10	M10	8.5	8.5	M12	G1/4	M20x1.5	40	9	-	8.5	5	30	10	M10

METAL WORK PNEUMATIC

DIMENSIONS OF THROUGH-ROD Ø 12 to 25

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE
1 = SENSOR SLOT

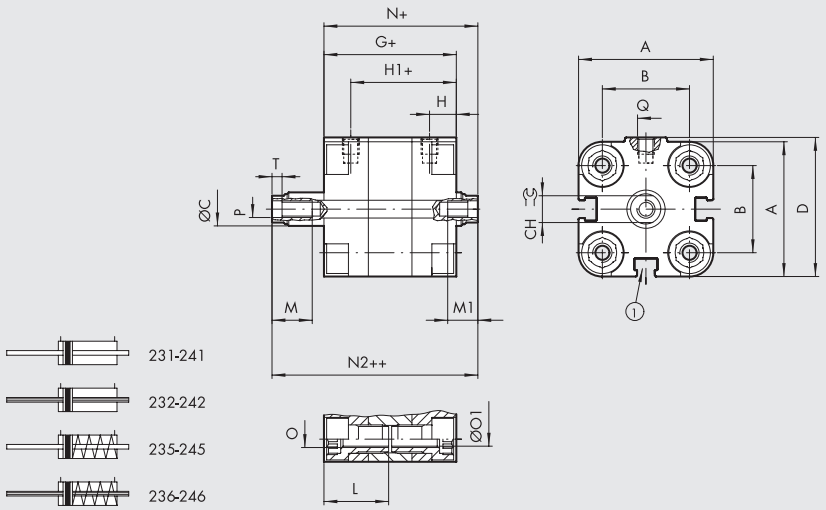

SE-DE MALE PERFORATED THROUGH-ROD



SE-DE MALE THROUGH-ROD



Ø	A	B	ØC	CH	CH1	D	G	H	H1	L	M	M1 x strokes < 5	M1 x strokes ≥ 5	N	N2	O	ØO1	P	P2	Q	R	S	T	NORM
12	29	18	6	5	10	30	38	8	30	18.5	8	5	8	42.5	47	M4	3.2	M3	–	M5	M6	16	2	-
16	29	18	8	7	13	30	38	8	30	18.5	10	5	10	42.5	47	M4	3.2	M4	–	M5	M8	20	2	-
20	36.5	22	10	8	17	37.5	38	8	30	18.5	12	7	12	42.5	47	M5	4.2	M5	1.5	M5	M10x1.25	22	2	UNITOP
25	40.5	26	10	8	17	41.5	39.5	8	31.5	19	12	7	12	45	50.5	M5	4.2	M5	1.5	M5	M10x1.25	22	2	UNITOP

DIMENSIONS OF THROUGH-ROD Ø 32 to 100

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

1 = SENSOR SLOT
7 = ONLY FOR Ø 63 TO Ø 100
8 = SLOT FOR DIN 7984 SCREWS

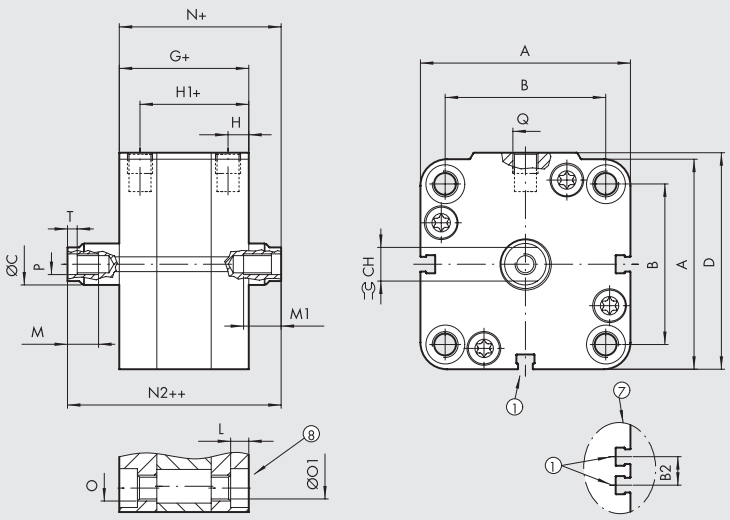

SE-DE MALE PERFORATED THROUGH-ROD



SE-DE MALE THROUGH-ROD





Ø	A	B ISO	B UNITOP	B2	ØC	CH	CH1	D	G	H	H1	L	M	M1 x strokes < 5	M1 x strokes ≥ 5	N	N2	O ISO	O UNITOP	ØO1 ISO	ØO1 UNITOP	P	P1	P2	Q	R	S	T
32	47	$32.5^{+0.1}_{-0.4}$	$32^{+0.4}_{-0.1}$	–	12	10	17	48.5	44.5	7.5	37	4	14	9	14	50.5	56.5	M6	M6	5.2	5.2	M6	–	2.5	G1/8	M10x1.25	22	2.5
40	56	38	42	–	12	10	17	57.5	45.5	7.5	38	4.5	14	9	14	52	58.5	M6	M6	5.2	5.2	M6	–	2.5	G1/8	M10x1.25	22	2.5
50	67	46.5	50	–	16	13	19	69	45.5	7.5	38	4.5	16	11	16	53	60.5	M8	M8	6.2	6.2	M8	–	4	G1/8	M12x1.25	24	3.5
63	80	56.5	62	13	16	13	19	82	50	7.5	42	5.5	16	11	16	57.5	65	M8	M10	6.2	8.5	M8	–	4	G1/8	M12x1.25	24	3.5
80	102	72	82	17	20	17	24	105	56	8.5	47.5	5.5	20	15	20	64	72	M10	M10	8.5	8.5	M10	1/8	5	G1/8	M16x1.5	32	4
100	123	89	103	21	25	22	30	126	66.5	10.5	56	5.5	24	19	24	76.5	86.5	M10	M10	8.5	8.5	M12	1/4	6	G1/4	M20x1.5	40	5

DIMENSIONS OF TANDEM Ø 20 to 25 - 4-STAGES

++ = ADD TWICE THE STROKE
+++ = ADD THREE TIMES THE STROKE
++++ = ADD FOUR TIMES THE STROKE

1 = SENSOR SLOT
2 = CYLINDERS OUT
5 = CYLINDERS IN

MALE PISTON ROD



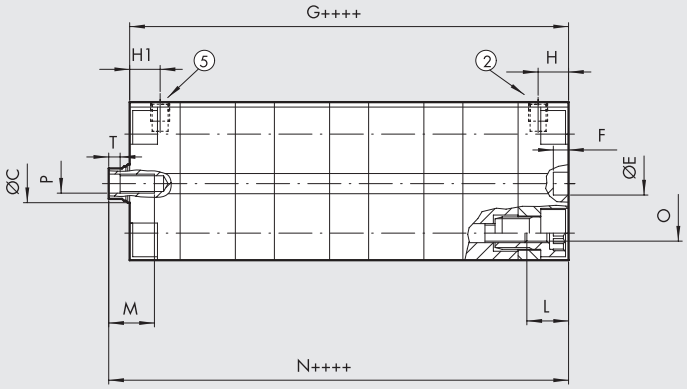





230-240

TANDEM 3 STAGES

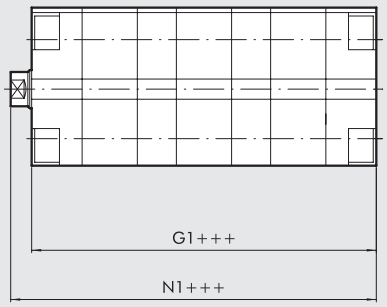

230-240

TANDEM 2 STAGES





230-240

Ø	A	B	ØC	CH	CH1	D	ØE H9	F	G	G1	G2	H	H1	L	M	N	N1	N2	O	P	Q	R	S	T	NORM
20	36.5	22	10	8	17	37.5	6	4	114.5	89	63.5	8	8	10	12	119	93.5	68	M5	M5	M5	M10x1.25	22	2	UNITOP
25	40.5	26	10	8	17	41.5	6	4	118	92	66	8	8	10	12	123.5	97.5	71.5	M5	M5	M5	M10x1.25	22	2	UNITOP

METAL WORK PNEUMATIC

DIMENSIONS OF TANDEM Ø 32 to 100 - 4-STAGES

++ = ADD TWICE THE STROKE
+++ = ADD THREE TIMES THE STROKE
++++ = ADD FOUR TIMES THE STROKE

2 = CYLINDERS OUT FOR Ø 32 to 63
5 = CYLINDERS IN FOR Ø 32 to 63
6 = CYLINDERS IN FOR Ø 80; 100
9 = CYLINDERS OUT FOR Ø 80; 100

1 = SENSOR SLOT
7 = ONLY FOR Ø 63 to 100
8 = SLOT FOR DIN 7984 SCREWS

MALE PISTON ROD



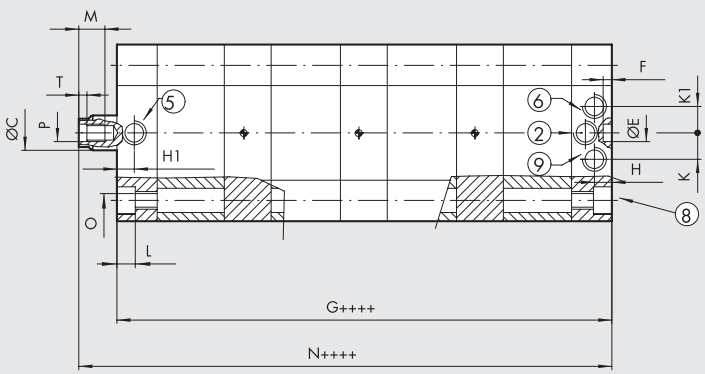

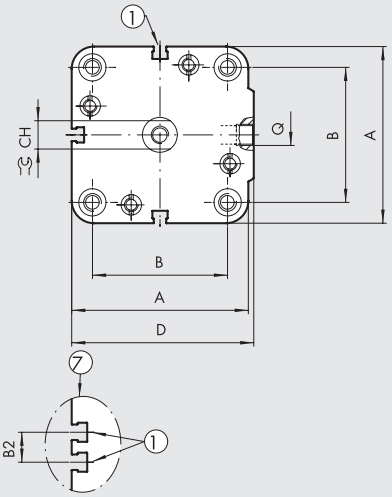

230-240
250-260

TANDEM 3-STAGES

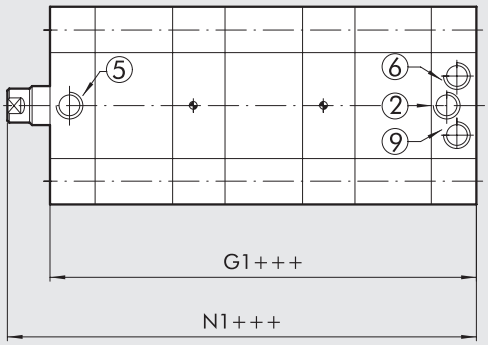

230-240
250-260

TANDEM 2-STAGES



230-240
250-260

Ø	A	B ISO	B UNITOP	B2	ØC	CH	CH1	D	ØE H9	F	G	G1	G2	H	H1	K	K1
32	47	32.5 $^{+0.1}_{-0.4}$	32 $^{+0.4}_{-0.1}$	–	12	10	17	48.5	6	4	154	117.5	81	7.5	7.5	–	–
40	56	38	42	–	12	10	17	57.5	6	4	162.5	123.5	84.5	7.5	7.5	–	–
50	67	46.5	50	–	16	13	19	69	6	4	163.5	124	85	7.5	7.5	–	–
63	80	56.5	62	13	16	13	19	82	8	4	182	138	94	7.5	7.5	–	–
80	102	72	82	17	20	17	24	105	8	4	204.5	155	105.5	8.5	–	10.5	10.5
100	123	89	103	21	25	22	30	126	8	4	243	184	125.5	10.5	–	14.5	14.5

Ø	L	M	N	N1	N2	O ISO	O UNITOP	P	Q	R	S	T
32	4	14	160	123.5	87	M6	M6	M6	G1/8	M10x1.25	22	2.5
40	4.5	14	169	130	91	M6	M6	M6	G1/8	M10x1.25	22	2.5
50	4.5	16	171	131.5	92.5	M8	M8	M8	G1/8	M12x1.25	24	3.5
63	5.5	16	189.5	145.5	101.5	M8	M10	M8	G1/8	M12x1.25	24	3.5
80	5.5	20	212.5	163	113.5	M10	M10	M10	G1/8	M16x1.5	32	4
100	5.5	24	253	194	135.5	M10	M10	M12	G1/4	M20x1.5	40	5

DIMENSIONS OF MULTI-POSITION Ø 12 to 25 - 3-STAGES

1 = SENSOR SLOT
2 = CYLINDER 1 OUT
3 = CYLINDER 2 OUT
4 = CYLINDER 3 OUT
5 = CYLINDERS 1-2-3 IN

X1 = CYLINDER 1 STROKE
X2 = CYLINDER 2 STROKE
X3 = CYLINDER 3 STROKE

MALE PISTON ROD



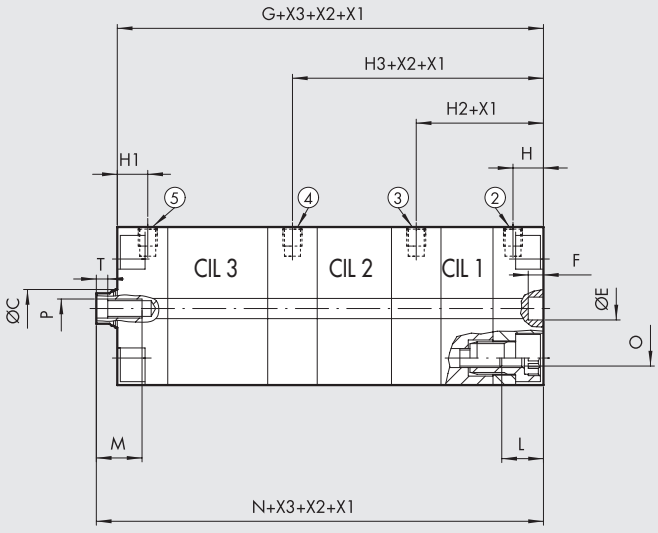





230-240

MULTI-POSITION 2-STAGES

2 = CYLINDER 1 OUT
3 = CYLINDER 2 OUT
5 = CYLINDERS 1-2 IN

X1 = CYLINDER 1 STROKE
X2 = CYLINDER 2 STROKE

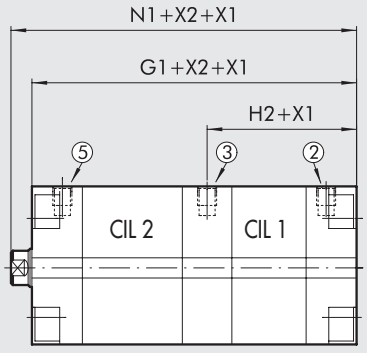

230-240

Ø	A	B	ØC	CH	CH1	D	ØE H9	F	G	G1	H	H1	H2	H3	L	M	N	N1	O	P	Q	R	S	T	NORM
12	29	18	6	5	10	30	6	4	89	63.5	8	8	33.5	59	10	8	93.5	68	M4	M3	M5	M6	16	2	-
16	29	18	8	7	13	30	6	4	89	63.5	8	8	33.5	59	10	10	93.5	68	M4	M4	M5	M8	20	2	-
20	36.5	22	10	8	17	37.5	6	4	89	63.5	8	8	33.5	59	10	12	93.5	68	M5	M5	M5	M10x1.25	22	2	UNITOP
25	40.5	26	10	8	17	41.5	6	4	92	66	8	8	34	60	10	12	97.5	71.5	M5	M5	M5	M10x1.25	22	2	UNITOP

METAL WORK PNEUMATIC

DIMENSIONS OF MULTI-POSITION Ø 32 to 100 - 3-STAGES

1 = SENSOR SLOT
2 = CYLINDER 1 OUT FOR Ø 32 to 63
3 = CYLINDER 2 OUT FOR Ø 32 to 100
4 = CYLINDER 3 OUT FOR Ø 32 to 100
5 = CYLINDER 1-2-3 IN FOR Ø 32 to 63
6 = CYLINDER 1-2-3 IN FOR Ø 80 to 100
7 = ONLY FOR Ø 63 to 100
8 = SLOT FOR DIN 7984 SCREWS
9 = CYLINDER 1 OUT FOR Ø 80 to 100

X1 = CYLINDER 1 STROKE
X2 = CYLINDER 2 STROKE
X3 = CYLINDER 3 STROKE

MALE PISTON ROD



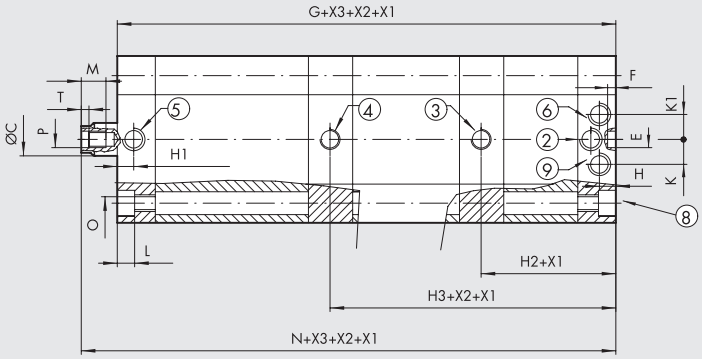





230-240
250-260

MULTI-POSITION 2-STAGES

2 = CYLINDER 1 OUT FOR Ø 32 to 63
3 = CYLINDER 2 OUT FOR Ø 32 to 100
5 = CYLINDER 1-2 IN FOR Ø 32 to 63
6 = CYLINDER 1-2 IN FOR Ø 80 to 100
9 = CYLINDER 1 OUT FOR Ø 80 to 100

X1 = CYLINDER 1 STROKE
X2 = CYLINDER 2 STROKE

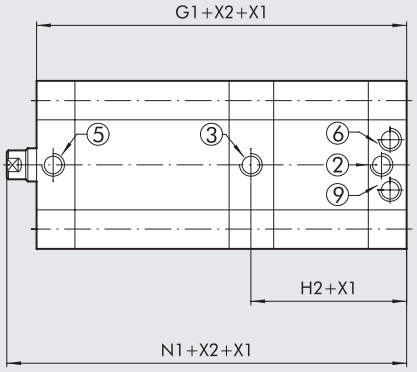

230-240
250-260

Ø	A	B ISO	B UNITOP	B2	ØC	CH	CH1	D	ØE H9	F	G	G1	H	H1	H2	H3
32	47	32.5 $^{+0.1}_{-0.4}$	32 $^{+0.4}_{-0.1}$	–	12	10	17	48.5	6	4	117.5	81	7.5	7.5	44	80.5
40	56	38	42	–	12	10	17	57.5	6	4	123.5	84.5	7.5	7.5	46.5	85.5
50	67	46.5	50	–	16	13	19	69	6	4	124	85	7.5	7.5	47	86
63	80	56.5	62	13	16	13	19	82	8	4	138	94	7.5	7.5	51.5	95.5
80	102	72	82	17	20	17	24	105	8	4	155	105.5	8.5	–	58	107.5
100	123	89	103	21	25	22	30	126	8	4	184	125.5	10.5	–	69.3	128

Ø	K	K1	L	M	N	N1	O ISO	O UNITOP	P	Q	R	S	T
32	–	–	4	14	123.5	87	M6	M6	M6	G1/8	M10x1.25	22	2.5
40	–	–	4.5	14	130	91	M6	M6	M6	G1/8	M10x1.25	22	2.5
50	–	–	4.5	16	131.5	92.5	M8	M8	M8	G1/8	M12x1.25	24	3.5
63	–	–	5.5	16	145.5	101.5	M8	M10	M8	G1/8	M12x1.25	24	3.5
80	10.5	10.5	5.5	20	163	113.5	M10	M10	M10	G1/8	M16x1.5	32	4
100	14.5	14.5	5.5	24	194	135.5	M10	M10	M12	G1/4	M20x1.5	40	5

FUNCTIONAL DIAGRAMS

MULTI-POSITION



1 = STAGE 1
2 = STAGE 2
3 = STAGE 3

TANDEM

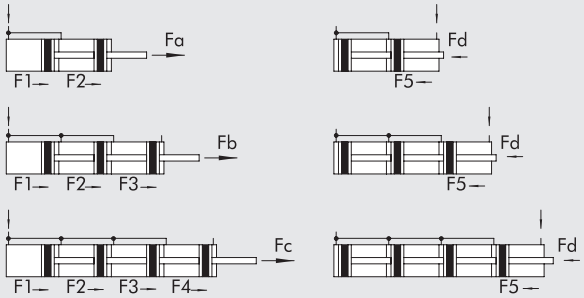

LEGENDA

P = Stage 1 stroke
R = Stage 2 stroke
T = Stage 3 stroke

Fa = F1+F2 [N]
Fb = F1+F2+F3 [N]
Fc = F1+F2+F3+F4 [N]
Fd = F5 [N]

KEY TO CODE

CYL	23	1	0	25	O	050	X	P
	TYPE			**BORE**		**STROKE ****	**MATERIAL**	**GASKETS**
	23 Compact cylinder centre distances to UNITOP male piston rod **24** Compact cylinder centre distances to UNITOP female piston rod ■ **25** Compact cylinder centre distances to ISO male piston rod ■ **26** Compact cylinder centre distances to ISO female piston rod	**0** Double-acting **1** Double-acting through-rod ✚ **2** Double-acting through-rod perforated ● **3** Single-acting retracting piston rod ● **4** Single-acting extended piston rod ● **5** Single-acting through-rod ●✚ **6** Single-acting through-rod piston rod perforated ▼ **7** Double-acting non-rotating **A** Double-acting through-rod non-rotating	**0** Magnetic □ **S** Non-magnetic ▲ **G** No stick-slip	12 16 20 25 32 40 50 63 80 ◆ 100	**0** Standard ✚ **A** 2-stage tandem ✚ **B** 3-stage tandem ✚ **C** 4-stage tandem **MULTI-POSITION** ●● **P** Stage 1 ●● **R** Stage 2 ●● **T** Stage 3		✱ **C** C45 piston rod chromium-plated ▷ **X** Stainless steel piston rod and nut ◁ **A** C45 chromed piston rod, aluminium piston ○ **Z** Stainless steel piston rod and nut aluminium piston	**P** Polyurethane gaskets ▶✚ **V** FKM/FPM gaskets

** For the maximum suppliabe stroke, see page **A1**.113

◆ In the code of cylinder with letter in fourth position Ø 100 becomes A1
■ Codes only for cylinders Ø 32 to100
● Can also be used as double-acting with spring return
✚ Available from Ø 20
▼ For versions 24 and 26 only (female piston rod)
▲ For Ø 12 to 25 the standard version (0 or S) it's already No stick-slip
For Ø 20 to 100 version with gaskets in FKM / FPM (0 or S) is already "no sick slip"
For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only
▶ Only for standard double acting and standard through rod double acting version (for Ø20 and Ø25 only "non-magnetic" version provided)
□ Compulsory for Ø 20 and Ø 25 version Z
✱ Only for Ø 32 to 100 P version (Polyurethane gaskets)
▷ Only for Ø 12 to 100 P version (Polyurethane gaskets)
◁ Only for Ø 32 to 100 V version (FKM/FPM gaskets)
○ Only for Ø 20 to 100 V version (FKM/FPM gaskets)

●● The ordering codes for a Multi-position cylinder is a combination of several codes, each describing a stage.

Coding example for a UNITOP multiposition cylinder
2 stages Ø 20 strokes 40 + 10 (total stroke 50 mm) male rod:
1° STADIO (P) : 230020P040XP +
2° STADIO (R): 230020R050XP

Coding example for a UNITOP multiposition cylinder
3 stages Ø 25 strokes 15 + 30 + 40 (total stroke 85 mm) male rod:
1° STADIO (P): 230025P015XP +
2° STADIO (R): 230025R045XP +
3° STADIO (T): 230025T085XP

COMPACT CYLINDER SERIES CMPC TWO-FLAT

METAL WORK PNEUMATIC

This version is used to keep at an angle the objects fixed onto the piston rod and to apply torques within the specified limits.
The piston rod in Two-Flat cylinders has two opposing longitudinal surfaces and is made entirely of stainless steel. The front head of the cylinder includes a sintered bronze bush that engages the piston rod and prevents it from rotating. A special polyurethane gasket guarantees air-tightness and dirt removal.
This technical solution is more airtight and reliable than square or hexagonal piston rods.
These compact cylinders come in the following versions:

- with or without a magnet
- dual-acting, single piston rod
- dual-acting, through piston rod – one piston rod is Two-Flat, and the other is cylindrical
- fixing centre distances compatible with ISO 15552 or with French standard NFE 49-004-1 and 2 (UNITOP).

The special profile and the fact that the external heads are screwed onto the liner give an excellent guide. Numerous fixing options are available thanks to wide range of anchor points. Retractable magnetic limit switches can be mounted in slots in the cylinder to measure the position.

TECHNICAL DATA			Ø32	Ø40	Ø50	Ø63	Ø80
Max operating pressure		bar	10				
		MPa	1				
		psi	145				
Temperature range	POLYURETHANE	°C	–10 to +80				
Design			With profile, heads with screws				
Fixing centre distances			ISO 15552 - VDMA 24562 o NFE 49-004-1 e 2 (UNITOP)				
Fluid			Unlubricated air. Lubrication, if used, must be continuous				
Maximun stroke ✚		mm	300		400		500
Versions			Double-acting, Double-acting Through-rod				
Sensor magnet			Available magnetic and non-magnetic versions.				
Inrush pressure		bar	0.8	0.6			
Max torque on piston rod		Nm	0.2		0.4		1
Maximum rotation on the rod		degrees	1° 30°		1° 30°		1°
Weights			See cylinder "**General technical data**" at the beginning of the chapter				
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**				
			✚ Maximum recommended strokes. Higher values can create operating problems				

COMPONENTS Ø 12 to 25

① PISTON ROD: stainless steel, Two-Flat
② HEAD: extruded anodized aluminium alloy
③ BARREL: drawn anodized and calibrated aluminium alloy
④ PISTON GASKET: polyurethane
⑤ MAGNET: Ø 32 neodymium - Ø 40 to 100 plastoferrite
⑥ PISTON ROD GASKET TWO-FLAT: polyurethane
⑦ GUIDE BUSHING: steel strip with bronze
⑧ STATIC O-rings: NBR
⑨ SECURING SCREWS: zinc-plated steel

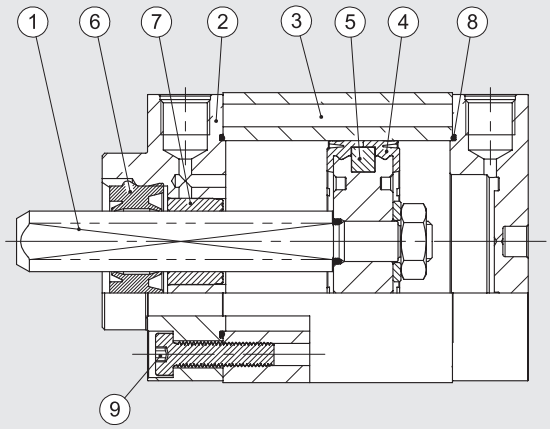

FIXING OPTIONS

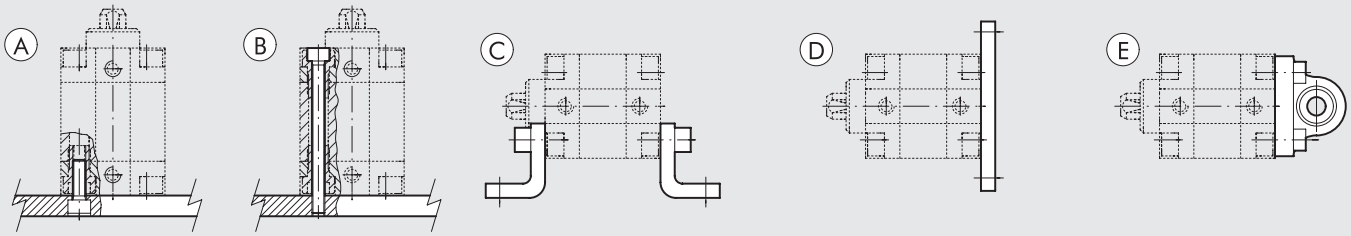

Ⓐ Fixing to structural work with a through screw, using the thread in the heads
Ⓑ Direct fixing from above using long through screws or tie rods. Non-magnetic stainless steel must be used (e.g. AISI 304)
Ⓒ Fixing with feet; the ordering code covers the supply of one foot and two screws for fixing to the cylinder.
Ⓓ Fixing with a flange mounted on the front or rear head; the ordering code covers the supply of a flange and four screws for fixing to the cylinder
Ⓔ Fixing with articulated hinge to compensate for slight system misalignment and turn freely
The ordering code covers the supply of a hinge and four screws for fixing to the cylinder

KEY TO CODE

CYL	2 3 TYPE	1	0	3 2 BORE	0	0 5 0 STROKE ✱	F MATERIAL	P GASKETS
	23 Compact cylinder centre distances to UNITOP male piston rod **24** Compact cylinder centre distances to UNITOP female piston rod **25** Compact cylinder centre distances to ISO male piston rod **26** Compact cylinder centre distances to ISO female piston rod	**0** Double-acting **1** Double-acting through-rod	**0** Magnetic **S** Non-magnetic ▲**G** No stick-slip	32 40 50 63 80	**0** Standard		**F** "Two-Flat" piston rod AISI 303 stainless steel	**P** Polyurethane gaskets

✱ For the maximum suppliable strokes, look at the technical data
▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only**

METAL WORK PNEUMATIC

DIMENSIONS OF DOUBLE-ACTING

+ = ADD THE STROKE
1 = SENSOR SLOT
7 = ONLY FOR Ø 63 to 100
8 = SEAT FOR DIN 7984 SCREWS

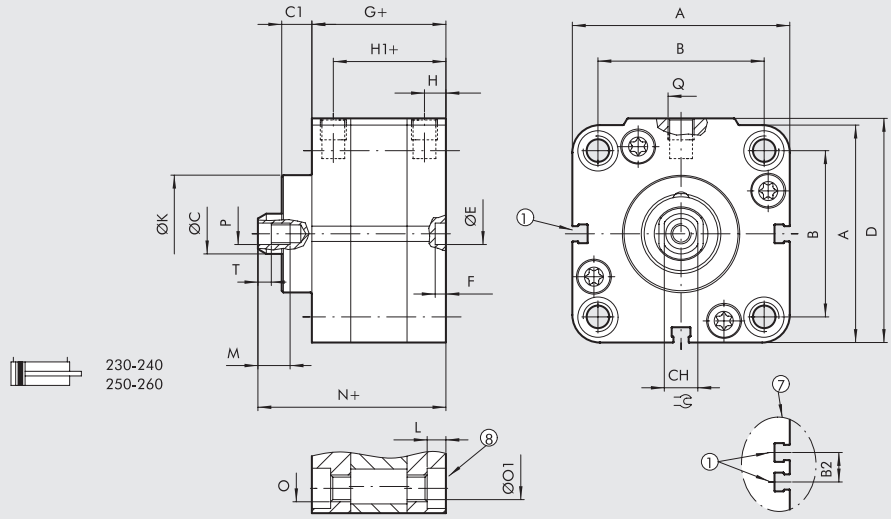

DE MALE PISTON ROD



Ø	A	B ISO	B UNITOP	B2	ØC	C1	CH	CH1	D	ØE H9	F	G	H	H1	ØK	L	M	N	O ISO	O UNITOP	ØO1 ISO	ØO1 UNITOP	P	Q	R	S	T
32	47	32.5 $^{+0.1}_{-0.4}$	32 $^{+0.4}_{-0.1}$	–	12	9	10	17	48.5	6	4	44.5	7.5	37	30	4	14	59.5	M6	M6	5.2	5.2	M6	G1/8	M10x1.25	22	2.5
40	56	38	42	–	12	9	10	17	57.5	6	4	45.5	7.5	38	35	4.5	14	61	M6	M6	5.2	5.2	M6	G1/8	M10x1.25	22	2.5
50	67	46.5	50	–	16	11.5	13	19	69	6	4	45.5	7.5	38	40	4.5	16	64.5	M8	M8	6.2	6.2	M8	G1/8	M12x1.25	24	3.5
63	80	56.5	62	13	16	11.5	13	19	82	8	4	50	7.5	42.5	45	5.5	16	69	M8	M10	6.2	8.5	M8	G1/8	M12x1.25	24	3.5
80	102	72	82	17	20	13	17	24	105	8	4	56	8.5	47.5	45	5.5	20	77	M10	M10	8.5	8.5	M10	G1/8	M16x1.5	32	4

DIMENSIONS OF THROUGH-ROD

+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

1 = SENSOR SLOT
7 = ONLY FOR Ø 63 TO Ø 80
8 = SLOT FOR DIN 7984 SCREWS

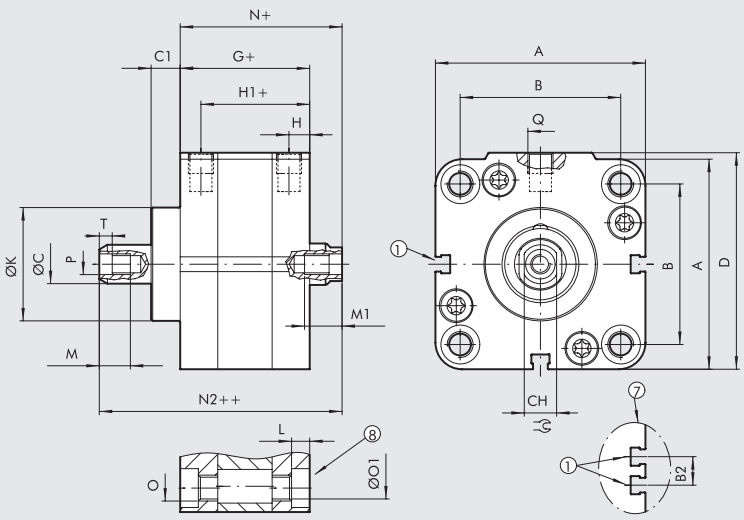

DE MALE PISTON ROD





Ø	A	B ISO	B UNITOP	B2	ØC	C1	CH	CH1	D	G	H	H1	ØK	L	M	M1 x strokes ≥ 5	M1 x strokes < 5	N	N2	O ISO	O UNITOP	ØO1 ISO	ØO1 UNITOP	P	Q	R	S	T
32	47	32.5 $^{+0.1}_{-0.4}$	32 $^{+0.4}_{-0.1}$	–	12	9	10	17	48.5	44.5	7.5	37	30	4	14	14	9	50.5	65.5	M6	M6	5.2	5.2	M6	G1/8	M10x1.25	22	2.5
40	56	38	42	–	12	9	10	17	57.5	45.5	7.5	38	35	4.5	14	14	9	52	67.5	M6	M6	5.2	5.2	M6	G1/8	M10x1.25	22	2.5
50	67	46.5	50	–	16	11.5	13	19	69	45.5	7.5	38	40	4.5	16	16	11	53	72	M8	M8	6.2	6.2	M8	G1/8	M12x1.25	24	3.5
63	80	56.5	62	13	16	11.5	13	19	82	50	7.5	42	45	5.5	16	16	11	57.5	76.5	M8	M10	6.2	8.5	M8	G1/8	M12x1.25	24	3.5
80	102	72	82	17	20	13	17	24	105	56	8.5	47.5	45	5.5	20	20	15	64	85	M10	M10	8.5	8.5	M10	G1/8	M16x1.5	32	4

COMPACT STOPPER CYLINDER

Compact stopper cylinders designed for stopping moving parts or chucks.

- With or without magnet execution
- Single-acting, oversize extended piston rod
- Can be also used as double-acting whith spring return
- Fixing centre distances to ISO 15552 for Ø 32, Ø 50, Ø 80 and French standard NFE 49-004-1 and 2 (UNITOP).

In the relevant cylinder slots, it is possible to mount retracting magnetic sensor.

TECHNICAL DATA		Ø20 Stroke 15	Ø32 Stroke 20	Ø50 Stroke 30	Ø80 Stroke 30	Ø80 Stroke 40
Max operating pressure	bar	10				
	MPa	1				
	psi	145				
Temperature range	°C	–10 to +80				
Design		With profile, heads with screws				
Fixing centre distances	ISO 15552	-	x	x	x	x
	NFE 49-004-1 e 2 (UNITOP)	x	x	x	x	x
Fluid		Unlubricated air. Lubrication, if used, must be continuous				
Versions		Single-acting extended rod, Can be also used as double-acting whith spring return				
Sensor magnet		Available magnetic and non-magnetic versions.				
Inrush pressure	bar	1.2	1		0.5	
Weights		See cylinder "**General technical data**" at the beginning of the chapter				
Notes		For correct operation, it is advisable to use 50 µm filtered air				

COMPONENTS Ø 20

① PISTON ROD: Stainless steel, thick chromed
② HEAD: extruded anodized aluminium alloy
③ BARREL: drawn anodized and calibrated aluminium alloy
④ PISTON GASKET: polyurethane
⑤ MAGNET: neodymium-plastic
⑥ PISTON ROD GASKET: polyurethane
⑦ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑧ STATIC O-RINGS: NBR
⑨ SECURING SCREWS: zinc-plated steel
⑩ RETURN SPRING: spring stainless steel
⑪ WHEEL: zinc-plated steel

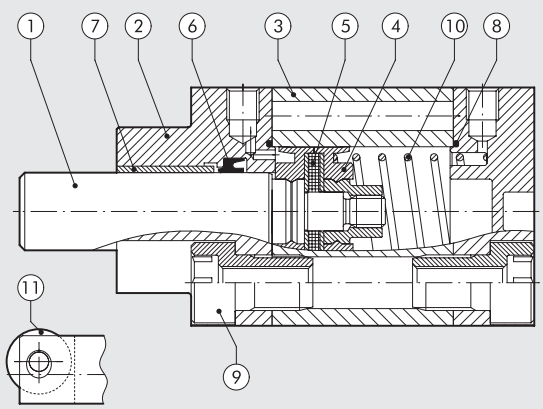

METAL WORK PNEUMATIC

COMPONENTS Ø 32, Ø 50, Ø 80

① PISTON ROD: Stainless steel, thick chromed
② HEAD: extruded anodized aluminium alloy
③ BARREL: drawn anodized and calibrated aluminium alloy
④ PISTON GASKET: polyurethane
⑤ MAGNET: Ø 32 neodymium-plastic - Ø 50 to 80 plastoferrite
⑥ PISTON ROD GASKET: polyurethane
⑦ GUIDE BUSHING: steel strip with bronze and PTFE insert.
⑧ STATIC O-rings: NBR
⑨ SECURING SCREWS: zinc-plated steel
⑩ RETURN SPRING: spring stainless steel
⑪ WHEEL: zinc-plated steel

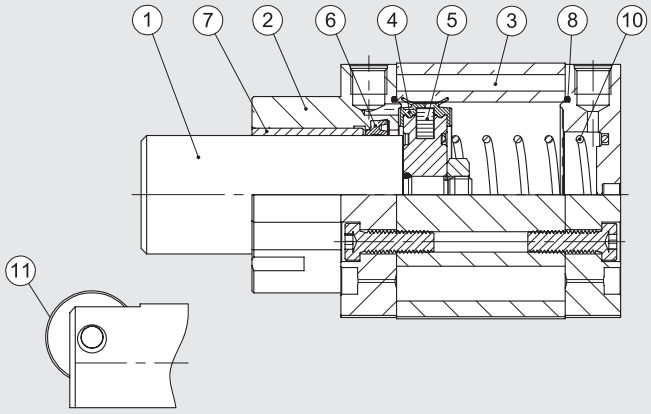

COMPACT STOPPER CYLINDER FIXING OPTIONS

Ⓐ Fixing with screws, using the thread in the rear heads
Ⓑ Direct fixing from above using long through screws or tie rods. Non-magnetic stainless steel must be used (e.g. AISI 304)
Ⓒ Fixing with screws, using the thread in the front heads.
Ⓓ Fixing using flange fixed onto the cylinder.

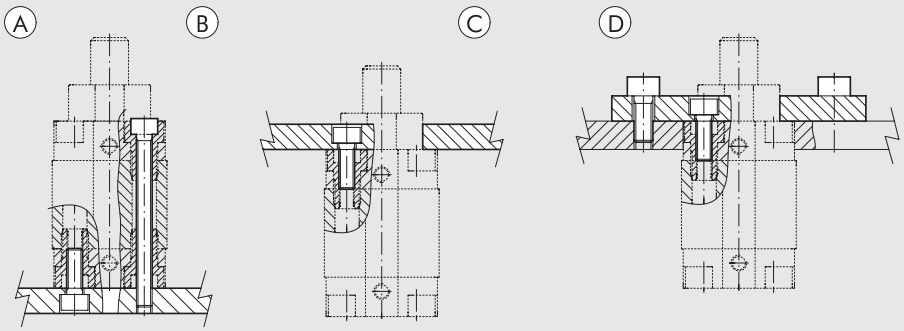

FORCE OF SPRINGS IN COMPACT STOPPER CYLINDERS (THEORETICAL)

Stroke bore	Ø 20 x 15	Ø 32 x 20	Ø 50 x 30	Ø 80 x 30	Ø 80 x 40
Min. load (N)	13.7	22.4	50.2	97.9	71.0
Max. load (N)	21.2	36.0	115.9	178.5	178.5

LOAD GRAPH

TRUNNION VERSION

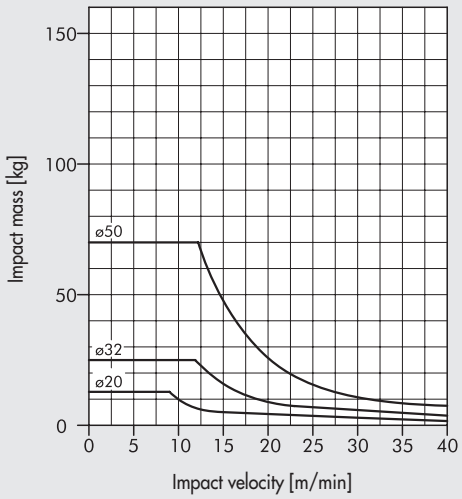

ROLLER VERSION

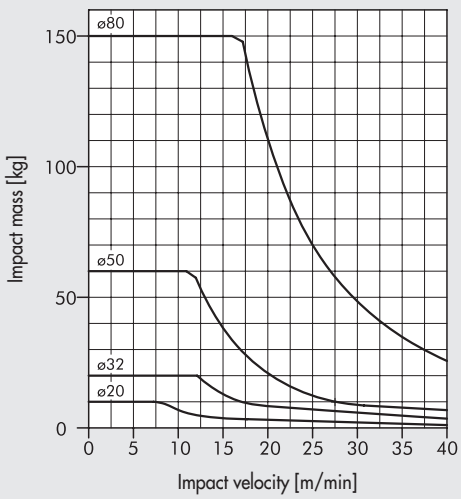

With stopper cylinders it is important to keep to the values shown in the graph to prevent early breakage of the mechanical parts.
The values shown are only valid with about 1 mm plastic deformation (stopper on chuck).

OPERATING DIAGRAMS

TRUNNION VERSION

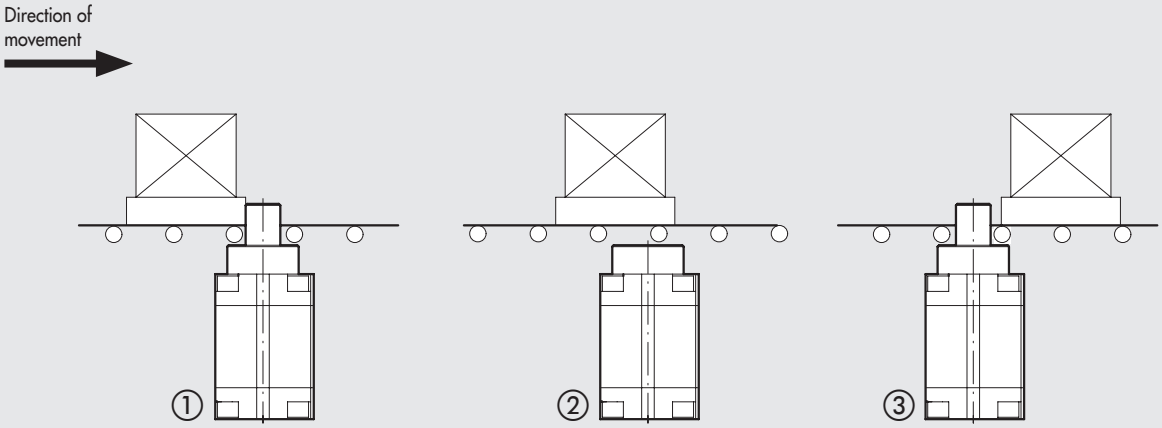

① Deceleration of the chuck as it comes into contact with the piston rod, with elastic deformation of about 1 mm.
② The cylinder is pressurized to release the chuck.
③ The pressure in the front chamber is maintained until the chuck has passed the stopper cylinder.
The piston rod extends due to the effect of the spring and any pressure in the opposite chamber.
The system is now ready to stop the next chuck.

ROLLER VERSION

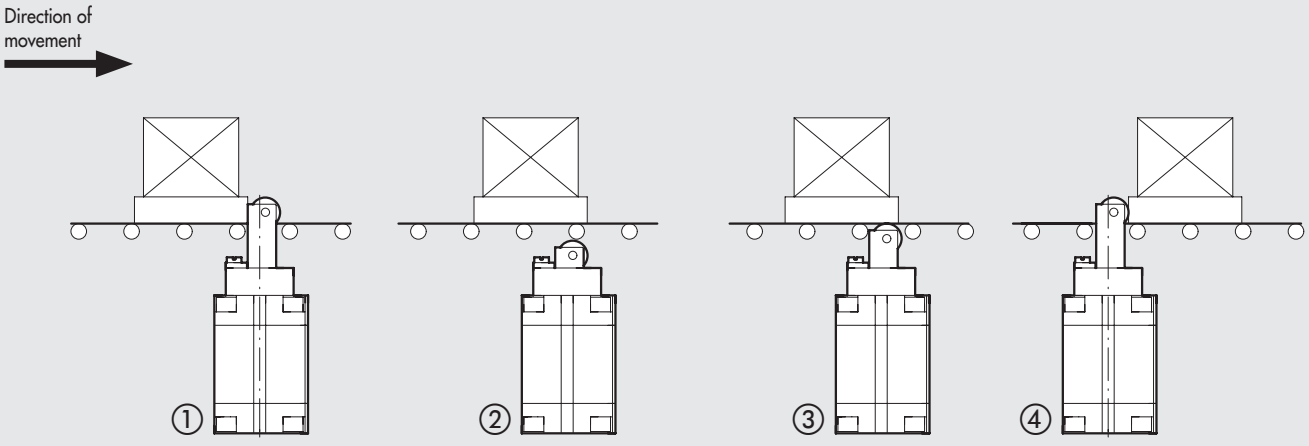

① Deceleration of the chuck as it comes into contact with the piston rod, with elastic deformation of about 1 mm.
② The cylinder is pressurized to release the chuck.
③ When the pressure in the front chamber drops, the piston rod extends due to the effect of the spring or any pressure until the wheel reaches the chuck and moves it on.
④ After the chuck has passed, the cylinder extends the piston rod fully. The system is now ready to stop the next chuck.

METAL WORK PNEUMATIC

Ø 20 STROKE 15 mm TRUNNION VERSION

1 = SENSOR SLOT

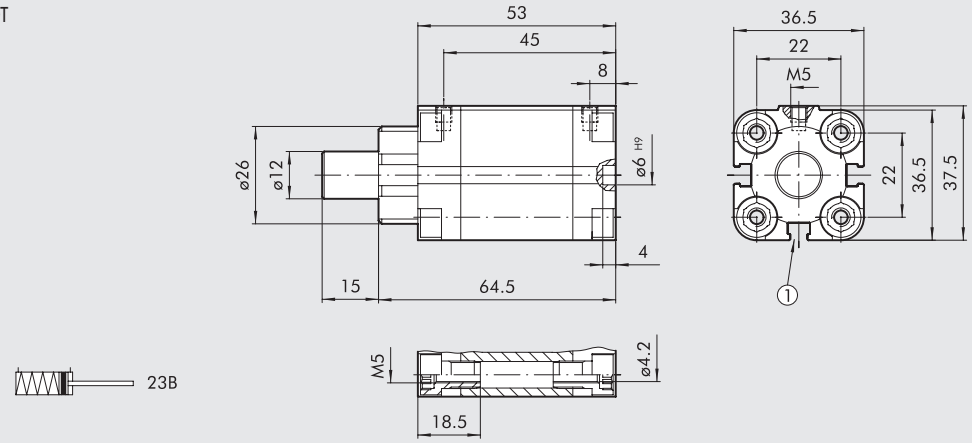

Code	Description
23B0200015XP	Compact stopper cylinder, trunnion Ø 20, stroke 15
23BS200015XP	Compact stopper cylinder, trunnion Ø 20, stroke 15 (non-magnetic version)

Ø 32 STROKE 20 mm; Ø 50 STROKE 30 mm TRUNNION VERSION

1 = SENSOR SLOT
8 = SEAT FOR DIN 7984 SCREWS

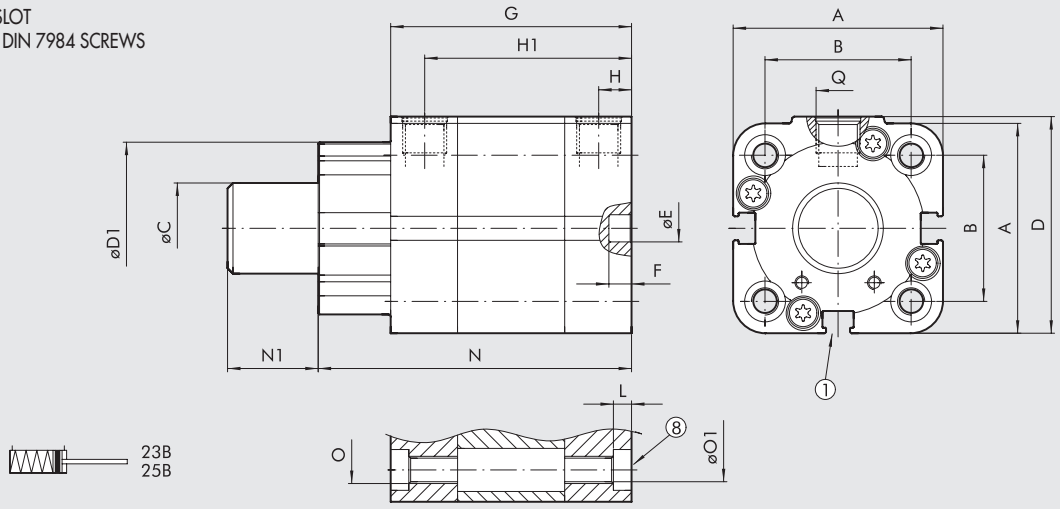

		B													O		ØO1		
Ø	**A**	**ISO**	**UNITOP**	**ØC**	**D**	**D1**	**ØE H9**	**F**	**G**	**H**	**H1**	**L**	**N**	**N1**	**ISO**	**UNITOP**	**ISO**	**UNITOP**	**Q**
32x20	47	32.5 $^{+0.1}_{-0.4}$	32 $^{+0.4}_{-0.1}$	20	48.5	38	6	4	64.5	7.5	57	4	80.5	20	M6	M6	5.2	5.2	G1/8
50x30	67	46.5	50	32	69	53	6	4	75.5	7.5	68	4.5	99.5	30	M8	M8	6.2	6.2	G1/8

Code	Description
23B0320020XP	Compact stopper cylinder, trunnion Ø 32, stroke 20 UNITOP
25B0320020XP	Compact stopper cylinder, trunnion Ø 32, stroke 20 ISO 15552
23BS320020XP	Compact stopper cylinder, trunnion Ø 32, stroke 20 UNITOP (non-magnetic version)
25BS320020XP	Compact stopper cylinder, trunnion Ø 32, stroke 20 ISO 15552 (non-magnetic version)
23B0500030XP	Compact stopper cylinder, trunnion Ø 50, stroke 30 UNITOP
25B0500030XP	Compact stopper cylinder, trunnion Ø 50, stroke 30 ISO 15552
23BS500030XP	Compact stopper cylinder, trunnion Ø 50, stroke 30 UNITOP (non-magnetic version)
25BS500030XP	Compact stopper cylinder, trunnion Ø 50, stroke 30 ISO 15552 (non-magnetic version)

Ø 20 STROKE 15 mm ROLLER VERSION

1 = SENSOR SLOT

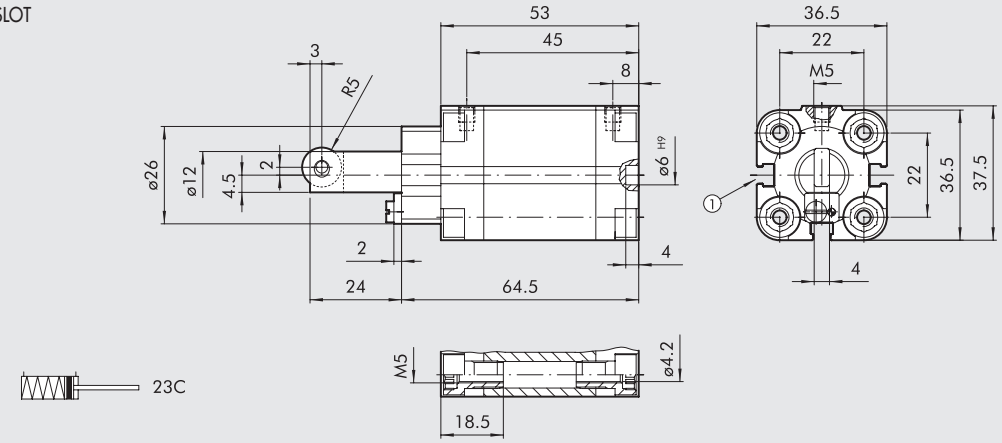

Code	Description
23C0200015XP	Compact stopper cylinder, roller Ø 20, stroke 15
23CS200015XP	Compact stopper cylinder, roller Ø 20, stroke 15 (non-magnetic version)

Ø 32 STROKE 20 mm; Ø 50 STROKE 30 mm; Ø 80 STROKE 30 AND 40 mm ROLLER VERSION

1 = SENSOR SLOT
7 = ONLY FOR Ø 80
8 = SEAT FOR DIN 7984 SCREWS

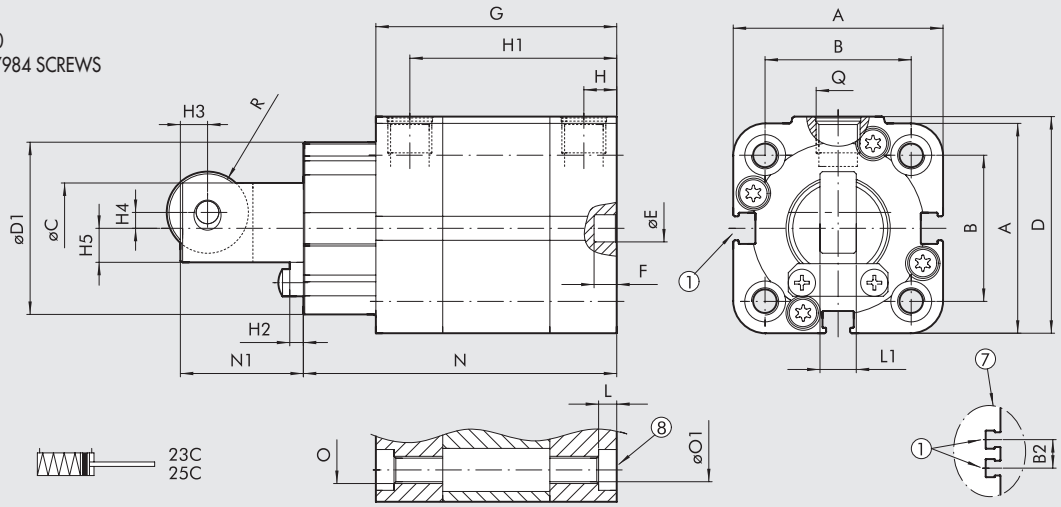

		B															O		ØO1							
Ø	**A**	**ISO**	**UNITOP**	**B2**	**ØC**	**D**	**D1**	**ØE H9**	**G**	**F**	**H**	**H1**	**H2**	**H3**	**H4**	**H5**	**ISO**	**UNITOP**	**ISO**	**UNITOP**	**L**	**L1**	**N**	**N1**	**Q**	**R**
32x20	47	32.5 $^{+0.1}_{-0.4}$	32 $^{+0.4}_{-0.1}$	-	20	48.5	38	6	64.5	4	7.5	57	3	6	3.5	7.5	M6	M6	5.2	5.2	4	8	80.5	38	G1/8	9
50x30	67	46.5	50	-	32	69	53	6	75.5	4	7.5	68	4	6	7	12	M8	M8	6.2	6.2	4.5	10	99.5	50.5	G1/8	12.5
80x30	102	72	82	17	50	105	76	8	126	4	8.5	117.5	8	10	11	18	M10	M10	8.5	8.5	5.5	18	141	63	G1/8	18
80x40	102	72	82	17	50	105	76	8	136	4	8.5	127.5	8	10	11	18	M10	M10	8.5	8.5	5.5	18	151	73	G1/8	18

Code	Description
23C0320020XP	Compact stopper cylinder, roller Ø 32, stroke 20 UNITOP
25C0320020XP	Compact stopper cylinder, roller Ø 32, stroke 20 ISO 15552
23CS320020XP	Compact stopper cylinder, roller Ø 32, stroke 20 UNITOP (non-magnetic version)
25CS320020XP	Compact stopper cylinder, roller Ø 32, stroke 20 ISO 15552 (non-magnetic version)
23C0500030XP	Compact stopper cylinder, roller Ø 50, stroke 30 UNITOP
25C0500030XP	Compact stopper cylinder, roller Ø 50, stroke 30 ISO 15552
23CS500030XP	Compact stopper cylinder, roller Ø 50, stroke 30 UNITOP (non-magnetic version)
25CS500030XP	Compact stopper cylinder, roller Ø 50, stroke 30 ISO 15552 (non-magnetic version)
23C0800030XP	Compact stopper cylinder, roller Ø 80, stroke 30 UNITOP
25C0800030XP	Compact stopper cylinder, roller Ø 80, stroke 30 ISO 15552
23CS800030XP	Compact stopper cylinder, roller Ø 80, stroke 30 UNITOP (non-magnetic version)
25CS800030XP	Compact stopper cylinder, roller Ø 80, stroke 30 ISO 15552 (non-magnetic version)
23C0800040XP	Compact stopper cylinder, roller Ø 80, stroke 40 UNITOP
25C0800040XP	Compact stopper cylinder, roller Ø 80, stroke 40 ISO 15552
23CS800040XP	Compact stopper cylinder, roller Ø 80, stroke 40 UNITOP (non-magnetic version)
25CS800040XP	Compact stopper cylinder, roller Ø 80, stroke 40 ISO 15552 (non-magnetic version)

ACCESSORIES FOR STOPPER CYLINDER

FLANGE Ø 32, Ø 50, Ø 80

+ = ADD THE STROKE

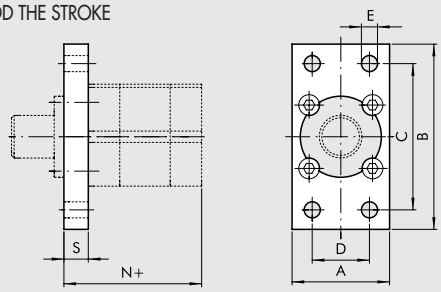

UNITOP

Code	Ø	A	B	C	D	E	N	S	Weight [g]
W0950326302	32	50	80	64	32	7	54.5	10	210
W0950506302	50	68	110	90	45	9	57.5	12	502
W0950806302	80	107	160	135	63	12	111	15	1575

ISO

Code	Ø	A	B	C	D	E	N	S	Weight [g]
W0950326302	32	50	80	64	32	7	54.5	10	210
W0950506312	50	65	110	90	45	9	57.5	12	447
W0950806312	80	95	153	126	63	12	112	16	1190

Note: Supplied with 4 screws.

NOTES

COMPACT CYLINDER WITH INTEGRATED VALVE, SERIES CCIV

How many times would we have liked to have a pneumatic actuator complete with a control system, so that we would simply need to connect a compressed air hose and a power cable to control the movement of the piston rod?
CCIV is the simple, direct answer to this requirement.
In order to control a standard cylinder, you need a solenoid valve, the required space and a system to fix the solenoid valve, 3 or 5 fittings, 3 pipes, flow regulators, if needed, silencers on the exhaust side; this means 12-14 component parts to be handled and assembled. With CCIV a code is enough to obtain a fully assembled and tested product, in line with the "plug & play" philosophy.
They are double-acting cylinders derivatives from the CMPC series, with a low power consumption solenoid valve. The solenoid valve is the 5/2 monostable type, so the piston rod comes out when it is powered on, and retracts when it is powered off.
You can choose whether to have a product ready assembled with automatic fitting on the inlet port and fixed or adjustable silencers on the exhaust ports or simply with threaded connections of the inlet and outlet ports.

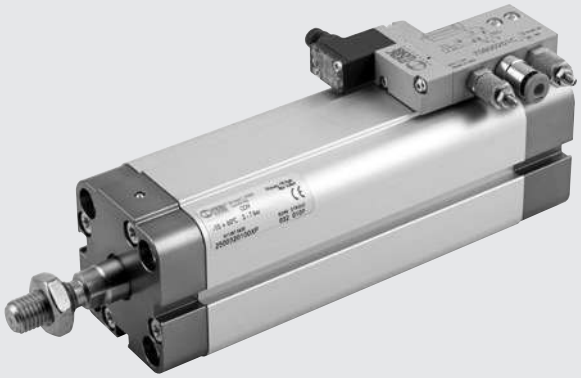

TECHNICAL DATA		Ø 20	Ø 25	Ø 32	Ø 40
Pressure range	bar	3 to 7			
	MPa	0.3 to 0.7			
	psi	44 to 102			
Temperature range	°C	-10 to +50			
	°F	14 to 122			
Fluid		Unlubricated air; lubrication, if used, must be continuous			
Versions		Double-acting cylinder			
		Monostable 5/2 solenoid valve; when operated, the piston rod comes out. Plug-in or M8 connector			
		With M7 threaded ports or a solenoid valve complete with automatic connector and fixed or adjustable silencers, on the exhaust ports			
Magnet for sensors		YES			
Inrush pressure	bar	0.6	0.6	0.6	0.4
Standard strokes	mm	from 5 to 50	from 5 to 50	from 5 to 80	from 5 to 80
Maximum recommended strokes	mm	200	200	300	300
Maximum speed at 6 bar OUT/IN	m/s	1.4 / 1.2	1 / 0.8	0.6 / 0.5	0.4 / 0.4
Forces generated at 6 bar thrust/retraction		See cylinder "**General technical data**" at the beginning of the chapter			
Voltage range		24VDC ±10%			
Power	W	0.9			
Solenoid rating		100% ED			
Manual operator		Monostable			
Insulation class		F155			
Degree of protection		With plug-in connector: IP51; with M8 connector: IP65			
Installation		In any position			
Weights	stroke = 0 [g]	220	250	295	420
	each mm stroke [g]	2.35	2.73	3.17	4.41
Air quality required		ISO 8573-1 class 4-7-3			
Notes		**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air**			

COMPONENTS

① PISTON ROD: C45 steel or stainless steel, thick chromed
② HEAD: extruded anodized aluminium alloy
③ BARREL: drawn anodized and calibrated aluminium alloy
④ PISTON GASKET: polyurethane
⑤ MAGNET: Ø 20 to 32 neodymium-plastic; Ø 40 plastoferrite
⑥ PISTON ROD GASKET: polyurethane
⑦ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑧ STATIC O-RINGS: NBR
⑨ SECURING SCREWS: zinc-plated steel
⑩ VALVE: painted aluminium + technopolymer

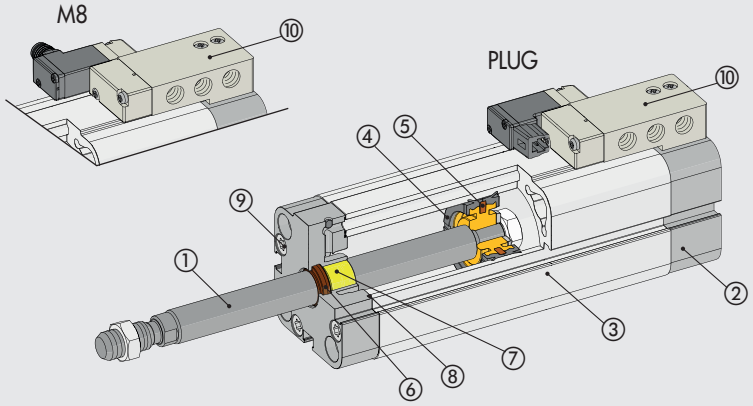

METAL WORK PNEUMATIC

THE ADVANTAGES OF INTEGRATION

TRADITIONAL SOLUTION

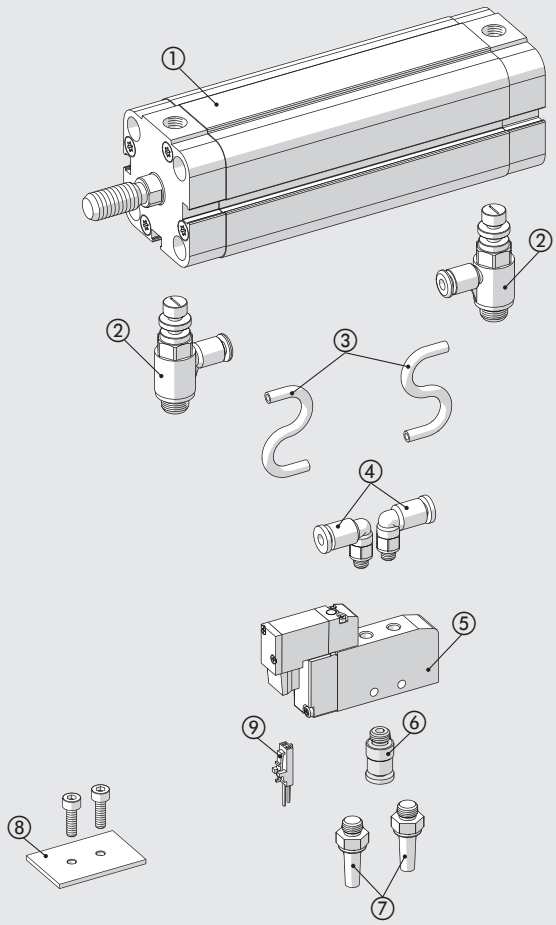

CCIV

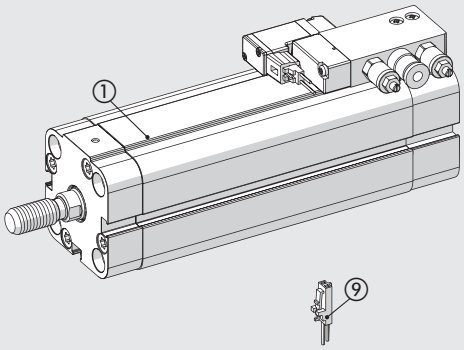

- One code only instead of 10-12 codes when ordering
- Savings in labour costs for assembly operations

① CYLINDER
② FITTINGS OR FLOW REGULATORS
③ PIPES
④ DELIVERY FITTINGS
⑤ SOLENOID VALVE
⑥ INLET FITTING
⑦ SILENCERS ON THE EXHAUST SIDE
⑧ VALVE-FIXING SYSTEM
⑨ ELECTRICAL CONNECTOR

ENERGY SAVING

Reduced air consumption as the result of the elimination of pipes between valves and cylinder.
The sample diagram shows the air savings as a percentage for a Ø 25 cylinder, depending on the cylinder stroke and the length of Ø 6/4 pipes.

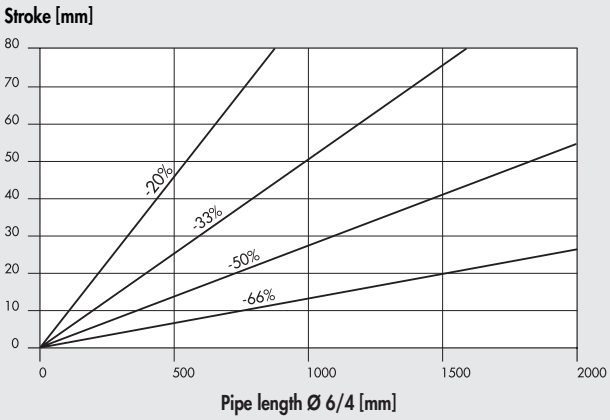

REDUCED OVERALL DIMENSIONS



TRADITIONAL SOLUTION
WITH FITTING



TRADITIONAL SOLUTION
WITH FLOW REGULATOR



CCIV

OPERATION

The piston rod comes out when the valve is powered on. The piston rod retracts when the valve is powered off.

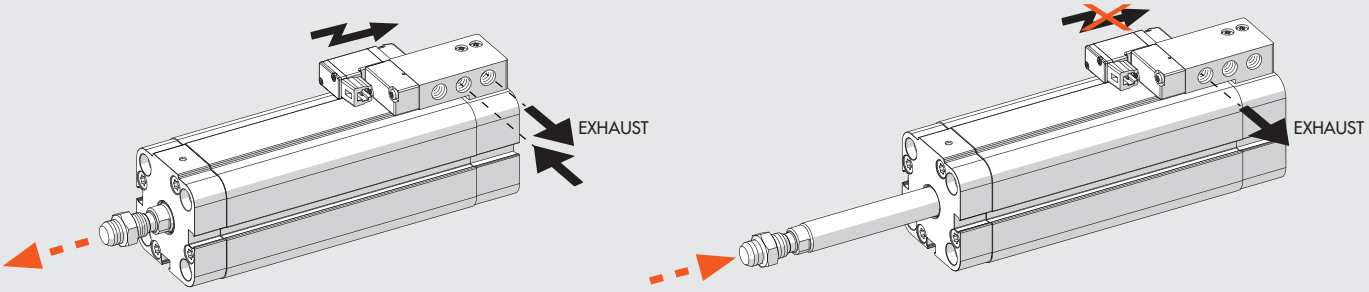

FIXING OPTIONS

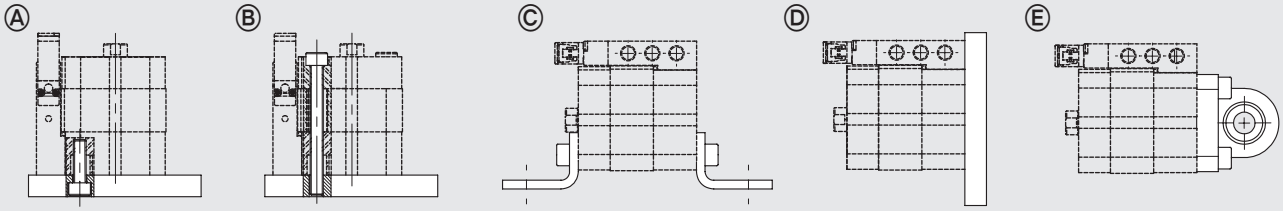

Ⓐ Fixing to structural work with a screw, using the thread in the heads.
Ⓑ Direct fixing from above using long through screws or tie rods. Non-magnetic stainless steel must be used (e.g. AISI 304).
Ⓒ Fixing with feet; the ordering code covers the supply of only one foot and two screws for fixing to the cylinder.
Ⓓ Fixing with a flange mounted on the front or rear head; the ordering code covers the supply of a flange and four screws for fixing to the cylinder.
Ⓔ Fixing with articulated hinge to compensate for slight system misalignment and turn freely.
The ordering code covers the supply of a hinge and four screws for fixing to the cylinder.

METAL WORK PNEUMATIC

DIMENSIONS

Ø 20 - 25









Version with fitting + silencers





Version with fitting + silenced exhaust regulators





PLUG-IN connector



M8 connector

Ø 32 - 40



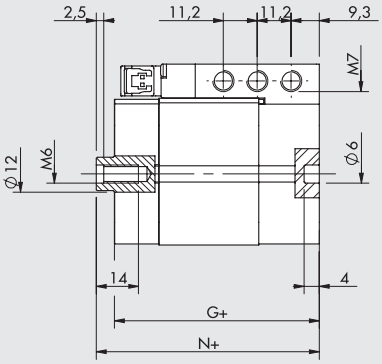



Version with fitting + silencers





Version with fitting + silenced exhaust regulators





PLUG-IN connector



M8 connector

\+ = ADD THE STROKE
1 = SENSOR SLOT
8 = SEAT FOR DIN 7984 SCREWS

M8 CONNECTOR

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V



MALE PISTON ROD



Ø	A	B ISO	B UNITOP	CH1	D	G	L	N	R	S	S1	L1	Q	T	U
20	36.5	-	22	17	37.5	45.5	18.5	50	M10x1.25	22	4.5	26	49	17	15-27
25	40.5	-	26	17	41.5	46.5	19	52	M10x1.25	22	5.5	26	53	15	13-24
32	47	32.5 $^{+0.1}_{-0.4}$	32 $^{+0.4}_{-0.1}$	17	48.5	50	4	56	M10x1.25	22	6	9.5	60	12	10-21
40	56	38	42	17	57.5	50.5	4.5	57	M10x1.25	22	6.5	9.5	69	7	5-17

KEY TO CODES

CYL	23	0	0	32	0050	C	P	2	2
	TYPE			BORE	STROKE	MATERIAL	GASKETS	ELECTRICAL CONNECTION	PNEUMATIC FITTINGS
	23 Compact cylinder centre distances to UNITOP male piston rod **24** Compact cylinder centre distances to UNITOP female piston rod ■ **25** Compact cylinder centre distances to ISO male piston rod ■ **26** Compact cylinder centre distances to ISO female piston rod	**0** Double-acting	**0** Magnetic **S** Non-magnetic ◆ **G** No stick-slip	▲ 20 ▲ 25 32 40	Ø 20 - 25: max 200 mm Ø 32 - 40: max 300 mm	■ **C** C45 piston rod chromium-plated **X** Stainless steel piston rod and nut	**P** Polyurethane gaskets	**2** Plug-in **M** M8	**1** M7 port **2** Straight fitting Ø 4 + silencers **3** Straight fitting Ø 4 + silenced exhaust regulators **4** Straight fitting Ø 6 + silencers **5** Straight fitting Ø 6 + silenced exhaust regulators

■ Only for Ø 32 and 40
▲ Stainless steel piston rod
◆ Standard for Ø 20 and 25

ACCESSORIES

PLUG-IN CONNECTOR



Code	Description
W0970512000	Plug-in connector for Mach 11 L = 300 mm
W0970512007	Plug-in connector for Mach 11 L = 1 m
W0970512002	Plug-in connector for Mach 11 L = 2 m

M8 STRAIGHT CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

90° M8 CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

SPARE PARTS

PLUG-IN PILOT



Code	Description
722113541100	PLT-10 3/2 NC 0.8W 24VDC LED plug-in with manual

M8 PILOT



Code	Description
7222M3541100	PLT-10 3/2 NC 0.8W 24VDC LED M8 with manual

CCIV 5/2 SOLENOID-PNEUMATIC MONOSTABLE VALVE 24 VDC



Symbol	Code	Abbrev.	Weight [g]
	**70800201C2**	MSV 15 SOS OO 24VDC PLUG-IN	43.3
	70800201CM	MSV 15 SOS OO 24VDC M8	43.3

SILENCER MW SE



Code	Description
W0970530020	Silencer MW SE M7

For technical data, see **chapter E5**

SILENCED EXHAUST REGULATOR MW SVL



Code	Description
W0970520009	Silenced exhaust regulator MW SVL M7

For technical data, see **chapter E5**

NOTES

For other spare parts, such as gaskets and magnets, see page **A1**.144

ACCESSORIES AND SPARE PARTS FOR CMPC, TWO-FLAT, STOPPER AND CCIV COMPACT CYLINDERS

ACCESSORIES

FOOT - MODEL A

+ = ADD THE STROKE

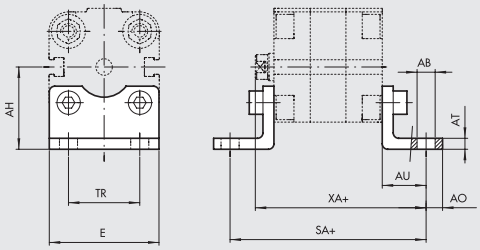

CMPC UNITOP, TWO-FLAT UNITOP, CCIV UNITOP

											TWO-FLAT		CCIV		
Code	Ø	E	AO	TR	AU	AB	AH	AT	XA	SA	XA	SA	XA	SA	Weight [g]
W0950126001 ▲	12	30	4.5	18	13	5.5	22	3	55.5	64	–	–	–	–	26
W0950126001 ▲	16	30	4.5	18	13	5.5	22	3	55.5	64	–	–	–	–	26
W0950206001	20	36	6	22	16	6.6	27	4	58.5	70	–	–	66	77.5	46
W0950256001	25	40	6	26	16	6.6	30	4	58.5	71.5	–	–	65.5	78.5	52
W0950322001	32	45	11	32	24	7	31.9	4	74.5	92.5	83.5	101.5	80	98	76
W0950406001	40	60	8	42	20	9	42.5	5	72	85.5	–	–	77	90.5	88
W0950406001F ✱	40	60	8	42	20	9	42.5	5	72	85.5	81	94.5	–	–	88
W0950506001	50	68	8	50	24	9	47	6	77	93.5	–	–	–	–	176
W0950506001F ✱	50	68	8	50	24	9	47	6	77	93.5	88.5	105	–	–	176
W0950636001	63	84	12	62	27	11	59.5	6	84.5	104	–	–	–	–	276
W0950636001F ✱	63	84	12	62	27	11	59.5	6	84.5	104	96	115.5	–	–	276
W0950806001	80	102	12	82	30	11	65.5	8	94	116	107	129	–	–	392
W0951006001	100	123	12	103	33	13.5	78	8	109.5	132.5	–	–	–	–	558

CMPC ISO, TWO-FLAT ISO, CCIV ISO

											TWO-FLAT		CCIV		
Code	Ø	E	AO	TR	AU	AB	AH	AT	XA	SA	XA	SA	XA	SA	Weight [g]
W0950322001	32	45	11	32	24	7	31.9	4	74.5	92.5	83.5	101.5	80	98	76
W0950402001	40	52	15	36	28	9	36	4	80	101.5	89	110.5	85	106.5	100
W0950502001	50	65	15	45	32	9	45	5	85	109.5	96.5	121	–	–	162
W0950632001	63	75	15	50	32	9	50	5	89.5	114	101	125.5	–	–	266
W0950802001	80	95	20	63	41	12	63	6	105	138	118	151	–	–	456
W0951002001	100	115	25	75	41	14	71	6	117.5	148.5	–	–	–	–	572

Note: Individually packed with 2 screws.
✱ Only for Two-Flat version
▲ Non UNITOP norm fixing distance

MALE HINGE-MODEL BA

+ = ADD THE STROKE

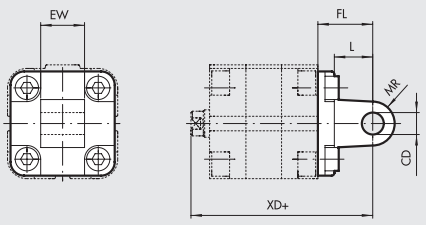

CMPC UNITOP, CCIV UNITOP

								CCIV	
Code	Ø	EW	FL	CD H9	MR	L	XD	XD	Weight [g]
W0950126004 ▲	12	12	16	6	6	10	58.5	–	24
W0950126004 ▲	16	12	16	6	6	10	58.5	–	24
W0950206004	20	16	20	8	8	12	62.5	70	44
W0950256004	25	16	20	8	8	12	62.5	69.5	48

CMPC ISO, TWO-FLAT ISO, CCIV ISO

								TWO-FLAT	CCIV	
Code	Ø	EW	FL	CD H9	MR	L	XD	XD	XD	Weight [g]
W0950322004	32	26	22	10	10	13	72.5	81.5	78	94
W0950402004	40	28	25	12	12	16	77	86	82	124
W0950502004	50	32	27	12	12	16	80	91.5	–	220
W0950632004	63	40	32	16	16	22	89.5	101	–	316
W0950802004	80	50	36	16	16	22	100	113	–	578
W0951002004	100	60	41	20	20	27	117.5	–	–	850

Note: Supplied with 4 screws.
▲ Non UNITOP norm fixing distance

METAL WORK PNEUMATIC

FEMALE HINGE-MODEL B

+ = ADD THE STROKE

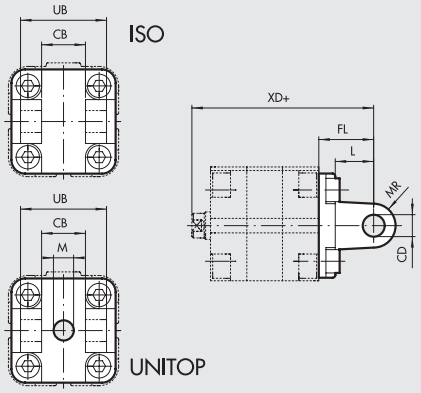

CMPC UNITOP, TWO-FLAT UNITOP, CCIV UNITOP

Code	Ø	UB	CB H14	FL	CD H9	M	MR	L	XD	TWO-FLAT XD	CCIV XD	Weight [g]
W0950322003	32	45	26	22	10	14	11	12	72.5	81.5	78	116
W0950406003	40	52	28	25	12	14	12.5	16	77	86	82	184
W0950506003	50	60	32	27	12	18	12.5	16	80	91.5	–	266
W0950636003	63	70	40	32	16	-	15	21	89.5	101	–	470
W0950806003	80	90	50	36	16	23	15	23	100	113	–	670
W0951006003	100	110	60	41	20	28	20	26	117.5	–	–	1110

CMPC ISO, TWO-FLAT ISO, CCIV ISO

Code	Ø	UB	CB H14	FL	CD H9	MR	L	XD	TWO-FLAT XD	CCIV XD	Weight [g]
W0950322003	32	45	26	22	10	11	12	72.5	81.5	78	116
W0950402003	40	52	28	25	12	13	15	77	86	82	160
W0950502003	50	60	32	27	12	13	15	80	91.5	–	252
W0950632003	63	70	40	32	16	17	20	89.5	101	–	394
W0950802003	80	90	50	36	16	17	20	100	113	–	670
W0951002003	100	110	60	41	23	21	25	117.5	–	–	1085

Note: Supplied with 4 screws, 4 washers, 2 snap-rings and 1 pin.

FLANGE Ø 12 to 25 - MODEL C (FRONT AND REAR)

+ = ADD THE STROKE

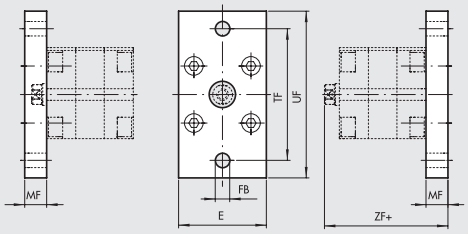

CMPC, CCIV

Code	Ø	E	UF	TF	FB	MF	ZF	CCIV ZF	Weight [g]
W0950126002 ▲	12	29	55	43	5.5	10	52.5	–	112
W0950126002 ▲	16	29	55	43	5.5	10	52.5	–	112
W0950206002	20	36	70	55	6.6	10	52.5	60	184
W0950256002	25	40	76	60	6.6	10	55	62	226

Note: Supplied with 4 screws

▲ Non UNITOP norm fixing distance

FLANGE Ø 32 to 100 - MODEL C (FRONT AND REAR)

+ = ADD THE STROKE

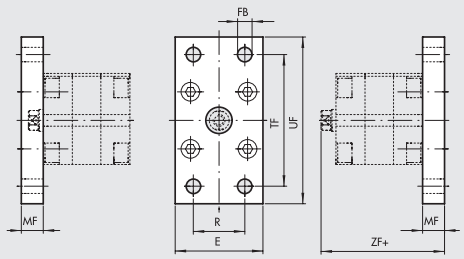

CMPC UNITOP, CCIV UNITOP

Code	Ø	E	UF	TF	R	FB	MF	ZF	CCIV ZF	Weight [g]
W0950322002	32	50	80	64	32	7	10	60.5	66	246
W0950406002	40	60	102	82	36	9	10	62	67	454
W0950506002	50	68	110	90	45	9	12	65	–	655
W0950636002	63	87	130	110	50	9	15	72.5	–	1255
W0950806002	80	107	160	135	63	12	15	79	–	1900
W0951006002	100	128	190	163	75	14	15	91.5	–	2700

TWO-FLAT UNITOP

Code	Ø	E	UF	TF	R	FB	MF	ZF	Weight [g]
W0950322002	32	50	80	64	32	7	10	69.5	246
W0950406002F	40	60	102	82	36	9	10	71	454
W0950506002F	50	68	110	90	45	9	12	76.5	655
W0950636002F	63	87	130	110	50	9	15	84	1255
W0950806002F	80	107	160	135	63	12	15	92	1900

CMPC ISO, TWO-FLAT ISO, CCIV ISO

Code	Ø	E	UF	TF	R	FB	MF	ZF	TWO-FLAT ZF	CCIV ZF	Weight [g]
W0950322002	32	50	80	64	32	7	10	60.5	69.5	66	246
W0950402002	40	55	90	72	36	9	10	62	71	67	290
W0950502002	50	65	110	90	45	9	12	65	76.5	–	522
W0950632002	63	75	120	100	50	9	12	72.5	84	–	670
W0950802002	80	95	150	126	63	12	15	79	92	–	1420
W0951002002	100	115	178	150	75	14	15	91.5	–	–	2040

Note: Supplied with 4 screws

Note: When installing the flange on the CCIV front heads, the cylinder stroke must be min. 20 mm

ARTICULATED MALE HINGE - MODEL BAS

+ = ADD THE STROKE

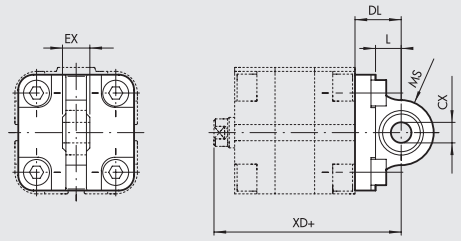

CMPC ISO, TWO-FLAT ISO, CCIV ISO

Code	Ø	EX	DL	CX H9	MS	L	XD	TWO-FLAT XD	CCIV XD	Weight [g]
W0950322006	32	14	22	10	16	12	72.5	81.5	78	106
W0950402006	40	16	25	12	18	15	77	86	82	142
W0950502006	50	16	27	12	21	15	80	91.5	–	236
W0950632006	63	21	32	16	23	20	89.5	101	–	336
W0950802006	80	21	36	16	28	20	100	113	–	572
W0951002006	100	25	41	20	30	25	117.5	–	–	840

Note: Supplied with 4 screws, 4 washers

FLANGE FOR OPPOSITE CYLINDERS

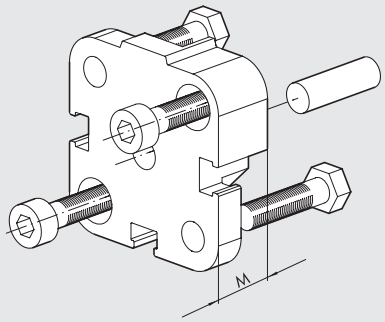

CMPC UNITOP Code	CMPC ISO Code	Ø	M	Weight [g] UNITOP	ISO
0950123060 ▲	–	12	12.5	29	–
0950123060 ▲	–	16	12.5	29	–
0950203060	–	20	12.5	45	–
0950253060	–	25	13	57	–
0950323060	0950323060	32	14.5	88	88
0950403060	0950403061	40	14.5	106	106
0950503060	0950503061	50	14.5	172	158
0950633060	0950633061	63	14.5	274	258
0950803060	0950803061	80	16.5	470	452
0951003060	0951003061	100	19.5	826	801

Note: Supplied complete with 1 pin, 4 screws
▲ Non UNITOP norm fixing distance

ASSEMBLING OPPOSING CYLINDERS

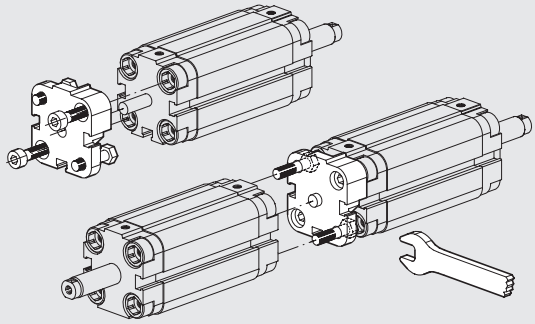

FORK - MODEL GK-M

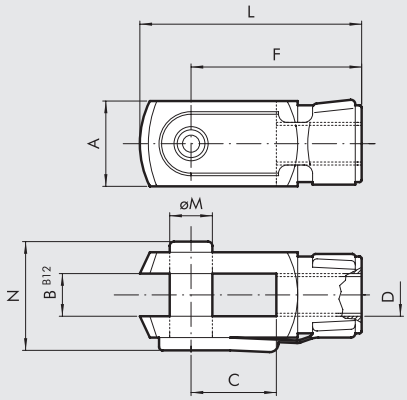

CMPC UNITOP AND ISO, TWO-FLAT UNITOP AND ISO, CCIV UNITOP AND ISO

Code	Ø	A	B	C	D	F	L	ØM	N	Weight [g]
W0950120020	12	12	6	12	M6	24	31	6	16	20
W0950200020	16	16	8	16	M8	32	42	8	22	48
W0950322020	20	20	10	20	M10x1.25	40	52	10	26	92
W0950322020	25	20	10	20	M10x1.25	40	52	10	26	92
W0950322020	32	20	10	20	M10x1.25	40	52	10	26	92
W0950322020	40	20	10	20	M10x1.25	40	52	10	26	92
W0950402020	50	24	12	24	M12x1.25	48	62	12	32	148
W0950402020	63	24	12	24	M12x1.25	48	62	12	32	148
W0950502020	80	32	16	32	M16x1.5	64	83	16	40	340
W0950802020	100	40	20	40	M20x1.5	80	105	20	48	690

Note: Individually packed

METAL WORK PNEUMATIC

ROD EYE - MODEL GA-M

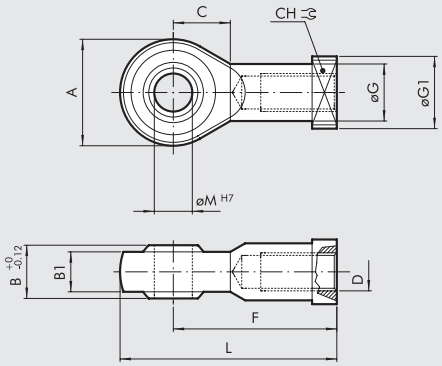

CMPC UNITOP E ISO, TWO-FLAT UNITOP E ISO, CCIV UNITOP AND ISO

Code	Ø	A	B	B1	C	CH	D	F	ØG	ØG1	L	ØM	Weight [g]
W0950120025	12	20	9	6.5	11	11	M6	30	10	13	40	6	22
W0950200025	16	24	12	9	13	14	M8	36	12.5	16	48	8	45
W0950322025	20	28	14	10.5	15	17	M10x1.25	43	15	19	57	10	70
W0950322025	25	28	14	10.5	15	17	M10x1.25	43	15	19	57	10	70
W0950322025	32	28	14	10.5	15	17	M10x1.25	43	15	19	57	10	70
W0950322025	40	28	14	10.5	15	17	M10x1.25	43	15	19	57	10	70
W0950402025	50	32	16	12	17	19	M12x1.25	50	17.5	22	66.5	12	108
W0950402025	63	32	16	12	17	19	M12x1.25	50	17.5	22	66.5	12	108
W0950502025	80	42	21	15	23	22	M16x1.5	64	22	27	85	16	216
W0950802025	100	50	25	18	27	30	M20x1.5	77	27.5	34	102.5	20	396

Note: Individually packed.

COMPENSATION JOINT - MODEL GA

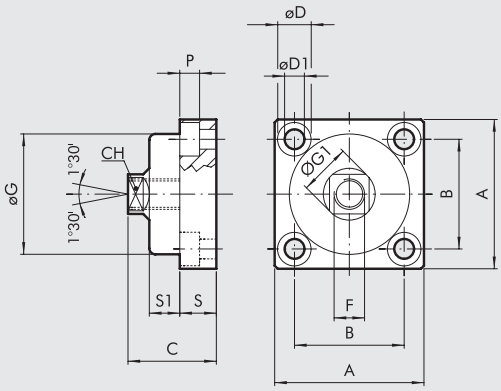

CMPC UNITOP E ISO, TWO-FLAT UNITOP AND ISO, CCIV UNITOP AND ISO

Code	Ø	A	B	C	CH	ØD	ØD1	F	ØG	ØG1	P	S	S1	Weight [g]
W0950326021	20	49	36	30	13	11	6.5	M10x1.25	39.5	17	6.5	12	10	172
W0950326021	25	49	36	30	13	11	6.5	M10x1.25	39.5	17	6.5	12	10	172
W0950326021	32	49	36	30	13	11	6.5	M10x1.25	39.5	17	6.5	12	10	172
W0950326021	40	49	36	30	13	11	6.5	M10x1.25	39.5	17	6.5	12	10	172
W0950406021	50	59	42	36	15	14	8.5	M12x.125	44	19	8.5	15	13.5	286
W0950406021	63	59	42	36	15	14	8.5	M12x1.25	44	19	8.5	15	13.5	286
W0950506021	80	79	58	44	22	17	10.5	M16x1.5	59	26	10.5	20	15	628
W0950806021	100	89	65	51	27	19	12.5	M20x1.5	69	31	12.5	20	20	1200

Note: Individually packed.

COUNTER-HINGE CETOP Ø 32 to 100

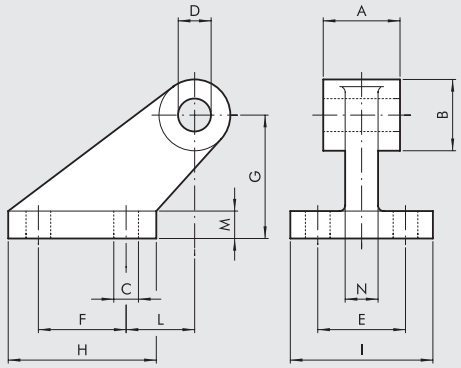

CMPC UNITOP E ISO, TWO-FLAT UNITOP E ISO, CCIV UNITOP AND ISO

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]
W0950322008	32	26	19	7	10	25	20	32	37	41	18	8	10	96
W0950402008	40	28	26	9	12	32	32	45	54	52	25	10	12	216
W0950502008	50	32	26	9	12	32	32	45	54	52	25	10	12	212
W0950632008	63	40	33	11	16	40	50	63	75	63	32	12	15	440
W0950802008	80	50	33	11	16	40	50	63	75	63	32	12	15	464
W0951002008	100	60	44	14	20	50	70	90	103	80	40	16	22	985

Note: Supplied complete with 4 screws, 4 washers

COUNTER-HINGE Ø 12 to 25 - MODEL BC

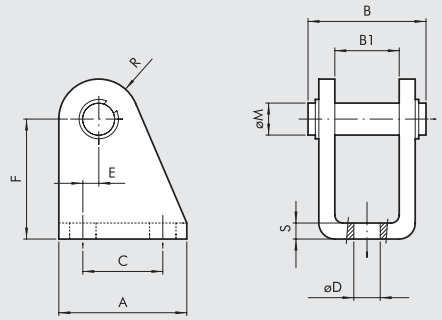

CMPC UNITOP, CCIV UNITOP

Code	Ø	A	B	B1	C	ØD	E	F	ØM	R	S	Weight [g]
W0950120005	12	25	25	12	15	5.5	2	27	6	7	3	40
W0950120005	16	25	25	12	15	5.5	2	27	6	7	3	40
W0950200005	20	32	30	16	20	6.5	4	30	8	10	4	78
W0950200005	25	32	30	16	20	6.5	4	30	8	10	4	78

Note: Supplied complete with 1 pin and and 2 snap rings

SELF ALIGNING ROD COUPLER - MODEL GA-K

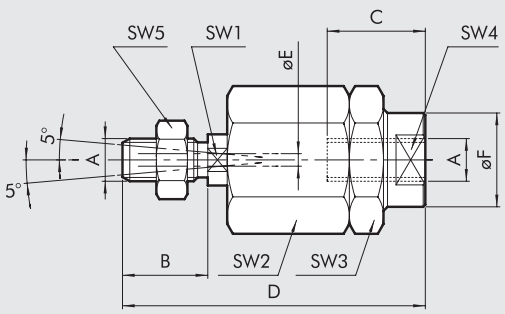

CMPC UNITOP AND ISO, TWO-FLAT UNITOP AND ISO, CCIV UNITOP AND ISO

Code	Ø	A	B	C	D	ØE	ØF	SW1	SW2	SW3	SW4	SW5	Weight [g]
W0950120030	**12**	M6	10	10	35	2	8.5	5	13	13	7	10	24
W0950200030	**16**	M8	20	20	57	4	12.5	7	17	17	11	13	56
W0950322030	**20**	M10x1.25	20	20	71	4	22	12	30	30	19	17	216
W0950322030	**25**	M10x1.25	20	20	71	4	22	12	30	30	19	17	216
W0950322030	**32**	M10x1.25	20	20	71	4	22	12	30	30	19	17	216
W0950322030	**40**	M10x1.25	20	20	71	4	22	12	30	30	19	17	216
W0950402030	**50**	M12x1.25	24	20	75	4	22	12	30	30	19	19	220
W0950402030	**63**	M12x1.25	24	20	75	4	22	12	30	30	19	19	220
W0950502030	**80**	M16x1.5	32	32	103	4	32	20	41	41	30	24	620
W0950802030	**100**	M20x1.5	40	40	119	4	32	20	41	41	30	30	680

Note: Individually packed.

RETRACTABLE SENSOR

For codes and technical data, see **chapter A6**.

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



POSITION SENSORS

For technical data and usage strokes see **chapter A6**.

LTS



VALVE ASSEMBLY ON CYLINDER

With this type of cylinder, the valves (D) can be mounted directly using the retracting sensor slot, without requiring the use of intermediate brackets.This can be done using the special plates (A) which come with both M3 and M4 threads, and screws (B) of the size, type and quantity shown in the table below.
The plates are supplied complete with 2 stud pins, one M3 and one M4 (C).
After the valve centre distance and the position of the valve have been determined, the plates can be secured to the cylinder.
A "position memory" will be created to facilitate subsequent maintenance on the valve.

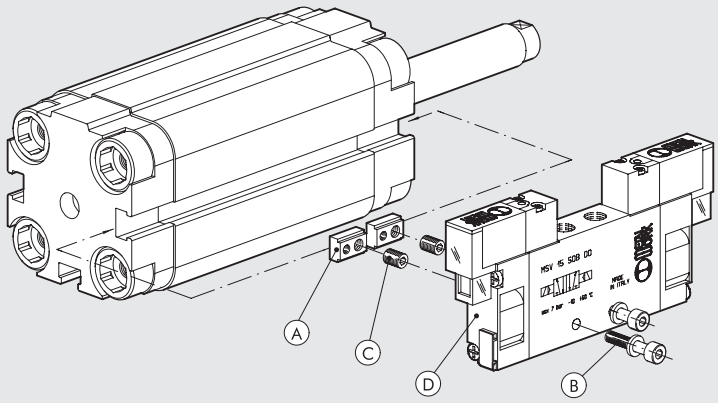

Type of valve to mount (D)	Fixing plate (A) CODE 0950003000	Position memory: grub screw (C) to be used	Screw (B) for connection to the cylinder (one per plate)	Washer (B) (one per screw)
MINIMACH	n° 2	M4	M3x16 UNI 5931 (DIN 912)	A3.2 UNI 1751 (DIN 127A)
MACH 11	n° 2	M4	M3x16 UNI 5931 (DIN 912)	A3.2 UNI 1751 (DIN 127A)
SERIE 70 1/8	n° 2	M3	M4x25 UNI 5931 (DIN 912)	–
SERIE 70 1/4	n° 2	M3	M4x30 UNI 5931 (DIN 912)	A4.3 UNI 1751 (DIN 127A)

METAL WORK PNEUMATIC

SPARE PARTS

COMPACT CYLINDERS, SERIES CMPC

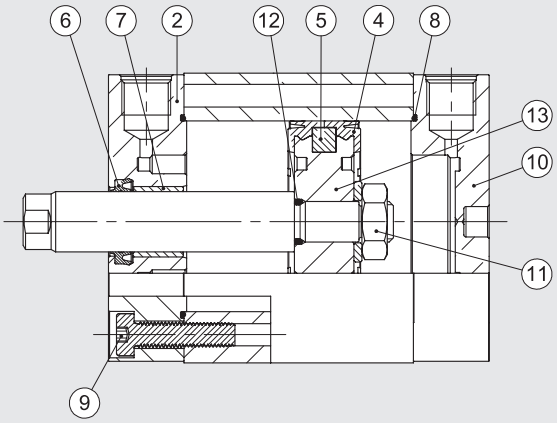

Code	Bores	Type	Parts
009 . . . 7001	Ø 12 to 100	Complete set of gaskets polyurethane	④⑥⑧
009 . . . 7008	Ø 20 to 100	Complete set of (high temperature) FKM/FPM gaskets	④⑥⑧
009 . . . 7013	Ø 12 to 100	Polyurethane piston rod gasket kit	⑥
009 . . . 7014	Ø 20 to 100	FKM/FPM piston rod gasket kit	⑥
009 . . . 7101	Ø 12 to 100	Front cylinder head kit for UNITOP polyurethane	②⑦⑥⑧⑨
0090327101	Ø 32	Front cylinder head kit for ISO Ø 32 polyurethane	②⑦⑥⑧⑨
009 . . . 8101	Ø 40 to 100	Front cylinder head kit for ISO polyurethane	②⑦⑥⑧⑨
009 . . . 7201	Ø 12 to 100	Rear cylinder head kit for UNITOP polyurethane	⑧⑨⑩
0090327201	Ø 32	Rear cylinder head kit for ISO Ø 32 polyurethane	⑧⑨⑩
009 . . . 8201	Ø 40 to 100	Rear cylinder head kit for ISO polyurethane	⑧⑨⑩
009 . . . 7401	Ø 12 to 100	Piston kit polyurethane	④⑤⑪⑫⑬

COMPACT CYLINDERS, SERIES CMPC TWO-FLAT

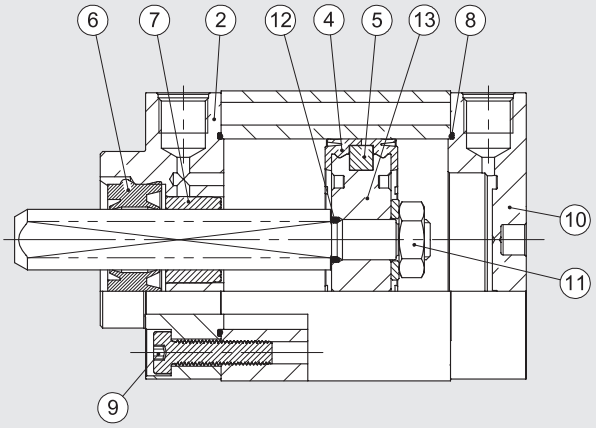

Code	Bores	Type	Parts
009 . . . 7001F	Ø 32 to 80	Set of gaskets	④⑧⑫
009 . . . 7101F	Ø 40 to 80	Front cylinder head kit for UNITOP	②⑦⑥⑧⑨
0090327101F	Ø 32	Front cylinder head kit for ISO Ø 32	②⑦⑥⑧⑨
009 . . . 8101F	Ø 40 to 80	Front cylinder head kit for ISO	②⑦⑥⑧⑨
009 . . . 7201	Ø 40 to 80	Rear cylinder head kit for UNITOP	⑧⑨⑩
0090327201	Ø 32	Rear cylinder head kit for ISO Ø 32	⑧⑨⑩
009 . . . 8201	Ø 40 to 80	Rear cylinder head kit for ISO	⑧⑨⑩
009 . . . 7401	Ø 32 to 80	Piston kit	④⑤⑪⑫⑨⑬

COMPACT CYLINDERS, STOPPER

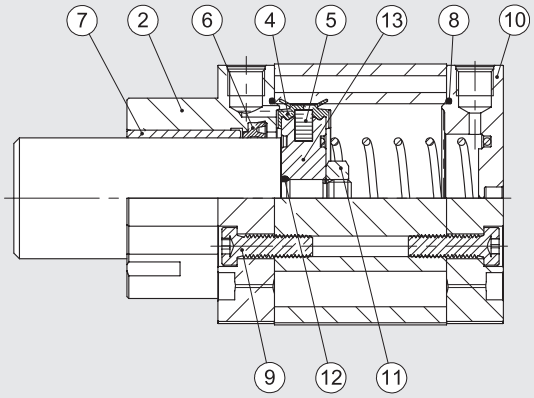

Code	Bores	Type	Parts
009 . . . 7060	Ø 20; 32; 50; 80	Complete set of gaskets	④⑥⑧
009 . . . 7160	Ø 20; 32; 50; 80	Front cylinder head kit for UNITOP	②⑦⑥⑧⑨
0090327160	Ø 32	Front cylinder head kit for ISO Ø 32	②⑦⑥⑧⑨
009 . . . 8160	Ø 50; 80	Front cylinder head kit for ISO	②⑦⑥⑧⑨
009 . . . 7201	Ø 20; 32	Rear cylinder head kit for UNITOP Ø 20 - Ø 32	⑧⑨⑩
009 . . . 7260	Ø 50; 80	Rear cylinder head kit for UNITOP	⑧⑨⑩
0090327201	Ø 32	Rear cylinder head kit for ISO Ø 32	⑧⑨⑩
009 . . . 8260	Ø 50; 80	Rear cylinder head kit for ISO	⑧⑨⑩
0090207401	Ø 20	Piston kit Ø 20	④⑤⑪
009 . . . 7460	Ø 32; 50; 80	Piston kit	④⑤⑪⑫⑬

COMPACT CYLINDER WITH INTEGRATED VALVE, SERIES CCIV

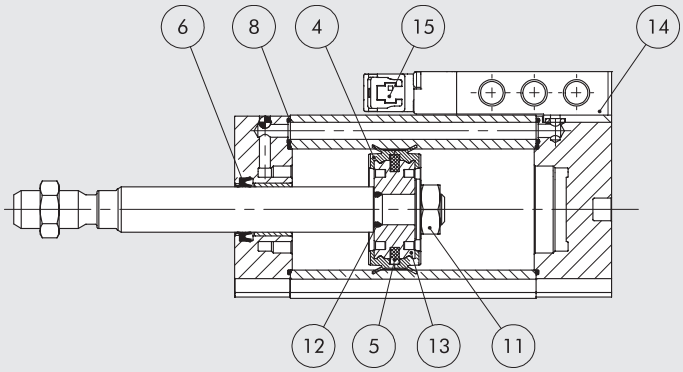

Code	Bores	Type	Parts
009...7001	Ø 20 to 40	Complete set of gaskets polyurethane	④⑥⑧
009...7013	Ø 20 to 40	Polyurethane piston rod gasket kit	⑥
009...7401	Ø 20 to 40	Piston kit polyurethane	④⑤⑪⑫⑬
70800201C2	Ø 20 to 40	CCIV solenoid-pneumatic monostable 24 VDC plug-in valve	⑭
70800201CM	Ø 20 to 40	CCIV solenoid-pneumatic monostable 24 VDC M8 valve	⑭
722113541100	Ø 20 to 40	Plug-in pilot	⑮
7222M3541100	Ø 20 to 40	M8 pilot	⑮

ROUND CYLINDER SERIES RNDC

Clean profile cylinders available in different versions:
- configuration with or without magnet
- single- and double-acting - single or through-rod
- pneumatic cushioning on request
- range of gaskets available in NBR, POLYURETHANE and FKM/FPM (for high temperatures)

TECHNICAL DATA			Ø32	Ø40	Ø50
Max operating pressure		bar	10		
		MPa	1		
		psi	145		
Temperature range	POLYURETHANE	°C	–25 to +80		
	NBR	°C	–10 to +80		
	FKM/FPM	°C	–10 to +150 (non-magnetic cylinders)		
	Low Temperature	°C	–35 to +80		
Design			Screwed heads		
Fluid			Unlubricated air. Lubrication, if used, must be continuous.		
Standard strokes ✚	Single-acting	mm	1 to 250		
	Double-acting	mm	1 to 500		
Versions			Double-acting, Double-acting through-rod, Double-acting cushioned, Double-acting through-rod cushioned, Single-acting, Single-acting through-rod, No stick-slip.		
Sensor magnet			Available magnetic and non-magnetic versions.		
Inrush pressure		bar	0.4		0.3
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter		
Weights			See cylinder "**General technical data**" at the beginning of the chapter		
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.** ✚ Maximum recommended strokes. Higher values can create operating problems		

COMPONENTS

① PISTON ROD: C45 steel or stainless steel, thick chromed
② PISTON ROD GASKET: polyurethane, NBR or FKM/FPM
③ GUIDE BUSHING: steel strip with bronze and PTFE insert
④ BARREL: drawn anodized aluminium alloy
⑤ HALF-PISTON: self-lubricating technopolymer with integrated cushioning ogives
⑥ MAGNET: plastoferrite
⑦ PISTON GASKET: polyurethane, NBR or FKM/FPM
⑧ HEAD: anodized aluminium alloy
⑨ HEAD: anodized aluminium alloy

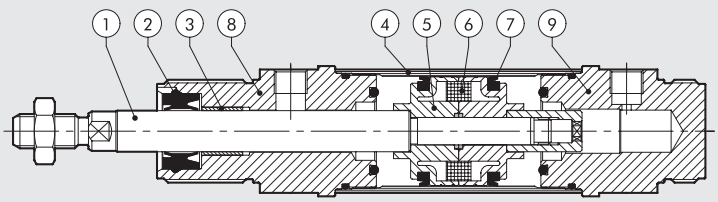

DIMENSIONS OF STANDARD VERSIONS

+ = ADD STROKE



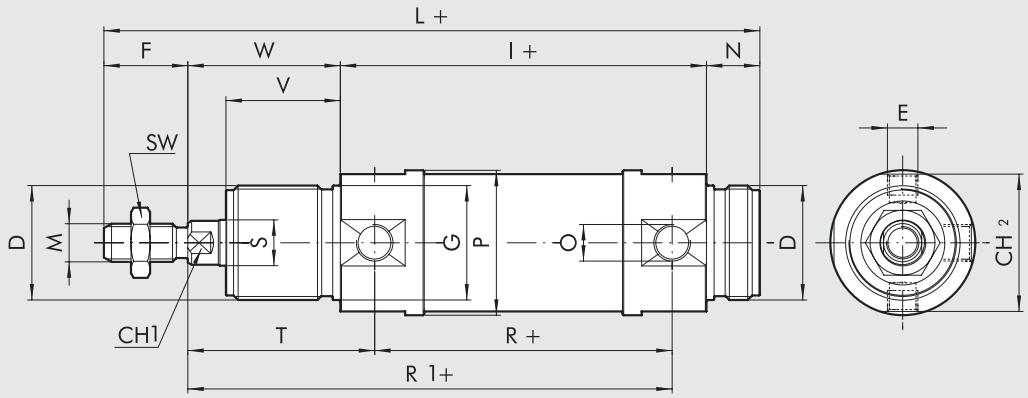

DIMENSIONS OF THROUGH-ROD VERSIONS

+ = ADD STROKE
++ = ADD TWICE THE STROKE



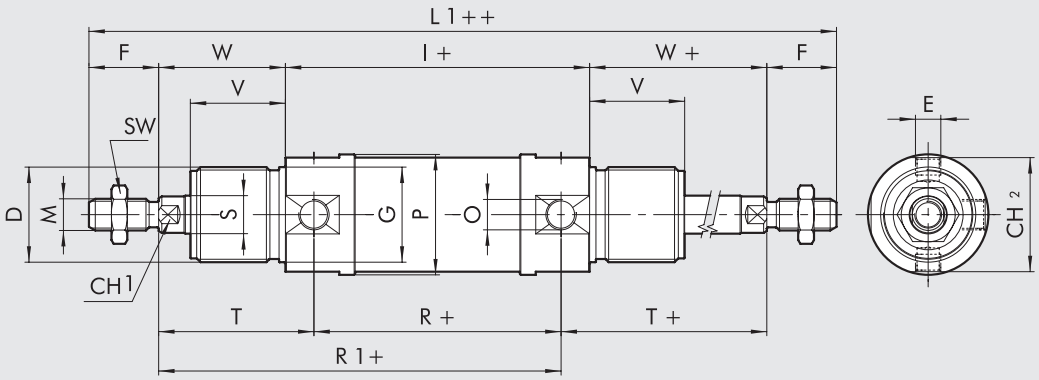

DIMENSIONS OF STANDARD DOUBLE-ACTING AND THROUGH-ROD

Ø	D	E	F	Ø G	CH1	I	L	M	N	O	Ø P	R	Ø S	SW	T	CH2	V	W	L1
32	M30x1.5	M8x1	22	30	10	96	172	M10x1.25	14	G1/8	38	78	12	17	49	36	30	40	220
40	M38x1.5	M10x1	24	38	13	113	198	M12x1.25	16	G1/4	46	89	16	19	57	43	35	45	251
50	M45x1.5	M12x1.5	32	45	17	120	220	M16x1.5	18	G1/4	57	96	20	24	62	54	38	50	284

DIMENSIONS OF STANDARD SINGLE-ACTING AND THROUGH-ROD

			I			L			R1			L1		
Lower limit	Stroke	Upper limit	Ø 32	Ø 40	Ø 50	Ø 32	Ø 40	Ø 50	Ø 32	Ø 40	Ø 50	Ø 32	Ø 40	Ø 50
0	< C ≤	50	96	113	120	172	198	220	127	146	158	220	251	284
50	< C ≤	100	125	145.5	155.5	201	230.5	255.5	156	178.5	193.5	249	283.5	319.5
100	< C ≤	150	154	178	191	230	263	291	185	211	229	278	316	355
150	< C ≤	200	183	210.5	226.5	259	295.5	326.5	214	243.5	264.5	307	348.5	390.5
200	< C ≤	250	212	243	262	288	328	362	243	276	300	336	381	426

For all the other values, see previous table, except for T and R which are both replaced by R1

METAL WORK PNEUMATIC

KEY TO CODES

CYL	1 1 2 TYPE	0	3 2 BORE	0 0 2 5 STROKE	C MATERIAL	P GASKETS
	■ **104** SA through-rod **109** DAC **110** DA ■ **111** SA **112** DAM **113** DAMC **114** DAM through-rod **115** DAMC through-rod	**0** Standard ▲ **G** No stick-slip **S** Non-magnetic	32 40 50	For the maximum suppliable strokes, look at the technical data	**A** C45 chrome piston rod, aluminium piston **C** C45 chrome rod, technopolymer piston rod **Z** Stainless steel piston rod and nut aluminium piston **X** Stainless steel piston rod and nut technopolymer piston	**P** polyurethane **N** NBR ● **V** FKM/FPM ● **B** low temperature

DA: Double-acting (non-cushioned, not magnetic)
DAM: Magnetic double-acting (non-cushioned)
DAMC: Magnetic double-acting (cushioned)
DAC: Cushioned double-acting (non-magnetic)
SA: Single-acting (magnetic)

● Only available for non-magnetic versions (S) and with aluminium piston (A or Z)
▲ **For speeds lower than 0.2m/s, to prevent surging.**
Use no-lubricated air only
■ Only available for versions with aluminium piston (A or Z)

NOTES

ACCESSORIES FOR ROUND CYLINDER: FIXINGS

FOOT MODEL AC

+ = ADD STROKE

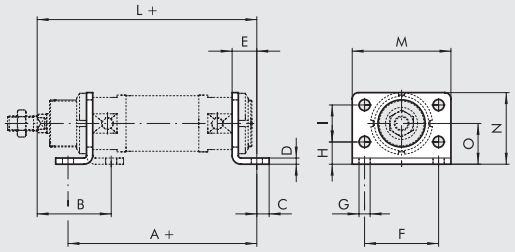

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	O	Weight [g]
W0950320002	32	124	50	7	4	14	52	7	14	28	150	66	49	28	104
W0950400002	40	153	60	10	5	20	60	9	18	30	178	80	58	33	190
W0950500002	50	160	64	10	6	20	70	9	20	40	190	90	70	40	296

Note: Individually packed

COUNTER-HINGE MODEL BC

+ = ADD STROKE

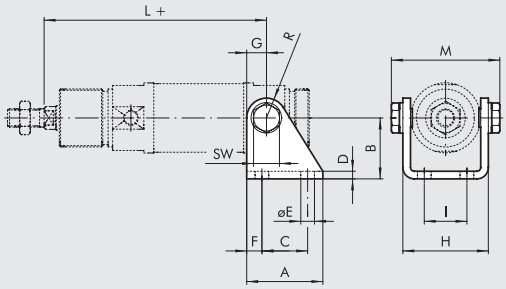

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	R	SW	Weight [g]
W0950320005	32	40	35	24	4	7	8	12	46.1	20	127	60	12	13	152
W0950400005	40	50	40	30	5	9	10	13	57.5	28	146	74	13	17	262
W0950500005	50	54	45	34	6	9	10	14	69.1	36	158	89	14	19	401

Note: Supplied with 2 screws

HEAD LOCK RING MODEL G

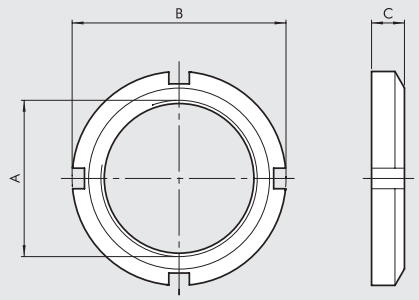

Code	Ø	A	B	C	Weight [g]
W0950320010	32	M30x1.5	45	7	46
W0950400010	40	M38x1.5	50	8	56
W0950500010	50	M45x1.5	58	9	124

Note: Individually packed

FORK MODEL GK-M

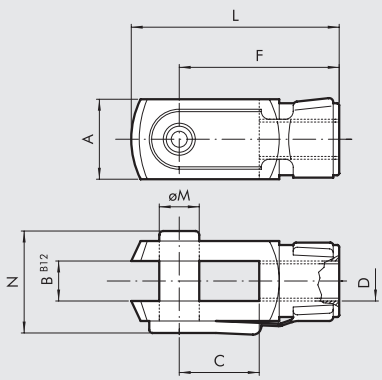

Code	Ø	Ø M	C	B	A	L	F	D	N	Weight [g]
W0950322020	32	10	20	10	20	52	40	M10x1.25	26	92
W0950402020	40	12	24	12	24	62	48	M12x1.25	32	148
W0950502020	50	16	32	16	32	83	64	M16x1.5	40	340

Note: Individually packed

METAL WORK PNEUMATIC

SPHERICAL JOINT MODEL GA-M

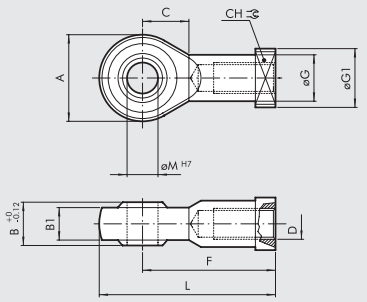

Code	Ø	øM	C	B1	B	A	L	F	D	øG	CH	Weight [g]
W0950322025	32	10	15	10.5	14	28	57	43	M10x1.25	15	17	70
W0950402025	40	12	17	12	16	32	66.5	50	M12x1.25	17.5	19	108
W0950502025	50	16	22	15	21	42	85	64	M16x1.5	22	22	216

Note: Individually packed

ARTICULATED JOINT MODEL GA-K

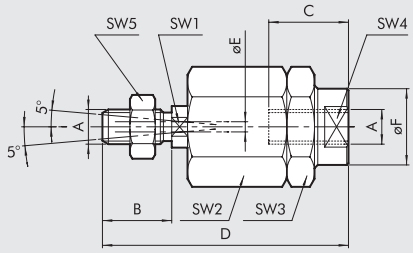

Code	Ø	A	B	C	D	øE	øF	SW1	SW2	SW3	SW4	SW5	Weight [g]
W0950322030	32	M10x1.25	20	20	71	4	22	12	30	30	19	17	216
W0950402030	40	M12x1.25	24	20	75	4	22	12	30	30	19	19	220
W0950502030	50	M16x1.5	32	32	103	4	32	20	41	41	30	24	620

Note: Individually packed

FLEXIBLE COLLAR - MODEL GA

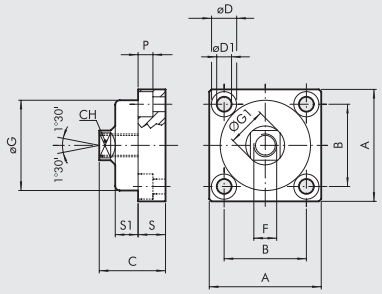

Code	Ø	A	B	C	CH	øD	øD1	F	øG	ØG1	P	S	S1	Weight [g]
W0950326021	32	49	36	30	13	11	6.5	M10x1.25	39.5	17	6.5	12	10	172
W0950406021	40	59	42	36	15	14	8.5	M12x.125	44	19	8.5	15	13.5	286
W0950506021	50	79	58	44	22	17	10.5	M16x1.5	59	26	10.5	20	15	628

Note: Individually packed

NOTES

ACCESSORIES FOR ROUND CYLINDER: MAGNETIC SENSORS

RETRACTABLE SENSOR

Ⓐ SENSOR, SQUARE TYPE
Latest generation, secure fixing



Ⓑ SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

Ⓒ SENSOR SERIES DSM



For codes and technical data, see **chapter A6**.

Ⓓ SENSOR SUPPORT BRACKETS FOR SENSORS SQUARE TYPE AND OVAL TYPE

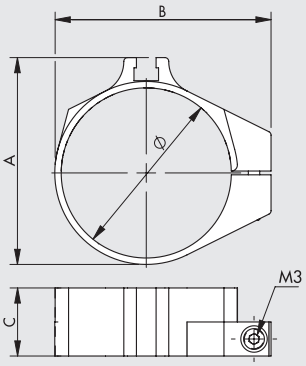

Code	Bore	Description	Ø	A	B	C
W0950000153	**32**	Bracket RNDC Ø32	36	46	48.5	18
W0950000154	**40**	Bracket RNDC Ø40	45	54.7	57.1	18
W0950000155	**50**	Bracket RNDC Ø50	55	64.7	68.2	18

Ⓔ SENSOR BRACKET



Code	Bore	Description	Ø	A	B
W0950000132	**32**	Bracket DXF 36 - 32	36	29.5	10
W0950000140	**40**	Bracket DXF 45 - 40	45	34.5	10
W0950000150	**50**	Bracket DXF 52 - 50	55	38.5	10

FOR MOUNTING ON THE CYLINDER Ø 50 INSERT THE ALUMINIUM SPACER ① YOU FIND IN THE PACKAGE

USE SENSORS

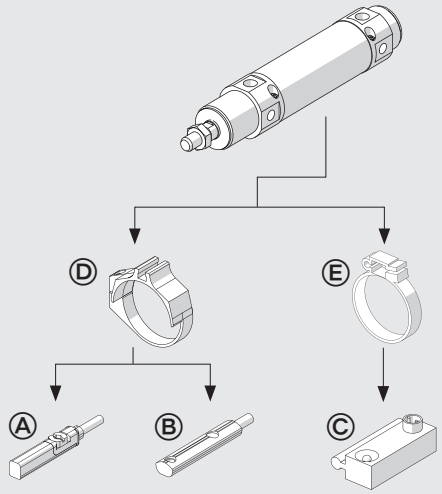

SHORT-STROKE CYLINDER SERIES SSCY

Compact cylinders suitable for installation in limited spaces:
- configuration with or without magnet
- single or double-acting - single or through-rod
- anti-rotation version and with built-in fixings
- possible choice of NBR, POLYURETHANE or FKM/FPM gaskets
- special design on request.

TECHNICAL DATA			Ø12	Ø16	Ø20	Ø25	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100
Max operating pressure		bar	10									
		MPa	1									
		psi	145									
Temperature range	POLYURETHANE	°C	–10 to +80									
	NBR	°C	–10 to +80									
	FKM/FPM	°C	–10 to +150 (non-magnetic cylinders)									
	Low Temperature	°C	–35 to +80									
Design			With profile									
Fluid			Unlubricated air. Lubrication, if used, must be continuous									
Standard strokes ✚	single-acting	mm		5 to 25			5 to 50				-	
	double acting	mm		5 to 50			5 to 70		5 to 110		5 to 150	
	anti-rotation	mm				5 to 120					5 to 150	
	perforated through-rod	mm	-			5 to 100			5 to 130		5 to 165	
Versions			Double-acting, Double-acting through-rod, Single-acting retracted piston rod, Single acting extended piston rod, Single-acting through-rod, Perforated through-rod, Anti-rotation, Oscillating male, Oscillating female, No stick-slip.									
Sensor magnet			Available magnetic and non-magnetic versions.									
Inrush pressure	single piston rod	bar	0.6	0.6	0.6	0.6	0.6	0.4	0.4	0.4	0.4	0.4
	through-rod	bar	1	0.8	0.8	0.8	0.6	0.4	0.4	0.4	0.4	0.4
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter									
Weights			See cylinder "**General technical data**" at the beginning of the chapter									
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**									
			✚ Maximum recommended strokes. Higher values can create operating problems									

COMPONENTS

① PISTON ROD: C45 steel or stainless steel, thick chromed
② HEAD:
Ø 12 to 25 nichel-plated brass
Ø 32 to 100 anodized aluminium
③ PISTON ROD GASKET: polyurethane, NBR or FKM/FPM
④ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑤ BARREL: drawn anodized aluminium alloy
⑥ HALF-PISTON:
Ø 12 to 63 acetal resin
Ø 80 to 100 in aluminium with PTFE guide pad
⑦ PISTON GASKET: polyurethane, NBR or FKM/FPM
⑧ MAGNET: Ø 12 to 25 neodymium - Ø 32 to 100 plastoferrite
⑨ Static O-rings: NBR or FKM/FPM

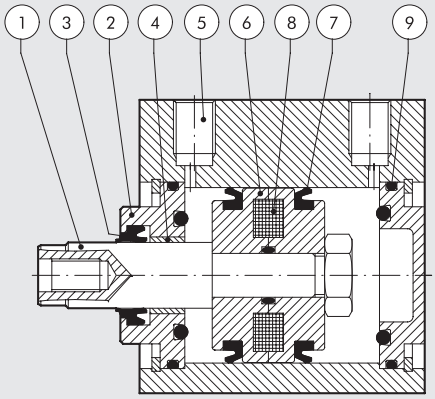

FIXING METHOD

Fix directly from above using long through-screws or tie rods.
Non-magnetic stainless steel must be used (e.g. AISI 304).



DIMENSIONS STANDARD VERSIONS

+ = ADD THE STROKE



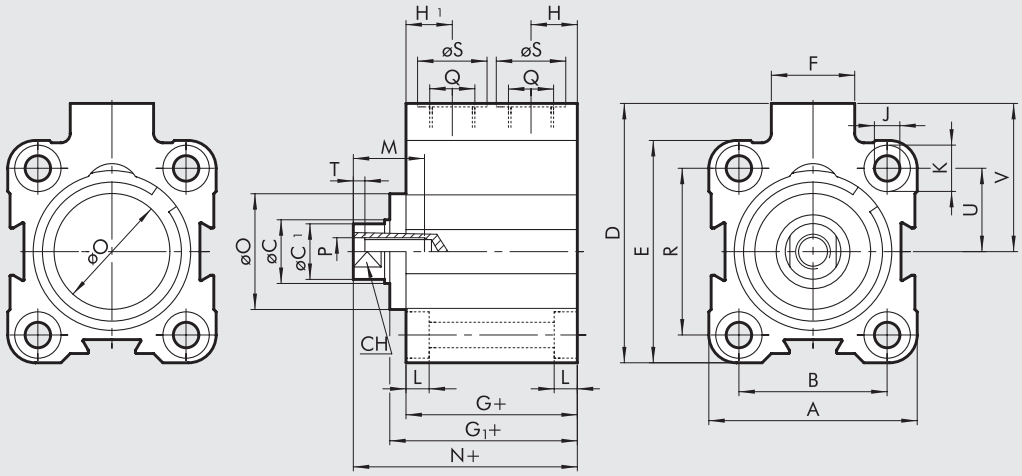

DIMENSIONS OF DOUBLE ACTING

Ø	A	B	øC	øC1	D	E	F	G	G1	H	H1	J	K	L	M	N	øO	P	Q	R	øS	CH	T	U	V
12	23.5	13	6	5.5	28	26	11	32.5	-	6.5	10.5	3.7	6	3.7	7	38	-	M3	M5	-	8	5	2	9.5	16.5
16	28	20	8	7.5	33	28	11	33	-	6.7	10.5	3.7	6	3.7	10	37.5	-	M5	M5	20	8	7	2	10	19
20	32	22	10	9	37	32	11	32	-	6.5	10.5	4.6	7.5	4.6	10	37.6	-	M5	M5	22	8	8	2	11	21
25	37	26	10	9	47.5	39	18	33	36.5	8.5	8.5	4.6	7.5	4.6	10	42.5	20	M5	G1/8	28	15	8	2	14	28
32	45	32	12	11	56	48	18	37	40.8	10	10	5.5	10	5.7	15	48.3	25	M6	G1/8	36	15	10	2.5	18	32
40	54.5	40	12	11	62.7	54.5	18	39.5	44.7	10	10	5.5	10	5.7	15	53.2	30	M6	G1/8	40	15	10	2.5	20	35.5
50	66	50	16	15	73	66	18	39.5	46.2	11	11	6.6	11	6.8	18	54.3	35	M8	G1/8	50	15	13	3.5	25	40
63	80	62	16	15	88	80	23	42	48.7	12	12	9	15	9	18	57.7	35	M8	G1/8	62	15	13	3.5	31	48
80	100	82	20	19	110	100	26	57	67.2	14	14	9	15	9	18	75.2	44	M10	G1/4	82	19	17	4	41	60
100	124	103	25	24	134	124	26	64	74.7	15	15	11	18	11	20	84.3	56	M12	G1/4	103	19	22	5	51.5	72

DIMENSIONS OF SINGLE-ACTING, RETRACTED PISTON ROD

Ø	stroke	A	B	øC	øC1	D	E	F	G	G1	H	H1	J	K	L	M	N	øO	P	Q	R	øS	CH	T	U	V
12	5 to 25	23.5	13	6	5.5	28	26	11	32.5	-	6.5	10.5	3.7	6	3.7	7	38	-	M3	M5	-	8	5	2	9.5	16.5
16	5 to 25	28	20	8	7.5	33	28	11	33	-	6.7	10.5	3.7	6	3.7	10	37.5	-	M5	M5	20	8	7	2	10	19
20	5 to 25	32	22	10	9	37	32	11	32	-	6.5	10.5	4.6	7.5	4.6	10	37.6	-	M5	M5	22	8	8	2	11	21
25	5 to 25	37	26	10	9	47.5	39	18	33	36.5	8.5	8.5	4.6	7.5	4.6	10	42.5	20	M5	G1/8	28	15	8	2	14	28
32	5 to 25	45	32	12	11	56	48	18	37	40.8	10	10	5.5	10	5.7	15	48.3	25	M6	G1/8	36	15	10	2.5	18	32
	> 25 to 50								45	48.8							56.3									
40	5 to 25	54.5	40	12	11	62.7	54.5	18	39.5	44.7	10	10	5.5	10	5.7	15	53.2	30	M6	G1/8	40	15	10	2.5	20	35.5
	> 25 to 50								47.5	52.7							61.2									
50	5 to 25	66	50	16	15	73	66	18	39.5	46.2	11	11	6.6	11	6.8	18	54.3	35	M8	G1/8	50	15	13	3.5	25	40
	> 25 to 50								47.5	54.2							62.3									
63	5 to 25	80	62	16	15	88	80	23	42	48.7	12	12	9	15	9	18	62.3	35	M8	G1/8	62	15	13	3.5	31	48
	> 25 to 50								50	56.7							65.7									

METAL WORK PNEUMATIC

DIMENSIONS OF SINGLE-ACTING EXTENDED PISTON ROD

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

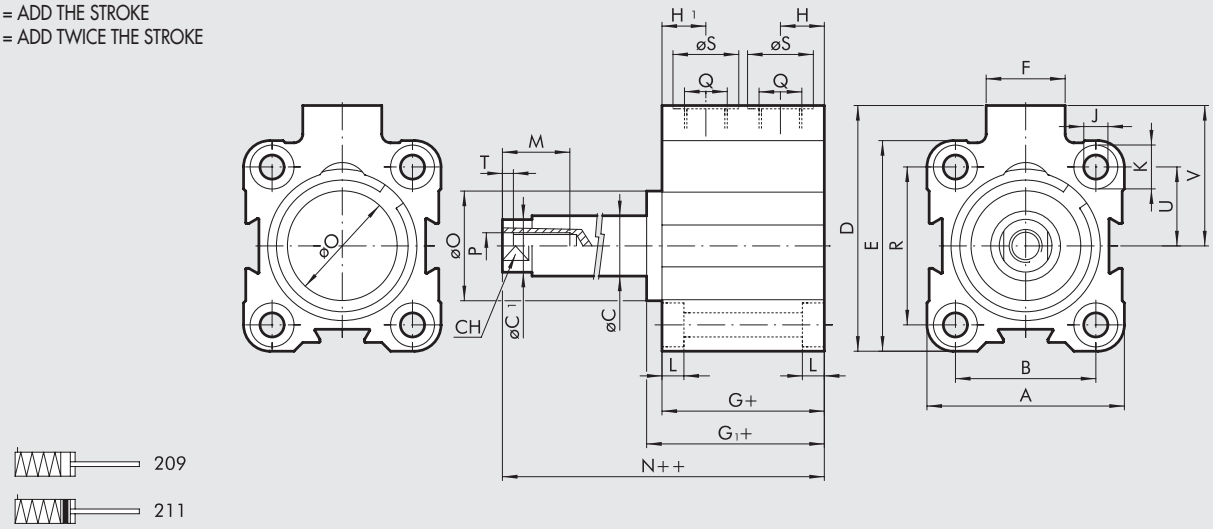

Ø	stroke	A	B	øC	øC1	D	E	F	G	G1	H	H1	J	K	L	M	N	øO	P	Q	R	øS	CH	T	U	V
12	5 to 25	23.5	13	6	5.5	28	26	11	32.5	-	6.5	10.5	3.7	6	3.7	7	38	-	M3	M5	-	8	5	2	9.5	16.5
16	5 to 25	28	20	8	7.5	33	28	11	33	-	6.7	10.5	3.7	6	3.7	10	37.5	-	M5	M5	20	8	7	2	10	19
20	5 to 25	32	22	10	9	37	32	11	32	-	6.5	10.5	4.6	7.5	4.6	10	37.6	-	M5	M5	22	8	8	2	11	21
25	5 to 25	37	26	10	9	47.5	39	18	33	36.5	8.5	8.5	4.6	7.5	4.6	10	42.5	20	M5	G1/8	28	15	8	2	14	28
32	5 to 25	45	32	12	11	56	48	18	37	40.8	10	10	5.5	10	5.7	15	48.3	25	M6	G1/8	36	15	10	2.5	18	32
	> 25 to 50								45	48.8							56.3									
40	5 to 25	54.5	40	12	11	62.7	54.5	18	39.5	44.7	10	10	5.5	10	5.7	15	53.2	30	M6	G1/8	40	15	10	2.5	20	35.5
	> 25 to 50								47.5	52.7							61.2									
50	5 to 25	66	50	16	15	73	66	18	39.5	46.2	11	11	6.6	11	6.8	18	54.3	35	M8	G1/8	50	15	13	3.5	25	40
	> 25 to 50								47.5	54.2							62.3									
63	5 to 25	80	62	16	15	88	80	23	42	48.7	12	12	9	15	9	18	57.7	35	M8	G1/8	62	15	13	3.5	31	48
	> 25 to 50								50	56.7							65.7									

DIMENSIONS OF Ø 12 ANTI-ROTATION

\+ = ADD THE STROKE

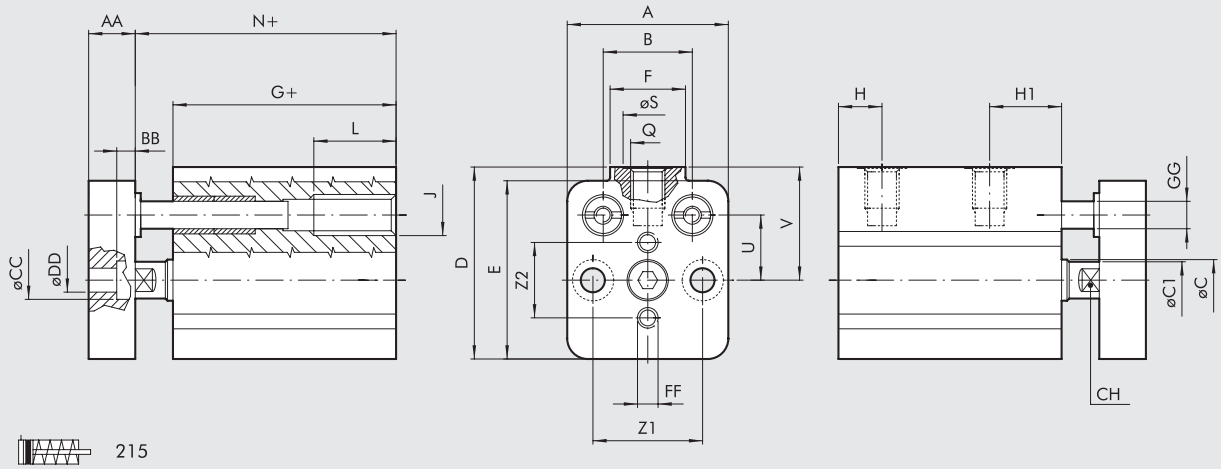



Ø	A	B	øC	øC1	D	E	F	G	H	H1	J	L	N	Z1	Z2	Q	øS	CH	U	V	AA	BB	øCC	øDD	FF	øGG
12	23.5	13	6	5.5	28	26	11	32.5	6.5	10.5	M6	12	38	16	11	M5	8	5	9.5	16.5	8	3.5	6	3.5	M3	4

DIMENSIONS OF Ø 16 TO Ø 100 ANTI-ROTATION

+ = ADD THE STROKE

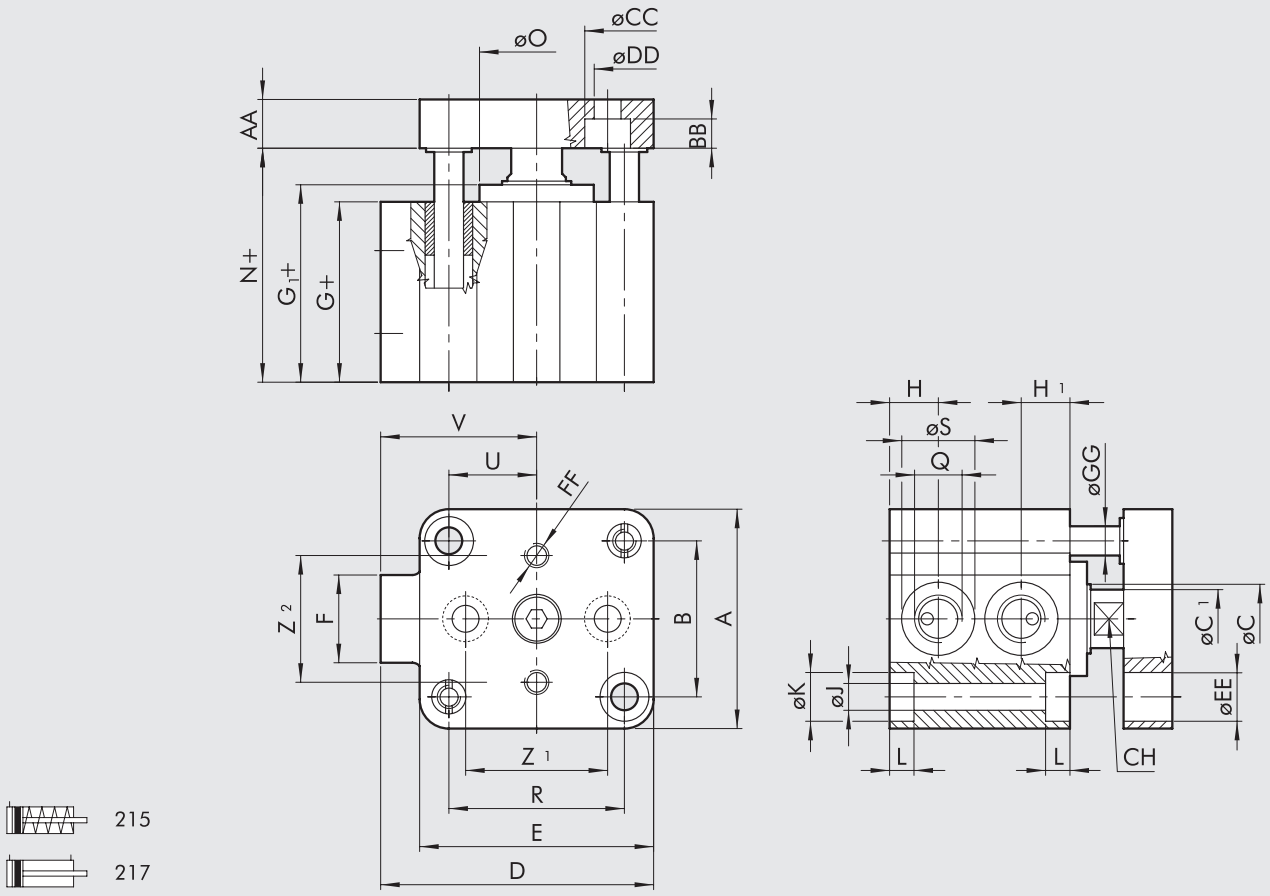

DOUBLE ACTING VERSION (217)

Ø	A	B	øC	øC1	D	E	F	G	G1	H	H1	J	K	L	N	Z1	Z2	Q	R	øS	CH	U	V	AA	BB	øCC	øDD	øEE	FF	øGG	øO
16	28	20	8	7.5	33	28	11	33	-	6.7	10.5	3.7	6	3.7	37.5	20	15	M5	20	8	7	10	19	8	3.5	6	3.5	6	M3	4	-
20	32	22	10	9	37	32	11	32	-	6.5	10.5	4.6	7.5	4.6	37.6	22	18	M5	22	8	8	11	21	8	5	7.5	4.5	7.5	M4	6	-
25	37	26	10	9	47.5	39	18	33	36.5	8.5	8.5	4.6	7.5	4.6	42.5	22	22	G1/8	28	15	8	14	28	8	5	7.5	4.5	8	M4	6	20
32	45	32	12	11	56	48	18	37	40.8	10	10	5.5	10	5.7	48.3	26	26	G1/8	36	15	10	18	32	10	6	10	5.5	10	M5	8	25
40	54.5	40	12	11	62.7	54.5	18	39.5	44.7	10	10	5.5	10	5.7	53.2	34	34	G1/8	40	15	10	20	35.5	10	6	10	5.5	10	M5	8	30
50	66	50	16	15	73	66	18	39.5	46.2	11	11	6.6	11	6.8	54.3	43	43	G1/8	50	15	13	25	40	12	7	11	6.5	11	M6	10	35
63	80	62	16	15	88	80	23	42	48.7	12	12	9	15	9	57.7	55	55	G1/8	62	15	13	31	48	12	9	14	9	15	M6	10	35
80	100	82	20	19	110	100	26	57	67.2	14	14	9	15	9	75.2	70	70	G1/4	82	19	17	41	60	14	9	14	9	15	M8	12	44
100	124	103	25	24	134	124	26	64	74.7	15	15	11	18	11	84.3	94	94	G1/4	103	19	22	51.5	72	17	9	14	9	18	M8	12	56

SINGLE-ACTING THROUGH-ROD VERSION (215)

Ø	Hub	A	B	øC	øC1	D	E	F	G	G1	H	H1	J	K	L	M	N	øO	P	Q	R	øS	CH	T	U	V
16	5 - 25	28	20	8	7.5	33	28	11	33	-	6.7	10.5	3.7	6	3.7	10	37.5	-	M5	M5	20	8	7	2	10	19
20	5 - 25	32	22	10	9	37	32	11	32	-	6.5	10.5	4.6	7.5	4.6	10	37.6	-	M5	M5	22	8	8	2	11	21
25	5 - 25	37	26	10	9	47.5	39	18	33	36.5	8.5	8.5	4.6	7.5	4.6	10	42.5	20	M5	G1/8	28	15	8	2	14	28
32	5 - 25	45	32	12	11	56	48	18	37	40.8	10	10	5.5	10	5.7	15	48.3	25	M6	G1/8	36	15	10	2.5	18	32
	> 25 - 50								45	48.8							56.3									
40	5 - 25	54.5	40	12	11	62.7	54.5	18	39.5	44.7	10	10	5.5	10	5.7	15	53.2	30	M6	G1/8	40	15	10	2.5	20	35.5
	> 25 - 50								47.5	52.7							61.2									
50	5 - 25	66	50	16	15	73	66	18	39.5	46.2	11	11	6.6	11	6.8	18	54.3	35	M8	G1/8	50	15	13	3.5	25	40
	> 25 - 50								47.5	54.2							62.3									
63	5 - 25	80	62	16	15	88	80	23	42	48.7	12	12	9	15	9	18	57.7	35	M8	G1/8	62	15	13	3.5	31	48
	> 25 - 50								50	56.7							65.7									

METAL WORK PNEUMATIC

DIMENSIONS OF THROUGH-ROD

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

PERFORATED THROUGH-ROD

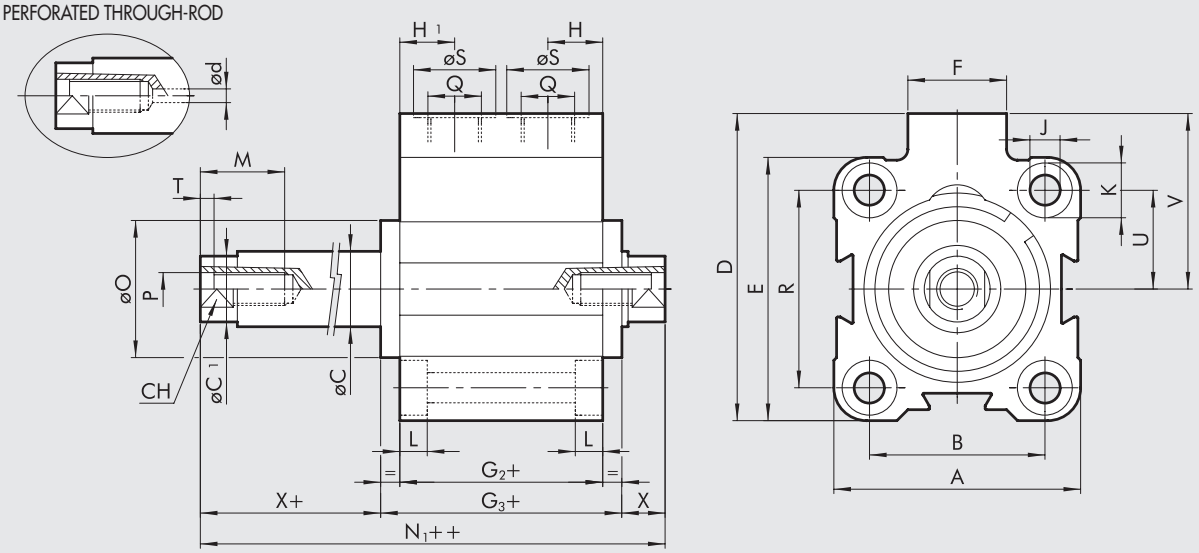



DIMENSION OF DOUBLE ACTING THROUGH-ROD AND PERFORATED THROUGH-ROD

Ø	A	B	øC	øC1	D	ød**	E	F	G2	G3	H	H1	J	K	L	M	N1	øO	P	Q	R	øS	CH	T	U	V	X*
12	23.5	13	6	5.5	28	-	26	11	36.7	-	10.5	10.5	3.7	6	3.7	7	47.7	-	M3	M5	-	8	5	2	9.5	16.5	5.5
16	28	20	8	7.5	33	-	28	11	36.8	-	10.5	10.5	3.7	6	3.7	10	45.8	-	M5	M5	20	8	7	2	10	19	4.5
20	32	22	10	9	37	1.5	32	11	36	-	10.5	10.5	4.6	7.5	4.6	10	47.2	-	M5	M5	22	8	8	2	11	21	5.6
25	37	26	10	9	47.5	1.5	39	18	35.7	42.7	8.5	8.5	4.6	7.5	4.6	10	54.7	20	M5	G1/8	28	15	8	2	14	28	6
32	45	32	12	11	56	2.5	48	18	37	44.5	10	10	5.5	10	5.7	15	59.5	25	M6	G1/8	36	15	10	2.5	18	32	7.5
40	54.5	40	12	11	62.7	2.5	54.5	18	39.5	49.9	10	10	5.5	10	5.7	15	66.9	30	M6	G1/8	40	15	10	2.5	20	35.5	8.5
50	66	50	16	15	73	2.5	66	18	39.5	52.9	11	11	6.6	11	6.8	18	69.1	35	M8	G1/8	50	15	13	3.5	25	40	8.1
63	80	62	16	15	88	4	80	23	42	55.4	12	12	9	15	9	18	73.4	35	M8	G1/8	62	15	13	3.5	31	48	9
80	100	82	20	19	110	5	100	26	57	77.4	14	14	9	15	9	18	93.4	44	M10	G1/4	82	19	17	4	41	60	8
100	124	103	25	24	134	6	124	26	64	85.4	15	15	11	18	11	20	104.6	56	M12	G1/4	103	19	22	5	51.5	72	9.6

* for Ø 12, 16, 20: $(N_1++) = (G_2+) + (X) + (X+)$
** column for perforated through-rod only

DIMENSION OF SINGLE-ACTING THROUGH-ROD

Ø	stroke	A	B	øC	øC1	D	E	F	G2	G3	H	H1	J	K	L	M	N1	øO	P	Q	R	øS	CH	T	U	V	X*
12	5 to 25	23.5	13	6	5.5	28	26	11	36.7	-	10.5	10.5	3.7	6	3.7	7	47.7	-	M3	M5	-	8	5	2	9.5	16.5	5.5
16	5 to 25	28	20	8	7.5	33	28	11	36.8	-	10.5	10.5	3.7	6	3.7	10	45.8	-	M5	M5	20	8	7	2	10	19	4.5
20	5 to 25	32	22	10	9	37	32	11	36	-	10.5	10.5	4.6	7.5	4.6	10	47.2	-	M5	M5	22	8	8	2	11	21	5.6
25	5 to 25	37	26	10	9	47.5	39	18	35.7	42.7	8.5	8.5	4.6	7.5	4.6	10	57.7	20	M5	G1/8	28	15	8	2	14	28	6
32	5 to 25	45	32	12	11	56	48	18	37	44.5	10	10	5.5	10	5.7	15	59.5	25	M6	G1/8	36	15	10	2.5	18	32	7.5
	> 25 to 50								45	52.5							67.5										7.5
40	5 to 25	54.5	40	12	11	62.7	54.5	18	39.5	49.9	10	10	5.5	10	5.7	15	66.9	30	M6	G1/8	40	15	10	2.5	20	35.5	8.5
	> 25 to 50								47.5	57.9							74.9										8.5
50	5 to 25	66	50	16	15	73	66	18	39.5	52.9	11	11	6.6	11	6.8	18	69.1	35	M8	G1/8	50	15	13	3.5	25	40	8.1
	> 25 to 50								47.5	60.9							77.1										8.1
63	5 to 25	80	62	16	15	88	80	23	42	55.4	12	12	9	15	9	18	73.4	35	M8	G1/8	62	15	13	3.5	31	48	9
	> 25 to 50								50	63.4							81.4										9

* for Ø 12, 16, 20: $(N_1++) = (G_2+) + (X) + (X+)$

DIMENSIONS: SAME AS 221 VERSION (MALE HINGE MOD. BA) - SAME AS 222 VERSION (FEMALE HINGE MOD. B)

VERSION 221 VERSION 222

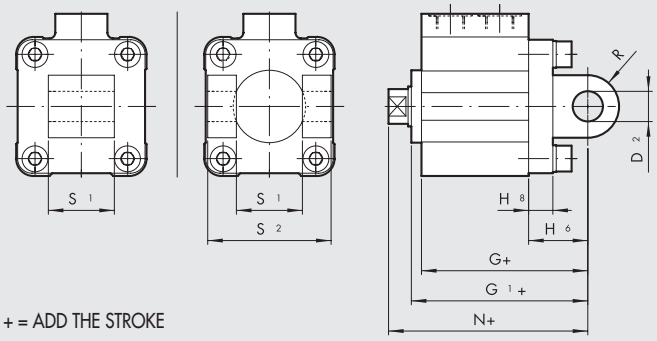

+ = ADD THE STROKE

Ø	Stroke	D_2	G	G_1	H_6	H_8	N	R	S_1	S_2
32	5 to 70	10	59	62.8	22	10	70.3	11	26	45
40	5 to 70	12	64.5	69.7	25	10	78.2	13	28	52
50	5 to 110	12	66.5	73.2	27	12	80.2	13	32	60
63	5 to 110	16	74	80.7	32	12	89.7	17	40	70

Note: For other dimensions, refer to the standard version

KEY TO CODES

CYL	2 1 2 TYPE	0	4 0 BORE	0 0 1 0 STROKE	C MATERIAL	P GASKETS
	■ **208** Single-acting retracted rod, non-magnetic ■ **209** Single-acting extended rod, non-magnetic ■ **210** Single-acting, retracted rod ■ **211** Single acting, extended rod **212** Double acting, magnetic **213** Double acting, non-magnetic **214** Double acting, through-rod ■ **215** Single-acting, retracted, anti-rotation **217** Double acting, anti-rotation ▼ **218** Double acting, perforated through-rod ✚ **221** Oscillating male hinge ✚ **222** Oscillating female hinge ■ **223** Single-acting, through-rod	**0** Standard **S** Non-magnetic ▲ **G** No stick-slip	12 16 20 25 32 40 50 63 80 ◆ 100	For the maximum suppliable strokes, look at the technical data	**C** C45 chrome piston rod, technopolymer piston Ø 12 to 63 mm **A** C45 chrome piston rod, aluminium piston (standard Ø 80 to 100 mm) **X** Stainless steel piston rod and nut technopolymer piston Ø 12 to 63 mm **Z** Stainless steel piston rod and nut aluminium piston (standard Ø 80 to 100 mm)	**P** Polyurethane gaskets **N** NBR gaskets ● **V** FKM/FPM gaskets ● **B** Low temperature

◆ In the code of cylinder with letter in fourth position Ø 100 becomes A1
■ Available up to Ø 63
▼ Available from Ø 20
✚ Available only Ø 32-63

● Only available for non-magnetic versions (S) and with aluminium piston (A or Z)
▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only**

ACCESSORIES

MALE NIPPLE FOR PISTON ROD

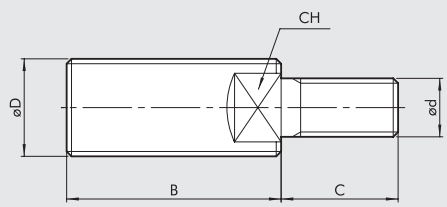

Code	Ø	Ø D	Ø d	B	C	CH	Weight [g]
219001200	**12**	M6	M3	16	6	4	3
219001600	**16**	M8	M5	20	9	6	8
219001600	**20**	M8	M5	20	9	6	8
219002500	**25**	M10x1.25	M5	22	9	7	12
219003200	**32**	M10x1.25	M6	22	12	7	14
219004000	**40**	M12x1.25	M6	24	12	10	14
219005000	**50**	M16x1.5	M8	32	15	13	20
219005000	**63**	M16x1.5	M8	32	15	13	20
219008000	**80**	M20x1.5	M10	40	15	17	96
219010000	**100**	M20x1.5	M12	40	18	17	102

MAGNETIC SENSORS

SENSOR SERIES DCB



For codes and technical data, see **chapter A6**.

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

ADAPTER FOR RETRACTABLE SENSOR SQUARE AND OVAL TYPES

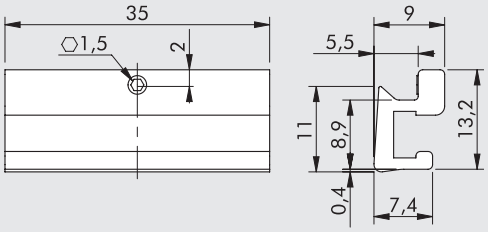

Code	Ø	Description
W0950001101	Ø 12 to 100	Sensor Adapter for SSC cylinders

ASSEMBLY DIAGRAM

① SSCY cylinder
② Sensor adapter for SSCY cylinders
③ Retractable sensor "oval type"
④ Retractable sensor "square type"
⑤ Grub screw for fixing adapter on profile



SPARES PARTS FOR SHORT-STROKE CYLINDERS

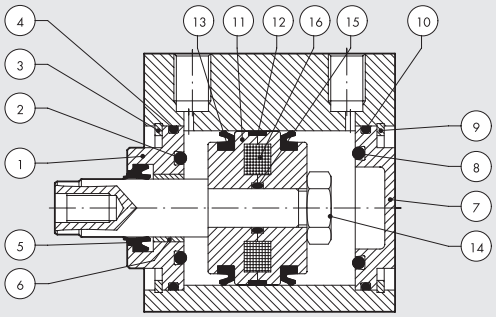

Code	Bores	Type	Parts
009 . . . 0010	Ø 12 to 100	Complete polyurethane front head kit	① ② ③ ④ ⑤ ⑥
009 . . . 0011	Ø 12 to 100	Complete NBR front head kit	① ② ③ ④ ⑤ ⑥
009 . . . 0015	Ø 12 to 100	Complete NBR rear head kit	⑦ ⑧ ⑨ ⑩
009 . . . 0021	Ø 12 to 100	Complete polyurethane piston kit	⑪ ⑫ ⑬ ⑭ ⑮
009 . . . 0023	Ø 12 to 100	Complete NBR piston kit	⑪ ⑫ ⑬ ⑭ ⑮
009 . . . 0005	Ø 12 to 100	Complete set of polyurethane gaskets	② ④ ⑤ ⑧ ⑩ ⑬ ⑮
009 . . . 0006	Ø 12 to 100	Complete set of NBR gaskets	② ④ ⑤ ⑧ ⑩ ⑬ ⑮
009 . . . 0007	Ø 12 to 100	Complete set of (high temperature) FKM/FPM gaskets	② ④ ⑤ ⑧ ⑩ ⑬ ⑮
009 . . . 2008	Ø 12 to 63	Polyurethane piston rod gasket kit	⑤
009 . . . 2008	Ø 80 to 100	Polyurethane piston rod gasket kit + seeger	⑤
009 . . . 2009	Ø 12 to 63	NBR piston rod gasket kit	⑤
009 . . . 2009	Ø 80 to 100	NBR piston rod gasket kit + seeger	⑤
009 . . . 2010	Ø 12 to 63	FKM/FPM piston rod gasket kit	⑤
009 . . . 2010	Ø 80 to 100	FKM/FPM piston rod gasket kit + seeger	⑤

CARTRIDGE MICRO-CYLINDER SERIES CRTC

Single-acting micro-cylinders with threaded body for fixing in small space or directly inside the machine body, owing to the external O-ring which ensures perfect seal.

ATTENTION: in case of cycles with high frequences it's advisable that the piston doesn't reach the end of the stroke during the rod coming out stage.

TECHNICAL DATA

Operating pressure	bar	2 to 6
	MPa	0.2 to 0.6
Temperature range	°C	–10 to +80
Fluid		Lubricated or unlubricated air.
		Lubrication, if used, must be continuous
Bores	mm	6; 10; 16
Strokes	mm	5; 10; 15
Port		M5
Versions		Single-acting
Design		Mechanically edged

Seal OR on the body (not included in the supply)

Ø	OR
6	7x1
10	9.5x1.5
16	16x1.5

Weight g

Ø	STROKE		
	5	10	15
6	14	16	19
10	30	35	40
16	76	84	90

COMPONENTS

① Nickel-plated brass body
② NBR rubber piston rod gasket (for Ø 6), polyurethane (for Ø 10 - Ø 16)
③ AISI 303 steel piston/piston rod (for Ø 6 - Ø 10) Brass piston (for Ø 16)
④ Steel spring
⑤ Zinc-plated steel nut
⑥ Brass bushing
⑦ AISI 303 steel piston rod (for Ø 16)
⑧ Zinc-plated steel nut

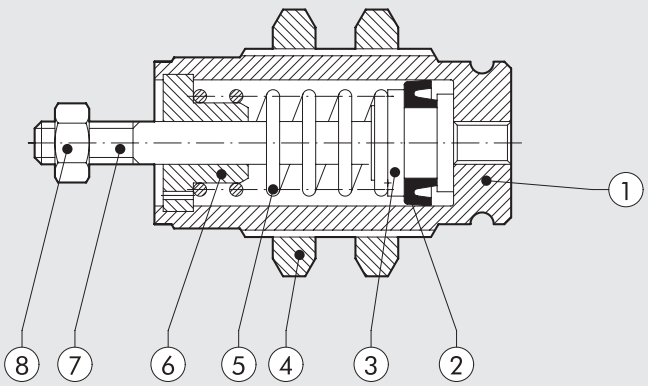

METAL WORK PNEUMATIC

CARTRIDGE CYLINDER DIMENSIONS, Ø 6, 10, 16



Ø	A Stroke 5	A Stroke 10	A Stroke 15	B Stroke 5	B Stroke 10	B Stroke 15	C	CH	CH1	E	F	G	H	M	N	S	SW
6	19.5	26.5	33.5	14.5	21.5	28.5	5	9	5.5	8	M3	8.5	M10x1	M5	2.4	3	14
10	23	29.5	36.5	16	22.5	29.5	7	14	7	10.5	M4	12	M15x1.5	M5	2	4	19
16	27	32	37	21	26	31	6	20	8	13	M5	19	M22x1.5	M5	4	5	27

ASSEMBLY SEAT DIMENSIONS

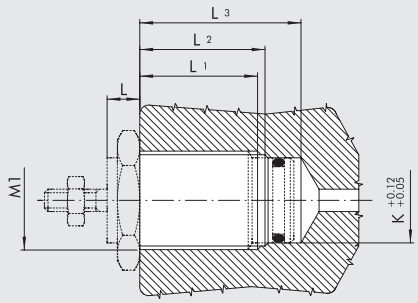

Ø	L Stroke 5	L Stroke 10	L Stroke 15	L1 Stroke 5	L1 Stroke 10	L1 Stroke 15	L2 Stroke 5	L2 Stroke 10	L2 Stroke 15	L3 Stroke 5	L3 Stroke 10	L3 Stroke 15	K	Hole	M1
6	5	5	5	10	17	24	11	18	25	16	24	31	8.5	9	M10x1
10	6	6	6	10	17	24	12	18.5	25.5	20	26	34	12	13.5	M15x1.5
16	7	7	7	14	19	24	15	20	25	26	31	36	19	20.5	M22x1.5

KEY TO CODES

Code	Description
W1000060005	CYL. CRTC-006-0005-S000-00
W1000060010	CYL. CRTC-006-0010-S000-00
W1000060015	CYL. CRTC-006-0015-S000-00
W1000100005	CYL. CRTC-010-0005-S000-00
W1000100010	CYL. CRTC-010-0010-S000-00
W1000100015	CYL. CRTC-010-0015-S000-00
W1000160005	CYL. CRTC-016-0005-S000-00
W1000160010	CYL. CRTC-016-0010-S000-00
W1000160015	CYL. CRTC-016-0015-S000-00

KEY TO CODES

CYL	C R T C	0 1 0	0 0 1 0	S 0 0 0	0 0	0 0
	TYPE	DIAMETER	STROKE	TYPE	FURTHER DESCRIPTION	SPECIAL DESIGN
	Cartridge microcylinder	006 010 016	0005 0010 0015	Single-acting retracted piston rod		

COMPACT GUIDED CYLINDER SERIES MULTIFIX

This functional and heavy-duty cylinder is a further development of the well-known and proven CMPG series. It is designed to allow the fixing on multiple sides using different methods, compressed air supply on both sides and double sensor slots, on both the upper and lower side.
The bushing guides of the piston rods are fitted directly into the anodized aluminium alloy cylinder liner.
There are two possible guiding solutions: sintered bronze bushings coupled with piston rods made of ground chromed carbon steel or ball recirculating bushings coupled with hardened, chromed and ground steel.
A silenced version with elastic end-stroke elements and a version with pneumatic cushioning with adjustable pins to control the braking are also available.

TECHNICAL DATA			Ø16	Ø20	Ø25	Ø32	Ø40	Ø50	Ø63	Ø80
Operating pressure		bar	1 to 10							
		MPa	0.1 to 1							
		psi	14.5 to 145							
Temperature range		°C	-20 to +80							
		°F	14 to 176							
Fluid			Unlubricated air. Lubrication, if used, mast be continuos.							
Version			With bronze bushings, with ball recirculating bearings							
			Silenced or with pneumatic cushioning							
Magnet for sensors			Yes							
Maximum impact energy	silenced	J	0.06	0.14	0.2	0.4	0.6	0.9	1.3	2
	with pneumatic cushioning	J	See diagram page **A1**.162							
Inrush pressure	with bronze bearings	bar	0.8	0.8	0.8	0.5	0.5	0.4	0.4	0.4
	with ball recirculating bearings	bar	0.6	0.6	0.6	0.4	0.4	0.3	0.3	0.3
Forces generated in thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter							

WEIGHTS [kg] - STROKES

SILENCED VERSION

Bore	Strokes [mm]															
	10	20	25	30	40	50	75	100	125	150	175	200	250	300	350	400
16	0.3	0.35	–	0.4	0.45	0.5	0.7	0.85	1	1.15	1.3	1.45	1.6	–	–	–
20	–	0.55	–	0.65	0.75	0.85	1.15	1.35	1.55	1.75	1.95	2.15	2.5	2.9	3.3	3.7
25	–	0.9	–	1.05	1.2	1.35	1.9	2.25	2.55	2.85	3.15	3.35	4	4.35	4.7	5
32	–	–	1.5	–	–	1.85	2.25	2.6	3	3.35	3.7	4.05	5.2	5.9	6.6	7.3
40	–	–	1.75	–	–	2.15	2.55	2.95	3.35	3.75	4.15	4.55	5.8	6.6	7.4	8.2
50	–	–	2.56	–	–	3.18	4.26	4.89	5.51	6.13	6.75	7.37	8.90	10.14	11.38	12.73
63	–	–	3.17	–	–	3.90	5.10	5.84	6.57	7.31	8.04	8.78	10.63	12.11	13.58	15.05
80	–	–	5	–	–	5.89	7.60	8.46	9.32	10.18	11.14	11.91	13.94	15.66	18.35	19.11

Other strokes on request but with the same cylinder dimensions as the standard stroke immediately above.

VERSION WITH PNEUMATIC CUSHIONING

Bore	Strokes [mm]											
	25	50	75	100	125	150	175	200	250	300	350	400
16	0.55	0.65	0.8	0.95	1.2	1.35	1.5	1.65	1.8	–	–	–
20	0.8	1	1.25	1.5	1.75	2	2.25	2.5	2.75	3	3.25	3.5
25	1.3	1.6	2	2.4	2.7	3	3.3	3.6	4.2	4.8	5.4	6
32	1.8	2.1	2.5	2.9	3.3	3.7	4.1	4.5	5.3	6.1	6.9	7.7
40	2.1	2.5	2.9	3.4	3.8	4.2	4.6	5	6.1	7.1	8.2	9.3
50	3.35	3.70	4.79	5.41	6.03	6.65	7.27	7.90	9.42	10.66	11.90	13.53
63	3.87	4.07	5.80	6.54	7.28	8.01	8.75	9.48	11.29	12.71	14.18	15.65
80	5.82	6.85	8.59	9.46	10.91	11.20	12.08	12.95	15.11	16.96	19.33	20.68

METAL WORK PNEUMATIC

COMPONENTS SILENCED VERSION

① BODY: anodized extruded aluminium alloy
② PISTON ROD: grinded chromed steel
③ REAR BASE: anodized aluminium alloy
④ FRONT BASE: anodized aluminium alloy
⑤ PISTON: aluminium alloy
⑥ MAGNET: plastoferrite
⑦ PISTON GASKET: NBR or polyurethane
⑧ GASKET O-Ring: NBR
⑨ FLANGE: anodized aluminium alloy
⑩ ELASTIC BUFFER: polyurethane
⑪ THREADED PLUG: nickel-plated brass with O-Ring
N.B.: when using side compressed air supplies, unscrew the caps and tighten them onto the threads of the compressed air supplies on the upper side.

Version with bronze bushings
⑫ GUIDE ROD: grinded chromed steel
⑬ SLIDE BUSHING: sintered bronze
⑭ WIPER RING: NBR

Version with ball recirculating bearings
⑮ GUIDE ROD: tempered and chromed chrome steel
⑯ BALL RECIRCULATING BEARING

Version with ball recirculating bearings

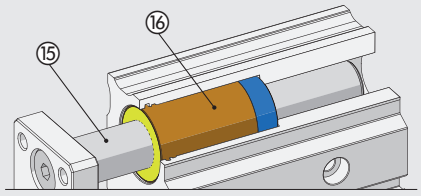

Version with bronze bushings

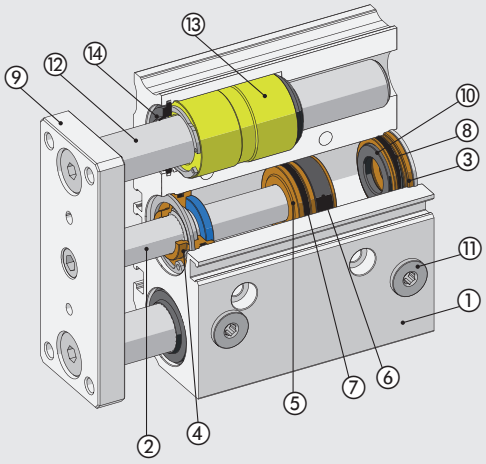

COMPONENTS VERSION WITH PNEUMATIC CUSHIONING

① BODY: anodized extruded aluminium alloy
② PISTON ROD: grinded chromed steel
③ REAR BASE: anodized aluminium alloy
④ FRONT BASE: anodized aluminium alloy
⑤ PISTON: aluminium alloy
⑥ MAGNET: plastoferrite
⑦ PISTON GASKET: NBR or polyurethane
⑧ GASKET O-Ring: NBR
⑨ FLANGE: anodized aluminium alloy
⑩ CUSHIONING GASKET: NBR
⑪ CUSHIONING NEEDLE: brass
⑫ THREADED PLUG: nickel-plated brass with O-Ring
N.B.: when using side compressed air supplies, unscrew the caps and tighten them onto the threads of the compressed air supplies on the upper side.

Version with bronze bushings
⑬ GUIDE ROD: grinded chromed steel
⑭ SLIDE BUSHING: sintered bronze
⑮ WIPER RING: NBR

Version with ball recirculating bearings
⑯ GUIDE ROD: tempered and chromed chrome steel
⑰ BALL RECIRCULATING BEARING

Version with ball recirculating bearings

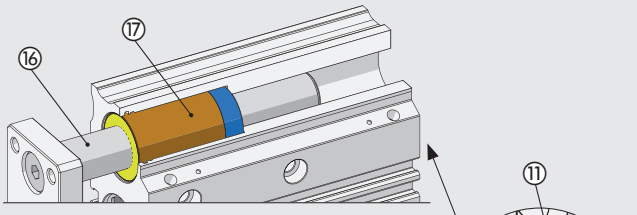

Version with bronze bushings

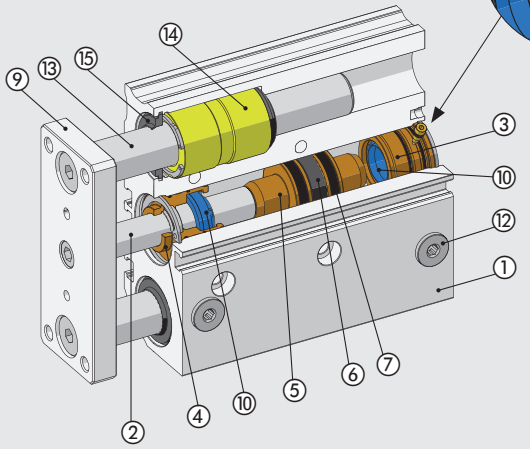

DIAGRAM OF SPEED AND MAXIMUM CUSHIONABLE LOAD

For the cylinder to reach the end-of-stroke position without intense or repeated impact which would damage it, it is necessary to annul the kinetic energy of the moving mass and the work generated.
The maximum cushionable load depends on the traversing speed and the absorption of the air buffer supplied standard with the various cylinders.
The diagram shows the speeds and cushionable mass for the various diameters at a pressure of 6 bar.

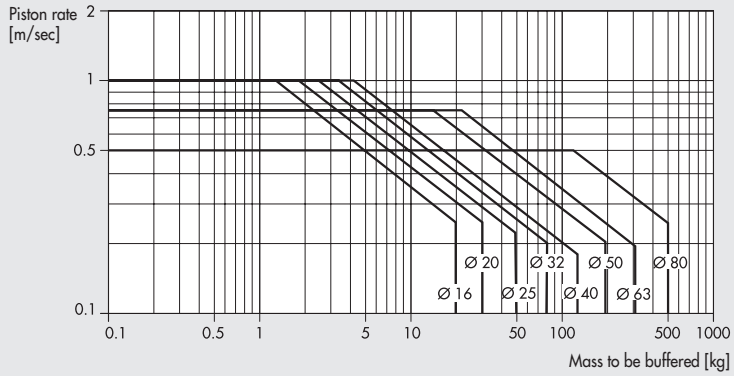

MAXIMUM SIDE LOAD

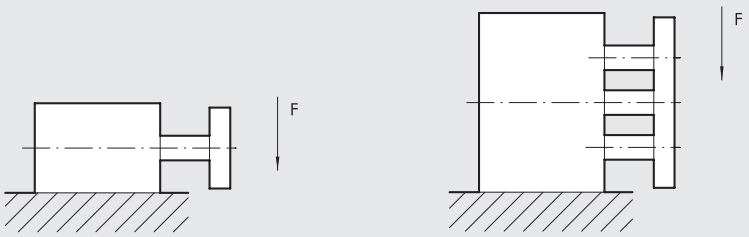

Ø	Guide unit	Strokes [mm]															
[mm]		10	20	25	30	40	50	75	100	125	150	175	200	250	300	350	400
16	Bushes	40	35	32	29	25	24	25	20	19	18	16	13	10	–	–	–
	Balls	35	38	33	30	29	28	35	24	21	19	16	13	10	–	–	–
20	Bushes	–	40	35	33	32	30	63	52	49	40	36	32	26	22	14	10
	Balls	–	40	34	32	31	28	55	50	45	38	34	30	25	21	12	8
25	Bushes	–	70	60	50	40	36	80	70	65	55	50	45	35	25	18	10
	Balls	–	70	60	50	40	36	65	55	62	52	45	42	30	23	15	6
32	Bushes	–	–	140	–	–	120	150	120	110	90	80	70	50	40	20	10
	Balls	–	–	120	–	–	100	180	140	125	120	110	90	80	60	30	15
40	Bushes	–	–	140	–	–	120	150	120	110	90	80	70	50	40	20	10
	Balls	–	–	120	–	–	100	180	140	125	120	110	90	80	60	30	15
50	Bushes	–	–	180	–	–	150	200	170	150	140	130	100	70	55	25	15
	Balls	–	–	125	–	–	110	220	190	185	180	160	150	130	110	60	40
63	Bushes	–	–	180	–	–	150	200	170	150	140	130	100	70	55	25	15
	Balls	–	–	125	–	–	110	220	190	185	180	160	150	130	110	65	40
80	Bushes	–	–	250	–	–	190	250	220	200	150	130	125	95	70	30	20
	Balls	–	–	170	–	–	170	320	300	280	250	200	190	160	140	70	60

Centre of gravity distance from the front plane = 50 mm
N.B.: Forces are expressed in N

METAL WORK PNEUMATIC

MAXIMUM TORQUE ON PLATE



Ø	Guide unit	Strokes [mm]															
[mm]		10	20	25	30	40	50	75	100	125	150	175	200	250	300	350	400
16	Bushes	0.71	0.60	0.54	0.50	0.44	0.39	0.71	0.60	0.52	0.45	0.41	0.37	0.31	–	–	–
	Balls	1.02	0.76	0.62	0.61	1.02	0.89	0.67	0.54	0.44	0.38	0.33	0.29	0.24	–	–	–
20	Bushes	–	1.08	1.03	0.96	0.85	0.77	1.94	1.68	1.48	1.32	1.19	1.09	0.93	0.80	0.71	0.64
	Balls	–	1.30	1.13	1.06	2.24	2.00	1.57	1.29	1.38	1.21	1.06	0.96	0.78	0.67	0.58	0.50
25	Bushes	–	1.81	1.67	1.60	1.42	1.29	3.05	2.65	2.33	2.08	1.88	1.72	1.46	1.28	1.12	1.01
	Balls	–	2.17	2.01	1.80	3.47	3.11	2.45	2.03	2.11	1.83	1.63	1.45	1.19	1.01	0.88	0.76
32	Bushes	–	–	6.54	–	–	5.28	5.86	5.12	4.55	4.10	3.72	3.41	2.93	2.55	2.27	2.04
	Balls	–	–	6.13	–	–	5.04	5.26	4.65	6.53	5.96	5.49	5.08	4.42	3.89	3.48	3.13
40	Bushes	–	–	7.21	–	–	5.83	6.46	5.64	5.02	4.51	4.10	3.76	3.22	2.82	2.50	2.26
	Balls	–	–	6.75	–	–	5.55	5.79	5.11	7.19	6.57	6.05	5.59	4.86	4.28	3.82	3.45
50	Bushes	–	–	13.39	–	–	11.12	12.36	10.92	9.79	8.86	8.10	7.46	6.43	5.65	5.05	4.56
	Balls	–	–	9.45	–	–	7.85	10.12	9.00	11.95	11.02	10.12	9.39	8.19	7.23	6.45	5.80
63	Bushes	–	–	15.14	–	–	12.46	13.91	12.26	11.02	9.98	9.13	8.40	7.25	6.38	5.69	5.14
	Balls	–	–	10.51	–	–	8.73	11.33	10.03	13.39	12.26	11.33	10.51	9.11	8.03	7.15	6.43
80	Bushes	–	–	22.55	–	–	19.15	23.58	21.11	19.15	17.51	16.06	14.93	12.97	11.53	10.30	9.38
	Balls	–	–	15.55	–	–	23.99	23.38	21.21	19.46	17.81	16.48	15.24	13.28	11.63	10.30	9.20

N.B.: Forces are expressed in Nm

TORSIONAL BACKLASH

Torsional backlash β with piston rods retracted and without applied loads.

	Ø [mm]							
Torsional backlash β [°]	**16**	**20**	**25**	**32**	**40**	**50**	**63**	**80**
With bronze bushings	±0.07	±0.06	±0.06	±0.05	±0.05	±0.04	±0.04	±0.03
With ball recirculating bearings	±0.05	±0.04	±0.04	±0.03	±0.03	±0.03	±0.03	±0.03



MOUNTING OPTIONS

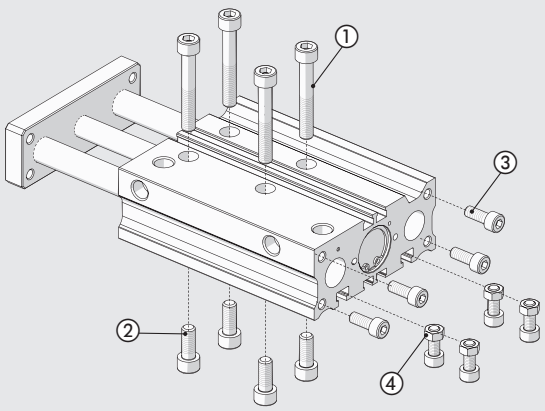

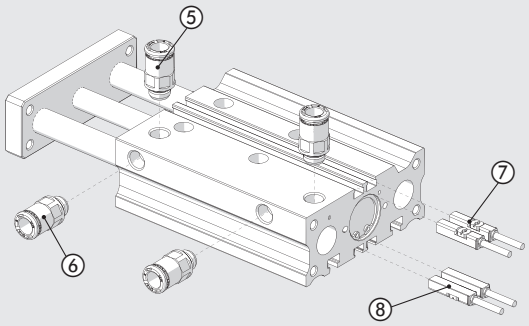

① Fixing with through screws
② Fixing with threaded holes
③ Fixing from the back side, using threaded holes
④ Fixing with DIN 834 hexagonal nuts inserted into the T-slots

Ø	Hexanogal nut DIN 834 (UNI 5588)		
	D	m	S
16	M4	3.2	7
20	M5	4	8
25	M5	4	8
32	M6	5	10
40	M6	5	10
50	M8	6.5	13
63	M10	8	17
80	M12	10	19



⑤ Compressed air supply on the upper side
⑥ Compressed air supply on the lateral side
⑦ Two sensor slots on the upper side
⑧ Two sensor slots on the lower side

STOPPER FUNCTIONS

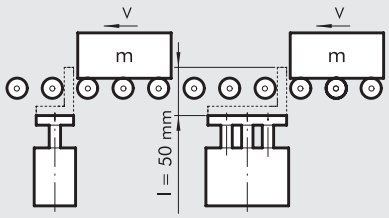

The graph refers to a cylinder with a maximum stroke of 50 mm and with bushing guides.

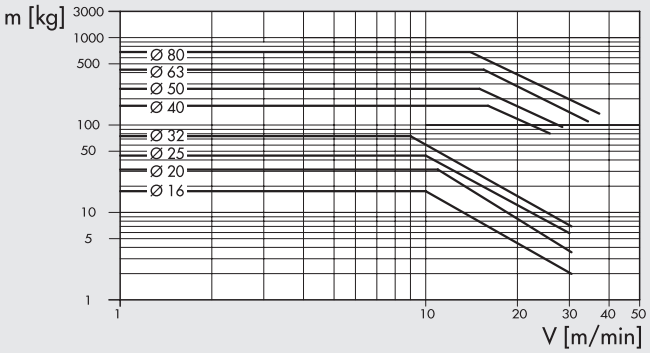

N.B.: The version with a ball bushing must not be used as a stopper.

LIFTING FUNCTIONS



The graph refers to cylinders with a stroke of up to 50 mm with a ball recirculation guide.

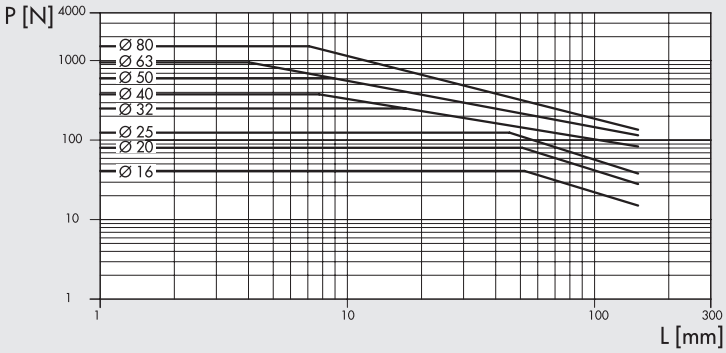

The graph refers to cylinders with a stroke greater than 50 mm with a ball recirculation guide.

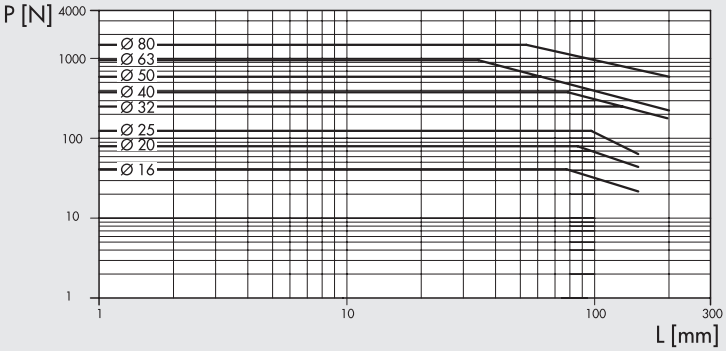

The graph refers to cylinders with a bushing guide.

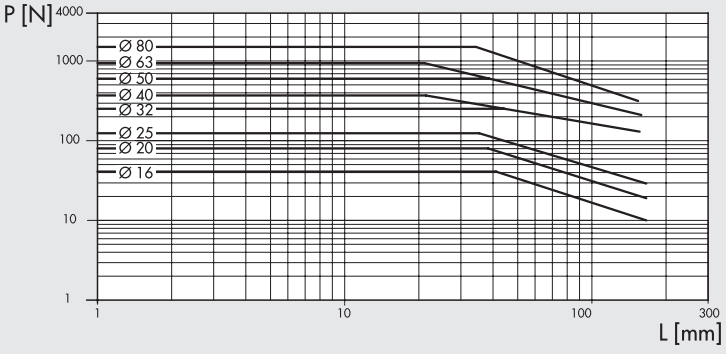

METAL WORK PNEUMATIC

DIMENSIONS SILENCED VERSION Ø 16 - 63

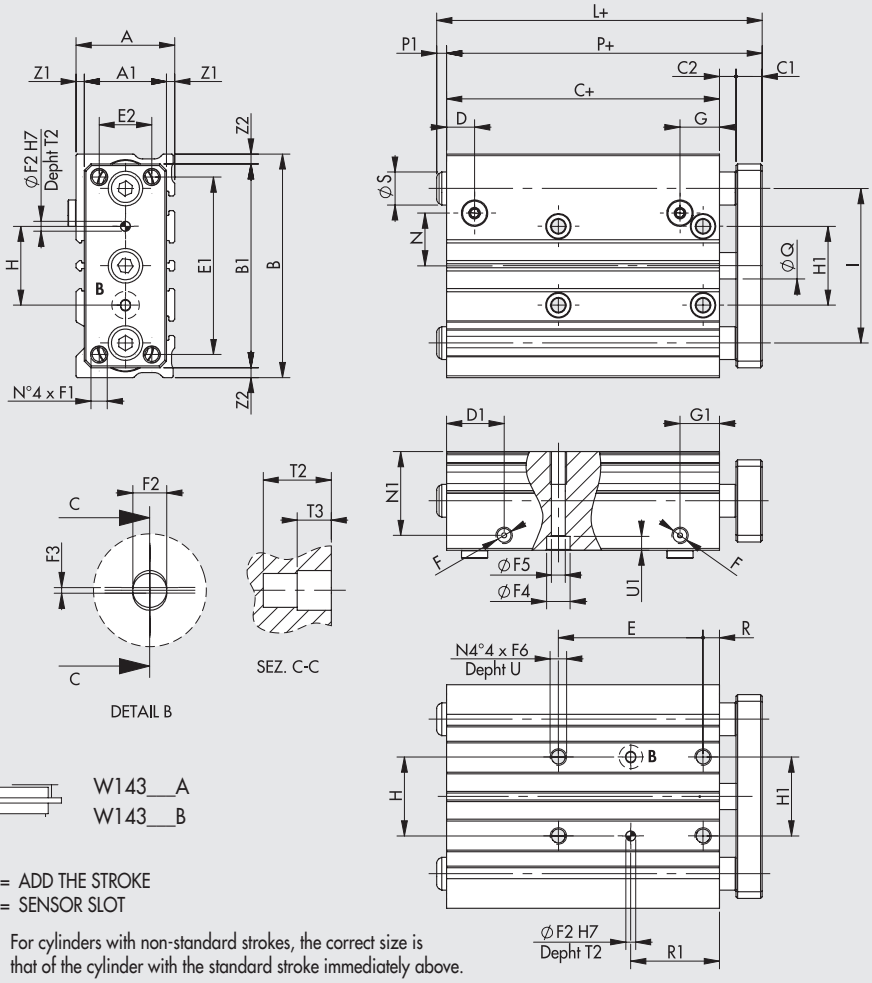

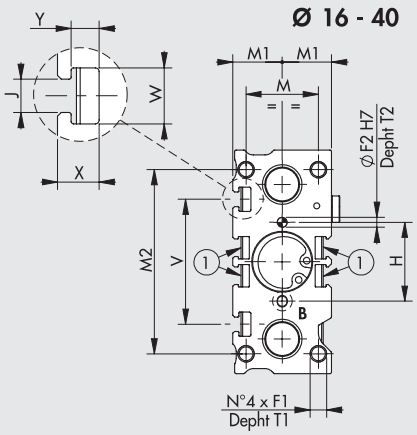

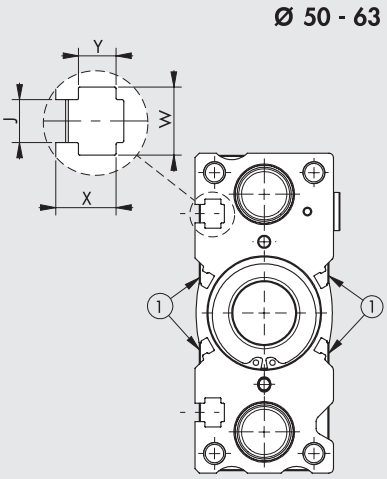

\+ = ADD THE STROKE
1 = SENSOR SLOT

◆ For cylinders with non-standard strokes, the correct size is that of the cylinder with the standard stroke immediately above.

Ø	A	A1	B	B1	C◆	C1	C2	D	D1	E1	E2	F	F1	F2^{H7}	F3	F4	F5	F6	G	G1	H$^{\pm 0.025}$	H1	I	J	M	M1
16	30	25	68	62	33	8	5	8.5	17.5	54	16	M5	M5	3	0.5	7.2	4.2	M5	12	12	24	24	47	4.4	22	15
20	36	30	83	81	37	10	6	9.5	24.5	70	18	G1/8	M5	3	0.5	8.8	5.2	M6	10.5	10.5	28	28	54	5.4	24	18
25	42	38	101	91	37.5	10	6	10	24.5	78	26	G1/8	M6	4	0.5	8.8	5.2	M6	10	10	34	34	68	5.4	30	21
32	48	44	112	110	37.5	12	10	10	28	96	30	G1/8	M8	4	0.5	10.2	6.8	M8	10.5	10.5	42	42	78	6.5	34	24
40	54	44	120	118	44	12	10	12.5	31	104	30	G1/8	M8	4	0.5	10.2	6.8	M8	12.5	12.5	50	50	86	6.5	40	27
50	64	60	148	146	44	16	12	11	35	130	40	G1/4	M10	5	1	14	8.6	M10	14	12	66	66	110	8.5	46	32
63	78	70	162	158	49	16	12	13.5	35	130	50	G1/4	M10	5	1	14	8.6	M10	16.5	16.5	80	80	124	11	58	39

Ø	M2	N	N1	P◆	Q	R	S	T1	T2	T3	U	U1	V	W	X	Y	Z1	Z2
16	56	16	25.5	46	8	5	10	10	6	3	10	4.2	38	7.4	5.5	3.7	2.5	3
20	72	25	29.5	53	10	17	12	12	6	3	12	5.2	44	8.4	7	4.5	3	1
25	82	25.5	36	53.5	12	17	16	12	6	3	12	5.2	50	8.4	7	4.5	2	5
32	98	35.5	41	59.5	16	21	20	16	6	3	16	6.2	63	10.5	7.5	5.5	2	1
40	106	36	46.5	66	16	22	20	16	6	3	16	6.2	72	10.5	7.5	5.5	5	1
50	130	47	54	72	20	24	25	21	8	4	20	9	92	13.5	12	7.5	2	1
63	142	55	67	77	20	24	25	21	8	4	20	9	110	17.8	17	10	4	2

	E					R1					L◆			P1		
	Strokes					Strokes					Strokes			Strokes		
Ø	**10-30**	**40-100**	**125-200**	**250-300**	**350-400**	**10-30**	**40-100**	**125-200**	**250-300**	**350-400**	**10-50**	**75-200**	**250-400**	**10-50**	**75-200**	**250-400**
16	24	44	110	200	-	17	27	60	105	-	49	79	109	3	33	63
20	24	44	120	200	300	29	39	77	117	167	58	88	118	5	35	65
25	24	44	120	200	300	29	39	77	117	167	70.5	103	118	17	49.5	64.5
32	24	48	124	200	300	33	45	83	121	171	88	88	138	28.5	28.5	78.5
40	24	48	124	200	300	34	46	84	122	172	88	88	138	22	22	72
50	24	48	124	200	300	36	48	86	124	174	79	112	160	7	40	88
63	28	52	128	200	300	38	50	88	124	174	78.5	111.5	159.5	1.5	34.5	82.5

DIMENSIONS SILENCED VERSION Ø 80

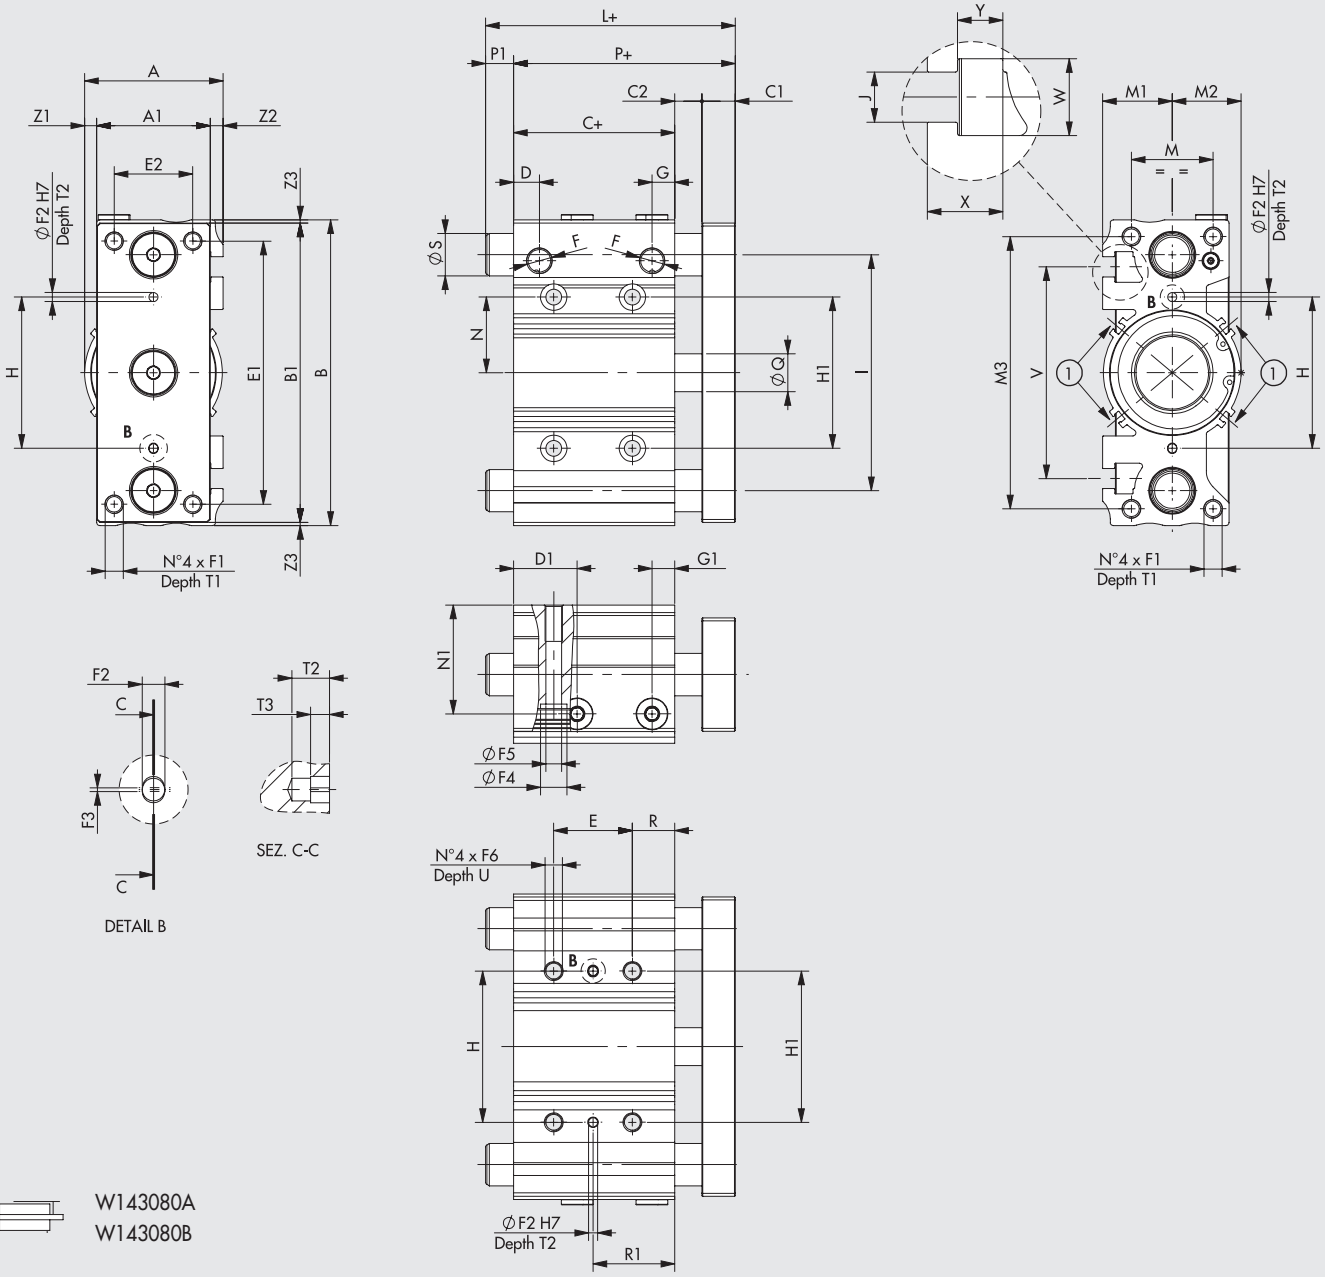

W143080A
W143080B

\+ = ADD THE STROKE
1 = SENSOR SLOT

◆ For cylinders with non-standard strokes, the correct size is that of the cylinder with the standard stroke immediately above.

Ø	A	A1	B	B1	C ◆	C1	C2	D	D1	E1	E2	F	F1	$F2^{H7}$	F3	F4	F5	F6	G	G1	$H^{\pm 0.025}$	H1	I	J	M	M1
80	91.5	75	202	198	56.5	22	18	17	42	174	52	G3/8	M12	6	1	17.5	10.5	M12	15	15	100	100	156	13.3	54	46

Ø	M2	M3	N	N1	P ◆	Q	R	S	T1	T2	T3	U	V	W	X	Y	Z1	Z2	Z3
80	45.5	180	50	72	96.5	25	28	28	25	10	5	24	140	20.3	20	12	8	8.5	2

	E					R1					L ◆			P1		
	Strokes					Strokes					Strokes			Strokes		
Ø	25	50-100	125-200	250-300	350-400	25	50-100	125-200	250-300	350-400	25-50	75-200	250-400	25-50	75-200	250-400
80	28	52	128	200	300	42	54	92	128	178	115	163	194	18.5	66.5	97.5

METAL WORK PNEUMATIC

DIMENSIONS WITH PNEUMATIC CUSHIONING VERSION Ø 16 - 63

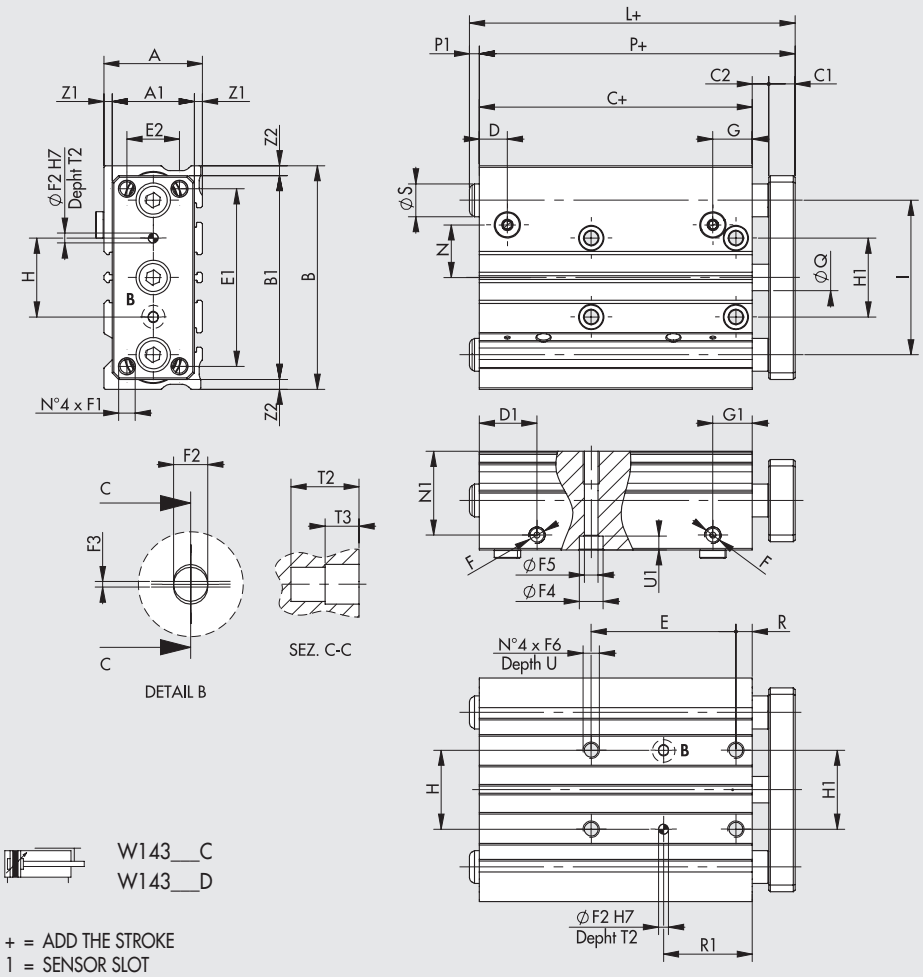

Ø 16 - 40

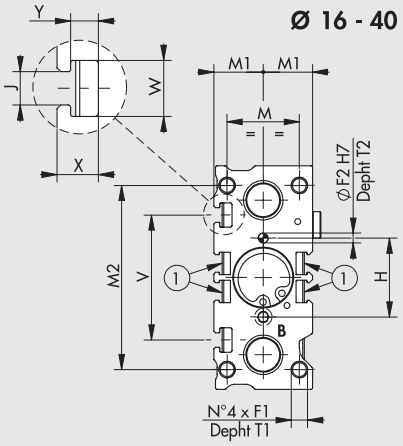

Ø 50 - 63

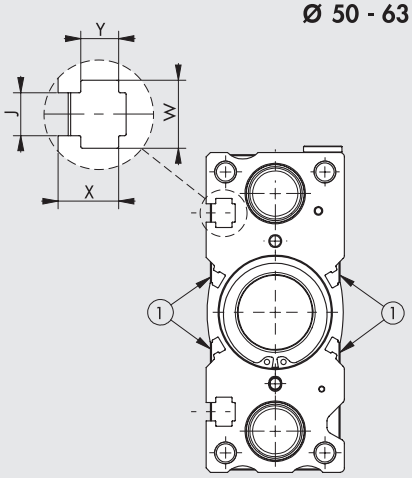

Ø	A	A1	B	B1	C	C1	C2	D	D1	E1	E2	F	F1	F2^{H7}	F3	F4	F5	F6	G	G1	H$^{\pm 0.025}$	H1	I	J	M	M1
16	30	25	68	62	58	8	5	8.5	17.5	54	16	M5	M5	3	0.5	7.2	4.2	M5	12	12	24	24	47	4.4	22	15
20	36	30	83	81	62	10	6	9	24.5	70	18	G1/8	M5	3	0.5	8.8	5.2	M6	11.5	11.5	28	28	54	5.4	24	18
25	42	38	101	91	62.5	10	6	9.5	24.5	78	26	G1/8	M6	4	0.5	8.8	5.2	M6	10	10	34	34	68	5.4	30	21
32	48	44	112	110	62.5	12	10	9	28	96	30	G1/8	M8	4	0.5	10.2	6.8	M8	9	9	42	42	78	6.5	34	24
40	54	44	120	118	69	12	10	10	31	104	30	G1/8	M8	4	0.5	10.2	6.8	M8	10	10	50	50	86	6.5	40	27
50	64	60	148	146	69	16	12	11	35	130	40	G1/4	M10	5	1	14	8.6	M10	14	12	66	66	110	8.5	46	32
63	78	70	162	158	74	16	12	13.5	35	130	50	G1/4	M10	5	1	14	8.6	M10	16.5	16.5	80	80	124	11	58	39

Ø	M2	N	N1	P	Q	R	S	T1	T2	T3	U	U1	V	W	X	Y	Z1	Z2
16	56	16	25.5	71	8	5	10	10	6	3	10	4.2	38	7.4	5.5	3.7	2.5	3
20	72	25	29.5	78	10	17	12	12	6	3	12	5.2	44	8.4	7	4.5	3	1
25	82	25.5	36	78.5	12	17	16	12	6	3	12	5.2	50	8.4	7	4.5	2	5
32	98	35.5	41	84.5	16	21	20	16	6	3	16	6.2	63	10.5	7.5	5.5	2	1
40	106	36	46.5	91	16	22	20	16	6	3	16	6.2	72	10.5	7.5	5.5	5	1
50	130	47	54	97	20	24	25	21	8	4	20	9	92	13.5	12	7.5	2	1
63	142	55	67	102	20	24	25	21	8	4	20	9	110	17.8	17	10	4	2

	E				R1				L			P1		
	Strokes				Strokes				Strokes			Strokes		
Ø	25-75	100-175	200-250	300-400	25-75	100-175	200-250	300-400	25-50	75-200	250-400	25-50	75-200	250-400
16	44	110	200	-	27	60	105	-	71	79	109	0	8	38
20	44	120	200	300	39	77	117	167	78	88	118	0	10	40
25	44	120	200	300	39	77	117	167	78.5	103	118	0	24.5	39.5
32	48	124	200	300	45	83	121	171	88	88	138	3.5	3.5	53.5
40	48	124	200	300	46	84	122	172	91	91	138	0	0	47
50	48	124	200	300	48	86	124	174	97	112	160	0	15	63
63	52	128	200	300	50	88	124	174	102	111.5	159.5	0	9.5	57.5

DIMENSIONS WITH PNEUMATIC CUSHIONING VERSION Ø 80

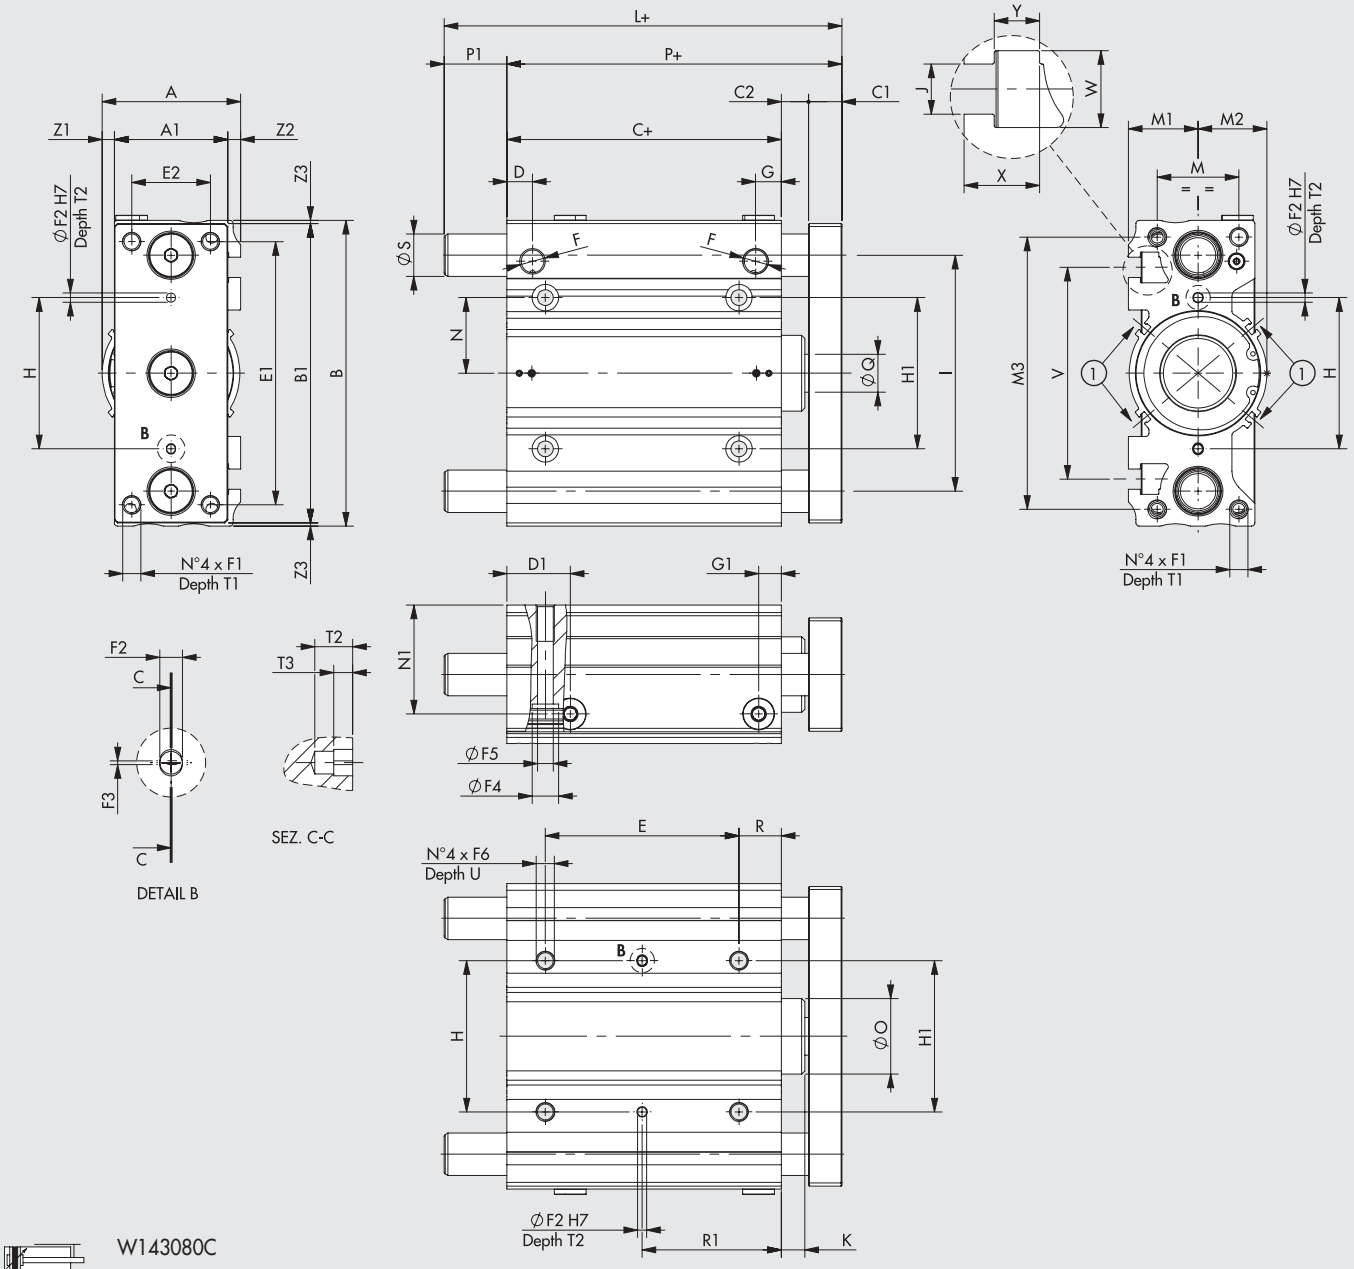

W143080C
W143080D

\+ = ADD THE STROKE
1 = SENSOR SLOT

Ø	A	A1	B	B1	C	C1	C2	D	D1	E1	E2	F	F1	F2^{H7}	F3	F4	F5	F6	G	G1	H$^{\pm 0.025}$	H1	I	J	K	M
80	91.5	75	202	198	81.5	22	18	17	42	174	52	G3/8	M12	6	1	17.5	10.5	M12	17	15	100	100	156	13.3	15.5	54

Ø	M1	M2	M3	N	N1	O	P	Q	R	S	T1	T2	T3	U	V	W	X	Y	Z1	Z2	Z3
80	46	45.5	180	50	72	50	121.5	25	28	28	25	10	5	24	140	20.3	20	12	8	8.5	2

	E				R1				L			P1		
	Strokes				Strokes				Strokes			Strokes		
Ø	25-75	100-175	200-300	350-400	25-75	100-200	250-300	350-400	25-50	75-200	250-400	25-50	75-200	250-400
80	52	128	200	300	54	92	128	150	121.5	163	194	0	41.5	72.5

METAL WORK PNEUMATIC

KEY TO CODES

W 1 4 3	0 2 0	D	0 7 5
TYPE	**DIAMETER**	**VERSION**	**STROKE**
Compact guided cylinder	**016** 16 **020** 20 **025** 25 **032** 32 **040** 40 **050** 50 **063** 63 **080** 80	**A** Bronze bushings, silenced **B** Ball recirculating bearings, silenced **C** Bronze bushings with pneumatic cushioning **D** Ball recirculating bearings with pneumatic cushioning	SILENCED VERSION ◆ **Ø 16:** 10, 20, 30, 40, 50, 75, 100, 125, 150, 175, 200, 250 **Ø 20 to 25:** 20, 30, 40, 50, 75, 100, 125, 150, 175, 200, 250, 300, 350, 400 **Ø 32 to 80:** 25, 50, 75, 100, 125, 150, 175, 200, 250, 300, 350, 400 WITH PNEUMATIC CUSHIONING VERSION **Ø 16:** 25, 50, 75, 100, 125, 150, 175, 200, 250 **Ø 20 to 80:** 25, 50, 75, 100, 125, 150, 175, 200, 250, 300, 350, 400 ◆ Other strokes on request but with the same cylinder dimensions as the standard stroke immediately above.

ACCESSORIES

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

NOTES

COMPACT GUIDED CYLINDER SERIES CMPG

The guided compact cylinder series CMPG is a robust and practical solution with a built-in guide unit. The rod guiding bushes are mounted directly in the anodized aluminium alloy lining.
Two guiding solutions are available: sintered bronze bushes coupled with ground carbon chromed steel rods, or ball recirculation bushes coupled with tempered, chromed and ground steel rods.
There are grooves on one side of the body to house the retractable sensors.
In the non-cushioned version, the stop is silenced by NBR front gaskets, and the cushioned version has adjustable pins to graduate braking.
Threaded holes and calibrated holes are provided for fixing the dowel pins.

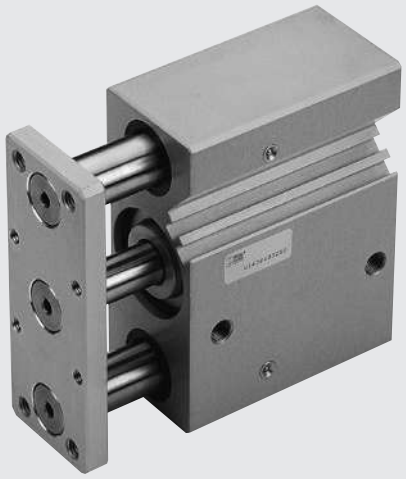

TECHNICAL DATA		CUSHIONED	NO-CUSHIONED
Operating pressure	bar	1 to 10	
	MPa	0.1 to 1	
	psi	14.5 to 145	
Temperature range	°C	-10 to +80	
	°F	14 to 176	
Fluid		Unlubricated air. Lubrication, if used, mast be continuos	
Bores	mm	16; 20; 25; 32; 40; 50; 63	16; 20; 25; 32; 40; 50; 63; 80; 100
Strokes	mm	**Ø 16:** 20 - 30-40-50	**Ø 16:** 10-20-25-30-40-50-75-100-150-200
		Ø 20; Ø 25: 20-30-40-50-75-100-150	**Ø 20; Ø 25:** 20-25-30-40-50-75-100-150-200
		Ø 32 to Ø 63: 25-50-75-100-150-175	**Ø 32 to Ø 100:** 25-50-75-100-150-200
			Other strokes on request but with the same cylinder dimensions as the standard stroke immediately above
Version		With bronze bushings With ball bearings	
Weights		See cylinder "**General technical data**" at the beginning of the chapter	

COMPONENTS

① BARREL: anodized aluminium alloy
② PISTON ROD: grinded chromed steel
③ GUIDE ROD: grinded chromed steel
④ GUIDE ROD: hardened and tempered chrome steel
⑤ REAR BASE: anodized aluminium alloy
⑥ FRONT BASE: anodized aluminium alloy
⑦ GUIDE BUSHING: self-lubricating bronze
⑨ PISTON: aluminium alloy
⑩ MAGNET: plastoferrite
⑪ PISTON GASKET: polyurethane
⑬ SLIDE BUSHING: sintered bronze
⑭ BALL BEARINGS
⑮ DUST SCRAPER RING: NBR or FKM/FPM
⑯ GREASE NIPPLES: zinc-plated or stainless steel
⑰ FLANGE: anodized aluminium alloy

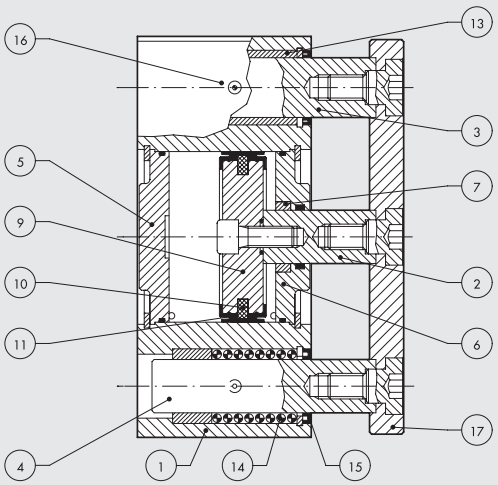

METAL WORK PNEUMATIC

MAXIMUM SIDE LOAD

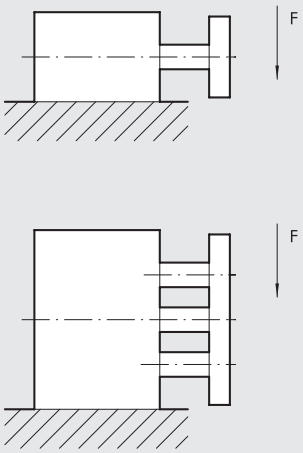

Ø	Guide unit	Stroke (mm)										
mm		10	20	25	30	40	50	75	100	150	175	200
16	Bushes	35	29	27	26	23	20	16	14	10	–	8
	Balls	29	31	–	27	38	34	29	24	12	–	8
20	Bushes	–	52	50	45	39	35	58	49	38	–	31
	Balls	–	56	–	48	79	70	54	50	27	–	32
25	Bushes	–	71	67	61	54	48	78	66	50	–	41
	Balls	–	72	–	62	78	73	60	52	37	–	30
32	Bushes	–	–	197	–	–	168	138	109	78	70	65
	Balls	–	–	89	–	–	60	276	217	138	122	110
40	Bushes	–	–	197	–	–	168	138	109	78	70	65
	Balls	–	–	89	–	–	60	276	217	138	122	110
50	Bushes	–	–	295	–	–	256	216	177	125	112	103
	Balls	–	–	138	–	–	89	393	314	184	163	148
63	Bushes	–	–	295	–	–	256	216	177	125	112	103
	Balls	–	–	138	–	–	89	393	314	184	163	148
80	Bushes	–	–	354	–	–	305	256	207	153	–	128
	Balls	–	–	236	–	–	158	864	687	413	–	335
100	Bushes	–	–	540	–	–	471	413	344	254	–	213
	Balls	–	–	471	–	–	314	1374	1074	629	–	511

N.B.: Forces are expressed in N

MAXIMUM TORQUE ON PLATE



Ø	Guide unit	Stroke (mm)										
mm		10	20	25	30	40	50	75	100	150	175	200
16	Bushes	0.51	0.45	0.40	0.36	0.32	0.28	0.24	0.20	0.46	–	0.12
	Balls	0.74	0.60	–	0.50	0.72	0.65	0.54	0.45	0.35	–	0.25
20	Bushes	–	0.92	0.85	0.79	0.72	0.64	1.05	0.90	0.69	–	0.56
	Balls	–	1.28	–	1.08	1.78	1.59	1.24	1	0.61	–	0.49
25	Bushes	–	1.55	1.42	1.32	1.18	1.04	1.70	1.44	1.10	–	0.90
	Balls	–	1.98	–	1.70	2.16	2.20	1.66	1.4	1.02	–	0.82
32	Bushes	–	–	3.94	–	–	2.95	2.46	1.97	1.55	1.38	1.24
	Balls	–	–	1.97	–	–	1	2.96	2.44	2.40	2.43	2.18
40	Bushes	–´	–	4.40	–	–	3.45	2.96	2.46	1.70	1.55	1.40
	Balls	–	–	2.46	–	–	1.45	6.38	5.4	3	2.73	2.40
50	Bushes	–	–	7.36	–	–	5.9	4.90	4.4	3	2.78	2.50
	Balls	–	–	3.45	–	–	2.44	10.8	8.35	4.5	4.06	3.60
63	Bushes	–	–	7.85	–	–	6.38	5.40	4.9	3.4	3.05	2.80
	Balls	–	–	3.94	–	–	2.46	11.77	9.3	5	4.46	4
80	Bushes	–	–	11.78	–	–	9.80	7.84	6.88	5.30	–	4.40
	Balls	–	–	9.34	–	–	5.88	31.38	24.5	10.40	–	11.7
100	Bushes	–	–	22.55	–	–	19.62	16.68	14.7	10.65	–	8.90
	Balls	–	–	21.56	–	–	13.73	63.72	49.1	26.6	–	21.6

N.B.: Forces are expressed in Nm

ASSEMBLY OPTIONS

If the compact guided cylinder is mounted as shown in figure A, there need to be two through holes in the frame for the guide columns.

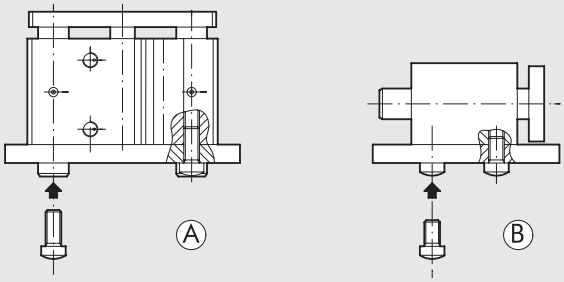

STOPPER FUNCTIONS

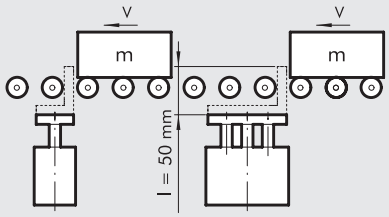

The graph refers to a 50mm-stroke cylinder with bushing guide unit

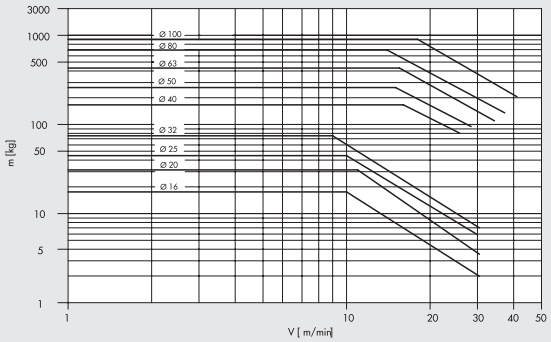

LIFTING FUNCTIONS



The graph refers from 25 to 50 mm-stroke cylinders with ball re-circulation guide unit

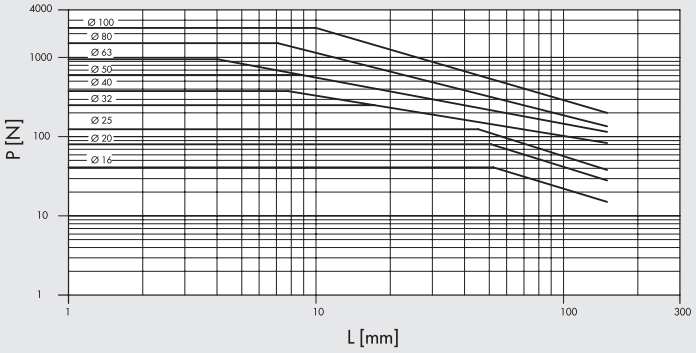

The graph refers from 75 to 100 mm-stroke cylinders with ball re-circulation guide unit

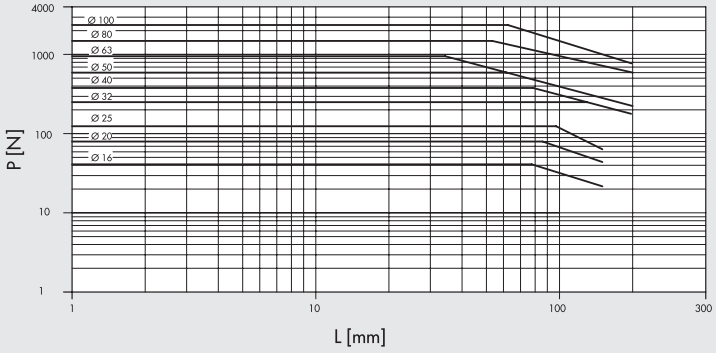

The graph refers to 50 mm-stroke cylinders with bushing guide unit

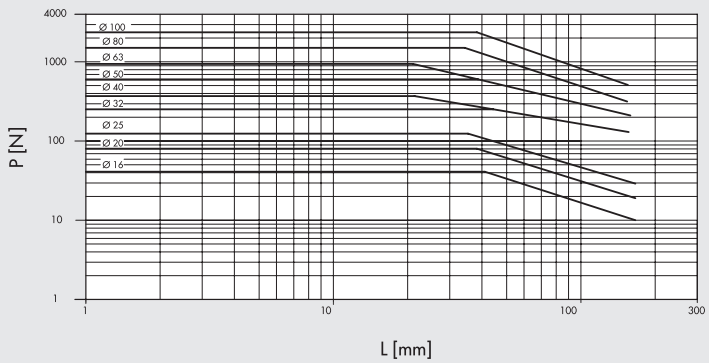

METAL WORK PNEUMATIC

DIMENSIONS OF NO-CUSHIONED COMPACT GUIDED CYLINDERS

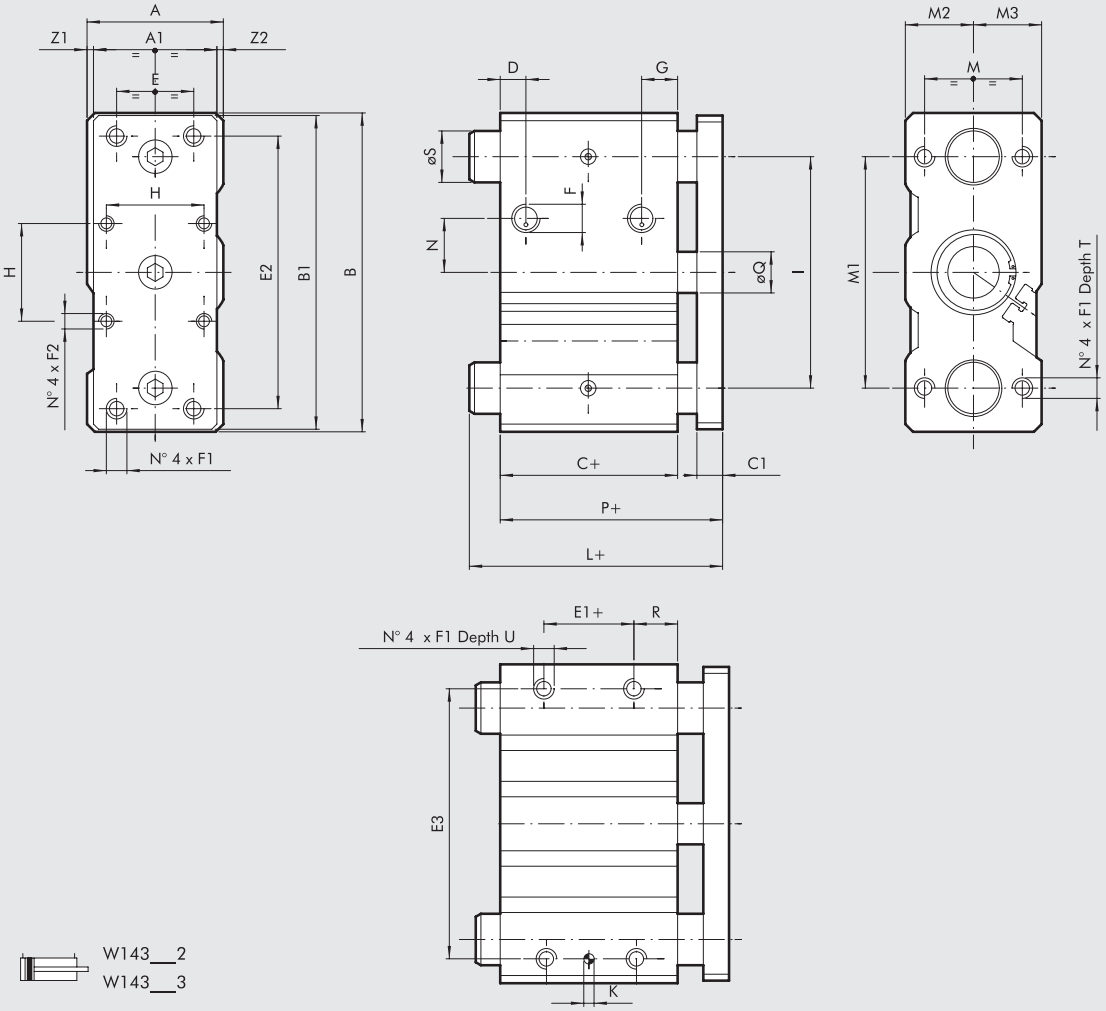

W143__2
W143__3

BORE	Ø S		L ◆			
			stroke 0 to 50		stroke > 50 to 200	
	Version BA (bronze bushings)	Version BB (ball bearings)	Version BA (bronze bushings)	Version BB (ball bearings)	Version BA (bronze bushings)	Version BB (ball bearings)
16	10	10	46	46	74.5	74.5
20	12	10	49	49	79	79
25	16	16	49.5	49.5	79.5	79.5
32	20	20	74.5	74.5	74.5	74.5
40	20	20	74.5	74.5	74.5	74.5
50	25	**	83	104	83	104
63	25	**	83	83	83	83
80	28	25	93	111	93	111
100	35	30	105	105	105	135

+ = ADD THE STROKE

◆ For cylinders with non-standard strokes, the correct size is that of the cylinder with the standard stroke immediately above.

** for strokes 25 and 50 = 20
for strokes ≥75 = 25

Ø	A	A1	B	B1	C ◆	C1	D	E	E1	E2	E3	F	F1	F2	G	H	K^{H7}	I	M	M1	M2	M3	N	P ◆	ØQ	R	T	U	Z1	Z2
16	33	25	64	62	33	10	9	16	7	52	54	M5	M5	–	10.5	–	4	40	22	42	15	18	6	46	8	13	20	8	5.5	2.5
20	36	29	74	72	37	10	9	18	10	60	64	1/8	M5	–	11	–	5	46	26	52	17	19	8	49	10	13	20	8	4.5	2.5
25	42	38	88	86	37.5	10	9	26	10	70	76	1/8	M6	–	11.5	–	5	56	32	62	21	21	8	49.5	12	14	25	9	2	2
32	51	48	114	112	37.5	10	9	30	5	96	100	1/8	M8	M6	12.5	32.5	6	80	38	80	25.5	25.5	14	49.5	16	16	20	11	1.5	1.5
40	51	48	124	122	44	10	11	30	10	106	110	1/8	M8	M6	14	38	6	90	38	90	25.5	25.5	21	56	16	17	20	11	1.5	1.5
50	59	56	140	138	44	12	11	40	10	120	124	1/4	M10	M8	14	46.5	6	100	44	100	29.5	29.5	27	58	20	17	25	12.5	1.5	1.5
63	72	69	150	148	49	12	13	50	10	130	132	1/4	M10	M8	15	56.5	6	110	44	110	36	36	33	63	20	20	25	15	1.5	1.5
80	92	88	188	185	56.5	16	15	60	15	160	166	3/8	M12	M10	15	72	6	140	56	140	46	46	36	74.5	25	21	30	18	2	2
100	112	108	224	221	66	16	19	80	15	190	200	3/8	M14	M10	21	89	8	170	62	170	56	56	40	84	32	25	35	21	2	2

DIMENSIONS OF CUSHIONED COMPACT GUIDED CYLINDERS

+ = ADD THE STROKE

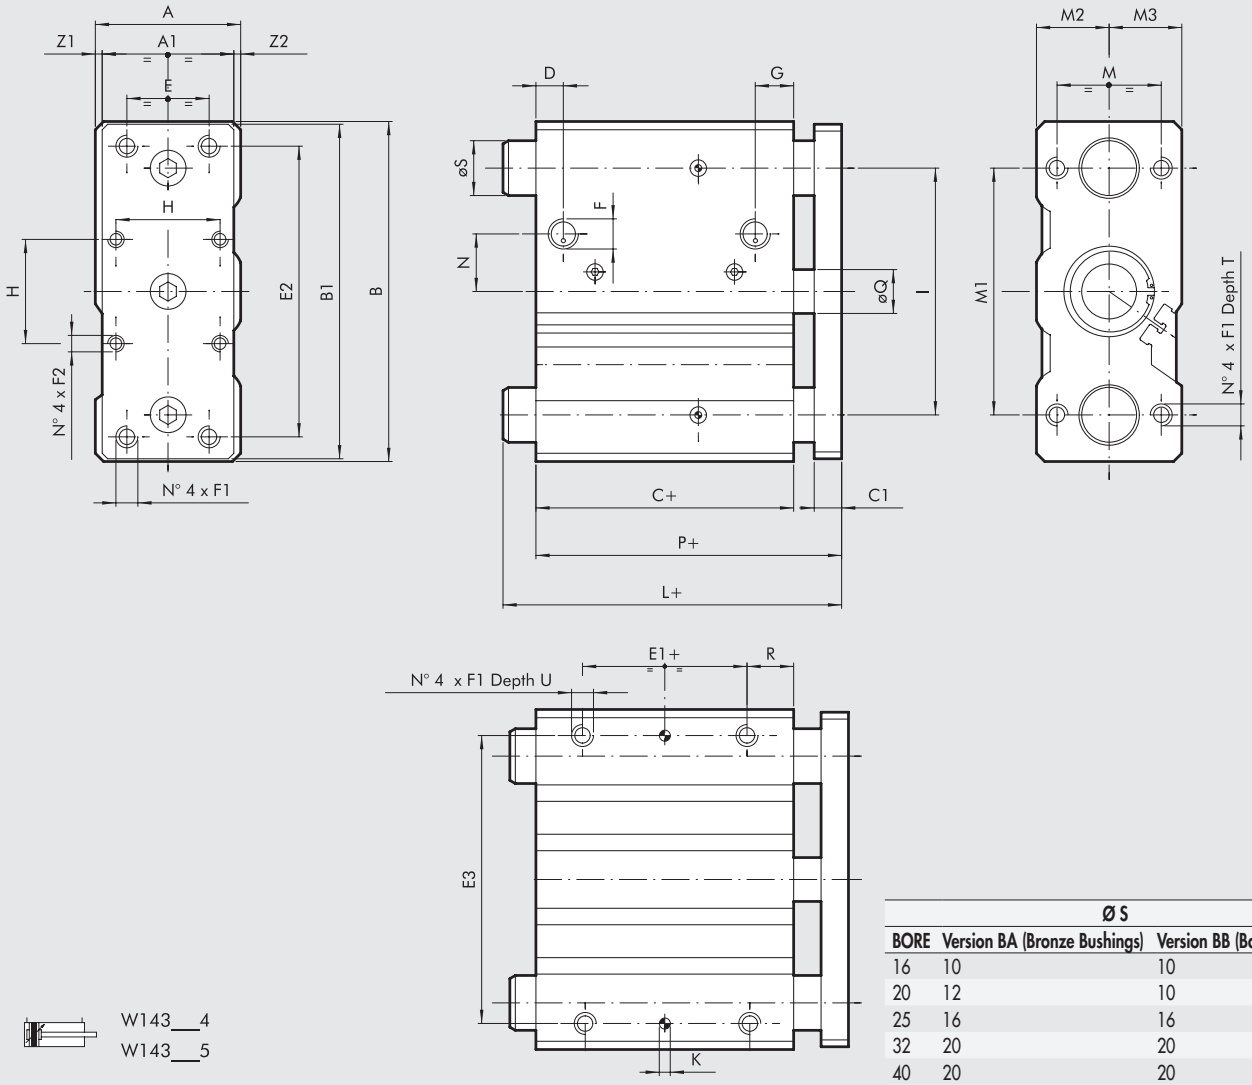

W143__4
W143__5

	Ø S	
BORE	Version BA (Bronze Bushings)	Version BB (Ball Bearings)
16	10	10
20	12	10
25	16	16
32	20	20
40	20	20
50	25	**
63	25	**

** for strokes 25 and 50 = 20
for strokes ≥75 = 25

* =	stroke	
BORE	0 to 50	75 to 200
16	73	–
20	78	105.5
25	78.5	108.5

Ø	A	A1	B	B1	C	C1	D	E	E1	E2	E3	F	F1	F2	G	H	K^{H7}	I	L	M	M1	M2	M3	N	P	ØQ	R	T	U	Z1	Z2
16	33	25	64	62	58	10	8	16	32	52	54	M5	M5	–	10.5	–	4	40	*	22	42	15	18	12	73	8	13	20	8	5.5	2.5
20	36	29	74	72	62	10	9	18	35	60	64	1/8	M5	–	11	–	5	46	*	26	52	16.5	19.5	8.5	78	10	13	20	8	4.5	2.5
25	42	38	88	86	62.5	10	9	26	35	70	76	1/8	M6	–	11	–	5	56	*	32	62	21	21	13.5	78.5	12	14	25	9	2	2
32	51	48	114	112	62.5	10	8	30	30	96	100	1/8	M8	M6	10	32.5	6	80	106.5	38	80	25.5	25.5	15	82.5	16	16	20	11	1.5	1.5
40	51	48	124	122	69	10	11	30	35	106	110	1/8	M8	M6	14	38	6	90	106.5	38	90	25.5	25.5	20	89	16	17	20	11	1.5	1.5
50	59	56	140	138	69	12	11.5	40	35	120	124	1/4	M10	M8	14.5	46.5	6	100	118	44	100	29.5	29.5	37	93	20	17	25	12.5	1.5	1.5
63	72	69	150	148	74	12	11.5	50	35	130	132	1/4	M10	M8	14	56.5	6	110	118	44	110	36	36	31.5	98	20	20	25	15	1.5	1.5

KEY TO CODES

W 1 4 3	0 3 2	2	0 2 5
TYPE	**DIAMETER**	**VERSION**	**STROKE**
	16 20 25 32 40 50 63 ✱ 80 ✱ A1=100	**2** Bronze bushings **3** Ball bearings **4** Cushioned with bronze bushings **5** Cushioned with ball bearings	CUSHIONED VERSION **Ø 16:** 20, 30, 40, 50 **Ø 20 to 25:** 20, 30, 40, 50, 75, 100, 150 **Ø 32 to 63:** 25, 50, 75, 100, 150, 175 NOT CUSHIONED VERSION ◆ **Ø 16:** 10, 20, 25, 30, 40, 50, 75, 100, 150, 200 **Ø 20 to 25:** 20, 25, 30, 40, 50, 75, 100, 150, 200 **Ø 32 to 100:** 25, 50, 75, 100, 150, 200 ◆ Other strokes on request but with the same cylinder dimensions as the standard stroke immediately above.

✱ Not cushioned version only

ACCESSORIES FOR COMPACT GUIDED CYLINDER: MAGNETIC SENSORS

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

NOTES

ROTOLINEAR SWING CLAMP CYLINDERS SERIES SWC AND SWH

When retracting, the piston rod of rotolinear swing clamp cylinders first rotates by 90° and then moves straight forward. When exiting, the sequence is reversed.
This facilitates the positioning of the workpiece to be clamped.
You can choose either a clockwise or an anti-clockwise direction.
A version without rotation is also available. The mechanism is very simple. It consists of a spiral groove and a pin that fits into the groove.
The fixing bracket, which can be ordered as an accessory, can be freely orientated through 360° and locked to the piston rod.
Two series are available:

- Series SWC (SWing Compact), which has the same fixings as CMPC series compact cylinders and can use the same flange and feet as the CMPC
- Series SWH (Swing Heavy Duty), which is more sturdy and features an enlarged body and piston rod guide system.

Possibility of choosing between polyurethane or FKM/FPM gaskets (for high temperatures).

series SWC

series SWH

TECHNICAL DATA			SWC					SWH		
Bore		mm	16	25	32	40	50	40	50	63
Operating pressure		bar	2 to 10							
		MPa	0.2 to 1							
		psi	29 to 145							
Temperature range	Polyurethane	°C	-20 to +80							
	FKM/FPM		-10 to +150							
Fluid			Unlubricated air; lubrication, if used, must be continuous.							
Design			Linear and rotating movement by means of a cam integral to the piston					Linear and rotating movement by means of a cam in the rod guide bushing		
Clamping stroke (linear)		mm	10	10	10	10	20	10	25	8
Overal Stroke		mm	20	25	25	27.3	40	25	43	25
Direction of rotation			Right or left or straight							
Rotation angle		degrees	90° ± 4°							
Sensor magnet			Yes							
Theoretical clamping force at 6 bar		N	90	220	360	630	970	630	970	1650
Effective clamping force at 6 bar, in relation to the distance of the clamping point from the cylinder axis										
	Locking force	N	80	180	300	450	810	420	800	1200
	Distance	mm	27	35	50	50	65	70	80	90
Weights		g	190	432	599	962	1577	1497	2895	2960

COMPONENTS SERIES SWC

① PISTON ROD: grinded chromed steel
② HEAD: extruded anodized aluminium alloy
③ BARREL: extruded aluminium, anodized
④ PISTON GASKET: polyurethane or FKM/FPM
⑤ MAGNET: neodymium-plastic
⑥ PISTON ROD GASKET: polyurethane or FKM/FPM
⑦ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑧ STATIC O-RINGS: NBR
⑨ SECURING SCREWS: zinc-plated steel
⑩ PIN: hardened steel
⑪ CAM: Ø 16 steel - Ø 25 to 50 technopolymer
⑫ BRACKET: anodized aluminium
⑬ BRACKET PLUG: zinc-plated steel and technopolymer

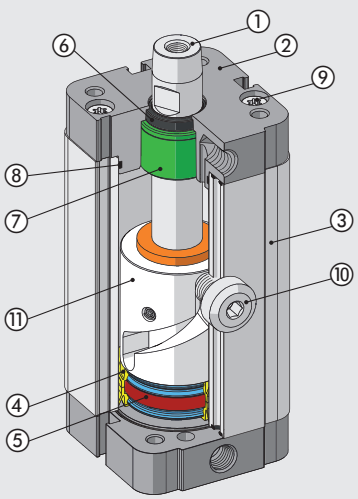



METAL WORK PNEUMATIC

COMPONENTS SERIES SWH

① SPISTON ROD: grinded chromed steel
② BODY: anodized aluminium
③ PISTON ROD GASKET: polyurethane or FKM/FPM
④ SCRAPER GASKET: polyurethane or FKM/FPM
⑤ HEADER FOR GUIDE AND PISTON ROD ROTATION: technopolymer
⑥ PIN: hardened steel
⑦ PISTON: aluminium
⑧ PISTON GASKET: polyurethane or FKM/FPM
⑨ MAGNET: plastoneodymium or plastoferrite
⑩ STATIC O-RINGS: NBR
⑪ SECURING SCREWS: zinc-plated steel
⑫ ADAPTOR: anodized aluminium

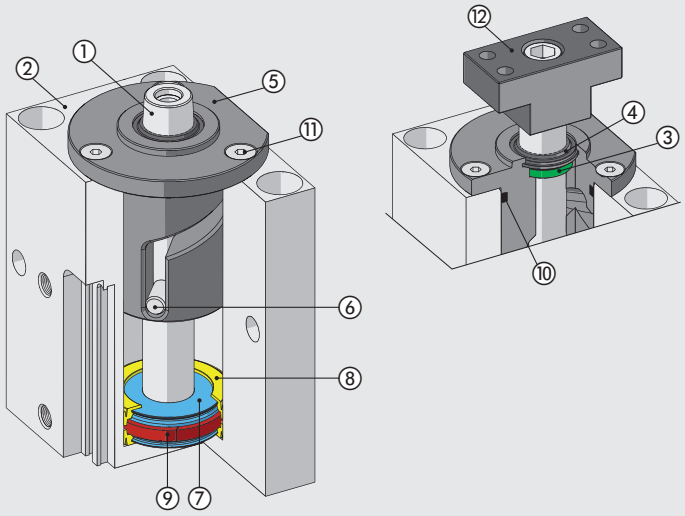

BRACKET FIXING

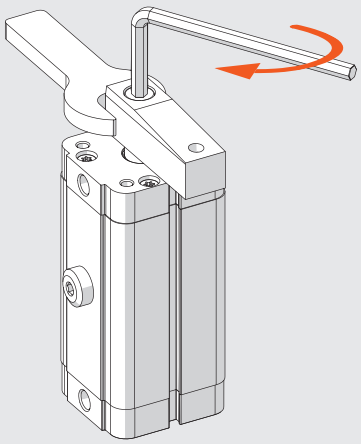

Series SWC	
Ø	**Maximum tightening torque [Nm]**
16	3
25	12
32	24
40	24
50	40

Series SWH	
Ø	**Maximum tightening torque [Nm]**
40	24
50	40
63	40

N.B.: When tightening or loosening the screw, DO NOT hold the cylinder body, only hold the bracket in place using a spanner.

DIRECTION OF ROTATION

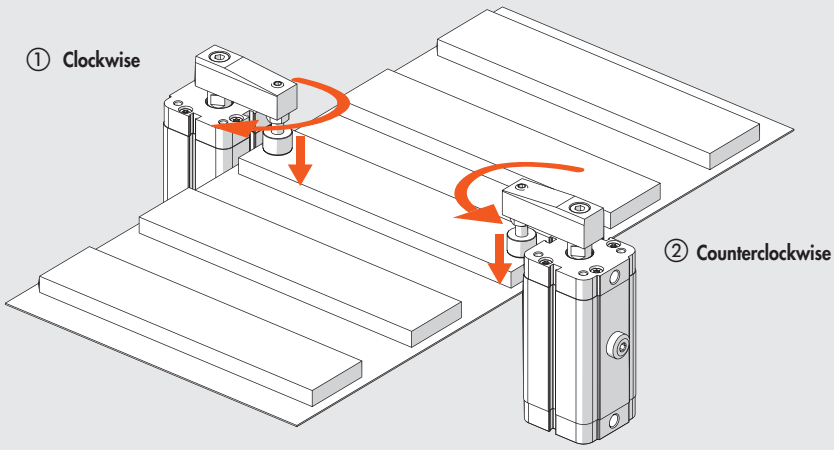

The right or left direction of rotation is determined by looking at the cylinder from the piston rod side, when the rod retracts:
① Right (R) = clockwise
② Left (L) = counterclockwise

MAXIMUM PERMISSIBLE MOMENT OF INERTIA

The permissible moment of inertia depends on the speed of movement. Refer to the formula below to calculate the moment of inertia.

$$J = \frac{M1 \cdot L1^2}{4} + M2 \cdot L2^2$$



M1 = Mass of the lever arm [kg]
M2 = Mass of the screw and plug [kg]
L1 = Lever arm length [cm]
L2 = Distance from the screw centre to the cylinder axis [cm]

J = Moment of inertia [kg · cm²]
t = Time to run each stroke

SWC 16

J [kg cm²]

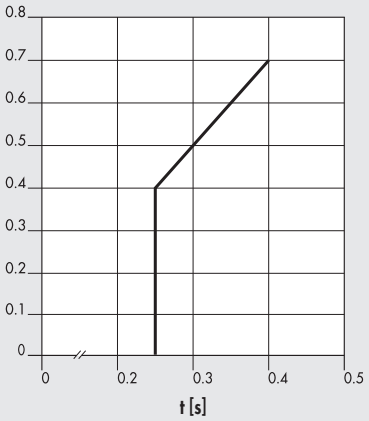

SWC 25

J [kg cm²]

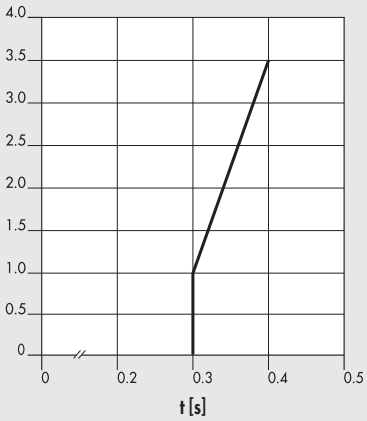

SWC 32

J [kg cm²]

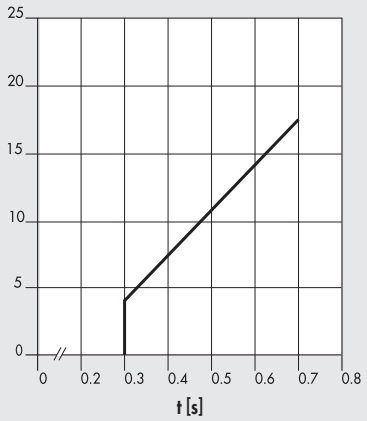

SWC 40

J [kg cm²]

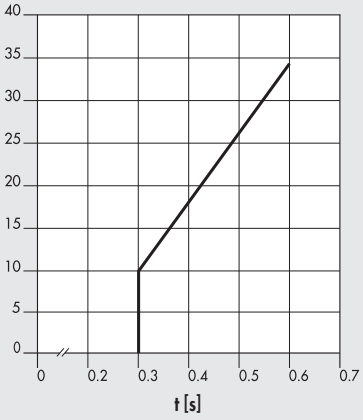

SWC 50

J [kg cm²]

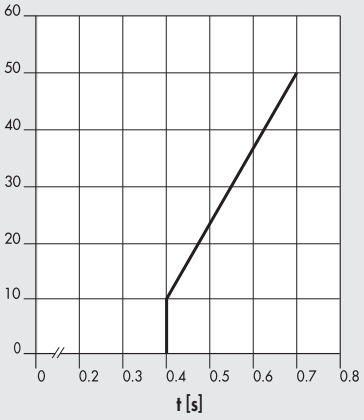

SWH 40

J [kg cm²]

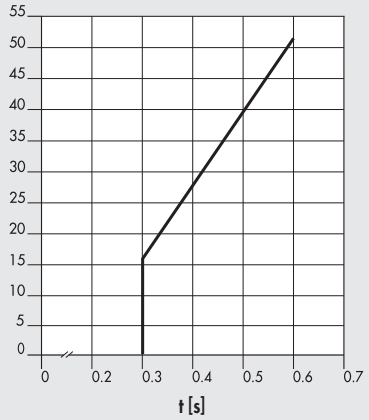

SWH 50

J [kg cm²]

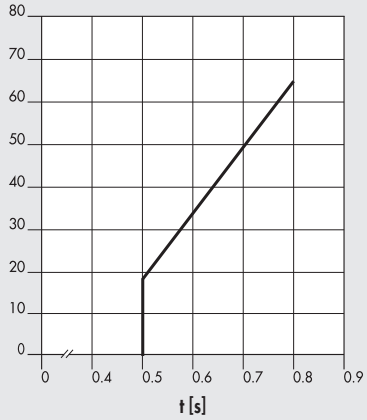

SWH 63

J [kg cm²]

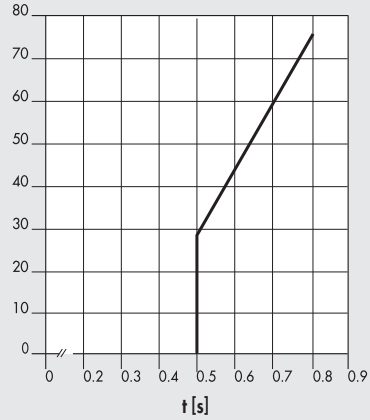

METAL WORK PNEUMATIC

LOCKING FORCE

Locking force "F" as a function of the length "L" of the bracket and pressure, measured at 5 mm from the limit switch.



SWC 16

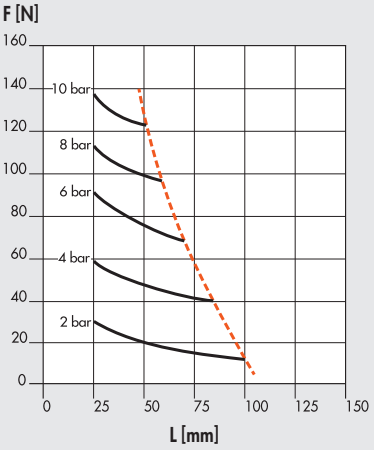

SWC 25

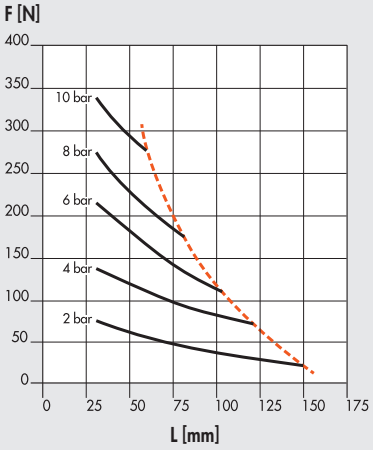

SWC 32

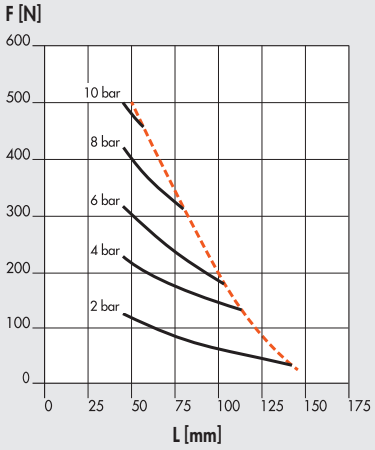

SWC 40

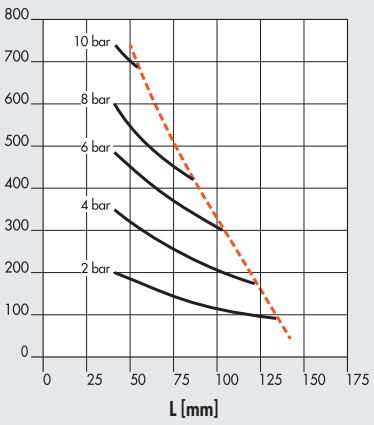

SWC 50

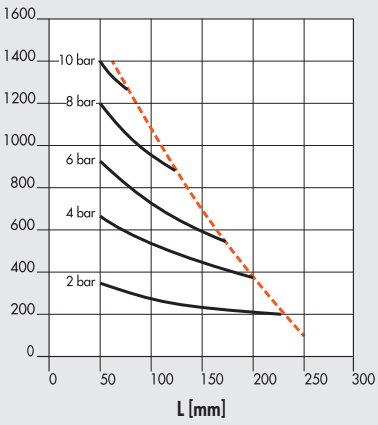

Maximum lever arm length

SWH 40

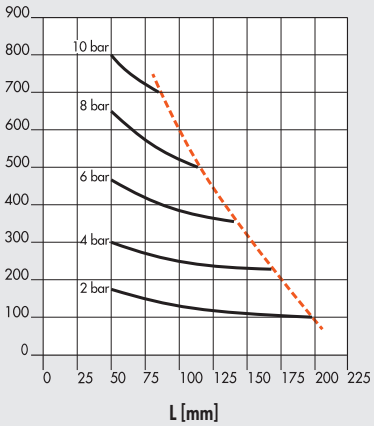

SWH 50

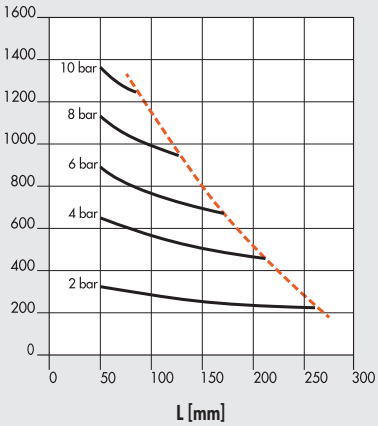

SWH 63

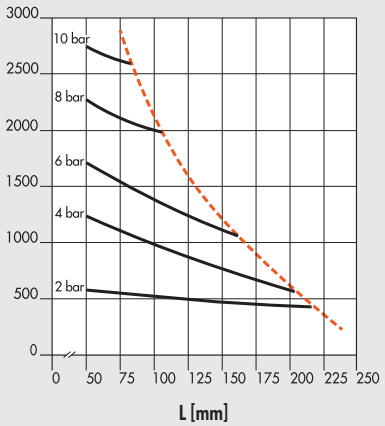

DIMENSIONS - SERIES SWC

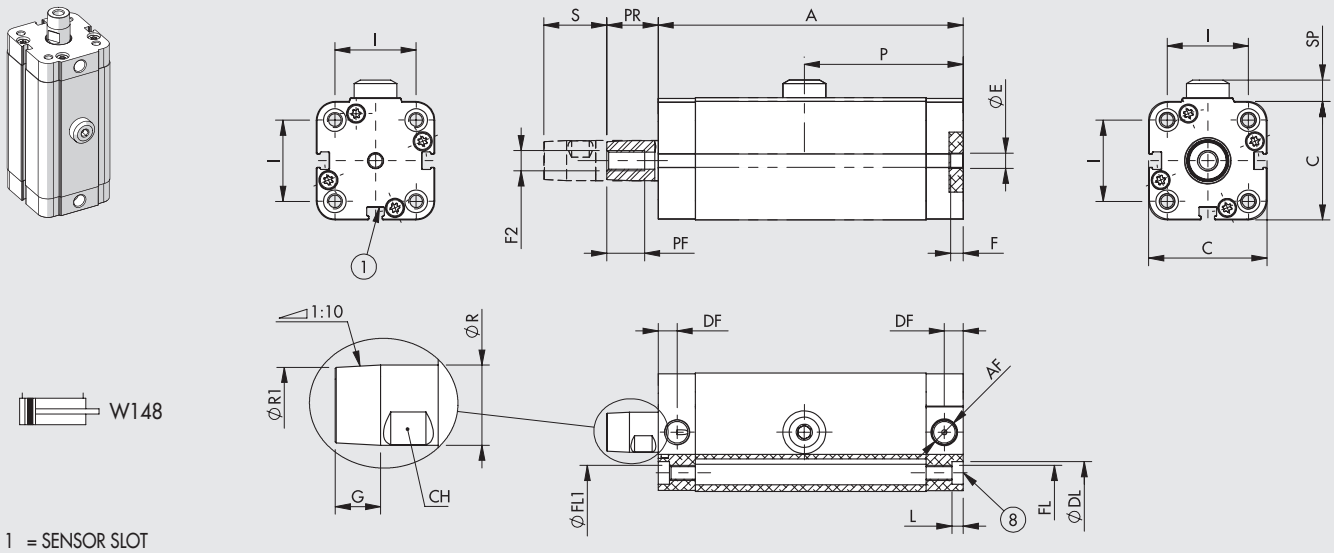

W148

1 = SENSOR SLOT
8 = SEAT FOR DIN 7984 SCREWS (only Ø 32 - 50)

Ø	Overal Stroke S	A	AF	C	CH	DF	ØDL *	ØE H9	F	F2	FL *	ØFL1	G	I *	L	P	PF	PR	ØR	ØR1	SP	Weight [g]
16	20	85	M5	29.4	7	4	6	6	5	M4	M4	3.2	5	18	3.2	31.5	13	11	8	7.5	4.8	190
25	25	102.5	M5	40.4	10	6	7.5	6	5	M6	M5	4.2	7.4	26	4.2	38.3	15	16.4	12	11.3	5.3	432
32	25	121	1/8"	47	13	7.5	9	6	5	M8	M6	5.2	9	32.3	4.5	63	15	20.4	16	15	8.5	599
40	27.3	122.5	1/8"	56	13	7.5	9	6	5	M8	M6	5.2	9	38	4.5	65	15	20.4	16	15	8.5	962
50	40	158	1/8"	67	17	7.5	10.7	6	5	M10	M8	6.2	10.3	46.5	5	85.3	15	20.8	20	19	9.5	1577

* For Ø 16, 25 according to UNITOP; for Ø 32 - 50 according to ISO

DIMENSIONS - SERIES SWH

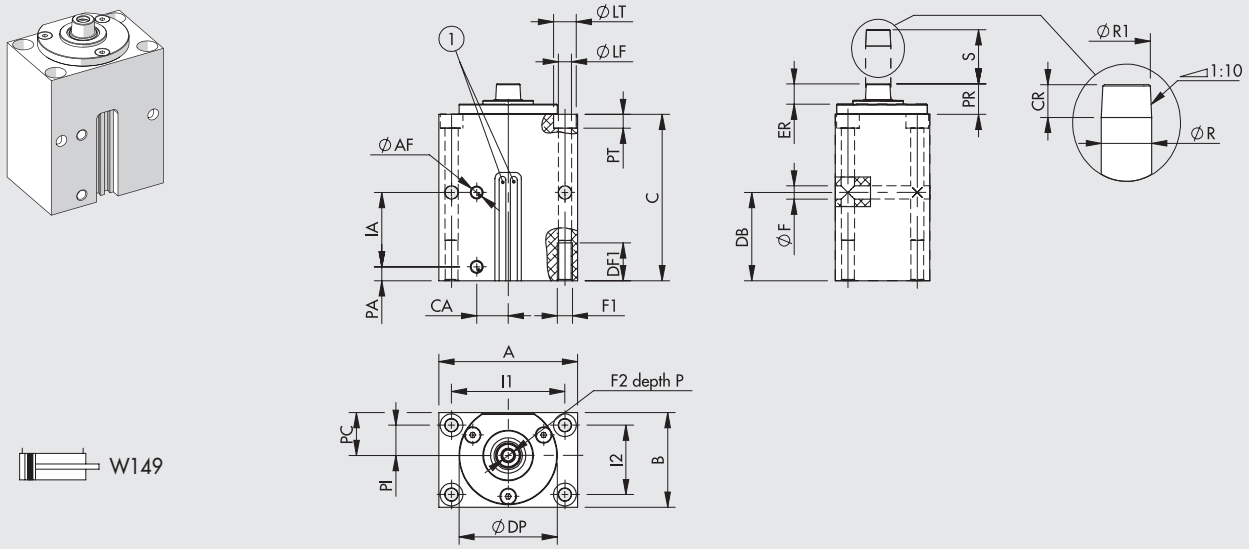

W149

1 = SENSOR SLOT

Ø	Overal Stroke S	A	ØAF	B	C	CA	CR	DB	DF1	ØDP	ER	ØF	F1	F2	I1	I2	IA	ØLF	LT	P	PA	PC	PI	PR	ØPT	ØR	ØR1	Weight [g]
40	25	90	1/8"	65	96	20	10	50	25	64	14	8.5	M10	M8	73	48	42	8.5	15	18	8	27.5	19	19	9	16	15	1497
50	43	110	1/8"	75	132	25	13	70	30	78	16	10.5	M12	M10	90	55	59	10.5	18	23	11	34	24	24	11	20	18.7	2895
63	25	120	1/4"	90	107.5	25	13	55	30	95	16	10.5	M12	M10	100	70	85	10.5	18	23	11	40	30	24	11	20	18.7	2960

METAL WORK PNEUMATIC

KEY TO CODES

CYL	W149 SERIES		C VERSION		40 BORE	10 CLAMPING STROKE	R DIRECTION OF ROTATION		A EXECUTION		P GASKETS	
	W149	Swing clamp cylinders SW	C	Compact	16	10	R	Clockwise	A	C45 chromed and ground piston rod, aluminium piston rod	P	Polyurethane gaskets
					25	10	L	Counter-clockwise			V	FKM/FPM gaskets
					32	10						
					40	10	S	Straight				
					50	20						
			H	Heavy duty	40	10						
					50	25						
					63	08						

ACCESSORIES FOR CYLINDERS SERIES SWC

BRACKET

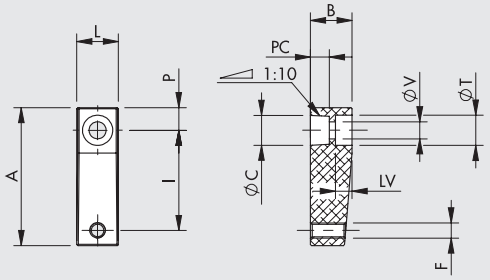

Code	Ø	A	L	I	P	C	PC	LV	V	B	T	F	Weight [g]
W0950166022	16	36.5	11	26.5	6	7.9	5	4.5	4.5	11	8	M4	10
W0950256022	25	50	16	35	9	11.9	7.5	6.5	6.5	16	11	M6	28
W0950326022	32-40	69	20	49	12	15.9	10.1	8.5	9	20	15	M8	65
W0950506022	50	88	25	65	13	19.9	10.5	7	11	25	18	M10	118

MATERIAL

Bracket: anodized aluminium

Screws TCE: zinc-plated steel

BRACKET PLUG



Code	Ø	L	B	G	F	CH	D	Weight [g]
W0950166023	16	32	6.5	25.5	M4	7	11	5
W0950256023	25	43	10	33	M6	10	15	11
W0950326023	32-40	49	13	36	M8	13	19	27
W0950506023	50	69	16	53	M10	16	24	58

MATERIAL

Plug: technopolymer

Screw and nut: zinc-plated steel

Note: if there is no risk of engraving the part to be clamped, the customer can use an hex an hexagonal-head screw available from the trade, instead of the coded pad.

FOOT - MODEL A

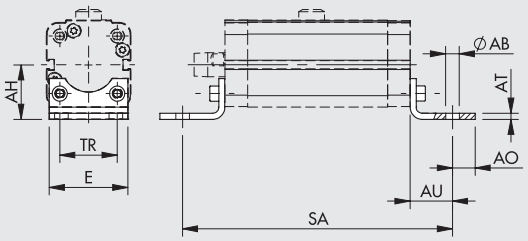

UNITOP

Code	Ø	Clamping stroke	E	TR	AU	AB	AH	SA	AT	AO	Weight [g]
W0950126001 ▲	16	10	30	18	13	5.5	22	111	3	4.5	26
W0950256001	25	10	40	26	16	6.6	30	134.5	4	6	52

ISO

Code	Ø	Clamping stroke	E	TR	AU	AB	AH	SA	AT	AO	Weight [g]
W0950322001	32	10	45	32	24	7	31.9	169	4	11	76
W0950402001	40	10	52	36	28	9	36	178.5	4	15	100
W0950502001	50	20	65	45	32	9	45	222	5	15	162

▲ Non UNITOP norm fixing distance

Note: Individually packed with 2 screws.

FLANGE - MODEL C

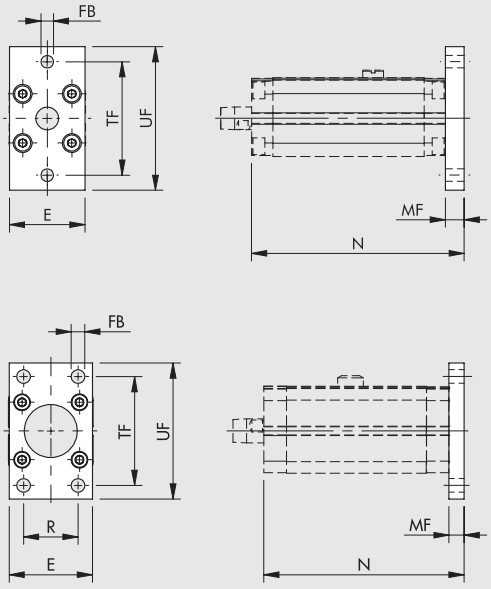

UNITOP

Code	Ø	Clamping stroke	E	UF	TF	FB	MF	N	Weight [g]
W0950126002 ▲	16	10	29	55	43	5.5	10	95	112
W0950256002	25	10	40	76	60	6.6	10	112.5	226

ISO

Code	Ø	Clamping stroke	E	UF	TF	R	FB	N	MF	Weight [g]
W0950322002	32	10	50	80	64	32	7	131	10	246
W0950402002	40	10	55	90	72	36	9	132.5	10	290
W0950502002	50	20	65	110	90	45	9	170	12	522

▲ Non UNITOP norm fixing distance
Note: Supplied with 4 screws.

ACCESSORIES FOR CYLINDERS SERIES SWH

ADAPTOR

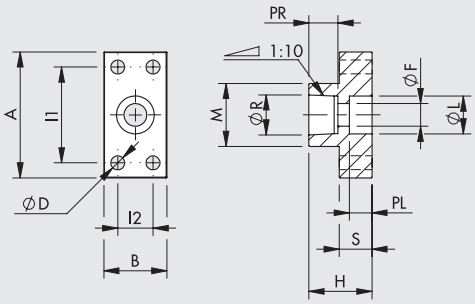

Code	Ø	A	B	L1	L2	ØD	H	M	S	ØL	ØF	PL	ØR	PR	Weight [g]
W0950406024	40	50	25	38	14	5.5	25	25	13	15	9	9	15.9	11.5	50
W0950506024	50	60	30	45	15	7	30	30	15	18	11	11	19.9	15	85
W0950636024	63	65	35	48	18	9	35	32	17	18	11	11	19.9	17	125

MATERIAL
Adaptor: anodized aluminium
Screws TCE: zinc-plated steel

ACCESSORIES FOR CYLINDERS SERIES SWC AND SWH: MAGNETIC SENSORS AND POSITION SENSORS

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

POSITION SENSORS

LTS



For technical data and usage strokes see **chapter A6**.

METAL WORK PNEUMATIC

NOTES

RODLESS CYLINDER SERIES STD

Rodless cylinders come in five different bores - Ø 16, 25, 32, 40 and 63 mm – and the design incorporates numerous innovations.

- Calibrated extruded anodized aluminium alloy barrel
- Sensor slots and accessory slots in the barrel itself
- Longitudinal seal by means of specially-shaped indeformable stainless steel strips
- Strokes 100 to 5700 mm with 1mm intervals
- Adjustable integrated pneumatic cushioning
- Adjustable limit switches and decelerations can be applied at any time
- For this type of cylinder (size 32 and upwards), the valves can be fitted directly using the retracting sensors without requiring any intermediate brackets. Refer to the table on page **A1**.66

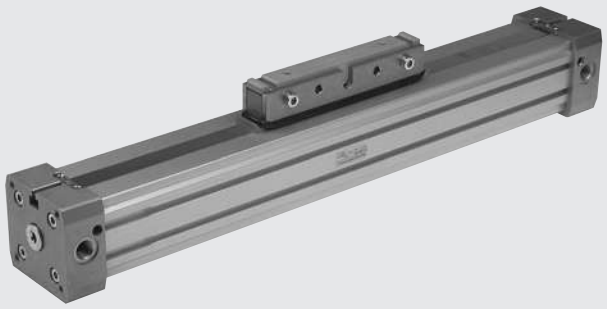

TECHNICAL DATA			Ø16	Ø25	Ø32	Ø40	Ø63
Operating pressure		bar	1 to 8				
		MPa	0.1 to 0.8				
		psi	14.5 to 116				
Temperature range	NBR - FKM/FPM	°C	–10 to +80				
Design			Double-acting rodless cylinder with direct transmission system				
Fluid			50 µm unlubricated filtered air Lubrication, if used, must be continuous				
Standard strokes		mm	100 to 5000	100 to 5700			100 to 5500
Sensor magnet			Available magnetic and non-magnetic versions.				
Recommended speeds	NBR	m/s	<1				
	FKM/FPM	m/s	≥1				
Max. speed with decelerators	NBR	m/s	<1				
	FKM/FPM	m/s	2				
Weights			See cylinder "**General technical data**" at the beginning of the chapter				
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**				

COMPONENTS

① CYLINDER HEAD: aluminium alloy
② BARREL: profiled anodized aluminium alloy
③ PISTON GASKET: NBR or FKM/FPM
④ CENTRAL ELEMENT: aluminium alloy
⑤ SCRAPER: Hostaform®
⑥ O-RING: FKM/FPM
⑦ PISTON: Hostaform®
⑧ CUSHIONING CONE: aluminium alloy
⑨ STATIC O-RINGS: NBR or FKM/FPM
⑩ SLIDE: aluminium alloy
⑪ OUTER STRIP: stainless steel
⑫ INNER STRIP: stainless steel
⑬ BAND SUPPORT: Hostaform®

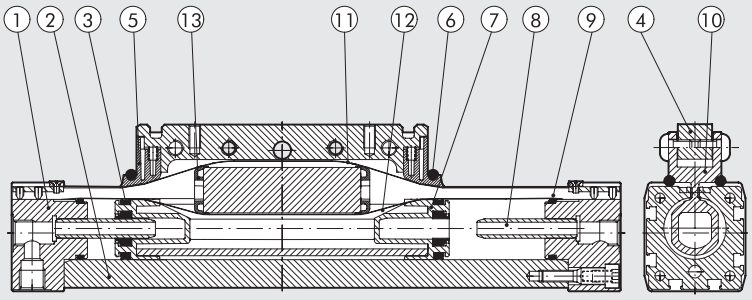

METAL WORK PNEUMATIC

DIMENSIONING - FORCE AND TORQUE

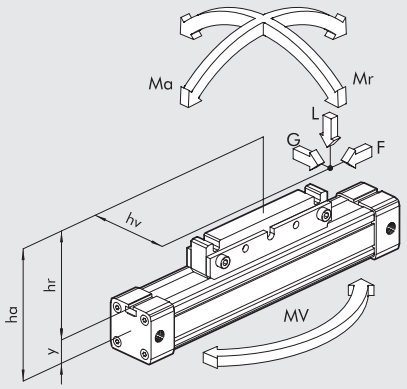

Bore	Centre Distance Y	Actual Force F at 6 bar [N]	Cushioning stroke [mm]	Max. load L [N]	Ma max [Nm]	Mr max [Nm]	Mv max [Nm]
16	9	110	15	120	4	0.3	0.5
25	14	250	21	300	15	1	3
32	18	420	26	450	30	2	4
40	22	640	32	750	60	4	8
63	44	1550	40	1650	200	8	24

N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

$Ma = F \times ha \qquad Mr = L \times hv + G \times hr \qquad Mv = F \times hv$

$$\frac{Mv}{Mv_{max}} \leq 1; \qquad \frac{L}{L_{max}} \leq 1; \qquad \frac{Ma}{Ma_{max}} + \frac{Mr}{Mr_{max}} + 0.22 \times \frac{Mv}{Mv_{max}} + 0.4 \frac{L}{L_{max}} \leq 1$$

DIAGRAM OF SPEED AND MAXIMUM CUSHIONABLE LOAD

For the cylinder to reach the end-of-stroke position without intense or repeated impact which would damage it, it is necessary to annul the kinetic energy of the moving mass and the work generated. The maximum cushionable load depends on the traversing speed and the absorption of the air buffer supplied standard with the various cylinders. The diagram shows the speeds and cushionable mass for the various diameters at a pressure of 6 bar.

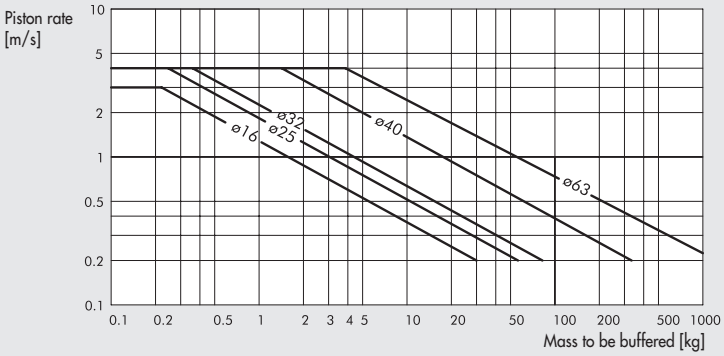

MAXIMUM LOAD ACCORDING TO THE DISTANCE BETWEEN SUPPORTS

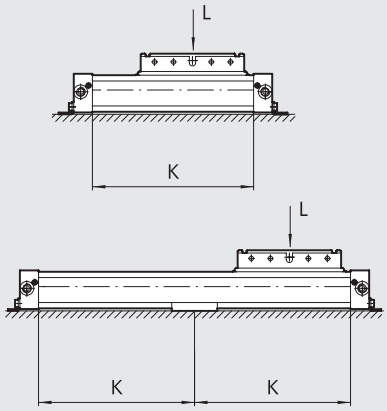

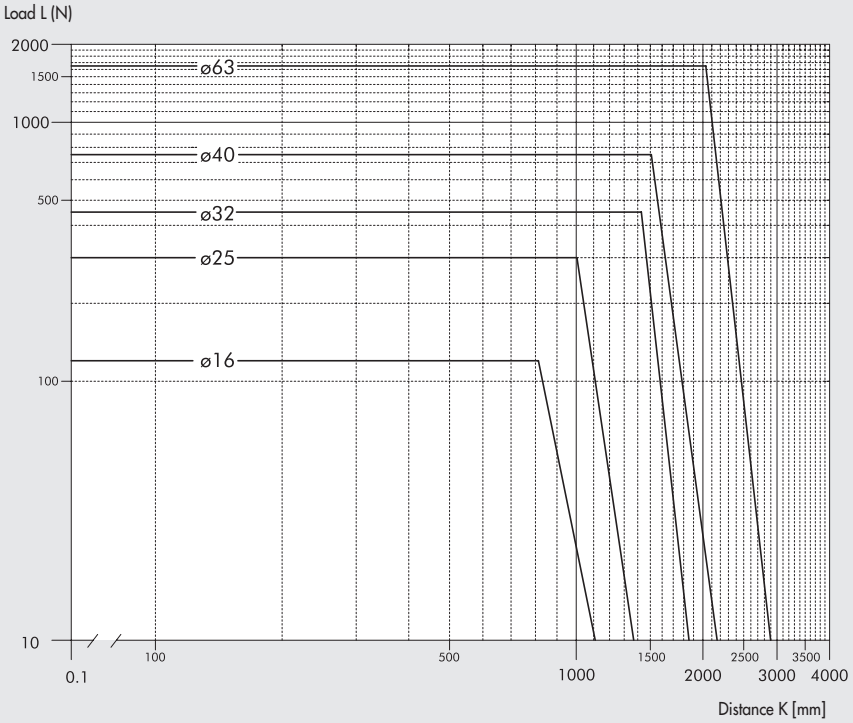

BARREL CROSS SECTION

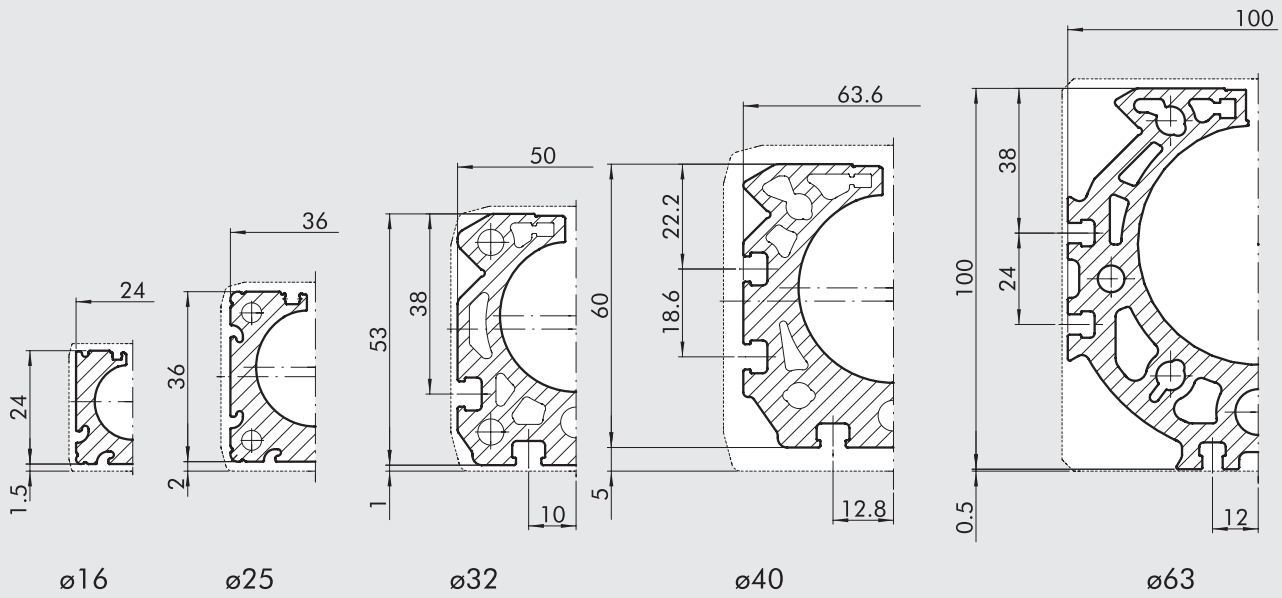

DIMENSIONS Ø 16 to 40

+ = ADDED STROKE

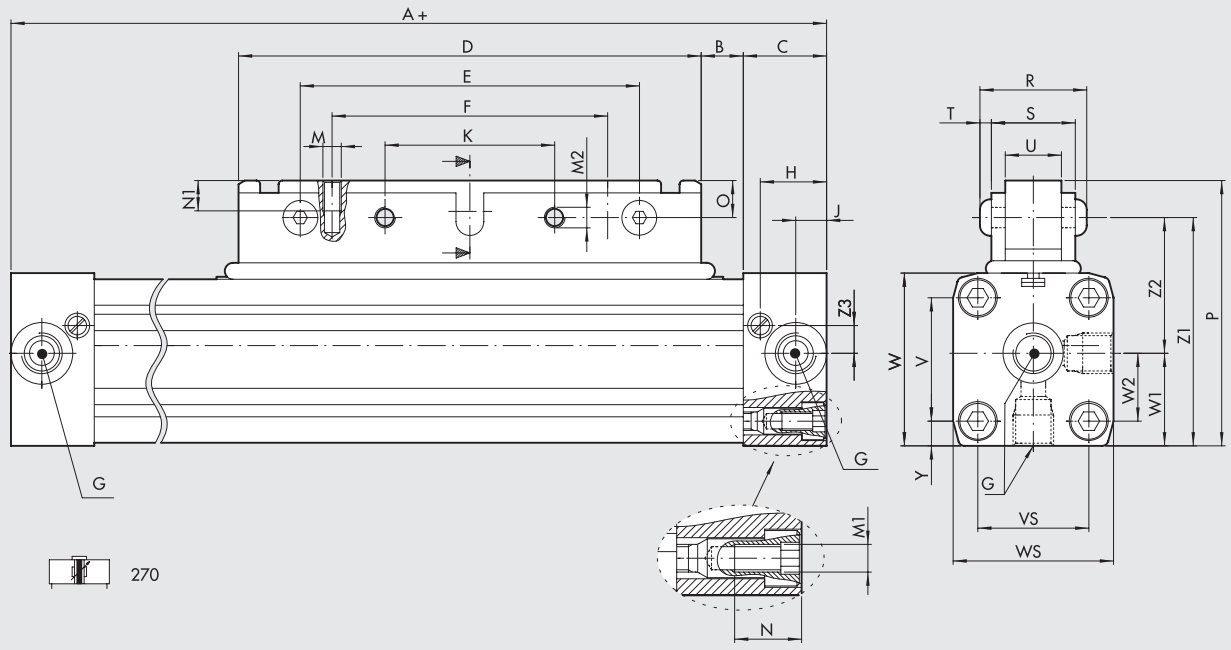

Ø	A	B	C	D	E	F	G	H	J	K	M	M1	M2	N	N1	O	P	R	S	T	U	V	VS	W	WS	W1	W2	Y	Z1	Z2	Z3	Z4
16	130	12	15	76	64	48	M5	12	6.4	32	M4	M3	M5	7	8	6	43.5	23.5	18	2.75	10	18	18	27	27	13.5	9	4.5	37.5	24	4.5	28
25	200	17	23	120	100	80	1/8	18.5	8.5	50	M5	M5	M6	12	11	13	66	29.6	23	3.3	15	27	27	40	40	20	13.5	6.5	53	33	6.5	42
32	250	23	27	150	110	90	1/4	22	10.5	55	M6	M6	M8	14	12	12	86	36	27	4.4	18	40	36	56	52	30	22	8	74	44	8	70
40	300	45	30	150	110	90	1/4	24	15	55	M6	M6	M8	17.5	12	12	97	36.8	28	4.4	18	54	54	69	72	36	27	9	85	49	11.8	70

METAL WORK PNEUMATIC

DIMENSIONS Ø 63

+ = ADDED STROKE

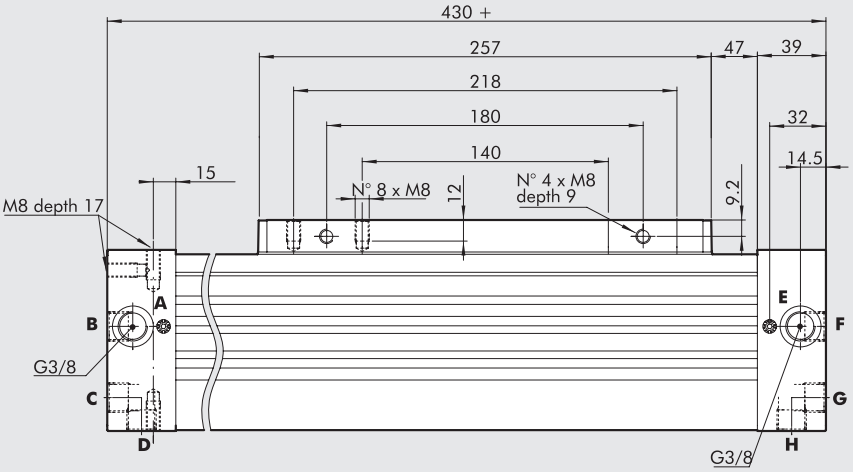

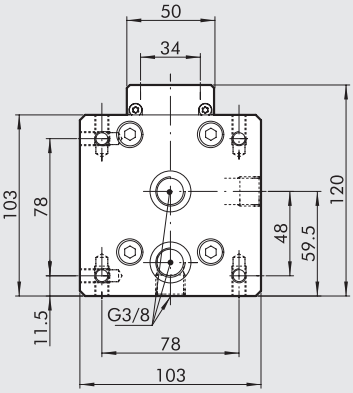

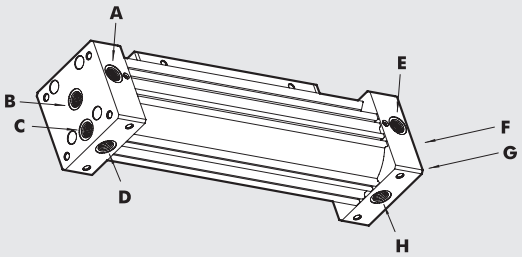

Basic supply
A, B, C, D to feed to left chambers
E, F, G, H to feed the right chambers
Note: B, C, D, F, G and H are supplied closed with threaded plugs

If you modify the position of an inner plug following the instructions provided with the cylinder, you can arrange:

all feeds from the left	**all feeds from the right**
A, B feed the left chambers	E, F feed the right chambers
C, D feed the right chambers	G, H feed the left chambers

VERSION WITH SWING CARRIAGE

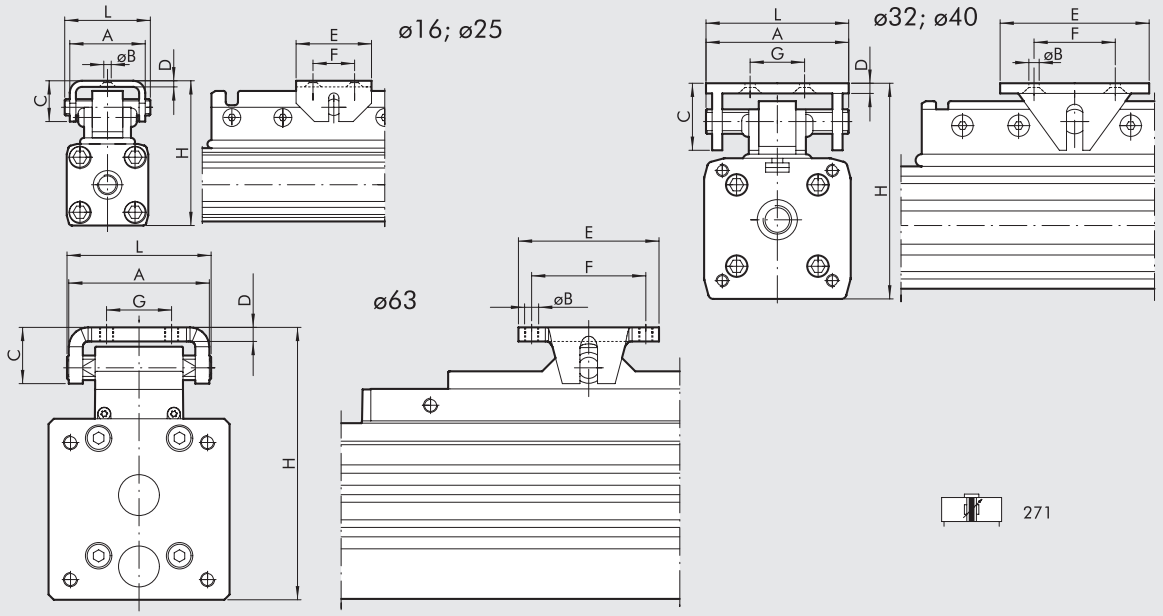

NOTE: For other dimensions see code 270

Ø	A	ØB	C	D	E	F	G	H	L
16	25	4.5	13	2	20	10	–	47-50	28
25	37	5.5	20	3	30	16	–	72-75	42
32	70	6.5	38	5	90	75	55	91-100	70
40	70	6.5	38	5	90	75	55	111-120	70
63	80	M8	32	8	80	65	37	155-162	82

DIMENSIONS VERSION WITH ADJUSTABLE LIMIT SWITCH AND SHOCK ABSORBERS

ø16

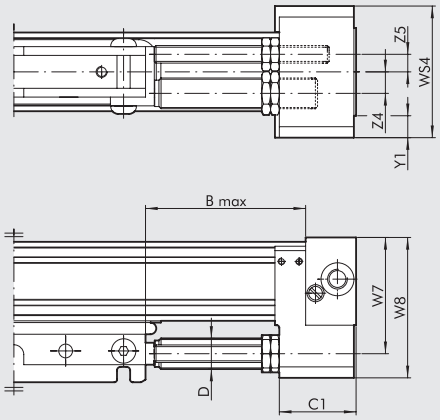

ø25÷ø40

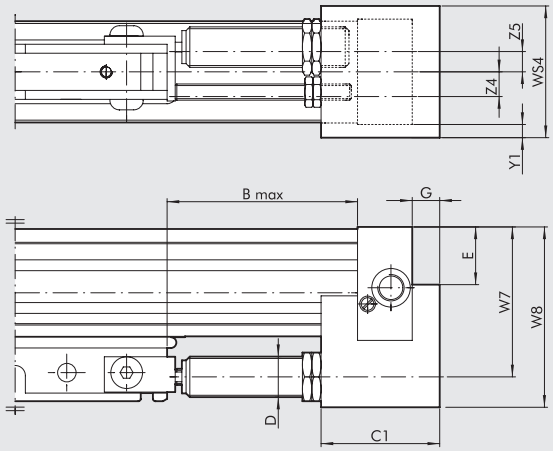

ø63

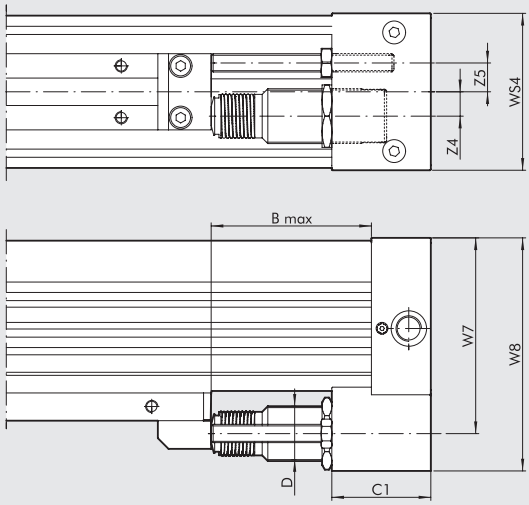

Ø	B Max	C1	D	E	G	W7	W8	WS4	Y1	Z4	Z5	Stroke	Max. cushioned force For stroke [J]	Max. cushioned force For hour [J]	Max. impact force [N]	Max. thrust force [N]
16	42	22	M12x1	–	–	38	46	42	7.5	7	7.5	10.4	10	14125	1000	220
25	72	44	M14x1.5	17	9	53	67	50	5	8	9.8	16	26	34000	2800	530
32	90	56	M20x1.5	29	11	74	89	60	4	10	12.2	22	54	53700	3750	890
40	105	74	M25x1.5	32.8	14	89	108	75	1.5	12.5	12.7	25	90	70000	5500	1550
63	105	65	M36x1.5	–	–	128.5	153	103	–	16	19	25	160	91000	11120	2220

For graphs to help choose shock absorbers see page **A1**.203

KEY TO CODES

CYL	27 TYPE	0	0	25 BORE	0150 STROKE	C	N GASKETS
	27 Rodless cylinder	**0** Double-acting cushioned magnetic **1** Double-acting with swing carriage ✚ **2** Twin cushioned series "Double" **3** Double-acting Magnetic + adjustable limit switches and shock absorbers	**0** Magnetic **S** Non-magnetic ■ **G** No stick-slip	16 25 32 40 63	Ø 16: from 100 to 5000 mm Ø 25 to 40: from 100 to 5700 mm Ø 63 from 100 to 5500 mm		**N** NBR gasket ● **V** FKM/FPM gasket

■ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only** ● For speed ≥ 1/m/s ✚ Available up to Ø 32

RODLESS CYLINDER WITH "V" GUIDE

Two opposed V-shaped guide units are obtained directly in the anodized aluminium cylinder liner, on which a cover with two acetalic resin wear-resistant pads slides.
The cover has a tip-up-type carriage-piston rod coupling. In this way the carriage only transfers loads axially and does not support loads and moments in other directions.
The play of the pads can be adjusted by means of side threaded grub screws. Therefore, it is possible to recover the wear of pads, which can be replaced without the need for dismantling the cylinder.
This family of rodless cylinders has the same features as the basic versions: such as an integrated adjustable pneumatic cushioning, sensor slots and accessory holding slots.
A version is available with adjustable limit switches and hydraulic decelerators. They can be purchased separately and applied at any time to the basic cylinders as well.

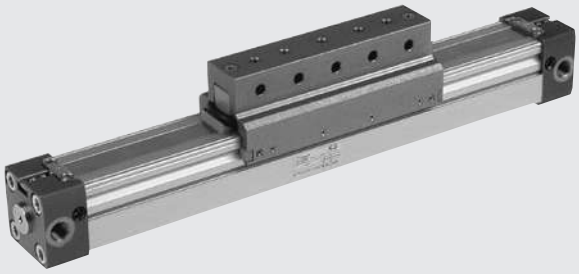

TECHNICAL DATA			Ø25	Ø32	Ø40	Ø63
Operating pressure		bar	1.5 to 8			
		MPa	0.15 to 0.8			
		psi	21.8 to 116			
Temperature range	NBR - FKM/FPM	°C	−10 to +80			
Design			Double-acting rodless cylinder with direct transmission system			
Fluid			50 µm unlubricated filtered air Lubrication, if used, must be continuous			
Standard strokes		mm	100 to 5700			100 to 5500
Sensor magnet			Available magnetic and non-magnetic versions.			
Recommended speeds	NBR	m/s	<1			
	FKM/FPM	m/s	≥1			
Max. speed with decelerators	NBR	m/s	<1			
	FKM/FPM	m/s	2			
Weights			See cylinder "**General technical data**" at the beginning of the chapter			
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**			

COMPONENTS

① CYLINDER HEAD: aluminium alloy
② BARREL: profiled anodized aluminium alloy
③ PISTON GASKET: NBR or FKM/FPM
④ CENTRAL ELEMENT: aluminium alloy
⑤ SCRAPER: Hostaform®
⑥ O-RING: FKM/FPM
⑦ PISTON: Hostaform®
⑧ CUSHIONING CONE: aluminium alloy
⑨ STATIC O-RINGS: NBR or FKM/FPM
⑩ SLIDE: aluminium alloy
⑪ OUTER STRIP: stainless steel
⑫ INNER STRIP: stainless steel
⑬ BAND SUPPORT: Hostaform®
⑭ "V" GUIDE PLATE: Hostaform®

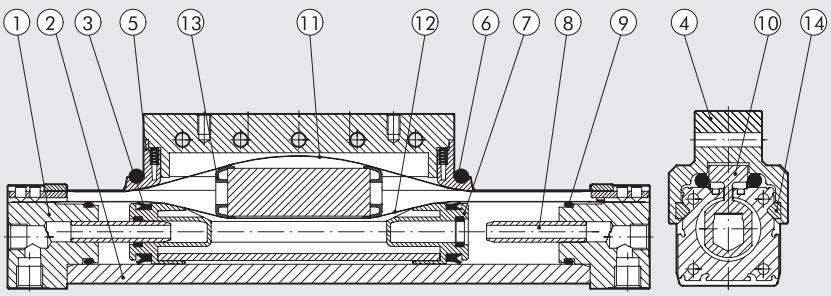

DIMENSIONING - FORCE AND TORQUE

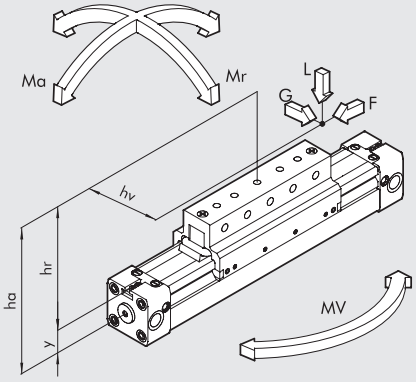

Bore	Centre Distance Y	Actual Force F at 6 bar [N]	Cushioning stroke [mm]	Max. load L [N]	Ma max [Nm]	Mr max [Nm]	Mv max [Nm]
25	14	200	21	350	22	5	22
32	18	300	26	400	40	10	40
40	22	490	32	700	70	26	70
63	44	1300	40	1800	250	80	250

N.B.: The loads can be applied for speeds below 0.2 m/s. For higher speeds, it is advisable not to exceed 1 m/s
N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

$Ma = F \times ha \qquad Mr = L \times hv + G \times hr \qquad Mv = F \times hv$

$$\frac{Mv}{Mv\ max} \leq 1; \qquad \frac{L}{L\ max} \leq 1; \qquad \frac{Ma}{Ma\ max} + \frac{Mr}{Mr\ max} + 0.22 \times \frac{Mv}{Mv\ max} + 0.4\,\frac{L}{L\ max} \leq 1$$

DIAGRAM OF SPEED AND MAXIMUM CUSHIONABLE LOAD

For the cylinder to reach the end-of-stroke position without intense or repeated impact which would damage it, it is necessary to annul the kinetic energy of the moving mass and the work generated. The maximum cushionable load depends on the traversing speed and the absorption of the air buffer supplied standard with the various cylinders. The diagram shows the speeds and cushionable mass for the various diameters at a pressure of 6 bar.

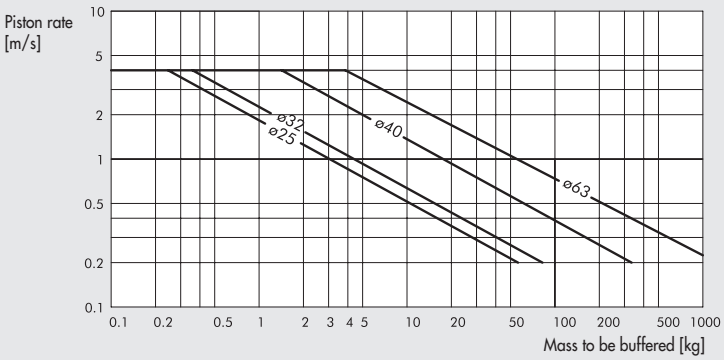

MAXIMUM LOAD ACCORDING TO THE DISTANCE BETWEEN SUPPORTS

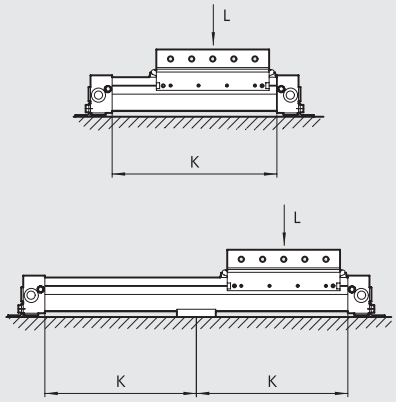

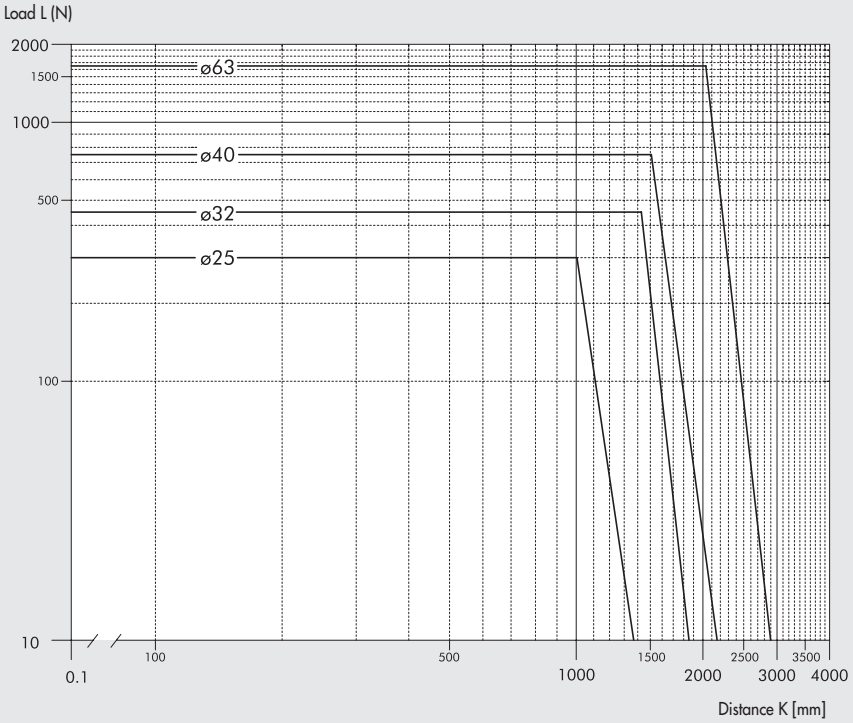

METAL WORK PNEUMATIC

BARREL CROSS SECTION

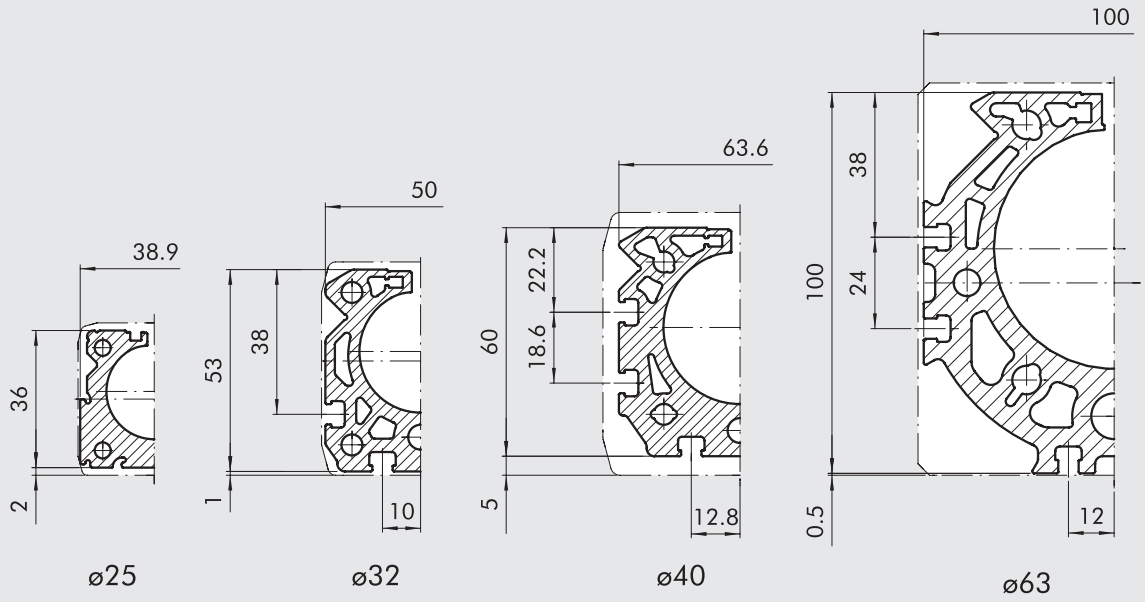

DIMENSIONS Ø 25 to 40

+ = ADDED STROKE

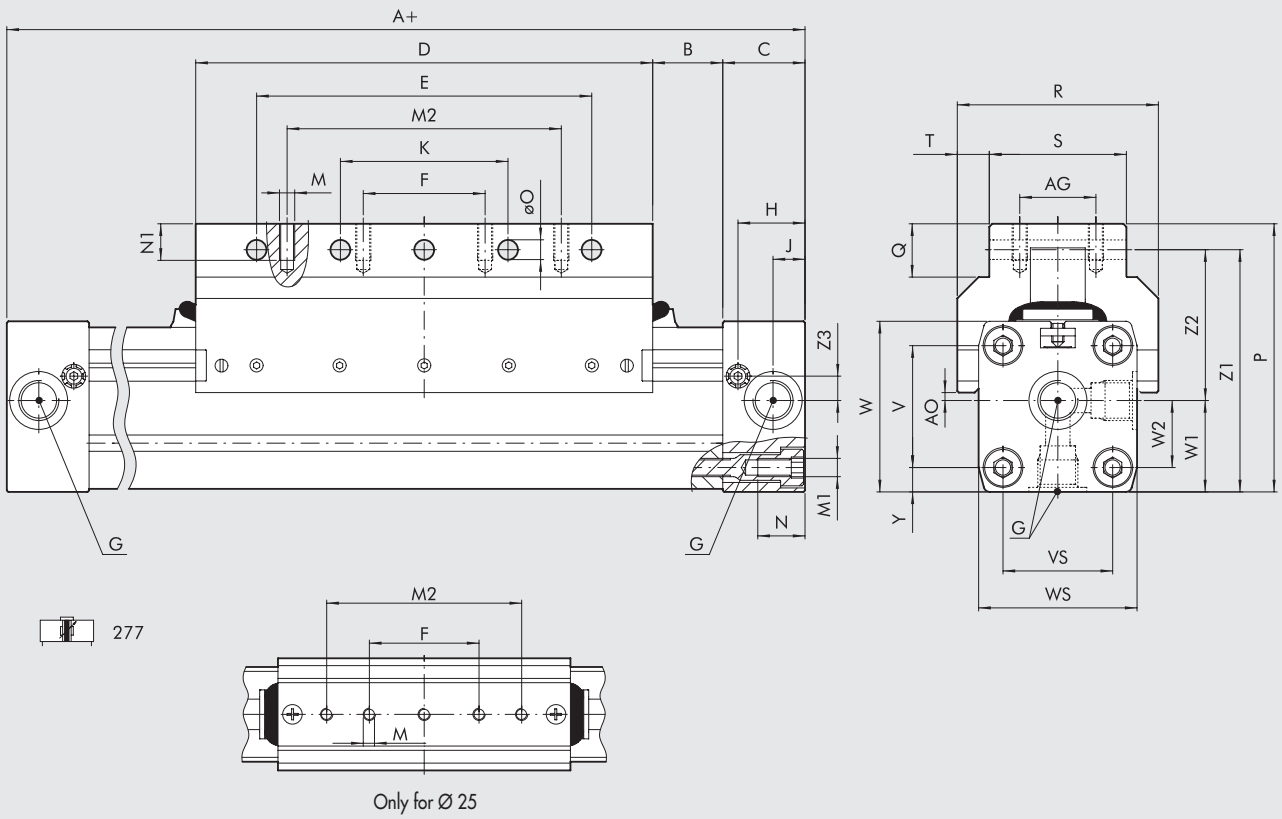

Only for Ø 25

Ø	A	AG	AO	B	C	D	E	F	G	H	J	K	M	M1	M2	N	N1	øO	P	Q	R	S	T	V	VS	W	WS	W1	W2	Y	Z1	Z2	Z3
25	200	-	2	17	23	120	90	45	1/8	18.5	8.5	45	M5	M5	80	12	8	5.5	67.5	21	46	26	10	27	27	40	40	20	13.5	6.5	57.5	37.5	6.5
32	250	25	2.6	23	27	150	110	40	1/4	22	10.5	55	M5	M6	90	15	12	6.4	88	17.5	66	45	10.5	40	36	56	52	30	22	8	79.5	49.5	8
40	300	25	9.4	45	30	150	110	40	1/4	24	15	55	M6	M6	90	17.5	12	6.4	98.5	17.5	80	45	17.5	54	54	69	72	36	27	9	89.9	53.9	11.8

DIMENSIONS Ø 63

+ = ADDED STROKE

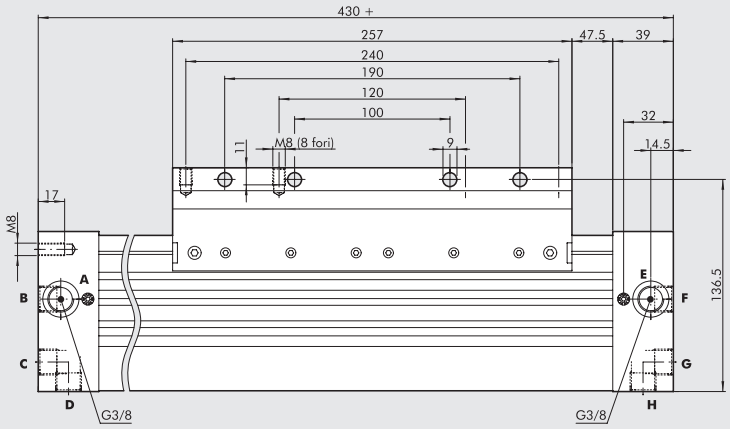

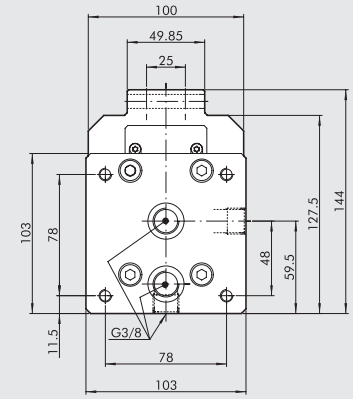

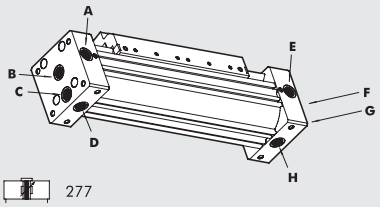

277

Basic supply
A, B, C, D to feed to left chambers
E, F, G, H to feed the right chambers
Note: B, C, D, F, G and H are supplied closed with threaded plugs

If you modify the position of an inner plug following the instructions provided with the cylinder, you can arrange:

all feeds from the left	**all feeds from the right**
A, B feed the left chambers	E, F feed the right chambers
C, D feed the right chambers	G, H feed the left chambers

DIMENSIONS VERSION WITH ADJUSTABLE LIMIT SWITCH AND SHOCK ABSORBERS

Ø 25



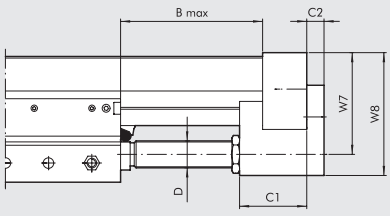

Ø 32; Ø 40

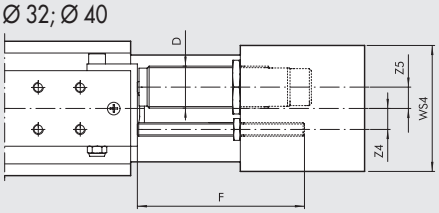

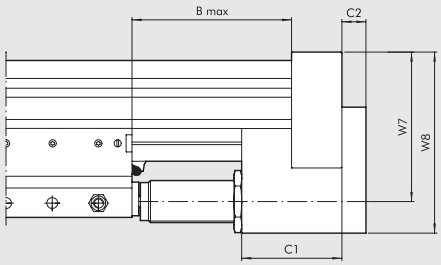

Ø 63

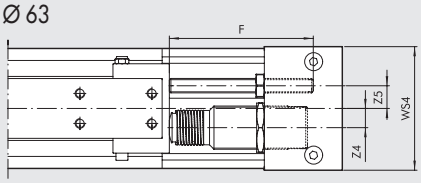

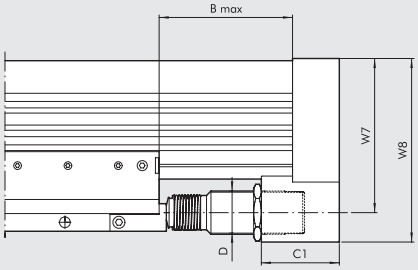

278

Ø	B Max	C1	C2	D	F	W7	W8	WS4	Z4	Z5	Stroke	Max. cushioned force For stroke [J]	Max. cushioned force For hour [J]	Max. impact force [N]	Max. thrust force [N]
25	84	35	9	M14x1.5	80	53	67	50	8	9.8	16	26	34000	2800	530
32	110	45	11	M20x1.5	100	74	89	60	10	12.2	22	54	53700	3750	890
40	120	60	14	M25x1.5	100	89	108	75	12.5	12.7	25	90	70000	5500	1550
63	122	65	-	M36x1.5	120	128.5	153	103	16	19	25	160	91000	11120	2220

For graphs to help choose shock absorbers see page **A1**.203

KEY TO CODES

CYL	27	7	0	25	0150	C	N
	TYPE			**BORE**	**STROKE**		**GASKETS**
	27 Rodless cylinder	**7** Double-acting cushioned Magnetic with "V" guide **8** Double-acting cushioned Magnetic with "V" guide + adjustable limit switches and decelerator	**0** Magnetic **S** Non-magnetic ✱ **G** No stick-slip	25 32 40 63	Ø 25 to 40: from 100 to 5700 mm Ø 63 from 100 to 5500 mm		**N** NBR gasket ● **V** FKM/FPM gasket

✱ For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only ● For speed ≥ 1/m/s

RODLESS CYLINDER WITH BALL RECIRCULATING GUIDE

The range of rodless cylinders with ball circulation guides is available with five different bores Ø 16, 25, 32, 40 and 63. The bore 63 can be supplied in two versions: the "standard" one for intermediate loads and the "heavy" one for considerably weighty loads. Besides the general features specified for standard rodless cylinders, the other main features are:

- Very high load capacity, acting in all directions without discharging onto the cylinder slide.
- Hardened steel guide connected firmly to the cylinder barrel.
- Ball circulation pads constructed using special technology that make them very silent when the guide slides, with very long maintenance intervals. For example, they only need lubricating every 2000 km or once a year, using type 2 grease, preferably containing lithium soap.
- Extra sturdy slide support with various holes for fixing the loads. Holes for centring pins are also provided.
- 100 to 2650 stroke at intervals of 1 mm.
- Integrated pneumatic adjustable cushioning.
- Adjustable limit switches and decelerations can be applied at any time.

For this type of cylinder (size 32 and upwards), the valves can be fitted directly using the retracting sensors without requiring any intermediate brackets.
Refer to the table on page **A1**.66

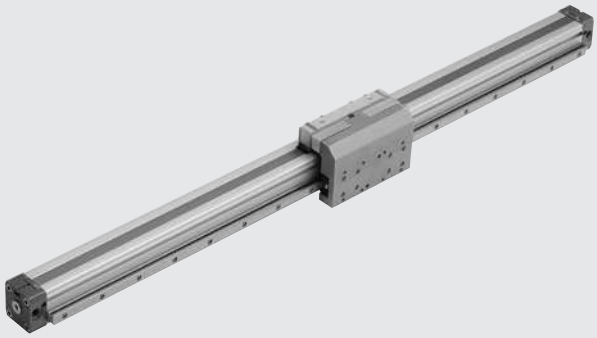

TECHNICAL DATA			Ø16	Ø25	Ø32	Ø40	Ø63	Ø63 heavy
Operating pressure		bar	1 to 8					
		MPa	0.1 to 0.8					
		psi	14.5 to 116					
Temperature range	NBR - FKM/FPM	°C	−10 to +80					
Design			Double-acting rodless cylinder with direct transmission system					
Fluid			50 µm unlubricated filtered air Lubrication, if used, must be continuous					
Standard strokes		mm	100 to 1350	100 to 2300		100 to 2250	100 to 2100	100 to 2650
Sensor magnet			Available magnetic and non-magnetic versions.					
Recommended speed	NBR	m/s	<1					
	FKM/FPM	m/s	≥1					
Max. speed with decelerators	NBR	m/s	<1					
	FKM/FPM	m/s	2					
Weights			See cylinder "**General technical data**" at the beginning of the chapter					
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**					

COMPONENTS

For version 275

① CYLINDER: see components of **rodless cylinders - series STD**
② GUIDE: hardened steel
③ PAD: steel with hardened ball circulation
④ SLIDE SUPPORT: anodized aluminium

For version 276

Besides the details specified above:
⑤ END-OF-STROKE STUD PIN: zinc-plated steel, complete with 2 zinc-plated nuts for fixing
⑥ DECELERATOR: burnished steel, complete with 2 zinc-plated or burnished nuts for fixing
⑦ DECELERATOR SUPPORT: anodized aluminium
⑧ BRACKET: hardened-and-tempered and zinc-plated steel

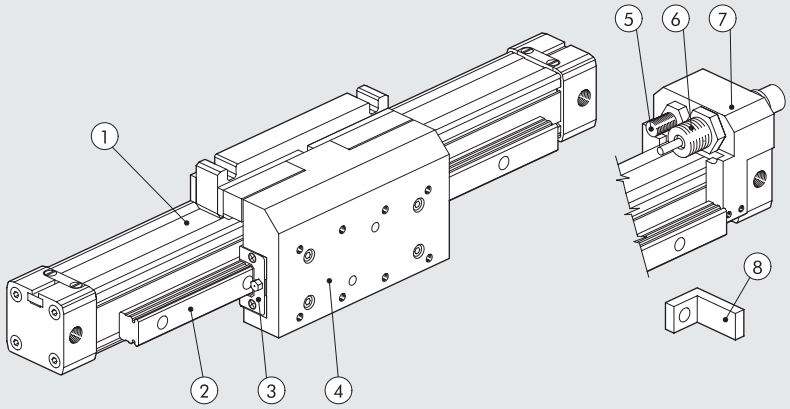

DIMENSIONING - FORCES AND MOMENTS





Ø	Version	Actual force F at 6 bar [N]	Cushioning stroke [mm]	K [mm]	X [mm]	Y [mm]	Z [mm]	Max load L [N]	Max load G [N]	Ma max [Nm]	Mr max [Nm]	Mv max [Nm]
16	–	110	15	35	16	29	33	500	500	16	15	16
25	–	250	21	50.5	21	44	51.5	1500	1500	100	50	100
32	–	420	26	59	22.5	53.5	70	3000	3000	200	100	200
40	–	640	32	68	24.7	58	73	4000	4000	200	140	200
63	standard	1550	40	84	23.1	79	100	6000	6000	400	140	400
63	heavy	1550	40	91	29.2	79	88	10000	10000	600	400	600

N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

$Ma = F \times (hr + Y)$ $\quad Mr = G \times (hr + z) + Lx (hv + X)$ $\quad Mv = F \times (K + hv)$

$$\frac{Ma}{Ma\ max} + \frac{Mr}{Mr\ max} + \frac{Mv}{Mv\ max} + \frac{L}{L\ max} + \frac{G}{G\ max} \leq 1$$

DIAGRAM OF SPEED AND MAXIMUM CUSHIONABLE LOAD

For the cylinder to reach the end-of-stroke position without intense or repeated impact which would damage it, it is necessary to annul the kinetic energy of the moving mass and the work generated.
The maximum cushionable load depends on the traversing speed and the absorption of the air buffer supplied standard with the various cylinders.
The diagram shows the speeds and cushionable mass for the various diameters at a pressure of 6 bar.

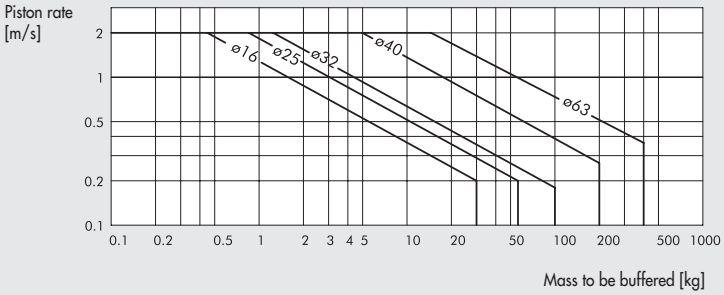

MAXIMUM LOAD ACCORDING TO THE DISTANCE BETWEEN SUPPORTS

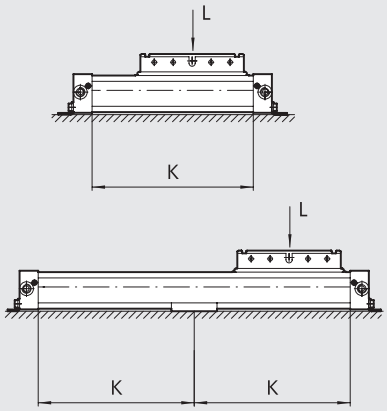

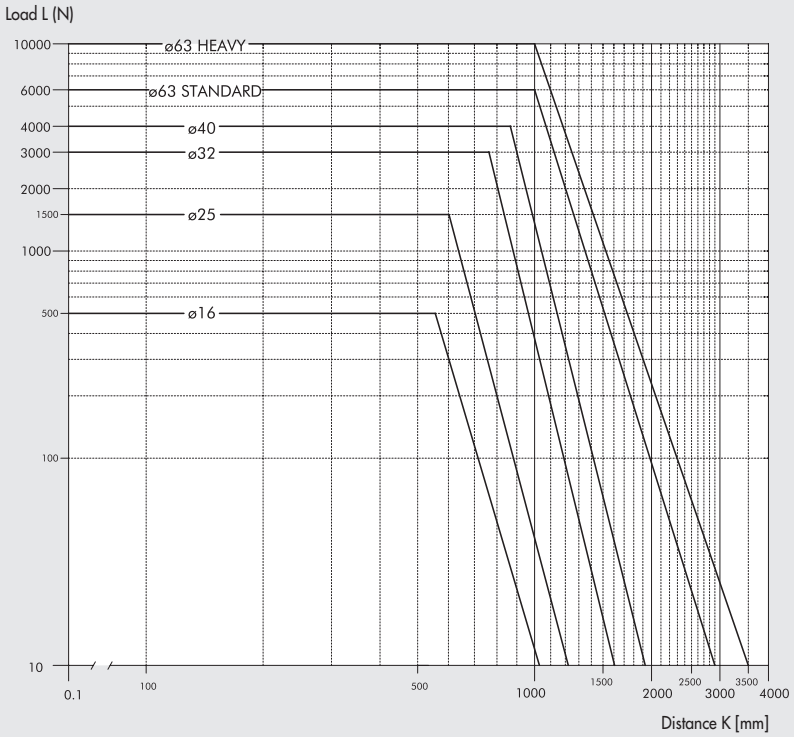

METAL WORK PNEUMATIC

DIMENSIONS Ø 16

+ = ADD THE STROKE

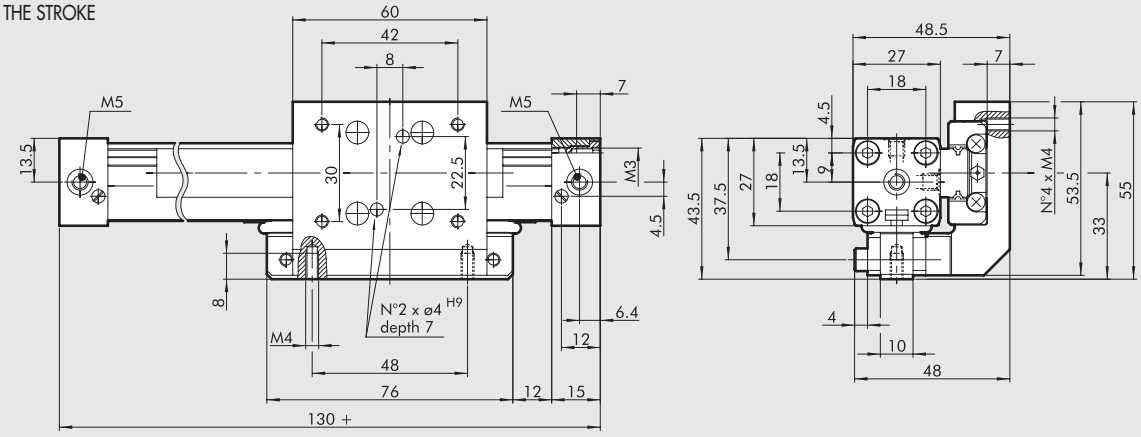

275

DIMENSIONS Ø 25

+ = ADD THE STROKE

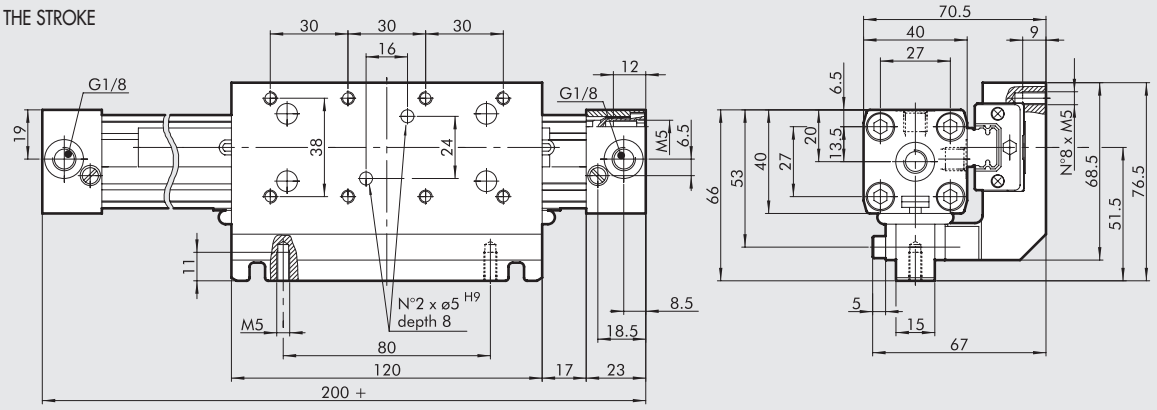

275

DIMENSIONS Ø 32; Ø 40

+ = ADD THE STROKE

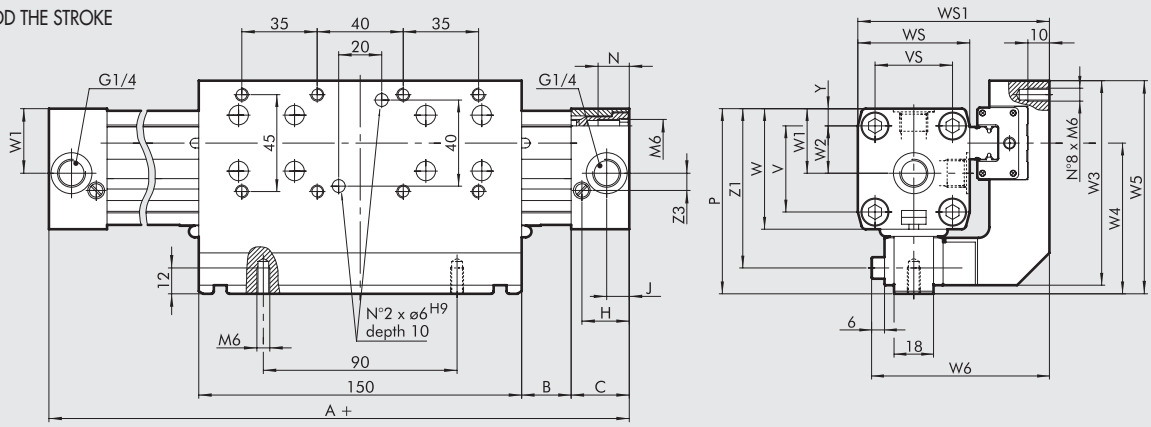

275

Ø	A	B	C	H	J	N	P	V	VS	W	WS	WS1	W1	W2	W3	W4	W5	W6	Y	Z1	Z3
32	250	23	27	22	10.5	14	86	40	36	56	52	85	30	22	95	70	99	78.5	8	74	8
40	300	45	30	24	15	17.5	97	54	54	69	72	104	36	27	98	73	102	88	9	85	11.8

DIMENSIONS Ø 63

HEAVY

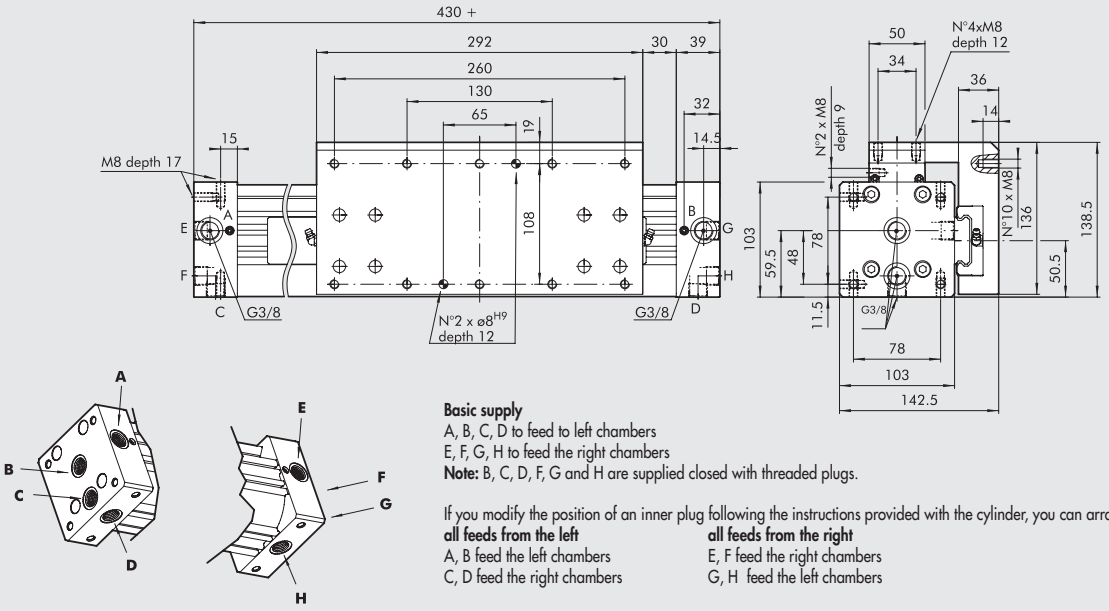

Basic supply
A, B, C, D to feed to left chambers
E, F, G, H to feed the right chambers
Note: B, C, D, F, G and H are supplied closed with threaded plugs.

If you modify the position of an inner plug following the instructions provided with the cylinder, you can arrange:

all feeds from the left	**all feeds from the right**
A, B feed the left chambers	E, F feed the right chambers
C, D feed the right chambers	G, H feed the left chambers

STANDARD

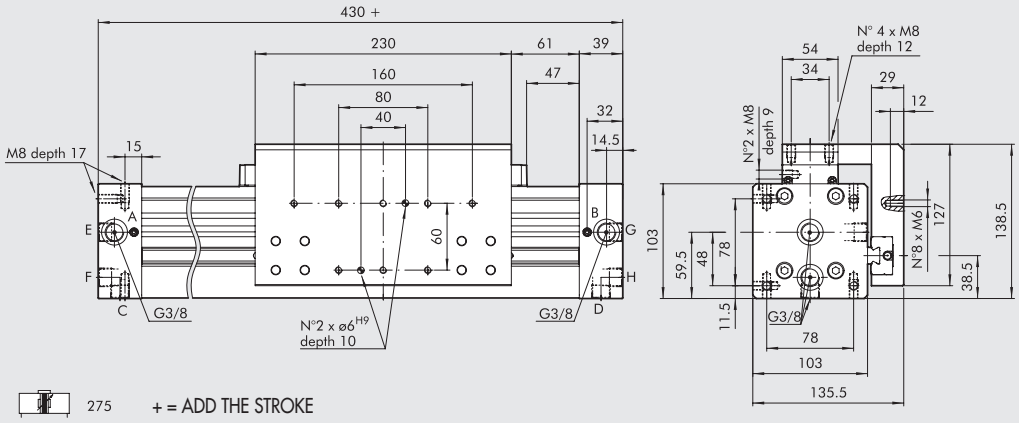

275 + = ADD THE STROKE

ASSEMBLY DIAGRAMS

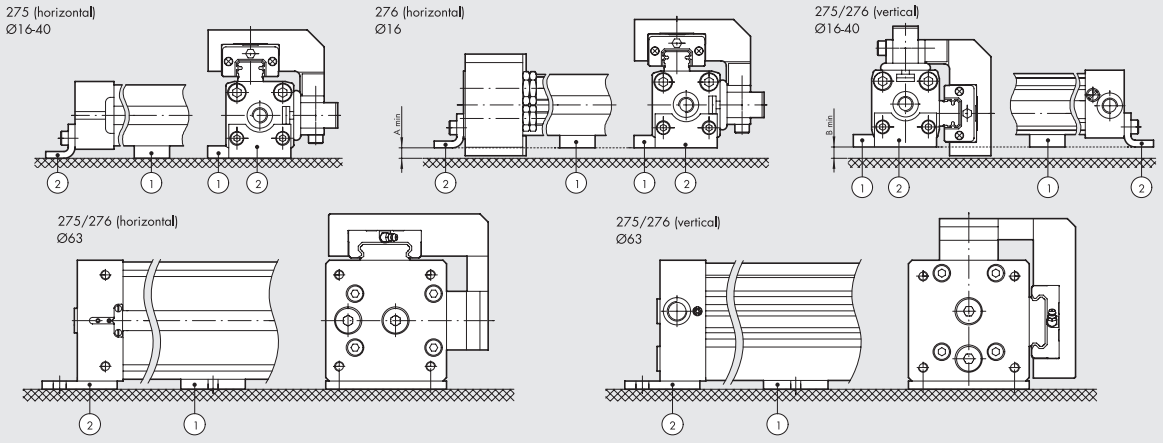

Ø	A min	Horizontal layout Interm. support code (1)	Leg code (2)	B min	Vertical layout Interm. support code (1)	Leg code (2)
16	8	W0950164004	W0950167001	12	W0950164004	W0950167001
25	10	W0950254004	W0950257001	10	W0950254004	W0950257001
32	4	W0950324004	W0950328035	11	W0950324004	W0950327001
40	3	W0950404004	W0950407001	5	W0950404004	W0950407001
63	–	W0950637036	W0950637001	–	W0950637033	W0950637001

METAL WORK PNEUMATIC

DIMENSION VERSION WITH ADJUSTABLE LIMIT SWITCH AND SHOCK ABSORBERS Ø 16 to 63

ø16

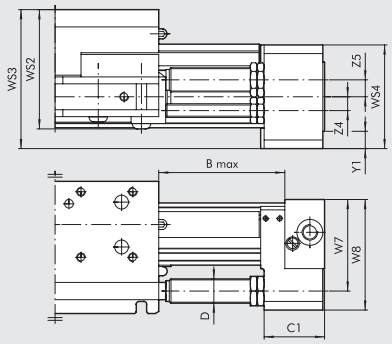

ø25; ø32; ø40

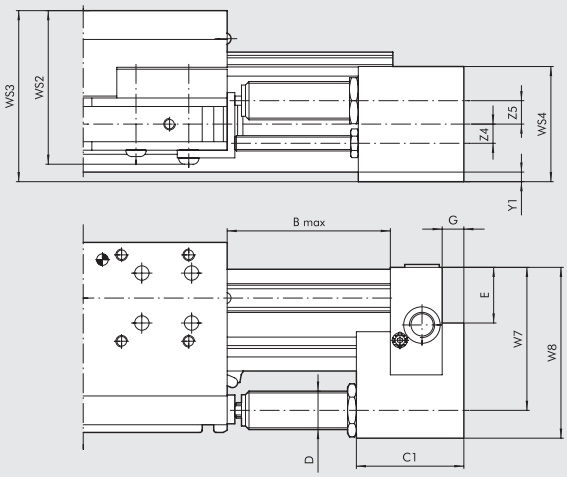

ø63 STD

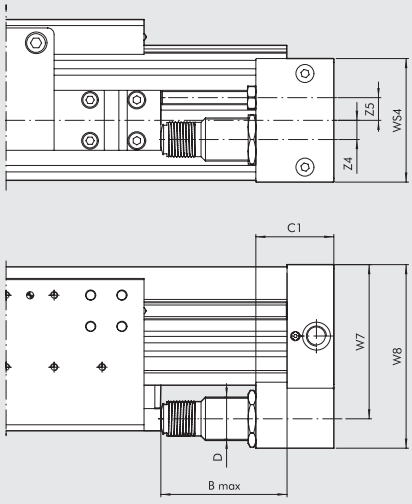

ø63 HEAVY

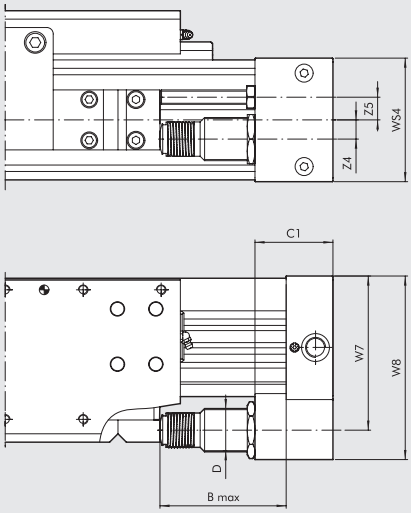

276

Ø	Version	B max	C1	D	E	G	W7	W8	WS2	WS3	WS4	Y1	Z4	Z5	Corsa	Max. cushioned force Per stroke [J]	Max. cushioned force Per hour [J]	Max. impact force [N]	Max. thrust force [N]
16	–	50	22	M12x1	–	–	38	46	52	56	42	7.5	7	7.5	10.4	10	14125	1000	220
25	–	72	44	M14x1.5	17	9	53	67	71	80.5	50	5	8	9.8	16	26	34000	2800	530
32	–	90	56	M20x1.5	29	11	74	89	82.5	91	60	4	10	12.2	22	54	53700	3750	890
40	–	105	74	M25x1.5	32.8	14	89	108	92	108	75	1.5	12.5	12.7	25	90	70000	5500	1550
63	standard	105	65	M36x1.5	–	–	128.5	153	–	–	103	–	16	19	25	160	91000	11120	2220
63	heavy	105	65	M36x1.5	–	–	128.5	153	–	–	103	–	16	19	25	160	91000	11120	2220

For graphs to help choose shock absorbers see page **A1**.203

KEY TO CODES

CYL	27 TYPE	5	0	25 BORE	0150 STROKE	C	N GASKETS
	27 Rodless cylinder	**5** Double-acting cushioned magnetic with ball circulation guides **6** Double-acting cushioned magnetic with ball circulation guides + adjustable limit switch and shock absorbers	**STANDARD** **0** Magnetic **S** Non-magnetic ■ **G** No stick-slip **HEAVY *** **A** Magnetic ■ **B** No stick-slip **C** Non-magnetic	16 25 32 40 63	Ø 16: 100 to 1350 mm Ø 25 - 32: 100 to 2300 mm Ø 40: 100 to 2250 mm Ø 63 std: 100 to 2100 mm Ø 63 heavy: 100 to 2650 mm		**N** NBR gasket ● **V** FKM/FPM gasket

■ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.** * Only available for Ø 63 ● For speed ≥ 1/m/s

RODLESS CYLINDER SERIES DOUBLE

DIMENSIONING – FORCES AND MOMENTS

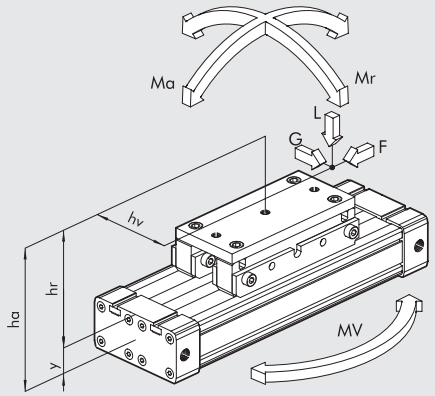

Bore	Actual force F at 6 bar [N]	Cushioning stroke [mm]	Max load L [N]	Ma max [Nm]	Mr max [Nm]	Mv max [Nm]
2x16	200	15	240	8	2.4	1
2x25	480	21	600	30	8	6
2x32	820	26	900	60	16.5	10

N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

$Ma = F \times ha \qquad Mr = L \times hv + G \times hr \qquad Mv = F \times hv$

$$\frac{Mv}{Mv\ max} \leq 1; \quad \frac{L}{L\ max} \leq 1; \quad \frac{Ma}{Ma\ max} + \frac{Mr}{Mr\ max} + 0.22 \times \frac{Mv}{Mv\ max} + 0.4\frac{L}{L\ max} \leq 1$$

For technical data, see **rodless cylinders - series STD**.
For weights, see cylinder "**General technical data**" at the beginning of the chapter.

DIMENSIONS OF RODLESS CYLINDER, DOUBLE SERIES

+ = ADD THE STROKE

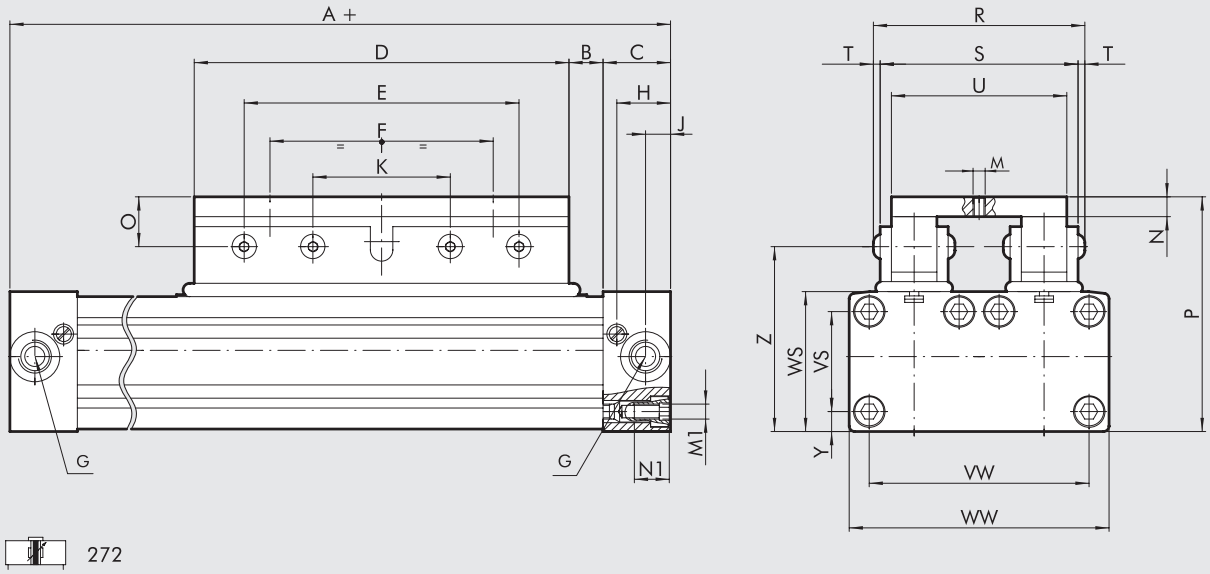

272

Ø	A	B	C	D	E	F	G	H	J	K	M	N	M1	N1	O	P	R	S	T	U	VW	VS	WW	WS	Y	Z
2x16	130	12	15	76	64	48	M5	12	6.4	32	M5	10	M3	7	16	53.5	48	42	3	34	42	18	51	27	4.5	37.5
2x25	200	17	23	120	100	80	1/8	18.5	8.5	50	M6	15	M5	12	20	74	66	59	3.5	50	63	27	72	41	7	53.5
2x32	250	23	27	150	110	90	1/4	22.5	10.5	55	M6	12	M6	14	20	95	86.5	77.5	4.5	70	86	40	100	56	8	74

DIAGRAM OF SPEED AND MAXIMUM CUSHIONABLE LOAD

For the cylinder to reach the end-of-stroke position without intense or repeated impact which would damage it, it is necessary to annul the kinetic energy of the moving mass and the work generated.
The maximum cushionable load depends on the traversing speed and the absorption of the air buffer supplied standard with the various cylinders.
The diagram shows the speeds and cushionable mass for the various diameters at a pressure of 6 bar.

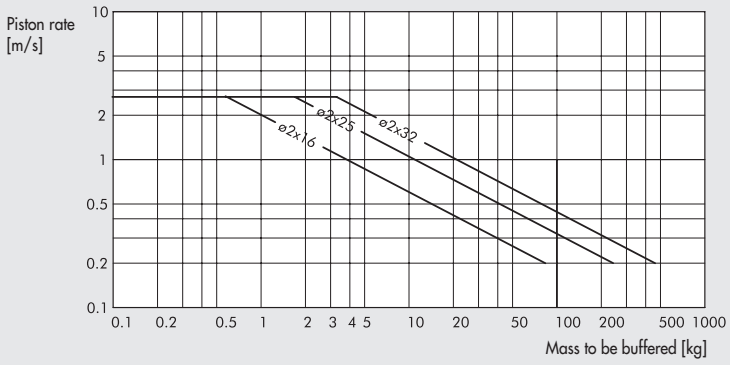

ACCESSORIES AND SPARE PARTS FOR RODLESS CYLINDERS

FIXINGS FOR RODLESS STD, "V" GUIDE, WITH BALL RECIRCULATING GUIDE CYLINDERS

FOOT Ø 16; 25

+ = ADDED STROKE

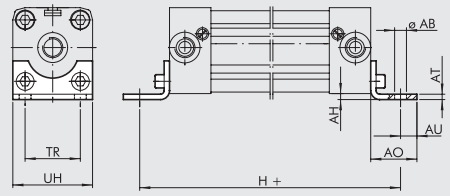

Code	Ø	ØAB	AH	AO	AT	AU	TR	UH	H	Weight [g]
W0950167001	16	3.6	1.5	14	1.6	4	18	26	150	10
W0950257001	25	5.5	2	22	2.5	6	27	40	232	32

Note: Individually packed with 2 screws

FOOT Ø 32; 40

+ = ADDED STROKE



Code	Ø	ØAB	AH	AO	AT	AU	AV	TR	UH	H	Weight [g]
W0950327001	32	6.6	4	25	20	8	20	36	51	284	88
W0950407001	40	9	2	25	20	11.5	30	54	71	327	112

Note: Individually packed with 2 screws

FOOT Ø 63

+ = ADDED STROKE

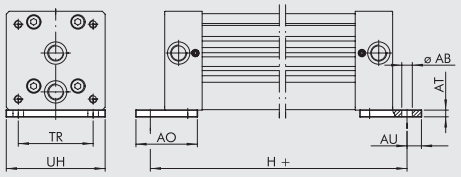

Code	Ø	ØAB	AT	AO	AU	TR	UH	H	Weight [g]
W0950637001	63	11	7	64	15	78	103	460	360

Note: Individually packed with 2 screws

INTERMEDIATE FOOT Ø 16; 25 FOR STD AND "V" GUIDE

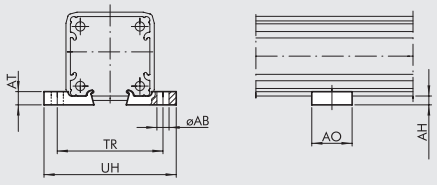

Code	Ø	ØAB	AH	AO	AT	TR	UH	Weight [g]
W0950167031	16	5.5	3	20	5	41	53	4
0950254094	25	5.5	4	20	6	48	60	6

Note: Individually packed.

INTERMEDIATE FOOT Ø 32; 40 FOR STD AND "V" GUIDE



Code	Ø	ØAB	AH	AO	AT	AV	TR	UH	Weight [g]
W0950327032	32	6.5	5	55	8	40	61.5	73	72
W0950407032	40	6.5	7	60	8	45	70-75	85	104

Note: plate supplied complete with 4 screws, 4 fixing plates

INTERMEDIATE SUPPORT Ø 63 FOR VERSION STD, "V" GUIDE AND VERTICAL POSITION BALL RECIRCULATING

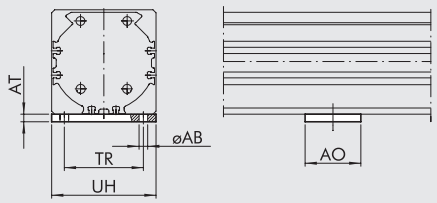

Code	Ø	ØAB	AO	AT	TR	UH	Weight [g]
W0950637032	63	8.5	55	7.5	78	103	330

Note: plate supplied complete with 4 screws, 4 fixing plates

INTERMEDIATE SUPPORT Ø 16 to 25 FOR BALL RECIRCULATING

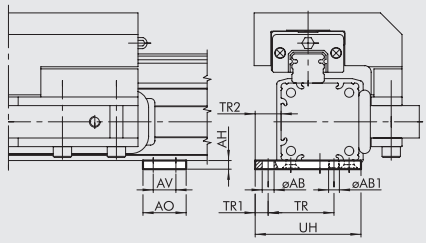

Code	Ø	ØAB	ØAB1	AH	AO	AV	TR	TR1	TR2	UH
W0950164004	16	3.5	M3	3	12	6	20	4	8	32.5
W0950254004	25	5.5	M5	4	20	10.5	30.5	6	12	49

Note: Supplied complete with 4 screws

INTERMEDIATE SUPPORT Ø 32 to 40 FOR BALL RECIRCULATING

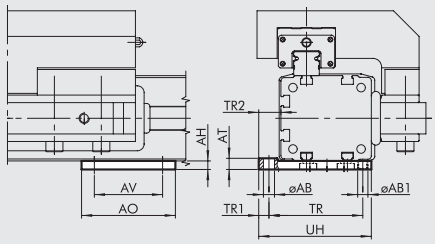

Code	Ø	ØAB	ØAB1	AH	AO	AT	AV	TR	TR1	TR2	UH
W0950324004	32	6.5	M6	5	55	5	40	55	6	13	66
W0950404004	40	6.5	M6	6.6	60	8	45	63	7.5	15	77

Note: Supplied complete with 4 screws, 4 plates.

INTERMEDIATE SUPPORT KIT Ø 63 FOR HORIZONTAL POSITION BALL RECIRCULATING

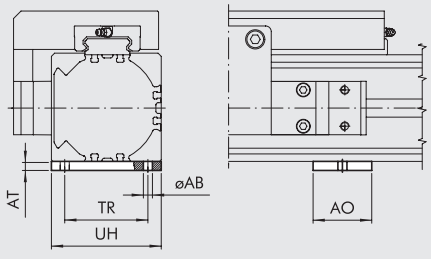

Code	Ø	ØAB	AH	AO	AT	TR	UH
W0950637036	63	8.5	7.5	55	8.5	78	103

Note: Supplied complete with 4 screws, 4 plates.

NOTES

FIXINGS FOR RODLESS CYLINDER SERIE DOUBLE

FOOT Ø 16; 25

+ = ADD STROKE

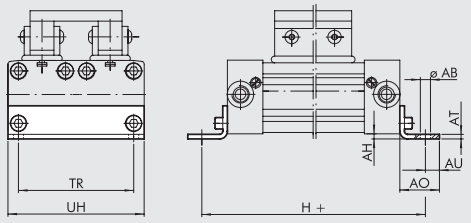

Code	Ø	ØAB	AH	AO	AT	AU	TR	UH	H	Weight [g]
W0950168001	2x16	3.6	1.5	14	1.6	4	42	51	150	18
W0950258001	2x25	5.5	2	22	2.5	6	63	72	232	54

Note: Individually packed complete with 2 screws

FOOT Ø 32

+ = ADD STROKE

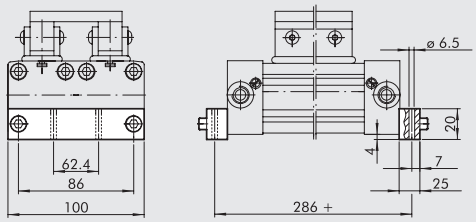

Code	Description	Weight [g]
W0950328036	Foot DOUBLE Ø 32	156

Note: Individually packed complete with 2 screws

VERTICAL FOOT Ø 16; 25

+ = ADD STROKE

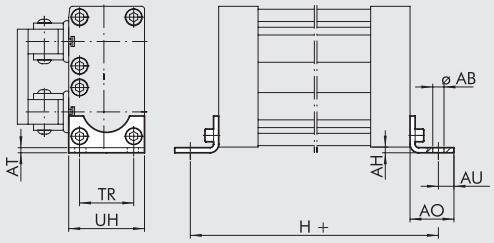

Code	Ø	ØAB	AH	AO	AT	AU	TR	UH	H	Weight [g]
W0950167001	2x16	3.6	1.5	14	1.6	4	18	26	150	10
W0950257001	2x25	5.5	4	22	2.5	6	27	40	232	32

Note: Individually packed complete with 2 screws

VERTICAL FOOT Ø 32

+ = ADD STROKE

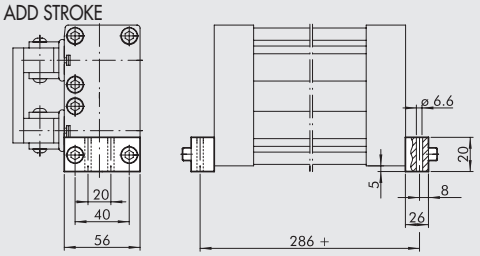

Code	Description	Weight [g]
W0950328035	Vertical foot Ø 32	92

Note: Individually packed complete with 2 screws

INTERMEDIATE FOOT Ø 16 to 32

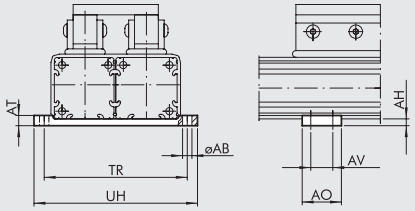

Code	Ø	ØAB	AH	AO	AT	AV	TR	UH	Weight [g]
W0950168037	2x16	3.5	3	12	6	6	60.5	64	16
W0950258037	2x25	5.5	4	20	6	10.5	84.5	96	34
W0950328037	2x32	6.5	5	55	8	40	111.5	123	96

Note: Supplied complete with 8 screws, 8 fixing plates (plates for Ø 32 only)

ACCESSORIES FOR CONVERTING STD RODLESS CYLINDERS INTO SWING CYLINDERS

KIT TO TRANSFORM INTO SWING VERSION

Ø16 to 40



Ø63



Code	Ø	Weight [g]
W0950167035	16	34
W0950257035	25	118
W0950327035	32	450
W0950327035	40	450
W0950637035	63	810

Note: Ø 16 to 40: Supplied complete with 1 adaptor, 1 support, 1 pin, 1 bushing
Ø 63: Supplied complete with 1 plate, 1 support, 1 pin, 2 bushings, 4 screws

DRIVE PIN

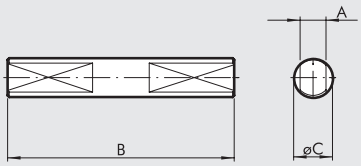

Code	Ø	A	B	ØC	Weight [g]
W0950167034	16	2.9	28	5	6
W0950257034	25	5	42	8	16
W0950327034	32	8	70	12	52
W0950327034	40	8	70	12	52
W0950637034	63	10	82	14	100

Note: Individually packed

SWING SUPPORT Ø 16; 25



Code	Ø	A	ØB	C	D	E	F	Weight [g]
W0950167033	16	25	4.5	13	2	20	10	14
W0950257033	25	37	5.5	20	3	30	16	40

Note: Individually packed

SWING SUPPORT Ø 32; 40; 63

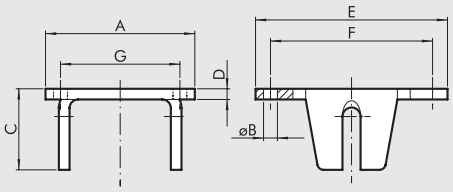

Code	Ø	A	ØB	C	D	E	F	G	Weight [g]
W0950327033	32	70	6.5	38	5	90	75	55	274
W0950327033	40	70	6.5	38	5	90	75	55	274
W0950637033	63	80	M8	32	8	80	65	37	400

Note: Individually packed

SENSOR MAGNETIC

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

Note: For rodless cylinders Ø25 having "V" guide use only the HS version of the oval type.

SENSOR SUPPORT Ø 16; 25



Code	Description
0950164001	Sensor support STD

Note: Supplied with 1 stud pin, 2 screws

METAL WORK PNEUMATIC

SENSOR SUPPORT Ø 16 FOR RODLESS CYLINDER WITH BALL RECIRCULATING

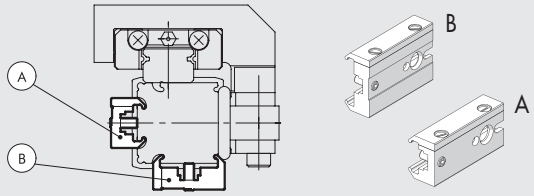

Code sensor support	Description sensor support	Type sensor support	Mounting on the carriage opposite side	Mounting on the guide opposite side
0950164003	Sensor support short	A	•	
0950164001	Sensor support std	B		•

Note: Supplied complete with 2 screws, 1 pin

SHOCK ABSORBERS

ADJUSTABLE LIMIT SWITCH AND SHOCK ABSORBERS KIT

Ø 16 Ø 25 to 40 Ø 63



Code	Description	Weight [g]
0950164002	Rodless cylinder limit switch and shock absorbers Ø 16	125
0950254002	Rodless cylinder limit switch and shock absorbers Ø 25	260
0950324002	Rodless cylinder limit switch and shock absorbers Ø 32	460
0950404002	Rodless cylinder limit switch and shock absorbers Ø 40	730
0950634002	Rodless cylinder limit switch and shock absorbers Ø 63	1620

Note: Supplied complete with 1 shock absorber support, 1 standard shock absorber, 1 shock absorber nut, 1 limit switch grub screw, 1 grub screw nut (2 for Ø 63), 1 bracket, 1 bracket screw, 4 locking grub screws (for Ø 16 and Ø 25), 4 locking plates and 4 screws (for Ø 32 and Ø 40)

ADJUSTABLE LIMIT SWITCH AND SHOCK ABSORBERS KIT FOR RODLESS CYLINDER WITH "V" GUIDE

Ø 25 to 40 Ø 63

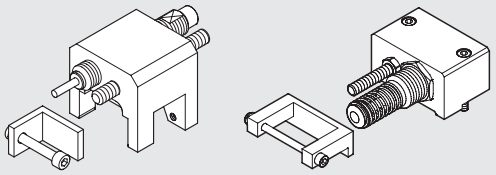

Code	Description	Weight [g]
0950254004	Rodless cylinder limit switch and shock absorbers Ø 25	260
0950324004	Rodless cylinder limit switch and shock absorbers Ø 32	460
0950404004	Rodless cylinder limit switch and shock absorbers Ø 40	730
0950634004	Rodless cylinder limit switch and shock absorbers Ø 63	1620

Note: Supplied complete with 1 shock absorber support, 1 standard shock absorber, 1 shock absorber nut, 1 limit switch grub screw, 1 grub screw nut (2 for Ø 63) , 1 bracket, 1 bracket screw, 4 locking grub screws (for Ø 25), 4 locking plates and 4 screws (for Ø 32 and Ø 40)

SHOCK ABSORBERS



Code	Description	Ø
0950004003	Shock absorbers ECO15 MF1 + nut M12x1	16
0950004004	Shock absorbers ECO25 MC2 + nut M14x1.5	25
0950004005	Shock absorbers ECO50 MC2 + nut M20x1.5	32
0950004006	Shock absorbers ECO100 MF2 + nut M25x1.5	40
0950004007	Shock absorbers ECO125 MF3 + nut M36x1.5	63

GRAPHS TO HELP CHOOSE THE RIGHT SHOCK ABSORBERS

Ø 16



Ø 25



Ø 32



Ø 40



Ø 63



The dotted areas indicate that the SHOCK ABSORBERS is supplied standard. Other options can be selected depending on the speed [m/sec] and the maximum work force [J/stroke] to dissipate at each stroke. Refer to the diagrams above to select the correct option.

SPARE PARTS FOR STD RODLESS CYLINDERS, "V" GUIDE, BALL RECIRCULATING GUIDE, DOUBLE

"LAST RELEASE" CYLINDER

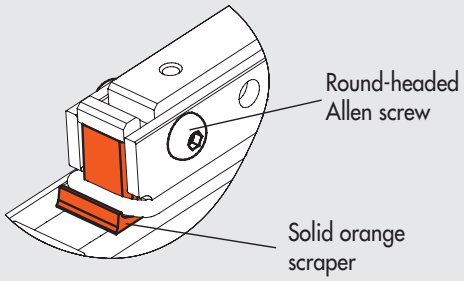

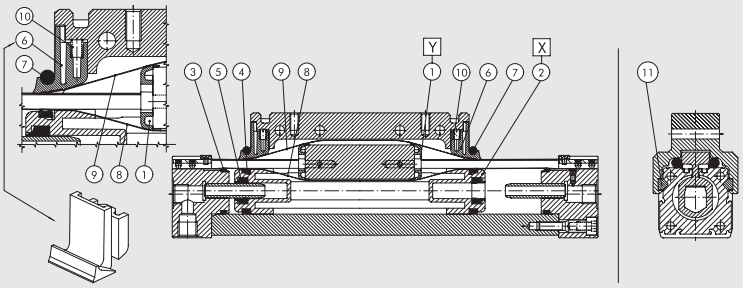

① Bands support Kit
② Piston kit
③ ④ ⑤ ⑥ ⑦ ⑩ NBR gaskets Kit (FKM/FPM for ⑦)
③ ④ ⑤ ⑥ ⑦ ⑩ FKM/FPM gaskets Kit
⑧ ⑨ Bands Kit (inner/outer)
⑪ "V" guide plate kit

Spare parts label
on one cylinder side



BANDS SUPPORT KIT POS 1 (Y)

Ø	Code White	Code Black	Code Orange	Code Light grey	Code Dark grey	Code Yellow
16	0090165080	0090165081	0090165082	0090165083	0090165084	0090165085
25	0090255080	0090255081	0090255082	0090255083	0090255084	0090255085
32	0090325080	0090325081	0090325082	0090325083	0090325084	0090325085
40	0090405080	0090405081	0090405082	0090405083	0090405084	0090405085
63	0090635080	0090635081	0090635082	0090635083	0090635084	0090635085

BANDS KIT (INNER AND OUTER) POS 8-9

Ø	Code
16	0090166...
25	0090256...
32	0090326...
40	0090406...
63	0090636...

Complete the code with the 4 figure cylinder stroke

"V" GUIDE PLATE KIT POS 11

Ø	Code
25	0090255060
32	0090325060
40	0090325060
63	0090635060

PISTON KIT POS 2 (X)

Ø	Code Type 0 (0 rings)	Code Type 1 (1 rings)	Code Type 2 (2 rings)	Code Type 3 (3 rings)	Code Type A (4 rings)
16	0090165015	0090165016	0090165017	0090165018	–
25	0090255015	0090255016	0090255017	0090255018	0090255019
32	0090325015	0090325016	0090325017	0090325018	0090325019
40	0090405015	0090405016	0090405017	0090405018	–
63	0090635015	0090635016	0090635017	0090635018	–

NBR GASKET KIT POS 3-4-5-6-7-10

Ø	Code
16	0090165022
25	0090255022
32	0090325022
40	0090405022
63	0090635022

FKM/FPM GASKET KIT POS 3-4-5-6-7-10

Ø	Code
16	0090165023
25	0090255023
32	0090325023
40	0090405023
63	0090635023

NOTES

If the ends of the carriage appear as below indicated, please contact our commercial department for the spare parts

"INTERMEDIATE RELEASE"



"OLD RELEASE"



RODLESS CYLINDER SERIES PU

METAL WORK PNEUMATIC

Series PU rodless cylinders have an internal strip for longitudinal tightness made of polyurethane (PU) with a harmonic steel wire core. This solution gives excellent air tightness values. It is particularly suitable for high-speed and highly cyclical applications, even with long strokes.
The external strip, which merely provides protection against of foreign bodies entry, is made of harmonic steel. The anodized aluminium cylinder liner has a T-slot on either side for housing the retracting sensors.
Cylinder control solenoid valves can also be housed in these slots and secured by means of plates and screws (see page **A1**.66). There are plastic anti-wear guide pads on either side of the carriage to increase the load capacity. They engage V-slots in the cylinder liner. All the cylinders incorporate adjustable pneumatic cushioning.
One version has hydraulic decelerators + adjustable limit switches.
These can also be added at a later stage by purchasing the relevant kit.
The balanced drive version avoids having to transmit transverse torques and forces to the carriage whenever the load is supported by guides outside the cylinder.

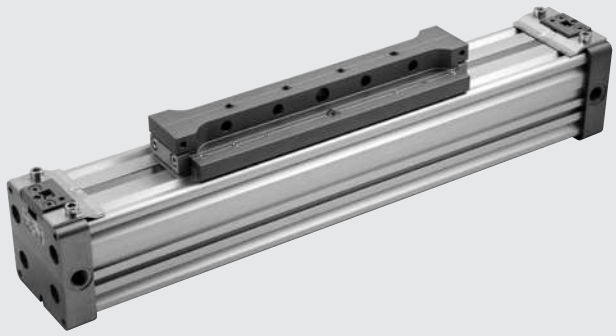

TECHNICAL DATA		Ø25	Ø32	Ø40	Ø50
Operating pressure	bar	1 to 8			
	MPa	0.1 to 0.8			
	psi	14.5 to 116			
Temperature range	°C	–10 to +80			
Design		Double-acting rodless cylinder with direct transmission system			
Fluid		50 µm unlubricated filtered air Lubrication, if used, must be continuous			
Standard strokes	mm	100 to 5700			100 to 5600
Sensor magnet		Available magnetic and non-magnetic versions.			
Recommended speeds	m/s	< 2			
Max. speed with decelerators	m/s	< 2			
Weights		See cylinder "**General technical data**" at the beginning of the chapter			
Notes		**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**			

COMPONENTS

① CYLINDER HEAD: anodized aluminium alloy
② BARREL: profiled anodized aluminium alloy
③ PISTON GASKET: polyurethane
④ V-SHAPED GUIDE PAD: Hostaform®
⑤ DUST SCRAPER: Hostaform®
⑥ PISTON: Hostaform®
⑦ CUSHIONING CONE: anodized aluminium alloy
⑧ STATIC O-RINGS: NBR
⑨ SLIDE: anodized aluminium alloy
⑩ OUTER STRIP: stainless steel
⑪ INTERNAL STRAP: polyurethane + steel strands
⑫ DIRECTION CHANGE: Hostaform®
⑬ BUFFER: polyurethane

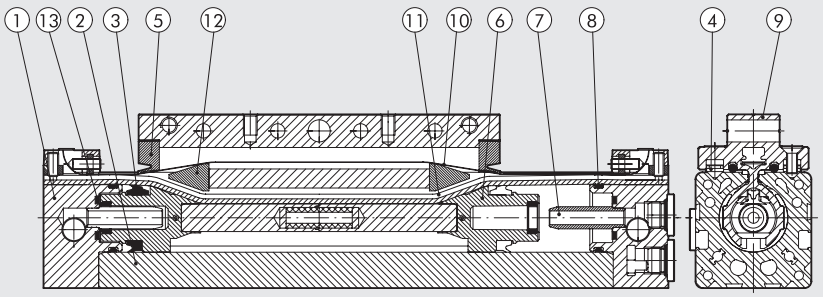

DIMENSIONING - FORCE AND TORQUE

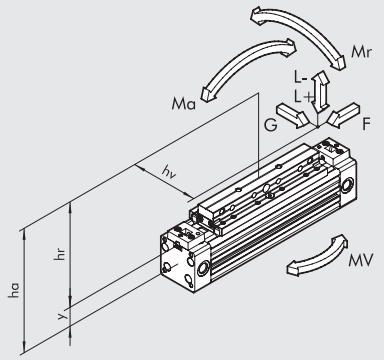

Bore	Centre Distance Y	Cushioning stroke [mm]	Actual Force F at 6 bar [N]	G [N]	Max. load L + [N]	Max. load L - [N]	Ma max [Nm]	Mr max [Nm]	Mv max [Nm]
25	16.5	20	250	350	480	350	22	5	10
32	20.1	24	420	450	650	450	40	10	20
40	25.3	33	640	750	900	750	70	26	35
50	30.4	39	1000	900	1100	900	90	32	45

N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

$Ma = F \times ha \qquad Mr = L \times hv + G \times hr \qquad Mv = F \times hv$

$$\frac{Mv}{Mv\ max} \leq 1; \qquad \frac{L}{L\ max} \leq 1; \qquad \frac{Ma}{Ma\ max} + \frac{Mr}{Mr\ max} + 0.22 \times \frac{Mv}{Mv\ max} + 0.4\,\frac{L}{L\ max} \leq 1$$

DIAGRAM OF SPEED AND MAXIMUM CUSHIONABLE LOAD

For the cylinder to reach the end-of-stroke position without intense or repeated impact which would damage it, it is necessary to annul the kinetic energy of the moving mass and the work generated.
The maximum cushionable load depends on the traversing speed and the absorption of the air buffer supplied standard with the various cylinders.
The diagram shows the speeds and cushionable mass for the various diameters at a pressure of 6 bar.

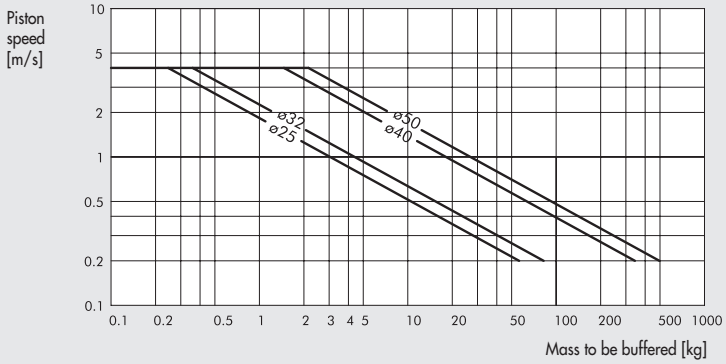

MAXIMUM LOAD ACCORDING TO THE DISTANCE BETWEEN SUPPORTS

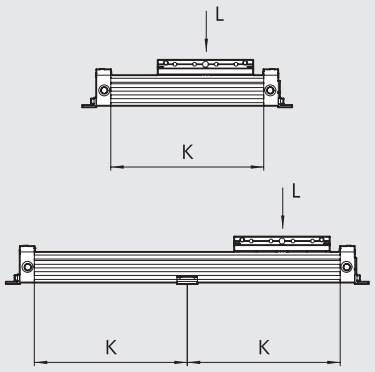

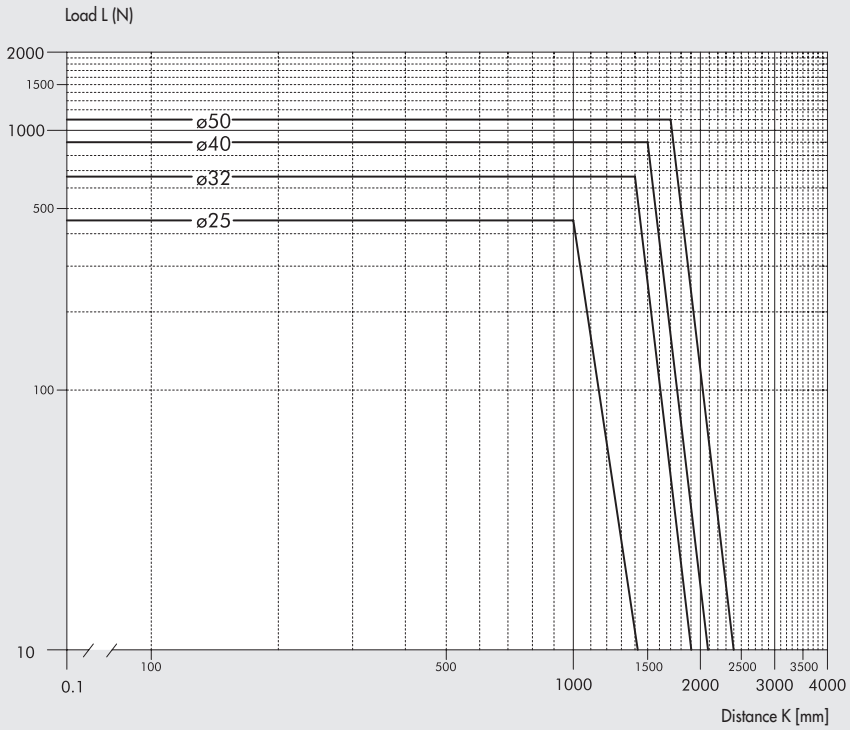

METAL WORK PNEUMATIC

BARREL CROSS SECTION

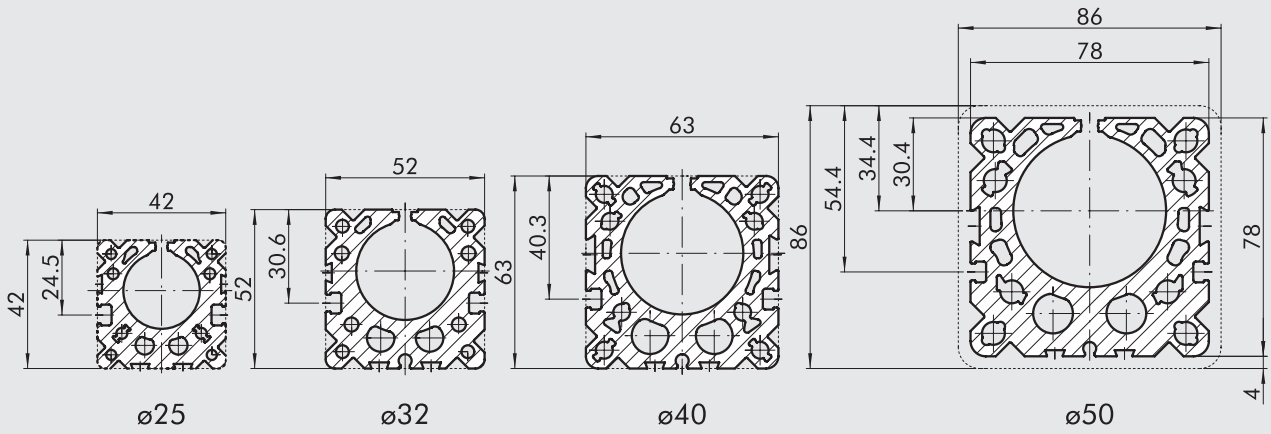

DIMENSIONS

+ = ADD THE STROKE

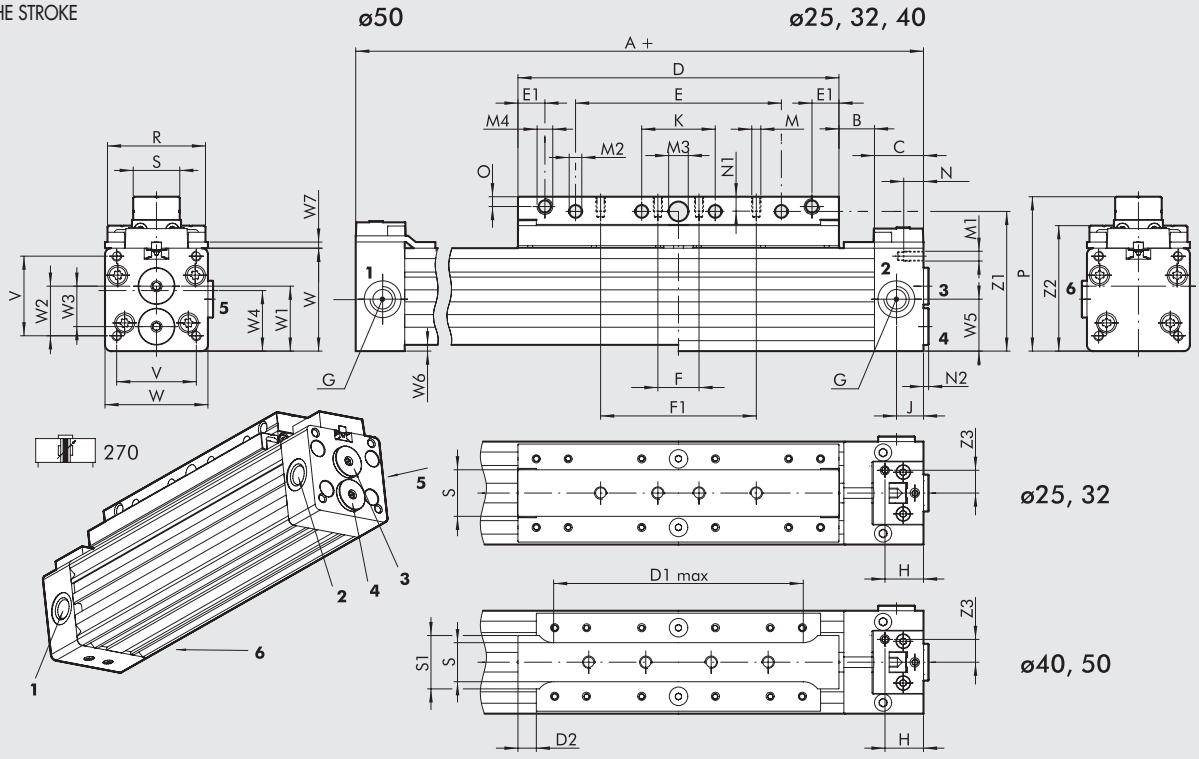

1 and **6** feed the left-hand chamber from the left side
4 feeds the left-hand chamber from the right side
2, **3** and **5** feed the right-hand chamber from the right side
NOTE: **3**, **4**, **5** and **6** are closed with threaded caps

Ø	A	B	C	D	D1 max	D2	E	E1	F	F1	G	H	J	K	M	M1	M2	M3 H10	M4	N	N1	N2	O	P	R	S	S1	V	W	W1	W2
25	200	14.5	20	131	-	-	84	11	50	-	G1/8	15.7	11	30	M5	M4	5.2	8	M6	13	7.5	2.1	4	63	40	19	-	32.5	42	26.5	20.3
32	250	19.5	20	171	-	-	124	11	30	100	G1/8	15.7	11	50	M5	M5	5.2	8	M6	13.5	7.5	2.1	4	73	48	19	-	40	52	31.2	24.3
40	300	19.8	23	214.5	168	10	150	5.2	40	130	G1/4	18	12.5	70	M6	M5	6.5	10	M5	15	11	2	5.5	92.5	60	21	33	49	63	37.7	29.7
50	350	19.9	23	264.3	198	10	170	6.2	50	150	G1/4	18	12.5	80	M8	M6	8.5	12	M6	16	12.5	2	6.5	115	74	24	42	72	86	53.4	46.4

Ø	W3	W4	W5	W6	W7	Z1	Z2	Z3
25	16.5	25.5	21.2	-	2.5	57	51.2	9.3
32	19	31.9	27	-	2.5	67	61	9.3
40	22	37.7	31.5	-	2.5	83.5	75.7	11
50	31.8	51.6	43	4	2.5	106	97	11

RODLESS CYLINDER WITH SWING CARRIAGE

NOTE: For other dimensions see code 270

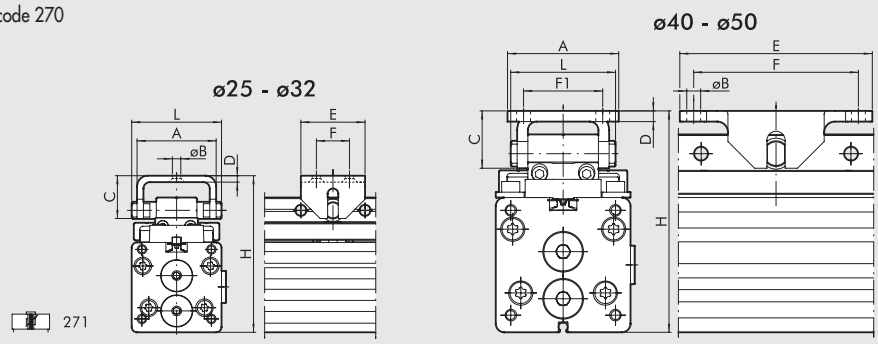

Ø	A	ØB	C	D	E	F	F1	H	L
25	37	5.5	20	3	30	16	-	73 - 75	42
32	37	5.5	20	3	30	16	-	83 - 85	42
40	52	6.5	26.8	5	90	77	37	103.5 - 105.5	49
50	52	6.5	26.8	5	90	77	37	125.3 - 128.3	49

DIMENSIONS VERSION WITH ADJUSTABLE LIMIT SWITCH AND SHOCK ABSORBERS

NOTE: For other dimensions see code 270

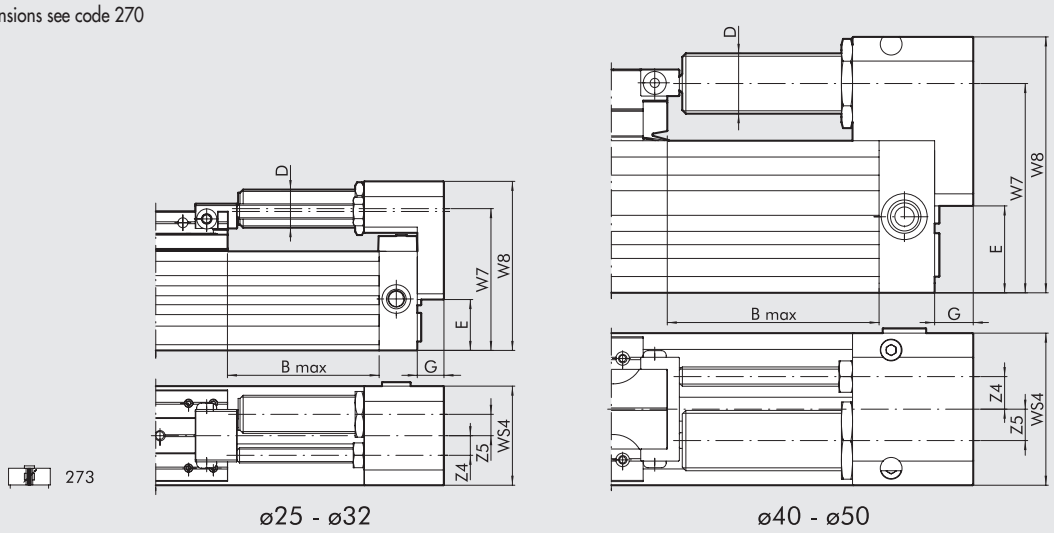

Ø	B Max	D	E	G	W7	W8	WS4	Z4	Z5	Stroke	Max. cushioned force For stroke [J]	Max. cushioned force For hour [J]	Max. impact force [N]	Max. thrust force [N]
25	50	M14x1.5	21.5	12	61.5	72	42	9.2	6	16	26	34000	2800	530
32	75	M20x1.5	26.7	14	74.4	88.7	52	10.3	11.2	22	54	53700	3750	890
40	88	M25x1.5	36	16	86.7	106	63	13.5	13	25	90	70000	5500	1550
50	82	M25x1.5	49	20	108.5	129	86	17.5	9	25	90	70000	5500	1550

For graphs to help choose shock absorbers see page **A1**.219

KEY TO CODES

CYL	27 TYPE	0	3	25 BORE	0100 STROKE	C	P GASKETS
	27 Rodless cylinder	**0** Double-acting cushioned magnetic **1** Double-acting with swing carriage **3** Double-acting + adjustable limit switch and shock absorbers	**3** Magnetic ■ **4** No stick-slip **5** Non-magnetic	25 32 40 50	Ø 25 to 40: from 100 to 5700 mm Ø 50: from 100 to 5600 mm		**P** Polyurethane gaskets

■ For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.

RODLESS CYLINDER WITH "V" GUIDE SERIES PU

METAL WORK PNEUMATIC

Series PU rodless cylinders have an internal strip for longitudinal tightness made of polyurethane (PU) with a harmonic steel wire core. This solution gives excellent air tightness values. It is particularly suitable for high-speed and highly cyclical applications, even with long strokes.
The external strip, which merely provides protection against of foreign bodies entry, is made of harmonic steel. The anodized aluminium cylinder liner has a T-slot on either side for housing the retracting sensors.
Cylinder control solenoid valves can also be housed in these slots and secured by means of plates and screws (see page **A1**.66).
In order to increase the load capacity, side pads are mounted in addition to the guide pads normally present on the standard PU version. They run in grooves and support the central element (cap), which has a carriage-piston rocking coupling.
This means the carriage only transmits axial loads; it does not support loads and moments in other directions. Pad clearance can be adjusted by means of lateral threaded screws to reduce wear. The pads can be replaced without having to remove the cylinder. This family of cylinders has the same features as described for the basic version, such as built-in adjustable pneumatic cushioning and sensor and accessory slots. A version with adjustable limit switches and hydraulic decelerators is available. They can be purchased and added at any time, even to basic cylinders.

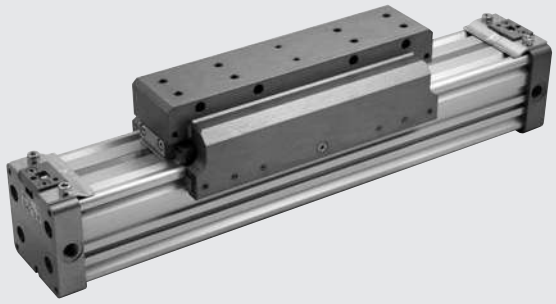

TECHNICAL DATA		Ø50
Operating pressure	bar	1 to 8
	MPa	0.1 to 0.8
	psi	14.5 to 116
Temperature range	°C	–10 to +80
Design		Double-acting rodless cylinder with direct transmission system
Fluid		50 µm unlubricated filtered air Lubrication, if used, must be continuous
Standard strokes	mm	100 to 5600
Sensor magnet		Available magnetic and non-magnetic versions.
Recommended speeds	m/s	< 2
Max. speed with decelerators	m/s	< 2
Weights		See cylinder "**General technical data**" at the beginning of the chapter
Notes		**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**

COMPONENTS

① CYLINDER HEAD: anodized aluminium alloy
② BARREL: profiled anodized aluminium alloy
③ PISTON GASKET: polyurethane
④ V-SHAPED GUIDE PAD: Hostaform®
⑤ DUST SCRAPER: Hostaform®
⑥ PISTON: Hostaform®
⑦ CUSHIONING CONE: anodized aluminium alloy
⑧ STATIC O-RINGS: NBR
⑨ CENTRAL ELEMENT: anodized aluminium alloy
⑩ OUTER STRIP: stainless steel
⑪ INTERNAL STRAP: polyurethane + steel strands
⑫ DIRECTION CHANGE: Hostaform®
⑬ BUFFER: polyurethane

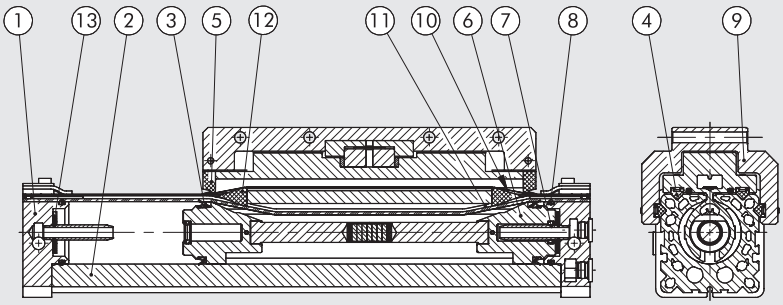

DIMENSIONING - FORCE AND TORQUE

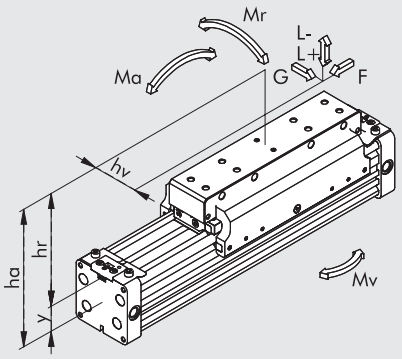

Bore	Centre Distance Y	Cushioning stroke [mm]	Actual Force F at 6 bar [N]	G [N]	Max. load L + [N]	Max. load L - [N]	Ma max [Nm]	Mr max [Nm]	Mv max [Nm]
50	30.4	39	850	1100	1400	1100	100	40	100

N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

$Ma = F \times ha \qquad Mr = L \times hv + G \times hr \qquad Mv = F \times hv$

$$\frac{Mv}{Mv\ max} \leq 1; \qquad \frac{L}{L\ max} \leq 1; \qquad \frac{Ma}{Ma\ max} + \frac{Mr}{Mr\ max} + 0.22 \times \frac{Mv}{Mv\ max} + 0.4\,\frac{L}{L\ max} \leq 1$$

DIAGRAM OF SPEED AND MAXIMUM CUSHIONABLE LOAD

For the cylinder to reach the end-of-stroke position without intense or repeated impact which would damage it, it is necessary to annul the kinetic energy of the moving mass and the work generated.
The maximum cushionable load depends on the traversing speed and the absorption of the air buffer supplied standard with the various cylinders.
The diagram shows the speeds and cushionable mass for the various diameters at a pressure of 6 bar.

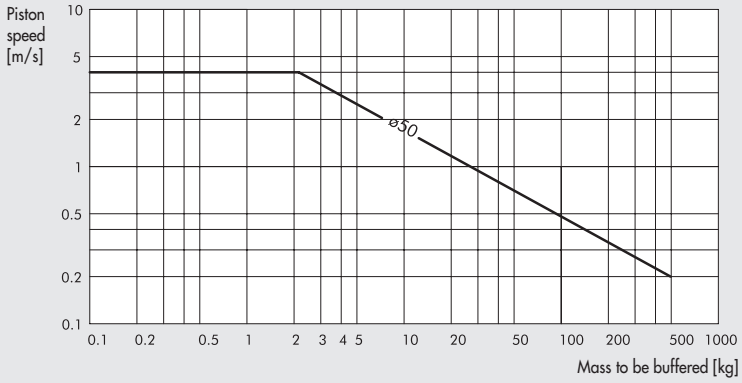

MAXIMUM LOAD ACCORDING TO THE DISTANCE BETWEEN SUPPORTS

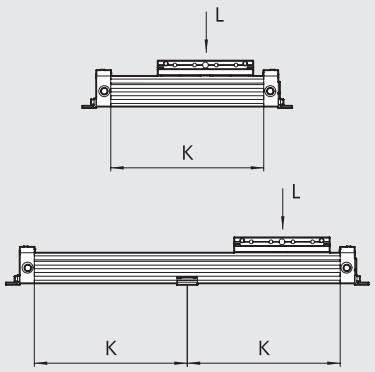

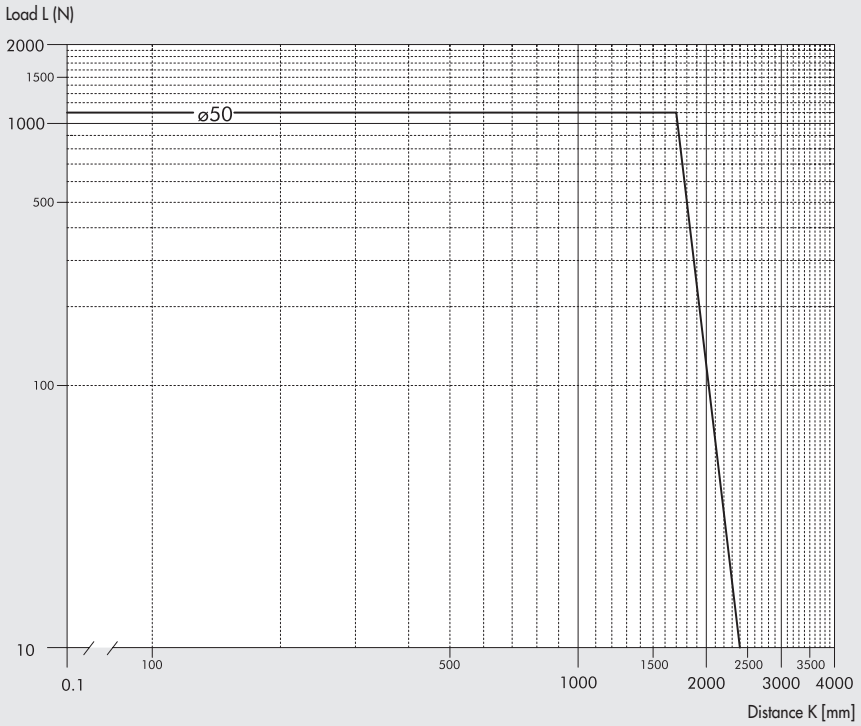

METAL WORK PNEUMATIC

BARREL CROSS SECTION

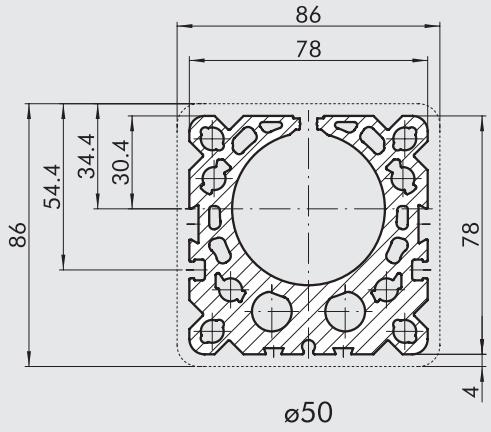

DIMENSIONS

+ = ADD THE STROKE

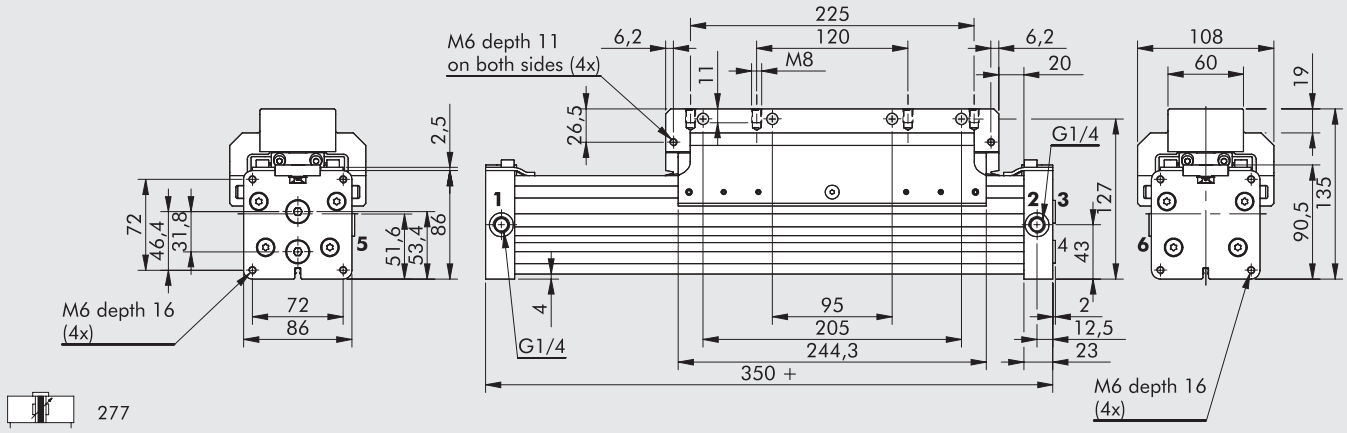

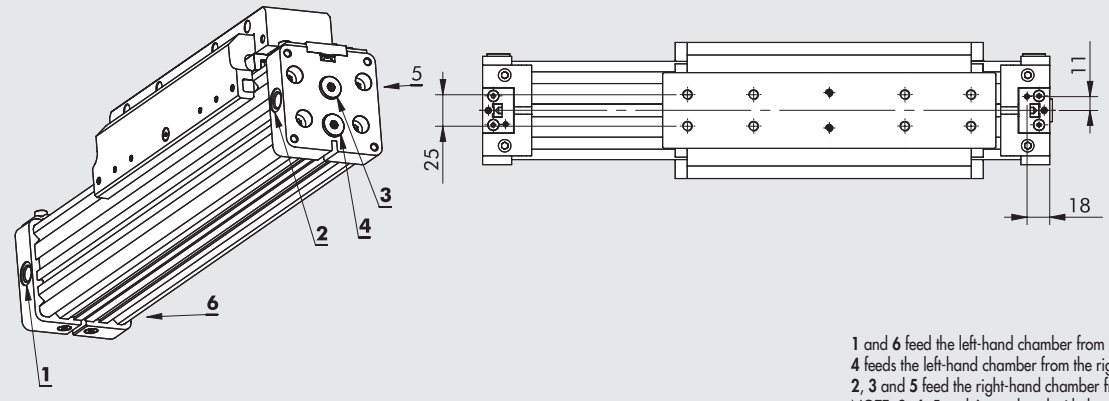

1 and **6** feed the left-hand chamber from the left side
4 feeds the left-hand chamber from the right side
2, **3** and **5** feed the right-hand chamber from the right side
NOTE: **3**, **4**, **5** and **6** are closed with threaded caps

ASSEMBLY DIAGRAMS

277 (horizontal)

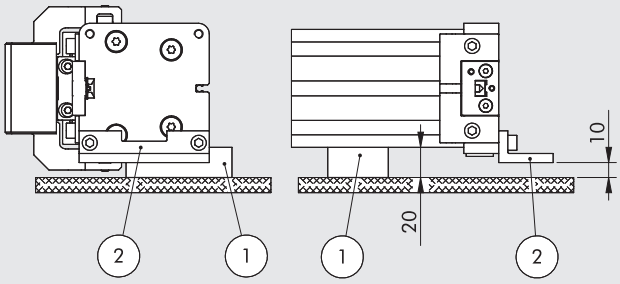

277/278 (vertical)

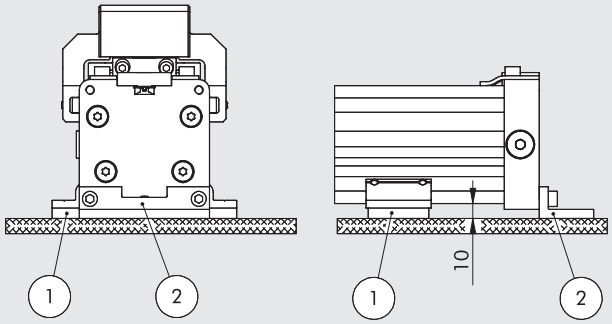

HORIZONTAL LAYOUT	
0950504052	Intermediate support code (1)
0950504041	Leg code (2)

VERTICAL LAYOUT	
W0950507038	Intermediate support code (1)
0950504041	Leg code (2)

DIMENSIONS VERSION WITH ADJUSTABLE LIMIT SWITCH AND SHOCK ABSORBERS

NOTE: For other dimensions see code 277

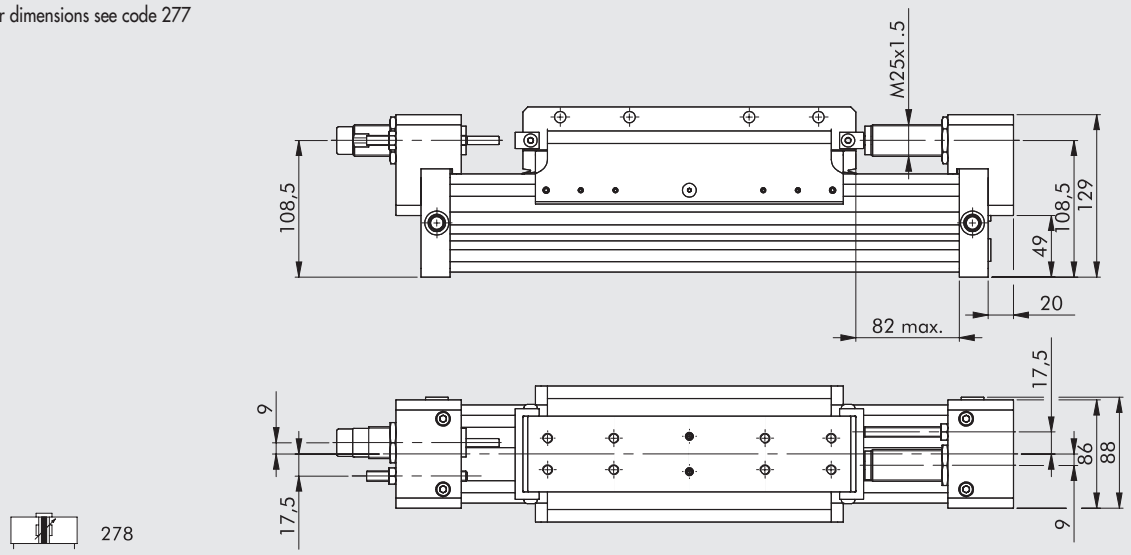

Ø	Cushioning stroke [mm]	Max. cushioned force For stroke [J]	Max. cushioned force For hour [J]	Max. impact force [N]	Max. thrust force [N]
50	25	65	70000	5550	1500

For graphs to help choose shock absorbers see page **A1**.219

KEY TO CODES

CYL	27	7	3	50	0100	C	P
	TYPE			**BORE**	**STROKE**		**GASKETS**
	27 Rodless cylinder	**7** Double acting cushioned magnetic with "V" guide **8** Double acting cushioned magnetic with "V" guide + adjustable limit switch and shock absorbers	**3** Magnetic ■ **4** No stick-slip **5** Non-magnetic	50	from 100 to 5600 mm		**P** Polyurethane gaskets

■ For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.

RODLESS CYLINDER WITH BALL RECIRCULATING GUIDE SERIES PU

Series PU rodless cylinders have an internal strip for longitudinal tightness made of polyurethane (PU) with a harmonic steel wire core. This solution gives excellent air tightness values. It is particularly suitable for high-speed and highly cyclical applications, even with long strokes.
The external strip, which merely provides protection against of foreign bodies entry, is made of harmonic steel. The anodized aluminium cylinder liner has a T-slot on either side for housing the retracting sensors.
Cylinder control solenoid valves can also be housed in these slots and secured by means of plates and screws (see page **A1**.66).
A hardened and tempered steel guide is firmly connected to the side of the liner to increase overall performance. This gives the following features:

- very high load capacity with forces acting in any direction and no transmission to the cylinder carriage;
- ball recirculation pads constructed using special technology that makes them very silent during movement of the guide and gives very long maintenance time intervals; lubrication must be performed every 2000 km or once a year, using type 2 grease, preferably with a lithium soap base;
- extra-sturdy carriage support with numerous load fixing holes and centring pin holes;
- stroke range 100-2470 mm with 1mm intervals.

One version has shock absorbers + adjustable limit switches.
These can also be added at a later stage by purchasing the relevant kit.

TECHNICAL DATA		Ø50
Operating pressure	bar	1 to 8
	MPa	0.1 to 0.8
	psi	14.5 to 116
Temperature range	°C	–10 to +80
Design		Double-acting rodless cylinder with direct transmission system
Fluid		50 µm unlubricated filtered air Lubrication, if used, must be continuous
Standard strokes	mm	100 to 2470
Sensor magnet		Available magnetic and non-magnetic versions.
Recommended speed	m/s	<2
Max. speed with decelerators	m/s	<2
Weights		See cylinder "**General technical data**" at the beginning of the chapter
Notes		**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**

COMPONENTS

For version 275

① CYLINDER: see components of **rodless cylinders - series PU**
② GUIDE: hardened steel
③ PAD: steel with hardened ball circulation
④ SLIDE SUPPORT: anodized aluminium

For version 276

Besides the details specified above:

⑤ END-OF-STROKE STUD PIN: zinc-plated steel, complete with 2 zinc-plated nuts for fixing
⑥ SHOCK ABSORBER: burnished steel, complete with 2 zinc-plated or burnished nuts for fixing
⑦ DECELERATOR SUPPORT: anodized aluminium
⑧ BRACKET: hardened-and-tempered and zinc-plated steel

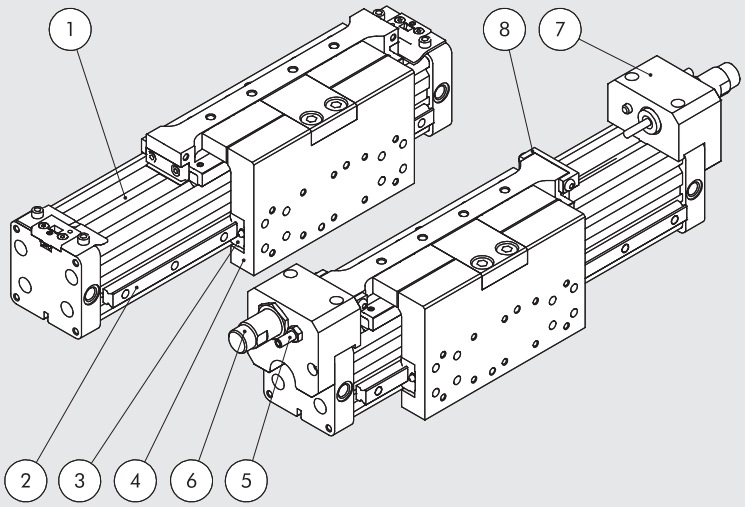

DIMENSIONING - FORCES AND MOMENTS

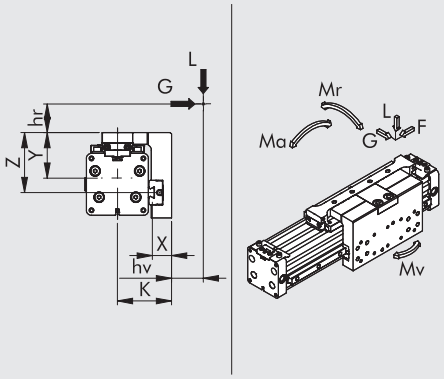

Bore	Actual force F at 6 bar [N]	Cushioning stroke [mm]	K [mm]	X [mm]	Y [mm]	Z [mm]	Max load L [N]	Max load G [N]	Ma max [Nm]	Mr max [Nm]	Mv max [Nm]
50	1000	39	75.1	26.6	63.3	83.3	4500	4500	260	140	260

N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

$Ma = F \times (hr + Y)$ $\quad Mr = G \times (hr + z) + Lx (hv + X)$ $\quad Mv = F \times (K + hv)$

$$\frac{Ma}{Ma_{max}} + \frac{Mr}{Mr_{max}} + \frac{Mv}{Mv_{max}} + \frac{L}{L_{max}} + \frac{G}{G_{max}} \leq 1$$

DIAGRAM OF SPEED AND MAXIMUM CUSHIONABLE LOAD

For the cylinder to reach the end-of-stroke position without intense or repeated impact which would damage it, it is necessary to annul the kinetic energy of the moving mass and the work generated.
The maximum cushionable load depends on the traversing speed and the absorption of the air buffer supplied standard with the various cylinders.
The diagram shows the speeds and cushionable mass for the various diameters at a pressure of 6 bar.

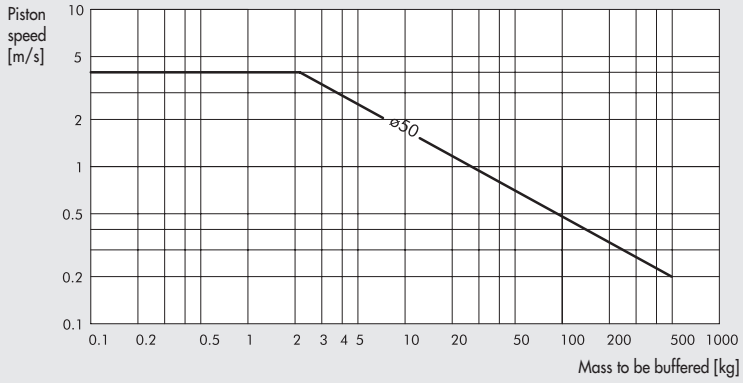

MAXIMUM LOAD ACCORDING TO THE DISTANCE BETWEEN SUPPORTS

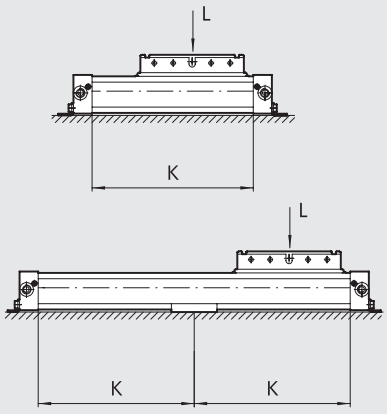

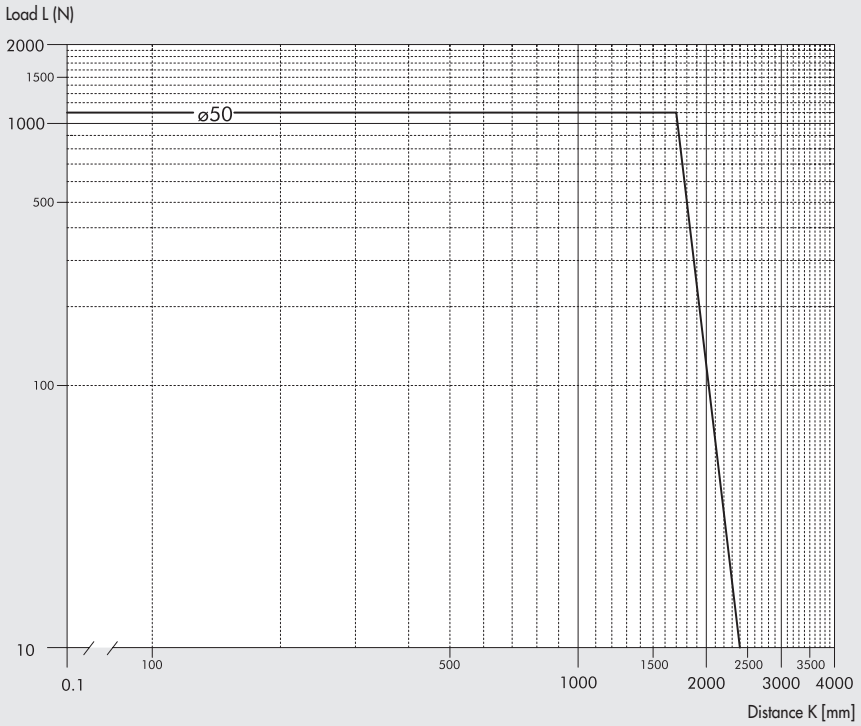

METAL WORK PNEUMATIC

BARREL CROSS SECTION

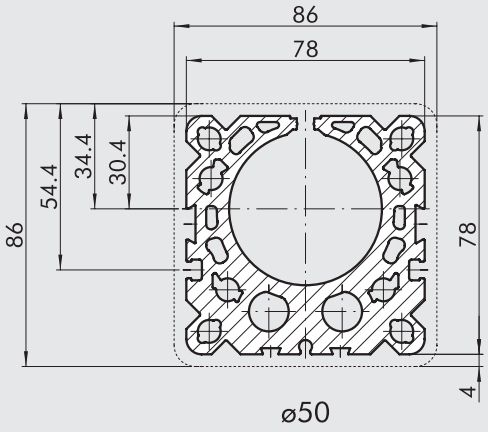

DIMENSIONS

+ = ADD THE STROKE

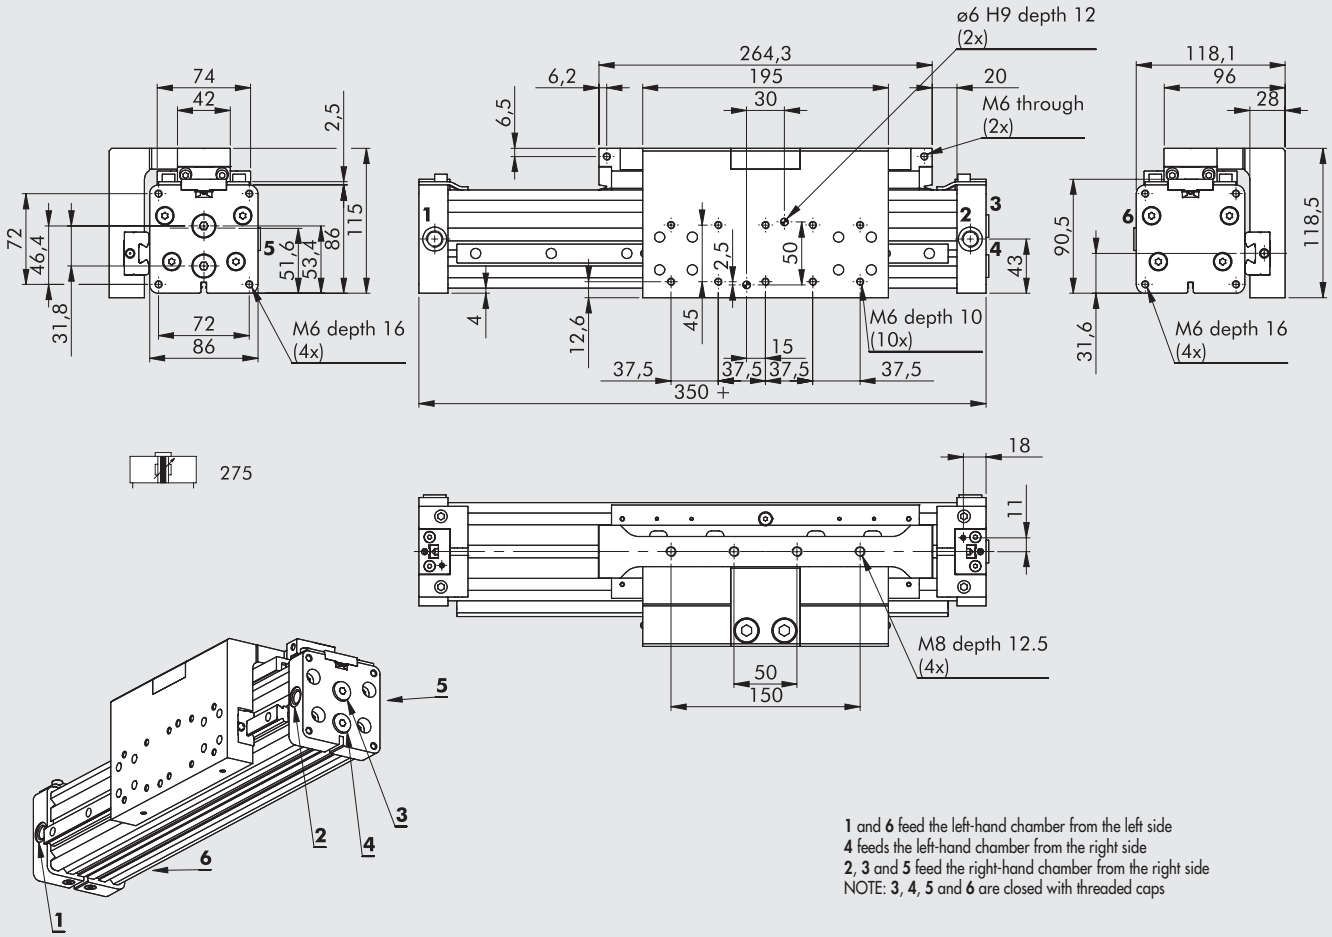

1 and **6** feed the left-hand chamber from the left side
4 feeds the left-hand chamber from the right side
2, **3** and **5** feed the right-hand chamber from the right side
NOTE: **3**, **4**, **5** and **6** are closed with threaded caps

ASSEMBLY DIAGRAMS

275 (horizontal)

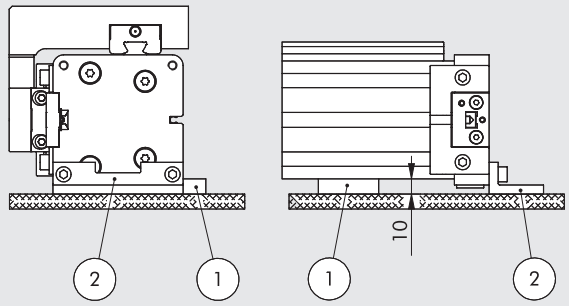

275/276 (vertical)

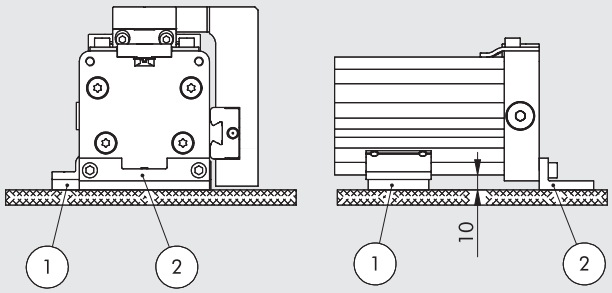

HORIZONTAL LAYOUT	
0950504051	Intermediate support code (1)
0950504041	Leg code (2)

VERTICAL LAYOUT	
0950504053	Intermediate support code (1)
0950504041	Leg code (2)

DIMENSION VERSION WITH ADJUSTABLE LIMIT SWITCH AND SHOCK ABSORBERS

NOTE: For other dimensions see code 275

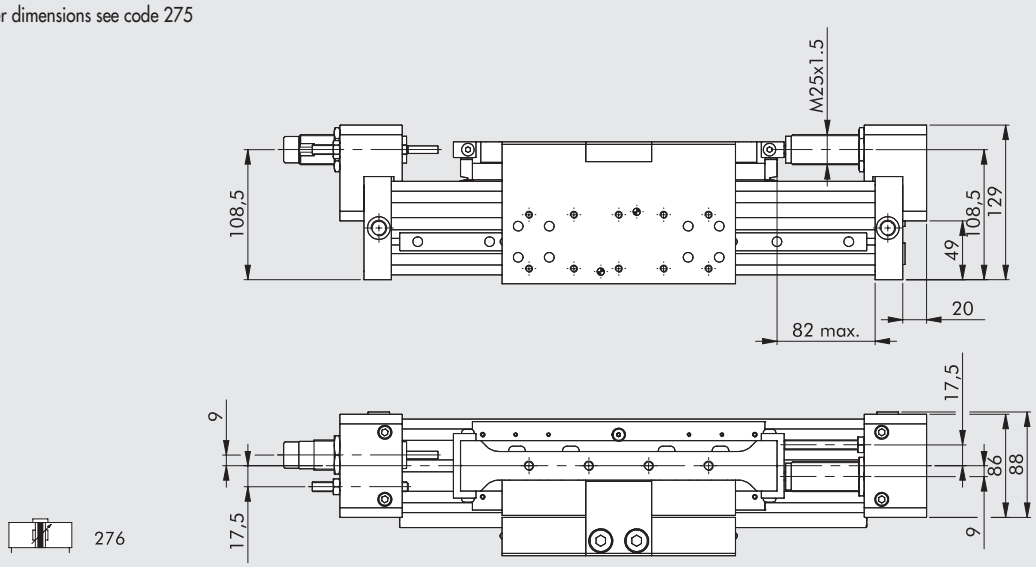

Ø	Cushioning stroke [mm]	Max. cushioned force Per stroke [J]	Max. cushioned force Per hour [J]	Max. impact force [N]	Max. thrust force [N]
50	25	65	70000	5550	1500

For graphs to help choose shock absorbers see page **A1**.219

KEY TO CODES

CYL	27	5	3	50	0100	C	P
	TYPE			**BORE**	**STROKE**		**GASKETS**
	27 Rodless cylinder	**5** Double-acting cushioned magnetic with ball circulation guides **6** Double-acting cushioned magnetic with ball circulation guides + adjustable limit switch and shock absorbers	**3** Magnetic ■ **4** No stick-slip **5** Non-magnetic	50	from 100 to 2470 mm		**P** Polyurethane gaskets

■ For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.

ACCESSORIES AND SPARE PARTS FOR RODLESS CYLINDER SERIES PU

FIXINGS

FOOT

+ = ADD THE STROKE

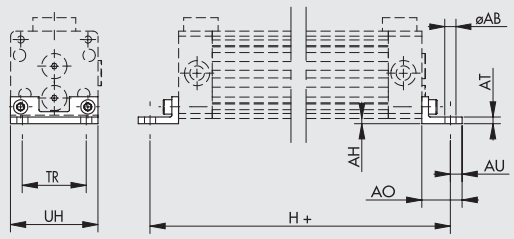

Code	Ø	ØAB	AH	AO	AT	AU	TR	UH	H	Weight [g]
0950254041	25	5.5	2	19	3	6	32.5	42	226	30
0950324041	32	6.6	3	24	4	7	38	52	284	60
0950404041	40	6.6	3	26	5	8.5	45	63	335	90
0950504041	50	9	6 - 10	36	6	11	65	86	400	203

Note: Individually packed with 2 screws

INTERMEDIATE SUPPORT FOR VERSION STD, "V" GUIDE

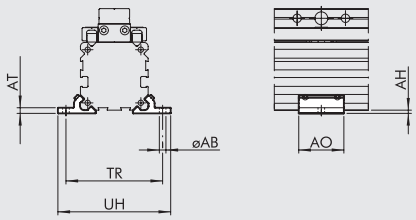

Code	Ø	ØAB	AH	AO	AT	TR	UH	Weight [g]
W0950257038	25	5.5	2	28	3.5	60	70	16
W0950327038	32	6.6	3	33	4	73	85	30
W0950407038	40	9	3	38	4.5	90	105	42
W0950507038	50	9	10	43	12	106	122	121

Note: 2 support and 4 grub screws for pack (Ø 25-32-40);
2 support, 4 grub screws and 2 plates for pack (Ø 50)

INTERMEDIATE SUPPORT FOR BALL RECIRCULATING", CODE 0950504053

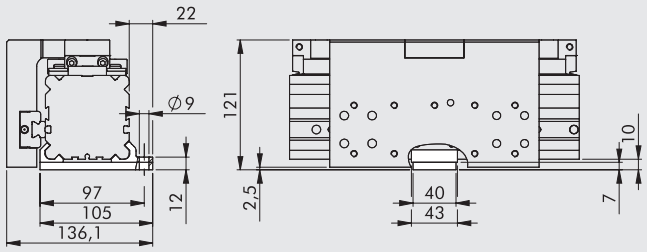

Weight = 132 g
Note: Individually packed with 4 grub screws, 3 screws, 1 plate, 2 intermediate supports

INTERMEDIATE SIDE SUPPORT FOR STD AND BALL RECIRCULATING VERSIONS

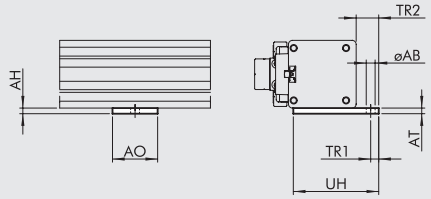

Code	Ø	ØAB	AH	AO	AT	TR1	TR2	UH	Weight [g]
0950254051	25	5.5	3.5	28	3.5	5	14	57.5	20
0950324051	32	5.5	4	40	4	5	12	61	32
0950404051	40	7	4	40	4	8	16	75	36
0950504051	50	7	10	40	10	8	19	90	101

Note: Individually packed with 2 screws, 2 plates

INTERMEDIATE SIDE SUPPORT FOR "V" GUIDE VERSION CODE 0950504052

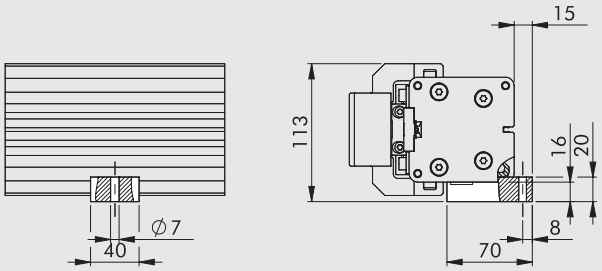

Weight = 162 g
Note: Individually packed with 2 screws, 2 plates

SENSOR

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

SHOCK ABSORBERS

ADJUSTABLE LIMIT SWITCH AND SHOCK ABSORBERS KIT



Code	Ø	Description	Weight [g]
0950254013	**25**	Rodless cylinder limit switch and shock absorbers Ø 25 series PU	220
0950324013	**32**	Rodless cylinder limit switch and shock absorbers Ø 32 series PU	420
0950404013	**40**	Rodless cylinder limit switch and shock absorbers Ø 40 series PU	675
0950504013	**50**	Rodless cylinder limit switch and shock absorbers Ø 50 series PU	967

Note: supplied complete with 1 decelerator bracket, 1 standard decelerator, 1 decelerator nut, 1 limit switch grub screw, 1 limit switch grub screw nut, 1 limit switch block, 2 block screws and 2 decelerator bracket screws (nr 4 decelerator bracket screw for Ø 40 and Ø 50)

ADJUSTABLE LIMIT SWITCH AND SHOCK ABSORBERS KIT FOR VERSION "V" GUIDE

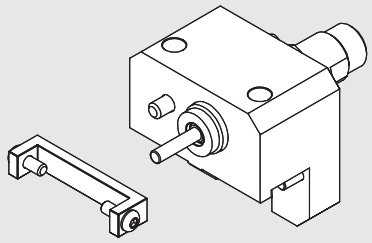

Code	Ø	Description	Weight [g]
0950504014	**50**	Rodless cylinder limit switch and shock absorbers Ø 50	967

Note: supplied complete with 1 decelerator bracket, 1 standard decelerator, 1 decelerator nut, 1 limit switch grub screw, 1 limit switch grub screw nut, 1 limit switch block, 2 block screws and 4 decelerator bracket screws

SHOCK ABSORBERS



Code	Ø	Description
0950004004	**25**	Shock absorbers ECO 25 MC2 + nut M14x1.5
0950004005	**32**	Shock absorbers ECO 50 MC2 + nut M20x1.5
0950004006	**40-50**	Shock absorbers ECO 100 MF2 + nut M25x1.5

NOTES

GRAPHS TO HELP CHOOSE THE RIGHT SHOCK ABSORBERS

Ø 25

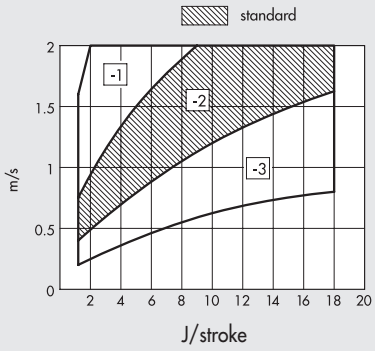

Ø 32

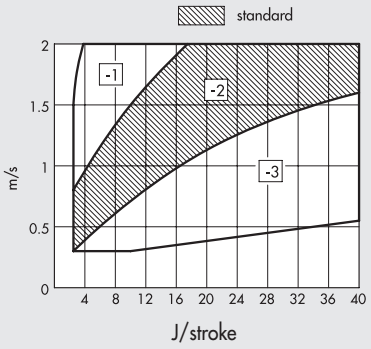

Ø 40-50

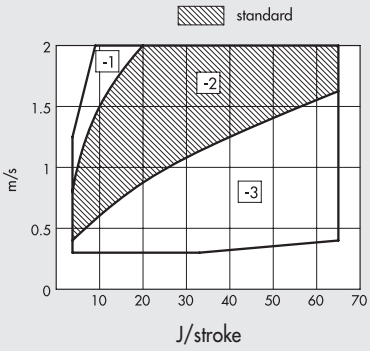

The dotted areas indicate that the SHOCK ABSORBERS is supplied standard.
Other options can be selected depending on the speed [m/sec] and the maximum work force [J/stroke] to dissipate at each stroke.
Refer to the diagrams above to select the correct option.

SPARE PARTS

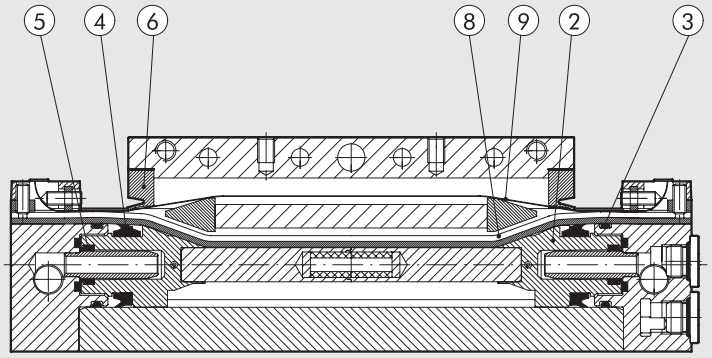

DUST SCRAPER KIT POS. 6	
Code	**Ø**
0090255025P	25
0090255025P	32
0090405025P	40
0090505025P	50
Note: 2 dust scrapers	

GASKET KIT POS. 3-4-5	
Code	**Ø**
0090255024P	25
0090325024P	32
0090405024P	40
0090505024P	50
Note: 2 gasket for position	

BANDS KIT (inner and outer) POS. 8-9	
Code	**Ø**
0090256____P	25
0090326____P	32
0090406____P	40
0090506____P	50
Complete the code with the 4-figure cylinder stroke	

NOTES

RODLESS CYLINDER WITH MAGNETIC SLIDING SERIES MAGNETIC SLIDE

The magnetic-slide rodless cylinder operates pneumatically and is equipped with a piston and a slide with magnets. The slide runs freely along the liner, following the piston movements, thanks to the magnetic coupling force between the two. If an axial force exceeding the magnetic coupling force is applied to the slide, it disengages. It is therefore important to operate within the pressure, force and speed ranges shown in the catalogue.
The load is fixed onto the slide using four threaded holes.
The cylinder is secured at the ends by means of nuts, flanges and brackets.
This solution is recommended when there is limited space for assembly, there must be no air leaks or impurities must be prevented from entering.
Available with three bores Ø 16-20-25, in the basic or swinging versions, with adjustable pneumatic cushioning or non-adjustable cushioning.
Designed for use with magnetic sensors.

N.B.: We always suggest to use flow microregulators. During the setup of the actuator, start with CLOSE flow microregulators, and open gradually till the achievment of the required speed.

TECHNICAL DATA		Ø16	Ø20	Ø25
Operating pressure	bar	2 to 7		
	MPa	0.2 to 0.7		
	psi	29 to 101		
Temperature range	°C	–10 to +60		
Design		Double-acting rodless cylinder, with magnetic coupling transmission system		
Fluid		50 µm unlubricated filtered air Lubrication, if used, must be continuous		
Standard strokes	mm	10 to 1000		
Versions		Magnetic uncushioned/cushioned		
		Swinging magnet uncushioned/cushioned		
Position sensing		Magnet for limit switch sensor		
Fixing		Hex nuts (supplied standard) - Legs - Flanges		
Theoretic force at 6 bar	N	118	185	288
Magnetic coupling force (static condition)	N	200	300	500
Recommended speed	m/s	0.4	0.4	0.4
Weights		See cylinder "**General technical data**" at the beginning of the chapter		
Notes		Lubricate the slide every 2000 km or once a year, through the lubricators		

COMPONENTS

① SLIDE: anodized aluminium alloy
② WIPER RING: polyurethane
③ TIE ROD: stainless steel, thick-chromed
④ BARREL: AISI 304 stainless steel
⑤ HEAD: anodized aluminium alloy
⑥ CUSHIONING GASKET: NBR
⑦ NEEDLE: OT 58 with needle-out movement safety system, even when fully open
⑧ HEAD NUT: OT 58 nickel-plated
⑨ HALF-PISTON: aluminium alloy
⑩ PISTON GASKET: polyurethane
⑪ BUFFER: NBR
⑫ INT/EXT MAGNETS: neodymium
⑬ INT/EXT GUIDES: thermoplastic resin with lubricating additive
⑭ GREASE NIPPLE: steel
⑮ Static O-rings: NBR

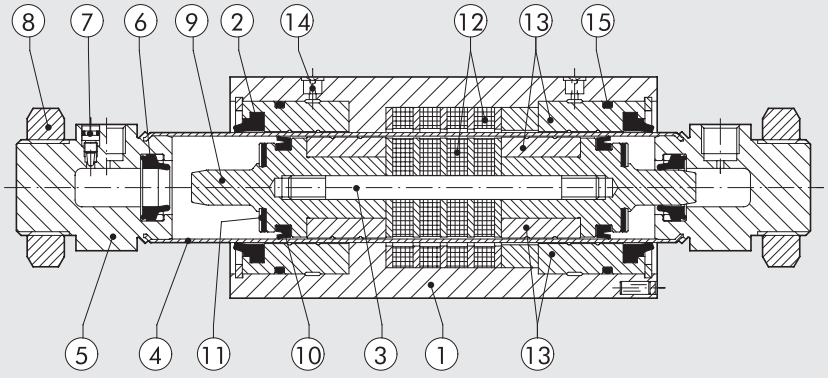

METAL WORK PNEUMATIC

ADMISSIBLE AXIAL FORCE "F" AS A FUNCTION OF THE LEVER ARM "A"



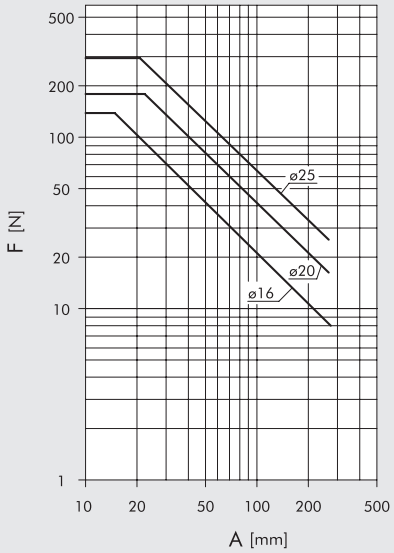

ADMISSIBLE RADIAL FORCE "F" AS A FUNCTION OF THE STROKE "C"

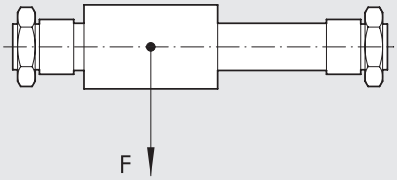

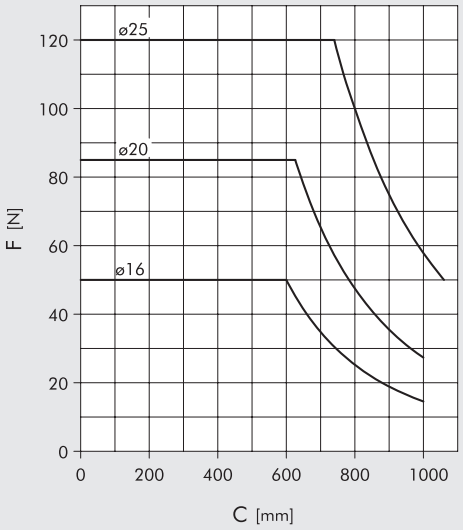

DIMENSIONS

+ = ADD STROKE

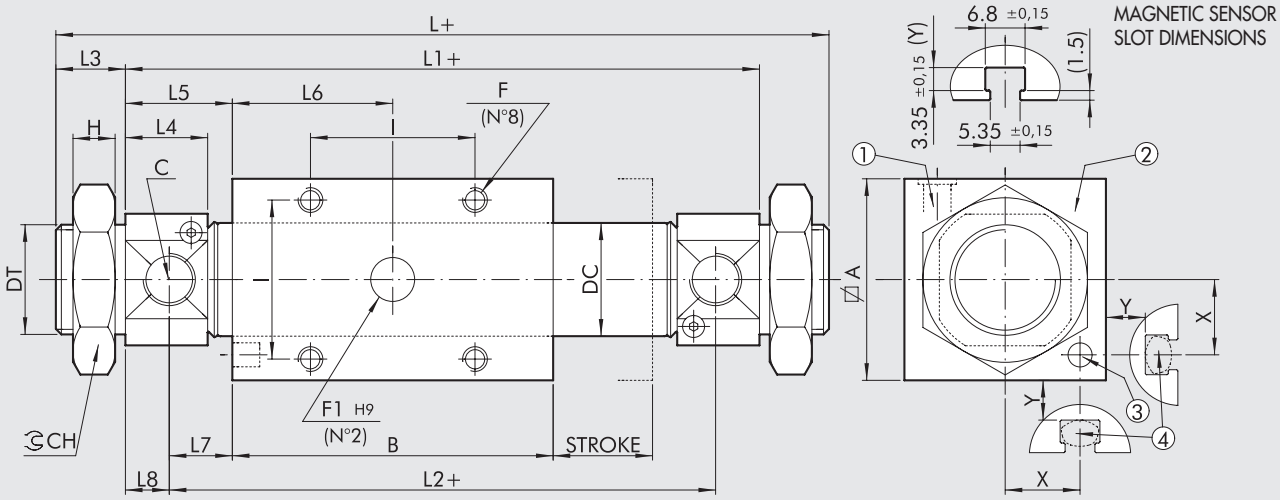

27A

27B

① Grease nipple
② External cursor, 360° adjustment
③ Sensor magnet
④ Position for magnetic sensors
(N.B. customer must provide supports)

Ø	A	B	C	DC	DT	F	F1	I	L	L1	L2	L3	L4	L5	L6	L7	L8	CH	H	X	Y
16	35	125	M5	17.3	M16x1.5	M5x7	8x3	26	205	181	169	12	10	28	62.5	22	6	24	8	14	9
20	42	135	G1/8	21.3	M22x1.5	M5x10	8x3	32	217	185	169	16	15.5	25	67.5	17	8	32	7	17.5	9
25	50	150	G1/8	26.5	M22x1.5	M6x11	10x4	36	238	206	188	16	17.1	28	75	19	9	32	7	21.5	9

KEY TO CODES

CYL	27 TYPE	A VERSION	0	16 BORE	0050 STROKE	X MATERIAL	P GASKETS
	27 Rodless cylinder	**A** Magnetic sliding DAM **B** Magnetic sliding DAMC **C** Magnetic sliding swinging DAM **D** Magnetic sliding swinging DAMC	**0** Magnetic	16 20 25	For the maximum suppliable strokes, look at the technical data	**X** Standard	**P** Polyurethane

DAM: Magnetic double-acting (non-cushioned)
DAMC: Magnetic double-acting (cushioned)

NOTES

ACCESSORIES FOR RODLESS CYLINDER WITH MAGNETIC SLIDING: FIXING

FOOT

+ = ADD STROKE

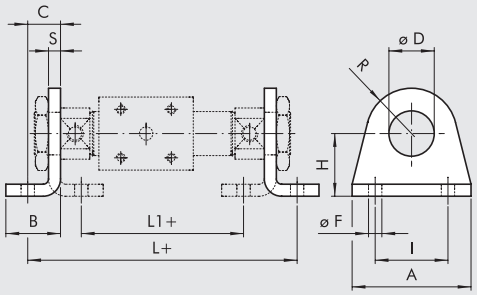

Code	Ø	D	A	B	C	H ±0.3	R	F ±0.2	I Js	L	L1	S	Weight [g]
0950164040	16	16	42	20	14	27	13	5.5	32	209	161	4	50
0950204040	20	22	54	25	17	30	20	6.5	40	219	161	5	105
0950204040	25	22	54	25	17	30	20	6.5	40	240	182	5	105

Note: individually pocket

FLANGE MODEL C

+ = ADD STROKE

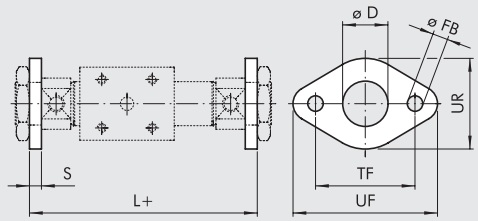

Code	Ø	D	FB H13	TF Js14	UF	UR	L	S	Weight [g]
W0950120002	16	16	5.5	40	52	30	189	4	26
W0950200002	20	22	6.5	50	66	40	195	5	52
W0950200002	25	22	6.5	50	66	40	216	5	52

Note: individually pocket

KIT FOR SWING VERSION

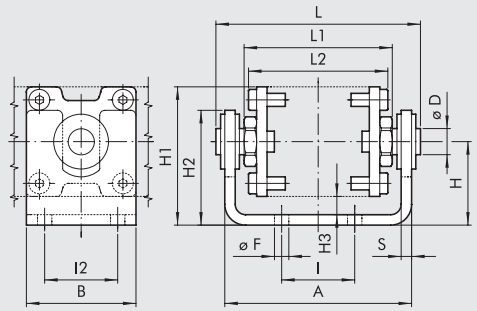

Code	Ø	A	B	D	F ±0.1	H	H1	H2	H3	I	I2	L	L1	L2	S	Weight [g]
0950164050	16	67	40	10	5.5	28.5	46	40	7	26	26	73.5	53	52	4	288
0950204050	20	74	42	10	5.5	32	53	43	7	32	32	80.5	60	59	4	345
0950254050	25	87	50	12	6.5	38	63	50	8	36	36	96.5	68	68	5	576

Note: individually pocket. Supplied with 8 screws.

The swinging version kit can be used to avoid bending moments and lateral loads on the slide.
It can also be used to compensate for misalignments with respect to the load guide.
Max alignment error ±1mm.

ACCESSORIES: MAGNETIC SENSOR

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

STAINLESS STEEL ISO 6432 MINI-CYLINDER

ISO 6432 stainless steel micro-cylinders are available in various versions with a wide range of accessories

- with or without magnet execution
- double-acting - single or through-rod
- gaskets: Polyurethane or FKM/FPM (for high temperatures)
- fixing accessories

TECHNICAL DATA			Ø16	Ø20	Ø25
Max operating pressure		bar	10		
		MPa	1		
Temperature range	POLYURETHANE	°C	–20 to +80		
	FKM/FPM	°C	–10 to +150 (non-magnetic cylinders)		
Design			Chamfered heads		
Fluid			Unlubricated air. Lubrication, if used, must be continuous		
Standard strokes ✚		mm	0 to 500		
Versions			Double-acting, Double Through-rod		
Sensor magnet			Available magnetic and non-magnetic versions.		
Weights			See cylinder "**General technical data**" at the beginning of the chapter		
Notes			✚ Maximum recommended strokes. Higher values can create operating problems		

COMPONENTS

① PISTON ROD: AISI 316 steel
② HEAD: AISI 304 steel
③ PISTON ROD GASKET: polyurethane or FKM/FPM
④ GUIDE BUSHING: sintered bronze
⑤ BARREL: AISI 304 steel
⑥ PISTON: brass
⑦ MAGNET: plastoferrite
⑧ PISTON GASKET: polyurethane or FKM/FPM
⑨ Static O-rings: NBR or FKM/FPM

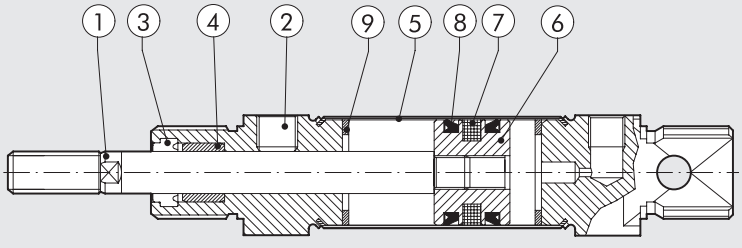

METAL WORK PNEUMATIC

DIMENSIONS OF DOUBLE-ACTING

+ = ADD STROKE

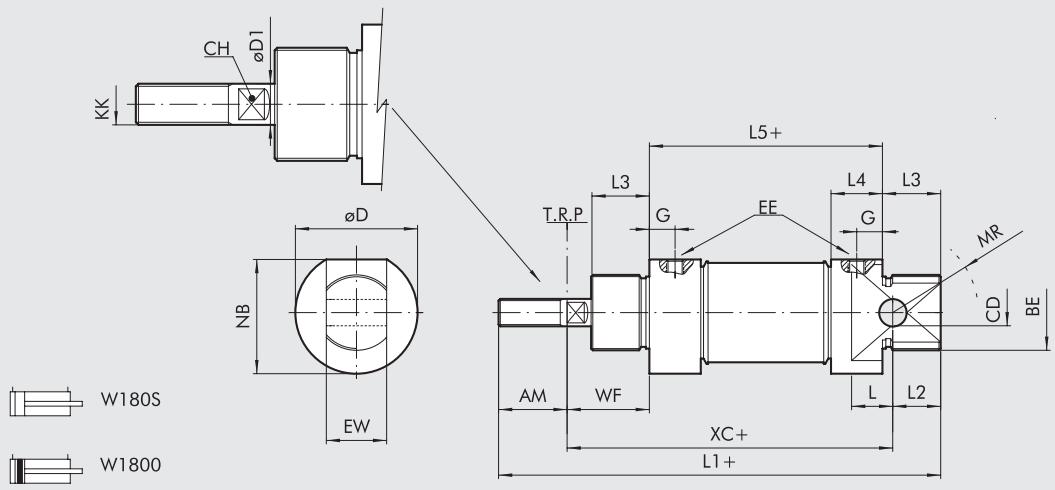

Ø	AM	BE	øCD H9	CH	øD	øD1	EE	EW d13	G	KK	L	L1	L2	L3	L5	MR	NB	WF	XC
16	16	M16x1.5	6	5	19	6	M5	12	5	M6	9	109	11	18	53	16	18	22	82
20	20	M22x1.5	8	7	27	8	G 1/8	16	8	M8	12	131	16	20	67	18	25.5	24	95
25	22	M22x1.5	8	9	30	10	G 1/8	16	8	M10x1.25	12	140	14	22	68	21	28.5	28	104

DIMENSIONS DOUBLE-ACTING THROUGH-ROD

+ = ADD STROKE
++ = ADD TWICE THE STROKE

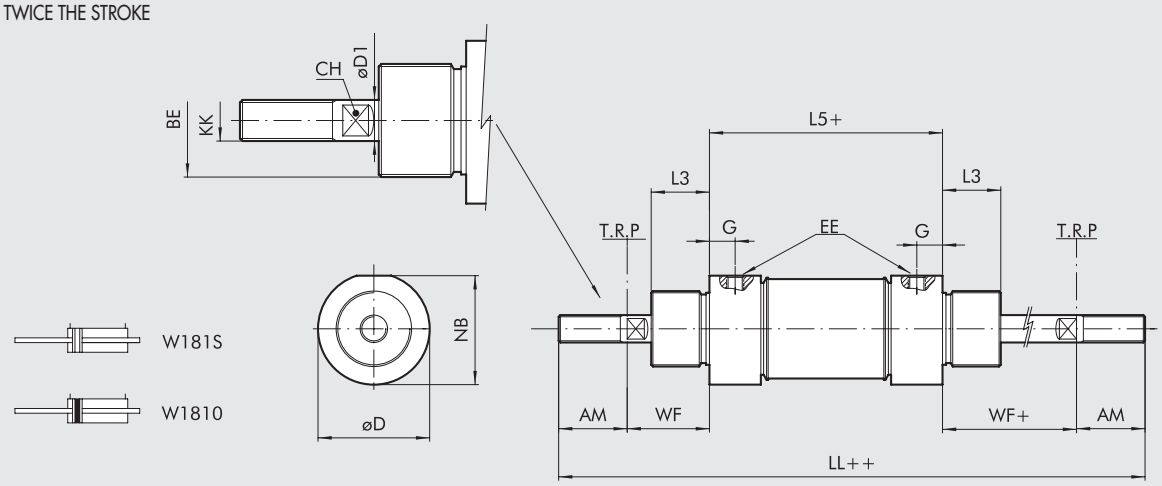

Ø	AM	BE	CH	øD	øD1	EE	G	KK	LL	L3	L5	NB	WF ±1,2
16	16	M16x1.5	5	19	6	M5	5	M6	129	18	53	18	22
20	20	M22x1.5	7	27	8	G 1/8	8	M8	155	20	67	25.5	24
25	22	M22x1.5	9	30	10	G 1/8	8	M10x1.25	168	22	68	28.5	28

KEY TO CODES

W 1 8	0	0	1 6	0 0 2 0
	TYPE	**VERSION**	**DIAMETER**	**STROKE**
Stainless steel cylinder	**0** DAM **1** DAM through-rod	**0** Standard (magnetic) **S** Non-magnetic ● **V** FKM/FPM gasket	16 20 25	✚ 0 to 500 mm

DAM: Magnetic double-acting (non-cushioned)
✚ Maximum recommended strokes. Higher values can create operating problems
● For this version the cylinder will be not magnetic

ACCESSORIES FOR STAINLESS STEEL ISO 6432 MINI-CYLINDER: FIXINGS

STAINLESS STEEL LEG MODEL A

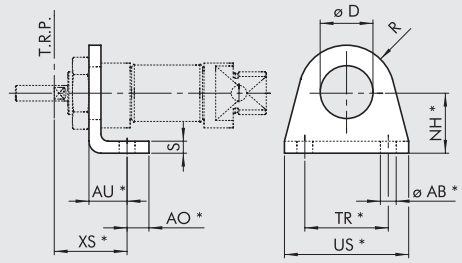

Code	Ø	ØAB	AU	AO	D	NH	XS ±1.4	R	S	TR	US	Weight [g]
W095X120001	**16**	5.5	14	6	16.1	20	22	13	4	32	42	42
W095X200001	**20**	6.6	17	8	22.1	25	36	20	5	40	54	90
W095X200001	**25**	6.6	17	8	22.1	25	40	20	5	40	54	90

*ISO 6432 values

Note: Individually packed

STAINLESS STEEL FLANGE MODEL C

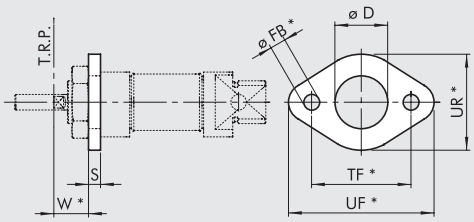

Code	Ø	D	FB	W ±1.4	S	TF	UF	UR	Weight [g]
W095X120002	**16**	16	5.5	18	4	40	52	30	26
W095X200002	**20**	22	6.6	19	5	50	66	40	52
W095X200002	**25**	22	6.6	23	5	50	66	40	52

*ISO 6432 values

Note: Individually packed

STAINLESS STEEL COUNTER-HINGE MODEL BC

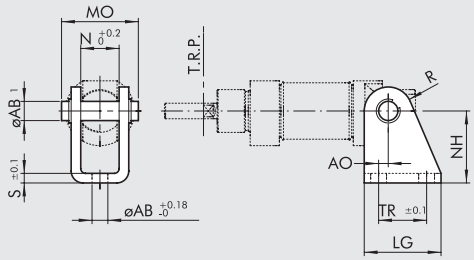

Code	Ø	AB1	AB	AO	LG	MO	N	NH	R	S	TR	Weight [g]
W095X120005	**16**	6	5.5	2	25	24	12.1	27	7	3	15	40
W095X200005	**20**	8	6.6	4	32	31	16.1	30	10	4	20	78
W095X200005	**25**	8	6.6	4	32	31	16.1	30	10	4	20	78

Note: Supplied complete with 1 pin and 2 snap rings

STAINLESS STEEL NUT FOR HEADS



Code	Ø	CH	F	H
W095X120010	**16**	22	M16x1.5	5
W095X200010	**20**	27	M22x1.5	8
W095X200010	**25**	27	M22x1.5	8

Note: Individually packed

STAINLESS STEEL NUT FOR PISTON RODS



Code	Ø	CH	F	H	Weight [g]
W095X120011	16	10	M6	4	1
W095X200011	20	13	M8	5	3
W095X322011	25	17	M10x1.25	6	7

Note: Individually packed

STAINLESS STEEL FORK-MODEL GK-M



Code	Ø	A	B	C	D	F	L	Ø M
W095X120020	16	12	6	12	M6	24	31	6
W095X200020	20	16	8	16	M8	32	42	8
W095X322020	25	20	10	20	M10x1.25	40	52	10

Note: Individually packed

ACCESSORIES: MAGNETIC SENSORS

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

SENSOR BRACKET

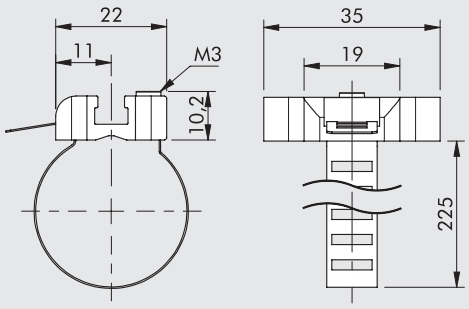

Code	Bore	Description
W0950001103	16 to 25	Sensor bracket 8 to 63

Note: Individually packed

MATERIAL
Bracket: stainless steel
Sensor holder: zamak

STAINLESS STEEL ROUND CYLINDER RNDC

Stainless steel clean profile cylinders available in different versions:
- with or without magnet execution
- double-acting - single or through-rod
- gaskets: Polyurethane or FKM/FPM (for high temperatures)

TECHNICAL DATA			Ø32	Ø40	Ø50	Ø63
Max operating pressure		bar	10			
		MPa	1			
		psi	145			
Temperature range	POLYURETHANE	°C	–20 to +80			
	FKM/FPM	°C	–10 to +150 (non-magnetic cylinders)			
Design			Chamfered heads			
Fluid			Unlubricated air. Lubrication, if used, must be continuous			
Standard strokes ✚		mm	0 to 500			
Versions			Double-acting, Double Through-rod			
Sensor magnet			Available magnetic and non-magnetic versions.			
Weights			See cylinder "**General technical data**" at the beginning of the chapter			
Notes			✚ Maximum recommended strokes. Higher values can create operating problems			

COMPONENTS

① PISTON ROD: AISI 316 steel
② PISTON ROD GASKET: polyurethane or FKM/FPM
③ GUIDE BUSHING: sintered bronze
④ BARREL: AISI 304 steel
⑤ PISTON: aluminium
⑥ MAGNET: plastoferrite
⑦ PISTON GASKET: polyurethane or FKM/FPM
⑧ ⑨ HEAD:AISI 304 steel
⑩ BUFFER: polyurethane
⑪ GUIDE RING: PTFE

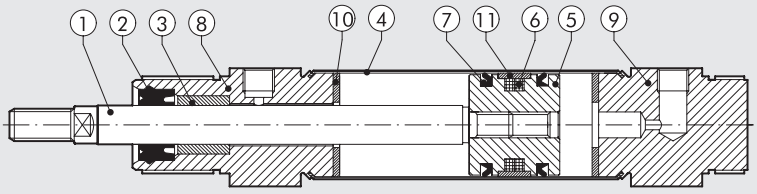

METAL WORK PNEUMATIC

DIMENSIONS OF DOUBLE-ACTING

+ = ADD STROKE

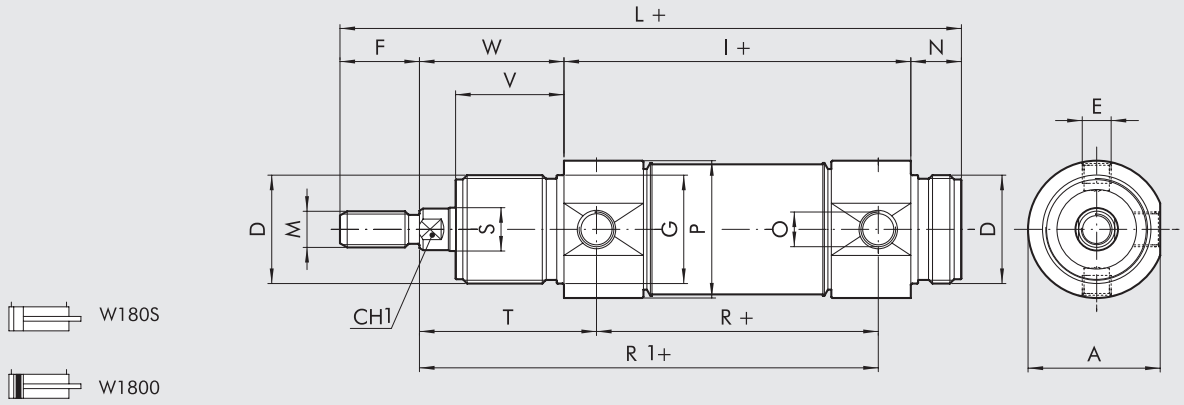

DIMENSIONS DOUBLE-ACTING THROUGH-ROD

+ = ADD STROKE
++ = ADD TWICE THE STROKE

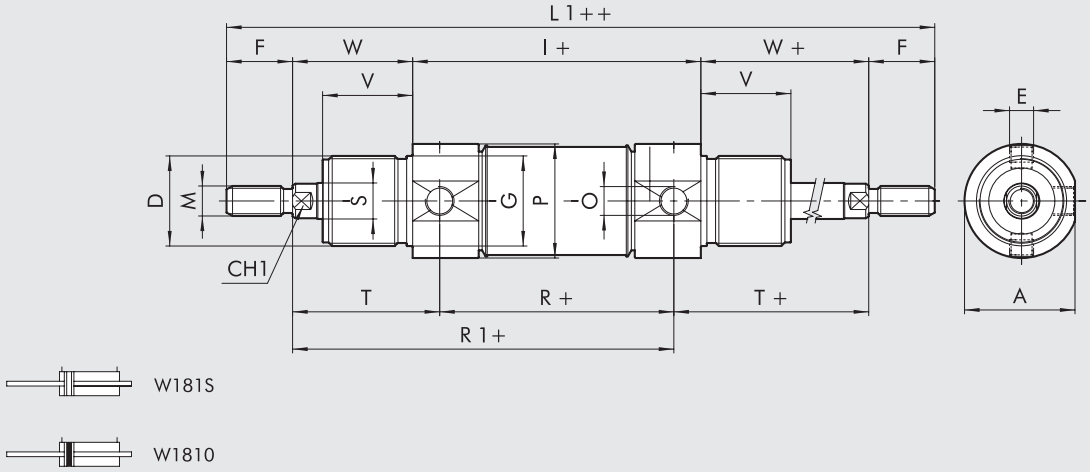

Ø	A	CH1	D	E	F	Ø G	I	L	L1	M	N	O	Ø P	R	Ø S	T	V	W
32	36.5	10	M30x1.5	M8x1	20	30	96	168	212	M10x1.5	14	G1/8	38	78	12	47	30	38
40	44	13	M38x1.5	M10x1	24	38	113	198	251	M12x1.75	16	G1/4	46	89	16	57	35	45
50	55	17	M45x1.5	M12x1.5	32	45	120	220	284	M16x2	18	G1/4	57	96	20	62	38	50
63	67.5	17	M45x1.5	M14x1.5	32	45	124	224	288	M16x2	18	G3/8	70	98	20	63	38	50

KEY TO CODES

W 1 8	0	0	3 2	0 0 3 2
	TYPE	**VERSION**	**DIAMETER**	**STROKE**
Stainless steel cylinder	**0** DAM **1** DAM through-rod	**0** Standard (magnetic) **S** Non-magnetic ● **V** FKM/FPM gasket	32 40 50 63	✚ Ø 32 to 63 stroke 0 to 500 mm

DAM: Magnetic double-acting (non-cushioned)
✚ Maximum recommended strokes. Higher values can create operating problems
● For this version the cylinder will be not magnetic

ACCESSORIES FOR STAINLESS STEEL ROUND CYLINDER: FIXINGS

STAINLESS STEEL LEG MODEL AC

+ = ADD STROKE

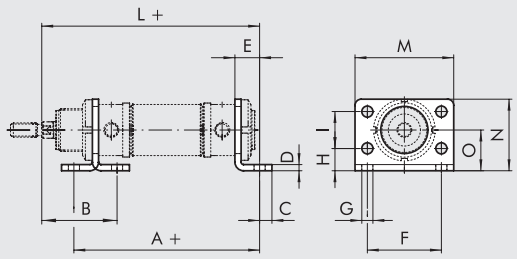

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	O
W095X320002	**32**	124	48	7	4	14	52	7	14	28	148	66	49	28
W095X400002	**40**	153	60	10	5	20	60	9	18	30	178	80	58	33
W095X500002	**50**	160	64	10	6	20	70	9	20	40	190	90	70	40
W095X630002	**63**	164	64	10	6	20	76	9	20	50	194	96	80	45

Note: Individually packed

STAINLESS STEEL COUNTER-HINGE MODEL BC

+ = ADD STROKE

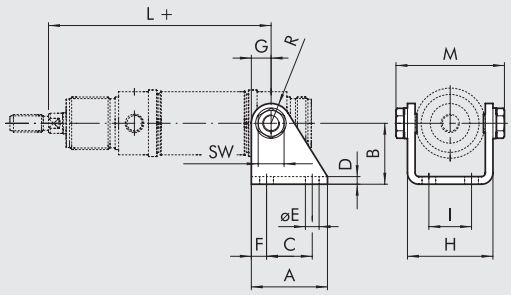

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	R
W095X320005	**32**	40	35	24	4	7	8	12	46.1	20	125	58.1	12
W095X400005	**40**	50	40	30	5	9	10	13	56.1	28	146	70.1	13
W095X500005	**50**	54	45	34	6	9	10	14	69.1	36	158	86.1	14
W095X630005	**63**	65	50	35	6	9	15	16	82.1	42	161	99.1	16

Nota: Supplied complete with 2 screws

STAINLESS STEEL HEAD RING NUT MODEL G

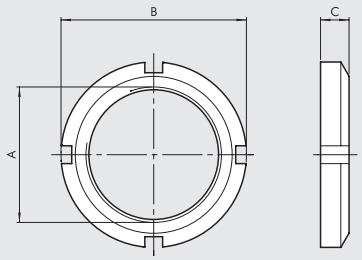

Code	Ø	A	B	C
W095X320010	**32**	M30x1.5	45	7
W095X400010	**40**	M38x1.5	52	8
W095X500010	**50**	M45x1.5	58	9
W095X500010	**63**	M45x1.5	58	9

Note: Individually packed

STAINLESS STEEL FORK-MODEL GK-M



Code	Ø	A	B	C	D	F	L	Ø M
W095X320020	**32**	20	10	20	M10x1.5	40	52	10
W095X400020	**40**	24	12	24	M12x1.75	48	62	12
W095X500020	**50**	32	16	32	M16x2	64	83	16
W095X500020	**63**	32	16	32	M16x2	64	83	16

Note: Individually packed

STAINLESS STEEL NUT FOR PISTON RODS



Code	Ø	F	CH	H	Weight [g]
W095X320011	32	M10x1.5	17	6	6
W095X400011	40	M12x1.75	19	7	12
W095X500011	50	M16x2	24	8	20
W095X500011	63	M16x2	24	8	20

Note: Individually packed

STAINLESS STEEL OSCILLATING PIN

+ = ADD STROKE

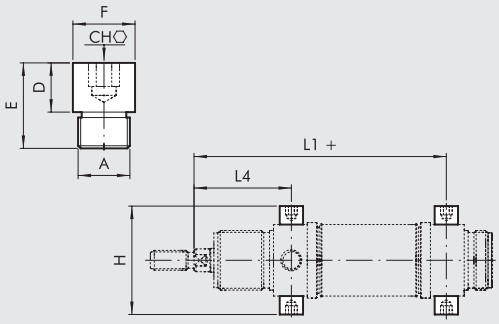

Code	Ø	A	CH	D	E	øF	H	L1	L4
W095X320007	32	M8X1	5	8	14	10	51	125	47
W095X400007	40	M10X1	6	9.5	16.5	12	61	146	57
W095X500007	50	M12X1.5	6	11	20	14	75	158	62
W095X630007	63	M14X1.5	8	13	26	16	92	161	63

Note: 2- piece pack

ACCESSORIES: MAGNETIC SENSORS

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

SENSOR BRACKET

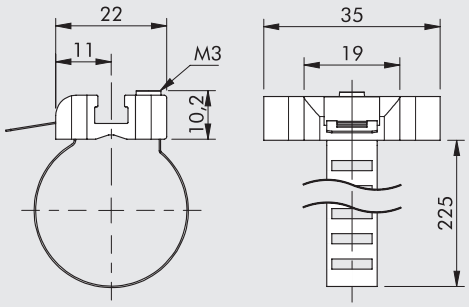

Code	Bore	Description
W0950001103	32 to 63	Sensor bracket 8 to 63

Note: Individually packed

MATERIAL
Bracket: stainless steel
Sensor holder: zamak

STAINLESS STEEL ISO 15552 CYLINDER

Stainless steel cylinders made to ISO 15552 available in various versions and with a wide range of accessories:

- with or without magnet execution
- double-acting – single- or through-rod
- gaskets: Polyurethane or FKM/FPM (for high temperatures)
- fixing accessories.

TECHNICAL DATA			Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125
Max operating pressure		bar	10						
		MPa	1						
		psi	145						
Temperature range	POLYURETHANE	°C	–20 to +80						
	FKM/FPM	°C	–10 to +150 (non-magnetic cylinders)						
Design			Heads with tie rods						
Fluid			Unlubricated air. Lubrication, if used, must be continuous						
Standard strokes ✚		mm	0 to 1000						
Versions			Double-acting cushioned, Double-acting through-rod cushioned						
Sensor magnet			Available magnetic and non-magnetic versions.						
Weights			See cylinder "**General technical data**" at the beginning of the chapter						
Notes			✚ Maximum recommended strokes. Higher values can create operating problems						
			These cylinder series cannot mount the rod lock, if necessary contact our sales offices.						

COMPONENTS

① PISTON ROD: AISI 316 steel
② HEAD: AISI 304 steel
③ PISTON ROD GASKET: polyurethane or FKM/FPM
④ GUIDE BUSHING: sintered bronze
⑤ BARREL: AISI 304 steel
⑥ ENBLOC GASKET: NBR or FKM/FPM
⑦ MAGNET: plastoferrite
⑧ Static O-rings: NBR or FKM/FPM
⑨ CUSHIONING GASKET: polyurethane or FKM/FPM
⑩ CUSHIONING NEEDLE: AISI 304 steel
⑪ TIE ROD: AISI 316 steel
⑫ NEEDLE-RETAINING RING: technopolymer

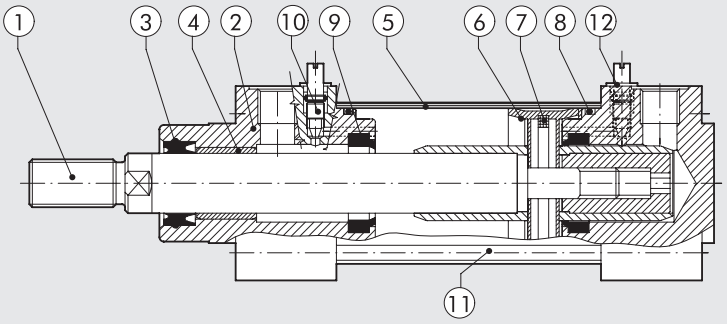

METAL WORK PNEUMATIC

DIMENSIONS OF DOUBLE-ACTING

+ = ADD STROKE

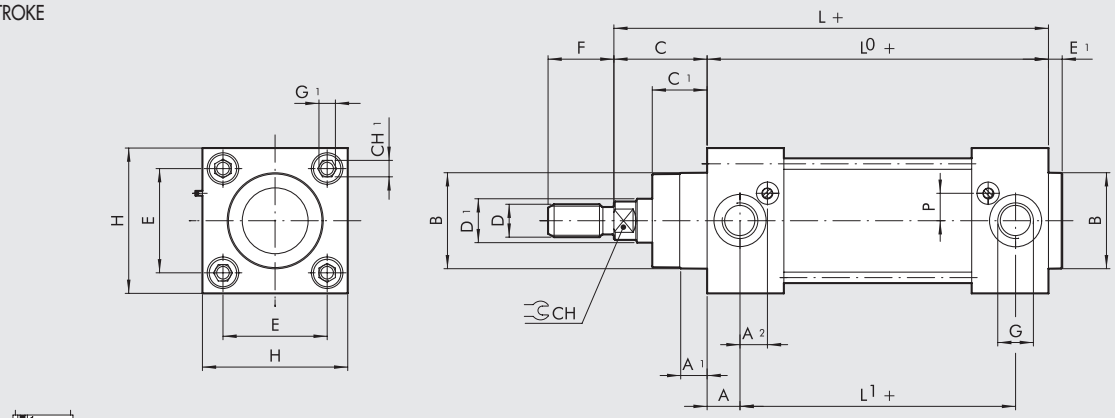

W184

DIMENSIONS DOUBLE-ACTING THROUGH-ROD

+ = ADD STROKE
++ = ADD TWICE THE STROKE

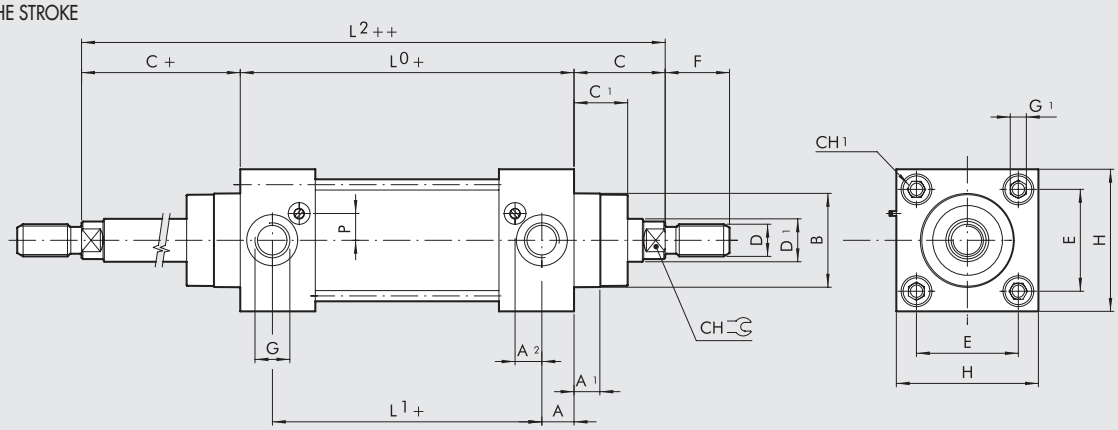



W185

Ø.	A	A_1	A_2	B	C	C_1	CH	CH_1	D	D_1	E	E_1	F	G	G_1	H	L	L_0	L_1	L_2	P
32	13	9	11.3	30	26	18	10	6	M10x1.25	12	32.5	4	22	G1/8	M6	50	120	94	68	146	6
40	14	9	13	35	30	22	13	6	M12x1.25	16	38	4	24	G1/4	M6	55	135	105	77	165	8
50	14	9	12.7	40	37	25.5	17	8	M16x1.5	20	46.5	4	32	G1/4	M8	65	143	106	78	180	11.8
63	16	9	15.8	45	37	25	17	8	M16x1.5	20	56.5	4	32	G3/8	M8	75	158	121	89	195	11.7
80	17	10	16.3	45	46	35	22	-	M20x1.5	25	72	4	40	G3/8	M10	95	174	128	94	220	15.5
100	18	10	15.5	55	51	38	22	-	M20x1.5	25	89	4	40	G1/2	M10	110	189	138	102	240	15.5
125	18	11	20	60	65	46	27	-	M27x2	32	110	6	54	G1/2	M12	140	225	160	124	290	15

KEY TO CODES

W 1 8	4	0	3 2	0 0 3 2
	TYPE	**VERSION**	**DIAMETER**	**STROKE**
Stainless steel cylinder	**4** DAMC **5** DAMC through-rod	**0** Standard (magnetic) **S** Non-magnetic ● **V** FKM/FPM gasket	32 40 50 63 80 ■ 100 ■ 125	✚ 0 to 1000 mm

DAMC: Magnetic double-acting (cushioned)
✚ Maximum recommended strokes. Higher values can create operating problems
● For this version the cylinder will be not magnetic
■ In the code of cylinder with letter in fifth position Ø 100 becomes A1; Ø 125 becomes A2

ACCESSORIES FOR STAINLESS ISO 15552 CYLINDER: FIXINGS

STAINLESS STEEL INTERMEDIATE HINGE - MODEL EN

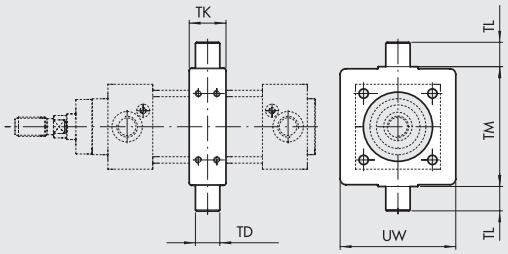

Code	Ø	TM	TL	TD	TK	UW	Weight [g]
W095X322007	32	50	12	12	15	46	140
W095X402007	40	63	16	16	20	59	330
W095X502007	50	75	16	16	20	69	390
W095X632007	63	90	20	20	25	84	730
W095X802007	80	110	20	20	25	102	925
W095XA12007	100	132	25	25	30	125	1700
W095XA22007	125	160	25	25	32	155	2580

Note: Supplied complete with 8 grub screws

STAINLESS STEEL SHORT FOOT MOUNTING

+ = ADD THE STROKE

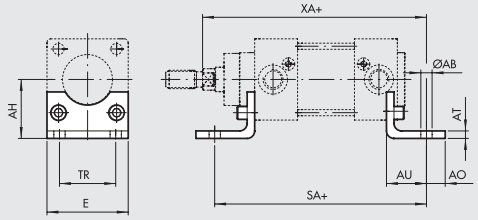

Code	Ø	Ø AB	AH	AO	AT	AU	TR	E	XA	SA	Weight [g]
W095X322001	32	7	32	11	4	24	32	45	145	143	85
W095X402001	40	10	36	8	4	28	36	52	163	161	95
W095X502001	50	10	45	15	5	32	45	65	175	170	200
W095X632001	63	10	50	13	5	32	50	75	190	185	225
W095X802001	80	12	63	14	6	41	63	95	215	210	435
W095XA12001	100	14.5	71	16	6	41	75	115	230	220	555
W095XA22001	125	16.5	90	25	8	45	90	140	270	250	1145

Note: Individually packed with 2 screws

STAINLESS STEEL FEMALE HINGE - MODEL B

+ = ADD THE STROKE

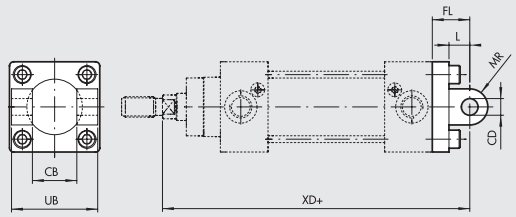

Code	Ø	UB	CB H14	FL	CD H9	XD	MR	L	Weight [g]
W095X322003	32	45	26	22	10	142	10	13	175
W095X402003	40	52	28	25	12	160	12	16	250
W095X502003	50	60	32	27	12	170	12	16	425
W095X632003	63	70	40	32	16	190	16	21	635
W095X802003	80	90	50	36	16	210	16	22	1270
W095XA12003	100	110	60	41	20	230	20	27	2000
W095XA22003	125	130	70	50	25	275	25	30	3715

Note: Supplied with 4 screws. **WITHOUT PIN.**

STAINLESS STEEL FEMALE HINGE PIN

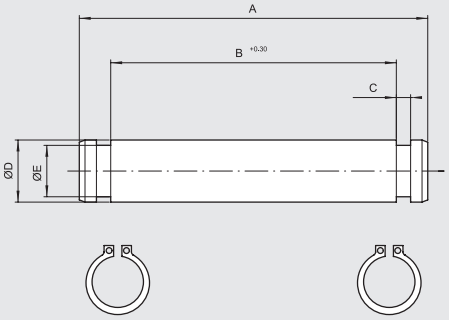

Code	Ø	A	B	C H13	ØD e8	ØE h11	Weight [g]
W095X322050	32	53	46	1.1	10	9.6	35
W095X402050	40	60	53	1.1	12	11.5	55
W095X502050	50	68	61	1.1	12	11.5	65
W095X632050	63	78	71	1.1	16	15.2	125
W095X802050	80	98	91	1.1	16	15.2	160
W095XA12050	100	118	111	1.3	20	19	295
W095XA22050	125	139	132	1.3	25	23.9	540

Note: Supplied with 2 snap-rings

METAL WORK PNEUMATIC

STAINLESS STEEL MALE HINGE - MODEL BA

+ = ADD THE STROKE

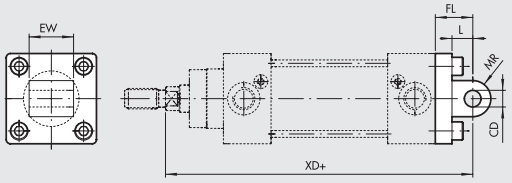

Code	Ø	EW	FL	MR	CD H9	L	XD	Weight [g]
W095X322004	32	26	22	10	10	13	143	195
W095X402004	40	28	25	12	12	16	160	265
W095X502004	50	32	27	12	12	16	170	445
W095X632004	63	40	32	16	16	21	190	715
W095X802004	80	50	36	16	16	22	210	1375
W095XA12004	100	60	41	20	20	27	230	2165
W095XA22004	125	70	50	25	25	30	275	3800

Note: Supplied with 4 screws

STAINLESS STEEL ISO COUNTER-HINGE FOR MODEL B - MODEL GL

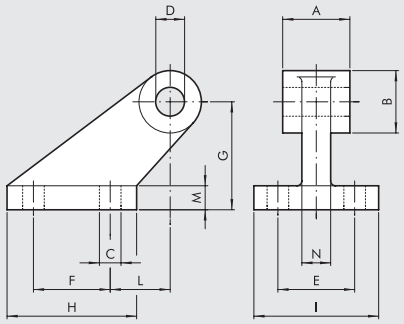

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]
W095X322008	32	26	20	6.6	10	38	18	32	31	51	3	8	10	165
W095X402008	40	28	22	6.6	12	41	22	36	35	54	2	10	15	235
W095X502008	50	32	26	9	12	50	30	45	45	65	3	12	16	460
W095X632008	63	40	30	9	16	52	35	50	50	67	2	14	16	590
W095X802008	80	50	30	11	16	66	40	63	60	86	7	14	20	1000
W095XA12008	100	60	38	11	20	76	50	71	70	96	5	15	20	1515
W095XA22008	125	70	45	14	25	94	60	90	90	124	10	20	30	3170

Note: Individually packed

STAINLESS STEEL FRONT FLANGE - MODEL C

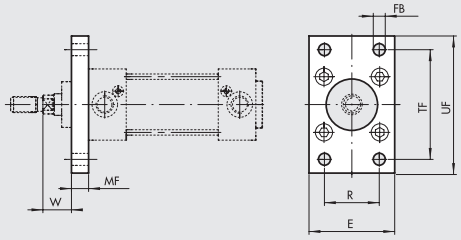

Code	Ø	UF	TF	E	R	MF	FB	W	Weight [g]
W095X322002	32	80	64	45	32	10	7	16	220
W095X402002	40	90	72	52	36	10	9	20	280
W095X502002	50	110	90	65	45	12	9	25	540
W095X632002	63	120	100	75	50	12	9	25	680
W095X802002	80	150	126	95	63	16	12	30	1550
W095XA12002	100	170	150	115	75	16	14	35	2100
W095XA22002	125	205	180	140	90	20	16	45	3950

Note: Supplied with 4 screws

STAINLESS STEEL REAR FLANGE - MODEL C

+ = ADD THE STROKE

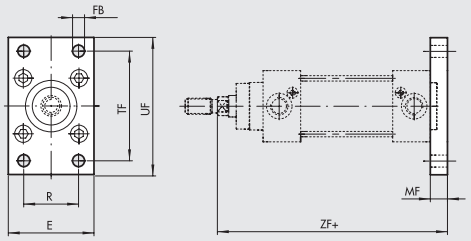

Code	Ø	UF	TF	E	R	MF	FB	ZF	Weight [g]
W095X322002	32	80	64	45	32	10	7	130	220
W095X402002	40	90	72	52	36	10	9	145	280
W095X502002	50	110	90	65	45	12	9	153	540
W095X632002	63	120	100	75	50	12	9	168	680
W095X802002	80	150	126	95	63	16	12	184	1550
W095XA12002	100	170	150	115	75	16	14	199	2100
W095XA22002	125	205	180	140	90	20	16	235	3950

Note: Supplied with 4 screws

STAINLESS STEEL NUT FOR PISTON RODS



Code	Ø	F	H	CH	Weight [g]
W095X322011	**32**	M10x1.25	6	17	8
W095X402011	**40**	M12x1.25	6	19	11
W095X502011	**50**	M16x1.5	8	24	18
W095X502011	**63**	M16x1.5	8	24	18
W095X802011	**80**	M20x1.5	10	30	31
W095X802011	**100**	M20x1.5	10	30	31
W095XA22011	**125**	M27x2	13.5	41	81

Note: Individually packed

STAINLESS STEEL FORK-MODEL GK-M



Code	Ø	A	B	C	D	F	L	Ø M	Weight [g]
W095X322020	**32**	20	10	20	M10x1.25	40	52	10	90
W095X402020	**40**	24	12	24	M12x1.25	48	62	12	145
W095X502020	**50**	32	16	32	M16x1.5	64	83	16	325
W095X502020	**63**	32	16	32	M16x1.5	64	83	16	325
W095X802020	**80**	40	20	40	M20x1.5	80	105	20	680
W095X802020	**100**	40	20	40	M20x1.5	80	105	20	680

Note: Individually packed

ACCESSORIES: MAGNETIC SENSORS

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

SENSOR BRACKET

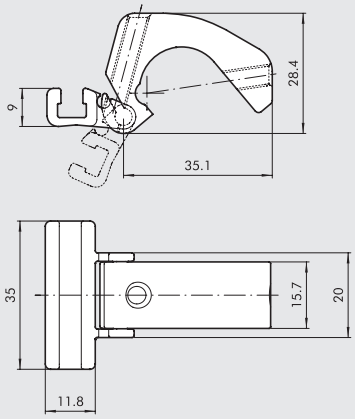

Code	Bore	Description
W0950001100	32 to 125	Sensor bracket

Note: Individually packed

MATERIAL
Bracket: aluminium
Sensor holder: aluminium
Fixing screw: stainless steel

METAL WORK PNEUMATIC

NOTES

GRIPPERS, ROTARY ACTUATORS, SLIDES SUMMARY

GRIPPERS

	GENERAL TECHNICAL DATA GRIPPERS	A2.4
	GRIPPER WITH TWO PARALLEL JAWS, SERIES P1	A2.8
	GRIPPER WITH TWO PARALLEL JAWS, SERIES P1K	A3.156
	GRIPPER WITH TWO PARALLEL JAWS, SERIES P2	A2.10
	GRIPPER WITH TWO PARALLEL JAWS, SERIES P2K	A3.161
	GRIPPER WITH TWO PARALLEL JAWS, SERIES P3	A2.13
	GRIPPER WITH TWO PARALLEL JAWS, SERIES P3K	A3.165
	GRIPPER WITH TWO PARALLEL LONG-STROKE JAWS, SERIES P4	A2.23
	GRIPPER WITH TWO PARALLEL LONG-STROKE JAWS, SERIES P4K	A3.173
	GRIPPER WITH TWO HINGED JAWS, SERIES P7	A2.26
	GRIPPER WITH TWO HINGED JAWS, SERIES P7K	A3.182
	TECHNOPOLYMER HINGED GRIPPER, SERIES P8	A2.28
	GRIPPER 180° WITH TWO HINGED JAWS SERIES P9	A2.30
	GRIPPER 180° WITH TWO HINGED JAWS SERIES P9K	A3.187
	GRIPPER WITH THREE PARALLEL JAWS, SERIES P12	A2.32
	GRIPPER WITH THREE PARALLEL JAWS, SERIES P12K	A3.192
	GRIPPER WITH TWO PARALLEL LONG-STROKE JAWS, SERIES GPLK	A3.177

ROTARY ACTUATORS

	GENERAL TECHNICAL DATA ROTARY ACTUATORS	A2.43
	ROTARY ACTUATOR SERIES R1	A2.44
	ROTARY ACTUATOR SERIES R2	A2.48
	ROTARY ACTUATOR SERIES R3	A2.51
	ROTARY ACTUATOR SERIES R3K	A3.124
	ROTARY ACTUATOR SERIES R3 WITH EXTERNAL SHOCK ABSORBERS	A2.56
	ROTARY ACTUATOR SERIES R3K WITH EXTERNAL SHOCK ABSORBERS	A3.130
	ROTARY ACTUATOR SERIES R4	B3.33
	VANE ROTARY ACTUATOR SERIES R5	A2.62
	ROTARY ACTUATOR SERIES DAPK	A3.136
	ELECTRIC ROTARY ACTUATOR SERIES ELEKTRO RBA	A5.196

METAL WORK PNEUMATIC

SLIDES

	GENERAL TECHNICAL DATA SLIDES	A2.68
	TWIN CYLINDER SERIES S10	A2.69
	TWIN CYLNDER SLIDE WITH FIXED BODY SERIES S11	A2.73
	TWIN CYLNDER SLIDE WITH FIXED PLATES SERIES S12	A2.79
	PRECISION SLIDE SERIES S13	A2.85
	ELECTRIC SLIDE SERIES ELEKTRO CS	A5.166
	COMPACT PRECISION SLIDE - SERIES S14K	A3.47

OTHER GUIDE UNITS AND SLIDE

	GDS, GDH AND GDM GUIDE UNITS FOR ISO 6432 GDHK, GDMK GUIDE UNITS FOR ISO 6432	A1.23 A3.79
	GDS, GDH AND GDM GUIDE UNITS FOR ISO 15552 GDHK, GDMK GUIDE UNITS FOR ISO 15552	A1.61 A3.79
	SHORT-STROKE ANTI-ROTATION CYLINDER	A1.153
	COMPACT ANTI-ROTATION CYLINDER SERIES CMPC	A1.115
	ISO 21287 ANTI-ROTATION CYLINDER SERIES LINER	A1.104
	TWIN-ROD CYLINDER SERIES TWNC	A1.78
	COMPACT GUIDED CYLINDER SERIES MULTIFIX	A1.160
	COMPACT GUIDES CYLINDER SERIES CMPG	A1.170
	RODLESS CYLINDER STD RODLESS CYLINDER WITH BALL RECIRCULATING GUIDE SERIES V-Lock	A1.184 A3.37

GENERAL TECHNICAL DATA GRIPPERS

NOMENCLATURE

① Pneumatic gripper
② Jaws
③ Clamping finger
④ Sensor slot
⑤ F = clamping force of one jaw only
If a gripper has three jaws, with
F = 25 N, so the total clamping force is 25 x 3 = 75 N
⑥ Load
⑦ L = distance between the barycentre of the load
and the reference surface
⑧ C = stroke of a single jaw
⑨ Fa = maximum axial force applied to the grippers

FIG. 1.1

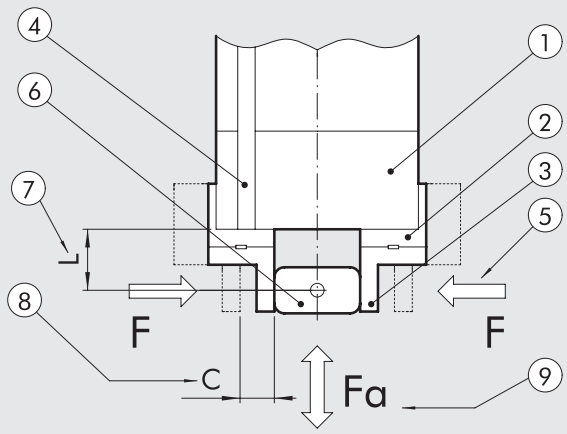

TYPES

Parallel gripper: the jaws move in a straight line. There may be two, three or even four jaws.



Hinged gripper: the jaws are hinged and move along the arc of a circle. It is generally cheaper than a parallel gripper but there are some limitations (see fig. 1.5):
- If the part has varying dimensions, the contact area changes (see fig. 1.6)
- If the part is cylindrical with varying dimensions, the position of the axis of the clamped part varies (see fig. 1.7)

Gripper with retracting jaws: the jaws have an opening angle of about 90°. The clamping fingers can retract fully from the work top, and so, in certain cases, it is possible to avoid one linear retraction motion (see fig. 1.5).



Toggle gripper: a hinged gripper with a toggle-action mechanism to achieve high clamping forces. Clamping is irreversible even when there is no pressure, so the part cannot be released accidentally. The opening angle is 90° so it acts as retracting gripper. The clamping force is high within a limited angle only.



Number of jaws: two-jaw grippers are used for prism-shaped parts or cylindrical ones with a single diameter. Three-jaw grippers can be used for cylindrical parts with different diameters.



METAL WORK PNEUMATIC

CLAMPING FINGERS

The clamping fingers must be as light and short as possible to keep inertia to a minimum.
The longer the clamping fingers, the less force is available (see fig. 1.2).
Wider fingers are only heavier, they do not increase friction (see fig. 1.3).

FIG. 1.2

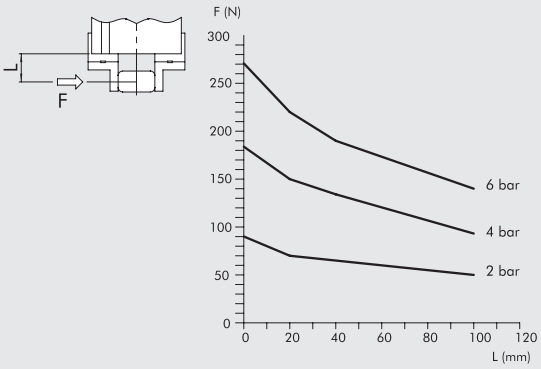

FIG. 1.3

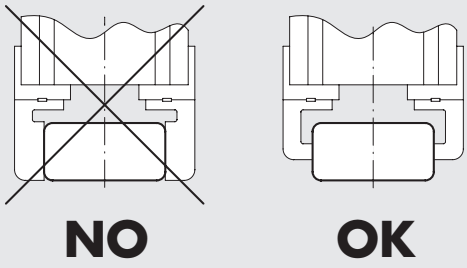

EXAMPLE OF CLAMPING FINGERS

FIG. 1.4

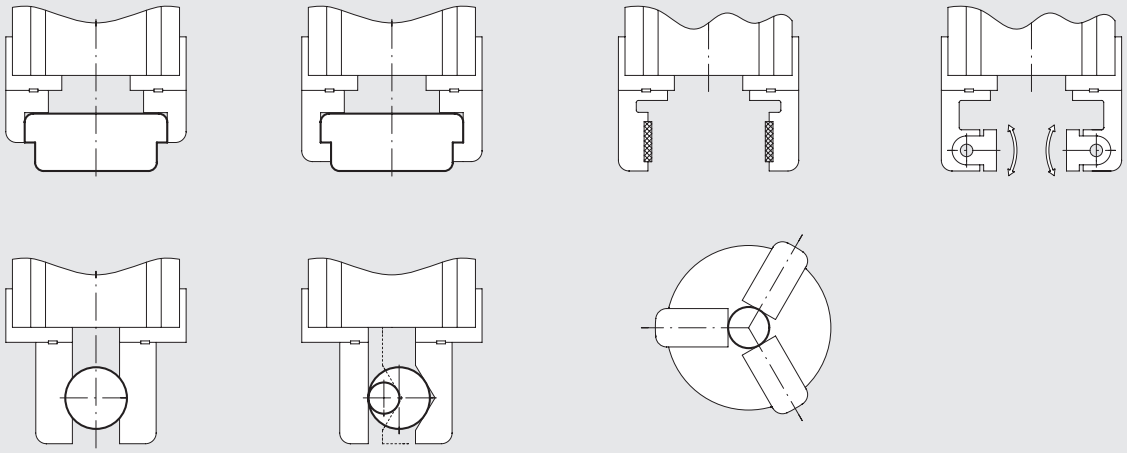

EXAMPLE OF RETRACTING HINGED GRIPPERS

FIG. 1.5

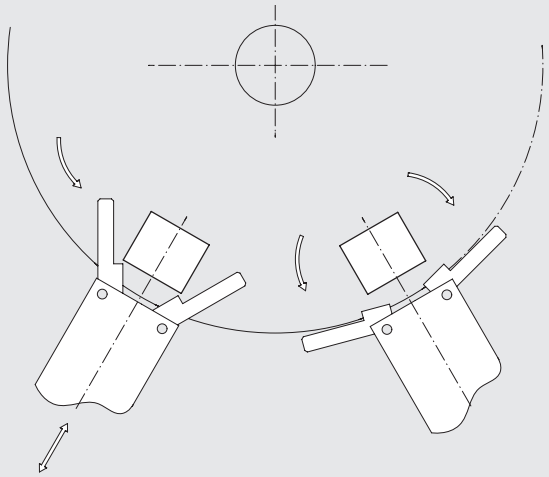

EXAMPLE OF USE LIMITATIONS OF HINGED GRIPPERS

FIG. 1.6

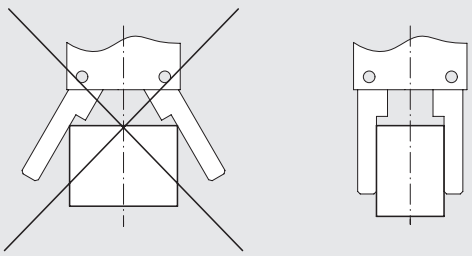

FIG. 1.7

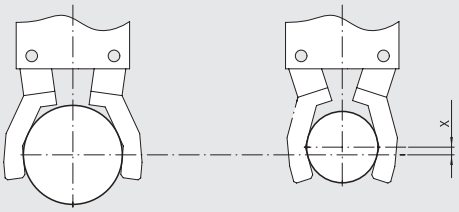

CALCULATIONS

First of all, determine the necessary clamping force.
Then decide which type of gripper can ensure this force with required pressure and clamping distance.
To help designers calculate the clamping force, we propose two levels of calculation.

DRAWING TO CALCULATE GRIPPER CLAMPING FORCE

FIG. 1.8

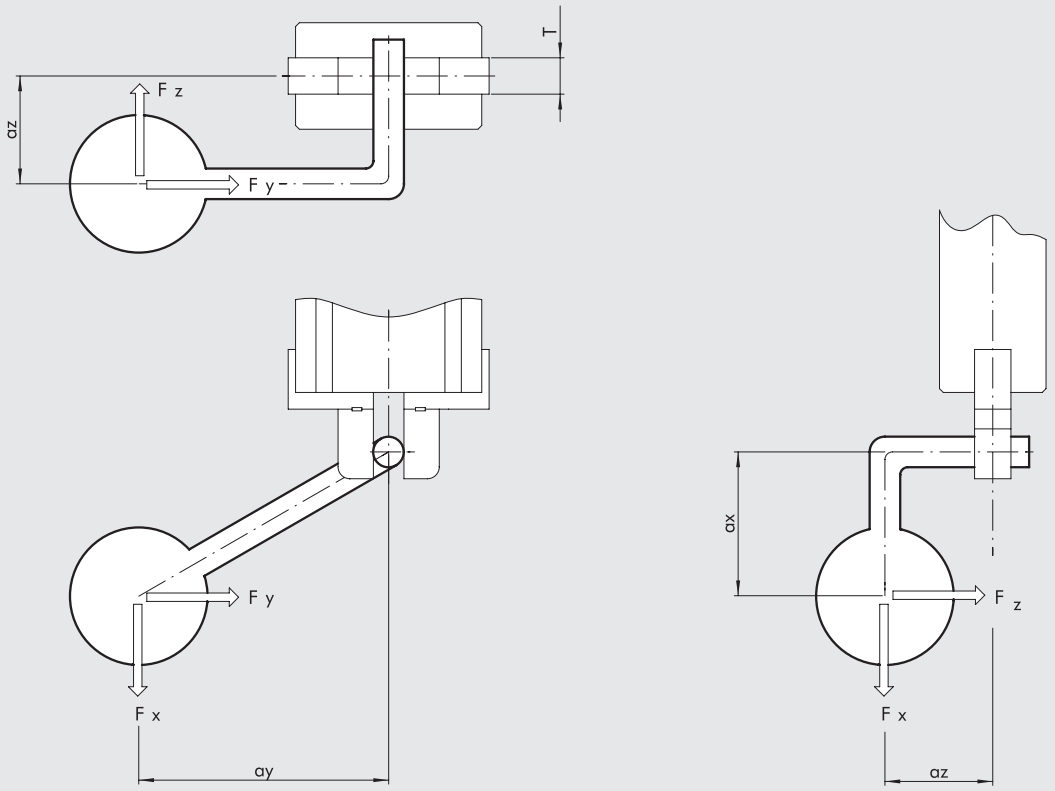

APPROXIMATION METHOD

Clamping force of each jaw [N] ≥ 200 x weight of part [kg] / number of jaws.

	Data	Unit of measurement	Formula	Example
M	Mass of part	kg		1.2
n	Number of jaws	–		3
F	Clamping force of each jaw	N	≥ 200 x M/n	≥ 200 x 1.2/3 = 80

METAL WORK PNEUMATIC

PRECISION COMPUTING METHOD

	Data	Unit of measur.	Formula	Example
M	Mass of part	kg		1.2
a	Acceleration	m/s^2		5 in direction Y
Ω	Angle speed	rad/s		0
T	Width of clamping finger	mm		8
d	Clamping diameter of part	mm		16
ax	Distance along X of the barycentre from clamping centre	mm		0
ay	Distance along Y of the barycentre from clamping centre	mm		0
az	Distance along Z of the barycentre from clamping centre	mm		25
μ	Finger/part friction coefficient			0.2
	Some examples:			
	Smooth steel on smooth metal		μ = 0.1	
	Rough steel on smooth metal		μ = 0.2 - 0.3	
	Soft material, e.g. Vulkolan		μ = 0.4	
	Coupled shape (vedi fig. 1.4)		μ = 1	
	Forces applied to barycentre of part. When determining the forces, assess for each direction:			
	Force x weight	N	M x 9.81	
	Force of inertia x linear acceleration	N	M x a	
	Force of inertia x angular velocity	N	$M \times \Omega^2 \times r$	
Fx	Force along gripper axis	N		Fx = weight 1.2 x 9.81 = 11.8 N
Fy	Force perpendicular to jaw	N		Fy = F. of inertia = 1.2 x 5 = 6 N
Fz	Force tangent to jaw	N		Fz = O
	Force equivalent to clamping centre:			
Ft eq	Equivalent tangential force	N	$\sqrt{\left[Fx \cdot \left(\frac{az+\frac{T}{2}}{T}+\frac{ay+\frac{d}{2}}{d}\right)+Fz \cdot \frac{ax}{T}+Fy \cdot \frac{ax}{d}\right]^2+Fz^2}$	$\sqrt{\left[11.8 \cdot \left(\frac{25+\frac{8}{2}}{8}+\frac{1}{2}\right)+O\right]^2} = 48.6\,N$
Fy eq	Equivalent perpendicular force	N	$Fy \cdot \frac{az+\frac{T}{2}}{T}+Fz \cdot \frac{ay}{T}$	$= 6 \cdot \frac{\left(25+\frac{8}{2}\right)}{8} = 75\,N$
Fs teo	Theoretical clamping force	N	Greater of (Fteq/2μ) and (Fyeq)	Greater of (42.8/2 · 0.2) and 75 = 107 N
F	Clamping force	N	FsTeo · 1.5 (safety coefficient)	= 107 · 1.5 = 160 N

NOTES

GRIPPER WITH TWO PARALLEL JAWS SERIES P1

- Dual-acting parallel gripper for internal and external clamping.
- Anodized aluminium alloy body and tempered steel jaws.
- Bottom or side fixing.
- All sizes come with magnets and sensor slots.

TECHNICAL DATA		P1-20	P1-32
Operating pressure	bar	2 to 8	
	MPa	0.2 to 0.8	
	psi	29 to 116	
Temperature range	°C	5 to 70	
Fluid		20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous	
Bores	mm	20	32
Clamping force at 6.3 bar 20 mm from the top surface during opening and closing		70	170
Single jaw stroke	mm	5	5
Weight	kg	0.50	0.70

COMPONENTS

① BODY: anodized aluminium
② JAWS: nitrided steel
③ GUIDE: tempered steel
④ PISTON ROD: chromed steel
⑤ PISTON: aluminium
⑥ PISTON GASKET: NBR
⑦ GUIDE RING: PTFE
⑧ MAGNET: plastoferrite
⑨ GASKET: NBR
⑩ REAR BASE: anodized aluminium
⑪ GASKET: NBR
⑫ GUIDE BUSHING
⑬ PISTON ROD GASKET: polyurethane

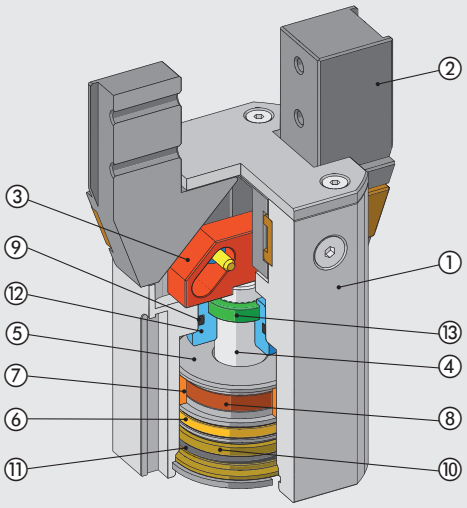

TABLE OF CLAMPING FORCES FOR VARIOUS POINTS OF APPLICATION



METAL WORK PNEUMATIC

DIMENSIONS OF GRIPPER P1-20

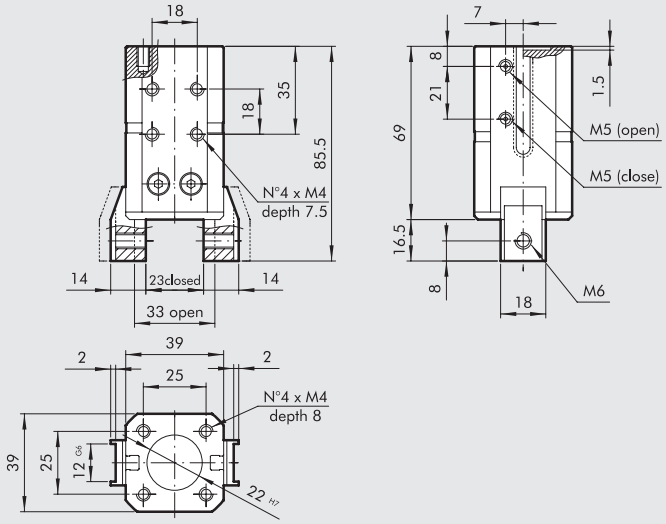

Code	Description
W1550200001	Gripper with 2 parallel jaws P1-20

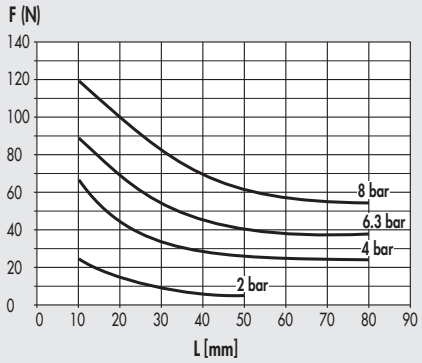

DIMENSIONS OF GRIPPER P1-32

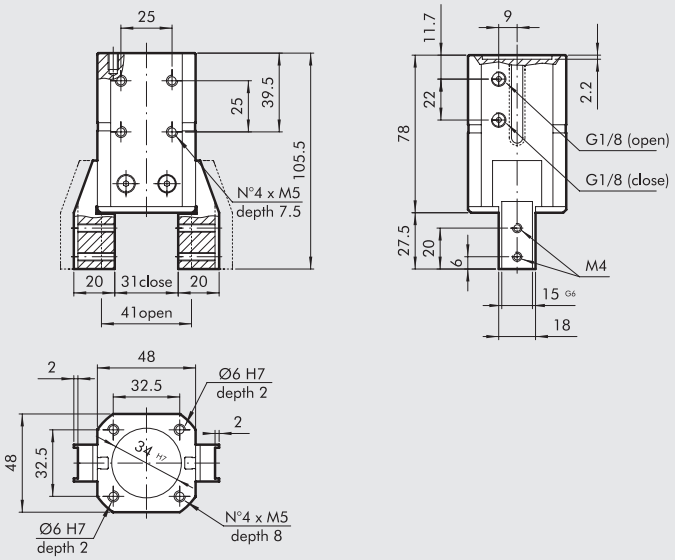

Code	Description
W1550320001	Gripper with 2 parallel jaws P1-32

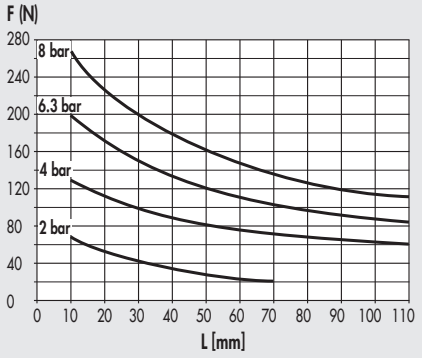

ACCESSORIES

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

GRIPPER WITH TWO PARALLEL JAWS SERIES P2

Parallel double-acting two-jaw gripper, with either internal or external clamping, with sliding of the jaws on inclined planes.
Aluminum alloy body coated with surface hardening treatment, jaws made of wear-resistant coated steel.
The jaw-guiding system and precision in coupling with the body make the gripper extremely stable.
The ceramic-coated body reduces friction and wear, and enhances the movement of the jaws on the body.
All sizes are equipped with a magnet and sensor grooves.

TECHNICAL DATA		P2 -16	P2-20	P2- 25
Operating pressure	bar		2 to 8	
	MPa		0.2 to 0.8	
	psi		29 to 116	
Operating temperature	°C		-10 to 80	
Fluid		Fluid 20 µm filtered air, lubricated or unlubricated. If lubricated air is used, lubrication must be continuous		
Bore	mm	16	20	25
Clamping force of a single jaw	N	45	100	135
at 6.3 bar, 20 mm from the upper surface, on opening and closing				
Stroke of each jaw	mm	4	5	7
Minimum opening/closing time	s		0.01/0.02	
Repeatability	mm		± 0.01	
Moment of inertia around the piston axis Jy	kg cm²	0.19	0.83	2.33
Max. admissible static loads:				
- Fa	N	225	300	545
- Mx	Nm	3	4	7
- My	Nm	1.5	2	3
- Mz	Nm	3.5	5	8
Weight	kg	0.13	0.27	0.51

COMPONENTS

① BODY: hard-anodized aluminium
② JAWS: nitrided steel
③ PISTON ROD + GUIDE: nitrided steel
④ PISTON ROD GASKET: polyurethane
⑤ BUSHING: bronze
⑥ BUFFER: polyurethane
⑦ PISTON: aluminium alloy
⑧ PISTON GASKET: NBR
⑨ MAGNET: plastoferrite
⑩ REAR BASE: anodized aluminium alloy
⑪ GASKET: NBR

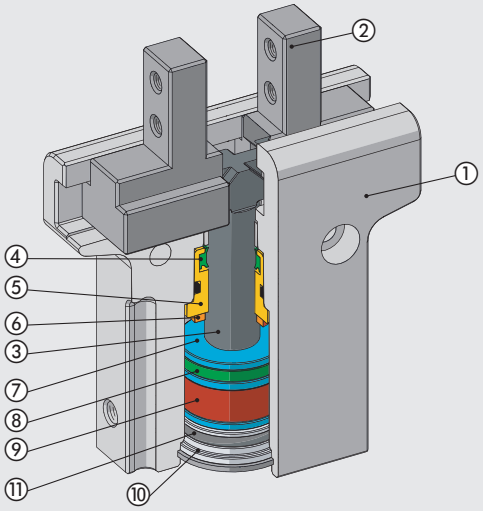

METAL WORK PNEUMATIC

DIAGRAM OF FORCES AND MOMENTS

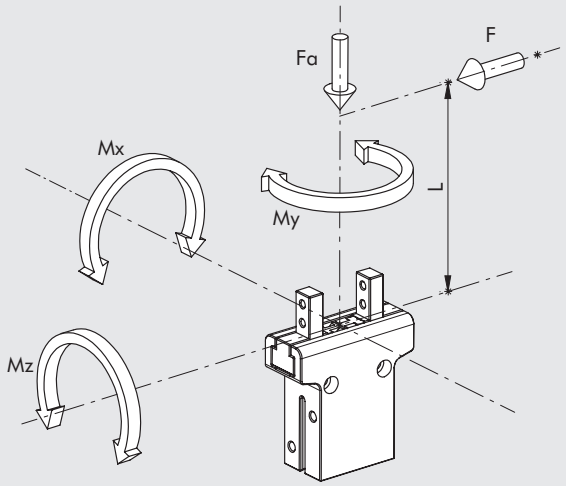

F	Clamping force for each jaw
Fa	Maximum static axial force
Mx, My, Mz	Maximum static moments

DIMENSIONS OF GRIPPER P2-16

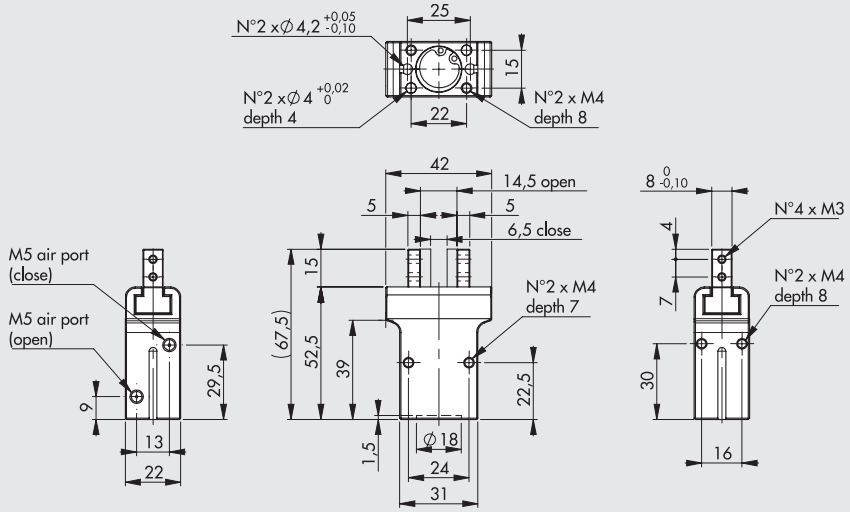

Code	Description
W1570160200	Gripper with 2 parallel jaws P2-16

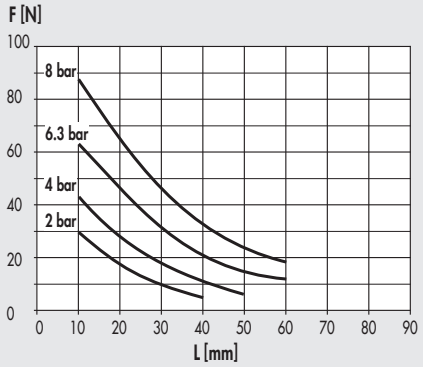

DIMENSIONS OF GRIPPER P2-20

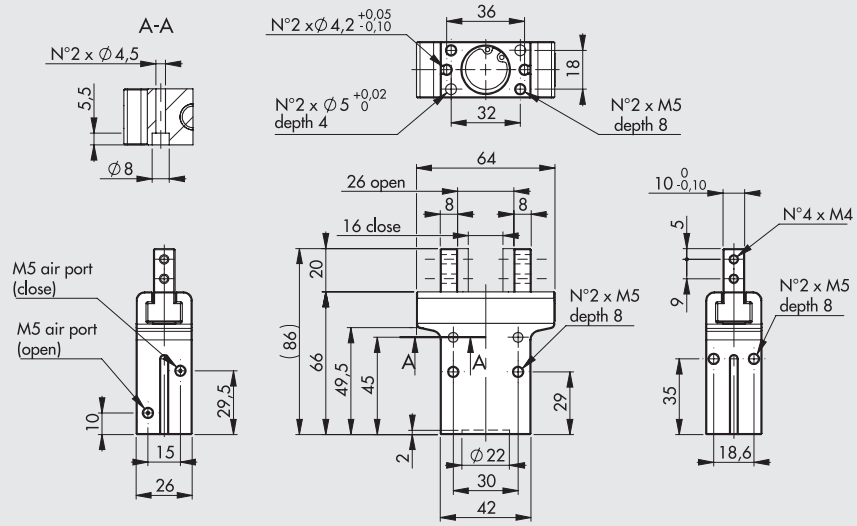

Code	Description
W1570200200	Gripper with 2 parallel jaws P2-20

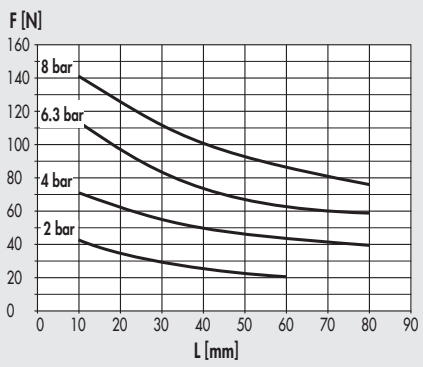

DIMENSIONS OF GRIPPER P2-25

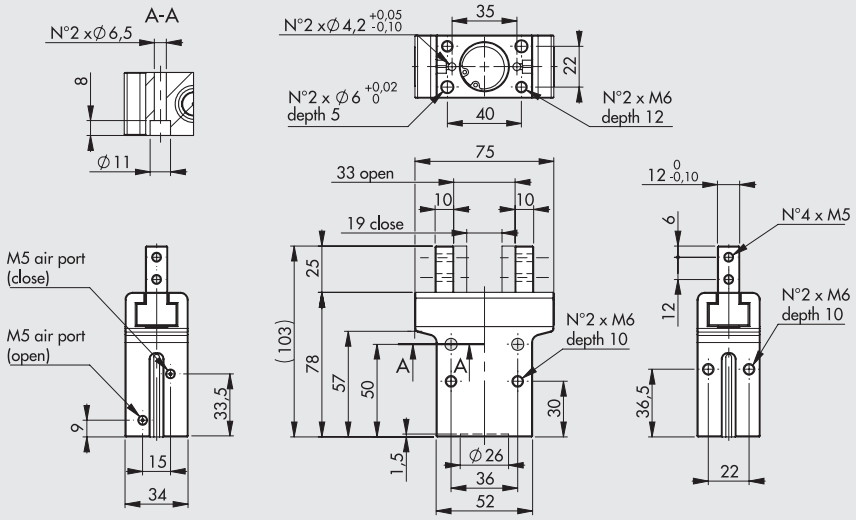

Code	Description
W1570250200	Gripper with 2 parallel jaws P2-25

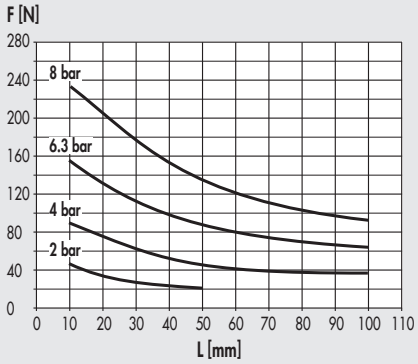

ACCESSORIES

SENSOR Ø 4



For codes and technical data, see **chapter A6**.

NOTES

GRIPPER WITH TWO PARALLEL JAWS, SERIES P3

Parallel double-acting two-jaw gripper, with either internal or external clamping.
Also available in the double-acting with spring version, normally open (NO) for internal grip and normally closed (NC) for external grip.
Aluminum alloy body coated with surface hardening treatment; jaws made of wear-resistant coated steel.
The jaw-guiding system and precision in coupling with the body make the gripper extremely stable.
The ceramic-coated body reduces friction and wear, and enhances the movement of the jaws on the body.
All sizes are available in the version with standard stroke and clamping force, while only some in the version with reduced stroke but with higher clamping torque.
The gripper is equipped with a magnet and grooves for sensors.
A version designed to house inductive sensors is also available (**the inductive sensors are not supplied by Metal Work**).
Pneumatic supply is available on both sides.

TECHNICAL DATA			P3-40			P3-64			P3-80						P3-100					
									Standard			Increased force			Standard			Increased force		
			DA	NO	NC	DA	NO	NC	DA	NO	NC	DA	NO	NC	DA	NO	NC	DA	NO	NC
Minimum operating pressure		bar	2	3		2			2						2					
		MPa	0.2	0.3		0.2			0.2						0.2					
		psi	29	43.5		29			29						29					
Maximum operating pressure		bar	8			8			8						8					
		MPa	0.8			0.8			0.8						0.8					
		psi	116			116			116						116					
Temperature range		°C	-10 to 80			-10 to 80			-10 to 80						-10 to 80					
Fluid			20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous																	
Gripping force at 6.3 bar *	opening	N	75	93	-	125	157	-	265	322	-	445	560	-	360	444	-	790	958	-
	closing	N	70	-	88	113	-	145	239	-	296	401	-	516	324	-	408	711	-	879
Minimum gripping force produced by the spring *		N	-	18	18	-	32	32	-	57	57	-	115	115	-	84	84	-	168	168
Recommended workpiece weight		kg	0.65			1.3			2.5			5			3.5			7		
Stroke of each jaw		mm	2.5			6			8			4			10			5		
Minimum time	opening	s	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1
	closing	s	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05
Repeatability		mm	0.01			0.01			0.01						0.01					
Moment of inertia as regards the piston axis		kg cm²	0.21	0.24	0.24	0.85	1.74	1.74	4.5	4.96	4.96	4.5	4.96	4.96	12	13.8	13.8	12	13.8	13.8
Weight		kg	0.08	0.1	0.1	0.17	0.35	0.35	0.5	0.61	0.61	0.5	0.61	0.61	0.9	1.1	1.1	0.9	1.1	1.1

DA: Double-acting; NO: Double acting with spring, normally open; NC: Double acting with spring, normally closed.
* Referred to a single jaw 20 mm from the upper surface. The total force is obtained by multiplying the reported value by 2.

COMPONENTS

① BODY: hard-anodized aluminium
② JAWS: nitrided steel
③ PISTON ROD + GUIDE: nitrided steel
④ PISTON: hard-anodized aluminium
⑤ PISTON GASKET: NBR
⑥ PISTON ROD GASKET: NBR / polyurethane
⑦ BASE GASKET: reinforced SBR / NBR
⑧ MAGNET: neodymium

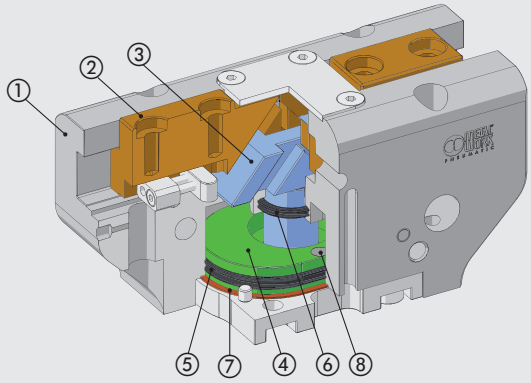

GRIPPER P3-40

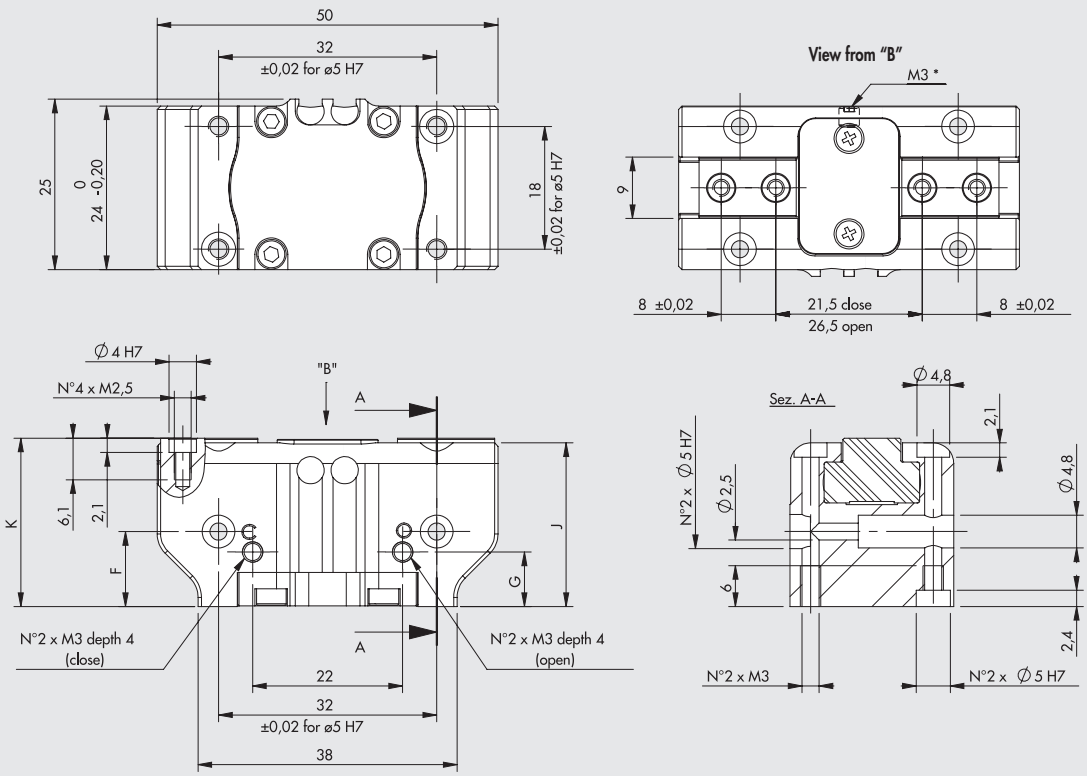

* Discharge pressurization connection

	K	J	F ±0.02	G
DA	24.7	24	11	8
NO /NC	33.7	33	20	17



Fa	250 N
Mx	12 Nm
My	5 Nm
Mz	10 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P3-40 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

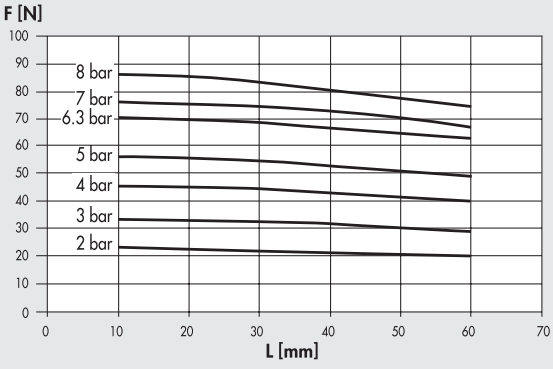

Internal grip*** (opening jaws)

Version DA

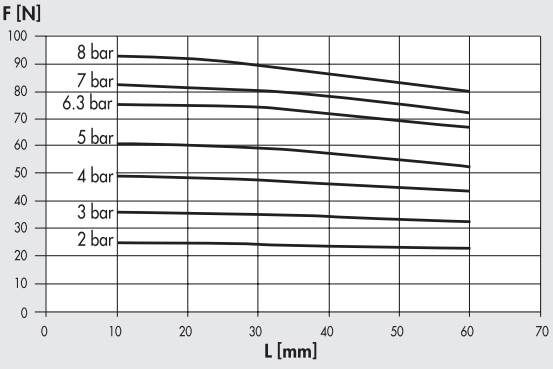

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

P3-40 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

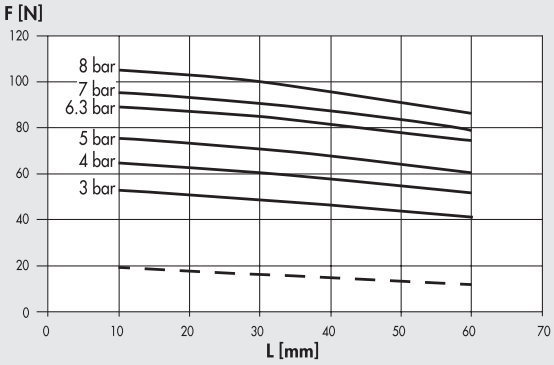

Internal grip*** (opening jaws)

Version NO

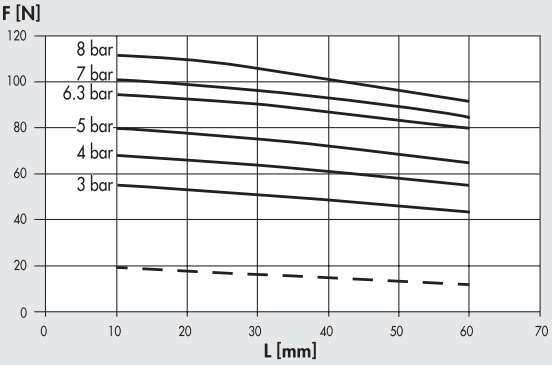

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

— — — Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1560400200	Gripper with 2 parallel jaws P3-40
W1560402200	Gripper with 2 parallel jaws P3-40 NO
W1560403200	Gripper with 2 parallel jaws P3-40 NC

GRIPPER P3-64

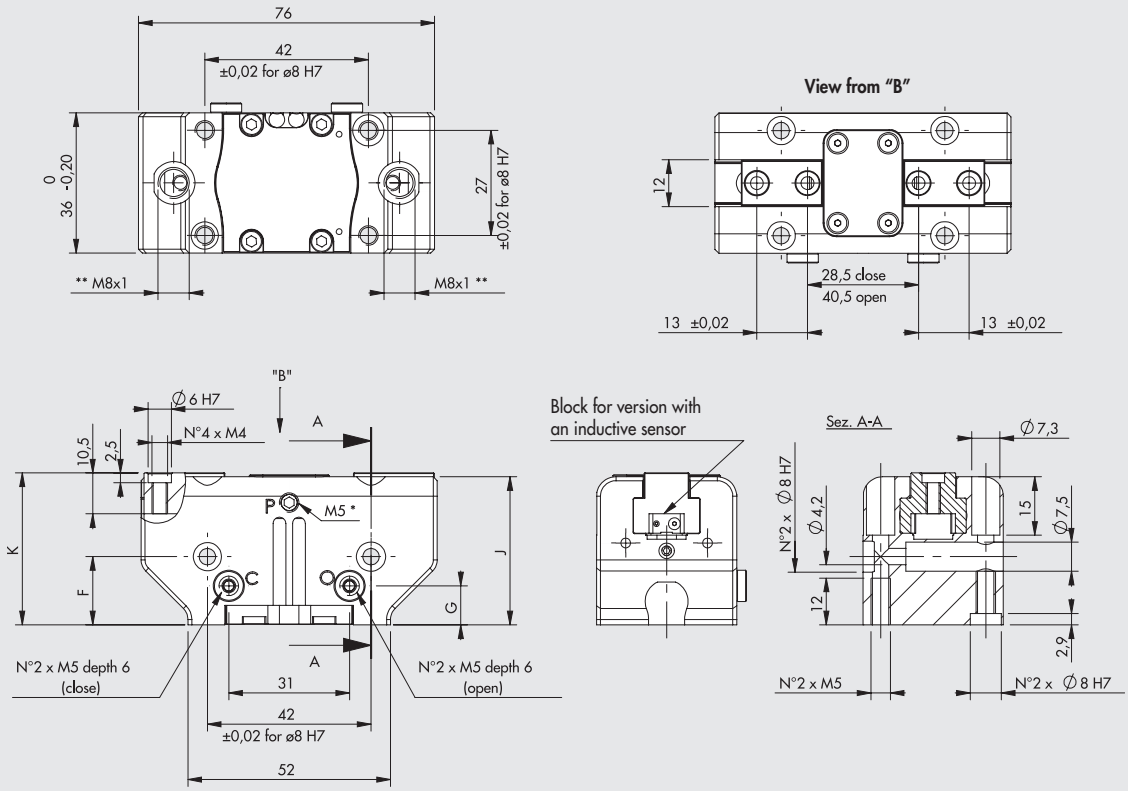

* Discharge pressurization connection, present on both sides
** Inductive sensor slot

	K	J	F ±0.02	G
DA	39	38	17.5	10
NO /NC	57	56	35.5	29



Fa	1100 N
Mx	60 Nm
My	40 Nm
Mz	40 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P3-64 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

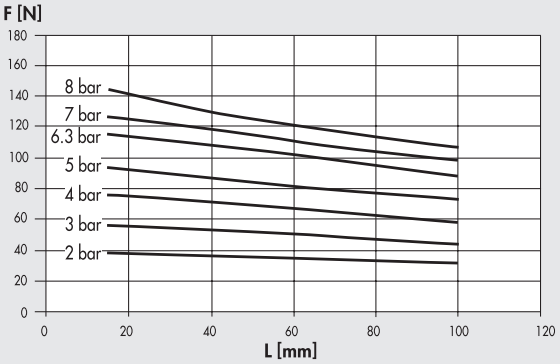

Internal grip*** (opening jaws)

Version DA

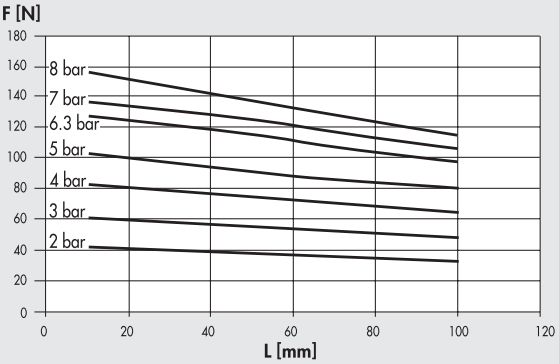

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

P3-64 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

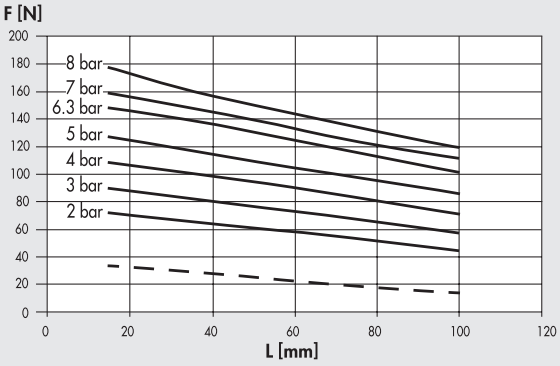

Internal grip*** (opening jaws)

Version NO

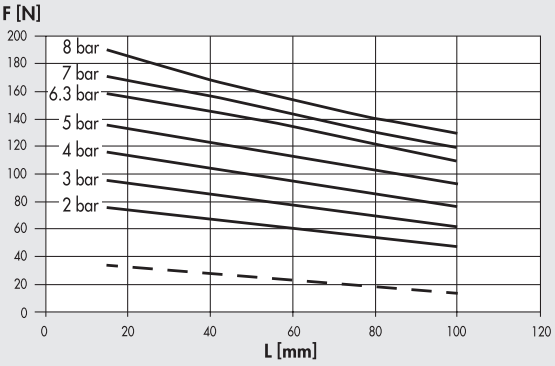

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

– – – Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1560640200	Gripper with 2 parallel jaws P3-64
W1560640201	Gripper with 2 parallel jaws P3-64 for inductive sensors
W1560642200	Gripper with 2 parallel jaws P3-64 NO
W1560642201	Gripper with 2 parallel jaws P3-64 NO for inductive sensors
W1560643200	Gripper with 2 parallel jaws P3-64 NC
W1560643201	Gripper with 2 parallel jaws P3-64 NC for inductive sensors

GRIPPER P3-80

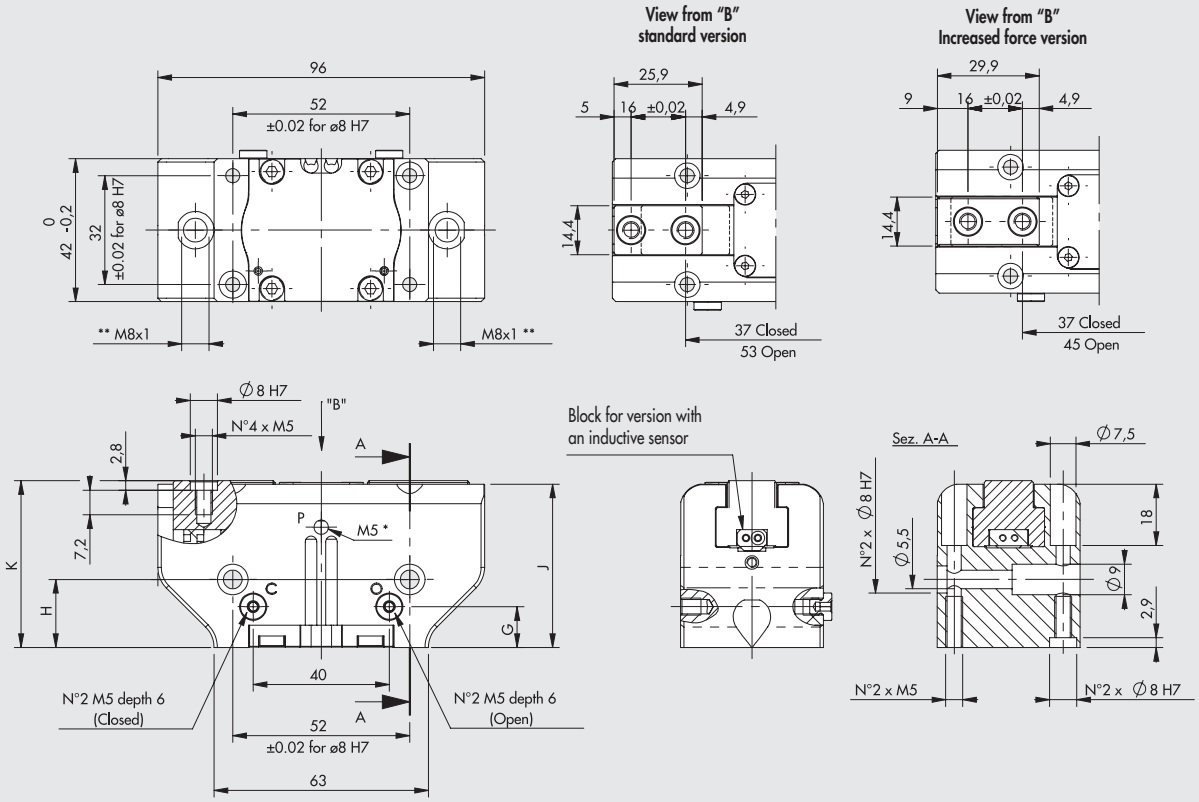

* Discharge pressurization connection, present on both sides
** Inductive sensor slot

	K	J	H ±0.02	G
DA	49	48	20	12
NO /NC	67	66	38	30



Fa	1500 N
Mx	90 Nm
My	55 Nm
Mz	55 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P3-80 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

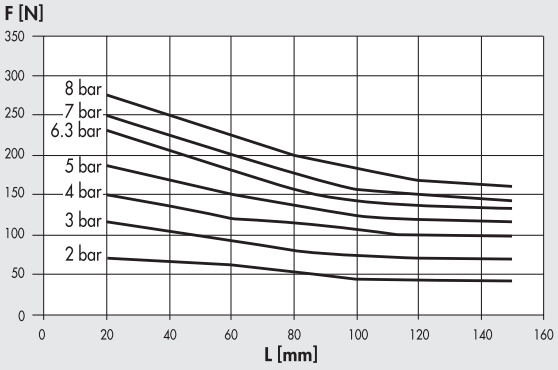

Internal grip*** (opening jaws)

Version DA

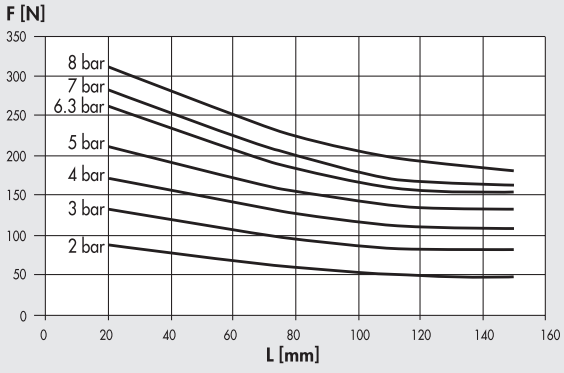

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

P3-80 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

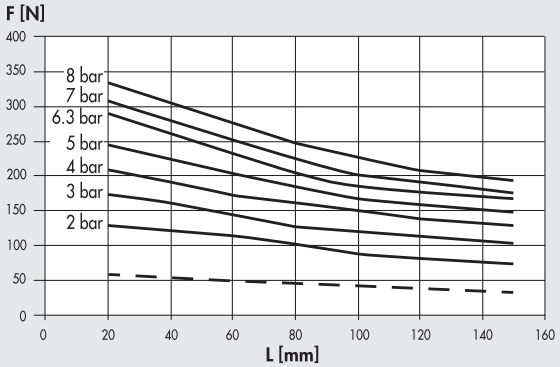

DA version increased force

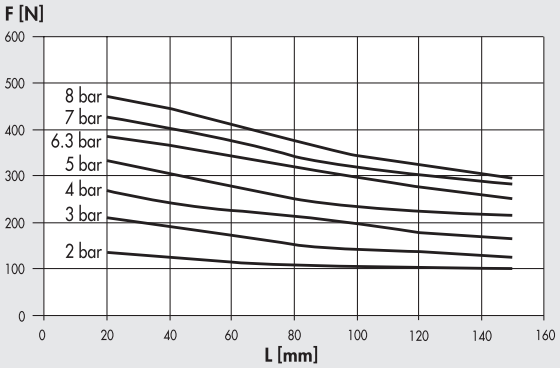

NC version increased force

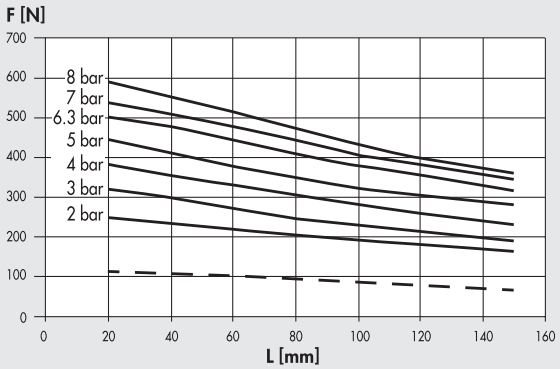

Internal grip*** (opening jaws)

Version NO

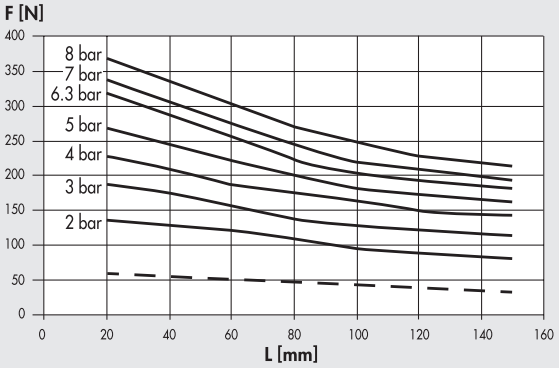

DA version increased force

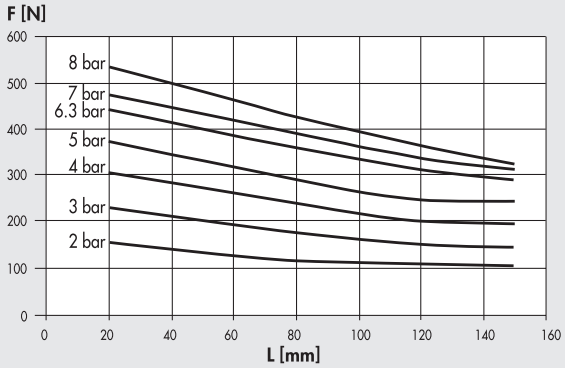

NO version increased force

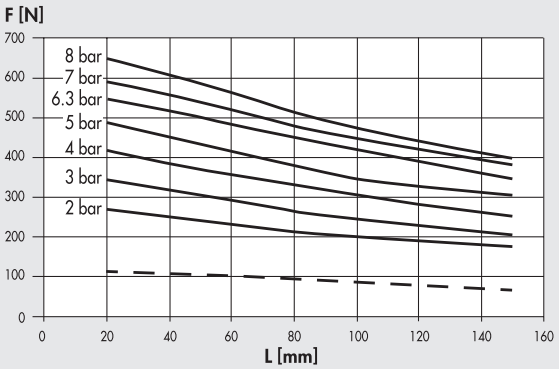

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

— — — Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1560800200	Gripper with 2 parallel jaw P3-80
W1560800201	Gripper with 2 parallel jaw P3-80 for inductive sensors
W1560800220	Gripper with 2 parallel jaw P3-80 increased force
W1560800221	Gripper with 2 parallel jaw P3-80 increased force for inductive sensors
W1560802200	Gripper with 2 parallel jaw P3-80 NO
W1560802201	Gripper with 2 parallel jaw P3-80 NO for inductive sensors
W1560802220	Gripper with 2 parallel jaw P3-80 NO increased force
W1560802221	Gripper with 2 parallel jaw P3-80 NO increased force for inductive sensors
W1560803200	Gripper with 2 parallel jaw P3-80 NC
W1560803201	Gripper with 2 parallel jaw P3-80 NC for inductive sensors
W1560803220	Gripper with 2 parallel jaw P3-80 NC increased force
W1560803221	Gripper with 2 parallel jaw P3-80 NC increased force for inductive sensors

GRIPPER P3-100

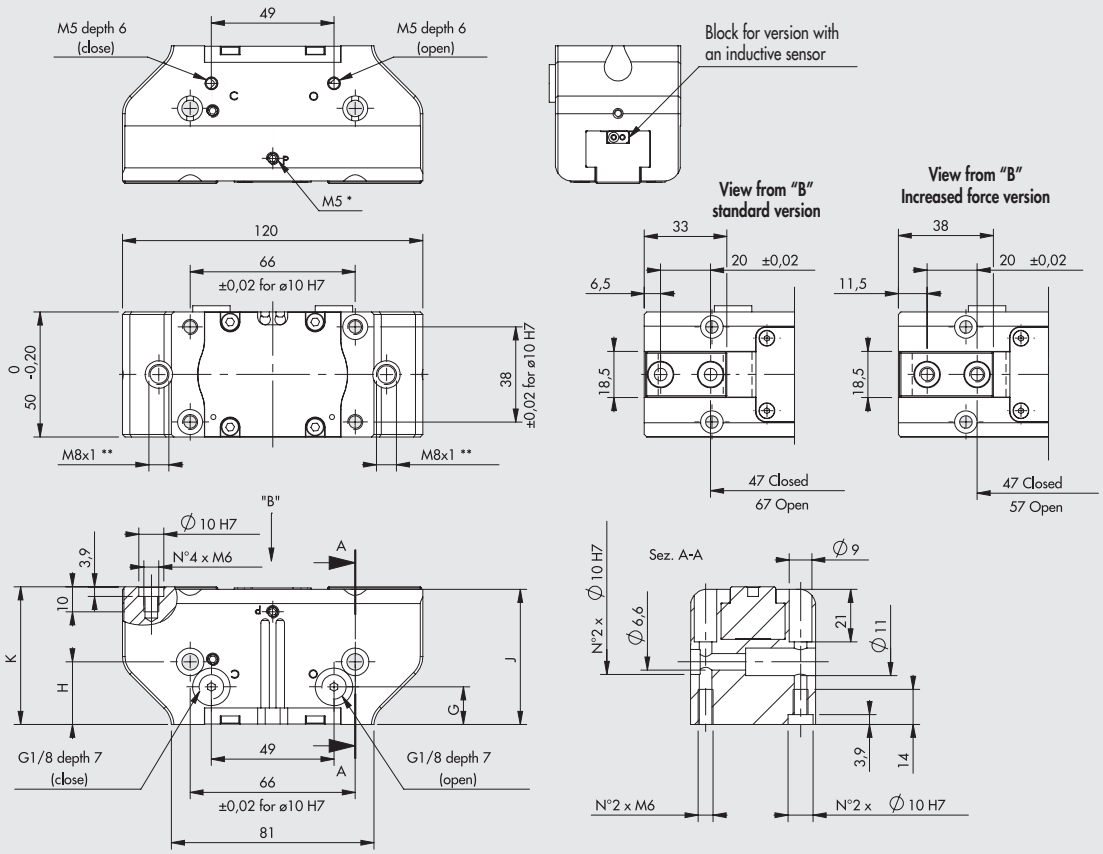

* Discharge pressurization connection, present on both sides
** Inductive sensor slot

	K	J	H ±0.02	G
DA	55	54	25	15
NO /NC	81	80	51	41



Fa	2000 N
Mx	115 Nm
My	70 Nm
Mz	80 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P3-100 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

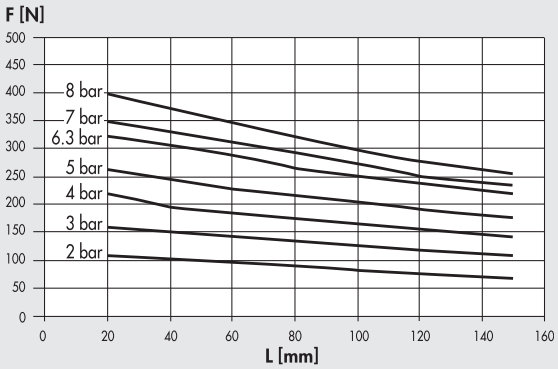

Internal grip*** (opening jaws)

Version DA

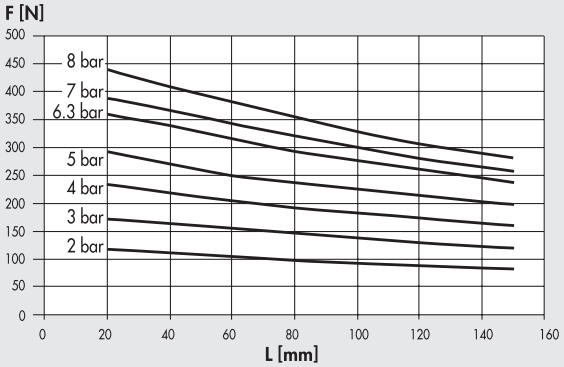

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

P3-100 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

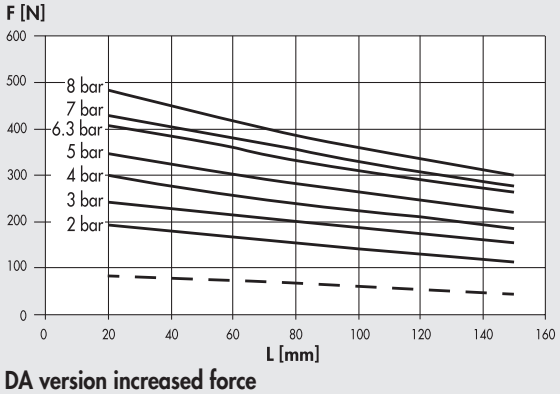

DA version increased force

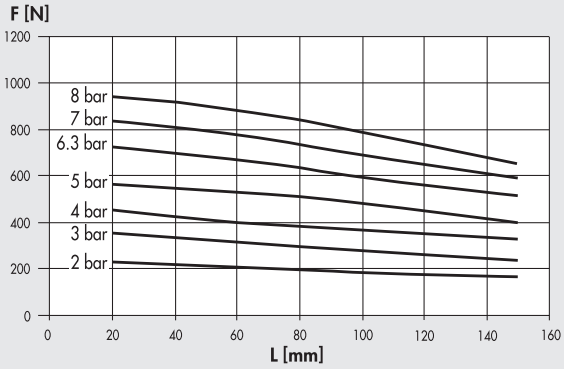

NC version increased force

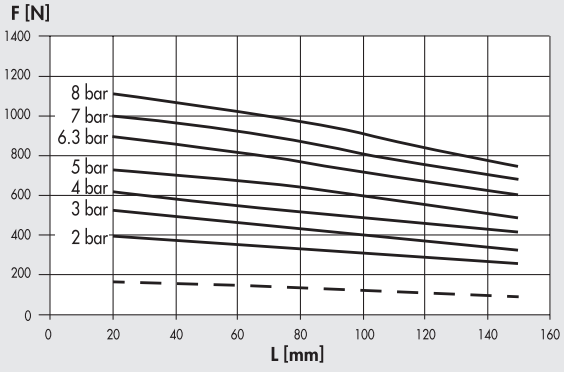

Internal grip*** (opening jaws)

Version NO

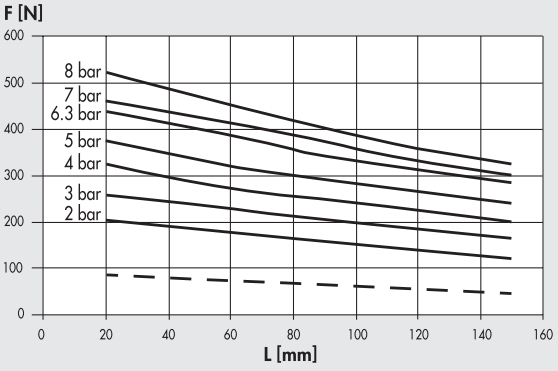

DA version increased force

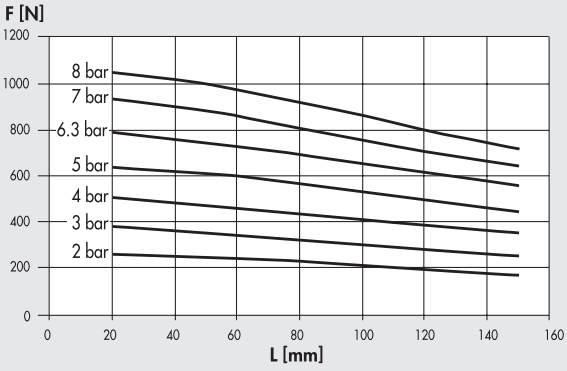

NO version increased force

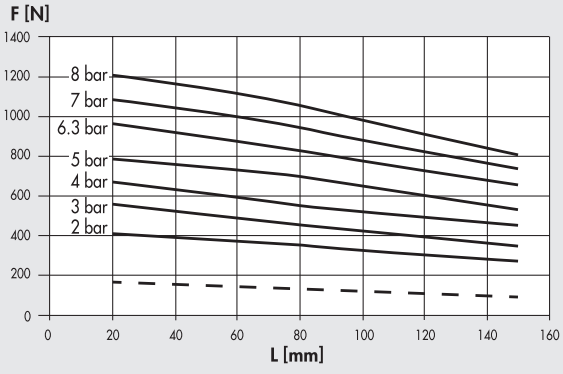

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

— — — Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1561000200	Gripper with 2 parallel jaws P3-100
W1561000201	Gripper with 2 parallel jaws P3-100 for inductive sensors
W1561000220	Gripper with 2 parallel jaws P3-100 increased force
W1561000221	Gripper with 2 parallel jaws P3-100 increased force for inductive sensors
W1561002200	Gripper with 2 parallel jaws P3-100 NO
W1561002201	Gripper with 2 parallel jaws P3-100 NO for inductive sensors
W1561002220	Gripper with 2 parallel jaws P3-100 NO increased force
W1561002221	Gripper with 2 parallel jaws P3-100 NO increased force for inductive sensors
W1561003200	Gripper with 2 parallel jaws P3-100 NC
W1561003201	Gripper with 2 parallel jaws P3-100 NC for inductive sensors
W1561003220	Gripper with 2 parallel jaws P3-100 NC increased force
W1561003221	Gripper with 2 parallel jaws P3-100 NC increased force for inductive sensors

ACCESSORIES

SENSOR Ø 4



For codes and technical data, see **chapter A6**.

Note: For the NO and NC versions, use only the Hall effect sensor.

SENSOR MOUNTING IN THE NO AND NC GRIPPERS SLOTS

To accommodate the sensor, a recess must be made in the base on which the gripper will be fixed.

P3-40



P3-64

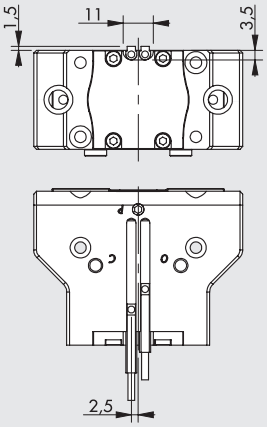

P3-80

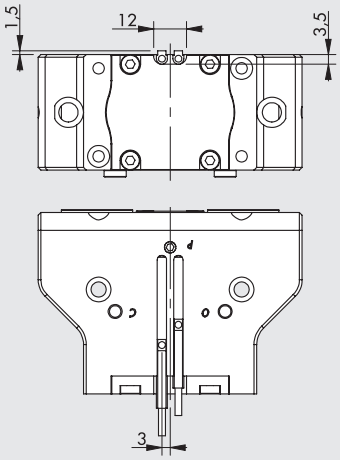

P3-100

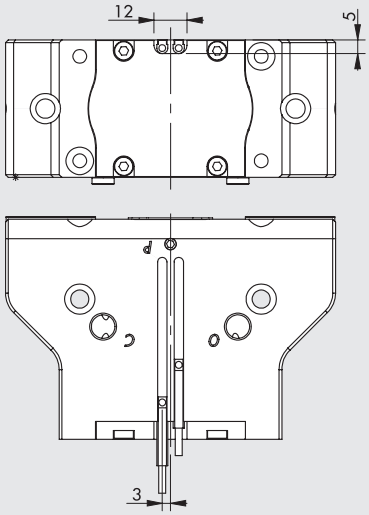

CENTRING RING



Code	ØA	ØB f7	C
W1560409201	$3^{0}_{-0.1}$	4	$4^{0}_{-0.1}$
W1560649201	$4.5^{0}_{-0.1}$	6	$5^{0}_{-0.1}$
W1560809201	$5.1^{0}_{-0.1}$	8	$5^{0}_{-0.05}$
W1561009201	$6.2^{\pm 0.1}$	10	$6.9^{0}_{-0.1}$

Note: 2-pieces pack

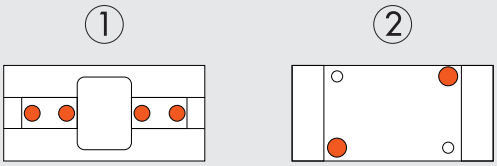

QUANTITY OF KITS NEEDED

Sizer gripper	① - USE WITH JAWS	② - BODY USE
40	**2** code W1560409201	-
64	**2** code W1560649201	**2** code W1560809201
80	**2** code W1560809201	**2** code W1560809201
100	**2** code W1561009201	**2** code W1561009201

NOTES

GRIPPER WITH TWO PARALLEL LONG-STROKE JAWS, SERIES P4

These are grippers with 2 parallel long-stroke jaws. The mechanical design makes them suitable for clamping bulky parts. All grippers, except for the smallest ones, can mount a retracting magnetic proximity sensor.

TECHNICAL DATA		P4-10	P4-12	P4-16	P4-25	P4-30
Operating pressure	bar	3 to 7				
	MPa	0.3 to 0.7				
	psi	43 to 101				
Operating temperature	°C	-10 to 80				
Maximum operating frequency	cicli/s	1				
Fluid		20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous				
Bore	mm	2 x 10	2 x 12	2 x 16	2 x 25	2 x 30
Single jaw stroke	mm	5	10	15	30	60
Clamping force at 6.3 bar 20 mm from the top surface during opening and closing	N	30	45	75	280	280
Weight	kg	0.18	0.3	0.5	2.95	3.7

COMPONENTS

① BODY: anodized aluminium
② JAWS anodized aluminium
③ GUIDE BUSHING: steel strip with bronze insert
④ PISTON ROD: nitrided steel
⑤ DRIVE ROD: steel
⑥ PISTON GASKET: NBR
⑦ BUFFER: polyurethane
⑧ GASKET: NBR
⑨ PISTON ROD GASKET: polyurethane
⑩ END CAP: bronze
⑪ MAGNET: plastoneodymium

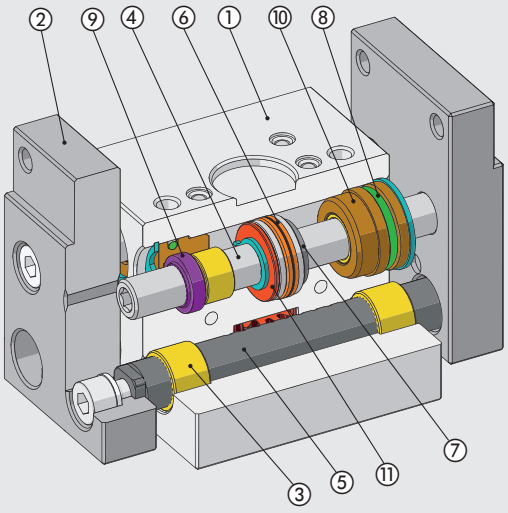

TABLE OF CLAMPING FORCES FOR VARIOUS POINTS OF APPLICATION



DIMENSIONS OF GRIPPER P4-10

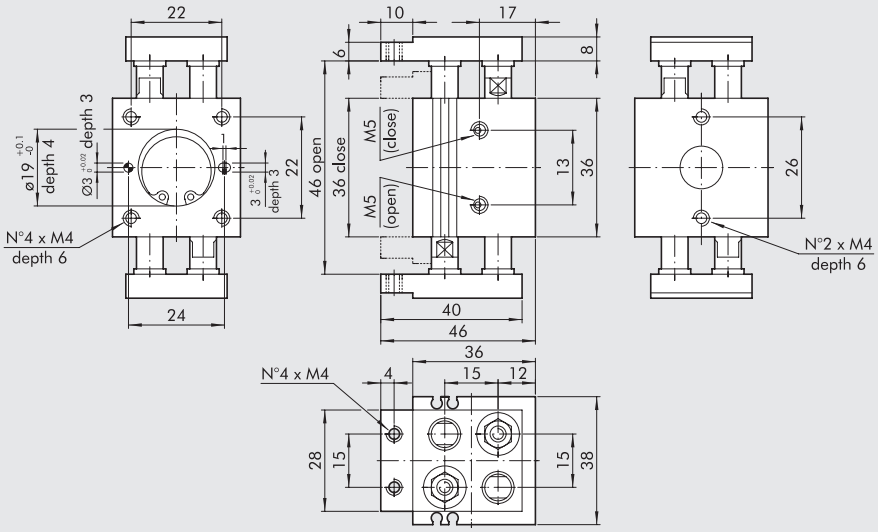

Code	Description
W1580100200	Gripper with 2 parallel long-stroke jaws P4-10

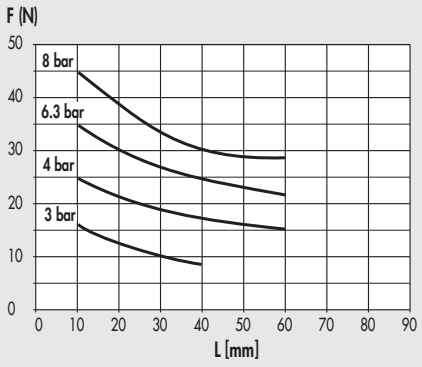

DIMENSIONS OF GRIPPER P4-12

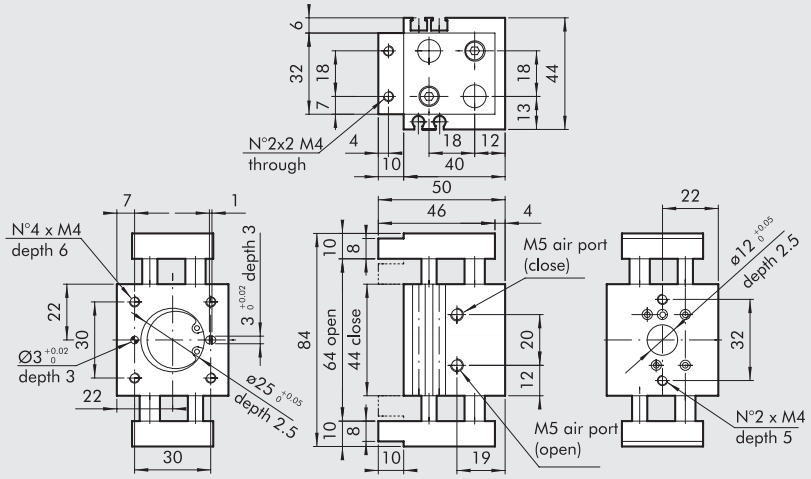

Code	Description
W1580120200	Gripper with 2 parallel long-stroke jaws P4-12

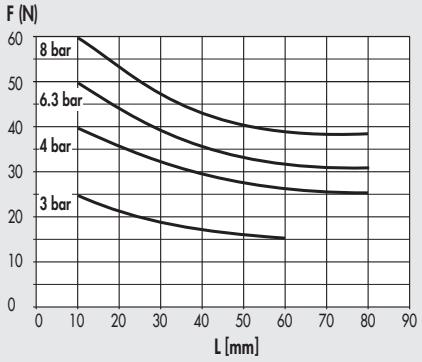

DIMENSIONS OF GRIPPER P4-16

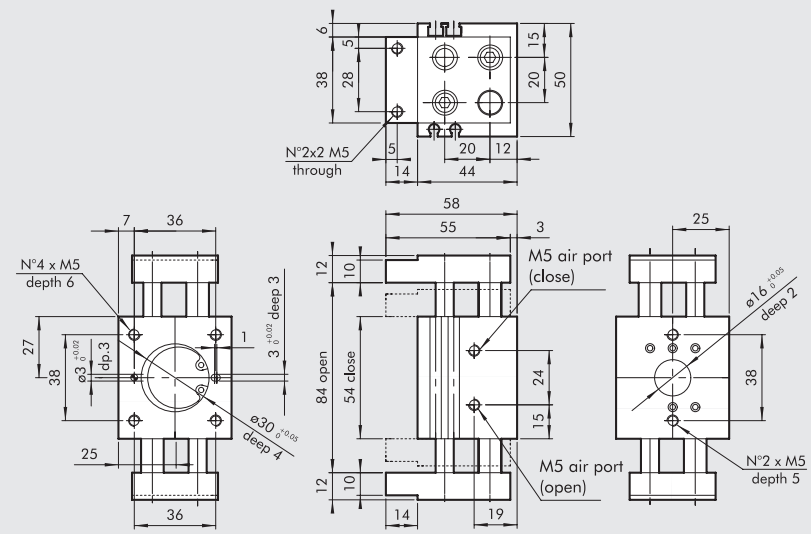

Code	Description
W1580160200	Gripper with 2 parallel long-stroke jaws P4-16

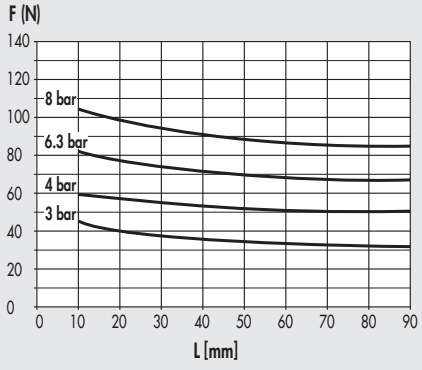

DIMENSIONS OF GRIPPER P4-25

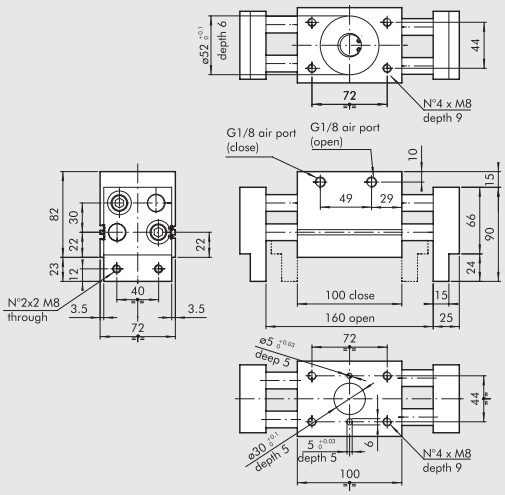

Code	Description
W1580250200	Gripper with 2 parallel long-stroke jaws P4-25

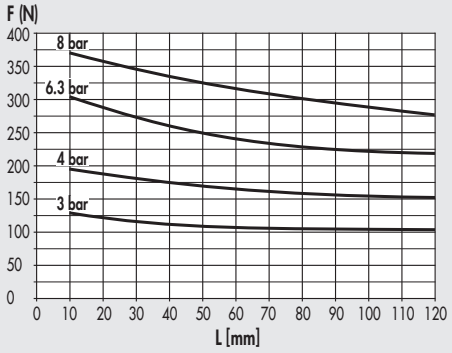

DIMENSIONS OF GRIPPER P4-30

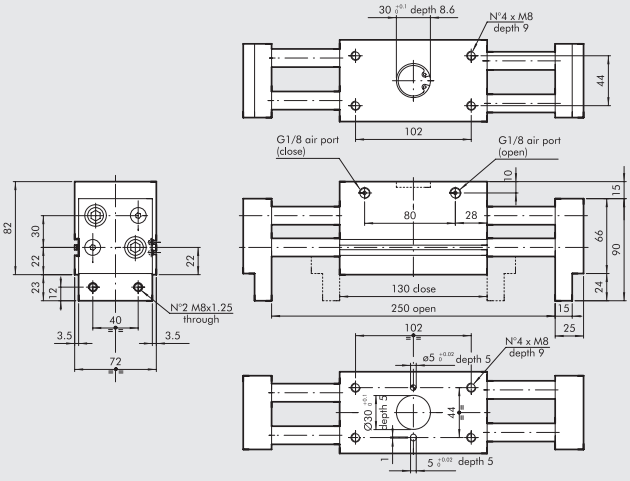

Code	Description
W1580300200	Gripper with 2 parallel long-stroke jaws P4-30

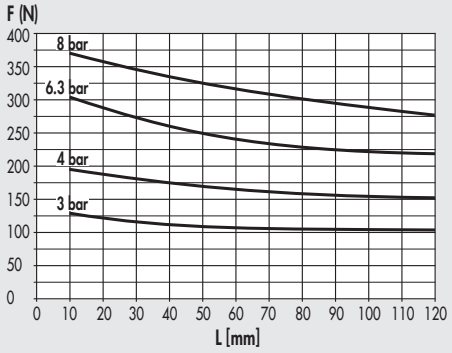

ACCESSORIES

SENSOR Ø 4 FOR P4 10-30



For codes and technical data, see **chapter A6**.

RETRACTABLE SENSOR FOR P4-12-30

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

GRIPPER WITH TWO HINGED JAWS – SERIES P7

Bores 16, 20, 32 and 50 mm.
All grippers are magnetic with slots in the body with retracting sensors.

TECHNICAL DATA		P7-16	P7-20	P7-32	P7-50
Operating pressure	bar	2 to 10			
	MPa	0.2 to 1			
	psi	29 to 145			
Temperature range	°C	-10 to 80			
Fluid		20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous			
Maximum opening angle of single jaw		15° 30′	16° 30′	16°	8° 30′
Clamping force at 6.3 bar 20 mm from the centre of rotation of the jaws, during opening and closing	N	27	50	120	380
Weight	kg	0.12	0.19	0.5	1.6

COMPONENTS

① BODY: anodized aluminium
② JAWS: nitrided steel
③ PISTON ROD: nitrided steel
④ PISTON: aluminium
⑤ PISTON GASKET: NBR
⑥ GUIDE RING: PTFE (only for Ø 32 and 50)
⑧ MAGNET: plastoferrite
⑧ GASKET: polyurethane
⑨ GASKET: NBR
⑩ REAR BASE: anodized aluminium

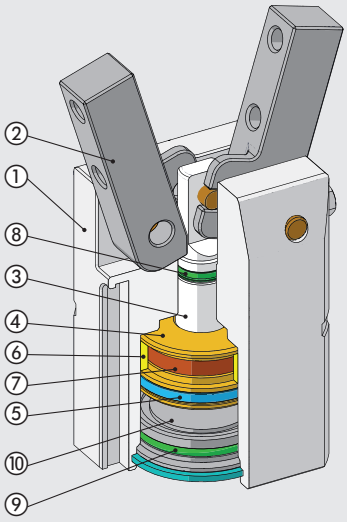

TABLE OF CLAMPING FORCES FOR VARIOUS POINTS OF APPLICATION



DIMENSIONS OF GRIPPER P7-16

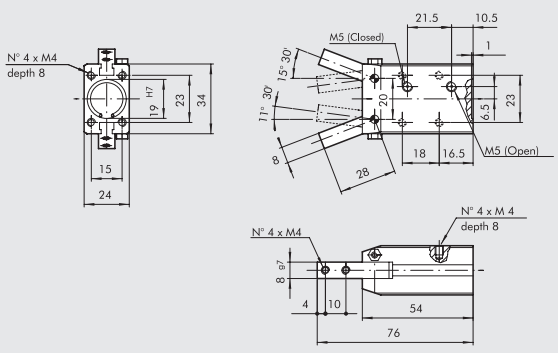

Code	Description
W1590160200	Gripper with 2 hinged jaws P7-16



METAL WORK PNEUMATIC

DIMENSIONS OF GRIPPER P7-20

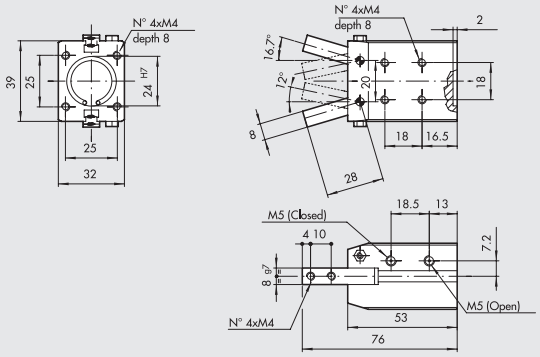

Code	Description
W1590200200	Gripper with 2 hinged jaws P7-20



DIMENSIONS OF GRIPPER P7-32

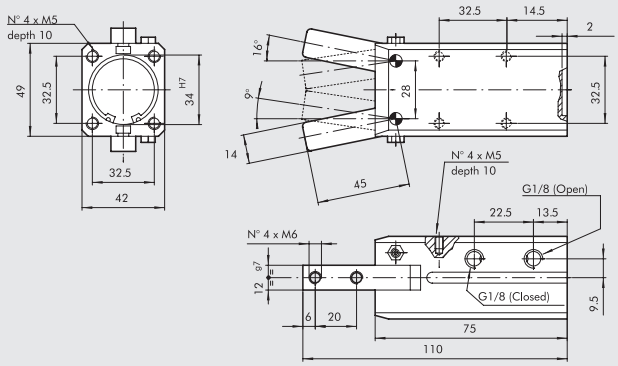

Code	Description
W1590320200	Gripper with 2 hinged jaws P7-32



DIMENSIONS OF GRIPPER P7-50

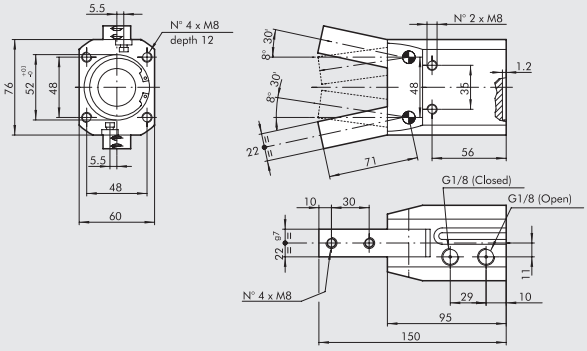

Code	Description
W1590500200	Gripper with 2 hinged jaws P7-50

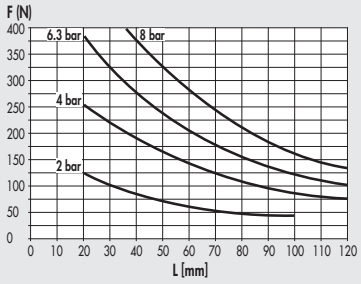

ACCESSORIES

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see chapter A6.

TECHNOPOLYMER HINGED GRIPPER SERIES P8

Single-acting hinged grippers, normally open, made entirely of technopolymer. Three sizes with clamping force 25-80 N at 6 bar. This solution makes the entire system lighter.
This gripper is corrosion-resistant and antimagnetic. It comes complete with spring-loaded bracket for pre-loading the piece (force 1.5-6 N) and sensor holders.

TECHNICAL DATA		P8-32	P8-40	P8-50
Operating pressure	bar		4 to 7	
	MPa		0.4 to 0.7	
	bar		58 to 101	
Operating temperature	°C		-10 to +60	
Fluid			20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous	
Life			Over 2 million cycles	
Jaw opening angle			8°	
Clamping force per jaw at 6 bar	N	22.5	48	80
Applicable weight (recommended)	kg	0.2	0.4	0.8
Air consumption per cycle	cm^3	0.5	1	1.8
Opening time	sec	0.04	0.05	0.05
Closing time	sec	0.06	0.08	0.08
Weight of grippers	g	36	45	60
Moment of inertia	kg cm^2	0.04	0.12	0.15
Repeatability	mm	0.1	0.1	0.1

TABLE OF MOMENTS

Gripper	FA (N)	Mx (Ncm)	My (Ncm)	Mz (Ncm)	P (N)
P8 - 32	3	9	10	10	22.5
P8 - 40	5	23	20	20	47.5
P8 - 50	8	49	30	40	80

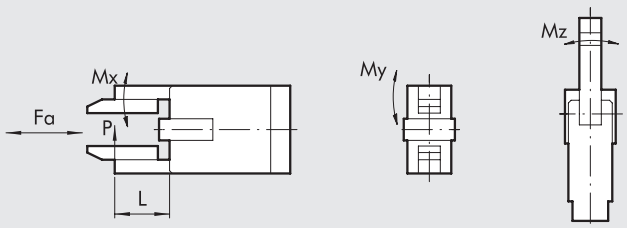

DIMENSIONS OF GRIPPER P8-32

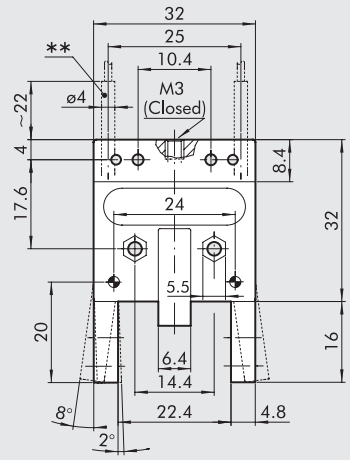

* Removable part clamping system
** Induction sensor

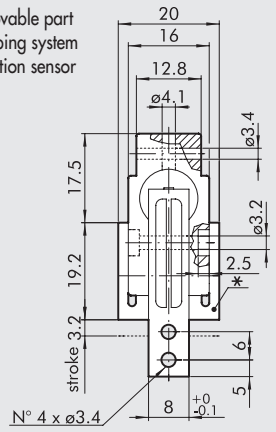

Code	Description
W0710010002	Tecnopolimer hinged grippers P8-32



DIMENSIONS OF GRIPPER P8-40

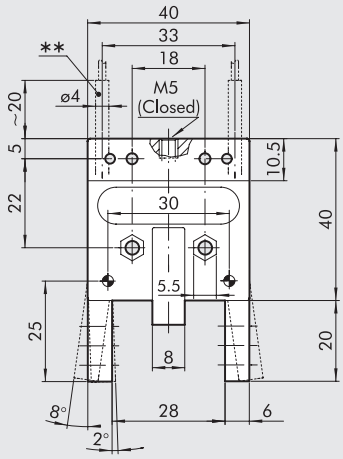

* Removable part clamping system
** Induction sensor

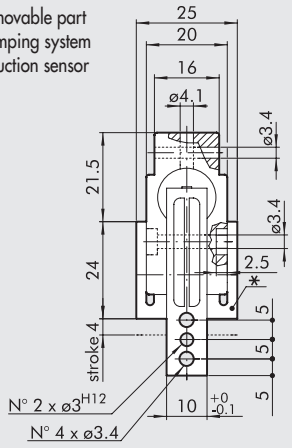

Code	Description
W0710010003	Tecnopolimer hinged grippers P8-40



DIMENSIONS OF GRIPPER P8-50

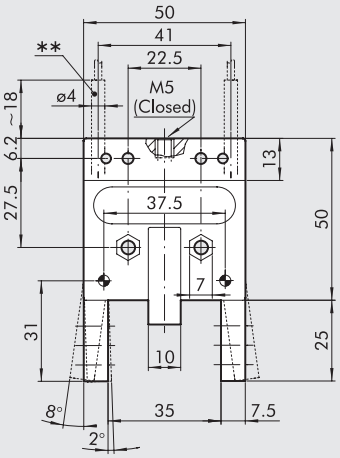

* Removable part clamping system
** Induction sensor

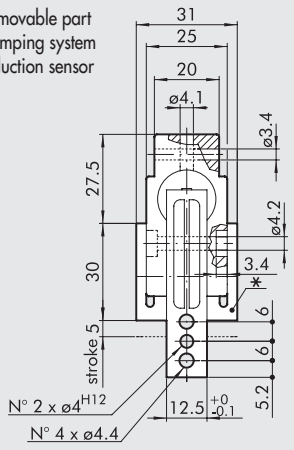

Code	Description
W0710010004	Tecnopolimer hinged grippers P8-50



ACCESSORIES

INDUCTION SENSOR



Code	Description
W0950037391	Induction sensor Ø 4 mm PNP-NO-2 m

GRIPPER 180° WITH TWO HINGED JAWS - SERIES P9

- Toggle-type pivoted grippers, with adjustable opening angle.
- High clamping forces.
- Body made of hard anodized aluminium, jaws and moving parts made of tempered steel.
- Bottom or side fixing.
- All sizes come with magnets and sensor slots.

TECHNICAL DATA		P9-32	P9-40
Operating pressure	bar	2 to 8	
	MPa	0.2 to 0.8	
	psi	29 to 116	
Temperature range	°C	-10 to 80	
Fluid		20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous	
Bores	mm	32	40
Jaw opening angle		180° con possibilità di regolazione	
Clamping force at 6.3 bar 40 mm from the jaw pivot	N	160	260
during opening and closing			
Weight	kg	0.85	1.5

COMPONENTS

① BODY: anodized aluminium
② JAWS: nitrided steel
③ LEVERAGE SYSTEM: nitrided steel
④ PISTON ROD: stainless steel
⑤ PISTON: aluminium
⑥ PISTON GASKET: NBR
⑦ GUIDE RING: PTFE
⑧ MAGNET: plastoferrite
⑨ GASKET: NBR
⑩ GUIDE BUSHING: bronze
⑪ GASKET: NBR
⑫ REAR BASE: anodized aluminium
⑬ PISTON ROD GASKET: polyurethane

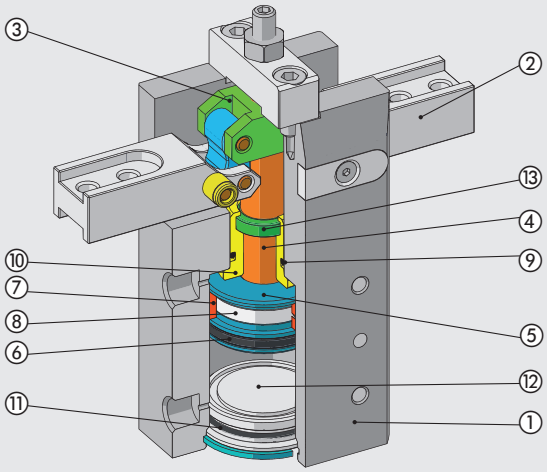

TABLE OF CLAMPING FORCES FOR VARIOUS POINTS OF APPLICATION



METAL WORK PNEUMATIC

DIMENSIONS OF GRIPPER P9-32

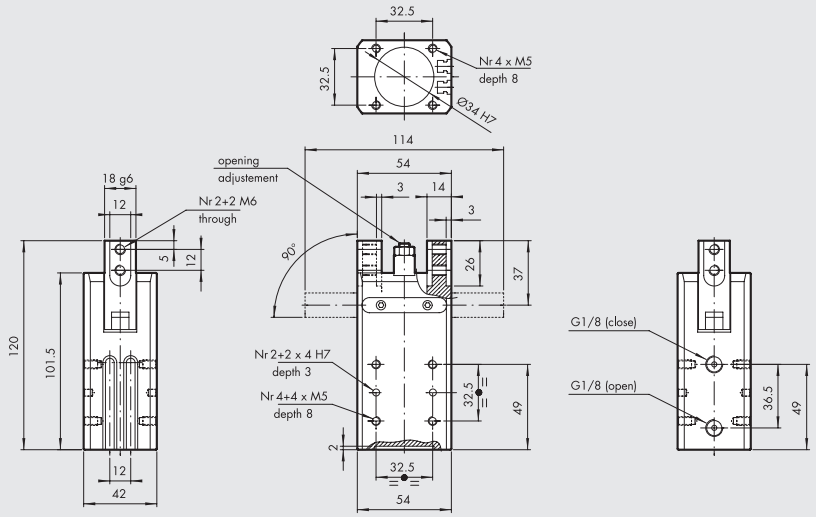

Code	Description
W1530320180	Hinged gripper P9-32

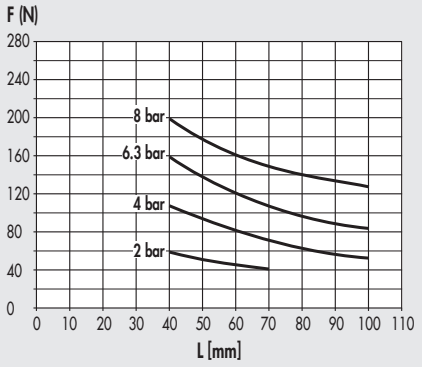

DIMENSIONS OF GRIPPER P9-40

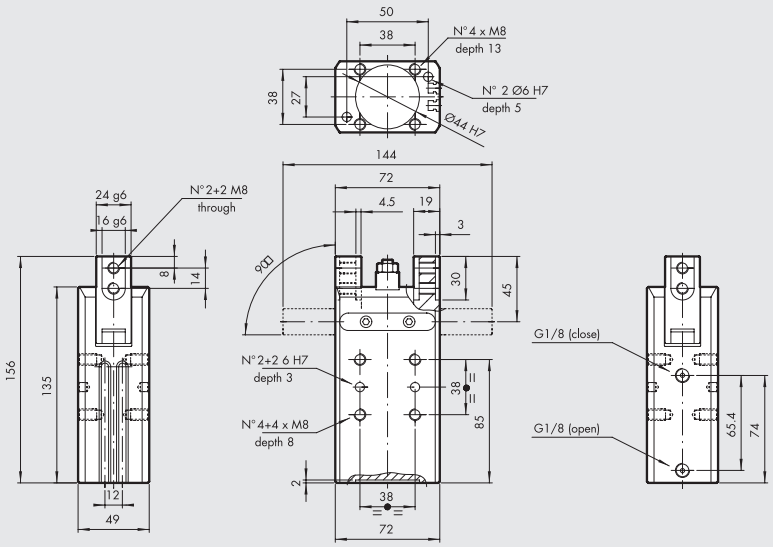

Code	Description
W1530400180	Hinged gripper P9-40

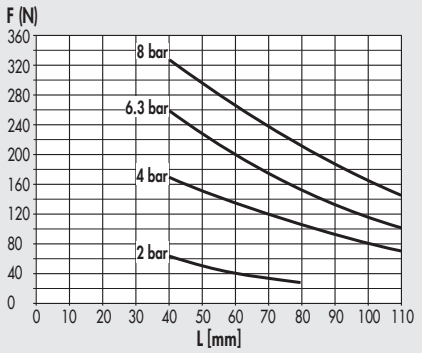

ACCESSORIES

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

GRIPPER WITH THREE PARALLEL JAWS, SERIES P12

Parallel double-acting three-jaw gripper, with either internal or external clamping.
Also available in the double-acting with spring version, normally open (NO) for internal grip and normally closed (NC) for external grip.
Aluminum alloy body coated with surface hardening treatment; jaws made of wear-resistant coated steel.
The jaw-guiding system and precision in coupling with the body make the gripper extremely stable.
The ceramic-coated body reduces friction and wear, and enhances the movement of the jaws on the body.
All sizes are available in the version with standard stroke and clamping force, while only some in the version with reduced stroke but with higher clamping torque.
The gripper is equipped with a magnet and grooves for sensors.
A version designed to house inductive sensors is also available (**the inductive sensors are not supplied by Metal Work**).

TECHNICAL DATA			P12-40			P12-64			P12-80						P12-100					
									Standard			Increased force			Standard			Increased force		
			DA	NO	NC	DA	NO	NC	DA	NO	NC	DA	NO	NC	DA	NO	NC	DA	NO	NC
Minimum operating pressure		bar	2			2			2						2					
		MPa	0.2			0.2			0.2						0.2					
		psi	29			29			29						29					
Maximum operating pressure		bar	8			8			8						8					
		MPa	0.8			0.8			0.8						0.8					
		psi	116			116			116						116					
Temperature range		°C	-10 to 80			-10 to 80			-10 to 80						-10 to 80					
Fluid			20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous																	
Gripping force at 6.3 bar *	opening	N	130	151	-	310	353	-	435	518	-	860	1026	-	840	999	-	1450	1767	-
	closing	N	117	-	138	279	-	322	392	-	475	774	-	940	756	-	915	1305	-	1622
Minimum gripping force produced by the spring *		N	-	21	21	-	43	43	-	83	83	-	166	166	-	159	159	-	317	317
Recommended workpiece weight		kg	1.3			2.9			4.5			9			9			20		
Stroke of each jaw		mm	2.5			6			8			4			10			5		
Minimum time	opening	s	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1
	closing	s	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05
Repeatability		mm	0.01			0.01			0.01						0.01					
Moment of inertia as regards the piston axis		kg cm²	0.33	0.38	0.38	1.57	2.96	2.96	6.5	8.64	8.64	6.5	8.64	8.64	19	26.13	26.13	19	26.13	26.13
Weight		kg	0.12	0.14	0.14	0.28	0.49	0.49	0.75	0.86	0.86	0.75	0.86	0.86	1.4	1.66	1.66	1.4	1.66	1.66

DA: Double-acting; NO: Double acting with spring, normally open; NC: Double acting with spring, normally closed.
* Referred to a single jaw 20 mm from the upper surface. The total force is obtained by multiplying the reported value by 3.

COMPONENTS

① BODY: hard-anodized aluminium
② JAWS: nitrided steel
③ PISTON ROD + GUIDE: nitrided steel
④ PISTON: hard-anodized aluminium
⑤ PISTON GASKET: NBR
⑥ PISTON ROD GASKET: NBR / polyurethane
⑦ BASE GASKET: reinforced SBR / NBR
⑧ MAGNET: neodymium

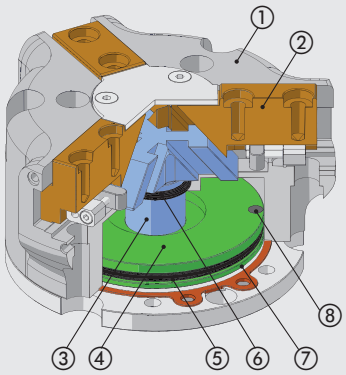

METAL WORK PNEUMATIC

GRIPPER P12-40

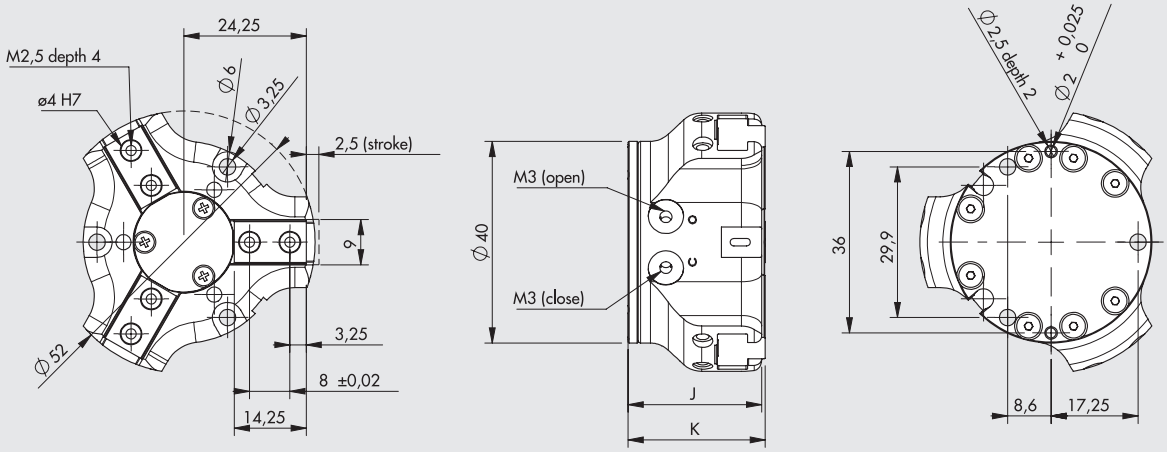

	K	J
DA	27.2	26.5
NO /NC	35.2	34.5



Fa	250 N
Mx	12 Nm
My	5 Nm
Mz	10 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P12-40 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

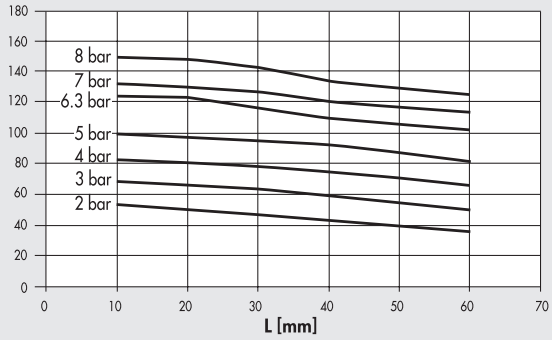

Internal grip*** (opening jaws)

Version DA

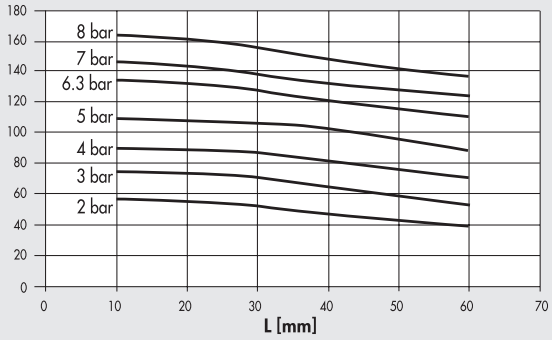

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

P12-40 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

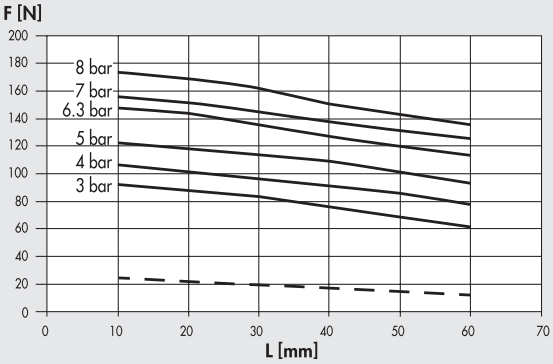

Internal grip*** (opening jaws)

Version NO

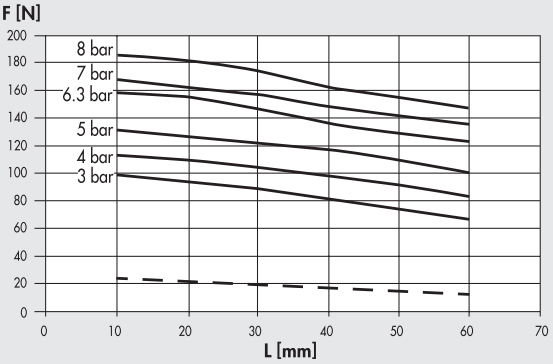

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

– – – Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1560400300	Gripper with 3 parallel jaws P12-40
W1560402300	Gripper with 3 parallel jaws P12-40 NO
W1560403300	Gripper with 3 parallel jaws P12-40 NC

METAL WORK PNEUMATIC

GRIPPER P12-64

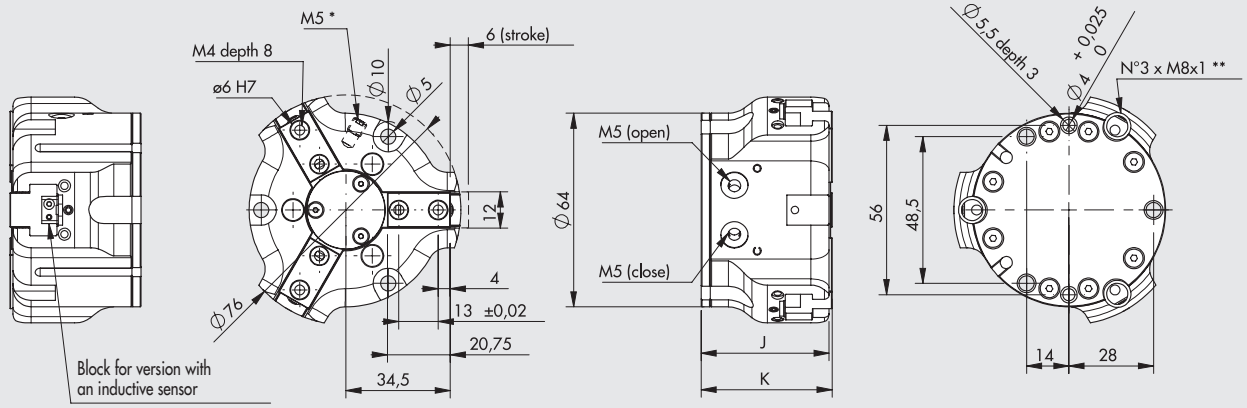

* Discharge pressurization connection
** Inductive sensor slot

	K	J
DA	42.3	43.3
NO /NC	55.8	56.8



Fa	1100 N
Mx	60 Nm
My	40 Nm
Mz	40 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P12-64 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

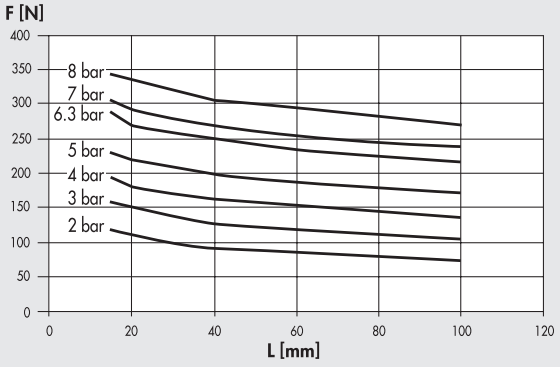

Internal grip*** (opening jaws)

Version DA

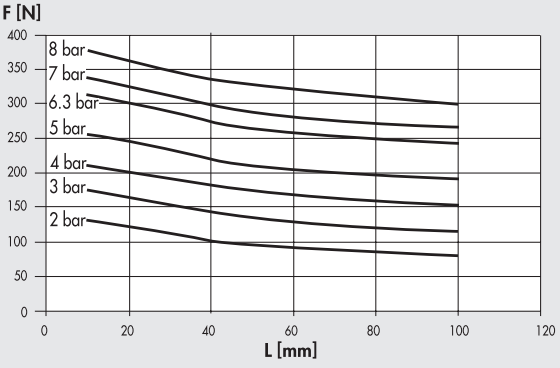

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

P12-64 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

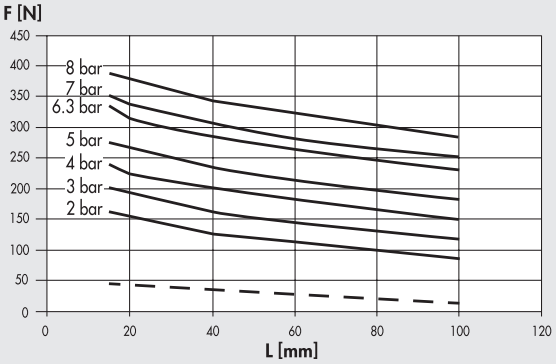

Internal grip*** (opening jaws)

Version NO

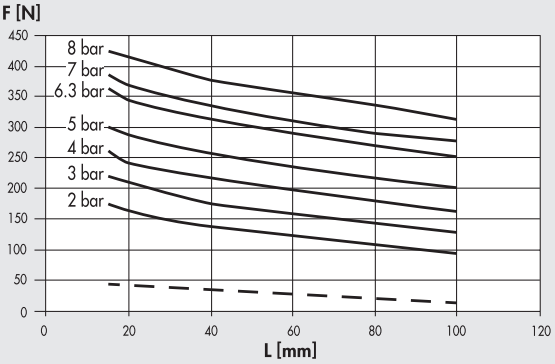

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

– – – Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1560640300	Gripper with 3 parallel jaws P12-64
W1560640301	Gripper with 3 parallel jaws P12-64 for inductive sensors
W1560642300	Gripper with 3 parallel jaws P12-64 NO
W1560642301	Gripper with 3 parallel jaws P12-64 NO for inductive sensors
W1560643300	Gripper with 3 parallel jaws P12-64 NC
W1560643301	Gripper with 3 parallel jaws P12-64 NC for inductive sensors

METAL WORK PNEUMATIC

GRIPPER P12-80

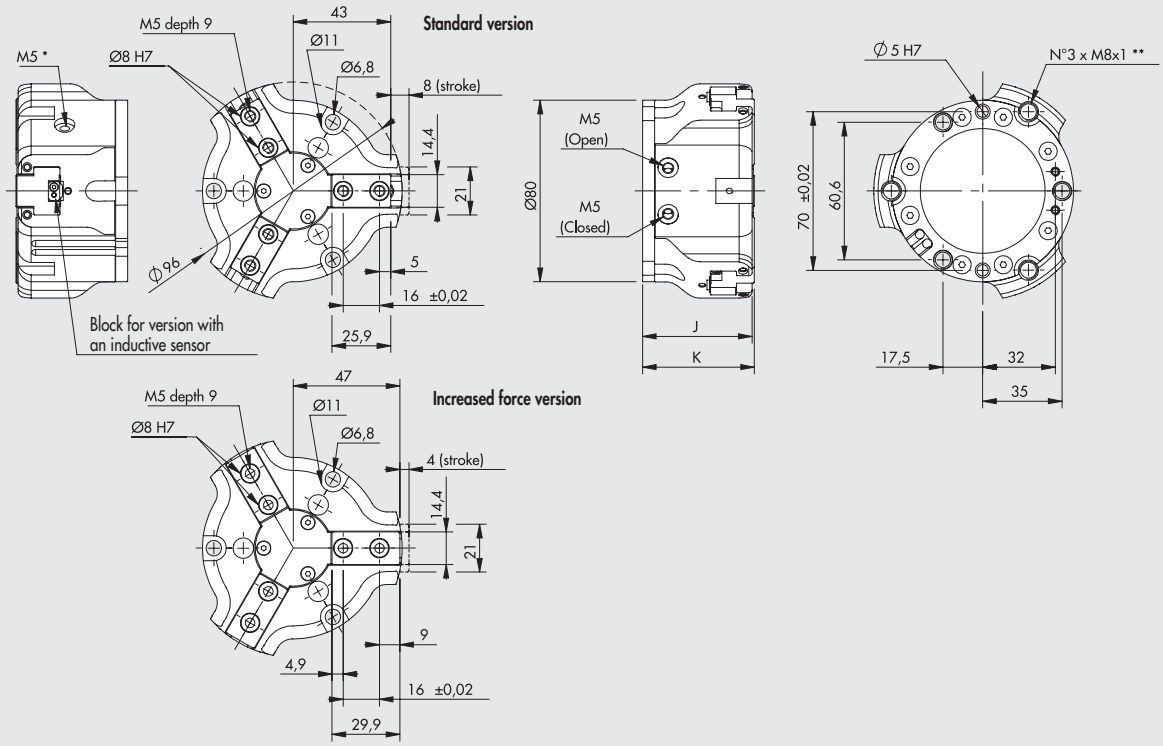

* Discharge pressurization connection
** Inductive sensor slot

	K	J
DA	49.3	48.3
NO /NC	67	66



Fa	1500 N
Mx	90 Nm
My	55 Nm
Mz	55 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P12-80 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

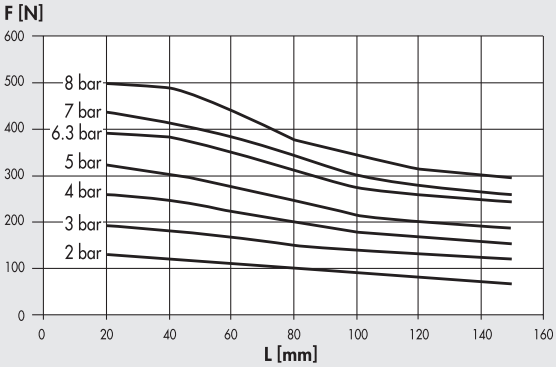

Internal grip*** (opening jaws)

Version DA

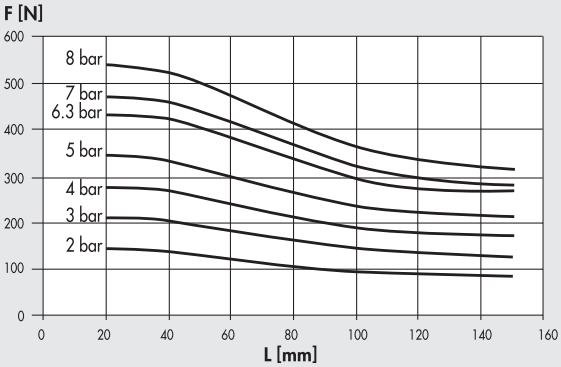

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

P12-80 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

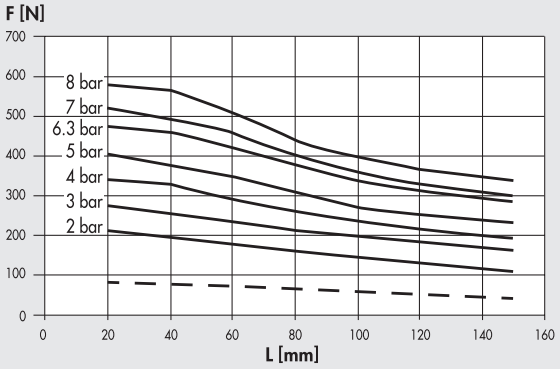

DA version increased force

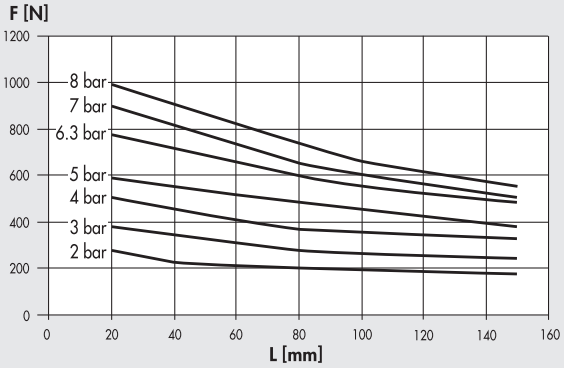

NC version increased force

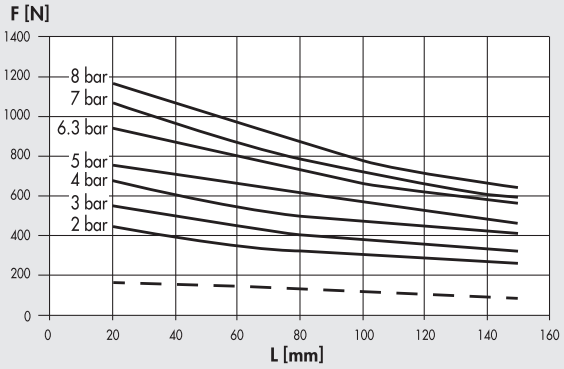

Internal grip*** (opening jaws)

Version NO

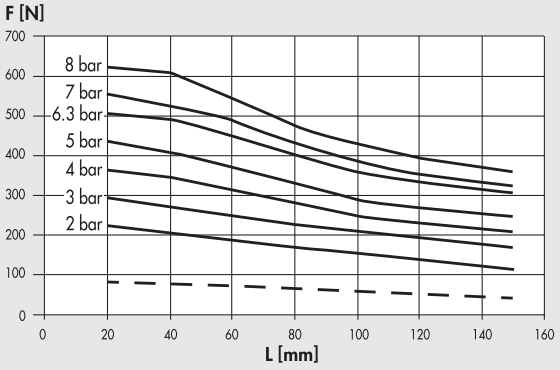

DA version increased force

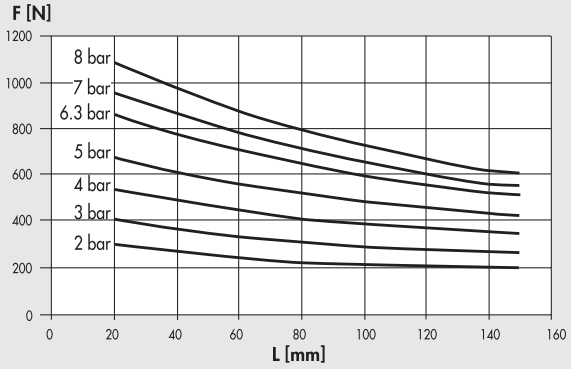

NO version increased force

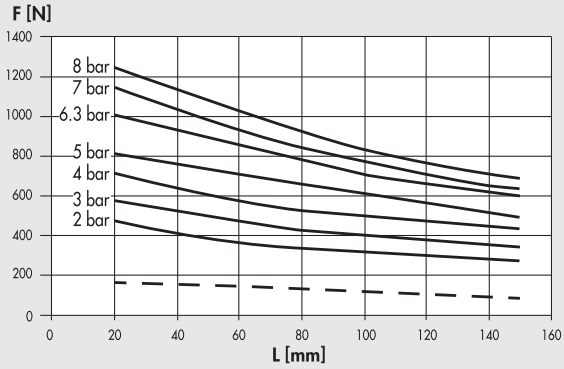

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

— — — Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1560800300	Gripper with 3 parallel jaws P12-80
W1560800301	Gripper with 3 parallel jaws P12-80 for inductive sensors
W1560800320	Gripper with 3 parallel jaws P12-80 increased force
W1560800321	Gripper with 3 parallel jaws P12-80 increased force for inductive sensors
W1560802300	Gripper with 3 parallel jaws P12-80 NO
W1560802301	Gripper with 3 parallel jaws P12-80 NO for inductive sensors
W1560802320	Gripper with 3 parallel jaws P12-80 NO increased force
W1560802321	Gripper with 3 parallel jaws P12-80 NO increased force for inductive sensors
W1560803300	Gripper with 3 parallel jaws P12-80 NC
W1560803301	Gripper with 3 parallel jaws P12-80 NC for inductive sensors
W1560803320	Gripper with 3 parallel jaws P12-80 NC increased force
W1560803321	Gripper with 3 parallel jaws P12-80 NC increased force for inductive sensors

METAL WORK PNEUMATIC

GRIPPER P12-100

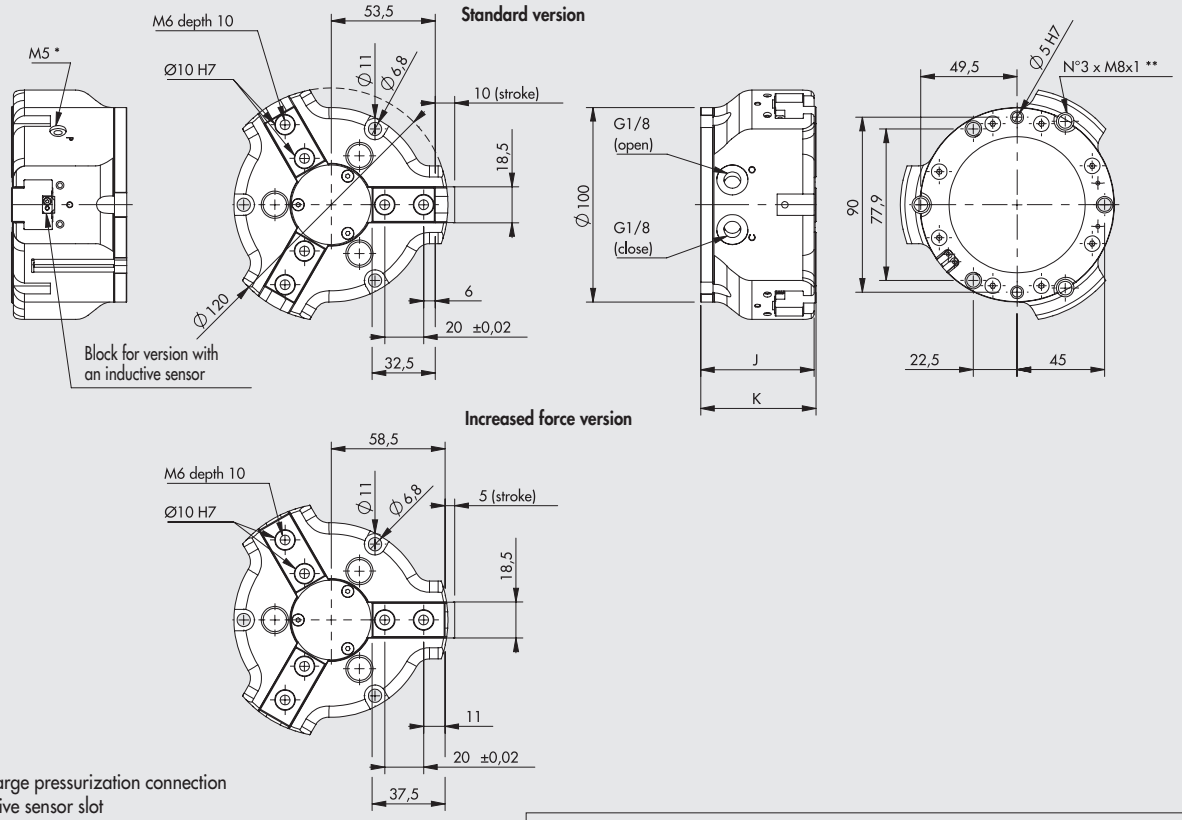

* Discharge pressurization connection
** Inductive sensor slot

	K	J
DA	59.3	58.3
NO /NC	79.3	78.3



Fa	2000 N
Mx	115 Nm
My	70 Nm
Mz	80 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P12-100 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

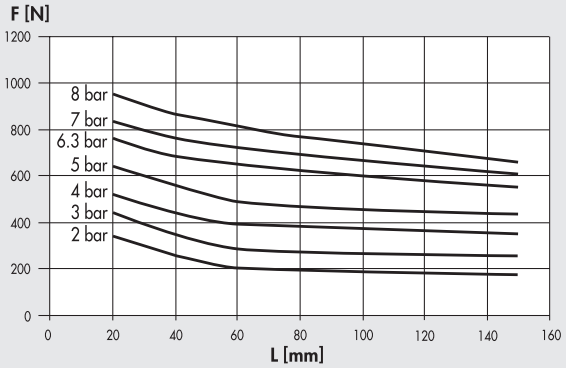

Internal grip*** (opening jaws)

Version DA

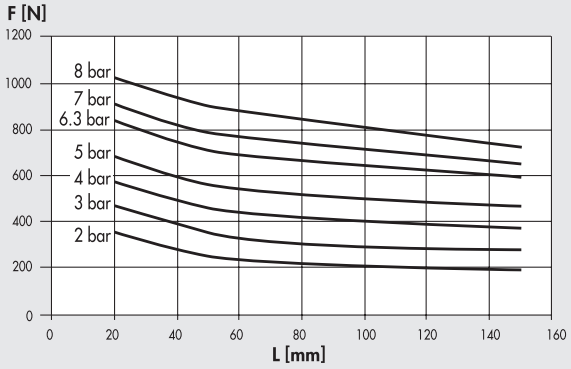

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

P12-100 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

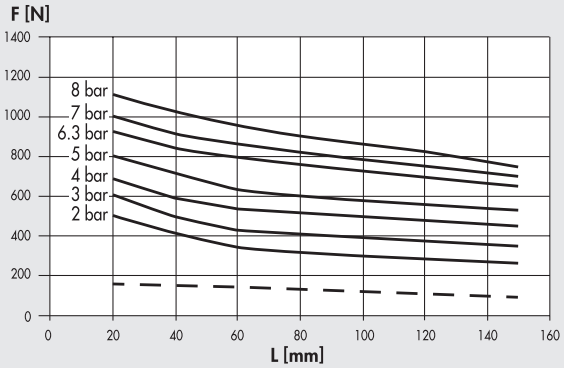

DA version increased force

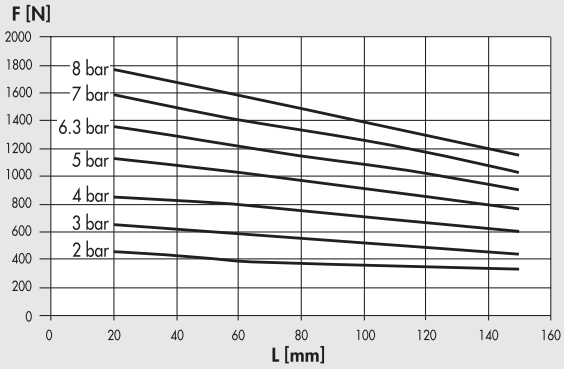

NC version increased force

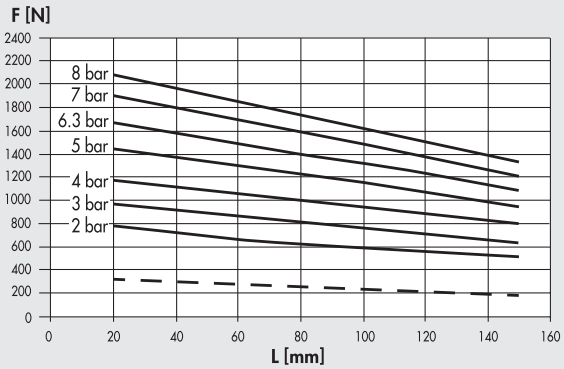

Internal grip*** (opening jaws)

Version NO

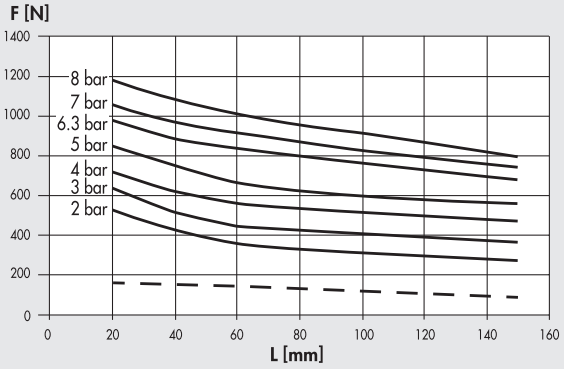

DA version increased force

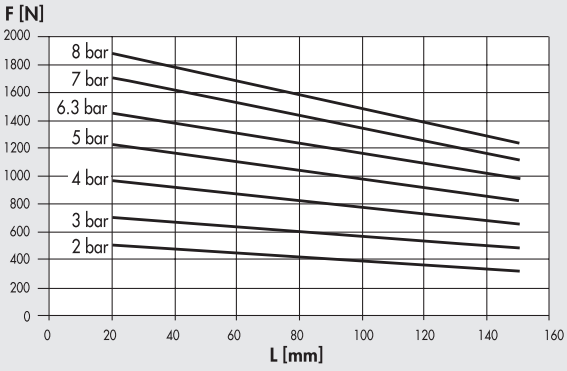

NO version increased force

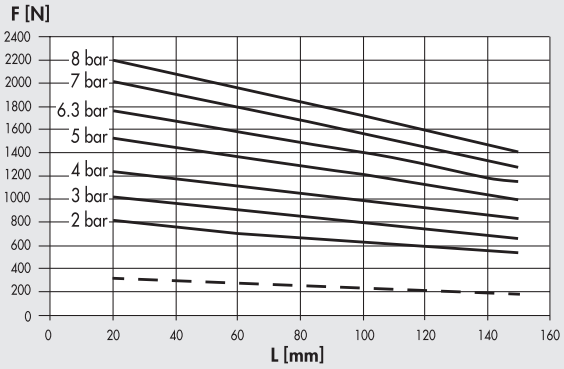

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

— — — Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1561000300	Gripper with 3 parallel jaws P12-100
W1561000301	Gripper with 3 parallel jaws P12-100 for inductive sensors
W1561000320	Gripper with 3 parallel jaws P12-100 increased force
W1561000321	Gripper with 3 parallel jaws P12-100 increased force for inductive sensors
W1561002300	Gripper with 3 parallel jaws P12-100 NO
W1561002301	Gripper with 3 parallel jaws P12-100 NO for inductive sensors
W1561002320	Gripper with 3 parallel jaws P12-100 NO increased force
W1561002321	Gripper with 3 parallel jaws P12-100 NO increased force for inductive sensors
W1561003300	Gripper with 3 parallel jaws P12-100 NC
W1561003301	Gripper with 3 parallel jaws P12-100 NC for inductive sensors
W1561003320	Gripper with 3 parallel jaws P12-100 NC increased force
W1561003321	Gripper with 3 parallel jaws P12-100 NC increased force for inductive sensors

ACCESSORIES

SENSOR Ø 4



For codes and technical data, see **chapter A6**.

Note: For the NO and NC versions, use only the Hall effect sensor

SENSOR MOUNTING IN THE NO AND NC GRIPPERS SLOTS

To accommodate the sensor, a recess must be made in the base on which the gripper will be fixed.

P12-40



P12-64

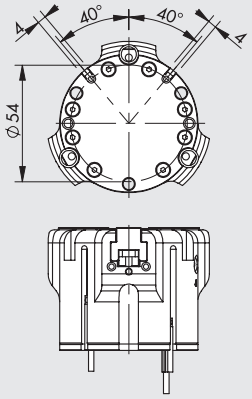

P12-80

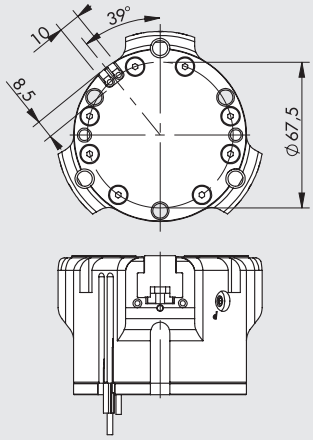

P12-100

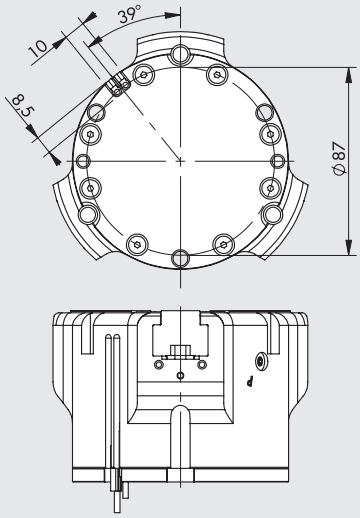

CENTRING RING





Code	Size	ØA	ØB f7	C	QUANTITY OF KITS NEEDED ① - Use with jaws
W1560409201	**40**	$3^{0}_{-0.1}$	4	$4^{0}_{-0.1}$	**3** code W1560409201
W1560649201	**64**	$4.5^{0}_{-0.1}$	6	$5^{0}_{-0.1}$	**3** code W1560649201
W1560809201	**80**	$5.1^{0}_{-0.1}$	8	$5^{0}_{-0.05}$	**3** code W1560809201
W1561009201	**100**	$6.2^{\pm 0.1}$	10	$6.9^{0}_{-0.1}$	**3** code W1561009201

Note: 2-pieces pack

NOTES

NOTES

GENERAL TECHNICAL DATA ROTARY ACTUATORS

DEVICES

The use of hydraulic decelerators means it is possible to increase absorbed power. Some models in the catalogue have built-in decelerators. For those without, the user can mount decelerators outside the actuator.
With horizontal axis rotation, if the masses are distributed asymmetrically it may be difficult to keep a constant rotation speed using flow regulators only. In this case it is advisable to use a decelerator.

CALCULATIONS

The following needs to be calculated:
- Absorbed kinetic energy
- Axial forces on the shaft or rotating flange
- Radial force on the shaft or rotating flange
- Overturning moment

Then compare each of the 4 sizes with the admissible ones shown in the catalogue for each rotary actuator. Remember that the application of optional hydraulic decelerator, where envisaged, doubles the kinetic energy that can be absorbed by the actuator.

SIZING

HOW TO CALCULATE KINETIC ENERGY

	Denomination	Unit of measurement	Formula	Example
				
α	Angle of rotation	rad	$= \text{degrees} \cdot \frac{\pi}{180}$	$= 90° = \frac{\pi}{2}$ rad.
t	Rotation time	s		2
Jta	Moment of inertia of rotating masses N.B.: added those of the individual masses	kg m^2	$= \sum Ji$	= 0.078 + 0.02 + 0.133 = 0.232
E	Kinetic energy	Nm	$= 1/2\ Jw^2 = 2J \cdot \left(\frac{\alpha}{t}\right)^2$	$= 2 \cdot 0.232 \cdot \left(\frac{\frac{\pi}{2}}{2}\right)^2 = 0.57$
Fr	Radial force (Remember to take into account centrifugal forces)	N	$(Fc = M \cdot w^2 \cdot R)$	50
Fa	Axial force	N		10
M	Overturning moment	Nm	$= M + Fr \cdot a + Fa \cdot b$	= 50 x 0.1 + 10 x 0 = 5

MOMENTS OF INERTIA FOR THE MOST COMMON SHAPES

	Denomination	Unit of measurement	Formula	Example
			Disco 	
M	Disk mass	kg		7
d	Disk diameter	m		0.3
J	Moment of inertia of the disk	kg m^2	$= \frac{Md^2}{8}$	$= \frac{7 \cdot 0.3^2}{8} = 0.0787$
			Mass distant from rotation axis 	
M	Mass	kg		0.5
R	Distance between barycenter and rotation axis	m		0.2
J	Moment of inertia of the mass	kg m^2	$= MR^2$	= 0.5 x 0.2^2 = 0.02
			Parallelepiped with barycenter on rotation axis 	
M	Mass	kg		10
L	Sides a and b of the parallelepiped	m		a = 0.4; b = 0.3
J	Moment of inertia of the mass	kg m^2	$= M \cdot \frac{1}{12} \cdot (a^2 + b^2)$	$= \frac{10 \cdot (0.4^2 + 0.3^2)}{12} = 0.21$

ROTARY ACTUATOR SERIES R1

Rack-type rotary actuators in various configurations:
- Configuration with standard magnet
- Version with male pinion or female hole
- Mechanical stroke adjustment
- Special configurations on request

The central body has ISO bore holes for wall fixing using ISO pin and/or flange fittings.

N.B.: We always suggest to use flow microregulators. During the setup of the actuator, start with CLOSE flow microregulators, and open gradually till the achievment of the required speed.

TECHNICAL DATA		Ø 32	Ø 40	Ø 50	Ø63	Ø 80	Ø 100	Ø 125
Operating pressure		10 bar (1 MPa - 145 psi)						
Temperature range	°C	-10 to 80						
Fluid		Filtered lubricated or unlubricated air. Lubrication, if used, must be continuous						
Rotation angle		90°; 180°; 270°; 360°						
Configuration		Magnetic standard cushioned						
Actual rotation angle		See next page						
Admissible kinetic energy	Joule	1.8	3	5	12	28	40	66

DIMENSIONS - FORCES AND MOMENTS

Ø	Cr Theoretical torque at 6 bar [Nm]	Fa Max axial load [N]	Fr Max radial Load [N]	M Max overturning moment [Nm]
32	6	2500	570	18
40	11	2800	650	25
50	21	4500	1000	45
63	37	5600	1310	68
80	80	8500	2040	135
100	148	12200	2920	230
125	303	20000	4640	480



WEIGHTS [kg]

	VERSION W165_ _ _1 _ _ _				VERSION W165_ _ _2 _ _ _				VERSION W166_ _ _1 _ _ _				VERSION W166_ _ _2 _ _ _			
	Rotation angle				Rotation angle				Rotation angle				Rotation angle			
Ø	90°	180°	270°	360°	90°	180°	270°	360°	90°	180°	270°	360°	90°	180°	270°	360°
32	1.15	1.25	1.36	1.47	1.25	1.36	1.47	1.58	1.00	1.20	1.30	1.40	1.20	1.30	1.40	1.50
40	1.65	1.80	1.90	2.00	1.80	1.95	2.05	2.15	1.55	1.65	1.75	1.85	1.60	1.75	1.90	2.05
50	2.50	2.70	2.90	3.05	2.27	2.90	3.07	3.25	2.35	2.50	2.70	2.85	2.50	2.75	2.90	3.07
63	3.60	3.80	4.05	4.25	3.85	4.05	4.30	4.50	3.35	3.55	3.80	4.00	3.50	3.80	4.00	4.20
80	7.40	7.90	8.30	8.80	7.80	8.30	8.80	9.30	6.80	7.30	7.80	8.30	7.20	7.70	8.20	8.70
100	11.60	12.40	13.20	13.90	12.20	12.90	13.60	14.40	10.50	11.20	12.00	12.70	11.00	11.70	12.50	13.30
125	20.00	21.70	23.30	25.00	20.60	22.30	23.90	25.60	18.80	20.50	22.10	23.80	19.40	21.10	22.70	24.40

COMPONENTS

① BARREL: profiled anodized aluminium alloy
② HEAD: die cast aluminium
③ CUSHIONING NEEDLE: OT 58 with needle out movement safety system even when fully open
④ BUFFER + Static O-rings: NBR or FKM/FPM
⑤ PISTON: aluminium
⑥ PISTON GASKET: NBR
⑦ MAGNET: plastoferrite
⑧ RACK: nitrided steel
⑨ PIGNON MALE/FEMALE: nitrided alloy steel
⑩ BALL BEARING
⑪ CENTRAL BODY: anodized aluminium
⑫ RACK GUIDE BUSH: self-lubricating sintered bronze
⑬ REGULATION SCREW: anodized aluminium

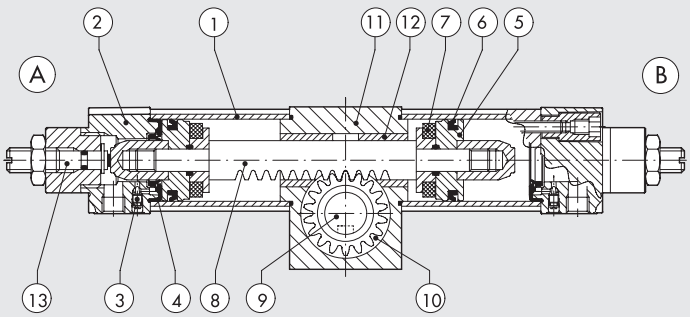

METAL WORK PNEUMATIC

DIMENSIONS OF ROTARY ACTUATOR R1 Ø 32 to 125

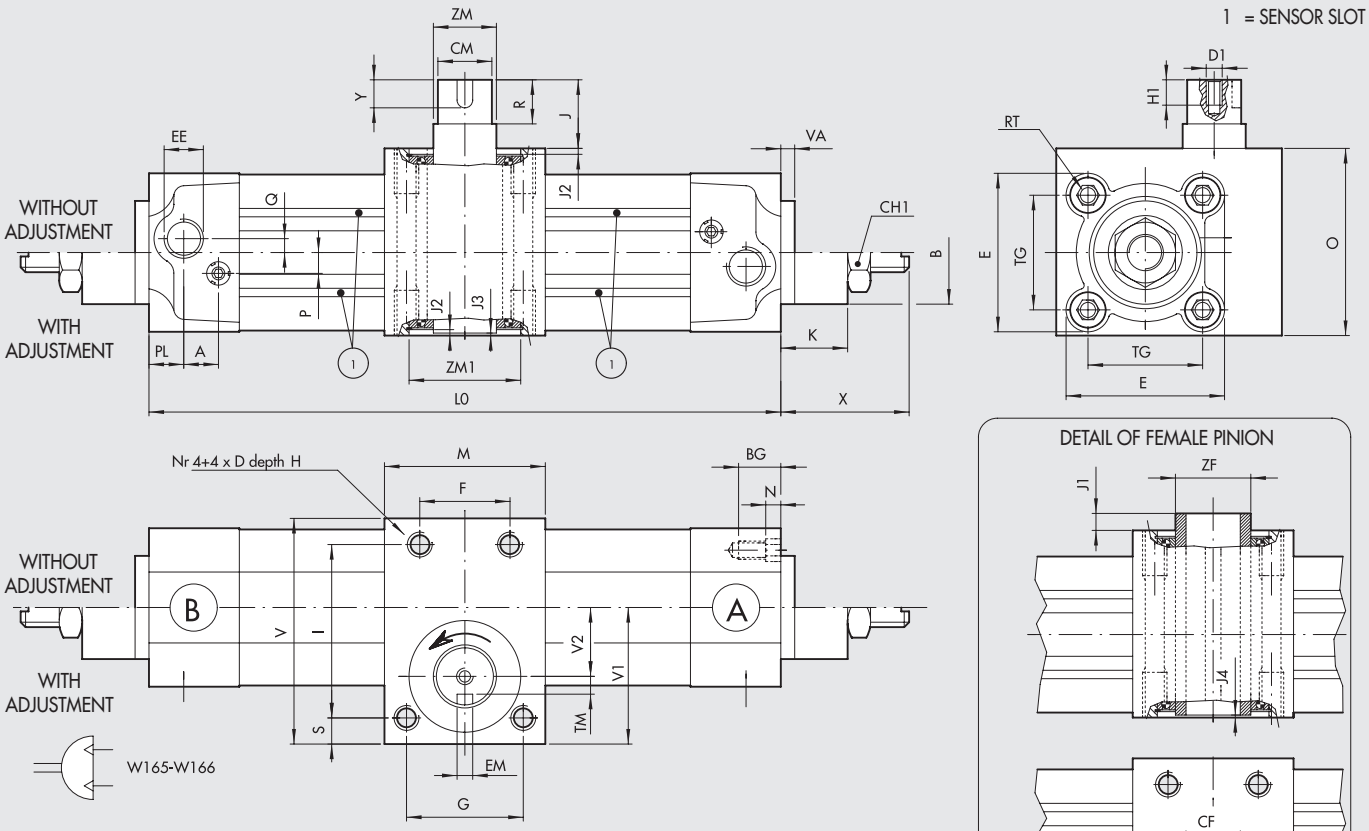

Note: with the key slot in the position specified, the piston is in contact with head Ⓐ

ACTUAL ROTATION ANGLE

VERSION WITH ADJUSTMENT



ß = Adjustment
∂ = Nominal rotation angle

VERSION WITHOUT ADJUSTMENT



ß = Manufactural tolerance
∂ = Nominal rotation angle

N.B.: The product is supplied with negative end-of-stroke piston (in the proximity of head A).
The first cycle involves movement of the piston (towards head B) with consequent anti-clockwise rotation of the pinion.

Ø	L0 ±1 for ROTATION ANGLE 90°	180°	270°	360°	Δ	A	B	BG	CM g7	CF G7	CH1	D	D 1	E	EE	EF D10	EM H9	F	G	H	H 1	I	J	J1
32	204.2	248.0	289.0	331.6	0.236	10	30	15.5	14	10	22	M6	M5	46	G1/8	3	5	30	30	14	12.5	50	34.5	4.5
40	220.3	267.5	314.5	360.5	0.262	10	35	15.5	16	12	22	M6	M5	54	G1/4	4	5	30	30	14	12.5	60	39.5	5
50	250.6	307.0	362.6	419.2	0.314	10	40	18.5	19	14	27	M8	M6	64.5	G1/4	5	6	32	45	16	16	65	46.5	7
63	277.2	340.2	401.4	464.2	0.349	10	45	18.5	24	16	27	M10	M8	75.5	G3/8	5	8	38	52	17	19	73	47.5	2.5
80	350.0	434.0	517.0	603.6	0.471	12	45	21.5	28	25	36	M12	M8	94	G3/8	8	8	48	70	20	19	100	58.5	8.5
100	385.8	487.6	587.2	690.0	0.559	12	55	21.5	38	30	36	M14	M10	111	G1/2	8	10	60	80	25	22	120	67	7
125	462.0	594.0	726.0	858.0	0.733	10	60	23	38	30	36	M12	M10	134	G1/2	8	10	70	90	25	22	150	51	7

Δ = Linear displacement (mm) for each degree of rotation

Ø	J2	J3	J4	K	M	N	O	P	PL	Q	R	RT	S	TG	TF	TM	V	V1	V2	VA	X	Y	ZM	ZM1	ZF
32	2.2	2.5	2.5	17	47	4.5	47	6	10	4	30	M6	9	32.5	6.4	4	68	44.5	19	4	29 - 32.5	20	15	32	15
40	1.7	0.5	0.5	17	52.5	4.5	54.5	6	12	4	35	M6	7	38	7.8	5	74	45	22	4	29 - 32.5	25	17	35	17
50	2.2	3	3	20	63	5.5	64	6	14	6	40	M8	10	46.5	8.7	6	85	51	25	4	32.5 - 37	25	20	42	20
63	3.7	2.5	2.5	20	75	5.5	75	6	16	6	45	M8	11	56.5	10.3	8	95	56	27.5	4	32.5 - 37	30	25	47	25
80	5.4	5.5	5.5	29	95	5.5	95	10	18	7	50	M10	12.5	72	15.8	10	125	76	39	4	42 - 50.5	35	35	62	35
100	4.4	5	5	29	108	5.5	110	10	20	7	60	M10	15	89	18.3	14	150	90.5	45.5	4	42 - 50.5	45	45	75	45
125	5.3	7	2	32.5	125	7	140	12	25	8	50	M12	15	110	18.3	14	188	118	58	6	45 - 54	45	60	95	60

KEY TO CODES

W165	050	1	090
TYPE	**BORES**	**VERSION**	**ANGLE OF ROTATION •**
W165 Rotary actuator with male pinion	032	**1** Without adjustment of rotation angle	090
W166 Rotary actuator with female pinion	040	**2** With adjustment of rotation angle	180
	050		270
	063		360
	080		
	100		
	125		

• Expressed in sexagesimal degrees.

ACCESSORIES: MAGNETIC SENSORS

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

SENSOR SUPPORT BRACKETS FOR SENSORS SQUARE TYPE AND OVAL TYPE

Ø 32 to 40

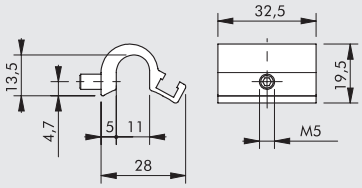

Code	Description
W0950001711	Bracket D.32-40

Ø 50 to 63

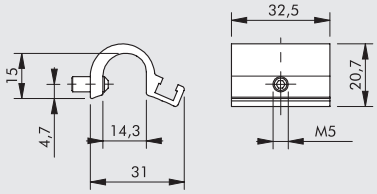

Code	Description
W0950001712	Bracket D.50-63

Ø 80 to 125

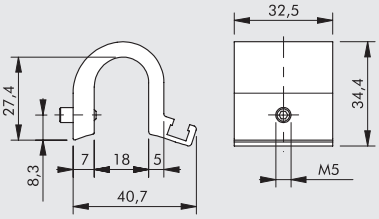

Code	Description
W0950001713	Bracket D.80-100-125-160

ADAPTER FOR OVAL TYPE RETRACTABLE SENSORS

ASSEMBLY DIAGRAM

① Rotary actuator Serie R1
② Sensor bracket mod. DST (Ø 32 to 125)
③ Adaptor
④ Retractable sensor "oval type"

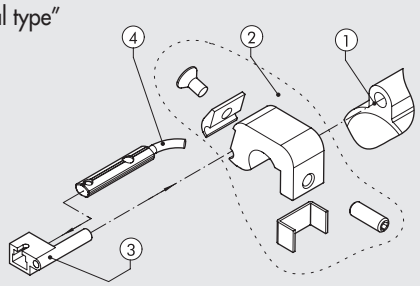

Code	Description
W0950001001	Adaptor DSS005 for DST/ST brackets

METAL WORK PNEUMATIC

SENSOR SERIES DSM

For codes and technical data, see **chapter A6**.



SENSOR SUPPORT BRACKETS FOR SENSORS DSM

Ø 32 to 40



Code	Description
W0950000711	Bracket D.32-40 DST 80

Ø 50 to 63



Code	Description
W0950000712	Bracket D.50-63 DST 81

Ø 80 to 125

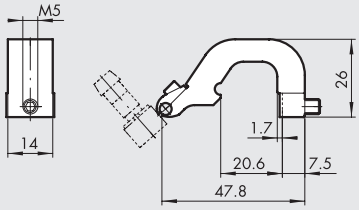

Code	Description
W0950000713	Bracket D.80-100-125 DST 82

NOTES

ROTARY ACTUATOR SERIES R2

Actuator with double rack and play take-up.
Four sizes – 12, 16, 20 and 25. Two angles of rotation – 90° and 180°.
Stroke adjustment system for all sizes. Pneumatic cushioning for all sizes except the smallest. There are slots in the body to house a magnetic proximity sensor. Air supply, stroke adjustment and cushioning adjustment are all on the same side.

N.B.: We always suggest to use flow microregulators.
During the setup of the actuator, start with CLOSE flow microregulators, and open gradually till the achievment of the required speed.

TECHNICAL DATA		R2-12	R2-16	R2-20	R2-25
Operating pressure	bar	1.5 to 7			
	MPa	0.15 to 0.7			
	psi	22 to 101			
Temperature range	°C	-10 to +80			
Angle adjustment	degrees	35° (about +10° -25°)			
Fluid		20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous			
Versions		90°/180° rotation			
Ports		Both at the front			
Sizes	mm	12	16	20	25
Theoretical torque (ΔP= pressure in bar)	Nm	0.065 x P	0.11 x P	0.21 x P	0.48 x P
Max. axial load	N	8	14	40	80
Max. radial load	N	8	14	40	80
Weight with 90° rotation	kg	0.18	0.26	0.63	0.8
Weight with 180° rotation	kg	0.21	0.31	0.72	1
Rotation time without load:					
• 90° angle	s	0.2	0.2	0.2	0.2
• 180° angle	s	0.3	0.3	0.3	0.3

COMPONENTS

① ROTARY SHAFT / PINION: hardened and tempered steel
② BALL BEARING
③ FLANGE: anodized aluminium
④ PISTON / RACK: hardened and tempered steel
⑤ PISTON GASKET: NBR
⑥ GUIDE PAD: PTFE
⑦ MAGNET: neodymium
⑧ CUSHIONING GASKET: NBR
⑨ CUSHIONING PIN: zinc-plated steel
⑩ HEAD: anodized aluminium
⑪ PNEUMATIC CONNECTION / STROKE ADJUSTMENT: steel
⑫ BARREL: anodized aluminium
⑬ BASE: anodized aluminium
⑭ SEAL: NBR

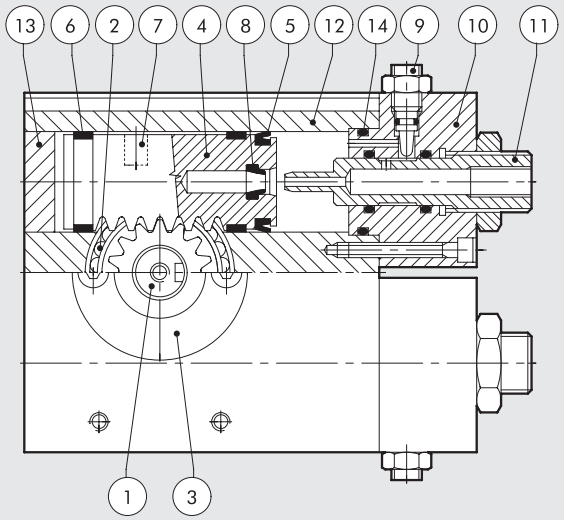

METAL WORK PNEUMATIC

ROTARY ACTUATOR R2-12 90°/180°

Code	Description
W1620122090	Rotary actuator R2-12-90°
W1620122180	Rotary actuator R2-12-180°

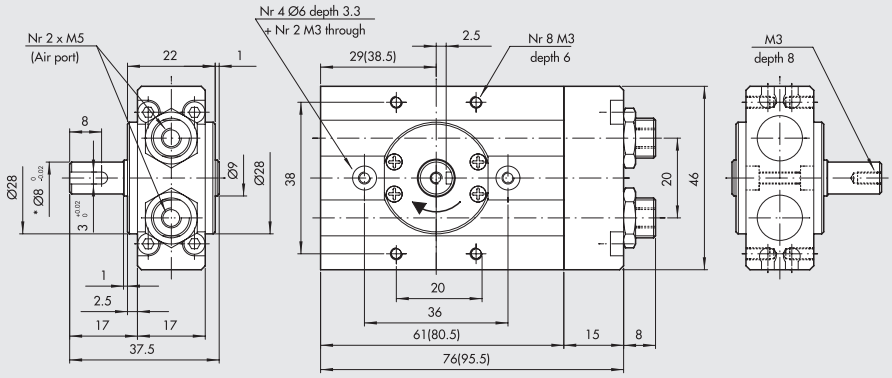

* For the version R2-12-90° it was Ø6 mm; spare actuators code W1620122091 can be still supplied
Dimensions for 180° rotation are given in brackets

ROTARY ACTUATOR R2-16 90°/180°

Code	Description
W1620162090	Rotary actuator R2-16-90°
W1620162180	Rotary actuator R2-16-180°

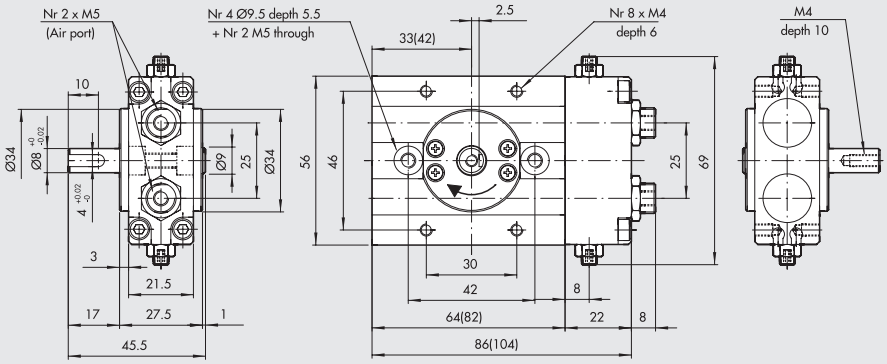

Dimensions for 180° rotation are given in brackets

ROTARY ACTUATOR R2-20 90°/180°

Code	Description
W1620202090	Rotary actuator R2-20-90°
W1620202180	Rotary actuator R2-20-180°

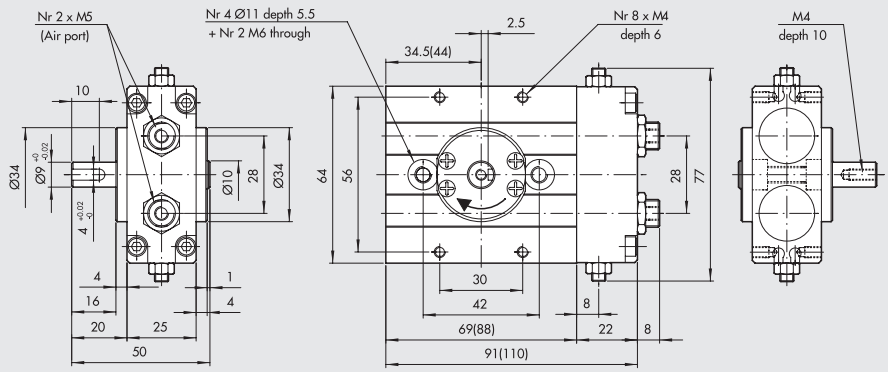

Dimensions for 180° rotation are given in brackets

ROTARY ACTUATOR R2-25 90°/180°

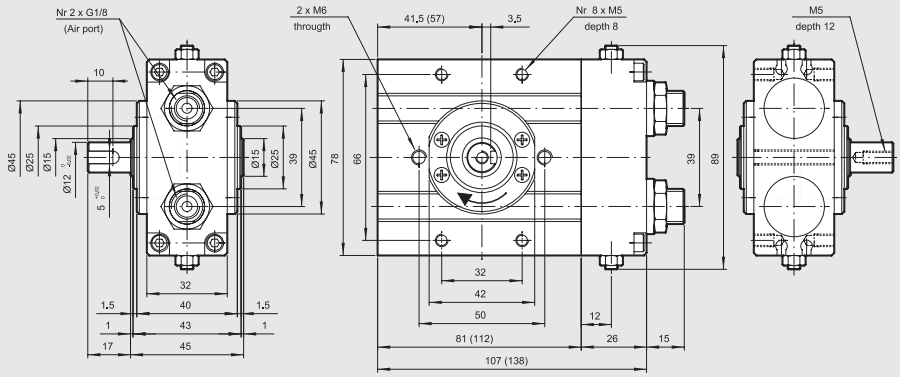

Code	Description
W1620252090	Rotary actuator R2-25-90°
W1620252180	Rotary actuator R2-25-180°

Dimensions for 180° rotation are given in brackets

ACCESSORIES

SENSOR Ø 4



For codes and technical data, see **chapter A6**.

NOTES

ROTARY ACTUATOR SERIES R3

Actuator with double rack and play take-up. Angle of rotation adjustable from 0 to 180°. The R3 rotary actuator can come with a mechanical stop or hydraulic end-of-stroke cushioning.
There is a version with flange and one with shaft (for ø16-20-25-30).
There are slots in the body for retracting magnetic proximity sensors, two on each side. There is hole in the flange for air pipes or wires.

N.B.: We always suggest to use flow microregulators.
During the setup of the actuator, start with CLOSE flow microregulators, and open gradually till the achievment of the required speed.

TECHNICAL DATA		R3-16	R3-20	R3-22	R3-25	R3-30	R3-40
Operating pressure	bar	3 to 7					
	MPa	0.3 to 0.7					
	psi	43.5 to 101					
Temperature range	°C	-10 to +80					
Angle adjustment	degrees	0° to 180°					
Fluid		20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous					
Versions		With mechanical stop / hydraulic decelerator					
Sizes		16	20	22	25	30	40
Bores	mm	2 x 16	2 x 20	2 x 22	2 x 25	2 x 30	2 x 40
Theoretical torque at 6 bar	Nm	0.9	1.8	2.7	4.6	9.3	22
Max. axial load	N	74	135	195	300	340	360
Max. radial load	N	78	137	360	450	490	560
Max overturning moment	Nm	2.4	4	5.3	9.7	12	18
Weight	kg	0.53	0.99	1.29	2.08	3.9	6.7
Rotation time without load	s	0.2	0.2	0.2	0.2	0.3	0.3
Admissible kinetic energy	Joule						
WITH MECANICAL STOP		0.007	0.025	0.049	0.082	0.090	0.150
(with flange W1630__2180 and with shaft W1630__5180)							
WITH HYDRAULIC DECELERATOR		-	-	-	0.29	1.10	1.60
(with flange W1630__2180 and with shaft W1630__5180)							

COMPONENTS

① ROTARY FLANGE: anodized aluminium
② PINION: hardened and tempered steel
③ BALL BEARING
④ PISTON / RACK: hardened and tempered steel
⑤ CUSHIONING GASKET: NBR
⑥ GUIDE PAD: PTFE
⑦ MAGNET: neodymium
⑧ HEAD: anodized aluminium
⑨ BARREL: anodized aluminium
⑩ SEAL: NBR

VERSIONS:
Ⓐ Stroke adjustment
Ⓑ Stroke adjustment with inside hydraulic shock absorbers (available from Ø 25)

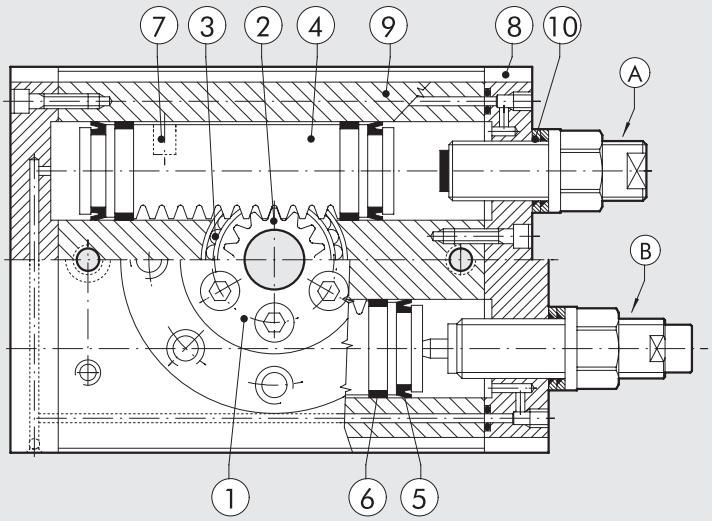

ROTARY ACTUATOR R3-16

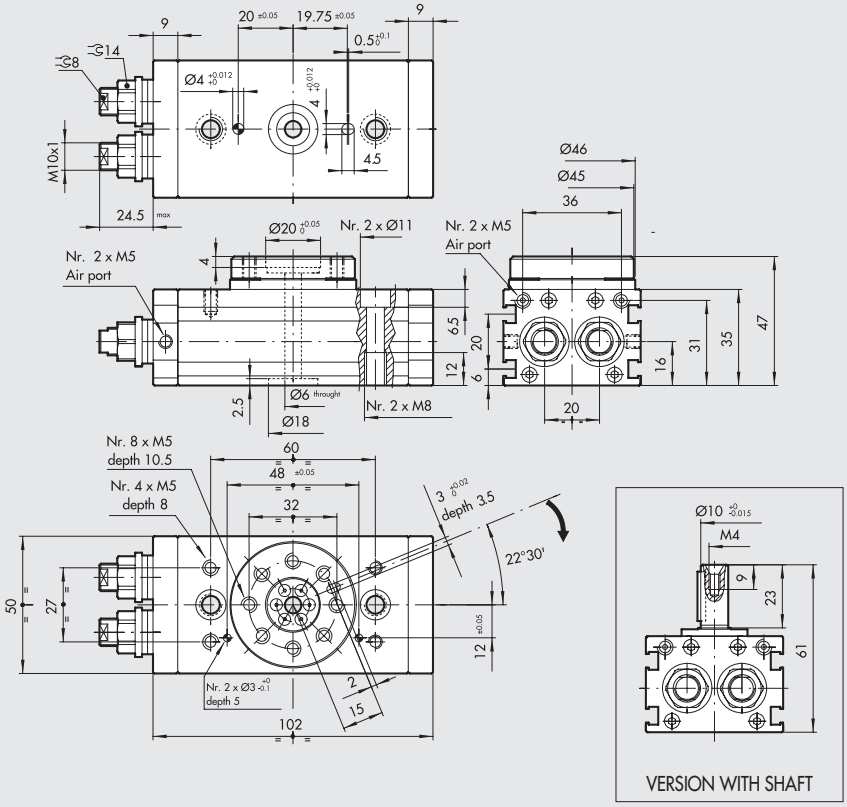

Code	Description
W1630162180	Rotary actuator with flange R3-16
W1630165180	Rotary actuator with shaft R3-16

ROTARY ACTUATOR R3-20

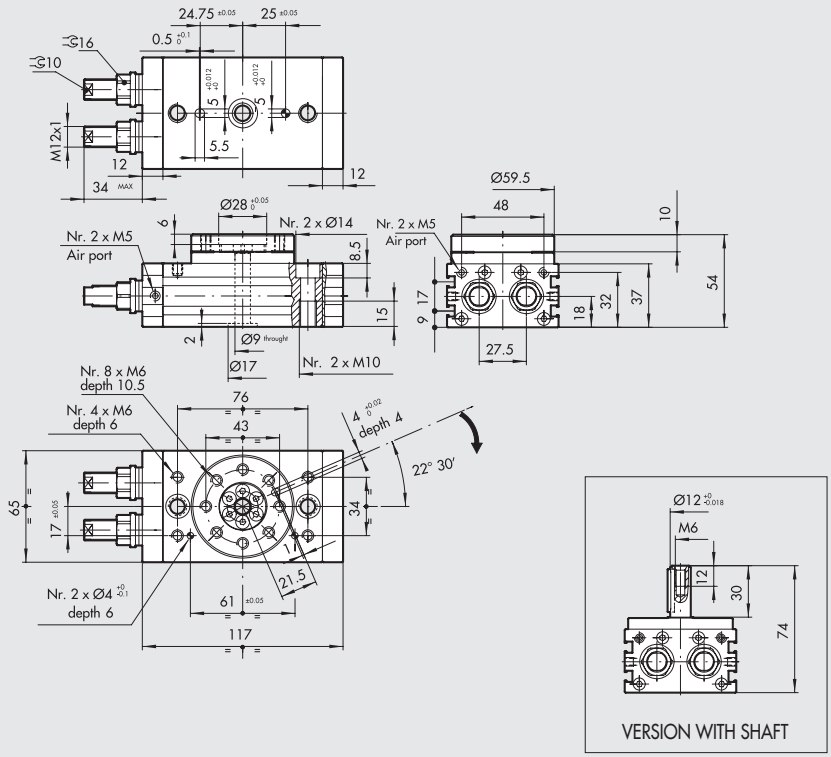

Code	Description
W1630202180	Rotary actuator with flange R3-20
W1630205180	Rotary actuator with shaft R3-20

METAL WORK PNEUMATIC

ROTARY ACTUATOR R3-22

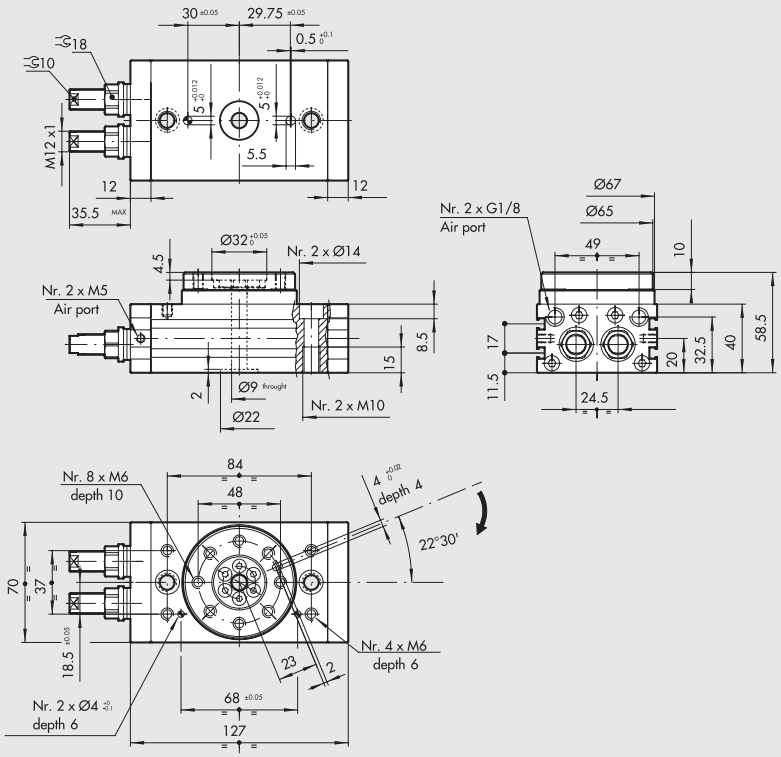

Code	Description
W1630222180	Rotary actuator with flange R3-22

ROTARY ACTUATOR R3-25

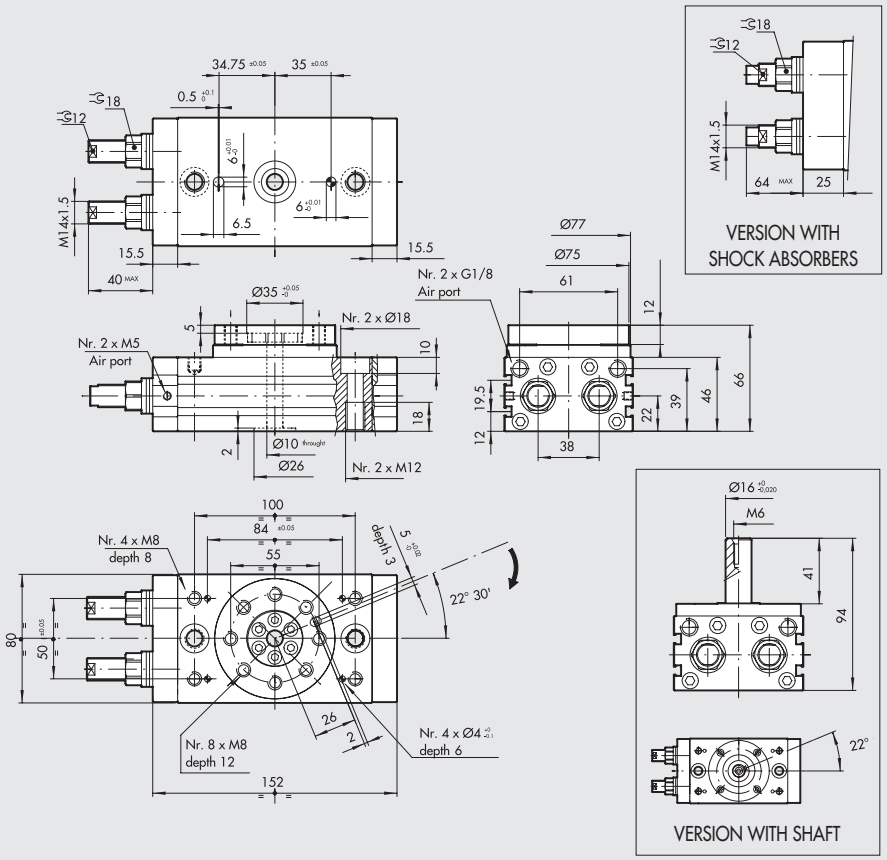

Code	Description
W1630252180	Rotary actuator with flange R3-25
W1630253180	Rotary actuator with flange + shock absorbers R3-25
W1630255180	Rotary actuator with shaft R3-25
W1630256180	Rotary actuator with shaft + shock absorbers R3-25

ROTARY ACTUATOR SERIES R3-30

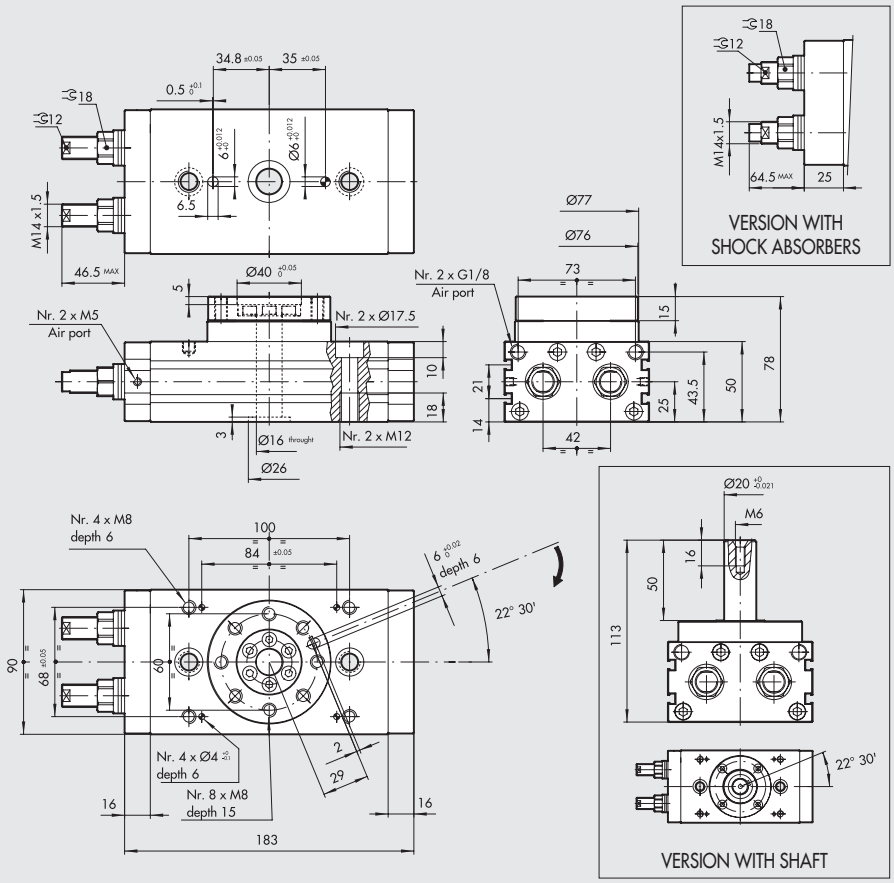

Code	Description
W1630302180	Rotary actuator with flange R3-30
W1630303180	Rotary actuator with flange + shock absorbers R3-30
W1630305180	Rotary actuator with shaft R3-30
W1630306180	Rotary actuator with shaft + shock absorbers R3-30

ROTARY ACTUATOR SERIES R3-40

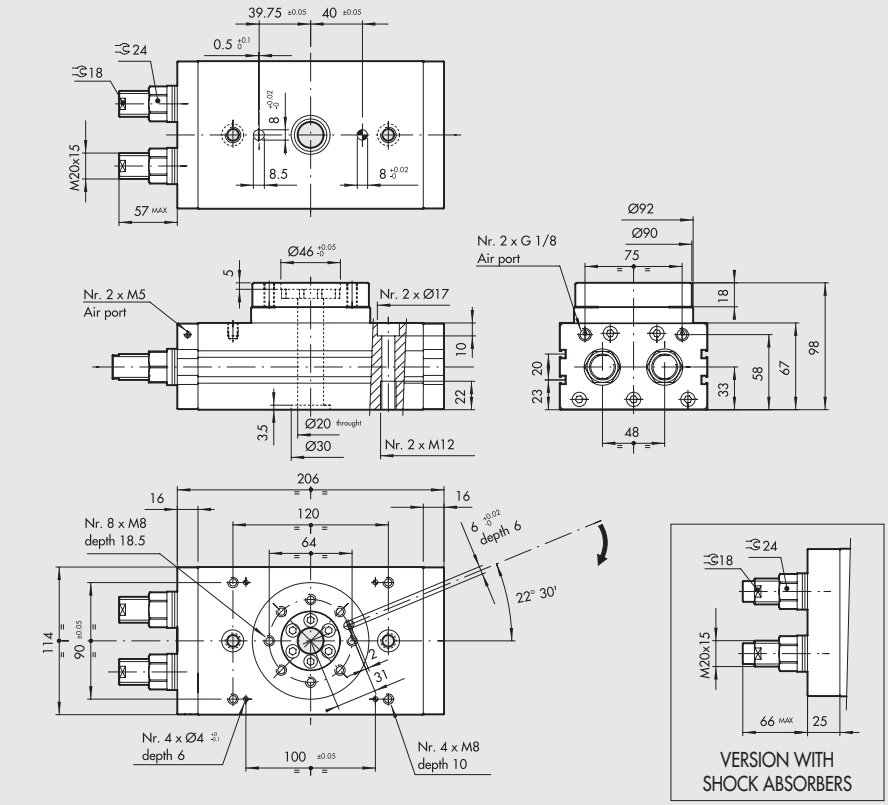

Code	Description
W1630402180	Rotary actuator with flange R3-40
W1630403180	Rotary actuator with flange + shock absorbers R3-40

ACCESSORIES

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

POSITION SENSORS

LTS



For technical data and usage strokes see **chapter A6**.

SPARE PARTS

SHOCK ABSORBERS



Code	Ø	Description
0950004015	25	Shock absorbers ECO S 25 MC2 short M14x1.5
0950004008	30	Shock absorbers ECO 25 MC4 M14x1.5
0950004005	40	Shock absorbers ECO 50 MC2 + nut M20x1.5

NOTES

ROTARY ACTUATOR SERIES R3 WITH EXTERNAL SHOCK ABSORBERS

Dual-rack actuator with automatic adjustment for wear.
Hydraulic shock absorbers are arranged externally and operate at a distance from the axis of rotation which is considerably higher than for internal ones. This means that the absorbable kinetic energy is 4 to 8 times higher.
It is reduced in length as there are no adjusting screws.
A 90° and a 180° versions are available.
Grooves are provided in the body to fix retractable magnetic proximity sensors, two on each side.
A hole has been drilled in the flange for the passage of air pipes or power cables.

N.B.: We always suggest to use flow microregulators.
During the setup of the actuator, start with CLOSE flow microregulators, and open gradually till the achievment of the required speed.

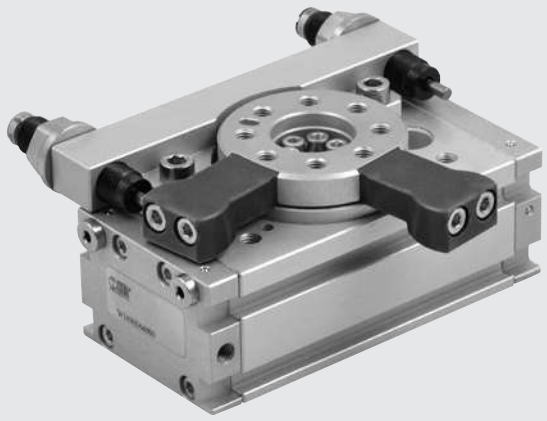

TECHNICAL DATA		R3-16	R3-20	R3-22	R3-25	R3-30	R3-40
Operating pressure	bar	3 to 7					
	MPa	0.3 to 0.7					
	psi	43.5 to 101					
Temperature range	°C	-10 to +80					
Angle adjustment	degrees	90° o 180° ± 3°					
Fluid		20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous					
Sizes	mm	16	20	22	25	30	40
Bore	mm	2 x 16	2 x 20	2 x 22	2 x 25	2 x 30	2 x 40
Theoretical torque at 6 bar	Nm	0.9	1.8	2.7	4.6	9.3	22
Max. axial load	N	74	135	195	300	340	360
Max. radial load	N	78	137	360	450	490	560
Max overturning moment	Nm	2.4	4	5.3	9.7	12	18
Admissible kinetic energy	J	0.16	0.55	0.85	1.40	1.85	3.35
Rotation time without load	s	0.2	0.2	0.2	0.2	0.3	0.3

COMPONENTS

① ROTARY FLANGE: anodized aluminium
② PINION: hardened and tempered steel
③ BALL BEARING
④ PISTON / RACK: hardened and tempered steel
⑤ CUSHIONING GASKET: NBR
⑥ GUIDE PAD: PTFE
⑦ MAGNET: neodymium
⑧ HEAD: anodized aluminium
⑨ BARREL: anodized aluminium
⑩ STROKE REGULATOR WITH HYDRAULIC SHOCK ABSORBERS
⑪ Block for 90° version

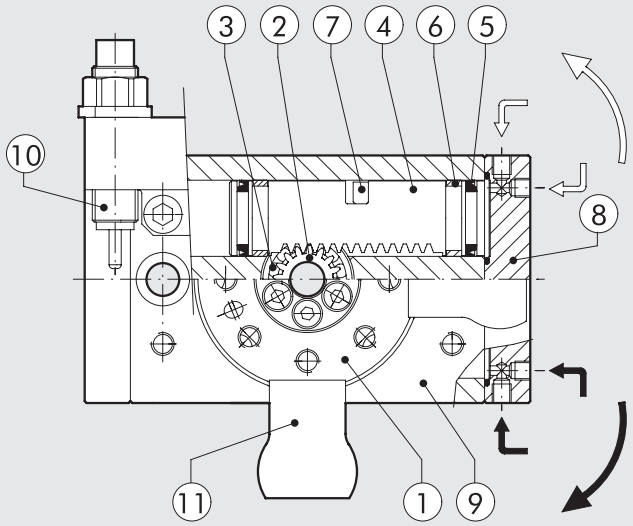

METAL WORK PNEUMATIC

ROTATION ANGLE

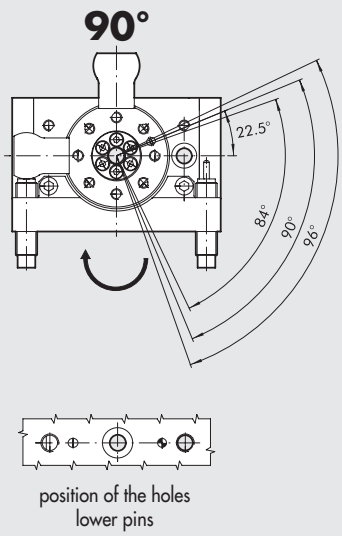

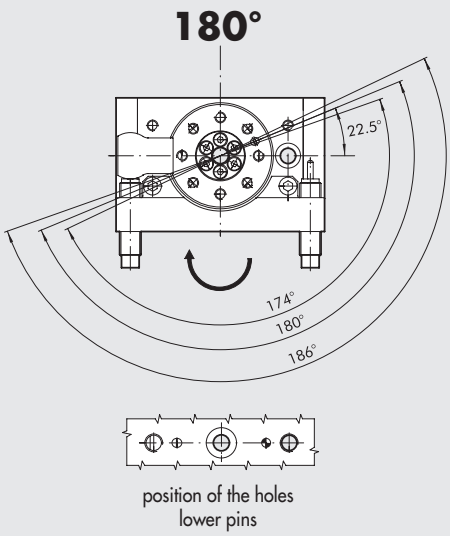

ADMISSIBLE KINETIC ENERGY Joule [J]

Bore Ø	With flange, 90° rotation°: W1630__4090 With flange, 180° rotation°: W1630__4180
16	0.16
20	0.55
22	0.85
25	1.40
30	1.85
40	3.35

DIMENSIONES - FORCES AND MOMENTS

Bore Ø	T Theoretical torque at 6 bar [Nm]	FA Max. axial load [N]	FR Max. radial load [N]	M Averturing momnet [Nm]
16	0.9	74	78	2.4
20	1.8	135	137	4
22	2.7	195	360	5.3
25	4.6	300	450	9.7
30	9.3	340	490	12
40	22	360	560	18



ROTARY ACTUATOR SERIES R3-16 WITH EXTERNAL SHOCK ABSORBERS, 90/180°

✱ Block for 90° version

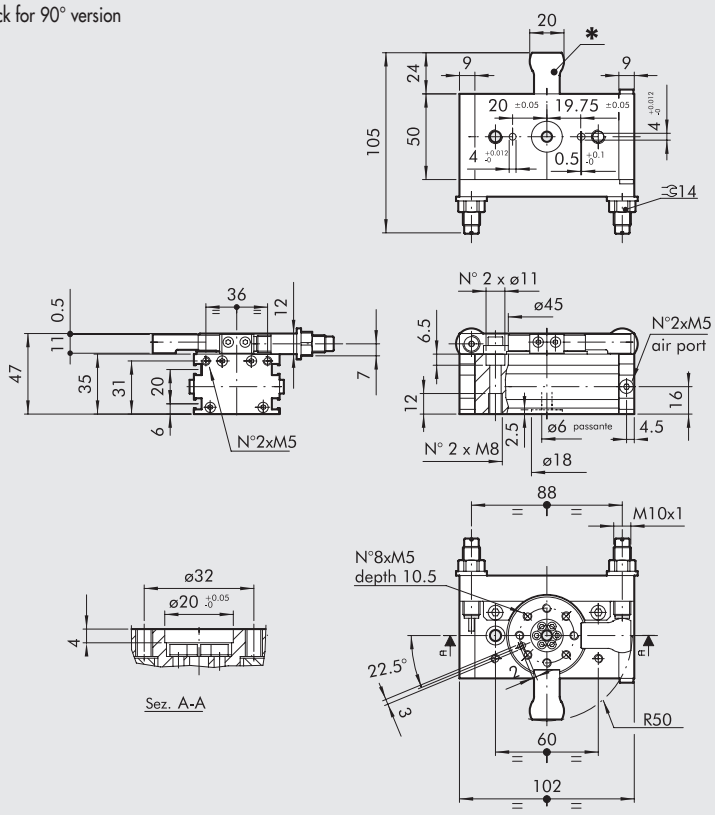

Code	Description
W1630164090	Rotary actuator with flange + shock absorbers R3-16-90
W1630164180	Rotary actuator with flange + shock absorbers R3-16-180

ROTARY ACTUATOR SERIES R3-20 WITH EXTERNAL SHOCK ABSORBERS, 90/180°

✱ Block for 90° version

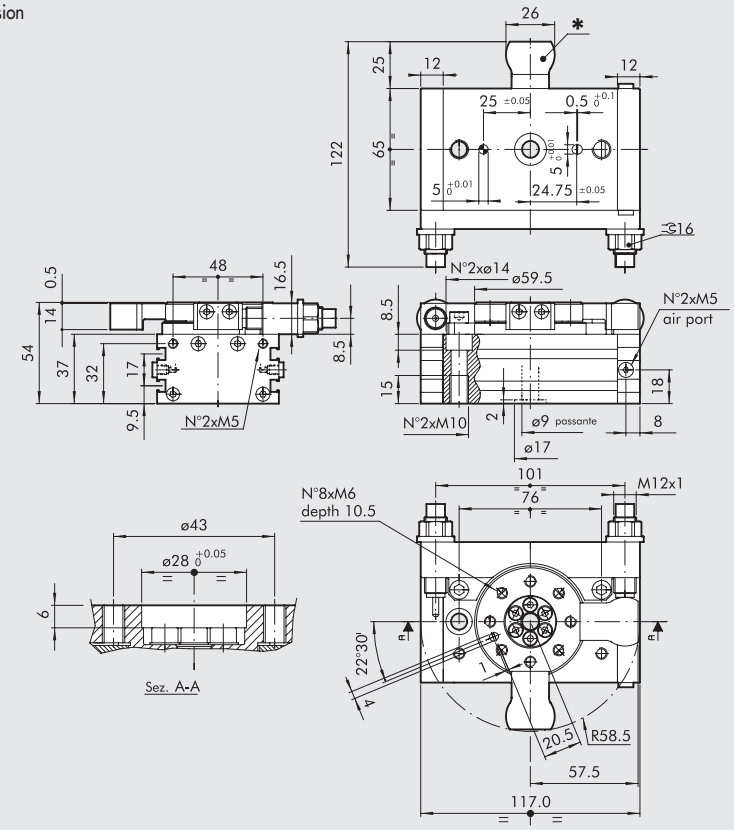

Code	Description
W1630204090	Rotary actuator with flange + shock absorbers R3-20-90
W1630204180	Rotary actuator with flange + shock absorbers R3-20-180

ROTARY ACTUATOR SERIES R3-22 WITH EXTERNAL SHOCK ABSORBERS, 90/180°

✱ Block for 90° version

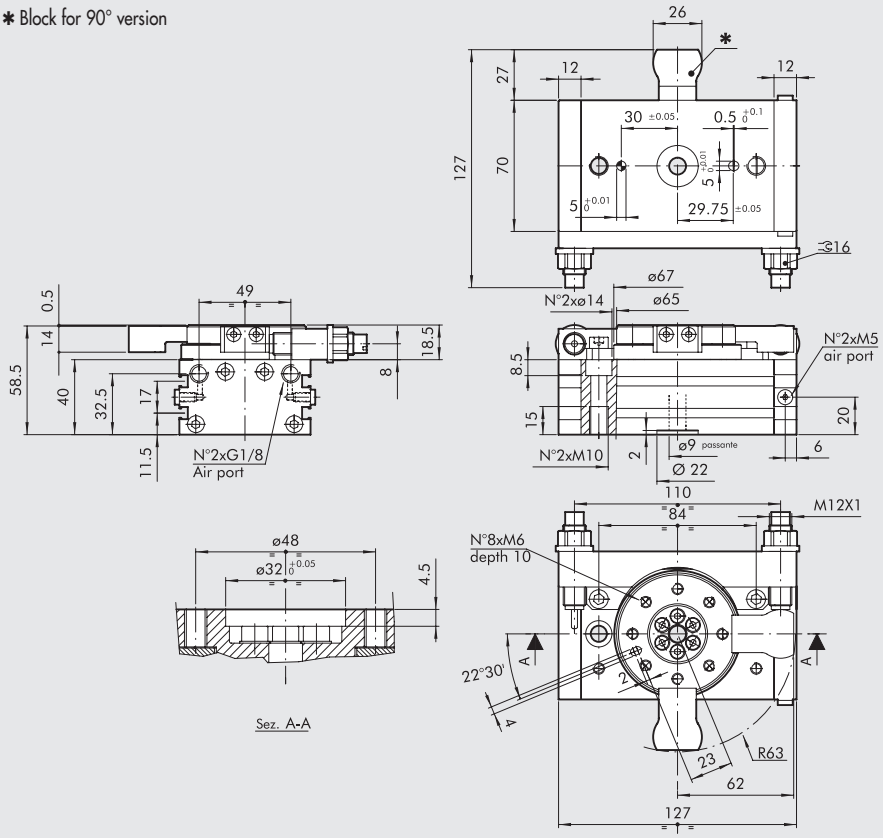

Code	Description
W1630224090	Rotary actuator with flange + shock absorbers R3-22-90
W1630224180	Rotary actuator with flange + shock absorbers R3-22-180

METAL WORK PNEUMATIC

ROTARY ACTUATOR SERIES R3-25 WITH EXTERNAL SHOCK ABSORBERS, 90/180°

✱ Block for 90° version

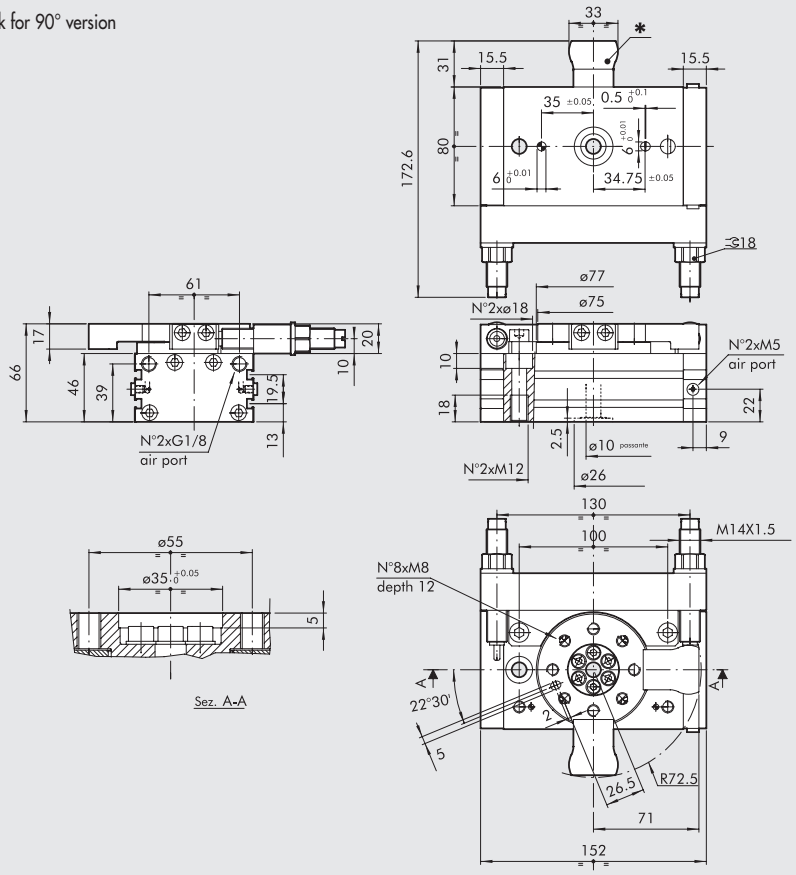

Code	Description
W1630254090	Rotary actuator with flange + shock absorbers R3-25-90
W1630254180	Rotary actuator with flange + shock absorbers R3-25-180

ROTARY ACTUATOR SERIES R3-30 WITH EXTERNAL SHOCK ABSORBERS, 90/180°

✱ Block for 90° version

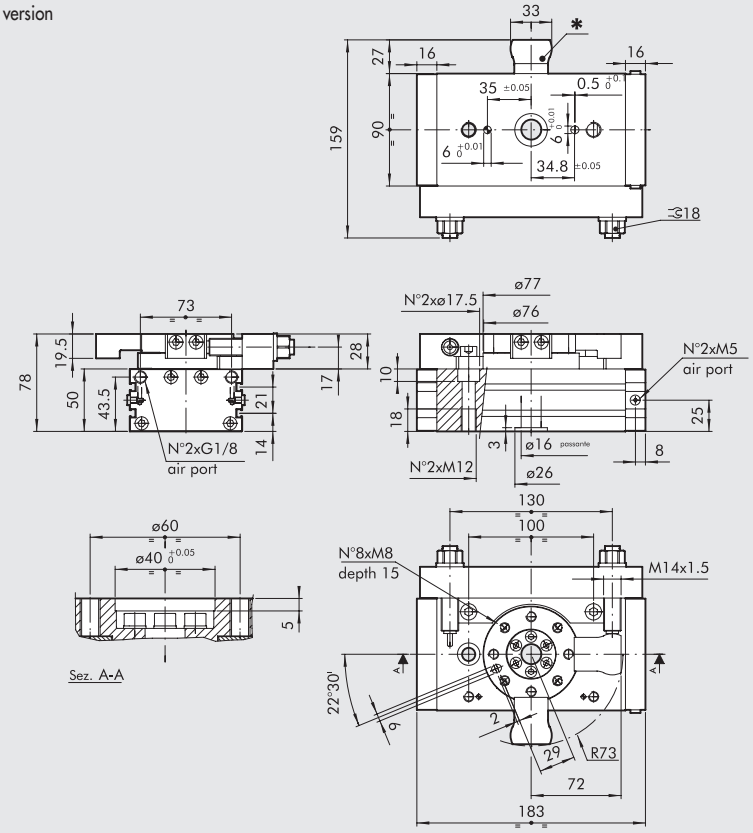

Code	Description
W1630304090	Rotary actuator with flange + shock absorbers R3-30-90
W1630304180	Rotary actuator with flange + shock absorbers R3-30-180

ROTARY ACTUATOR SERIES R3-40 WITH EXTERNAL SHOCK ABSORBERS, 90/180°

✱ Block for 90° version

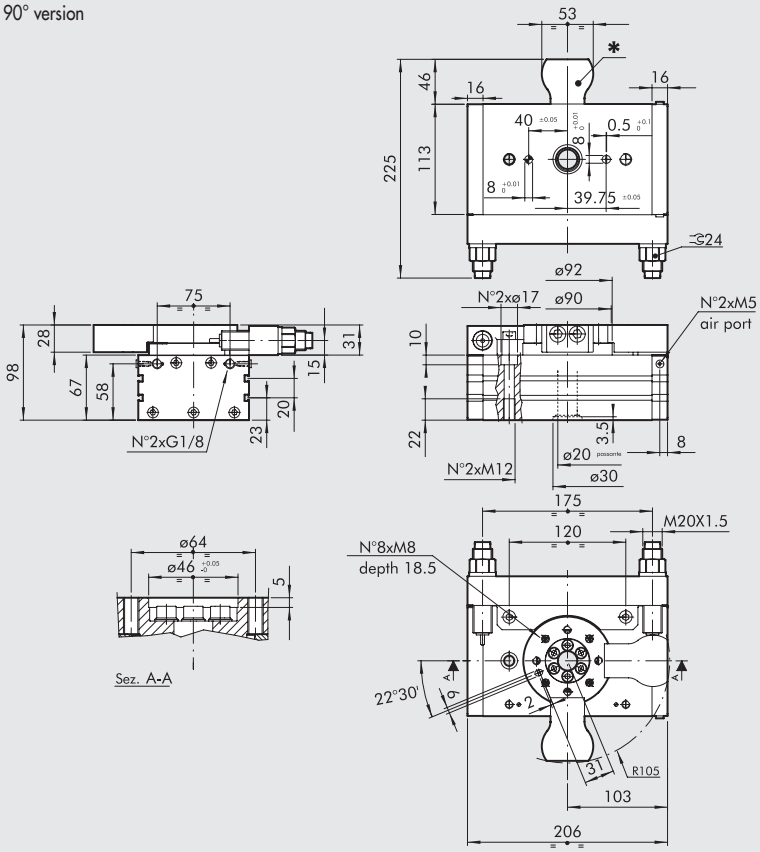

Code	Description
W1630404090	Rotary actuator with flange + shock absorbers R3-40-90
W1630404180	Rotary actuator with flange + shock absorbers R3-40-180

ACCESSORIES

RETRACTABLE SENSOR

For codes and technical data, see **chapter A6**.

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



POSITION SENSORS

For technical data and usage strokes see **chapter A6**.

LTS



SPARE PARTS

SHOCK ABSORBERS



Code	Ø	Description
0950004009	16	Shock absorbers ECO 10 MF3 M10x1
0950004010	22	Shock absorbers ECO 15 MF4 M12x1
0950004015	25 - 30	Shock absorbers ECO S 25 MC2 M14x1.5
0950004005	40	Shock absorbers ECO MC2 + nut M20x1.5

NOTES

VANE ROTARY ACTUATOR SERIES R5

The R5 Series vane rotary actuator combines space-saving and compact design with low inertia of internal moving masses, which ensures particularly fast rotation.
The steel rotating shaft is supported by two bearings at the ends and comes with an over-moulded seal. The pressure difference in the two chambers of the anodized aluminium main body makes it to rotate clockwise or anticlockwise.
Three versions with a maximum rotation of 90°, 180° or 270° are available depending on the type of internal partition.
It can be either fixed directly to the wall, using the threads on the casing, or by means of an L-shaped bracket (foot), which can be fixed to the front or rear, or by means of a sturdy front fixing attachment.
An accessory for rotation angle adjustment can be mounted on the rear side on which special elastic stops and magnetic sensors for detecting end-of-stroke positions can also be mounted.

N.B.: The use of micro-flow regulators is always recommended.
When commissioning the actuator, start with a CLOSED micro regulator; open it gradually until the desired speed is reached.

TECHNICAL DATA		R5-16			R5-25		
Operating pressure	bar	2 to 8					
	MPa	0.2 to 0.8					
	psi	29 to 116					
Operating temperature range	°C	0 to +60					
	°F	32 to 140					
Fluid		20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous					
End position stop shock-absorption		Elastic mechanical stop (if "Angle adjustment" accessory is used)					
End-position control		Magnetic sensors (if "Angle adjustment" accessory is used)					
Moment of inertia around the central axis	Kg m²	$2x10^{-6}$			$1x10^{-5}$		
Theoretical torque at 6 bar	Nm	2.2			6		
Maximum overturning moment	Nm	1.4			3.6		
Maximal radial load	N	30			60		
Maximum axial load	N	25			40		
Admissible kinetic energy	Joule						
with elastic mechanical stop (if "Angle adjustment" accessory is used)		0.02			0.03		
without elastic mechanical stop		0.015			0.02		
Rotation angle	degrees	90°	180°	270°	90°	180°	270°
Minimum rotation time without load	s	0.07	0.12	0.17	0.15	0.30	0.45
Weights	kg	0.33	0.33	0.31	0.59	0.59	0.58

DIMENSIONES - FORCES AND MOMENTS

Size	Cr Theoretical torque at 6 bar [Nm]	Fa Max. axial load [N]	Fr Max. radial load [N]	M Max. averturing momnet [Nm]
16	2.2	25 *	30	1.4
25	6	40 *	60	3.6



* The application of axial loads during the working sequence could reduce the life of the gaskets.

METAL WORK PNEUMATIC

COMPONENTS

① BODY: anodized aluminium
② ROD SHAFT: rubber overmoulded stainless steel
③ PISTON ROD GASKET: polyurethane
④ BALL BEARING
⑤ SPACER: brass
⑥ O-RING: NBR
⑦ SEPARATOR: anodized aluminium
⑧ PIN: steel
⑨ PARTITION SEAL: NBR

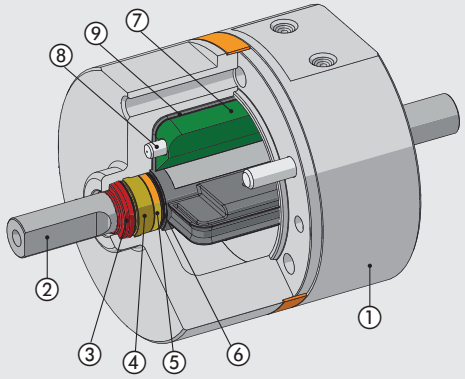

MOMENT OF INERTIA APPLICABLE ACCORDING TO ROTATION TIME

With angle adjustment accessory

R5-16

J [kgm²]

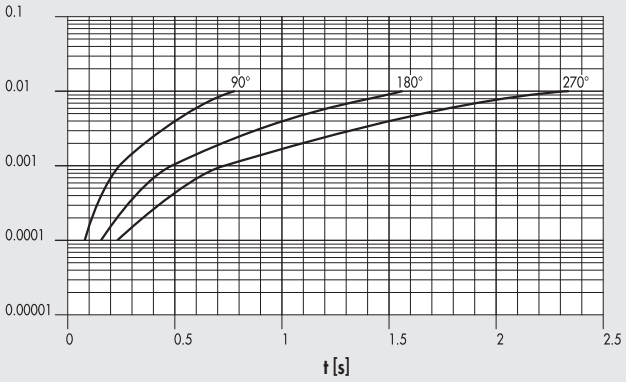

R5-25

J [kgm²]

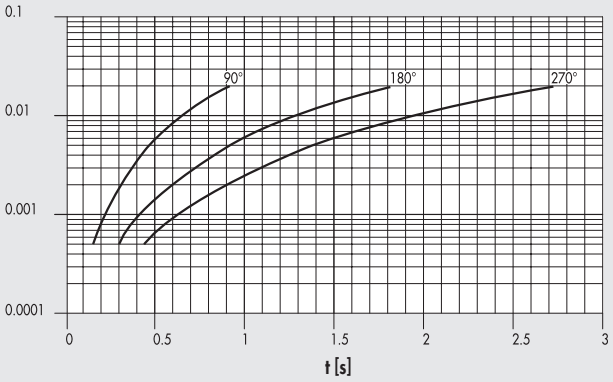

Without angle adjustment accessory

R5-16

J [kgm²]

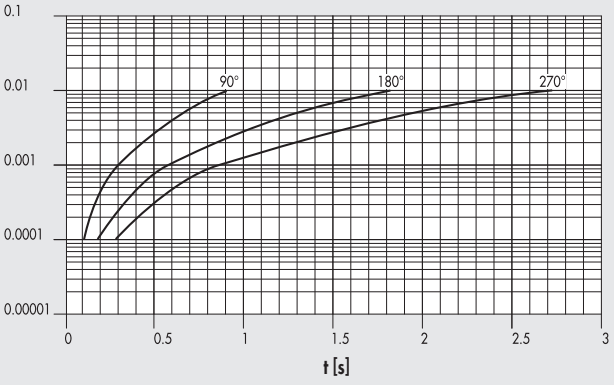

R5-25

J [kgm²]

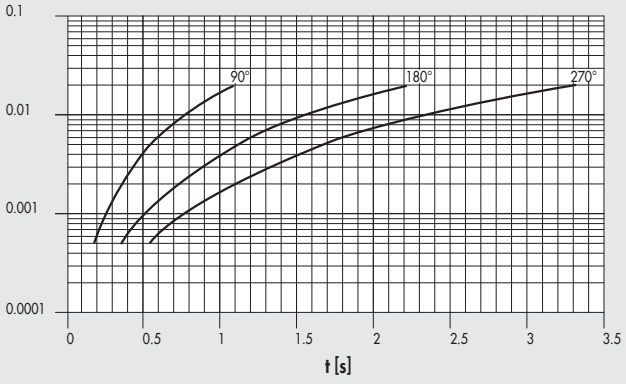

TORQUE OUTPUT ACCORDING TO INLET PRESSURE

R5-16

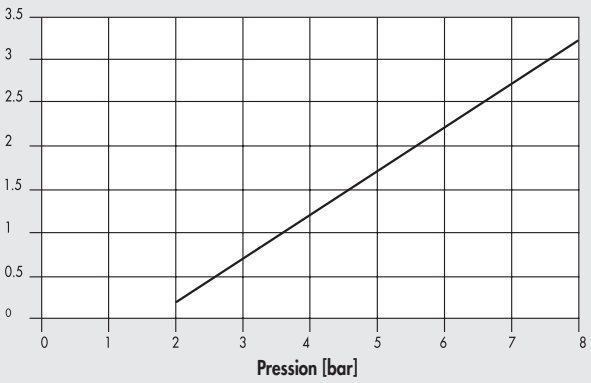

R5-25

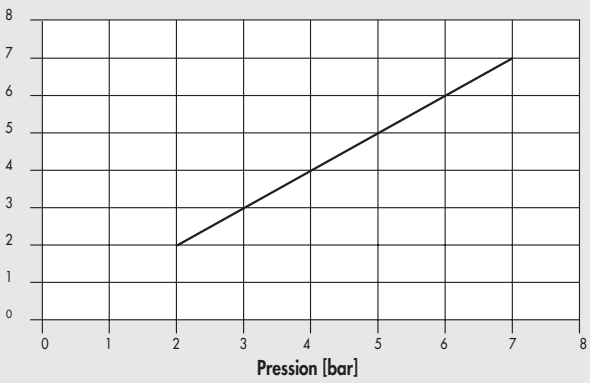

FIXING OPTIONS

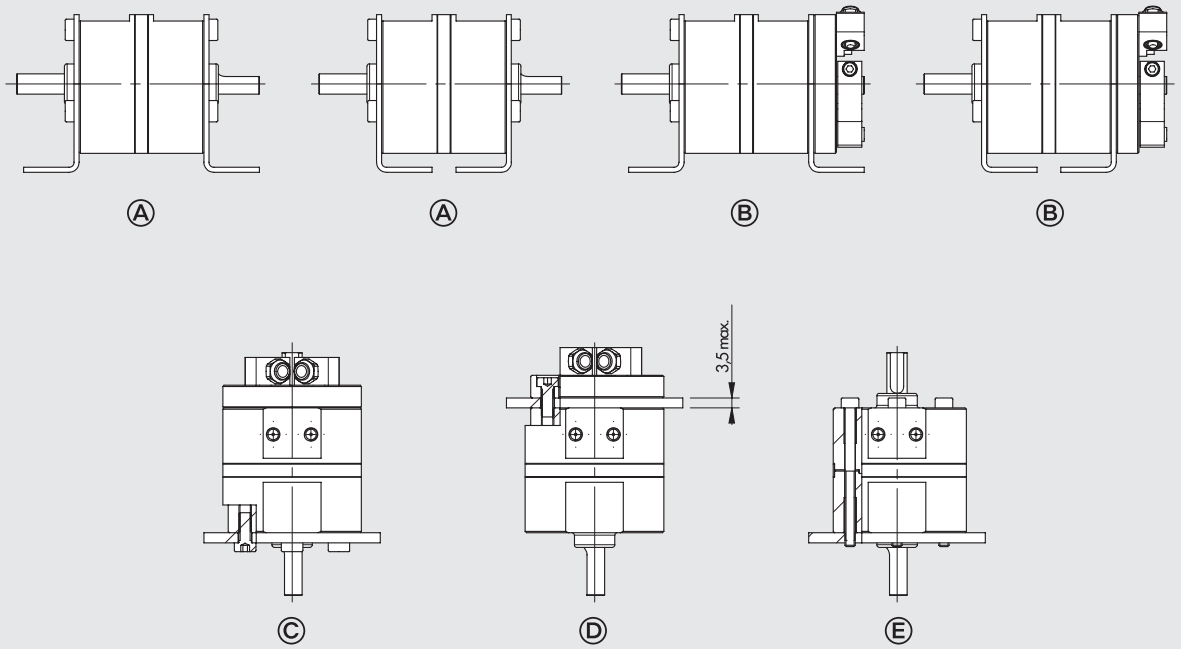

Ⓐ Fixing by means of feet without "Angle adjustment" accessory.
Ⓑ Fixing by means of feet with "Angle adjustment" accessory.
Ⓒ Fixing as pass-through sheet metal on front endcap.
Ⓓ Fixing as pass-through sheet metal on rear endcap.
Ⓔ Direct fixing from behind by means of long screws or tie rods. In this case, it is not possible to use the "Angle adjustment" accessory.

Possible attachment combinations using the "Foot" accessory and the corresponding power supply positions.

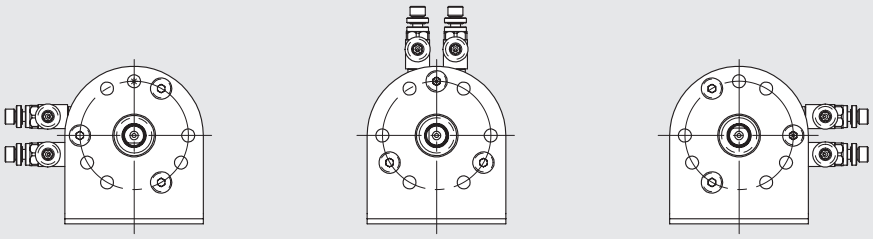

METAL WORK PNEUMATIC

DIMENSIONS

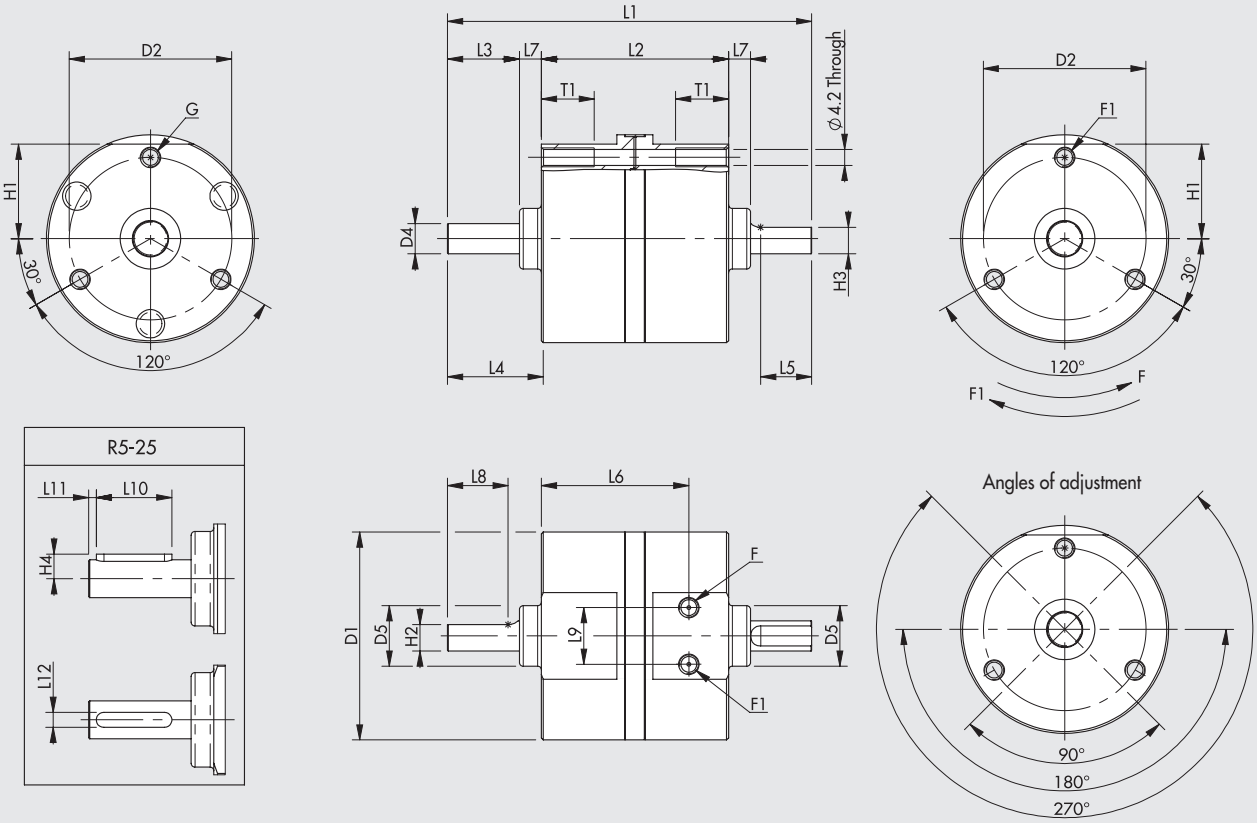

Double acting

Size	D1	D2	D4	D5 (+0/-0.1)	F	F1	G	H1	H2	H3	H4	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12	T1
16	55	43	8	16	M5	M5	M5	25	7	7	-	96.3	49.5	19	23.8	13.5	39	5.8	16	15	-	-	-	14
25	70	56	10	25	M5	M5	M5	32	9	9	6.5	115	56.5	27	33	13.5	45	6	-	18	20	2	4	14

KEY TO CODES

W167	016	0	270
TYPE	**SIZE**	**VERSION**	**ANGLE OF ROTATION •**
W167 Vane rotary actuator series R5	016 025	**0** Standard **1** With adjustment of rotation angle **2** With adjustment of rotation angle and provision for magnetic sensor	090 180 270

• Expressed in sexagesimal degrees.

ACCESSORIES

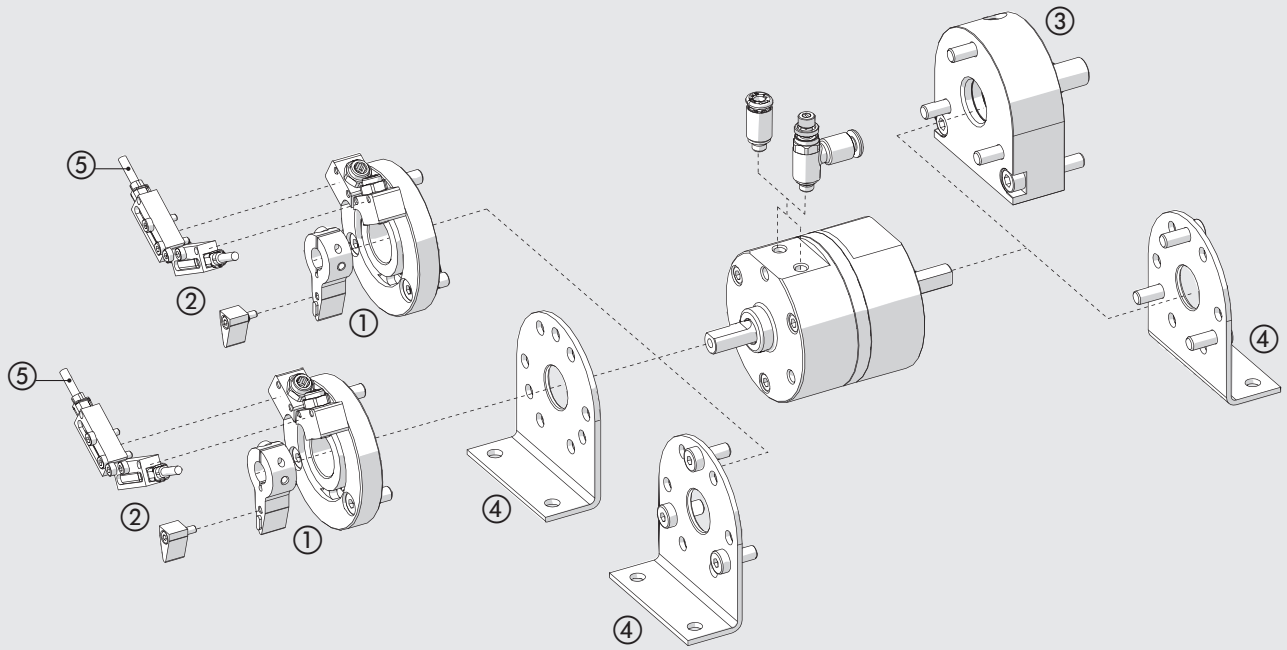

① ANGLE ADJUSTMENT

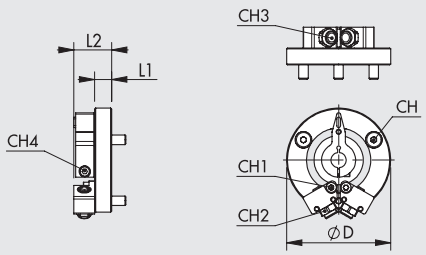

Code	Size	ØD	L1	L2	CH	CH1	CH2	CH3	CH4	Weight [g]
095016P001	16	55	9	20	3	2.5	9	4	2.5	73
095025P001	25	70	11	23	3	3	11	4	3	141

② SENSOR SUPPORT



Code	Size	H	H1	L	L1	CH	Weight [g]
095016P002	16	23	6	9.5	5	2	8
095025P002	25	27	6	11.5	5	2	11.5

③ FIXING ATTCHMENT

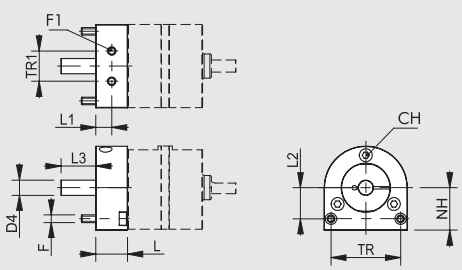

Code	Size	F	F1	D4	L	L1	L2	L3	NH	TR	TR1	CH	Weight [g]
095016P010	16	M5	M5	10	21	10.5	20.5	23	28	46	20	3	170
095025P010	25	M5	M5	12	22.5	11.3	23	30	40	60	42	4	279

METAL WORK PNEUMATIC

④ FOOT

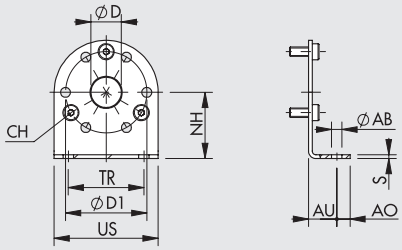

Code	Size	ØD	ØD1	TR	US	NH	CH	ØAB	AU	AO	S	Weight [g]
095016P020	**16**	16	43	40	55	35	3	5.5	15	7	2	62
095025P020	**25**	26	56	50	70	45	3	6.5	17	8	2.5	124

Note: Individually packed with 3 screws

⑤ RETRACTING SENSOR T7

SENSOR, SQUARE TYPE
Latest generation, secure fixing



For codes and technical data, see **chapter A6**.

Note: Use T7 sensors only

NOTES

GENERAL TECHNICAL DATA SLIDES

TYPES

The range of guide units and slides is very extensive.
Guides are grouped into families.



Guide units to couple with standard cylinders.
These are separate units to which an ISO 6432 or ISO 15552 cylinder is attached.

Twin pneumatic cylinder.
The barrel has two calibrated holes for housing two pistons and rods side by side. There are versions with a single piston rod, through piston rod and different power supplies depending on whether you wish to fix the barrel or the flanges to the ends of the piston rod.



Pneumatic single piston cylinders with supports at the end of the piston rod.
The common factor in all the various configurations is that, as well the calibrated hole for the piston in the cylinder body or front head, there are other slots housing bushes or guide bearings for additional piston rods.



Rodless cylinders.
In these cylinders the piston rod is integral with a carriage on the outside of the barrel, so there is no piston rod.
We offer versions in which the barrel is open, with a C-shaped section, and piston and carriage linked mechanically.



Guides with pneumatic actuator.
The main part of this actuators is the guiding section which determines the shape, applications, loads, maximum strokes and cost. The pneumatic part is housed in one of the bodies of the unit or it comes as a complete cylinder housed inside the guide.

LOAD CONDITIONS

Admitted loads for each guide unit are shown in the catalogue.
If the load is not aligned with the moving plate, it is possible to determine the equivalent load or stroke with a good approximation.









LOAD OR STROKE EQUIVALENCE



To check the admissible load



To check the arrow







TWIN CYLINDER SERIES S10

There are two sliding systems available:
• on bushes
• on ball recirculating bearings
The frame is made up of two paired cylinders with a common anodized aluminium body containing slots for retracting sensors.
There are 5 bores available:
2 x Ø 12, 2 x Ø 16, 2 x Ø 20, 2 x Ø 25 and 2 x Ø 30.

TECHNICAL DATA		S10-12	S10-16	S10-20	S10-25	S10-30
Pressure range	bar	3 to 7				
	MPa	0.3 to 0.7				
	psi	43.5 to 101				
Temperature range	°C	-10 to +80				
Fluid		20 µm dried or lubricated filtered air. Lubrication, if used, must be continuous.				
Piston speed	mm/s	30 to 100				
Versions		System with sliding bushes/System with ball bushes available with stop screw				
Sizes		12	16	20	25	30
Bores	mm	2 x 12	2 x 16	2 x 20	2 x 25	2 x 30
Piston rod diameter	mm	6	8	10	12	16
Strokes	mm	15	15	25	25	25
	mm	25	25	50	50	50
	mm	50	50	75	75	75
	mm	–	75	100	100	100
		–	–	–	125	125
Weight (C = stroke mm)						
Bushes version	kg	0.12 + (0.002 x C)	0.24 + (0.0025 x C)	0.51 + (0.005 x C)	0.76 + (0.006 x C)	1.3 + (0.009 x C)
Ball bearing version	kg	0.21 + (0.002 x C)	0.48 + (0.0025 x C)	0.77 + (0.005 x C)	1.18 + (0.006 x C)	1.92 + (0.009 x C)
Maximum impact energy	J	0.10	0.15	0.20	0.30	0.5
Theoretical thrust (P = relative pressure in bar)		(Multiply the value shown by the pressure in bar)				
Thrust force	da N	2.26 x P	4 x P	6.28 x P	9.8 x P	14.1 x P
Pull force	da N	1.69 x P	3 x P	4.11 x P	7.5 x P	10.1 x P
Max. loads		(The values shown refer to the min. and max. strokes)				
Bushes version	N	6 to 4	11 to 6	20 to 7	26 to 8	36 to 11
Ball bearing version	N	3 to 1.5	6 to 3	10 to 3.5	12 to 5.6	20 to 7

COMPONENTS

① FLANGE: anodized aluminium
② REAR BASE: anodized aluminium
③ ADJUSTABLE STRIKER PLATE. Zinc-plated steel
④ FRONT BASE: brass
⑤ PISTON: brass
⑥ MAGNET: Plastoferrite
⑦ CYLINDER BODY: anodized aluminium
⑧ STATIC O-RING: NBR
⑨ BALL RE-CIRCULATION BUSH
⑩ PISTON ROD: grinded chromed stainless steel
⑪ PISTON ROD: tempered chrome stainless steel, grinded

VERSIONS:
Ⓐ With sliding bushes
Ⓑ With ball bushes

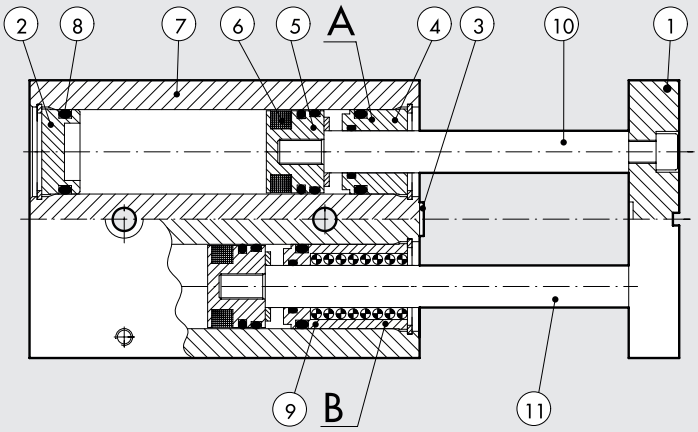

DIMENSIONS OF TWIN CYLINDER SERIES S10, ON BUSHES Ø 12 to 30 mm

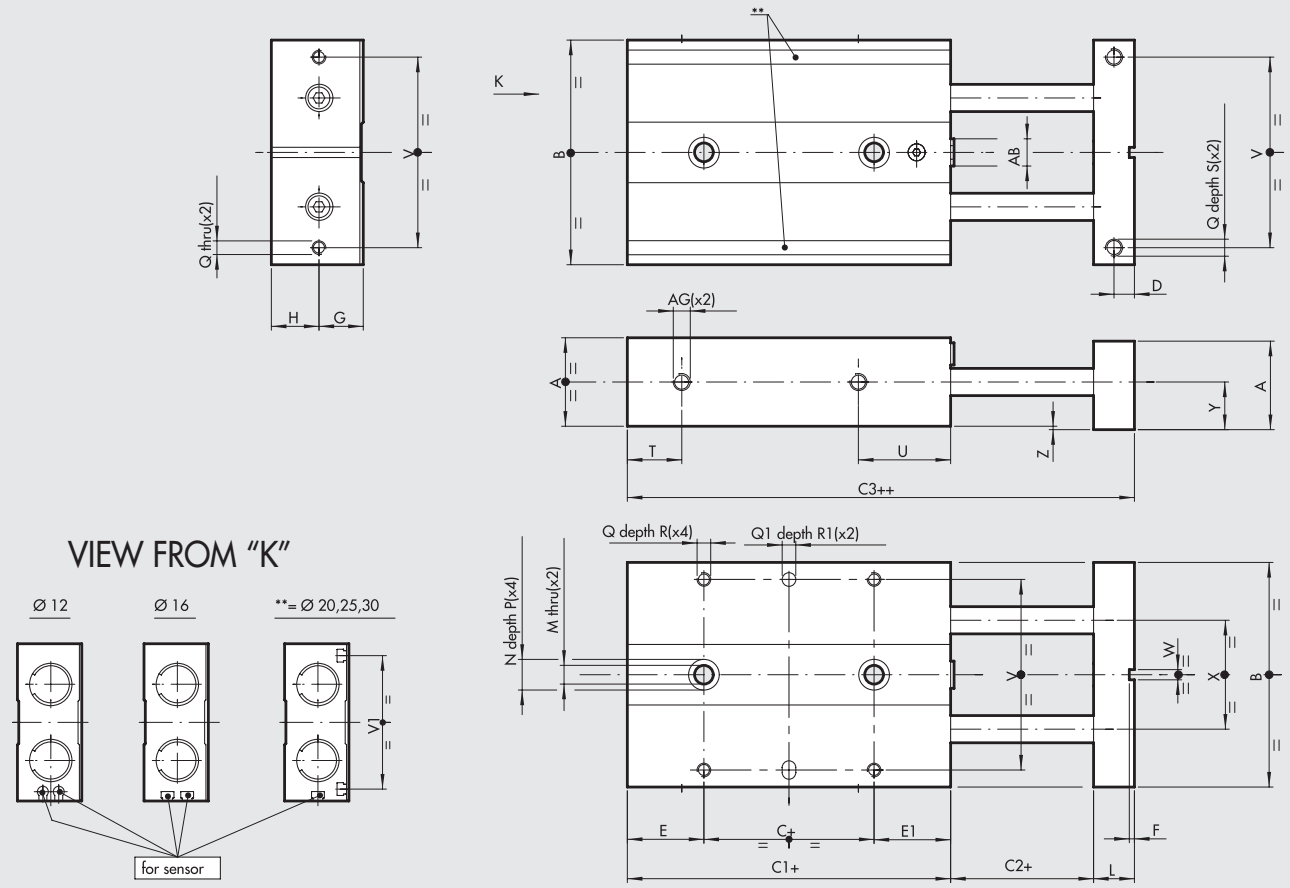

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

Code	Ø	A	B	C	C1	C2	C3	D	E	E1	F	G	H	L	M	N	P	Q	Q1 H7	R	R1	S	T
W1440122...	**12**	18	46	10	50	2	60	4	20	20	1.5	9	10	8	4.3	8	4	M3	4	5	3	8	9
W1440162...	**16**	22	56	16	62	2	74	5	26	20	1.5	11	12	10	4.3	8	4	M4	4	6	3	8	10
W1440202...	**20**	26	66	10	68	2	82	6	29	29	1.5	13	14	12	5.5	9	5	M4	4	7	3	10	11
W1440252...	**25**	32	78	10	74	2	90	7	32.5	31.5	2.5	16	17	14	6.5	10.5	6	M5	4	7	3	12	11
W1440302...	**30**	36	98	10	87	2	105	8	37.5	39.5	2.5	18	19	16	8.5	14	8	M6	6	8	5	12	13

Ø	U	V	V1	W	X	Y	Z	AB	AG
12	28	38	–	3	20	10	1	M5	M5
16	33	46	–	3	26	12	1	M6	M5
20	40	56	54	3	30	14	1	M8	M5
25	42	66	64	5	39	17	1	M10	M5
30	51	86	82	5	52	19	1	M12	G 1/8"

...Enter the stroke in mm (e.g. Ø 12 stroke 50 = W1440122050)

Strokes for bore 12 mm	15; 25; 50;
Strokes for bore 16 mm	15; 25; 50; 75;
Strokes for bore 20 mm	25; 50; 75; 100;
Strokes for bore 25 mm	25; 50; 75; 100; 125;
Strokes for bore 30 mm	25; 50; 75; 100; 125;

METAL WORK PNEUMATIC

DIMENSIONS OF TWIN CYLINDER SERIES S10, ON BALL BEARINGS Ø 12 to 30 mm

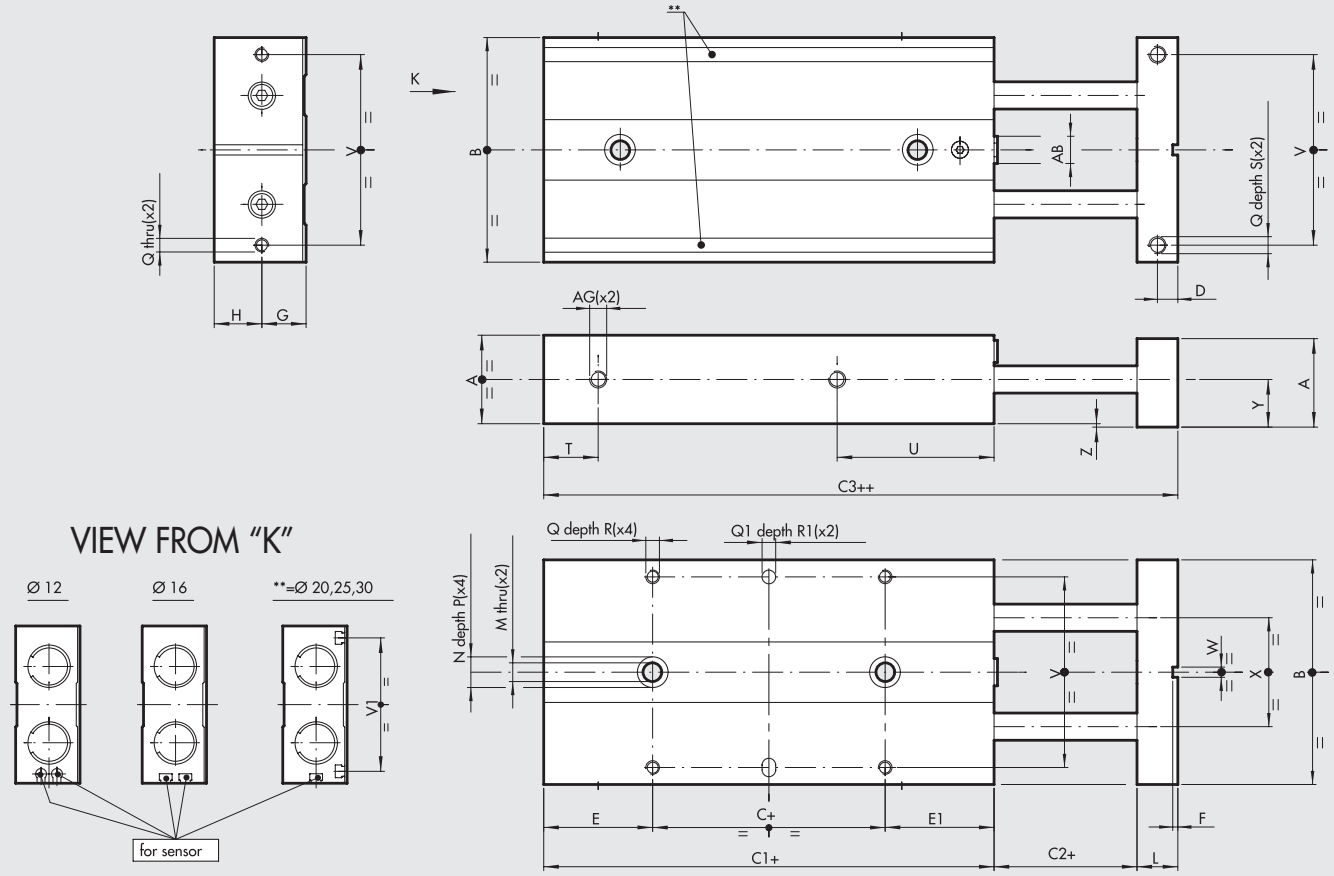

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

Code	Ø	A	B	C	C1	C2	C3	D	E	E1	F	G	H	L	M	N	P	Q	Q1^{H7}	R	R1	S	T
W1440123...	**12**	18	46	10	69	2	79	4	29.5	29.5	1.5	9	10	8	4.3	8	4	M3	4	5	3	8	9
W1440163...	**16**	22	56	10	90	2	98	5	42	38	1.5	11	12	10	4.3	8	4	M4	4	6	3	8	10
W1440203...	**20**	26	66	10	100	2	111	6	46.5	43.5	1.5	13	14	12	5.5	9	5	M4	4	7	3	10	11
W1440253...	**25**	32	78	10	108	2	120	7	51.5	46.5	2.5	16	17	14	6.5	10.5	6	M5	4	7	3	12	11
W1440303...	**30**	36	98	10	124	2	142	8	56	58	2.5	18	19	16	8.5	14	8	M6	6	8	5	12	13

Ø	U	V	V1	W	X	Y	Z	AB	AG
12	47	38	–	3	20	10	1	M5	M5
16	57	46	–	3	26	12	1	M6	M5
20	69	56	54	3	30	14	1	M8	M5
25	72	66	64	5	39	17	1	M10	M5
30	88	86	82	5	52	19	1	M12	G 1/8"

...Enter the stroke in mm (e.g. Ø 12 stroke 50 = W1440123050)

Strokes for bore 12 mm	15; 25; 50;
Strokes for bore 16 mm	15; 25; 50; 75;
Strokes for bore 20 mm	25; 50; 75; 100;
Strokes for bore 25 mm	25; 50; 75; 100; 125;
Strokes for bore 30 mm	25; 50; 75; 100; 125;

ACCESSORIES

SENSOR Ø 4, FOR SLIDE S10 Ø 12



For codes and technical data, see **chapter A6**.

RETRACTABLE SENSOR, FOR SLIDE S10 Ø16 to 30

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

NOTES

TWIN CYLINDER SLIDE WITH FIXED BODY SERIES S11

There are two sliding systems available:
• on bushes
• on ball bearings
The frame is made up of two paired through-rod cylinders with a common anodized aluminium body containing slots for retracting sensors.
There are 5 bores available:
2 x Ø 12; 2 x Ø 16; 2 x Ø 20; 2 x Ø 25 and 2 x Ø 30.
The piston rods are united by means of a plate on which mechanical stops or hydraulic shock absorbers can be mounted.

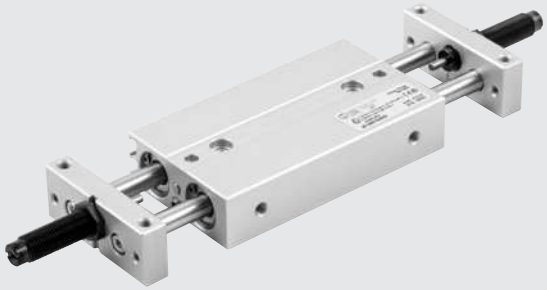

TECHNICAL DATA		S11-12	S11-16	S11-20	S11-25	S11-30
Fluid		20 µm filtered air				
Pressure range	bar	1.5 to 7				
	MPa	0.15 to 0.7				
	psi	43.5 to 101				
Temperature range	°C	-10 to +80				
Piston speed	mm/s	30 to 200				
Versions		With sliding bushes / With ball bearing bushes / With stop screw / With hydraulic shock absorbers				
Bores	mm	12	16	20	25	30
Piston rod diameter	mm	6	8	10	12	16
Strokes	mm	25	25	25	25	25
		50	50	50	50	50
		75	75	75	75	75
		–	100	100	100	100
		–	–	125	125	125
		–	–	–	150	150
Weight = X + (Y · C) where C = stroke	kg					
Bushes version		X = 0.14	X = 0.25	X = 0.5	X = 0.7	X = 1.24
		Y = 0.002	Y = 0.0035	Y = 0.0045	Y = 0.007	Y = 0.01
Ball bearing version		X = 0.25	X = 0.37	X = 0.78	X = 1.04	X = 1.98
		Y = 0.002	Y = 0.0035	Y = 0.0045	Y = 0.007	Y = 0.01
Maximum impact energy with buffers	J	0.10	0.15	0.20	0.30	0.5
Maximum impact energy with hydraulic decelerators	J	2	5	5	10	20
Theoretical thrust (P = relative pressure in bar)	N	16.9 x P	30 x P	47 x P	75 x P	101 x P
Max. loads		(The values shown refer to the min. and max. strokes)				
Bushes version	N	Fr: 13 to 5	Fr: 35 to 6.5	Fr: 58 to 7	Fr: 80 to 8	Fr: 130 to 18
		Fp: 6 to 3	Fp: 11 to 3	Fp: 18 to 5	Fp: 23 to 6	Fp: 50 to 8
Ball bearing version	N	Fr: 7 to 3	Fr: 20 to 4	Fr: 35 to 4.5	Fr: 50 to 5.4	Fr: 80 to 12
		Fp: 4 to 1.5	Fp: 4 to 1.5	Fp: 12 to 3	Fp: 15 to 3.5	Fp: 20 to 4.5



COMPONENTS

① FLANGE: anodized aluminium
② ADJUSTABEL STRIKER PLATE: Zinc-plated steel
③ BASE: brass
④ PISTON: brass
⑤ MAGNET: plastoferrite
⑥ CYLINDER BODY: anodized aluminium
⑦ STATIC O-RINGS: NBR
⑧ BUSH: ball bearing
⑨ PISTON ROD: grinded chromed stainless steel
⑩ PISTON ROD: tempered chrome stainless steel, grinded

VERSIONS:
Ⓐ With sliding bushes
Ⓑ With ball bearing bushes

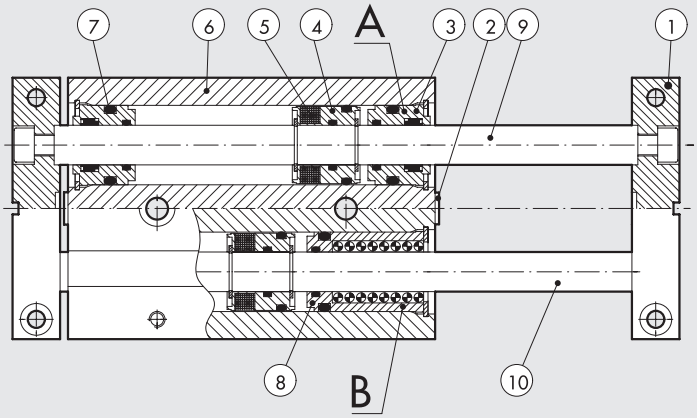

DIMENSIONS OF TWIN-CYLINDER GUIDE UNITS SERIES S11, ON BUSHES Ø 12 to 30

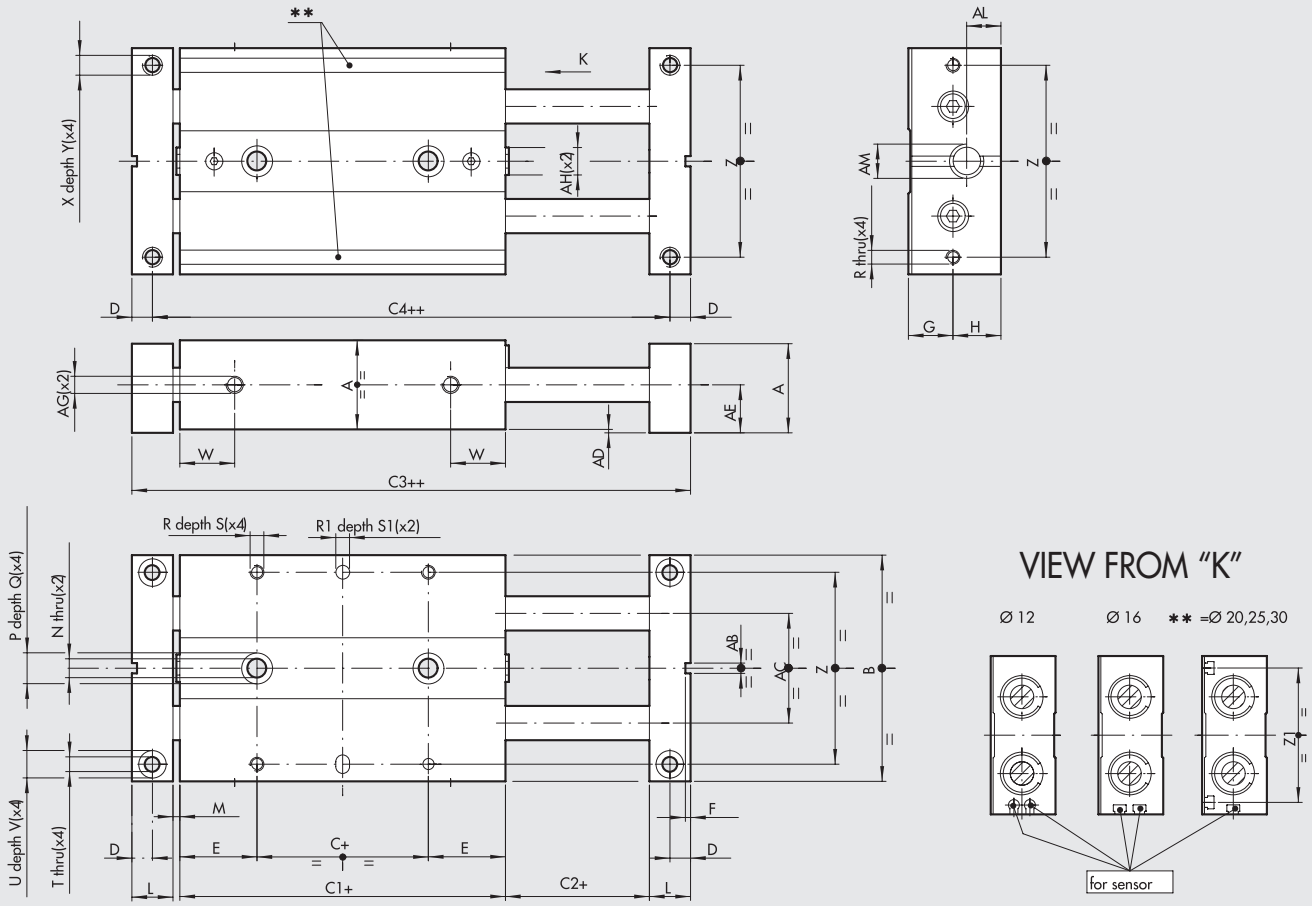

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

Code	Ø	A	B	C	C1	C2	C3	C4	D	E	F	G	H	L	M	N	P	Q	R	R1 H7	S	S1	T
W1450122...	**12**	18	46	5	45	2	65	57	4	20	1.5	9	10	8	2	4.3	8	4	M3	4	5	3	3.3
W1450162...	**16**	22	56	10	50	2	74	64	5	20	1.5	11	12	10	2	4.3	8	4	M4	4	6	3	4.3
W1450202...	**20**	26	66	10	55	2	83	71	6	22.5	1.5	13	14	12	2	5.5	9	5	M4	4	7	3	4.3
W1450252...	**25**	32	78	10	60	2	92	78	7	25	2.5	16	17	14	2	6.5	10.5	6	M5	4	7	3	5.2
W1450302...	**30**	36	98	10	70	2	106	90	8	30	2.5	18	19	16	2	8.5	14	8	M6	6	8	5	5.2

Ø	U	V	W	X	Y	Z	Z1	AB	AC	AD	AE	AF	AG	AM	AL
12	6	3	14	M4	6	38	–	3	20	1	10	4	M5	M8x1	7
16	8	4	15	M5	8	46	–	3	26	1	12	5	M5	M10x1	8.5
20	8	4	16	M5	10	56	54	3	30	1	14	5	M5	M10x1	9
25	9	5	19	M6	12	66	64	5	39	1	17	6	M5	M12x1	10
30	9	5	21	M6	12	86	82	5	52	1	19	6	G 1/8	M14x1.5	12

...Enter the stroke in mm (e.g. Ø 12 stroke 50 = W1450122050)

Strokes for bore 12 mm	25; 50; 75
Strokes for bore 16 mm	25; 50; 75; 100
Strokes for bore 20 mm	25; 50; 75; 100; 125
Strokes for bore 25 mm	25; 50; 75; 100; 125; 150
Strokes for bore 30 mm	25; 50; 75; 100; 125; 150

METAL WORK PNEUMATIC

DIMENSIONS OF TWIN-CYLINDER GUIDE UNITS SERIES S11, ON BALL BEARINGS Ø 12 to 30

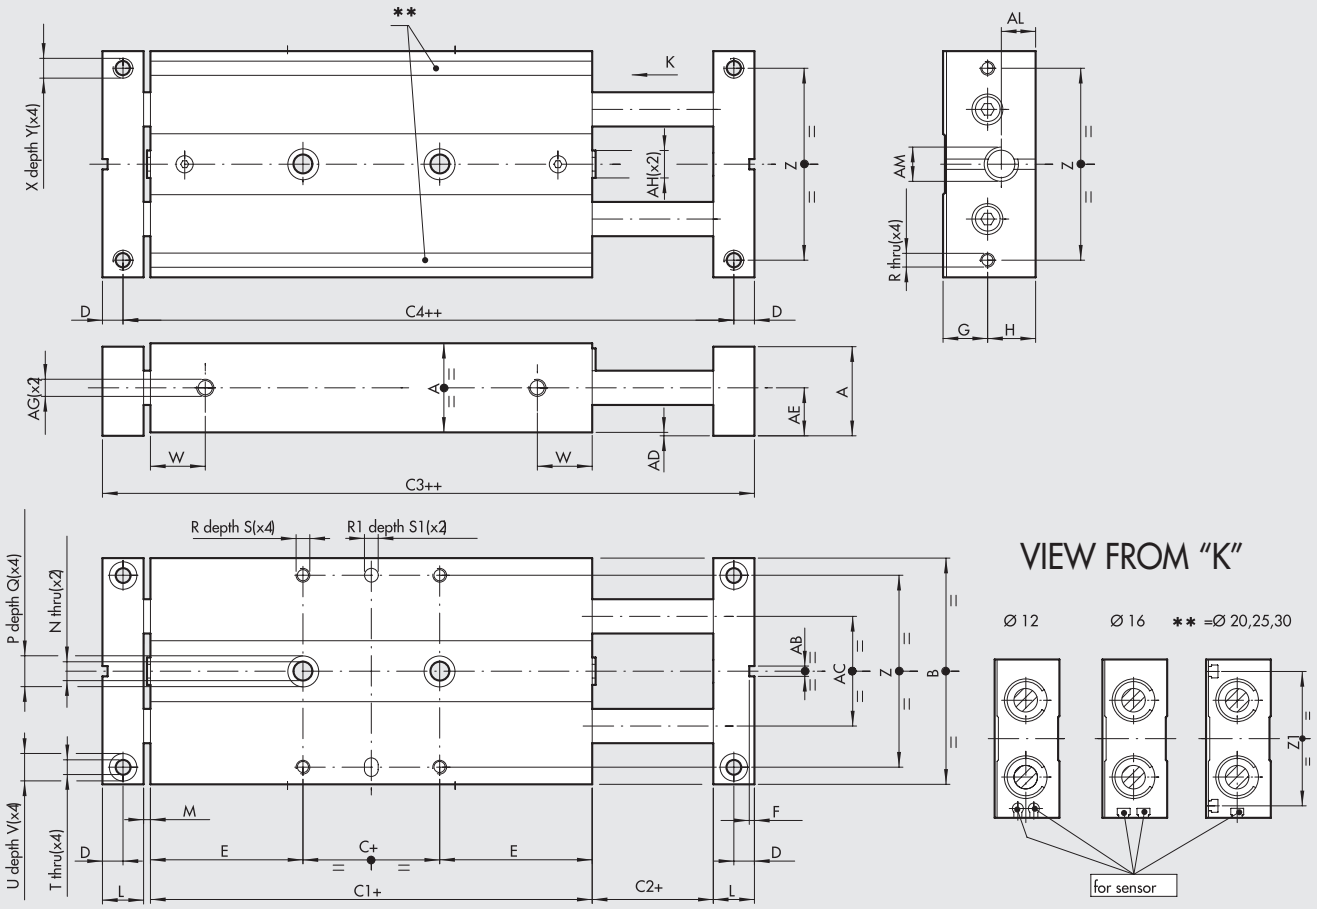

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

Code	Ø	A	B	C	C1	C2	C3	C4	D	E	F	G	H	L	M	N	P	Q	R	R1 H7	S	S1	T
W1450123...	**12**	18	46	5	71	2	91	83	4	33	1.5	9	10	8	2	4.3	8	4	M3	4	5	3	3.3
W1450163...	**16**	22	56	10	85	2	109	99	5	37.5	1.5	11	12	10	2	4.3	8	4	M4	4	6	3	4.3
W1450203...	**20**	26	66	10	99	2	127	115	6	44.5	1.5	13	14	12	2	5.5	9	5	M4	4	7	3	4.3
W1450253...	**25**	32	78	10	105	2	137	123	7	47.5	2.5	16	17	14	2	6.5	10.5	6	M5	4	7	3	5.2
W1450303...	**30**	36	98	10	128	2	164	148	8	59	2.5	18	19	16	2	8.5	14	8	M6	6	8	5	5.2

Ø	U	V	W	X	Y	Z	Z1	AB	AC	AD	AE	AF	AG	AH	AM	AL
12	6	3	28	M4	6	38	–	3	20	1	10	4	M5	M5	M8x1	7
16	8	4	33	M5	8	46	–	3	26	1	12	5	M5	M6	M10x1	8.5
20	8	4	40	M5	10	56	54	3	30	1	14	5	M5	M8	M10x1	9
25	9	5	42	M6	6	66	64	5	39	1	17	6	M5	M10	M12x1	10
30	9	5	50	M6	12	86	82	5	52	1	19	6	G 1/8	M12	M14x1.5	12

...Enter the stroke in mm (e.g. Ø 12 stroke 50 = W1450123050)

Strokes for bore 12 mm	25; 50; 75
Strokes for bore 16 mm	25; 50; 75; 100
Strokes for bore 20 mm	25; 50; 75; 100; 125
Strokes for bore 25 mm	25; 50; 75; 100; 125; 150
Strokes for bore 30 mm	25; 50; 75; 100; 125; 150

DIMENSIONS OF TWIN-CYLINDER GUIDE UNITS WITH SHOCK ABSORBERS SERIES S11, ON BUSHES Ø 12 to 30

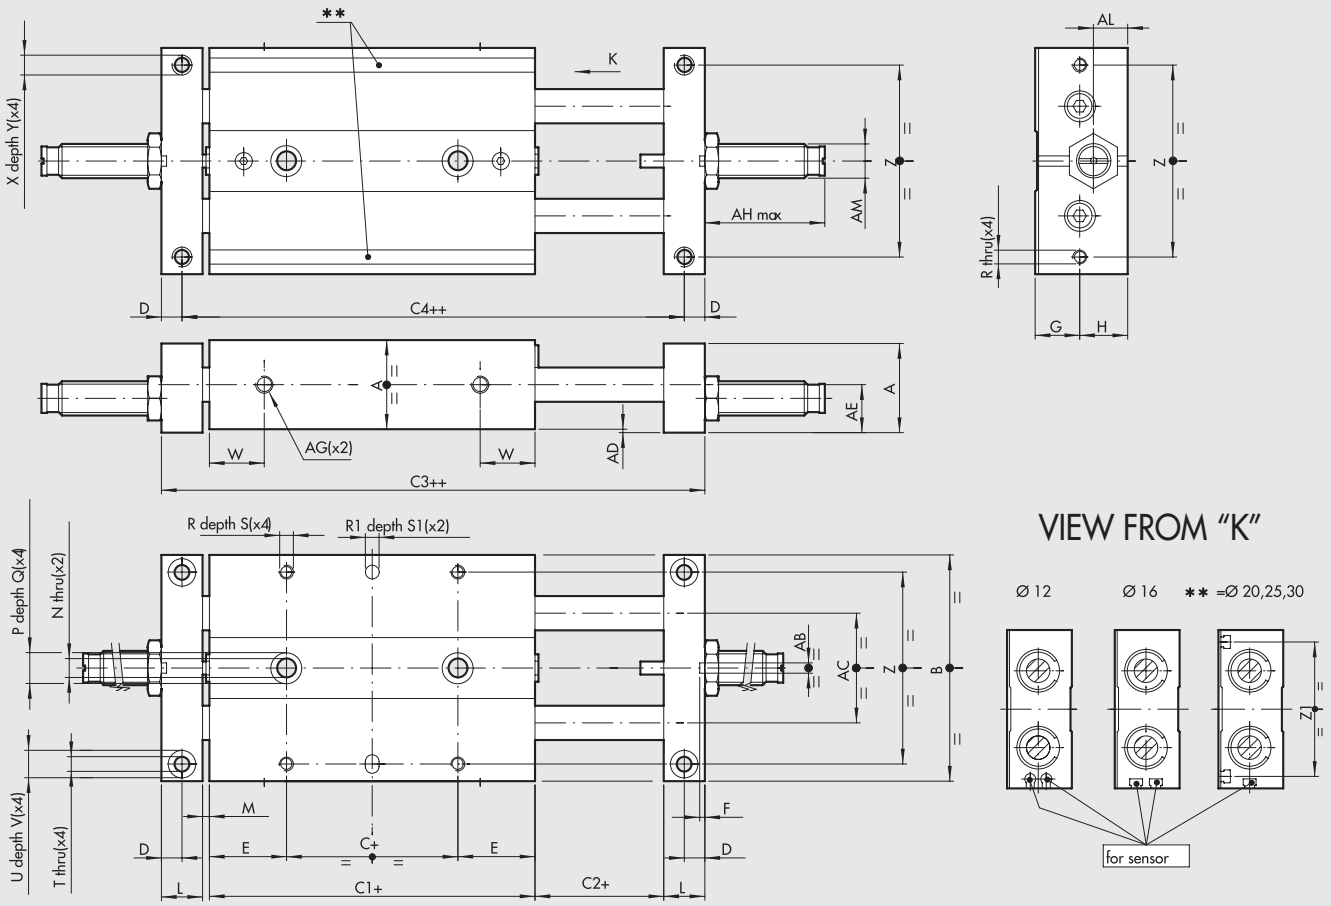

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

Code	Ø	A	B	C	C1	C2	C3	C4	D	E	F	G	H	L	M	N	P	Q	R	R1 H7	S	S1	T
W1450124...	**12**	18	46	5	45	2	65	57	4	20	1.5	9	10	8	2	4.3	8	4	M3	4	5	3	3.3
W1450164...	**16**	22	56	10	50	2	74	64	5	20	1.5	11	12	10	2	4.3	8	4	M4	4	6	3	4.3
W1450204...	**20**	26	66	10	55	2	83	71	6	22.5	1.5	13	14	12	2	5.5	9	5	M4	4	7	3	4.3
W1450254...	**25**	32	78	10	60	2	92	78	7	25	2.5	16	17	14	2	6.5	10.5	6	M5	4	7	3	5.2
W1450304...	**30**	36	98	10	70	2	106	90	8	30	2.5	18	19	16	2	8.5	14	8	M6	6	8	5	5.2

Ø	U	V	W	X	Y	Z	Z1	AB	AC	AD	AE	AF	AG	AH	AM	AL
12	6	3	14	M4	6	38	–	3	20	1	10	4	M5	30	M8x1	7
16	8	4	15	M5	8	46	–	3	26	1	12	5	M5	35	M10x1	8.5
20	8	4	16	M5	10	56	54	3	30	1	14	5	M5	35	M10x1	9
25	9	5	19	M6	12	66	69	5	39	1	17	6	M5	36	M12x1	10
30	9	5	21	M6	12	86	82	5	52	1	19	6	G 1/8	60	M14x1.5	12

...Enter the stroke in mm (e.g. Ø 12 stroke 50 = W1450124050)

Strokes for bore 12 mm	25; 50; 75
Strokes for bore 16 mm	25; 50; 75; 100
Strokes for bore 20 mm	25; 50; 75; 100; 125
Strokes for bore 25 mm	25; 50; 75; 100; 125; 150
Strokes for bore 30 mm	25; 50; 75; 100; 125; 150

METAL WORK PNEUMATIC

DIMENSIONS OF TWIN-CYLINDER GUIDE UNITS WITH SHOCK ABSORBERS SERIES S11, ON BALL BEARING Ø 12 to 30

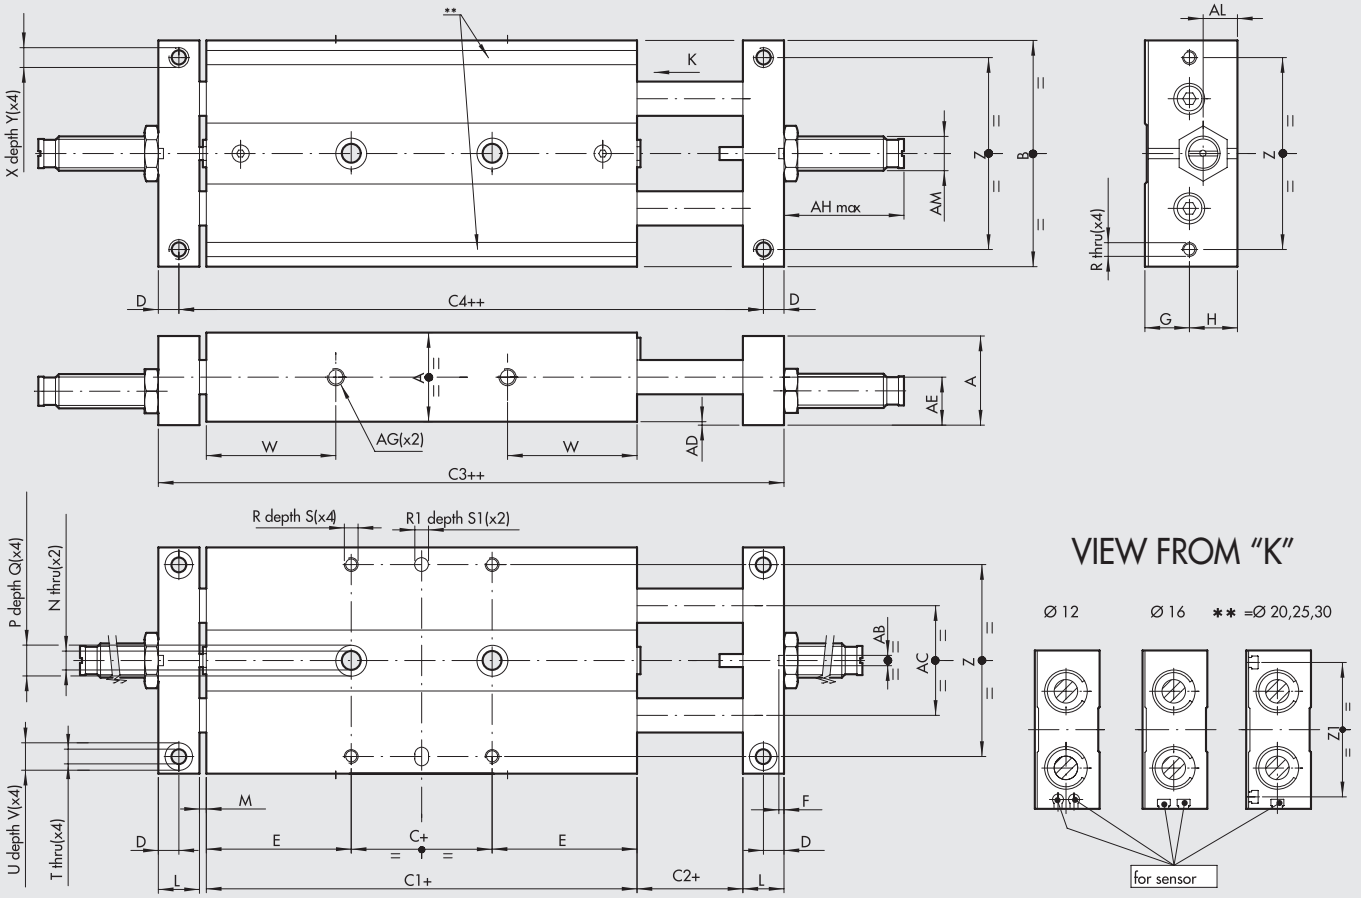

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

Code	Ø	A	B	C	C1	C2	C3	C4	D	E	F	G	H	L	M	N	P	Q	R	R1 H7	S	S1	T
W1450125...	**12**	18	46	5	71	2	91	83	4	33	1.5	9	10	8	2	4.3	8	4	M3	4	5	3	3.3
W1450165...	**16**	22	56	10	85	2	109	99	5	37.5	1.5	11	12	10	2	4.3	8	4	M4	4	6	3	4.3
W1450205...	**20**	26	66	10	99	2	127	115	6	44.5	1.5	13	14	12	2	5.5	9	5	M4	4	7	3	4.3
W1450255...	**25**	32	78	10	105	2	137	123	7	47.5	2.5	16	17	14	2	6.5	10.5	6	M5	4	7	3	5.2
W1450305...	**30**	36	98	10	128	2	164	148	8	59	2.5	18	19	16	2	8.5	14	8	M6	6	8	5	5.2

Ø	U	V	W	X	Y	Z	Z1	AB	AC	AD	AE	AF	AG	AH	AM	AL
12	6	3	28	M4	6	38	–	3	20	1	10	4	M5	30	M8x1	7
16	8	4	33	M5	8	46	–	3	26	1	12	5	M5	35	M10x1	8.5
20	8	4	40	M5	10	56	54	3	30	1	14	5	M5	35	M10x1	9
25	9	5	42	M6	6	66	64	5	39	1	17	6	M5	36	M12x1	10
30	9	5	50	M6	12	86	82	5	52	1	19	6	G 1/8	60	M14x1.5	12

...Enter the stroke in mm (e.g. Ø 12 stroke 50 = W1450125050)

Strokes for bore 12 mm	25; 50; 75
Strokes for bore 16 mm	25; 50; 75; 100
Strokes for bore 20 mm	25; 50; 75; 100; 125
Strokes for bore 25 mm	25; 50; 75; 100; 125; 150
Strokes for bore 30 mm	25; 50; 75; 100; 125; 150

ACCESSORIES

SENSOR Ø 4, FOR SLIDE S11 Ø 12



For codes and technical data, see **chapter A6**.

RETRACTABLE SENSOR, FOR SLIDE S11 Ø16 to 30

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

SPARE PARTS

SHOCK ABSORBERS



Code	Ø	Description
0950004001	12	Shock absorbers ECO 8 MC2 + nut M8x1
0950004002	16 - 20	Shock absorbers ECO 10 MF2 + nut M10x1
0950004003	25	Shock absorbers ECO 15 MF1 + nut M12x1
0950004004	30	Shock absorbers ECO 25 MC2 + nut M14x1.5

NOTES

TWIN CYLINDER SLIDE WITH FIXED PLATES SERIES S12

METAL WORK PNEUMATIC

Two sliding systems are available:
• on bushes
• on ball bearings
The structure is made up of two paired through-rod cylinders with a common anodized aluminium body with grooves for mounting the retractable sensor.
Five bores available: 2 x Ø 16; 2 x Ø 20; 2 x Ø 25; 2 x Ø 30.
The rods are joined together by means of a plate on which the mechanical limit switches or hydraulic shock absorbers can be mounted.
The compressed air ports are at the end of the piston rods.

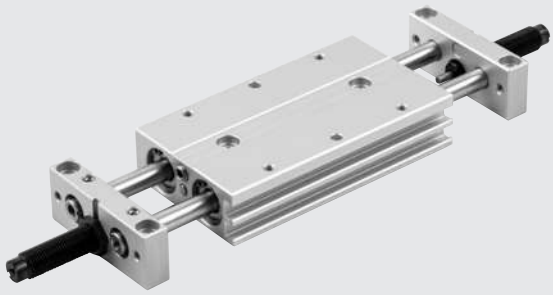

TECHNICAL DATA		S12-16	S12-20	S12-25	S12-30
Fluid		20 µm filtered air			
Pressure range	bar	1.5 to 7			
	MPa	0.15 to 0.7			
	psi	21.5 to 101			
Temperature range	°C	-10 to +80			
Piston speed	mm/s	30 to 200			
Versions		With sliding bushes / With ball bearing bushes / With stop screw / With hydraulic shock absorbers			
Bores	mm	16	20	25	30
Piston rod diameter	mm	8	10	12	16
Strokes	mm	25	25	25	25
		50	50	50	50
		75	75	75	75
		100	100	100	100
		–	125	125	125
		–	–	150	150
Weight = X + (Y · C) where C = stroke	kg				
Bushes version		X = 0.25	X = 0.5	X = 0.7	X = 1.24
		Y = 0.0035	Y = 0.0045	Y = 0.007	Y = 0.01
Ball bearing version		X = 0.37	X = 0.78	X = 1.04	X = 1.98
		Y = 0.0035	Y = 0.0045	Y = 0.007	Y = 0.01
Maximum impact energy with buffers	J	0.15	0.20	0.30	0.5
Maximum impact energy with hydraulic decelerators	J	5	5	10	20
Theoretical thrust (P = relative pressure in bar)	N	30 x P	47 x P	75 x P	101 x P
Max. loads		(The values shown refer to the min. and max. strokes)			
Bushes version	N	Fr: 35 to 6.5	Fr: 58 to 7	Fr: 80 to 8	Fr: 130 to 18
		Fp: 11 to 3	Fp: 18 to 5	Fp: 23 to 6	Fp: 50 to 8
Ball bearing version	N	Fr: 20 to 4	Fr: 35 to 4.5	Fr: 50 to 5.4	Fr: 80 to 12
		Fp: 4 to 1.5	Fp: 12 to 3	Fp: 15 to 3.5	Fp: 20 to 4.5



COMPONENTS

① FLANGE: anodized aluminium
② ADJUSTABLE STRIKER PLATE: Zinc-plated steel
③ BASE: brass
④ PISTON: brass
⑤ MAGNET: Plastoferrite
⑥ CYLINDER BODY: anodized aluminium
⑦ STATIC O-RINGS: NBR
⑧ BUSH: ball bearing
⑨ SCREW: pneumatically powered
⑩ PISTON ROD: grinded chromed stainless steel
⑪ PISTON ROD: tempered chrome stainless steel, grinded

VERSIONS:
Ⓐ With sliding bush
Ⓑ With ball bearing bush

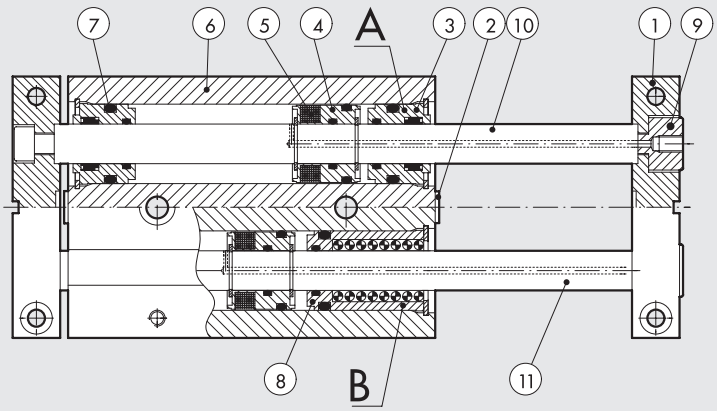

DIMENSIONS OF TWIN-CYLINDER SLIDE SERIES S12, ON BUSHES Ø 16 to 30

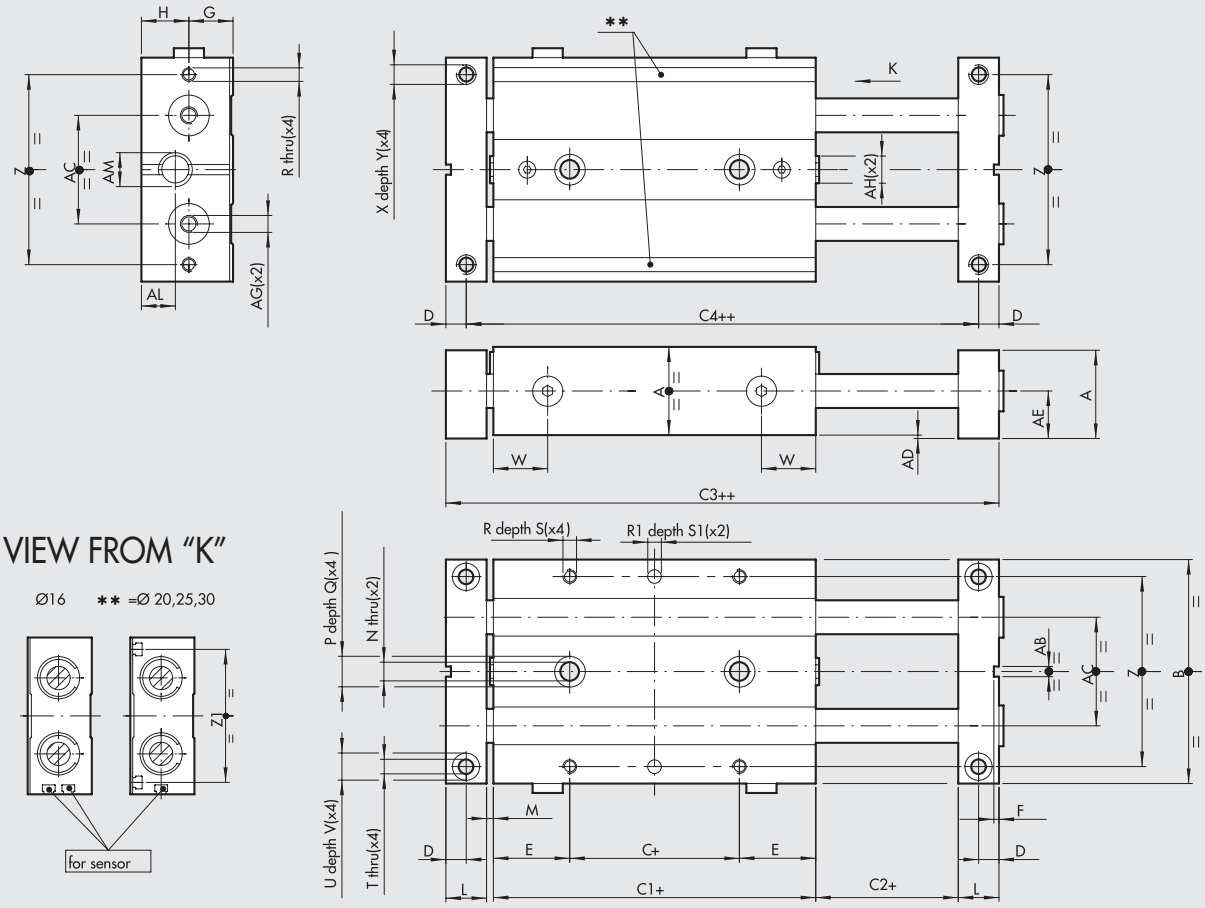

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

Code	Ø	A	B	C	C1	C2	C3	C4	D	E	F	G	H	L	M	N	P	Q	R	R1^{H7}	S	S1	T
W1460162...	**16**	22	56	10	50	2	74	64	5	20	1.5	11	12	10	2	4.3	8	4	M4	4	6	3	4.3
W1460202...	**20**	26	66	10	55	2	83	71	6	22.5	1.5	13	14	12	2	5.5	9	5	M4	4	7	3	4.3
W1460252...	**25**	32	78	10	60	2	92	78	7	25	2.5	16	17	14	2	6.5	10.5	6	M5	4	7	3	5.2
W1460302...	**30**	36	98	10	70	2	106	90	8	30	2.5	18	19	16	2	8.5	14	8	M6	6	8	5	5.2

Ø	U	V	W	X	Y	Z	Z1	AB	AC	AD	AE	AF	AG	AH	AM	AL
16	8	4	15	M5	8	46	–	3	26	1	12	5	M5	M6	M10x1	8.5
20	8	4	16	M5	10	56	54	3	30	1	14	5	M5	M8	M10x1	9
25	9	5	19	M6	12	66	64	5	39	1	17	6	M5	M10	M12x1	10
30	9	5	21	M6	12	86	82	5	52	1	19	6	G 1/8	M12	M14x1.5	12

...Enter the stroke in mm (e.g. Ø 16 stroke 50 = W1450162050)

Strokes for bore 16 mm	25; 50; 75; 100
Strokes for bore 20 mm	25; 50; 75; 100; 125
Strokes for bore 25 mm	25; 50; 75; 100; 125; 150
Strokes for bore 30 mm	25; 50; 75; 100; 125; 150

METAL WORK PNEUMATIC

DIMENSIONS OF TWIN-CYLINDER SLIDE SERIES S12, ON BALL BEARINGS Ø 16 to 30

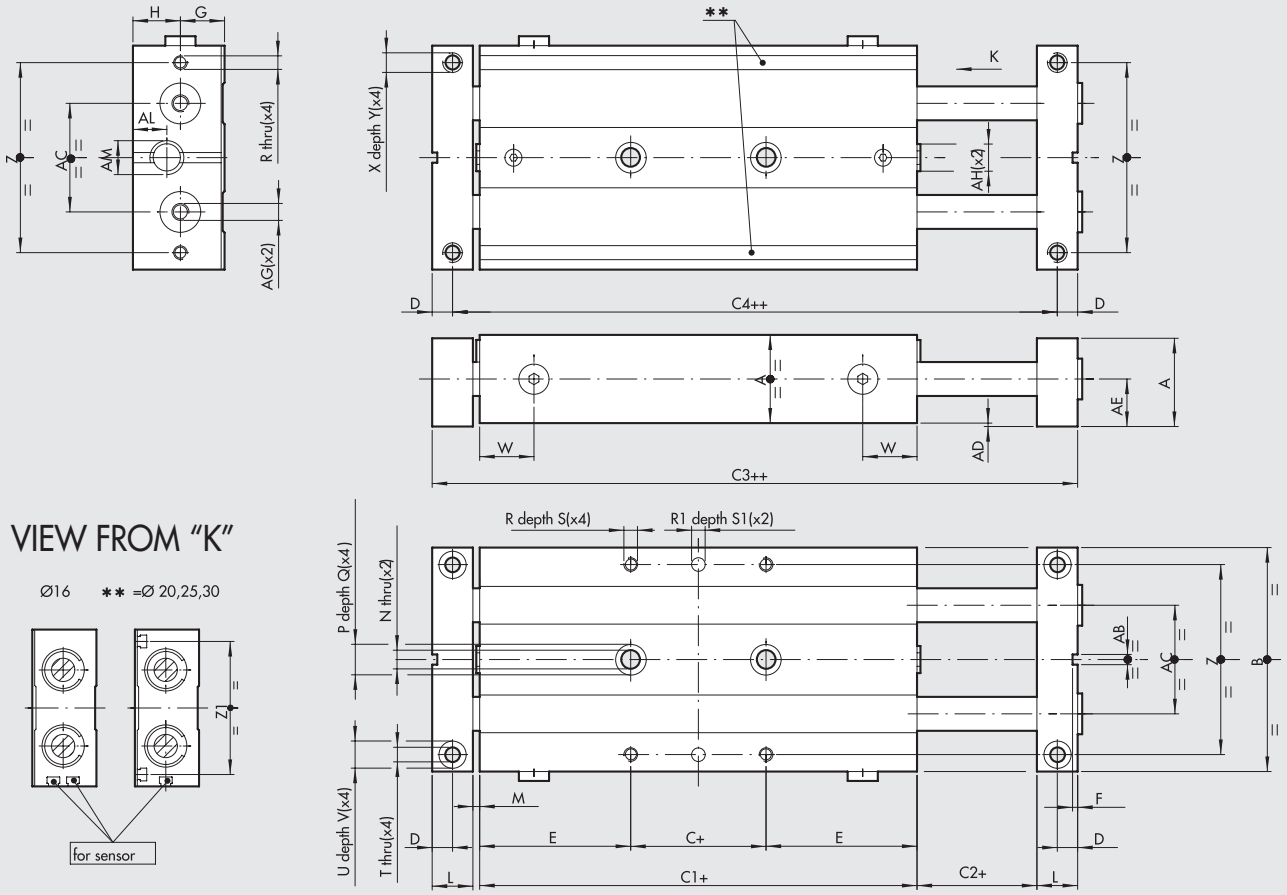

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

Code	Ø	A	B	C	C1	C2	C3	C4	D	E	F	G	H	L	M	N	P	Q	R	R1 H7	S	S1	T
W1460163...	**16**	22	56	10	85	2	109	99	5	37.5	1.5	11	12	10	2	4.3	8	4	M4	4	6	3	4.3
W1460203...	**20**	26	66	10	99	2	127	115	6	44.5	1.5	13	14	12	2	5.5	9	5	M4	4	7	3	4.3
W1460253...	**25**	32	78	10	105	2	137	123	7	47.5	2.5	16	17	14	2	6.5	10.5	6	M5	4	7	3	5.2
W1460303...	**30**	36	98	10	128	2	164	148	8	59	2.5	18	19	16	2	8.5	14	8	M6	6	8	5	5.2

Ø	U	V	W	X	Y	Z	Z1	AB	AC	AD	AE	AF	AG	AH	AM	AL
16	8	4	33	M5	8	46	–	3	26	1	12	5	M5	M6	M10x1	8.5
20	8	4	40	M5	10	56	54	3	30	1	14	5	M5	M8	M10x1	9
25	9	5	42	M6	6	66	64	5	39	1	17	6	M5	M10	M12x1	10
30	9	5	50	M6	12	86	82	5	52	1	19	6	G 1/8	M12	M14x1.5	12

...Enter the stroke in mm (e.g. Ø 16 stroke 50 = W1450163050)

Strokes for bore 16 mm	25; 50; 75; 100
Strokes for bore 20 mm	25; 50; 75; 100; 125
Strokes for bore 25 mm	25; 50; 75; 100; 125; 150
Strokes for bore 30 mm	25; 50; 75; 100; 125; 150

DIMENSIONS OF TWIN-CYLINDER SLIDE WITH SHOCK ABSORBERS SERIES S12, ON BUSHES Ø 16 to 30

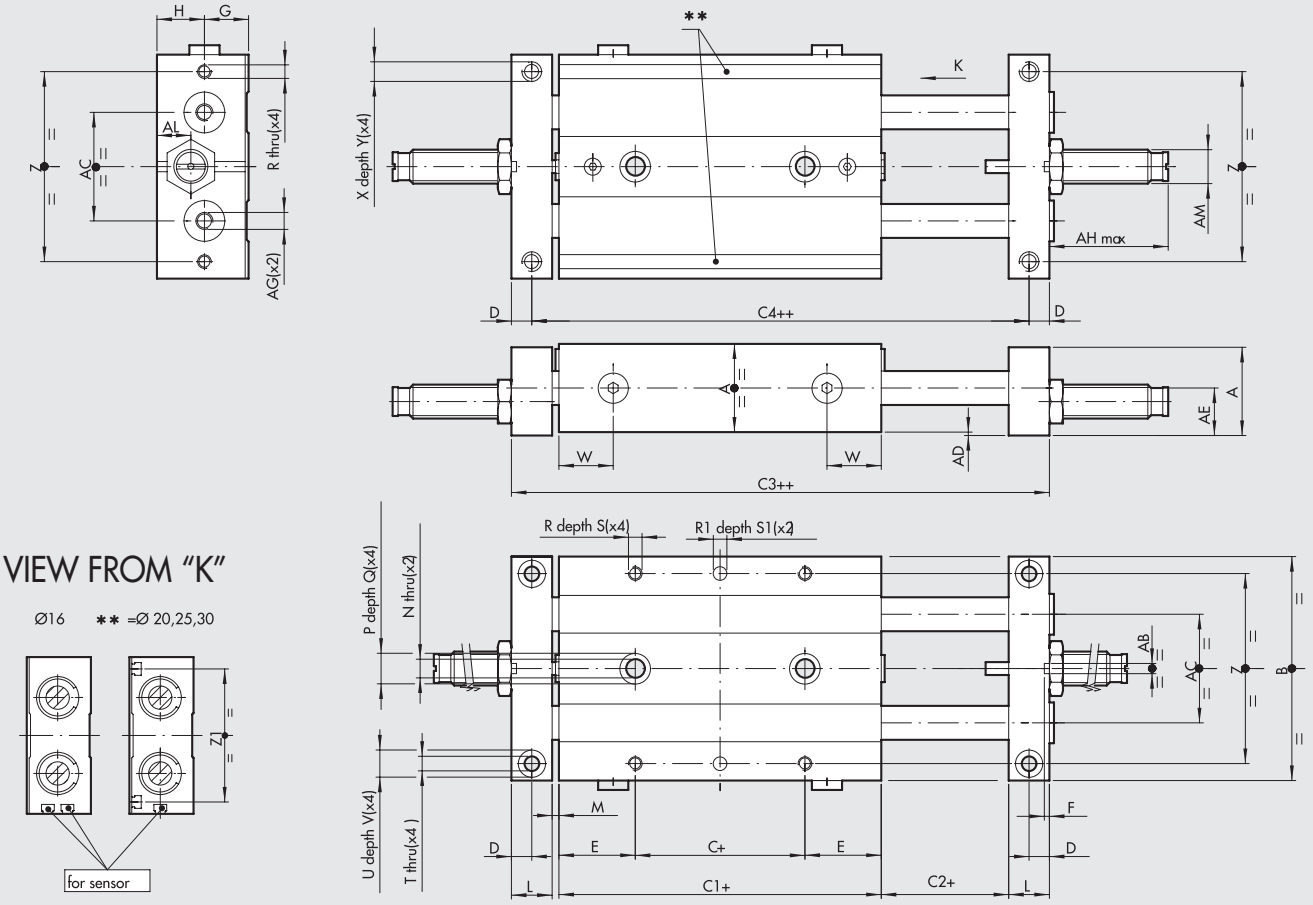

VIEW FROM "K"

Ø16 ** =Ø 20,25,30

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

Code	Ø	A	B	C	C1	C2	C3	C4	D	E	F	G	H	L	M	N	P	Q	R	R1 H7	S	S1	T
W1460164...	16	22	56	10	50	2	74	64	5	20	1.5	11	12	10	2	4.3	8	4	M4	4	6	3	4.3
W1460204...	20	26	66	10	55	2	83	71	6	22.5	1.5	13	14	12	2	5.5	9	5	M4	4	7	3	4.3
W1460254...	25	32	78	10	60	2	92	78	7	25	2.5	16	17	14	2	6.5	10.5	6	M5	4	7	3	5.2
W1460304...	30	36	98	10	70	2	106	90	8	30	2.5	18	19	16	2	8.5	14	8	M6	6	8	5	5.2

Ø	U	V	W	X	Y	Z	Z1	AB	AC	AD	AE	AF	AG	AH	AM	AL
16	8	4	15	M5	8	46	–	3	26	1	12	5	M5	35	M10x1	8.5
20	8	4	16	M5	10	56	54	3	30	1	14	5	M5	35	M10x1	9
25	9	5	19	M6	12	66	64	5	39	1	17	6	M5	36	M12x1	10
30	9	5	21	M6	12	86	82	5	52	1	19	6	G 1/8	60	M14x1.5	12

...Enter the stroke in mm (e.g. Ø 16 stroke 50 = W1450164050)

Strokes for bore 16 mm	25; 50; 75; 100
Strokes for bore 20 mm	25; 50; 75; 100; 125
Strokes for bore 25 mm	25; 50; 75; 100; 125; 150
Strokes for bore 30 mm	25; 50; 75; 100; 125; 150

METAL WORK PNEUMATIC

DIMENSIONS OF TWIN-CYLINDER SLIDE WITH SHOCK ABSORBERS SERIES S12, ON BALL BEARING Ø 16 to 30

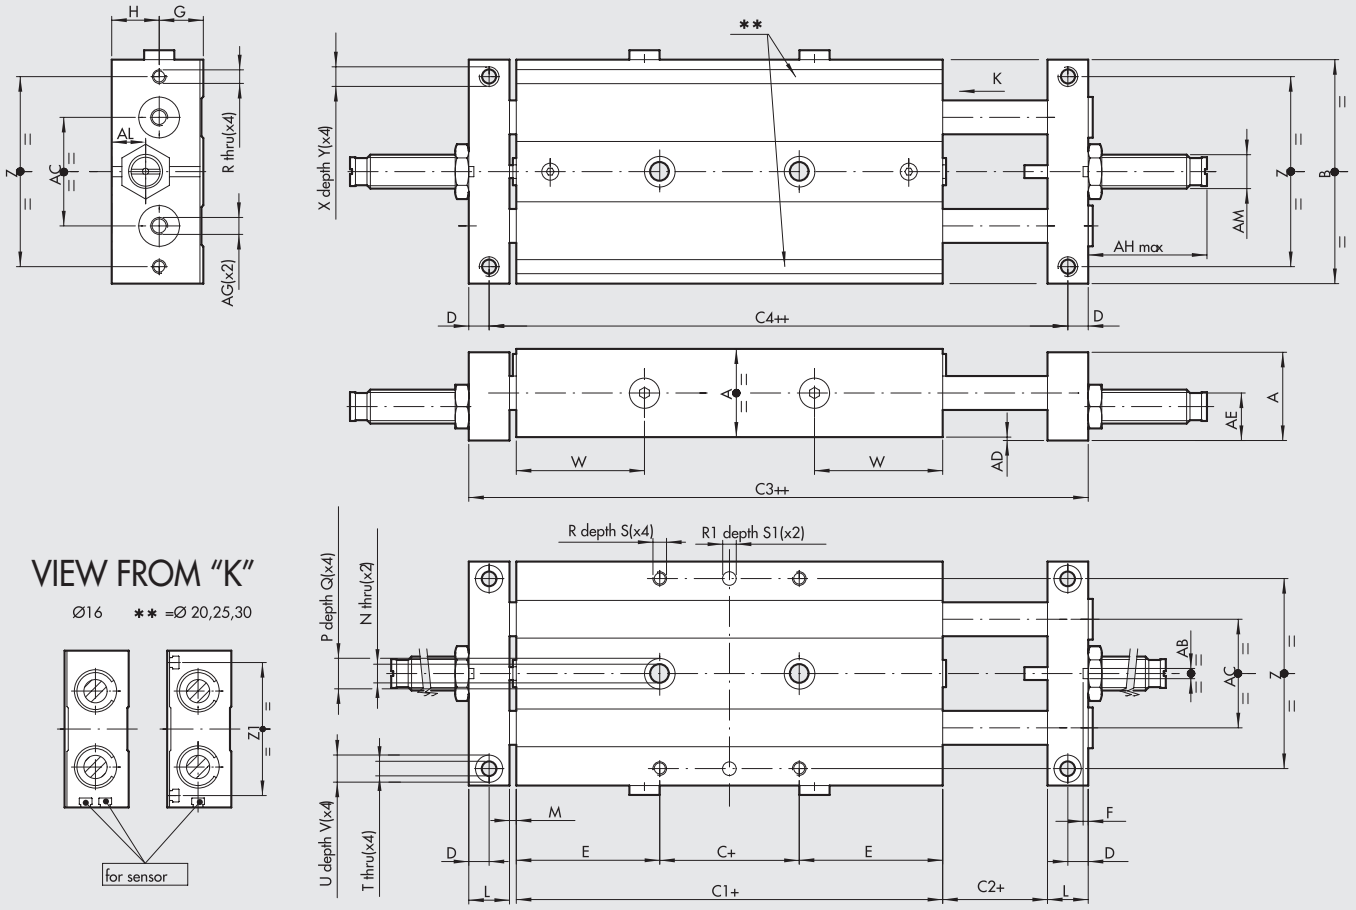

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

Code	Ø	A	B	C	C1	C2	C3	C4	D	E	F	G	H	L	M	N	P	Q	R	R1 H7	S	S1	T
W1460165...	**16**	22	56	10	85	2	109	99	5	37.5	1.5	11	12	10	2	4.3	8	4	M4	4	6	3	4.3
W1460205...	**20**	26	66	10	99	2	127	115	6	44.5	1.5	13	14	12	2	5.5	9	5	M4	4	7	3	4.3
W1460255...	**25**	32	78	10	105	2	137	123	7	47.5	2.5	16	17	14	2	6.5	10.5	6	M5	4	7	3	5.2
W1460305...	**30**	36	98	10	128	2	164	148	8	59	2.5	18	19	16	2	8.5	14	8	M6	6	8	5	5.2

Ø	U	V	W	X	Y	Z	Z1	AB	AC	AD	AE	AF	AG	AH	AM	AL
16	8	4	33	M5	8	46	–	3	26	1	12	5	M5	35	M10x1	8.5
20	8	4	40	M5	10	56	54	3	30	1	14	5	M5	35	M10x1	9
25	9	5	42	M6	6	66	64	5	39	1	17	6	M5	36	M12x1	10
30	9	5	50	M6	12	86	82	5	52	1	19	6	G 1/8	60	M14x1	12

...Enter the stroke in mm (e.g. Ø 16 stroke 50 = W1450165050)

Strokes for bore 16 mm	25; 50; 75; 100
Strokes for bore 20 mm	25; 50; 75; 100; 125
Strokes for bore 25 mm	25; 50; 75; 100; 125; 150
Strokes for bore 30 mm	25; 50; 75; 100; 125; 150

ACCESSORIES

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see chapter A6.

SPARES

SHOCK ABSORBERS



Code	Ø	Description
0950004002	16 - 20	Shock absorbers ECO 10 MF2 + nut M10x1
0950004003	25	Shock absorbers ECO 15 MF1 + nut M12x1
0950004004	30	Shock absorbers ECO 25 MC2 + nut M14x1.5

NOTES

PRECISION SLIDE SERIES S13

Series S13 precision slides feature a dual-acting pneumatic cylinder that has the sole purpose of pushing and pulling the load, a ground steel guide that is integral with the body, and a ball recirculation pad that is fixed onto the moving table and is designed to withstand all the loads and movements applied. This ensures accurate movement with virtually no play, and the piston rods do not suffer wear as there are no lateral loads.
All the slides are equipped with sensor magnets.
The body can be secured on many sides. The load side can be fixed onto the table from the top or the front. The compressed air supply can be connected on three sides. The retractable sensors can be fitted on the right or on the left. All these possibilities make the application extremely flexible. The width is extremely reduced to allow installation in small spaces and the combination of several reduced-pitch slides.

TECHNICAL DATA		Ø 6	Ø 10	Ø 16	Ø 20
Operating pressure	bar	2 to 8			
	MPa	0.2 to 0.8			
	psi	29 to 116			
Operating temperature	°C	-10 to +80			
Fluid		Lubricated and unlubricated compressed air at 20 µm, must be uninterrupted when lubricated			
Minimum and maximum speed	mm/s	30 to 500			
Pneumatic fittings		M5			
Type of guide		Ball recirculation			
Versions		Magnetic dual-acting with rubber buffer			
Strokes	mm	10	10	10	10
		25	25	25	25
		---	---	50	50
Theoretical thrust force, at 6 bar	N	17	47	120	188
Theoretical pull force, at 6 bar	N	13	40	104	158
Admitted loads		See **next page**			
Admitted kinetic energy	Joule	0.012	0.025	0.050	0.100
Stroke tolerance	mm	0 / +1.0			
Assembly position		Any (horizontal and vertical)			
Weight	kg	See **next page**			

COMPONENTS

① NUT: stainless steel
② SNAP RING: zinc-plated steel
③ FRONT BASE: bronze
④ BODY: anodized aluminium
⑤ GUIDE: tempered stainless steel
⑥ PISTON: aluminium
⑦ BALL RECIRCULATION PAD: stainless steel
⑧ BUFFER: NBR
⑨ REAR BASE: anodized aluminium
⑩ PLATE: anodized aluminium
⑪ PISTON ROD GASKET: type EM, NBR
⑫ O-RING: NBR
⑬ PISTON ROD: stainless steel
⑭ PISTON GASKET: type PZ, NBR
⑮ MAGNET: neodymium (Ø 6 and Ø 10)
plastoferrite (Ø 16 and Ø 20)

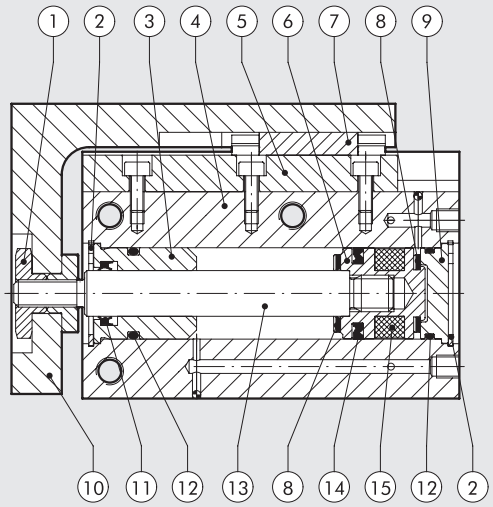

WEIGHTS

WEIGHT [gr]				
Stroke	**Bore**			
	6	10	16	20
10	68	125	230	455
25	90	160	280	550
50	---	---	350	660

WEIGHT OF MOVING PART [gr]				
Stroke	**Bore**			
	6	10	16	20
10	30	50	100	180
25	40	68	125	220
50	---	---	167	290

MASS/VELOCITY DIAGRAM

M (kg) = Mass applied
L (mm) = Distance between the axis of the piston rod and the barycentre of the mass
v (mm/s) = Velocity of the slide
vert = Limit with vertical movement

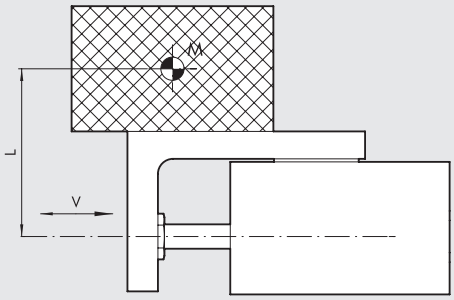

ADMITTED LOADS DIAGRAM

S13-6

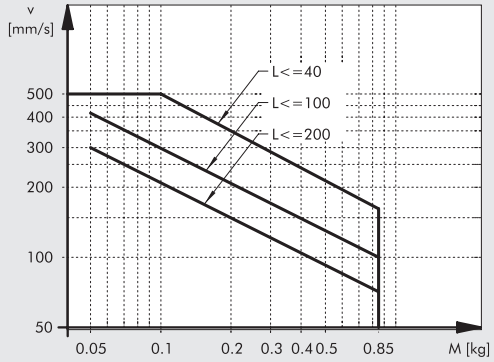

S13-10

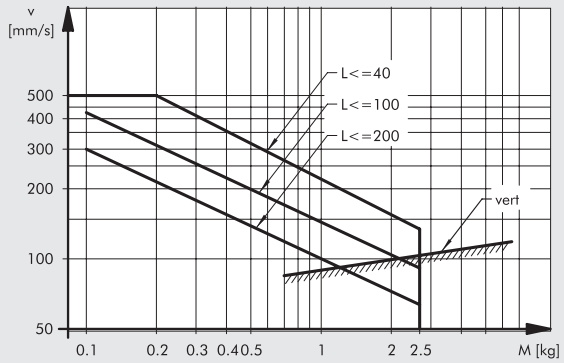

S13-16

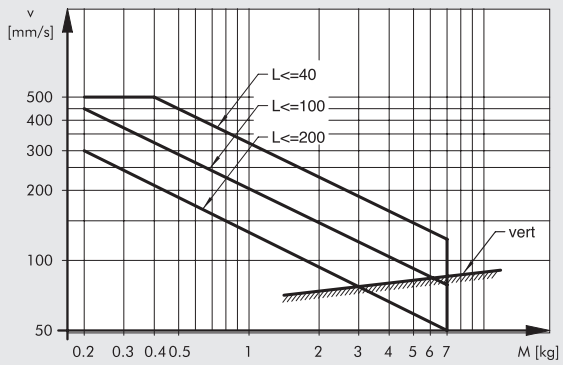

S13-20

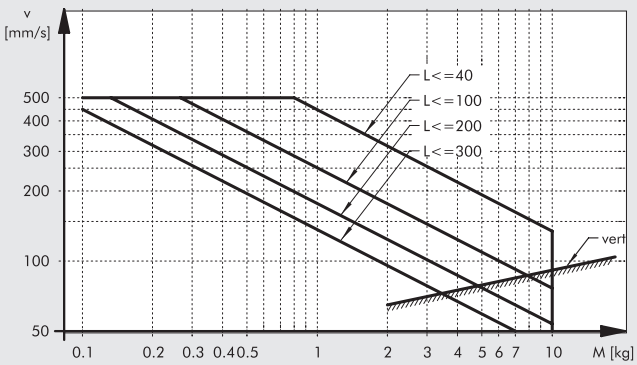

FIXING OPTIONS

FIXING THE BODY
Ⓐ Lateral, via the through holes
Ⓑ Lateral, on the hole threads
Ⓒ Rear, on the threaded holes
Ⓓ Vertical, on the threaded holes

FIXING THE MOVING TABLE
Ⓔ Front, on the threaded holes
Ⓕ Top, on the threaded holes

N.B. Since the table is supported by a ball guide/pad, avoid applying excessive torques or forces. When securing the screws, hold the table, not the body, so that the torque discharges through the ball pad.

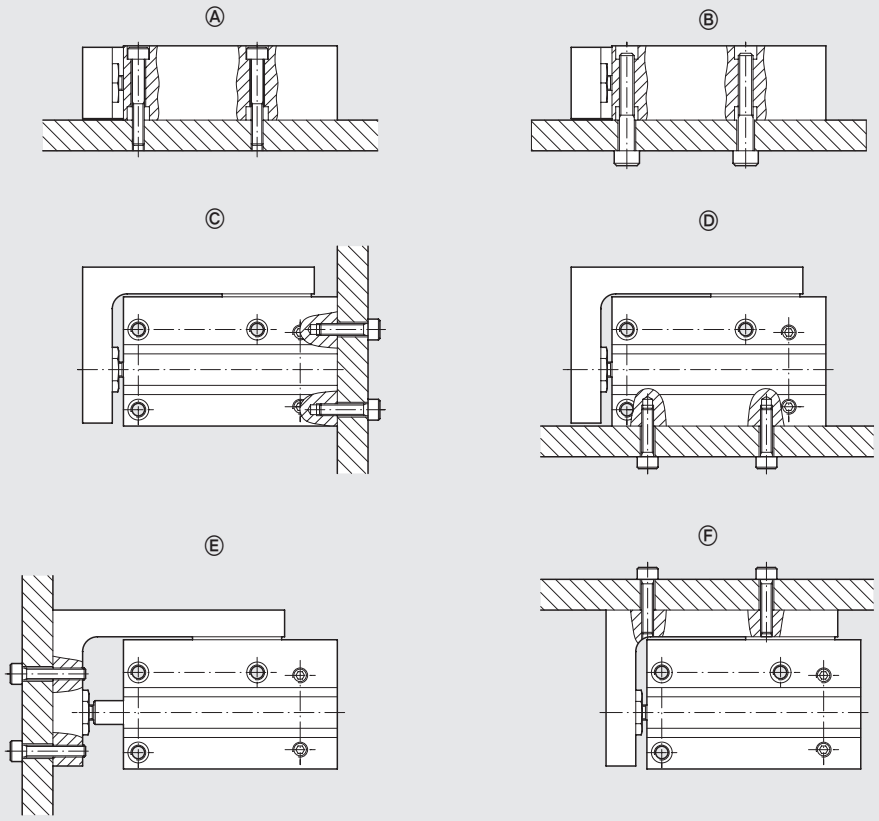

COMPRESSED-AIR SUPPLY

The compressed air supply can be from the back, from the left or from the right.
The slide comes with holes on the left and right that are plugged with screws and O-ring seals.
If you wish to use the holes, remove the screws and O-rings and fix them in the holes in the back, applying a drop of adhesive to the screw thread.

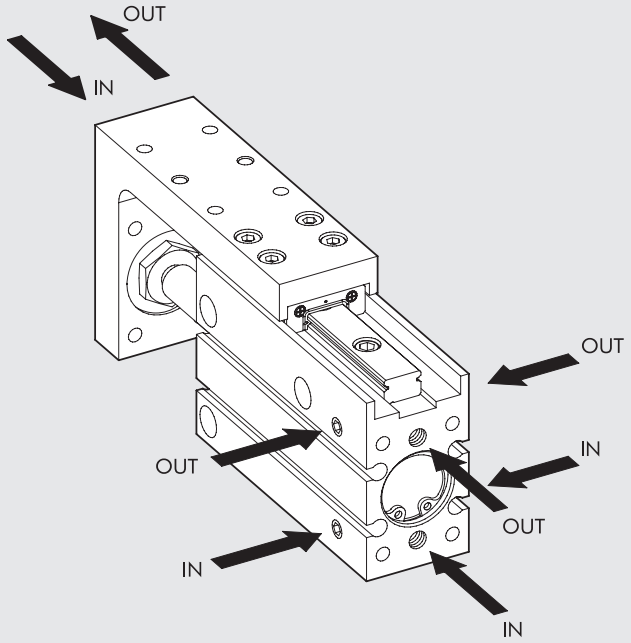

DIMENSIONS

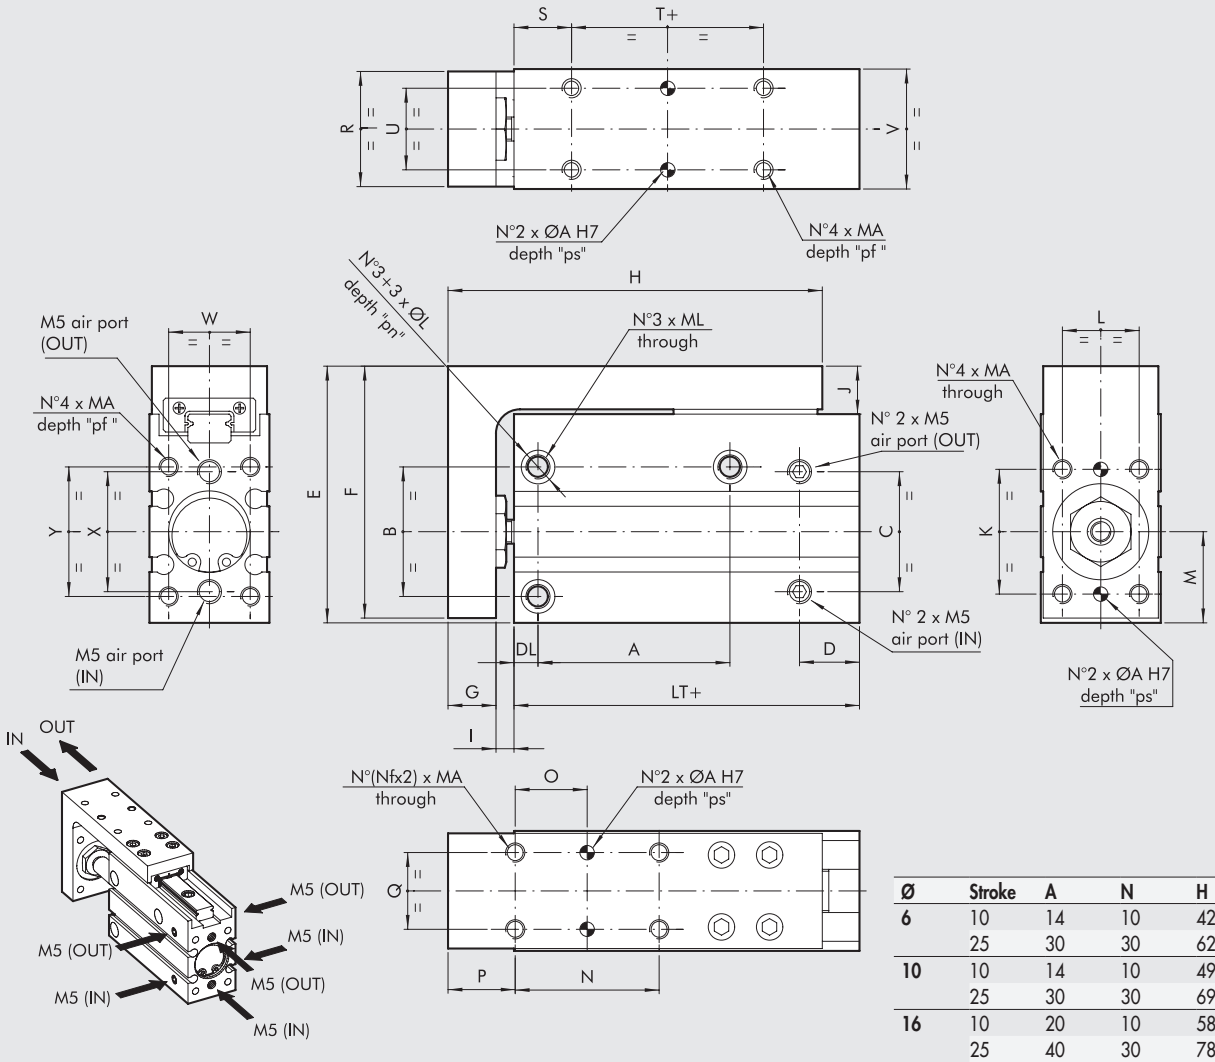

Ø	Stroke	A	N	H	NF
6	10	14	10	42	2
	25	30	30	62	2
10	10	14	10	49	2
	25	30	30	69	2
16	10	20	10	58	2
	25	40	30	78	2
	50	60	25	98	3
20	10	20	10	64	2
	25	40	30	84	2
	50	70	25	104	3

\+ = ADD THE STROKE

Code	Ø	LT	B	C	D	E	F	G	I	J	K	MA	pf	ØA	ps	L	M	O	P	Q	R	S
W1471063...*	**6**	31	19	18	10	39	38	5.5	2.9	7.5	15	M3	5	2	4.5	9	14.5	N/2	8	9	15	10
W1471103...*	**10**	35	23	20	12.5	47	46	7.5	4	9	18	M4	6	2	4.5	11	15.5	N/2	11	11	19	12
W1471163...*	**16**	42	27	25	12.5	53.5	52.5	10	3.75	10	26	M4	7	3	7.5	16	19	N/2	14	16	24	12
W1471203...*	**20**	52.5	34	32	15	64.5	63.5	11	4.5	10.5	34	M5	9	3	7.5	20	23	N/2	14	20	31	15

Ø	T	U	V	W	X	Y	ØL	pn	ML	DL
6	5	9	16	10.5	18	19	6	3.5	M4	4
10	5	13	20	13	20	23	7.5	4.5	M5	5
16	10	17	25	17	25	27	7.5	4.5	M5	5
20	10	20	32	20	32	34	9.5	7.5	M6	6

* Enter the stroke in mm (e.g. Ø 6 stroke 10=W1471063010)

Standard strokes:

Bore Ø 6 -> 10; 25 mm

Bore Ø 10 -> 10; 25 mm

Bore Ø 16 -> 10; 25; 50 mm

Bore Ø 20 -> 10; 25; 50 mm

ACCESSORIES

SENSOR Ø 4



For codes and technical data, see **chapter A6**.

NOTES

SUMMARY V-Lock

V-Lock SYSTEM

- V-Lock GENERAL INTRODUCTION A3.4

BASIC ELEMENTS

- V-Lock FIXING ELEMENTS A3.12

- V-Lock ADAPTORS A3.19

- PROFILES A3.32

- V-Lock ACCESSORIES AND SPARE PARTS A3.36

LINEAR ACTUATORS

- RODLESS CYLINDER WITH BALL RECIRCULATING GUIDE SERIES V-Lock A3.37

- COMPACT PRECISION SLIDE SERIES S14K A3.47

- COMPACT GUIDED CYLINDER SERIES CMPGK A3.63

- GUIDE UNITS SERIES GDHK AND GDMK A3.79

- LINEAR UNITS SERIES LEPK A3.95

ROTARY ACTUATORS

- ROTARY ACTUATOR SERIES R3K A3.124

- ROTARY ACTUATOR SERIES R3K WITH EXTERNAL SHOCK ABSORBERS A3.130

- ROTARY ACTUATOR SERIES DAPK A3.136

GRIPPERS

- GRIPPER WITH TWO PARALLEL JAWS SERIES P1K A3.156

- GRIPPER WITH TWO PARALLEL JAWS SERIES P2K A3.161

- GRIPPER WITH TWO PARALLEL JAWS SERIES P3K A3.165

METAL WORK PNEUMATIC

- GRIPPER WITH TWO PARALLEL LONG-STROKE JAWS, SERIES P4K — A3.173

- GRIPPER WITH TWO PARALLEL LONG-STROKE JAWS, SERIES GPLK — A3.177

- GRIPPER WITH TWO HINGED JAWS SERIES P7K — A3.182

- GRIPPER 180° WITH TWO HINGED JAWS SERIES P9K — A3.187

- GRIPPER WITH THREE PARALLEL JAWS SERIES P12K — A3.192

- V-Lock GRIPPER ACCESSORIES — A3.200

ELECTRIC AXIS

- ELECTRIC AXIS ELEKTRO SHAK SERIES — A5.84

- ELECTRIC AXIS SERIES ELEKTRO SHAK GANTRY — A5.100

- ELECTRIC AXIS BELT-DRIVEN RODLESS, SERIES ELEKTRO VBK — A5.110

- ELECTRIC AXIS ELEKTRO SVAK SERIES — A5.122

- ELECTRIC AXIS - RODLESS ELEKTRO SK SERIES — A5.129

- ELECTRIC AXIS BELT-DRIVEN RODLESS, SERIES ELEKTRO BK — A5.146

ELECTRIC SLIDES

- ELECTRIC SLIDE SERIES ELEKTRO CS — A5.166

V-Lock GENERAL INTRODUCTION

THE V-Lock WORLD

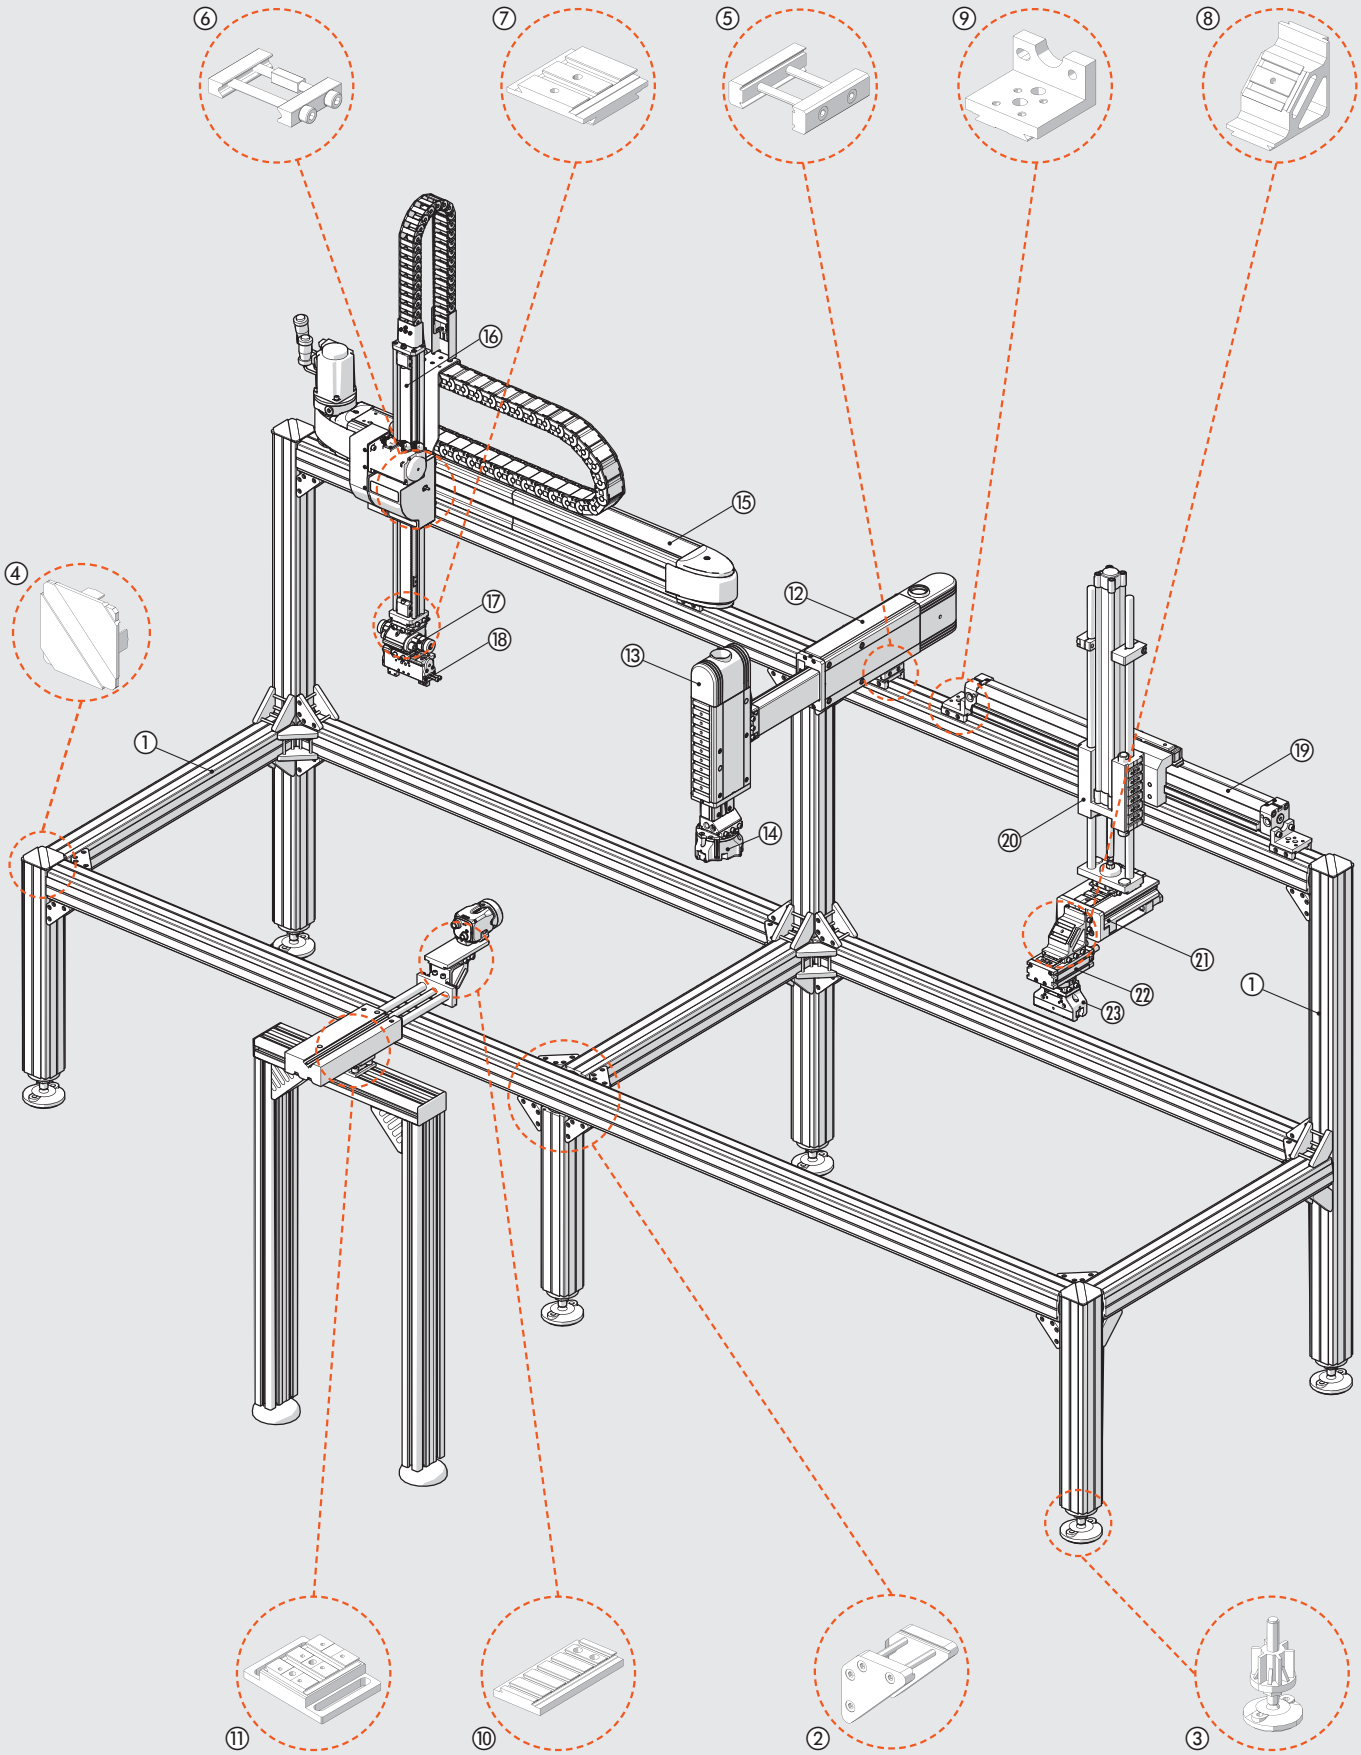

The V-Lock system can be used to create pneumatic and/or electrical automation systems for a wide range of applications, from simple to more complex ones.

① Quick-Set dovetail fixing PROFILES, which can be cut up using a standard die-cutter and do no required any particular machining; no threaded holes or pinholes are required. Dovetail fixing elements can withstand greater loads than those with T-grooves.
② BRACKETS for fixing Quick-set profiles.
③ Articulated FOOTS with 90mm adjustment length.
④ Plastic CAP for profiles.
⑤ QS FIXING ELEMENTS for the coupling of V-Lock profiles and/or components (no need for V-Lock transverse grooves).
⑥ K FIXING ELEMENTS for V-Lock couplings, using the transverse grooves of V-Lock components. They feature high precision, repeatability and space saving.
⑦ Parallel or crosswise ADAPTORS for the coupling of V-Lock components, e.g. rotated by 90 degrees.
⑧ BRACKETS for fixing at a 45° or 90° angle, longitudinal, transversal, cross.
⑨ Various V-Lock fixing ACCESSORIES: foots, flanges, etc.
⑩ V-Lock TRANSFORMERS fixed to any component (a video camera in the photo) converts it into a V-Lock component.
⑪ PROFILE ADAPTORS to secure any types of profile (Bosch®, Item® ecc.) available from the trade into V-Lock components.
⑫ Pneumatically-controlled LINEAR UNITS SERIES LEPK, featuring high precision and rigidity, long life, adjustable strokes, cushioned end stop, 2 or 3 positions.
⑬ LINEAR UNITS SERIES LEPK FOR VERTICAL MOUNTING, featuring weight balance of the slide and the applied mass.
⑭ 3-JAW GRIPPERS.
⑮ ELECTRIC AXES SERIES ELEKTRO with a toothed belt, a ball circulation screw, various guide and drive systems. The figure shows an electric axis in the Elektro SHAK 340 series.
⑯ ELECTRIC AXIS FOR VERTICAL APPLICATIONS. The figure shows an electric axis in the Elektro SVAK series.
⑰ Pneumatically-controlled PRECISION ROTARY ACTUATORS. The figure shows a DAPK actuator with 2 adjustable angles.
⑱ PRECISION GRIPPERS. The figure shows a parallel long-stroke two-jaw gripper in the GPLK series.
⑲ RODLESS CYLINDERS with a V-Lock ball circulation guide.
⑳ V-Lock GUIDE UNIT for ISO 15552 pneumatic cylinders or Elektro ISO 15552 electric cylinders.
㉑ SLIDES. The figure shows an S14K compact precision slide.
㉒ R3K pneumatic ROTARY ACTUATORS, with an adjustable angle, mechanical stop or hydraulic internal or external shock-absorbers.
㉓ GRIPPERS with two parallel jaws, two hinged jaws, toggle joint and three jaws.

EXAMPLES OF APPLICATION

METAL WORK PNEUMATIC

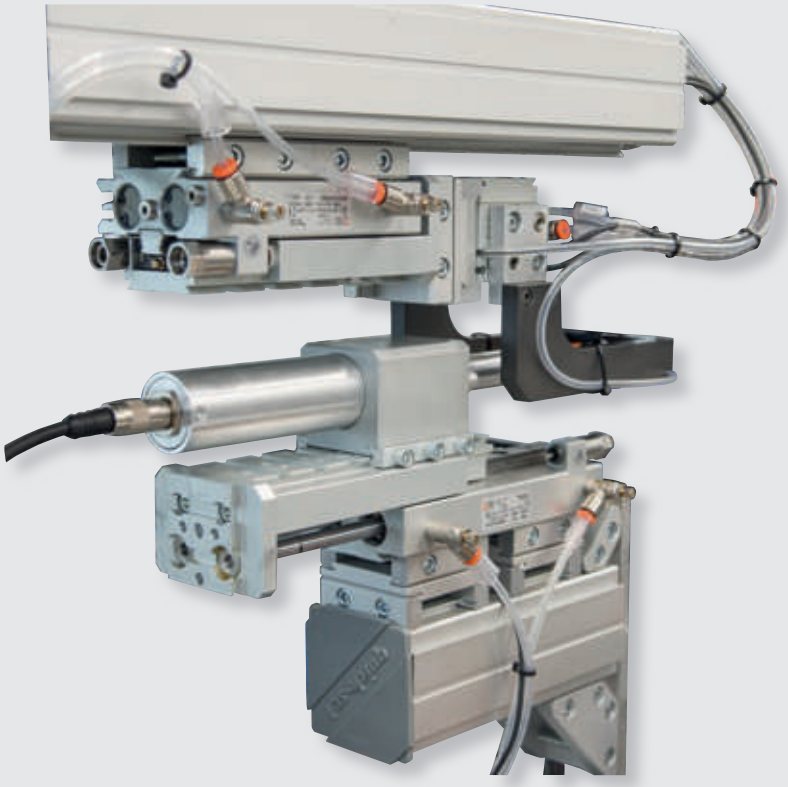

The V-Lock system is a range of components for automation, fixing elements and accessories featuring a standard modular connecting system, easy assembly, rapid configuration, and the option of either precise repeatable connections or an adjustable mounting position.

Unlike the other components used with machinery and equipment, all V-Lock components have a 40 mm-wide dovetail in the coupling surfaces that extends the entire length of the component. There are precision-cut transversal grooves in the component that are 6^{H7} wide and have a 20 mm pitch.

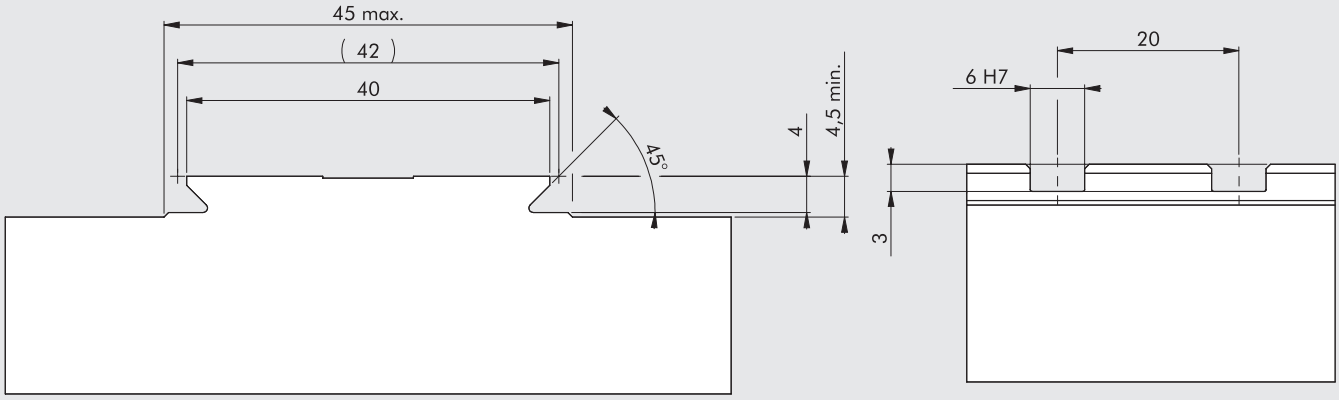

To connect two components, merely bring them into contact and tighten the M5 screws in the fixing elements, transversal to the body of the component. This system makes the assembly, disassembly and reconfiguration of numerous multiple components very quick and easy. Despite this, the parts are connected in a perfectly stable and precise manner.

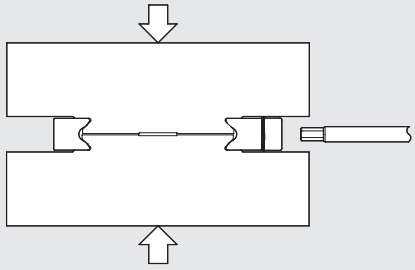

There are two types of fixing element for connecting V-Lock components, type K for highly compact, precise and repeatable fixing, and type QS to give a flexible system that can be regulated at the mounting stage.

When using K elements, insert the hollow square key (6^{f8}) in one of the transversal grooves (6^{H7}) and the M5 screw in the adjacent free-passage slot. This means the components will always be in the original position when the coupling is disassembled or reassembled.

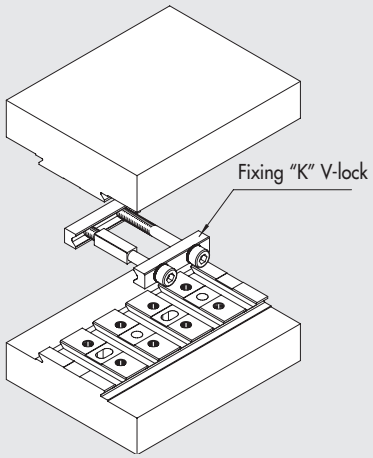

If you require mechanical adjustment of the position at the assembly stage, it is preferable to use QS elements, which form part of the Montech® Quick-set system.
The distance between components allows free passage of the M5 screws, which do not affect the relative position of the components, which remain apart. The assembly position must be regulated whenever the components are disassembled.

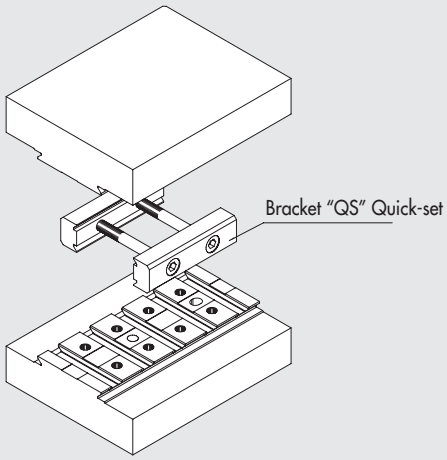

The V-Lock system comes with a series of modules and accessories designed to allow free spatial positioning of the components. The range includes cross adaptors, 45° and 90° squares, which are described in detail in the catalogue.
V-Lock components can be connected to Quick-set profiles by Montech® using QS fixing elements because the dovetails in the two systems are the same.
V-Lock components can also be connected to all the main extruded profiles with a slot centre distance of 40 mm or 45 mm. There is also a universal adaptor for the longitudinal assembly of V-Lock components and one for transversal assembly.

Where physically possible, all the faces of V-Lock components have a series of M5 threaded holes, pitch 20 x 20 mm, and holes for Ø 5 pins to allow standard mounting of external elements on V-Lock components.

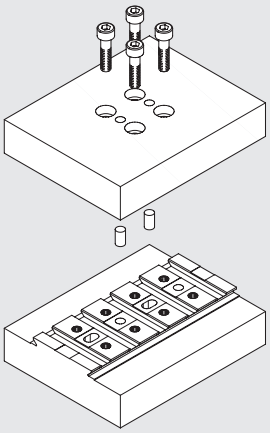

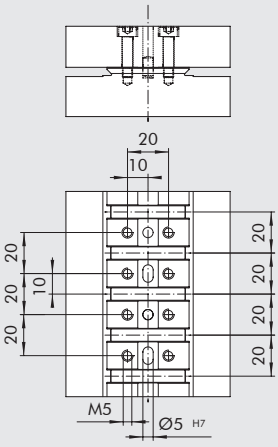

This standard and universal modular system makes the designer's work easier because it is not necessary to design adaptors, flanges, brackets and so on, and he can concentrate on the heart of the problem, namely the design of the machine.
Likewise, the person who assembles the components is provided with a complete kit that is quick and easy to use, so the machine can be assembled, set up and reconfigured in a very short time.
In short, with the V-Lock system you can:
- connect anything to anything: grippers, slides, rotary actuators or guide units, or even aluminium structures of any make
- have any spatial orientation
- make a simple quick-to-lock connection that is accessible from all sides
- avoid adaptor plates between components
- obtain an extremely robust connection that can withstand high loads and vibration
- construct a system with precision to the hundredth of a millimetre and repeatable, so that when a component is removed for maintenance, it can be repositioned accurately.

NON-MODULAR SYSTEM

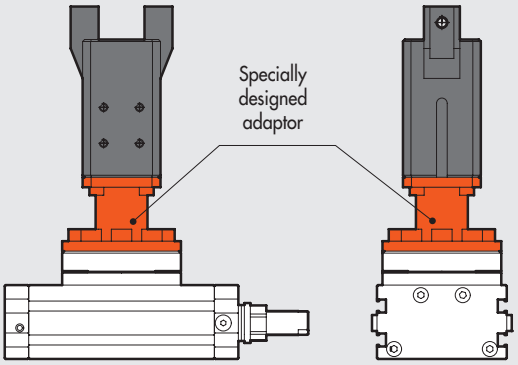

Adaptors have to be designed, produced and assembled.

Quick-set SYSTEM (Montech®)

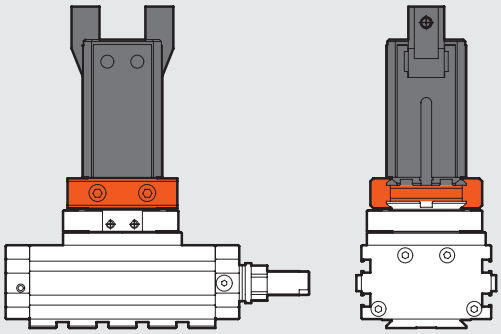

① ✓ No adaptors required
② ✓ High rigidity
③ ✓ Longitudinally adjustable position
④ /
⑤ /
⑥ /
⑦ ✓ Rapid assembly
⑧ ✓ Easy access to fastening screws

V-Lock System (Metal Work®)

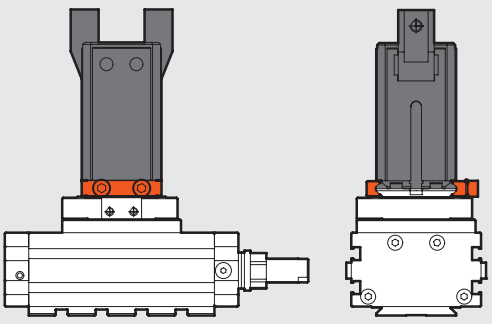

① ✓ No adaptors required
② ✓ Improved rigidity
③ /
④ ✓ Accurate positioning using a key
⑤ ✓ Positioning repeatability after disassembly
⑥ ✓ Reduced overall dimensions
⑦ ✓ Rapid assembly
⑧ ✓ Easy access to fastening screws

METAL WORK PNEUMATIC

THE V-Lock WORLD CAN BE COMBINED WITH OTHER WORLDS OF AUTOMATION

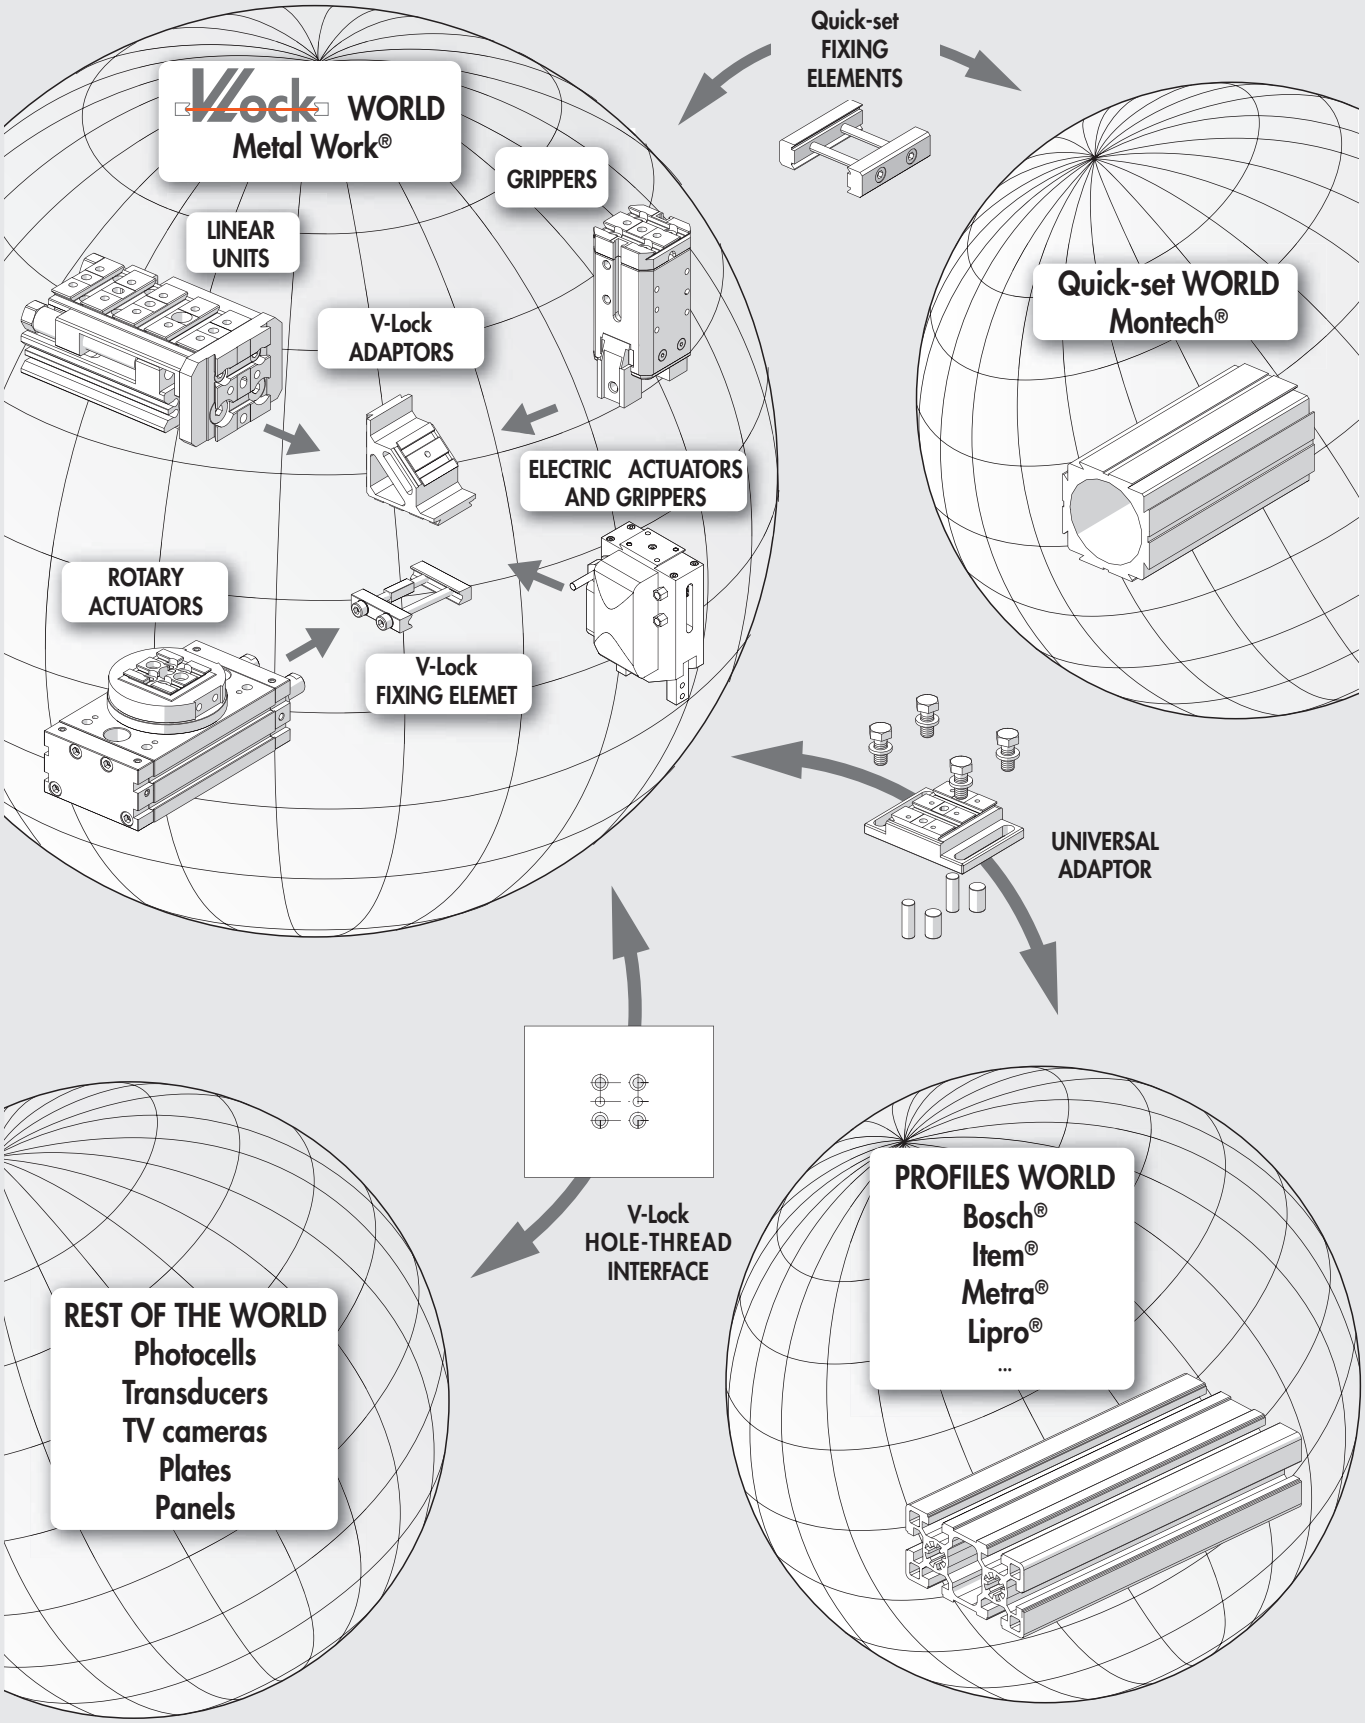

V-Lock FIXING ELEMENTS

Metal Work products in the V-Lock series can be connected using either type K fixing system or QS fixing system, by Montech® Quick-Set.

Both modular systems are complementary and interchangeable.

The V-Lock system guarantees accurate and repeatable positioning, even longitudinally. A hollow key can be inserted in the transverse grooves in the dovetails in the components (f8/H7 coupling).
Components connected using K elements are slightly detached from each other (minimum 0.4 mm distance between the adjacent surfaces of two components) to allow self-centring during assembly.

QS fixing elements allow longitudinal adjustment during assembly, without limiting the fitter to a particular position Here, too, the components are detached, but by more compared to the K system - 8 mm or 22 mm, depending on the connecting element chosen.

Both systems give rapid and accurate couplings that are very sturdy and vibration-resistant due to the dovetail joint and do not require specially designed adaptors.
The screws all remain accessible, so the components are easy to disassemble.

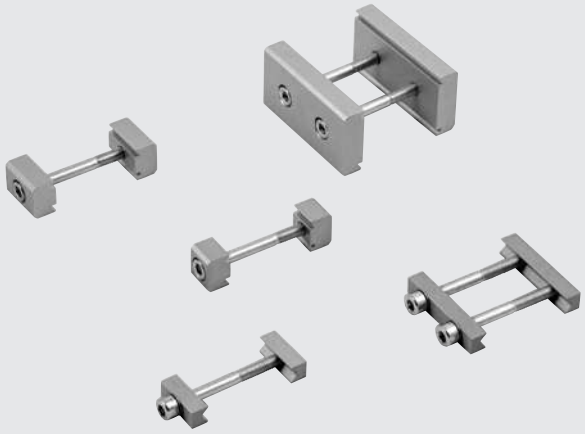

For very high loads there is a 6 mm solid square key with f8 tolerance (see accessories) that can be positioned between the free grooves in adjacent V-Lock elements.

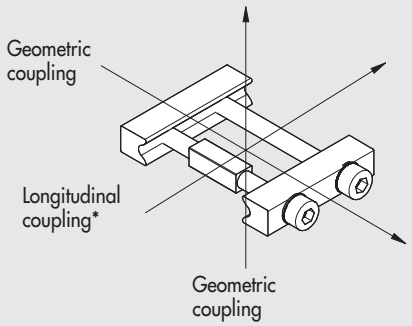

* Resistance to the reciprocal displacement of two components with a 6 Nm screw torque.
Tests conducted with intact and undamaged elements.

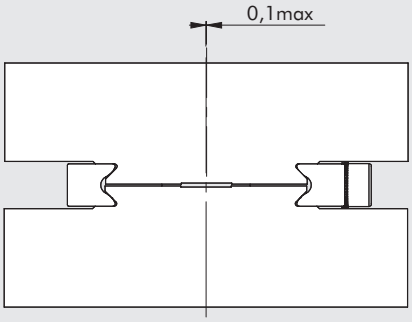

The V-Lock system allows transversal self-centring of the components. If the K blocks are mounted correctly, the alignment error is less than 0.1 mm.



If greater precision is required, one or two Ø 5 pins can be inserted in the slots provided.

K FIXING ELEMENT

STANDARD TRANSVERSE DIMENSIONS

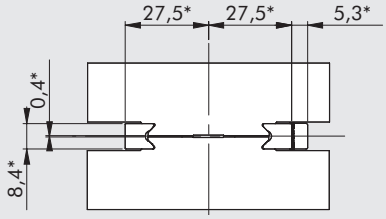

*dimensions with element fixed

K FIXING ELEMENT WITH ONE SCREW, CODE W0950005051K



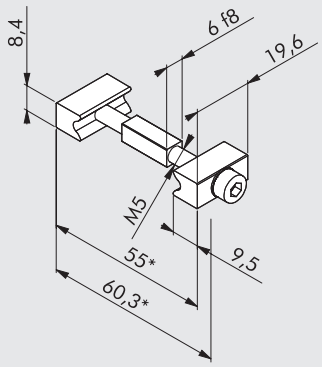

Short fixing element for low stress.

Resistance to longitudinal displacement	750 N
Recommended screw torque	6 Nm
Parallelism of locked surfaces	±0.02 mm
Material	Anodized aluminium
Weight	0.020 kg

*dimensions with element fixed

K FIXING ELEMENT WITH TWO SCREWS, CODE W0950005052K



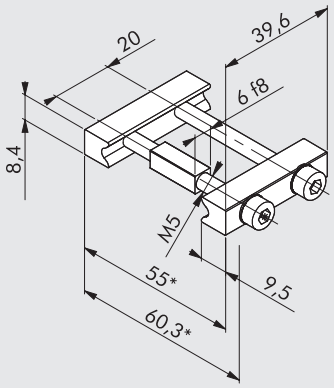

Fixing element for high stress.

Resistance to longitudinal displacement	3000 N
Recommended screw torque	6 Nm
Parallelism of locked surfaces	±0.02 mm
Material	Anodized aluminium
Weight	0.037 kg

*dimensions with element fixed

K FIXING ELEMENT WITH THREE SCREWS, CODE W0950005053K



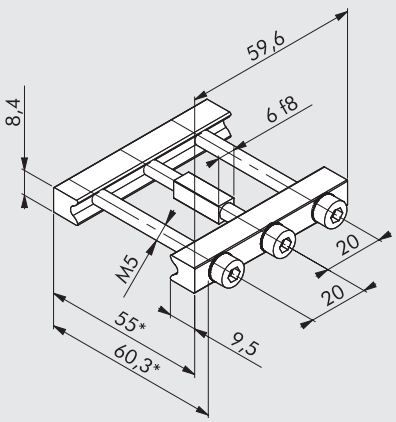

Fixing element for very high stress.

Resistance to longitudinal displacement	5000 N
Recommended screw torque	6 Nm
Parallelism of locked surfaces	±0.02 mm
Material	Anodized aluminium
Weight	0.055 kg

*dimensions with element fixed

For applications with high impacts, accelerations and masses, the resistance of the coupling system can be increased by inserting a solid key (code W0950005151K) instead of a screw and hollow key.

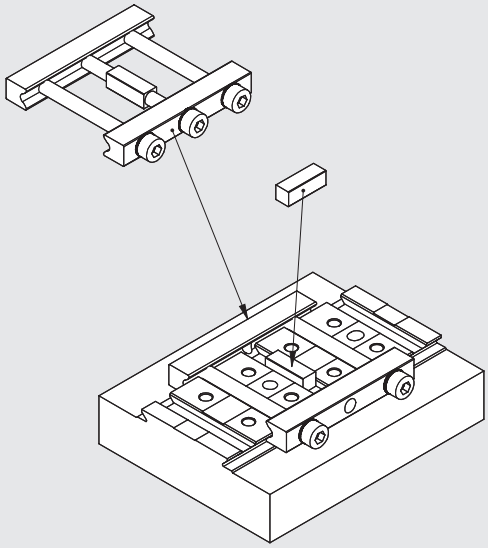

The number and size of fixing elements depend on the specific application. Under operating conditions of high speed, pressure and load, we recommend installing two elements with two screws as spaced as possible from each other.

NO

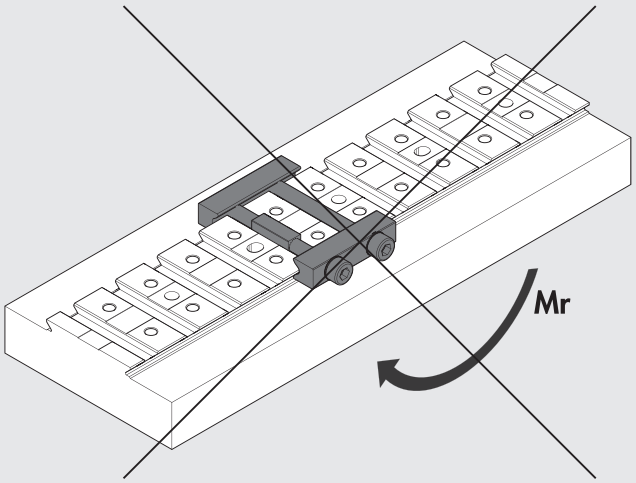

YES

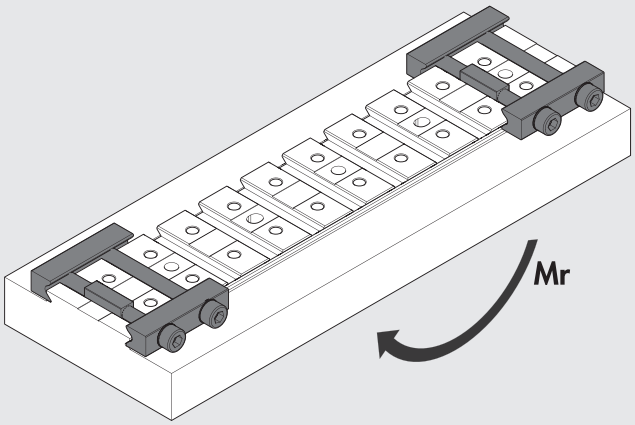

FIXING ELEMENT QS

QS HEIGHT 8 mm: STANDARD TRANSVERSE DIMENSIONS



*dimensions with element fixed

QS 12-8 (SLL-12-40) FIXING ELEMENT, CODE W0950005000K



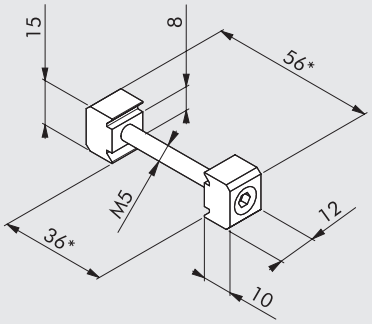

Short fixing element for low stress.

Resistance to longitudinal displacement	750 N
Recommended screw torque	6 Nm
Parallelism of locked surfaces	±0.02 mm
Material	Anodized aluminium
Weight	0.016 kg

*dimensions with element fixed

QS 20-8 (SLL-20-40) FIXING ELEMENT, CODE W0950005001K



Short fixing element for medium stress.

Resistance to longitudinal displacement	1350 N
Recommended screw torque	6 Nm
Parallelism of locked surfaces	±0.02 mm
Material	Anodized aluminium
Weight	0.020 kg

*dimensions with element fixed

QS 55-8 (SLL-55-40) FIXING ELEMENT, CODE W0950005003K

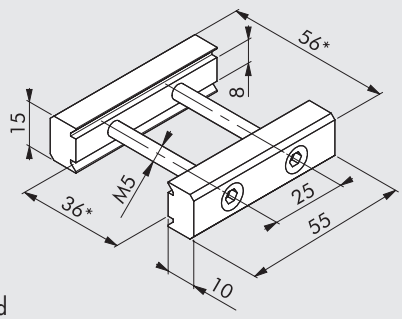

Fixing element for high stress.

Resistance to longitudinal displacement	3000 N
Recommended screw torque	6 Nm
Parallelism of locked surfaces	±0.02 mm
Material	Anodized aluminium
Weight	0.055 kg

*dimensions with element fixed

QS HEIGHT 22 mm: STANDARD TRANSVERSE DIMENSIONS



*dimensions with element fixed

QS 20-22 (SLL-20/22-40) FIXING ELEMENT, CODE W0950005002K



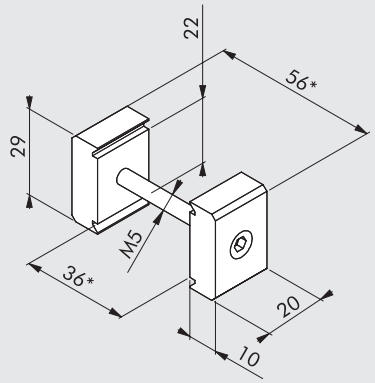

Short fixing element for medium stress and greater distances.

Resistance to longitudinal displacement	1350 N
Recommended screw torque	6 Nm
Parallelism of locked surfaces	±0.02 mm
Material	Anodized aluminium
Weight	0.022 kg

*dimensions with element fixed

QS 55-22 (SLL-55/22-40) FIXING ELEMENT, CODE W0950005004K

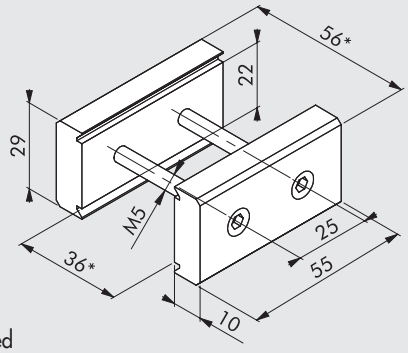

Short fixing element for high stress and greater distances.

Resistance to longitudinal displacement	3000 N
Recommended screw torque	6 Nm
Parallelism of locked surfaces	±0.02 mm
Material	Anodized aluminium
Weight	0.096 kg

*dimensions with element fixed

NOTES

FIXING BRACKETS FOR PROFILES

EV-2-40 FIXING BRACKET, CODE W0950005811K



Angled attachment for 90° connections for use in reduced load applications.

Resistance to longitudinal displacement	1800 N
Recommended screw torque	6 Nm
Locking groove orthogonality (referred to a 19 mm length)	±0.02 mm
Material	Anodized aluminium
Weight	0.050 kg

*dimensions with element fixed

EV-3-40 FIXING BRACKET, CODE W0950005812K



Angled attachment for 90° connections for use in medium load applications.

Resistance to longitudinal displacement	3000 N
Recommended screw torque	6 Nm
Locking groove orthogonality (referred to a 45 mm length)	±0.03 mm
Material	Anodized aluminium
Weight	0.130 kg

*dimensions with element fixed

EV-4-40 FIXING BRACKET, CODE W0950005813K

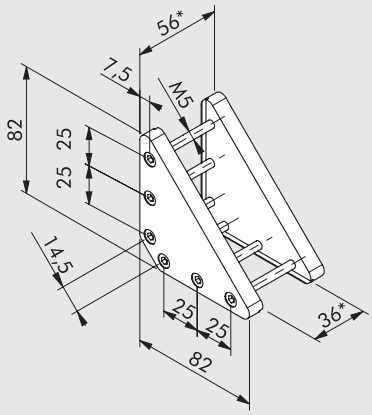

Angled attachment for 90° connections in high load applications.

Resistance to longitudinal displacement	4500 N
Recommended screw torque	6 Nm
Locking groove orthogonality (referred to a 70 mm length)	±0.04 mm
Material	Anodized aluminium
Weight	0.250 kg

*dimensions with element fixed

FRONT ADAPTER FOR LIGHTWEIGHT PROFILE PROFILE

FRONT ADAPTER SA-58-40, CODE W0950005816K



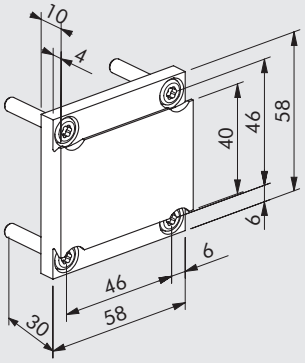

Adapter for front fixing obtained from DIN 17615 profile profiles (precision profiles)

Recommended screw torque	6 Nm
Material	Anodized aluminium heat set
Weight	0.060 kg

Note: Adapter for lightweight profile LP-66-40-3M, code W0950005801K

NOTES

V-Lock ADAPTORS

METAL WORK PNEUMATIC

V-Lock adaptors can be used to connect various components quickly and securely when you require a rotated fixing or you need to adapt single-groove elements to multiple-groove elements.

All these adaptors have a 45° dovetail for connection using K and QS fixing elements.

Where possible, pinholes have been drilled in the surfaces for interfacing with other components.

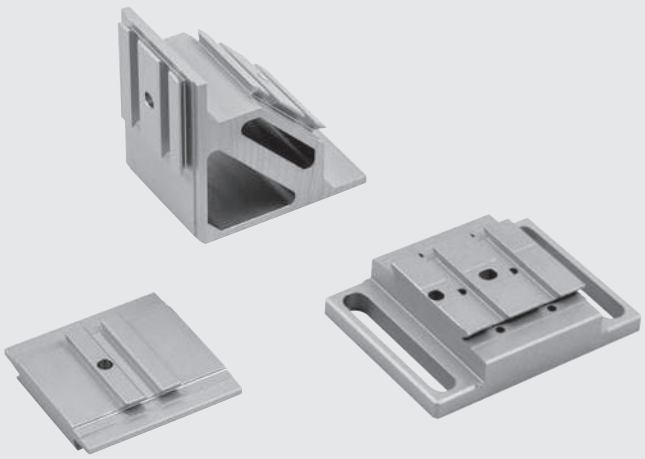

DIMENSIONS OF V-Lock DOVETAIL

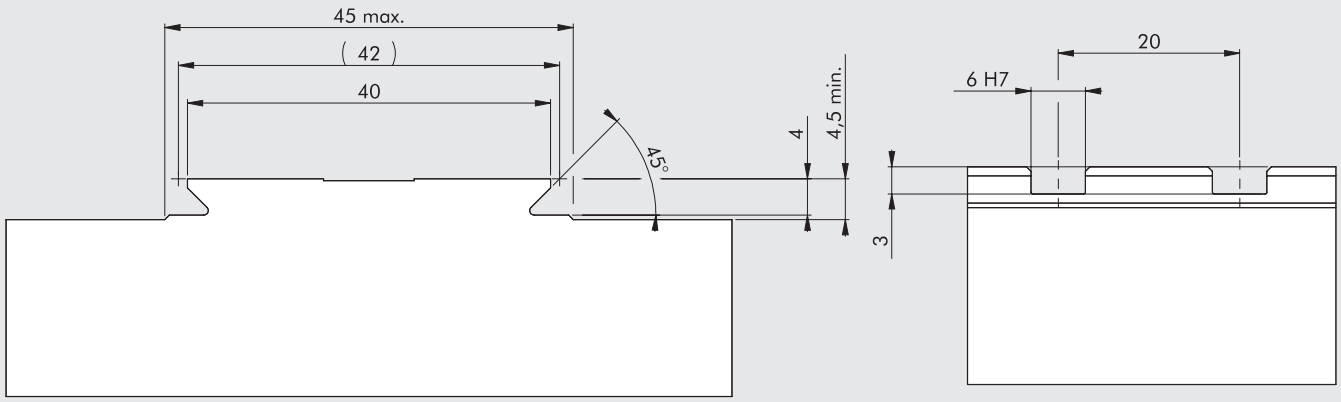

GENERAL APPLICATION OF V-Lock ADAPTORS

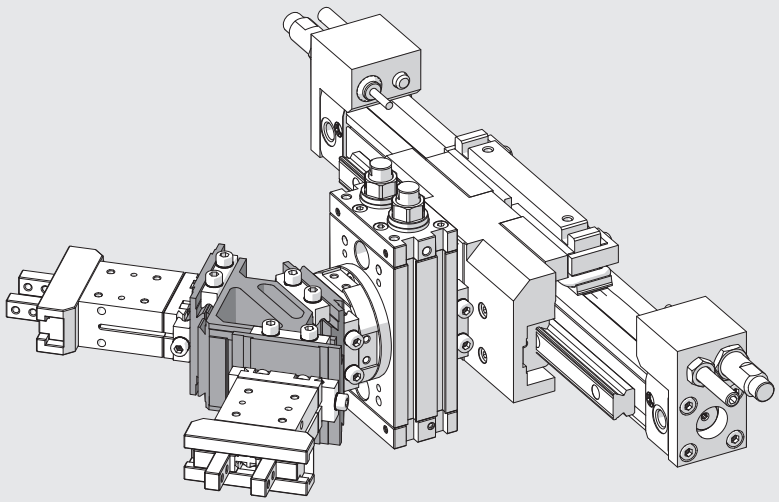

2-1 PARALLEL ADAPTOR, CODE W0950005100K

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.







A-A





Adaptor suitable for parallel coupling of two V-Lock components, one with at least two grooves and the other with one groove only.

Material	Anodized aluminium
Weight	0.060 kg

EXAMPLE OF APPLICATION

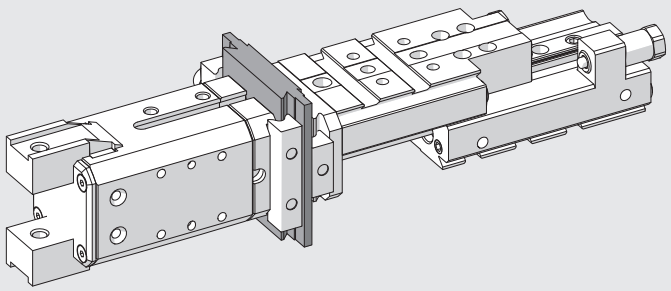

METAL WORK PNEUMATIC

2-2 CROSS ADAPTOR, CODE W0950005110K

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.







A-A





Adaptor suitable for cross-coupling two V-Lock components, both with at least two grooves.

Material	Anodized aluminium
Weight	0.069 kg

EXAMPLE OF APPLICATION

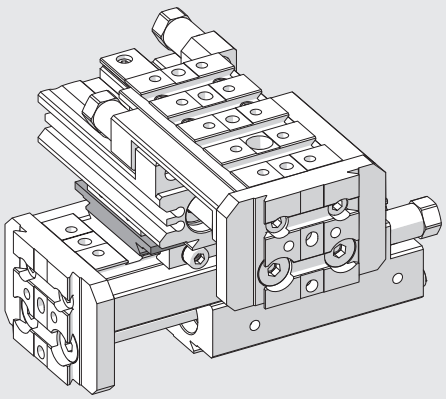

2-1 CROSS ADAPTOR, CODE W0950005120K



NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

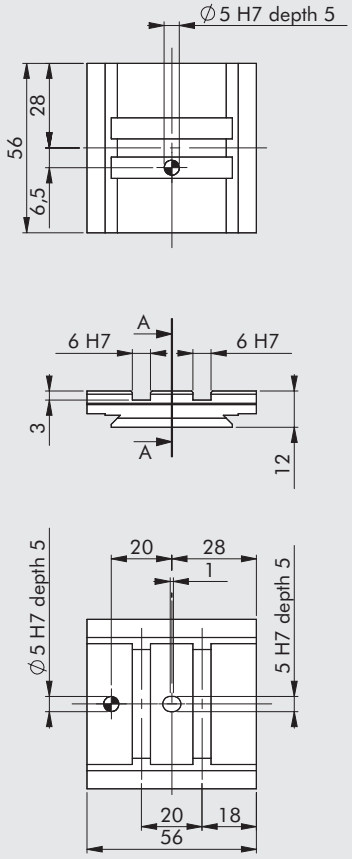



Adaptor suitable for cross-coupling of two V-Lock components, one with at least two grooves and the other with one groove only.

Material	Anodized aluminium
Weight	0.060 kg

EXAMPLE OF APPLICATION

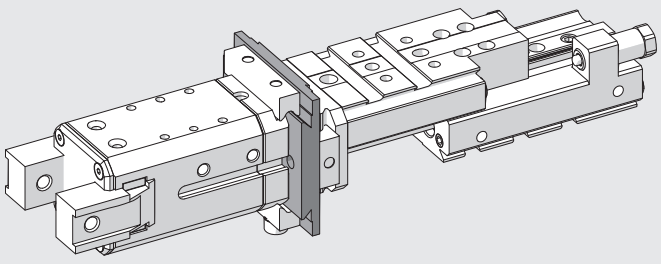

METAL WORK PNEUMATIC

LONGITUDINAL BRACKET, CODE W0950005200K

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

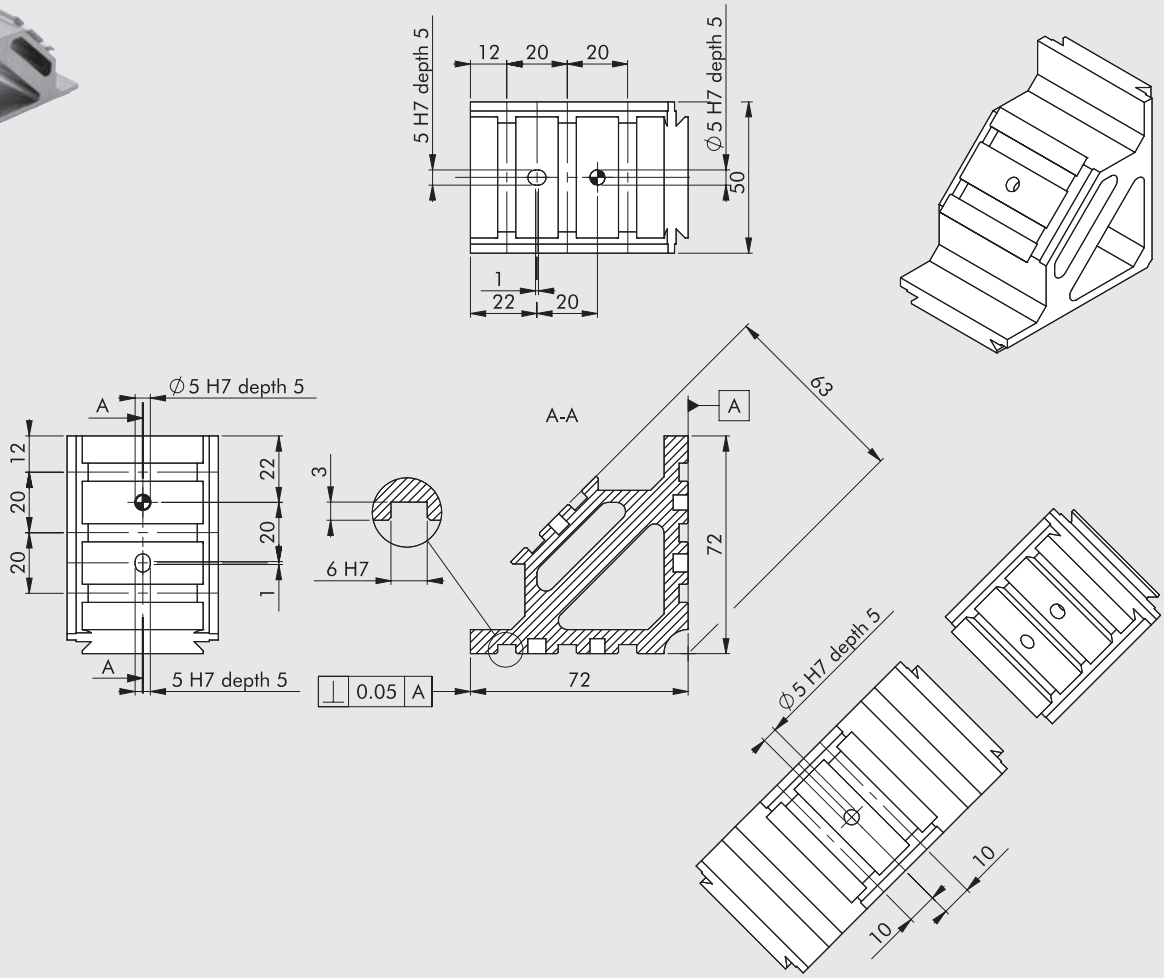

Adaptor suitable for the rotated coupling of two or three V-Lock components, with two right-angle supporting surfaces and parallel grooves.
The third surface is at 45° angle and the grooves are parallel to those in the other two faces.

Material	Anodized aluminium
Weight	0.235 kg

EXAMPLE OF APPLICATION

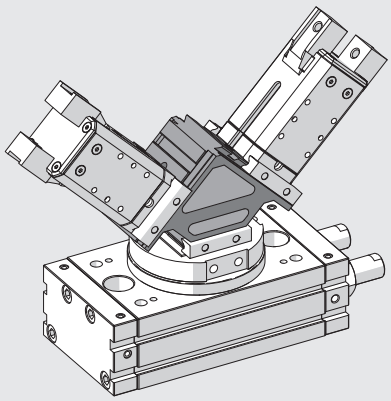

TRANSVERSAL BRACKET, CODE W0950005201K



NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

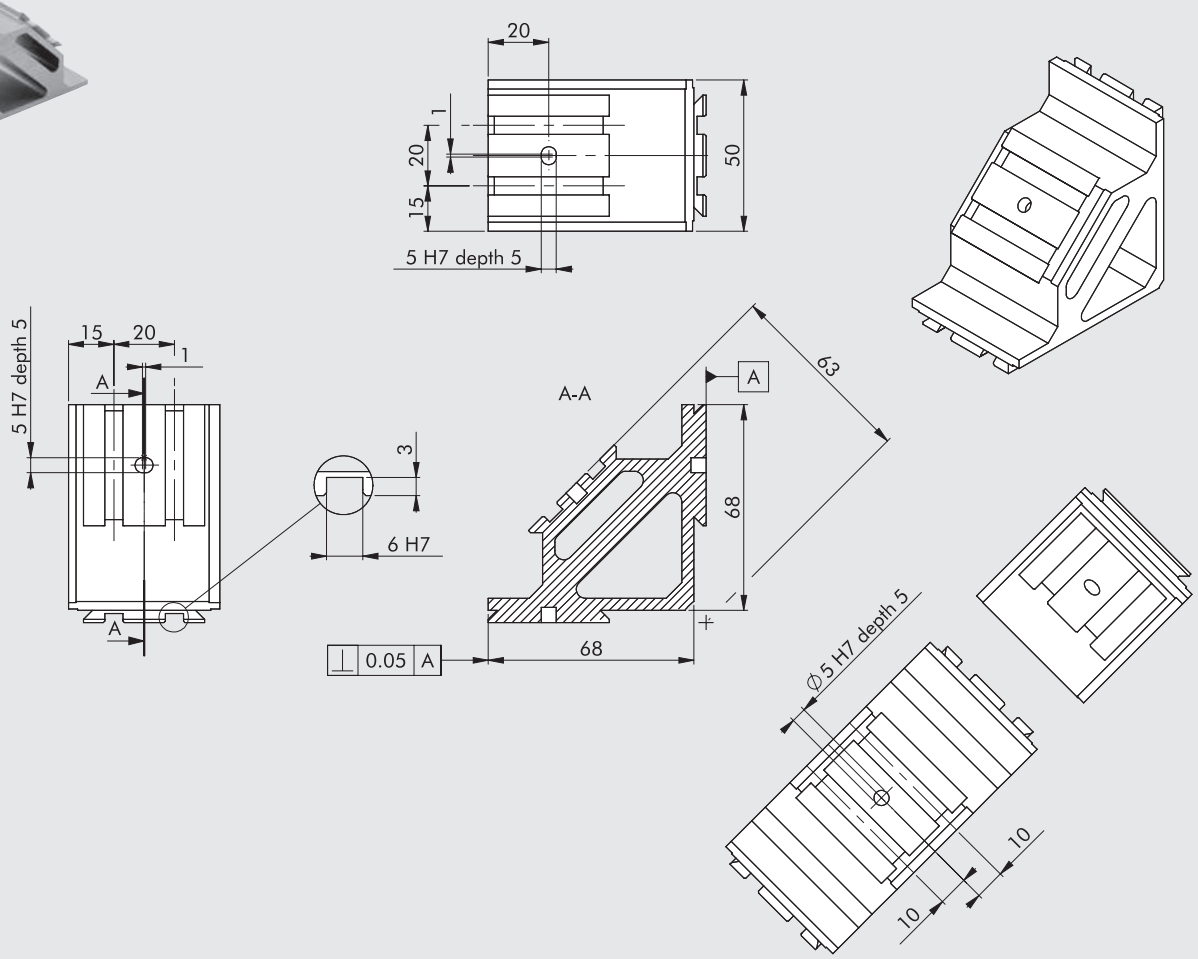

Adaptor suitable for the rotated coupling of two or three V-Lock components, with two supporting surfaces at right angles. The third surface is at 45° angle. All the grooves are parallel.

Material	Anodized aluminium
Weight	0.218 kg

EXAMPLE OF APPLICATION

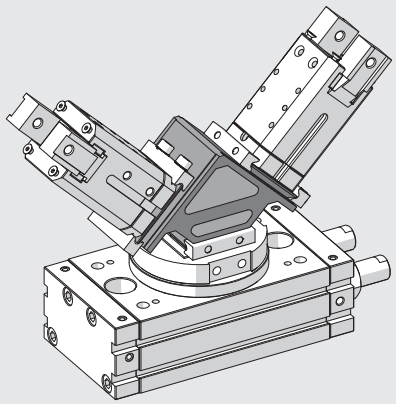

METAL WORK PNEUMATIC

CROSS BRACKET, CODE W0950005202K

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

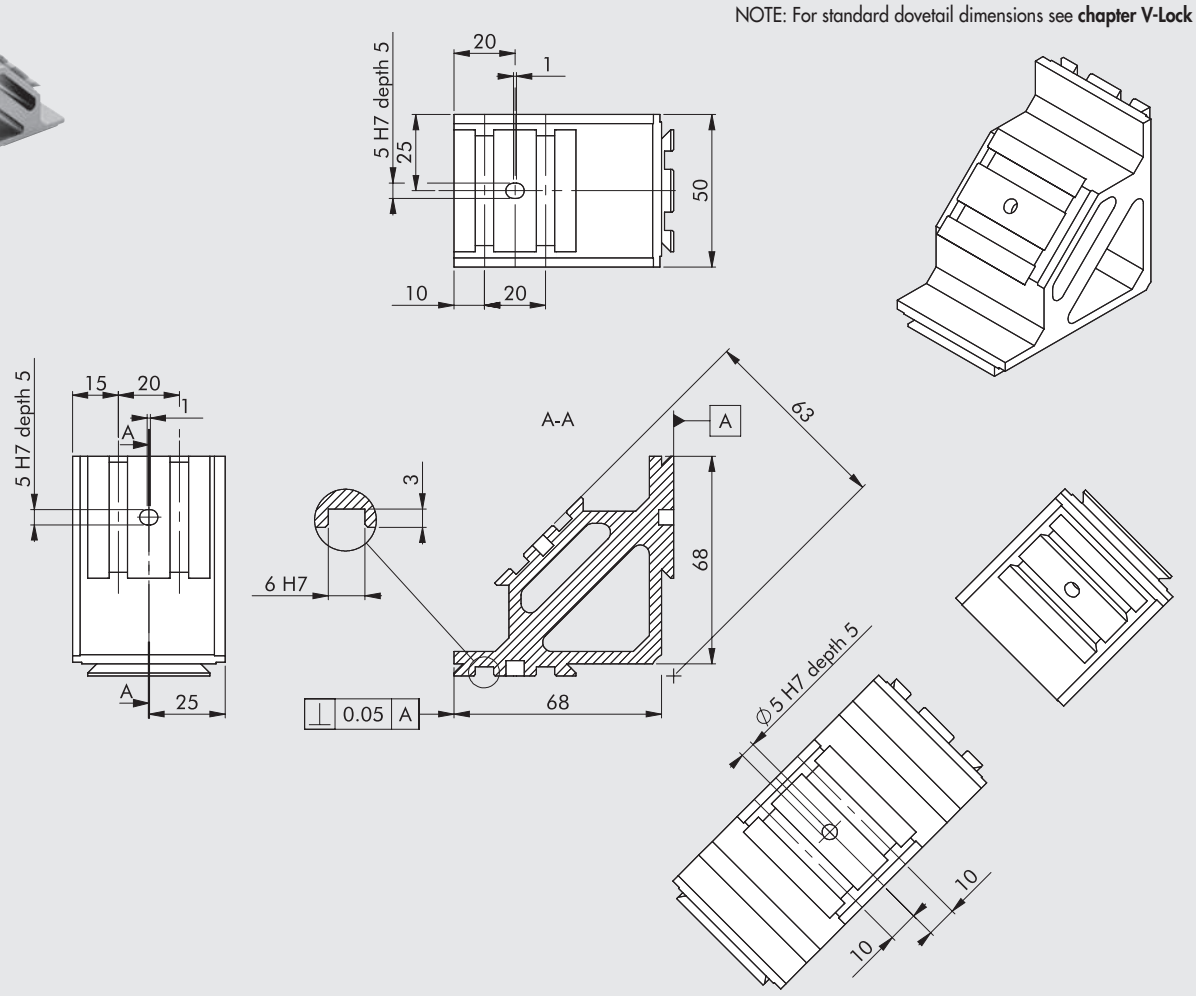

Adaptor suitable for the rotated coupling of two or three V-Lock components, with two right-angled supporting surfaces and grooves at right angles.
The third surface is at 45° angle.

Material	Anodized aluminium
Weight	0.218 kg

EXAMPLE OF APPLICATION

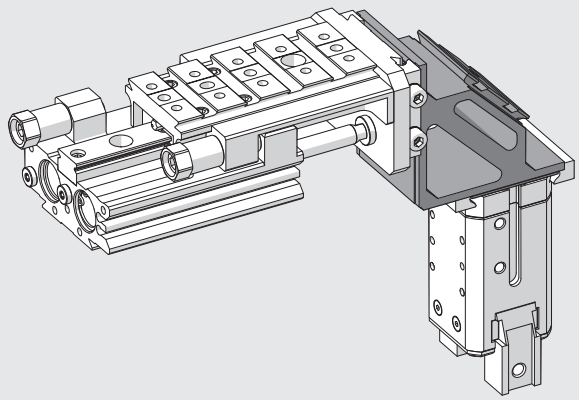

LONGITUDINAL ADAPTOR, CODE 0950008001K



NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

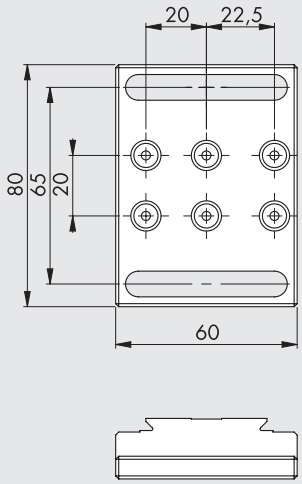

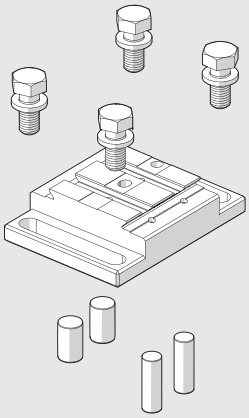





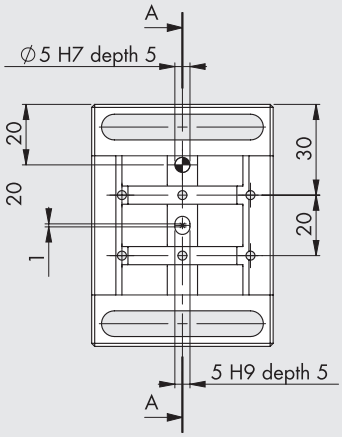

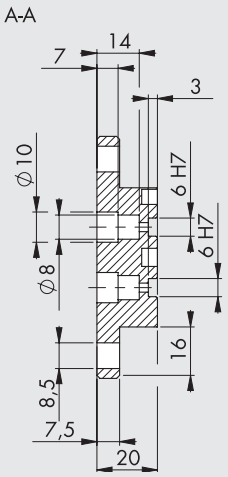

An adaptor for fixing V-Lock components longitudinally onto extruded profiles, with slots with 40 or 45 mm centre distance or 8 or 10 mm width.
If the slots have a 40 mm centre distance, insert two pins in the slots 20 mm from the axis of the adaptor and use them as an alignment reference.
If the slots have a 45 mm centre distance, use the 22.5 mm pin slots.

Kit contents:		
1 longitudinal adaptor	Material	Anodized aluminium
	Weight	0.164 kg
2 cylindrical pins Ø 10 x 16		
2 cylindrical pins Ø 8 x 24		
4 zinc-plated M8 x 16 screws		

EXAMPLE OF APPLICATION

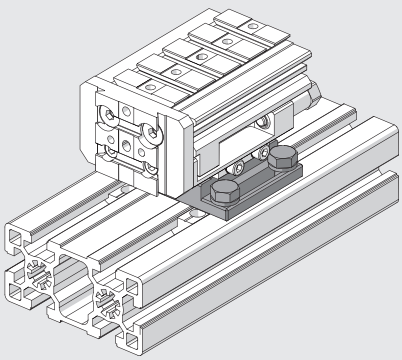

METAL WORK PNEUMATIC

TRANSVERSAL ADAPTOR, CODE 0950008002K

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

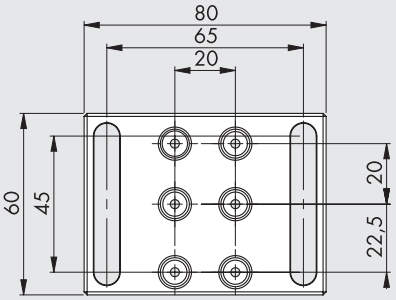

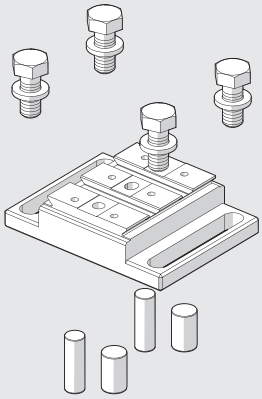



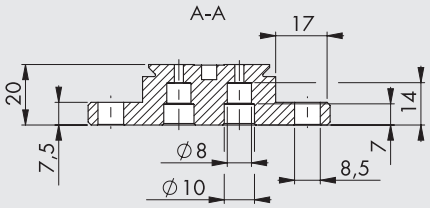



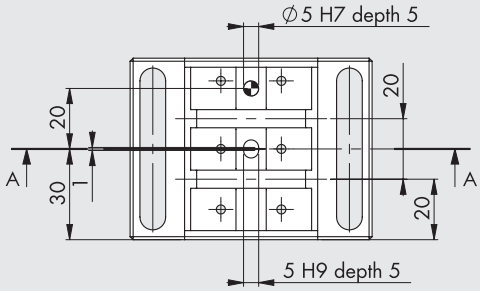



An adaptor for fixing V-Lock components transversally onto extruded profiles, with slots with 40 or 45 mm centre distance or 8 or 10 mm width.
If the slots have a 40 mm centre distance, insert two pins in the slots 20 mm from the axis of the adaptor and use them as an alignment reference.
If the slots have a 45 mm centre distance, use the 22.5 mm pin slots.

Kit contents:		
1 transversal adaptor:	Material	Anodized aluminium
	Weight	0.160 kg
2 cylindrical pins Ø 10 x 16		
2 cylindrical pins Ø 8 x 24		
4 zinc-plated M8 x 16 screws		

EXAMPLE OF APPLICATION

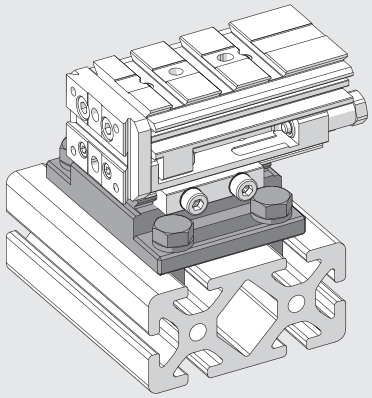

V-Lock TRANSFORMER

V-Lock transformers can be used to connect components other than V-Lock to the system or V-Lock components to other types of frames (e.g. bases, plates and walls). V-Lock transformers can be supplied without fixing screw holes or pinholes. This means that you can create the desired configuration.
For other similar adapters, see **chapter V-Lock Gripper accessories**.
The example below shows how to transform an S11 slide into a V-Lock slide.

Start from V-Lock transformer



Drill a hole where required



Apply to the component

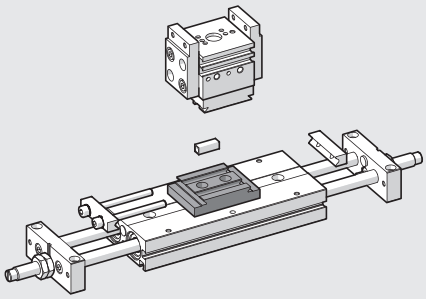

2-GROOVE V-Lock TRANSFORMER, CODE 0950008012K



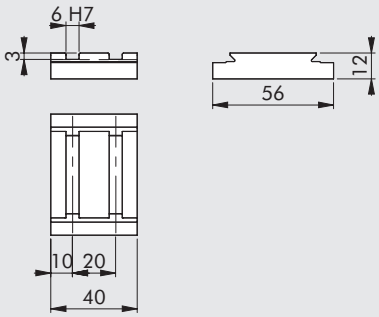

Weight: 0.060 kg
Material: anodized aluminium

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

6-GROOVE V-Lock TRANSFORMER, CODE 0950008016K



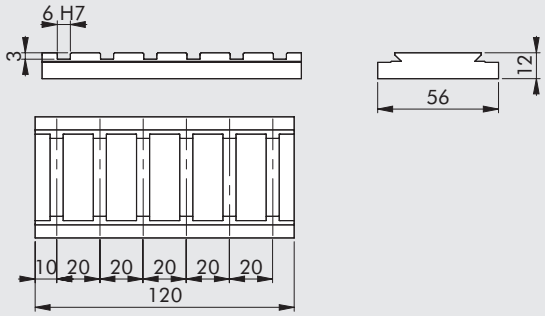

Weight: 0.181 kg
Material: anodized aluminium

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

10-GROOVE V-Lock TRANSFORMER, CODE 0950008020K



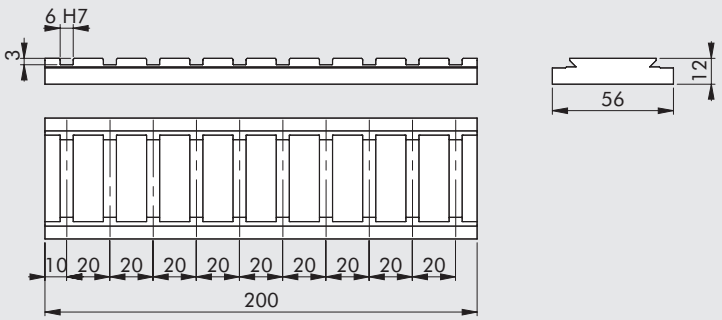

Weight: 0.301 kg
Material: anodized aluminium

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

QS TRANSFORMER L = 55, CODE 0950008050K



Fixing from below with M6 screw, or from above with through M5 screw.



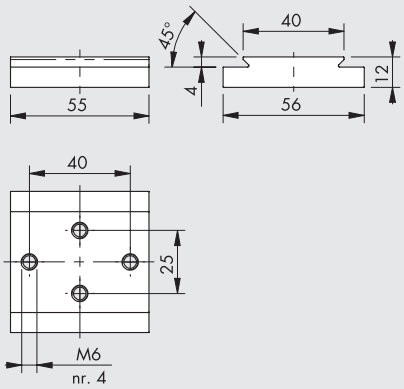

Weight: 0.087 kg
Material: anodized aluminium

NOTES

NOTES

METAL WORK PNEUMATIC

NOTES

PROFILES

The Quick-Set fixing system is the natural complement to modular components for V-Lock automation. The two systems share the same dovetail coupling system.
All types of structures can be quickly installed using Quick-Set profiles and accessories, including simple lightweight supports and complete assembly and testing lines. Couplings between profiles are accurate, very sturdy and vibration resistant. They are suitable for use in both static and dynamic applications. The profiles can be cut to measure using a die cutter and without requiring any machining; no need for holes or junction pinholes.
Dovetail joints can withstand higher loads than T-grooved joints; the reciprocal resistance of two screw-coupled joints is over 3000 N.
All the locking screws can be accessed at all times. The installations can be dismantled and reused.
In addition to the products shown in this catalogue and available from Metal Work stock, all the other Montech® Quick-Set components can be supplied on request.

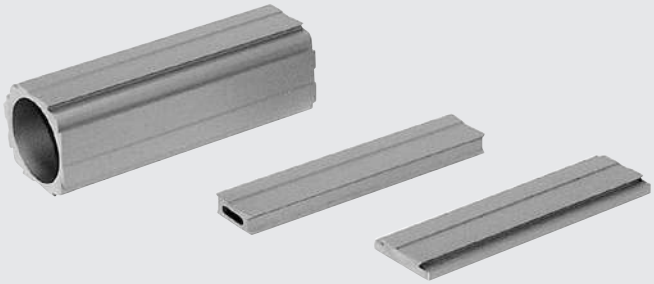

EXAMPLES OF APPLICATION

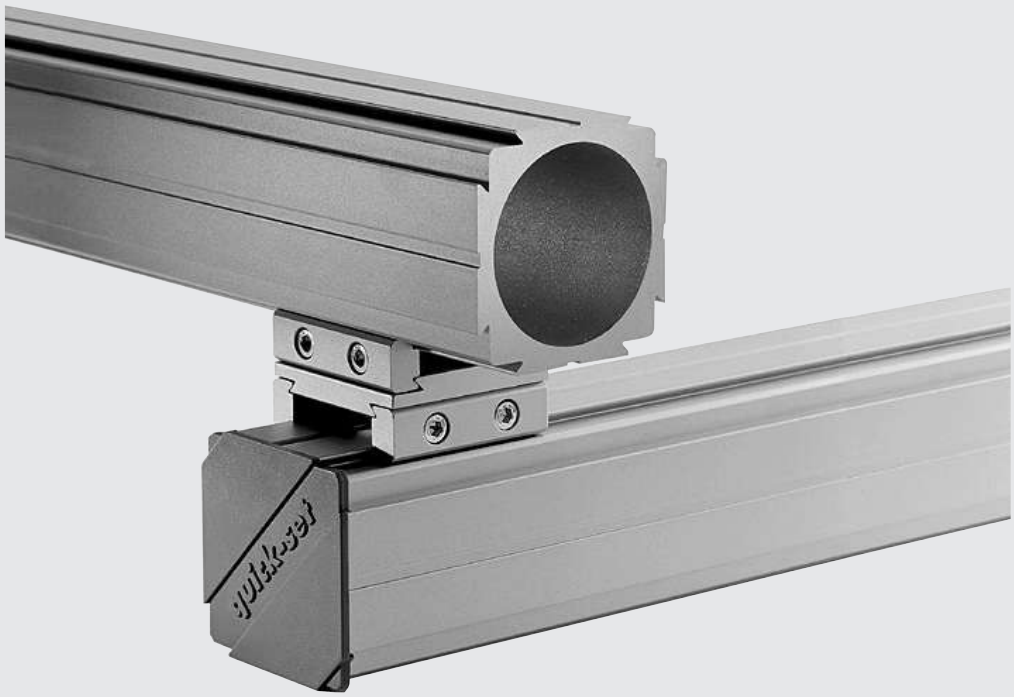

METAL WORK PNEUMATIC

TP-66-40-3M SUPPORTING PROFILE, CODE W0950005800K





Profile to DIN 17615 (precision profiles)

Length	3000 mm
Profile surface	1480 mm^2
Flexural modulus	Wx = Wy = 23 cm^3
Moment of inertia	Jx = Jy = 76 cm^4
Length tolerance	±2 mm (DIN 7168 average)
Torsion tolerance	1 mm/m
Straightness tolerance	0.5 mm/m
Material	Anodized aluminium heat set
Weight	3.996 kg/m

LP-66-40-3M LIGHTWEIGHT PROFILE, CODE W0950005801K



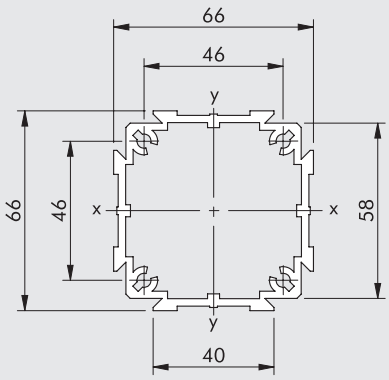

Profile to DIN 17615 (precision profiles)

Length	3000 mm
Profile surface	809 mm^2
Flexural modulus	Wx = Wy = 13 cm^3
Moment of inertia	Jx = Jy = 45 cm^4
Length tolerance	±2 mm (DIN 7168 average)
Torsion tolerance	1 mm/m
Straightness tolerance	0.5 mm/m
Material	Anodized aluminium heat set
Weight	2.186 kg/m

TP-16-40-2M SUPPORTING PROFILE, CODE W0950005802K





Profile to DIN 17615 (precision profiles)

Length	2000 mm
Profile surface	368 mm^2
Flexural modulus	Wx = 1.025 cm^3 Wy = 1.640 cm^3
Moment of inertia	Jx = 0.820 cm^4 Jy = 3.28 cm^4
Length tolerance	±1.2 mm (DIN 7168 average)
Torsion tolerance	1 mm/m
Straightness tolerance	0.5 mm/m
Material	Anodized aluminium heat set
Weight	0.980 kg/m

AP-56-40-2M ADAPTER PROFILE, CODE W0950005803K





Profile to DIN 17615 (precision profiles).
Used for making adaptors.

Length	2000 mm
Profile surface	600 mm^2
Flexural modulus	Wx = 1.04 cm^3
	Wy = 4.83 cm^3
Moment of inertia	Jx = 0.67 cm^4
	Jy = 13.53 cm^4
Length tolerance	±1.2 mm (DIN 7168 average)
Torsion tolerance	1 mm/m
Straightness tolerance	0.5 mm/m
Material	Anodized aluminium heat set
Weight	1.620 kg/m

KFM-40-2M CABLE CARRIER PROFILE, CODE W0950005804K

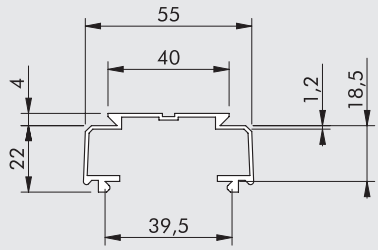

Profile to DIN 17615 (precision profiles).
Snap-in profile for the laying of pneumatic hoses and electrical cables.

Length	2000 mm
Length tolerance	±1.2 mm (DIN 7168 average)
Material	Anodized aluminium heat set
Weight	0.549 kg/m

AK-66-40 PLASTIC CAP, CODE W0950005810K



End cap for TP-66-40 and LP-66-40 bearing profiles.

Material	Light grey ABS
Weight	2.5 g

METAL WORK PNEUMATIC

GFTP-66-40 ARTICULATED FOOT, CODE W0950005814K

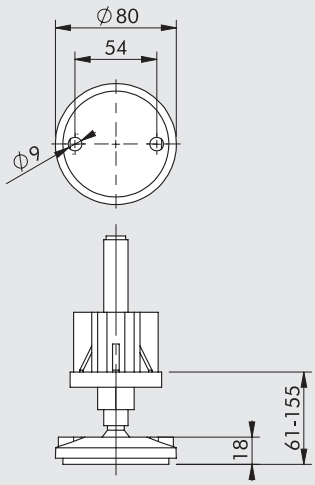

Articulated foot with adaptor for TP-66-40 bearing profile.

Maximum axial load	5000 N
Material	Black plastic plate. Threaded rod in zinc-plated steel.
Weight	0.350 kg

GFLP-66-40 ARTICULATED FOOT, CODE W0950005815K

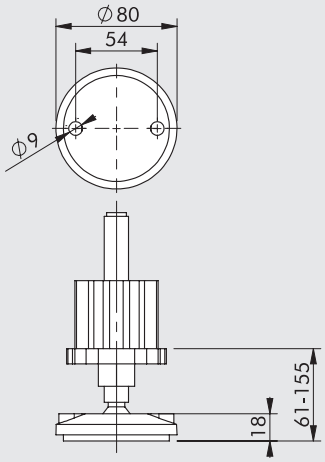

Articulated foot with adaptor for LP-66-40 lightweight profile.

Maximum axial load	5000 N
Material	Black plastic plate. Threaded rod in zinc-plated steel.
Weight	0.400 kg

NOTES

V-Lock ACCESSORIES AND SPARE PARTS

ACCESSORIES

V-Lock HOLLOW KEY



Code	Description
W0950005150K	V-Lock hollow key kit

Note: Kit of 5 stainless steel 6 x 6 hollow keys

V-Lock SOLID KEY



Code	Description
W0950005151K	V-Lock key kit

Note: Kit of 5 stainless steel solid 6 x 6 keys

V-Lock profile tool

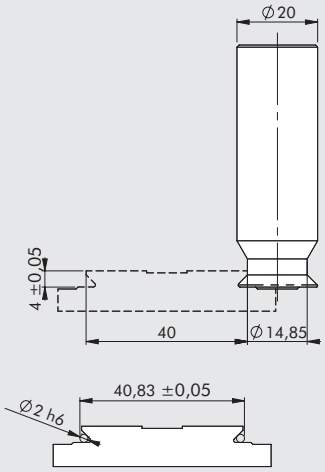

Code	Description
9000770	Tool for V-Lock profile

Workable materials: aluminium – steel

Note: This tool can be used to obtain the dovetail V-Lock profile on parts and/or components without it (e.g. plates, jibs and columns).

SPARE PARTS

V-Lock SCREW KIT



Code	Description
W0950005170K	K screw kit

Note: Kit of 10 zinc-plated M5x55 screws (class 8.8) and 10 zinc-plated knurled M5 washers

Quick-Set SCREW KIT



Code	Description
W0950005171K	QS screw kit

Note: Kit of 10 zinc-plated M5x50 screws (class 8.8) and 10 zinc-plated knurled M5 washers

RODLESS CYLINDER WITH BALL RECIRCULATING GUIDE SERIES V-Lock

METAL WORK PNEUMATIC

V-Lock rodless cylinders come with bores Ø 16, Ø 25 and Ø 32.
Their main feature is that the carriage support has a dovetail with V-Lock grooves for mounting other components in the V-Lock family.
The provision of threaded holes and centring pins allows non-V-Lock components to be fixed onto the carriage.
The fixing foots also use the V-Lock system, so the cylinder can be fixed onto something else using K or QS elements.
The carriage support is mounted on ball-recirculation pads that run on tempered guides and can withstand very high loads and moments.
Main features of V-Lock rodless cylinders:

- extruded anodized aluminium alloy cylinder liner;
- sensor grooves in the liner;
- longitudinal pneumatic seal system using stainless steel non-deformable strips;
- very high load capacities acting in any direction, without affecting the cylinder carriage in any way;
- tempered steel guide anchored firmly to the cylinder liner;
- ball-bearing pads made using special technology to allow very silent operation and long maintenance intervals;
- built-in adjustable pneumatic cushioning;
- provision for the application of adjustable stops and shock absorbers;
- with diameter 32 cylinders, the valves can be fixed onto the liner using the retracting sensor grooves, without the need for intermediate brackets.

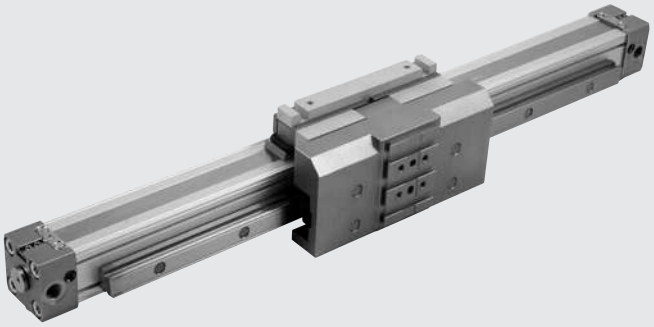

TECHNICAL DATA		Ø16	Ø25	Ø32
Operating pressure	bar	1 to 8		
	MPa	0.1 to 0.8		
	psi	14.5 to 116		
Temperature range	°C	–10 to +80		
Design		Double-acting rodless cylinder with direct transmission system		
Fluid		50 µm unlubricated filtered air Lubrication, if used, must be continuous		
Standard strokes	mm	100 to 1350	100 to 2300	
Threaded ports		M5, 1/8", 1/4"		
Fixing position		Free		
Max. speed with or without shock absorbers	m/s	≤1		
Lubrication		Every 2000 km or once a year (grease code 9910506)		
Notes		**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**		
		When operating conditions exceed the values shown in the "Diagram of speed and maximum cushionable load", it is advisable to use the version with external shock absorbers.		

WEIGHTS

Ø	Version 275_ _ _ _ _ _ _ _CNK		Version 276_ _ _ _ _ _ _ _CNK	
	Weight [g] Stroke = 0	Weight [g] every mm	Weight [g] Stroke = 0	Weight [g] every mm
16	500	1.79	758	1.79
25	1676	2.99	2208	2.99
32	3168	5.04	4381	5.04

COMPONENTS

① CYLINDER HEAD: aluminium alloy
② LINER: shaped anodized aluminium alloy
③ PISTON GASKET: NBR o FKM/FPM
④ CENTRAL ELEMENT: aluminium alloy
⑤ WIPER RING: Hostaform®
⑥ OR-SEAL: FKM/FPM
⑦ PISTON: Hostaform®
⑧ CUSHIONING CONE: aluminium alloy
⑨ STATIC OR-SEAL: NBR or FKM/FPM
⑩ CARRIAGE: aluminium alloy
⑪ BOUTER STRIP: stainless steel
⑫ INNER STRIP: stainless steel
⑬ BAND SUPPORT: Hostaform®

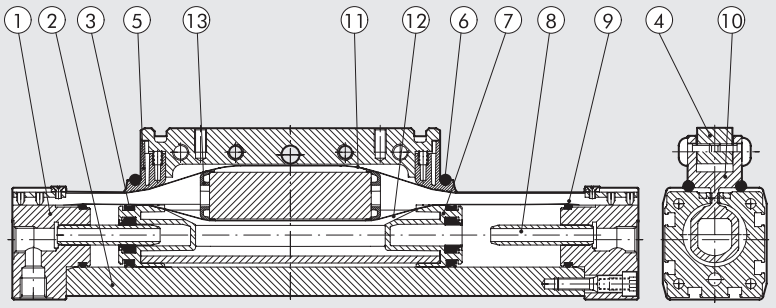

For version 275_ _ _ _ _ _ _ CNK
⑭ CYLINDER: see above
⑮ GUIDE: hardened steel
⑯ PAD: steel with hardened ball recirculation
⑰ CARRIAGE SUPPORT: anodized aluminium

For version 276_ _ _ _ _ _ _ CNK
In addition to the above details:
⑱ END-OF-STROKE STUD PIN: zinc-plated steel, complete with 2 zinc-plated steel nuts
⑲ DECELERATOR: burnished steel, complete with 2 zinc-plated or burnished steel nuts
⑳ DECELERATOR SUPPORT: anodized aluminium
㉑ BRACKET: hardened-andtempered zinc-plated steel

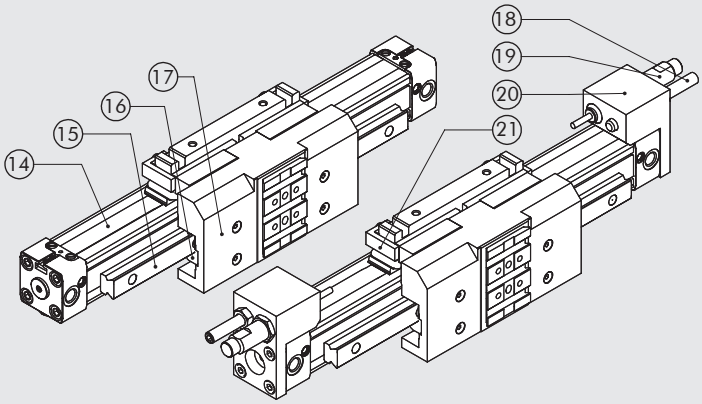

DIMENSIONING - MOMENTS AND FORCES





Ø	Actual force F at 6 bar [N]	Cushioning stroke [mm]	K [mm]	X [mm]	Y [mm]	Z [mm]	Max. load L [N]	Max. load G [N]	Ma max [Nm]	Mr max [Nm]	Mv max [Nm]
16	110	15	35	16	29	33	500	500	16	15	16
25	250	21	50.5	21	44	51.5	1500	1500	100	50	100
32	420	26	59	22.5	53.5	70	3000	3000	200	100	200

N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.
$Ma = F \cdot (hr + Y)$ $Mr = G \cdot (hr + z) + L \cdot (hv + X)$ $Mv = F \cdot (K + hv)$

$$\frac{Ma}{Ma_{max}} + \frac{Mr}{Mr_{max}} + \frac{Mv}{Mv_{max}} + \frac{L}{L_{max}} + \frac{G}{G_{max}} \leq 1$$

METAL WORK PNEUMATIC

DIAGRAM OF SPEED AND MAXIMUM CUSHIONABLE LOAD

For the cylinder to reach the end-of-stroke position without intense or repeated impact, which would damage it, it is necessary to annul the kinetic energy of the moving mass and the energy generated.
The maximum cushionable load depends on the traversing speed and the absorption of the air buffer supplied standard with the various cylinders.
The diagram shows the speeds and cushionable masses for the various diameters at a pressure of 6 bar.

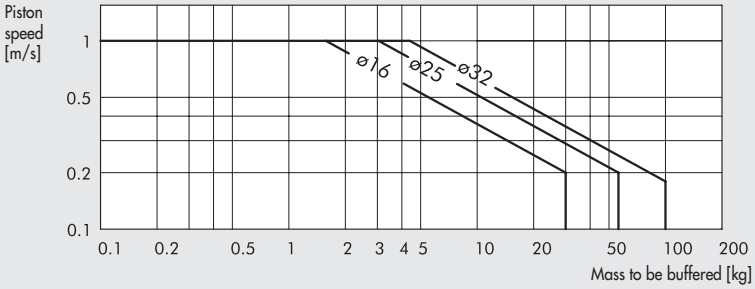

MAXIMUM LOAD BASED ON DISTANCE BETWEEN SUPPORTS

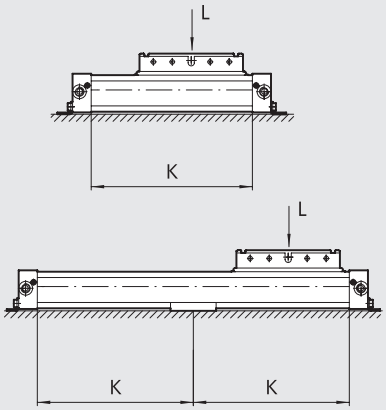

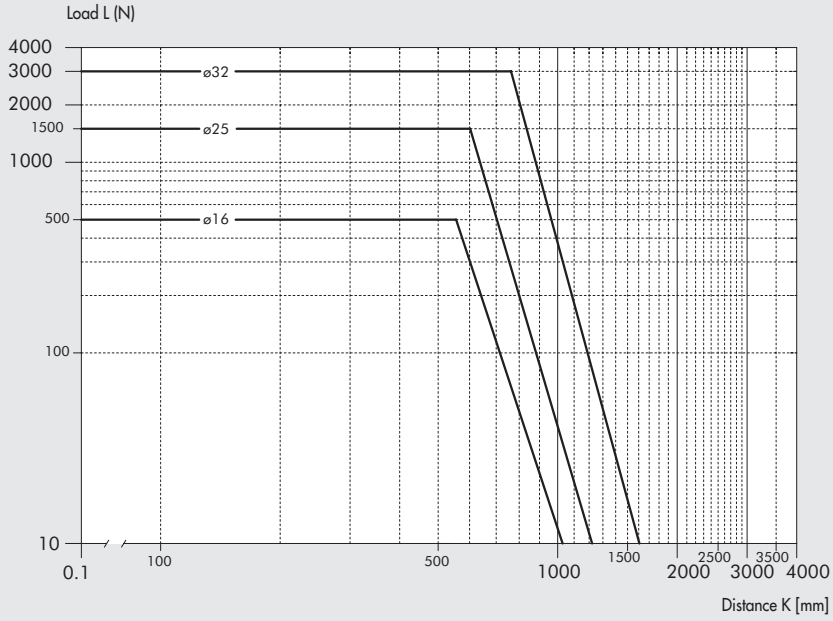

EXAMPLES OF APPLICATION

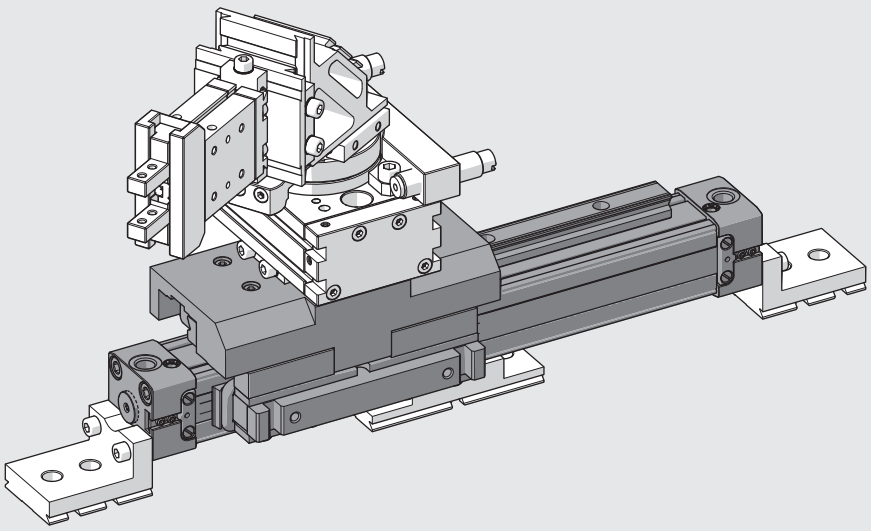

DIMENSIONS

Ø 16

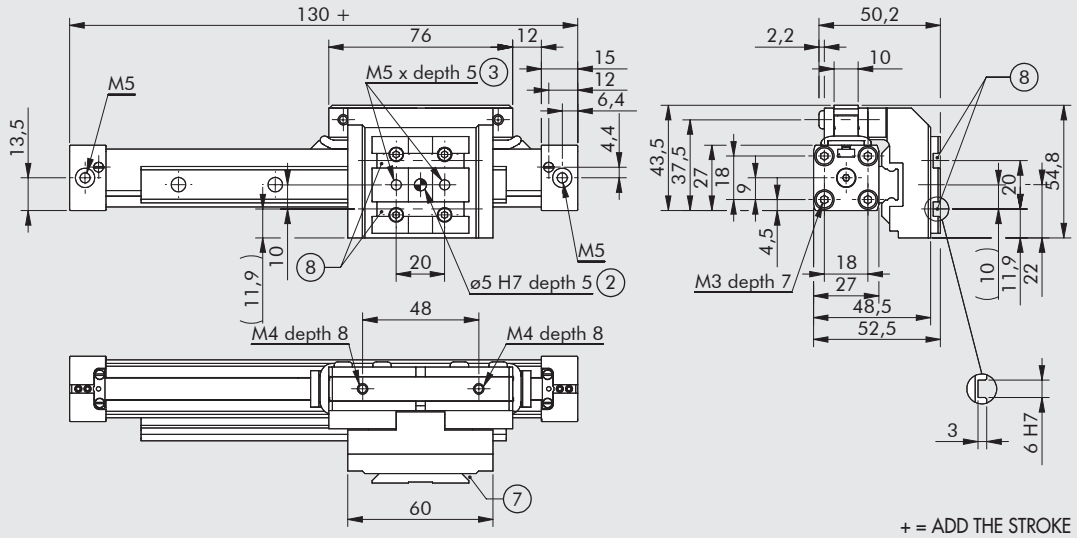

② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

+ = ADD THE STROKE

Ø 25

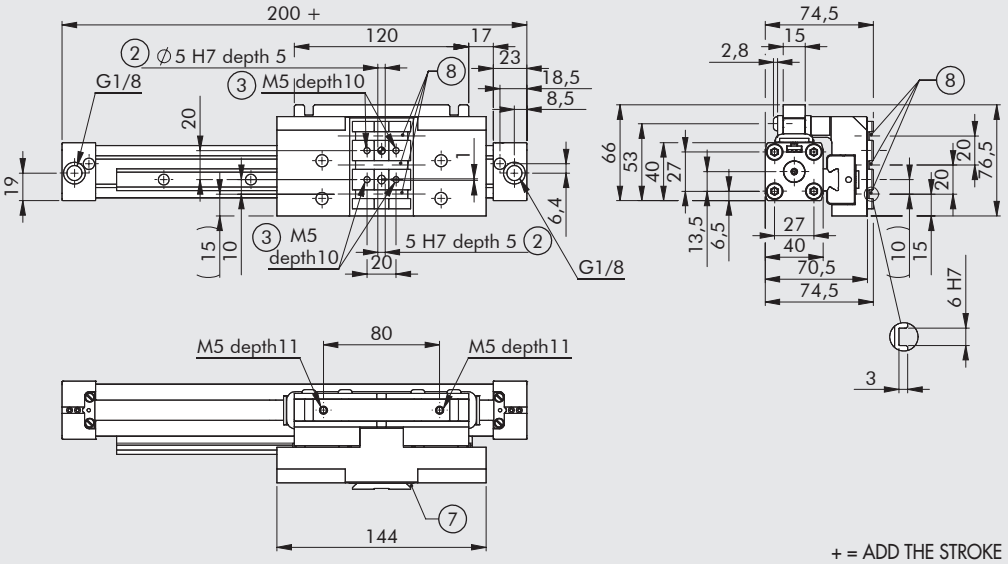

② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

+ = ADD THE STROKE

Ø 32

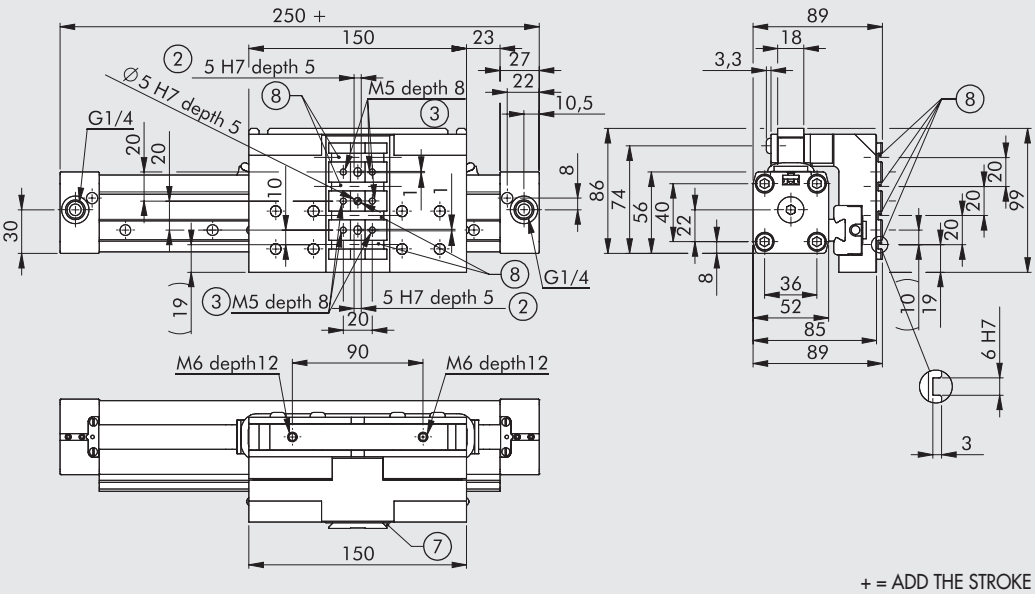

② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

+ = ADD THE STROKE

METAL WORK PNEUMATIC

DIMENSIONS OF VERSION WITH DECELERATORS

Ø 16

+ = ADD THE STROKE

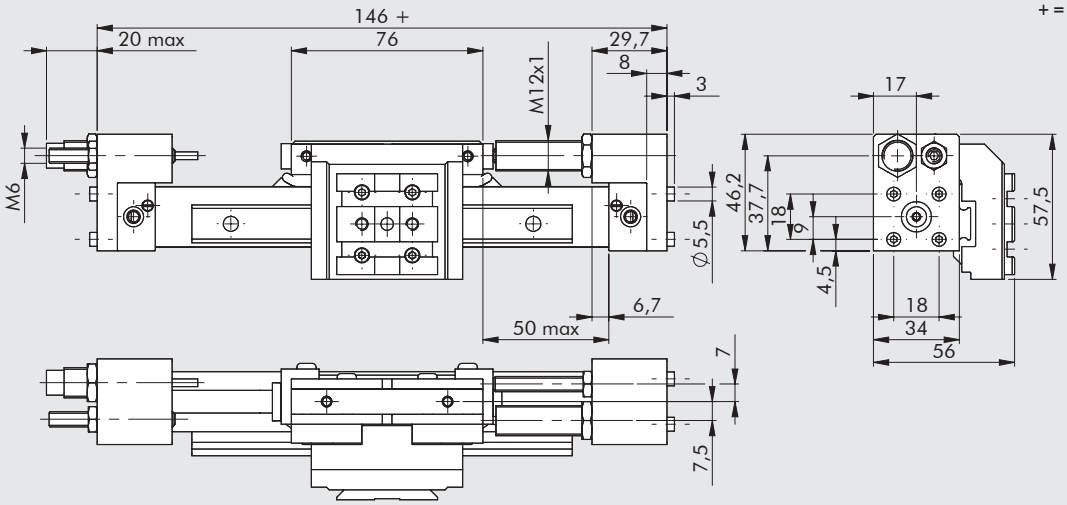

Ø 25

+ = ADD THE STROKE

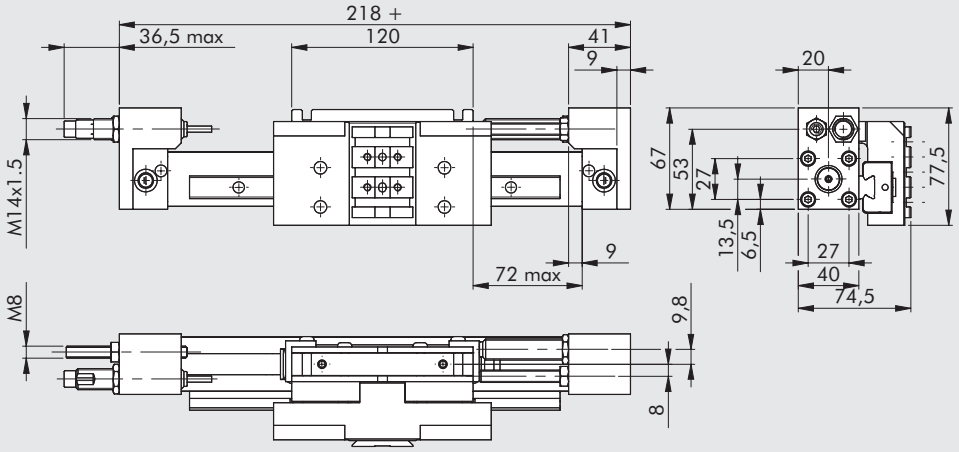

Ø 32

+ = ADD THE STROKE

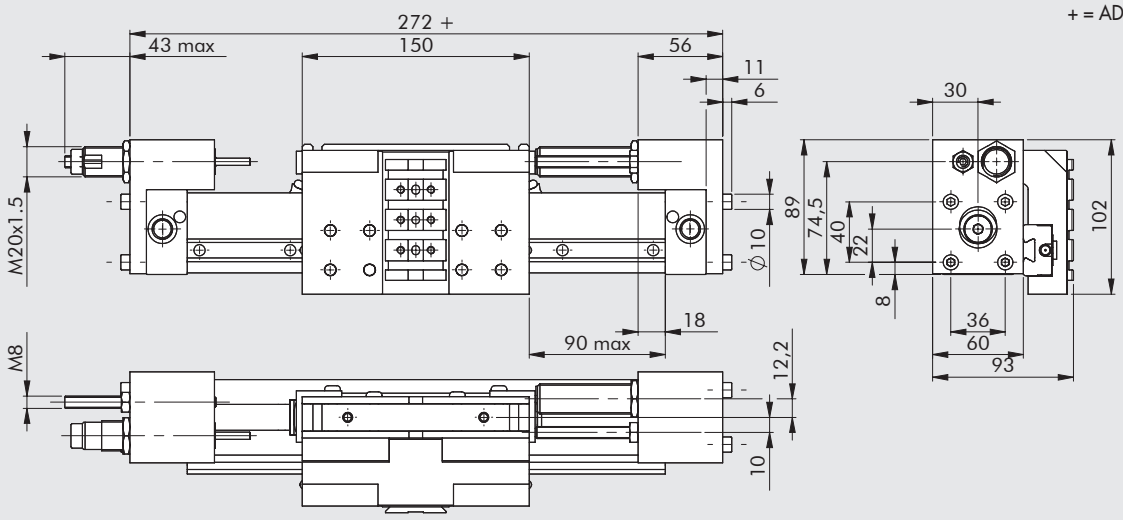

Ø	Stroke	Max. cushioning		Max. impact	Max. thrust
		For stroke [J]	For hour [J]	force [N]	force [N]
16	10	4.5	14125	1000	220
25	16	18	34000	2800	530
32	22	40	53700	3750	890

ASSEMBLY DIAGRAMS

275 (horizontal)

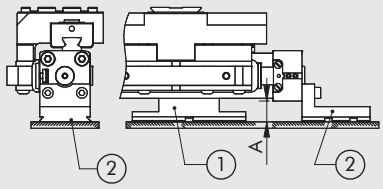

275/276 (vertical)

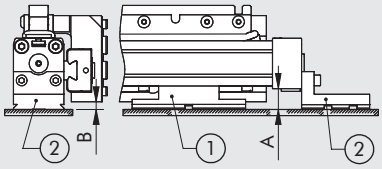

276 (horizontal)

Ø 16 - 25

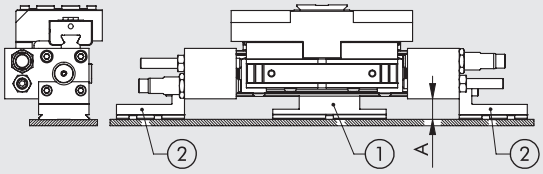

Ø 32

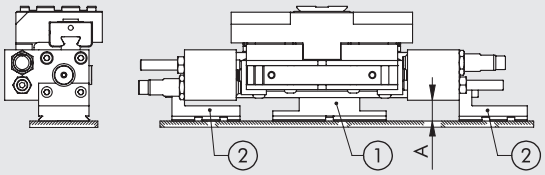

	A	Horizontal		A	B	Vertical	
Ø		Intermediate support code (1)	Foot code (2)			Intermediate support code (1)	Foot code (2)
16	17	**W0950164004K**	**W0950167001K**	17	5.7	**W0950164004K**	**W0950167001K**
25	16.5	**W0950254004K**	**W0950257001K**	16.5	6	**W0950254004K**	**W0950257001K**
32	17.5	**W0950324004K**	**W0950327001K**	17.5	4.5	**W0950324004K**	**W0950327001K**

KEY TO CODES

CYL	27	5	0	32	0100	C	N	K
	TYPE			**BORE**	**STROKE**		**GASKETS**	**FAMILY**
	27 Rodless cylinder	**5** Dual-acting, cushioned, magnetic, with ball recirculation guides ▲ **6** Dual-acting, cushioned, with ball recirculation guides + adjustable stops and decelerators	**0** Magnetic **S** Non-magnetic ■ **G** No stick-slip	16 25 32	**Ø 16**: 100 to 1350 mm **Ø 25** and **32**: 100 to 2300 mm		**N** NBR gaskets	**K** V-Lock

■ **Use at speeds lower than 0.2 m/s to prevent bounce. Use unlubricated air only.**

▲ For use in conditions exceeding those shown in the "Diagram of speed and maximum cushionable load" on page **A3**.39.

NOTES

METAL WORK PNEUMATIC

ACCESSORIES: FIXINGS

FOOT Ø 16, CODE W0950167001K

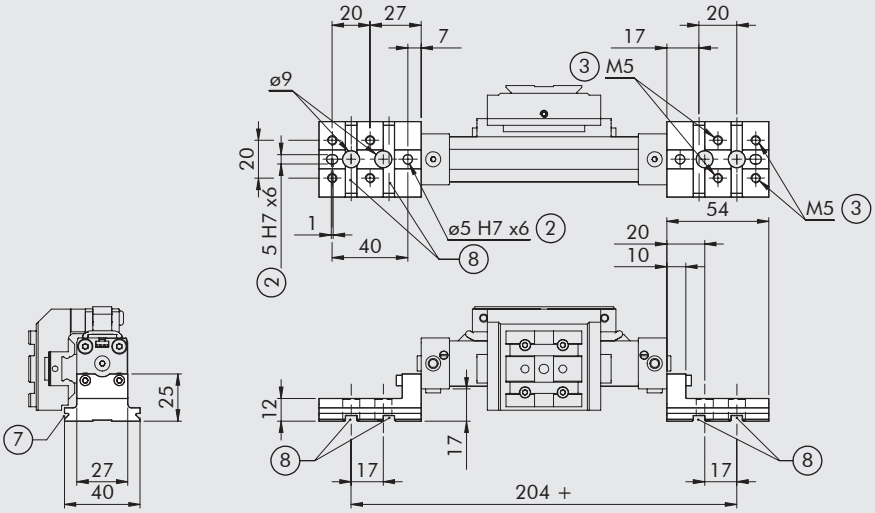

+ = ADD THE STROKE

② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see
chapter V-Lock adaptors
⑧ Slot for "V-Lock" precision key

Weight: 68 g
Note: One element per pack, complete with 2 short screws for fixing to the head and 2 long screws for use when a decelerator support is prese

FOOT Ø 25, CODE W0950257001K

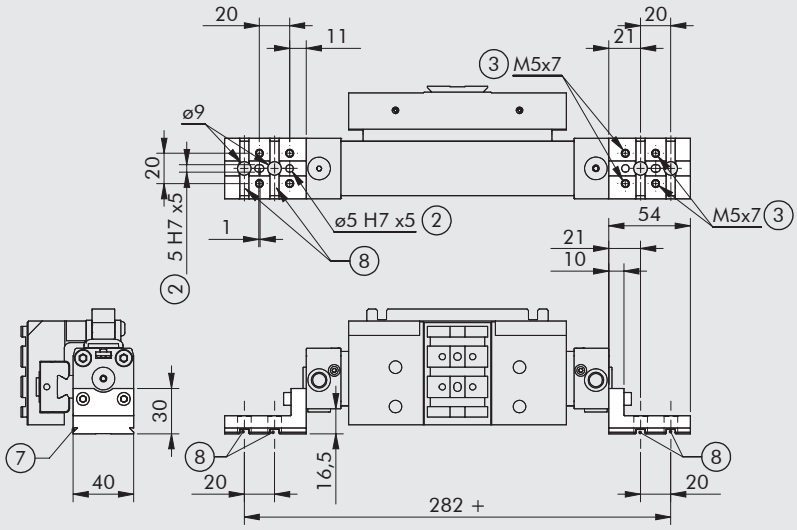

+ = ADD THE STROKE

② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see
chapter V-Lock adaptors
⑧ Slot for "V-Lock" precision key

Weight: 94 g
Note: One element per pack, complete with 2 short screws for fixing to the head and 2 long screws for use when a decelerator support is prese

FOOT Ø 32, CODE W0950327001K

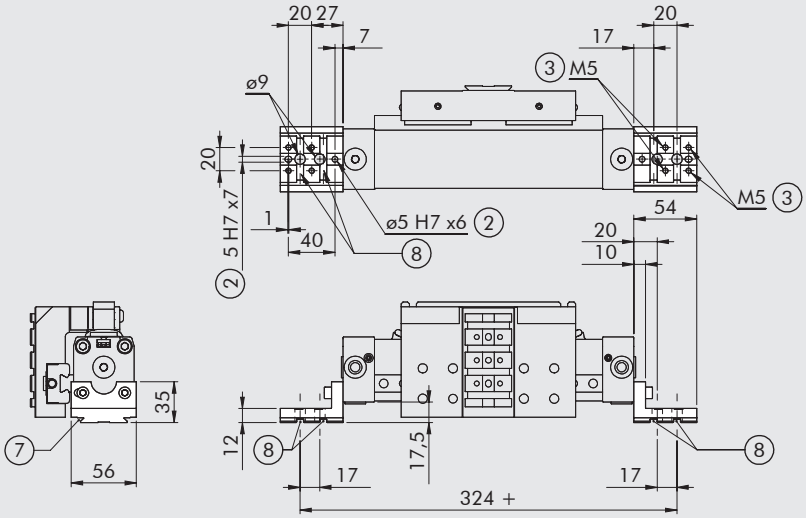

+ = ADD THE STROKE

② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see
chapter V-Lock adaptors
⑧ Slot for "V-Lock" precision key

Weight: 148 g
Note: One element per pack, complete with 2 short screws for fixing to the head and 2 long screws for use when a decelerator support is prese

INTERMEDIATE SUPPORT Ø 16, CODE W0950164004K

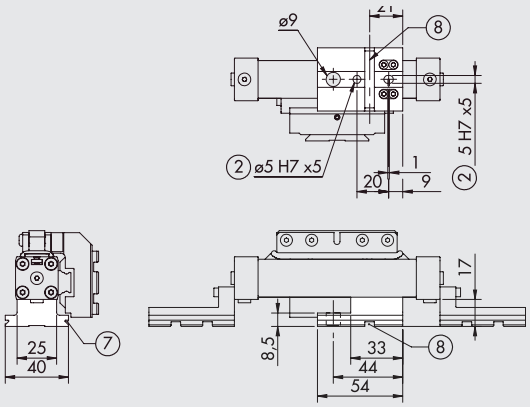

② Holes for centring pins
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

Weight: 70 g
Note: 1 per pack, complete with 4 screws.
To fix it to the barrel, make the holes indicated in the instruction together with the accessorie.
Use only as a support and not as a fixture

INTERMEDIATE SUPPORT Ø 25, CODE W0950254004K

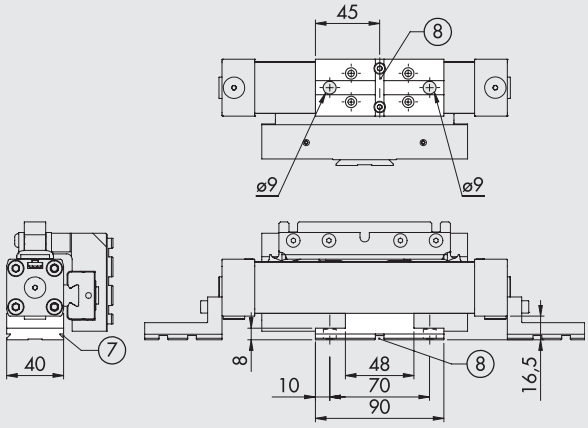

⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

Weight: 127 g
Note: Plate supplied with 2 screws.
To fix it to the barrel, make the holes indicated in the instruction together with the accessorie.
Use only as a support and not as a fixture

INTERMEDIATE SUPPORT Ø 32, CODE W0950324004K

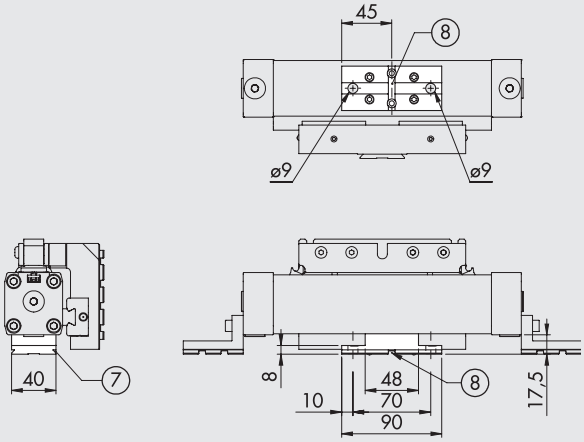

⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

Weight: 136 g
Note: 1 support + 4 screws and 4 fixing plates.
Use only as a support and not as a fixture

ACCESSORIES: MAGNETIC SENSORS

RETRACTING SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

Ø 16 SENSOR SUPPORT





Code Sensor support	Description Sensor support	Type Sensor support	Mounting on the carriage opposite side	Mounting on the guide opposite side
0950164003	Sensor support short	A	•	
0950164001	Sensor support std	B		•

Note: Supplied cmplete with 2 screw, 1 pin

Ø 25 SENSOR SUPPORT



Code	Description
0950164001	Sensor support STD

Note: Supplied with 1 stud pin, 2 screws

ACCESSORIES: DECELERATORS

ADJUSTABLE LIMIT SWITCH AND SHOCK ABSORBERS KIT

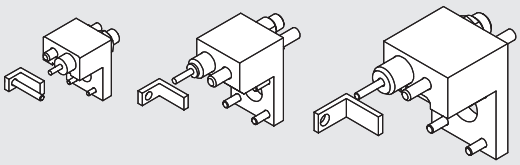

Code	Description	Weight [g]
0950164002K	Rodless cylinder limit switch and shock absorbers Ø 16 V-Lock	133
0950254002K	Rodless cylinder limit switch and shock absorbers Ø 25 V-Lock	267
0950324002K	Rodless cylinder limit switch and shock absorbers Ø 32 V-Lock	610

Note: Kit contents: 1 decelerator support, 1 decelerator, 1 decelerator nut, 1 stop grub screw, 1 grub screw nut, 1 bracket, 1 bracket screw (for Ø 16 only), 4 support locking screws.

SHOCK ABSORBERS



Code	Description	Ø
0950004003	Shock absorbers ECO15 MF1 + nut M12x1	16
0950004004	Shock absorbers ECO25 MC2 + nut M14x1.5	25
0950004005	Shock absorbers ECO50 MC2 + nut M20x1.5	32

GRAPHS TO HELP CHOOSE THE RIGHT SHOCK ABSORBERS

Ø 16



Ø 25



Ø 32



The dotted areas indicate that the SHOCK ABSORBERS is supplied standard. Other options can be selected depending on the speed [m/sec] and the maximum work force [J/stroke] to dissipate at each stroke. Refer to the diagrams above to select the correct option.

SPARES

① Band support kit
② Piston kit
③ ④ ⑤ ⑥ ⑦ ⑩ NBR gaskets Kit (FKM/FPM for ⑦)
⑧ ⑨ Bands Kit (inner/outer)

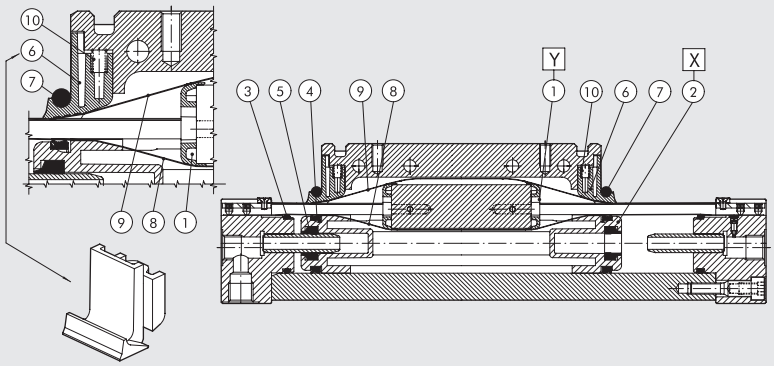

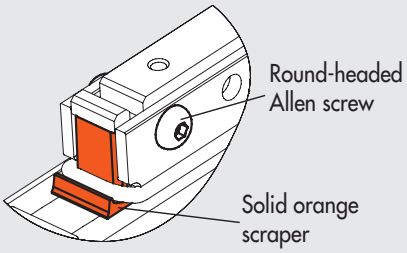

Spare parts label on one cylinder side



BANDS SUPPORT KIT POS 1 (Y)

Ø	Code White	Code Black	Code Orange	Code Light grey	Code Dark grey	Code Yellow
16	0090165080	0090165081	0090165082	0090165083	0090165084	0090165085
25	0090255080	0090255081	0090255082	0090255083	0090255084	0090255085
32	0090325080	0090325081	0090325082	0090325083	0090325084	0090325085

PISTON KIT POS 2 (X)

Ø	Code Type 0 (0 rings)	Code Type 1 (1 rings)	Code Type 2 (2 rings)	Code Type 3 (3 rings)	Code Type A (4 rings)	Code Yellow
16	0090165015	0090165016	0090165017	0090165018	–	0090165085
25	0090255015	0090255016	0090255017	0090255018	0090255019	0090255085
32	0090325015	0090325016	0090325017	0090325018	0090325019	0090325085

BANDS KIT (INNER AND OUTER) POS. 8-9

Ø	Code
16	0090166_ _ _ _
25	0090256_ _ _ _
32	0090326_ _ _ _

Complete the code with the 4 figure cylinder stroke.

NBR GASKET KIT POS. 3-4-5-6-7-10

Ø	Code
16	0090165022
25	0090255022
32	0090325022

COMPACT PRECISION SLIDE SERIES S14K

Flat, compact precision slides with two cylinders.
The fixed and moving parts are moved by a sturdy ball recirculation carriage running on hardened guides. Elastic mechanical stop or shock absorbers are used to achieve adjustable stop at the end of the stroke.
A three-position version is available allowing an intermediate stop.
Slots are provided in the body for end-of-stroke sensors.

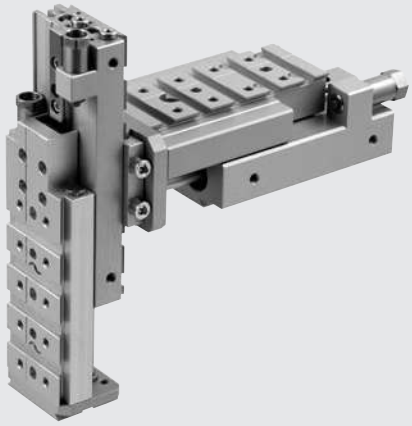

TECHNICAL DATA		S14K-8	S14K-16	S14K-25
Operating pressure	bar	2 to 8		
	psi	29 to 116		
Temperature range	°C	–10 to +80		
Fluid		Dry or lubricated 10 µm filtered compressed air. Lubrication, if used, must be continuous		
Maximum speed	m/s	0.8 (we always suggest to use micro regulator)	0.8	0.8
Versions		With shock absorbers – With elastic mechanical stop		
Bore		2 x Ø 8	2 x Ø 16	2 x Ø 25
Piston rod diameter	mm	4	8	12
Strokes	mm	10, 20, 30, 40, 50, 80, 100	10, 20, 30, 40, 50, 80, 100, 125, 150	10, 20, 30, 40, 50, 80, 100, 125, 150, 200
Stroke reduction by adjusting the decelerators retraction	mm	16 extension / 16 retraction	12 extension / 12 retraction	30 extension / 30 retraction
Stroke reduction by adjusting the buffers retraction	mm	8 extension / 8 retraction	10 extension / 10 retraction	15 extension / 15 retraction
Maximum impact energy with hydraulic decelerators	J	2	5	20
Maximum impact energy with buffers	J	0.15	0.25	0.5
Sensors		Sensors Magnetic Hall or Reed		
Theoretical thrust force at 6 bar	N	60	240	589
Theoretical pull force at 6 bar	N	46	180	453
Repeatability in stop positions	mm	0.02 (with shock absorbers); 0.02 (with buffers and 5 bar minimum pressure)		
Monitoring position		Any		
Notes		Lubrication recommended: every 2 million cycles for strokes below 100 mm and 1 million for longer strokes (grease code 9910506)		

COMPONENTS

① SLIDE BODY: anodized aluminium
② GUIDE: hardened steel
③ CARRIAGE: recirculating ball bearings
④ MOVING PART: anodized aluminium
⑤ FRONT PLATE: anodized aluminium
⑥ PISTON ROD: stainless steel
⑦ END CAP: brass
⑧ PISTON: aluminium
⑨ GASKETS: polyurethane/NBR
⑩ MAGNET: plastoferrite/plastoneodymium
⑪ GUIDE STRIP: special technopolymer
⑫ STOP: stainless steel

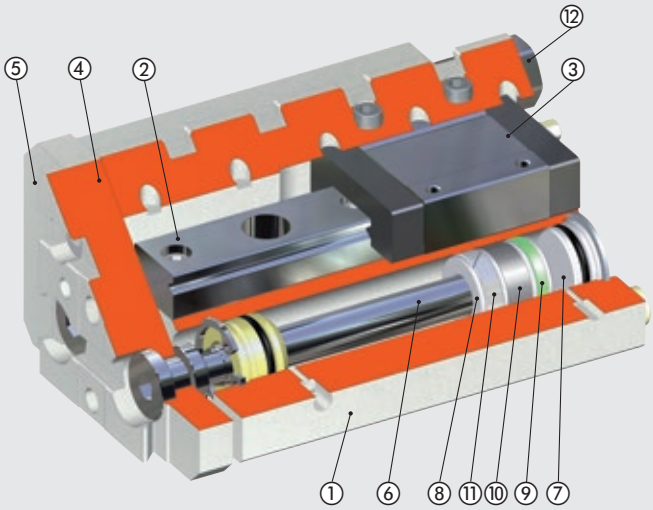

WEIGHTS OF SLIDES AND OF MOVING MASSES

S14K Ø 8

Stroke [mm]	Total slide weight [kg]	Masses in movement [kg]
10	0.341	0.162
20	0.337	0.162
30	0.335	0.162
40	0.369	0.178
50	0.430	0.208
80	0.526	0.148
100	0.591	0.174

S14K Ø 16

Stroke [mm]	Total slide weight [kg]	Masses in movement [kg]
10	0.783	0.386
20	0.777	0.386
30	0.773	0.386
40	0.839	0.413
50	0.905	0.436
80	1.110	0.531
100	1.363	0.648
125	1.533	0.721
150	1.678	0.773

S14K Ø 25

Stroke [mm]	Total slide weight [kg]	Masses in movement [kg]
10	2.582	1.137
20	2.570	1.137
30	2.561	1.137
40	2.548	1.137
50	2.705	1.198
80	3.143	1.367
100	3.434	1.469
125	3.788	1.608
150	4.180	1.748
200	4.914	2.026

EXAMPLES OF APPLICATION

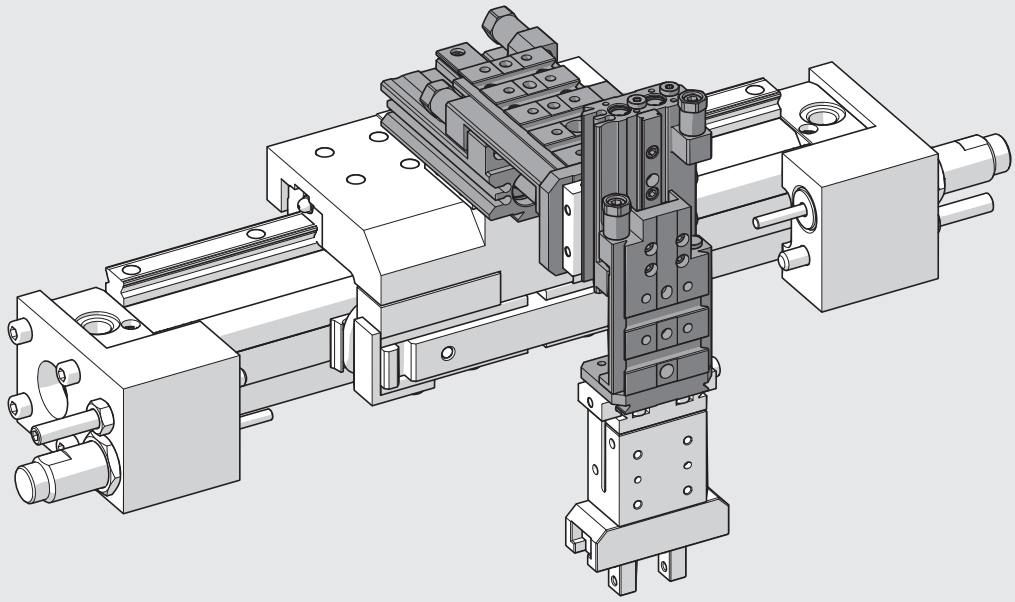

MAXIMUM LOADS AND SPEEDS

The graphs below show the maximum recommended movable loads (masses) [kg] as a function of the average traverse speed [m/s], defined as stroke/time, slide position (horizontal/vertical) and supply pressure.
The following stop versions are available:
- buffer: for lightweight applications, with a lower amount of energy to cushion (relatively low speeds and loads);
- shock absorbers: for heavy-duty applications, with more energy to cushion.

METAL WORK PNEUMATIC

MAXIMUM LOADS: VERSIONS WITH SHOCK ABSORBERS

S14K **Ø 8** - Vertical orientation

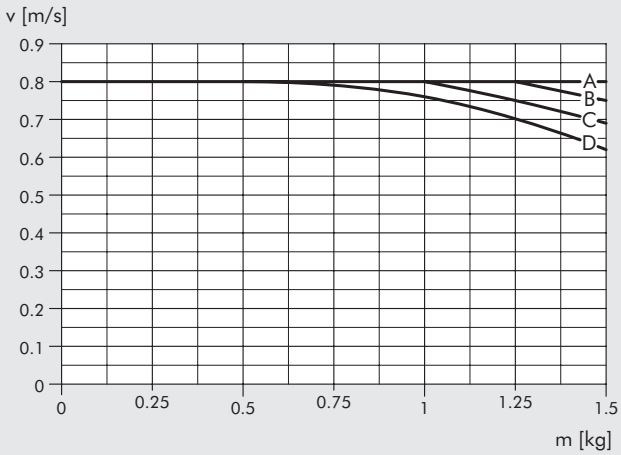

S14K **Ø 8** - Horizontal orientation

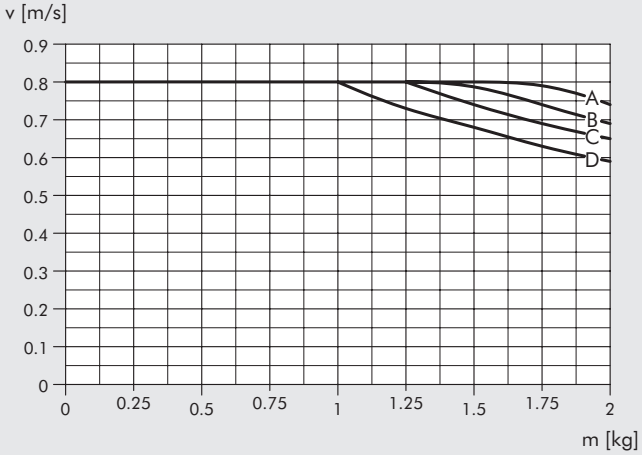

S14K **Ø 16** - Vertical orientation

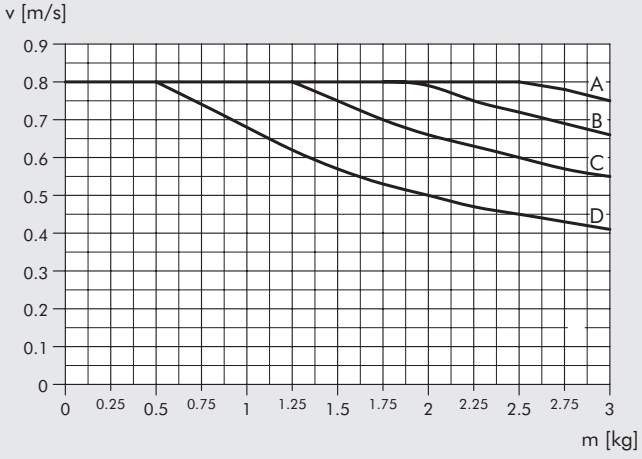

S14K **Ø 16** - Horizontal orientation

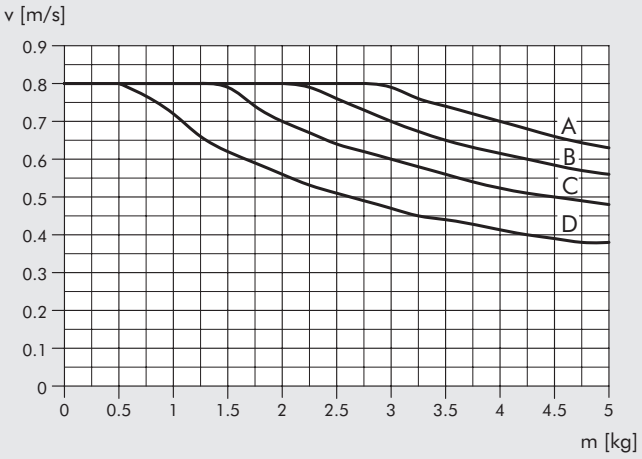

S14K **Ø 25** - Vertical orientation

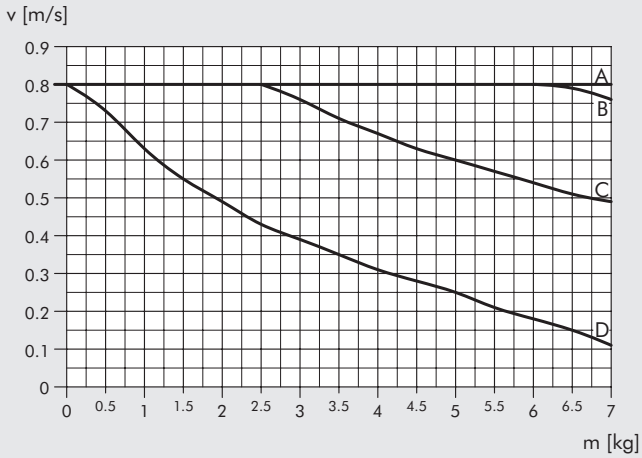

S14K **Ø 25** - Horizontal orientation

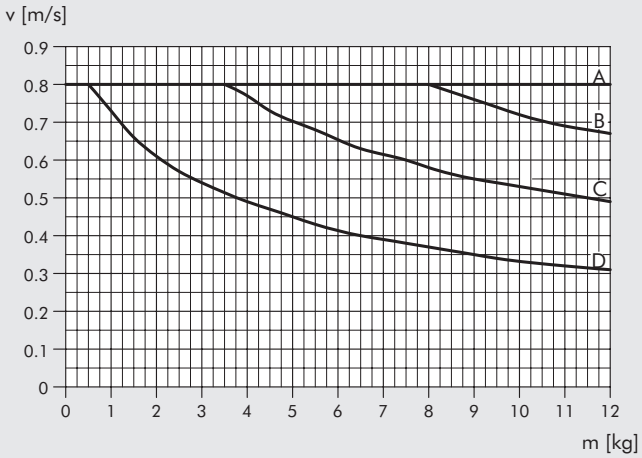

A = 2 bar B = 4 bar C = 6 bar D = 8 bar

MAXIMUM LOADS: VERSIONS WITH ELASTIC MECHANICAL STOP

S14K **Ø 8** - Vertical orientation

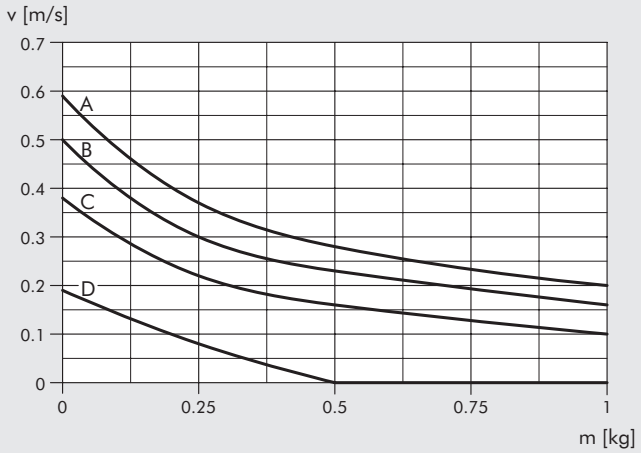

S14K **Ø 8** - Horizontal orientation

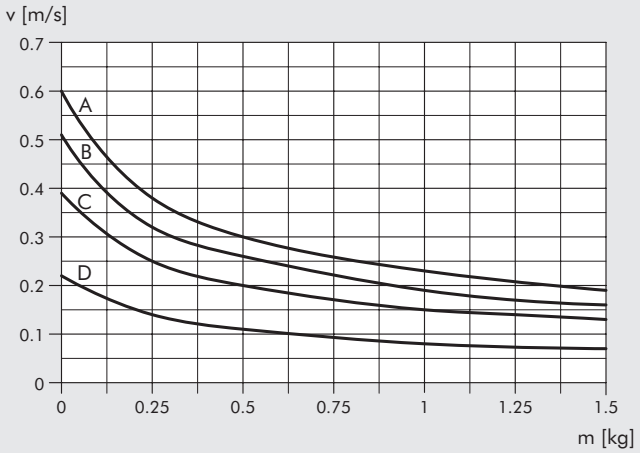

S14K **Ø 16** - Vertical orientation

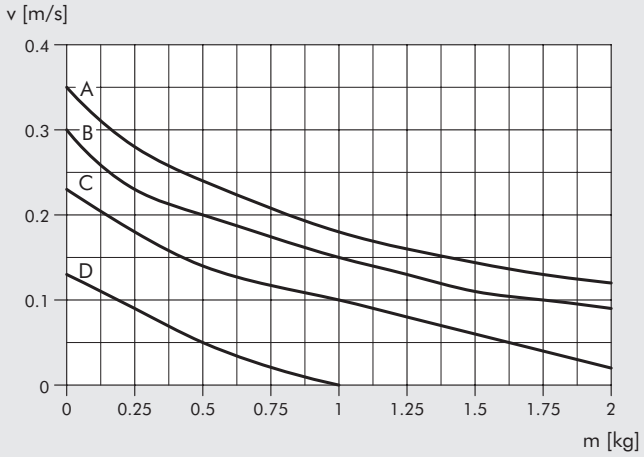

S14K **Ø 16** - Horizontal orientation

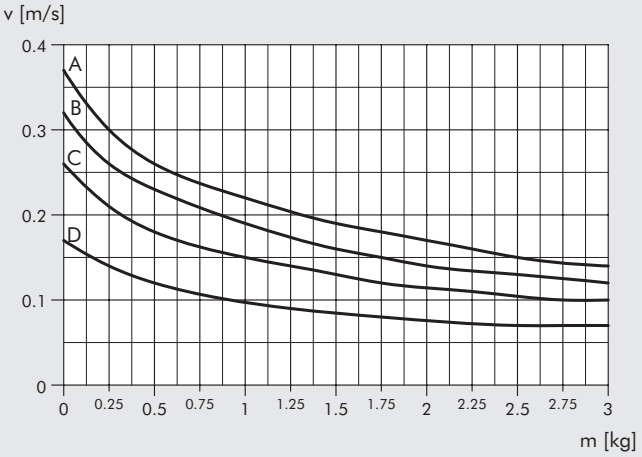

S14K **Ø 25** - Vertical orientation

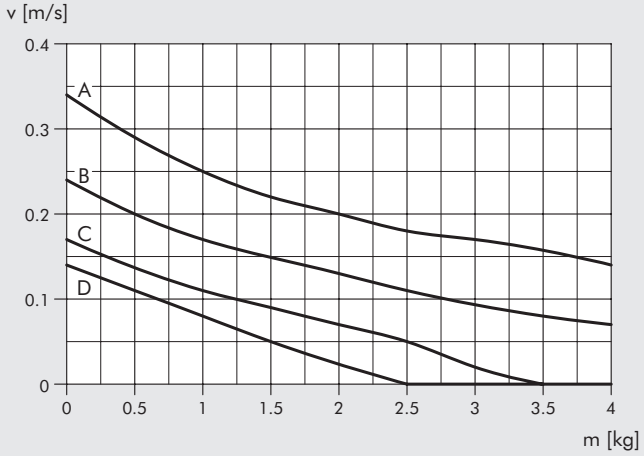

S14K **Ø 25** - Horizontal orientation

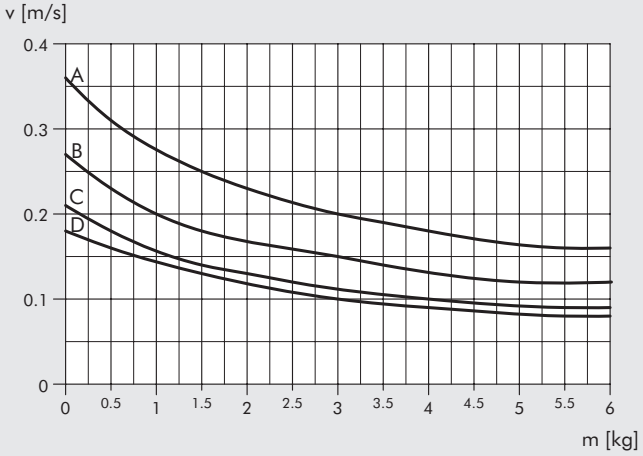

A = 2 bar B = 4 bar C = 6 bar D = 8 bar

METAL WORK PNEUMATIC

STATIC FORCES AND MOMENTS

To prevent the recirculating ball guide from getting damaged, the maximum static loads and moments applied must meet the following equations, where the lengths have to be given in metres.

$$\frac{Ma}{Ma\ max} + \frac{Mr}{Mr\ max} + \frac{Mv}{Mv\ max} + \frac{L}{L\ max} + \frac{G}{G\ max} \leq 1$$

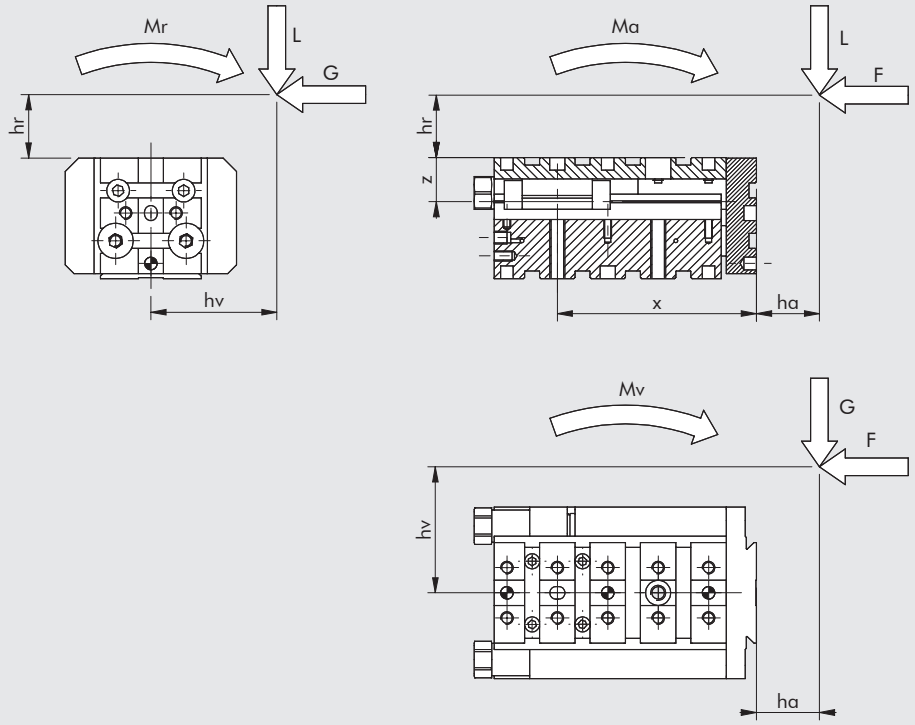

Sum of the moments, with the signs shown in the example:
Mr = L · hv - G · (hr+z)
Ma = -F · (hr+z) + L · (ha+x)
Mv = -F · hv + G · (ha+x)

Ø	Stroke [mm]	X [mm]	Z [mm]	G max [N]	L max [N]	Mr max [Nm]	Ma max [Nm]	Mv max [Nm]
8	10	61	14	309.1	368.0	1.8	1.3	1.1
	20	61	14	309.1	368.0	1.8	1.3	1.1
	30	61	14	309.1	368.0	1.8	1.3	1.1
	40	71	14	309.1	368.0	1.8	1.3	1.1
	50	83.5	14	398.2	474.1	2.7	2.7	2.2
	80	113.5	14	398.2	474.1	2.7	2.7	2.2
	100	133.5	14	398.2	474.1	2.7	2.7	2.2
16	10	67	17.5	962.6	1145.9	10.7	9.1	7.7
	20	67	17.5	962.6	1145.9	10.7	9.1	7.7
	30	67	17.5	962.6	1145.9	10.7	9.1	7.7
	40	79	17.5	962.6	1145.9	10.7	9.1	7.7
	50	79	17.5	962.6	1145.9	10.7	9.1	7.7
	80	119	17.5	962.6	1145.9	10.7	9.1	7.7
	100	146.5	17.5	962.6	1145.9	10.7	9.1	7.7
	125	171.5	17.5	962.6	1145.9	10.7	9.1	7.7
	150	196.5	17.5	962.6	1145.9	10.7	9.1	7.7
25	10	98	22	1423.1	1694.1	43.6	18	15.1
	20	98	22	1423.1	1694.1	43.6	18	15.1
	30	98	22	1423.1	1694.1	43.6	18	15.1
	40	98	22	1423.1	1694.1	43.6	18	15.1
	50	108	22	1423.1	1694.1	43.6	18	15.1
	80	138	22	1423.1	1694.1	43.6	18	15.1
	100	158	22	1423.1	1694.1	43.6	18	15.1
	125	183	22	1423.1	1694.1	43.6	18	15.1
	150	208	22	1423.1	1694.1	43.6	18	15.1
	200	258	22	1423.1	1694.1	43.6	18	15.1

LUBRICATION INSTRUCTIONS

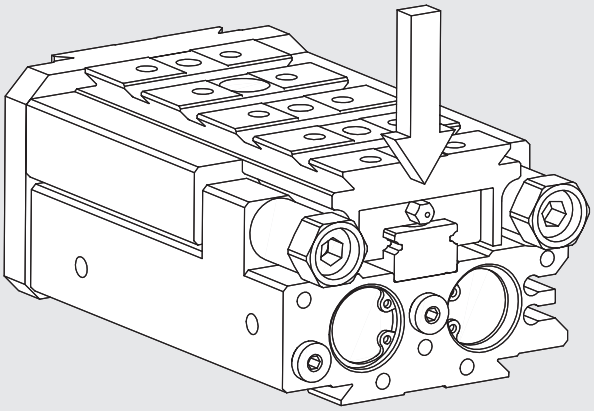

Ball recirculation carriages are supplied pre-lubricated.
They can be re-greased when necessary using the hole (Ø 8) or greasing Nipple (Ø 16 and Ø 25) provided.
The lubrication frequency depends on the environmental and operating conditions.
To ensure smooth movement and long life, we recommend an average lubrication interval of 2 million cycles for strokes less than 100 mm and 1 million for longer strokes.
A suitable bearing lubrication grease must be used (code 9910506).

NOTES

METAL WORK PNEUMATIC

DIMENSIONS

① Through holes for fixing actuators
② Holes for centring pins
③ Threaded holes for fixing
④ Piston rod extension supply
⑤ Piston rod retraction supply
⑥ Sensor fixing slots
⑦ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

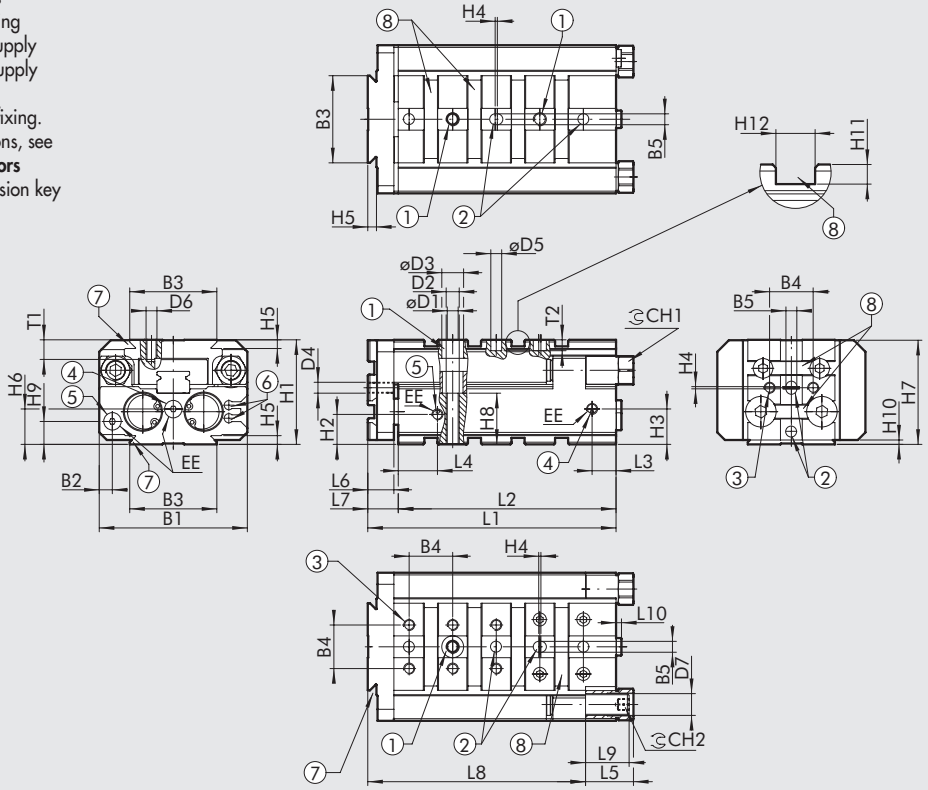

Ø	B1	B2	B3	B4	B5H7	øD1	D2	øD3	D4	øD5H7	D6	D7	EE	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12H7	T1	T2	CH1	CH2
8	48	7	40	-	5	3.3	M4	6	-	5	M5	M8x1	M5	35	8.8	11.3	1	4	10	34.8	17	7.5	2	3	6	6	5	11	4
16	68	6	40	20	5	5	M6	9.5	M5	5	M5	M10x1	M5	48	13.8	16.3	1	4	16.3	47.8	23.5	10.5	2	3	6	9	5	13	5
25	106	7.5	40	20	5	6.8	M8	11	M5	5	M5	M14x1.5	1/8"	64	17.3	23	1	4	17	63.8	35	12	2	3	6	10	5	18	6

ACCORDING TO THE STROKE

Ø	Stroke	L1	L2	L3	L4	L5	L6	L7	L8	L9		L10
										buffer decel.	shock absorbers	
	10	81	70	10	13.5	16	9	11	71	15	27.9	2.5
	20	81	70	10	13.5	16	9	11	71	15	27.9	2.5
	30	81	70	10	13.5	16	9	11	71	15	27.9	2.5
8	40	91	80	10	13.5	16	9	11	81	15	27.9	2.5
	50	106	95	10	13.5	16	9	11	96	15	27.9	2.5
	80	136	125	10	13.5	16	9	11	126	15	27.9	2.5
	100	156	145	10	13.5	16	9	11	146	15	27.9	2.5
	10	109	95	11	18	22	12	14	95	20	30.7	2.5
	20	109	95	11	18	22	12	14	95	20	30.7	2.5
	30	109	95	11	18	22	12	14	95	20	30.7	2.5
	40	119	105	11	18	22	12	14	105	20	30.7	2.5
16	50	129	115	11	18	22	12	14	115	20	30.7	2.5
	80	159	145	11	18	22	12	14	145	20	30.7	2.5
	100	179	165	11	18	22	12	14	165	20	30.7	2.5
	125	204	190	11	18	22	12	14	190	20	30.7	2.5
	150	229	215	11	18	22	12	14	215	20	30.7	2.5
	10	138	120	16.5	25	30	16	18	118	28	65.7	2.5
	20	138	120	16.5	25	30	16	18	118	28	65.7	2.5
	30	138	120	16.5	25	30	16	18	118	28	65.7	2.5
	40	138	120	16.5	25	30	16	18	118	28	65.7	2.5
25	50	148	130	16.5	25	30	16	18	128	28	65.7	2.5
	80	178	160	16.5	25	30	16	18	158	28	65.7	2.5
	100	198	180	16.5	25	30	16	18	178	28	65.7	2.5
	125	223	205	16.5	25	30	16	18	203	28	65.7	2.5
	150	248	230	16.5	25	30	16	18	228	28	65.7	2.5
	200	298	280	16.5	25	30	16	18	278	28	65.7	2.5

DIMENSIONS OF SLIDE S14K Ø 8

Ø 8 stroke 10; 20; 30 mm

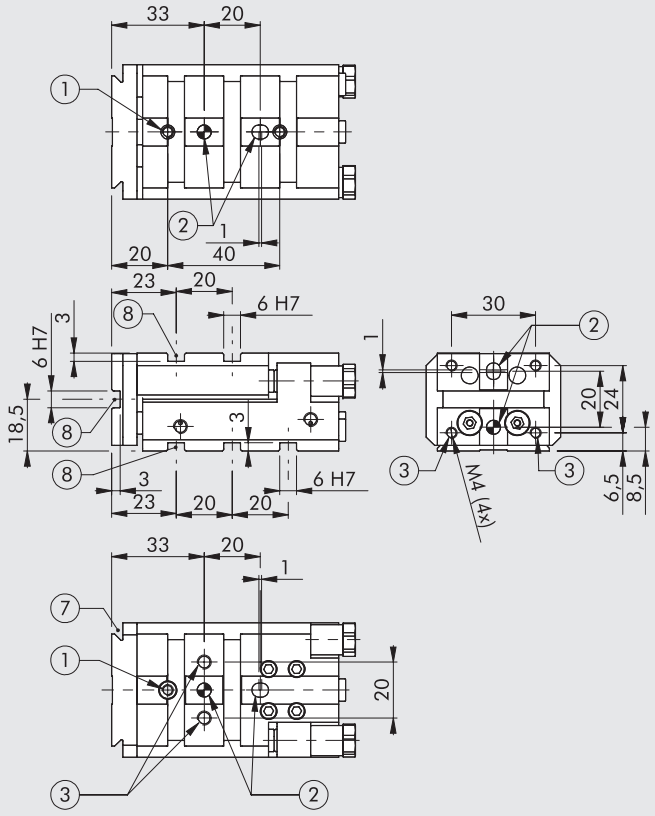

① Through holes for fixing actuators
② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

Ø 8 stroke 40 mm

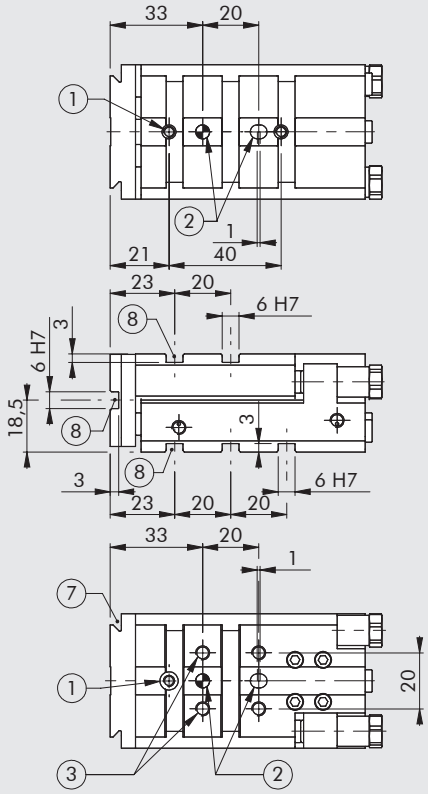

Ø 8 stroke 50 mm

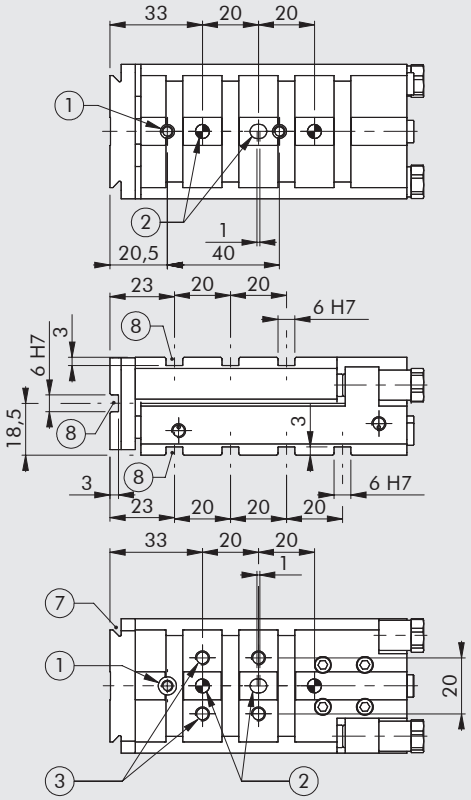

Ø 8 stroke 80 mm

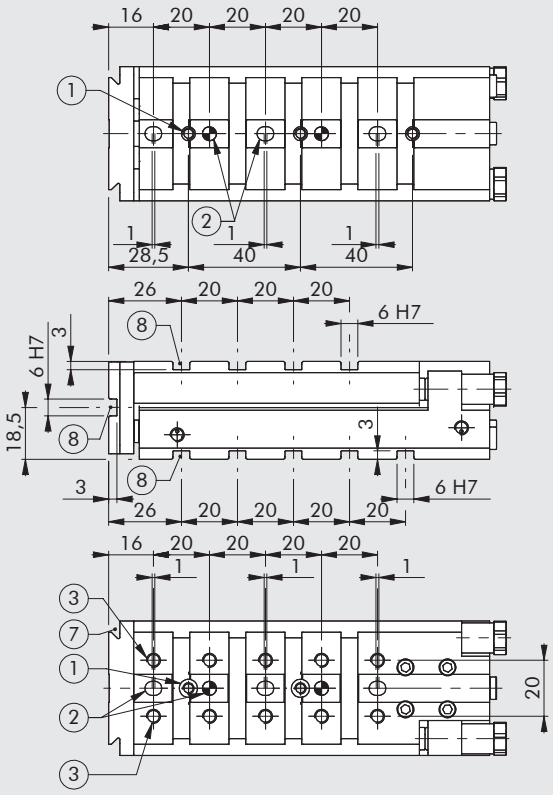

Ø 8 stroke 100 mm

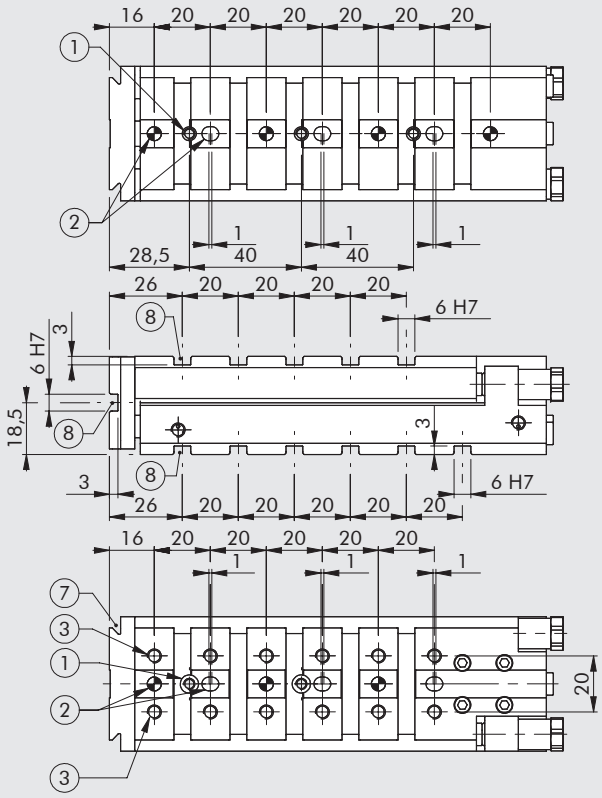

NOTES

DIMENSIONS OF SLIDE S14K Ø 16

Ø 16 stroke 10; 20; 30 mm

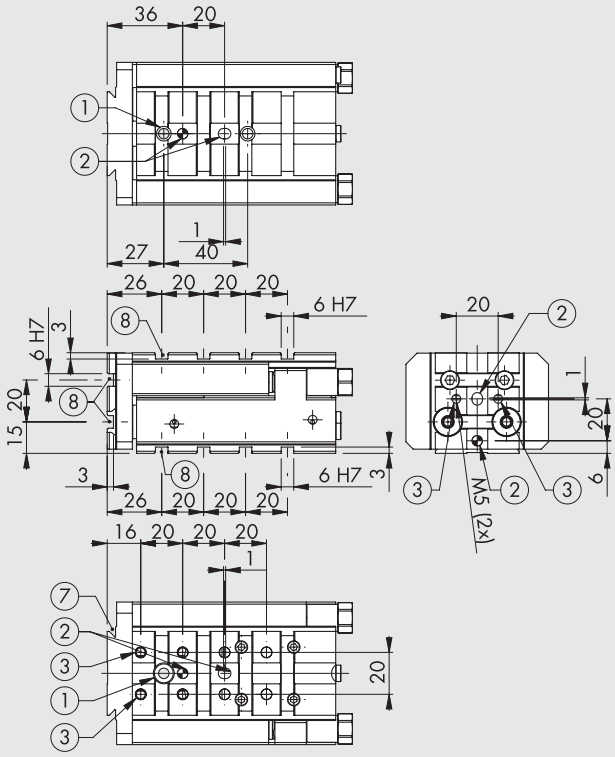

① Through holes for fixing actuators
② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

Ø 16 stroke 40 mm

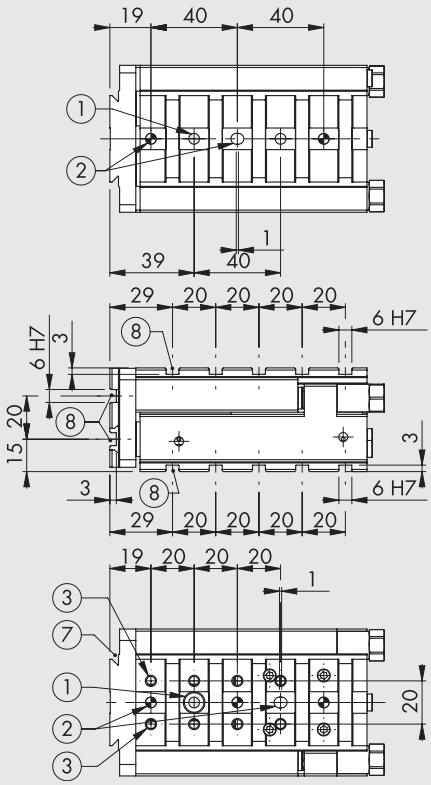

Ø 16 stroke 50 mm

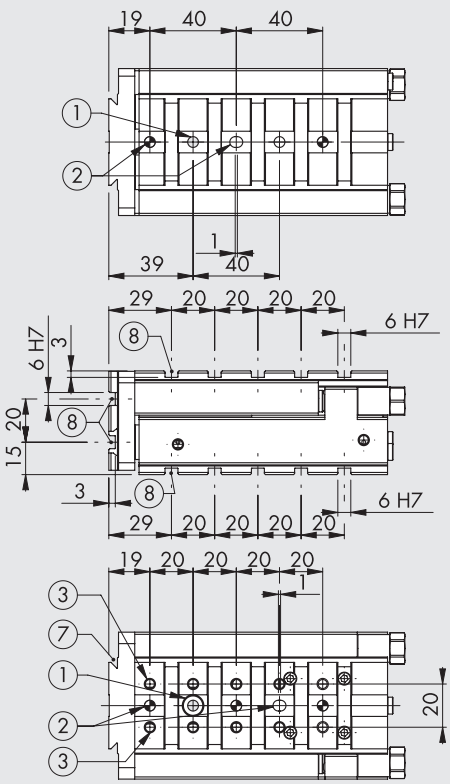

METAL WORK PNEUMATIC

Ø 16 stroke 80 mm

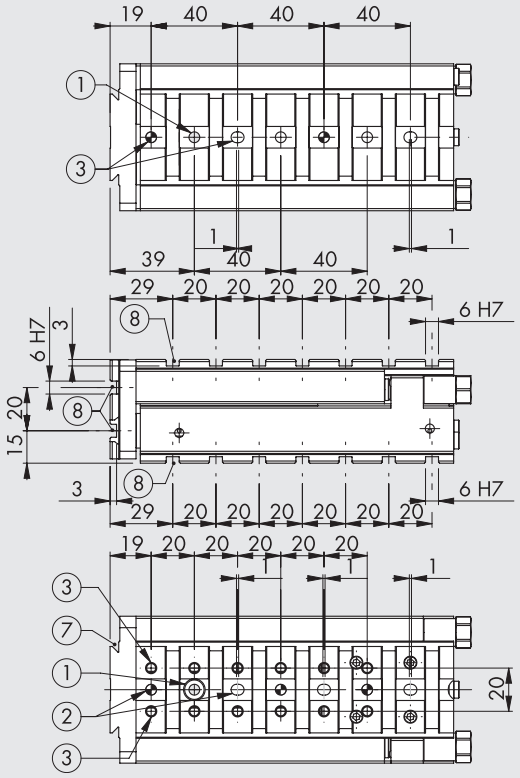

Ø 16 stroke 100 mm

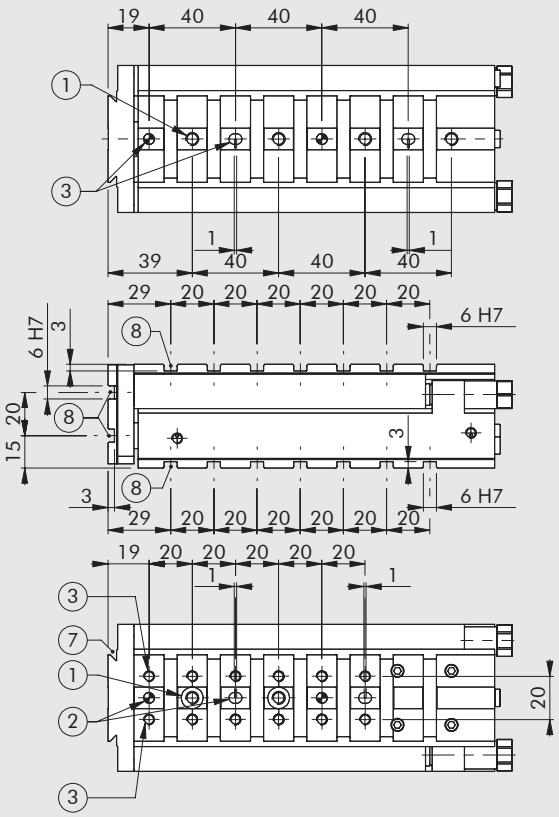

Ø 16 stroke 125 mm

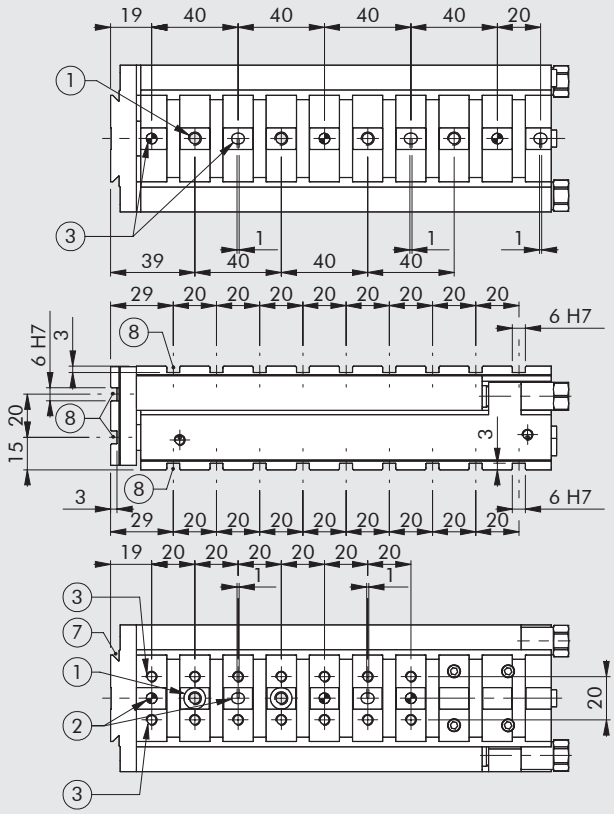

Ø 16 stroke 150 mm

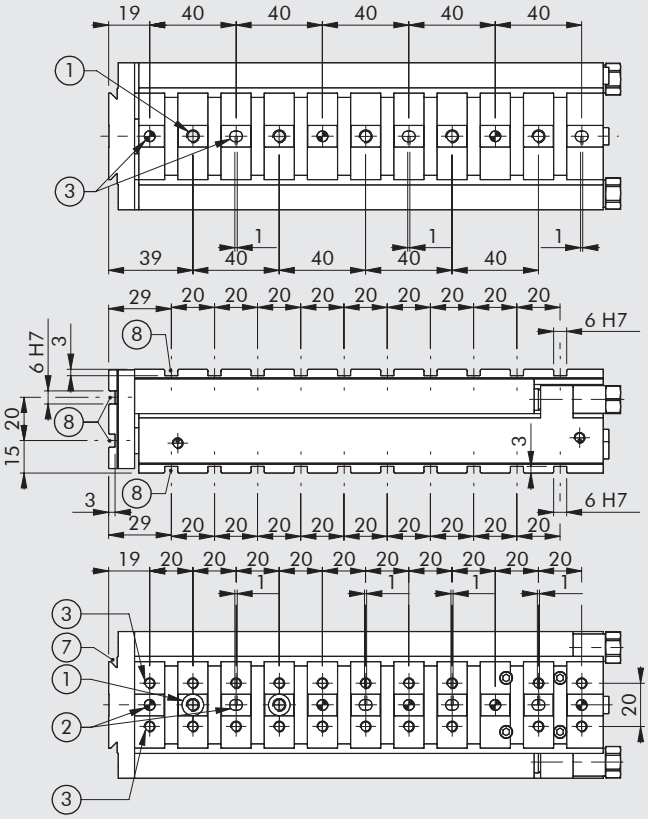

DIMENSIONS OF SLIDE S14K Ø 25

Ø 25 stroke 10; 20; 30; 40 mm

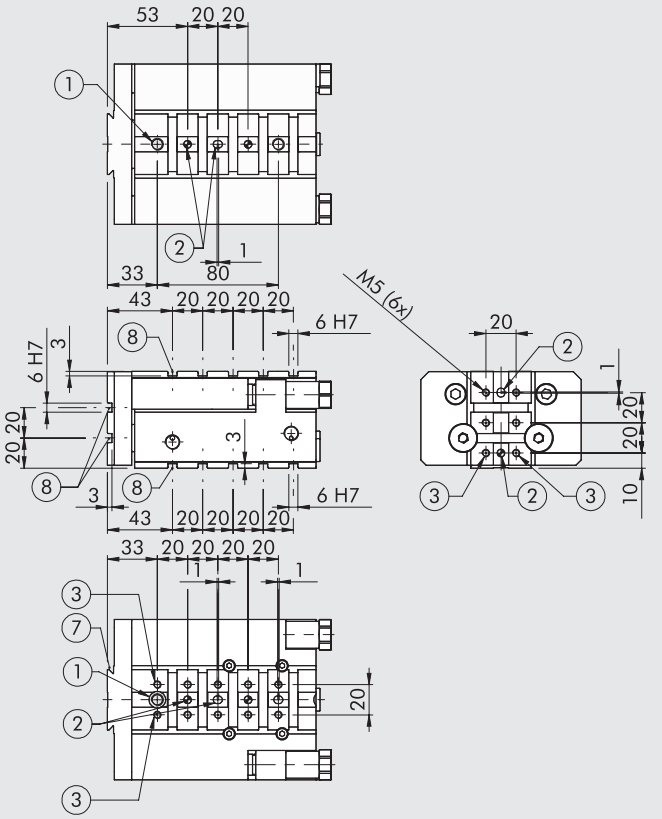

① Through holes for fixing actuators
② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

Ø 25 stroke 50 mm

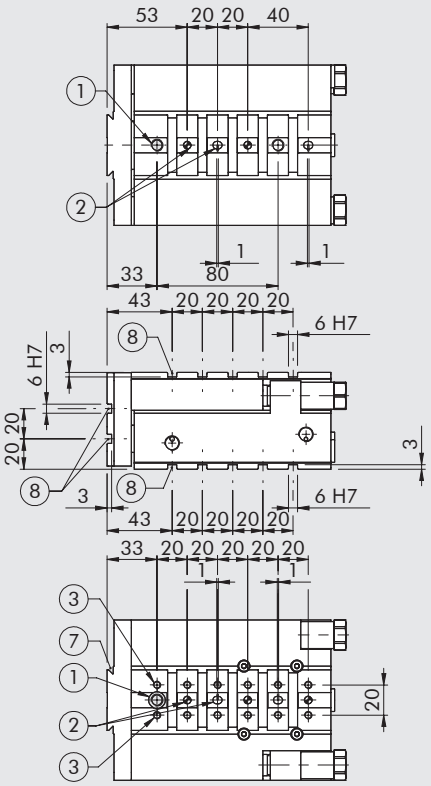

Ø 25 stroke 80 mm

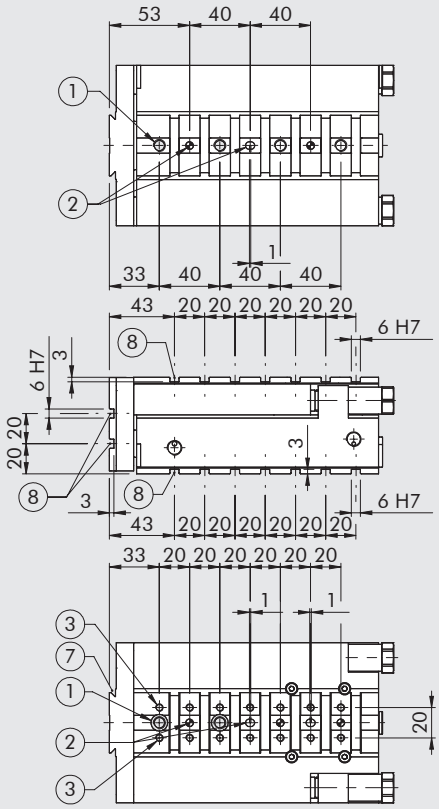

METAL WORK PNEUMATIC

Ø 25 stroke 100 mm

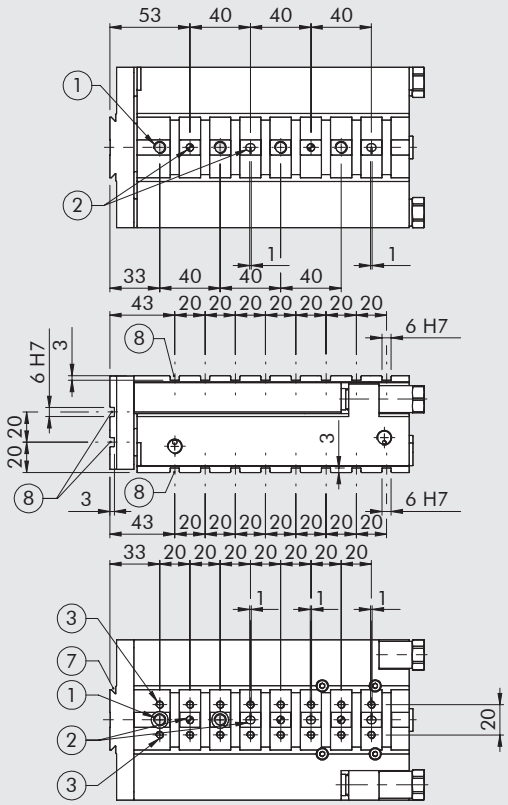

Ø 25 stroke 125 mm

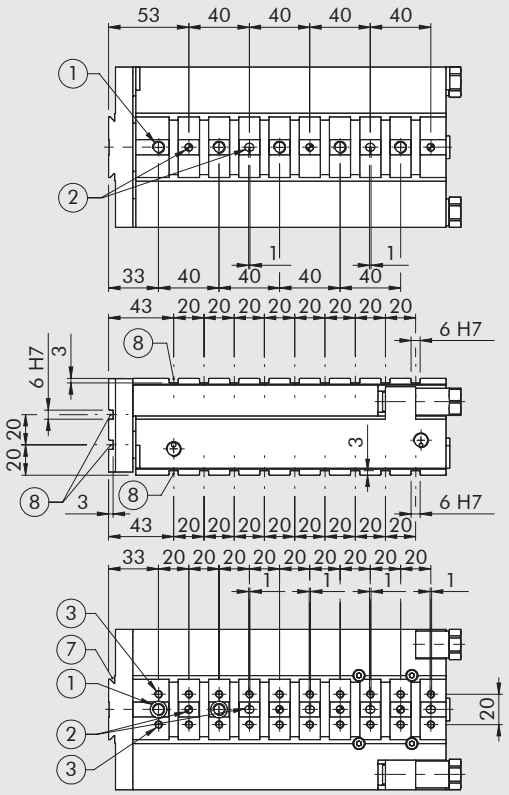

Ø 25 stroke 150 mm

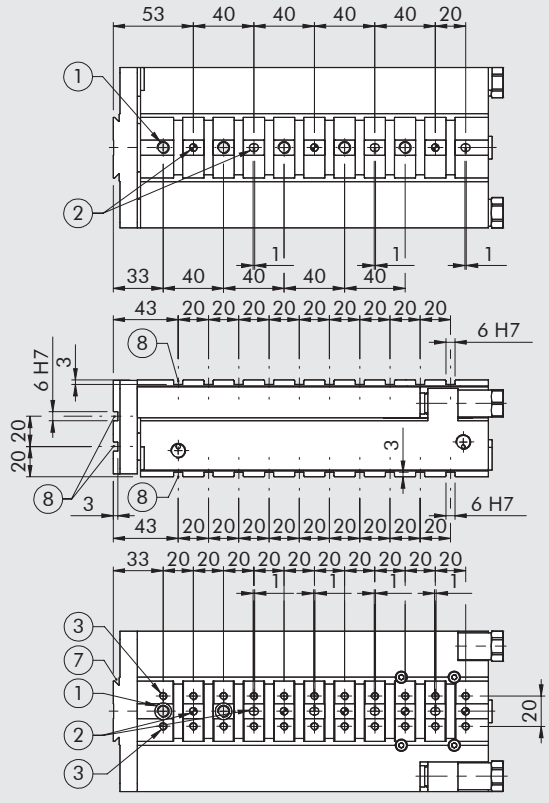

Ø 25 stroke 200 mm

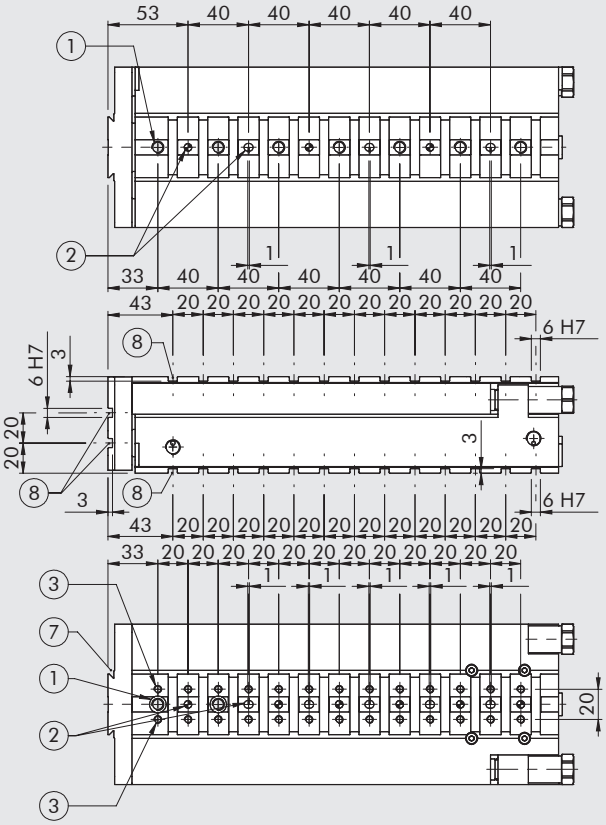

THIRD-POSITION STOP DEVICE

Slide S14 can be supplied in a version with a third-position stop device for application where the slide needs to stop in an intermediate position (e.g. for depositing a workpiece).
A stop device is mounted in series with the slide and partialises the total stroke when supplied with compressed air.
The third-position stop device comes with a magnet on the piston and slots for sensors to monitor the position of the piston rod.

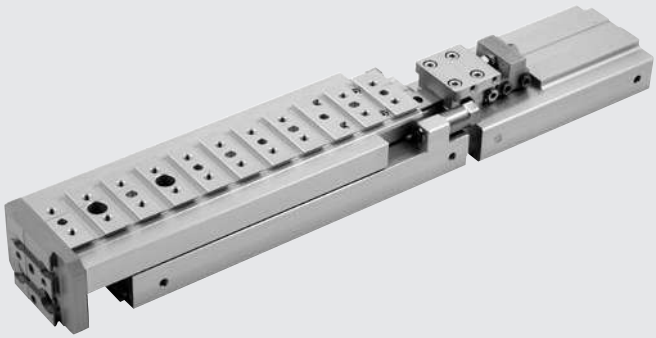

This device can be ordered with a free nominal stroke, up to the total length of the slide on which it is mounted, with 1 mm interval.
The stop position can be adjusted mechanically within ± 1.5 mm of the nominal stroke. For example, a stop device with a 30 mm stroke can limit the stroke of the slide by an adjustable length ranging from 28.5 to 31.5 mm.

	S14K-8	S14K-16	S14K-25
Maximum impact energy in intermediate position [J]	0.05	0.15	0.25

PNEUMATIC SYSTEM DIAGRAM

The third-position stop device can be operated by a 3/2 valve, as shown in the diagram.
The optional pressure regulator can be used to regulate the backpressure, and hence the useful force, in the first section of the stroke.

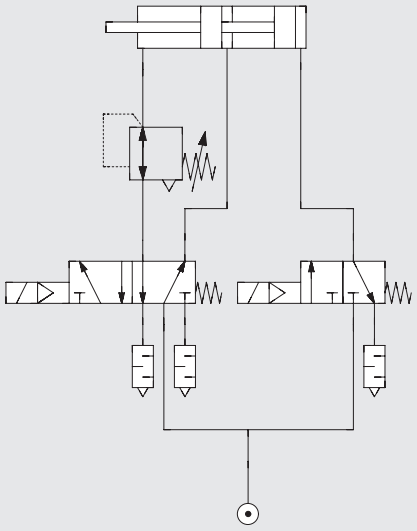

PNEUMATIC THRUST CHART

Supply diagram	Useful theoretical thrust [N] depending on pressure [bar]		
	S14K-8	S14K-16	S14K-25
Piston rod retracted position	p1 x 7.5	p1 x 30	p1 x 75.5
Intermediate position	p3 x 10 - p1 x 7.5	p3 x 40 - p1 x 30	p3 x 98 - p1 x 75.5
Piston rod extended position	p2 x 10	p2 x 40	p2 x 98

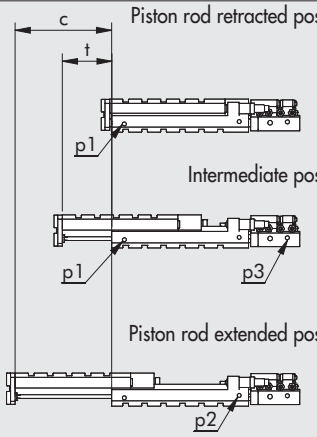

c = Slide S14K stroke
t = Third-position stop device stroke

FINE ADJUSTMENT

How to adjust the third position:
- Unscrew the lock nuts on the adjusting grub screw ①
- Regulate the position of the stop by adjusting the moving unit ②
- Tighten the lock nuts on the adjusting grub screw ①

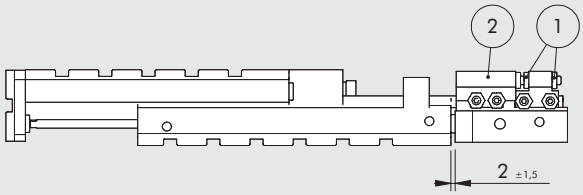

DIMENSIONS OF THE THIRD-POSITION DEVICE FOR SLIDE S14K Ø 8 - Ø 16 - Ø 25

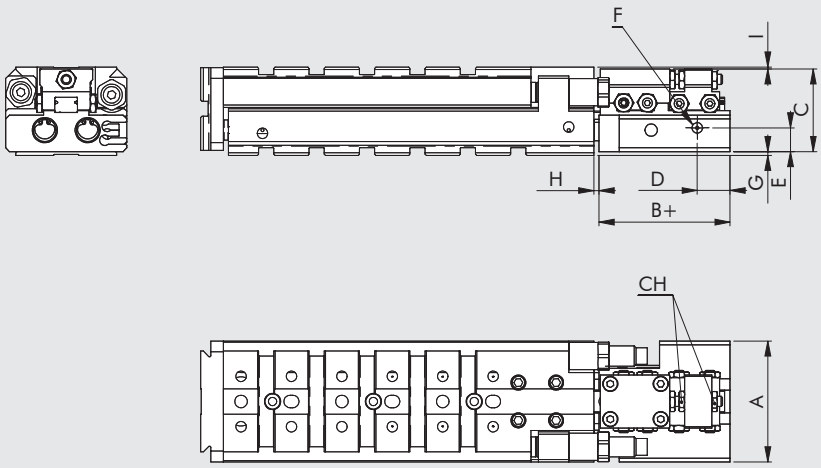

+ = Add the stroke of the third position
H = Adjusting the third position

Ø	A	B	C	D	E	F	G	H max	I	CH
8	48	52	33.3	13	9	M5	1	4	0.7	7
16	68	60	42	13	12	M5	3	4	3	8
25	106	85	59.5	16	16	1/8"	4	4	0.5	13

KEY TO CODES - STANDARD VERSION

W147	2	08	3	050	K
TYPE	**MODEL**	**BORE**	**STOP**	**STROKE**	**FAMILY**
Precision slide	**2** S14K	08 16 25	**3** With mechanical stop **5** With shock absorbers	See general technical data	**K** V-Lock

KEY TO CODES - VERSION WITH THIRD-POSITION STOP DEVICE

W147	2	08	3	050	020	K
TYPE	**MODEL**	**BORE**	**STOP**	**STROKE**	**THIRD POSITION STROKE**	**FAMILY**
Precision slide	**2** S14K	08 16 25	**3** With mechanical stop **5** With shock absorbers	See general technical data		**K** V-Lock

S14K SLIDE ACCESSORIES

V-Lock ACCESSORIES

See page **A3**.36

SENSOR Ø 4



For codes and technical data, see **chapter A6**.

GREASE



Code	Description	Weight [g]
9910506	Tube of RHEOLUBE 363 AX1 grease	400

S14K SLIDE SPARE PARTS

GASKET SPARE PARTS KIT

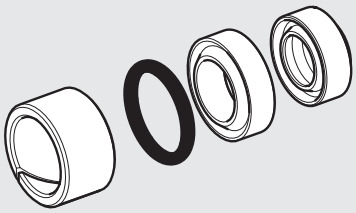

Code	Description
W1472089001K	S14K gasket kit Ø 8
W1472169001K	S14K gasket kit Ø 16
W1472259001K	S14K gasket kit Ø 25

NOTE: kit contents: 1 guide strip, 1 piston rod gasket, 1 piston gasket, 1 end cap O-ring

SHOCK ABSORBERS



Code	Ø	Description
W0950005300	8	Shock absorbers - 2 M8 x 1
W0950005301	16	Shock absorbers - 2 M10 x 1
W0950005303	25	Shock absorbers - 2 M14 x 1.5

ELASTIC MECHANICAL STOP

Ø8



Ø16



Ø25



Code	Ø	Description
W0950005400K	8	Elastic mechanical stop M8 x 1
W0950005401K	16	Elastic mechanical stop M10 x 1 + nut
W0950005402K	25	Elastic mechanical stop M14 x 1.5 + bushing

COMPACT GUIDED CYLINDER SERIES CMPGK

The CMPGK is a functional, sturdy guided compact cylinder with a built-in guide unit.
The piston rod guide bushings are mounted directly in the anodized aluminium alloy cylinder liner.
Two different types of guides can be mounted as required: sintered bronze bushings coupled with chromed and ground carbon steel piston rods, or ball recirculation bushings with chromed and ground hardened steel piston rods.
Grooves are provided on one side of the body to accommodate retractable sensors.
Currently available is either a non-cushioned version with the end-of-stroke stop cushioned by NBR front gaskets, or a cushioned one with pins that can be adjusted to regulate progressive braking.
The front plate features the typical V-lock dovetail with grooves and holes.
V-Lock fixing elements can be fitted to the main body on any of the three surfaces identified as UP, SIDE and DOWN. The chosen surface has a grid of threaded holes and pinholes with one or two V-Lock plates, depending on the stroke.
The plates are mounted in a preset position, but they can be moved on the grid as required.

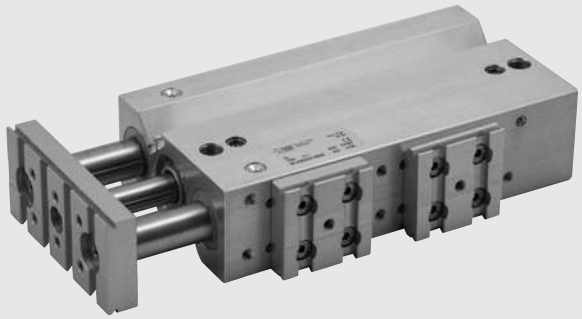

TECHNICAL DATA		CUSHIONED	NON-CUSHIONED
Operating pressure	bar	1 to 10	
	MPa	0.1 to 1	
	psi	14.5 to 145	
Temperature range	°C	-10 to +80	
	°F	14 to 176	
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous	
Bore	mm	16, 20, 25, 32, 40	
Standard stroke	mm	**Ø 16:** 20, 30, 40, 50	**Ø 16:** 30*, 40, 50, 75, 100, 150, 200
		Ø 20: 20, 30, 40, 50, 75, 100, 150, 200	**Ø 20:** 25, 30, 40, 50, 75, 100, 150, 200
		Ø 25: 20, 30, 40, 50, 75, 100, 150	**Ø 25:** 25, 30, 40, 50, 75, 100, 150, 200
		Ø 32: 25, 50, 75, 100, 150, 175	**Ø 32:** 25, 50, 75, 100, 150, 200
		Ø 40: 25*, 50, 75, 100, 150, 175	**Ø 40:** 50, 75, 100, 150, 200
Version		With bronze bushings - With ball bearings	
Sensor magnet		Standard	
Maximum impact energy	J	See diagram on **next page**	**Ø 16**: 0.06
			Ø 20: 0.14
			Ø 25: 0.2
			Ø 32: 0.4
			Ø 40: 0.6
Notes		* Side and Down versions only	

WEIGHTS

Ø	Non-cushioned		Cushioned	
	Weight [g] Stroke = 0	Weight [g] each mm	Weight [g] Stroke = 0	Weight [g] each mm
16	395	5.77	514	5.77
20	586	7.38	643	7.38
25	650	11.01	835	11.01
32	1042	17.51	1454	17.51
40	1128	19.04	1579	19.04

COMPONENTS

① BARREL: anodized aluminium alloy
② PISTON ROD: grinded chromed steel
③ GUIDE ROD: grinded chromed steel
④ GUIDE ROD: hardened and tempered chrome steel, grinded
⑤ REAR BASE: anodized aluminium alloy
⑥ FRONT BASE: anodized aluminium alloy
⑦ PISTON ROD GASKET: polyurethane
⑧ CUSHIONING GASKET: NBR
⑨ PISTON: aluminium alloy
⑩ MAGNET: plastoferrite
⑪ PISTON GASKET: NBR
⑫ SLIDE BUSHING: sintered bronze
⑬ BALL BEARINGS
⑭ DUST SCRAPER RING: NBR or FKM/FPM
⑮ GREASE NIPPLES: zinc-plated or stainless steel
⑯ FLANGE: anodized aluminium alloy
⑰ CUSHIONING NEEDLE: OT58 brass

Ball Bearings versions

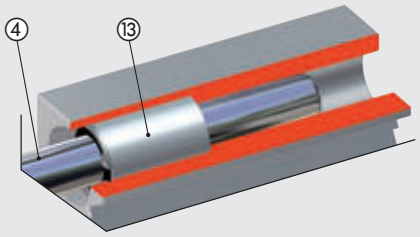

Bronze bushings version

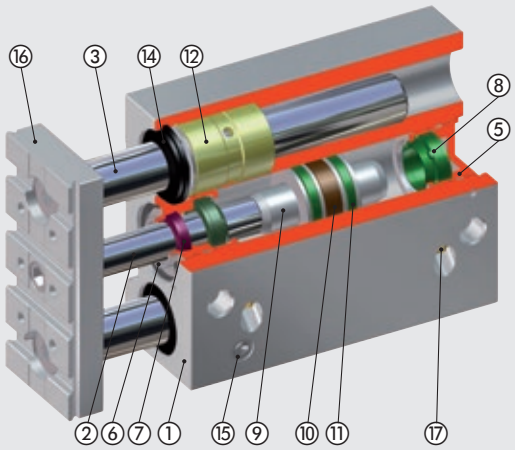

DIAGRAM OF SPEED AND MAXIMUM CUSHIONABLE LOAD

For the cylinder to reach the end-of-stroke position without intense or repeated impact which would damage it, it is necessary to annul the kinetic energy of the moving mass and the work generated. The maximum cushionable load depends on the traversing speed and the absorption of the air buffer supplied standard with the various cylinders. The diagram shows the speeds and cushionable mass for the various diameters at a pressure of 6 bar.

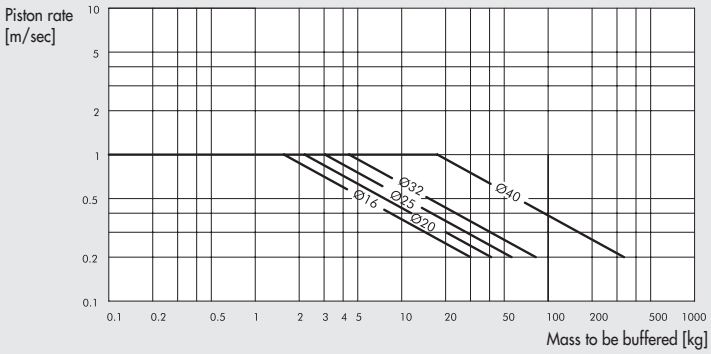

METAL WORK PNEUMATIC

MAXIMUM SIDE LOAD

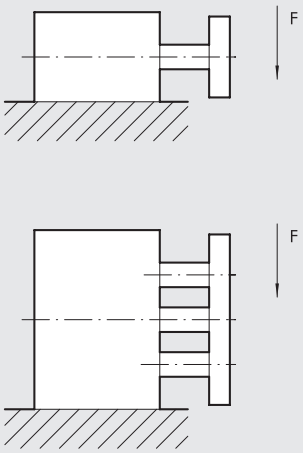

Ø	Guide unit	Stroke (mm)									
mm		20	25	30	40	50	75	100	150	175	200
16	Bushes	29	–	26	23	20	16	14	10	–	8
	Balls	31	–	27	38	34	29	24	12	–	8
20	Bushes	52	50	45	39	35	58	49	38	–	31
	Balls	56	–	48	79	70	54	50	27	–	32
25	Bushes	71	67	61	54	48	78	66	50	–	41
	Balls	72	68	62	78	73	60	52	37	–	30
32	Bushes	–	197	–	–	168	138	109	78	70	65
	Balls	–	89	–	–	60	276	217	138	122	110
40	Bushes	–	197	–	–	168	138	109	78	70	65
	Balls	–	89	–	–	60	276	217	138	122	110

N.B.: Forces are expressed in N

MAXIMUM TORQUE ON PLATE



Ø	Guide unit	Stroke (mm)									
mm		20	25	30	40	50	75	100	150	175	200
16	Bushes	0.45	–	0.36	0.32	0.28	0.24	0.20	0.46	–	0.12
	Balls	0.60	–	0.50	0.72	0.65	0.54	0.45	0.35	–	0.25
20	Bushes	0.92	0.85	0.79	0.72	0.64	1.05	0.90	0.69	–	0.56
	Balls	1.28	–	1.08	1.78	1.59	1.24	1	0.61	–	0.49
25	Bushes	1.55	1.42	1.32	1.18	1.04	1.70	1.44	1.10	–	0.90
	Balls	1.98	1.78	1.70	2.16	2.20	1.66	1.4	1.02	–	0.82
32	Bushes	–	3.94	–	–	2.95	2.46	1.97	1.55	1.38	1.24
	Balls	–	1.97	–	–	1	2.96	2.44	2.40	2.43	2.18
40	Bushes	–	4.40	–	–	3.45	2.96	2.46	1.70	1.55	1.40
	Balls	–	2.46	–	–	1.45	6.38	5.4	3	2.73	2.40

N.B.: Forces are expressed in Nm

STOPPER FUNCTIONS

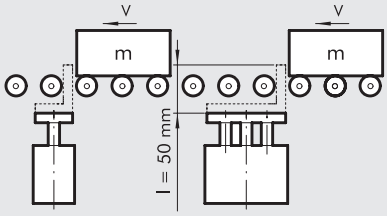

The graph refers to a 50 mm-stroke cylinder.

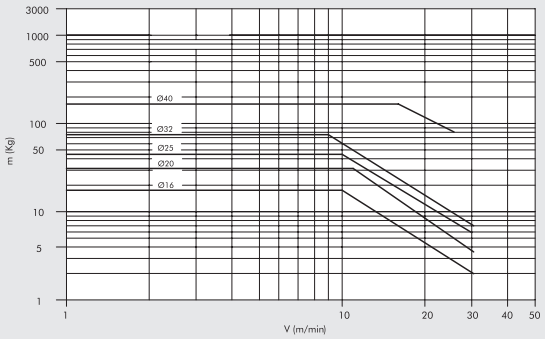

LIFTING FUNCTIONS



The graph refers from 25 to 50 mm-stroke cylinders with ball re-circulation guide unit

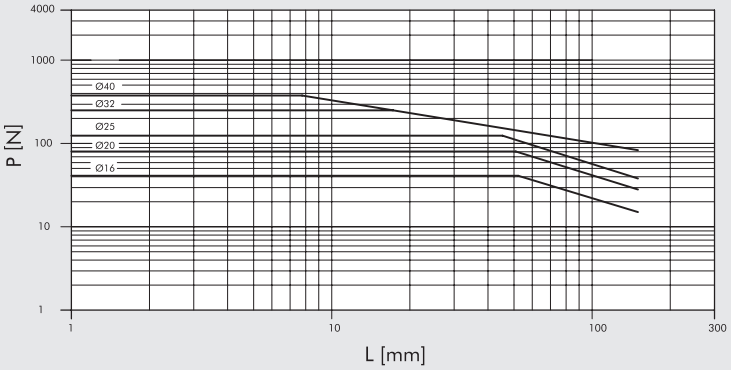

The graph refers from 75 to 100 mm-stroke cylinders with ball re-circulation guide unit

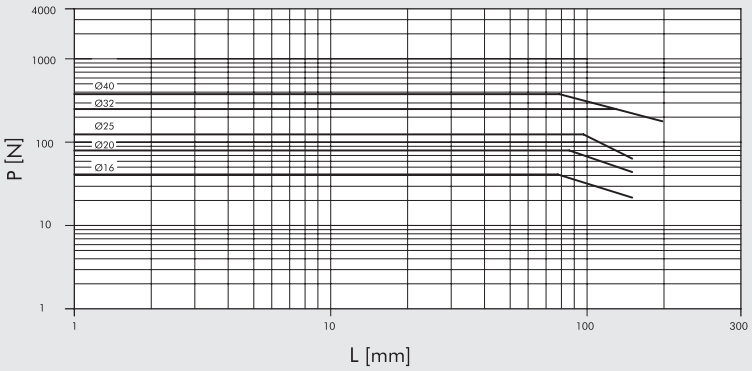

The graph refers to 50 mm-stroke cylinders with bushing guide unit

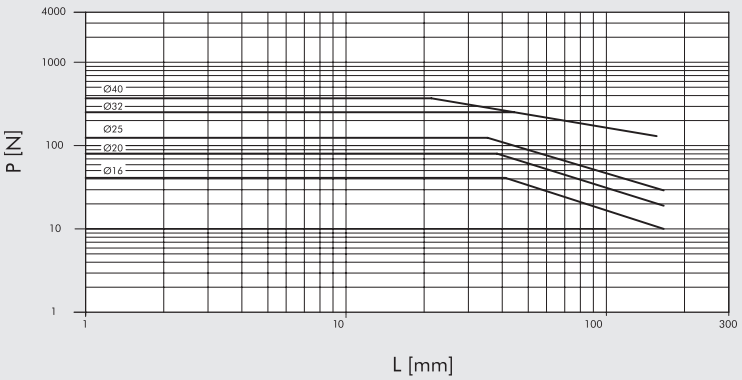

MOUNTING OPTIONS

The surface of the body on which to mount the V-Lock plates must be specified at the coding stage. The surface is identified by a letter **U** (Up), **S** (Side) or **D** (Down).

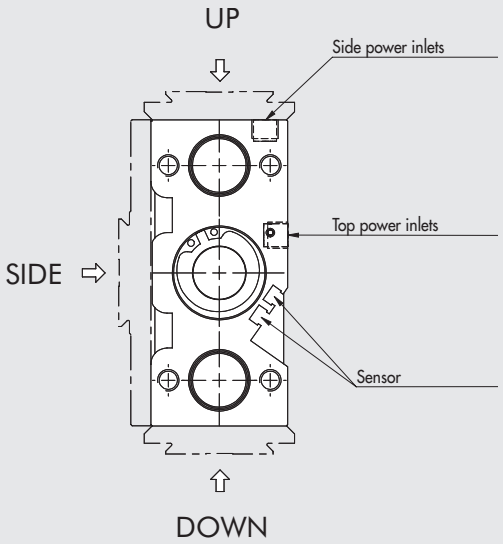

The chosen side of the CMPGK cylinder has a series of threaded holes and pinholes, and one or more V-Lock plates, depending on the stroke. The cylinder is delivered with a plate mounted in the foremost position and another, if provided, in the rearmost position.

The V-Lock plates can be moved as required and fixed to any of the threaded holes.

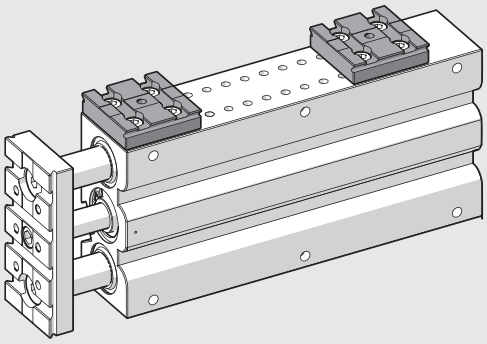

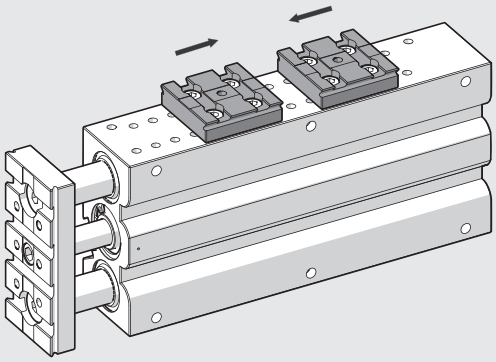

EXAMPLES OF APPLICATION

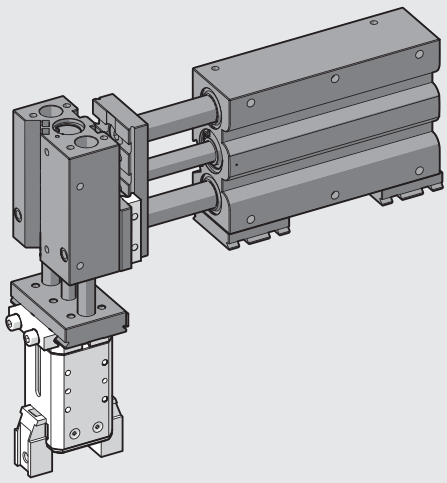

DIMENSIONS OF Ø 16, BA AND BB NON-CUSHIONED VERSION
DIMENSIONS OF Ø 16, BA AND BB CUSHIONED VERSION

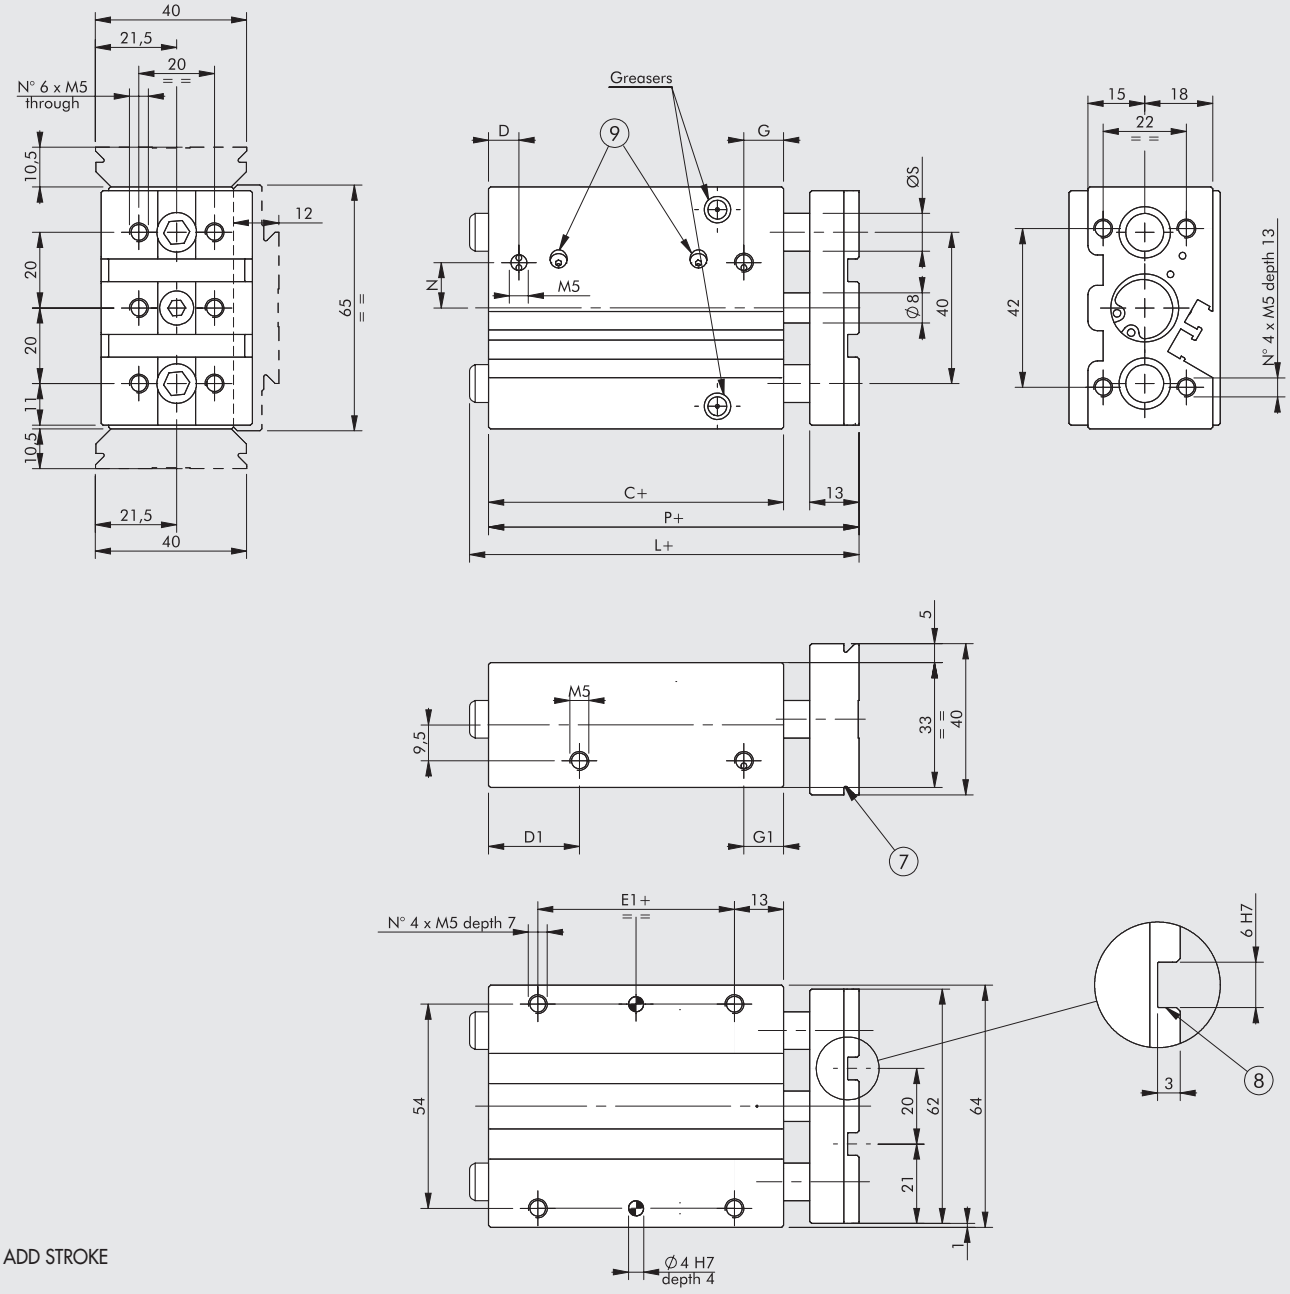

+ = ADD STROKE

⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key
⑨ Cushioning pins (in the cushioned version only)

Stroke	L ◆
0 to 50	49
75 to 200	77.5

Stroke	L
0 to 50	76
75 to 200	104.5

NON-CUSHIONED

C ◆	D	D1	E1	G	G1	L		N	P ◆	Ø S	
						BA*	BB**			BA*	BB**
33	8.5	20	7	11.5	11.5	see above		6.5	49	10	10

CUSHIONED

C	D	D1	E1	G	G1	L		N	P	Ø S	
						BA*	BB**			BA*	BB**
58	8	24	32	10.5	10.5	see above		12	74	10	10

*** Version BA (Bronze Bushings)**
**** Version BB (Ball Bearings)**
◆ For cylinders with non-standard strokes, the correct size is that of the cylinder with the standard stroke immediately above.

METAL WORK PNEUMATIC

POSITION OF Ø 16 PLATES, BA AND BB NON-CUSHIONED VERSION
POSITION OF Ø 16 PLATES, BA AND BB CUSHIONED VERSION

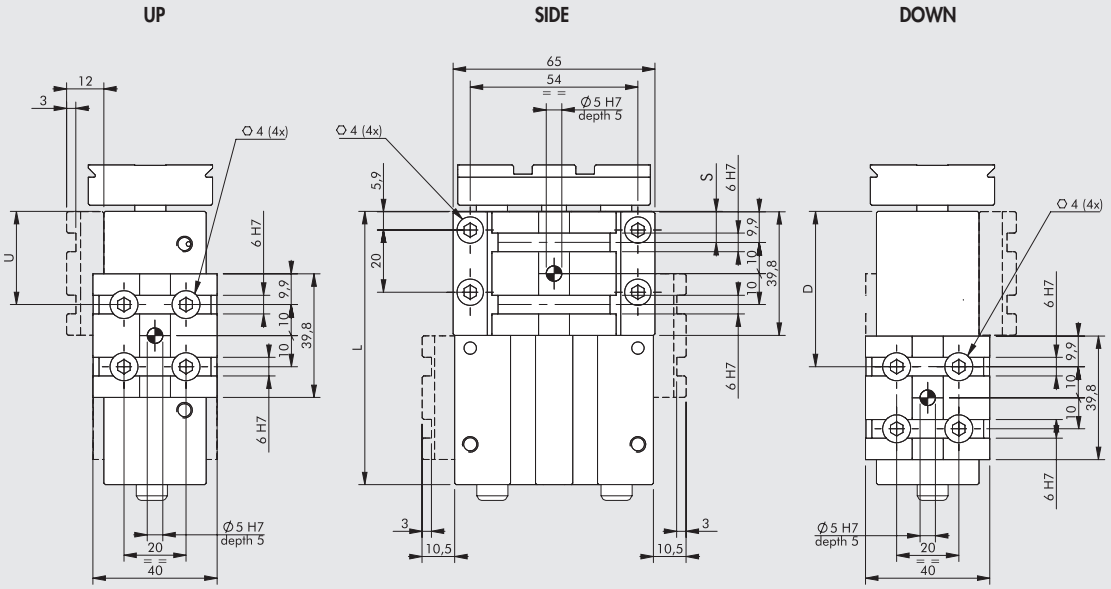

NON-CUSHIONED

Stroke [mm]	30			40			50			75			100			150			200		
Position	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D
Possible positions (see page A3.67)	-	10	10	-	10	10	-	10	10	-	10	10	-	10	10	-	10	10	-	10	10
	-	-	30	✱ 30	30	30	✱ 30	-	30	30	30	30	30	30	30	30	30	30	30	30	30
							-	-	50	50	50	50	50	-	50	50	50	50	50	50	50
										✱ 70	70	70	70	-	70	70	70	70	70	70	70
													✱ 90	90	90	90	90	90	90	90	90
																110	110	110	110	110	110
																✱ 130	130	130	130	130	130
																-	-	150	150	150	150
																			170	170	170
																			✱ 190	190	190
No. of V-Lock plates supplied	1			1			1			2			2			2			2		
L	63			73			83			108			133			183			233		

CUSHIONED

Stroke [mm]	20			30			40			50		
Position	U	S	D	U	S	D	U	S	D	U	S	D
Possible positions (see page A3.67)	-	10	-	-	10	-	-	10	-	-	10	-
	✱ 30	30	30	✱ 30	-	30	30	-	30	30	30	30
	-	-	50	-	-	50	✱ 50	-	50	✱ 50	50	50
							-	-	70	-	70	70
No. of V-Lock plates supplied	1			1			1			2		
L	78			88			98			108		

✱ Outlet side power supply not available

DIMENSIONS OF Ø 20, BA AND BB NON-CUSHIONED VERSION
DIMENSIONS OF Ø 20, BA AND BB CUSHIONED VERSION

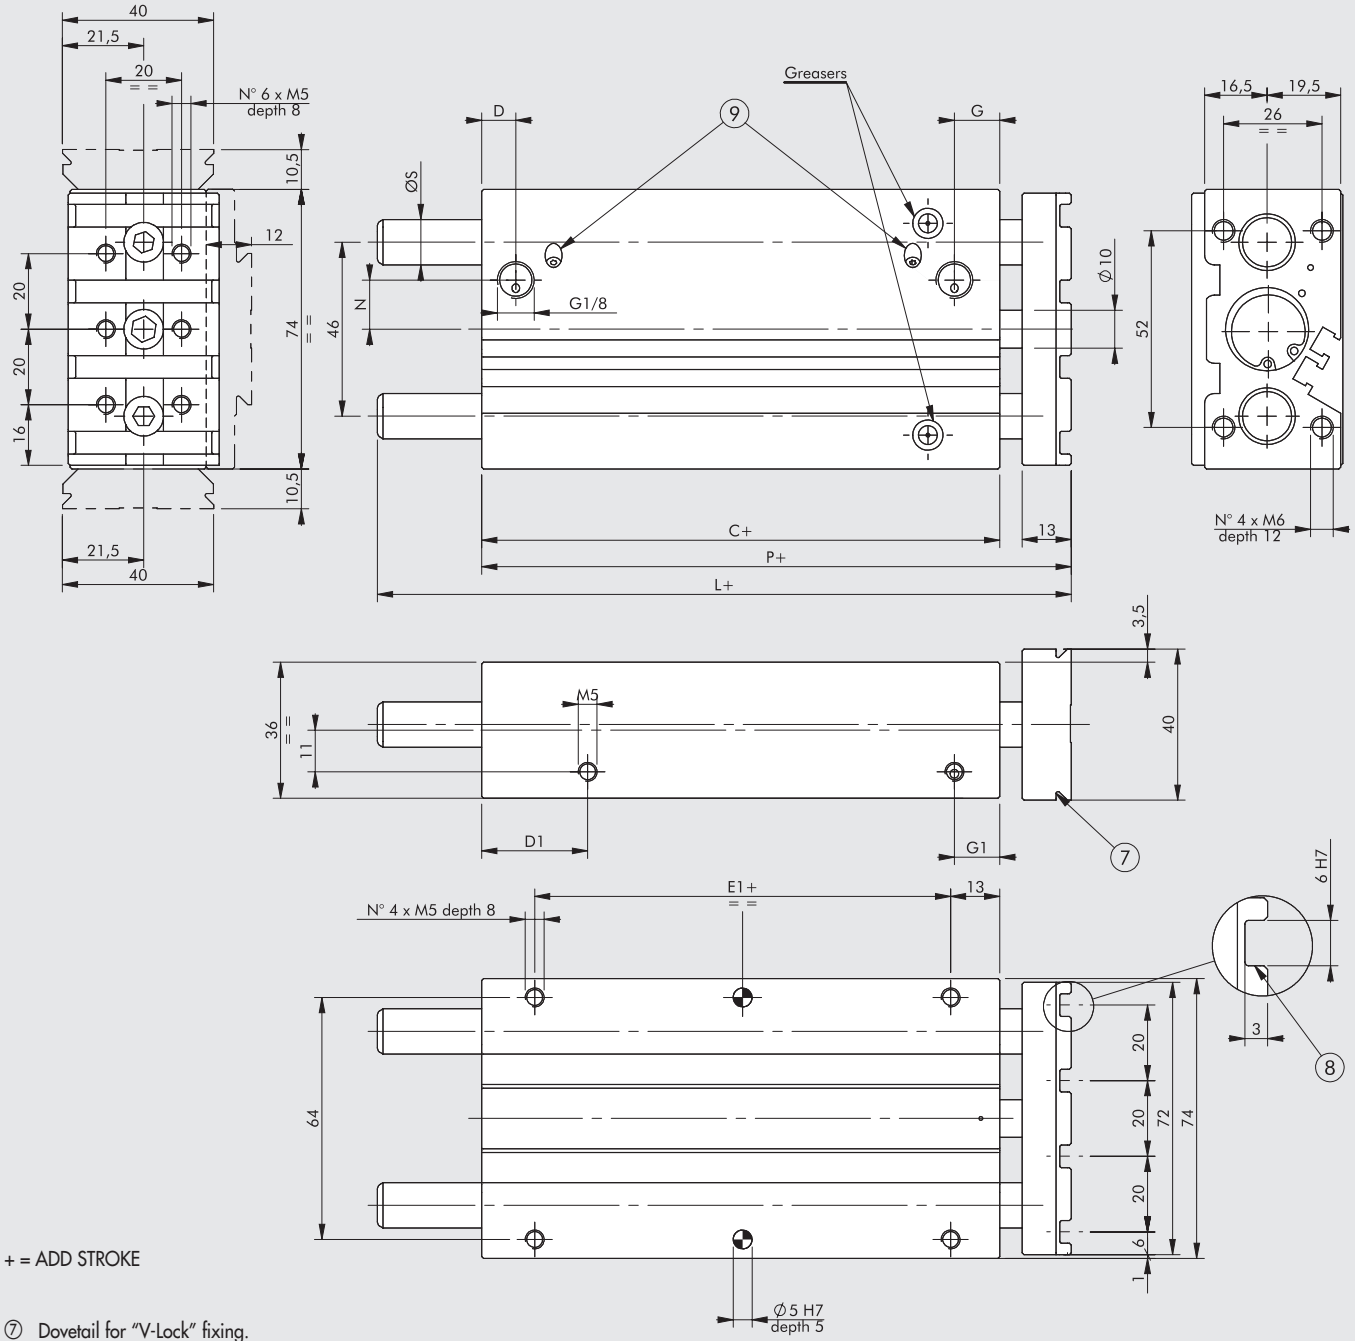

+ = ADD STROKE

⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key
⑨ Cushioning pins (in the cushioned version only)

Stroke	L ◆
0 to 50	52
75 to 200	82

Stroke	L
0 to 50	81
75 to 200	108.5

NON-CUSHIONED

C ◆	D	D1	E1	G	G1	L		N	P ◆	Ø S	
						BA*	BB**			BA*	BB**
37	9	20	10	11	11	see above		8.5	52	12	10

CUSHIONED

C	D	D1	E1	G	G1	L		N	P	Ø S	
						BA*	BB**			BA*	BB**
62	9	28	35	12	12	see above		13	81	12	10

*** Version BA (Bronze Bushings)**
**** Version BB (Ball Bearings)**
◆ For cylinders with non-standard strokes, the correct size is that of the cylinder with the standard stroke immediately above.

METAL WORK PNEUMATIC

POSITION OF Ø 20 PLATES, BA AND BB NON-CUSHIONED VERSION
POSITION OF Ø 20 PLATES, BA AND BB CUSHIONED VERSION

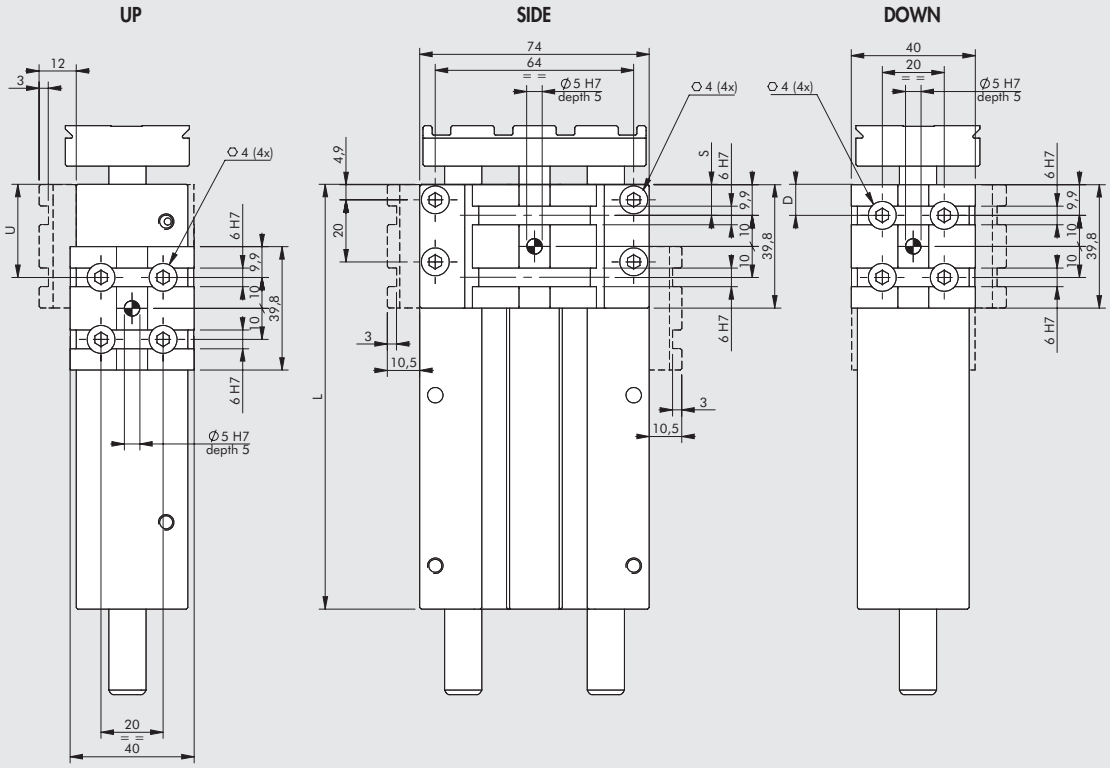

NON-CUSHIONED

Stroke [mm]	25			30			40			50			75			100			150			200		
Position	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D
Possible positions (see page A3.67)	■ 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10
	-	-	30	-	30	30	✱ 30	30	30	30	-	30	30	30	30	30	30	30	30	30	30	30	30	30
										-	-	50	50	50	50	50	-	50	50	50	50	50	50	50
													✱ 70	70	70	70	-	70	70	70	70	70	70	70
																✱ 90	90	90	90	90	90	90	90	90
																			110	110	110	110	110	110
																			130	130	130	130	130	130
																			-	150	150	150	150	150
																						170	170	170
																						✱ 190	190	190
																						-	-	210
No. of V-Lock plates supplied	1			1			1			1			2			2			2			2		
L	62			67			77			87			112			137			187			237		

CUSHIONED

Stroke [mm]	20			30			40			50			75			100			150			200		
Position	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D
Possible positions (see page A3.67)	-	10	10	-	10	10	-	10	10	-	10	10	-	10	10	-	10	10	-	10	10	-	10	10
	✱ 30	-	30	✱ 30	-	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30
	-	-	50	-	-	50	✱ 50	50	50	✱ 50	50	50	50	-	50	50	50	50	50	50	50	50	50	50
							-	-	70	-	70	70	70	-	70	70	-	70	70	70	70	70	70	70
													✱ 90	90	90	90	-	90	90	-	90	90	90	90
																✱ 110	110	110	110	-	110	110	110	110
																-	-	130	130	130	130	130	130	130
																			✱ 150	150	150	150	150	150
																			-	170	170	170	170	170
																						190	190	190
																						✱ 210	210	210
																						-	-	230
No. of V-Lock plates supplied	1			1			1			1			2			2			2			2		
L	82			92			102			112			137			162			212			262		

✱ Outlet side power supply not available ● Return side power supply not available ■ Side power supply not available

DIMENSIONS OF Ø 25, BA AND BB NON-CUSHIONED VERSION
DIMENSIONS OF Ø 25, BA AND BB CUSHIONED VERSION

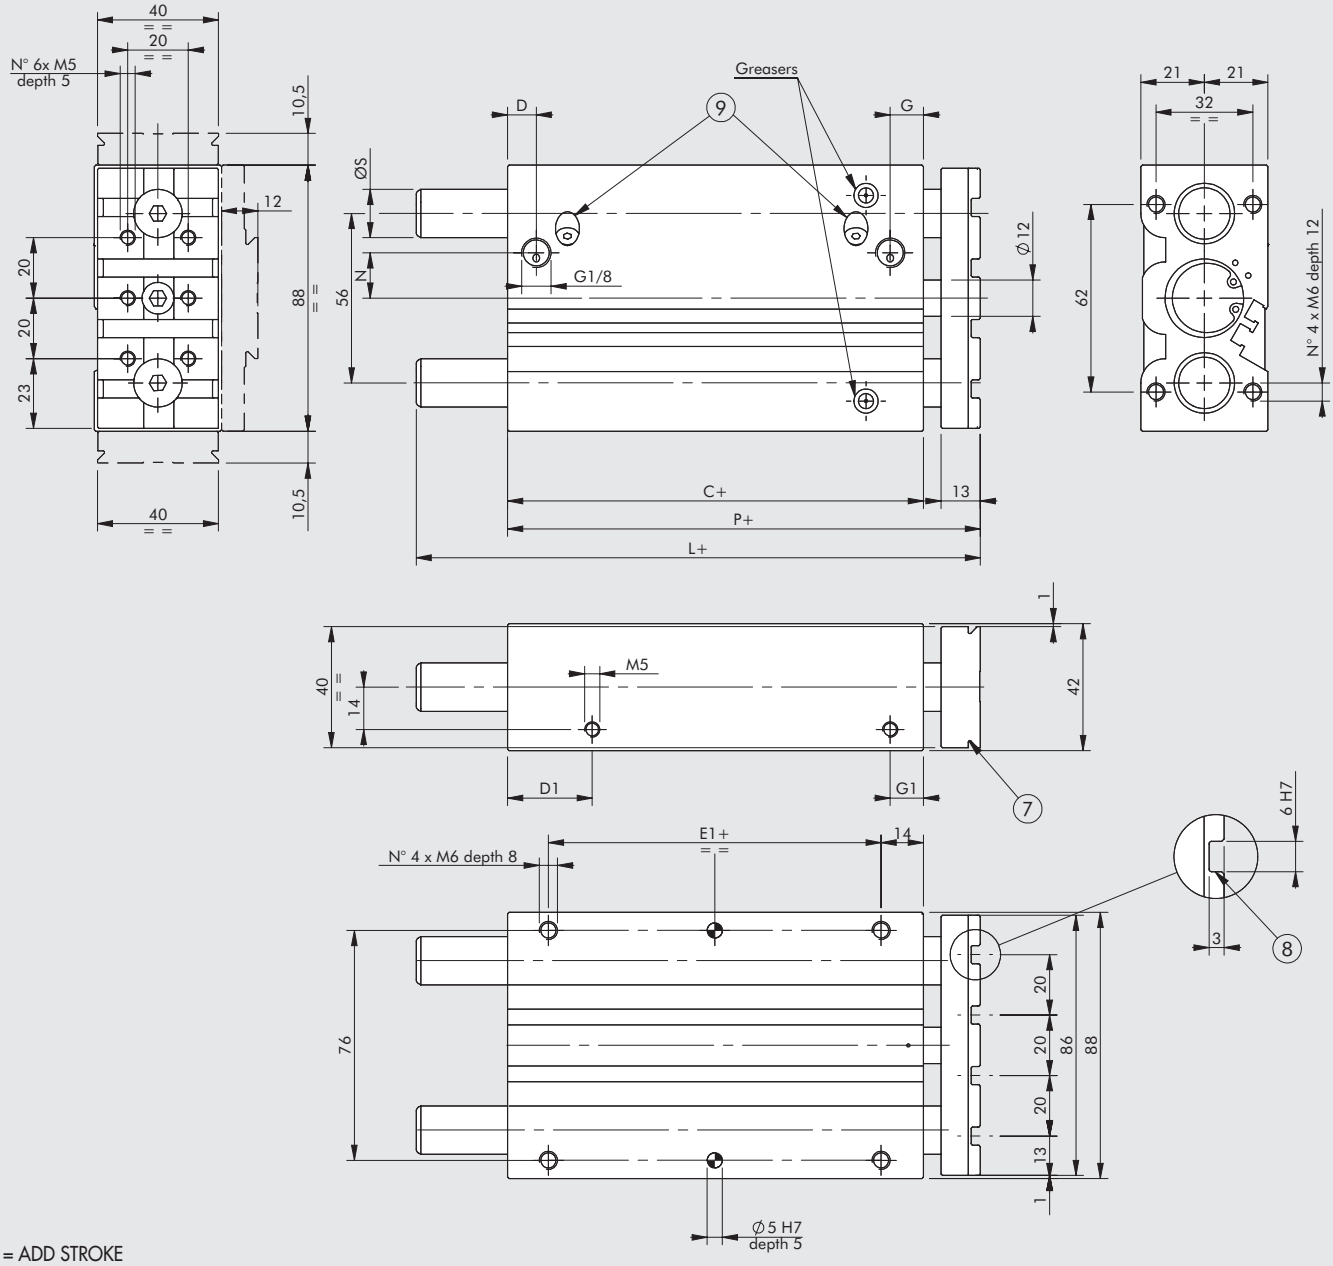

+ = ADD STROKE

⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key
⑨ Cushioning pins (in the cushioned version only)

Stroke	L ◆
0 to 50	52.5
75 to 200	82.5

Stroke	L
0 to 50	81.5
75 to 200	111.5

NON-CUSHIONED

C ◆	D	D1	E1	G	G1	L		N	P ◆	Ø S	
						BA*	BB**			BA*	BB**
37.5	9	23	10	11	11	see above		8	52.5	16	16

CUSHIONED

C	D	D1	E1	G	G1	L		N	P	Ø S	
						BA*	BB**			BA*	BB**
62.5	9.5	28	35	11	11	see above		15	81.5	16	16

*** Version BA (Bronze Bushings)**
**** Version BB (Ball Bearings)**
◆ For cylinders with non-standard strokes, the correct size is that of the cylinder with the standard stroke immediately above.

METAL WORK PNEUMATIC

POSITION OF Ø 25 PLATES, BA AND BB NON-CUSHIONED VERSION
POSITION OF Ø 25 PLATES, BA AND BB CUSHIONED VERSION

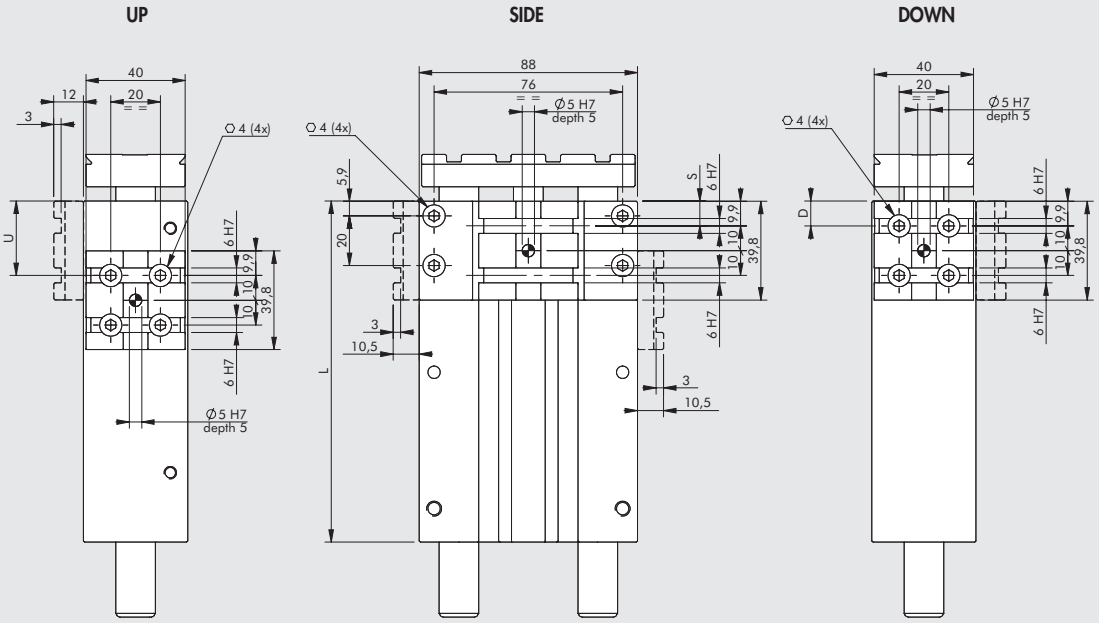

NON-CUSHIONED

Stroke [mm]	25			30			40			50			75			100			150			200		
Position	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D
Possible positions (see page A3.67)	■ 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10
	-	-	30	-	30	30	✱ 30	30	30	✱ 30	-	30	30	30	30	30	30	30	30	30	30	30	30	30
							✱ 50	-	50	-	-	50	50	50	50	50	-	50	50	50	50	50	50	50
													✱ 70	70	70	70	-	70	70	70	70	70	70	70
																✱ 90	90	90	90	90	90	90	90	90
																-	-	110	110	110	110	110	110	110
																			✱ 130	130	130	130	130	130
																			-	150	150	150	150	150
																						170	170	170
																						✱ 190	190	190
																						-	-	210
No. of V-Lock plates supplied	1			1			1			1			2			2			2			2		
L	62.5			67.5			77.5			87.5			112.5			137.5			187.5			237.5		

CUSHIONED

Stroke [mm]	20			30			40			50			75			100			150			
Position	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	
Possible positions (see page A3.67)	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	
	✱ 30	-	30	✱ 30	-	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
	-	-	50	-	-	50	✱ 50	50	50	✱ 50	50	50	50	-	50	50	50	50	50	50	50	
							-	-	70	-	70	70	70	-	70	70	-	70	70	70	70	
													✱ 90	90	90	90	-	90	90	-	90	
													✱ 110	-	110	✱ 110	110	110	110	-	110	
																-	-	130	130	130	130	
																			✱ 150	150	150	
																			-	170	170	
No. of V-Lock plates supplied	1			1			1			1			2			2			2			
L	82.5			92.5			102.5			112.5			137.5			162.5			212.5			

✱ Outlet side power supply not available ● Return side power supply not available ■ Side power supply not available

DIMENSIONS OF Ø 32, BA AND BB NON-CUSHIONED VERSION
DIMENSIONS OF Ø 32, BA AND BB CUSHIONED VERSION

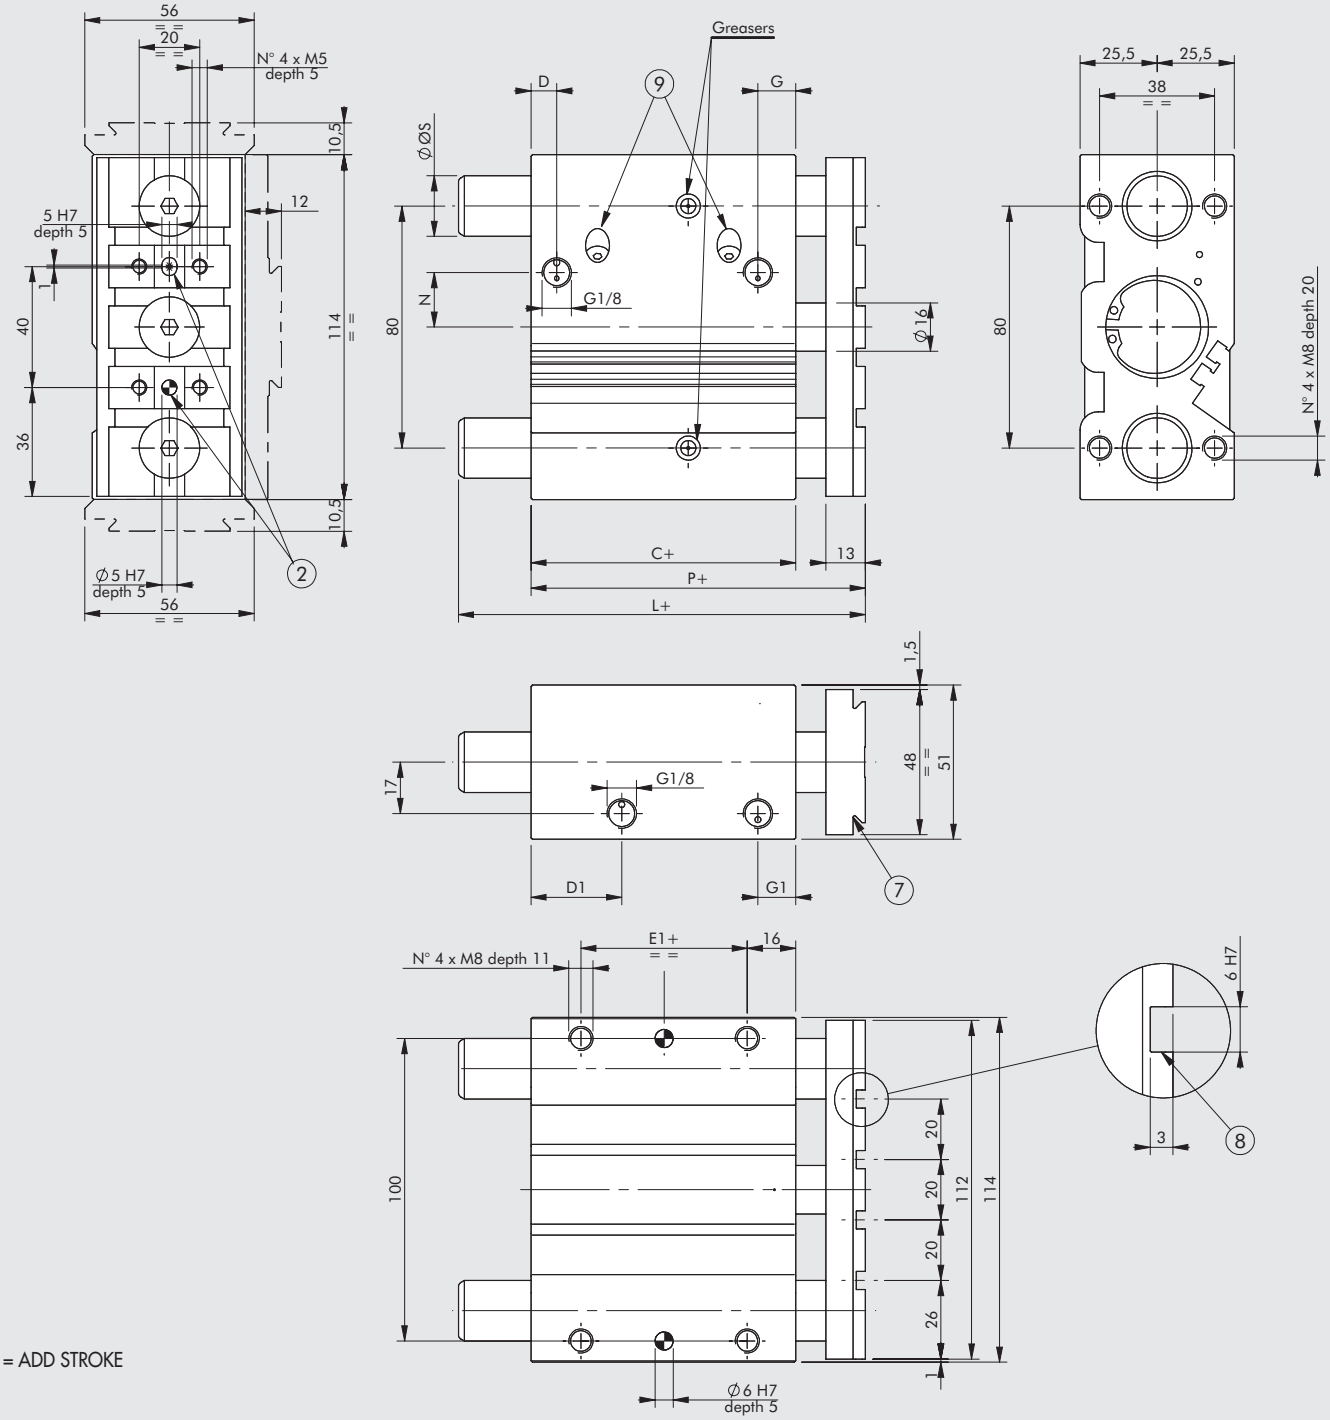

+ = ADD STROKE

② Holes for centring pins
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key
⑨ Cushioning pins (in the cushioned version only)

NON-CUSHIONED

C ◆	D	D1	E1	G	G1	L ◆		N	P ◆	Ø S	
						BA*	BB**			BA*	BB**
37.5	9	26.5	5	12.5	12.5	76.5	76.5	14	52.5	20	20

CUSHIONED

C	D	D1	E1	G	G1	L		N	P	Ø S	
						BA*	BB**			BA*	BB**
62.5	8.5	25	30	12.5	12.5	109.5	109.5	18	85.5	20	20

*** Version BA (Bronze Bushings)**
**** Version BB (Ball Bearings)**
◆ For cylinders with non-standard strokes, the correct size is that of the cylinder with the standard stroke immediately above.

METAL WORK PNEUMATIC

POSITION OF Ø 32 PLATES, BA AND BB NON-CUSHIONED VERSION
POSITION OF Ø 32 PLATES, BA AND BB CUSHIONED VERSION

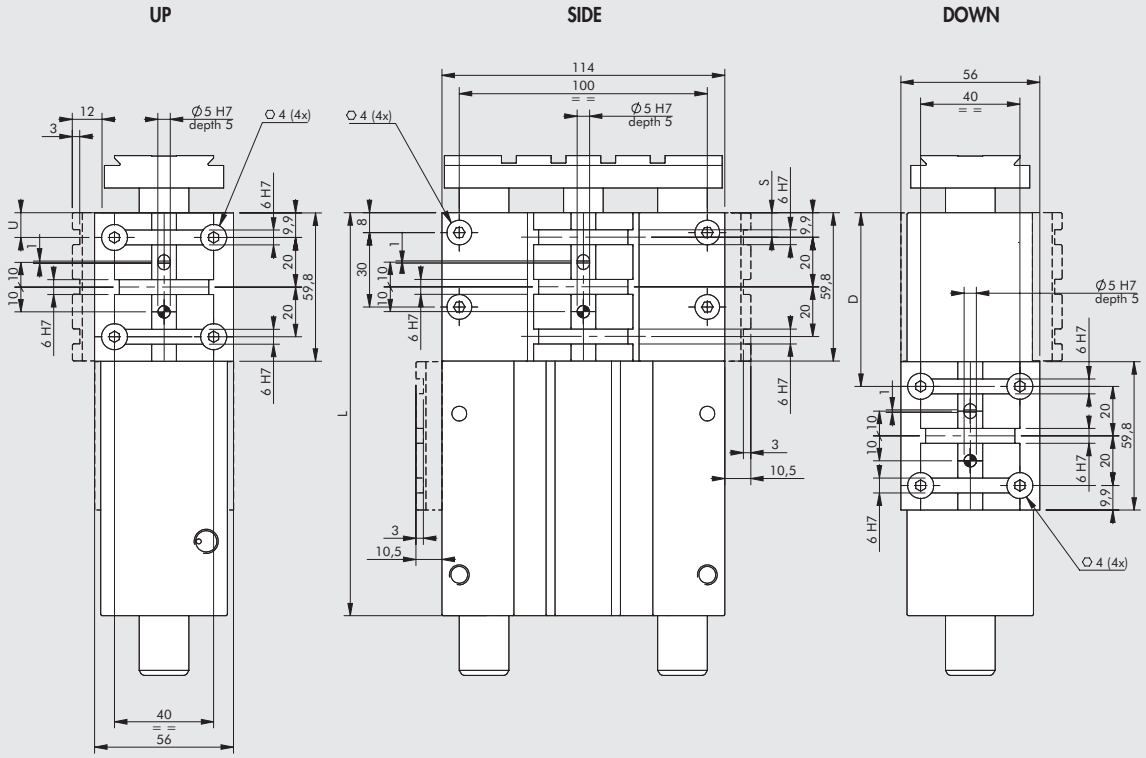

NON-CUSHIONED

Stroke [mm]	25			50			75			100			150			200		
Position	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D
Possible positions (see page A3.67)	■ 10	10	10	■ 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10
							-	40	-	-	-	-	-	40	-	-	40	-
										✱ 70	-	70	70	-	70	70	70	70
										-	100	-	-	-	-	-	100	-
													-	130	130	130	130	130
																-	160	-
																-	-	190
No. of V-Lock plates supplied	1			1			1			2			2			2		
L	62.5			87.5			112.5			137.5			187.5			237.5		

CUSHIONED

Stroke [mm]	25			50			75			100			150			175		
Position	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D
Possible positions (see page A3.67)	■ 10	-	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10
							-	-	-	-	40	-	-	40	-	-	40	-
							-	-	70	70	70	70	70	70	70	70	70	70
							-	100	-	-	100	-	-	100	-	-	100	-
													✱ 130	130	130	130	130	130
													-	160	-	-	160	-
																-	-	190
No. of V-Lock plates supplied	1			1			1			2			2			2		
L	87.5			112.5			137.5			162.5			212.5			237.5		

✱ Outlet side power supply not available ● Return side power supply not available ■ Side power supply not available

DIMENSIONS OF Ø 40, BA AND BB NON-CUSHIONED VERSION
DIMENSIONS OF Ø 40, BA AND BB CUSHIONED VERSION

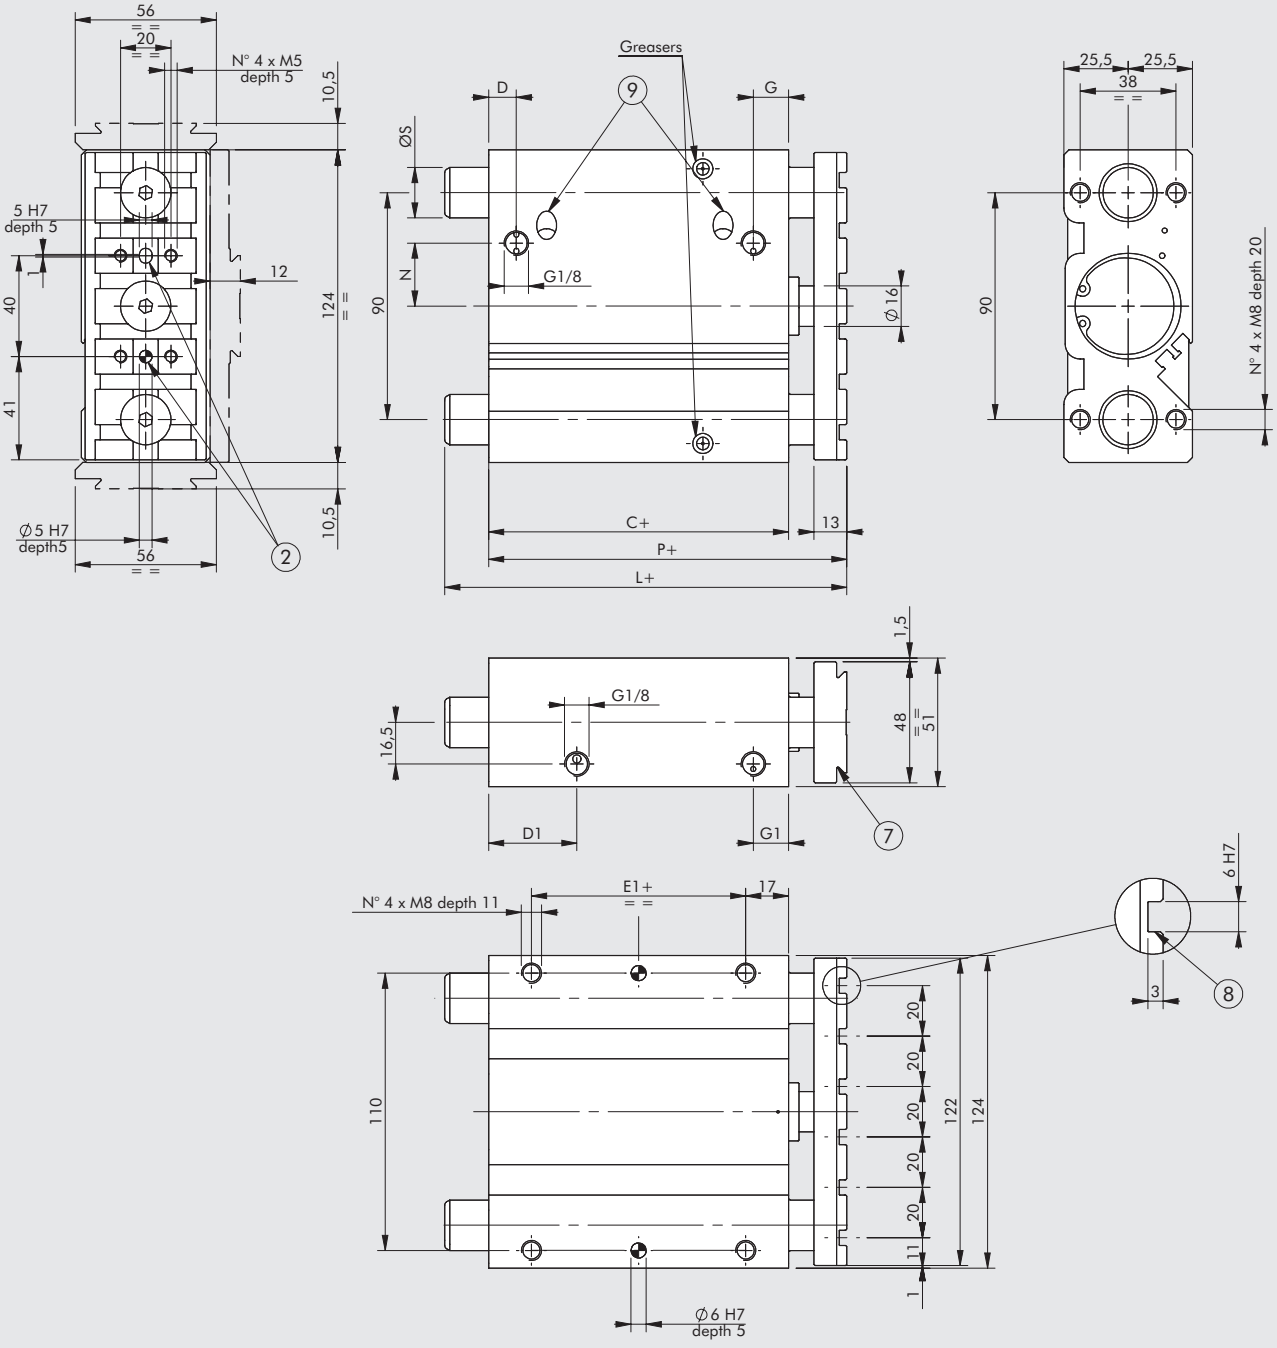

+ = ADD STROKE

② Holes for centring pins
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key
⑨ Cushioning pins (in the cushioned version only)

NON-CUSHIONED

C ◆	D	D1	E1	G	G1	L ◆		N	P ◆	Ø S	
						BA*	BB**			BA*	BB**
44	10	35	10	14	14	76.5	76.5	21	59	20	20

CUSHIONED

C	D	D1	E1	G	G1	L		N	P	Ø S	
						BA*	BB**			BA*	BB**
69	11	35	35	14	14	109.5	109.5	25	92	20	20

*** Version BA (Bronze Bushings)**
**** Version BB (Ball Bearings)**
◆ For cylinders with non-standard strokes, the correct size is that of the cylinder with the standard stroke immediately above.

METAL WORK PNEUMATIC

POSITION OF Ø 40 PLATES, BA AND BB NON-CUSHIONED VERSION
POSITION OF Ø 40 PLATES, BA AND BB CUSHIONED VERSION

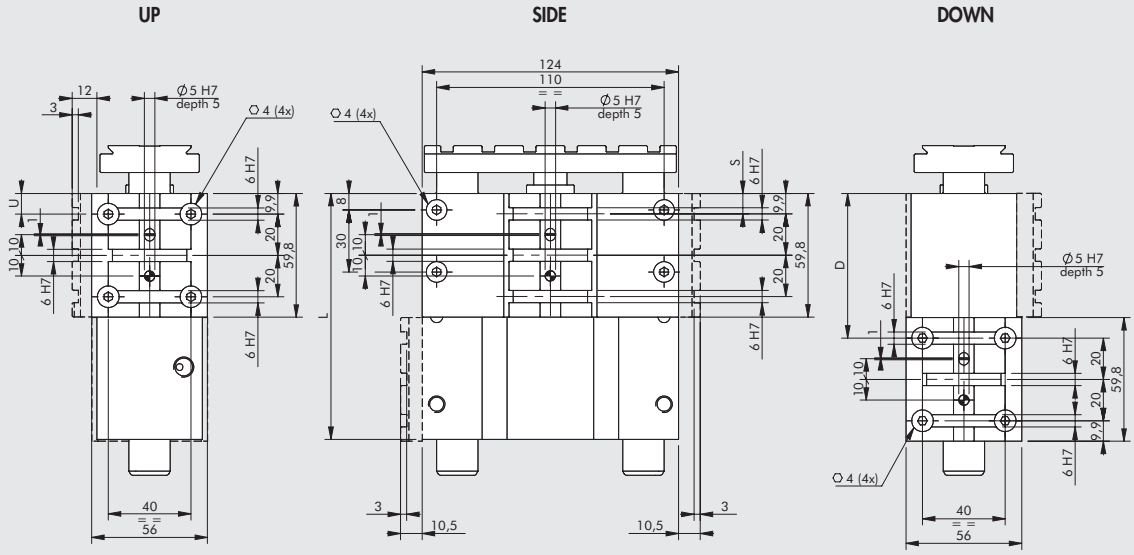

NON-CUSHIONED

Stroke [mm]	50			75			100			150			200		
Position	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D
Possible positions (see page A3.67)	■ 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10
	-	40	-	-	40	-	-	-	-	-	40	-	30	40	-
	-	-	-	✱ 70	-	70	✱ 70	-	70	70	-	70	70	70	70
										-	-	-	-	100	-
										✱ 130	130	130	130	130	130
													-	160	-
													-	190	190
No. of V-Lock plates supplied	1			1			1			2			2		
L	94			119			144			194			244		

CUSHIONED

Stroke [mm]	25			50			75			100			150			175		
Position	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D	U	S	D
Possible positions (see page A3.67)	-	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10	● 10	10	10
	-	40	-	-	40	-	-	-	-	-	40	-	-	40	-	-	40	-
				-	-	70	✱ 70	-	70	70	70	70	70	70	70	70	70	70
										-	100	-	-	100	-	-	100	-
													✱ 130	130	130	130	130	130
													-	160	-	-	160	-
																-	190	190
No. of V-Lock plates supplied	1			1			1			2			2			2		
L	94			119			144			169			219			244		

✱ Outlet side power supply not available ● Return side power supply not available ■ Side power supply not available

KEY TO CODES

CYL	W143	032	2	050	U	K
	TYPE	**DIAMETER**	**VERSION**	**STROKE**	**FIXING SIDE**	**FAMILY**
	Compact guided cylinder	**016** Ø 16 **020** Ø 20 **025** Ø 25 **032** Ø 32 **040** Ø 40	**2** Non-cushioned with bronze bushings **3** Non-cushioned with ball bearings **4** Cushioned with bronze bushings **5** Cushioned with ball bearings	CUSHIONED VERSION **Ø 16:** 20, 30, 40, 50 **Ø 20:** 20, 30, 40, 50, 75, 100, 150, 200 **Ø 25:** 20, 30, 40, 50, 75, 100, 150 **Ø 32:** 25, 50, 75, 100, 150, 175 **Ø 40:** 25*, 50, 75, 100, 150, 175 NOT CUSHIONED VERSION ◆ **Ø 16:** 30*, 40, 50, 75, 100, 150, 200 **Ø 20:** 25, 30, 40, 50, 75, 100, 150, 200 **Ø 25:** 25, 30, 40, 50, 75, 100, 150, 200 **Ø 32:** 25, 50, 75, 100, 150, 200 **Ø 40:** 50, 75, 100, 150, 200 * Side and Down versions only ◆ Other strokes on request but with the same cylinder dimensions as the standard stroke immediately above.	**U** Up **S** Side **D** Down	**K** V-Lock

ACCESSORIES

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

NOTES

GUIDE UNITS
SERIES GDHK AND GDMK

Guide units GDHK and GDMK guarantee excellent alignment and anti-rotation of the pneumatic cylinder connected to them.
They can be used either singly or in combination to obtain complete handling units. The typical dovetail profile with V-Lock slots allows assembly with other elements in the V-Lock series.

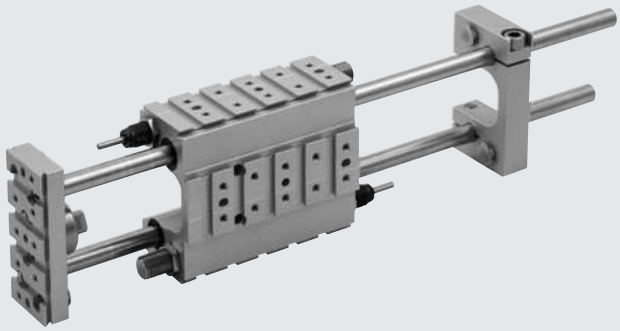

Guide units can be coupled with:
- ISO 6432 cylinders Ø 12, 16, 20 and Ø 25. **You can not use sensor bracket mod. DSW;**
- ISO 15552 series 3 cylinders Ø 32 and 40;
- ISO 15552 STD and type A cylinders Ø 32 and 40. **You can not apply position sensors.**
- Electric cylinder series Elektro ISO 15552 Ø32. It is a version with shorter columns; the cylinder must be an anti-rotation type because the guide coupling is rotary and cannot prevent piston rod rotation.

Series GDHK has bronze bushes and is more suitable for high loads.
Series GDMK has recirculating ball bushes and is more suitable for high speeds.

Guide units are available with 5 types of stop mechanism:
- without stops (stop is provided by the cylinder);
- with buffers for piston rod retraction;
- with a hydraulic shock absorber for piston rod retraction;
- with buffers for piston rod extension and retraction;
- with hydraulic shock absorbers for piston rod extension and retraction.

TECHNICAL DATA		Ø 12	Ø 16	Ø 20	Ø 25	Ø 32	Ø 40
Strokes	mm	From 1 to 600					
		The total stroke can be shortened using adjusting stops and/or the rear plate					
Stroke reduction via stop adjustment	mm	–14 per side		–22 per side		–40 per side	–35 per side
Temperature range	°C	–10 to +80					
Recommended maximum speed	m/s	1					
Rear plate torques	Nm	7 ±1		22 ±2			35 ±2
Guide column diameter	mm	10		12		16	20
Maximum impact energy							
with shock absorbers	Ec [J]	5		20		25	70
with buffers	Ec [J]	0.5		1		2	2
without stops		refer to the diagram on page **A3**.82					
Repeatability (at 6 bar)							
Versions with buffers	mm	±0.02 (with minimum pressure 5 bar)					
Versions with shock absorbers	mm	±0.02					
Lubrication		The guides are supplied lubricated. There are two greasers on the guide bodies (one per column) for periodic lubrication using a pump with a nozzle. The following greases are recommended: - version GDHK: code 9910502 (RHEOLUBE 362 HB) - version GDMK: code 9910506 (RHEOLUBE 363AX1) The lubrication interval depends on numerous factors such as load, temperature, speed, stroke, lubricant, environmental conditions and assembly position. **As a general rule, lubrication is recommended every 500.000 – 1.000.000 cycles.**					

COMPONENTS

① BODY: anodized aluminium
② FRONT PLATE: anodized aluminium
③ REAR PLATE: anodized aluminium
④ STOP: tempered steel
⑤ COLUMN GUIDES:
- sintered bronze (for GDH version)
- recirculation ball bushes (for GDM version)

⑥ GUIDE COLUMNS:
- C45 grinded chromed steel (for GDH version)
- tempered steel (for GDM version)

⑦ DUST SCRAPER RING: polyurethane or NBR
⑧ BUFFER
⑨ DECELERATOR
⑩ ADJUSTABLE STOP: tempered steel (for versions with shock absorbers)
⑪ COUPLING: C45 steel

GDHK



GDMK

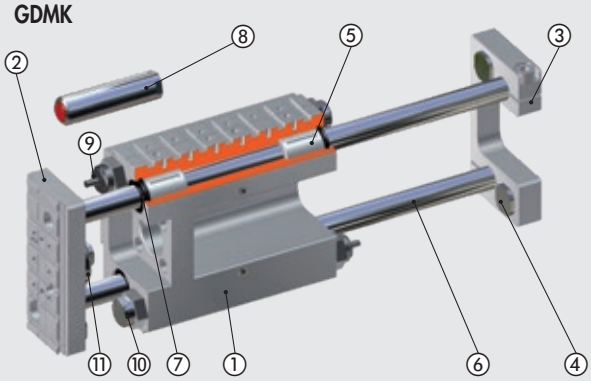

EXECUTIONS

00



without stop

01



with front stop and buffers

02



with front stop and shock absorber

03



with front and rear stop and buffers

04



with front and rear stop and shock absorbers

05



with short columns for Elektro cylinder

WEIGHTS AND MOVING MASSES

TOTAL WEIGHTS

Ø mm	Weight [g] for Stroke = 0 mm — Execution 00	01	02	03	04	05	Weight [g] every mm
12-16	779	817	823	953	965	-	1.2
20-25	1412	1520	1534	1809	1837	-	1.8
32	2262	2582	2558	3161	3113	2137	3.1
40	4316	4836	4873	5864	5938	-	4.9

TOTAL MOVING MASSES

Ø mm	Weight [g] for Stroke = 0 mm — Execution 00	01	02	03	04	05	Weight [g] every mm
12-16	293	293	293	391	391	-	1.2
20-25	518	518	518	699	699	-	1.8
32	667	667	667	926	926	542	3.1
40	1670	1670	1670	2178	2178	-	4.9

METAL WORK PNEUMATIC

LOAD DIAGRAM

The graph on the right shows the maximum static load that can be applied to the guides as a function of the distance between the body of the guide and the barycenter of the load (with the piston rod extended).

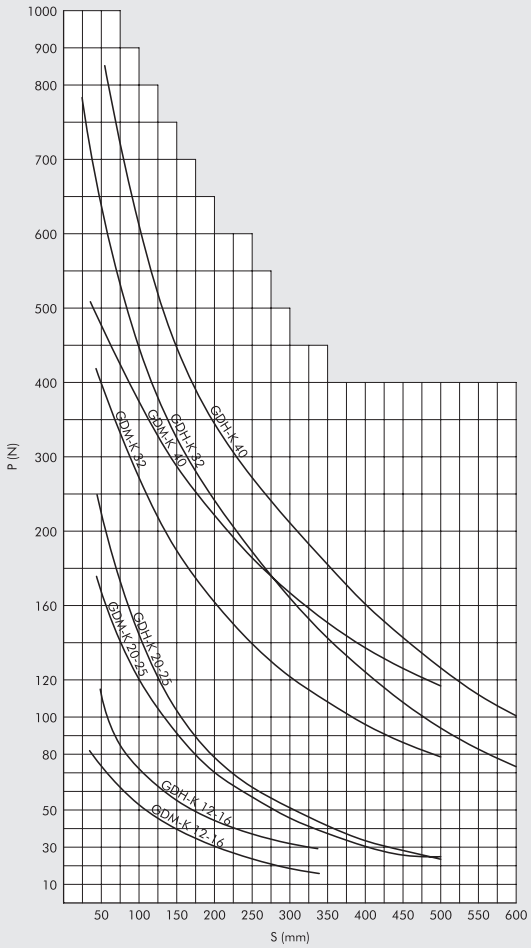

HORIZONTAL APPLICATIONS

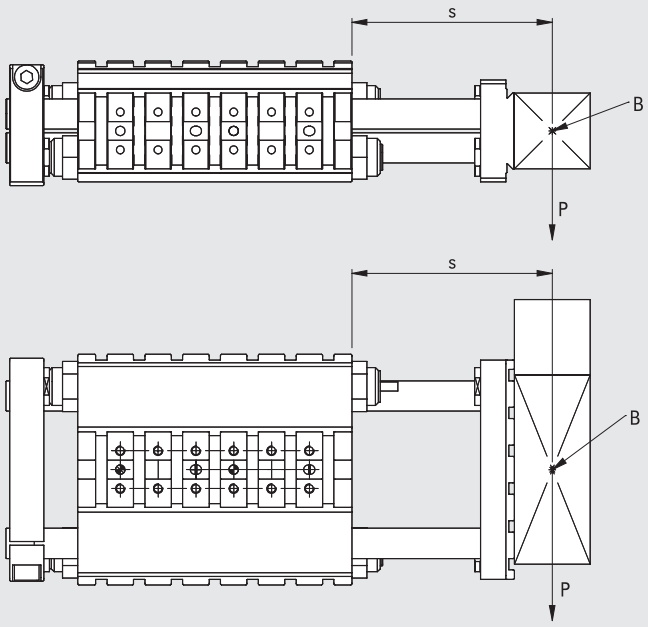

VERTICAL APPLICATIONS

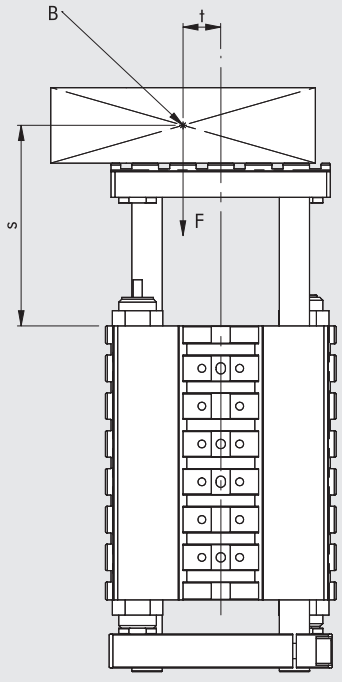

$$P = \frac{F \cdot t}{s}$$

B = Barycentre; S = Projection; P = Useful load

MAXIMUM LOADS AND SPEEDS

The graphs below show the maximum recommended movable loads "m" (masses) [kg] as a function of the average traverse speed "v" [m/s], defined as stroke/time, slide position (horizontal/vertical) and supply pressure.

MAXIMUM LOADS: VERSIONS WITHOUT STOPS

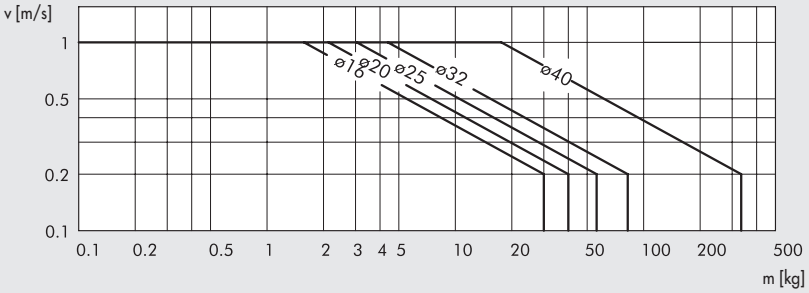

MAXIMUM LOADS: VERSIONS WITH SHOCK ABSORBERS

Ø 12-16 - Vertical orientation

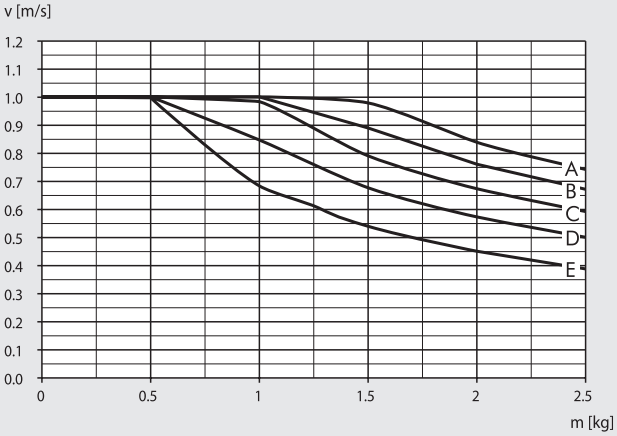

Ø 12-16 - Horizontal orientation

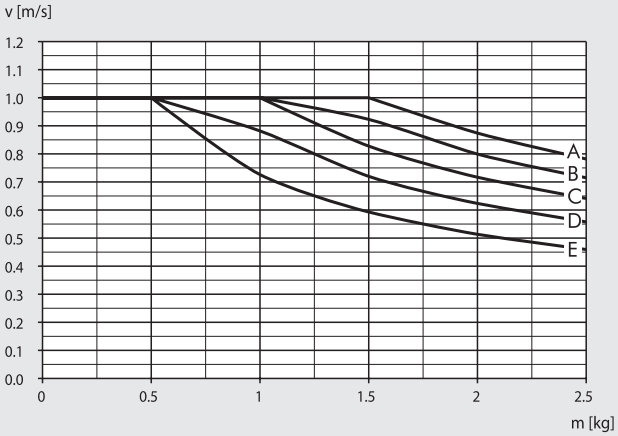

Ø 20-25 - Vertical orientation

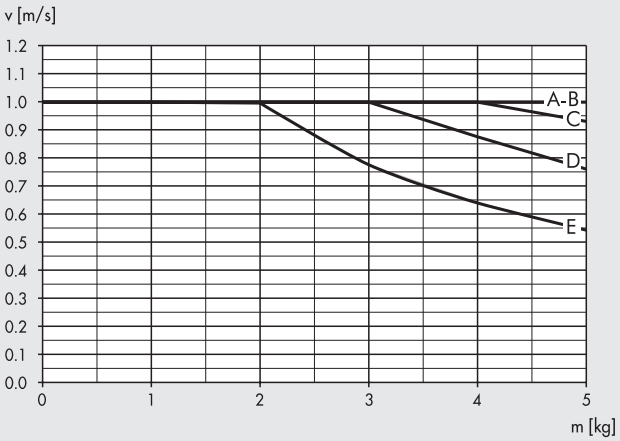

Ø 20-25 - Horizontal orientation

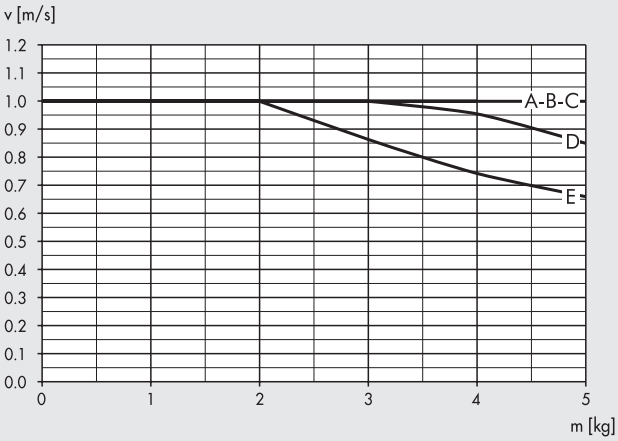

A = 2 bar B = 4 bar C = 6 bar D = 8 bar E = 10 bar

Ø 32 - Vertical orientation

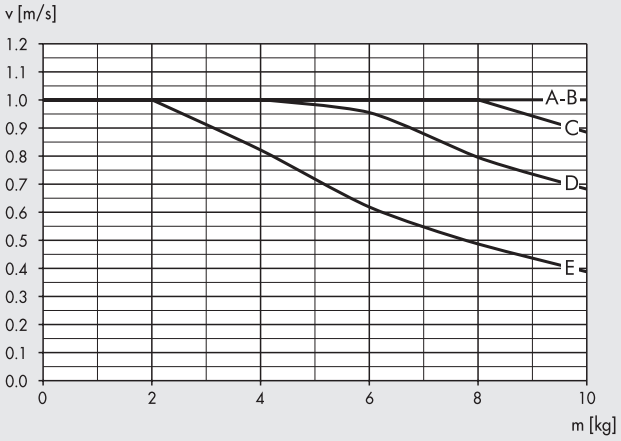

Ø 32 - Horizontal orientation

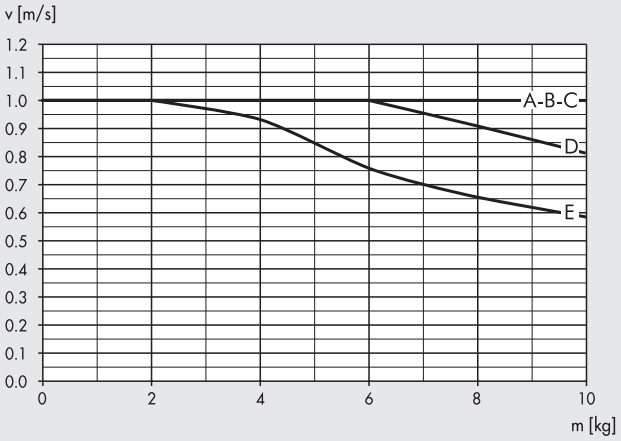

Ø 40 - Vertical orientation

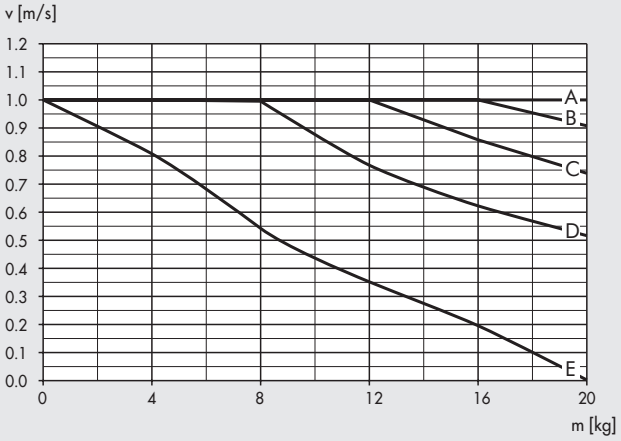

Ø 40 - Horizontal orientation

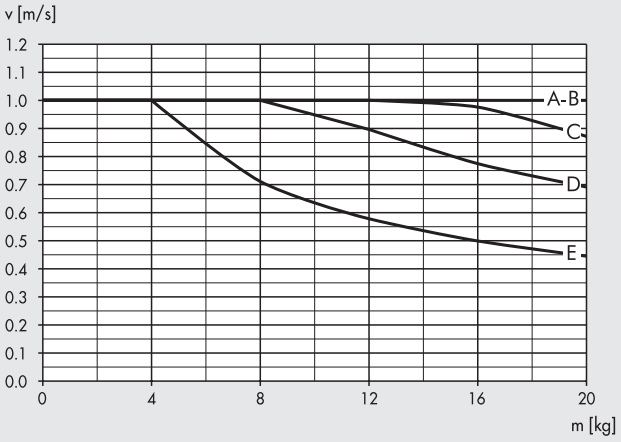

A = 2 bar B = 4 bar C = 6 bar D = 8 bar E = 10 bar

MAXIMUM LOADS: VERSIONS WITH BUFFERS

Ø 12-16 - Vertical orientation

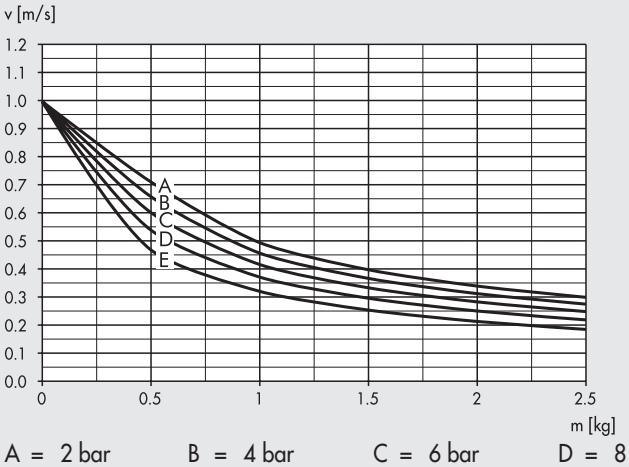

Ø 12-16 - Horizontal orientation

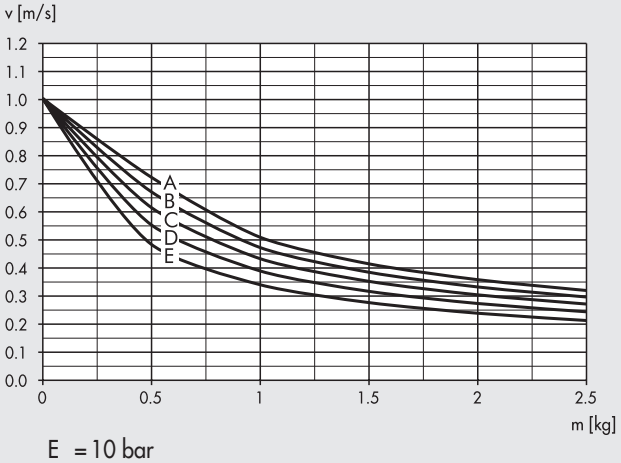

A = 2 bar B = 4 bar C = 6 bar D = 8 bar E = 10 bar

Ø 20-25 - Vertical orientation

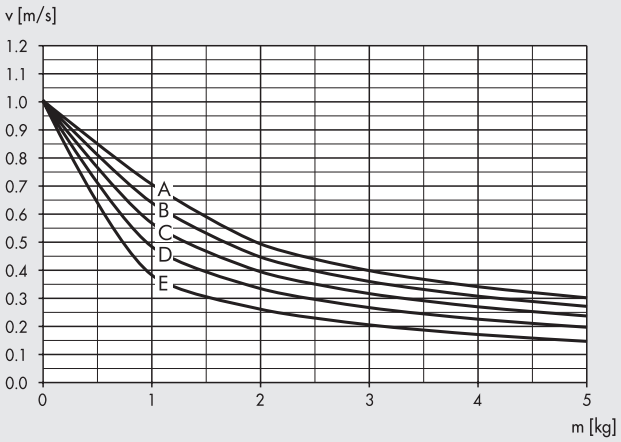

Ø 20-25 - Horizontal orientation

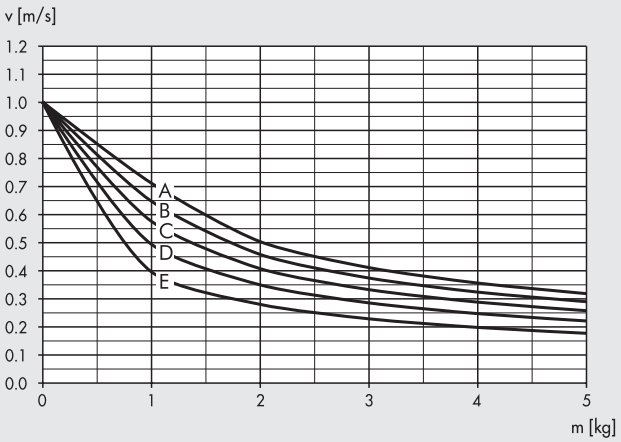

Ø 32 - Vertical orientation

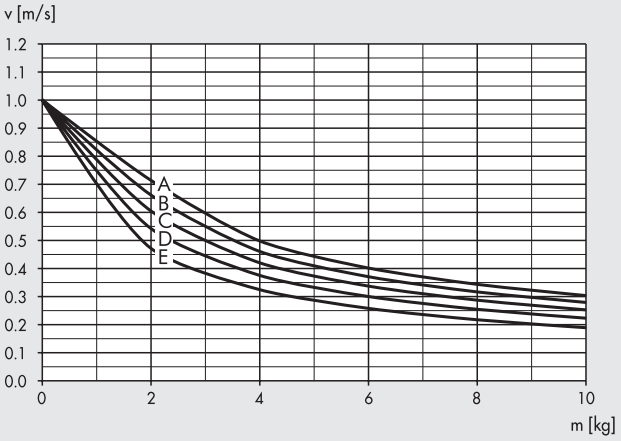

Ø 32 - Horizontal orientation

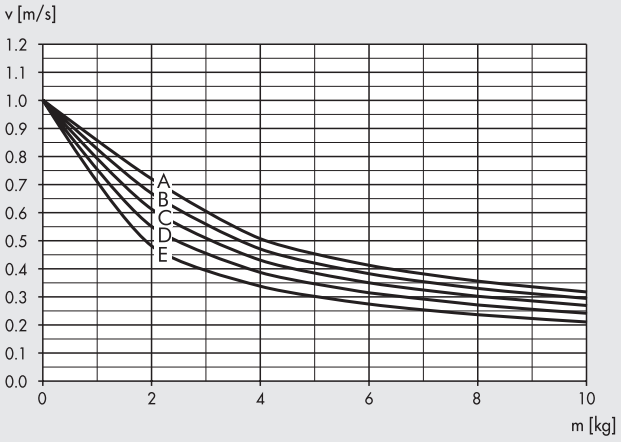

Ø 40 - Vertical orientation

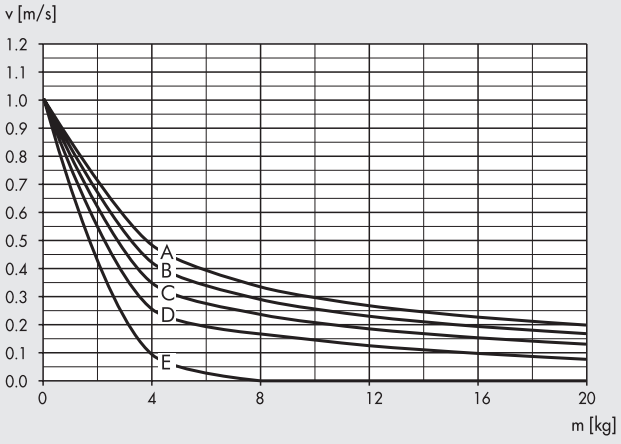

Ø 40 - Horizontal orientation

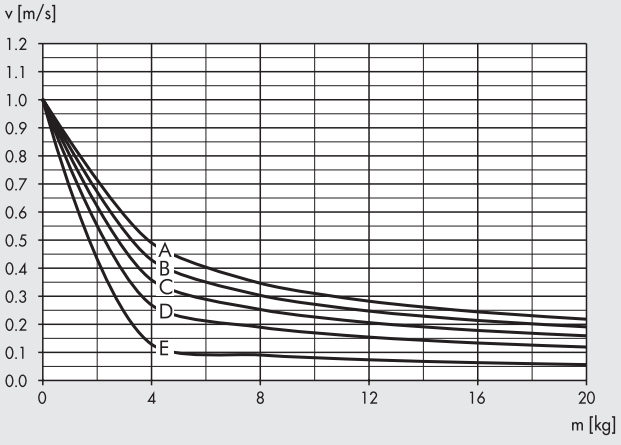

A = 2 bar B = 4 bar C = 6 bar D = 8 bar E = 10 bar

METAL WORK PNEUMATIC

DIMENSIONS Ø 12-16

Versions 00-01-02

+ = ADD THE STROKE

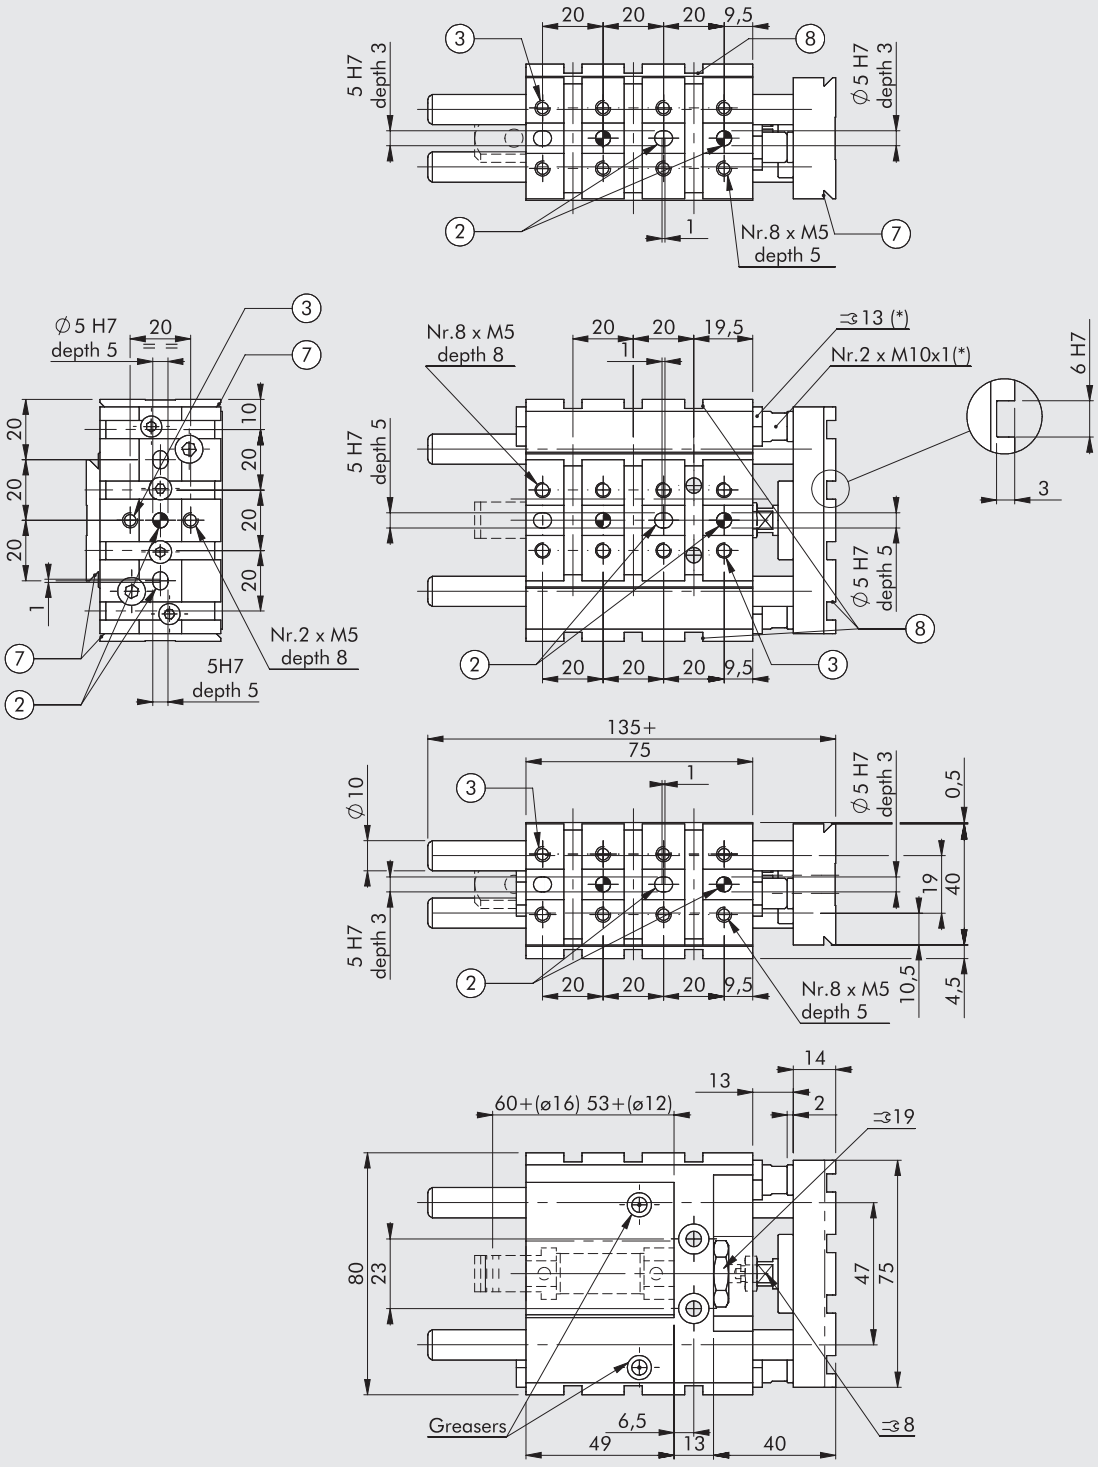

* Not present in version 00
② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

DIMENSIONS Ø 12-16

Versions 03-04

+ = ADD THE STROKE

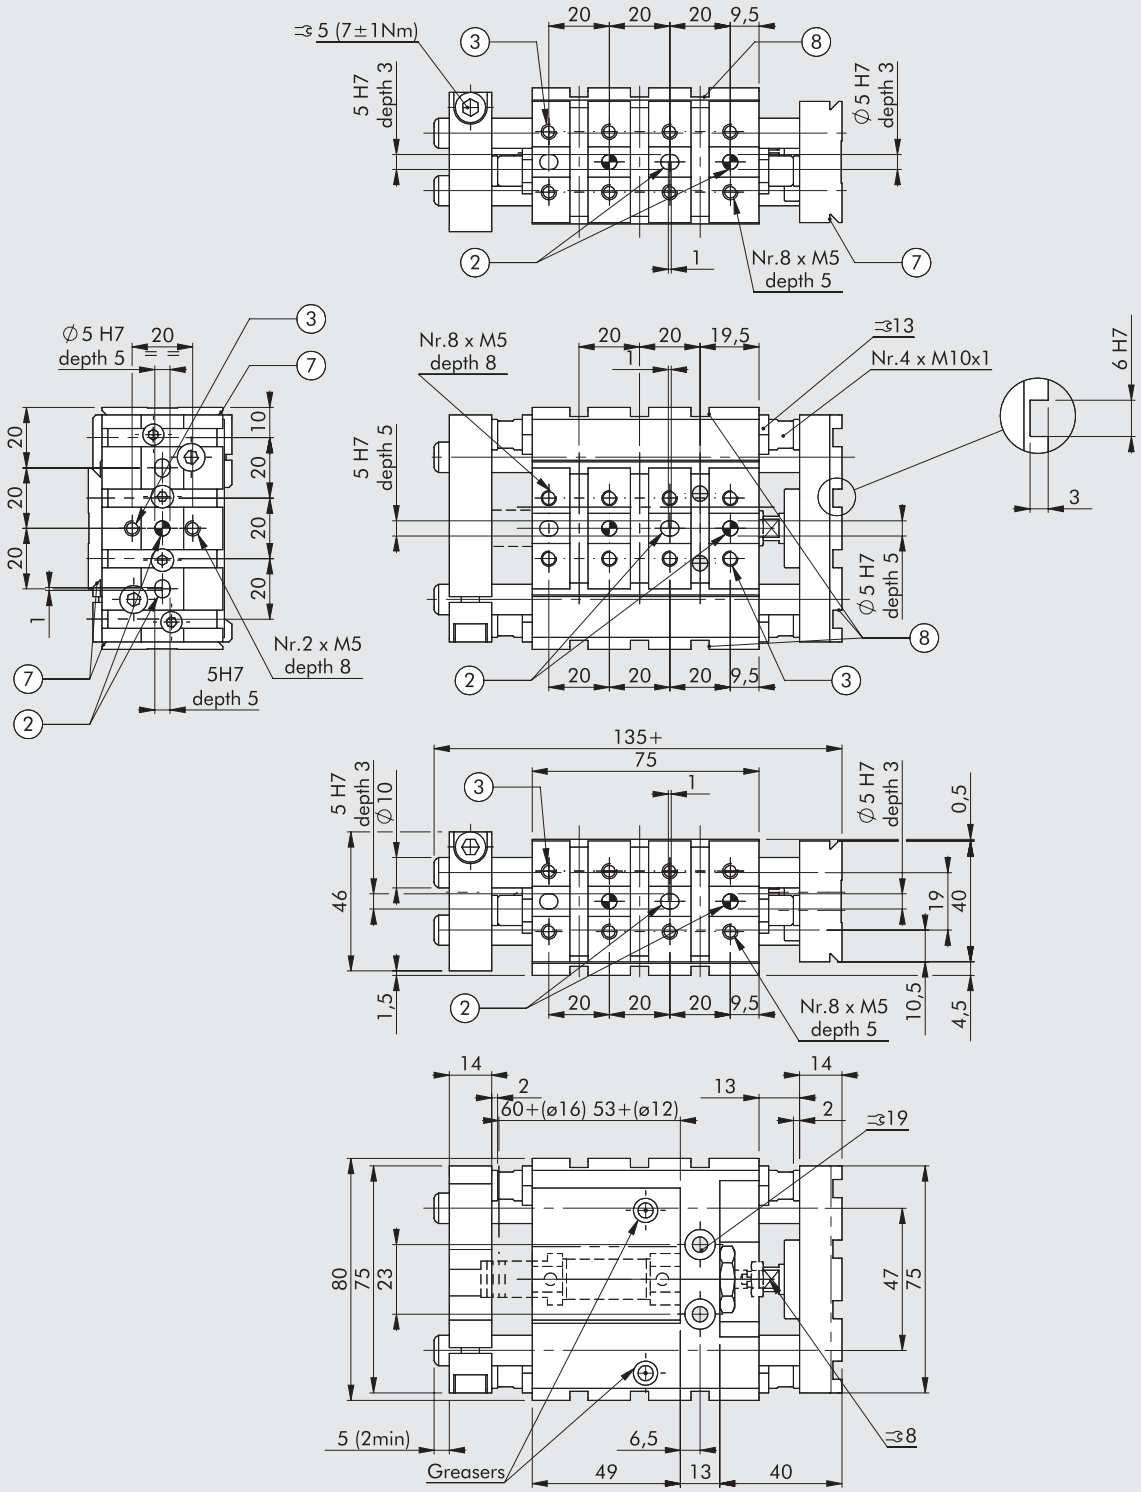

② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

METAL WORK PNEUMATIC

DIMENSIONS Ø 20-25

Versions 00-01-02

+ = ADD THE STROKE

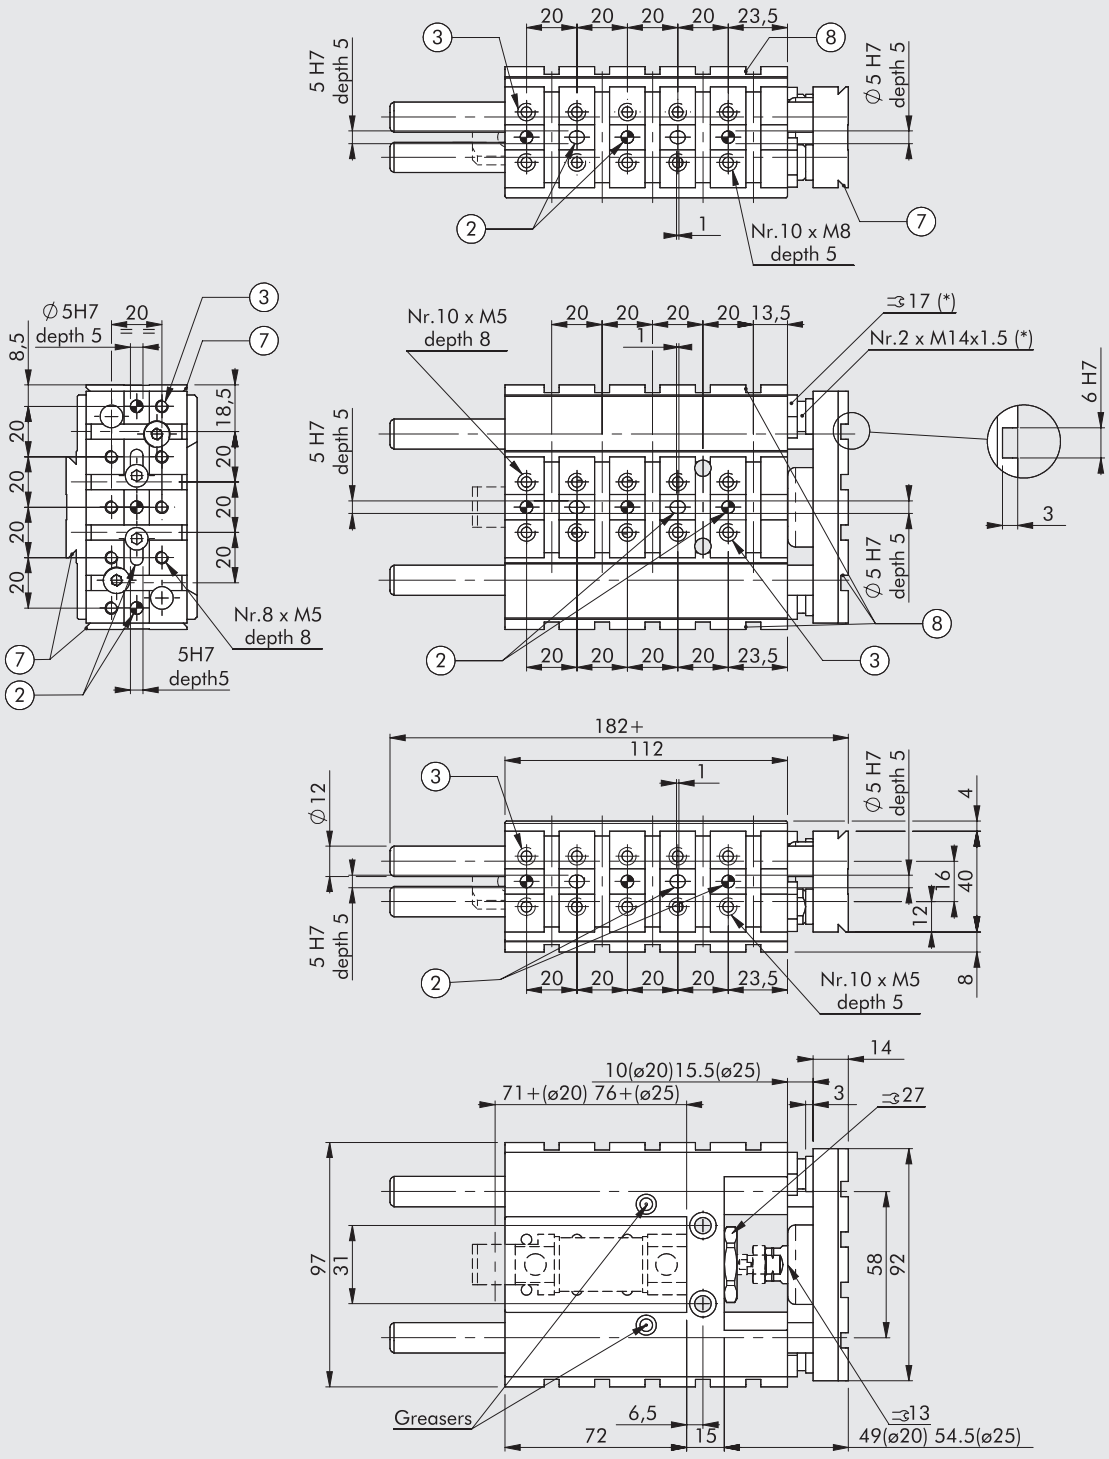

* Not present in version 00
② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

DIMENSIONS Ø 20-25

Versions 03-04

+ = ADD THE STROKE

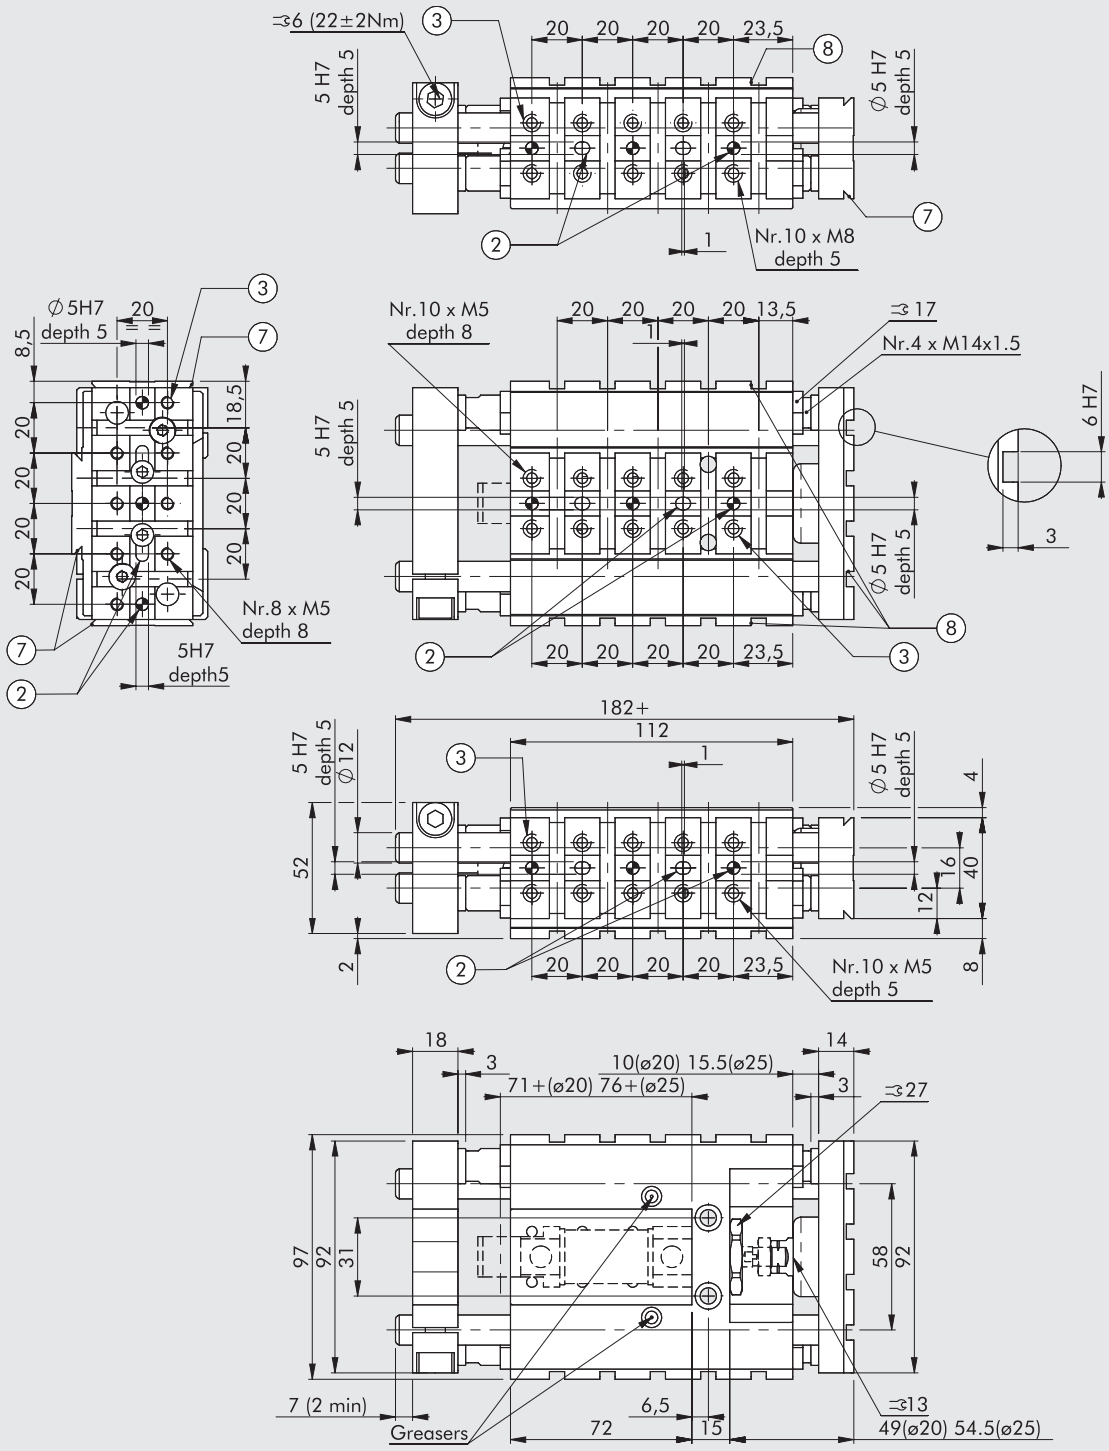

② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

METAL WORK PNEUMATIC

DIMENSIONS Ø 32

Versions 00-01-02-05

+ = ADD THE STROKE

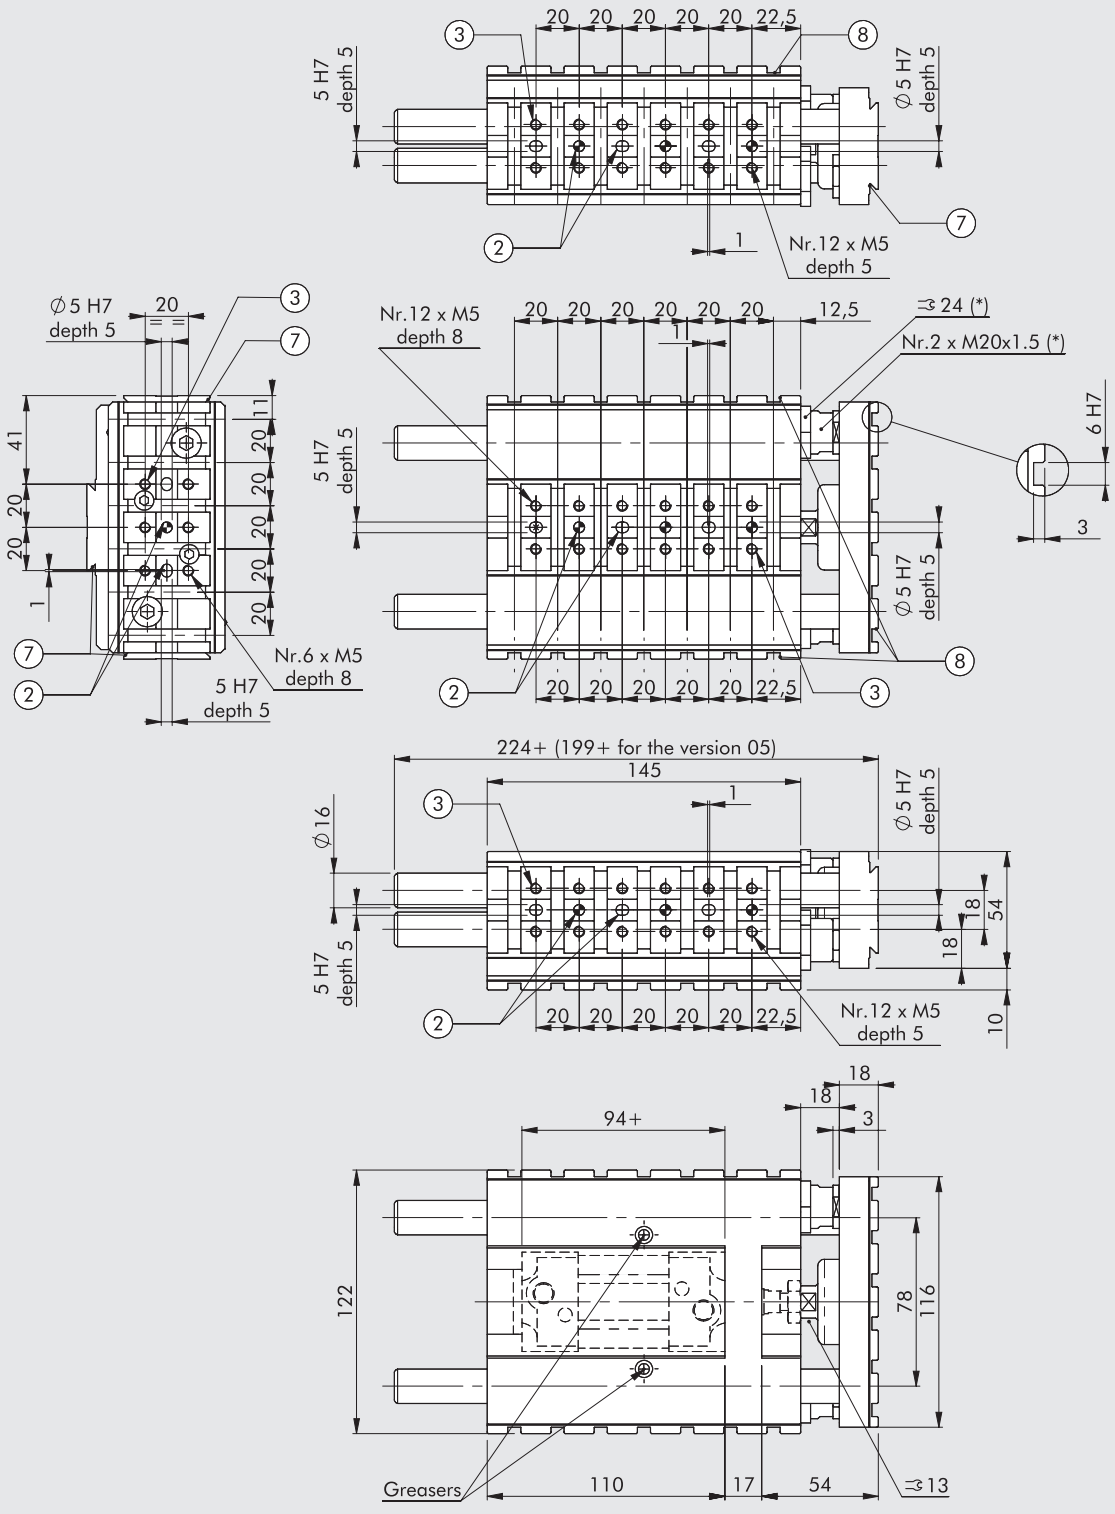

* Not present in version 00 and 05
② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

DIMENSIONS Ø 32

Versions 03-04

+ = ADD THE STROKE

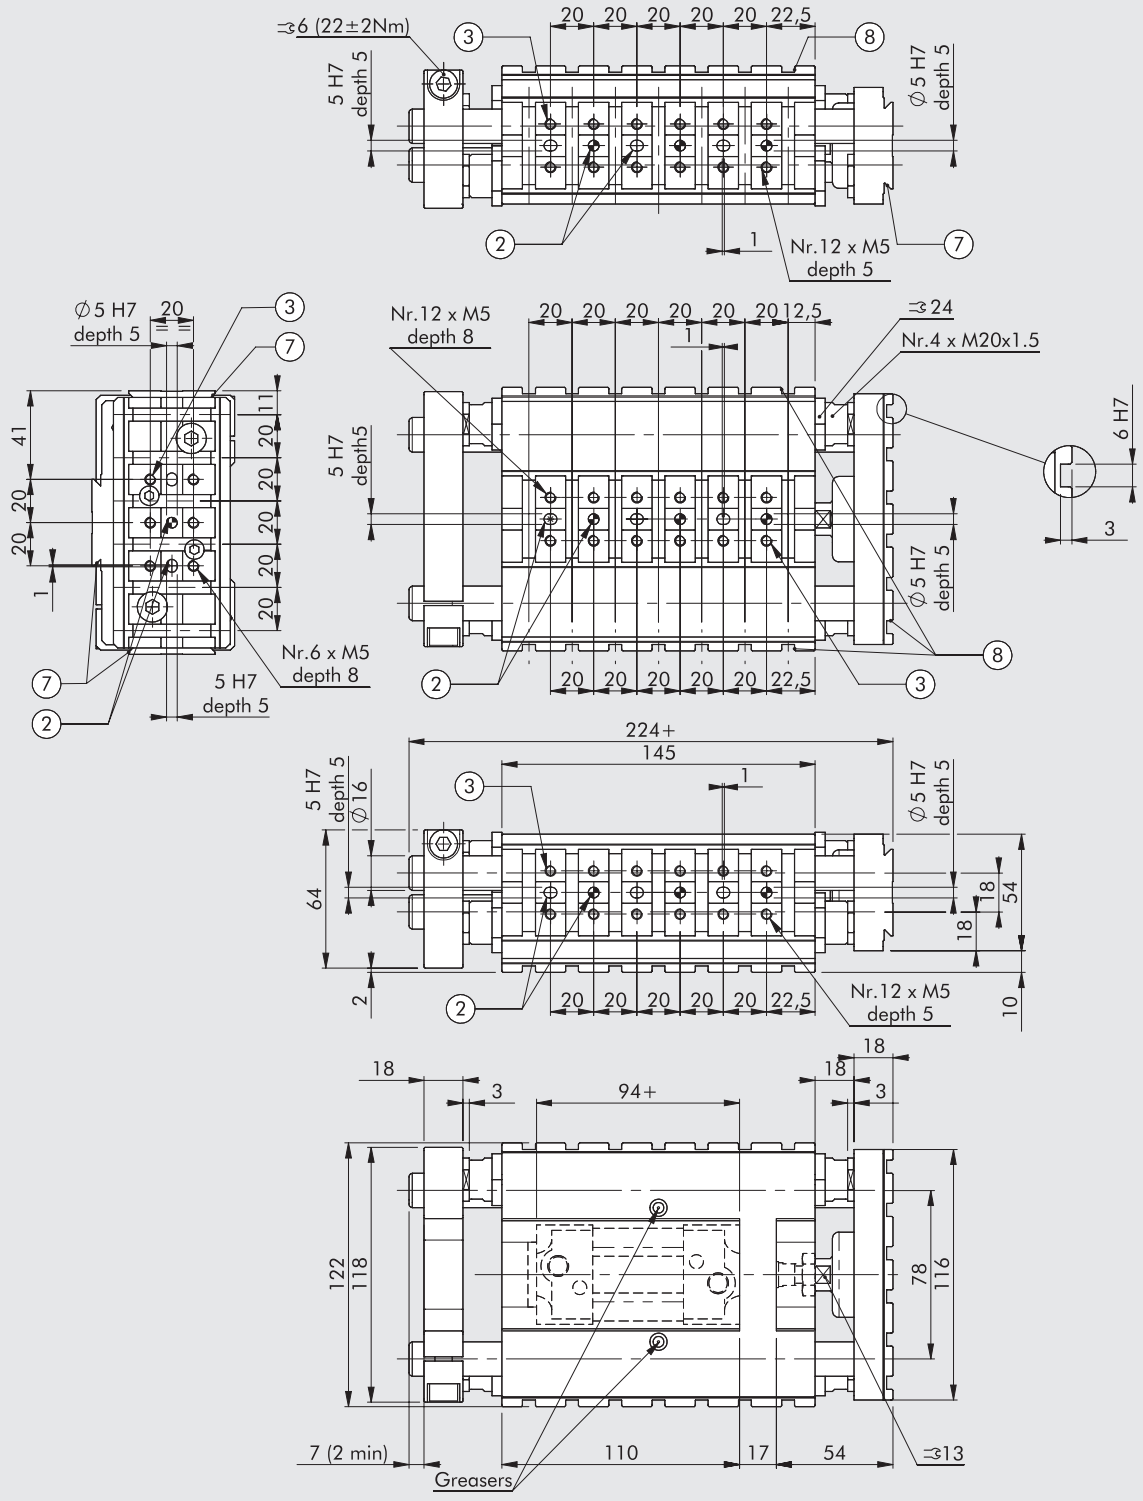

② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

METAL WORK PNEUMATIC

DIMENSIONS Ø 40

Versions 00-01-02

+ = ADD THE STROKE

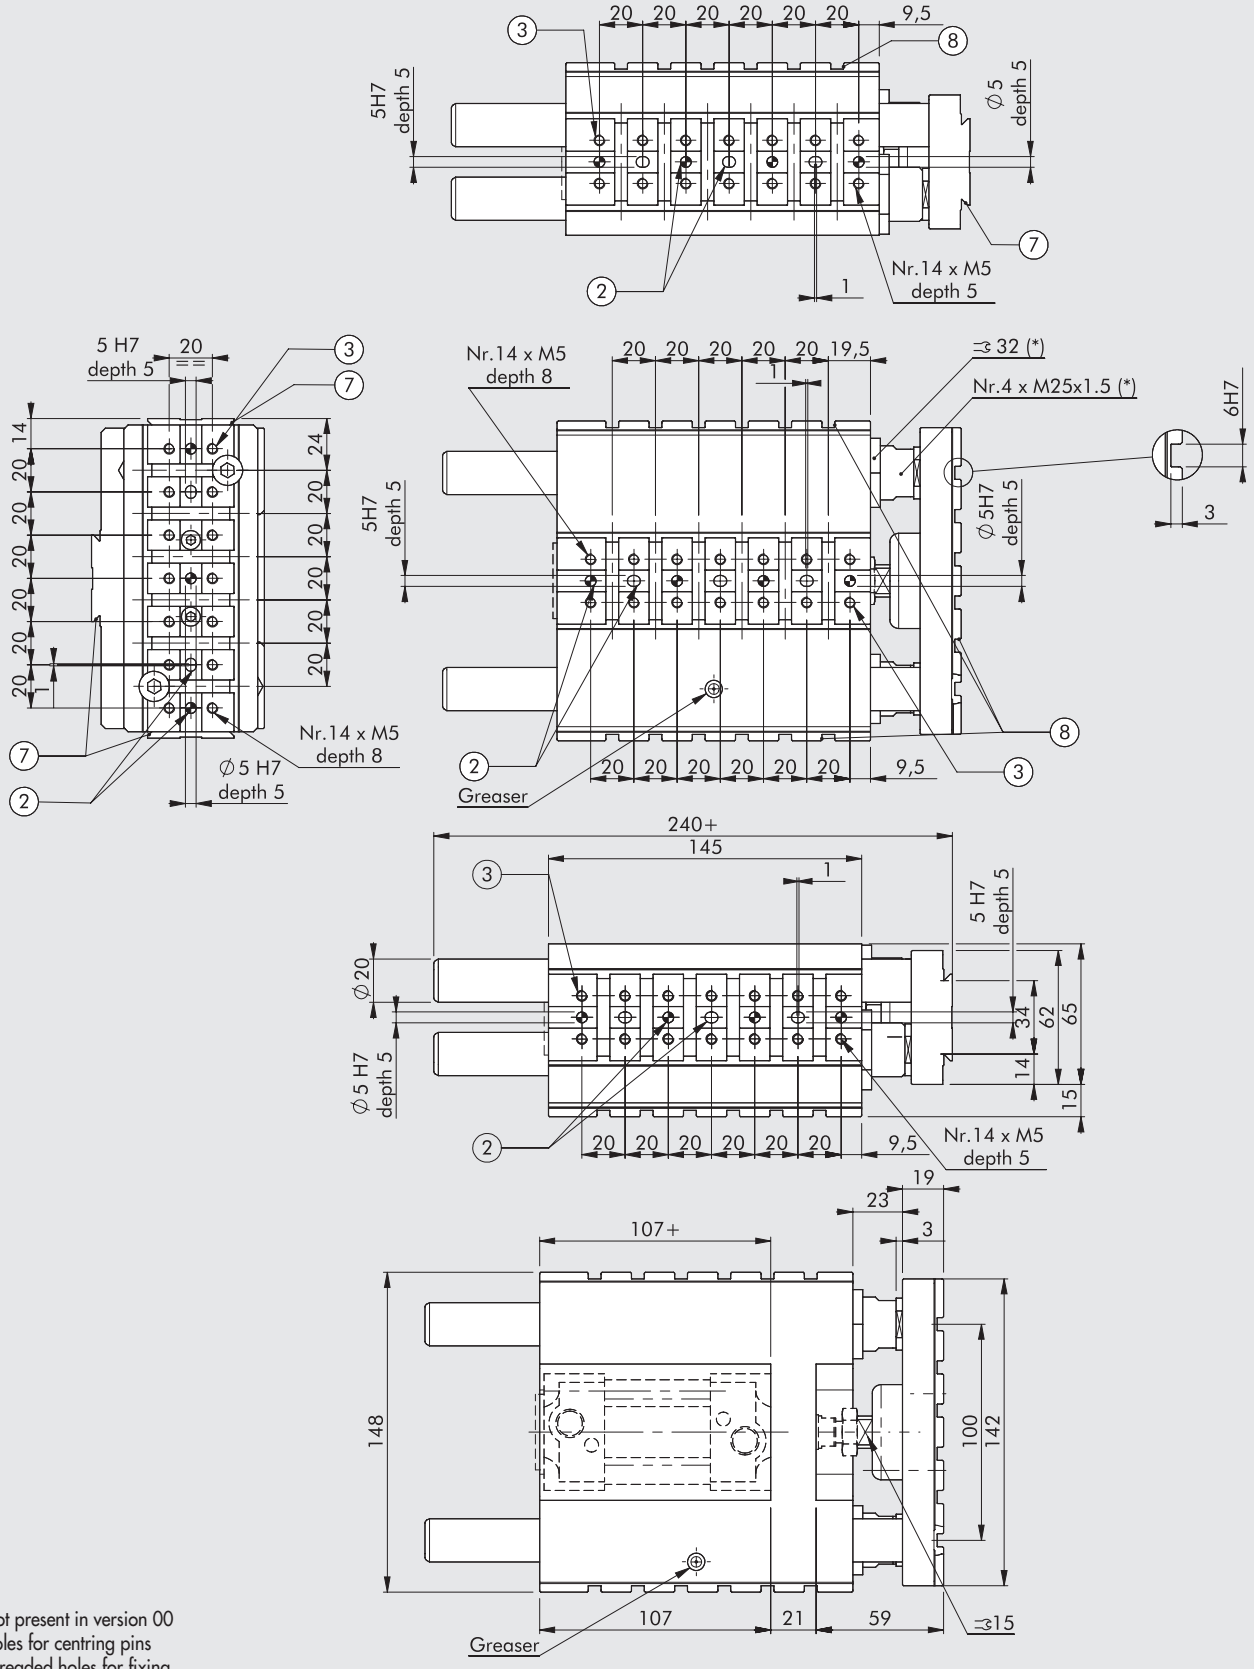

* Not present in version 00
② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

DIMENSIONS Ø 40

Versions 03-04

+ = ADD THE STROKE

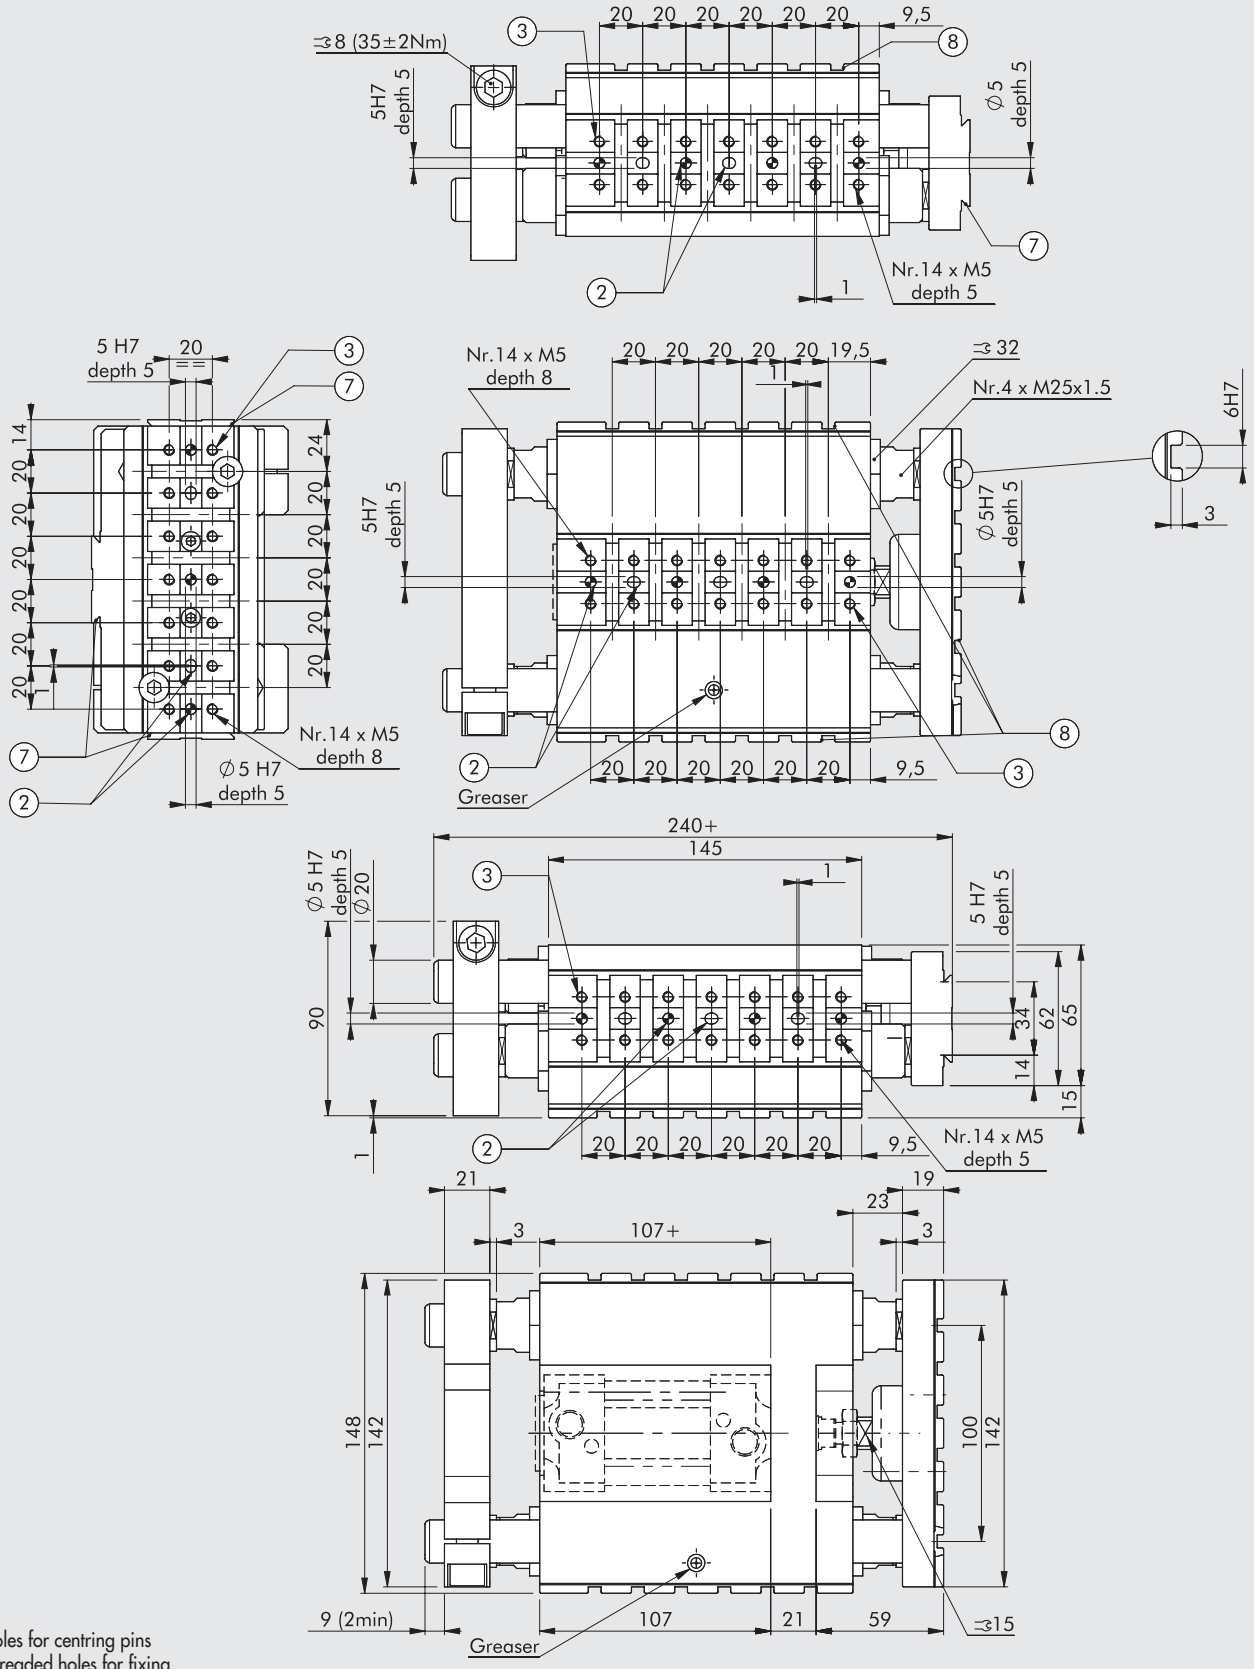

② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

MOUNTING ON ISO 6432 CYLINDERS

For mounting on the body of ISO 6432 cylinders:
Ⓐ Insert the cylinder in the guide.
Ⓑ Retract the piston rod and tighten the nut ① from the front using a wrench, holding the front end of the cylinder firmly.
Ⓒ Screw the piston rod onto the coupling and tighten the nut ②.

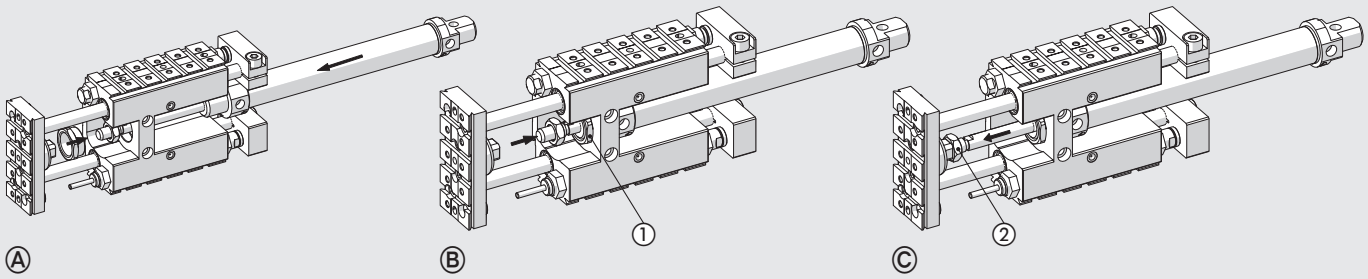

KEY TO CODES

W070	012	2	050	00	K
TYPE	**BORE**	**VERSION**	**STROKE**	**EXECUTION**	**FAMILY**
Guide unit	**012** 12-16 **020** 20 **025** 25 **032** 32 **040** 40	**2** Version H **3** Version M	See general technical data	**00** Without stop **01** With front stop and buffers **02** With front stop and shock absorber **03** With front and rear stops and buffers **04** With front and rear stops and shock absorbers ■ **05** With short columns for Elektro cylinder	**K** V-Lock

■ For Ø 32 only

EXAMPLES OF APPLICATION

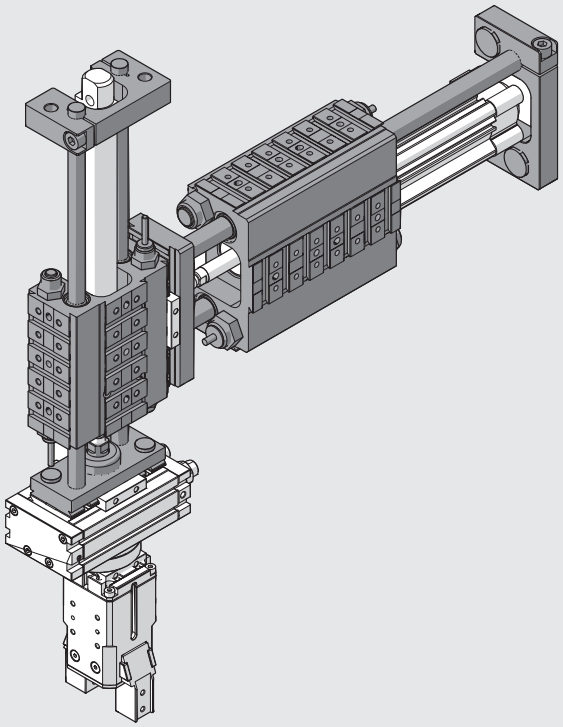

ACCESSORIES AND SPARE PARTS FOR GUIDE UNITS SERIES GDHK AND GDMK

ELASTIC MECHANICAL STOP

Ø12-16 Ø20-25 Ø32-40



Code	Ø	Description
W0950005401K	12-16	Elastic mechanical stop M10x1 + nut
W0950005402K	20-25	Elastic mechanical stop M14x1.5 + bushing
W0950005403K	32	Elastic mechanical stop M20x1.5 + nut
W0950005404K	40	Elastic mechanical stop M25x1.5 + nut

MECHANICAL STOPS



Code	Ø	Description
W0950005501K	12-16	Mechanical stop M10x1 + nut
W0950005502K	20-25	Mechanical stop M14x1.5 + nut
W0950005503K	32	Mechanical stop M20x1.5 + nut
W0950005504K	40	Mechanical stop M25x1.5 + nut

SHOCK ABSORBERS



Code	Ø	Description
W0950005301	12-16	Shock absorbers 2 M10x1 + nut
0950004004	20-25	Shock absorbers ECO25 MC2 + nut M14x1.5
0950004005	32	Shock absorbers ECO50 MC2 + nut M20x1.5
0950004006	40	Shock absorbers ECO100 MF2 + nut M25x1.5

REAR PLATE KITS



Code	Ø	Description
W0950005600K	12-16	Rear plate kit GD_K
W0950005601K	20-25	Rear plate kit GD_K
W0950005602K	32	Rear plate kit GD_K
W0950005603K	40	Rear plate kit GD_K

Note: invidually packed with 2 screws

GREASE



Code	Description	Weight [g]
9910502	Tube of RHEOLUBE 362 grease (for GDHK version)	1000
9910506	Tube of RHEOLUBE 363 AX1 grease (for GDMK version)	400

LINEAR UNITS SERIES LEPK

The LEPK linear units are designed for horizontal or vertical mounting. They are driven by an ISO 6432 pneumatic cylinder that can be easily removed when it needs to be replaced.
The precision round bars, which are hardened and incorporated in the rectangular profile enclosed by the body, provide a reliable guide system without any backlash, jointly with the adjustable casters.
The stoke is limited by mechanical stops that are provided with a fine adjustment device and hydraulic shock-absorbers.
A LED visible through the openings provided in the body indicates the switching status. The final positions are controlled by inductive sensors (included in the supply). The front plate comes with V-Lock connections. Dovetail guides are provided on both sides of the body for the connection of the V-Lock or QS system.
The area of the body where to make the transversal grooves for connection with type K fixing elements can be specified at the time of the order. The encapsulated construction ensures the elimination of any points of hazard and increased silent operation.
The linear units are available in two versions:

- version A comes with a retracted position and an adjustable extended position;
- version B is designed to achieve a second supplementary adjustable extended position.

The LEPK units for vertical mounting can be equipped with a return spring to balance the weights. In the event of an emergency or a drop in pressure, the vertical slide is automatically pulled into the upper end-of-stroke position (slide fully retracted). For the orderly arrangement of cables and pipes, a hose pipe can be ordered. The linear unit for horizontal mounting can be supplied complete with an electrical terminal board.

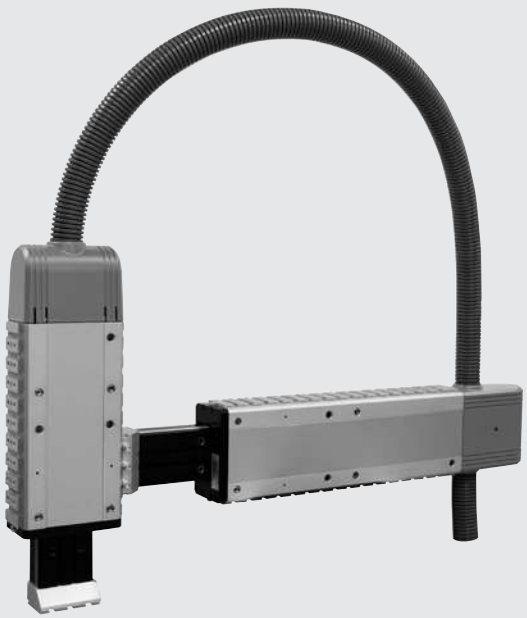

TECHNICAL DATA		LEPK-1-90-H		LEPK-1-160-H		LEPK-1-225-H		LEPK-2-320-H		LEPK-2-450-H		LEPK-1-60-V		LEPK-1-90-V		LEPK-1-160-V	
		Type A	Type B	Type A	Type B	Type A	Type B	Type A	Type B	Type A	Type B	Type A	Type B	Type A	Type B	Type A	Type B
Number of positions		2	3	2	3	2	3	2	3	2	3	2	3	2	3	2	3
Orientation		Horizontal										Vertical					
Operating pressure	bar	3 to 7															
	MPa	0.3 to 0.7															
	psi	43.5 to 101															
Temperature range	°C	-10 to 50															
	°F	14 to 122															
Fluid		Lubricated or unlubricated 20 µm filtered air. If lubricated air is used, lubrication must be continuous															
End position stop shock-absorption	mm	Hydraulic shock-absorbers															
End-position control		Inductive sensors with a LED visible from the outside															
Repeatability (on 100 strokes at constant conditions)	mm	< 0.005															
Piston diameter / Piston rod diameter	mm	16 / 6						20 / 8		25 / 10		16 / 6					
Stroke (min / max)	mm	15 to 90		15 to 160		15 to 225		50 to 320		50 to 450		15 to 60		15 to 90		15 to 160	
Intermediate useful stroke	mm	-	0 to 80	-	0 to 100	-	0 to 100	-	0 to 150	-	0 to 150	-	0 to 50	-	0 to 80	-	0 to 100
Theoretic force at 6 bar:																	
in thrust	N	106		106		106		165		260		Max. 90 (see page **A3**.101/102)					
in traction	N	90		90		90		137		218		Max. 150 (see page **A3**.101/102)					
Weight	kg	2.5	3.1	3.2	3.8	4.5	4.6	8	9.6	10.5	11	2.15	2.5	2.35	3	3.1	3.7
Weight of the moving mass	kg	0.68		0.83		1.25		2.29		3.12		0.61		0.68		0.83	
Maximum kinetic energy	J/stroke	5.88						19.6				5.88					
	J/h	25000						53000				25000					
Electrical protection class with PG29 pipe mounted (only for versions with a terminal board)		IP 42										-		-		-	
Relative air humidity (only for versions with a terminal board)		< 95 %										-		-		-	
Power connection cable (only for versions with a terminal board)		Max. 17 wires 0.14 - 0.5 mm² for max. 15 proximity switches +0 V +24 V										-		-		-	
Pneumatic connection		Pipe Ø 4						Pipe Ø 6				Pipe Ø 4					
Speed control		Flow regulators Ø 4 - M5						Flow regulators Ø 6 - 1/8"				Flow regulators Ø 4 - M5					

IMPORTANT: for maximum forces and moments, see page **A3**.97

COMPONENTS

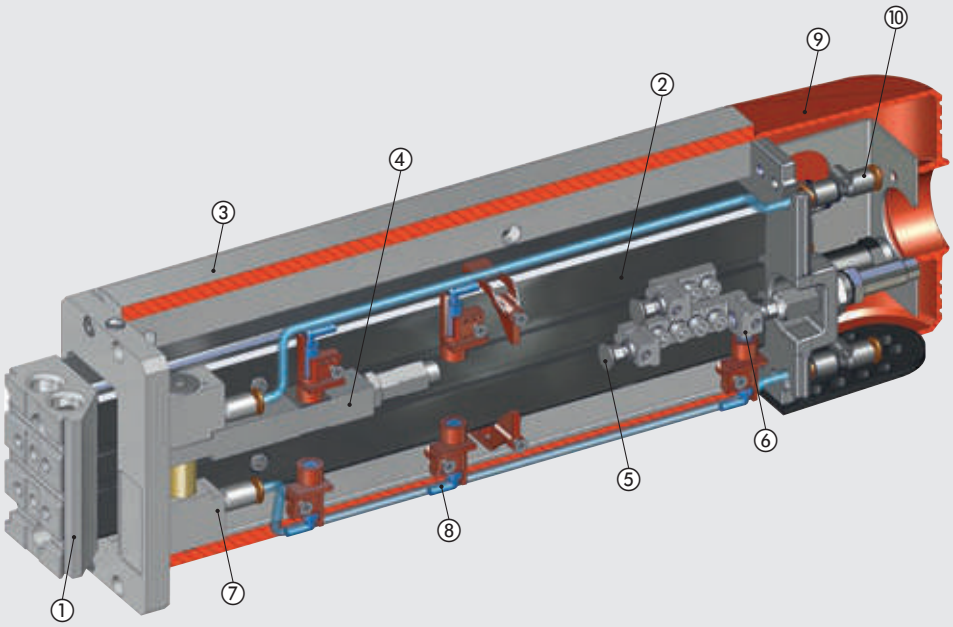

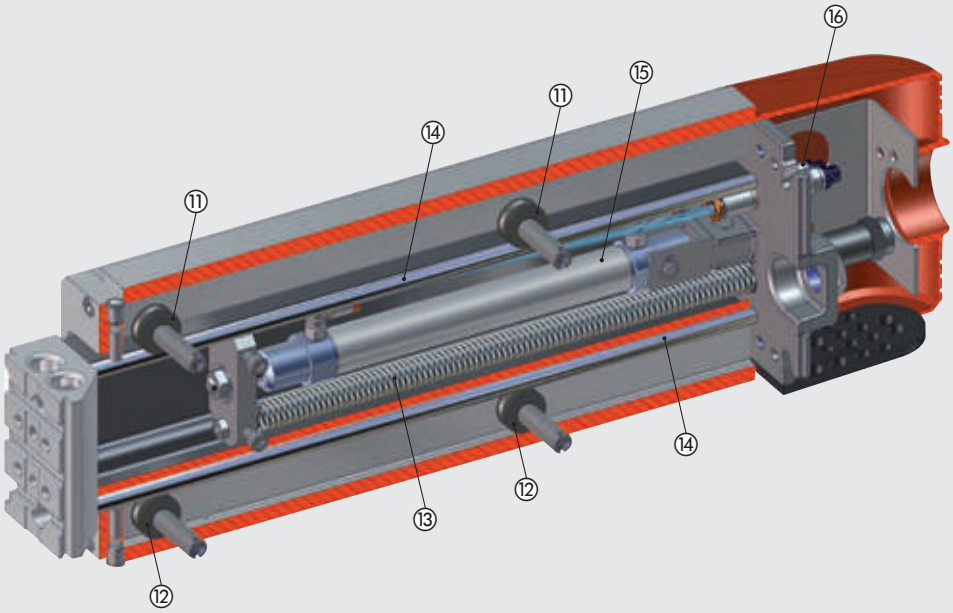

① FRONTAL INTERFACE: anodized aluminium
② SLIDING GUIDE: burnished aluminium
③ BODY: anodized aluminium
④ 3rd POSITION STOP: aluminium
⑤ ADJUSTABLE STOP: zinc-plated steel
⑥ FIXED STOP: zinc-plated steel
⑦ CONTROL CYLINDER, 3rd POSITION
⑧ INDUCTIVE SENSOR
⑨ GUARD: technopolymer
⑩ CYLINDER AIR SUPPLY FITTING, 3rd POSITION
⑪ ECCENTRIC ROLLER
⑫ CENTRIC ROLLER
⑬ RETURN SPRING: steel (optional for vertical versions only)
⑭ HARDENED GUIDE: hardened ground chromed steel
⑮ PNEUMATIC CYLINDER FOR HANDLING
⑯ FLOW REGULATOR FOR PNEUMATIC CYLINDER

METAL WORK PNEUMATIC

DIAGRAM OF FORCES AND MOMENTS

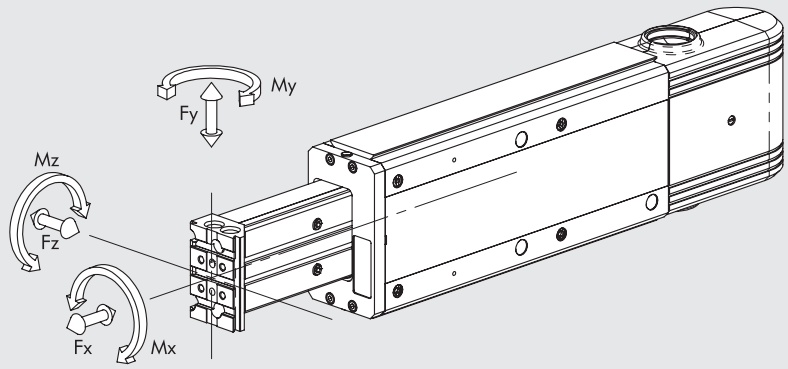

Type	Xcr [mm]
LEPK-1-90-H-A	100
LEPK-1-90-H-B	128.5
LEPK-1-160-H-A	100
LEPK-1-160-H-B	134
LEPK-1-225-H-A	165
LEPK-1-225-H-B	165
LEPK-1-60-V-A	100
LEPK-1-60-V-B	115.5
LEPK-1-90-V-A	100
LEPK-1-90-V-B	128.5
LEPK-1-160-V-A	100
LEPK-1-160-V-B	134
LEPK-2-320-H-A	132
LEPK-2-320-H-B	179.5
LEPK-2-450-H-A	179.5
LEPK-2-450-H-B	179.5

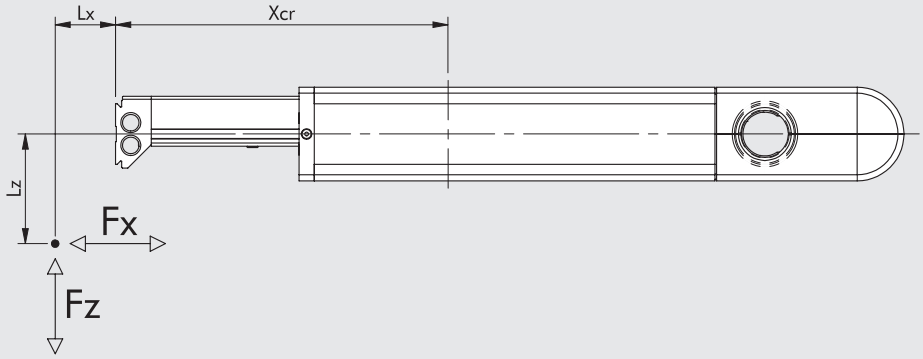

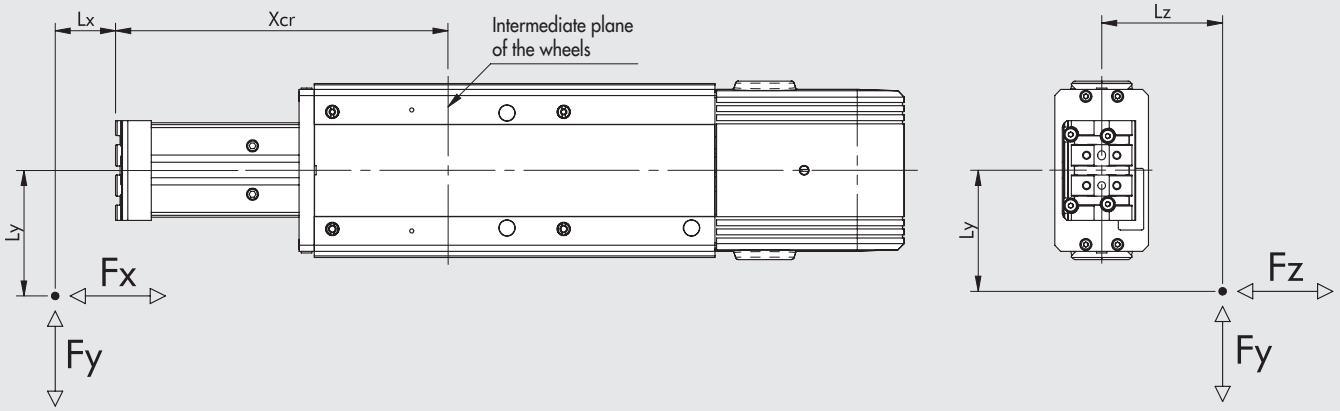

Size	Fy [N]	Fz [N]	Mx [Nm]	My [Nm]	Mz [Nm]
LEPK-1	550	270	11	20	40
LEPK-2	1000	600	50	60	100

N.B.: The values are calculated on the basis of theoretical useful life of 10.000 km.

N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

$Mx = Fz \cdot Ly + Fy \cdot Lz \qquad My = Fz \cdot (Lx + Xcr) + Fx \cdot Lz \qquad Mz = Fy \cdot (Lx + Xcr) + Fx \cdot Ly$

$$\frac{[Mx]}{Mx_{max}} + \frac{[My]}{My_{max}} + \frac{[Mz]}{Mz_{max}} + \frac{[Fy]}{Fy_{max}} + \frac{[Fz]}{Fz_{max}} \leq 1$$

HORIZONTAL LAYOUT

LEPK-1-90-H-A/B - Diagram of traverse times

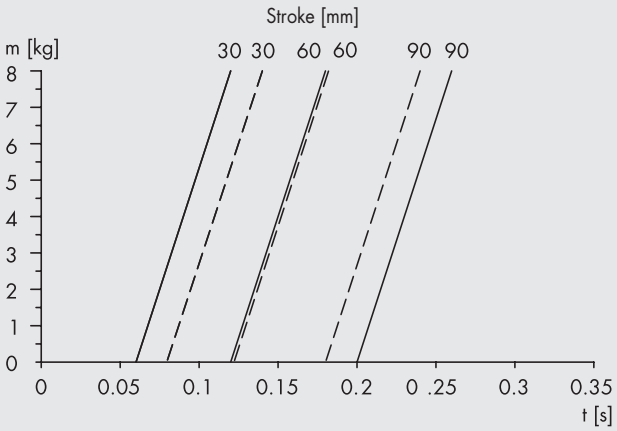

— — — Extension time
——— Retraction time at 5 bar without choke

LEPK-1-90-H-A/B - Stress-deformation diagram

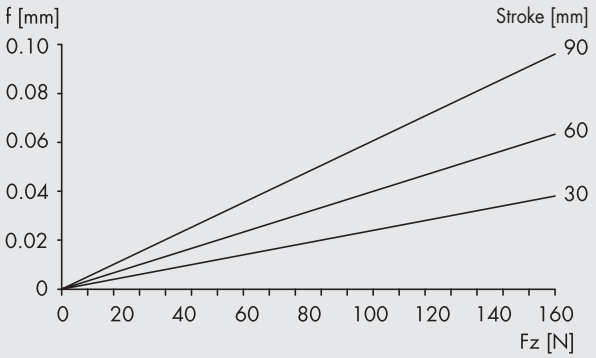

f = Deflection (measured at the locking plate)
Fz = The sum of all vertical forces

LEPK-1-160-H-A/B - Diagram of traverse times

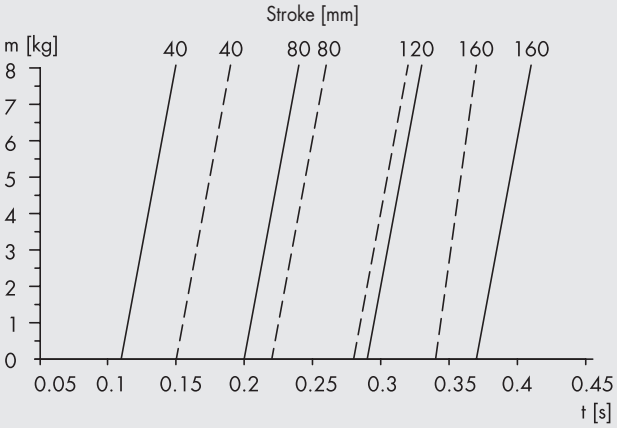

— — — Extension time
——— Retraction time at 5 bar without choke

LEPK-1-160-H-A/B - Stress-deformation diagram

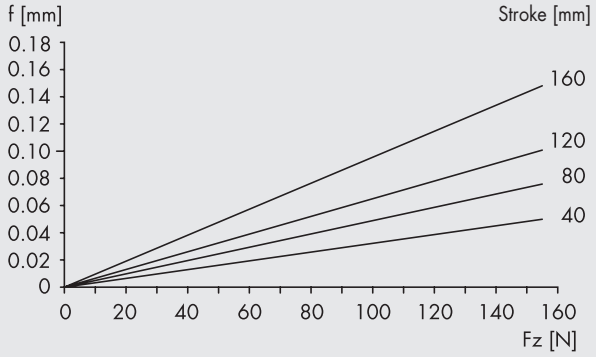

f = Deflection (measured at the locking plate)
Fz = The sum of all vertical forces

LEPK-1-225-H-A/B - Diagram of traverse times

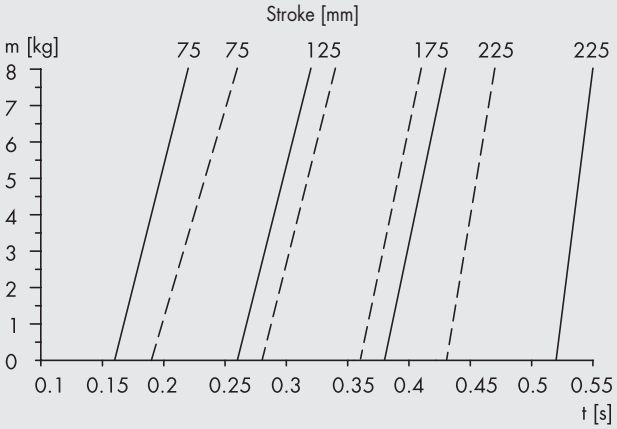

— — — Extension time
——— Retraction time at 5 bar without choke

LEPK-1-225-H-A/B - Stress-deformation diagram

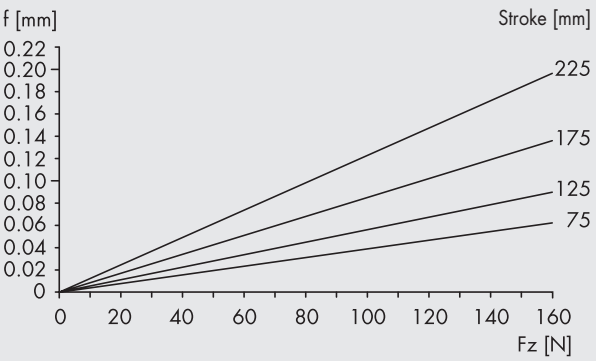

f = Deflection (measured at the locking plate)
Fz = The sum of all vertical forces

LEPK-2-320-H-A/B - Diagram of traverse times

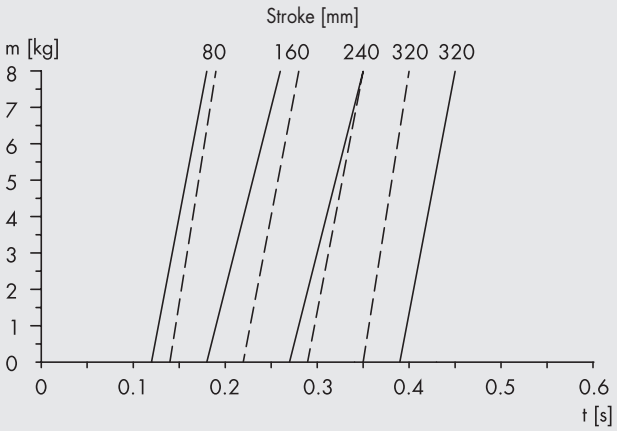

— — — Extension time
——— Retraction time at 5 bar without choke

LEPK-2-320-H-A/B - Stress-deformation diagram

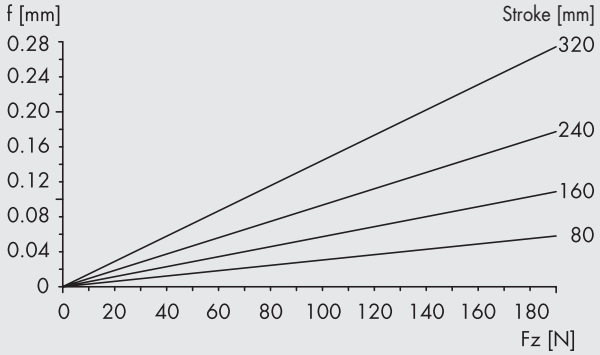

f = Deflection (measured at the locking plate)
Fz = The sum of all vertical forces

LEPK-2-450-H-A/B - Diagram of traverse times

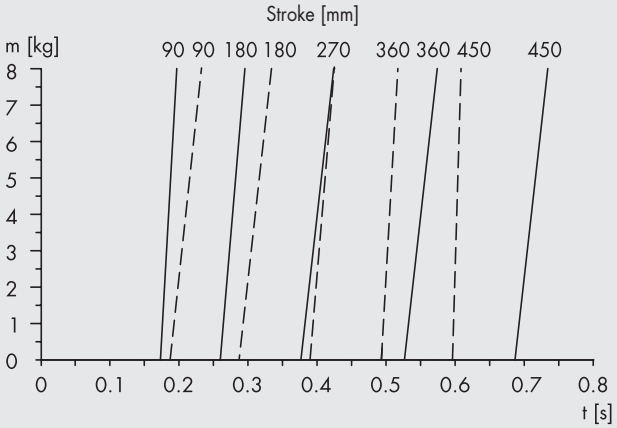

— — — Extension time
——— Retraction time at 5 bar without choke

LEPK-2-450-H-A/B - Stress-deformation diagram

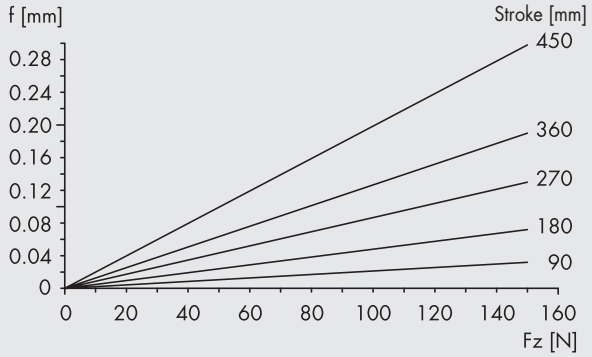

f = Deflection (measured at the locking plate)
Fz = The sum of all vertical forces

VERTICAL LAYOUT

EXAMPLE
LEPK-1-60-V-A/B - Traverse times

Extension time
m = 3 kg
Stroke = 40 mm
Result: t = 0.11 s

Retraction time
m = 3 kg
Stroke = 40 mm
Result: t = 0.13 s

m = Mass applied [kg]
t = Traverse times [s]
Stroke = Traverse stroke [mm]

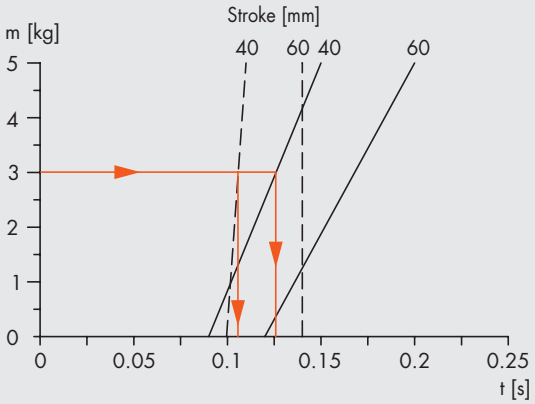

— — — Extension time
——— Retraction time at 5 bar without choke

LEPK-1-60-V-A/B - Diagram of traverse times

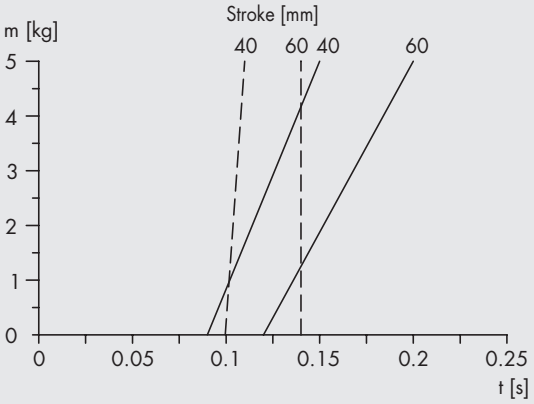

— — — Extension time
——— Retraction time at 5 bar without choke

LEPK-1-90-V-A/B - Diagram of traverse times

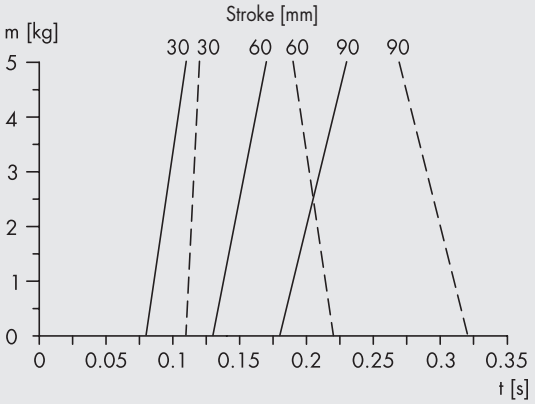

— — — Extension time
——— Retraction time at 5 bar without choke

LEPK-1-160-V-A/B - Diagram of traverse times

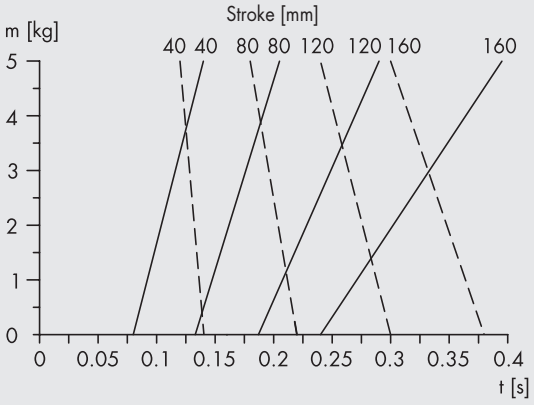

— — — Extension time
——— Retraction time at 5 bar without choke

FORCES RELATING TO LEPK VERTICAL UNITS WITH SPRING

EXAMPLE
LEPK-1-60-V-A/B – Diagram of forces – Interpretation of the diagram of LEPK vertical unit forces

Stroke = 40 mm
Operating pressure = 5 bar
Mass applied = 2.5 kg (about 25 N)
Requirement = in no-pressure conditions (0 bar), the mass applied (2.5 kg) must move to the upper end-of-stroke position ("0")

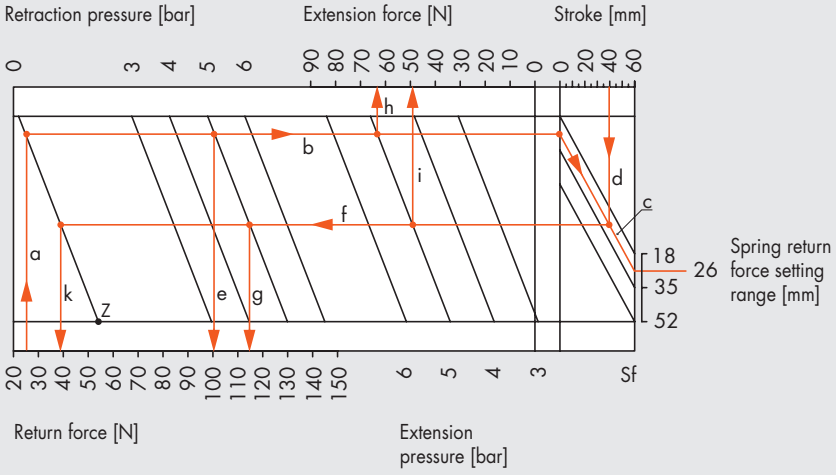

Vertical mounting position

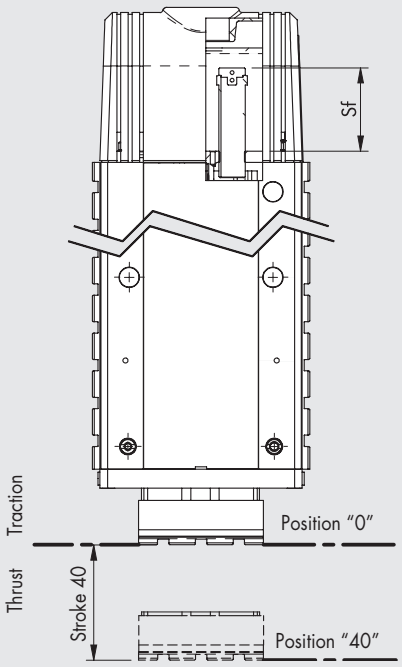

1) Maintenance of the LEPK in position "0" with no pressure (stroke = 0 mm, pressure = 0 bar):
starting from the weight force of the mass to be lifted (25 N), and following the lines **a** - **b** - **c**, you can set the Sf = 26 mm and the following force values:

- **line e**: tractive force in position "0" and with a pressure of 5 bar in the cylinder on the front side (stroke = 0 mm, pressure = 5 bar): in the case in point, it is around 100 N.
  The mass applied must now be subtracted:
  F = 100 N - 25 N = 75 N

Traction position "0" p = 5 bar



- **line h**: thrust force in position "0" and with a pressure of 5 bar in the cylinder on the back side (stroke = 0 mm, pressure = 5 bar): in the case in point, it is about 65 N.
  The mass applied must now be added up, which gives:
  F = 65 N + 25 N = 90 N

Thrust position "0" p = 5 bar



N.B.: As can be seen in the graph, for the LEPK-1-60-V, the maximum weight sustainable by the spring alone without pressure is about 55 N (with Sf = 52 mm). See point "**Z**" in the graph.

2) Verification of the forces with stroke setting to 40 mm:
starting from the 40 mm stroke and following the line **d** - **f** the following values of force are obtained:

- **line g**: traction force in position "40" and with a pressure of 5 bar in the cylinder on the front side (stroke = 0 mm, pressure = 5 bar): in the case in point, it is around 115 N.
  The mass applied must now be subtracted, which gives:
  F = 115 N - 25 N = 90 N

Traction position "40" p = 5 bar



- **line i**: thrust force in position "40" and with a pressure of 5 bar in the cylinder on the back side (stroke = 40 mm, pressure = 5 bar): in the case in point, it is about 50 N.
  The mass applied must now be added up, which gives:
  F = 50 N + 25 N = 75 N

Thrust position "40" p = 5 bar



- **line k**: tractive force of the spring in position "40" and without pressure (stroke = 40 mm, pressure = 0 bar): in the case in point it is about 39 N.
  The mass applied must now be subtracted, which gives:
  F = 39 N - 25 N = 14 N

Traction position "40" p = 0 bar

LEPK-1-60-V-A/B - Diagram of forces

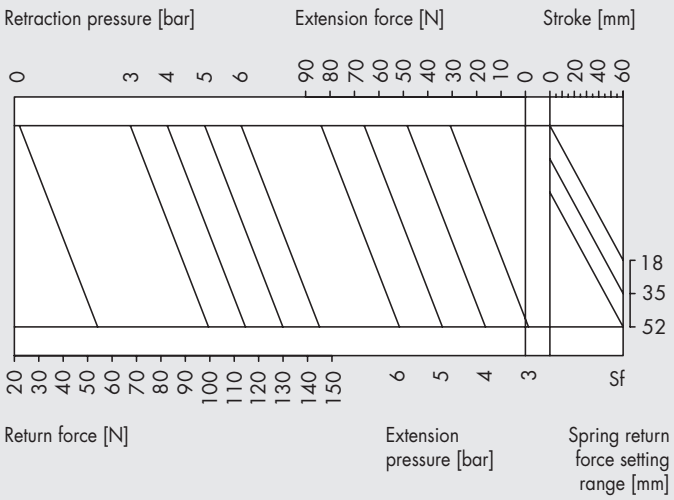

LEPK-1-90-V-A/B - Diagram of forces

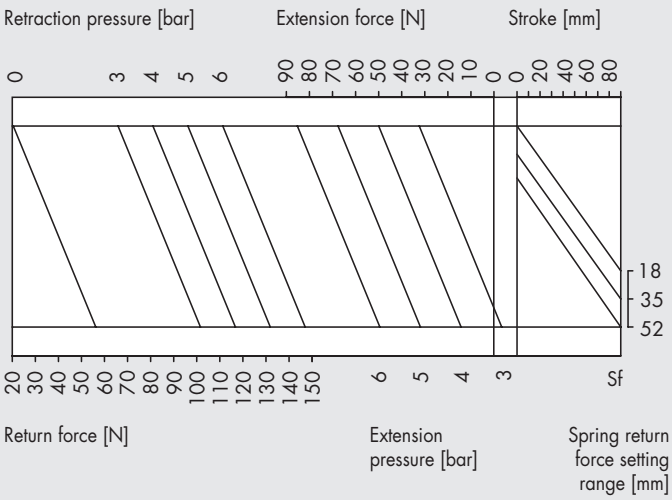

LEPK-1-160-V-A/B - Diagram of forces

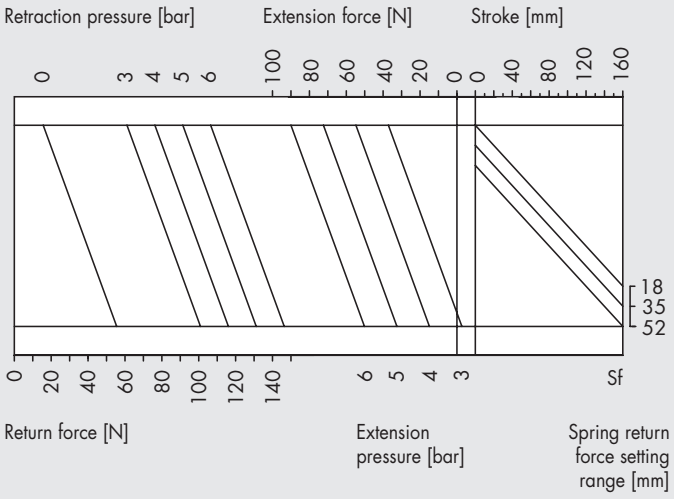

Minimum vertical retraction actuation pressure without spring

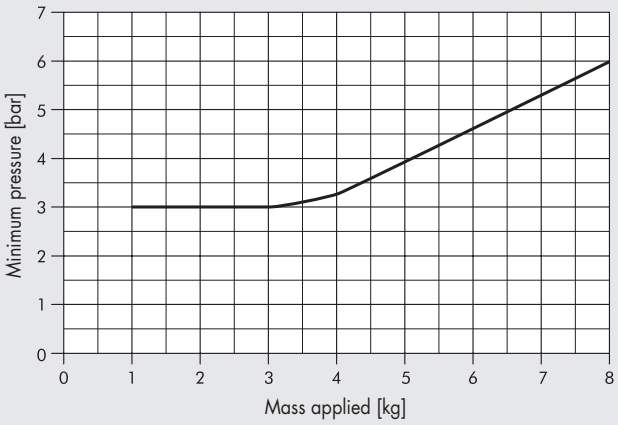

MOUNTING OPTIONS

At the encoding stage, you need to determine whether to make the V-Lock grooves and on what side. Number "0" (Zero) identifies the no machining condition, while the letters "U" (Up), "D" (Down) and "B" (Both) identify the side where V-Lock connections must be provided.
The letters identify the position of machining in accordance with the diagram shown in the drawing below.

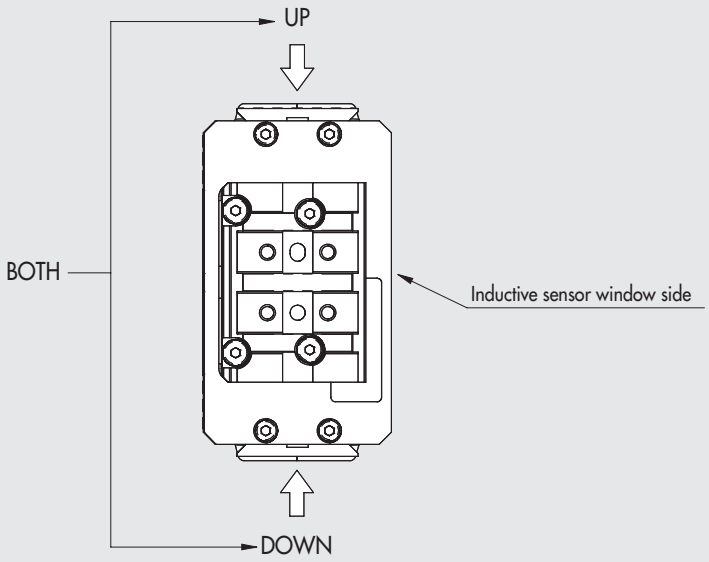

After determining the side of machining, you need to establish the point at which to perform the first V-Lock machining (the reference is the front plane).
The position of the first machining shall be in accordance with the following rules:
- minimum distance from the front reference plane: 25 mm;
- subsequent distances: starting from 25 mm, the distance is increased by 20 mm steps at a time (i.e. 25, 45, 65, 85, etc.).
The number of the V-Lock grooves to be machined is then indicated (the number of Ø5 H7 pinholes coincides with the number of grooves less 1).

IMPORTANT!
If you decide for version "B", i.e. the one with the grooves machined on both sides of the body, the distance values and the number of grooves shall apply to both sides.

EXAMPLE
If you order an LEPK unit encoded **K1012H00090B06505K** the part ordered will be as follows:

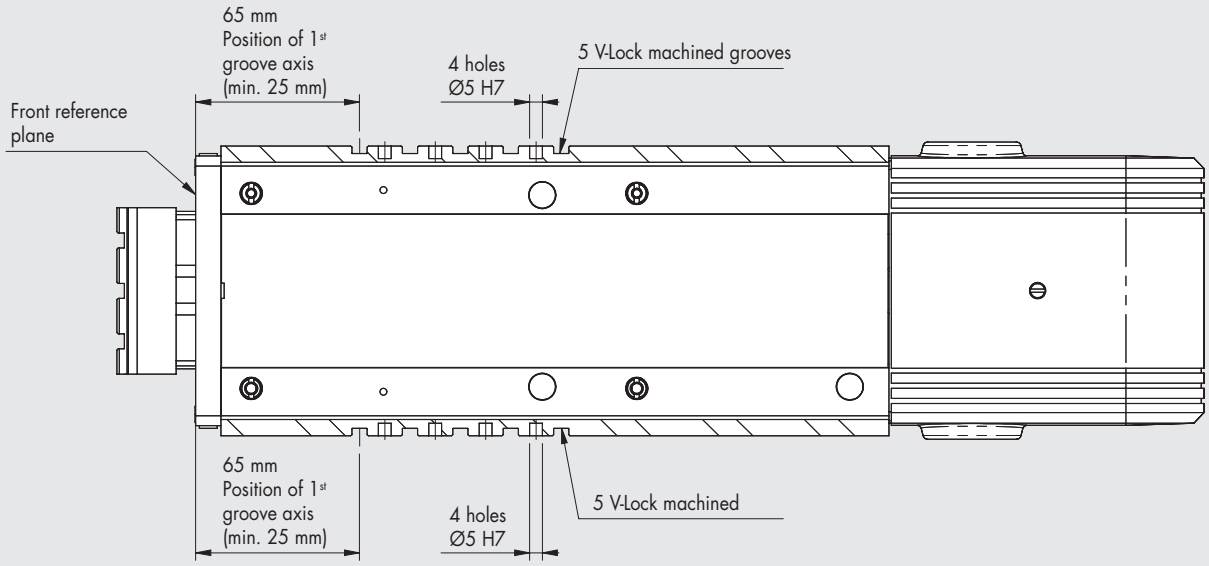

EXAMPLES OF APPLICATION

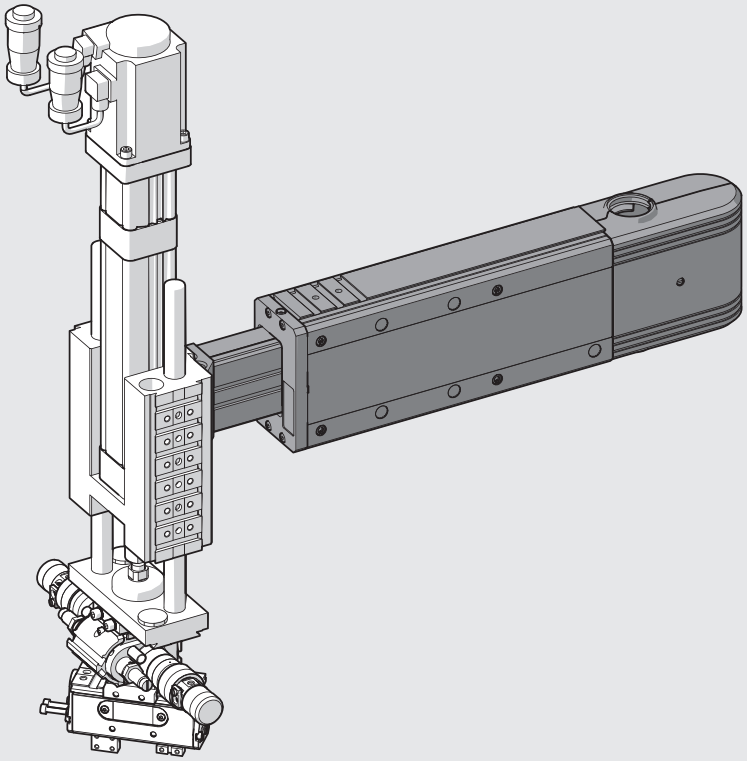

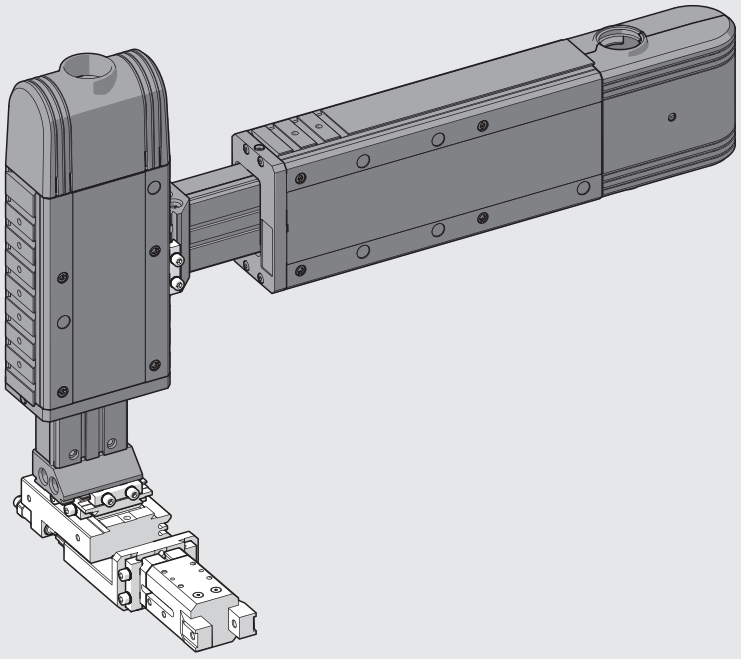

METAL WORK PNEUMATIC

DIMENSIONS OF THE LEPK-1-90-H-A LINEAR UNIT (horizontal, 2 positions)

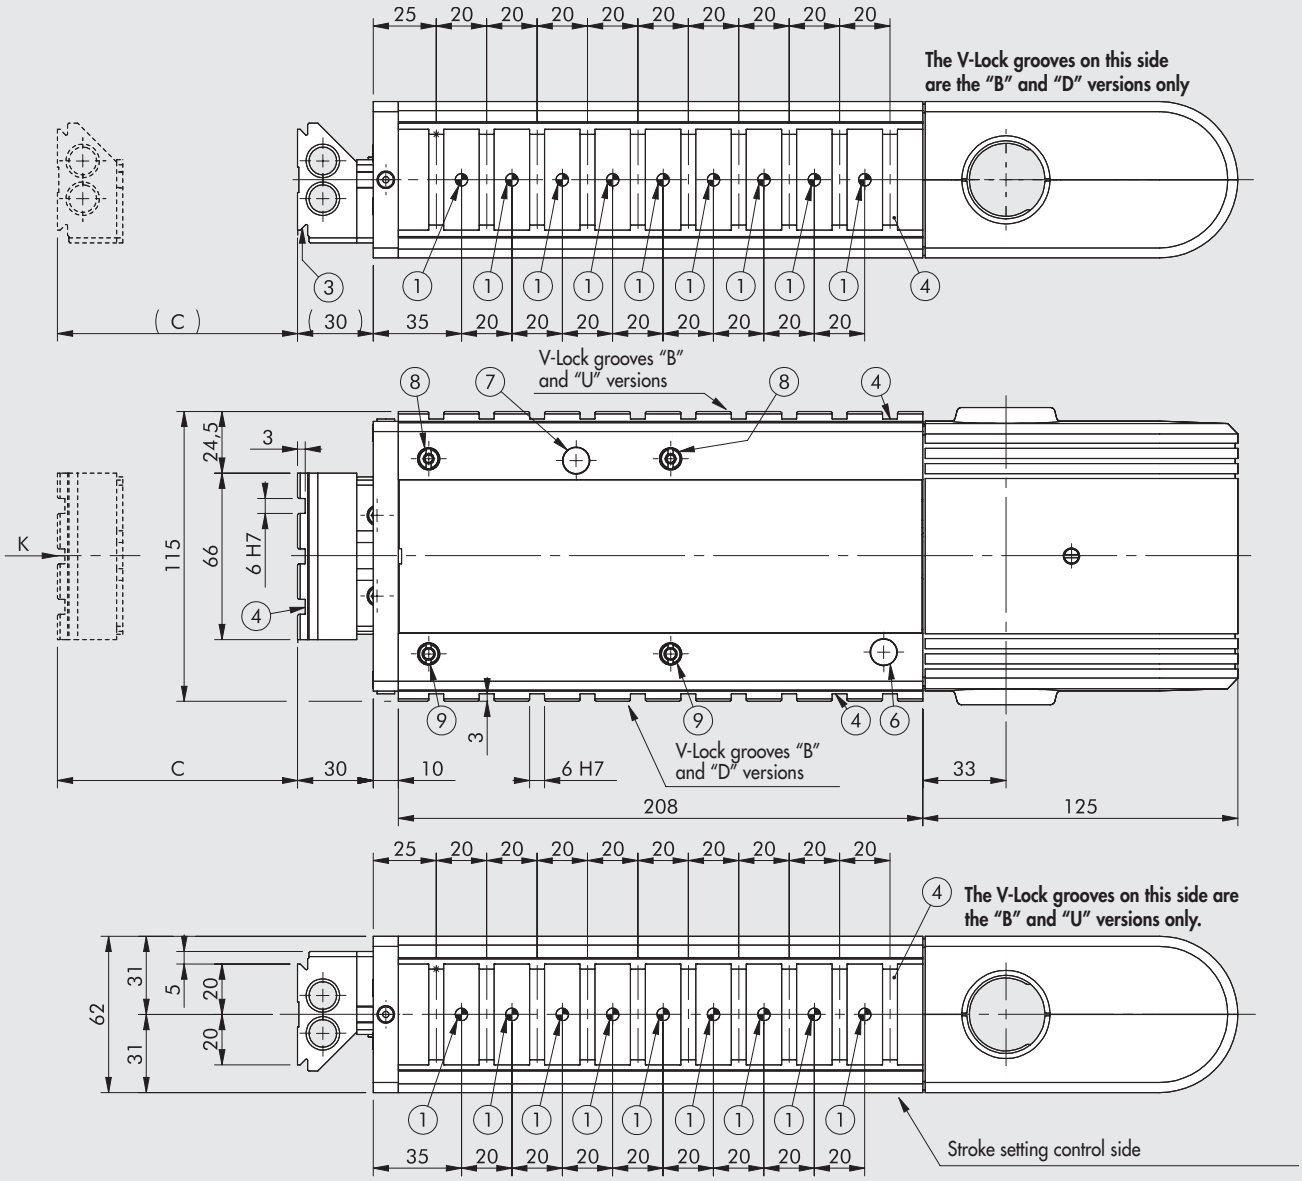

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod

IMPORTANT!
The drawing shows the code K101AH00090B02510K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101AH00090000000K K101AH00090B _ _ _ _ _ K K101AH00090D _ _ _ _ _ K K101AH00090U _ _ _ _ _ K	LEPK-1-90-H-A	15 to 90
K101AH20090000000K K101AH20090B _ _ _ _ _ K K101AH20090D _ _ _ _ _ K K101AH20090U _ _ _ _ _ K	LEPK-1-90-H-A without terminal board	

VIEWED FROM "K"

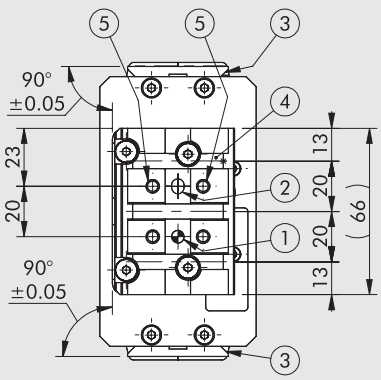

IMPORTANT. The LEPK-1-90-H-A can hold maximum 10 V-Lock grooves and hence a maximum of 9 Ø5 H7 pinholes.

DIMENSIONS OF THE LEPK-1-90-H-B LINEAR UNIT (horizontal, 3 positions)

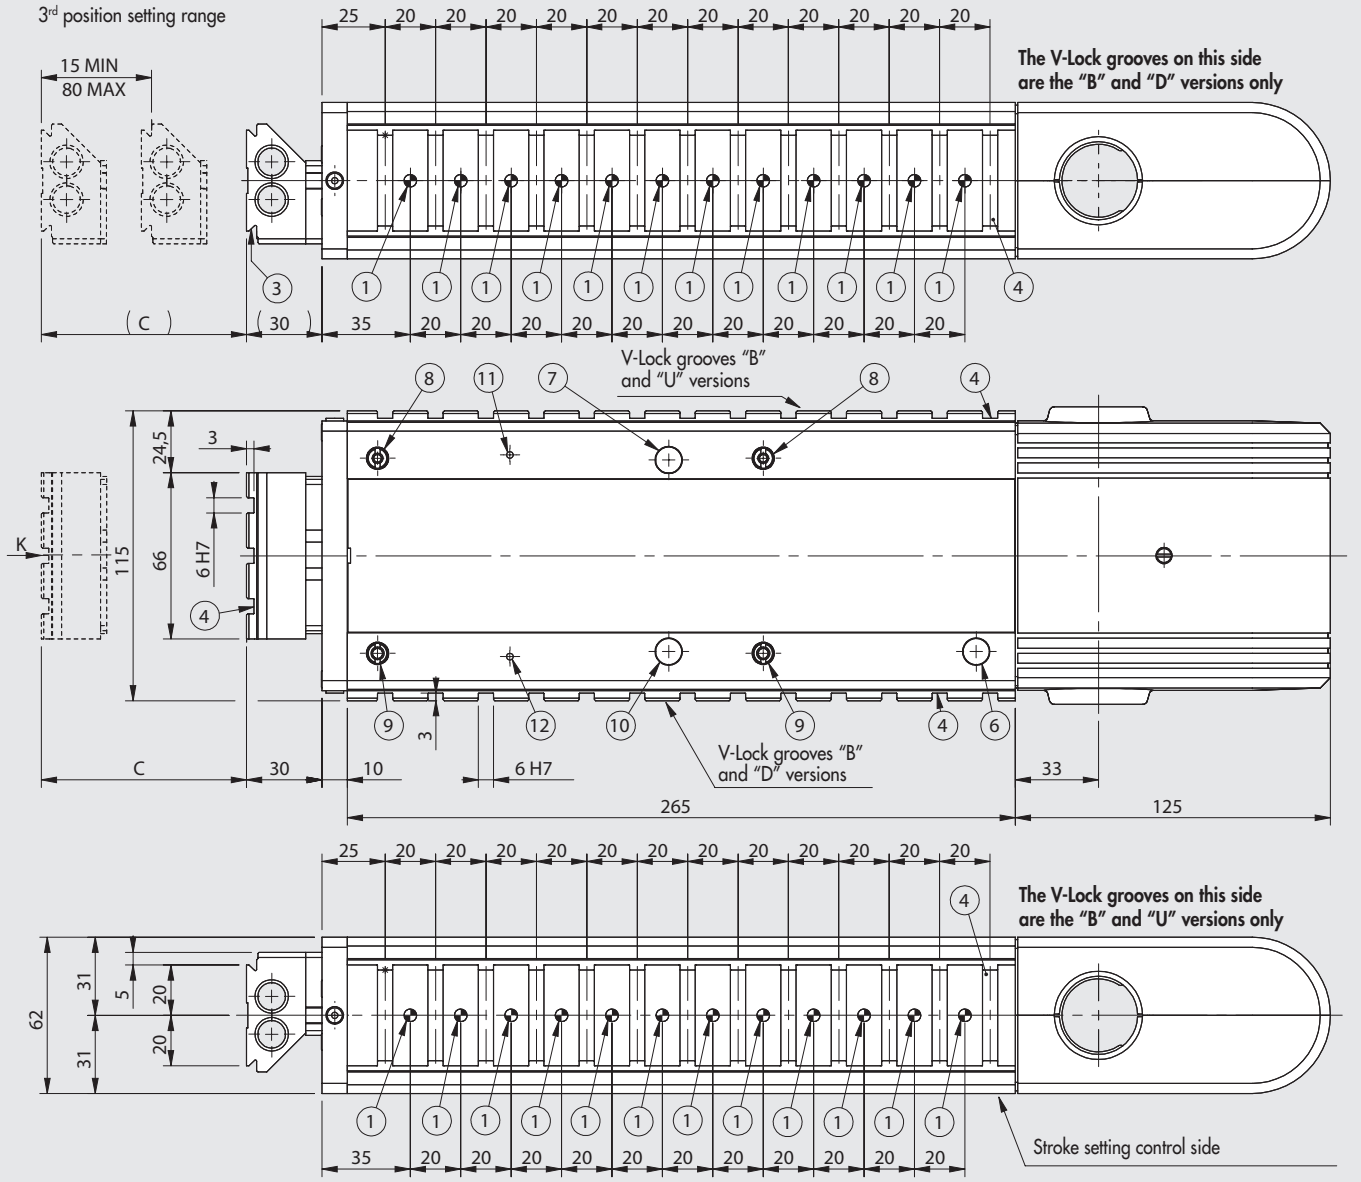

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod
⑩ Sensor LED inspection hole for 3rd position
⑪ Sensor LED inspection hole for 3rd position DISABLED
⑫ Sensor LED inspection hole for 3rd position ENABLED

IMPORTANT!
The drawing shows the code K101BH00090B02513K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101BH00090000000K	LEPK-1-90-H-B	15 to 90
K101BH00090B _ _ _ _ _ K		
K101BH00090D _ _ _ _ _ K		
K101BH00090U _ _ _ _ _ K		
K101BH20090000000K	LEPK-1-90-H-B without terminal board	
K101BH20090B _ _ _ _ _ K		
K101BH20090D _ _ _ _ _ K		
K101BH20090U _ _ _ _ _ K		

VIEWED FROM "K"

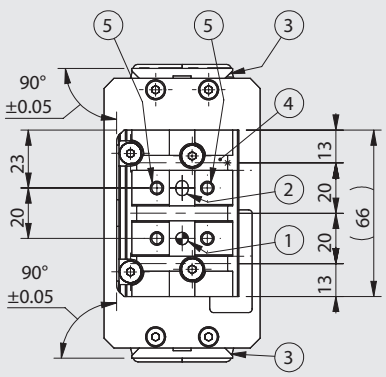

IMPORTANT. The LEPK-1-90-H-B can hold maximum 13 V-Lock grooves and hence a maximum of 12 Ø5 H7 pinholes.

METAL WORK PNEUMATIC

DIMENSIONS OF THE LEPK-1-160-H-A LINEAR UNIT (horizontal, 2 positions)

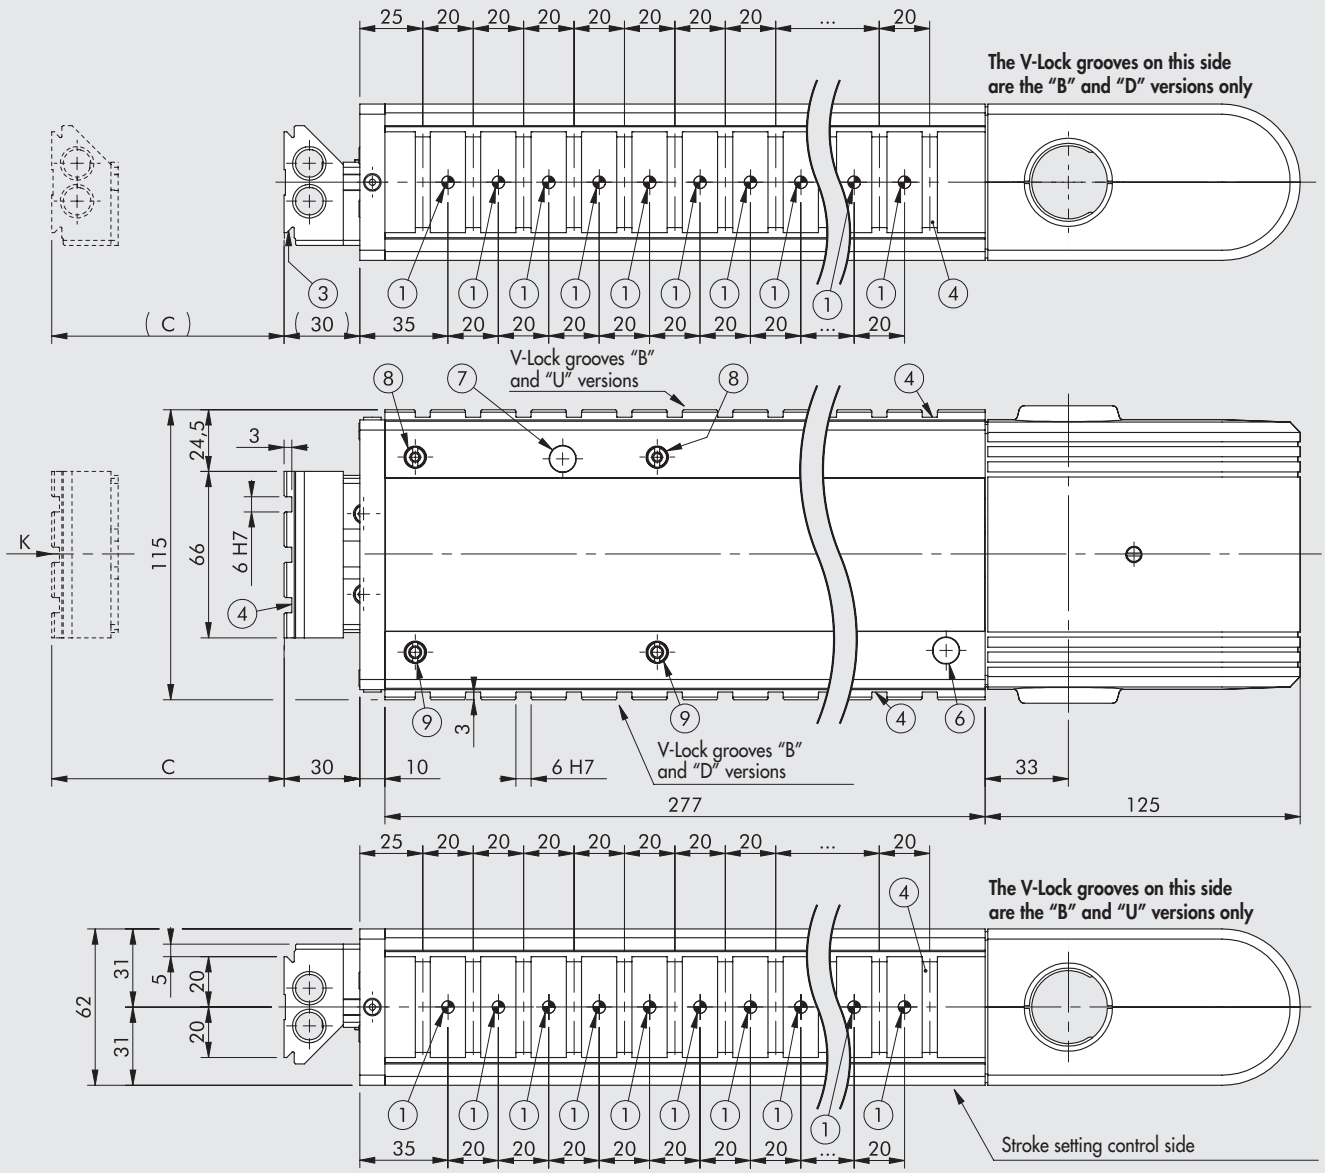

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod

IMPORTANT!
The drawing shows the code K101AH00160B02513K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101AH00160000000K K101AH00160B _ _ _ _ _ K K101AH00160D _ _ _ _ _ K K101AH00160U _ _ _ _ _ K	LEPK-1-160-H-A	15 to 160
K101AH20160000000K K101AH20160B _ _ _ _ _ K K101AH20160D _ _ _ _ _ K K101AH20160U _ _ _ _ _ K	LEPK-1-160-H-A without terminal board	

VIEWED FROM "K"

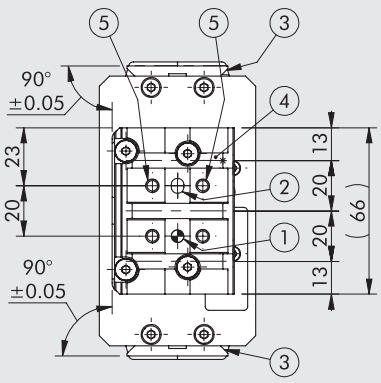

IMPORTANT. The LEPK-1-160-H-A can hold maximum 13 V-Lock grooves and hence a maximum of 12 Ø5 H7 pinholes.

DIMENSIONS OF THE LEPK-1-160-H-B LINEAR UNIT (horizontal, 3 positions)

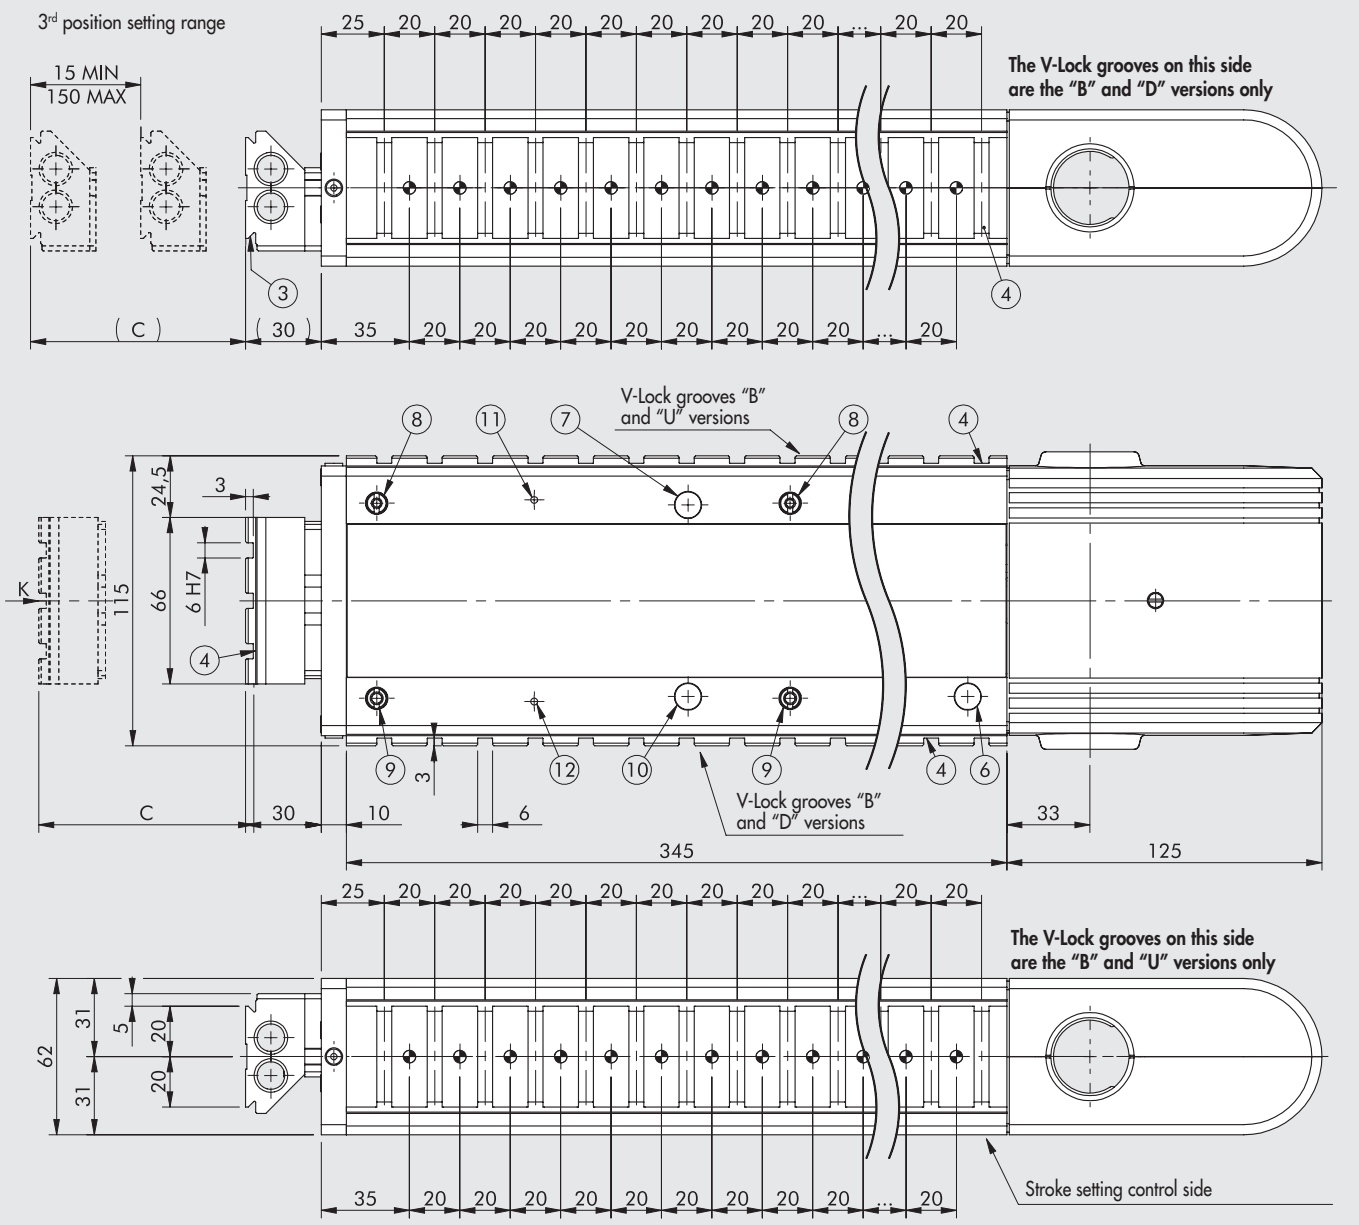

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod
⑩ Sensor LED inspection hole for 3rd position
⑪ Sensor LED inspection hole for 3rd position DISABLED
⑫ Sensor LED inspection hole for 3rd position ENABLED

IMPORTANT!
The drawing shows the code K101BH00160B02517K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101BH00160000000K **K101BH00160B _ _ _ _ _ K** **K101BH00160D _ _ _ _ _ K** **K101BH00160U _ _ _ _ _ K**	LEPK-1-160-H-B	15 to 160
K101BH20160000000K **K101BH20160B _ _ _ _ _ K** **K101BH20160D _ _ _ _ _ K** **K101BH20160U _ _ _ _ _ K**	LEPK-1-160-H-B without terminal board	

VIEWED FROM "K"

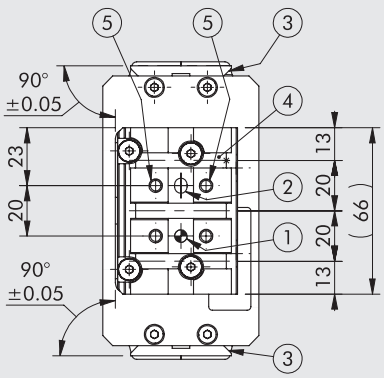

IMPORTANT. The LEPK-1-160-H-B can hold maximum 17 grooves and hence a maximum of 16 Ø5 H7 pinholes.

METAL WORK PNEUMATIC

DIMENSIONS OF THE LEPK-1-225-H-A LINEAR UNIT (horizontal, 2 positions)

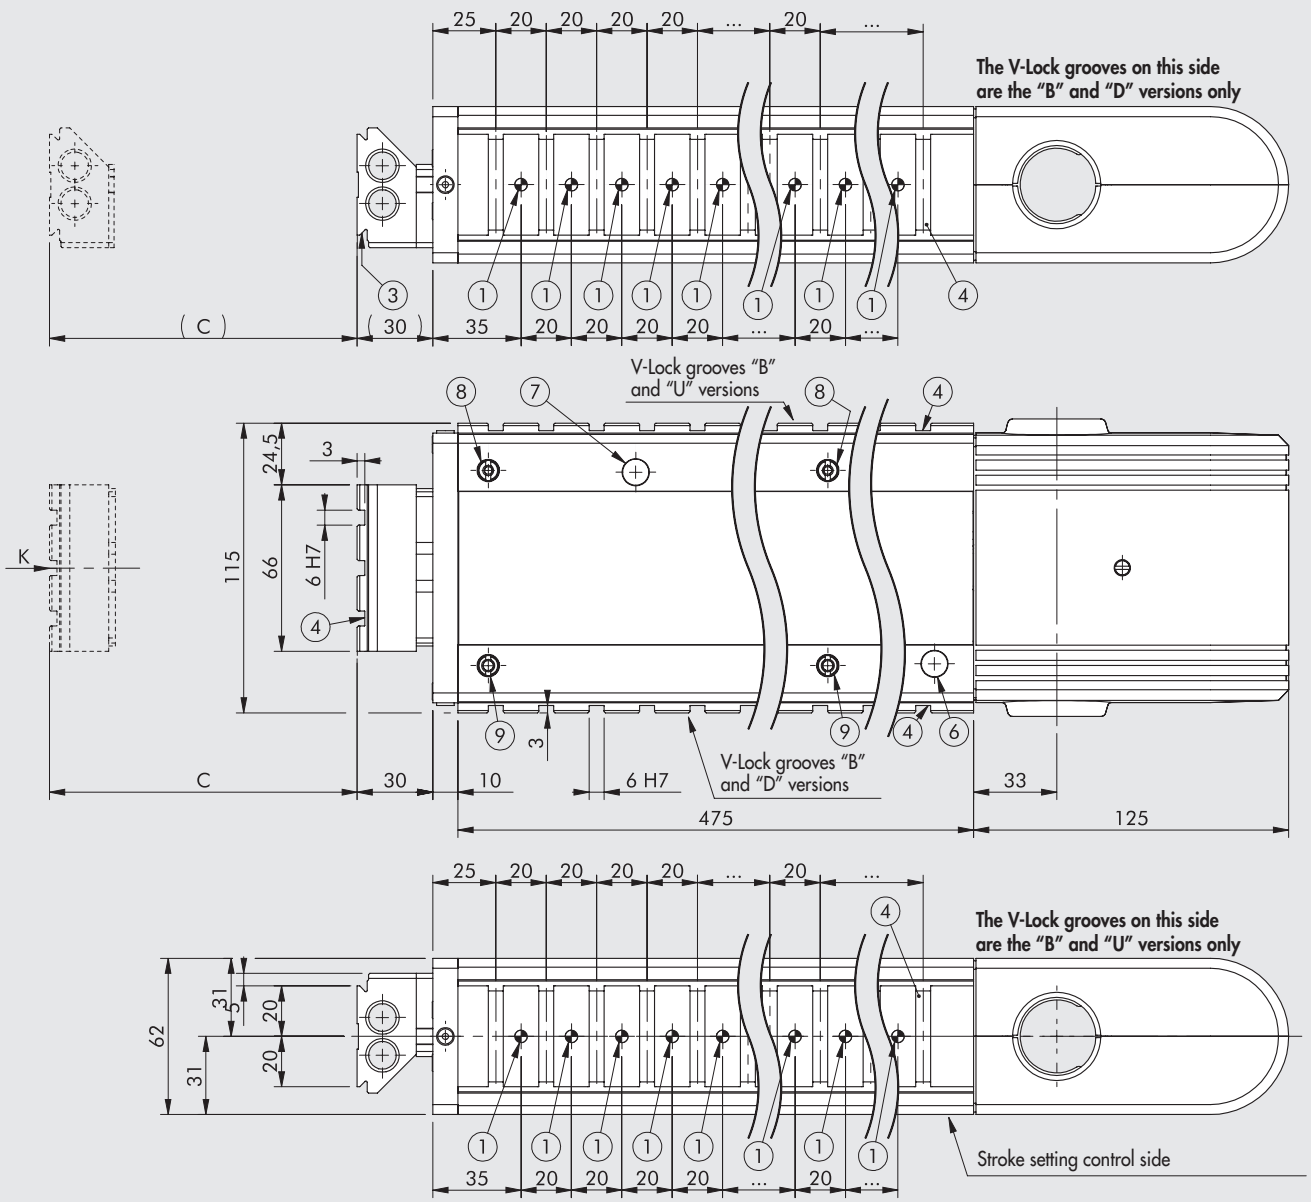

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod

IMPORTANT!
The drawing shows the code K101AH00225B02523K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101AH00225000000K K101AH00225B _ _ _ _ _ K K101AH00225D _ _ _ _ _ K K101AH00225U _ _ _ _ _ K	LEPK-1-225-H-A	15 to 225
K101AH20225000000K K101AH20225B _ _ _ _ _ K K101AH20225D _ _ _ _ _ K K101AH20225U _ _ _ _ _ K	LEPK-1-225-H-A without terminal board	

VIEWED FROM "K"

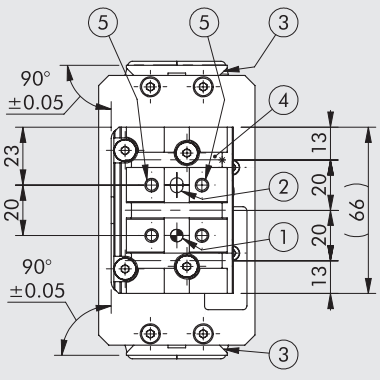

IMPORTANT. The LEPK-1-225-H-A can hold maximum 23 grooves and hence a maximum of 22 Ø5 H7 pinholes.

DIMENSIONS OF THE LEPK-1-225-H-B LINEAR UNIT (horizontal, 3 positions)

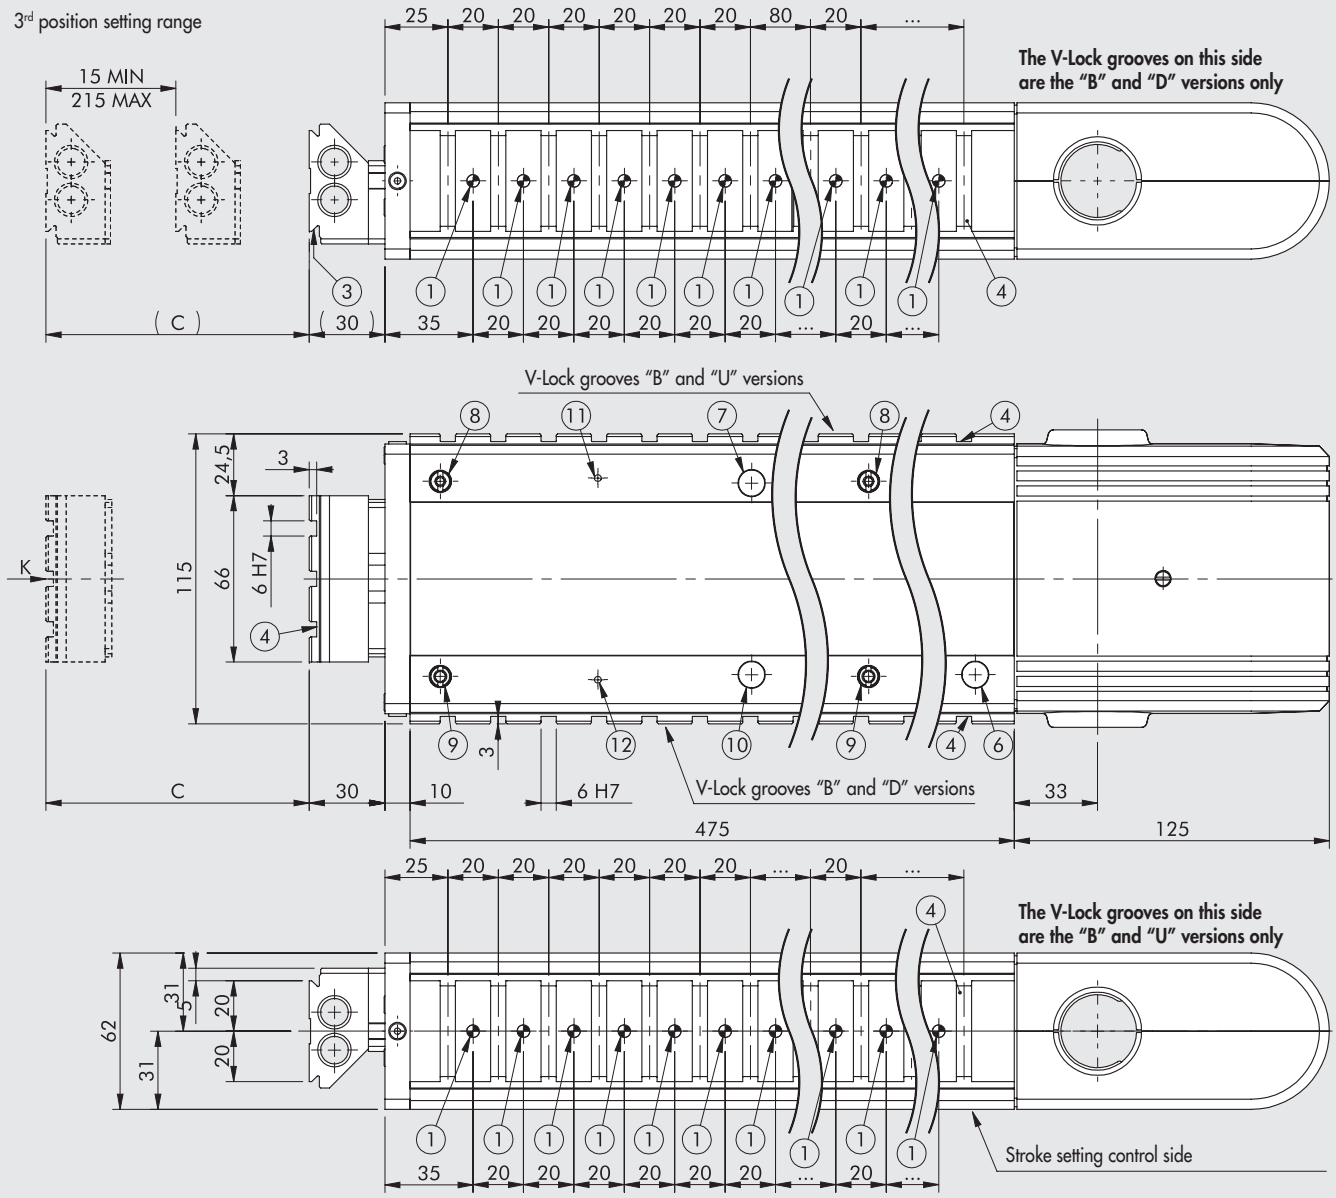

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod
⑩ Sensor LED inspection hole for 3rd position
⑪ Sensor LED inspection hole for 3rd position DISABLED
⑫ Sensor LED inspection hole for 3rd position ENABLED

IMPORTANT!
The drawing shows the code K101BH00225B02523K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101BH00225000000K **K101BH00225B _ _ _ _ _ K** **K101BH00225D _ _ _ _ _ K** **K101BH00225U _ _ _ _ _ K**	LEPK-1-225-H-B	15 to 225
K101BH20225000000K **K101BH20225B _ _ _ _ _ K** **K101BH20225D _ _ _ _ _ K** **K101BH20225U _ _ _ _ _ K**	LEPK-1-225-H-B without terminal board	

VIEWED FROM "K"

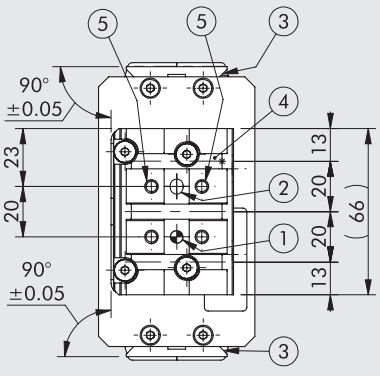

IMPORTANT. The LEPK-1-225-H-B can hold maximum 23 V-Lock grooves and hence a maximum of 22 Ø5 H7 pinholes.

METAL WORK PNEUMATIC

DIMENSIONS OF THE LEPK-2-320-H-A LINEAR UNIT (horizontal, 2 positions)

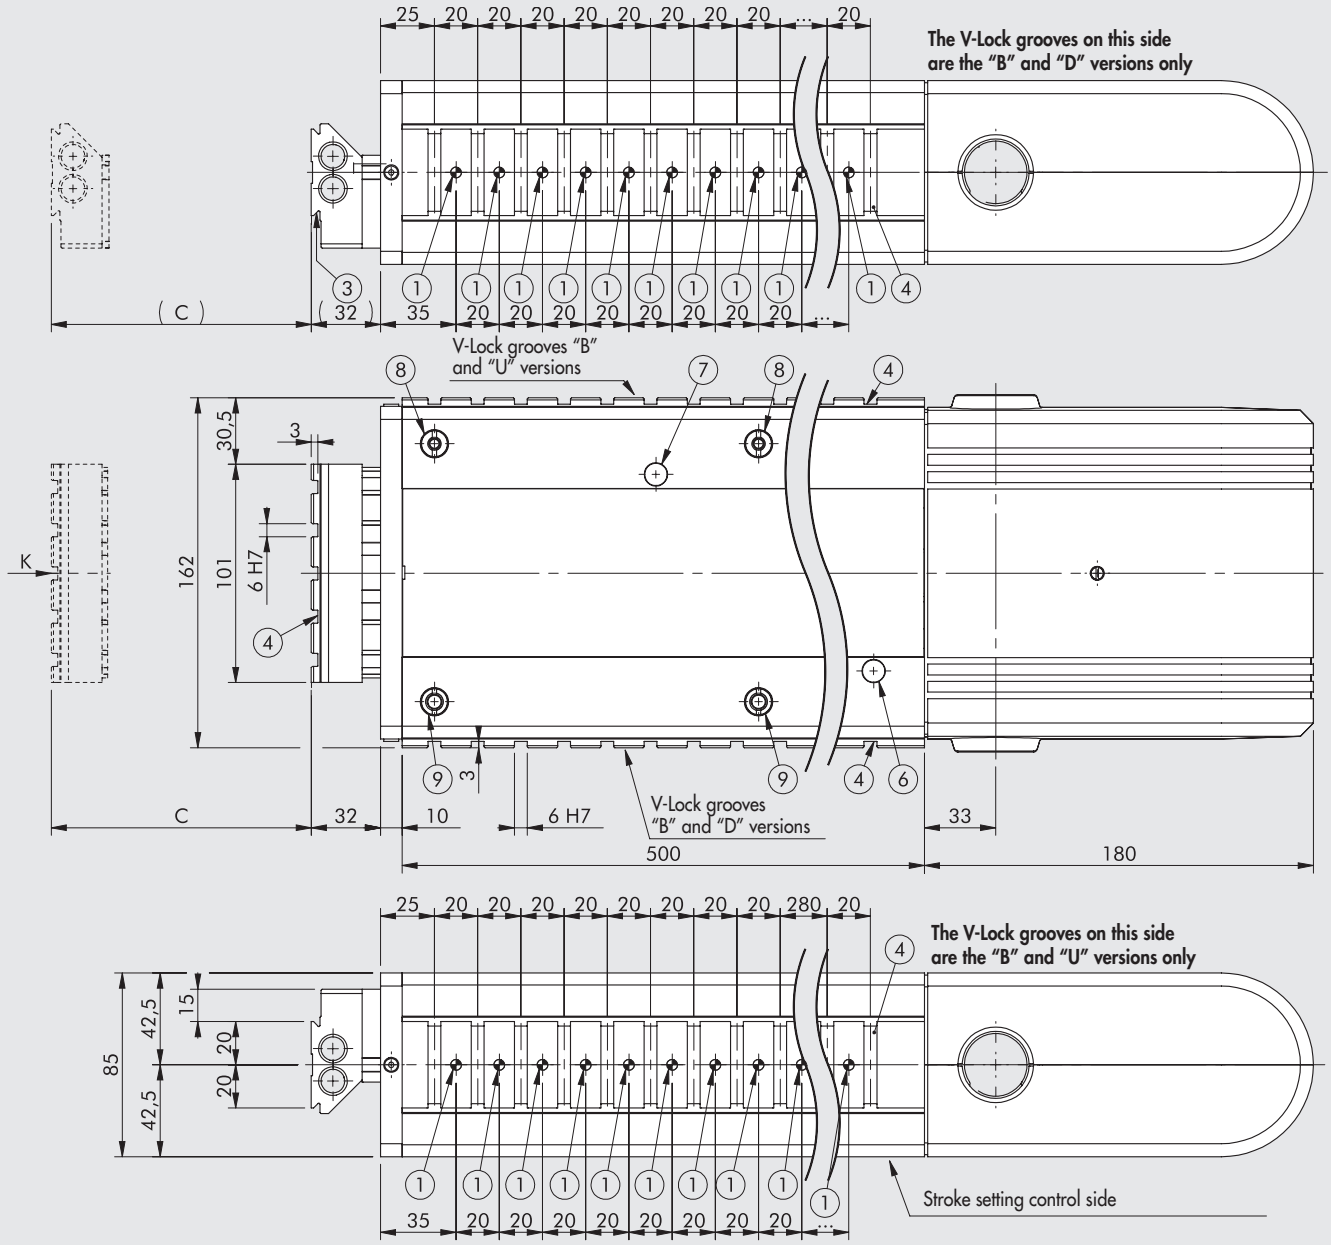

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod

IMPORTANT!
The drawing shows the code K102AH00320B02524K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K102AH00320000000K K102AH00320B _ _ _ _ _ K K102AH00320D _ _ _ _ _ K K102AH00320U _ _ _ _ _ K	LEPK-2-320-H-A	50 to 320
K102AH20320000000K K102AH20320B _ _ _ _ _ K K102AH20320D _ _ _ _ _ K K102AH20320U _ _ _ _ _ K	LEPK-2-320-H-A without terminal board	

VIEWED FROM "K"

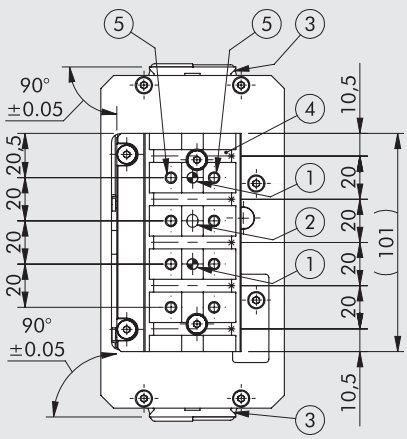

IMPORTANT. The LEPK-2-320-H-A can hold maximum 24 V-Lock grooves and hence a maximum of 23 Ø5 H7 pinholes.

DIMENSIONS OF THE LEPK-2-320-H-B LINEAR UNIT (horizontal, 3 positions)

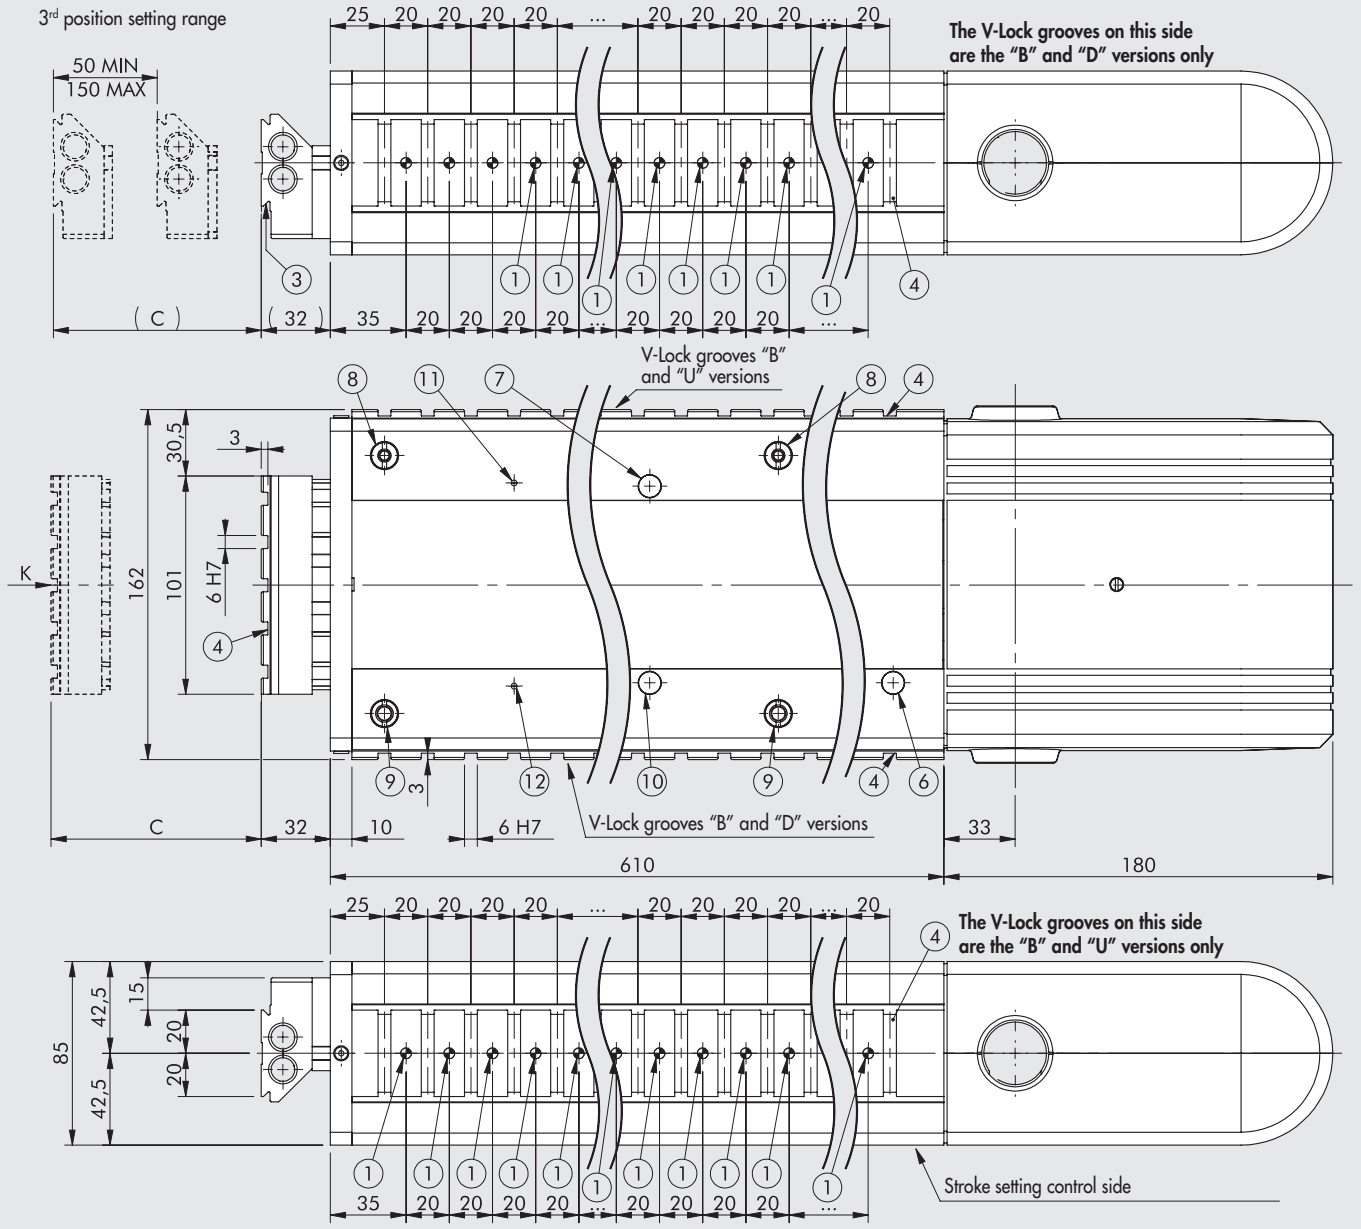

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod
⑩ Sensor LED inspection hole for 3rd position
⑪ Sensor LED inspection hole for 3rd position DISABLED
⑫ Sensor LED inspection hole for 3rd position ENABLED

IMPORTANT!
The drawing shows the code K102BH00320B02529K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K102BH00320000000K	LEPK-2-320-H-B	50 to 320
K102BH00320B _ _ _ _ _ K		
K102BH00320D _ _ _ _ _ K		
K102BH00320U _ _ _ _ _ K		
K102BH20320000000K	LEPK-2-320-H-B without terminal board	
K102BH20320B _ _ _ _ _ K		
K102BH20320D _ _ _ _ _ K		
K102BH20320U _ _ _ _ _ K		

VIEWED FROM "K"

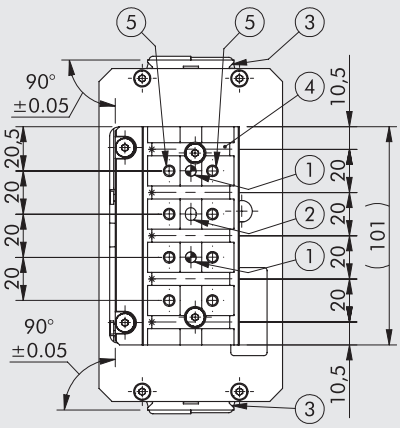

IMPORTANT. The LEPK-2-320-H-B can hold maximum 29 V-Lock grooves and hence a maximum of 28 Ø5 H7 pinholes.

METAL WORK PNEUMATIC

DIMENSIONS OF THE LEPK-2-450-H-A LINEAR UNIT (horizontal, 2 positions)

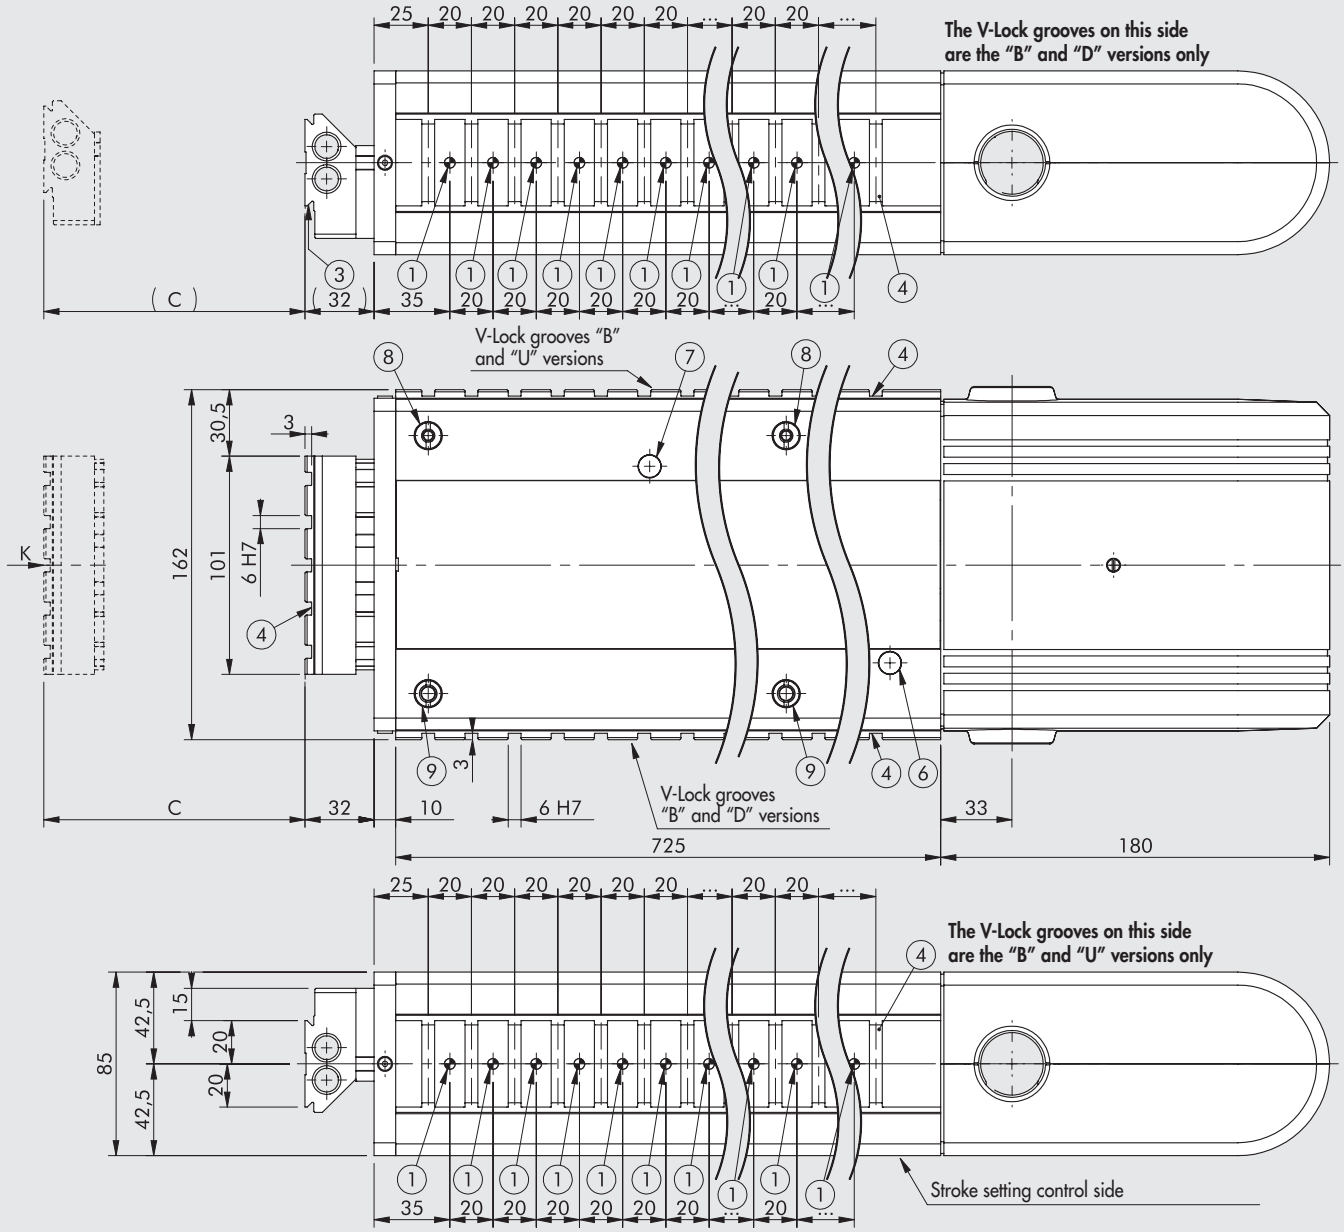

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod

IMPORTANT!
The drawing shows the code K102AH00450B02535K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K102AH00450000000K	LEPK-2-450-H-A	50 to 450
K102AH00450B _ _ _ _ _ K		
K102AH00450D _ _ _ _ _ K		
K102AH00450U _ _ _ _ _ K		
K102AH20450000000K	LEPK-2-450-H-A without terminal board	
K102AH20450B _ _ _ _ _ K		
K102AH20450D _ _ _ _ _ K		
K102AH20450U _ _ _ _ _ K		

VIEWED FROM "K"

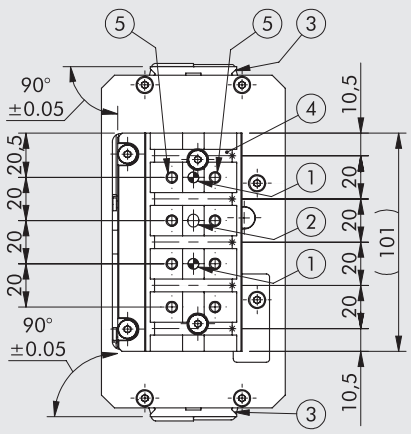

IMPORTANT. The LEPK-2-450-H-A can hold maximum 35 V-Lock grooves and hence a maximum of 34 Ø5 H7 pinholes.

DIMENSIONS OF THE LEPK-2-450-H-B LINEAR UNIT (horizontal, 3 positions)

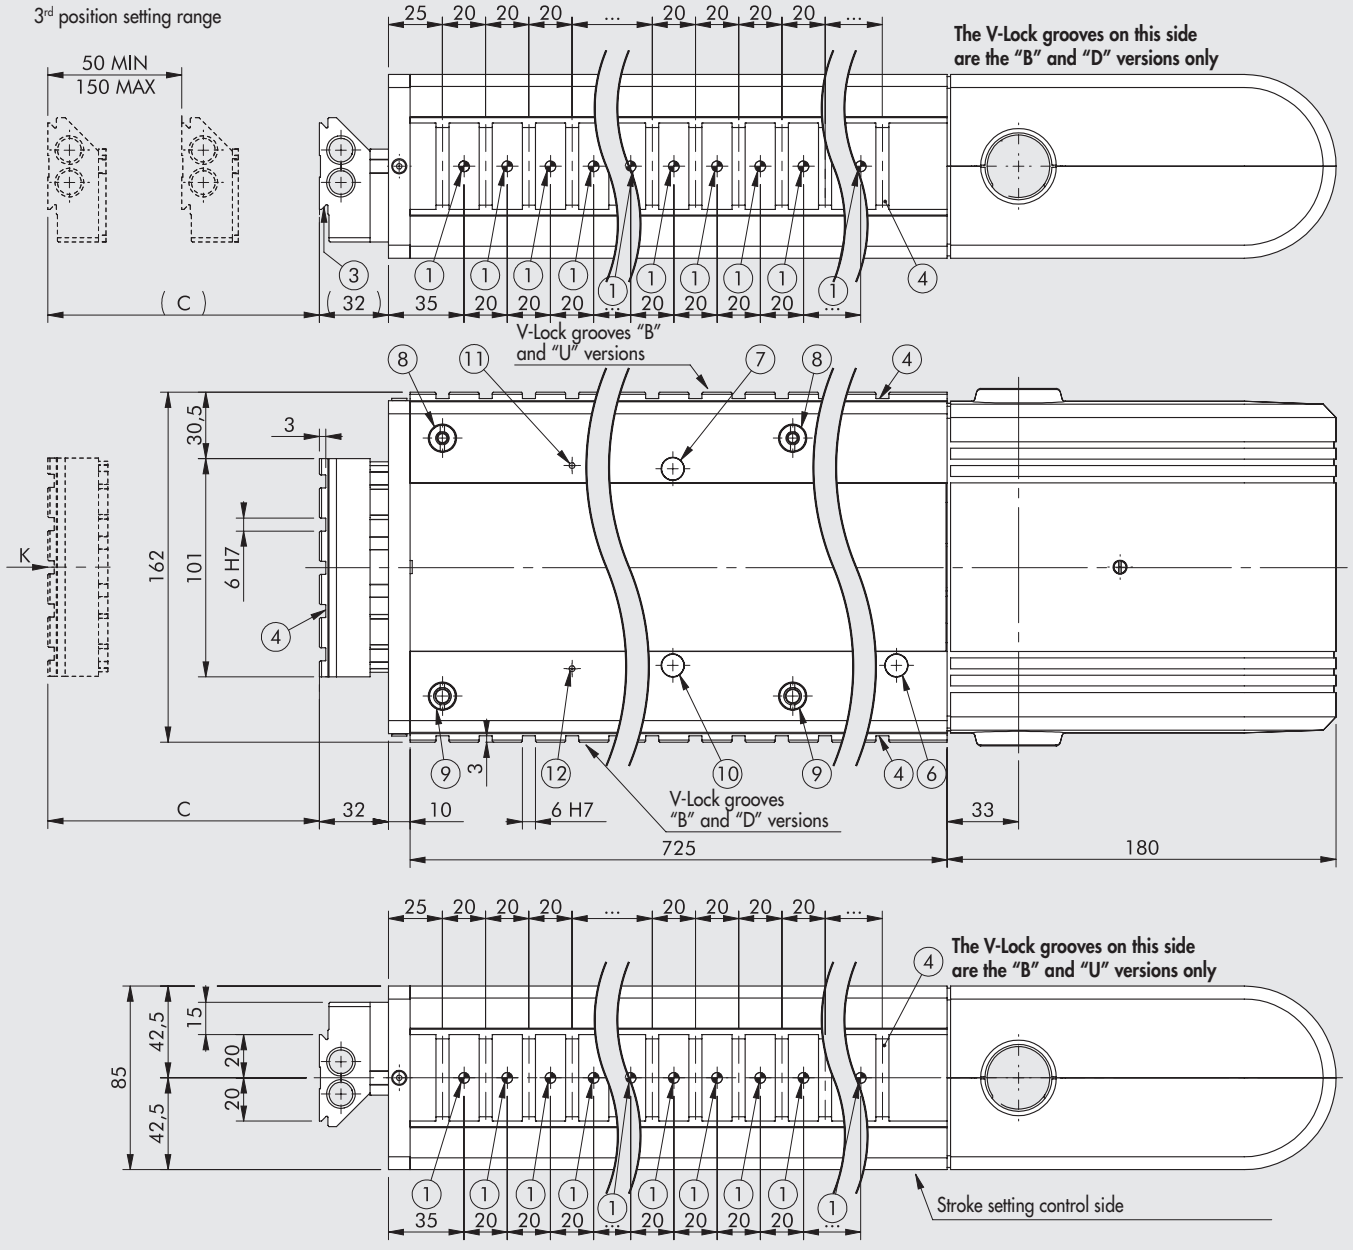

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod
⑩ Sensor LED inspection hole for 3rd position
⑪ Sensor LED inspection hole for 3rd position DISABLED
⑫ Sensor LED inspection hole for 3rd position ENABLED

IMPORTANT!
The drawing shows the code K102BH00450B02535K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K102BH00450000000K K102BH00450B _ _ _ _ _ K K102BH00450D _ _ _ _ _ K K102BH00450U _ _ _ _ _ K	LEPK-2-450-H-B	50 to 450
K102BH20450000000K K102BH20450B _ _ _ _ _ K K102BH20450D _ _ _ _ _ K K102BH20450U _ _ _ _ _ K	LEPK-2-450-H-B without terminal board	

VIEWED FROM "K"

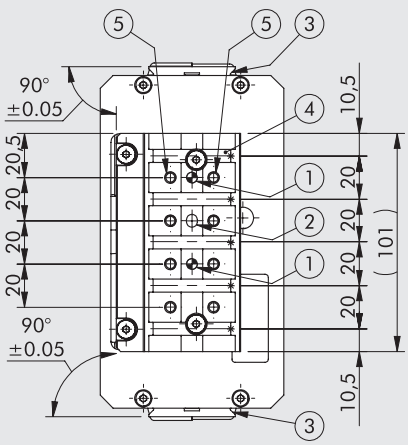

IMPORTANT. The LEPK-2-450-H-B can hold maximum 35 V-Lock grooves and hence a maximum of 34 Ø5 H7 pinholes.

METAL WORK PNEUMATIC

DIMENSIONS OF THE LEPK-1-60-V-A LINEAR UNIT (Vertical, 2 positions)

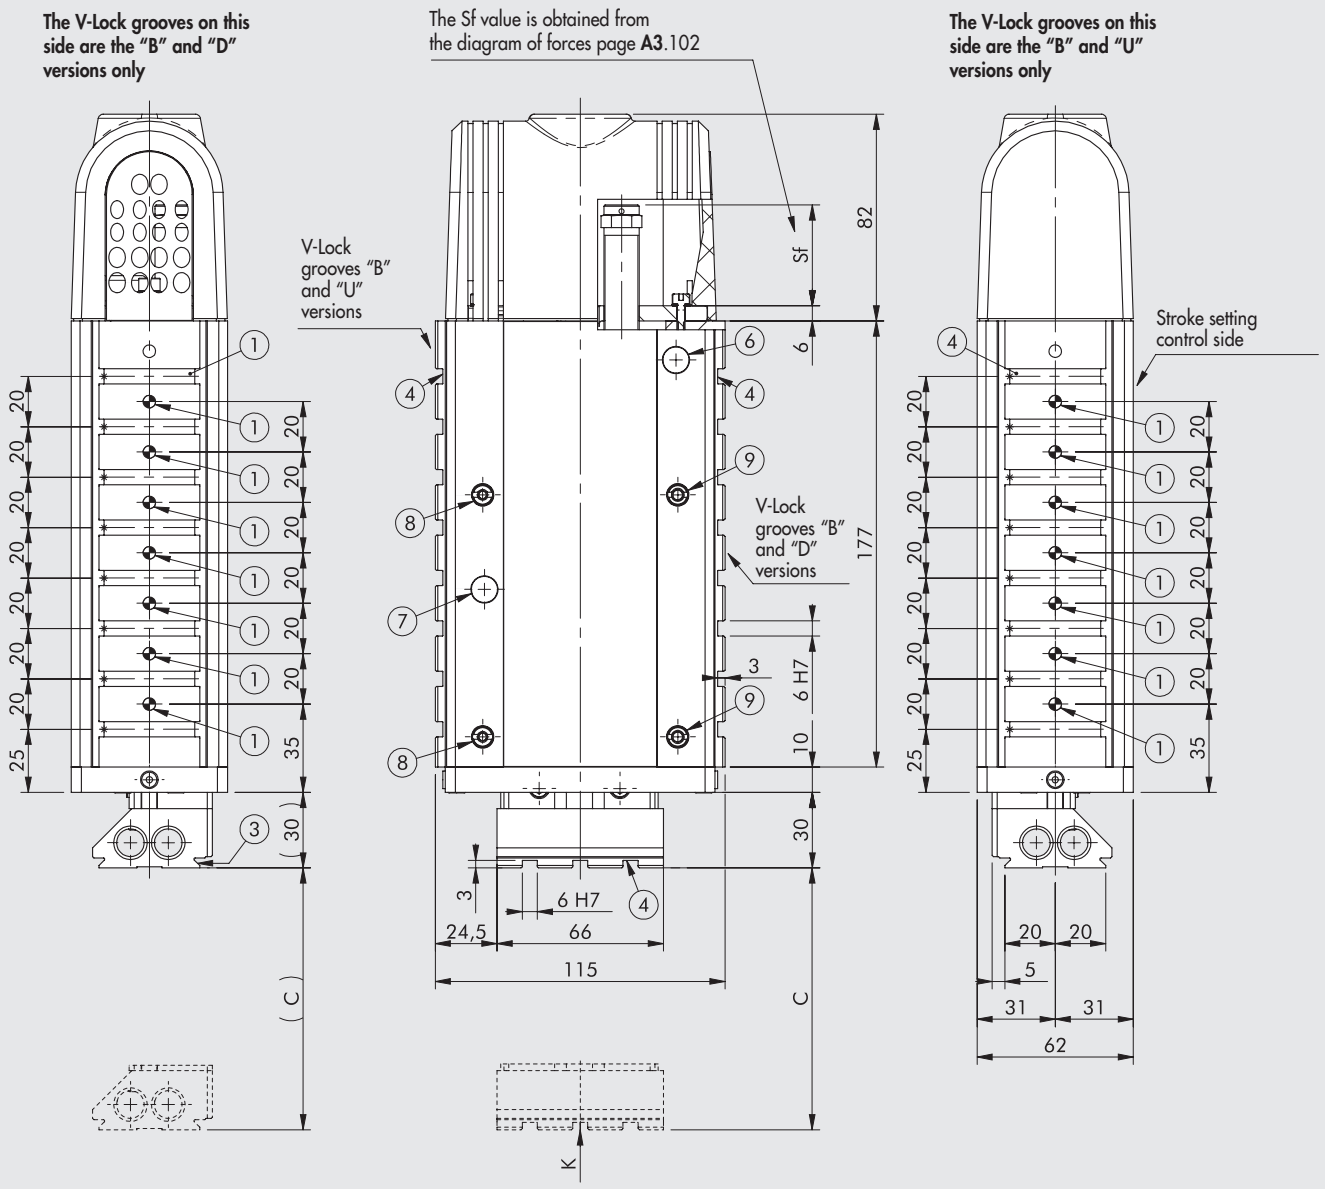

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod

IMPORTANT!
The drawing shows the code K101AV00060B02508K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101AV20060000000K	LEPK-1-60-V-A	15 to 60
K101AV20060B _ _ _ _ _ K		
K101AV20060D _ _ _ _ _ K		
K101AV20060U _ _ _ _ _ K		
K101AS20060000000K	LEPK-1-60-V-A without spring	
K101AS20060B _ _ _ _ _ K		
K101AS20060D _ _ _ _ _ K		
K101AS20060U _ _ _ _ _ K		

VIEWED FROM "K"

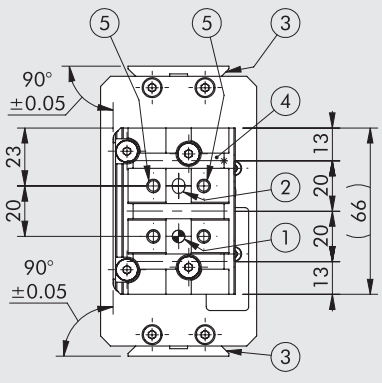

IMPORTANT. The LEPK-1-60-V-A can hold maximum 8 V-Lock grooves and hence a maximum of 7 Ø5 H7 pinholes.

DIMENSIONS OF THE LEPK-1-60-V-B LINEAR UNIT (Vertical, 3 positions)

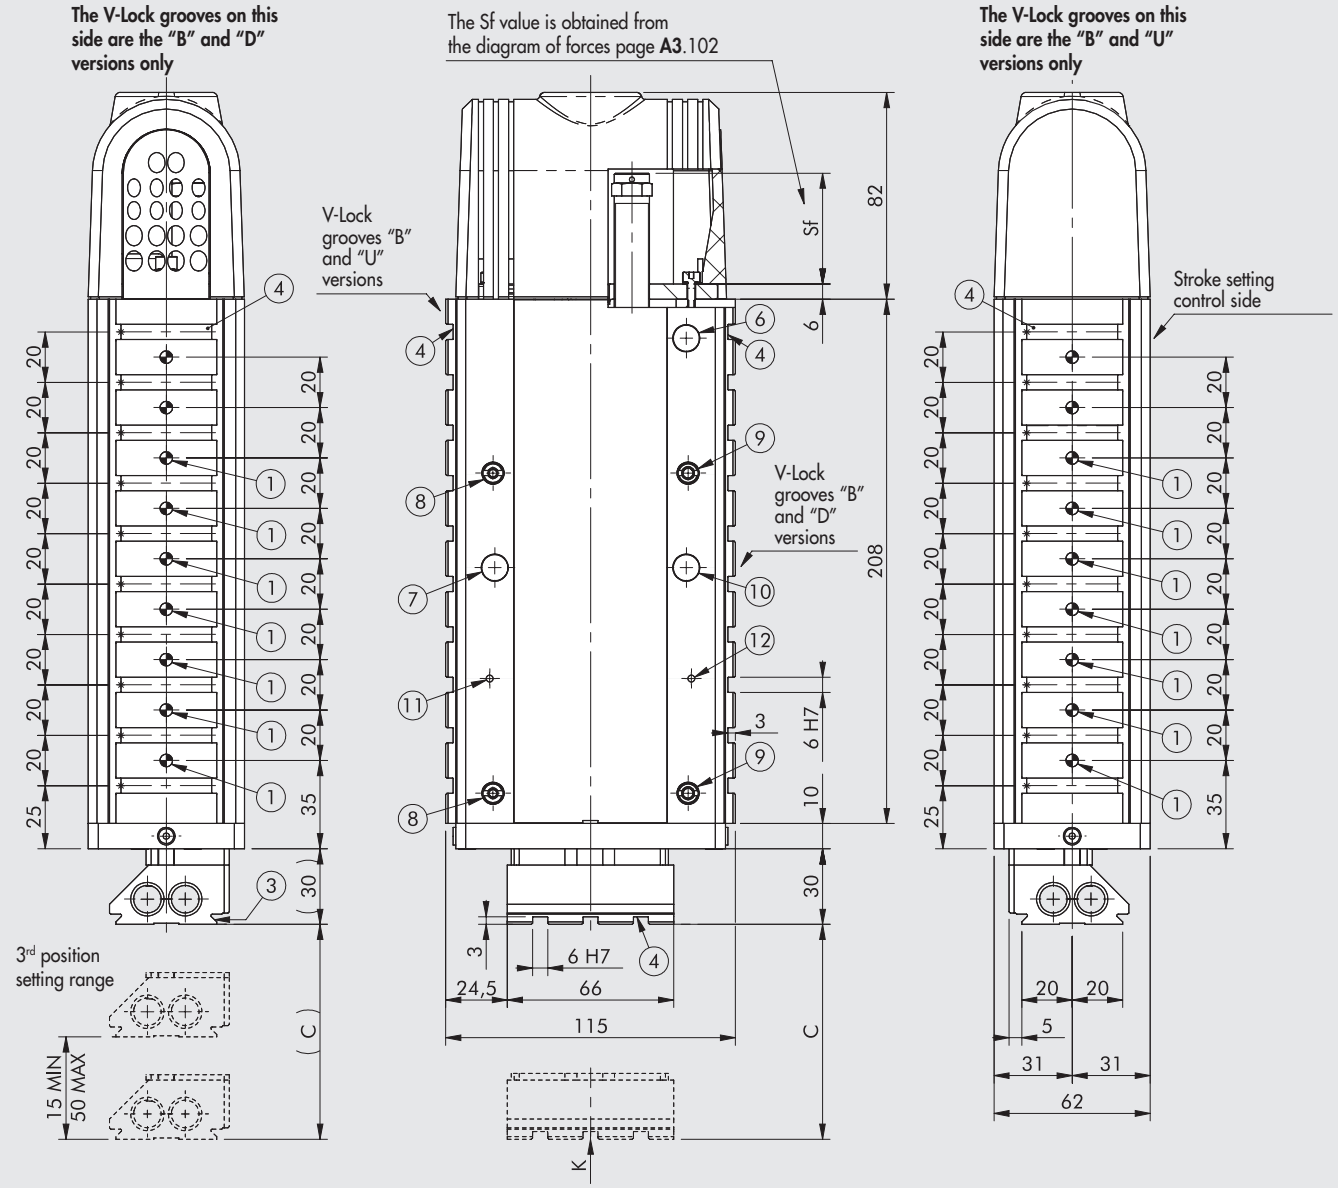

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod
⑩ Sensor LED inspection hole for 3rd position
⑪ Sensor LED inspection hole for 3rd position DISABLED
⑫ Sensor LED inspection hole for 3rd position ENABLED

IMPORTANT!
The drawing shows the code K101BV00060B02510K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101BV20060000000K	LEPK-1-60-V-B	15 to 60
K101BV20060B _ _ _ _ _ K		
K101BV20060D _ _ _ _ _ K		
K101BV20060U _ _ _ _ _ K		
K101BS20060000000K	LEPK-1-60-V-B without spring	
K101BS20060B _ _ _ _ _ K		
K101BS20060D _ _ _ _ _ K		
K101BS20060U _ _ _ _ _ K		

VIEWED FROM "K"

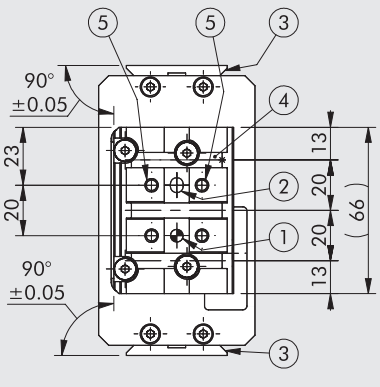

IMPORTANT. The LEPK-1-60-V-B can hold maximum 10 V-Lock grooves and hence a maximum of 9 Ø5 H7 pinholes.

METAL WORK PNEUMATIC

DIMENSIONS OF THE LEPK-1-90-V-A LINEAR UNIT (Vertical, 2 positions)

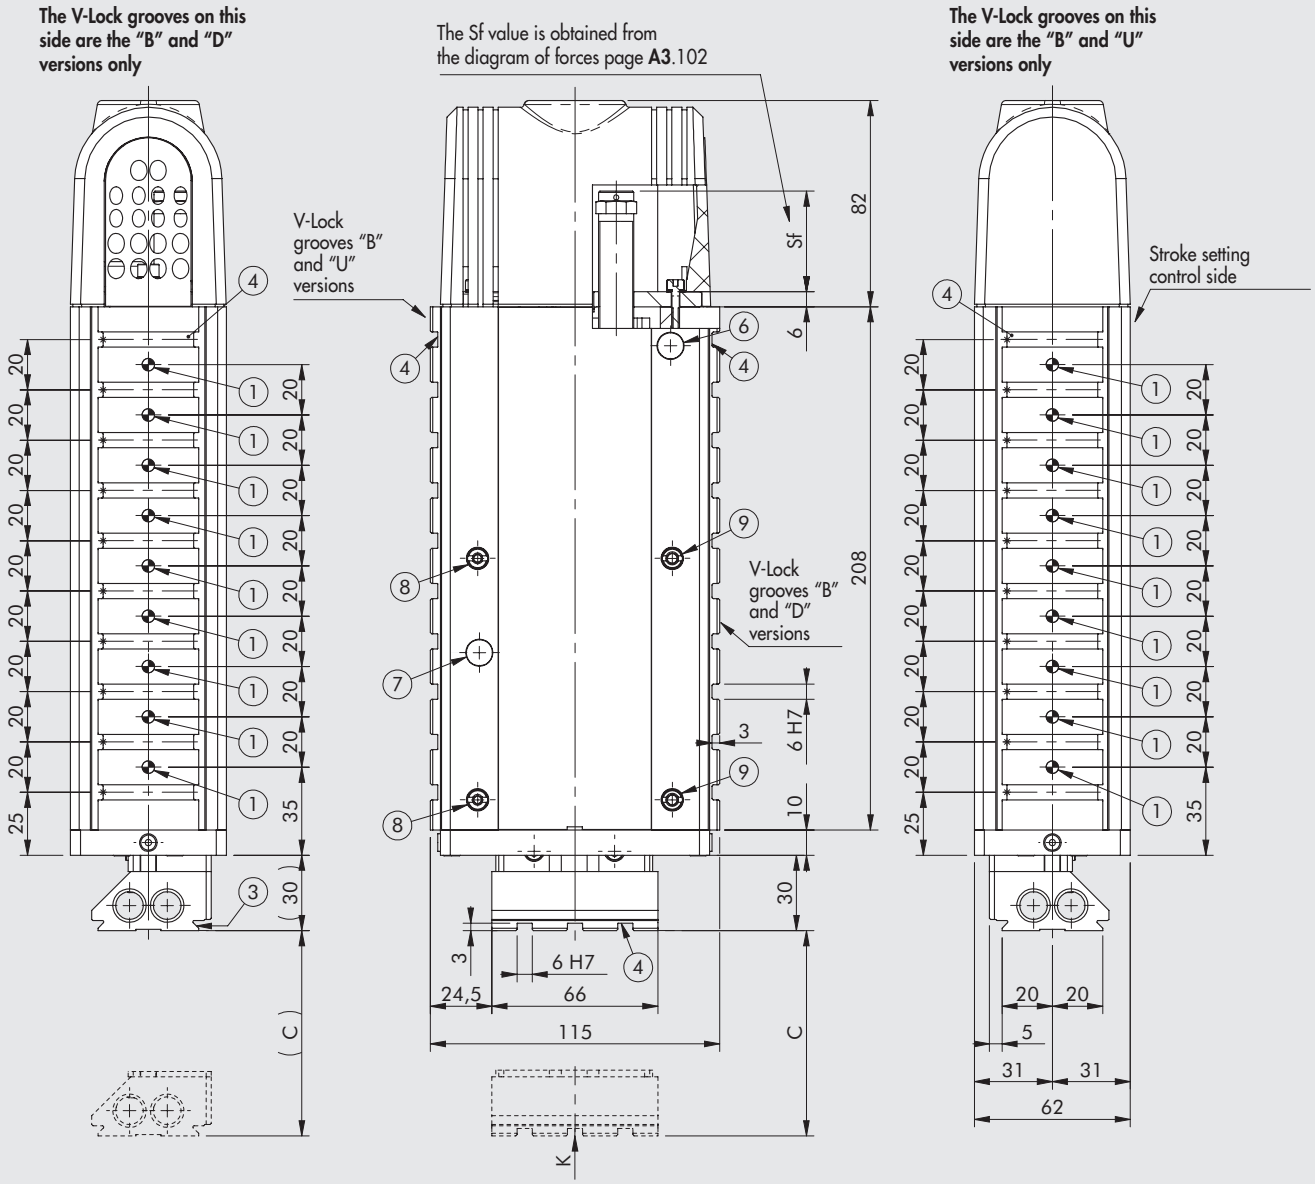

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod

IMPORTANT!
The drawing shows the code K101AV00090B02510K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101AV20090000000K	LEPK-1-90-V-A	15 to 90
K101AV20090B _ _ _ _ _ K		
K101AV20090D _ _ _ _ _ K		
K101AV20090U _ _ _ _ _ K		
K101AS20090000000K	LEPK-1-90-V-A without spring	
K101AS20090B _ _ _ _ _ K		
K101AS20090D _ _ _ _ _ K		
K101AS20090U _ _ _ _ _ K		

VIEWED FROM "K"

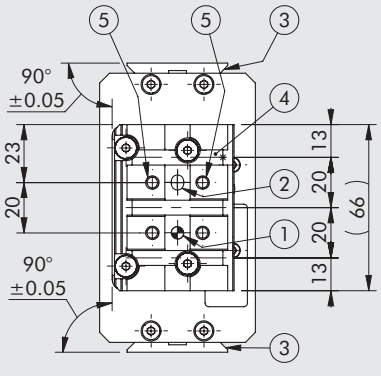

IMPORTANT. The LEPK-1-90-V-A can hold maximum 10 V-Lock grooves and hence a maximum of 9 Ø5 H7 pinholes.

DIMENSIONS OF THE LEPK-1-90-V-B LINEAR UNIT (Vertical, 3 positions)

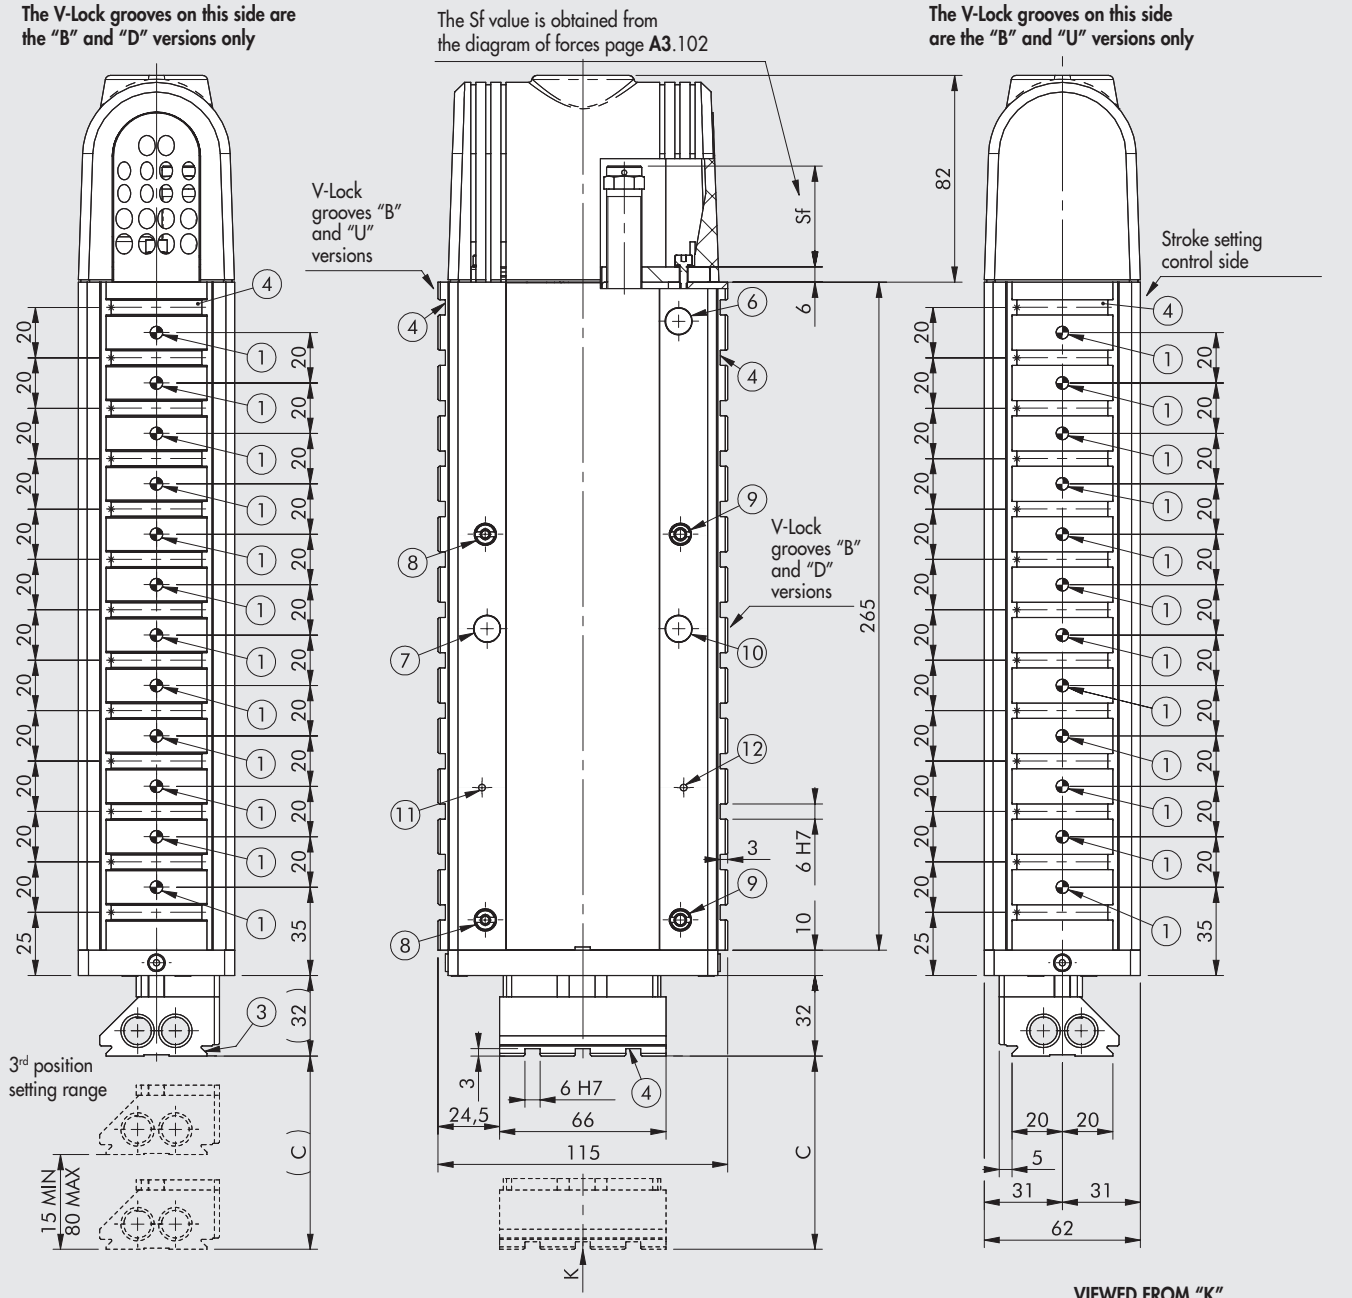

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod
⑩ Sensor LED inspection hole for 3rd position
⑪ Sensor LED inspection hole for 3rd position DISABLED
⑫ Sensor LED inspection hole for 3rd position ENABLED

IMPORTANT!
The drawing shows the code K101BV00090B02513K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101BV20090000000K	LEPK-1-90-V-B	15 to 90
K101BV20090B _ _ _ _ _ K		
K101BV20090D _ _ _ _ _ K		
K101BV20090U _ _ _ _ _ K		
K101BS20090000000K	LEPK-1-90-V-B without spring	
K101BS20090B _ _ _ _ _ K		
K101BS20090D _ _ _ _ _ K		
K101BS20090U _ _ _ _ _ K		

VIEWED FROM "K"

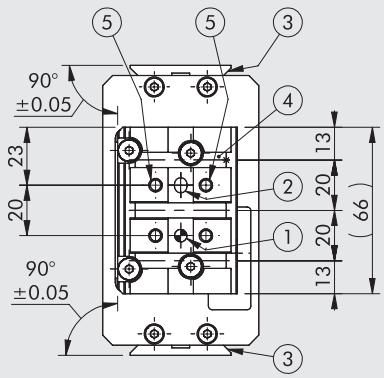

IMPORTANT. The LEPK-1-90-V-B can hold maximum 13 V-Lock grooves and hence a maximum of 12 Ø5 H7 pinholes.

METAL WORK PNEUMATIC

DIMENSIONS OF THE LEPK-1-160-V-A LINEAR UNIT (Vertical, 2 positions)

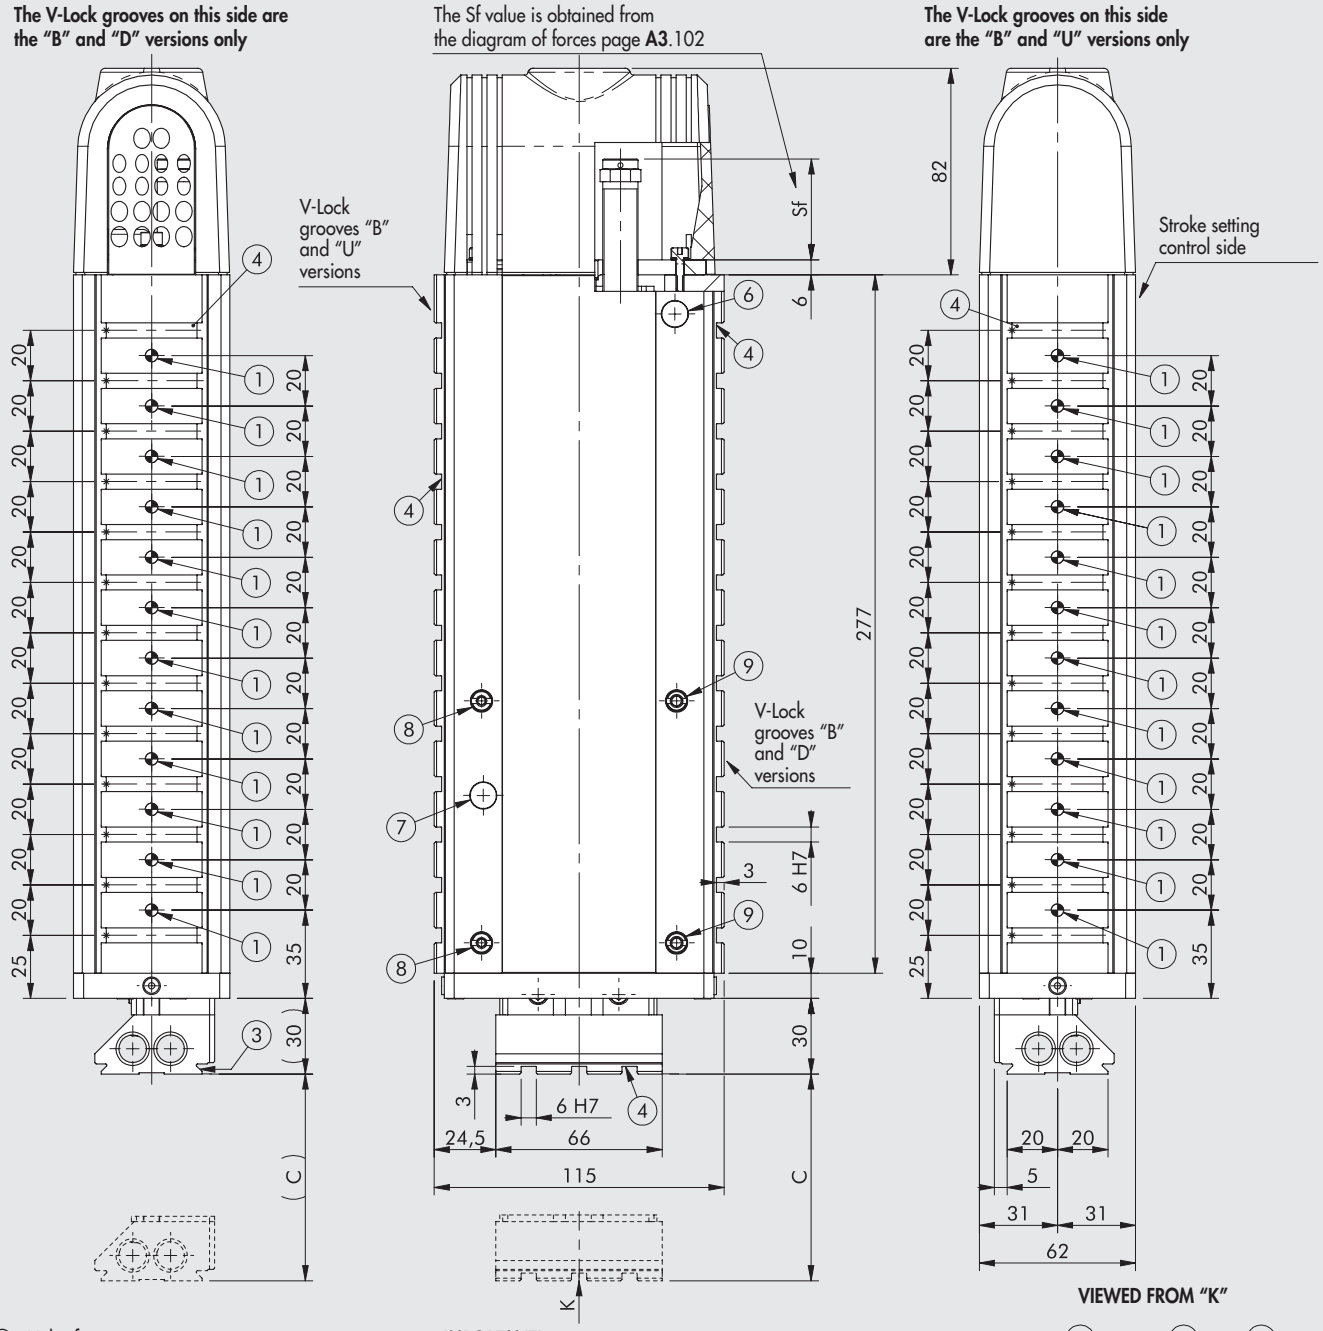

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod

IMPORTANT!
The drawing shows the code K101AV00160B02513K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101AV20160000000K	LEPK-1-160-V-A	15 to 160
K101AV20160B _ _ _ _ _ K		
K101AV20160D _ _ _ _ _ K		
K101AV20160U _ _ _ _ _ K		
K101AS20160000000K	LEPK-1-160-V-A without spring	
K101AS20160B _ _ _ _ _ K		
K101AS20160D _ _ _ _ _ K		
K101AS20160U _ _ _ _ _ K		

VIEWED FROM "K"

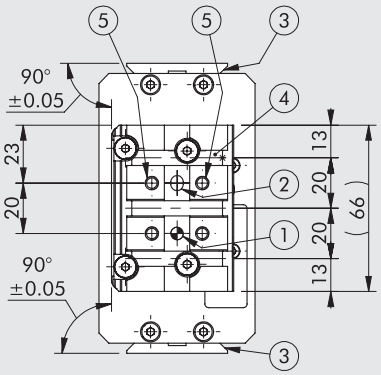

IMPORTANT. The LEPK-1-160-V-A can hold maximum 13 grooves and hence a maximum of 12 Ø5 H7 pinholes.

DIMENSIONS OF THE LEPK-1-160-V-B LINEAR UNIT (Vertical, 3 positions)

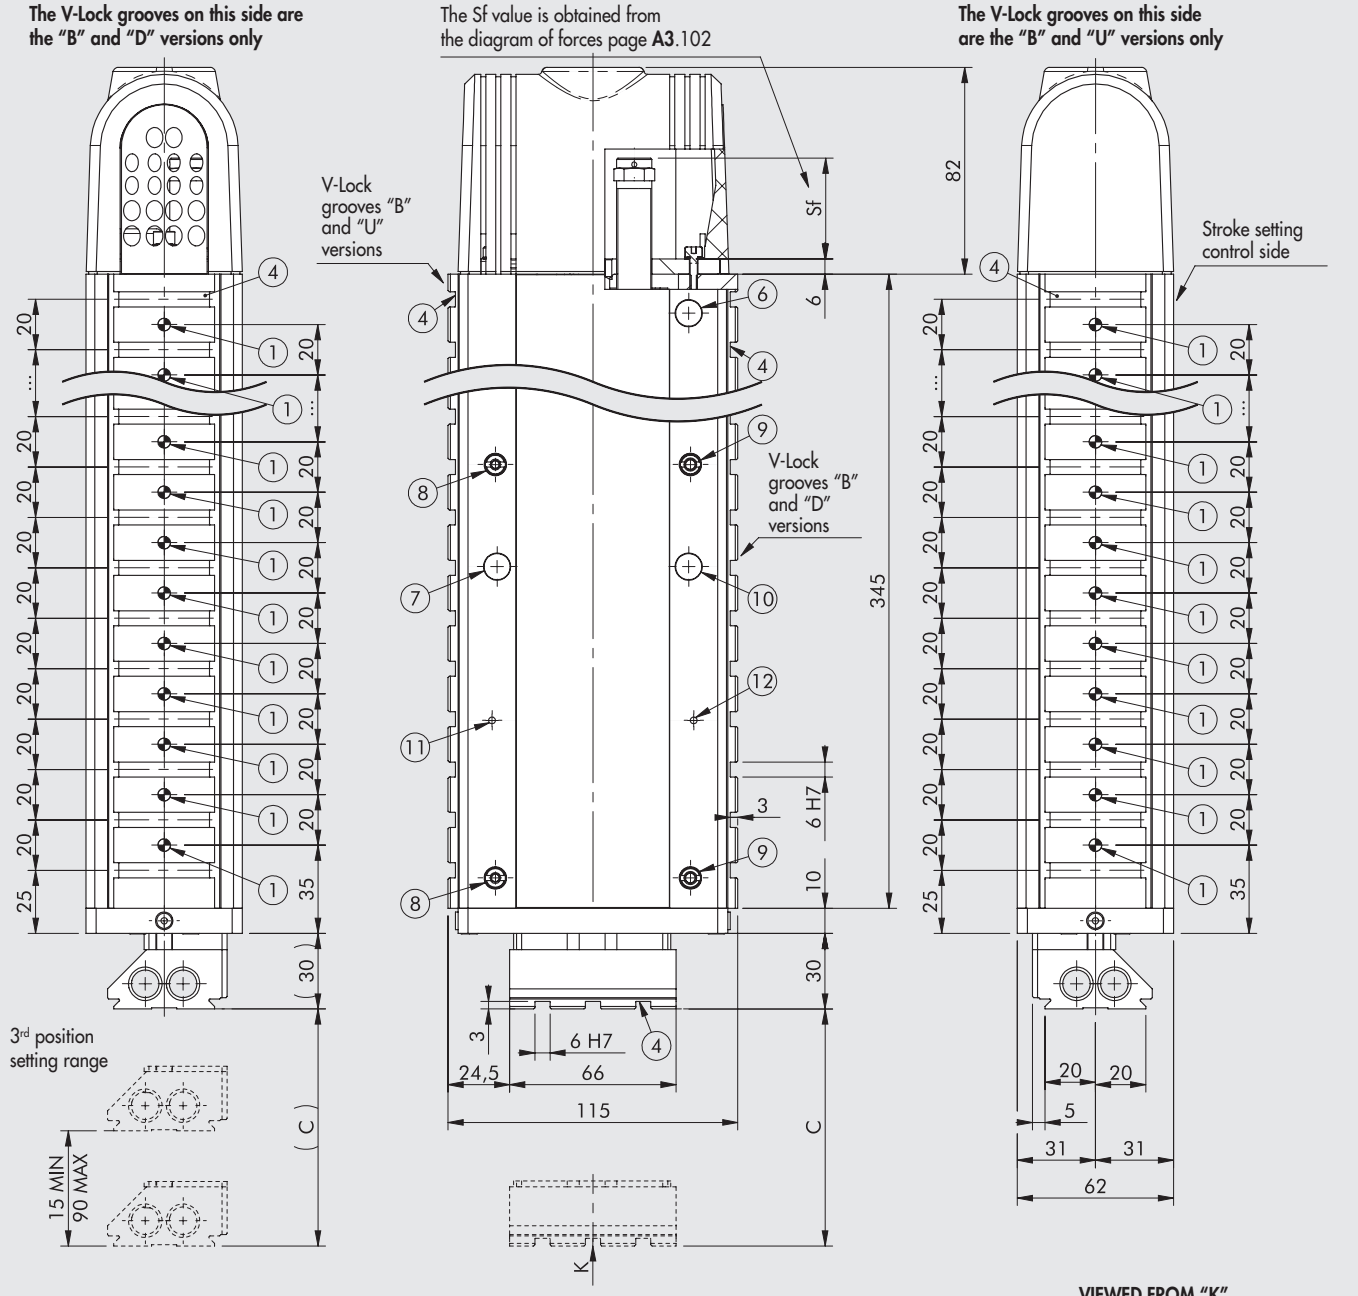

① Holes for centring pins
② Centring slot
③ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
④ Slot for "V-Lock" precision key
⑤ Threaded holes for fixing
⑥ Sensor LED inspection hole for the retracted position ("0")
⑦ Sensor LED inspection hole for the extended position
⑧ Eccentric rod for backlash take-up
⑨ Centric rod
⑩ Sensor LED inspection hole for 3rd position
⑪ Sensor LED inspection hole for 3rd position DISABLED
⑫ Sensor LED inspection hole for 3rd position ENABLED

IMPORTANT!
The drawing shows the code K101BV00160B02517K with the maximum number of V-Lock grooves (version BOTH)

Code	Description	C
K101BV20160000000K **K101BV20160B _ _ _ _ _ K** **K101BV20160D _ _ _ _ _ K** **K101BV20160U _ _ _ _ _ K**	LEPK-1-160-V-B	15 to 160
K101BS20160000000K **K101BS20160B _ _ _ _ _ K** **K101BS20160D _ _ _ _ _ K** **K101BS20160U _ _ _ _ _ K**	LEPK-1-160-V-B without spring	

VIEWED FROM "K"

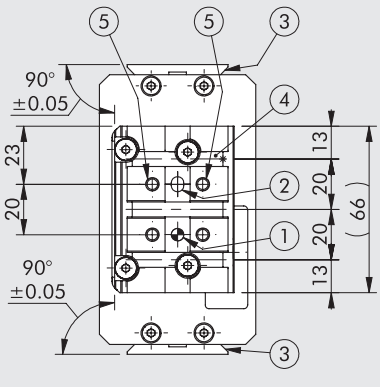

IMPORTANT. The LEPK-1-160-V-B can hold maximum 17 V-Lock grooves and hence a maximum of 16 Ø5 H7 pinholes.

METAL WORK PNEUMATIC

KEY TO CODES

K10	1	A	H	0	0	090	0	000	00	K
	SIZE	POSITION	ORIENTATION			STROKE	V-Lock CONNECTION	V-Lock POSITION	Number of V-Lock GROOVES	FAMILY
Linear units series LEPK	1 Size 1 ◀ 2 Size 2	A 2 positions B 3 positions	H Horizontal V Vertical (with return spring) S Vertical (without return spring)	0 Inductive sensors (with terminal board) ● 2 Inductive sensors (without terminal board)		▼ 060 ◆ 090 ◆ 160 ✚ 225 ✱ 320 ✱ 450	0 None B Grooves above and below D Grooves below U Grooves above	☐ 000 None ▲ _ _ _ Position	☐ 00 None ■ _ _ Number of grooves	K V-Lock

◀ Available only in horizontal orientation (H).
● Standard for the version with vertical orientation (V).
▼ Only size 1 - V/S
◆ Only size 1 - V/S/H
✚ Only size 1 - H
✱ Only size 2 - H
☐ Always use when "V-Lock connection" is equal to "0" (none)
▲ For connecting V-Lock "B" - "D" - "U" minimum value "025", the following values vary by steps of 20 mm (e.g. "045", "065" and "085").
For mounting options, see page **A3**.103

■ The maximum number of possible grooves is:

LEPK 1-60-V/S-A = n. 08	LEPK 1-160-V/S-A = n. 13
LEPK 1-60-V/S-B = n. 10	LEPK 1-160-V/S-B = n. 17
LEPK 1-90-V/S-A = n. 10	LEPK 1-225-H-A = n. 23
LEPK 1-90-V/S-B = n. 13	LEPK 1-225-H-B = n. 23
LEPK 1-90-H-A = n. 10	LEPK 2-320-H-A = n. 24
LEPK 1-90-H-B = n. 13	LEPK 2-320-H-B = n. 29
LEPK 1-160-H-A = n. 13	LEPK 2-450-H-A = n. 35
LEPK 1-160-H-B = n. 17	LEPK 2-450-H-B = n. 35

N.B.: The number of Ø5 H7 pinholes always coincides with the number of grooves ordered less 1.
For mounting options, see page **A3**.103

ORDERING CODES

Code	Description
LEPK-1 HORIZONTAL	
K101AH000900000000K	LEPK-1-90-H-A without V-Lock
K101AH00090B____K	LEPK-1-90-H-A V-Lock above and below
K101AH00090D____K	LEPK-1-90-H-A V-Lock above
K101AH00090U____K	LEPK-1-90-H-A V-Lock below
K101AH200900000000K	LEPK-1-90-H-A without V-Lock
K101AH20090B____K	LEPK-1-90-H-A V-Lock above and below
K101AH20090D____K	LEPK-1-90-H-A V-Lock above
K101AH20090U____K	LEPK-1-90-H-A V-Lock below
K101BH000900000000K	LEPK-1-90-H-B without V-Lock
K101BH00090B____K	LEPK-1-90-H-B V-Lock above and below
K101BH00090D____K	LEPK-1-90-H-B V-Lock above
K101BH00090U____K	LEPK-1-90-H-B V-Lock below
K101BH200900000000K	LEPK-1-90-H-B without V-Lock
K101BH20090B____K	LEPK-1-90-H-B V-Lock above and below
K101BH20090D____K	LEPK-1-90-H-B V-Lock above
K101BH20090U____K	LEPK-1-90-H-B V-Lock below
K101AH000160000000K	LEPK-1-160-H-A without V-Lock
K101AH00160B____K	LEPK-1-160-H-A V-Lock above and below
K101AH00160D____K	LEPK-1-160-H-A V-Lock above
K101AH00160U____K	LEPK-1-160-H-A V-Lock below
K101AH201600000000K	LEPK-1-160-H-A without V-Lock
K101AH20160B____K	LEPK-1-160-H-A V-Lock above and below
K101AH20160D____K	LEPK-1-160-H-A V-Lock above
K101AH20160U____K	LEPK-1-160-H-A V-Lock below
K101BH000160000000K	LEPK-1-160-H-B without V-Lock
K101BH00160B____K	LEPK-1-160-H-B V-Lock above and below
K101BH00160D____K	LEPK-1-160-H-B V-Lock above
K101BH00160U____K	LEPK-1-160-H-B V-Lock below
K101BH201600000000K	LEPK-1-160-H-B without V-Lock
K101BH20160B____K	LEPK-1-160-H-B V-Lock above and below
K101BH20160D____K	LEPK-1-160-H-B V-Lock above
K101BH20160U____K	LEPK-1-160-H-B V-Lock below
K101AH002250000000K	LEPK-1-225-H-A without V-Lock
K101AH00225B____K	LEPK-1-225-H-A V-Lock above and below
K101AH00225D____K	LEPK-1-225-H-A V-Lock above
K101AH00225U____K	LEPK-1-225-H-A V-Lock below
K101AH202250000000K	LEPK-1-225-H-A without V-Lock
K101AH20225B____K	LEPK-1-225-H-A V-Lock above and below
K101AH20225D____K	LEPK-1-225-H-A V-Lock above
K101AH20225U____K	LEPK-1-225-H-A V-Lock below
K101BH00225000000K	LEPK-1-225-H-B without V-Lock
K101BH00225B____K	LEPK-1-225-H-B V-Lock above and below
K101BH00225D____K	LEPK-1-225-H-B V-Lock above
K101BH00225U____K	LEPK-1-225-H-B V-Lock below
K101BH20225000000K	LEPK-1-225-H-B without V-Lock
K101BH20225B____K	LEPK-1-225-H-B V-Lock above and below
K101BH20225D____K	LEPK-1-225-H-B V-Lock above
K101BH20225U____K	LEPK-1-225-H-B V-Lock below
LEPK-1 VERTICAL	
K101AS20060000000K	LEPK-1-60-S-A without V-Lock
K101AS20060B____K	LEPK-1-60-S-A V-Lock above and below
K101AS20060D____K	LEPK-1-60-S-A V-Lock above
K101AS20060U____K	LEPK-1-60-S-A V-Lock below
K101AV20060000000K	LEPK-1-60-V-A without V-Lock
K101AV20060B____K	LEPK-1-60-V-A V-Lock above and below
K101AV20060D____K	LEPK-1-60-V-A V-Lock above
K101AV20060U____K	LEPK-1-60-V-A V-Lock below
K101BS20060000000K	LEPK-1-60-S-B without V-Lock
K101BS20060B____K	LEPK-1-60-S-B V-Lock above and below
K101BS20060D____K	LEPK-1-60-S-B V-Lock above
K101BS20060U____K	LEPK-1-60-S-B V-Lock below
K101BV20060000000K	LEPK-1-60-V-B without V-Lock
K101BV20060B____K	LEPK-1-60-V-B V-Lock above and below
K101BV20060D____K	LEPK-1-60-V-B V-Lock above
K101BV20060U____K	LEPK-1-60-V-B V-Lock below
K101AS20090000000K	LEPK-1-90-S-A without V-Lock
K101AS20090B____K	LEPK-1-90-S-A V-Lock above and below
K101AS20090D____K	LEPK-1-90-S-A V-Lock above
K101AS20090U____K	LEPK-1-90-S-A V-Lock below
K101AV20090000000K	LEPK-1-90-V-A without V-Lock
K101AV20090B____K	LEPK-1-90-V-A V-Lock above and below
K101AV20090D____K	LEPK-1-90-V-A V-Lock above
K101AV20090U____K	LEPK-1-90-V-A V-Lock below
K101BS20090000000K	LEPK-1-90-S-B without V-Lock
K101BS20090B____K	LEPK-1-90-S-B V-Lock above and below
K101BS20090D____K	LEPK-1-90-S-B V-Lock above
K101BS20090U____K	LEPK-1-90-S-B V-Lock below

ORDERING CODES

Code	Description
LEPK-1 VERTICAL	
K101BV20090000000K	LEPK-1-90-V-B without V-Lock
K101BV20090B____K	LEPK-1-90-V-B V-Lock above and below
K101BV20090D____K	LEPK-1-90-V-B V-Lock above
K101BV20090U____K	LEPK-1-90-V-B V-Lock below
K101AS20160000000K	LEPK-1-160-S-A without V-Lock
K101AS20160B____K	LEPK-1-160-S-A V-Lock above and below
K101AS20160D____K	LEPK-1-160-S-A V-Lock above
K101AS20160U____K	LEPK-1-160-S-A V-Lock below
K101AV20160000000K	LEPK-1-160-V-A without V-Lock
K101AV20160B____K	LEPK-1-160-V-A V-Lock above and below
K101AV20160D____K	LEPK-1-160-V-A V-Lock above
K101AV20160U____K	LEPK-1-160-V-A V-Lock below
K101BS20160000000K	LEPK-1-160-S-B without V-Lock
K101BS20160B____K	LEPK-1-160-S-B V-Lock above and below
K101BS20160D____K	LEPK-1-160-S-B V-Lock above
K101BS20160U____K	LEPK-1-160-S-B V-Lock below
K101BV20160000000K	LEPK-1-160-V-B without V-Lock
K101BV20160B____K	LEPK-1-160-V-B V-Lock above and below
K101BV20160D____K	LEPK-1-160-V-B V-Lock above
K101BV20160U____K	LEPK-1-160-V-B V-Lock below

Code	Description
LEPK-2 HORIZONTAL	
K102AH00320000000K	LEPK-2-320-H-A without V-Lock
K102AH00320B____K	LEPK-2-320-H-A V-Lock above and below
K102AH00320D____K	LEPK-2-320-H-A V-Lock above
K102AH00320U____K	LEPK-2-320-H-A V-Lock below
K102AH20320000000K	LEPK-2-320-H-A without V-Lock
K102AH20320B____K	LEPK-2-320-H-A V-Lock above and below
K102AH20320D____K	LEPK-2-320-H-A V-Lock above
K102AH20320U____K	LEPK-2-320-H-A V-Lock below
K102BH00320000000K	LEPK-2-320-H-B without V-Lock
K102BH00320B____K	LEPK-2-320-H-B V-Lock above and below
K102BH00320D____K	LEPK-2-320-H-B V-Lock above
K102BH00320U____K	LEPK-2-320-H-B V-Lock below
K102BH20320000000K	LEPK-2-320-H-B without V-Lock
K102BH20320B____K	LEPK-2-320-H-B V-Lock above and below
K102BH20320D____K	LEPK-2-320-H-B V-Lock above
K102BH20320U____K	LEPK-2-320-H-B V-Lock below
K102AH00450000000K	LEPK-2-450-H-A without V-Lock
K102AH00450B____K	LEPK-2-450-H-A V-Lock above and below
K102AH00450D____K	LEPK-2-450-H-A V-Lock above
K102AH00450U____K	LEPK-2-450-H-A V-Lock below
K102AH20450000000K	LEPK-2-450-H-A without V-Lock
K102AH20450B____K	LEPK-2-450-H-A V-Lock above and below
K102AH20450D____K	LEPK-2-450-H-A V-Lock above
K102AH20450U____K	LEPK-2-450-H-A V-Lock below
K102BH00450000000K	LEPK-2-450-H-B without V-Lock
K102BH00450B____K	LEPK-2-450-H-B V-Lock above and below
K102BH00450D____K	LEPK-2-450-H-B V-Lock above
K102BH00450U____K	LEPK-2-450-H-B V-Lock below
K102BH20450000000K	LEPK-2-450-H-B without V-Lock
K102BH20450B____K	LEPK-2-450-H-B V-Lock above and below
K102BH20450D____K	LEPK-2-450-H-B V-Lock above
K102BH20450U____K	LEPK-2-450-H-B V-Lock below

ACCESSORIES

OIL

Code	Description	Volume [ml]
9910490	PARALIQ P 460	80

CABLE GUIDE



Code	Description	Length [mm]
095K2100850K	Cable guide LEPK-1-90-A/B 160-A	850
095K2100900K	Cable guide LEPK-1-160-B	900
095K2101200K	Cable guide LEPK-1-225-A/B	1200
095K2101550K	Cable guide LEPK-2-320-A/B	1550
095K2101700K	Cable guide LEPK-2-450-A/B	1700
095K2102500K	Cable guide LEPK	2500

METAL WORK PNEUMATIC

NOTES

ROTARY ACTUATOR SERIES R3K

An actuator with a double rack and play take-up.
Angle of rotation adjustable from 0° to 180°.
These rotary actuators can be supplied with a mechanical stop or, for some sizes, a hydraulic decelerator.
There is also a version with external hydraulic decelerators with more kinetic energy.
The typical V-Lock dovetail and grooves are present on the turntable and the lower part of the body.
There are two grooves on either side for inserting retracting magnetic sensors.
There is a hole in the flange for air pipes or power cables.

N.B.: We always suggest to use flow microregulators.
During the setup of the actuator, start with CLOSE flow microregulators, and open gradually till the achievment of the required speed.

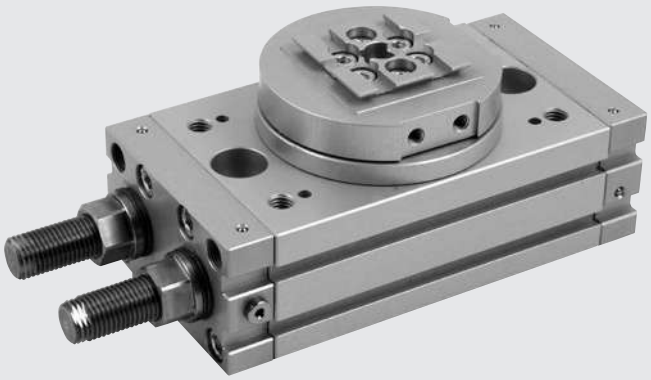

TECHNICAL DATA		R3K-16	R3K-20	R3K-25
Operating pressure	bar	3 to 7		
	MPa	0.3 to 0.7		
	psi	43 to 101		
Temperature range	°C	-10 to 80		
Fluid		Lubricated or unlubricated 20 µm filtered air. If lubricated air is used, lubrication must be continuous		
Bore	mm	2 x 16	2 x 20	2 x 25
Theoretical torque at 6 bar	Nm	0.9	1.8	4.6
Maximum axial load	N	74	135	300
Maximum radial load	N	78	137	450
Maximum overturning moment	Nm	2.4	4	9.7
Rotation time without load	s	0.2	0.2	0.2
Maximum kinetic energy:				
with mechanical stop	Joule	0.007	0.025	0.082
with inner decelerators	Joule	-	-	0.29
Weight	kg	0.66	1.13	2.17

COMPONENTS

① ROTARY FLANGE: anodized aluminium
② PINION: hardened and tempered steel
③ BALL BEARING
④ PISTON / RACK: hardened and tempered steel
⑤ CUSHIONING GASKET: NBR
⑥ GUIDE PAD: PTFE
⑦ MAGNET: neodymium
⑧ HEAD: anodized aluminium
⑨ BARREL: anodized aluminium
⑩ GASKET: NBR

VERSIONS:
⑪ Stroke adjustment
⑫ Stroke adjustment with inside hydraulic shock absorbers (available from Ø 25)

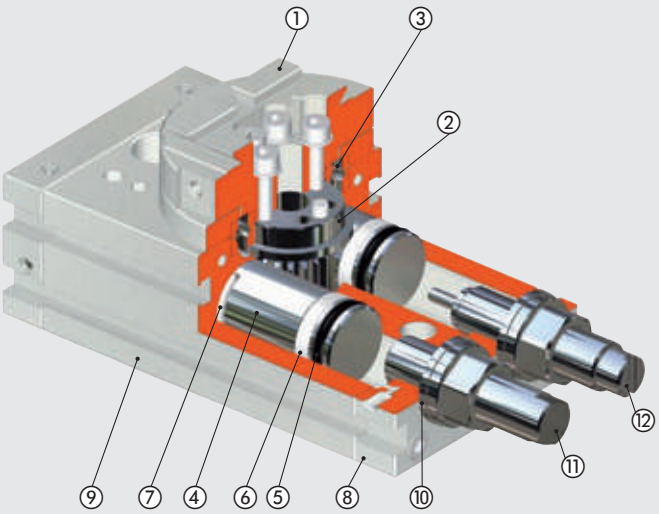

KEY DIAGRAM

Due to the design of turntables for R3K actuators, and to allow precision assembly with the K fixing elements, it is necessary to add a second key code W0950005150K to the one already present on the standard element.

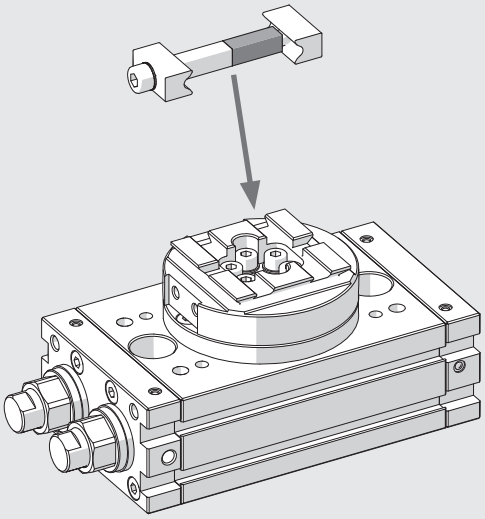

EXAMPLES OF APPLICATION

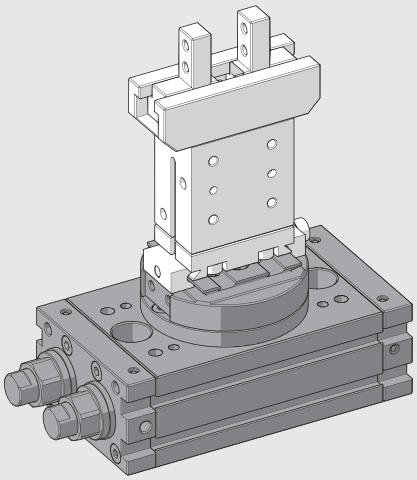

NOTES

ROTARY ACTUATOR R3K-16

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

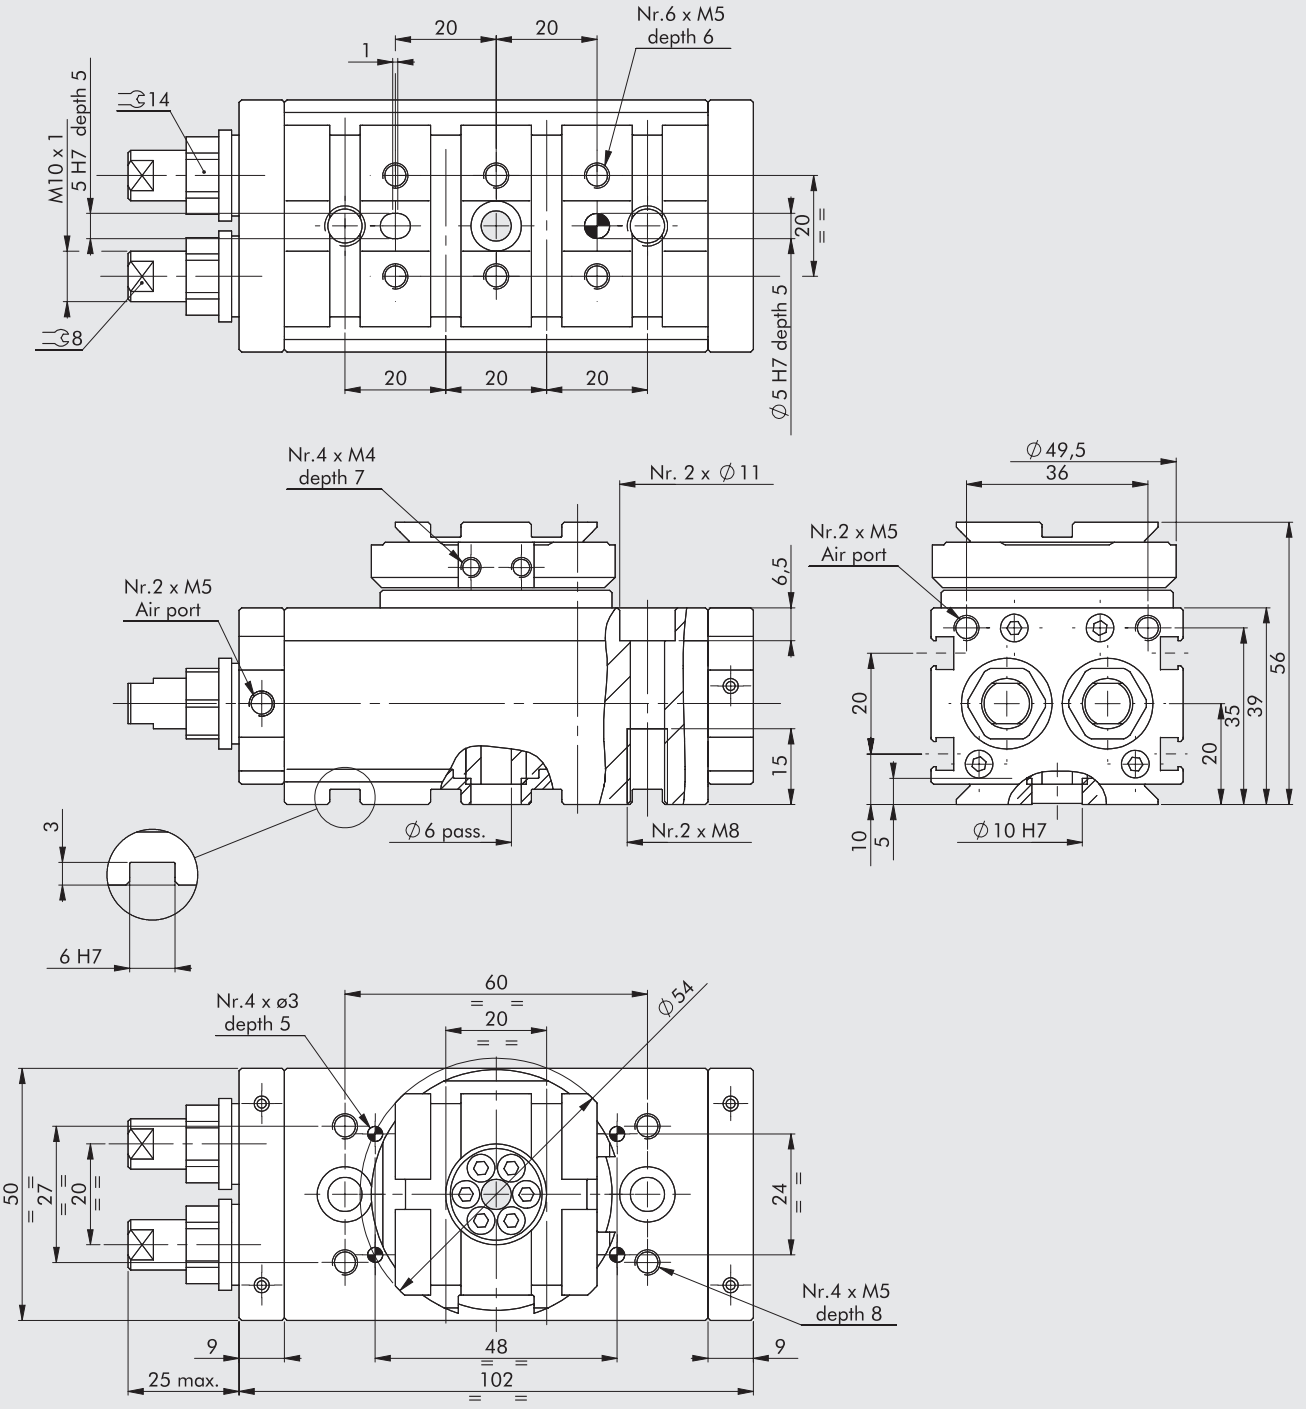

Code	Description
W1630162180K	Rotary actuator R3K-16

METAL WORK PNEUMATIC

ROTARY ACTUATOR R3K-20

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

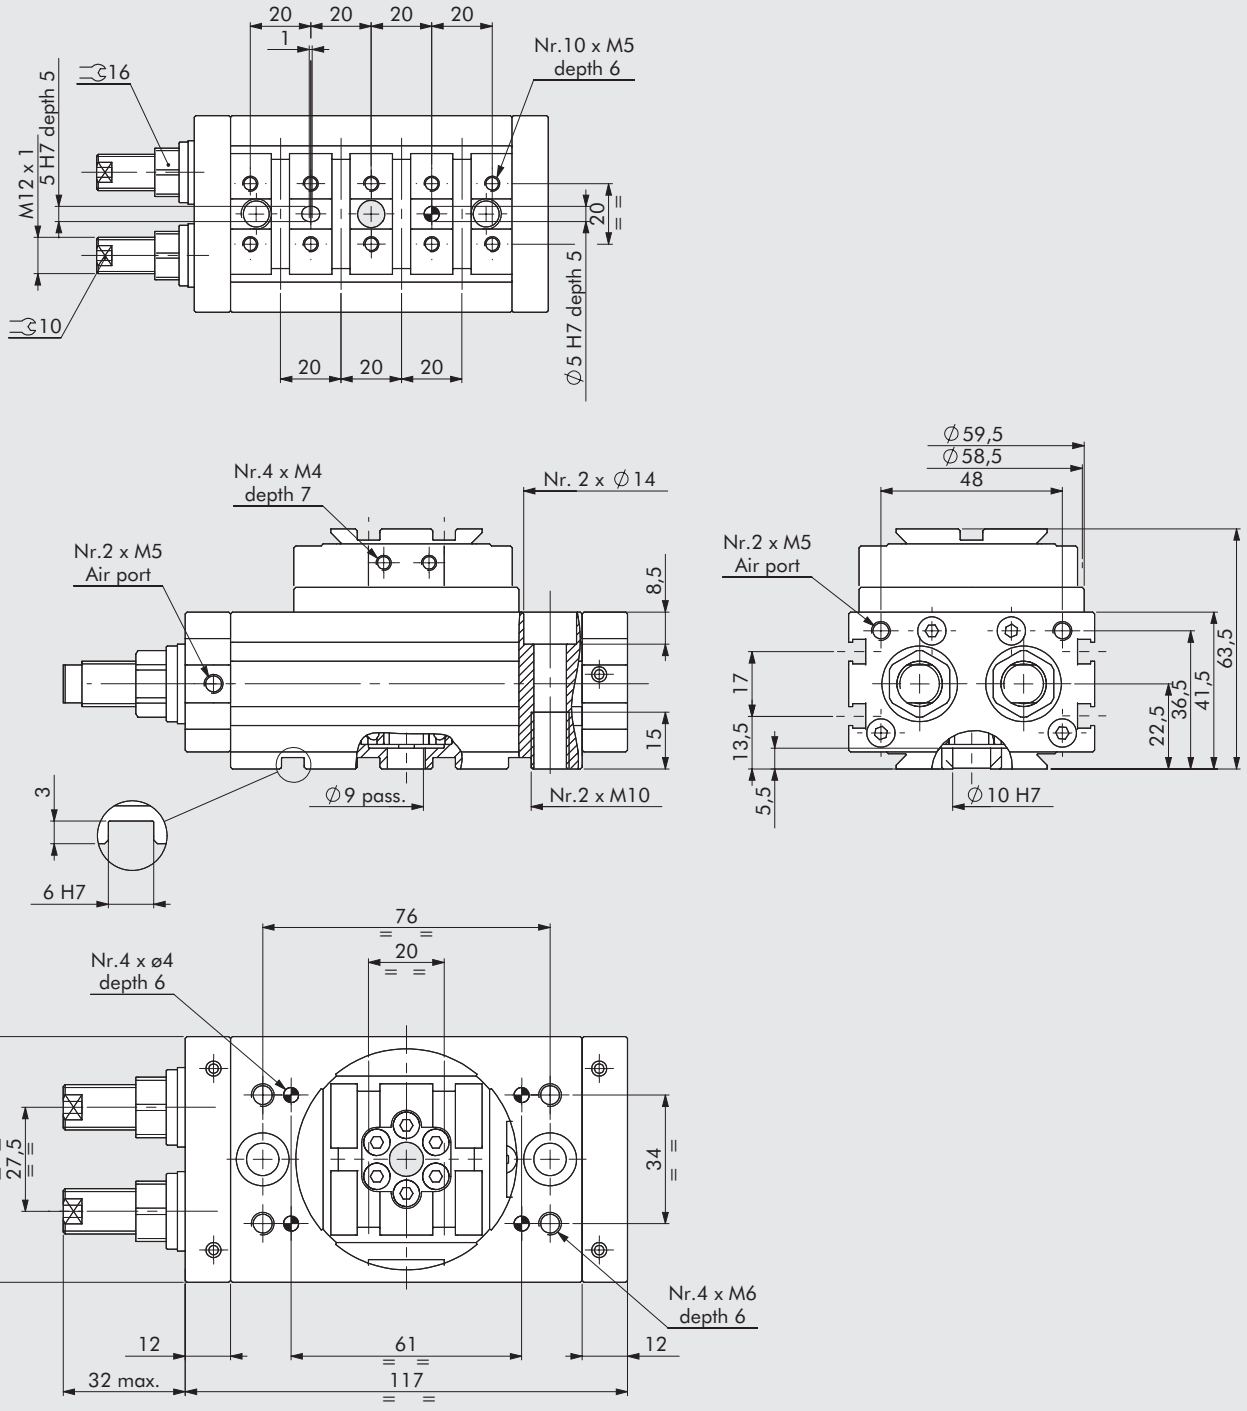

Code	Description
W1630202180K	Rotary actuator R3K-20

ROTARY ACTUATOR R3K-25

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

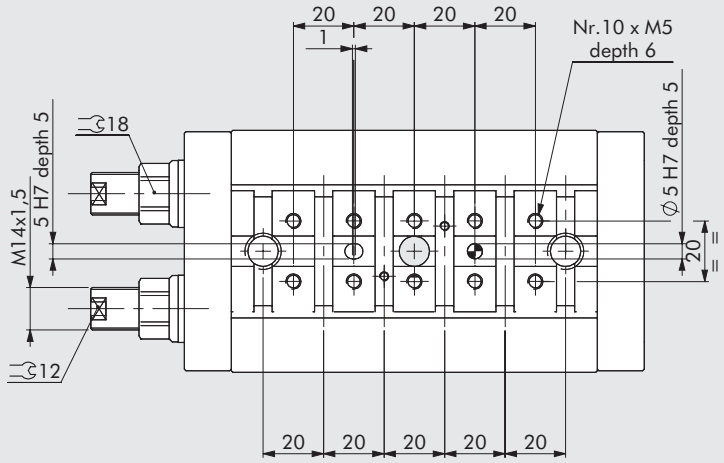

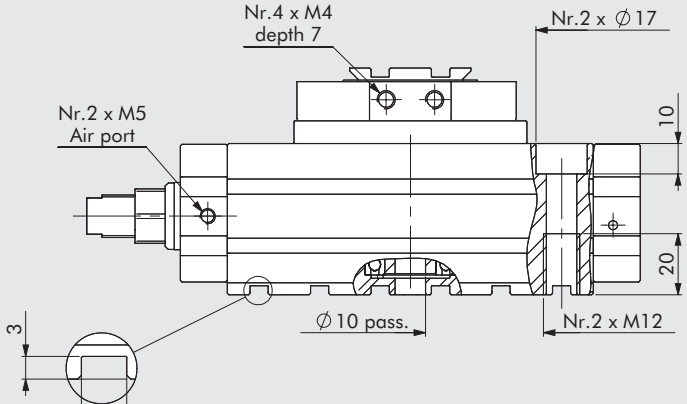

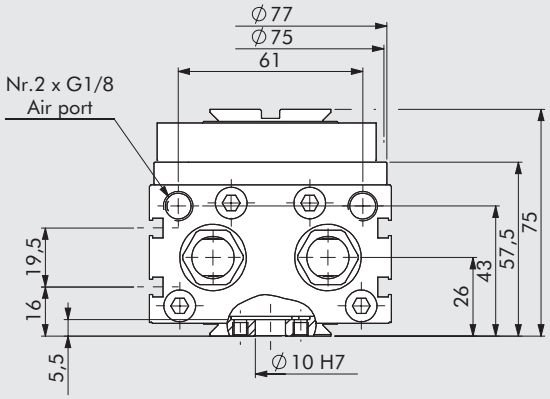

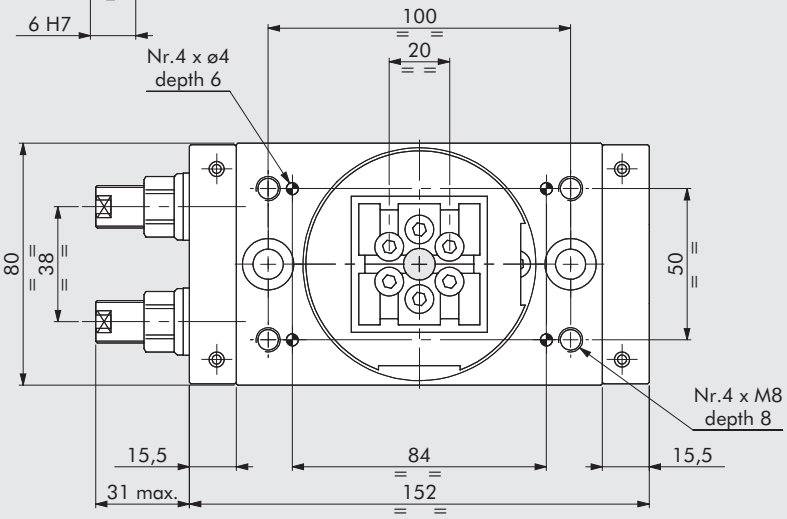

Code	Description
W1630252180K	Rotary actuator R3K-25
W1630253180K	Rotary actuator + shock absorbers R3K-25

ACCESSORIES

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

POSITION SENSORS

LTS



For technical data and usage strokes see **chapter A6**.

SPARE PARTS

SHOCK ABSORBERS



Code	Ø	Description
0950004015	25	Shock absorbers ECO S 25 MC2 short M14 x 1.5

NOTES

ROTARY ACTUATOR SERIES R3K WITH EXTERNAL SHOCK ABSORBERS

An actuator with a double rack and play take-up.
The hydraulic decelerators are mounted externally and act at a greater distance from the rotation axis compared to internal decelerators.
This means the amount of kinetic energy absorbed is 4-8 times greater than with internal decelerators.
Reduced longitudinal dimensions as there are no adjusting screws.
Available in versions with 90° and 180° rotation.
The typical V-Lock dovetail and grooves are present on the turntable and the lower part of the body.
There are two grooves on either side for inserting retracting magnetic sensors.
There is a hole in the flange for air pipes or power cables.

N.B.: The use of flow microregulators is recommended.
During setup, start with the microregulator CLOSED, then open it gradually until the desired speed is reached.

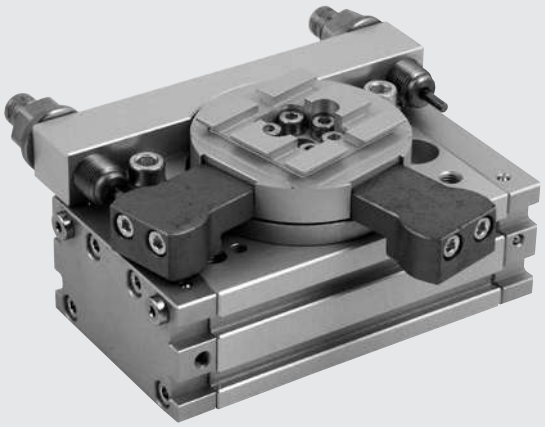

TECHNICAL DATA		R3K-16	R3K-20	R3K-25
Operating pressure	bar	3 to 7		
	MPa	0.3 to 0.7		
	psi	43 to 101		
Temperature range	°C	-10 to 80		
Fluid		Fluid Lubricated or unlubricated 20 µm filtered air. If lubricated air is used, lubrication must be continuous		
Bore	mm	2 x 16	2 x 20	2 x 25
Theoretical torque at 6 bar	Nm	0.9	1.8	4.6
Maximum axial load	N	74	135	300
Maximal radial load	N	78	137	450
Maximum overturning moment	Nm	2.4	4	9.7
Rotation time without load	s	0.2	0.2	0.2
Maximum kinetic energy	Joule	0.16	0.55	1.40
Weight	kg	0.76	1.43	2.86

COMPONENTS

① ROTARY FLANGE: anodized aluminium
② PINION: hardened and tempered steel
③ BALL BEARING
④ PISTON / RACK: hardened and tempered steel
⑤ CUSHIONING GASKET: NBR
⑥ GUIDE PAD: PTFE
⑦ MAGNET: neodymium
⑧ HEAD: anodized aluminium
⑨ BARREL: anodized aluminium
⑩ STROKE REGULATOR WITH HYDRAULIC SHOCK ABSORBERS
⑪ Block for 90° version

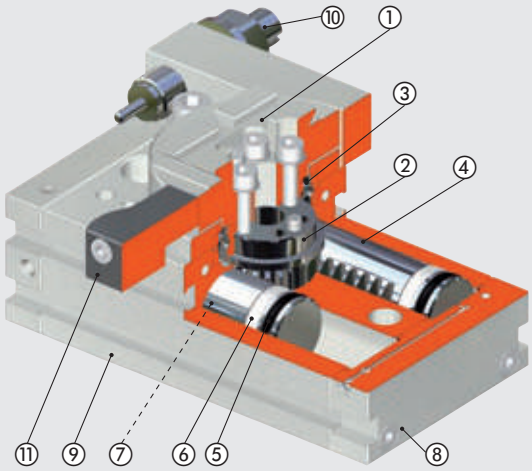

METAL WORK PNEUMATIC

ANGLES OF ROTATION

90°



Hole position
for bottom pins

180°



Hole position
for bottom pins

MAXIMUM KINETIC ENERGY Joule [J]

Ø	With flange, 90° rotation: W1630__4090K With flange, 180°rotation: W1630__4180K
16	0.16
20	0.55
22	0.85
25	1.40

DIMENSIONS - FORCES AND MOMENTS

Ø	T Theoretical torque at 6 bar [Nm]	FA Max axial load [N]	FR Max radial load [N]	M Overturning moment [Nm]
16	0.9	74	78	2.4
20	1.8	135	137	4
22	2.7	195	360	5.3
25	4.6	300	450	9.7



KEY DIAGRAM

Due to the design of turntables for R3K actuators, and to allow precision assembly with the K fixing elements, it is necessary to add a second key code W095000515 0K to the one already present on the standard element.

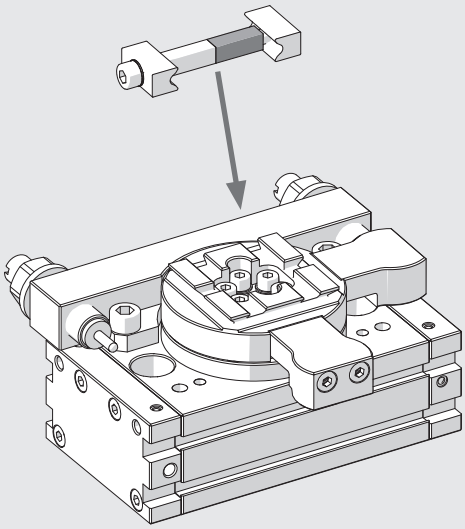

EXAMPLES OF APPLICATION

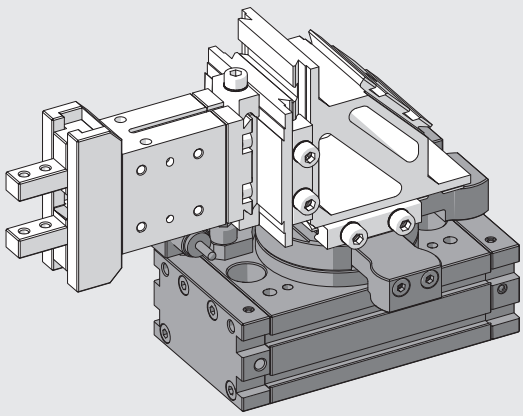

ROTARY ACTUATOR WITH EXTERNAL SHOCK ABSORBERS R3K-16 90/180°

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

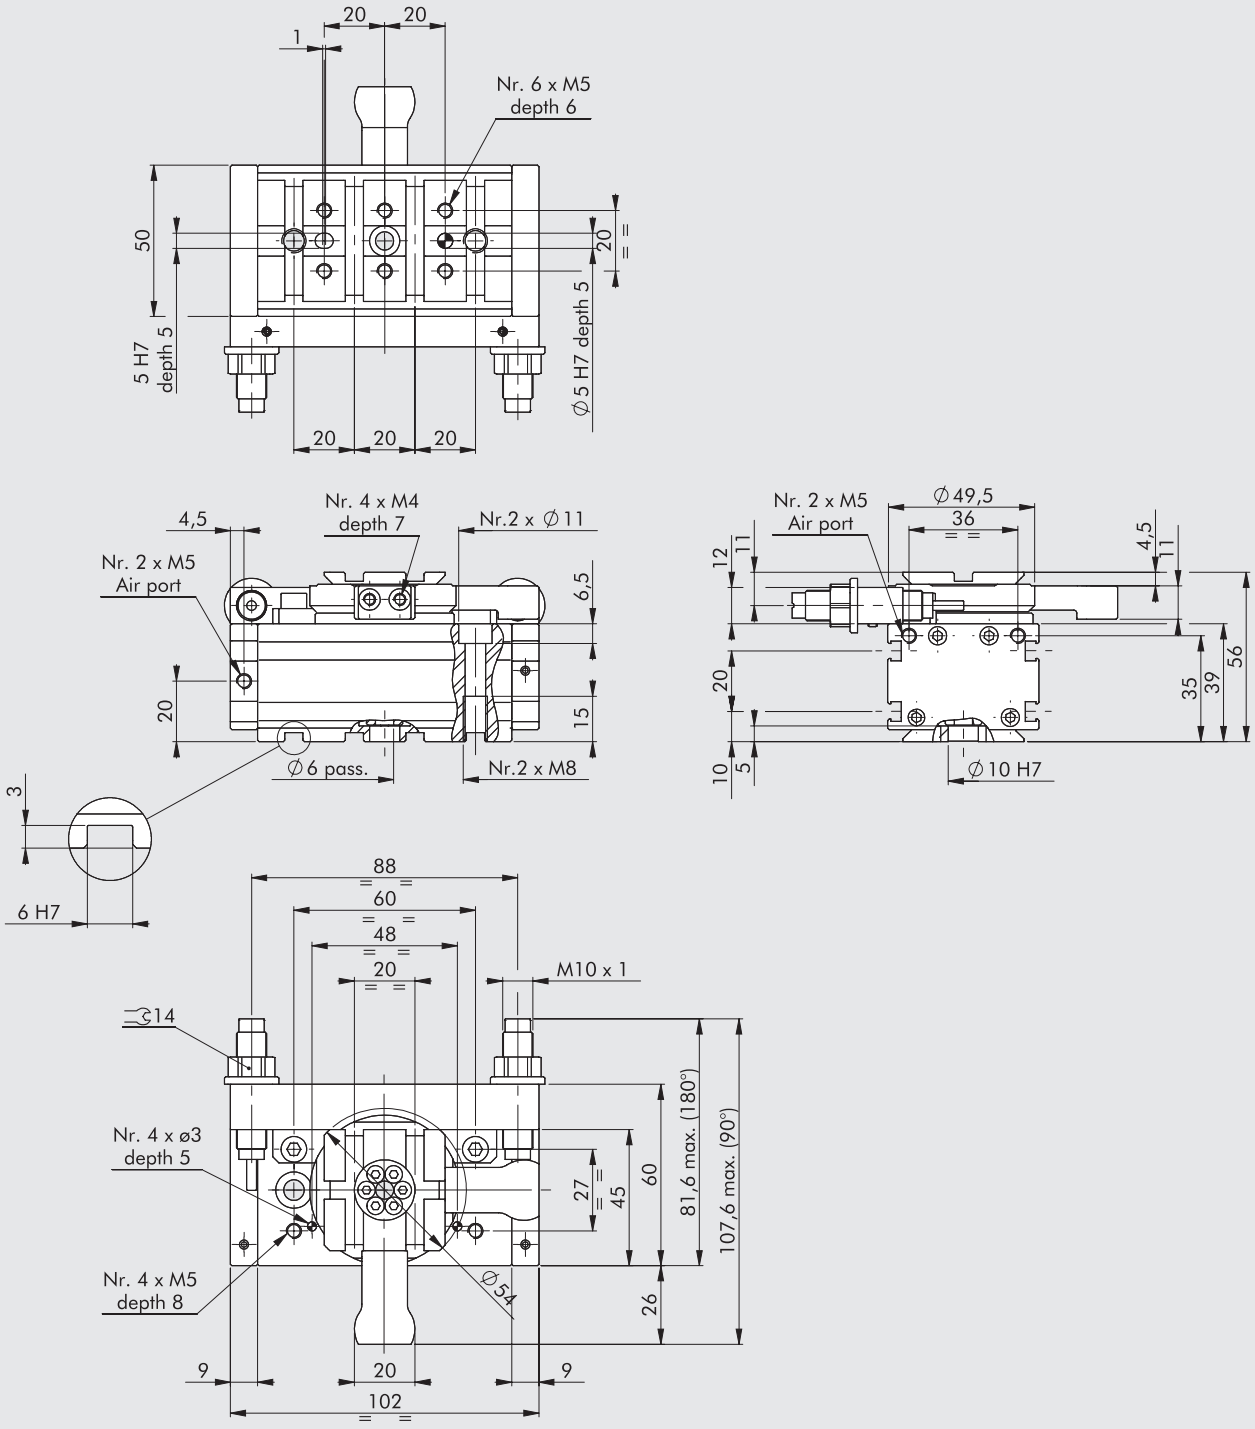

Code	Description
W1630164090K	Rotary actuator with external shock absorbers R3K-16-90
W1630164180K	Rotary actuator with external shock absorbers R3K-16-180

METAL WORK PNEUMATIC

ROTARY ACTUATOR WITH EXTERNAL SHOCK ABSORBERS R3K-20 90/180°

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

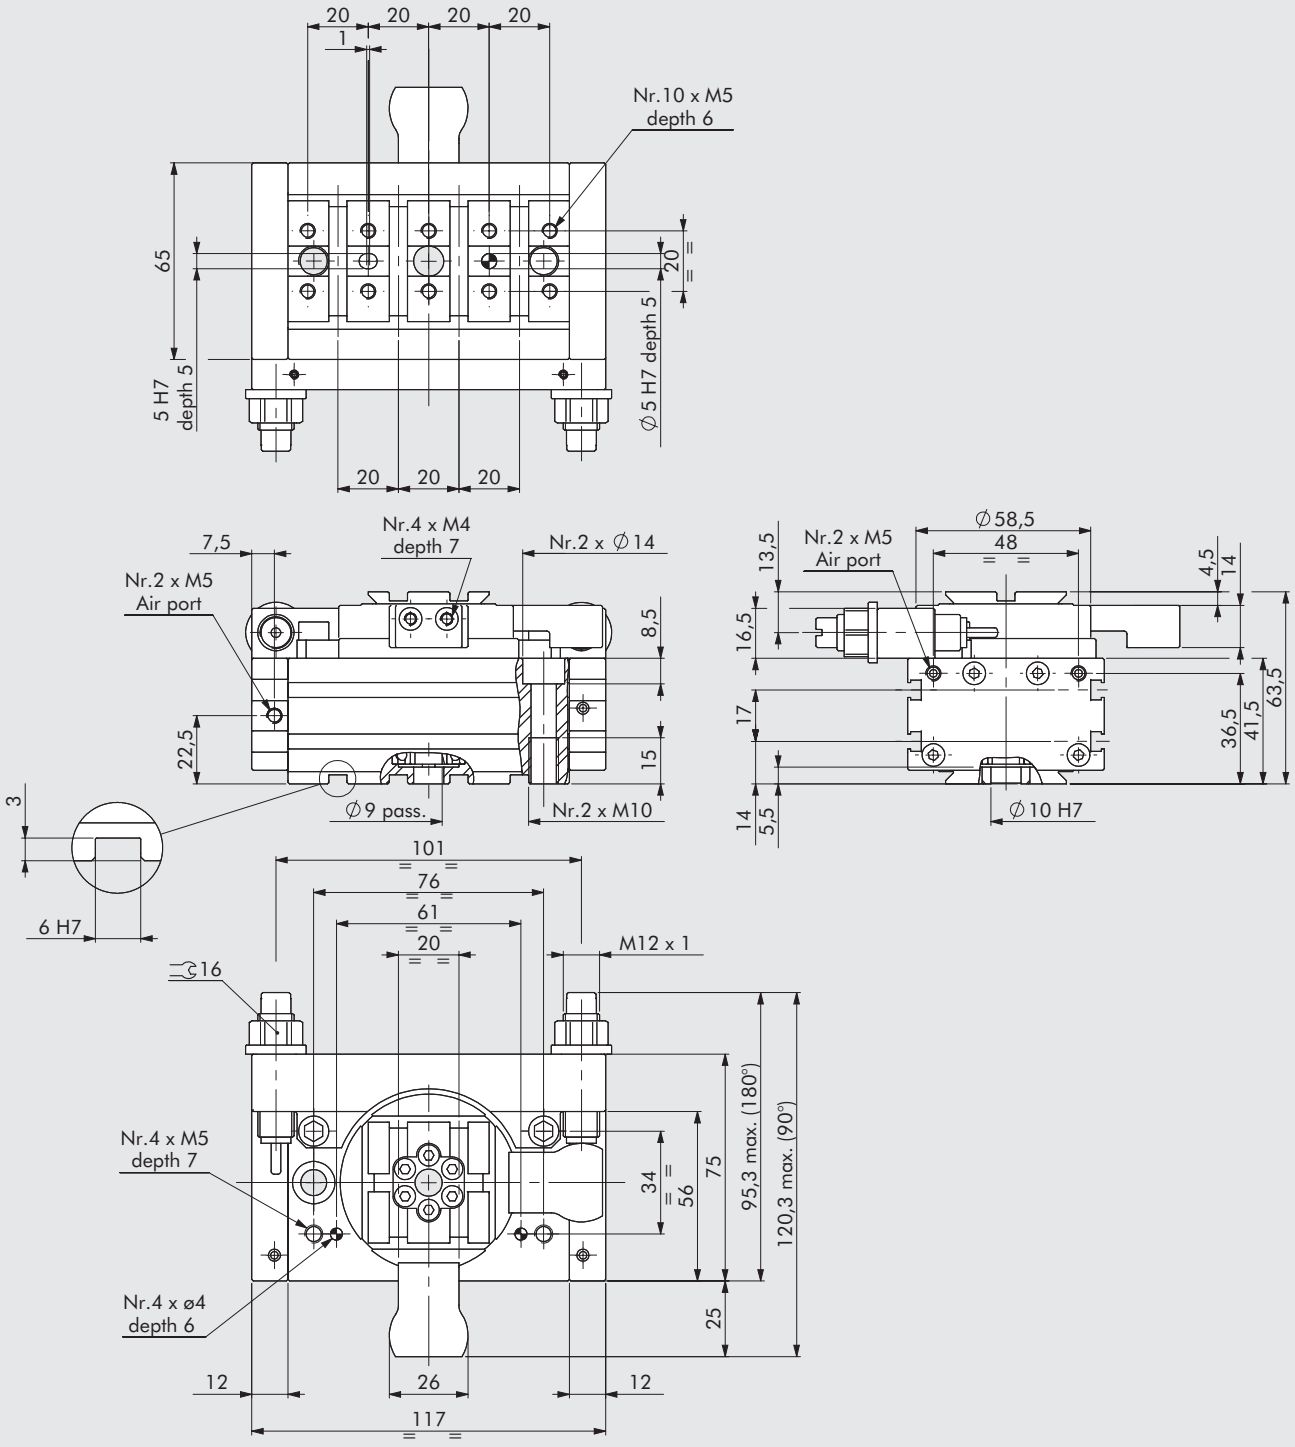

Code	Description
W1630204090K	Rotary actuator with external shock absorbers R3K-20-90
W1630204180K	Rotary actuator with external shock absorbers R3K-20-180

ROTARY ACTUATORS WITH EXTERNAL SHOCK ABSORBERS R3K-25 90/180°

NOTE: For standard dovetail dimensions see **chapter V-Lock Adaptors**.

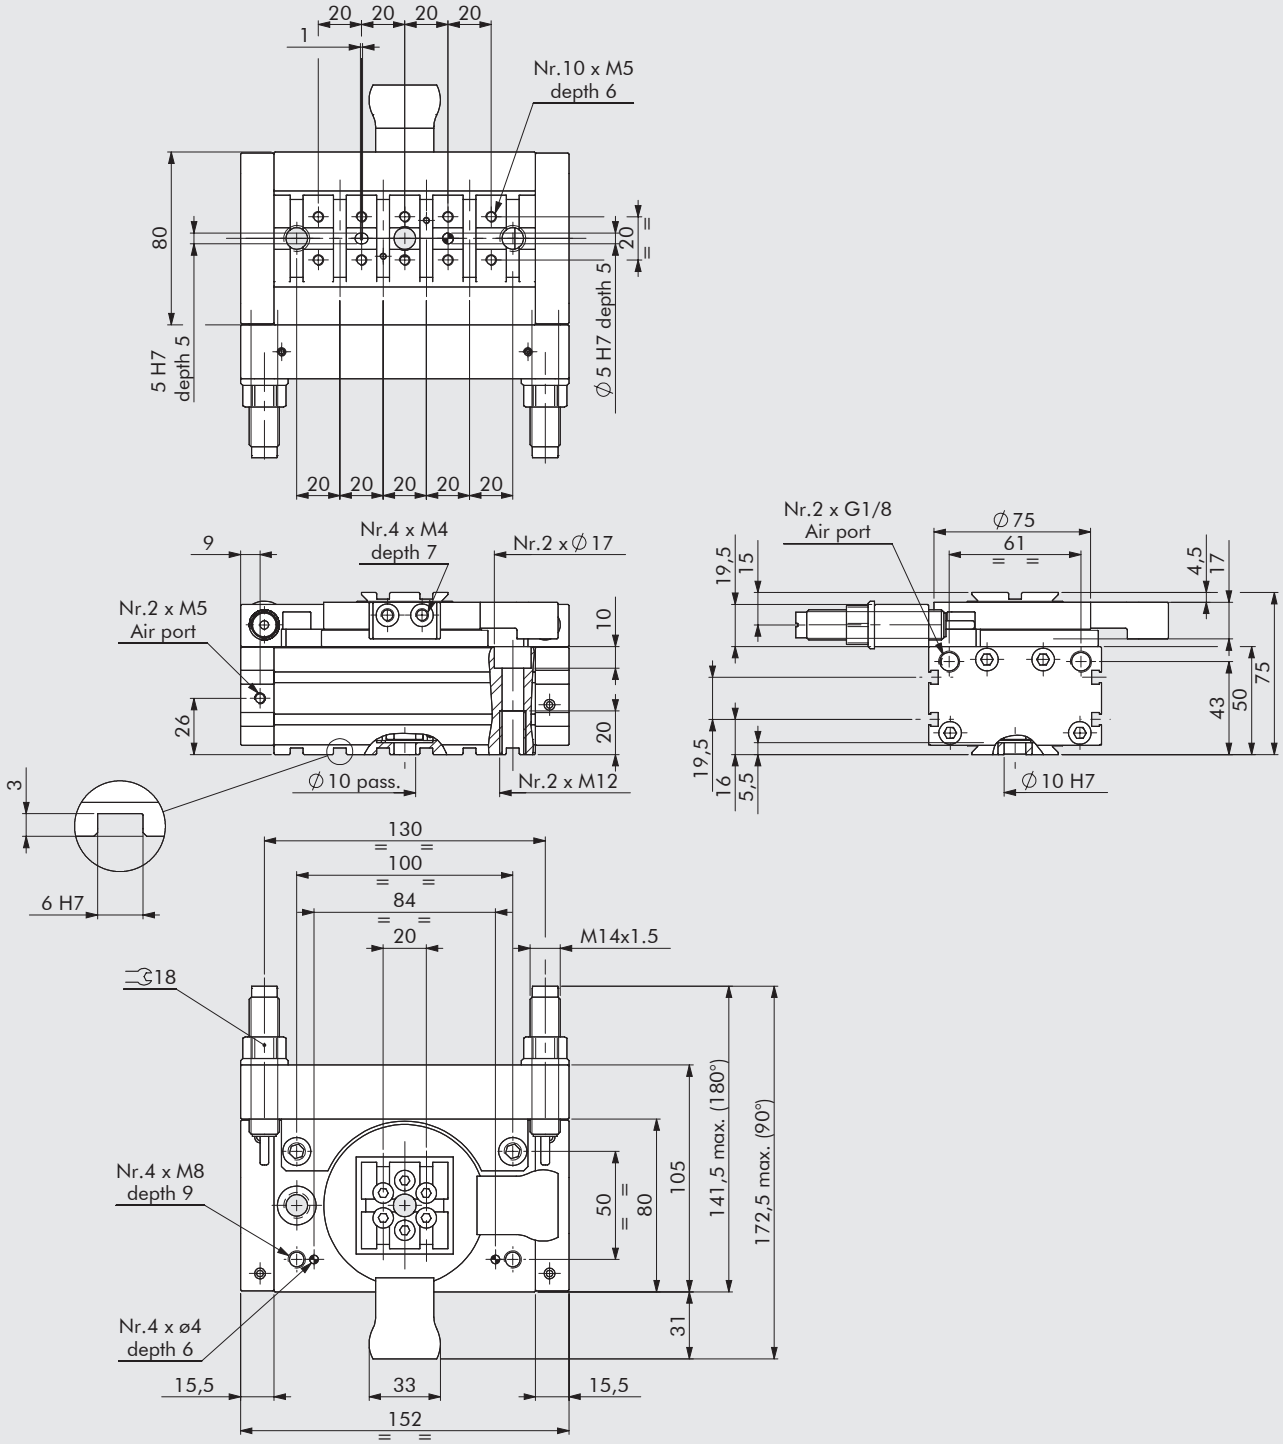

Code	Description
W1630254090K	Rotary actuator with external shock absorbers R3K-25-90
W1630254180K	Rotary actuator with external shock absorbers R3K-25-180

ACCESSORIES

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

POSITION SENSORS

LTS



For technical data and usage strokes see **chapter A6**.

SPARE PARTS

SHOCK ABSORBERS



Code	Ø	Description
0950004009	16	Shock absorbers ECO 10 MF3 M10 x 1
0950004010	20	Shock absorbers ECO 15 MF4 M12 x 1
0950004015	25	Shock absorbers ECO S 25 MC2 short M14 x 1.5

NOTES

ROTARY ACTUATOR SERIES DAPK

The DAPK rotary actuator is characterised by an exceptionally high level of performance, great ease of use, positioning accuracy and long life. It features a patented rack and pinion slack adjustment mechanism.
The angle of rotation can be adjusted between 0° and 180°.
A 3° overrun beyond 180° is also provided at each side.
The end position stops can be either elastic mechanical stop (for application with reduced mass and velocity) or hydraulic shock absorbers.
The end position can be detected using either the magnetic version, which is suitable for magnetic sensors, or the version suitable for inductive sensors. Versions with two, three and four positions are also available. The third and fourth position can be added at a later stage by installing the accessory provided. The versions with a pneumatic rotary distributor can be used to supply compressed air to the rotating plate from the inside, thus avoiding using external rotating pipes.
In this case the rotating plate can be chosen among the one mounted in-line and that tilted by 90°.
N.B.: We always suggest to use flow microregulators.
During the setup of the actuator, start with CLOSE flow microregulators, and open gradually till the achievment of the required speed.

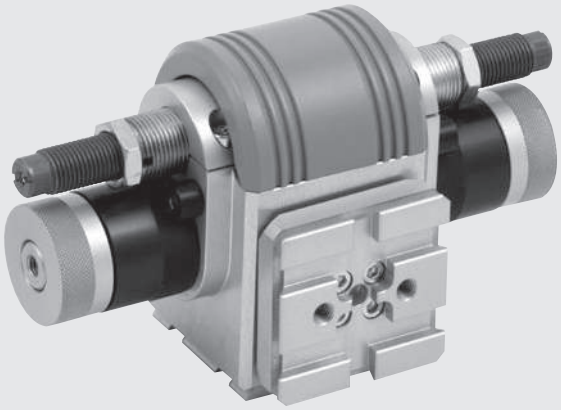

TECHNICAL DATA		DAPK-1	DAPIK-1	DAPK-2	DAPIK-2
Internal air flows		NO	YES	NO	YES
Operating pressure	bar	2 to 7			
	MPa	0.2 to 0.7			
	psi	29 to 101			
Temperature range	°C	-10 to 80			
	°F	14 to 176			
Fluid		Lubricated or unlubricated 20 µm filtered air. If lubricated air is used, lubrication must be continuous			
End position stop shock-absorption		Hydraulic shock-absorbers or elastic mechanical stop			
End-position control		Inductive sensors, magnetic sensors			
Rotation angle	°	Adjustable from 0 to 180			
Bore	mm	20		32	
Moment of inertia around the central axis	kg·m²	0.004		0.030	
Theoretical torque at 6 bar	Nm	1.1		3.8	
Maximum overturning moment	Nm	5		15	
Allowable axial tensile stress/compression	N	90 / 120		240 / 460	
Allowable critical strain energy:					
with elastic mechanical stop	Joule	0.02		0.06	
with shock absorbers	Joule	0.20		0.60	
Repeatability (on 100 strokes at constant conditions)	°	≤ 0.01		≤ 0.01 - 0.02	
Weight of the 2-position version	kg	0.56	0.71	1.50	1.73
Weight of the 3-position version	kg	0.66	0.80	1.67	1.90
Weight of the 4-position version	kg	0.76	0.89	1.84	2.07

COMPONENTS

① BODY: blank anodized aluminium
② PLATE: blank anodized aluminium
③ PINION: steel
④ INTERFACE COVER: blank anodized aluminium
⑤ RACK: steel
⑥ SECONDARY RACK: steel
⑦ GUIDE RING: special technopolymer
⑧ GASKETS: NBR
⑨ TUBE: hard-anodized aluminium
⑩ END CAP: blank anodized aluminium
⑪ COVER: blank anodized aluminium

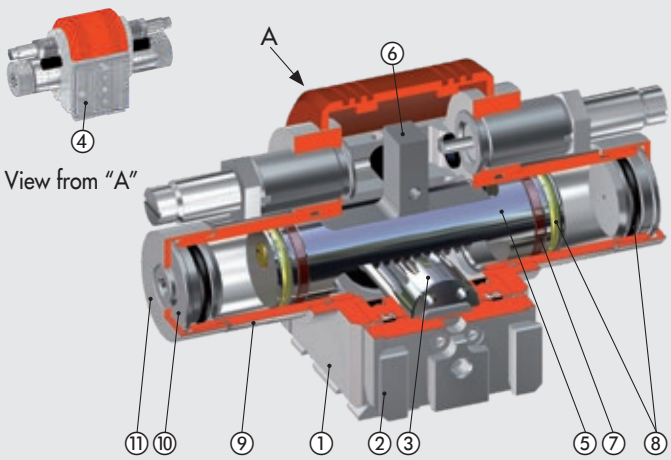

METAL WORK PNEUMATIC

CHOOSING THE SHOCK-ABSORBER

For the correct use of the DAPK-1/DAPIK-1 and DAPK-2/DAPIK-2, use the shock-absorber that best suits the application.
For the DAPK-1/DAPIK-1, you can select only one shock-absorber.
For the DAPK-2/DAPIK-2, you can choose three types of shock-absorbers according to the following procedure:

EXAMPLE
DAPK-2 with:
- Moment of inertia applied to the rotary actuator: J = 0.0100 kg.m²
- Set angle of rotation: φ = 150 °

Requirement: Determine the shock-absorber that best suits the application:

1. Calculate the moment of inertia of the component applied to the DAPK-2/DAPIK-2 rotary actuator.
   In our case the value is J = 0.0100 kg.m²
2. Determine the angle of rotation that the rotary actuator must perform.
   In our case the value is φ = 150 °
3. Intersect the angle and moment of inertia in the diagrams "shock-absorber range of use" of the three types of shock-absorbers used. The shock-absorber whose point is inside the grey area shall be chosen.
   In our case the shock-absorber obtained is the "Shock-absorber on request" MC150EUMH2 average hardness (see encryption key).

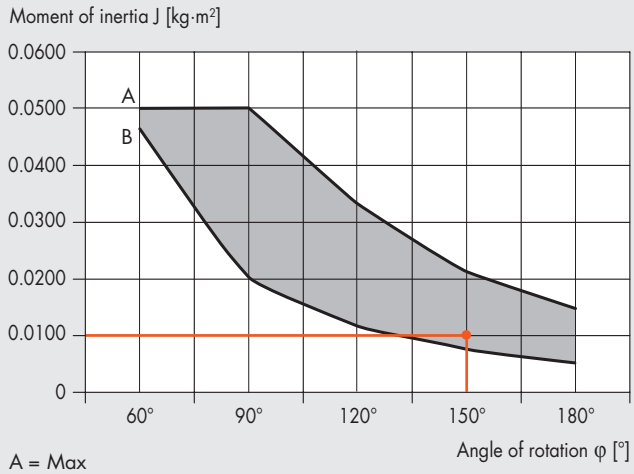

A = Max
B = Min

MC150EUMH STD shock-absorber range of use

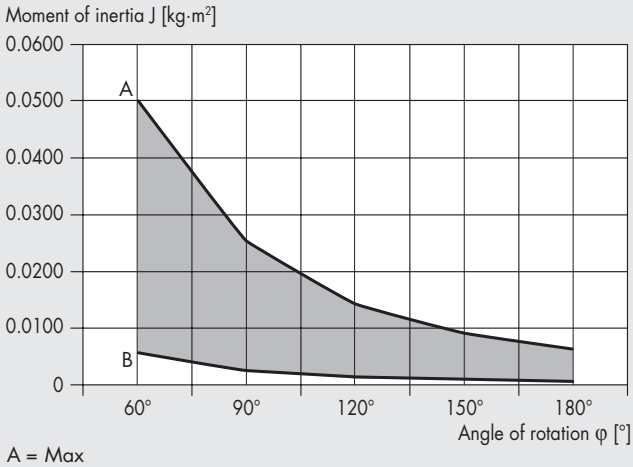

A = Max
B = Min

MC150EUMH2 medium hardness shock-absorber range of use

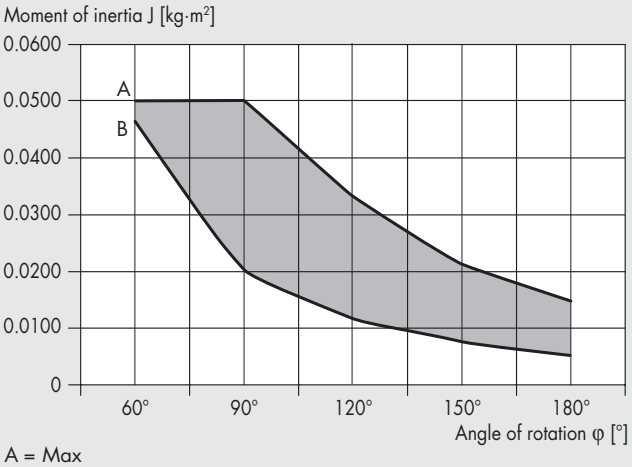

A = Max
B = Min

SC190EUM7 hard shock-absorber range of use

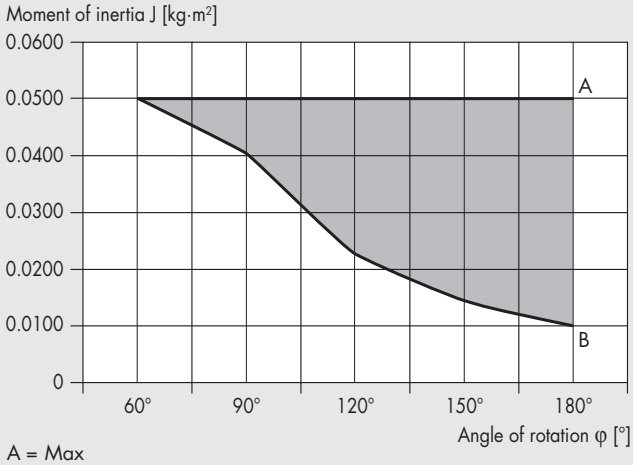

A = Max
B = Min

PERFORMANCE

The method used to determine the maximum theoretical number of cycles and theoretical time of a rotation is the same for both sizes of the DAPK/DAPIK, which involves the use of:

- "performance chart of DAPK-1/DAPIK-1 with hydraulic shock-absorbers and buffers";
- "performance chart of DAPK-2/DAPIK-2 with hydraulic shock-absorbers and buffers".

EXAMPLE

DAPK-2 with:

- Moment of inertia applied to the rotary actuator: J = 0.0100 kg.m^2
- Set angle of rotation: φ = 150 °
- Supply pressure: p = 5 bar

Requirement: Determine the maximum theoretical number of cycles and theoretical time of a rotation:

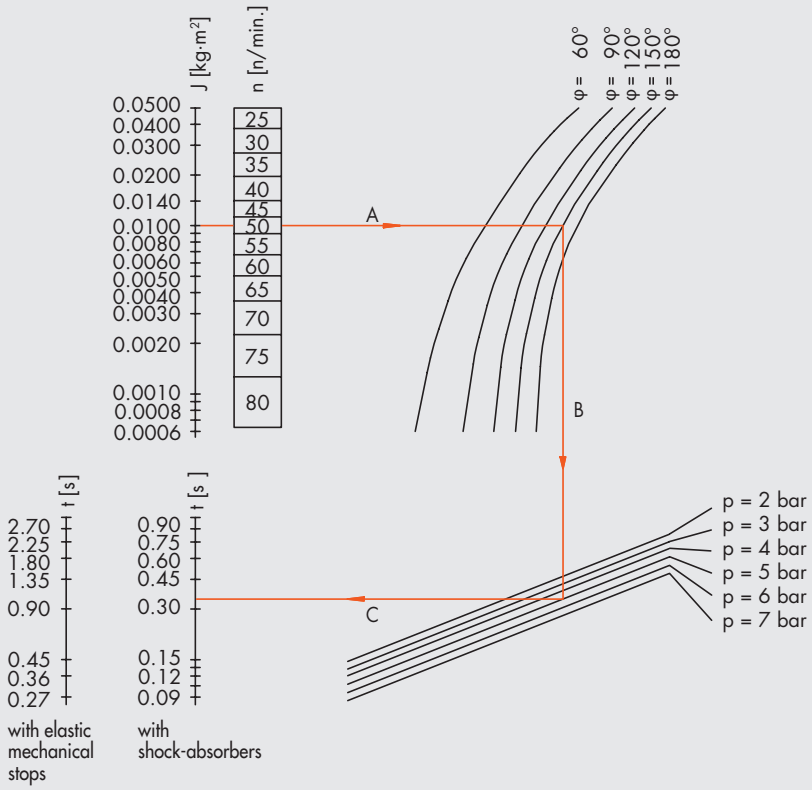

Applicability:

- Centre of gravity of the rotating mass on the axis of rotation. Axis of rotation in any position.
- Centre of gravity of the rotating mass outside the axis of rotation. Axis of rotation in a vertical position.

Example of hydraulic with shock-absorbers:
J = 0.010 kg·m^2
φ = 150°
p = 5 bar

Results:
n_{max} = 50 double strokes per minute
t = 0.34 s standard shock absorber

J = moment of inertia of mass
n = max. number of double strokes per minute for the version with shock-absorbers
p = pneumatic drive pressure
t = traverse time per stroke
φ = angle of rotation

1. Starting from the moment of inertia applied to the rotary actuator, the maximum number of settable theoretical cycles is determined (line A). In our case the value is = 50 cycles/min
2. When the line of the desired angle of rotation is intercepted, move down to the supply pressure (line B) and, by crossing the indexed scale "t" (line C), you obtain the theoretical time of a rotation.
3. In our case the value is t ≈ 0.35 sec.

IMPORTANT: the maximum number of cycles and the time of a rotation are theoretical data and as such, for particular applications, these values are unlikely to be achieved.

METAL WORK PNEUMATIC

PERFORMANCE GRAPHS FOR DAPK-1, DAPIK-1 WITH HYDRALIC SHOCK-ABSORBERS AND ELASTIC MECHANICAL STOPS

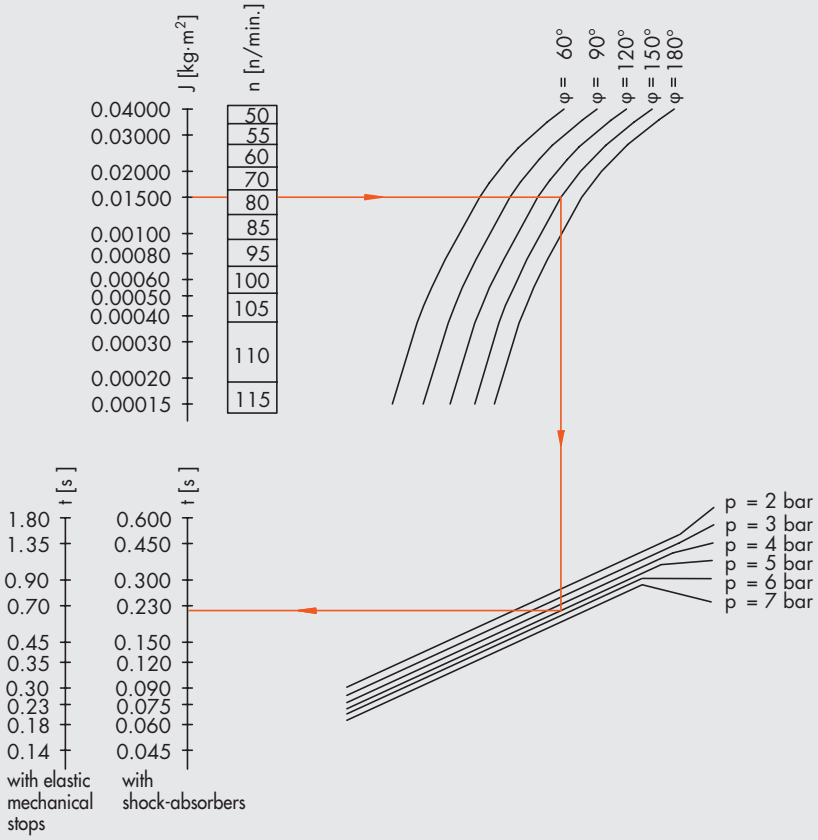

Applicability:
- Centre of gravity of the rotating mass on the axis of rotation. Axis of rotation in any position.
- Centre of gravity of the rotating mass outside the axis of rotation. Axis of rotation in a vertical position.

Example of hydraulic with shock-absorbers:
J = 0.0015 kg·m²
φ = 150°
p = 5 bar

Results:
n_{max} = 80 double strokes per minute
t = 0.22 s

J = moment of inertia of mass
n = max. number of double strokes per minute for the version with shock-absorbers
p = pneumatic drive pressure
t = traverse time per stroke
φ = angle of rotation

PERFORMANCE GRAPHS FOR DAPK-2, DAPIK-2 WITH HYDRALIC SHOCK-ABSORBERS AND ELASTIC MECHANICAL STOPS

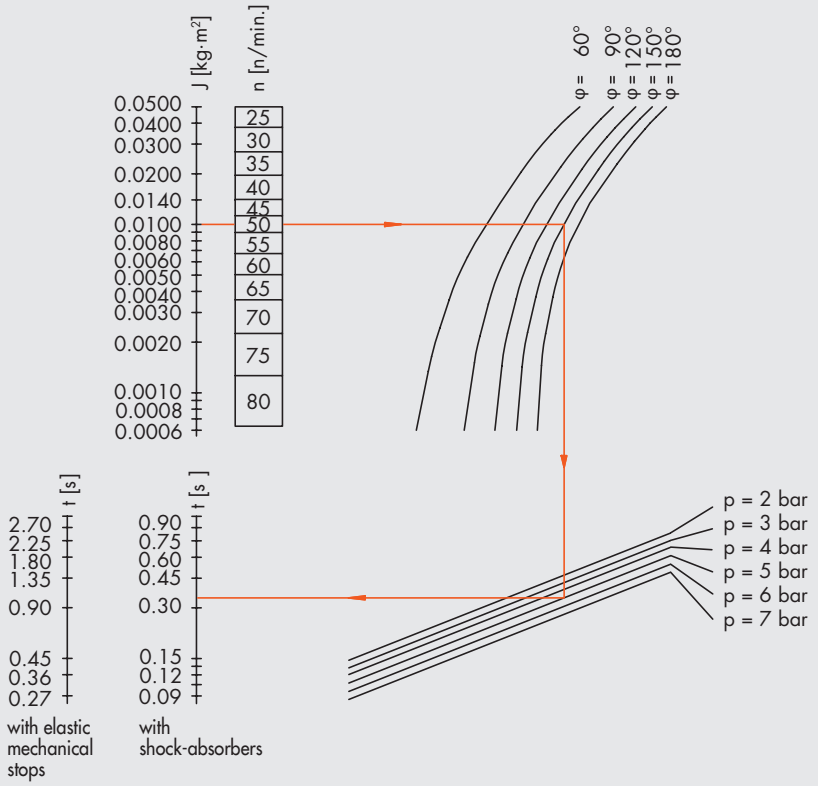

Applicability:
- Centre of gravity of the rotating mass on the axis of rotation. Axis of rotation in any position.
- Centre of gravity of the rotating mass outside the axis of rotation. Axis of rotation in a vertical position.

Example of hydraulic with shock-absorbers:
J = 0.010 kg·m²
φ = 150°
p = 5 bar

Results:
n_{max} = 50 double strokes per minute
t = 0.34 s standard shock absorber

J = moment of inertia of mass
n = max. number of double strokes per minute for the version with shock-absorbers
p = pneumatic drive pressure
t = traverse time per stroke
φ = angle of rotation

PRESSURE / TORQUE CHART DAPK-1, DAPIK-1, DZAK-1

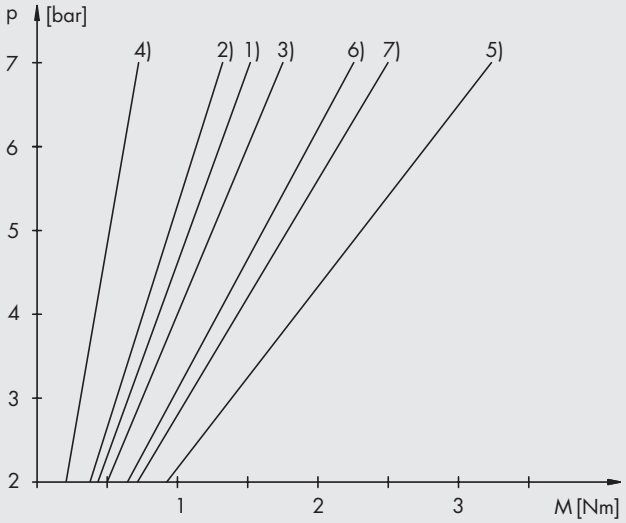

p = drive pressure
M_H = moment of holding, i.e. the moment applicable from the outside to the stationary pinion shaft, with no pinion movement.
M_B = moment of movement, i.e. the moment available for the moving pinion shaft due to the effect of pneumatic drive.

2-POSITION VERSIONS

DAPK left /right end position



M_H = p · 0.21 ⟶ 1)
M_B = p · 0.18 ⟶ 2)

3-POSITION VERSIONS (DZAK)

DAPK against DZAK on the outlet



M_H = p · 0.25 ⟶ 3)
M_B = p · 0.10 ⟶ 4)

DZAK outlet, DAPK without pressure



M_H = p · 0.46 ⟶ 5)
M_B = p · 0.32 ⟶ 6)

DAPK + DZAK



M_B = p · 0.35 ⟶ 7)

PRESSURE / TORQUE CHART DAPK-2, DAPIK-2, DZAK-2

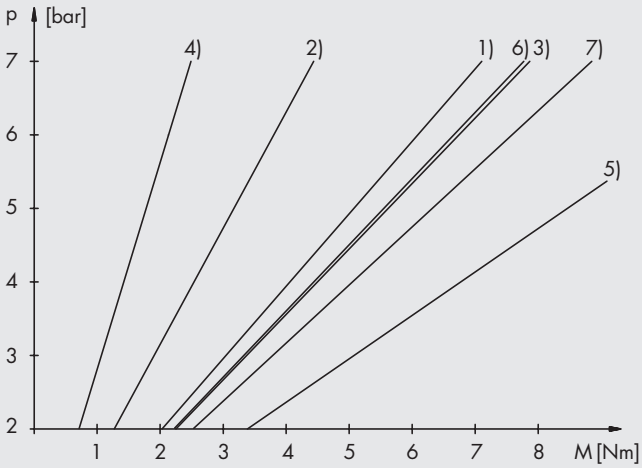

p = drive pressure
M_H = moment of holding, i.e. the moment applicable from the outside to the stationary pinion shaft, with no pinion movement.
M_B = moment of movement, i.e. the moment available for the moving pinion shaft due to the effect of pneumatic drive.

2-POSITION VERSIONS

DAPK left /right end position



M_H = p · 1.01 ⟶ 1)
M_B = p · 0.63 ⟶ 2)

3-POSITION VERSIONS (DZAK)

DAPK against DZAK on the outlet



M_H = p · 1.12 ⟶ 3)
M_B = p · 0.35 ⟶ 4)

DZAK outlet, DAPK without pressure



M_H = p · 1.69 ⟶ 5)
M_B = p · 1.10 ⟶ 6)

DAPK + DZAK



M_B = p · 1.26 ⟶ 7)

METAL WORK PNEUMATIC

EXAMPLES OF APPLICATION

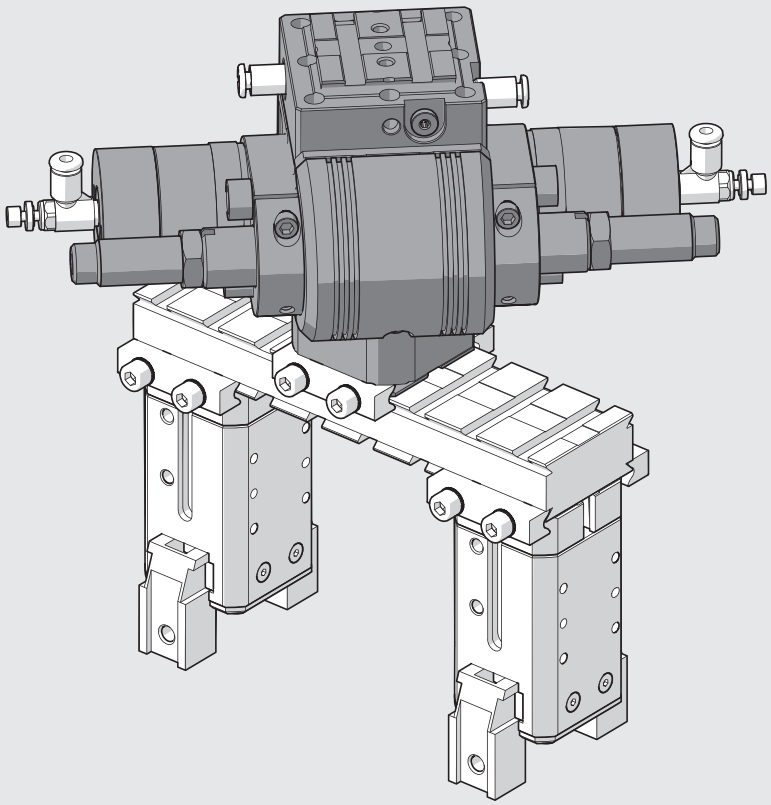

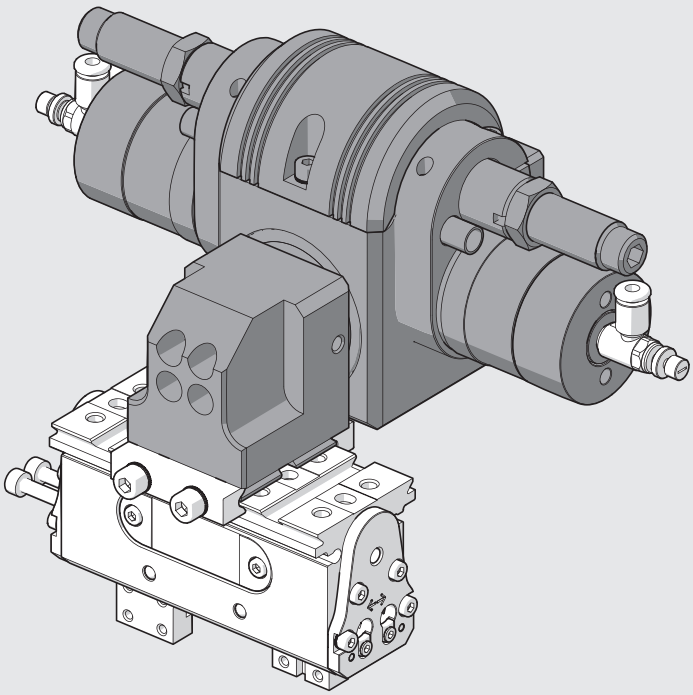

DIMENSIONS OF THE DAPK-1 ROTARY ACTUATOR

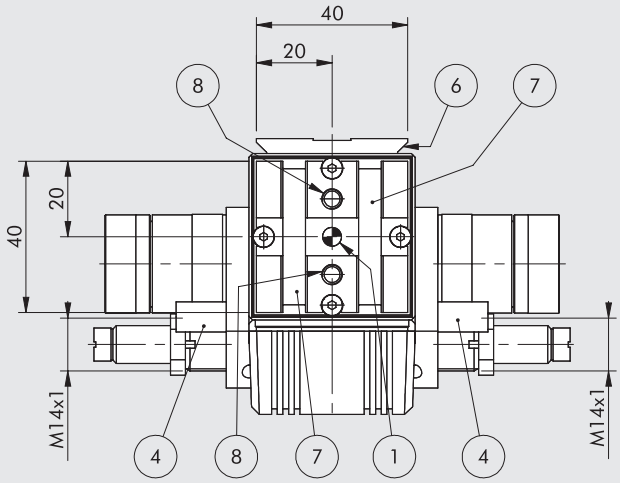

VERSION WITH ELASTIC MECHANICAL STOP

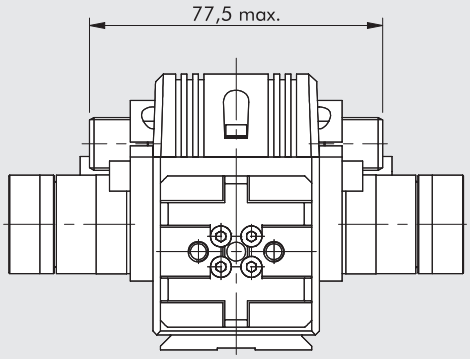

MAGNETIC VERSION



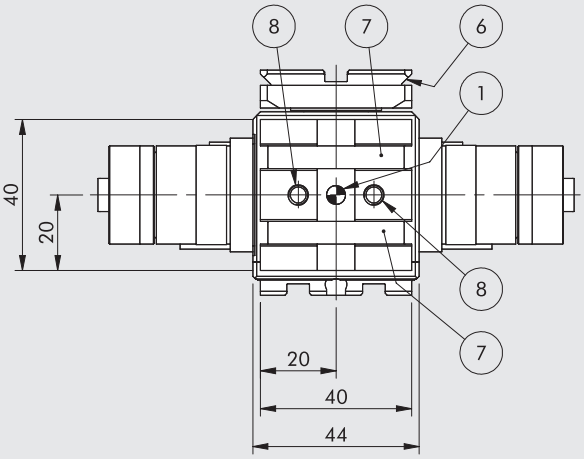

① Holes for centring pins
② Right-hand rotation supply
③ Left-hand rotation supply
④ Bushing for inductive sensors
⑤ Magnetic sensor or position sensor fixing slots
⑥ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑦ Slot for "V-Lock" precision key
⑧ Threaded holes for fixing

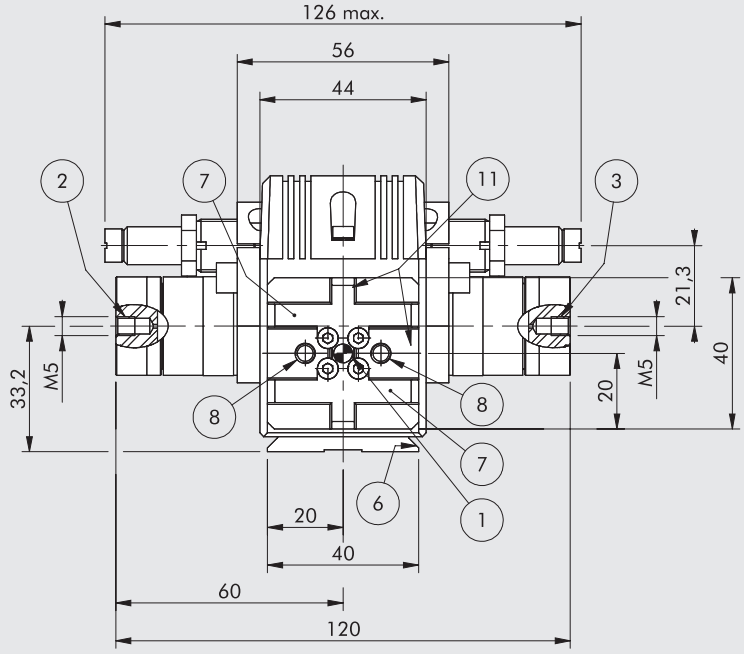

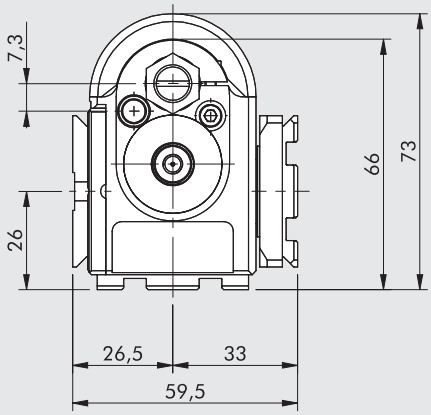

IMPORTANT: 1° of rotation corresponds to a linear movement of Δ = 0.126 mm

METAL WORK PNEUMATIC

DAPIK-1 ROTARY ACTUATOR DIMENSIONS WITH INTERNAL AIR FLOWS

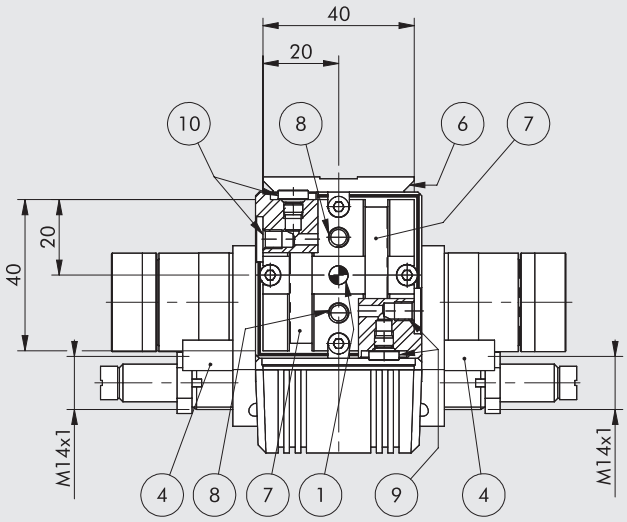

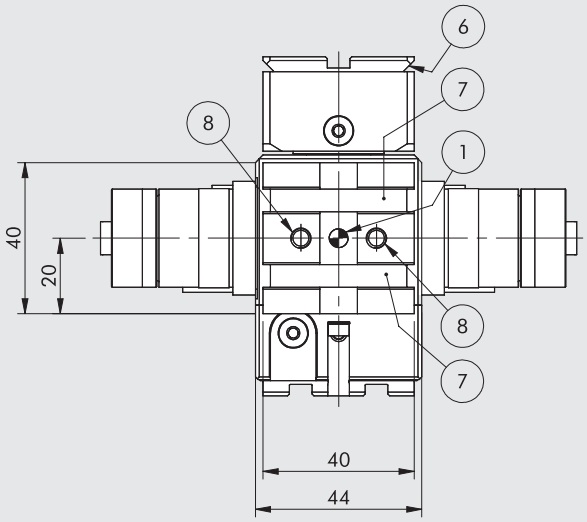

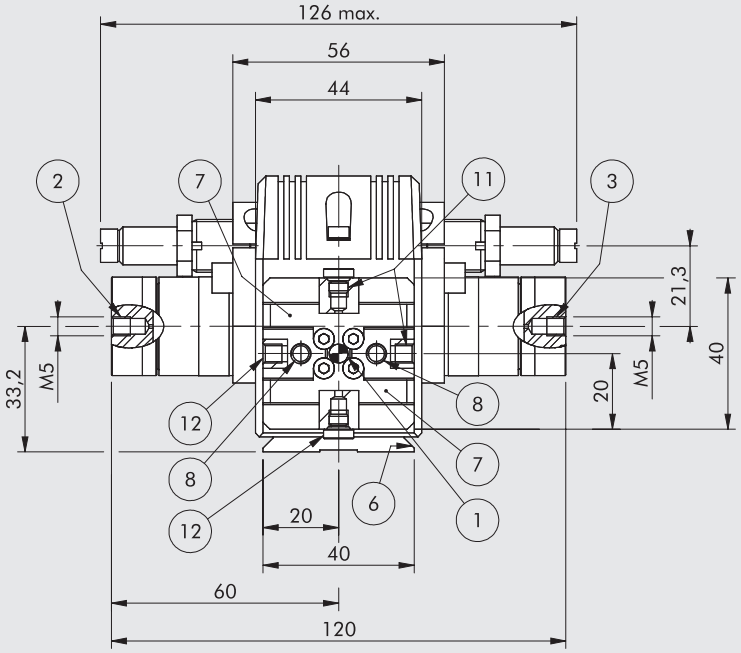

VERSION WITH ELASTIC MECHANICAL STOP

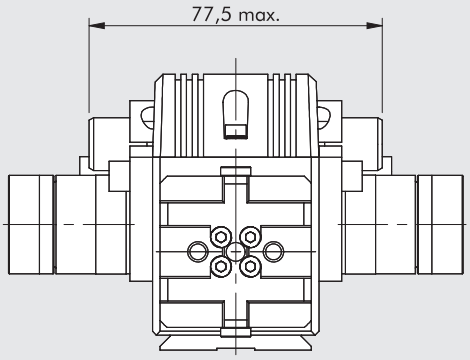

MAGNETIC VERSION

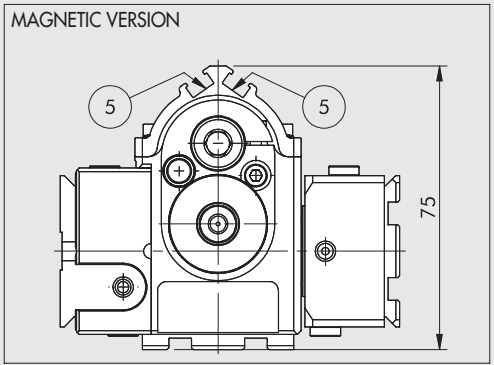

① Holes for centring pins
② Right-hand rotation supply
③ Left-hand rotation supply
④ Bushing for inductive sensors
⑤ Magnetic sensor or position sensor fixing slots
⑥ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑦ Slot for "V-Lock" precision key
⑧ Threaded holes for fixing
⑨ Air inlets on the right (M5 thread)
⑩ Air inlets on the left (M5 thread)
⑪ Air outlets on the right (M5 thread)
⑫ Air outlets on the left (M5 thread)

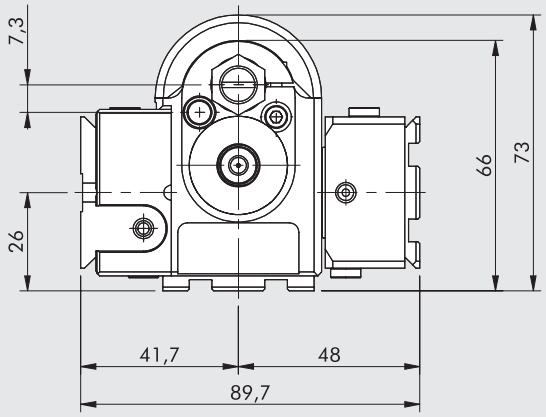

IMPORTANT: 1° of rotation corresponds to a linear movement of Δ = 0.126 mm

DIMENSIONS OF THE DAPK-2 ROTARY ACTUATOR

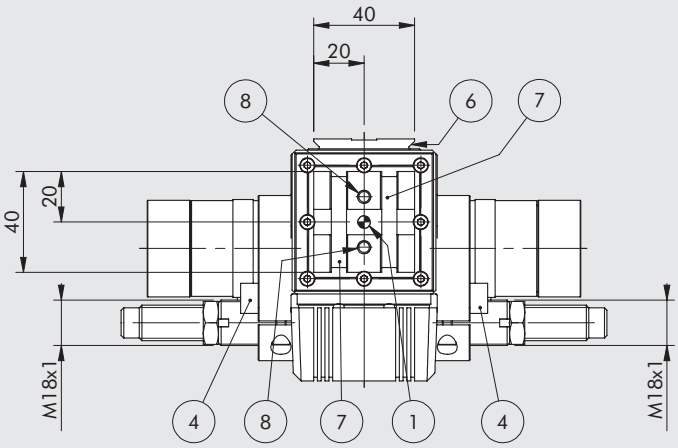

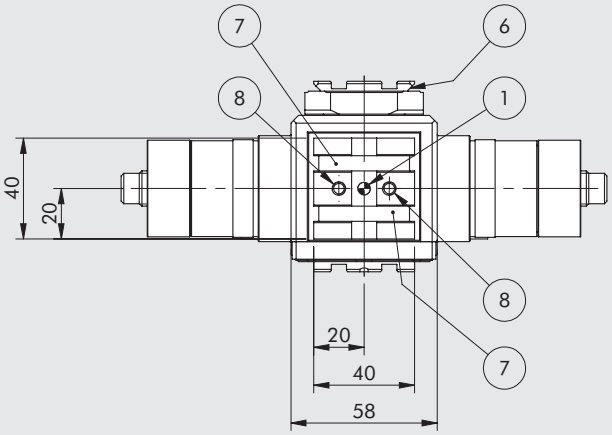

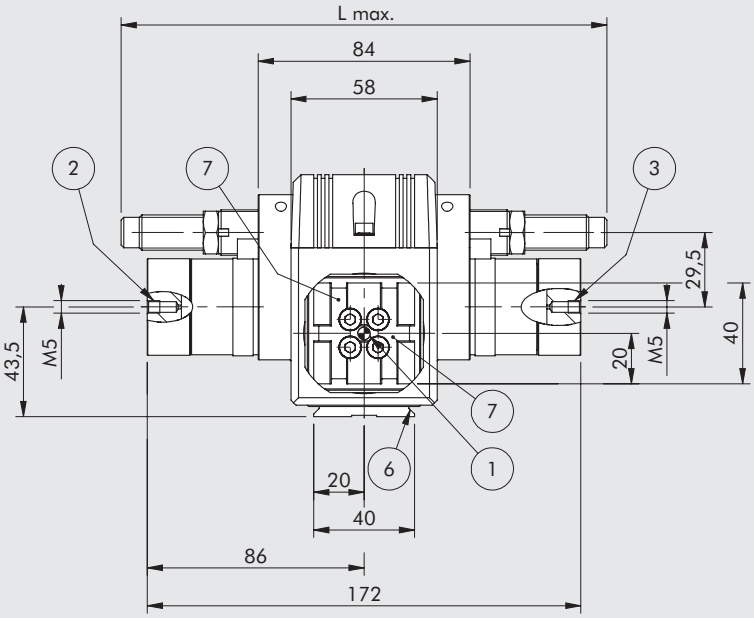

VERSION WITH ELASTIC MECHANICAL STOP

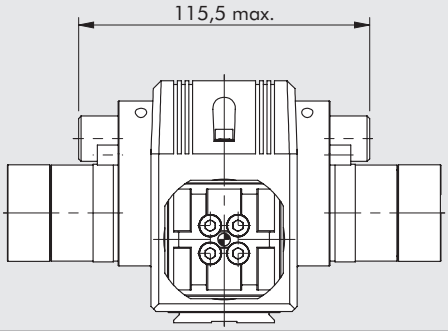

MAGNETIC VERSION



① Holes for centring pins
② Right-hand rotation supply
③ Left-hand rotation supply
④ Bushing for inductive sensors
⑤ Magnetic sensor or position sensor fixing slots
⑥ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑦ Slot for "V-Lock" precision key
⑧ Threaded holes for fixing

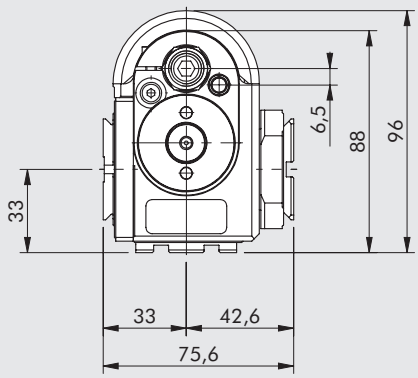

Shock-absorbers	L
Standard (H)	192.7 mm
Medium hardness (H2)	192.7 mm
Hard (M7)	209.5 mm

IMPORTANT: 1° of rotation corresponds to a linear movement of Δ = 0.183 mm

METAL WORK PNEUMATIC

DAPIK-2 ROTARY ACTUATOR DIMENSIONS WITH INTERNAL AIR FLOWS

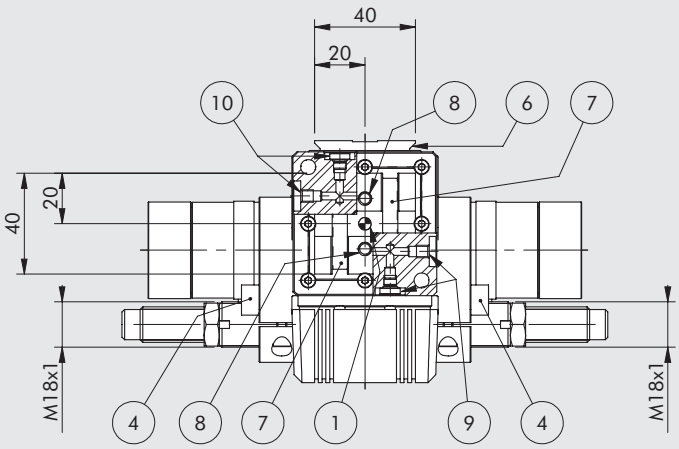

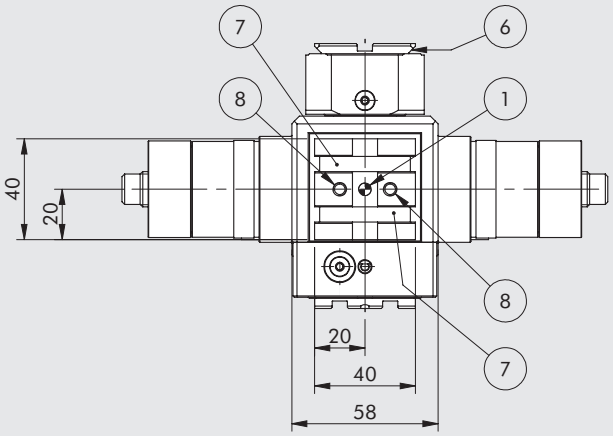

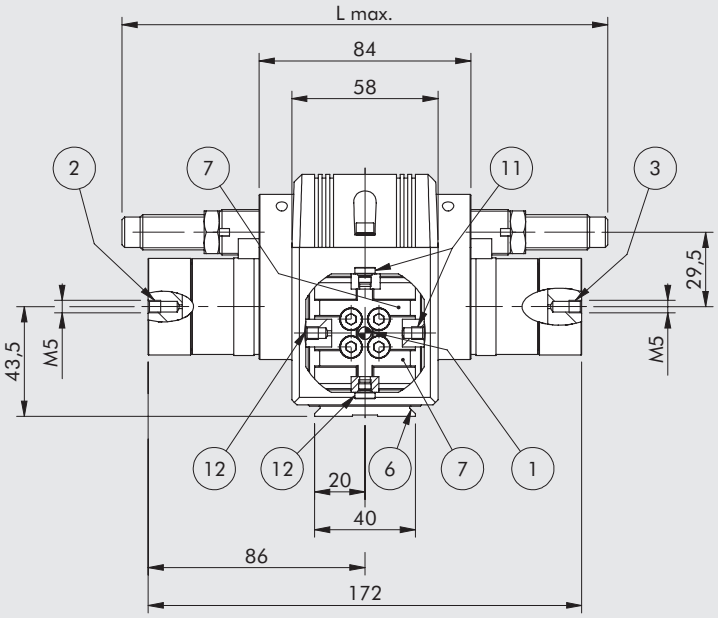

VERSION WITH ELASTIC MECHANICAL STOP

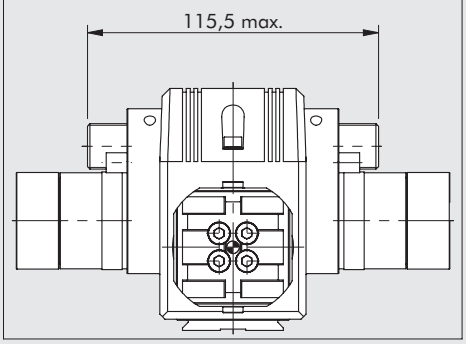

MAGNETIC VERSION

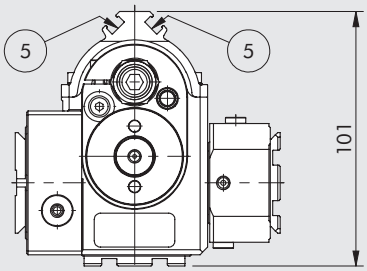

① Holes for centring pins
② Right-hand rotation supply
③ Left-hand rotation supply
④ Bushing for inductive sensors
⑤ Magnetic sensor or position sensor fixing slots
⑥ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑦ Slot for "V-Lock" precision key
⑧ Threaded holes for fixing
⑨ Air inlets on the right (M5 thread)
⑩ Air inlets on the left (M5 thread)
⑪ Air outlets on the right (M5 thread)
⑫ Air outlets on the left (M5 thread)

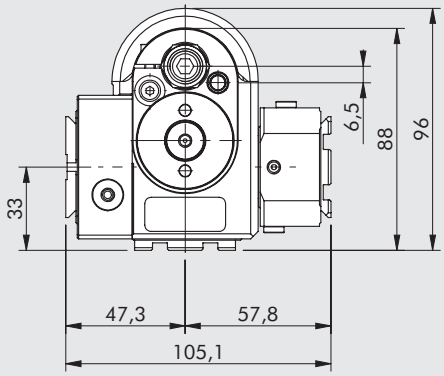

Shock-absorbers	L
Standard (H)	192.7 mm
Medium hardness (H2)	192.7 mm
Hard (M7)	209.5 mm

IMPORTANT: 1° of rotation corresponds to a linear movement of Δ = 0.183 mm

DIMENSIONS OF DAPIK-1 + WAK-1 ROTARY ACTUATOR WITH INTERNAL AIR FLOWS AND 90° RETURN

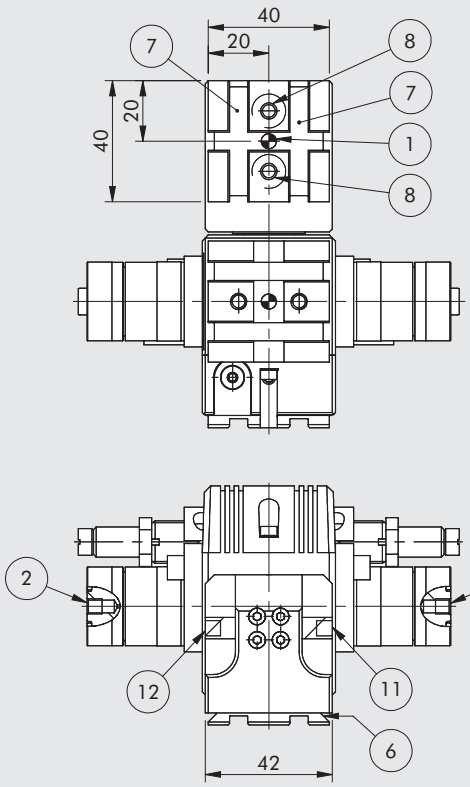

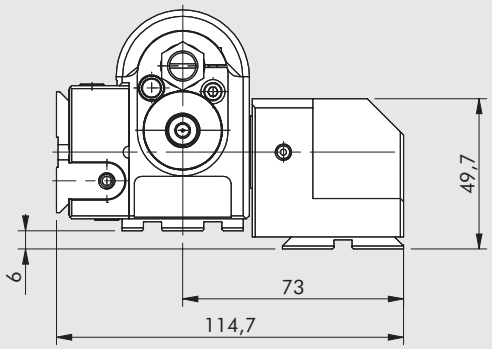

① Holes for centring pins
② Right-hand rotation supply
③ Left-hand rotation supply
⑥ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑦ Slot for "V-Lock" precision key
⑧ Threaded holes for fixing
⑪ Air outlets on the right (M5 thread)
⑫ Air outlets on the left (M5 thread)

IMPORTANT: for any missing dimensions, please refer to the DAPIK-1 rotary actuator on page **A3**.143

DIMENSIONS OF DAPIK-2 + WAK-2 ROTARY ACTUATOR WITH INTERNAL AIR FLOWS AND 90° RETURN

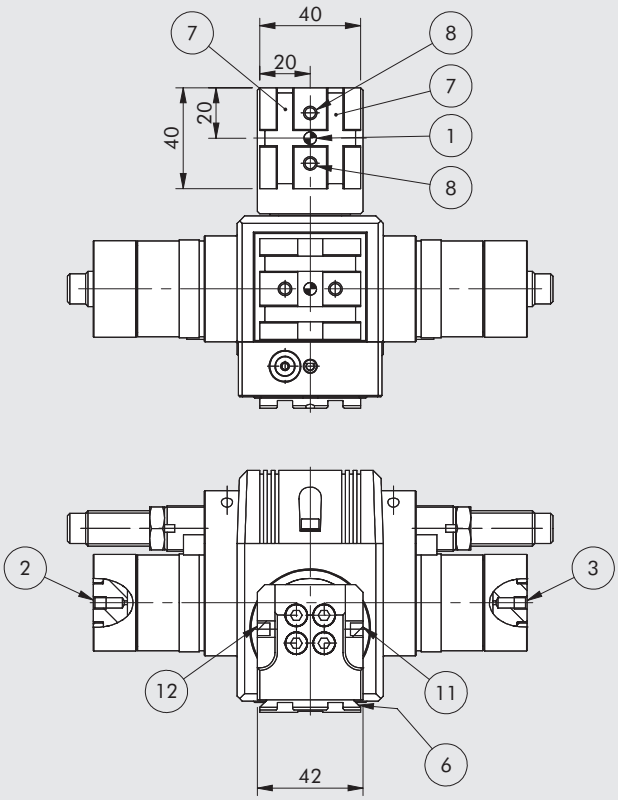

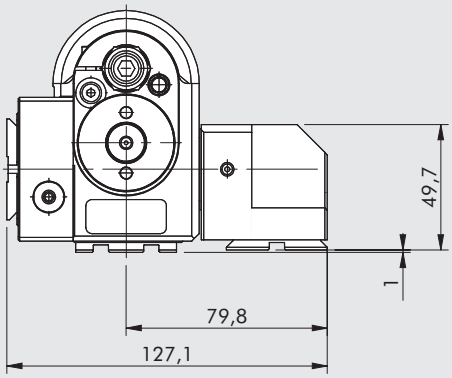

① Holes for centring pins
② Right-hand rotation supply
③ Left-hand rotation supply
⑥ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑦ Slot for "V-Lock" precision key
⑧ Threaded holes for fixing
⑪ Air outlets on the right (M5 thread)
⑫ Air outlets on the left (M5 thread)

IMPORTANT: for any missing dimensions, please refer to the DAPIK-2 rotary actuator on page **A3**.145

DIMENSIONS OF DAPK-1 + DZAK-1 THREE-POSITION ROTARY ACTUATOR (right or left)

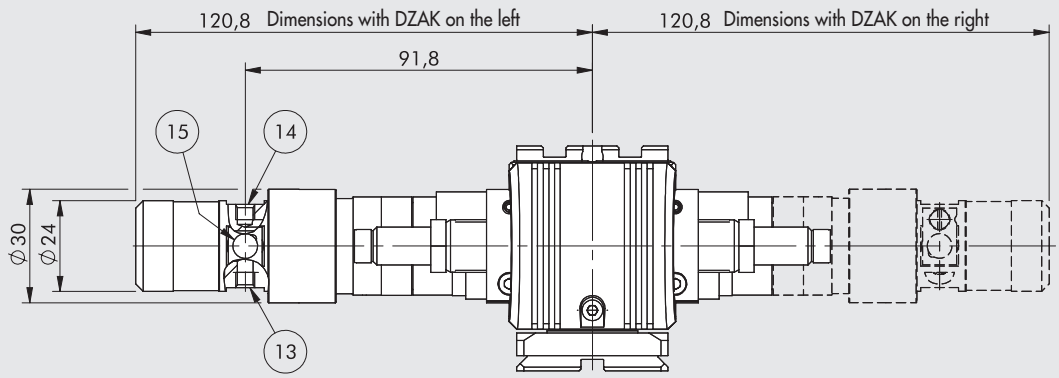

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPK-1 rotary actuator on page **A3**.142

DIMENSIONS OF DAPIK-1 + DZAK-1 THREE-POSITION ROTARY ACTUATOR WITH INTERNAL AIR FLOWS (right or left)

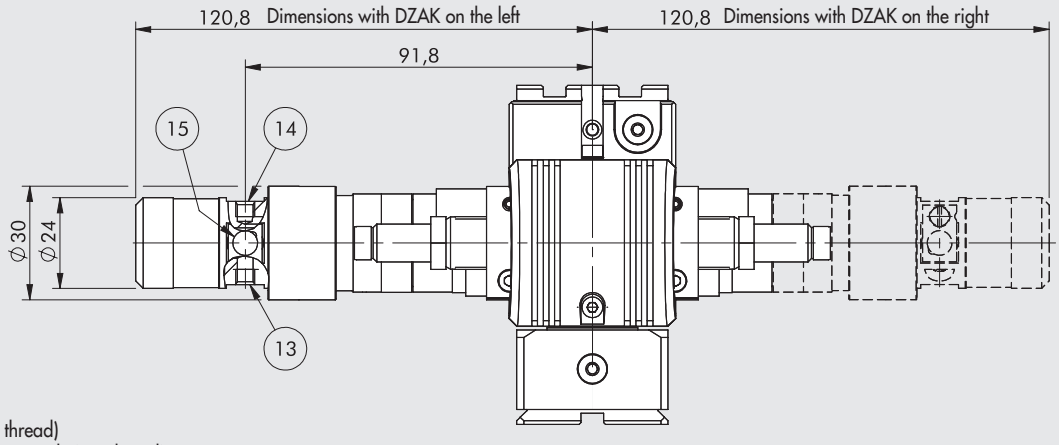

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPIK-1 rotary actuator on page **A3**.143

DIMENSIONS OF DAPIK-1 + WAK-1 + DZAK-1 THREE-POSITION ROTARY ACTUATOR WITH INTERNAL AIR FLOWS AND 90° RETURN (right or left)

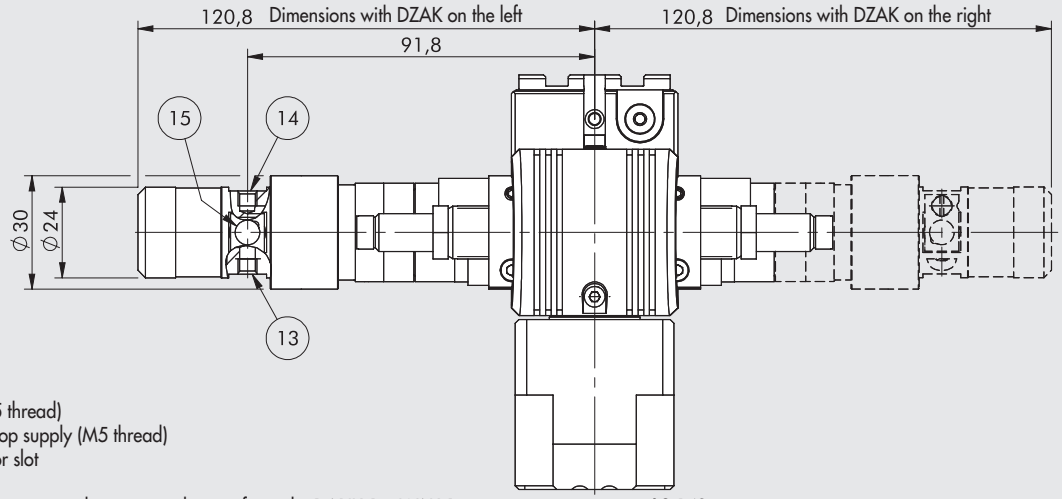

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPIK-1 + WAK-1 rotary actuator on page **A3**.142

DIMENSIONS OF DAPK-2 + DZAK-2 THREE-POSITION ROTARY ACTUATOR (right or left)

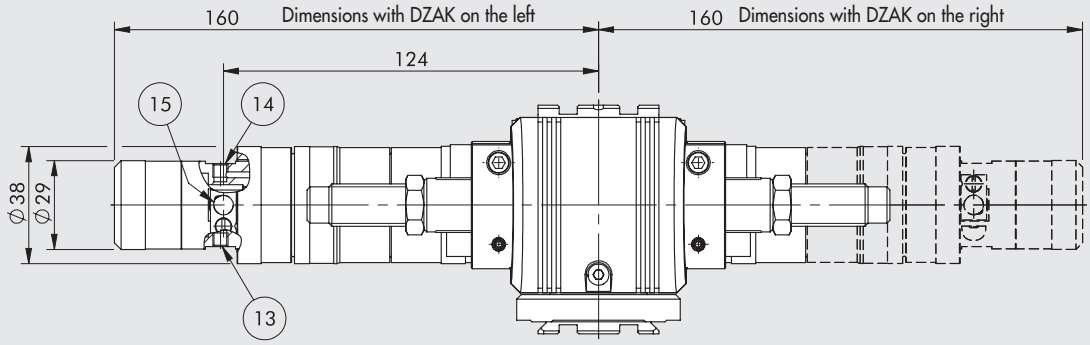

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPK-2 rotary actuator on page **A3**.144

DIMENSIONS OF DAPIK-2 + DZAK-2 THREE-POSITION ROTARY ACTUATOR WITH INTERNAL AIR FLOWS (right or left)

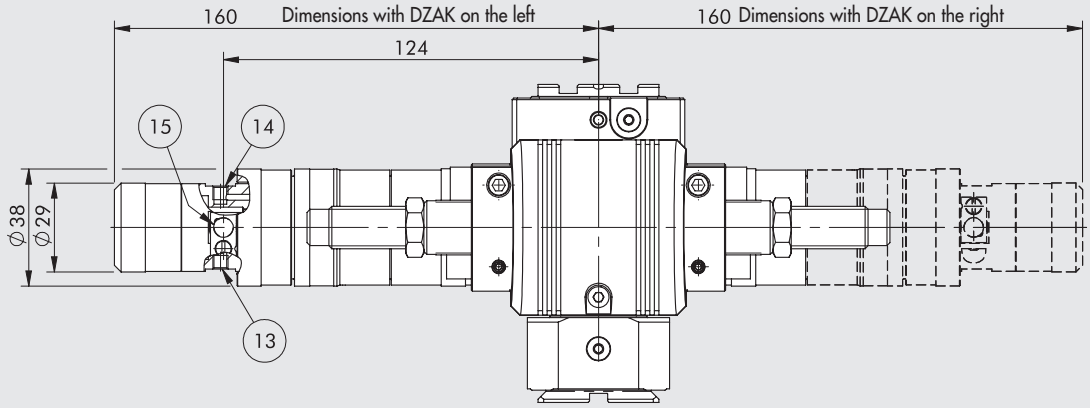

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPIK-2 rotary actuator on page **A3**.145

DIMENSIONS OF DAPIK-2 + WAK-2 + DZAK-2 THREE-POSITION ROTARY ACTUATOR WITH INTERNAL AIR FLOWS AND 90° RETURN (right or left)

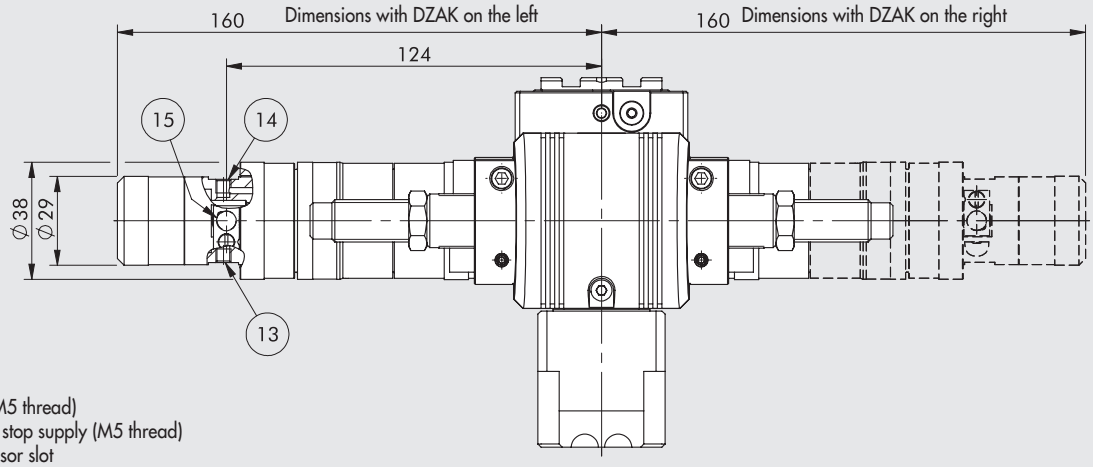

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPIK-2 + WAK-2 rotary actuator on page **A3.**146

DIMENSIONS OF DAPK-1 + 2 DZAK-1 FOUR-POSITION ROTARY ACTUATOR

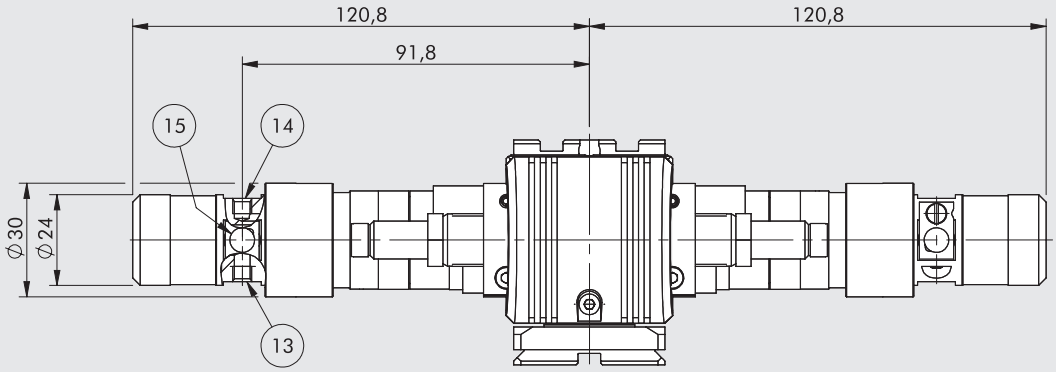

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPK-1 rotary actuator on page **A3**.142

DIMENSIONS OF DAPIK-1 + 2 DZAK-1 FOUR-POSITION ROTARY ACTUATOR WITH INTERNAL AIR FLOWS

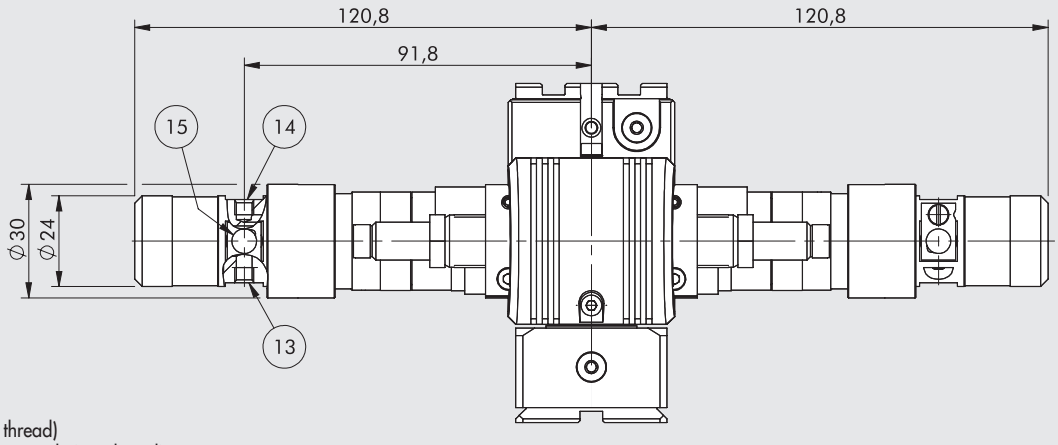

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPIK-1 rotary actuator on page **A3**.143

DIMENSIONS OF DAPIK-1 + WAK-1 + 2 DZAK-1 FOUR-POSITION ROTARY ACTUATOR WITH INTERNAL AIR FLOWS AND 90° RETURN

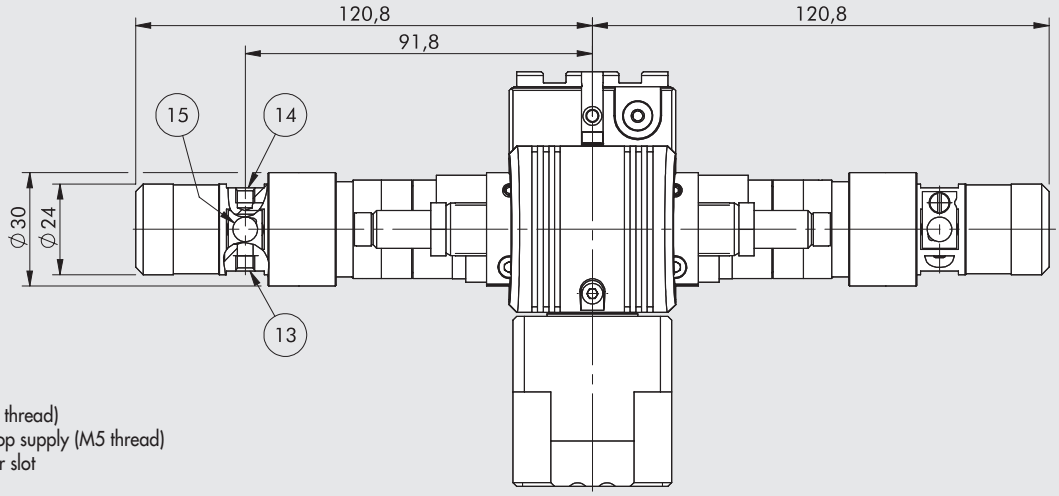

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPIK-1 + WAK-1 rotary actuator on page **A3**.142

DIMENSIONS OF DAPK-2 + 2 DZAK-2 FOUR-POSITION ROTARY ACTUATOR

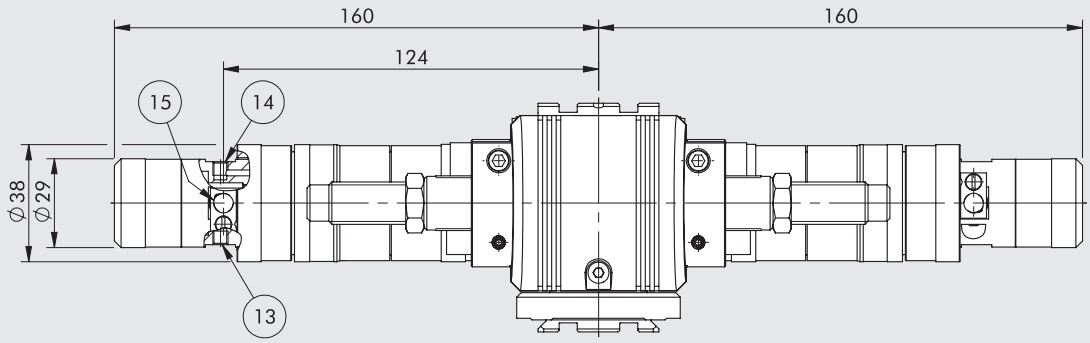

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPK-2 rotary actuator on page **A3**.144

DIMENSIONS OF DAPK-2 + 2 DZAK-2 FOUR-POSITION ROTARY ACTUATOR WITH INTERNAL AIR FLOWS

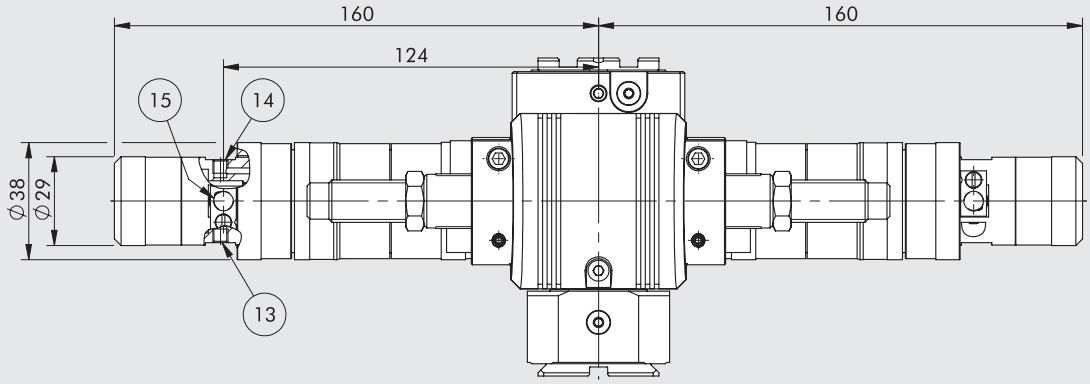

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPIK-2 rotary actuator on page **A3**.145

DIMENSIONS OF DAPIK-2 + WAK-2 + 2 DZAK-2 FOUR-POSITION ROTARY ACTUATOR WITH INTERNAL AIR FLOWS AND 90° RETURN

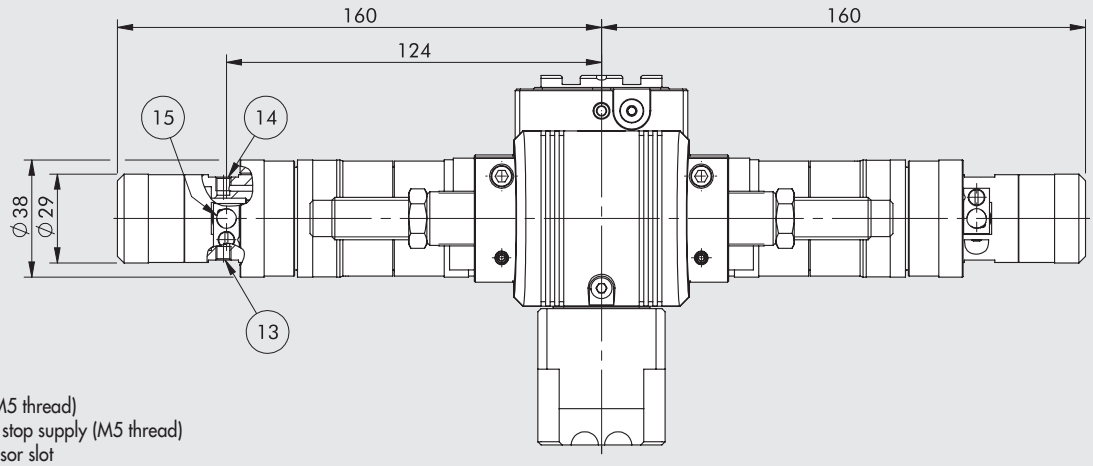

⑬ Air supply (M5 thread)
⑭ Intermediate stop supply (M5 thread)
⑮ Inductive sensor slot

IMPORTANT: for any missing dimensions, please refer to the DAPIK-2 + WAK-2 rotary actuator on page **A3.**146

METAL WORK PNEUMATIC

KEY TO CODES

K20	1	02	0	3	0	00	K
	SIZE	POSITION		END POSITION			FAMILY
Rotary actuator series DAPK / DAPIK	**1** Size 1 **2** Size 2	**02** 2 position (DAPK) ▲ **S3** 3 position (DAPK + DZAK) ■ **D3** 3 position (DAPK + DZAK) **04** 4 position (DAPK + n.2 DZAK)	**0** Without internal air flow **1** With internal in-line air flow (DAPIK) **2** With 90° in-line air flow (DAPIK + WAK)	**3** With elastic mechanical stop **5** With standard shock absorbers (STD) **On request** ● **6** With medium hardness shock-absorbers (H2) ● **7** With hard shock-absorbers (M7)	**0** Magnetic **S** Non-magnetic		**K** V-Lock

▲ On the left viewed from the rotating plate. ■ On the right viewed from the rotating plate. ● Only for size 2.

ORDERING CODES

Code	Description
DAPK-1	
K2010203000K	DAPK-1 magnetic with elastic mechanical stop
K2010203S00K	DAPK-1 NON-magnetic with elastic mechanical stop
K2010205000K	DAPK-1 magnetic with shock absorbers
K2010205S00K	DAPK-1 NON-magnetic with shock absorbers
K2010213000K	DAPIK-1 magnetic with elastic mechanical stop
K2010213S00K	DAPIK-1 NON-magnetic with elastic mechanical stop
K2010215000K	DAPIK-1 magnetic with shock absorbers
K2010215S00K	DAPIK-1 NON-magnetic with shock absorbers
K201S303000K	DAPK-1 + DZAK-1 (SX) magnetic with elastic mechanical stop
K201S303S00K	DAPK-1 + DZAK-1 (SX) NON-magnetic with elastic mechanical stop
K201S305000K	DAPK-1 + DZAK-1 (SX) magnetic with shock absorbers
K201S305S00K	DAPK-1 + DZAK-1 (SX) NON-magnetic with shock absorbers
K201D303000K	DAPK-1 + DZAK-1 (DX) magnetic with elastic mechanical stop
K201D303S00K	DAPK-1 + DZAK-1 (DX) NON-magnetic with elastic mechanical stop
K201D305000K	DAPK-1 + DZAK-1 (DX) magnetic with shock absorbers
K201D305S00K	DAPK-1 + DZAK-1 (DX) NON-magnetic with shock absorbers
K2010403000K	DAPK-1 + n°2 DZAK-1 magnetic with elastic mechanical stop
K2010403S00K	DAPK-1 + n°2 DZAK-1 NON-magnetic with elastic mechanical stop
K2010405000K	DAPK-1 + n°2 DZAK-1 magnetic with shock absorbers
K2010405S00K	DAPK-1 + n°2 DZAK-1 NON-magnetic with shock absorbers
K201S313000K	DAPIK-1 + DZAK-1 (SX) magnetic with elastic mechanical stop
K201S313S00K	DAPIK-1 + DZAK-1 (SX) NON-magnetic with elastic mechanical stop
K201S315000K	DAPIK-1 + DZAK-1 (SX) magnetic with shock absorbers
K201S315S00K	DAPIK-1 + DZAK-1 (SX) NON-magnetic with shock absorbers
K201D313000K	DAPIK-1 + DZAK-1 (DX) magnetic with elastic mechanical stop
K201D313S00K	DAPIK-1 + DZAK-1 (DX) NON-magnetic with elastic mechanical stop
K201D315000K	DAPIK-1 + DZAK-1 (DX) magnetic with shock absorbers
K201D315S00K	DAPIK-1 + DZAK-1 (DX) NON-magnetic with shock absorbers
K2010413000K	DAPIK-1 + n°2 DZAK-1 magnetic with elastic mechanical stop
K2010413S00K	DAPIK-1 + n°2 DZAK-1 NON-magnetic with elastic mechanical stop
K2010415000K	DAPIK-1 + n°2 DZAK-1 magnetic with shock absorbers
K2010415S00K	DAPIK-1 + n°2 DZAK-1 NON-magnetic with shock absorbers
K2010223000K	DAPIK-1 + WAK-1 magnetic with elastic mechanical stop
K2010223S00K	DAPIK-1 + WAK-1 NON-magnetic with elastic mechanical stop
K2010225000K	DAPIK-1 + WAK-1 magnetic with shock absorbers
K2010225S00K	DAPIK-1 + WAK-1 NON-magnetic with shock absorbers
K201S323000K	DAPIK-1 + WAK-1 + DZAK-1 (SX) magnetic with elastic mechanical stop
K201S323S00K	DAPIK-1 + WAK-1 + DZAK-1 (SX) NON-magnetic with elastic mechanical stop
K201S325000K	DAPIK-1 + WAK-1 + DZAK-1 (SX) magnetic with shock absorbers
K201S325S00K	DAPIK-1 + WAK-1 + DZAK-1 (SX) NON-magnetic with shock absorbers
K201D323000K	DAPIK-1 + WAK-1 + DZAK-1 (DX) magnetic with elastic mechanical stop
K201D323S00K	DAPIK-1 + WAK-1 + DZAK-1 (DX) NON-magnetic with elastic mechanical stop
K201D325000K	DAPIK-1 + WAK-1 + DZAK-1 (DX) magnetic with shock absorbers
K201D325S00K	DAPIK-1 + WAK-1 + DZAK-1 (DX) NON-magnetic with shock absorbers
K2010423000K	DAPIK-1 + WAK-1 + n°2 DZAK-1 magnetic with elastic mechanical stop
K2010423S00K	DAPIK-1 + WAK-1 + n°2 DZAK-1 NON-magnetic with elastic mechanical stop
K2010425000K	DAPIK-1 + WAK-1 + n°2 DZAK-1 magnetic with shock absorbers
K2010425S00K	DAPIK-1 + WAK-1 + n°2 DZAK-1 NON-magnetic with shock absorbers

Code	Description
DAPK-2	
K2020203000K	DAPK-2 magnetic with elastic mechanical stop
K2020203S00K	DAPK-2 NON-magnetic with elastic mechanical stop
K2020205000K	DAPK-2 magnetic with STD shock absorbers
K2020205S00K	DAPK-2 NON-magnetic with STD shock absorbers
K2020213000K	DAPIK-2 magnetic with elastic mechanical stop
K2020213S00K	DAPIK-2 NON-magnetic with elastic mechanical stop
K2020215000K	DAPIK-2 magnetic with STD shock absorbers
K2020215S00K	DAPIK-2 NON-magnetic with STD shock absorbers
K202S303000K	DAPK-2 + DZAK-2 (SX) magnetic with elastic mechanical stop
K202S303S00K	DAPK-2 + DZAK-2 (SX) NON-magnetic with elastic mechanical stop
K202S305000K	DAPK-2 + DZAK-2 (SX) magnetic with STD shock absorbers
K202S305S00K	DAPK-2 + DZAK-2 (SX) NON-magnetic with STD shock absorbers
K202D303000K	DAPK-2 + DZAK-2 (DX) magnetic with elastic mechanical stop
K202D303S00K	DAPK-2 + DZAK-2 (DX) NON-magnetic with elastic mechanical stop
K202D305000K	DAPK-2 + DZAK-2 (DX) magnetic with STD shock absorbers
K202D305S00K	DAPK-2 + DZAK-2 (DX) NON-magnetic with STD shock absorbers
K2020403000K	DAPK-2 + n°2 DZAK-2 magnetic with elastic mechanical stop
K2020403S00K	DAPK-2 + n°2 DZAK-2 NON-magnetic with elastic mechanical stop
K2020405000K	DAPK-2 + n°2 DZAK-2 magnetic with STD shock absorbers
K2020405S00K	DAPK-2 + n°2 DZAK-2 NON-magnetic with STD shock absorbers
K202S313000K	DAPIK-2 + DZAK-2 (SX) magnetic with elastic mechanical stop
K202S313S00K	DAPIK-2 + DZAK-2 (SX) NON-magnetic with elastic mechanical stop
K202S315000K	DAPIK-2 + DZAK-2 (SX) magnetic with STD shock absorbers
K202S315S00K	DAPIK-2 + DZAK-2 (SX) NON-magnetic with STD shock absorbers
K202D313000K	DAPIK-2 + DZAK-2 (DX) magnetic with elastic mechanical stop
K202D313S00K	DAPIK-2 + DZAK-2 (DX) NON-magnetic with elastic mechanical stop
K202D315000K	DAPIK-2 + DZAK-2 (DX) magnetic with STD shock absorbers
K202D315S00K	DAPIK-2 + DZAK-2 (DX) NON-magnetic with STD shock absorbers
K2020413000K	DAPIK-2 + n°2 DZAK-2 magnetic with elastic mechanical stop
K2020413S00K	DAPIK-2 + n°2 DZAK-2 NON-magnetic with elastic mechanical stop
K2020415000K	DAPIK-2 + n°2 DZAK-2 magnetic with STD shock absorbers
K2020415S00K	DAPIK-2 + n°2 DZAK-2 NON-magnetic with STD shock absorbers
K2020223000K	DAPIK-2 + WAK-2 magnetic with elastic mechanical stop
K2020223S00K	DAPIK-2 + WAK-2 NON-magnetic with elastic mechanical stop
K2020225000K	DAPIK-2 + WAK-2 magnetic with STD shock absorbers
K2020225S00K	DAPIK-2 + WAK-2 NON-magnetic with STD shock absorbers
K202S323000K	DAPIK-2 + WAK-2 + DZAK-2 (SX) magnetic with elastic mechanical stop
K202S323S00K	DAPIK-2 + WAK-2 + DZAK-2 (SX) NON-magnetic with elastic mechanical stop
K202S325000K	DAPIK-2 + WAK-2 + DZAK-2 (SX) magnetic with STD shock absorbers
K202S325S00K	DAPIK-2 + WAK-2 + DZAK-2 (SX) NON-magnetic with STD shock absorbers
K202D323000K	DAPIK-2 + WAK-2 + DZAK-2 (DX) magnetic with elastic mechanical stop
K202D323S00K	DAPIK-2 + WAK-2 + DZAK-2 (DX) NON-magnetic with elastic mechanical stop
K202D325000K	DAPIK-2 + WAK-2 + DZAK-2 (DX) magnetic with STD shock absorbers
K202D325S00K	DAPIK-2 + WAK-2 + DZAK-2 (DX) NON-magnetic with STD shock absorbers
K2020423000K	DAPIK-2 + WAK-2 + n°2 DZAK-2 magnetic with elastic mechanical stop
K2020423S00K	DAPIK-2 + WAK-2 + n°2 DZAK-2 NON-magnetic with elastic mechanical stop
K2020425000K	DAPIK-2 + WAK-2 + n°2 DZAK-2 magnetic with STD shock absorbers
K2020425S00K	DAPIK-2 + WAK-2 + n°2 DZAK-2 NON-magnetic with STD shock absorbers

ACCESSORIES

V-Lock ACCESSORIES

See page **A3**.36

DZAK-1 INTERMEDIATE STOP



Code	Description	Weight [g]
095K2000100K	DZAK-1 intermediate stop	105

DZAK-2 INTERMEDIATE STOP



Code	Description	Weight [g]
095K2000110K	DZAK-2 intermediate stop	214

DZAK-1 ADJUSTING WRENCH



Code	Description	Weight [g]
095K2000250K	DZAK-1 adjusting wrench	25

DZAK-2 ADJUSTING WRENCH



Code	Description	Weight [g]
095K2000260K	DZAK-2 adjusting wrench	30

WAK-1



Code	Description	Weight [g]
095K2000150K	WAK-1 angle adaptor	190

Note: Individually packed with 4 screws, 4 washers

METAL WORK PNEUMATIC

WAK-2



Code	Description	Weight [g]
095K2000160K	WAK-2 angle adaptor	175

Note: Individually packed with 4 screws, 4 washers

SHOCK ABSORBERS



Code	Description	For
W0950005301	Shock absorbers - 2 M10 x 1	DAPK-1/DAPIK-1
0950004012	Shock absorbers standard MC150EUMH M14 x 1.5	DAPK-2/DAPIK-2
0950004013	Medium hardness shock absorber MC150EUMH2 M14 x 1.5	DAPK-2/DAPIK-2
0950004014	Hard shock absorber SC190EUM7 M14 x 1.5	DAPK-2/DAPIK-2

ELASTIC MECHANICAL STOP



Code	Description	For
095K2000200K	Elastic mechanical stop M14 x 1	DAPK-1/DAPIK-1
095K2000210K	Elastic mechanical stop M18 x 1	DAPK-2/DAPIK-2

INDUCTION SENSOR Ø 6.5



Code	Description
W095K030006	PNP Ø 6.5 PNP inductive sensor with LED 2 m
W095K031006	NPN Ø 6.5 NPN inductive sensor with LED 2 m

QUICK-FIT INDUCTIVE SENSOR Ø 6.5



Code	Description
W095K030009	PNP Ø 6.5 inductive sensor with push-in LED

CABLE WITH STRAIGHT CONNECTOR FOR Ø 6.5 PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

CABLE WITH 90° CONNECTOR FOR Ø 6.5 PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

M8 M – M8 F CONNECTOR FOR Ø 6.5 PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital INPUT of the EB 80 and CM valves

RETRACTING SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

POSITION SENSOR

LTS



Code	Description	For
W0950000470	LTS-032 position sensor with M8 4-PIN 0.3 m connector	DAPK-1/ DAPIK-1
W0950000471	LTS-064 position sensor with M8 4-PIN 0.3 m connector	DAPK-2/DAPIK-2

For technical data, see **chapter A6**.

OIL

Code	Description	Volume
9910490	PARALIQ P 460	80 ml

NOTES

METAL WORK PNEUMATIC

NOTES

GRIPPER WITH TWO PARALLEL JAWS SERIES P1K

Dual-acting grippers with parallel jaws and internal and external clamping.
The body is made of anodized aluminium alloy and the jaws are made of hardened steel. All sizes are equipped with a magnet and sensor grooves. The lower plate has a V-Lock profile and grooves.
A plate with a V-Lock coupling can also be mounted to the sides of the grippers.

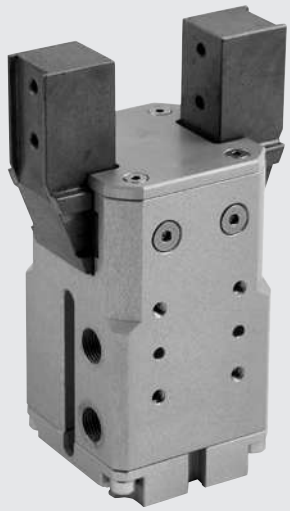

TECHNICAL DATA		P1K-20	P1K-32
Operating pressure	bar	2 to 8	
	MPa	0.2 to 0.8	
	psi	29 to 116	
Temperature range	°C	5 to 70	
Fluid		20 µm filtered air, lubricated or unlubricated. If lubricated air is used, lubrication must be continuous	
Bore	mm	20	32
Clamping force of a single jaw	N	70	170
at 6.3 bar, 20 mm from the upper surface, on opening and closing			
Stroke of each jaw	mm	5	5
Max. frequency on continuous operation	Hz	> 5	> 5
Minimum opening/closing time	s	0.009 / 0.016	0.02 / 0.02
Repeatability	mm	> 0.02	> 0.02
Lubrication		Grease the sliding surfaces of the jaws every one million cycles. Use grease code 9910509	
Max. admissible static loads:			
- Fa	N	200	350
- Mx	Nm	6	10
- My	Nm	6	10
- Mz	Nm	8	12
Weight	kg	0.50	0.85

COMPONENTS

① BODY: anodized aluminium
② JAWS: nitrided steel
③ GUIDE: tempered steel
④ PISTON ROD: chromed steel
⑤ PISTON: aluminium
⑥ PISTON GASKET: NBR
⑦ GUIDE RING: PTFE
⑧ MAGNET: plastoferrite
⑨ GASKET: NBR
⑩ V-Lock REAR PLATE: anodized aluminium
⑪ GASKET: NBR
⑫ GUIDE BUSHING
⑬ PISTON ROD GASKET: polyurethane

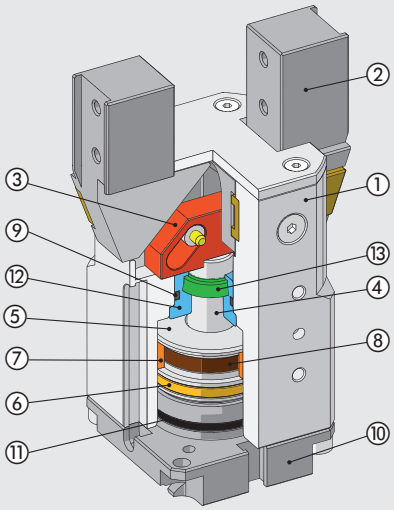

DIAGRAM OF FORCES AND MOMENTS

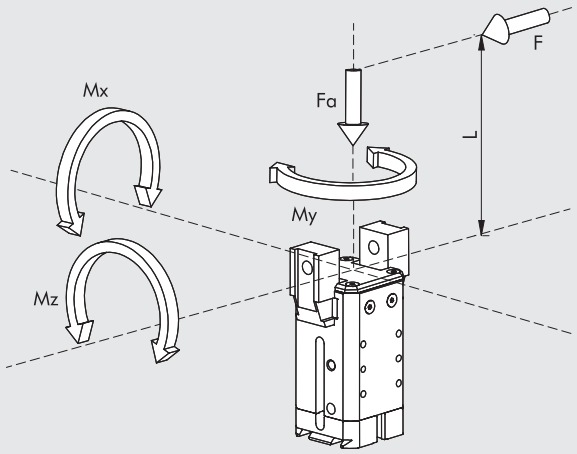

F	Clamping force for each jaw
Fa	Maximum static axial force
Mx, My, Mz	Maximum static moments

EXAMPLES OF APPLICATION

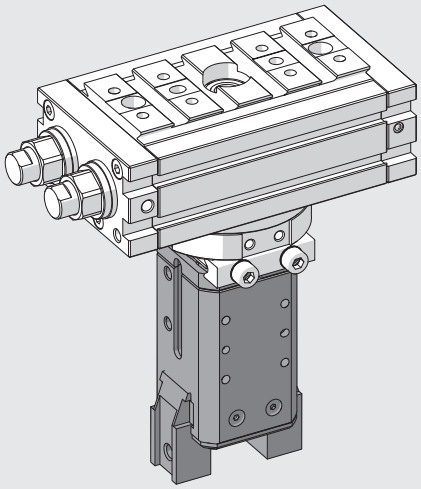

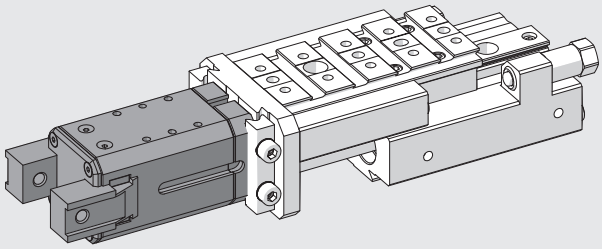

NOTES

V-Lock MOUNTING OPTIONS

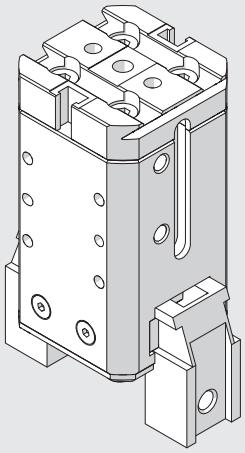

Gripper as supplied



Unscrew the 4 screws at the back and rotate the rear flange by 90°

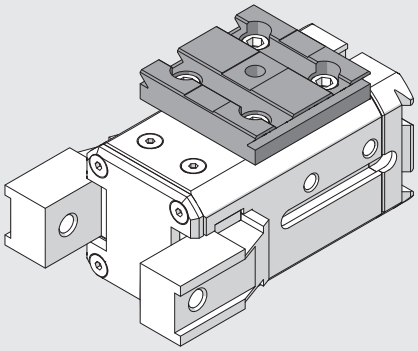

Fix the accessory "type 2 side adaptor" code 0950008004K to the right, lengthwise

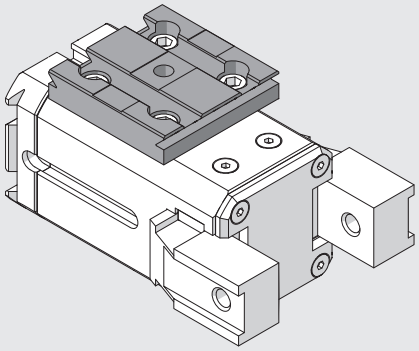

Fix the accessory "type 2 side adaptor" code 0950008004K to the right, crosswise

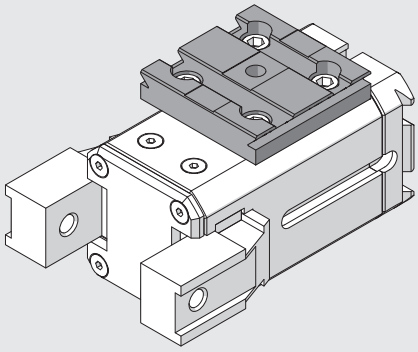

Fix the accessory "type 2 side adaptor" code 0950008004K to the left, lengthwise

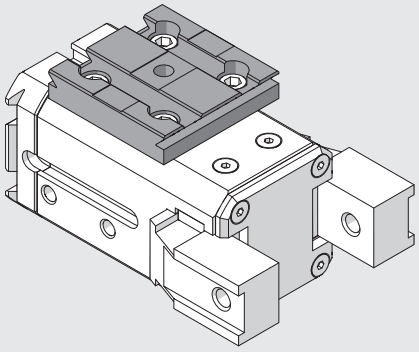

Fix the accessory "type 2 side adaptor" code 0950008004K to the left, crosswise

METAL WORK PNEUMATIC

DIMENSIONS OF GRIPPER P1K-20



NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

(*): The screws can be untightened. Rotate the rear plate by 90° and tighten the screws.



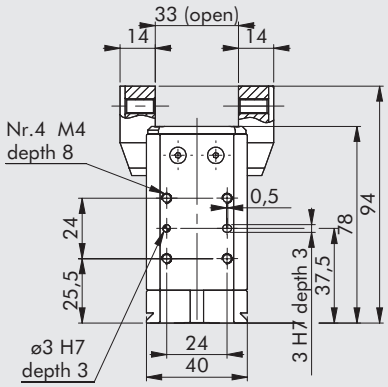

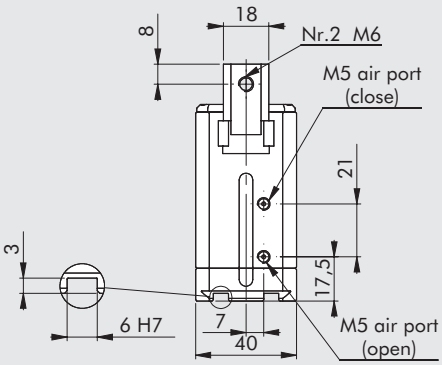

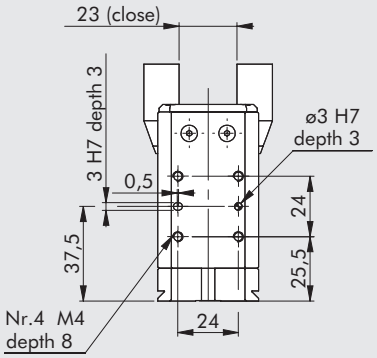

Code	Description
W1550200001K	Gripper with 2 parallel jaws P1K-20

DIMENSIONS OF GRIPPER P1K-32



NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

(*): The screws can be untightened. Rotate the rear plate by 90° and tighten the screws.

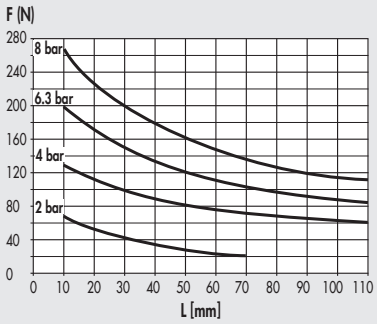

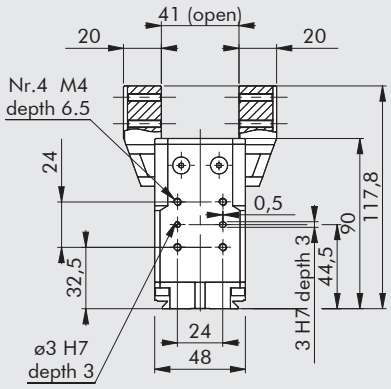

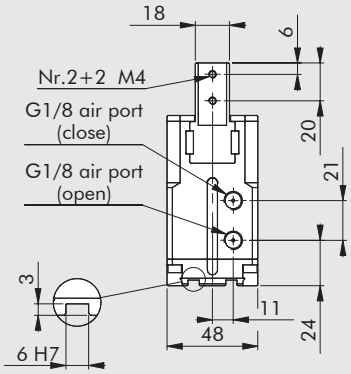



Code	Description
W1550320001K	Gripper with 2 parallel jaws P1K-32

ACCESSORIES

RETRACTING SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

DIRECTION RECOMMENDED FOR FIXING THE SENSORS TO THE GRIPPER GROOVES

P1K-20

CLOSED



OPEN



P1K-32

CLOSED



OPEN



GRIPPER WITH TWO PARALLEL JAWS SERIES P2K

Parallel double-acting two-jaw gripper, with either internal or external clamping, with sliding of the jaws on inclined planes.
Aluminum alloy body coated with surface hardening treatment, jaws made of wear-resistant coated steel.
The jaw-guiding system and precision in coupling with the body make the gripper extremely stable.
The ceramic-coated body reduces friction and wear, and enhances the movement of the jaws on the body.
All sizes are equipped with a magnet and sensor grooves.
The lower plate has a V-Lock profile and grooves.
A plate with a V-Lock coupling can also be mounted to the sides of the grippers.

TECHNICAL DATA		P2K-20
Operating pressure	bar	2 to 8
	MPa	0.2 to 0.8
	psi	29 to 116
Temperature range	°C	-10 to 80
Fluid		Fluid 20 µm filtered air, lubricated or unlubricated. If lubricated air is used, lubrication must be continuous
Bore	mm	20
Clamping force of a single jaw	N	100
at 6.3 bar, 20 mm from the upper surface, on opening and closing		
Stroke of each jaw	mm	5
Max. frequency on continuous operation	Hz	2
Minimum opening/closing time	s	0.01/ 0.02
Repeatability	mm	± 0.01
Moment of inertia around the piston axis Jy	kg cm^2	0.87
Max. admissible static loads:		
- Fa	N	300
- Mx	Nm	4
- My	Nm	2
- Mz	Nm	5
Weight	kg	0.3

COMPONENTS

① BODY: hard-anodized aluminium
② JAWS: nitrided steel
③ PISTON ROD + GUIDE: nitrided steel
④ PISTON ROD GASKET: polyurethane
⑤ BUSHING: bronze
⑥ BUFFER: polyurethane
⑦ PISTON: aluminium alloy
⑧ PISTON GASKET: NBR
⑨ MAGNET: plastoferrite
⑩ GASKET: NBR
⑪ V-Lock REAR PLATE: anodized aluminium

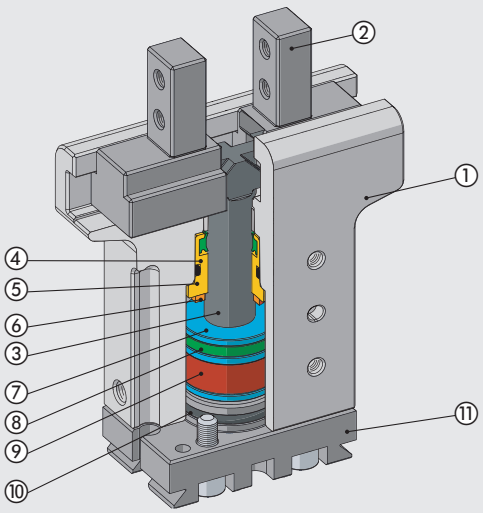

DIAGRAM OF FORCES AND MOMENTS

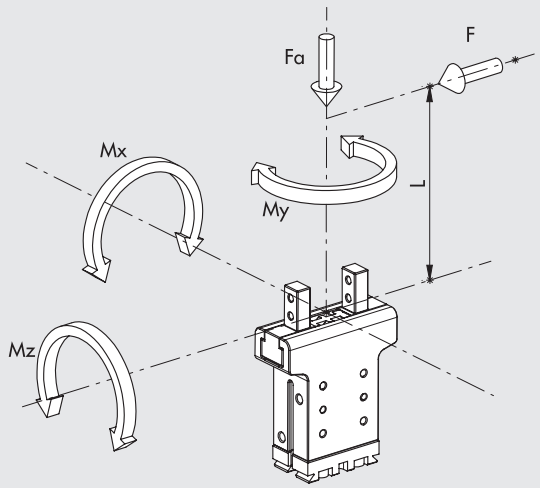

F	Clamping force for each jaw
Fa	Maximum static axial force
Mx, My, Mz	Maximum static moments

EXAMPLES OF APPLICATION

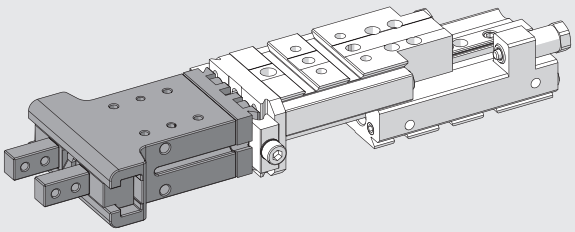

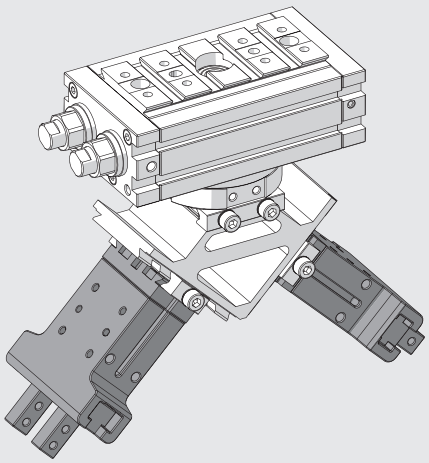

NOTES

METAL WORK PNEUMATIC

V-Lock MOUNTING OPTIONS

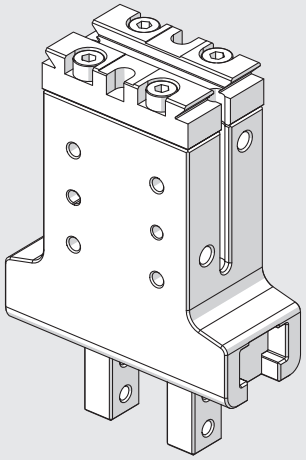

Gripper as supplied

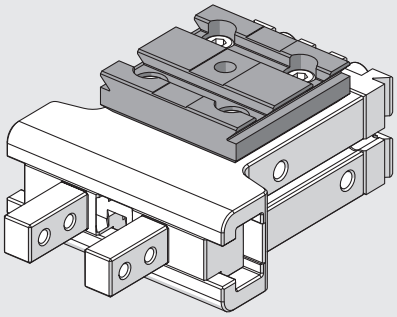

Fix the accessory "type 2 side adaptor" code 0950008004K to the right, lengthwise

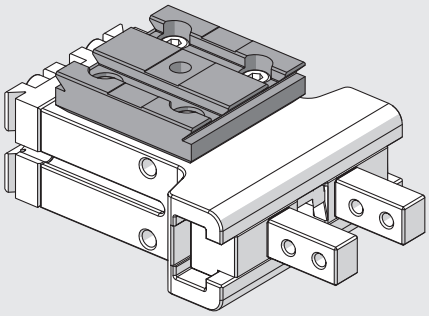

Fix the accessory "type 2 side adaptor" code 0950008004K to the right, crosswise



Fix the accessory "type 2 side adaptor" code 0950008004K to the left, lengthwise

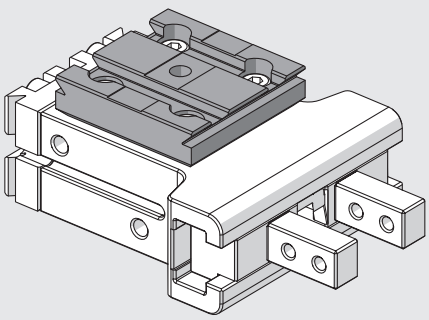

Fix the accessory "type 2 side adaptor" code 0950008004K to the left, crosswise

DIMENSIONS OF GRIPPER P2K-20

NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

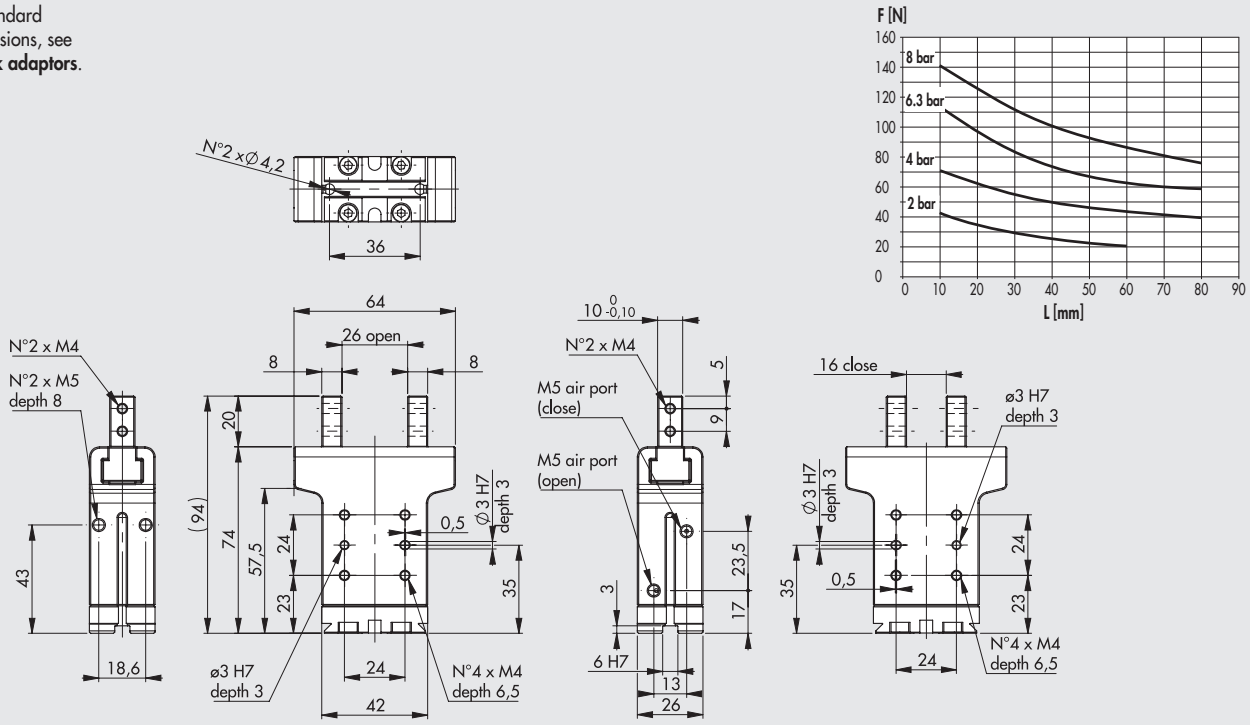

Code	Description
W1570200200K	Gripper with 2 parallel jaws P2K-20

ACCESSORIES

SENSOR Ø 4



For codes and technical data, see **chapter A6**.

DIRECTION RECOMMENDED FOR FIXING THE SENSORS TO THE GRIPPER GROOVES

CLOSED



OPEN



GRIPPER WITH TWO PARALLEL JAWS SERIES P3K

Parallel double-acting two-jaw gripper, with either internal or external clamping. Also available in the double-acting with spring version, normally open (NO) for internal grip and normally closed (NC) for external grip.
Aluminum alloy body coated with surface hardening treatment; jaws made of wear-resistant coated steel.
The jaw-guiding system and precision in coupling with the body make the gripper extremely stable.
The ceramic-coated body reduces friction and wear, and enhances the movement of the jaws on the body.
All sizes are available in the version with standard stroke and clamping force, while only some in the version with reduced stroke but with higher clamping torque.
The gripper is equipped with a magnet and grooves for sensors.
A version designed to house inductive sensors is also available (**the inductive sensors are not supplied by Metal Work**).
Pneumatic supply is available on both sides. There are different mounting options, including that with V-Lock interfacing plates on the bottom or on the side.

TECHNICAL DATA			P3K-64			P3K-80						P3K-100					
						Standard			Increased force			Standard			Increased force		
			DA	NO	NC	DA	NO	NC	DA	NO	NC	DA	NO	NC	DA	NO	NC
Minimum operating pressure		bar	2			2						2					
		MPa	0.2			0.2						0.2					
		psi	29			29						29					
Maximum operating pressure		bar	8			8						8					
		MPa	0.8			0.8						0.8					
		psi	116			116						116					
Temperature range		°C	-10 to 80			-10 to 80						-10 to 80					
Fluid			20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous														
Gripping force at 6.3 bar *	opening	N	125	157	-	265	322	-	445	560	-	360	444	-	790	958	-
	closing	N	113	-	145	239	-	296	401	-	516	324	-	408	711	-	879
Minimum gripping force produced by the spring *		N	-	32	32	-	57	57	-	115	115	-	84	84	-	168	168
Recommended workpiece weight		kg	1.3			2.5			5			3.5			7		
Stroke of each jaw		mm	6			8			4			10			5		
Minimum time	opening	s	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1
	closing	s	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05
Repeatability		mm	0.01			0.01						0.01					
Moment of inertia as regards the piston axis		kg cm²	1	1.9	1.9	4.5	5.3	5.3	4.5	5.3	5.3	12	14.5	14.5	12	14.5	14.5
Weight		kg	0.21	0.38	0.38	0.6	0.7	0.7	0.6	0.7	0.7	1	1.2	1.2	1	1.2	1.2

DA: Double-acting; NO: Double acting with spring, normally open; NC: Double acting with spring, normally closed.
* Referred to a single jaw 20 mm from the upper surface. The total force is obtained by multiplying the reported value by 2.

COMPONENTS

① BODY: hard-anodized aluminium
② JAWS: nitrided steel
③ PISTON ROD + GUIDE: nitrided steel
④ PISTON: hard-anodized aluminium
⑤ PISTON GASKET: NBR
⑥ PISTON ROD GASKET: NBR / polyurethane
⑦ BASE GASKET: reinforced SBR / NBR
⑧ MAGNET: neodymium

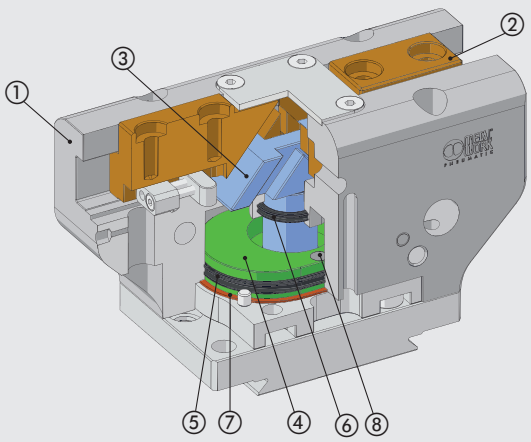

V-Lock MOUNTING OPTIONS FOR P3K-80 AND P3K-100 GRIPPERS

Standard



The gripper as supplied.

Lateral



Unscrew the 4 screws ①, remove the plate ② and pull out the centring rings ③. Then unscrew the 2 plugs ④.

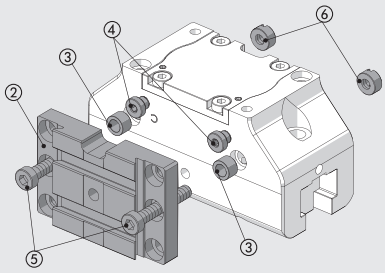

Replace the 2 plugs ④ on the opposite side of the gripper and insert the 2 centring rings ③.
Position the plate ② and the two long screws ⑤ (supplied with the gripper). On the opposite side of the plate, insert the two nuts with a screwdriver slot ⑥ (supplied with the gripper) and tighten them against the screws ⑤.

GRIPPER P3K-64

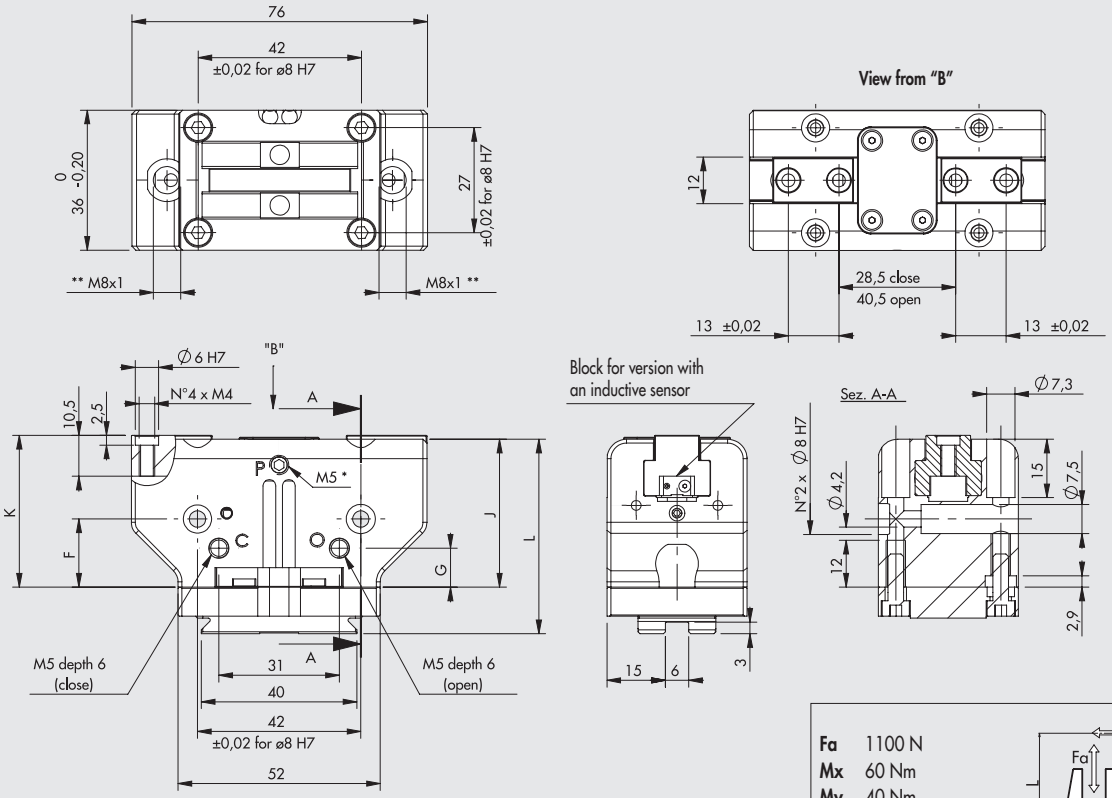

	K	J	F ±0.02	G	L
DA	39	38	17.5	10	50
NO /NC	57	56	35.5	29	68

* Discharge pressurization connection, present on both sides
** Inductive sensor slot
NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

Fa	1100 N
Mx	60 Nm
My	40 Nm
Mz	40 Nm



F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

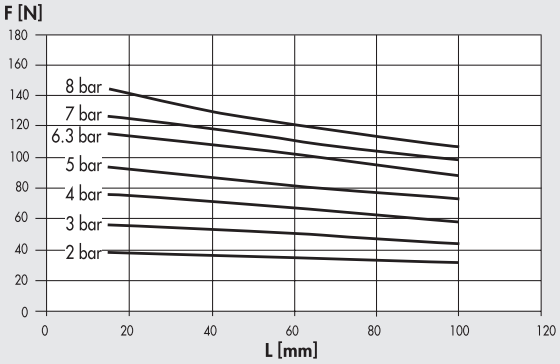

Version NC

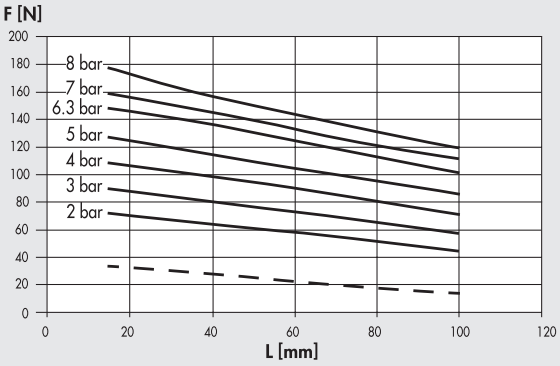

Internal grip*** (opening jaws)

Version DA

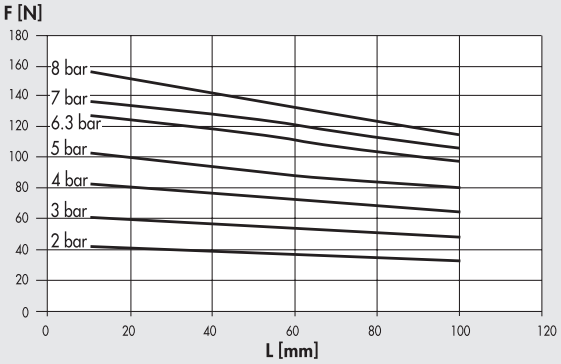

Version NO

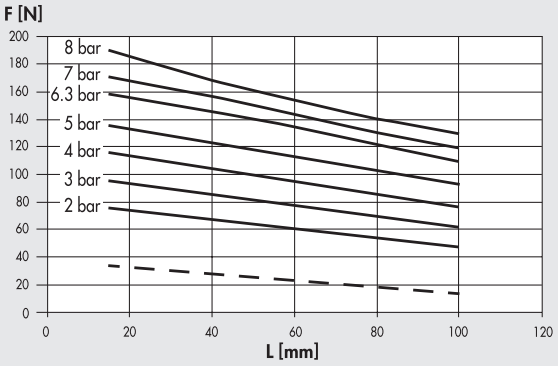

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

– – – Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1560640200K	Gripper with 2 parallel jaws P3K-64
W1560640201K	Gripper with 2 parallel jaws P3K-64 for inductive sensors
W1560642200K	Gripper with 2 parallel jaws P3K-64 NO
W1560642201K	Gripper with 2 parallel jaws P3K-64 NO for inductive sensors
W1560643200K	Gripper with 2 parallel jaws P3K-64 NC
W1560643201K	Gripper with 2 parallel jaws P3K-64 NC for inductive sensors

GRIPPER P3K-80

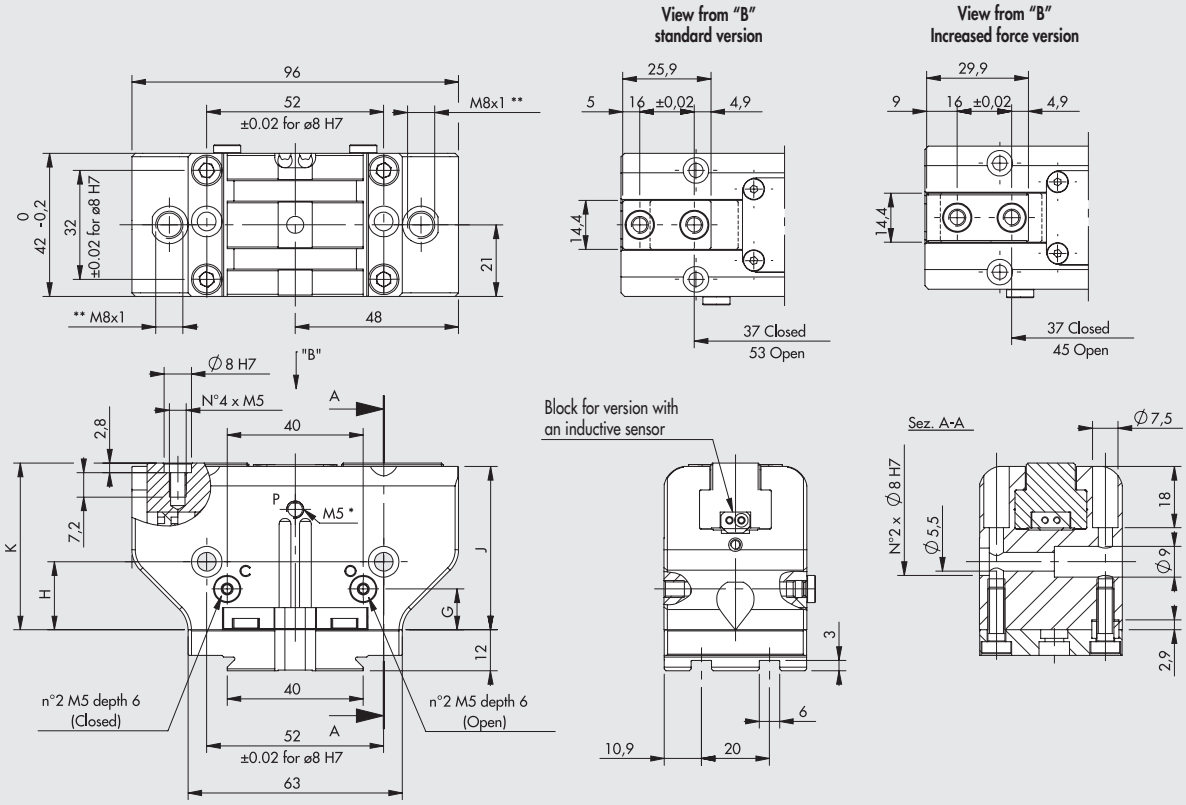

* Discharge pressurization connection, present on both sides
** Inductive sensor slot
Note: For standard dovetail dimensions, **see chapter V-Lock adaptors**.

	K	J	H ±0.02	G
DA	49	48	20	12
NO /NC	67	66	38	30



Fa 1500 N
Mx 90 Nm
My 55 Nm
Mz 55 Nm

F gripping force for each jaw
Fa maximum admissible static axial force
Mx, My, Mz maximum admissible static moments

P3K-80 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

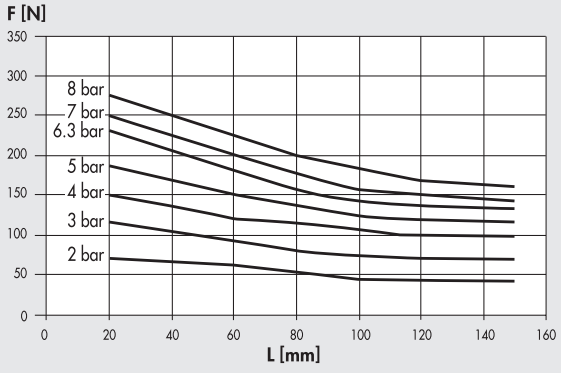

Internal grip*** (opening jaws)

Version DA

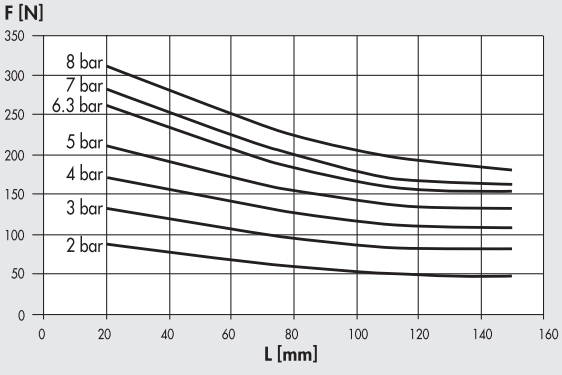

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

METAL WORK PNEUMATIC

P3K-80 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

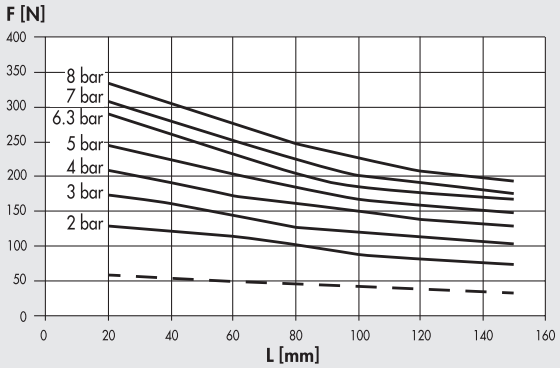

DA version increased force

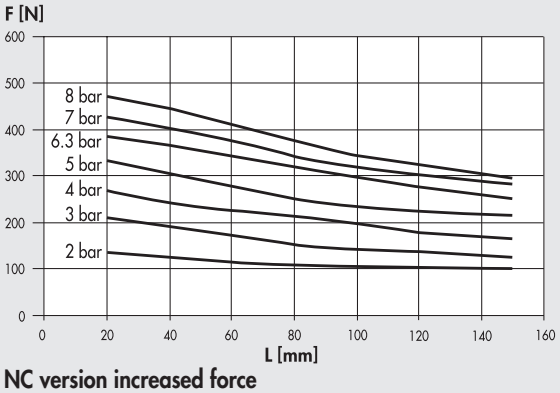

NC version increased force

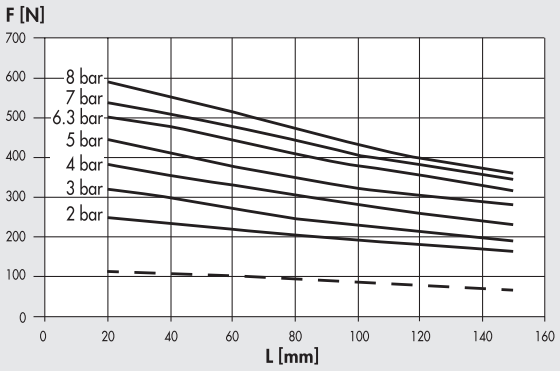

Internal grip*** (opening jaws)

Version NO

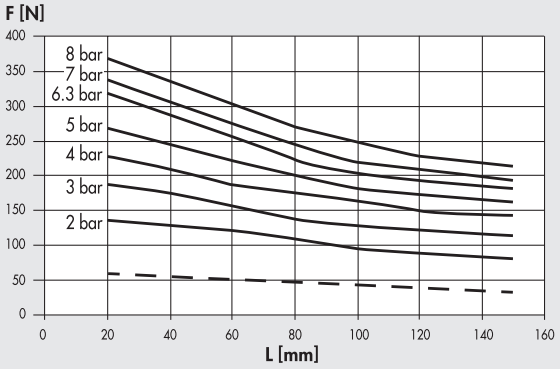

DA version increased force

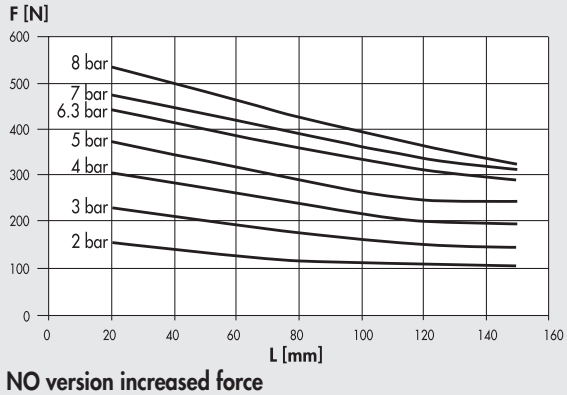

NO version increased force

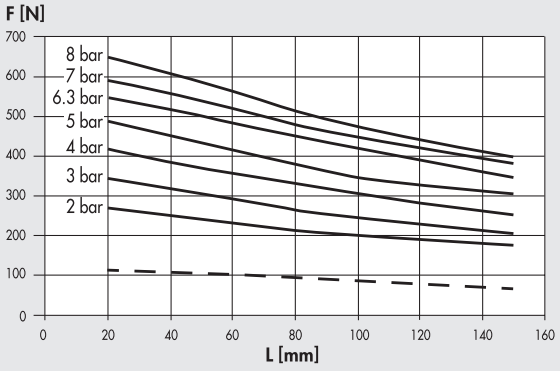

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

— — — Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1560800200K	Gripper with 2 parallel jaws P3K-80
W1560800201K	Gripper with 2 parallel jaws P3K-80 for inductive sensors
W1560800220K	Gripper with 2 parallel jaws P3K-80 increased force
W1560800221K	Gripper with 2 parallel jaws P3K-80 increased force for inductive sensors
W1560802200K	Gripper with 2 parallel jaws P3K-80 NO
W1560802201K	Gripper with 2 parallel jaws P3K-80 NO for inductive sensors
W1560802220K	Gripper with 2 parallel jaws P3K-80 NO increased force
W1560802221K	Gripper with 2 parallel jaws P3K-80 NO increased force for inductive sensors
W1560803200K	Gripper with 2 parallel jaws P3K-80 NC
W1560803201K	Gripper with 2 parallel jaws P3K-80 NC for inductive sensors
W1560803220K	Gripper with 2 parallel jaws P3K-80 NC increased force
W1560803221K	Gripper with 2 parallel jaws P3K-80 NC increased force for inductive sensors

GRIPPER P3K-100

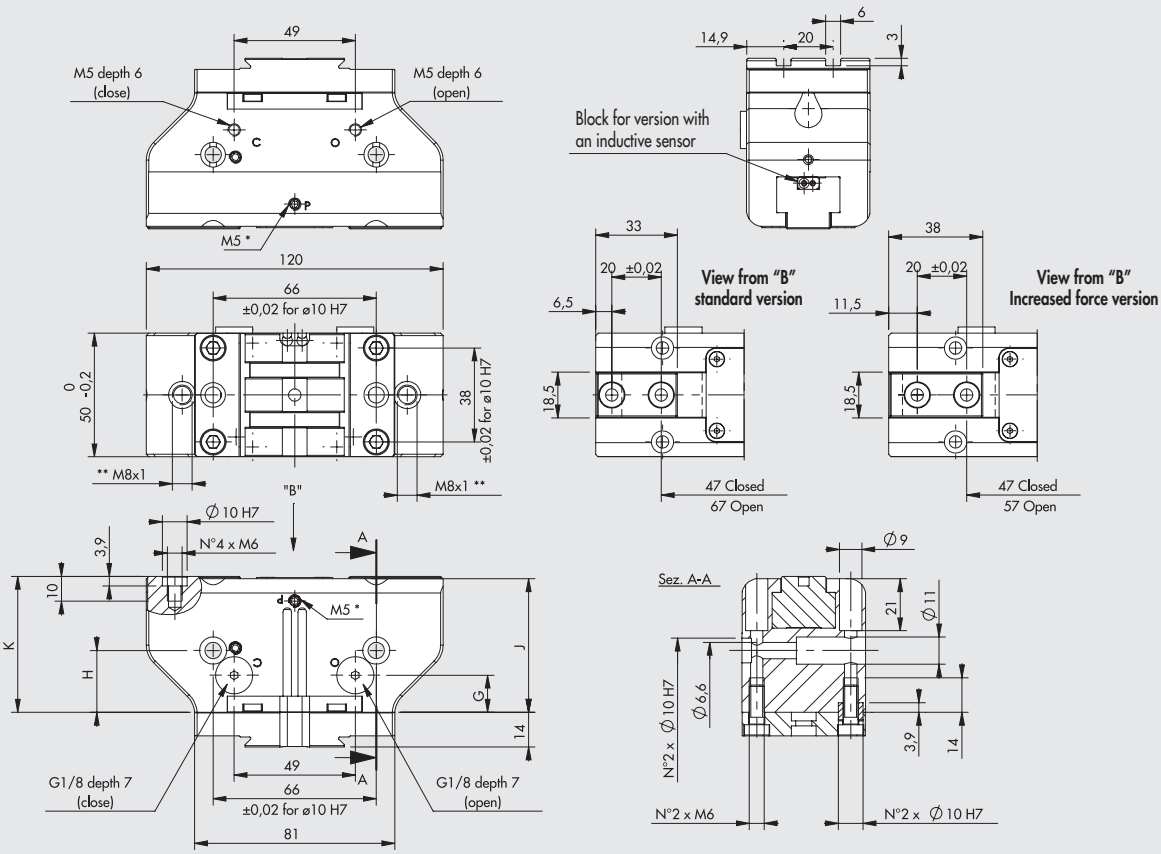

* Discharge pressurization connection, present on both sides
** Inductive sensor slot
NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

	K	J	H ±0.02	G
DA	55	54	25	15
NO /NC	81	80	51	41



Fa	2000 N
Mx	115 Nm
My	70 Nm
Mz	80 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P3K-100 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

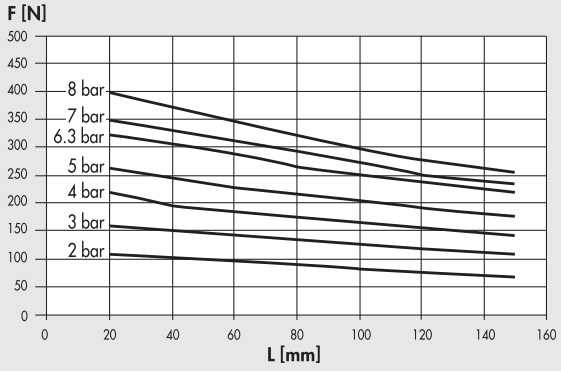

Internal grip*** (opening jaws)

Version DA

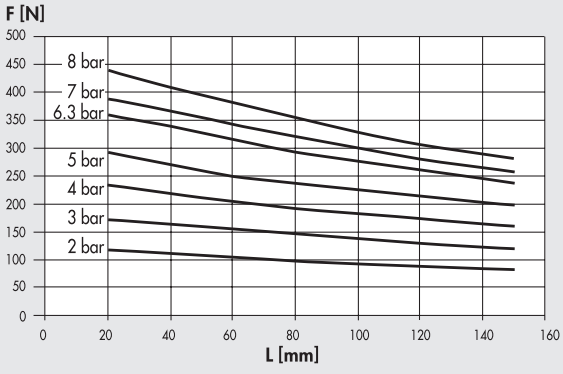

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

P3K-100 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

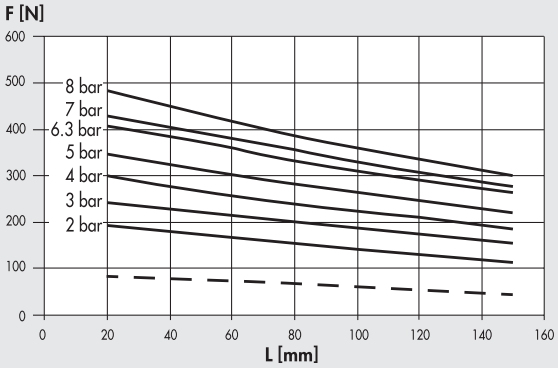

DA version increased force

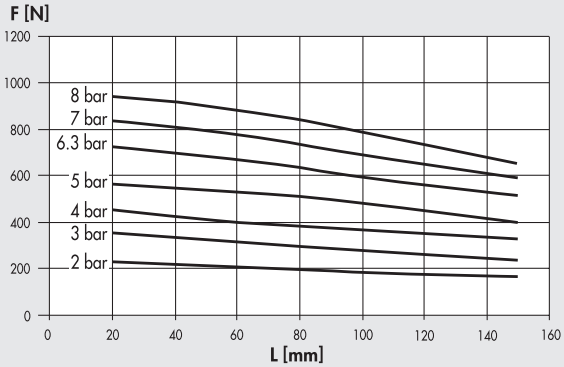

NC version increased force

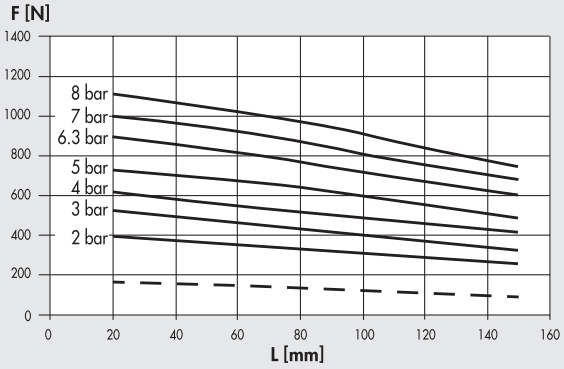

Internal grip*** (opening jaws)

Version NO

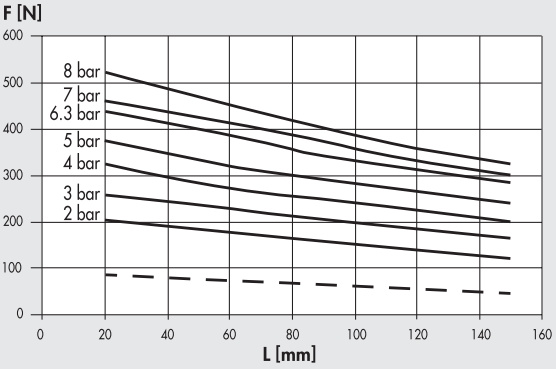

DA version increased force

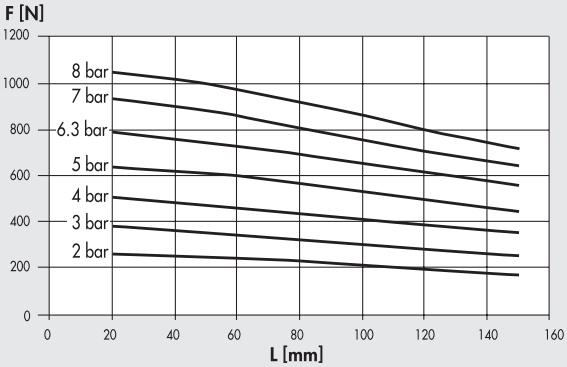

NO version increased force

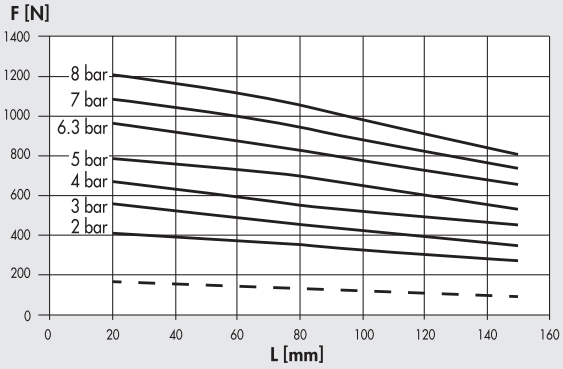

*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

— — — Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1561000200K	Gripper with 2 parallel jaws P3K-100
W1561000201K	Gripper with 2 parallel jaws P3K-100 for inductive sensors
W1561000220K	Gripper with 2 parallel jaws P3K-100 increased force
W1561000221K	Gripper with 2 parallel jaws P3K-100 increased force for inductive sensors
W1561002200K	Gripper with 2 parallel jaws P3K-100 NO
W1561002201K	Gripper with 2 parallel jaws P3K-100 NO for inductive sensors
W1561002220K	Gripper with 2 parallel jaws P3K-100 NO increased force
W1561002221K	Gripper with 2 parallel jaws P3K-100 NO increased force for inductive sensors
W1561003200K	Gripper with 2 parallel jaws P3K-100 NC
W1561003201K	Gripper with 2 parallel jaws P3K-100 NC for inductive sensors
W1561003220K	Gripper with 2 parallel jaws P3K-100 NC increased force
W1561003221K	Gripper with 2 parallel jaws P3K-100 NC increased force for inductive sensors

ACCESSORIES

SENSOR Ø 4



For codes and technical data, see **chapter A6**.

Note: For the NO and NC versions, use only the Hall effect sensor

SENSOR MOUNTING IN THE NO AND NC GRIPPERS SLOTS

To accommodate the sensor, a recess may be required in the base on which the gripper will be fixed.

P3K-64

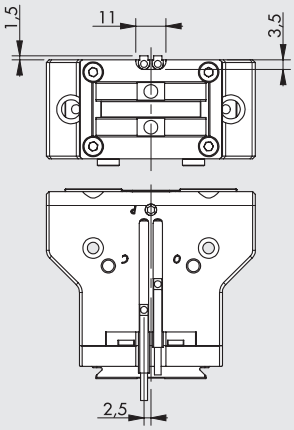

P3K-80

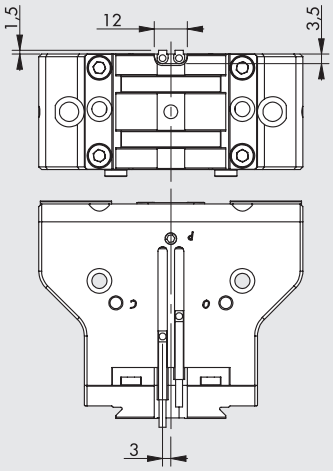

P3K-100

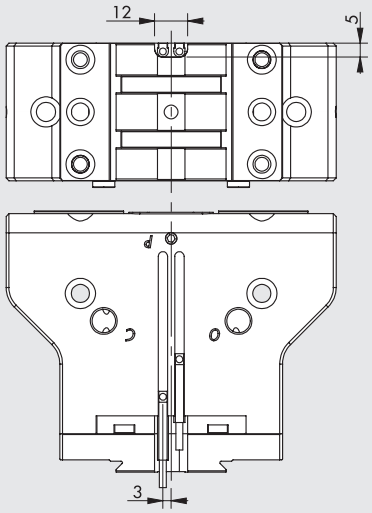

CENTRING RING



Code	ØA	ØB f7	C
W1560649201	$4.5^{0}_{-0.1}$	6	$5^{0}_{-0.1}$
W1560809201	$5.1^{0}_{-0.1}$	8	$5^{0}_{-0.05}$
W1561009201	$6.2^{\pm 0.1}$	10	$6.9^{0}_{-0.1}$

Nota: n. 2 pezzi per confezione

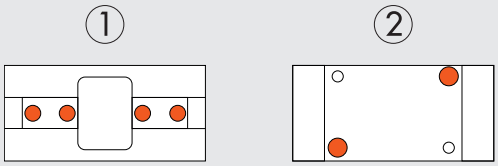

QUANTITY OF KITS NEEDED

Sizer gripper	① - Use with jaws	② - Body use
64	**2** code W1560649201	**1** code W1560809201
80	**2** code W156080920	**1** code W1560809201
100	**2** code W1561009201	**1** code W1561009201

NOTES

GRIPPER WITH TWO PARALLEL LONG-STROKE JAWS, SERIES P4K

Dual-acting grippers with parallel jaws and internal and external clamping.
Specifically designed for clamping particularly bulky items.
They come with a magnet and sensor grooves.
The lower plate has a V-Lock profile and grooves.
A plate with a V-Lock coupling can also be mounted to the sides of the grippers.

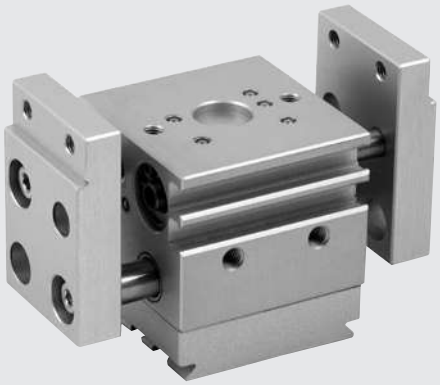

TECHNICAL DATA		P4K-12
Operating pressure	bar	3 to 8
	MPa	0.3 to 0.8
	psi	43 to 116
Temperature range	°C	-10 to 80
Fluid		20 µm filtered air, lubricated or unlubricated. If lubricated air is used, lubrication must be continuous
Bore	mm	2 x 12
Clamping force of a single jaw	N	45
at 6.3 bar, 20 mm from the upper surface, on opening and closing		
Stroke of each jaw	mm	10
Max. frequency on continuous operation	Hz	> 4
Minimum opening/closing time	s	0.008 / 0.008
Repeatability	mm	< 0.04
Max. admissible static loads:		
- Fa	N	200
- Mx	Nm	6
- My	Nm	6
- Mz	Nm	8
Weight	kg	0.35

COMPONENTS

① BODY: anodized aluminium
② JAWS anodized aluminium
③ GUIDE BUSHING: steel strip with bronze insert
④ PISTON ROD: nitrided steel
⑤ DRIVE ROD: steel
⑥ PISTON GASKET: NBR
⑦ BUFFER: polyurethane
⑧ GASKET: NBR
⑨ PISTON ROD GASKET: polyurethane
⑩ END CAP: bronze
⑪ MAGNET: plastoneodymium
⑫ V-Lock REAR PLATE: anodized aluminium

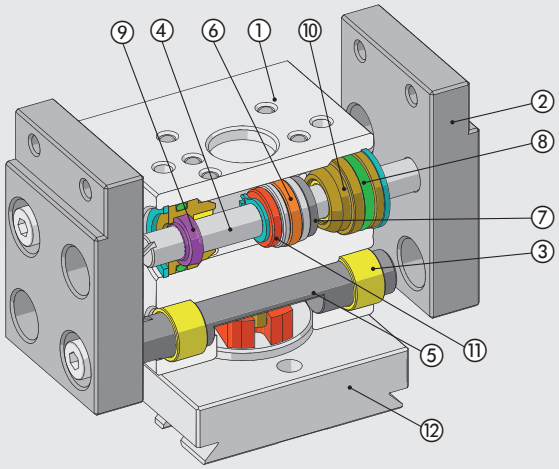

DIAGRAM OF FORCES AND MOMENTS

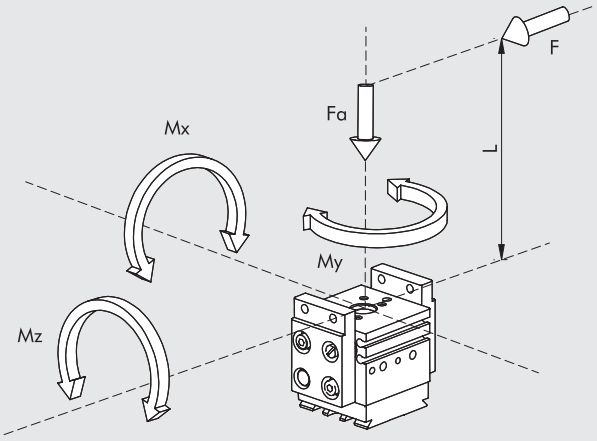

F	Clamping force for each jaw
Fa	Maximum static axial force
Mx, My, Mz	Maximum static moments

EXAMPLES OF APPLICATION

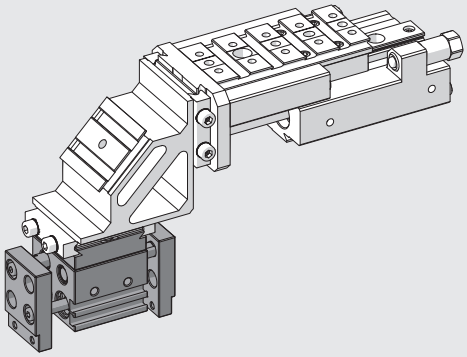

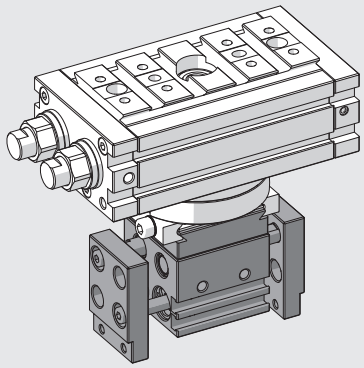

NOTES

V-Lock MOUNTING OPTIONS

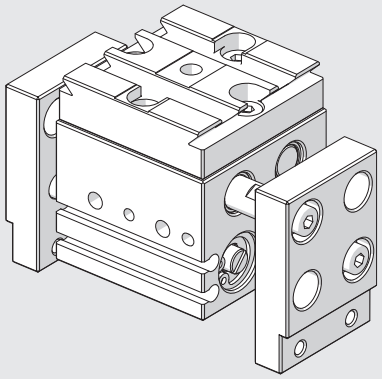

Gripper as supplied

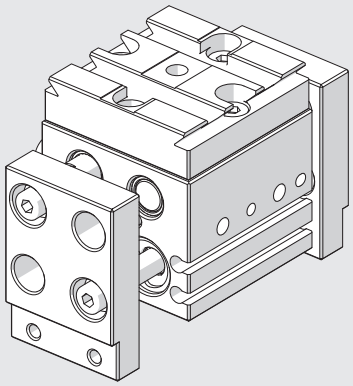

Unscrew the 4 screws at the back and rotate the rear flange by 90°

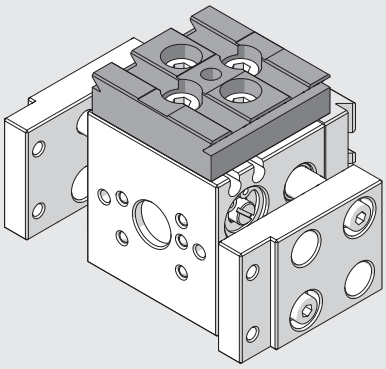

Fix the accessory "type 1 side adaptor" code 0950008003K to the right, lengthwise

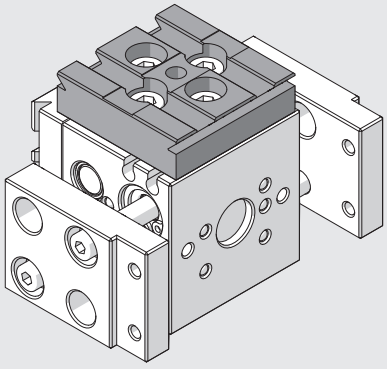

Fix the accessory "type 1 side adaptor" code 0950008003K to the right, crosswise

NOTES

DIMENSIONS OF GRIPPER P4K-12

NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

(*): The screws can be untightened. Rotate the rear plate by 90° and tighten the screws.

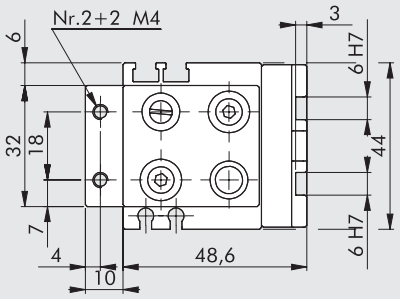



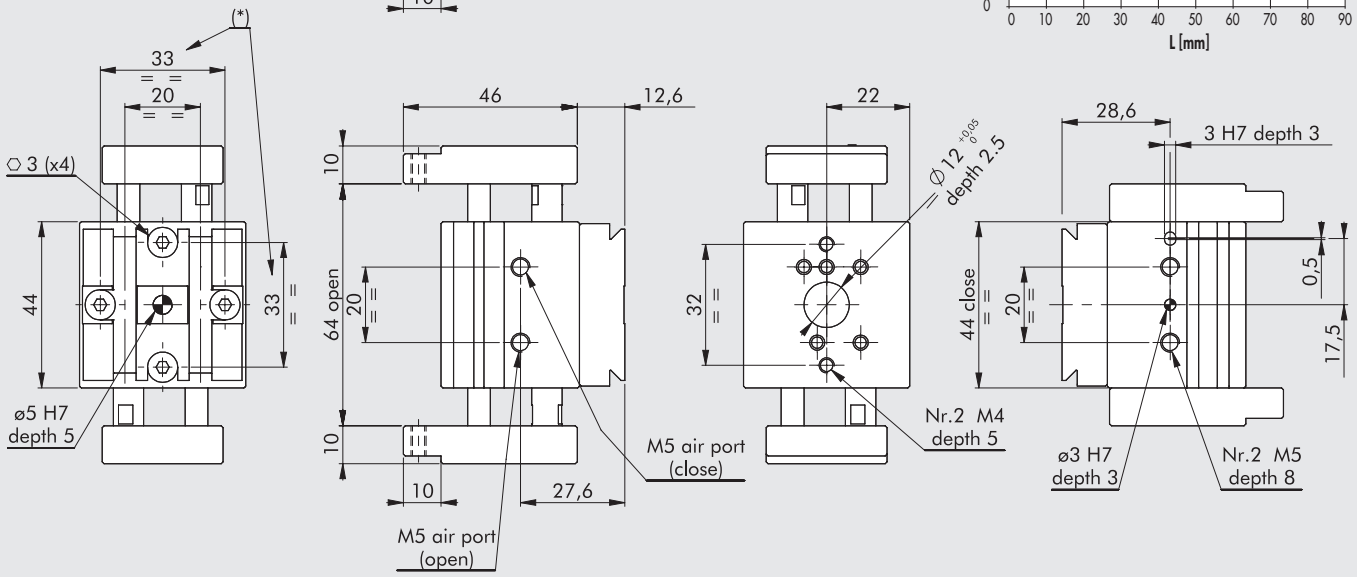

Code	Description
W1580120200K	Gripper with 2 parallel long-stroke jaws P4K-12

ACCESSORIES

SENSOR Ø 4

For codes and technical data, see **chapter A6**.



RETRACTABLE SENSOR

For codes and technical data, see **chapter A6**.

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



GRIPPER WITH TWO PARALLEL LONG-STROKE JAWS, SERIES GPLK

Dual-acting parallel grippers with either internal or external clamping.
The long stroke make them ideal for clamping parts of different sizes or when the clamping fingers are specifically shaped to hold the part.
The jaw guide is particularly sturdy and is designed to reduce friction and backlash to a minimum, which is a guarantee of long life.
The body is made of hard-anodized aluminium.
The jaws are made of high-tensile hardened and ground steel.
The pistons are housed in a stainless steel jacket.
The end-of-stroke position both on opening and closing can be adjusted using the screws positioned on one side. The grippers come with magnetic or inductive sensors to read the end-of-stroke position.
The magnetic sensors are housed in grooves on the side of the body.
Inductive sensors are inserted into holes on one side.
The side of the body opposite the jaws has a V-Lock profile and grooves.
It is advisable to use flow regulators to control the opening and closing speed and prevent end-of-stroke impacts.

TECHNICAL DATA		GPLK-1-30	GPLK-1-40	GPLK-2-45	GPLK-2-60	GPLK-2-75
Operating pressure	bar	2 to 8				
	MPa	0.2 to 0.8				
	psi	29 to 116				
Temperature range	°C	-10 to 80				
Fluid		20 µm filtered air, lubricated or unlubricated. If lubricated air is used, lubrication must be continuous				
Clamping force of a single jaw	N	42		116		
at 6.3 bar, 20 mm from the upper surface, on opening and closing						
Single jaw stroke, adjustable	mm	1 to 15	6 to 20	5.5 to 22.5	13 to 30	20 to 37.5
Maximum overall stroke	mm	30	40	45	60	75
Minimum opening/closing time						
measured at maximum stroke:						
at 3 bar	s	0.18	0.22	0.44	0.60	0.76
at 6 bar	s	0.10	0.12	0.28	0.32	0.36
Repeatability (on 100 strokes at constant conditions)	mm	< 0.03			< 0.04	
Moment of inertia around the y axis	kg.cm²	3.5	4.4	16.4	21.5	29.1
Weight	kg	0.44	0.46	1.04	1.12	1.26
Max. admissible static loads						
Ft	N	7.5			15	
Fa	N	70			120	
Mx	Nm	9			37	
My	Nm	4			23	
Mz	Nm	7			22	

COMPONENTS

① BODY: hard-anodized aluminium
② ROLLER: tempered steel
③ BLANKING PLATE: blank anodized aluminium
④ STOP PLATE: blank anodized aluminium
⑤ INTERNAL BODY: steel
⑥ PINION: nitrided steel
⑦ MAGNET: neoplast
⑧ PISTON: technopolymer
⑨ GASKET: NBR
⑩ RACK: burnished steel
⑪ JAW: tempered steel

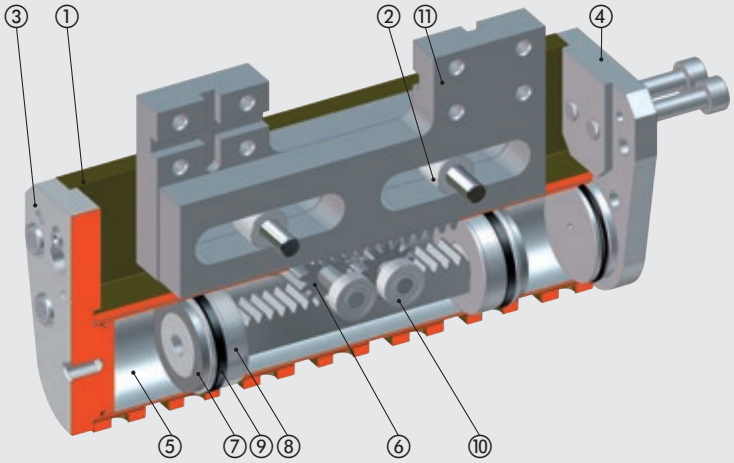

DIAGRAM OF FORCES AND MOMENTS

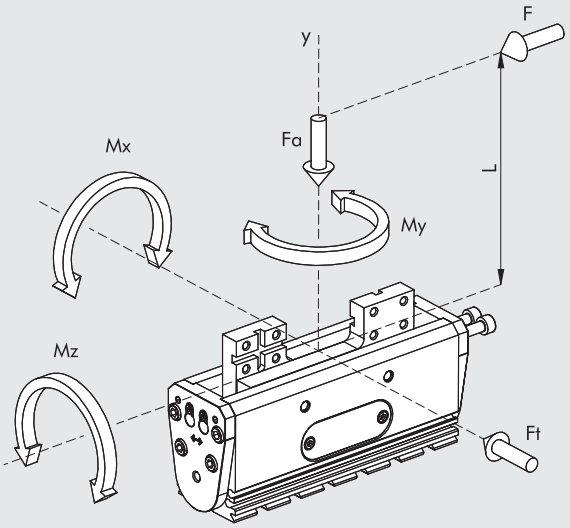

F	Clamping force
Ft	Maximum static traverse force
Fa	Maximum static axial force
Mx, My, Mz	Maximum static moments

EXAMPLES OF APPLICATION

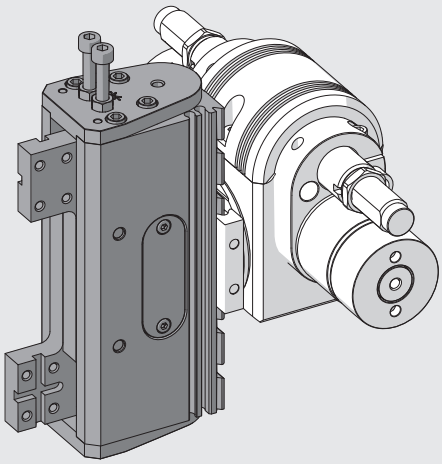

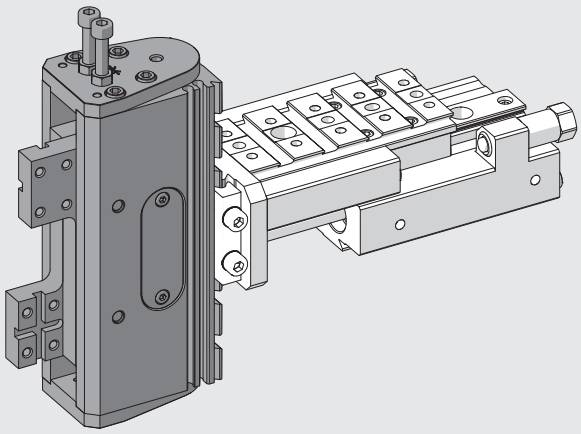

V-Lock MOUNTING OPTIONS

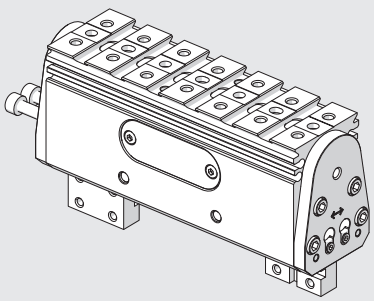

Gripper as supplied

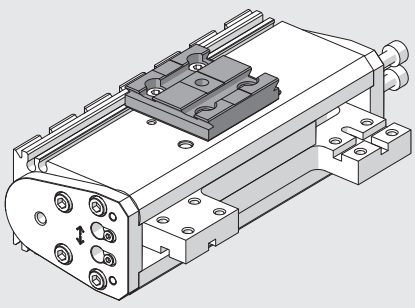

Fix the accessory "type 2 side adaptor" code 0950008004K, lengthwise

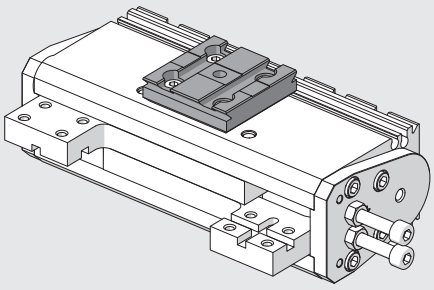

Fix the accessory "type 2 side adaptor" code 0950008004K, crosswise

METAL WORK PNEUMATIC

DIMENSIONS OF GRIPPER GPLK-1

① Holes for centring pins (Ø5H7 depth 2.5)
② Centring slot (Ø5H7 depth 2.5)
③ Gripper opening power (M5)
④ Gripper closing power (M5)
⑤ Magnetic sensor fixing slots
⑥ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
⑦ Slot for "V-Lock" precision key
⑧ Inductive induction sensor slot
⑨ Threaded holes for fixing (max depth 4.5)

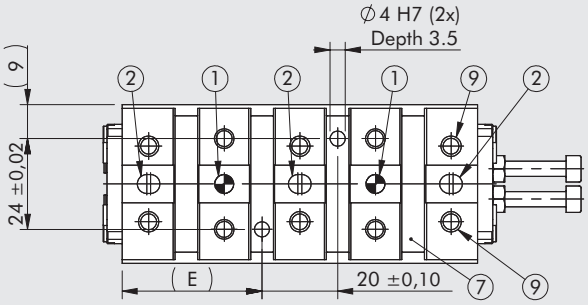

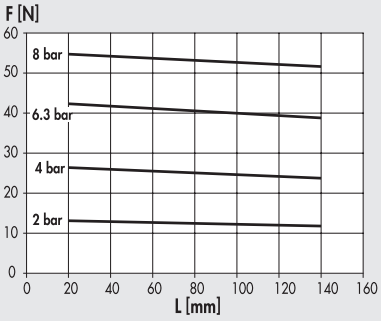



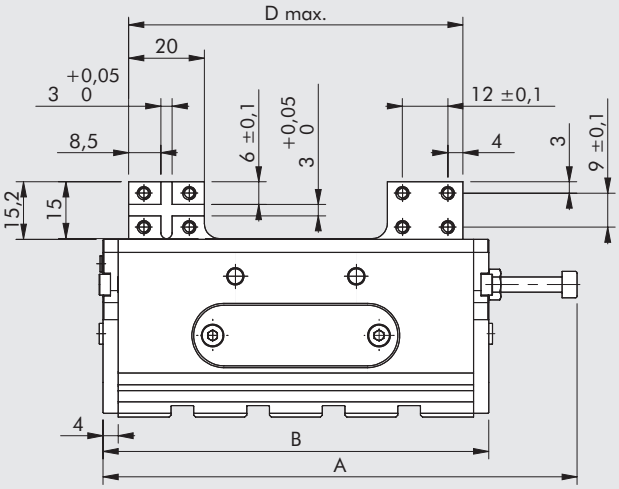

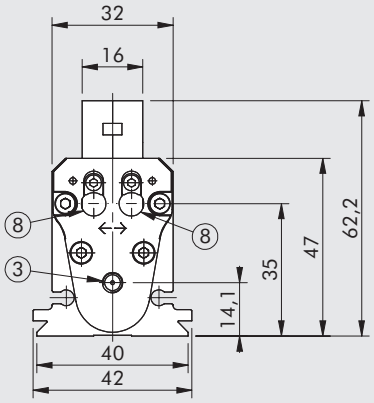

GPLK-1-30

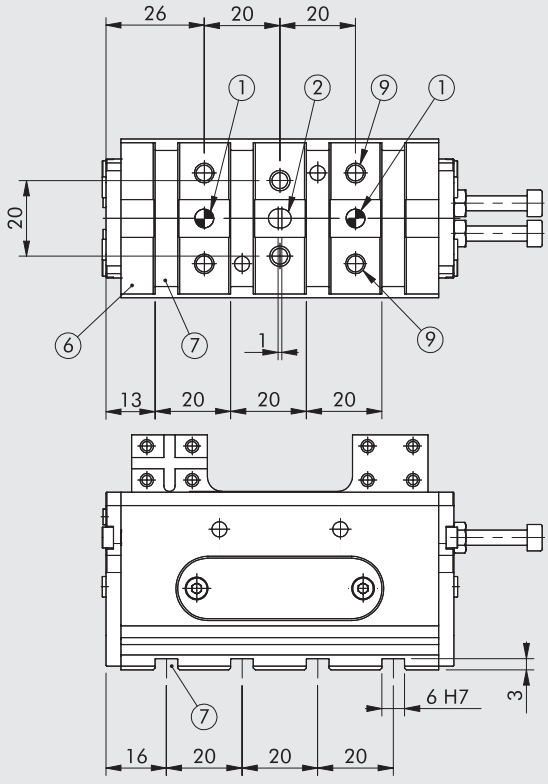

GPLK-1-40

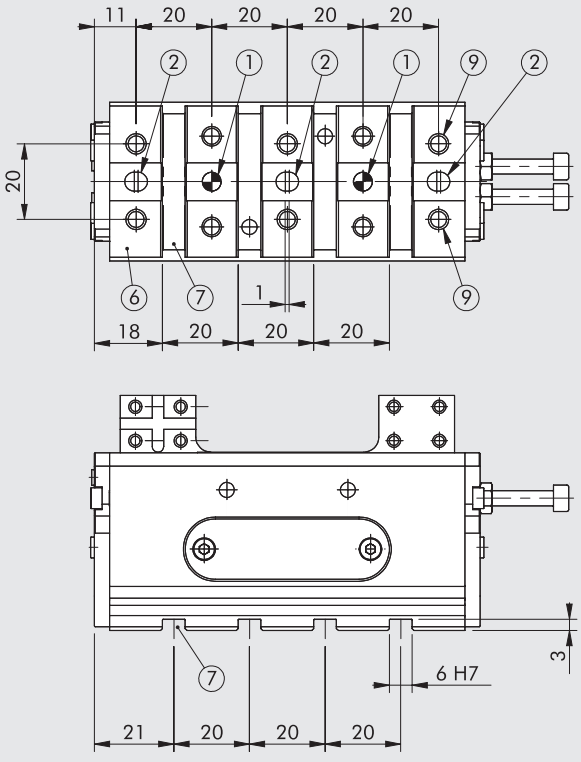

Code	Description	Overal Stroke	A	B	D max	E
K3010300000K	GPLK-1-30	30	114	92	78	32
K3010400000K	GPLK-1-40	40	124	102	88	37

DIMENSIONS OF GRIPPER GPLK-2

① Holes for centring pins (Ø5H7 depth 2.5)
② Centring slot (Ø5H7 depth 2.5)
③ Gripper opening power (M5)
④ Gripper closing power (M5)
⑤ Magnetic sensor fixing slots
⑥ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
⑦ Slot for "V-Lock" precision key
⑧ Inductive induction sensor slot
⑨ Threaded holes for fixing (max depth 4.5)

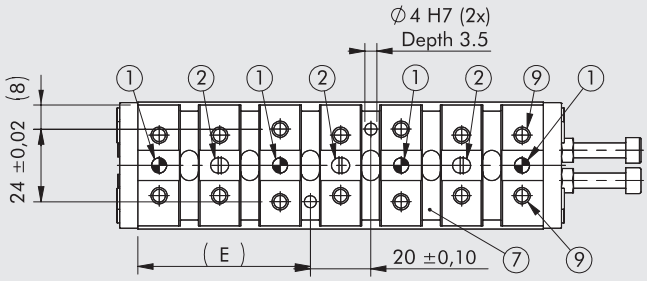

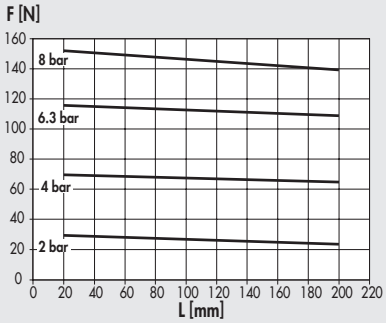

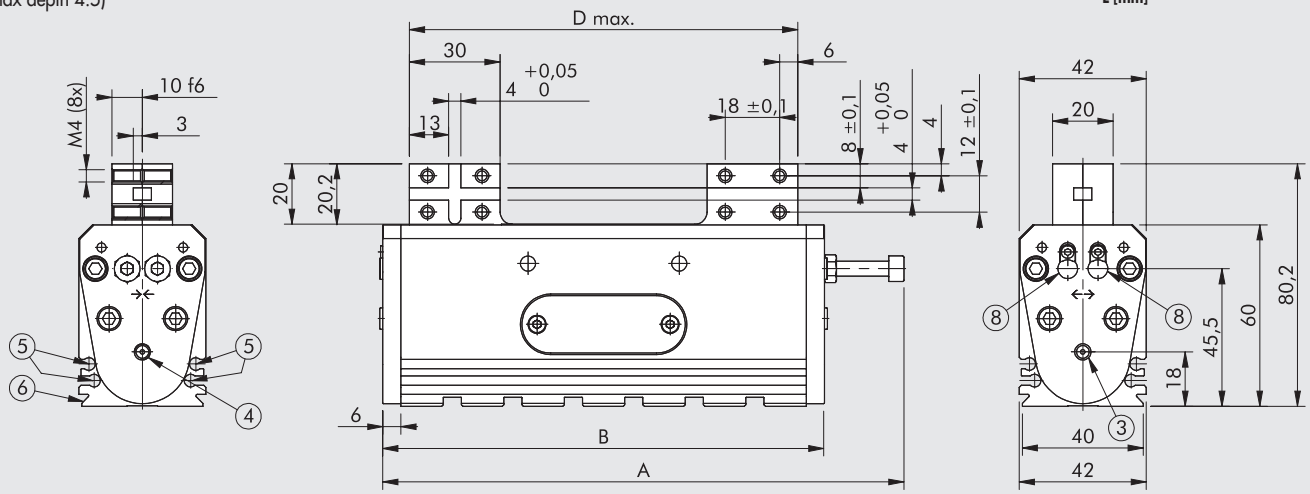

GPLK-2-45

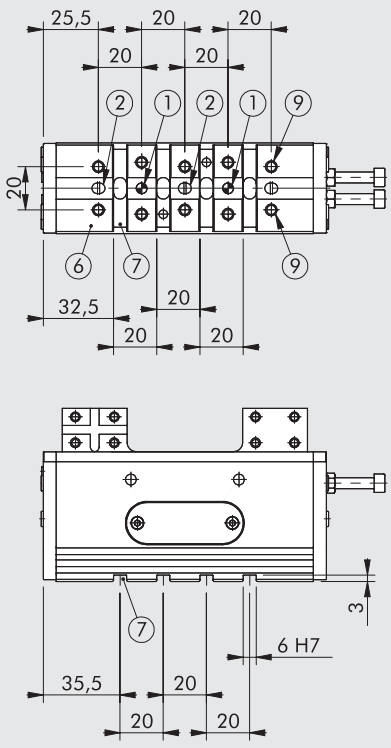

GPLK-2-60

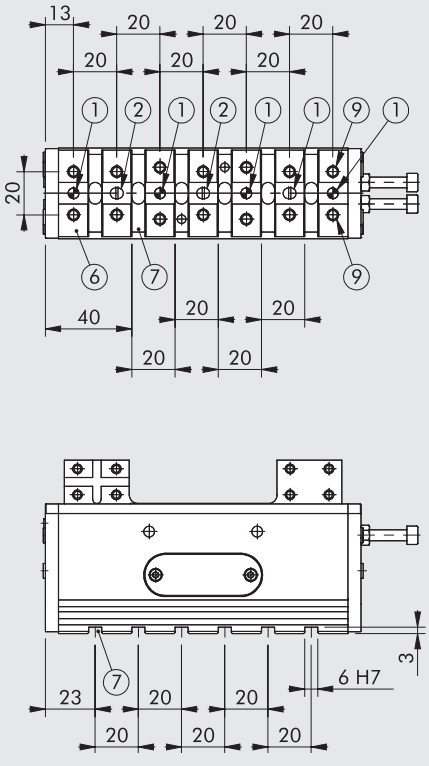

GPLK-2-75

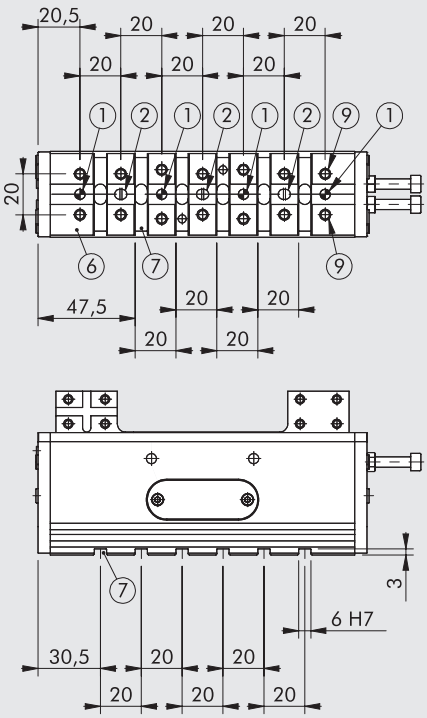

Code	Description	Overal Stroke	A	B	D max	E
K3020450000K	GPLK-2-45	45	157	131	113	49.5
K3020600000K	GPLK-2-60	60	172	146	128	57
K3020750000K	GPLK-2-75	75	187	161	143	64.5

ACCESSORIES

V-Lock ACCESSORIES

See page **A3**.36

INDUCTION SENSOR Ø 6.5



Code	Description
W095K030006	PNP Ø 6.5 PNP inductive sensor with LED 2 m
W095K031006	NPN Ø 6.5 NPN inductive sensor with LED 2 m

QUICK-FIT INDUCTIVE SENSOR Ø 6.5



Code	Description
W095K030009	PNP Ø 6.5 inductive sensor with push-in LED

CABLE WITH STRAIGHT CONNECTOR FOR Ø 6.5 PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

CABLE WITH 90° CONNECTOR FOR Ø 6.5 PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



in	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

M8 M – M8 F CONNECTOR FOR Ø 6.5 PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)

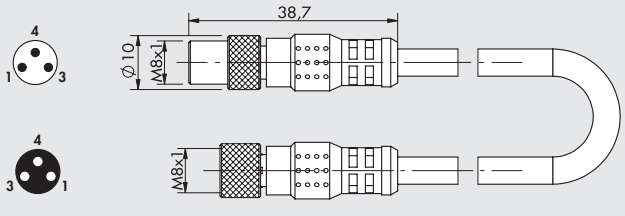

Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital INPUT of the EB 80 and CM valves

SENSOR Ø 4



For codes and technical data, see **chapter A6**.

OIL

Code	Description	Volume
9910490	PARALIQ P 460	80 ml

GRIPPER WITH TWO HINGED JAWS SERIES P7K

The body is made of anodized aluminium alloy and the jaws are made of hardened steel. They come with a magnet and sensor grooves.
The lower plate has a V-Lock profile and grooves.
A plate with a V-Lock coupling can also be mounted to the sides of the grippers.

TECHNICAL DATA		P7K-20	P7K-32
Operating pressure	bar	2 to 10	
	MPa	0.2 to 1.0	
	psi	29 to 145	
Temperature range	°C	-10 to 80	
Fluid		20 µm filtered air, lubricated or unlubricated. If lubricated air is used, lubrication must be continuous	
Bore	mm	20	32
Maximum opening angle for single jaw		16° 30′	16°
Clamping force of a single jaw at 6.3 bar,	N	50	120
20 mm from the upper surface,			
on opening and closing			
Max. frequency on continuous operation	Hz	> 5	> 5
Minimum opening/closing time	s	0.042 / 0.016	0.017 / 0.010
Repeatability	mm	0.01	0.01
Lubrication		Grease the sliding surfaces of the jaws every one million cycles. Use grease code 9910509	
Max. admissible static loads:			
- Fa	N	200	350
- Mx	Nm	6	10
- My	Nm	6	10
- Mz	Nm	8	12
Weight	kg	0.22	0.54

COMPONENTS

① BODY: anodized aluminium
② JAWS: nitrided steel
③ PISTON ROD: nitrided steel
④ PISTON: aluminium
⑤ PISTON GASKET: NBR
⑥ GUIDE RING: PTFE (only for Ø 32)
⑧ MAGNET: plastoferrite
⑧ GASKET: polyurethane
⑨ GASKET: NBR
⑩ V-Lock REAR PLATE: anodized aluminium

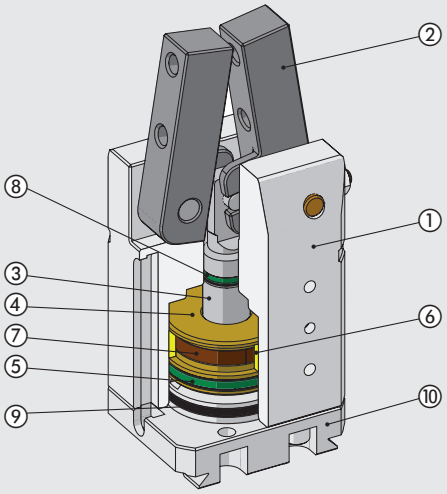

DIAGRAM OF FORCES AND MOMENTS

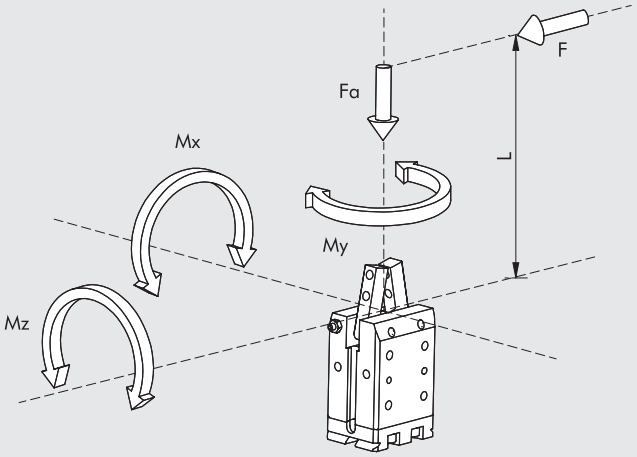

F	Clamping force for each jaw
Fa	Maximum static axial force
Mx, My, Mz	Maximum static moments

EXAMPLES OF APPLICATION

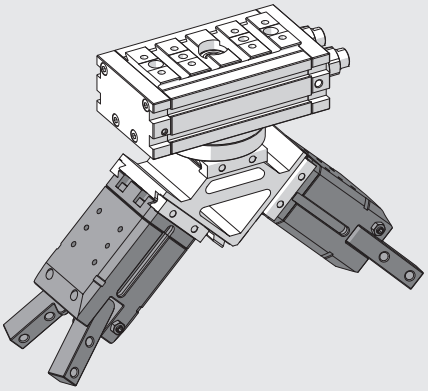

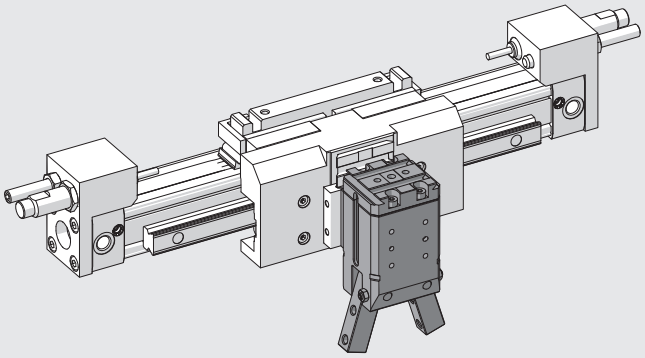

NOTES

V-Lock MOUNTING OPTIONS



Gripper as supplied



Fix the accessory "type 2 side adaptor" code 0950008004K to the right, lengthwise

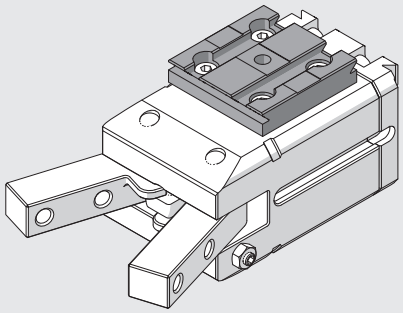

Fix the accessory "type 2 side adaptor" code 0950008004K to the right, crosswise



Fix the accessory "type 2 side adaptor" code 0950008004K to the left, lengthwise

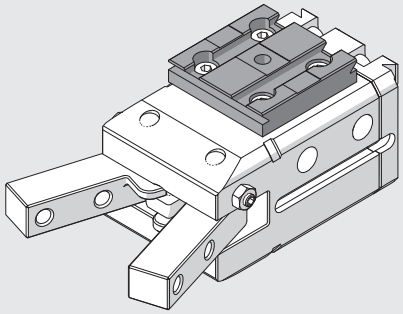

Fix the accessory "type 2 side adaptor" code 0950008004K to the left, crosswise

METAL WORK PNEUMATIC

DIMENSIONS OF GRIPPER P7K-20

NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

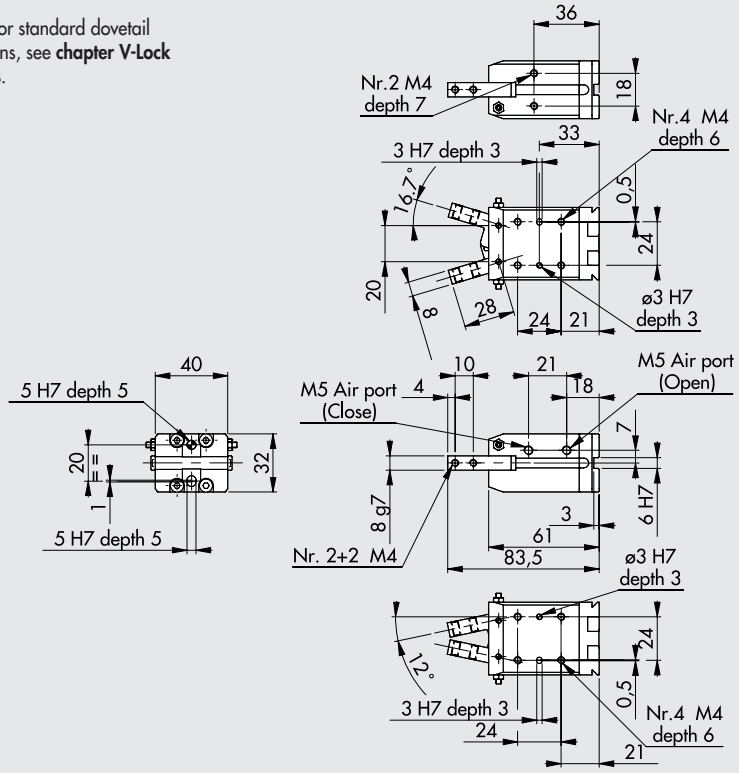

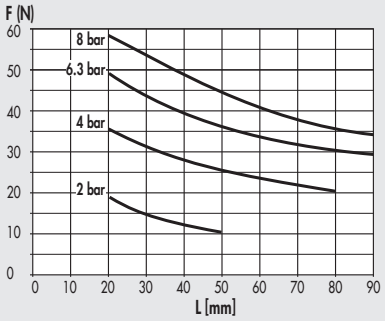

Code	Description
W1590200200K	Gripper with 2 hinged jaws P7K-20

DIMENSIONS OF GRIPPER P7K-32

NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

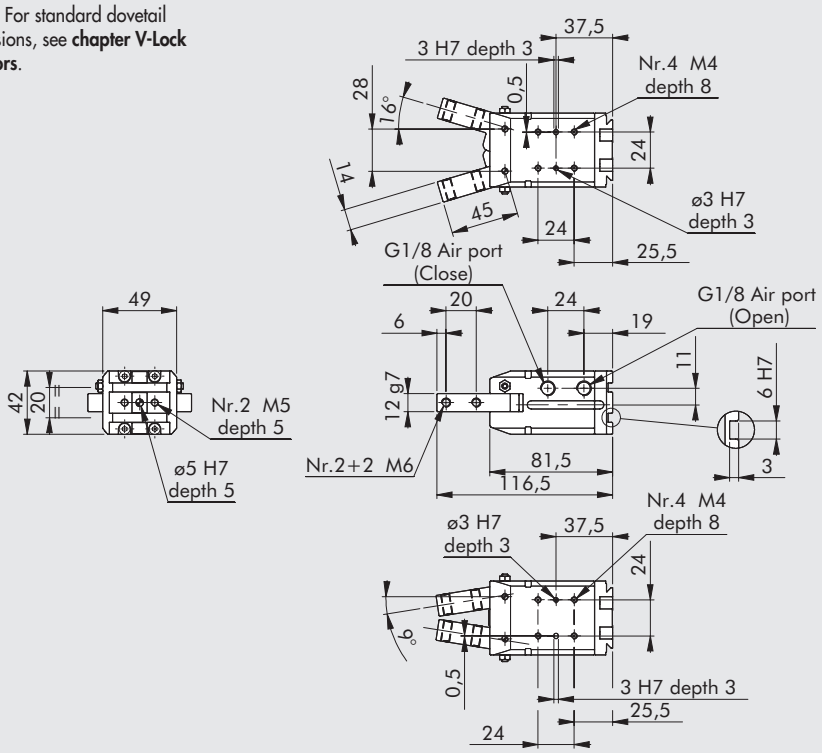

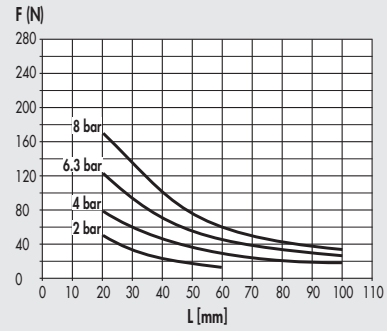

Code	Description
W1590320200K	Gripper with 2 hinged jaws P7K-32

ACCESSORIES

RETRACTING SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

DIRECTION RECOMMENDED FOR FIXING THE SENSORS TO THE GRIPPER GROOVES

P7K-20

CLOSED



OPEN



P7K-32

CLOSED



OPEN



GRIPPER 180° WITH TWO HINGED JAWS SERIES P9K

Hinged toggle grippers with an adjustable opening angle.
High clamping forces.
The body is made of hard anodized aluminium alloy and the jaws and moving parts are made of hardened steel.
They come with a magnet and sensor grooves.
The lower plate has a V-Lock profile and grooves.
A plate with a V-Lock coupling can also be mounted to the sides of the grippers.

TECHNICAL DATA		P9K-32	P9K-40
Operating pressure	bar	2 to 8	
	MPa	0.2 to 0.8	
	psi	29 to 116	
Temperature range	°C	-10 to 80	
Fluid		20 µm filtered air, lubricated or unlubricated. If lubricated air is used, lubrication must be continuous	
Bore	mm	32	40
Clamping force of a single jaw at 6.3 bar, 40 mm from the upper surface, on opening and closing	N	160	260
Max. frequency on continuous operation	Hz	> 5	> 5
Minimum opening/closing time	s	0.034 / 0.041	0.052 / 0.061
Repeatability	mm	< 0.02	< 0.02
Lubrication		Grease the sliding surfaces of the jaws every one million cycles. Use grease code 9910509	
Max. admissible static loads:			
- Fa	N	350	500
- Mx	Nm	12	20
- My	Nm	12	20
- Mz	Nm	16	24
Weight	kg	0.76	1.6

COMPONENTS

① BODY: anodized aluminium
② JAWS: nitrided steel
③ LEVERAGE SYSTEM: nitrided steel
④ PISTON ROD: stainless steel
⑤ PISTON: aluminium
⑥ PISTON GASKET: NBR
⑦ GUIDE RING: PTFE
⑧ MAGNET: plastoferrite
⑨ GASKET: NBR
⑩ GUIDE BUSHING: bronze
⑪ GASKET: NBR
⑫ V-Lock REAR PLATE: anodized aluminium
⑬ PISTON ROD GASKET: polyurethane

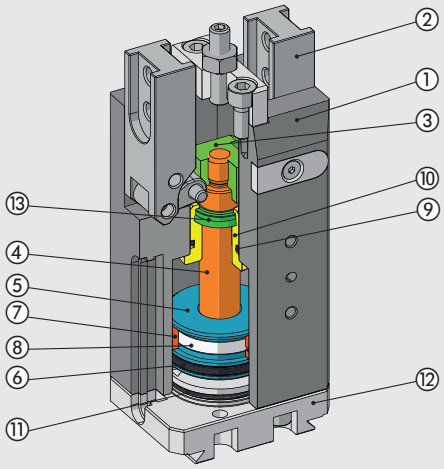

DIAGRAM OF FORCES AND MOMENTS

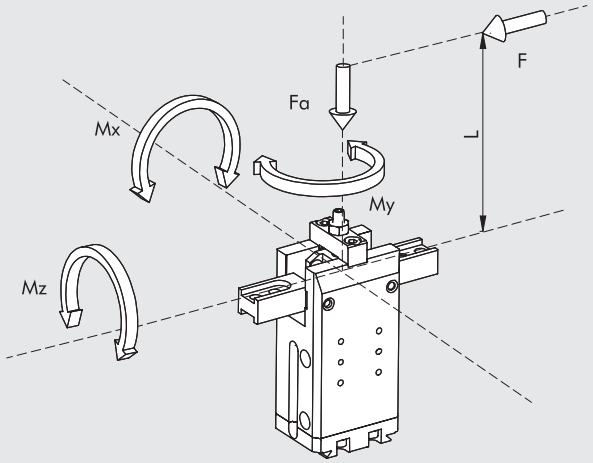

F	Clamping force for each jaw
Fa	Maximum static axial force
Mx, My, Mz	Maximum static moments

EXAMPLES OF APPLICATION

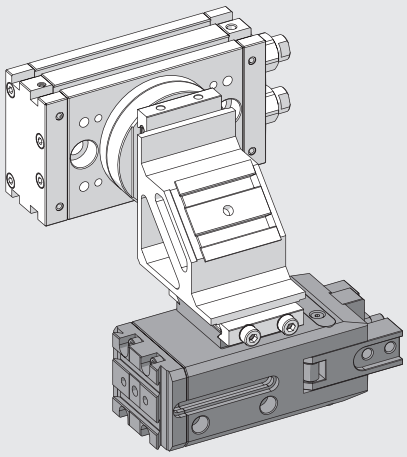

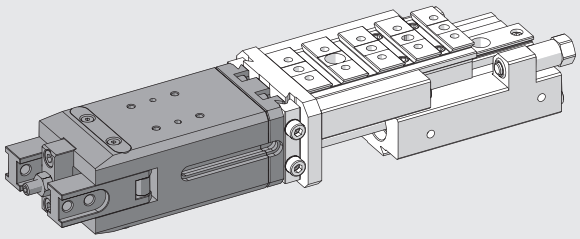

NOTES

METAL WORK PNEUMATIC

V-Lock MOUNTING OPTIONS



Gripper as supplied



Fix the accessory "type 2 side adaptor" code 0950008004K (for Ø 32) or "type 3 side adaptor" code 0950008005K (for Ø 40) to the right, lengthwise

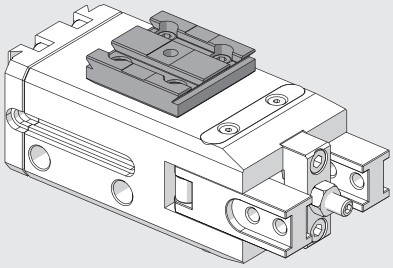

Fix the accessory "type 2 side adaptor" code 0950008004K (for Ø 32) or "type 3 side adaptor" code 0950008005K (for Ø 40) to the right, crosswise



Fix the accessory "type 2 side adaptor" code 0950008004K (for Ø 32) or "type 3 side adaptor" code 0950008005K (for Ø 40) to the left, lengthwise

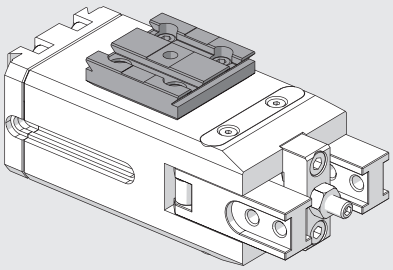

Fix the accessory "type 2 side adaptor" code 0950008004K (for Ø 32) or "type 3 side adaptor" code 0950008005K (for Ø 40) to the left, crosswise

DIMENSIONS OF GRIPPER P9K-32

NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.





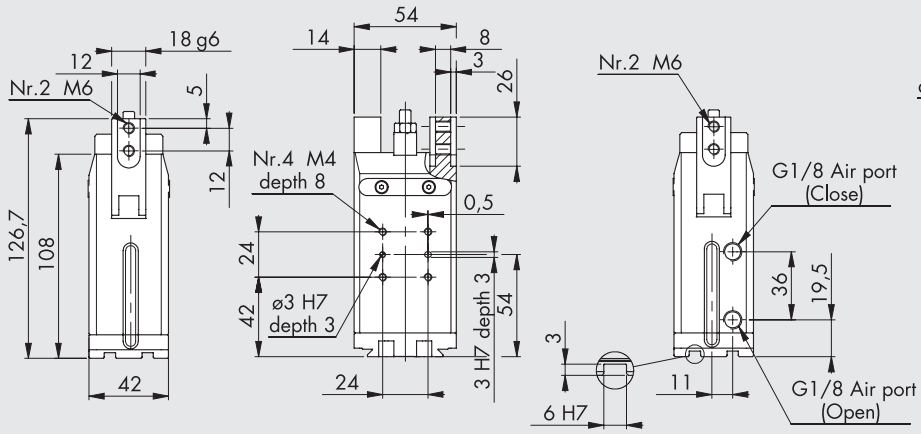

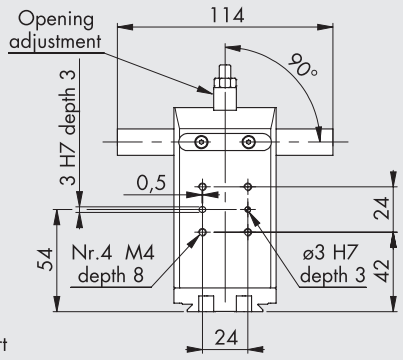

Code	Description
W1530320180K	Hinged gripper P9K-32

DIMENSIONS OF GRIPPER P9K-40

NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.



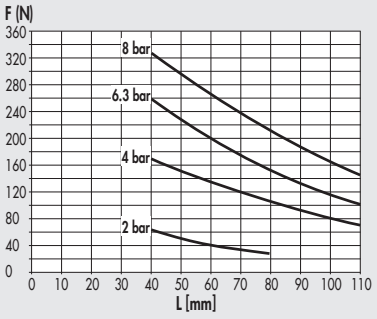

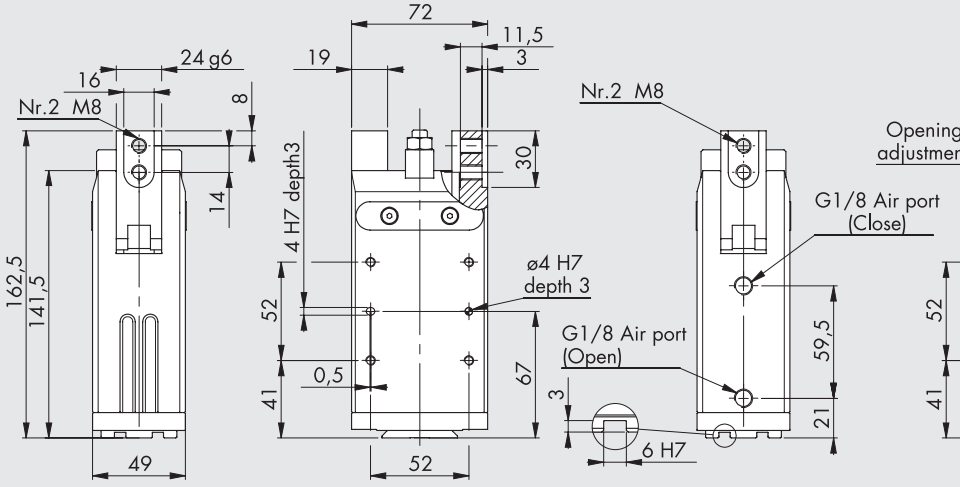

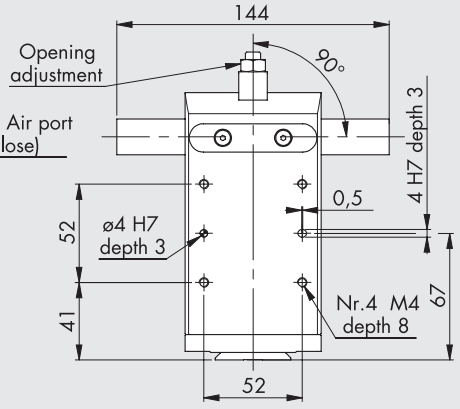

Code	Description
W1530400180K	Hinged gripper P9K-40

ACCESSORIES

RETRACTING SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

DIRECTION RECOMMENDED FOR FIXING THE SENSORS TO THE GRIPPER GROOVES

P9K-32

CLOSED



OPEN



NOTES

GRIPPER WITH THREE PARALLEL JAWS SERIES P12K

Parallel double-acting three-jaw gripper, with either internal or external clamping.
Also available in the double-acting with spring version, normally open (NO) for internal grip and normally closed (NC) for external grip.
Aluminum alloy body coated with surface hardening treatment; jaws made of wear-resistant coated steel.
The jaw-guiding system and precision in coupling with the body make the gripper extremely stable.
The ceramic-coated body reduces friction and wear, and enhances the movement of the jaws on the body.
All sizes are available in the version with standard stroke and clamping force, while only some in the version with reduced stroke but with higher clamping torque.The gripper is equipped with a magnet and grooves for sensors.
A version designed to house inductive sensors is also available (**the inductive sensors are not supplied by Metal Work**).

TECHNICAL DATA			P12K-64			P12K-80						P12K-100					
						Standard			Increased force			Standard			Increased force		
			DA	NO	NC	DA	NO	NC	DA	NO	NC	DA	NO	NC	DA	NO	NC
Minimum operating pressure		bar	2			2						2					
		MPa	0.2			0.2						0.2					
		psi	29			29						29					
Maximum operating pressure		bar	8			8						8					
		MPa	0.8			0.8						0.8					
		psi	116			116						116					
Temperature range		°C	-10 to 80			-10 to 80						-10 to 80					
Fluid			20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous														
Gripping force at 6.3 bar *	opening	N	310	353	-	435	518	-	860	1026	-	840	999	-	1450	1767	-
	closing	N	279	-	322	392	-	475	774	-	940	756	-	915	1305	-	1622
Minimum gripping force produced by the spring *		N	-	43	43	-	83	83	-	166	166	-	159	159	-	317	317
Recommended workpiece weight		kg	2.9			4.5			9			9			20		
Stroke of each jaw		mm	6			8			4			10			5		
Minimum time	opening	s	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1
	closing	s	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05	0.05	0.1	0.05
Repeatability		mm	0.01			0.01						0.01					
Moment of inertia as regards the piston axis		kg cm²	1.6	3.0	3.0	6.5	8.7	8.7	6.5	8.7	8.7	19	21.5	21.5	19	21.5	21.5
Weight		kg	0.3	0.5	0.5	0.8	0.9	0.9	0.8	0.9	0.9	1.5	1.7	1.7	1.5	1.7	1.7

DA: Double-acting; NO: Double acting with spring, normally open; NC: Double acting with spring, normally closed.
* Referred to a single jaw 20 mm from the upper surface. The total force is obtained by multiplying the reported value by 3.

COMPONENTS

① BODY: hard-anodized aluminium
② JAWS: nitrided steel
③ PISTON ROD + GUIDE: nitrided steel
④ PISTON: hard-anodized aluminium
⑤ PISTON GASKET: NBR
⑥ PISTON ROD GASKET: NBR / polyurethane
⑦ BASE GASKET: reinforced SBR / NBR
⑧ MAGNET: neodymium

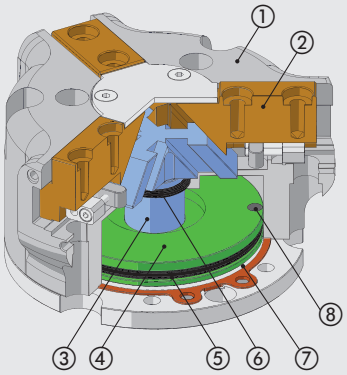

METAL WORK PNEUMATIC

GRIPPER P12K-64

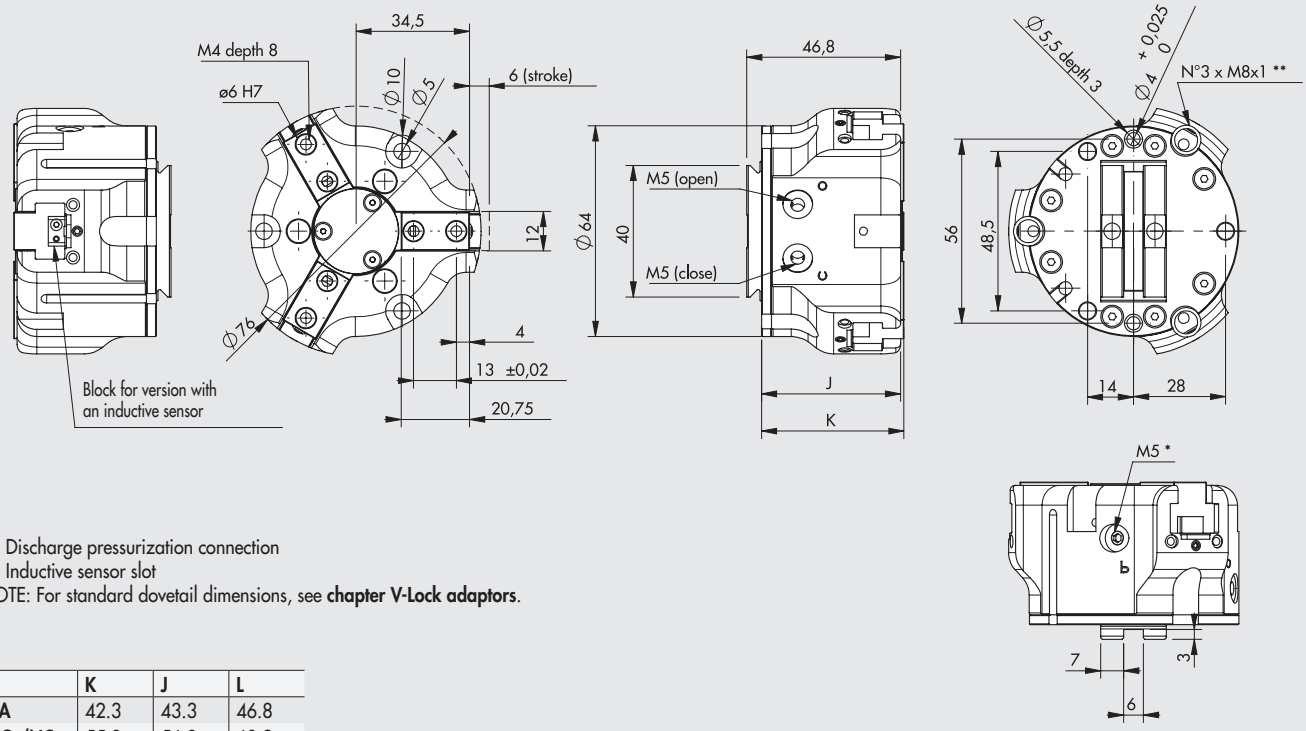

* Discharge pressurization connection
** Inductive sensor slot
NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

	K	J	L
DA	42.3	43.3	46.8
NO /NC	55.8	56.8	60.3

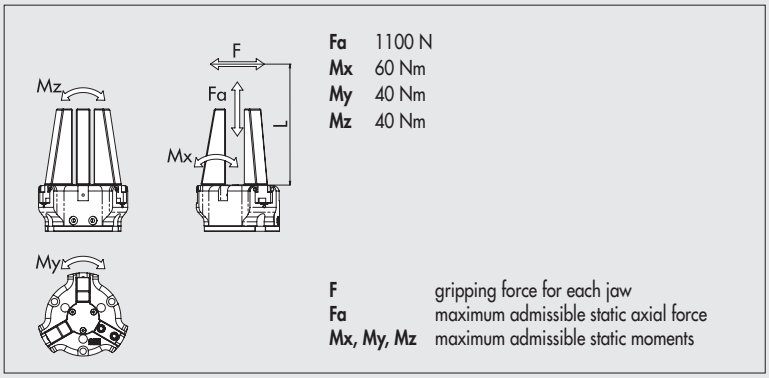

Fa	1100 N
Mx	60 Nm
My	40 Nm
Mz	40 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P12K-64 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

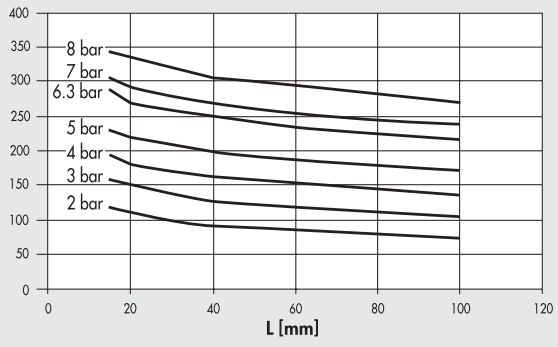

Internal grip*** (opening jaws)

Version DA

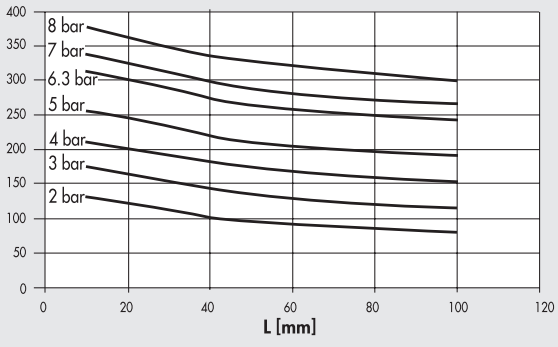

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

P12K-64 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

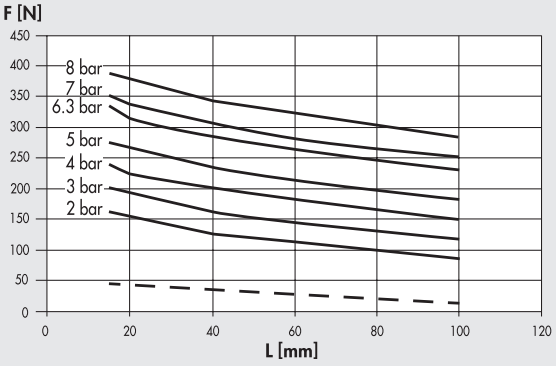

Internal grip*** (opening jaws)

Version NO

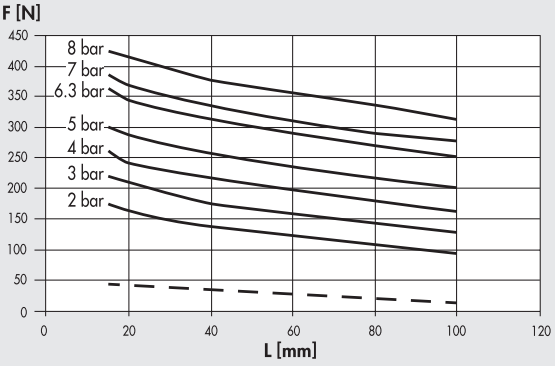

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

– – – Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1560640300K	Gripper with 3 parallel jaws P12K-64
W1560640301K	Gripper with 3 parallel jaws P12K-64 for inductive sensors
W1560642300K	Gripper with 3 parallel jaws P12K-64 NO
W1560642301K	Gripper with 3 parallel jaws P12K-64 NO for inductive sensors
W1560643300K	Gripper with 3 parallel jaws P12K-64 NC
W1560643301K	Gripper with 3 parallel jaws P12K-64 NC for inductive sensors

METAL WORK PNEUMATIC

GRIPPER P12K-80

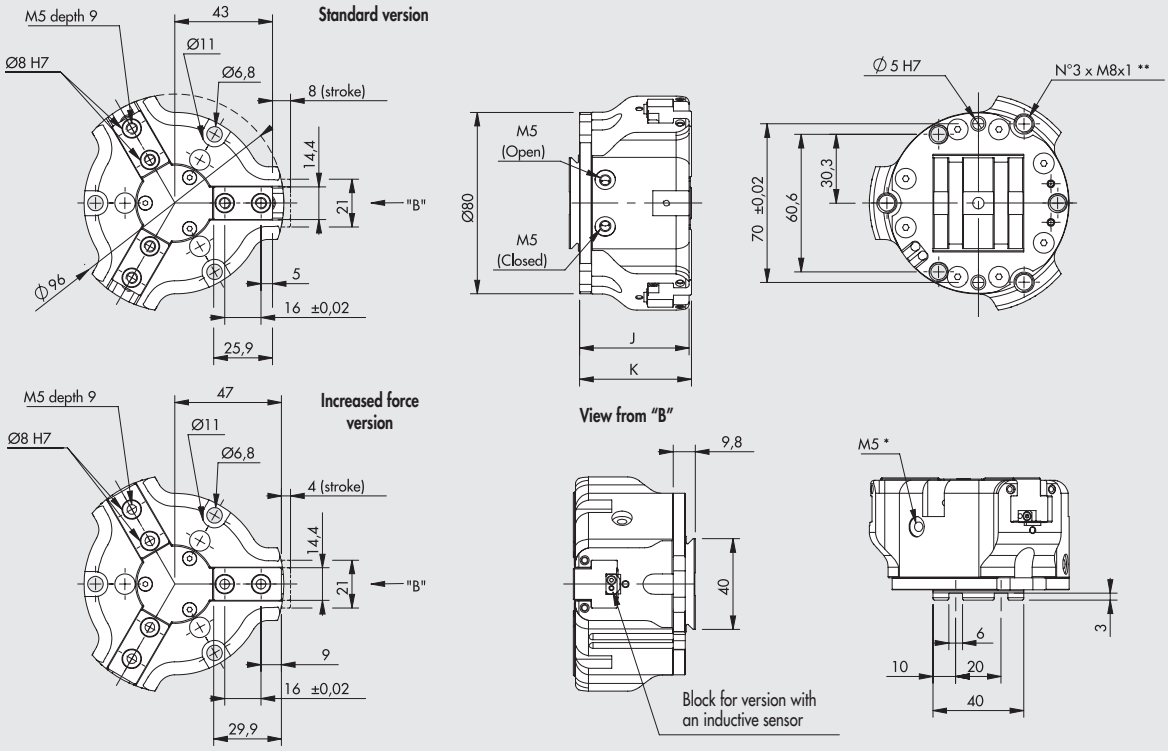

* Discharge pressurization connection
** Inductive sensor slot
NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

	K	J
DA	49.3	48.3
NO /NC	67	66



Fa	1500 N
Mx	90 Nm
My	55 Nm
Mz	55 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P12K-80 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

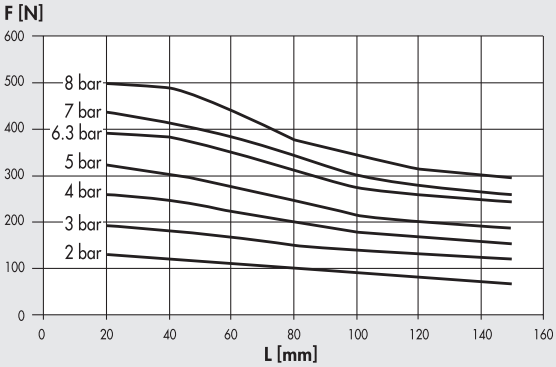

Internal grip*** (opening jaws)

Version DA

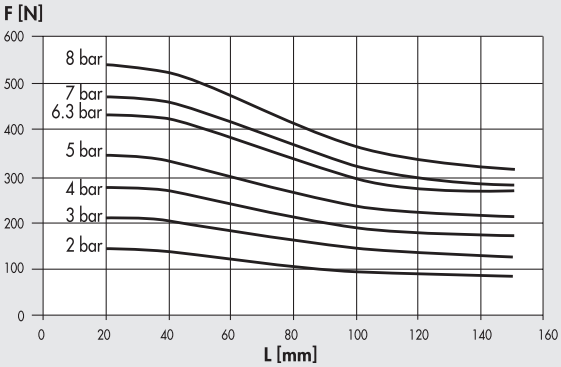

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

P12K-80 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

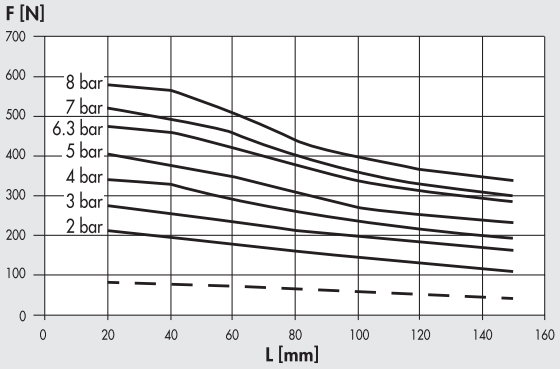

DA version increased force

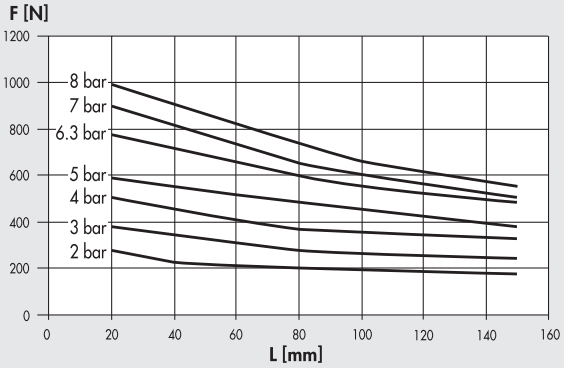

NC version increased force

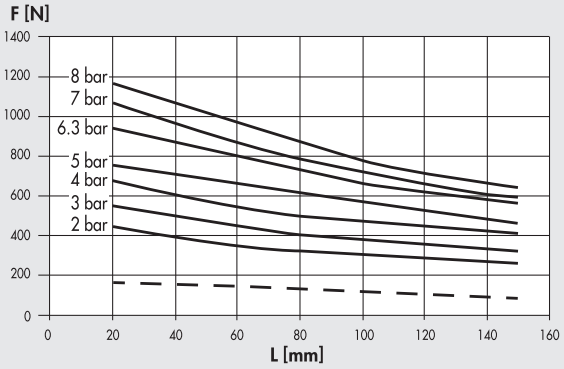

Internal grip*** (opening jaws)

Version NO

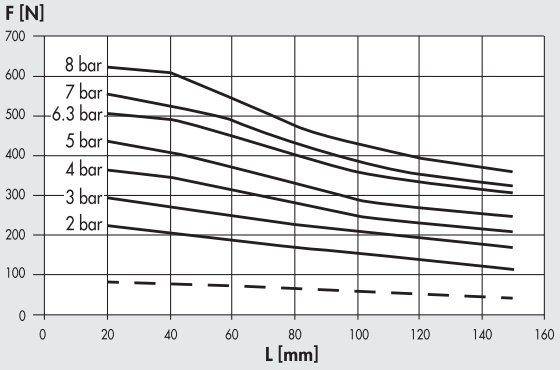

DA version increased force

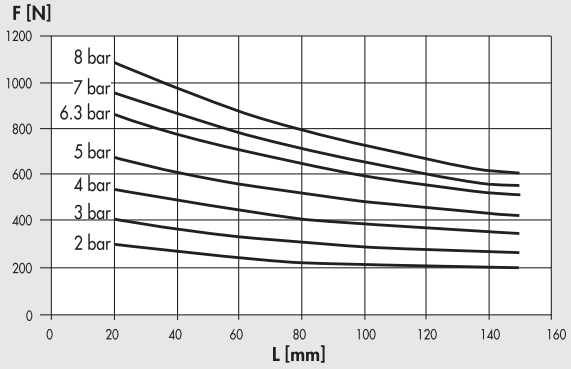

NO version increased force

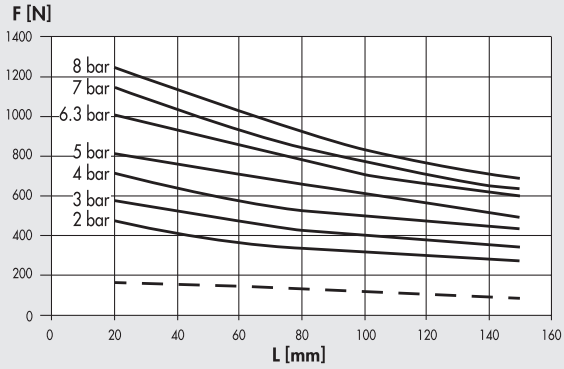

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

— — — Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1560800300K	Gripper with 3 parallel jaws P12K-80
W1560800301K	Gripper with 3 parallel jaws P12K-80 for inductive sensors
W1560800320K	Gripper with 3 parallel jaws P12K-80 increased force
W1560800321K	Gripper with 3 parallel jaws P12K-80 increased force for inductive sensors
W1560802300K	Gripper with 3 parallel jaws P12K-80 NO
W1560802301K	Gripper with 3 parallel jaws P12K-80 NO for inductive sensors
W1560802320K	Gripper with 3 parallel jaws P12K-80 NO increased force
W1560802321K	Gripper with 3 parallel jaws P12K-80 NO increased force for inductive sensors
W1560803300K	Gripper with 3 parallel jaws P12K-80 NC
W1560803301K	Gripper with 3 parallel jaws P12K-80 NC for inductive sensors
W1560803320K	Gripper with 3 parallel jaws P12K-80 NC increased force
W1560803321K	Gripper with 3 parallel jaws P12K-80 NC increased force for inductive sensors

METAL WORK PNEUMATIC

GRIPPER P12K-100

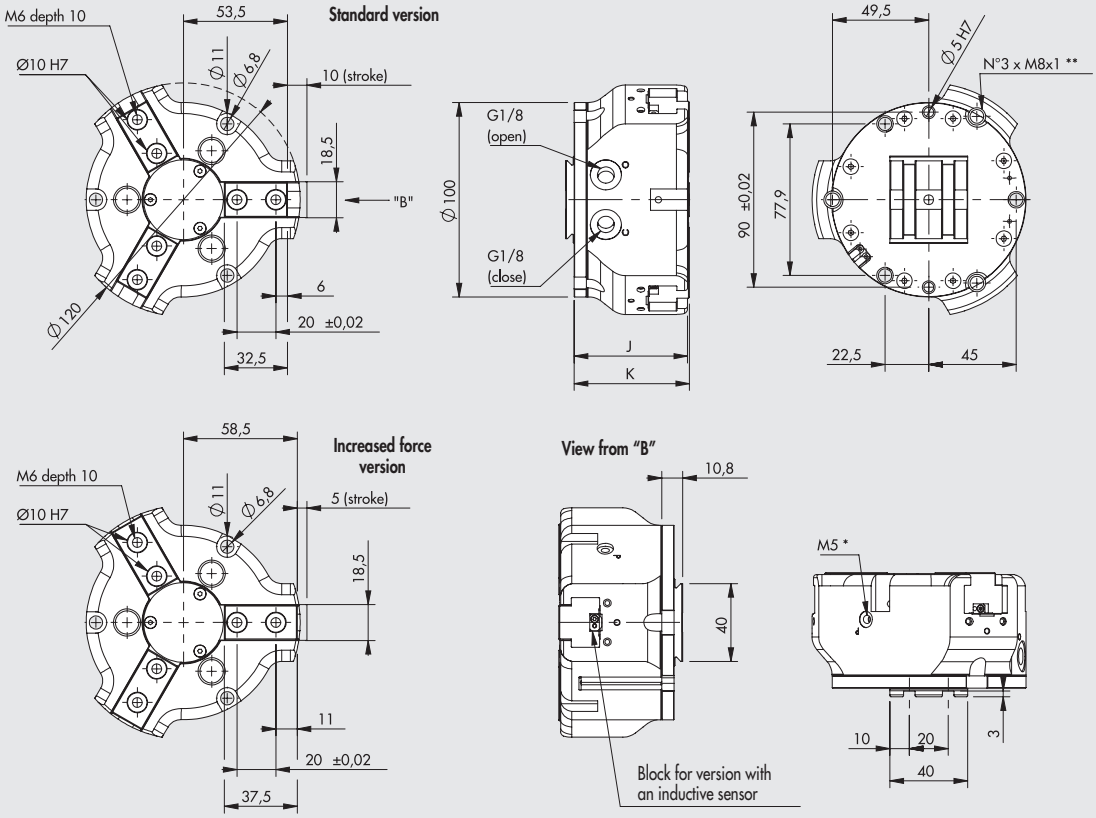

* Discharge pressurization connection
** Inductive sensor slot
NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

	K	J
DA	59.3	58.3
NO /NC	79.3	78.3



Fa	2000 N
Mx	115 Nm
My	70 Nm
Mz	80 Nm

F	gripping force for each jaw
Fa	maximum admissible static axial force
Mx, My, Mz	maximum admissible static moments

P12K-100 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

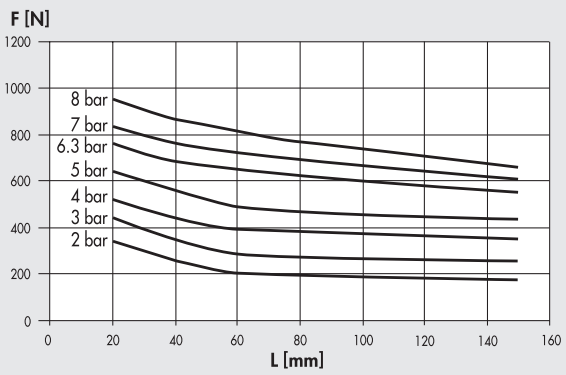

Internal grip*** (opening jaws)

Version DA

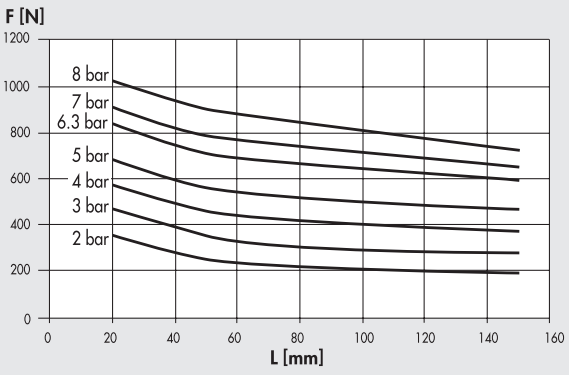

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

P12K-100 GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version NC

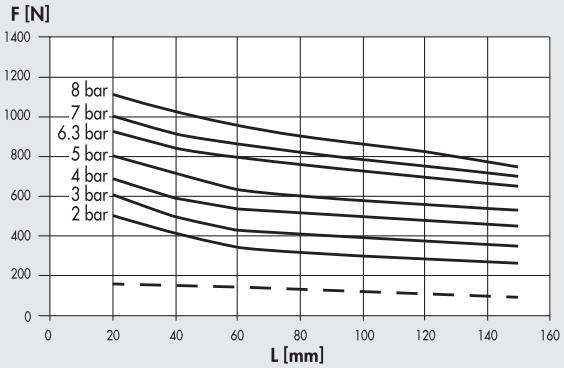

DA version increased force

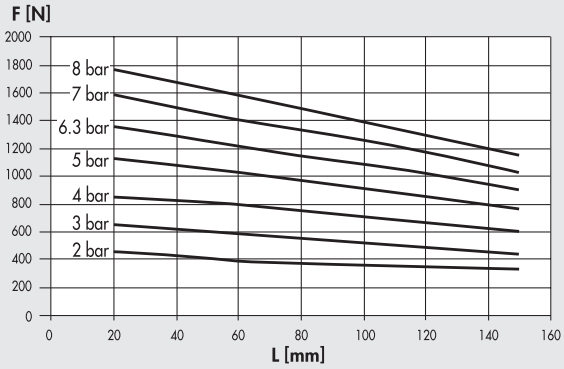

NC version increased force

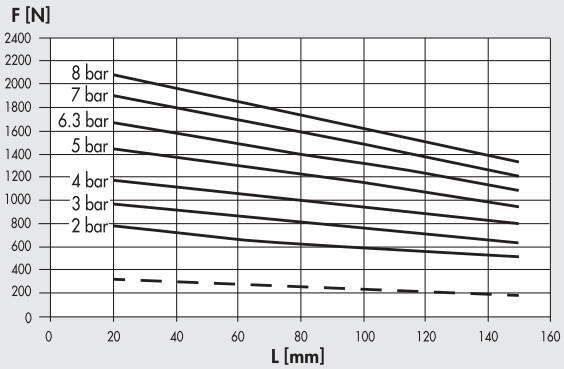

Internal grip*** (opening jaws)

Version NO

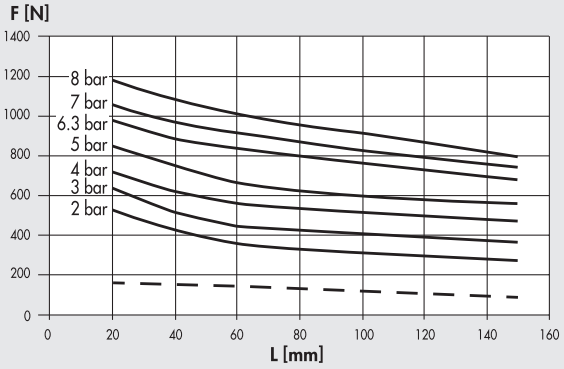

DA version increased force

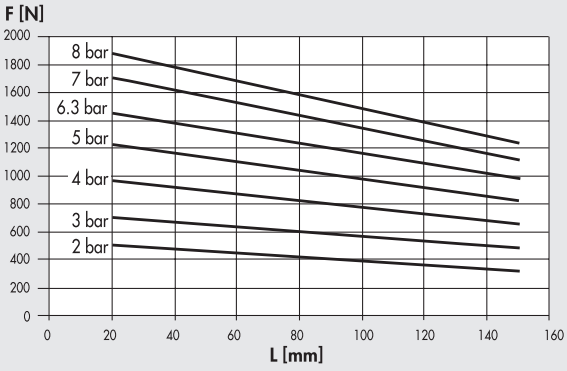

NO version increased force

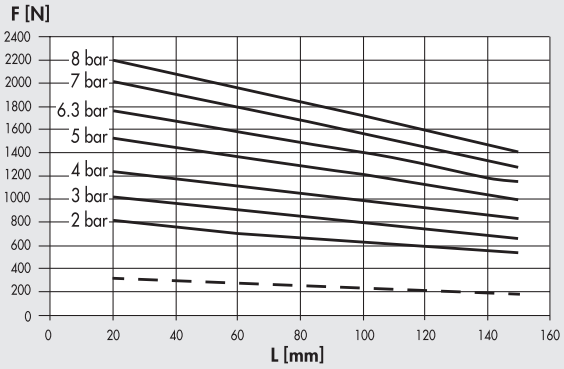

*** Referred to a single jaw. The total force is obtained by multiplying the value by 3.

— — — Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.

Code	Description
W1561000300K	Gripper with 3 parallel jaws P12K-100
W1561000301K	Gripper with 3 parallel jaws P12K-100 for inductive sensors
W1561000320K	Gripper with 3 parallel jaws P12K-100 increased force
W1561000321K	Gripper with 3 parallel jaws P12K-100 increased force for inductive sensors
W1561002300K	Gripper with 3 parallel jaws P12K-100 NO
W1561002301K	Gripper with 3 parallel jaws P12K-100 NO for inductive sensors
W1561002320K	Gripper with 3 parallel jaws P12K-100 NO increased force
W1561002321K	Gripper with 3 parallel jaws P12K-100 NO increased force for inductive sensors
W1561003300K	Gripper with 3 parallel jaws P12K-100 NC
W1561003301K	Gripper with 3 parallel jaws P12K-100 NC for inductive sensors
W1561003320K	Gripper with 3 parallel jaws P12K-100 NC increased force
W1561003321K	Gripper with 3 parallel jaws P12K-100 NC increased force for inductive sensors

ACCESSORIES

SENSOR Ø 4



For codes and technical data, see **chapter A6**.

Note: For the NO and NC versions, use only the Hall effect sensor

SENSOR MOUNTING IN THE NO AND NC GRIPPERS SLOTS

To accommodate the sensor, a recess may be required in the base on which the gripper will be fixed.

P12K-64



P12K-80

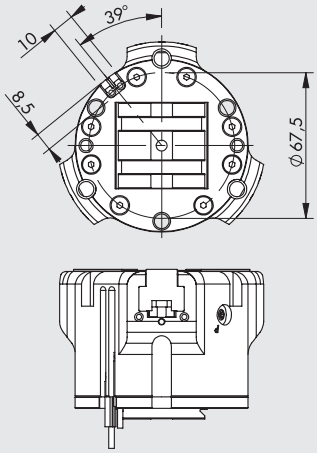

P12K-100

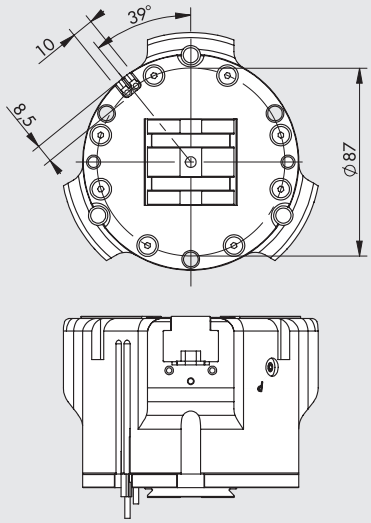

CENTRING RING





Code	Size	ØA	ØB f7	C	QUANTITY OF KITS NEEDED ① - Use with jaws
W1560649201	**64**	$4.5^{0}_{-0.1}$	6	$5^{0}_{-0.1}$	**2** code W1560649201
W1560809201	**80**	$5.1^{0}_{-0.1}$	8	$5^{0}_{-0.05}$	**2** code W1560809201
W1561009201	**100**	$6.2^{\pm 0.1}$	10	$6.9^{0}_{-0.1}$	**2** code W1561009201

Note: 2-pieces pack

NOTES

V-Lock GRIPPER ACCESSORIES

SIDE ADAPTOR KIT TYPE 1 CODE 0950008003K









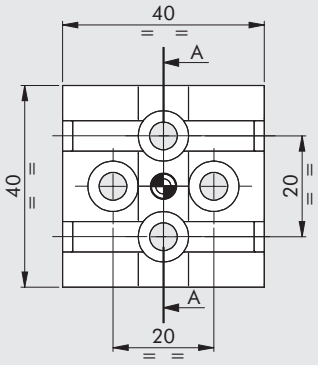



NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

Adaptor for fixing to other V-Lock or Quick-set components. For lateral fixing to the grippers.
W1580120200K Gripper with 2 jaws, long stroke, P4K-12

The 4 screws and 2 pins can be used to fix the plate to the grippers in two orthogonal directions.

Kit contents:

1 side cylinder head P4K-12:	Material	Anodized aluminium
	Weight	0.041 kg
2 cylindrical pins Ø 3 x 8		
4 screws M5 x 10 zinc-plated		

EXAMPLES OF APPLICATION

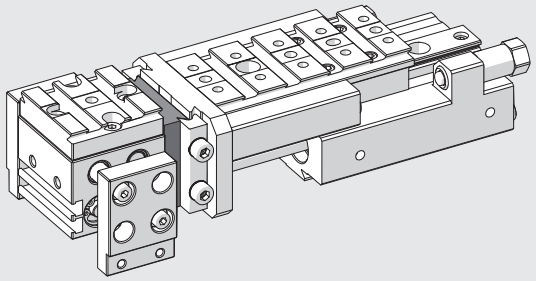

METAL WORK PNEUMATIC

SIDE ADAPTOR KIT TYPE 2 CODE 0950008004K

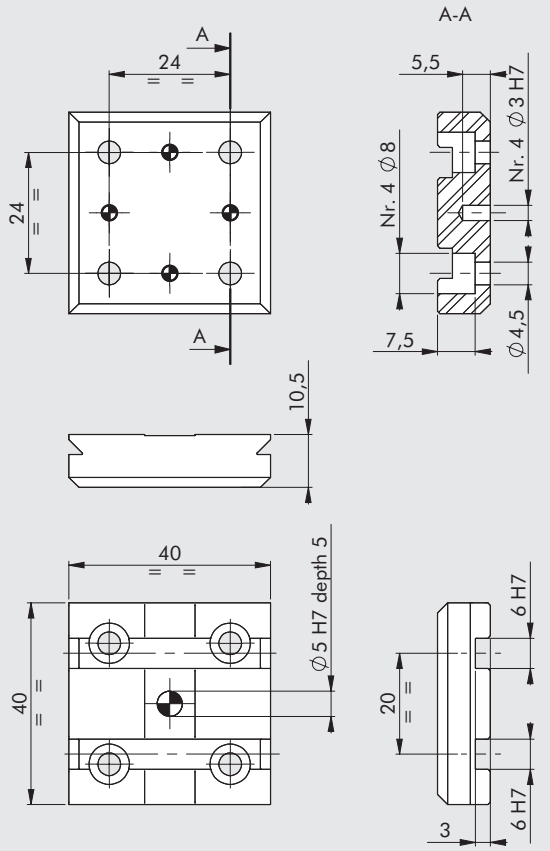



NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

Adaptor for fixing to other V-Lock or Quick-set components. For lateral fixing to the grippers.

W1550200001K	Gripper with 2 parallel jaws P1K-20	**K3010300000K**	Gripper with 2 parallel jaws, long stroke GPLK-1-30
W1550320001K	Gripper with 2 parallel jaws P1K-32	**K3010400000K**	Gripper with 2 parallel jaws, long stroke GPLK-1-40
W1570200200K	Gripper with 2 parallel jaws P2K-20	**K3020450000K**	Gripper with 2 parallel jaws, long stroke GPLK-2-45
W1590200200K	Gripper with 2 hinged jaws P7K-20	**K3020600000K**	Gripper with 2 parallel jaws, long stroke GPLK-2-60
W1590320200K	Gripper with 2 hinged jaws P7K-32	**K3020750000K**	Gripper with 2 parallel jaws, long stroke GPLK-2-75
W1530320180K	Gripper 180° with 2 hinged jaws P9K-32		

The 4 screws and 2 pins can be used to fix the plate to the grippers in two orthogonal directions.

Kit contents:

1 side cylinder head P1K-20:	Material	Anodized aluminium
	Weight	0.037 kg
2 cylindrical pins Ø 3 x 8		
4 screws M4 x 8 zinc-plated		

EXAMPLES OF APPLICATION

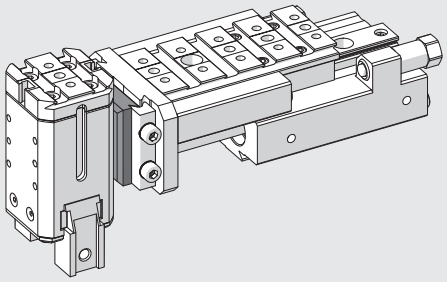

SIDE ADAPTOR KIT TYPE 3 CODE 0950008005K



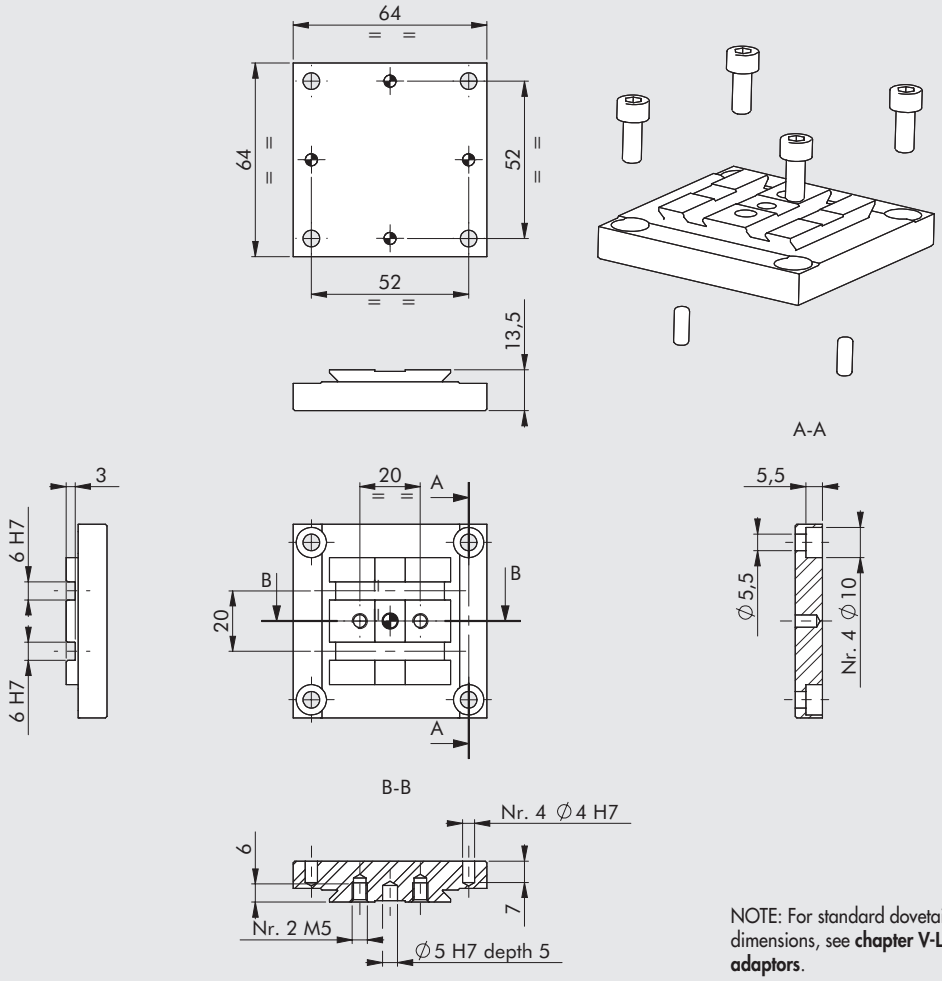

NOTE: For standard dovetail dimensions, see **chapter V-Lock adaptors**.

Adaptor for fixing to other V-Lock or Quick-set components. For lateral fixing to the grippers.
W1530400180K Gripper 180° with 2 hinged jaws P9K-40

The 4 screws and 2 pins can be used to fix the plate to the grippers in two orthogonal directions.

Kit contents:

1 side cylinder head P9K-40:	Material	Anodized aluminium
	Weight	0.115 kg
2 cylindrical pins Ø 4 x 10		
4 screws M5 x 12, zinc-plated		

EXAMPLES OF APPLICATION



METAL WORK PNEUMATIC

GREASE



Code	Description	Weight [g]
9910509	Grease pipe NYOGEL 774 H	500

NOTES

NOTES

SUMMARY HYDRAULIC-PNEUMATIC



- **HYDRAULIC BRAKE SERIES BRK** — A4.2

- **INTEGRATED HYDRAULIC BRAKE** — A4.16

- **REMOTE REGULATION OF HYDRAULIC BRAKES** — A4.26

HYDRAULIC BRAKE SERIES BRK

This is a closed-loop hydraulic brake without its own power source.
It is normally associated with an ISO 15552 pneumatic cylinder.
It consists of an oil-filled cylinder, one or more regulation valves and a tank compensating for oil leaks.
It is available in two sizes, the Ø40 and Ø63, and in different versions:

- with regulation in piston rod extension, in retraction or both
- SKIP valve (slow/fast) or STOP valve or both, with NC or NO control

After a certain operating time, the brake compensation tank needs to be topped up. Refer to the minimum mark on the dipstick. With the piston rod fully extended, the dipstick must project at least 15 mm from the tank cap. Use only DEXRON ATF hydraulic oil. During the first few work cycles, excess oil is ejected through a hole in the tank.
Regulation can be controlled remotely, as shown on page **A4**.26

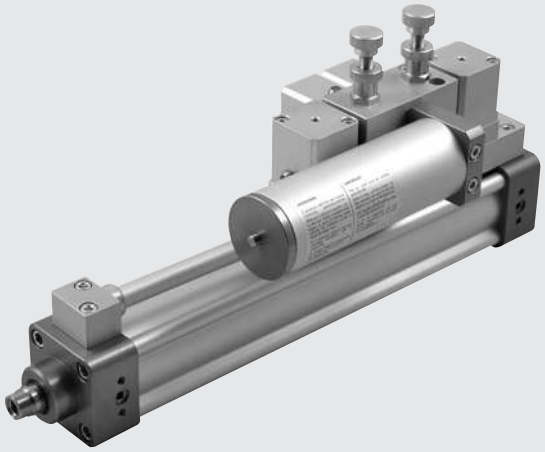

TECHNICAL DATA		Ø40	Ø63
Operating temperature	°C	−10 to +70	
Fluid		Oil, brake fluid provided	
Maximum applicable load	N	7000	25000
Speed	mm/min	See attached diagram	
Standard strokes	mm	50, 100, 150, 200, 250, 300, 350, 400, 450, 500 special strokes up to 1000 on request.	
Versions		Regulation in piston rod extension and/or retraction. Remote regulation. SKIP valves. STOP valves. NC or NO. Tank in-line or on the side	
Cylinder fixing		Using flange kit	-
ISO 15552 cylinders connected	mm	Ø40 to Ø100	Ø100 to Ø200

COMPONENTS

① PISTON ROD: thick chromed steel
② HEADS: anodized aluminium alloy
③ PISTON ROD GASKET: NBR rubber
④ PISTON ROD GUIDE BUSHING: steel strip with bronze and PTFE insert
⑤ JACKET: drawn anodized aluminium alloy
⑥ PISTON: aluminium alloy
⑦ PISTON GASKET: NBR rubber
⑧ OIL SEAL GASKET: polyurethane
⑨ Static O-rings: NBR rubber
⑩ SEALING DISK: plastic
⑪ SPRINGS: zinc-plated steel
⑫ SECURING/ASSEMBLY SCREW: self-threading screw (Tap Tite)
⑬ OIL LEVEL STICK: zinc-plated steel
⑭ OIL RECOVERY TANK
⑮ VALVE for OIL FILLING
⑯ FLOW REGULATION NEEDLE
⑰ MINIMUM LEVEL

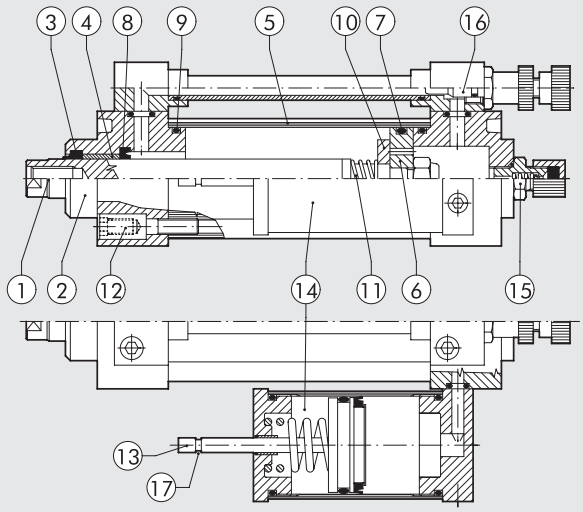

METAL WORK PNEUMATIC

SPEED

The table indicates the maximum speed that can be reached by a pneumatic cylinder, without external loads, fed at a pressure of 6 bar and coupled to the BRK brake. Valves measured at a temperature of 20 °C. As the ambient temperature increases, the speed also increases and vice versa.

	Ø40							Ø63					
Type	Code Hydraulic brake	Piston rod direction	Maximum speed at 6 bar [m/min] Ø 40	Ø 50	Ø 63	Ø 80	Ø 100	Code Hydraulic brake	Piston rod direction	Maximum speed at 6 bar [m/min] Ø 40	Ø 50	Ø 63	Ø 80
Regulation in extension	W170001___	Extension	23	28	33	39	42	W170001___63	Extension	13	14	17.5	13
		Retraction	•	•	•	•	•		Retraction	•	•	•	•
Regulation in extension, in-line tank	W170001___L	Extension	23	28	33	39	42	W170001___63L	Extension	13	14	17.5	13
		Retraction	•	•	•	•	•		Retraction	•	•	•	•
Regulation in retraction	W170011___	Extension	•	•	•	•	•	W170011___63	Extension	•	•	•	•
		Retraction	13	20	24	29	33		Retraction	13	14	17.5	13
Regulation in extension/retraction	W170021___	Extension	15	18	21	26	31	W170021___63	Extension	9	12	13.5	12
		Retraction	9.5	13	15.5	18	24		Retraction	8.5	10	12	11
Regulation in extension + SKIP valve	W170101___ W170102___	Extension	8	10	12	16	20	W170101___63 W170102___63	Extension	13	14	17.5	13
		Retraction	•	•	•	•	•		Retraction	•	•	•	•
Regulation in extension + STOP valve	W170201___ W170202___	Extension	6	8	9	12	14	W170201___63 W170202___63	Extension	3.5	4.5	6	6.5
		Retraction	•	•	•	•	•		Retraction	•	•	•	•
Regulation in extension + SKIP valve, in-line tank	W170101___L W170102___L	Extension	8	10	12	16	20	W170101___63L W170102___63L	Extension	13	14	17.5	13
		Retraction	•	•	•	•	•		Retraction	•	•	•	•
Regulation in extension + STOP valve, in-line tank	W170201___L W170202___L	Extension	6	8	9	12	14	W170201___63L W170202___63L	Extension	3.5	4.5	6	6.5
		Retraction	•	•	•	•	•		Retraction	•	•	•	•
Regulation in retraction + SKIP valve	W170111___ W170112___	Extension	•	•	•	•	•	W170111___63 W170112___63	Extension	•	•	•	•
		Retraction	14	18	21	26	30		Retraction	5	6	7.5	8
Regulation in retraction + STOP valve	W170211___ W170212___	Extension	•	•	•	•	•	W170211___63 W170212___63	Extension	•	•	•	•
		Retraction	4	5	6	8.5	10		Retraction	3.5	4.5	6	7
Regulation in extension + SKIP/STOP valves	W170301___ W170302___	Extension	4.5	6	7.5	10	12	W170301___63 W170302___63	Extension	3	3.5	4.5	5.5
		Retraction	•	•	•	•	•		Retraction	•	•	•	•
Regulation in extension + SKIP/STOP valves, in-line tank	W170301___L W170302___L	Extension	4.5	6	7.5	10	12	W170301___63L W170302___63L	Extension	3	3.5	4.5	5.5
		Retraction	•	•	•	•	•		Retraction	•	•	•	•
Regulation in retraction + SKIP/STOP valves	W170311___ W170312___	Extension	•	•	•	•	•	W170311___63 W170312___63	Extension	•	•	•	•
		Retraction	4	4.5	6	8.5	10		Retraction	3.5	4	5	5.5
Regulation in extension/retraction + extension SKIP valve	W17002A___ W17002B___	Extension	18.5	22	27.5	33	41	W17002A___63 W17002B___63	Extension	11	15	17	17
		Retraction	11.5	16	19	21.5	30		Retraction	10.5	12.5	14.5	14.5
Regulation in extension/retraction + retraction SKIP valve	W17002C___ W17002D___	Extension	18.5	22	27.5	33	41	W17002C___63 W17002D___63	Extension	11	15	17	17
		Retraction	11.5	16	19	21.5	30		Retraction	10.5	12.5	14.5	14.5
Regulation in extension/retraction + extension STOP valve	W170023___ W170024___	Extension	7	8	10	13	16.5	W170023___63 W170024___63	Extension	3.5	4.5	5.5	7
		Retraction	12	14	17	21	26		Retraction	8.5	10	12	11
Regulation in extension/retraction + retraction STOP valve	W170025___ W170026___	Extension	15	18	22	28	40	W170025___63 W170026___63	Extension	9	12	13.5	12
		Retraction	4	5.5	6.5	9	12		Retraction	3	4	5	6
Regulation in extension/retraction + dual STOP valve	W170221___ W170222___	Extension	5.5	7	9	12	16.5	W170221___63 W170222___63	Extension	3.5	4.5	5.5	7
		Retraction	4	5	6.5	8.5	11.5		Retraction	3	4	5	6
Regulation in extension/retraction + dual SKIP valve	W170121___ W170122___	Extension	18.5	22	27.5	33	41	W170121___63 W170122___63	Extension	11	15	17	17
		Retraction	11.5	16	19	21.5	30		Retraction	10.5	12.5	14.5	14.5
Regulation in extension/ retraction + dual SKIP valve + extension STOP valve	W170123___ W170124___	Extension	7	8	10	13	16.5	W170123___63 W170124___63	Extension	3.5	4.5	5.5	7
		Retraction	12	14	17	21	26		Retraction	8.5	10	12	11
Regulation in extension/ retraction + dual SKIP valve + retraction STOP valve	W170125___ W170126___	Extension	15	18	22	28	40	W170125___63 W170126___63	Extension	9	12	13.5	12
		Retraction	4	5.5	6.5	9	12		Retraction	3	4	5	6
Regulation in extension/ retraction + dual SKIP valve + dual STOP valve	W170321___ W170322___	Extension	6	8	10	13	16.5	W170321___63 W170322___63	Extension	4	5	6	7.5
		Retraction	4	5	6.5	8.5	11.5		Retraction	4	5	6	7

• = the brake does not affect the speed of the pneumatic cylinder.

SKIP-STOP APPLICATION WITH VALVES

NO

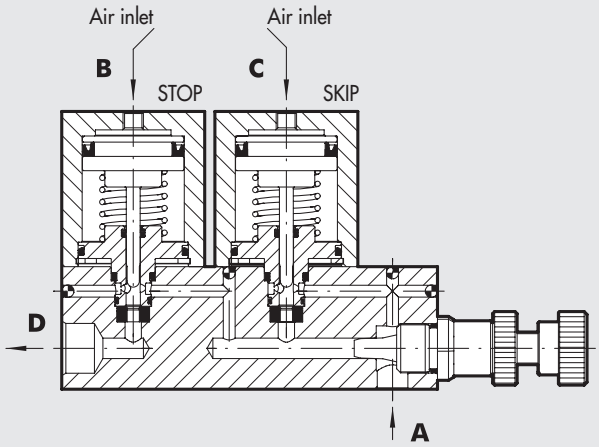

NC

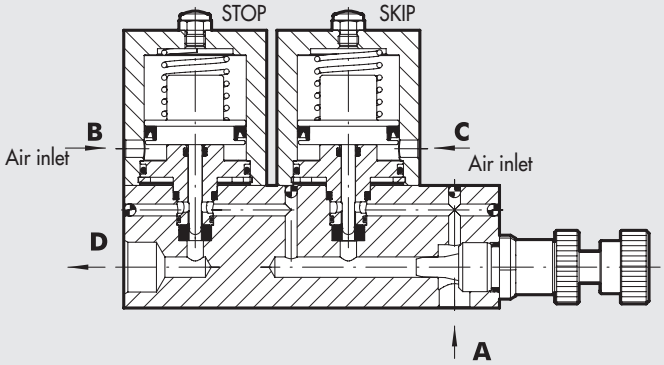

In normally-open (NO) valves, flow moves freely from A to D. When port C is supplied, this operates the SKIP valve and the fluid is forced through the bottleneck generated by the adjusting pin. When port B is supplied, this operates the STOP valve and interrupts the flow of fluid.
In normally-closed NC valves, flow is normally inhibited. When port B is supplied, the fluid flows through but it is forced through the bottleneck generated by the adjusting pin. When port C is supplied, flow moves freely from A to D.

DIMENSIONS AND ORDERING CODES

HYDRAULIC BRAKE WITH REGULATION IN PISTON ROD EXTENSION

Symbol	Code	Ø
	W170001____	40
	W170001____63	63

____ = Enter the stroke

Weight [g]
Ø40: For stroke 0 mm = 1340 g / Each mm = 4.2 g
Ø63: For stroke 0 mm = 2340 g / Each mm = 8.7 g

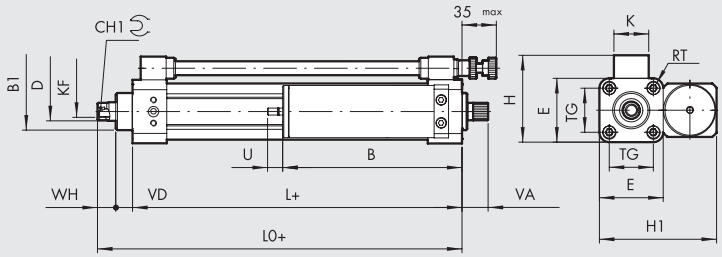

+ = ADD THE STROKE

Ø	B1	CH1	D	E	H	H1	K	KF	L	L0	RT	TG	VA	VD	WH
40	32	13	16	55	75	101	30	M10	84	114	M6	38	22.5	14.5	15.5
63	45	19	22	75	100	131	35	M16	96	126.5	M8	56.5	22.5	15	15.5

	B		U max	
Stroke	Ø40	Ø63	Ø40	Ø63
1 - 50	109	133	23	28
51 - 150	129	158	39	47
151 - 250	154	178	55	67
251 - 350	174	228	71	86
351 - 450	204	248	87	105
451 - 500	229	273	95	124

METAL WORK PNEUMATIC

HYDRAULIC BRAKE WITH REGULATION IN PISTON ROD EXTENSION, IN-LINE TANK

Symbol	Code	Ø
	W170001____L	40
	W170001____63L	63

____ = Enter the stroke

Weight [g]

Ø40: For stroke 0 mm = 1300 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 2300 g / Each mm = 8.7 g

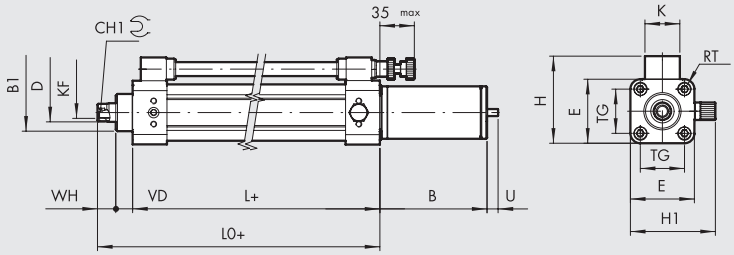

+ = ADD THE STROKE

Ø	B1	CH1	D	E	H	H1	K	KF	L	L0	RT	TG	VD	WH
40	32	13	16	55	75	73	30	M10	84	114	M6	38	14.5	15.5
63	45	19	22	75	100	93	35	M16	96	126.5	M8	56.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
1 - 50	92	112	23	28
51 - 150	112	137	39	47
151 - 250	137	157	55	67
251 - 350	157	187	71	86
351 - 450	187	212	87	105
451 - 500	212	252	95	124

HYDRAULIC BRAKE WITH REGULATION IN PISTON ROD RETRACTION

Symbol	Code	Ø
	W170011____	40
	W170011____63	63

____ = Enter the stroke

Weight [g]

Ø40: For stroke 0 mm = 1340 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 2340 g / Each mm = 8.7 g

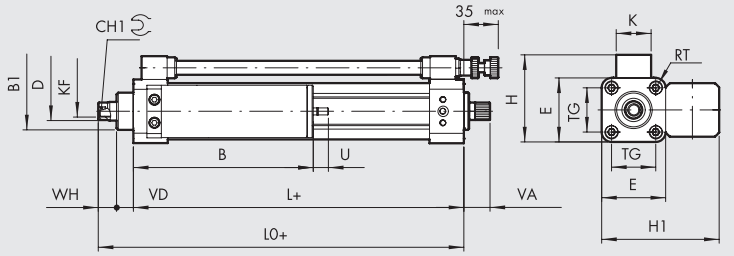

+ = ADD THE STROKE

Ø	B1	CH1	D	E	H	H1	K	KF	L	L0	RT	TG	VA	VD	WH
40	32	13	16	55	75	101	30	M10	84	114	M6	38	22.5	14.5	15.5
63	45	19	22	75	100	131	35	M16	96	126.5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
1 - 50	109	133	23	28
51 - 150	129	158	39	47
151 - 250	154	178	55	67
251 - 350	174	228	71	86
351 - 450	204	248	87	105
451 - 500	229	273	95	124

HYDRAULIC BRAKE WITH REGULATION IN PISTON ROD EXTENSION/RETRACTION

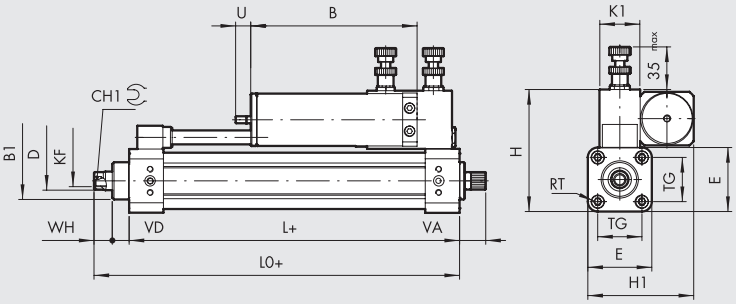

+ = ADD THE STROKE

Symbol	Code	Ø
	W170021____	40
	W170021____63	63

____ = Enter the stroke

Weight [g]

Ø40: For stroke 0 mm = 1710 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 2760 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	K1	KF	L	L0	RT	TG	VA	VD	WH
40	32	13	16	55	105	91	35	M10	84	114	M6	38	22.5	14.5	15.5
63	45	19	22	75	135	111	35	M16	96	126.5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
1 - 50	98	122	23	28
51 - 150	118	147	39	47
151 - 250	143	167	55	67
251 - 350	163	217	71	86
351 - 450	193	237	87	105
451 - 500	218	262	95	124

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION + SKIP VALVE
HYDRAULIC BRAKE WITH REGULATION IN EXTENSION + STOP VALVE

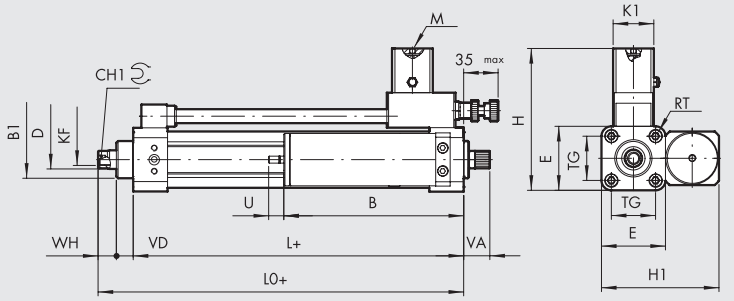

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170101____	40	SKIP NO
	W170101____63	63	SKIP NO
	W170201____	40	STOP NO
	W170201____63	63	STOP NO
	W170102____	40	SKIP NC
	W170102____63	63	SKIP NC
	W170202____	40	STOP NC
	W170202____63	63	STOP NC

____ = Enter the stroke

Weight [g]

Ø40: For stroke 0 mm = 1555 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 2620 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	K1	KF	L	L0	M	RT	TG	VA	VD	WH
40	32	13	16	55	123	101	35	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	143	131	35	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
1 - 50	109	133	23	28
51 - 150	129	158	39	47
151 - 250	154	178	55	67
251 - 350	174	228	71	86
351 - 450	204	248	87	105
451 - 500	229	273	95	124

METAL WORK PNEUMATIC

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION + SKIP VALVE, IN-LINE TANK
HYDRAULIC BRAKE WITH REGULATION IN EXTENSION + STOP VALVE, IN-LINE TANK

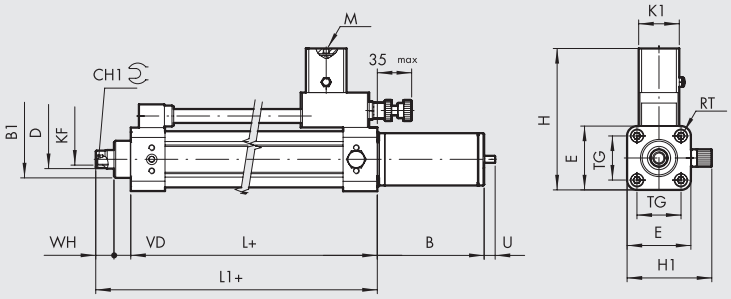

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170101____L	40	SKIP NO
	W170101____63L	63	SKIP NO
	W170201____L	40	STOP NO
	W170201____63L	63	STOP NO
	W170102____L	40	SKIP NC
	W170102____63L	63	SKIP NC
	W170202____L	40	STOP NC
	W170202____63L	63	STOP NC

____ = Enter the stroke

Weight [g]
Ø40: For stroke 0 mm = 1510 g / Each mm = 4.2 g
Ø63: For stroke 0 mm = 2600 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	K1	KF	L	L0	M	RT	TG	VD	WH
40	32	13	16	55	123	73	35	M10	84	114	M5	M6	38	14.5	15.5
63	45	19	22	75	143	93	35	M16	96	126.5	M5	M8	56.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
1 - 50	92	112	23	28
51 - 150	112	137	39	47
151 - 250	137	157	55	67
251 - 350	157	187	71	86
351 - 450	187	212	87	105
451 - 500	212	252	95	124

HYDRAULIC BRAKE WITH REGULATION IN RETRACTION + SKIP VALVE
HYDRAULIC BRAKE WITH REGULATION IN RETRACTION + STOP VALVE

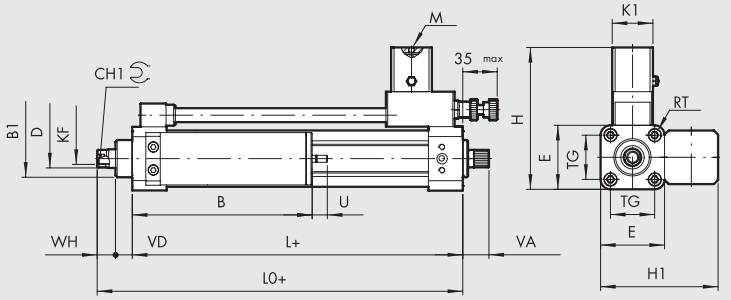

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170111____	40	SKIP NO
	W170111____63	63	SKIP NO
	W170211____	40	STOP NO
	W170211____63	63	STOP NO
	W170112____	40	SKIP NC
	W170112____63	63	SKIP NC
	W170212____	40	STOP NC
	W170212____63	63	STOP NC

____ = Enter the stroke

Weight [g]
Ø40: For stroke 0 mm = 1555 g / Each mm = 4.2 g
Ø63: For stroke 0 mm = 2620 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	K1	KF	L	L0	M	RT	TG	VA	VD	WH
40	32	13	16	55	123	101	35	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	143	131	35	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
1 - 50	109	133	23	28
51 - 150	129	158	39	47
151 - 250	154	178	55	67
251 - 350	174	228	71	86
351 - 450	204	248	87	105
451 - 500	229	273	95	124

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION + SKIP/STOP VALVES

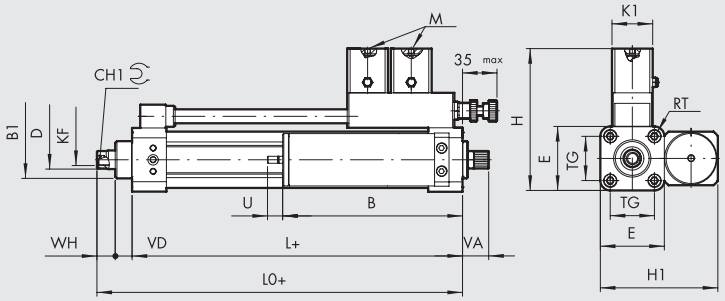

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170301____	40	SKIP/STOP NO
	W170301____63	63	SKIP/STOP NO
	W170302____	40	SKIP/STOP NC
	W170302____63	63	SKIP/STOP NC

____ = Enter the stroke

Weight [g]

Ø40: For stroke 0 mm = 1730 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 2850 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	K1	KF	L	L0	M	RT	TG	VA	VD	WH
40	32	13	16	55	123	101	35	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	143	131	35	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B		U max	
	Ø40	Ø63	Ø40	Ø63
1 - 50	109	133	23	28
51 - 150	129	158	39	47
151 - 250	154	178	55	67
251 - 350	174	228	71	86
351 - 450	204	248	87	105
451 - 500	229	273	95	124

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION + SKIP/STOP VALVES, IN-LINE TANK

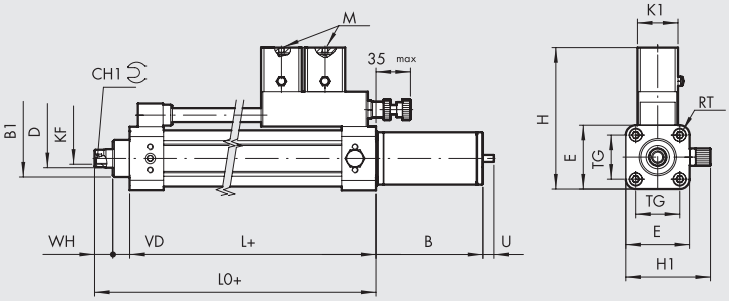

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170301____L	40	SKIP/STOP NO
	W170301____63L	63	SKIP/STOP NO
	W170302____L	40	SKIP/STOP NC
	W170302____63L	63	SKIP/STOP NC

____ = Enter the stroke

Weight [g]

Ø40: For stroke 0 mm = 1690 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 2800 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	K1	KF	L	L0	M	RT	TG	VD	WH
40	32	13	16	55	123	73	35	M10	84	114	M5	M6	38	14.5	15.5
63	45	19	22	75	143	93	35	M16	96	126.5	M5	M8	56.5	15	15.5

Stroke	B		U max	
	Ø40	Ø63	Ø40	Ø63
1 - 50	92	112	23	28
51 - 150	112	137	39	47
151 - 250	137	157	55	67
251 - 350	157	187	71	86
351 - 450	187	212	87	105
451 - 500	212	252	95	124

METAL WORK PNEUMATIC

HYDRAULIC BRAKE WITH REGULATION IN RETRACTION + SKIP/STOP VALVES

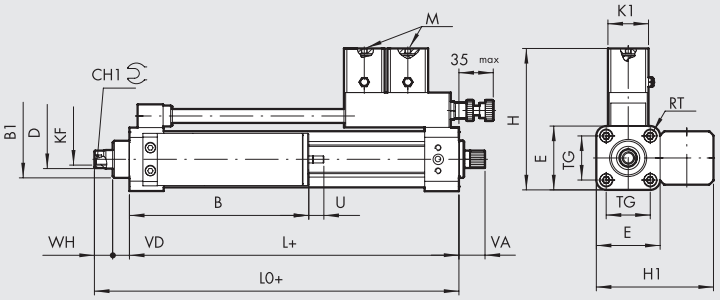

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170311____	40	SKIP/STOP NO
	W170311____63	63	SKIP/STOP NO
	W170312____	40	SKIP/STOP NC
	W170312____63	63	SKIP/STOP NC

____ = Enter the stroke

Weight [g]

Ø40: For stroke 0 mm = 1730 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 2850 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	K1	KF	L	LO	M	RT	TG	VA	VD	WH
40	32	13	16	55	123	101	35	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	143	131	35	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
1 - 50	109	133	23	28
51 - 150	129	158	39	47
151 - 250	154	178	55	67
251 - 350	174	228	71	86
351 - 450	204	248	87	105
451 - 500	229	273	95	124

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION/RETRACTION + EXTENSION SKIP VALVE

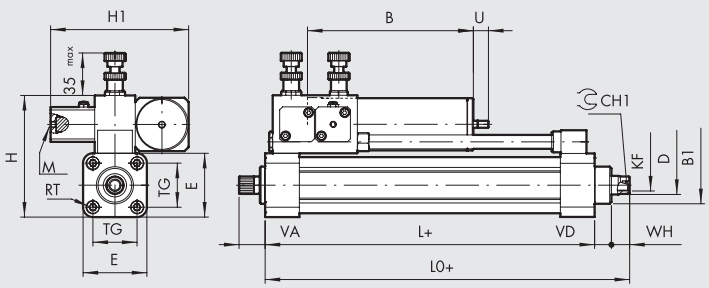

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W17002A____	40	SKIP NO
	W17002A____63	63	SKIP NO
	W17002B____	40	SKIP NC
	W17002B____63	63	SKIP NC

____ = Enter the stroke

Weight [g]

Ø40: For stroke 0 mm = 1850 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 2910 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	KF	L	LO	M	RT	TG	VA	VD	WH
40	32	13	16	55	105	119	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	135	129	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
1 - 50	98	122	23	28
51 - 150	118	147	39	47
151 - 250	143	167	55	67
251 - 350	163	217	71	86
351 - 450	193	237	87	105
451 - 500	218	262	95	124

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION/RETRACTION + RETRACTION SKIP VALVE

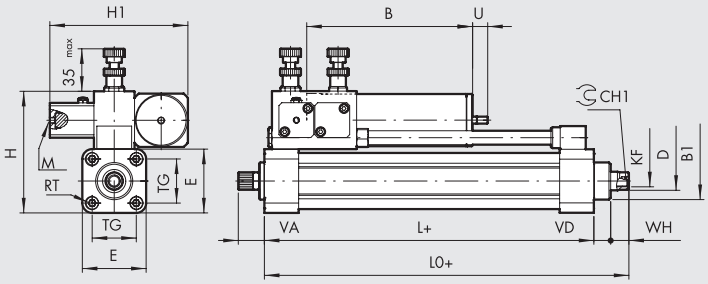

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	**W17002C____**	**40**	SKIP NO
	W17002C____63	**63**	SKIP NO
	**W17002D____**	**40**	SKIP NC
	W17002D____63	**63**	SKIP NC

____ = Enter the stroke

Weight [g]

Ø40: For stroke 0 mm = 1850 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 2910 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	KF	L	L0	M	RT	TG	VA	VD	WH
40	32	13	16	55	105	119	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	135	129	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
1 - 50	98	122	23	28
51 - 150	118	147	39	47
151 - 250	143	167	55	67
251 - 350	163	217	71	86
351 - 450	193	237	87	105
451 - 500	218	262	95	124

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION/RETRACTION + EXTENSION STOP VALVE

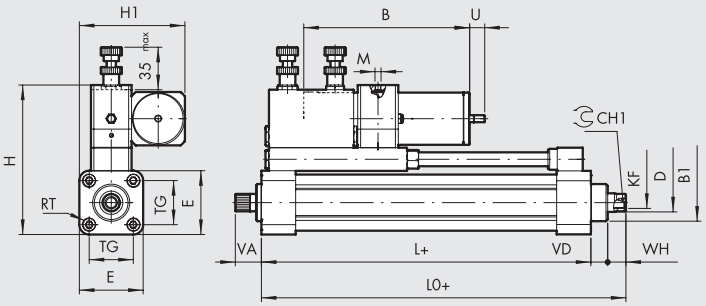

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	**W170023____**	**40**	STOP NO
	W170023____63	**63**	STOP NO
	**W170024____**	**40**	STOP NC
	W170024____63	**63**	STOP NC

____ = Enter the stroke

Note: Minimum stroke 100 mm

Weight [g]

Ø40: For stroke 0 mm = 1990 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 3230 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	KF	L	L0	M	RT	TG	VA	VD	WH
40	32	13	16	55	129	91	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	160	111	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
100 - 150	118	147	39	47
151 - 250	143	167	55	67
251 - 350	163	217	71	86
351 - 450	193	237	87	105
451 - 500	218	262	95	124

METAL WORK PNEUMATIC

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION/RETRACTION + RETRACTION STOP VALVE



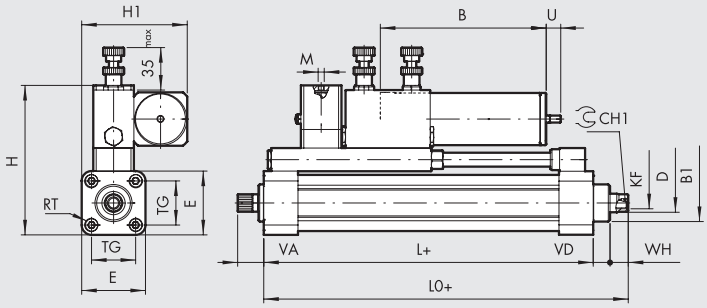

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170025____	40	STOP NO
	W170025____63	63	STOP NO
	W170026____	40	STOP NC
	W170026____63	63	STOP NC

____ = Enter the stroke

Note: Minimum stroke 100 mm

Weight [g]

Ø40: For stroke 0 mm = 2080 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 3230 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	KF	L	L0	M	RT	TG	VA	VD	WH
40	32	13	16	55	129	91	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	160	111	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
100 - 150	118	147	39	47
151 - 250	143	167	55	67
251 - 350	163	217	71	86
351 - 450	193	237	87	105
451 - 500	218	262	95	124

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION/RETRACTION + DUAL STOP VALVE



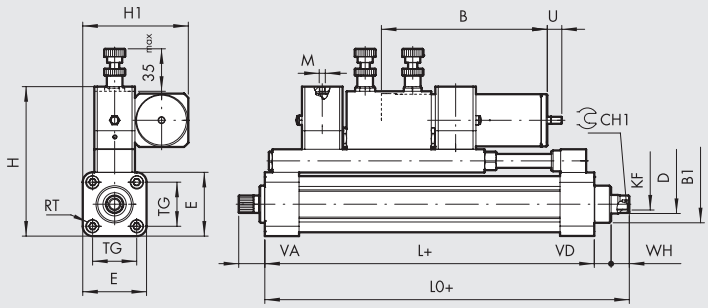

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170221____	40	STOP NO
	W170221____63	63	STOP NO
	W170222____	40	STOP NC
	W170222____63	63	STOP NC

____ = Enter the stroke

Note: Minimum stroke 150 mm

Weight [g]

Ø40: For stroke 0 mm = 2260 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 3560 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	KF	L	L0	M	RT	TG	VA	VD	WH
40	32	13	16	55	129	91	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	160	111	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
150	118	147	39	47
151 - 250	143	167	55	67
251 - 350	163	217	71	86
351 - 450	193	237	87	105
451 - 500	218	262	95	124

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION/RETRACTION + DUAL SKIP VALVE

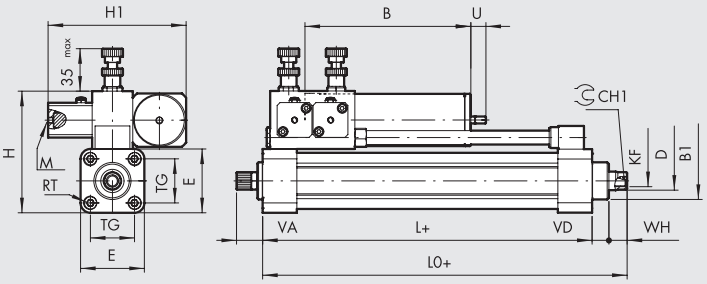

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170121____	40	SKIP NO
	W170121____63	63	SKIP NO
	W170122____	40	SKIP NC
	W170122____63	63	SKIP NC

____ = Enter the stroke

Weight [g]

Ø40: For stroke 0 mm = 1850 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 3050 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	KF	L	L0	M	RT	TG	VA	VD	WH
40	32	13	16	55	105	119	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	135	129	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
1 - 50	98	122	23	28
51 - 150	118	147	39	47
151 - 250	143	167	55	67
251 - 350	163	217	71	86
351 - 450	193	237	87	105
451 - 500	218	262	95	124

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION/RETRACTION + DUAL SKIP VALVE + PISTON ROD EXTENSION STOP VALVE



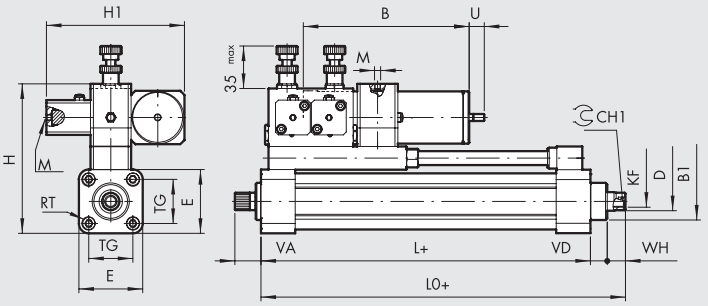

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170123____	40	SKIP + STOP NO
	W170123____63	63	SKIP + STOP NO
	W170124____	40	SKIP + STOP NC
	W170124____63	63	SKIP + STOP NC

____ = Enter the stroke

Note: Minimum stroke 100 mm

Weight [g]

Ø40: For stroke 0 mm = 2110 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 3490 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	KF	L	L0	M	RT	TG	VA	VD	WH
40	32	13	16	55	129	119	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	160	129	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
100 - 150	118	147	39	47
151 - 250	143	167	55	67
251 - 350	163	217	71	86
351 - 450	193	237	87	105
451 - 500	218	262	95	124

METAL WORK PNEUMATIC

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION/RETRACTION + DUAL SKIP VALVE + PISTON ROD RETRACTION STOP VALVE



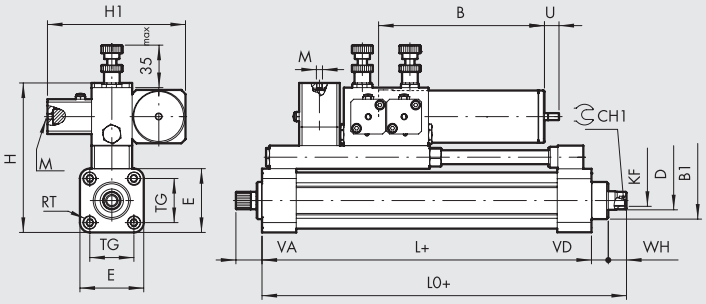

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170125____	40	SKIP + STOP NO
	W170125____63	63	SKIP + STOP NO
	W170126____	40	SKIP + STOP NC
	W170126____63	63	SKIP + STOP NC

____ = Enter the stroke

Note: Minimum stroke 100 mm

Weight [g]

Ø40: For stroke 0 mm = 2210 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 3490 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	KF	L	L0	M	RT	TG	VA	VD	WH
40	32	13	16	55	129	119	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	160	129	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
100 - 150	118	147	39	47
151 - 250	143	167	55	67
251 - 350	163	217	71	86
351 - 450	193	237	87	105
451 - 500	218	262	95	124

HYDRAULIC BRAKE WITH REGULATION IN EXTENSION/RETRACTION + DUAL SKIP VALVE + DUAL STOP VALVE



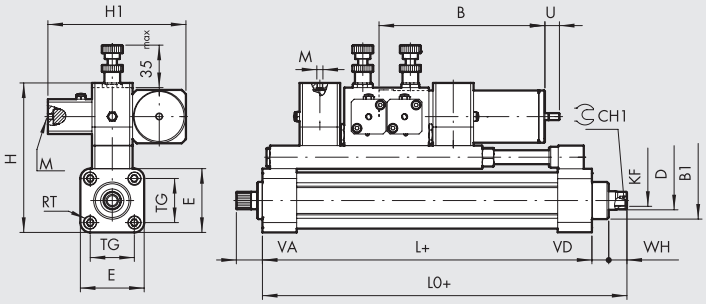

+ = ADD THE STROKE

Symbol	Code	Ø	Valve
	W170321____	40	SKIP + STOP NO
	W170321____63	63	SKIP + STOP NO
	W170322____	40	SKIP + STOP NC
	W170322____63	63	SKIP + STOP NC

____ = Enter the stroke

Note: Minimum stroke 150 mm

Weight [g]

Ø40: For stroke 0 mm = 2415 g / Each mm = 4.2 g

Ø63: For stroke 0 mm = 3820 g / Each mm = 8.7 g

Ø	B1	CH1	D	E	H	H1	KF	L	L0	M	RT	TG	VA	VD	WH
40	32	13	16	55	129	119	M10	84	114	M5	M6	38	22.5	14.5	15.5
63	45	19	22	75	160	129	M16	96	126.5	M5	M8	56.5	22.5	15	15.5

Stroke	B Ø40	B Ø63	U max Ø40	U max Ø63
150	118	147	39	47
151 - 250	143	167	55	67
251 - 350	163	217	71	86
351 - 450	193	237	87	105
451 - 500	218	262	95	124

KEY TO CODES

W 1 7 0	1	0	1	0300	L	◆ R1500
				STROKE		
W170 BRK hydraulic brake	**0** Regulation **1** Regulation + SKIP **2** Regulation + STOP **3** Regulation + SKIP + STOP	**0** Extension **1** Retraction **2** Extension and retraction	**1** No valve or NO **2** NC ✱ **3** + STOP NO in extension ✱ **4** + STOP NC in extension ✱ **5** + STOP NO in retraction ✱ **6** + STOP NC in retraction ▲ **A** + SKIP NO in extension ▲ **B** + SKIP NC in extension ▲ **C** + SKIP NO in retraction ▲ **D** + SKIP NC in retraction	Enter the desired stroke in four digits (e.g. 0500 for stroke 500)	**_** Ø 40 ● **L** Ø 40 In-line tank **63** Ø 63 ● **63L** Ø 63 In-line tank	

● Only for versions with piston rod regulation in extension
✱ In combination with regulation in extension/retraction or regulation + SKIP in extension/retraction
▲ In combination with regulation in extension/retraction or regulation + STOP in extension/retraction
◆ Execution with remote control only, see page **A4**.26

N.B.: The Orderable configurations are shown on the previous pages.

NOTES

ACCESSORIES

FLANGE FOR MOUNTING HYDRAULIC BRAKE Ø 40 WITH ISO 15552 CYLINDER

Ø 40

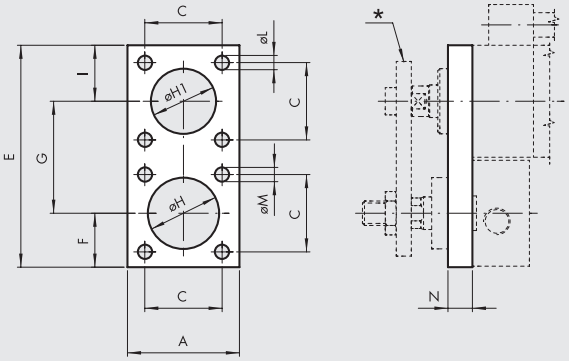

Ø 50-63-80-100

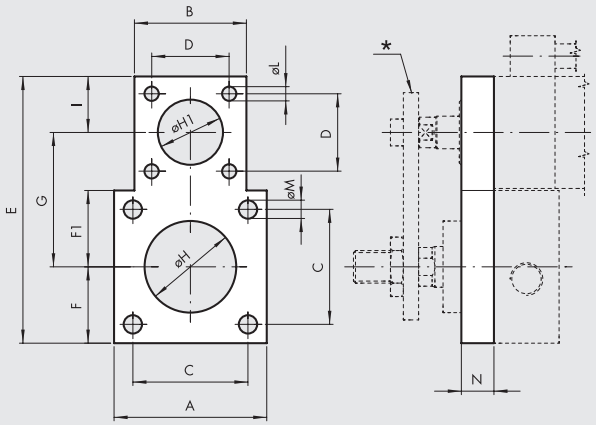



* Piston rod connection plate.

Depending on the cylinder size and operating pressure, it may be necessary for the plate connecting the two piston rods to be guided externally in order to withstand the bending moment due to braking.
The table shows the minimum pressure "p", above which it is advisable to guide the plate.

Code	Ø	A	B	C	D	E	F	F1	G	ØH	ØH1	I	ØL	ØM	N	Weight [g]	p min [bar]
W0950402012	**40**	55	-	38	38	109	26.5	-	55	35	32	27.5	7	7	12	418	10
W0950502012	**50**	65	55	46.5	38	121	32.5	32.5	61	40	32	27.5	7	9	12	540	10
W0950632012	**63**	75	55	56.5	38	131	37.5	37.5	66	45	32	27.5	7	9	15	792	6
W0950802012	**80**	95	55	72	38	151	47.5	47.5	76	45	32	27.5	7	11	15	1216	3
W0951002012	**100**	112	55	89	38	168	56	56	84.5	55	32	27.5	7	11	15	1535	2

Note: 1 pc. per pack complete with 8 screws

FLANGE SCREW KIT FOR HYDRAULIC BRAKE Ø 40



Code	Description	Weight [g]
W0950402111	Kit BRK-P/C-040	58
W0950502111	Kit BRK-P/C-050	93
W0950632111	Kit BRK-P/C-063	97
W0950802111	Kit BRK-P/C-080-100	151

Note: code corresponds to 8 screws

INTEGRATED HYDRAULIC BRAKE

The integrated hydraulic brake is comprised of a pneumatic cylinder that acts as an actuator and an oleo-dynamic circuit that acts as a brake.
The dimensions of the pneumatic cylinder comply with ISO 15552.
The hydraulic circuit is comprised of a brake fluid tank and one or two flow regulation pins. It can mount one or more (slow-fast) SKIP or STOP valves that are normally open (NO) or normally closed (NC), for the piston rod extension and retraction.
The basic feature of this device is that the driving force and the braking force are coaxial, so they do not generate undesired bending moments on the piston rod and the external structures connected to it. Due to its conception, this brake is particularly compact and has reduced dimensions compared to BRK external hydraulic brakes.
After a certain operating time, the brake fluid tank must be topped up with oil. This needs doing when the oil level reaches the minimum mark on the rod. With the piston rod right out, the minimum level mark must not project less than 8-10 mm from the cap.
Always use DEXRON ATF hydraulic oil or another compatible product.
During the first operating cycles, excess oil is expelled through a hole in the tank.
Regulation can be controlled remotely, as shown on page **A4**.26

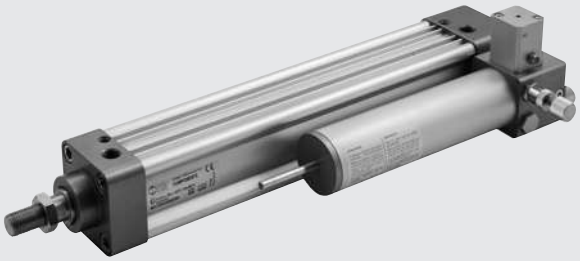

TECHNICAL DATA		Ø50	Ø63	Ø80	Ø100	Ø125
Operating pressure	bar	2 to 8				
	MPa	0.2 to 0.8				
	psi	29 to 116				
NC valve actuation pressure	bar	3 to 8				
	MPa	0.3 to 0.8				
	psi	43.5 to 116				
Operating temperature range	°C	-10 to +70				
	°F	14 to 156				
Pneumatic circuit fluid		Lubricated or unlubricated filtered air.				
Hydraulic circuit fluid		DEXRON ATF - the list of compatible oils is available on the web site www.metalwork.it				
Thrust force generated at 6 bar	N	1109	1801	2946	4521	7170
Pull force generated at 6 bar	N	883	1292	2437	3756	6405
Maximum load which can be applied from outside while the rod is lock	N					
• Version without valves and with closed pins:						
Thrust Load on the rod			6000		7000	
Traction Load on the rod			5000		6000	
• Version with STOP NC valves not operated:						
Thrust Load on the rod			6000		7000	
Traction Load on the rod			5000		6000	
• Version with STOP NO valves operated at 6 bar:						
Thrust Load on the rod			6000		7000	
Traction Load on the rod			5000		6000	
• Version with STOP NO valves operated at 8 bar:						
Thrust Load on the rod			6000		7000	
Traction Load on the rod			5000		6000	
Speeds at 6 bar and 20°C		See charts on the following pages				
Standard strokes		50, 100, 150, 200, 250, 300, 350, 400, 450, 500.				
		Other special strokes up to 500 available on request.				
Valve combinations		Piston-out, piston-in and dual regulation. Remote regulation.				
		The following combinations of valves can be mounted on each regulated section:				
		STOP NO, STOP NC, SKIP NO, SKIP NC, DOUBLE STOP NO, DOUBLE STOP NC,				
		DOUBLE SKIP NO, DOUBLE SKIP NC, STOP NO+STOP NC, SKIP NO+SKIP NC,				
		STOP NO+SKIP NO, STOP NC+SKIP NC, STOP NO+SKIP NC, STOP NC+SKIP NO				
Sensor magnet		All versions are provided with a magnet				

METAL WORK PNEUMATIC

COMPONENTS

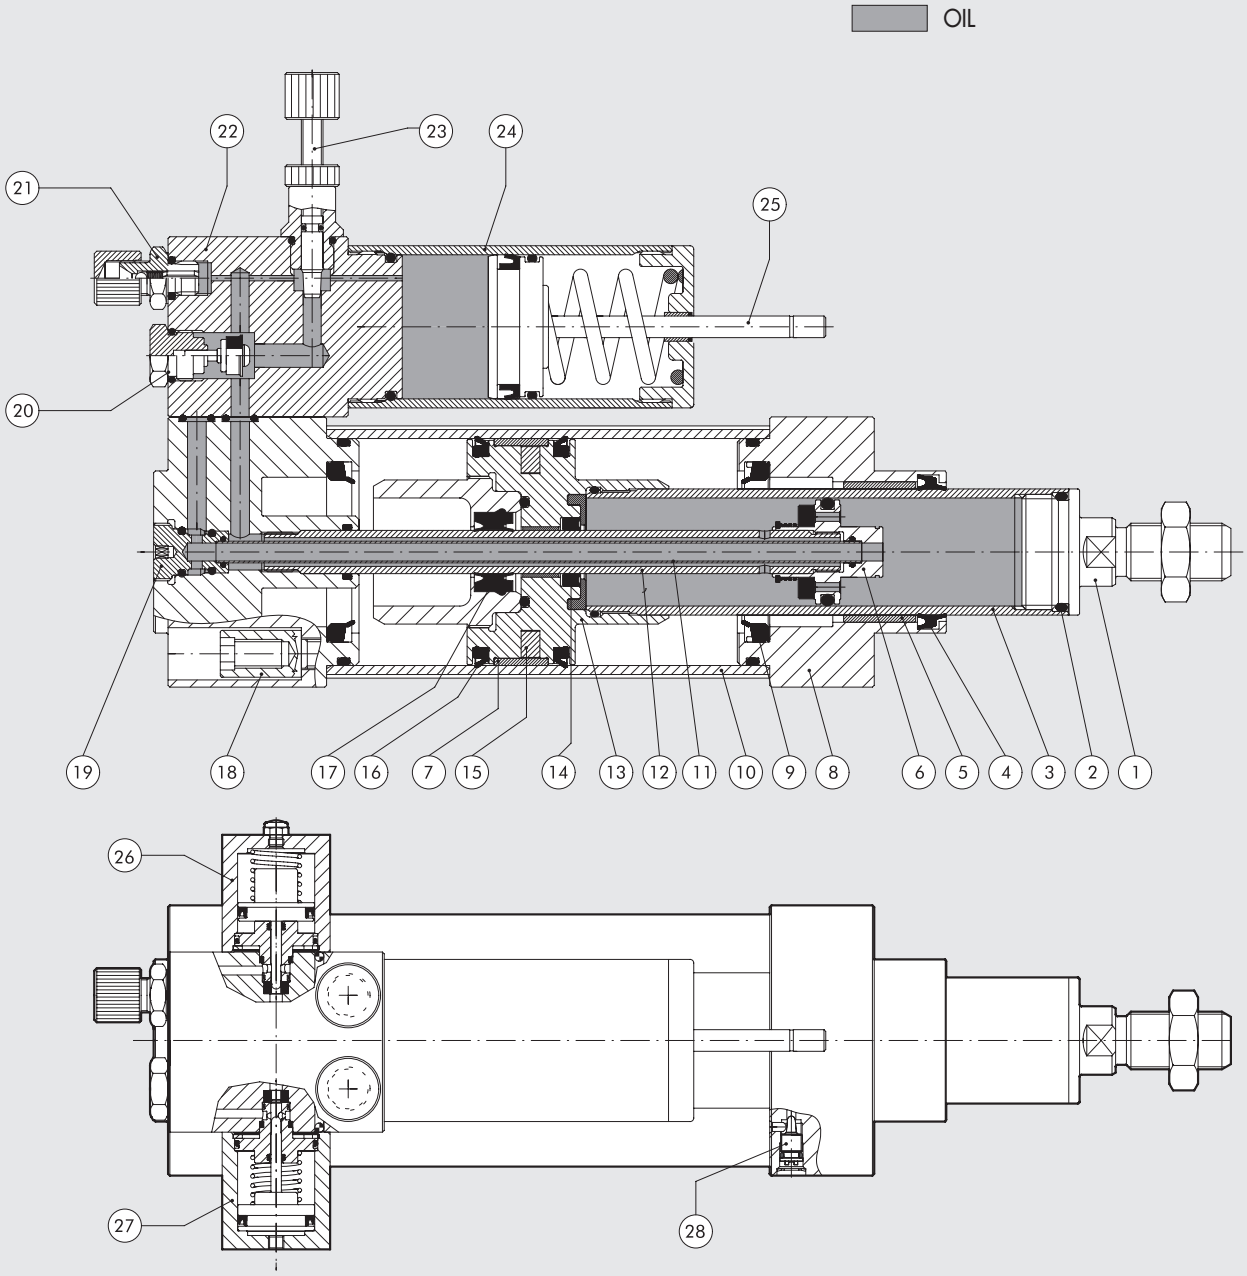

① GUIDE HOLD: AISI 303 stainless steel
② O-RING: NBR
③ PISTON ROD: thickly chromed steel
④ PISTON ROD GASKET: polyurethane
⑤ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑥ INSIDE PISTON: aluminium
⑦ GUIDE RING: PTFE
⑧ HEAD: anodized aluminium
⑨ CUSHIONING GASKET: NBR
⑩ JACKET: anodized and calibrated aluminium section
⑪ INTERNAL PIPE: brass
⑫ INTERMEDIATE PIPE: steel
⑬ PISTON: aluminium
⑭ PISTON ROD GASKET: polyurethane
⑮ MAGNET: plastoferrite
⑯ PISTON GASKET: NBR
⑰ PISTON ROD GASKET: polyurethane
⑱ SECURING/ASSEMBLY SCREW: self-tapping
⑲ BUSH: AISI 303 stainless steel
⑳ CHECK VALVE
㉑ OIL FILLING VALVE
㉒ REGULATION UNIT: anodized aluminium
㉓ REGULATION PIN
㉔ OIL RECOVERY TANK
㉕ OIL LEVEL ROD: AISI 303 stainless steel
㉖ NC VALVE
㉗ NO VALVE
㉘ CUSHIONING PIN

SPEED

Maximum speed reached. The diagrams show the indicative speed, which depends on the bore and feed pressure.
Average values for temperature of 20°C. The maximum speed increases with oil temperature, and vice versa.

INTEGRATED HYDRAULIC BRAKE WITH REGULATION IN EXTENSION, IN RETRACTION OR DUAL

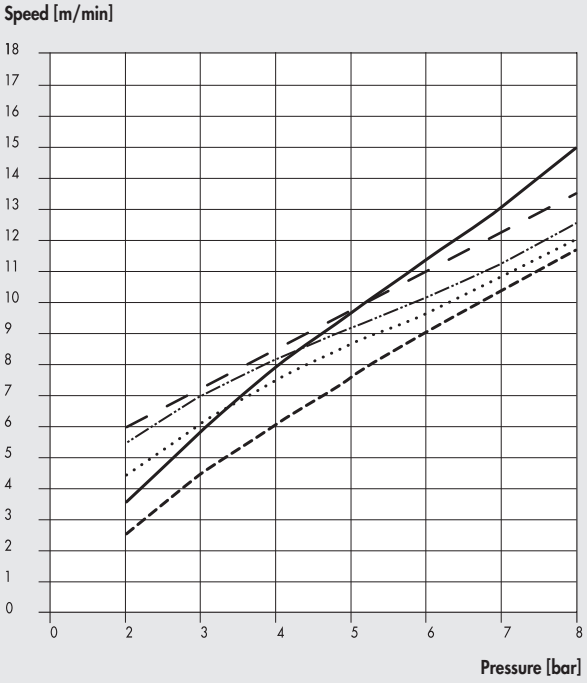

Ø50 Ø80 Ø125
Ø63 Ø100

INTEGRATED HYDRAULIC BRAKE WITH VALVES STOP

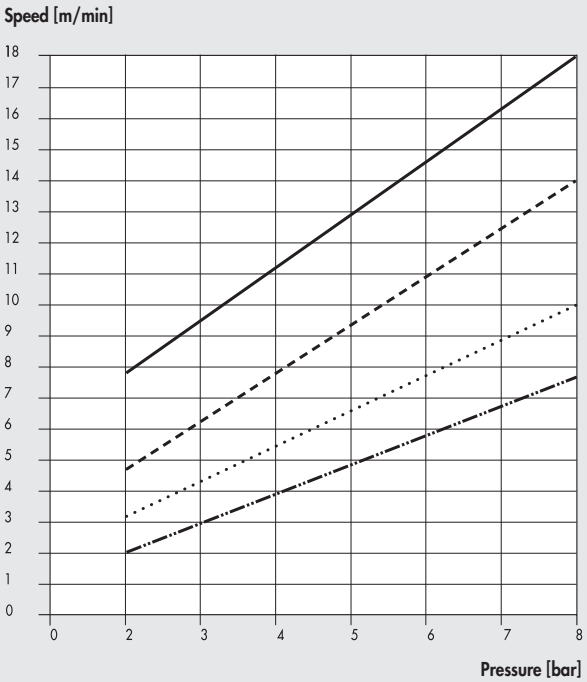

Ø50 extension Ø63 extension
Ø50 retraction Ø63 retraction

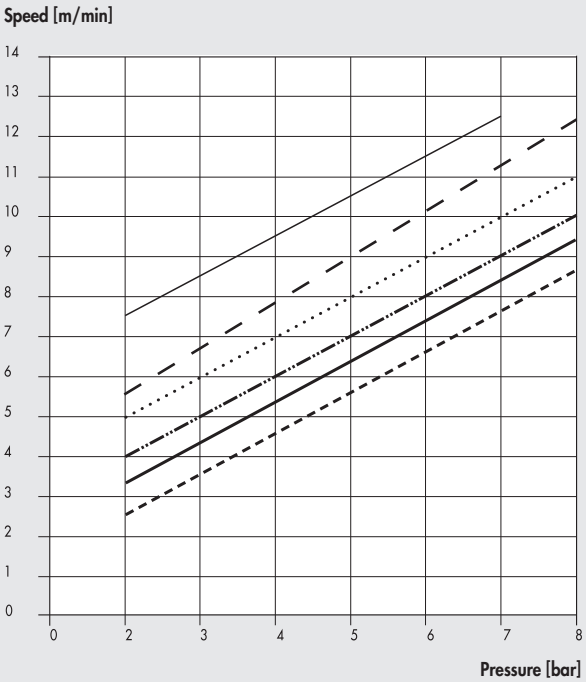

Ø80 extension Ø100 extension Ø125 extension
Ø80 retraction Ø100 retraction Ø125 retraction

INTEGRATED HYDRAULIC BRAKE WITH VALVES SKIP AND WITH VALVES SKIP AND STOP

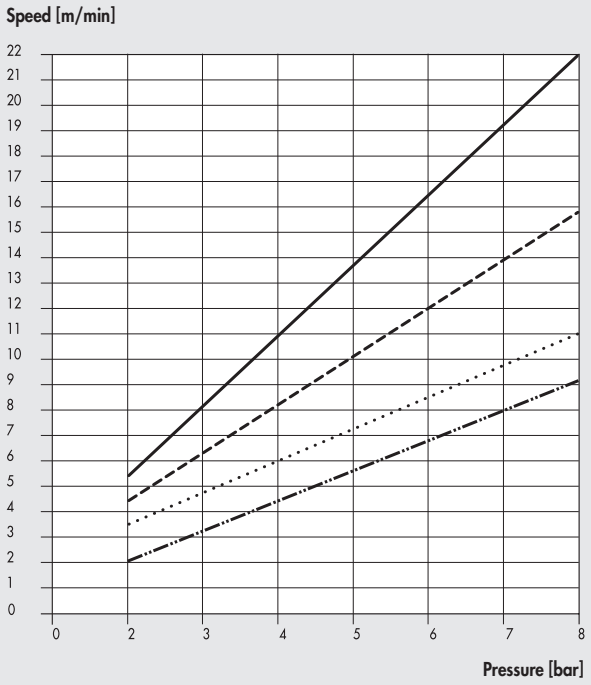

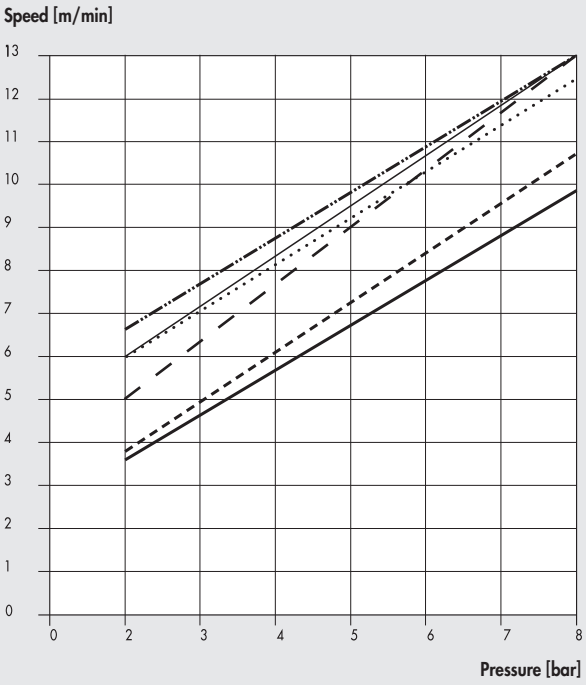

Ø50 extension
Ø50 retraction
Ø63 extension
Ø63 retraction

Ø80 extension
Ø80 retraction
Ø100 extension
Ø100 retraction
Ø125 extension
Ø125 retraction

SKIP-STOP APPLICATION WITH VALVES

NO

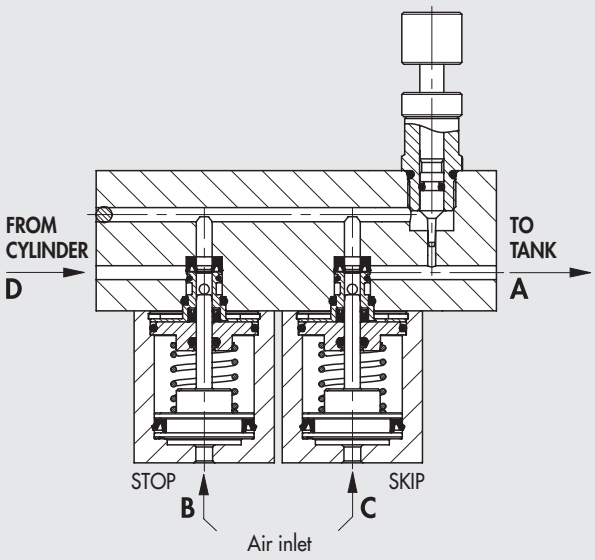

In normally-open (NO) valves, flow moves freely from A to D.
When port C is supplied, this operates the SKIP valve and the fluid is forced through the bottleneck generated by the adjusting pin. When port B is supplied, this operates the STOP valve and interrupts the flow of fluid.

NC

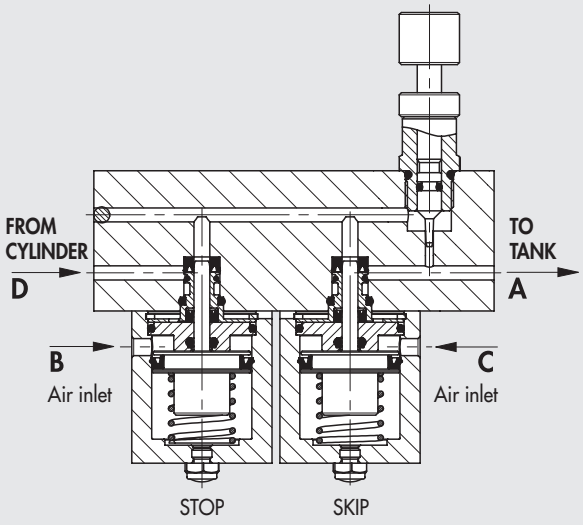

In normally-closed NC valves, flow is normally inhibited.
When port B is supplied, the fluid flows through but it is forced through the bottleneck generated by the adjusting pin. When port C is supplied, flow moves freely from A to D.

DIMENSIONS OF THE VARIOUS VERSIONS

+ = ADD THE STROKE

① Magnetic sensor or position sensor fixing slots (only on the utility ports side)

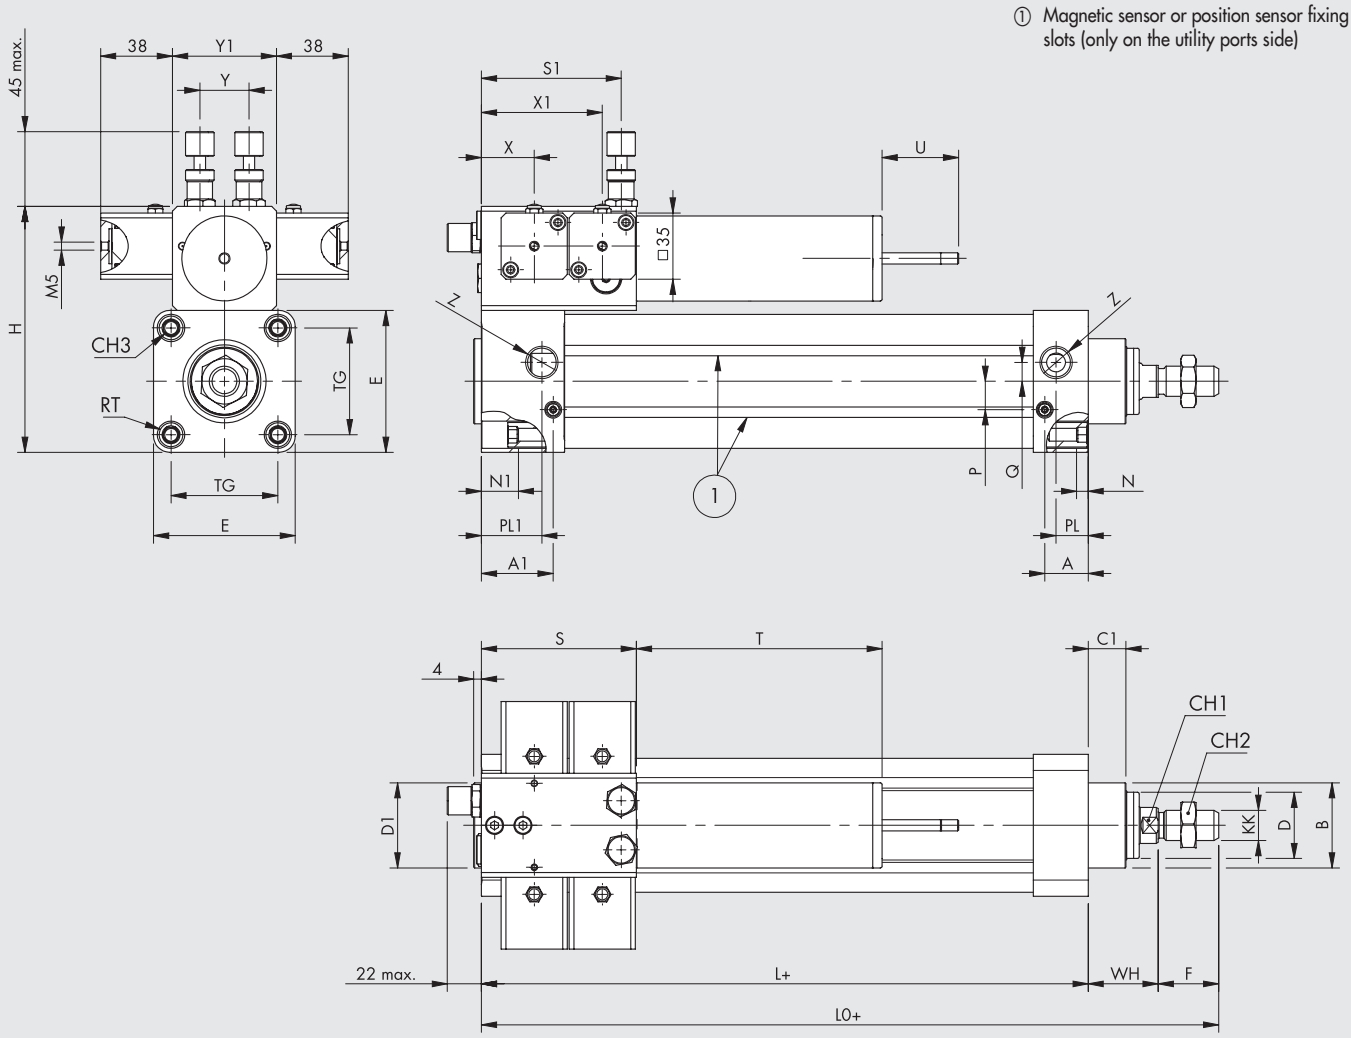

Stroke	Ø 50-63-80 T	Ø 50-63-80 U max	Ø 100-125 T	Ø 100-125 U max
50	106	25	150	30
100	131	30	150	38
150	131	35	180	46
200	171	40	180	54
250	171	45	220	62
300	171	50	220	70
350	216	55	245	78
400	216	60	245	86
450	301	65	345	94
500	301	70	345	102

Type	Ø 50-63-80 S	Ø 50-63-80 S1	Ø 100-125 S	Ø 100-125 S1
Regulation only	50	41	65	50
1 valve for side	50	41	65	50
2 valve for side	82	74	105	90

Ø	A	A1	B	C1	CH1	CH2	CH3	KK	D	D1	E	F	H	L	L0	N	N1	P	PL	PL1	Q	RT	TG	WH	X	X1	Y	Y1	Z
50	28	38	40	15	17	24	8	M16x1.5	25	45	65	32	120	128	192	5.5	19	11	22	32	8	M8	46.5	32	28	64	26	55	G1/4
63	23	38	45	20	17	24	8	M16x1.5	35	45	75	32	130	121	190	5.5	19	15	17	32	10	M8	56.5	37	28	64	26	55	G3/8
80	25	36	45	16	22	30	10	M20x1.5	35	45	95	40	150	125	204	6	15	15	21	32	10	M10	72	39	28	64	26	55	G3/8
100	38	50	60	30	22	30	10	M20x1.5	45	55	110	40	175	172	261	20.5	32.5	15	35	47	10	M10	89	49	40	80	30	65	G1/2
125	38	50	60	30	27	41	12	M27x2	45	60	135	54	200	180	292	15	27	15	35	47	12	M12	110	52	40	80	30	64	G1/2

METAL WORK PNEUMATIC

KEY TO CODES

W 1 7 3	2	3	1	0	0 5 0 0	◆ R1500
INTEGRATED BRAKE	**REGULATION**	**PISTON ROD EXTENSION CONTROL VALVES**	**PISTON ROD RETRACTION CONTROL VALVES**	**BORE**	**STROKE**	
W173 Integrated brake	**0** Out **1** In **2** Dual	**0** Without valves **1** Stop NO **2** Stop NC **3** Skip NO **4** Skip NC **5** Stop NO Skip NO **6** Stop NO Skip NC **7** Stop NC Skip NO **8** Stop NC Skip NC	**0** Without valves **1** Stop NO **2** Stop NC **3** Skip NO **4** Skip NC **5** Stop NO Skip NO **6** Stop NO Skip NC **7** Stop NC Skip NO **8** Stop NC Skip NC	**A** Ø 50 **0** Ø 63 **1** Ø 80 **2** Ø 100 **3** Ø 125	Specify the desired stroke in 4 digits (e.g. 0500 for stroke 500)	

N.B. With at least one extension control valve and one retraction control valve, type W1732_ _ _ is required.

◆ Execution with remote control only, see page **A4**.26

ACCESSORIES: FIXINGS

FOOT - MODEL A

+ = ADD THE STROKE

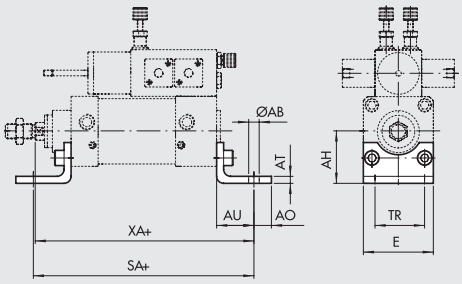

Code	Ø	Ø AB	AH	AO	AT	AU	TR	E	XA	SA	Weight [g]
W0950502001	50	9	45	15	5	32	45	65	192	192	162
W0950632001	63	9	50	15	5	32	50	75	190	185	266
W0950802001	80	12	63	20	6	41	63	95	213	207	456
W0951252001	125	16	90	15	8	45	90	140	277	270	1130

Note: Individually packed with 2 screws.

For fixing to the front head is necessary to use:
- Ø125 n. 2 screws M12x40 UNI 5931

For fixing to the rear head is necessary to use:
- Ø50-63 n. 2 screws M8x40 UNI 5931 (see kit 0950636092)
- Ø80 n. 2 screws M10x40 UNI 5931
- Ø125 n. 2 screws M12x60 UNI 5931

FEMALE HINGE - MODEL B

+ = ADD THE STROKE

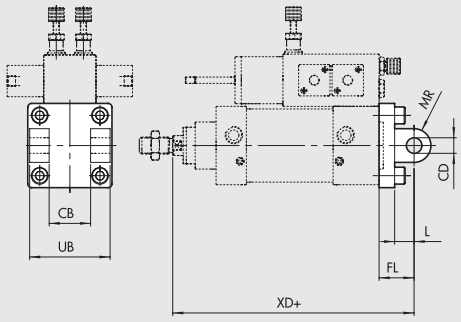

Code	Ø	UB	CB H14	FL	CD H9	XD	MR	L	Weight [g]
W0950502003	50	60	32	27	12	187	12	15	252
W0950632003	63	70	40	32	16	190	16	20	394
W0950802003	80	90	50	36	16	208	16	20	670
W0951002003	100	110	60	41	20	262	20	25	1085
W0951252003	125	130	70	50	25	282	25	30	2000

Note: Supplied with 4 screws, 4 washers, 2 snap rings and 1 pin.

For fixing is necessary to use:
- Ø50-63 n. 4 screws M8x40 UNI 5931 (see kit 0950636092)
- Ø80 n. 4 screws M10x40 UNI 5931
- Ø100 n. 4 screws M10x60 UNI 5931 (see kit 0951006092)
- Ø125 n. 4 screws M12x60 UNI 5931

MALE HINGE - MODEL BA

+ = ADD THE STROKE

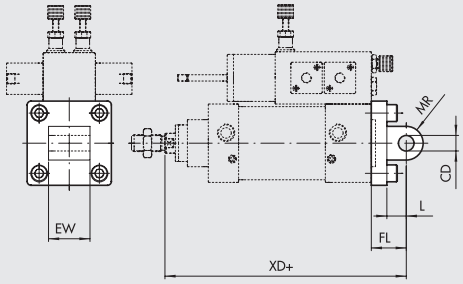

Code	Ø	EW	FL	MR	CD H9	L	XD	Weight [g]
W0950502004	50	32	27	13	12	15	187	220
W0950632004	63	40	32	17	16	20	190	316
W0950802004	80	50	36	17	16	20	208	578
W0951002004	100	60	41	21	20	25	262	850
W0951252004	125	70	50	25	25	30	282	1590

Note: Supplied with 4 screws.

For fixing is necessary to use:
- Ø50-63 n. 4 screws M8x40 UNI 5931 (see kit 0950636092)
- Ø80 n. 4 screws M10x40 UNI 5931
- Ø100 n. 4 screws M10x60 UNI 5931 (see kit 0951006092)
- Ø125 n. 4 screws M12x60 UNI 5931

ARTICULATED MALE HINGE - MODEL BAS

+ = ADD THE STROKE

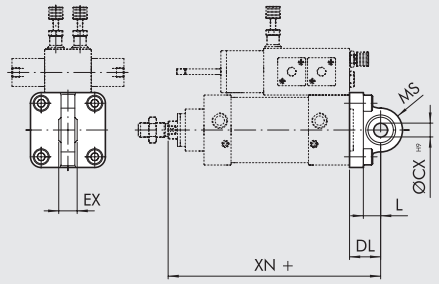

Code	Ø	DL	MS	L	XN	øCX	EX	Weight [g]
W0950502006	50	27	21	15	187	12	16	236
W0950632006	63	32	23	20	190	16	21	336
W0950802006	80	36	28	20	208	16	21	572
W0951002006	100	41	30	25	262	20	25	840
W0951252006	125	50	40	30	282	25	31	1520

Note: Supplied with 4 screws, 4 washers.

For fixing is necessary to use:

- Ø50-63 n. 4 screws M8x40 UNI 5931 (see kit 0950636092)
- Ø80 n. 4 screws M10x40 UNI 5931
- Ø100 n. 4 screws M10x60 UNI 5931 (see kit 0951006092)
- Ø125 n. 4 screws M12x60 UNI 5931

CETOP HINGE FOR MODEL B - MODEL GL

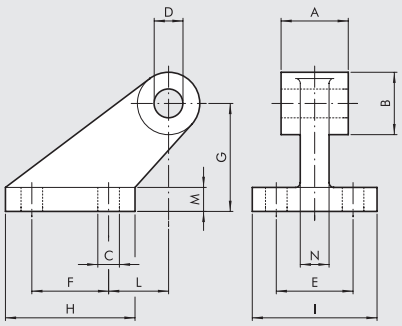

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]
W0950502008	50	32	26	9	12	32	32	45	54	52	25	10	12	212
W0950632008	63	40	33	11	16	40	50	63	75	63	32	12	15	440
W0950802008	80	50	33	11	16	40	50	63	75	63	32	12	15	464
W0951002008	100	60	44	14	20	50	70	90	103	80	40	16	22	985
W0951252008	125	70	44	14	25	50	70	90	103	80	40	16	22	1000

Note: Supplied with 4 screws, 4 washers.

ISO HINGE FOR MODEL B - MODEL GS



Code	Ø	B	C	D	E	G	J	L	M	N	Weight [g]
W0950502108	50	32	46.5	65	9	45	13	12	12	12	252
W0950632108	63	40	56.5	75	9	50	17	12	16	15	350
W0950802108	80	50	72	95	11	63	17	16	16	15	655
W0951002108	100	60	89	115	11	73	21	16	20	22	980

Note: Supplied with 4 screws, 4 washers.

ISO 15552 HINGE FOR MODEL B - MODEL AB7



Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]
W0950502017	50	32	26	9	12	50	30	45	45	65	3	12	16	21	3	162
W0950632017	63	40	30	9	16	52	35	50	50	67	2	14*	16	21	3	191
W0950802017	80	50	30	11	16	66	40	63	60	86	7	14	20	21	3	332
W0951002017	100	60	38	11	20	76	50	71	70	96	5	17*	20	11	3	522
W0951252017	125	70	45	14	25	94	60	90	90	124	10	20	30	21	3	960

* Dimensions not to ISO 15552

METAL WORK PNEUMATIC

FRONT FLANGE - MODEL C

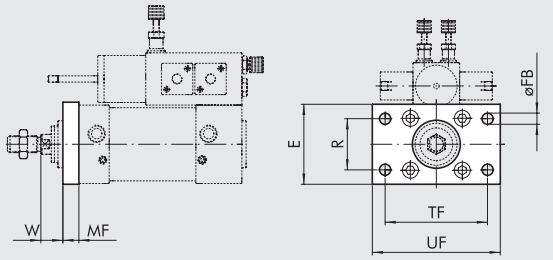

Code	Ø	TF	UF	E	MF	R	øFB	W	Weight [g]
W0950502002	50	90	110	65	12	45	9	20	522
W0950632002	63	100	120	75	12	50	9	25	670
W0950802002	80	126	150	95	15	63	12	24	1420
W0951252002	125	180	220	140	20	90	16	45	4300

Note: Supplied with 4 screws.

For fixing is necessary to use:
- Ø125 n. 4 screws M12x40 UNI 5931

REAR FLANGE - MODEL C

+ = ADD THE STROKE

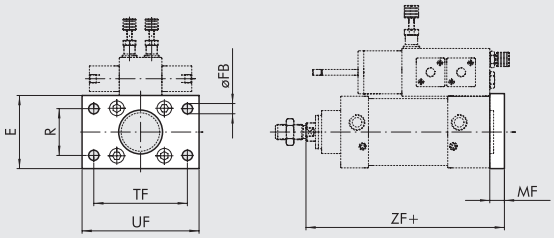

Code	Ø	TF	UF	E	MF	R	øFB	ZF	Weight [g]
W0950502002	50	90	110	65	12	45	9	170	522
W0950632002	63	100	120	75	12	50	9	170	670
W0950802002	80	126	150	95	15	63	12	179	1420
W0951002002	100	150	178	115	16	75	14	205	2040
W0951252002	125	180	220	140	20	90	16	245	4300

Note: Supplied with 4 screws.

For fixing is necessary to use:
- Ø50-63 n. 4 screws M8x40 UNI 5931 (see kit 0950636092)
- Ø80 n. 4 screws M10x40 UNI 5931
- Ø100 n. 4 screws M10x60 UNI 5931 (see kit 0951006092)
- Ø125 n. 4 screws M12x60 UNI 5931

ROD NUT - MODEL S



Code	Ø	F	H	CH	Weight [g]
0950502010	50-63	M16x1.5	8	24	20
0950802010	80-100	M20x1.5	9	30	32
0951252010	125	M27x2	12	41	74

Note: Individually packed.

FORK MODEL GK-M



Code	Ø	Ø M	C	B	A	L	F	D	N	Weight [g]
W0950502020	50-63	16	32	16	32	83	64	M16x1.5	40	340
W0950802020	80-100	20	40	20	40	105	80	M20x1.5	40	690
W0951252020	125	30	54	30	55	148	110	M27x2	65	1835

Note: Individually packed.

ROD EYE - MODEL GA-M

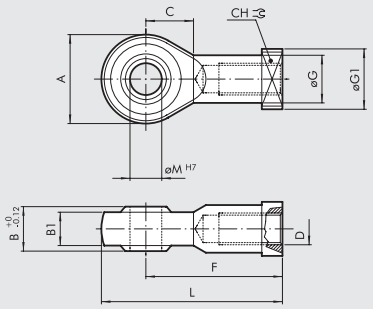

Code	Ø	Ø M	C	B1	B	A	L	F	D	Ø G	CH	Ø G1	Weight [g]
W0950502025	50-63	16	22	15	21	42	85	64	M16x1.5	22	22	22	216
W0950802025	80-100	20	26	18	25	50	102.5	77	M20x1.5	27.5	30	27	396
W0951252025	125	30	36	25	37	70	145	110	M27x2	40	41	49	1160

Note: Individually packed.

SELF ALIGNING ROD COUPLER - MODEL GA-K

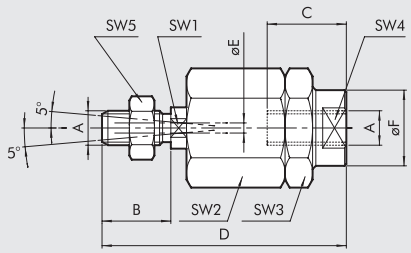

Code	Ø	A	B	C	D	ØF	ØE	SW_1	SW_2	SW_3	SW_4	SW_5	Weight [g]
W0950502030	**50-63**	M16x1.5	32	32	103	32	4	20	41	41	30	24	620
W0950802030	**80-100**	M20x1.5	40	40	119	32	4	20	41	41	30	30	680

Note: Individually packed.

KIT OF REAR HEAD SCREWS Ø50-63-100



Code	Ø	Description
0950636092	**50-63**	Kit of M8x40 UNI 5931 rear head fixing screws
0951006092	**100**	Kit of M10x60 UNI 5931 rear head fixing screws

Note: 4 items per pack.

CYLINDER BRACKET - VALVE SERIES KCV

Fig. Ⓐ

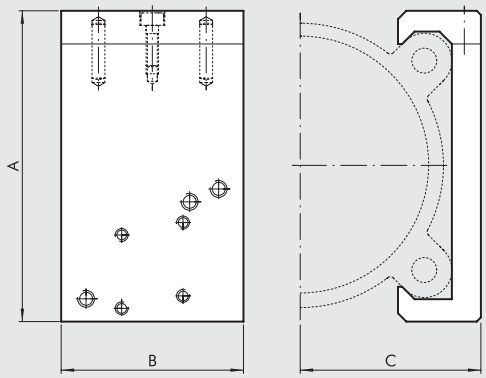

Fig. Ⓑ

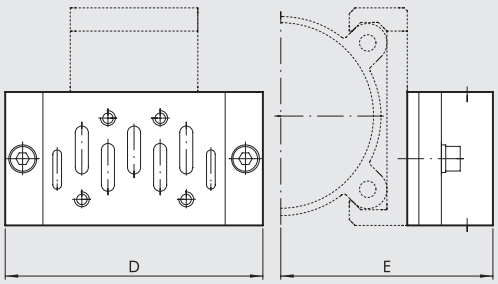

VALVE FIXING BRACKET - BRAKE (Fig. Ⓐ)

					ISO 1		ISO 2			
Code	Ø	A	B	C	D	E	D	E	Applicable valves	Weight [g]
0950502090	**50**	71.5	40	37	110	72	124	78	MACH 16 Series 70 1/8-1/4 ISO 1 - ISO 2	93
0950632090	**63**	81.5	40	42	110	77	124	83	MACH 16 Series 70 1/8-1/4 ISO 1 - ISO 2	101
0950802090	**80**	99	60	53.5	110	88.5	124	94.5	Series 70 1/8-1/4-1/2 ISO 1 - ISO 2	222
0951002090	**100**	119.5	60	63.5	110	98.5	124	104.5	Series 70 1/8-1/4-1/2 ISO 1 - ISO 2	258
0951252090	**125**	148	60	76.5	110	111.5	124	117.9	Series 70 1/8-1/4-1/2 ISO 1 - ISO 2	298

KIT FOR FIXING VALVES TO BRACKETS

Code	Valve KIT	Composition	Weight [g]
0950002003	MACH 16	2 hex. screws TCE M3x25 with washer	4
0950002004	Series 70 1/8-1/4	2 hex. screws TCE M4x30 with washer	8
0950002006	Series 70 1/2	2 hex. screws TCE M5x50 with washer	20
0950002001	ISO 1	Adaptor + ISO 1 BASE SIDE + screws + washers (Fig. Ⓑ)	230
0950002002	ISO 2	Adaptor + ISO 2 BASE SIDE + screws + washers (Fig. Ⓑ)	350

VALVE ASSEMBLY ON HYDRAULIC BRAKE

FOR Ø 50-63



FOR Ø 80-125

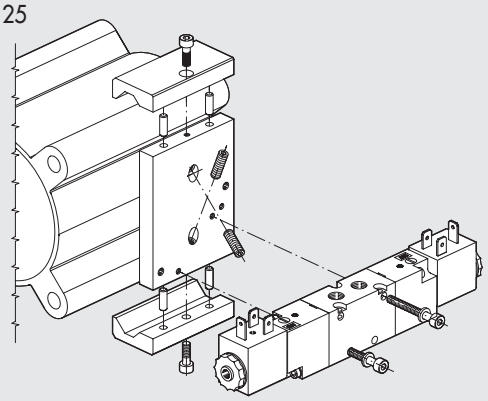

ACCESSORIES: MAGNETIC SENSORS

SENSOR SERIES DSM



For codes and technical data, see **chapter A6**.

SENSOR SUPPORT BRACKETS FOR SENSORS DSM

Ø 50-63



Code	Description
W0950000712	Bracket D.50-63 DST 81

Ø 80-125



Code	Description
W0950000713	Bracket D.80-100-125 DST 82

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

POSITION SENSORS

LTS



LTL



For technical data and usage strokes see **chapter A6**.

REMOTE REGULATION OF HYDRAULIC BRAKES

The speed of a BRK series hydraulic brake or an integrated hydraulic brake can be regulated via a precision flow regulator that is physically separated from the brake.
The regulator is connected to the brake via hydraulic hoses.
In this way the regulator can be placed in a position accessible to the operator, for example on a control panel.
The regulator is unidirectional, which means that the speed is regulated in one direction, e.g. at the piston rod extension
The speed in the other direction remains free. You can remote two regulators to control both directions of movement.
This solution is ideal for both the BRK series hydraulic brakes and the integrated hydraulic brakes.

TECHNICAL DATA

		The technical data of the **BRK series hydraulic brake** or the **integrated hydraulic brake** with connected remote regulator apply.
Connection hose length		At the customer's choice. The following lengths are available in a reasonably short delivery time:
	mm	500, 1500, 2000, 3000
Minimum hose length	mm	300
Speed regulation		Unidirectional. In case you need to regulate the brake remotely for both extension and retraction, two separate regulators are supplied and the number of hoses required is four.
Number of knob turns, from the closed position to fully open		11

COMPONENTS

① HYDRAULIC BRAKE: series BRK or INTEGRATED
② REGULATOR: precision, unidirectional
③ PIPE: hydraulic hose R7

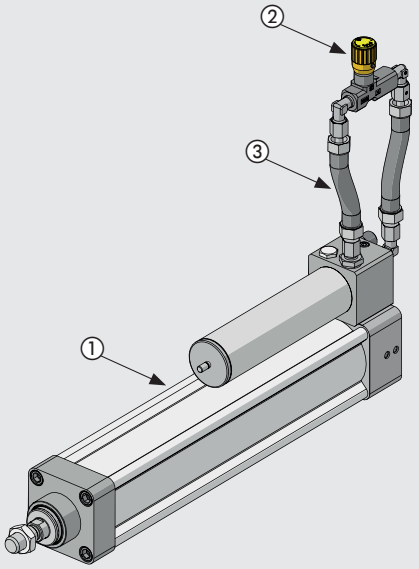

METAL WORK PNEUMATIC

VERSIONS

Remote regulation in extension.
Remote regulation in retraction.

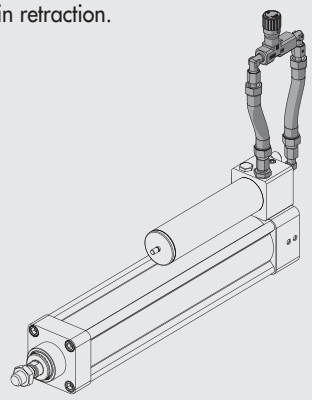

Remote regulation in both piston rod extension and retraction.

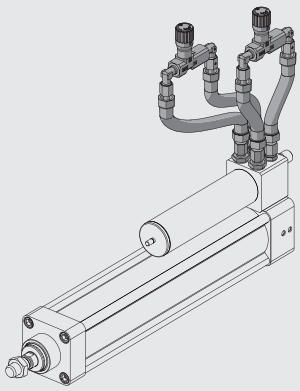

SPEED REGULATION

The speed is reduced by screwing the knob; it increases by unscrewing it.



Once the regulation has been made, lock the knob in position by tightening the grub screw at the side.



HOW TO ELIMINATE TORSIONAL DEFORMATION OF THE HOSE

The operation must be done in the absence of pressure.

Unscrew the outer fitting by one or two turns.
Let the pipe settle in the most natural position.
Tighten the fitting back on.
This operation applies to the fittings on the regulator side and those on the hydraulic brake side.



PANEL MOUNTING

The assembly is supplied complete with a separate ring nut. In order to fit the ring nut, you need to remove the regulator knob.



Remove the yellow cover of the knob, with the help of a cutter.



Unscrew the Phillips head screw.



Pull out the knob.



Tighten the ring nuts and reassemble everything.

DIMENSIONS

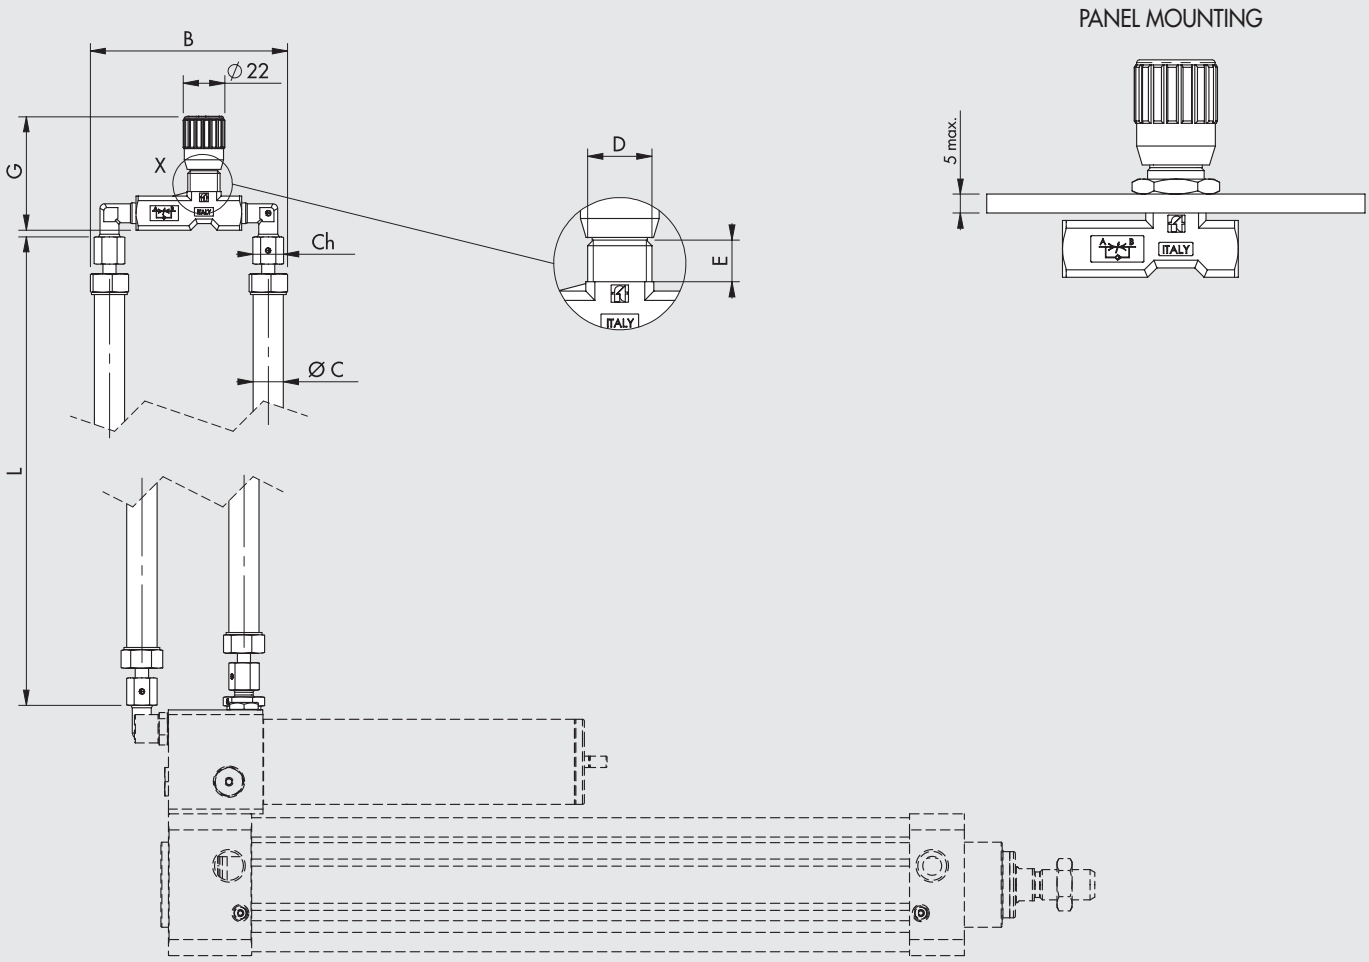

Type of hydraulic brake	B	Ø C	D	E	Ch	G		L	Tube	Minimum radius of the tube
						min	max			
Hydraulic brake series BRK Ø 40, 63	100	12.2	M17x1	11	19	57	61.5	300 to 9999	R7 1/4 pmax 210 bar	35
Cylinder with integrated hydraulic brake Ø 50, 63, 80	85	9.6	M15x1	12	14	55	59	300 to 9999	R7 3/16 pmax 210 bar	25
Cylinder with integrated hydraulic brake Ø 100. 125	100	12.2	M17x1	11	19	57	61.5	300 to 9999	R7 1/4 pmax 210 bar	35

KEY TO CODES

The product code is obtained by adding the type of execution and hose length to the hydraulic brake code

Code Hydraulic brake	**R**	**0 3 0 0**
	EXECUTION	**PIPE LENGTH**
	R Remote regulation	Enter the length **L** [mm] of the hydraulic pipes in 4 digits (example 0500 for length 500)

Example:

W1700010100**R0500** Hydraulic brake series BRK Ø 40, stroke 100 mm, with regulation in extension only. Remote regulation in extension with hose length L = 500 mm

W173200A0500**R2000** Integrated hydraulic brake Ø 50, stroke 500, with regulation in both extension and retraction. Remote regulation in both extension and retraction with hose length L = 2000 mm

METAL WORK PNEUMATIC

NOTES

NOTES

METAL WORK PNEUMATIC

NOTES

SUMMARY ELECTRICAL ACTUATORS

ELECTRIC CYLINDERS

- ELECTRIC CYLINDER SERIES ELEKTRO ISO 15552 — A5.4

- ELECTRIC CYLINDER SERIES ELEKTRO ISO 15552 EK — A5.42

- ELECTRIC CYLINDER SERIES ELEKTRO SSC — A5.57

- ELECTRIC CYLINDER SERIES ELEKTRO MINI DC — A5.72

- ELECTRIC CYLINDER SERIES ELEKTRO ROUND DC — A5.77

ELECTRIC AXIS

- ELECTRIC AXIS SERIES ELEKTRO SHAK — A5.84

- ELECTRIC AXIS SERIES ELEKTRO SHAK GANTRY — A5.100
- ELECTRIC CANTILEVER AXES — A5.110

  - ELECTRIC AXIS BELT-DRIVEN RODLESS, SERIES ELEKTRO VBK — A5.110

  - ELECTRIC AXIS SERIES ELEKTRO SVAK — A5.122

- ELECTRIC AXIS SCREW-DRIVEN RODLESS SERIES ELEKTRO SK — A5.129

- ELECTRIC AXIS BELT-DRIVEN RODLESS, SERIES ELEKTRO BK — A5.146

SLIDES AND GUIDED CYLINDERS ELECTRIC

- ELECTRIC SLIDE SERIES ELEKTRO CS — A5.166

- ELECTRIC CYLINDER SERIES ELEKTRO MULTIFIX — A5.182

ELECTRIC ROTATORS

- ELECTRIC ROTARY ACTUATOR SERIES ELEKTRO RBA — A5.196

ELECTRIC MOTORS

- STEPPING MOTORS — A5.208
  - STEPPING MOTORS — A5.208
  - STEPPING MOTORS WITH ENCODER — A5.212
  - STEPPING MOTORS WITH BRAKE — A5.214
  - STEPPING MOTORS WITH BRAKE + ENCODER — A5.215

METAL WORK PNEUMATIC

- **BRUSHLESS MOTORS** A5.219
  - **BRUSHLESS MOTORS** A5.219
  - **BRUSHLESS MOTORS WITH BRAKE** A5.227
- **DIMENSIONS OF ELECTRIC MOTORS** A5.235

DRIVES AND ACCESSORIES

- **PROGRAMMABLE UNIT - E.MOTION** A5.241

- **PROGRAMMABLE STEPPING MOTOR DRIVE - E.DRIVE** A5.244

- **E.DIRECT DRIVE FOR DIRECT CURRENT MOTORS** A5.248

- **DRIVES FOR STEPPING MOTORS** A5.250
  - **4.4A - 48VDC DRIVE FOR STEPPING MOTORS** A5.250
  - **6A - 75VDC DRIVE FOR STEPPING MOTORS** A5.251
  - **6A - 140VDC, 10A - 62VAC DRIVE FOR STEPPING MOTORS** A5.252
  - **6A - 110 - 230VAC DRIVE FOR STEPPING MOTORS** A5.253
  - **CABLES FOR B&R STEPPING MOTORS** A5.254
  - **CABLES FOR STEPPING MOTORS STEPPERONLINE** A5.255

- **DRIVES FOR BRUSHLESS MOTORS** A5.256
  - **DRIVE FOR 200W, 400W, 750W, 1000W SANYO DENKI BRUSHLESS MOTORS** A5.256
  - **DRIVE FOR 100W, 200W, 400W, 750W DELTA BRUSHLESS MOTORS** A5.259
  - **DRIVE FOR 1kW DELTA BRUSHLESS MOTORS** A5.261
  - **DRIVE FOR 3kW DELTA BRUSHLESS MOTORS** A5.263
  - **DRIVE FOR B3 400W DELTA BRUSHLESS MOTORS** A5.265
  - **CABLES FOR DELTA BRUSHLESS MOTORS** A5.267
  - **ACCESSORIES FOR DELTA DRIVES** A5.269

ELECTRIC CYLINDER
SERIES ELEKTRO ISO 15552

This electric cylinder features an ISO 15552 mounting interface that ensures full compatibility with the standard accessories used in pneumatic cylinders. The piston rod is moved by a hardened and tempered screw coupled with a ball recirculation nut, which guarantees precision and reliability over time. A version with a built-in anti-rotation system is also available. It consists of two opposing pads that slide along special longitudinal grooves cut out of the cylinder sleeve. These grooves are designed to house sensors, while the piston is equipped with a magnet. The rod boasts an enhanced outer diameter and thickness, which guarantees maximum rigidity and greater resistance to radial and peak loads. The system also includes a device for lubricating the screw and nut, thereby ensuring long life and steady performance.
The cylinder can be secured using a wide range of standard accessories, readily available in both aluminium and steel, which is particularly suitable for applications subject to high mechanical stress.
The cylinder can be equipped with motors chosen from an optimised range, which includes stepper motors and brushless motors. Versions with an in-line motor are available, where the motor shaft is connected directly to the screw via a coupling, and versions with a geared motor, where motion is driven via pulleys and a toothed belt. The most suitable drives for motor control are also provided. On request, flanges and adaptor couplings can be manufactured with a view to allowing the use of specific brand motors chosen by the customer.

N.B.: A piston rod anti-rotation system must be used. If the piston rod is not fixed firmly to an element, a flange or to any other device preventing it from rotating, a cylinder in the anti-rotation version must be used.

in-line version

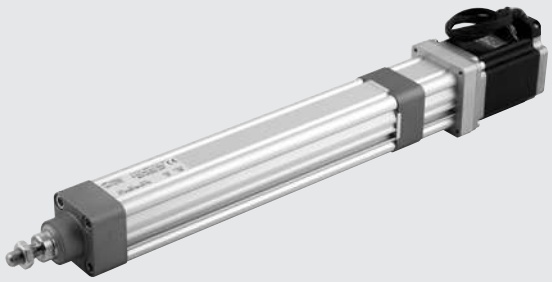

geared version

TECHNICAL DATA			Ø 32	Ø 50	Ø 63 Ø63 HD	Ø 80	Ø 100 Ø 100 HD
Piston rod thread			M10x1.25	M16x1.5	M16x1.5	M20x1.5	
Temperature range	WITH MOTOR	°C	see single motor data sheet				
	ONLY MECHANICS	°C	from -10 to +50				
Electrical protection rating with	STEPPING motors		IP20/IP40 or IP55 (see key to codes on page **A5**.33)			IP55 (only for Ø 80 and Ø 100)	
	BRUSHLESS motors		IP40 or IP65 (see key to codes on page **A5**.33)			IP65	
Minimum stroke for version with non-rotating			Twice the screw pitch (to guarantee ball lubrication)				
Minimum stroke for version without non-rotating		mm	80 (in order to re-grease the screw)			125 (in order to re-grease the screw)	
Maximum stroke		mm	1370	1500			
Positioning repeatability		mm	± 0.02				
Positioning accuracy		mm	± 0.2 **				
Overall radial oscillation of the piston rod (without load) for 100 mm of stroke		mm	0.4				
Versions			With or without piston rod non-rotating			With or without piston rod non-rotating; in line or geared motor; wth or without planetary gearbox	
Uncontrolled impact at the end of stroke			NOT ALLOWED (it provides an extra-stroke minimum 5 mm)				
Sensor magnet			YES				
Maximum angle of twist of the piston rod for non-rotating version			1°30′	1°	0°45′	0°35′	0°30′
Work position			Any				

** indicative average data that gets influenced by various factors such as the stroke, the type of motor, the cylinder version, etc ...

N.B.: On request available with:
- piston rod in stainless steel (Ø32, Ø50 in AISI 316; Ø63, Ø63HD, Ø80, Ø100, Ø100 HD in AISI 304), with limitations to the maximum stroke;
- head-sleeve fixing screws in AISI 316 stainless steel;
- lubrication grease compatible with the food industry, certified NSF Cat. H1 (accidental contact with food);
- FKM/FPM scrapers.

METAL WORK PNEUMATIC

MECHANICAL FEATURES		Ø 32		Ø 50			Ø 63			Ø 63 HD		Ø 80			Ø 100		Ø 100 HD
Screw pitch (p)	mm	4	12	5	10	16	5	10	20	5	10	5	10	32	10	40	10
Screw diameter	mm	12	12	16	16	16	20	20	20	20	20	32	32	32	50	40	50
Static axial load (F_o)*	N	2800		3700			6900			13500		24100			32000		40000
Dynamic axial load (F)	N	5000	5000	6700	6670	4330	10010	11200	4880	17600	18980	30890	36300	26400	44200	43510	73000
		Calculate mean axial load and the calculate life (see graphs on page **A5**.10)															
Maximum number of revs	1/min	4000		3000			2500			2500		2000			3000	2200	3000
Maximum speed (V_{max})	mm/s	267	800	250	500	800	208	417	833	208	417	165	310	1100	500	1500	500

* **N.B.:** Static loads bearable without damage. Useful loads are shown in the diagrams on page **A5**.12 onwards.

WEIGHTS (ONLY CYLINDER)

		Ø 32		Ø 50			Ø 63 - 63 HD		
Screw pitch (p)	mm	4	12	5	10	16	5	10	20
Transmission ratio (τ)		1:1	1:1	1:1	1:1	1:1	1:1	1:1	1:1
Weight at stroke 0	g	896	973	1990	2043	2086	2942	3209	3056
Additional weight each mm of stroke	g	3.98	3.96	6.64	6.62	6.55	6.25	6.32	6.32
Weight of the in-line transmission (without motor)	g	300		900			1100		
Weight of the geared transmission (without motor)	g	1100		2000			3000		
Moving mass at stroke 0 (non-rotating version) Mx	g	270	353	586	629	703	956	1215	1067
Additional moving mass each mm of stroke	g	1.25		1.84			1.98		

		Ø 80					Ø 100						Ø 100 HD	
Screw pitch (p)	mm	5		10			32	10			40			10	
Transmission ratio (τ)		1:1	1:1.25	1:1	1:1.25	1:1.5	1:1	1:1.5	1:1	1:2	1:3	1:1	1:2	1:3	1:1	1:2
Weight at stroke 0	g	8658		8629			8650	15049			13719			17056	
Additional weight each mm of stroke	g	15.6		15.3			16	35.5			26			35.5	
Weight of the in-line transmission (without motor)	g	1700						2900						3200	
Weight of the geared transmission (without motor)	g	6300						8700						12900	8800
Moving mass at stroke 0 (non-rotating version) Mx	g	3709		3730			3667	6630			6171			6630	
Additional moving mass each mm of stroke	g	4.9						15			9.6			15	

N.B.: You get the total weight of a complete cylinder by adding
weight stroke 0 + stroke [mm] x weight for each mm of stroke + weight of the transmission + gearbox weight (if present) + weight of the motor.

MASS MOMENTS OF INERTIA

		Ø 32		Ø 50			Ø 63 - 63 HD		
Screw pitch	mm	4	12	5	10	16	5	10	20 (solo Ø63)
Transmission ratio (τ)		1:1	1:1	1:1	1:1	1:1	1:1	1:1	1:1
J0 at stroke 0	$kgmm^2$	1.2407	2.4309	5.3455	6.1360	9.1113	12.4043	14.8767	23.5427
J1 each metre of stroke	$kgmm^2/m$	12.2592	17.8468	35.2305	38.5264	49.1936	86.2990	96.6652	116.3671
J2 each kg of load	$kgmm^2/kg$	0.4053	3.6476	0.6333	2.5332	6.4849	0.6333	2.5332	10.1327
J3 in-line transmission	$kgmm^2$	5.2		5.2			36.2		
J3 geared transmission	$kgmm^2$	62		161.7			322.1		

		Ø 80								
Screw pitch	mm	5		10			32			
Transmission ratio (τ)		1:1	1:1.25	1:1	1:1.25	1:1.5	1:1	1:1.5		
J0 at stroke 0	$kgmm^2$	430		420.3			438.8			
J1 each metre of stroke	$kgmm^2/m$	688		608			753			
J2 each kg of load	$kgmm^2/kg$	0.6333		2.5330			25.9382			
J3 in-line transmission	$kgmm^2$	148.2	-	148.2	-	-	148.2	-		
J3 geared transmission	$kgmm^2$	1773.4	523.6	1773.4	523.6	1421.7	1773.4	1421.7		

		Ø 100						Ø 100 HD		
Screw pitch	mm	10			40			10		
Transmission ratio (τ)		1:1	1:2	1:3 ●	1:1	1:2	1:3 ●	1:1	1:2	1:3 ●
J0 at stroke 0	$kgmm^2$	1357			1042.4			1357		
J1 each metre of stroke	$kgmm^2/m$	3984			1869.3			3984		
J2 each kg of load	$kgmm^2/kg$	2.5330			40.5284			2.533		
J3 in-line transmission	$kgmm^2$	327.8	-	258.4	327.8	-	258.4	427.8	-	269.5
J3 geared transmission	$kgmm^2$	1773.4	1491.2	-	1773.4	1491.2	-	-	1491.2	906.5

● with planetary gearbox

The total mass moment of inertia (Jtot) reduced for the motor is: Jtot = [J1 · Stroke [m] + J2 · (Load [kg] + Mx [kg]) + J0] · τ^2 + J3
Mx is defined in the weight table.

CALCULATION OF MEAN AXIAL LOAD F_m AND VERIFICATION

Peak axial load in a work cycle must not exceed the static axial load F_o. The peak value is usually achieved during upward acceleration in vertical installation. Exceeding this value leads to greater wear and hence shorter life of the recirculating ball screw.

Mean axial load F_m

$$F_m = \sqrt[3]{\sum F_x^3 \times \frac{V_x}{V_m} \times \frac{q}{100}} =$$

$$F_m = \sqrt[3]{F_{x1}^3 \times \frac{V_{X1}}{V_m} \times \frac{q_1}{100} + F_{x2}^3 \times \frac{V_{X2}}{V_m} + \frac{q_2}{100} + F_{x3}^3 \times \frac{V_{X3}}{V_m} \times \frac{q_3}{100} + \ldots}$$

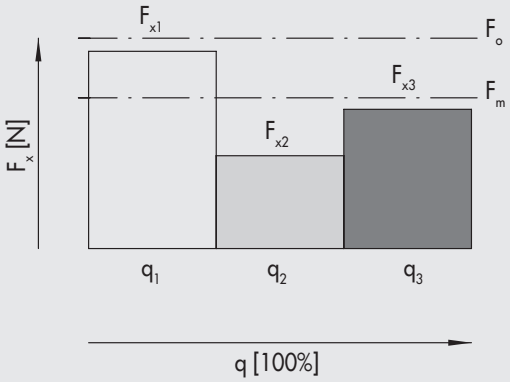

F_x = Axial load at stage x
F_m = Mean axial load during extension
F_o = Static axial load
q = Time segment
V_x = Speed in the phase x
V_m = Average speed

The mean axial load must not exceed the dynamic axial load: $F_m \leq F$
The graphs on page **A5**.10 show screw life as a function of F_m

BARREL CROSS SECTION

Ø 32



Ø 50

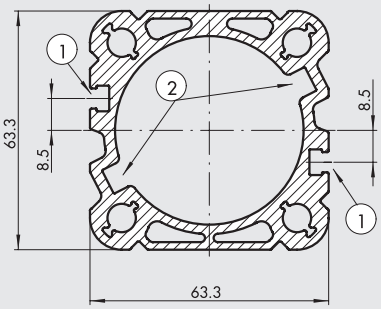

Ø 63 - Ø 63 HD

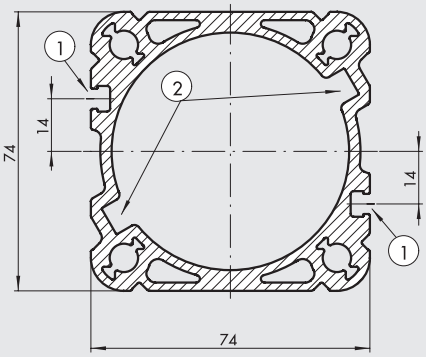

Ø 80

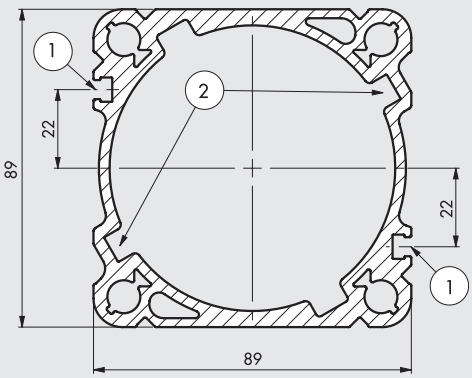

Ø 100 - Ø 100 HD

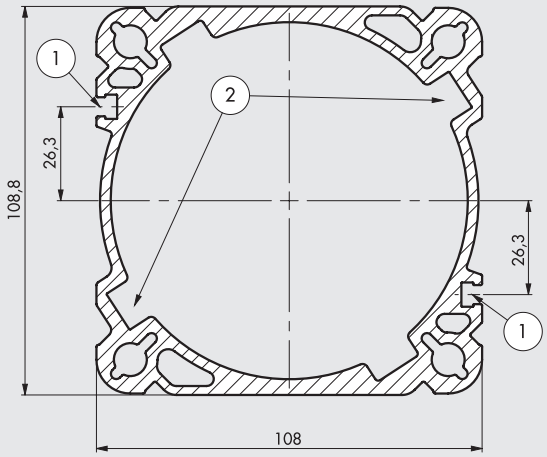

① Slots for sensors
② Slots for anti-rotation

METAL WORK PNEUMATIC

COMPONENTS

IN-LINE VERSION WITH MOTOR

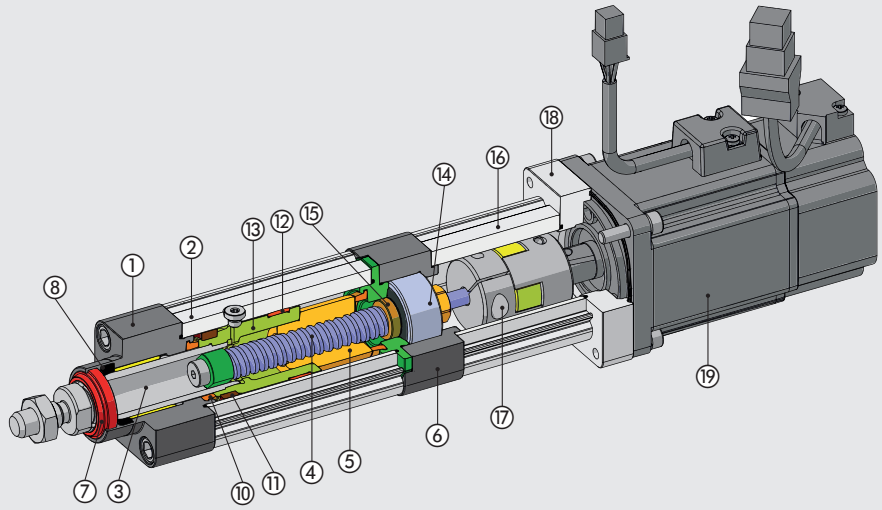

GEARED VERSION WITH MOTOR

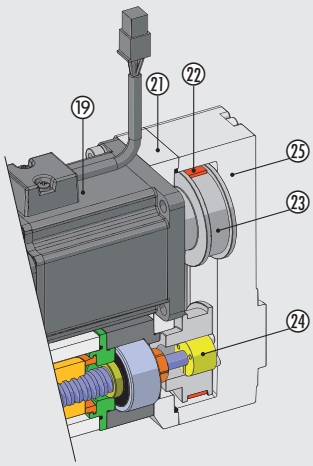

IN-LINE VERSION WITH MOTOR AND GEARBOX

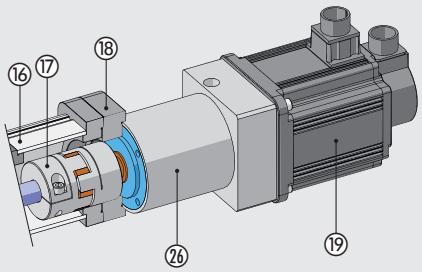

GEARED VERSION WITH MOTOR AND GEARBOX

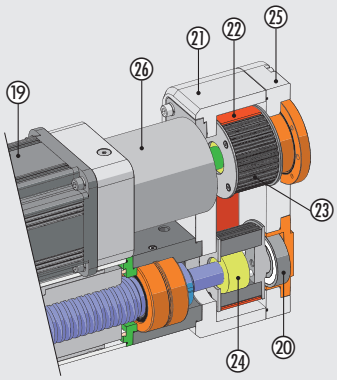

① FRONT CYLINDER HEAD: anodized aluminium
② BARREL: extruded and anodized aluminium alloy
③ PISTON ROD: grinded chromed steel
④ WORM SCREW: hardened steel
⑤ BALL SCREW NUT: steel
⑥ REAR CYLINDER HEAD: anodized aluminium
⑦ WIPER RING: polyurethane
⑧ PISTON ROD GASKET: NBR (IP55/ IP65 version only)
⑨ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑩ BUFFER: technopolymer
⑪ MAGNET: plastoferrite
⑫ GUIDE STRIP: self-lubricated calibrated technopolymer
⑬ PISTON: aluminium
⑭ BEARING: oblique with two ball rings / with tapered rollers (only for Ø 100 HD)
⑮ BEARING LOCKING RING: anodized aluminium
⑯ BELL: extruded and anodized aluminium alloy
⑰ COUPLING
⑱ ADAPTOR PLATE: anodized aluminium
⑲ ELECTRIC MOTOR
⑳ PULLEY SUPPORT BEARING
㉑ TRANSMISSION PLATE: anodized aluminium
㉒ DRIVE BELT
㉓ PULLEY: steel
㉔ SHRINK DISC
㉕ COVER: anodized aluminium
㉖ PLANETARY GEARBOX

PEAK LOADS

The following load conditions applied to the piston rod must be met.

Axial load [N]

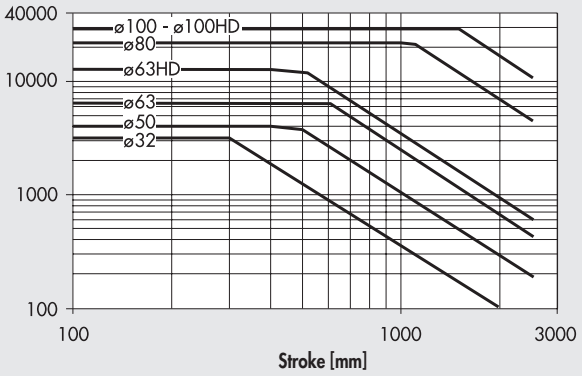

CRITICAL VELOCITY

The two variables (stroke and linear speed) must meet the conditions in the graph below, otherwise resonance could be generated and affect the system.

Ø 32

Speed [mm/s]

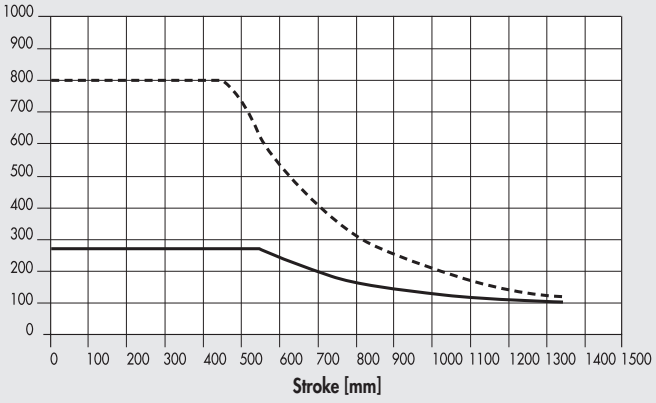

screw pitch 4 — screw pitch 12

Ø 50

Speed [mm/s]

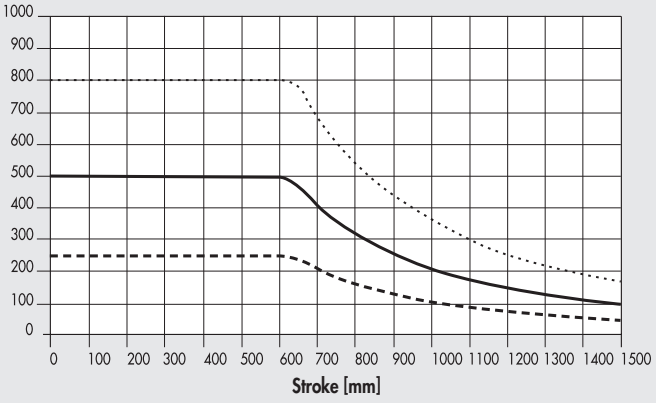

screw pitch 5 — screw pitch 16

screw pitch 10

Ø 63 - Ø 63 HD

Speed [mm/s]

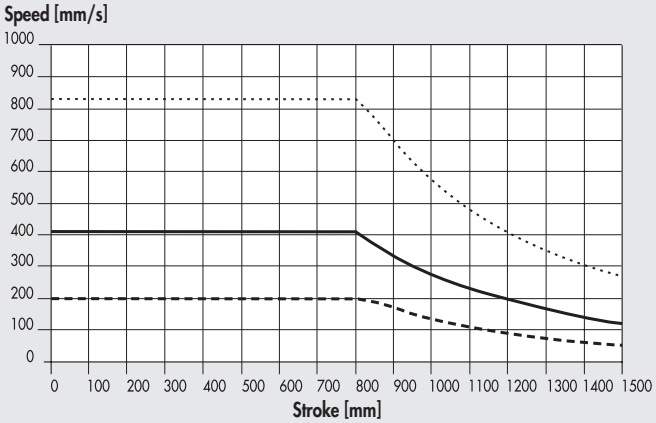

screw pitch 5 — screw pitch 20 (only Ø 63)

screw pitch 10

Ø 80

Speed [mm/s]

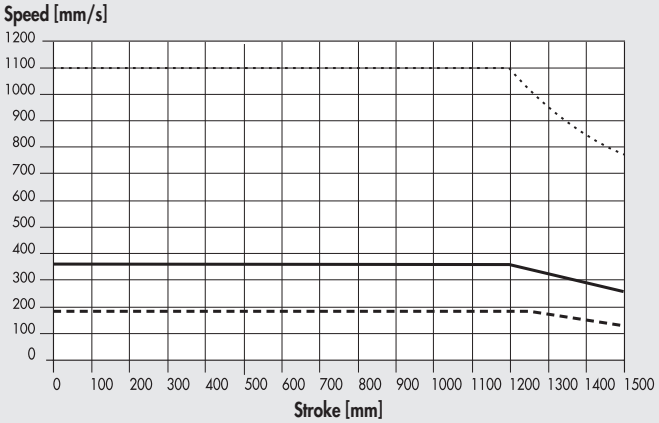

screw pitch 5 — screw pitch 32

screw pitch 10

Ø 100 - Ø 100 HD

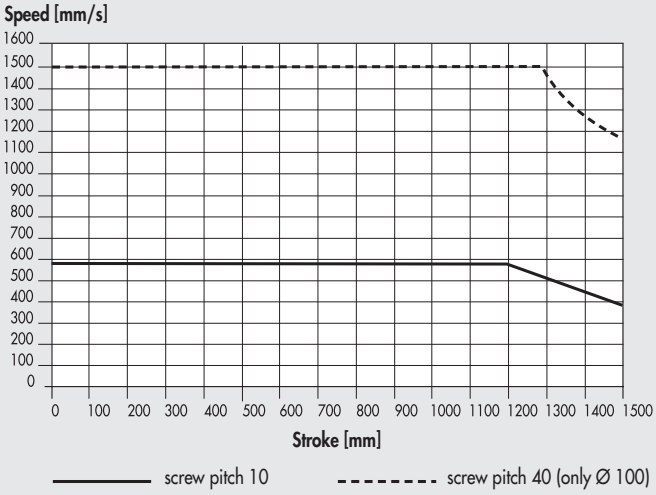

MAXIMUM RADIAL LOADS ON PISTON ROD

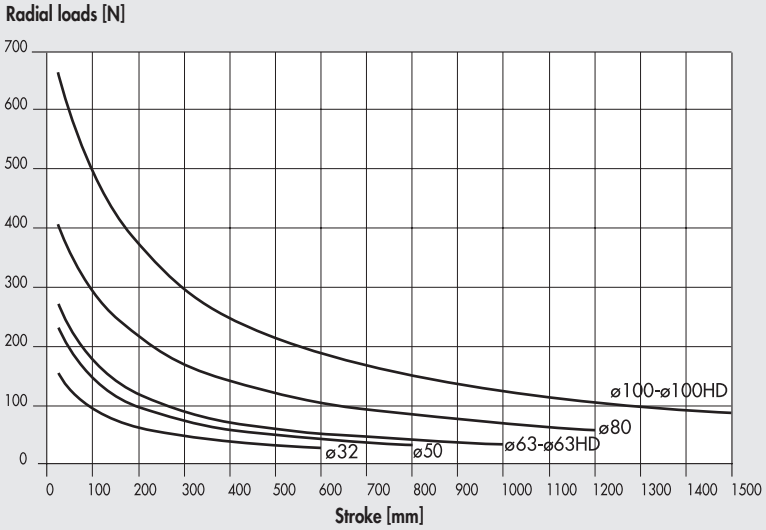

Radial loads can be applied to the piston rod.
They must not exceed the values in the adjacent chart, otherwise the guides on the rod and piston will be subjected to excessive wear.

PISTON ROD SPEED DEPENDING ON THE NUMBER OF SCREW TURNS

SCREW PITCH	TRANSMISSION RATIO	K (n/V)
4	1:1	15
5	1:1	12
	1:1.25	15
10	1:1	6
	1:1.25	7.5
	1:1.5	9
	1:2	12
	1:3	18
12	1:1	5
16	1:1	3.75
20	1:1	3
32	1:1	1.87
	1:1.5	2.81
40	1:1	1.5
	1:2	3
	1:3	4.5

The table shows the direct correspondence between the number of turns (1/min) and the translation speed of the stem (mm/s).
In any case all the other conditions and limitations of each specific cylinder will have to be complied.

Example:
V = 100 mm/s
pitch = 10
transmission ratio = 1:1.5
K = 9
n = V x K = 900 rpm

DRIVE TORQUE AS A FUNCTION OF THE AXIAL LOAD APPLIED TO THE PISTON ROD

SCREW PITCH	TRANSMISSION RATIO	h (C/F)
4	1:1	0.0008
5	1:1	0.0010
	1:1.25	0.0008
10	1:1	0.0020
	1:1.25	0.0016
	1:1.5	0.0013
	1:2	0.0010
	1:3	0.0007
12	1:1	0.0024
16	1:1	0.0032
20	1:1	0.0040
32	1:1	0.0064
	1:1.5	0.0043
40	1:1	0.0080
	1:2	0.0040
	1:3	0.0027

The friction generated in the mechanical system is taken into account.

Example:
F = 1000 N
pitch = 10
transmission ratio = 1:1.5
h = 0.0013
C = F x h = 1.3 Nm

LIFE CHARACTERISTICS AS A FUNCTION OF THE MEAN AXIAL LOAD

Life characteristics can vary considerably from those indicated in the graphs due to different operating conditions (radial loads, temperature, lubrication status, etc.).

Ø 32

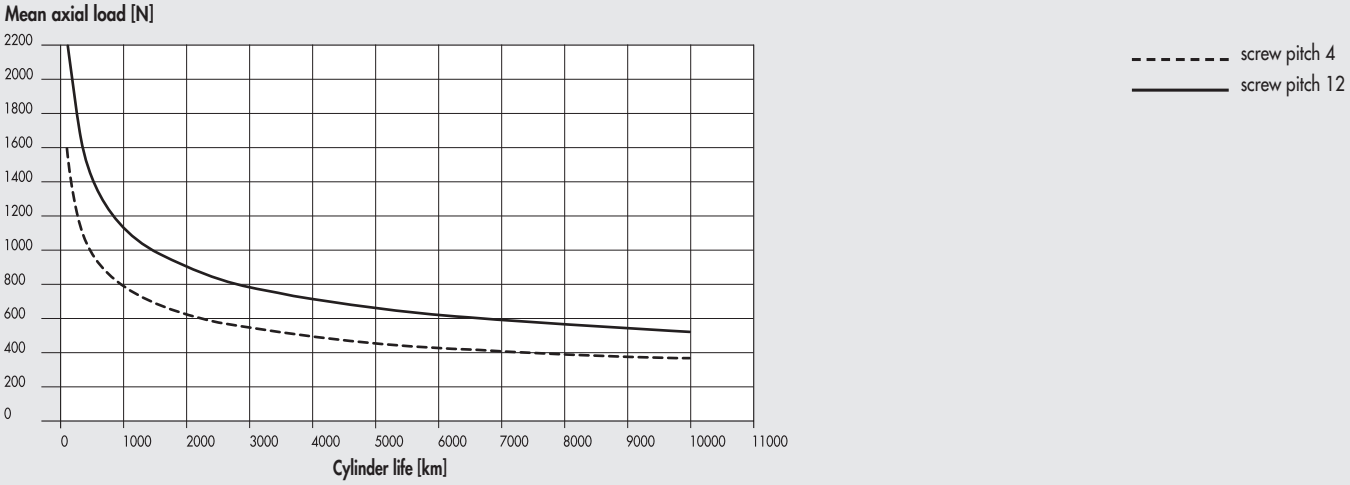

Ø 50

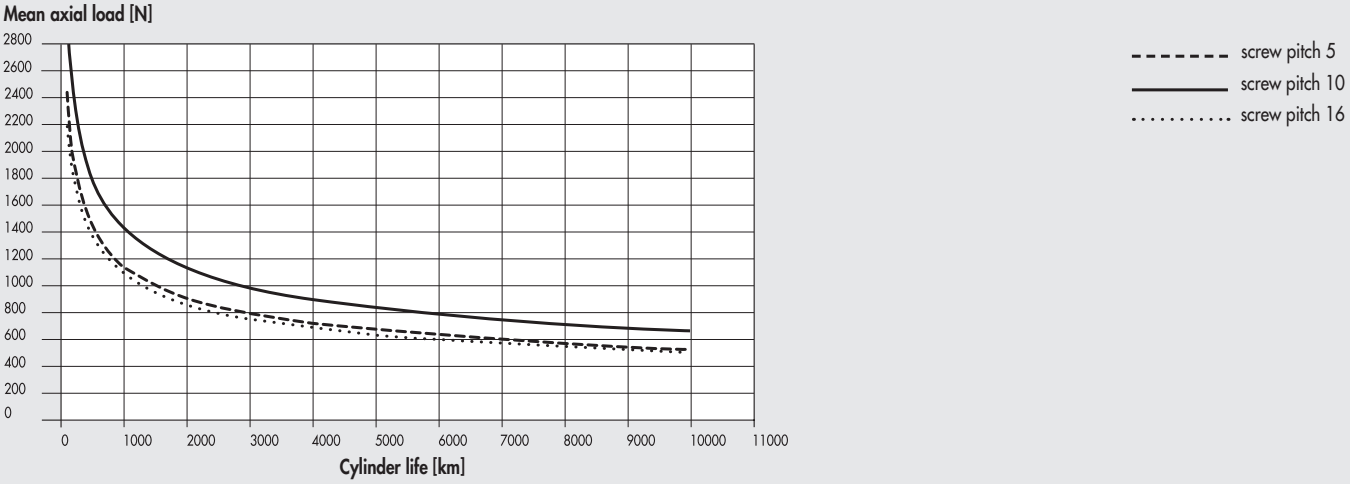

Ø 63 - Ø 63 HD

Mean axial load [N]

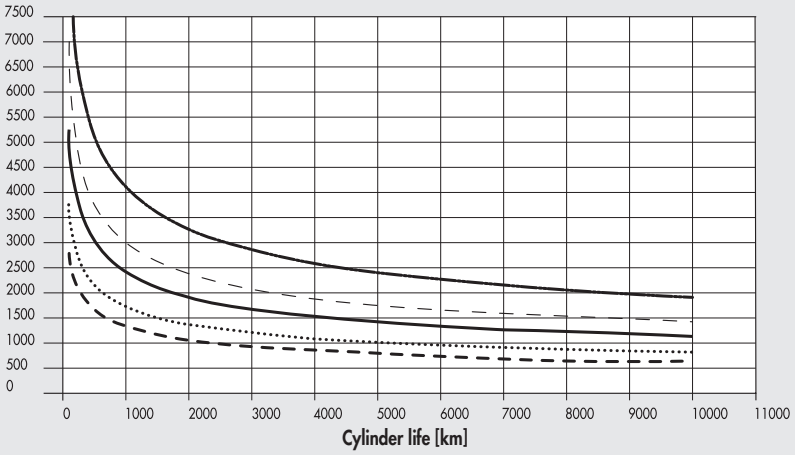

screw pitch 5
screw pitch 10
screw pitch 20
screw pitch 5 HD
screw pitch 10 HD

Ø 80

Mean axial load [N]

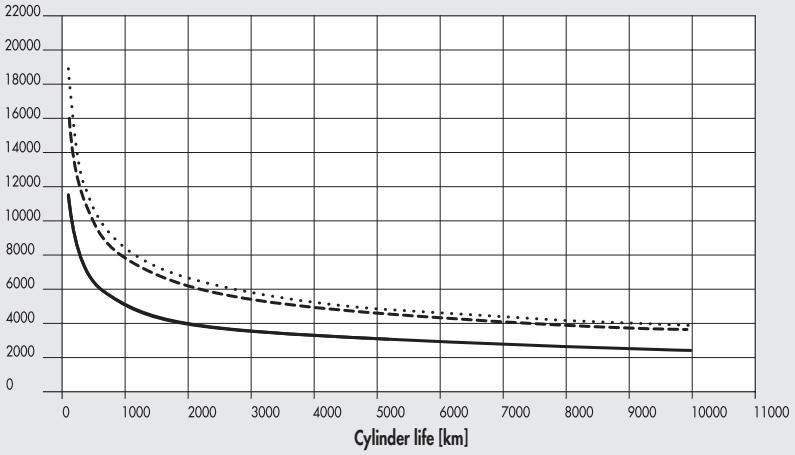

screw pitch 5
screw pitch 10
screw pitch 32

Ø 100 - Ø 100 HD

Mean axial load [N]

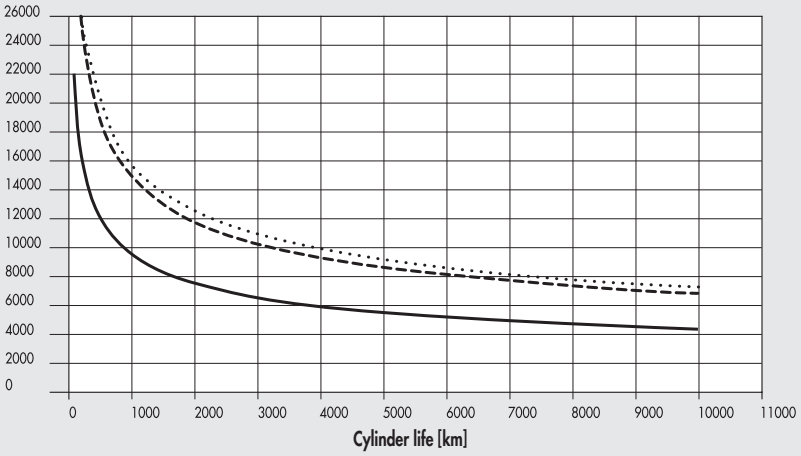

screw pitch 10
screw pitch 40
screw pitch 10 HD

AXIAL LOAD CURVES AS A FUNCTION OF SPEED (CYLINDER COMPELTE WITH MOTOR AND DRIVE)

N.B.: The obtainable load values already take the efficiency of the system into account. For STEPPING motors, with the motor off, the drive current is automatically reduced by 50% to prevent overheating. Consequently, available axial load with the motor stopped is also reduced by 50%.

Ø 32 with pitch 4 screw, STEPPING motors and motor 1 STEPPING with BRAKE

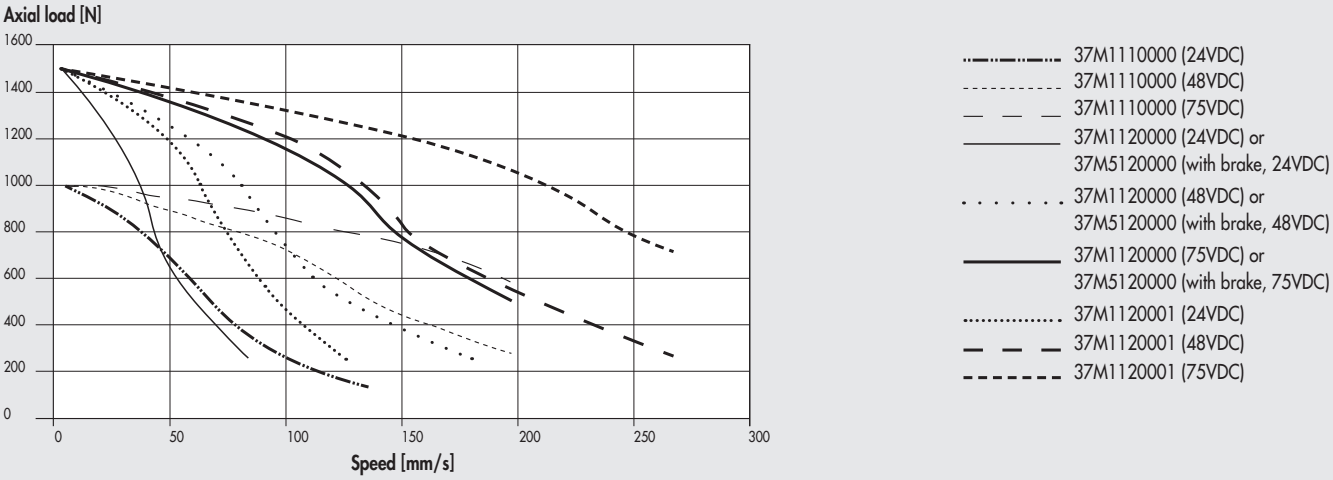

Ø 32 with pitch 4 screw, STEPPING motors with BRAKE + ENCODER

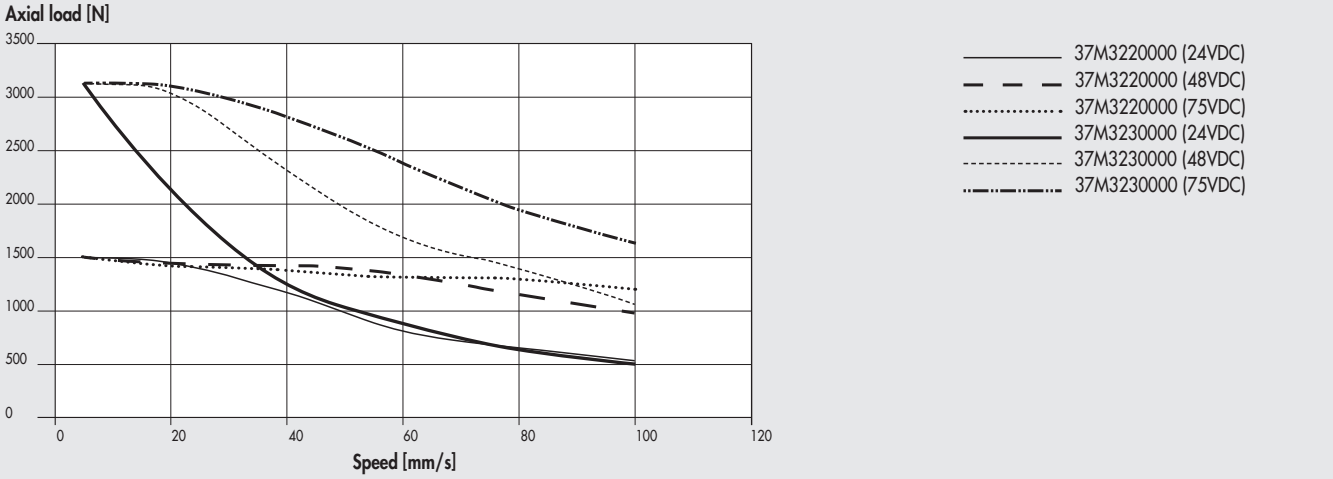

Ø 32 with pitch 12 screw, STEPPING motors and motor 1 STEPPING with BRAKE

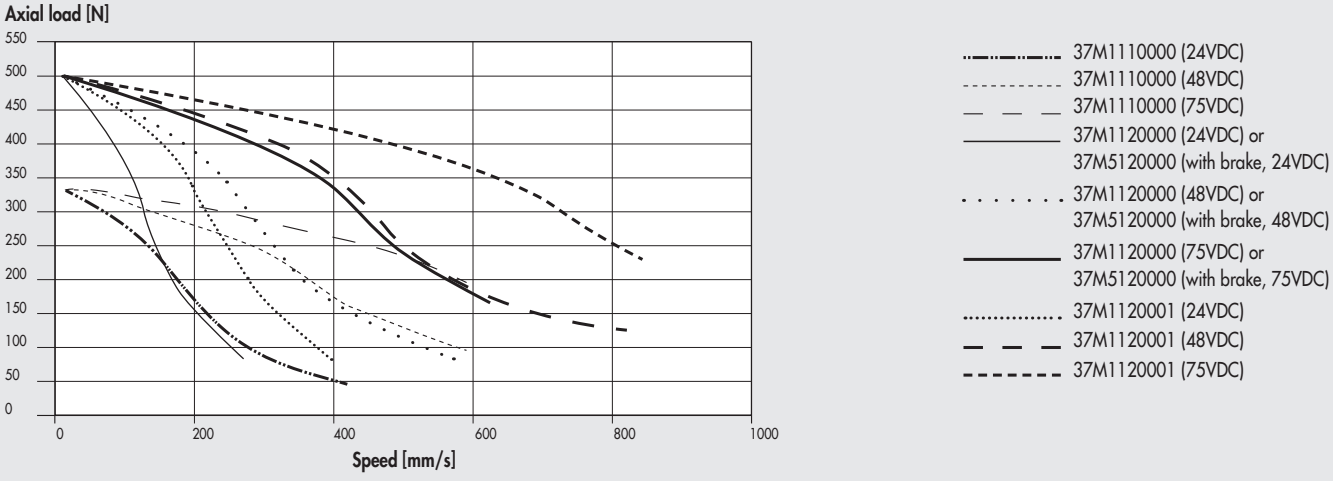

Ø 32 with pitch 12 screw, STEPPING motors with BRAKE + ENCODER

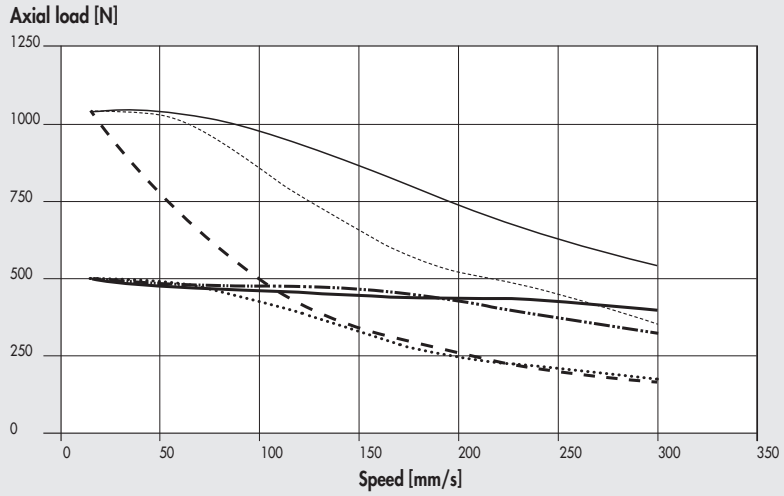

Ø 50 with pitch 5 screw, STEPPING motors

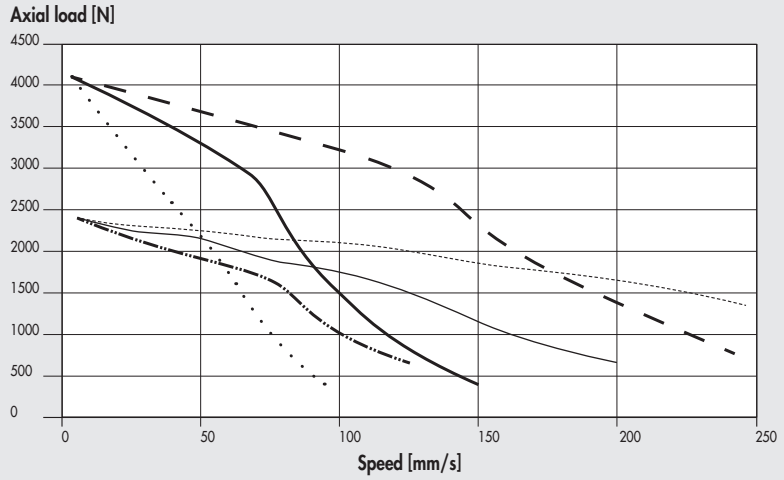

Ø 50 with pitch 5 screw, STEPPING motors with BRAKE + ENCODER

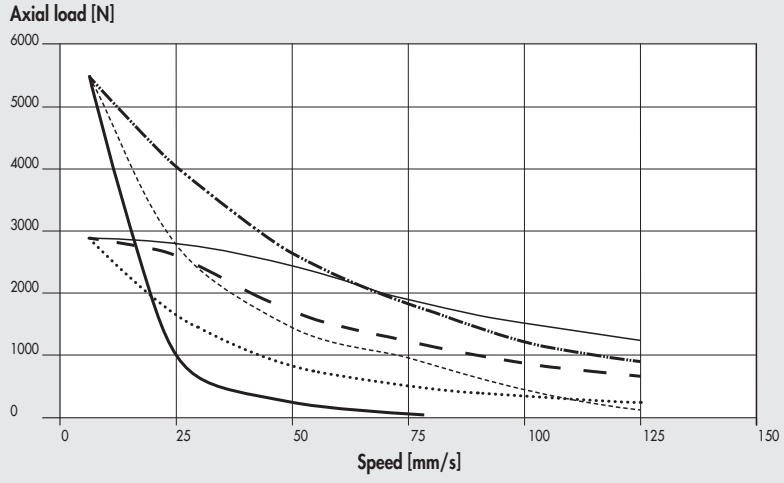

Ø 50 with pitch 10 screw, STEPPING motors

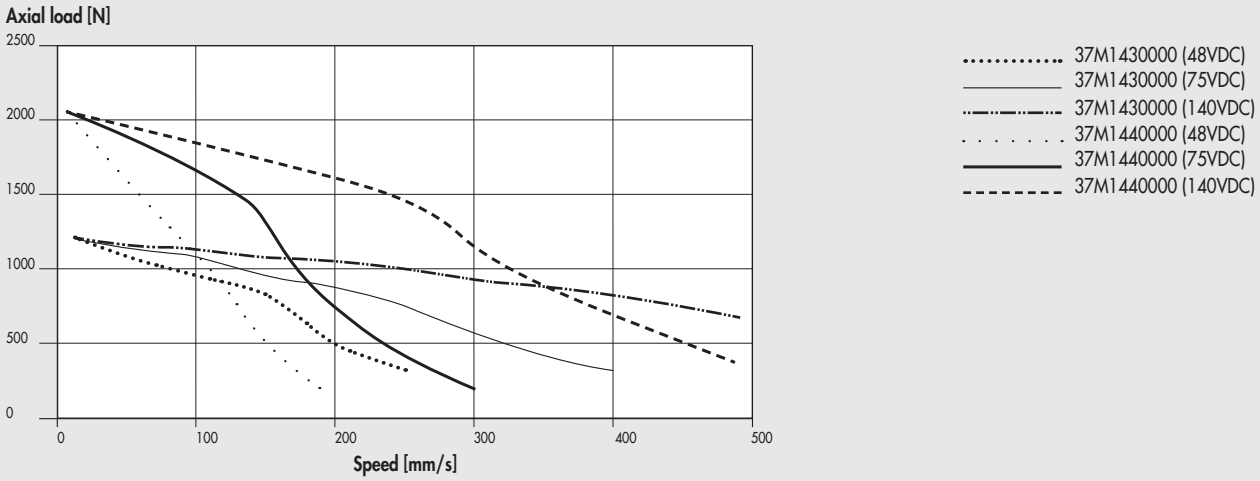

Ø 50 with pitch 10 screw, STEPPING motors with BRAKE + ENCODER

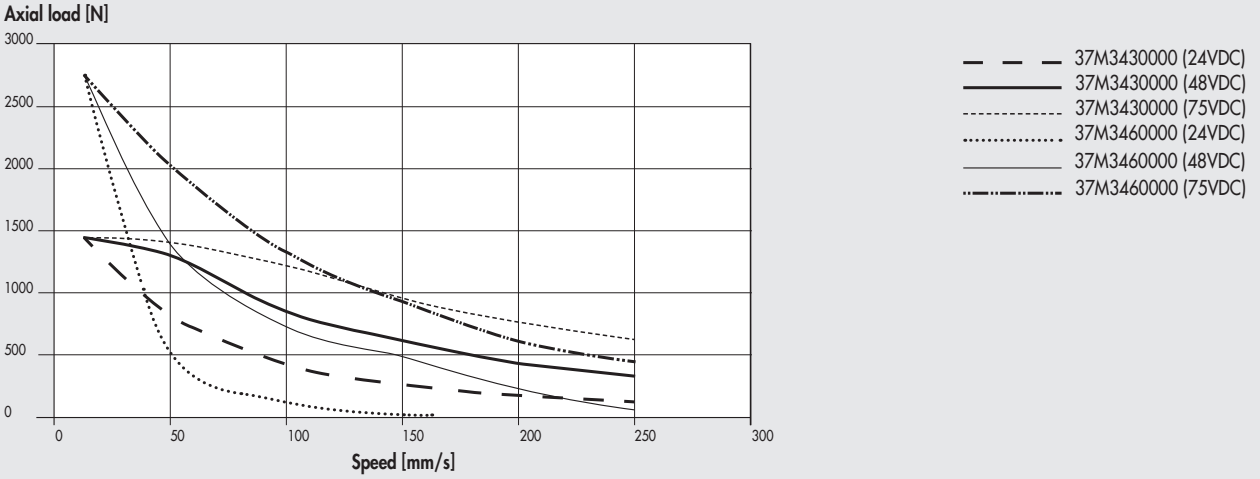

Ø 50 with pitch 16 screw, STEPPING motors

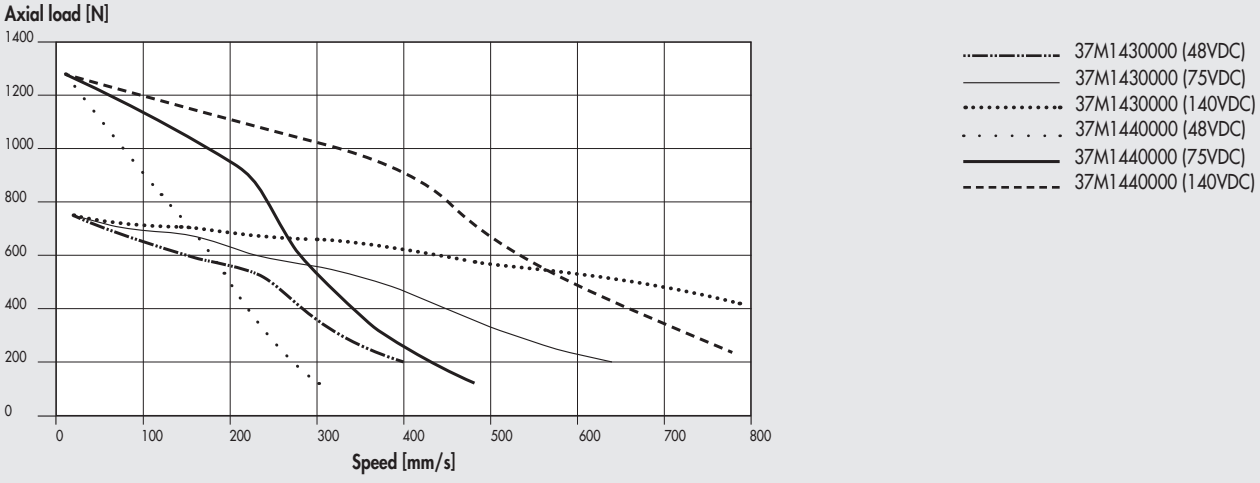

Ø 50 with pitch 16 screw, STEPPING motors with BRAKE + ENCODER

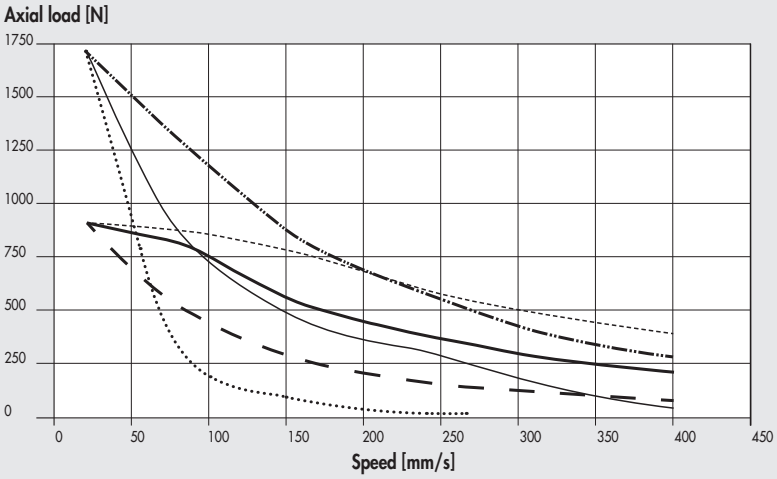

Ø 63 with pitch 5 screw, STEPPING motors

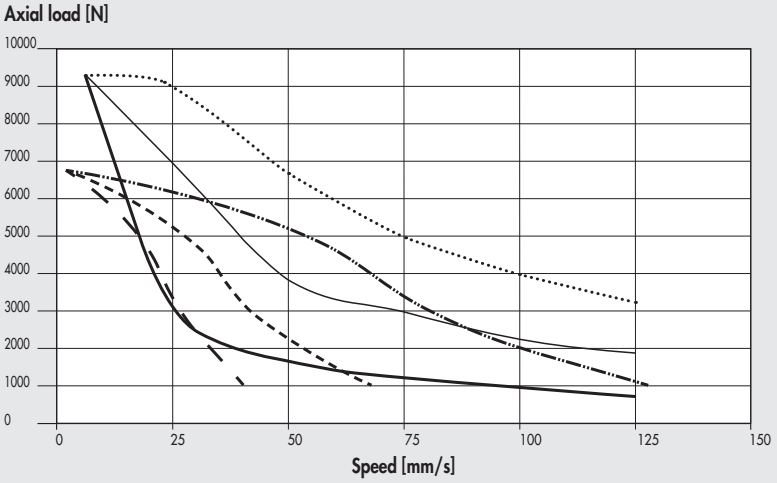

Ø 63 with pitch 5 screw, STEPPING motors with BRAKE + ENCODER

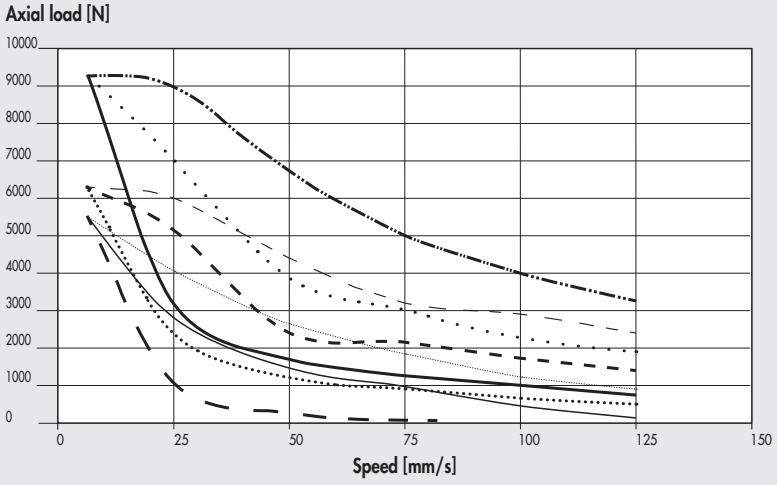

Ø 63 with pitch 10 screw, STEPPING motors

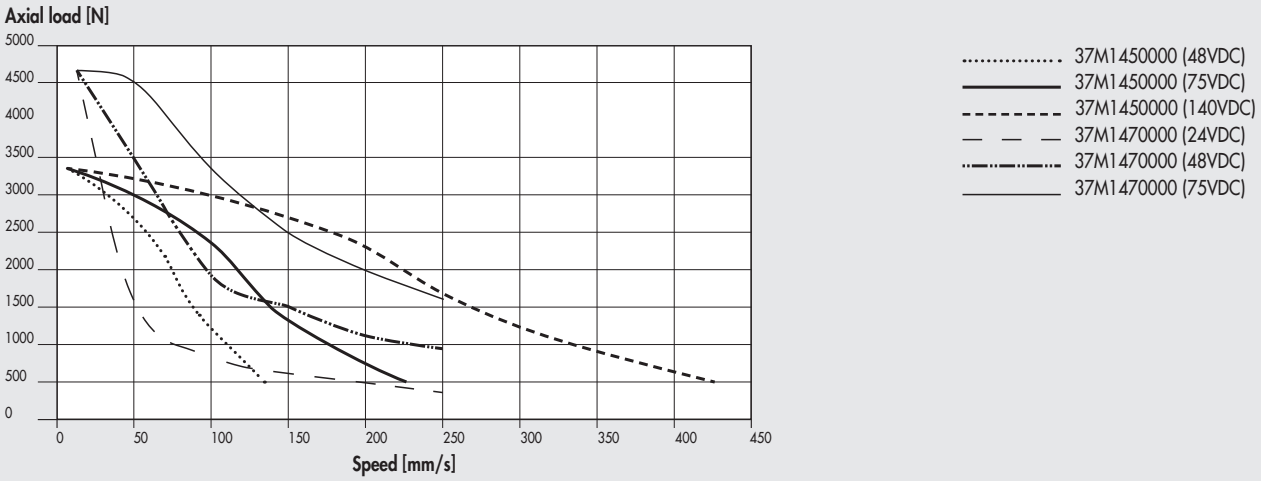

Ø 63 with pitch 10 screw, STEPPING motors with BRAKE + ENCODER

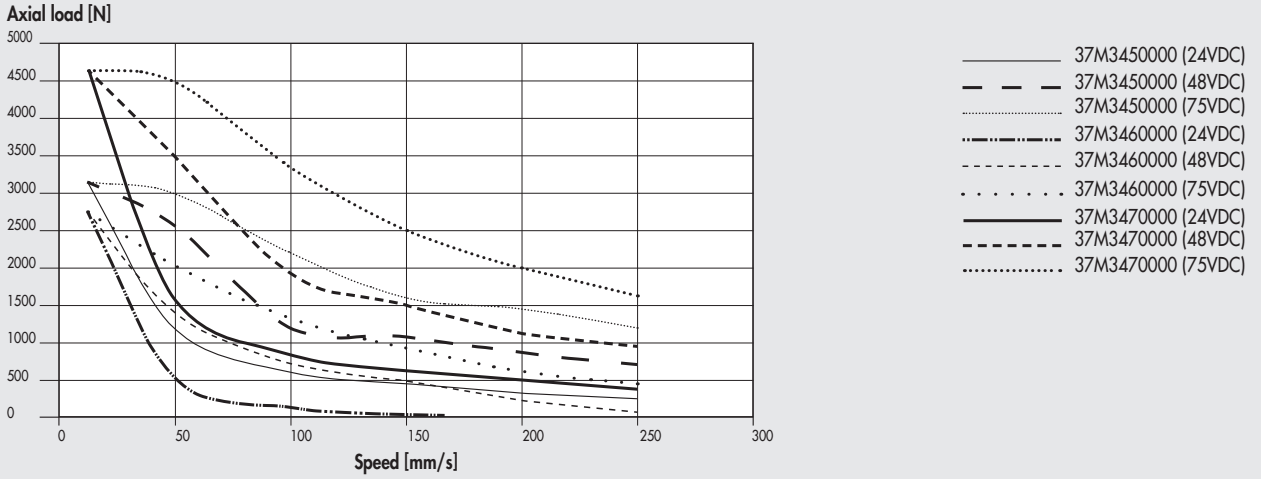

Ø 63 with pitch 20 screw, STEPPING motors

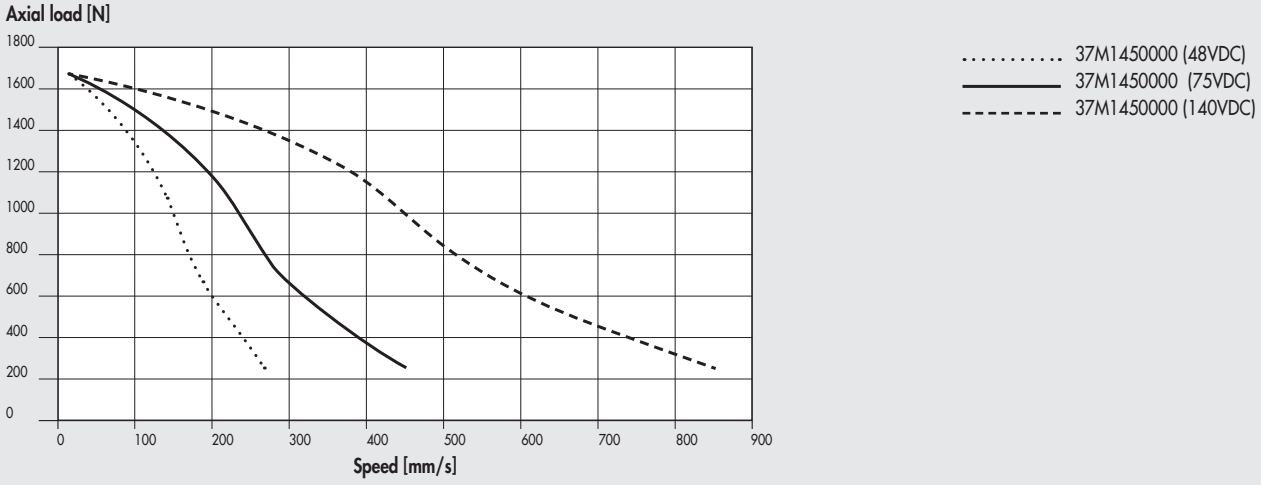

Ø 63 with pitch 20 screw, STEPPING motors with BRAKE + ENCODER

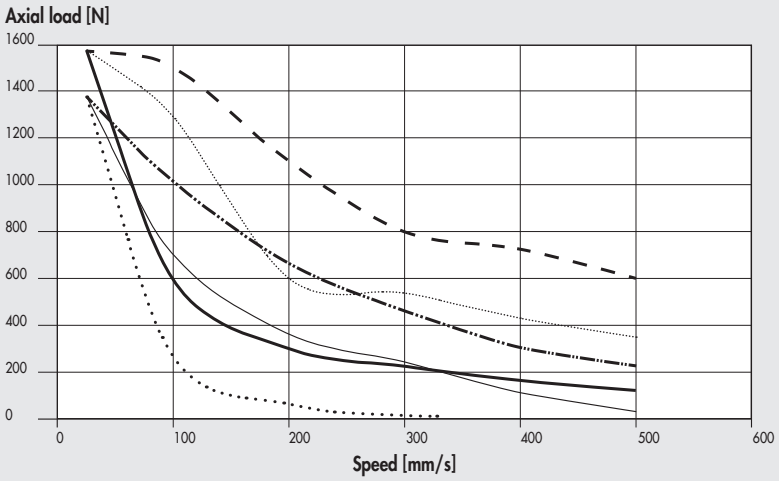

ø 80 with pitch 5 screw, STEPPING motors

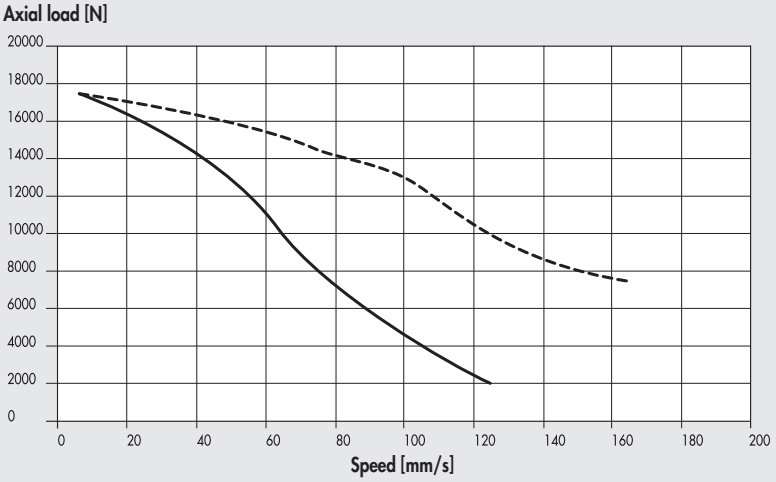

ø 80 with pitch 10 screw, STEPPING motors

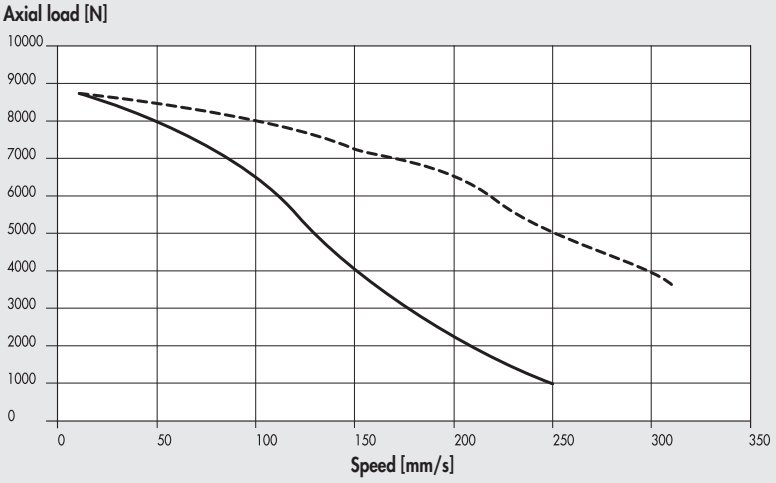

Ø 80 with pitch 32 screw, STEPPING motors

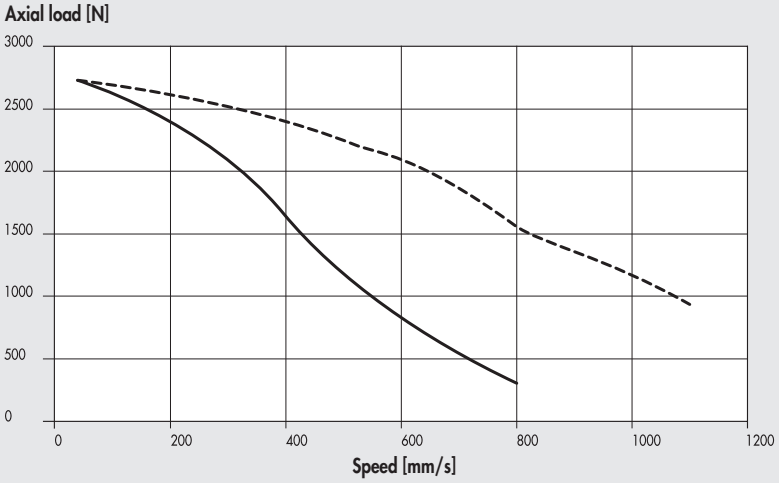

37M1890000 + 37D1362001 (230VAC)
37M1890000 + 37D1362001 (115VAC)

Ø 100 with pitch 10 screw, STEPPING motors

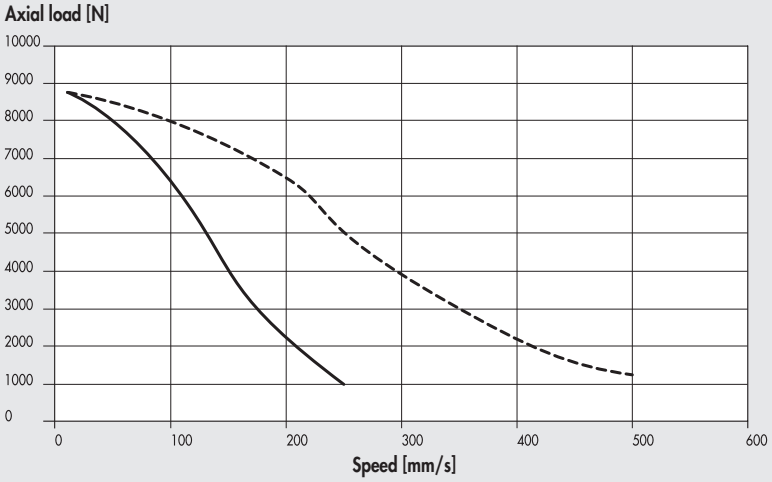

37M1890000 + 37D1362001 (230VAC)
37M1890000 + 37D1362001 (115VAC)

Ø 100 with pitch 40 screw, STEPPING motors

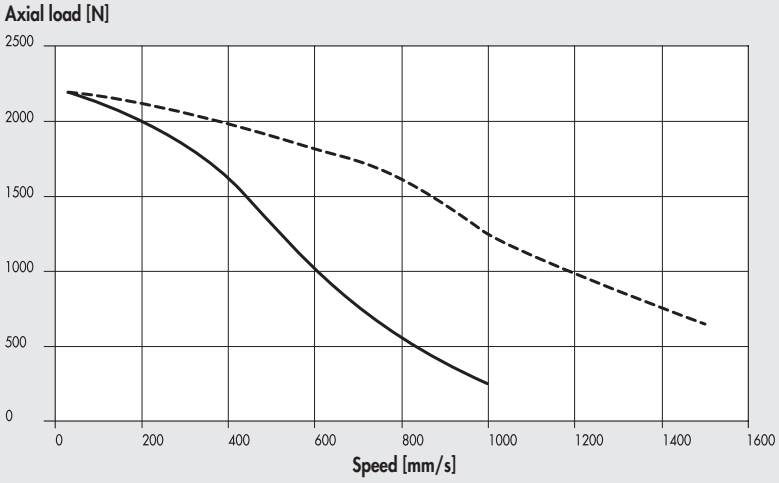

37M1890000 + 37D1362001 (230VAC)
37M1890000 + 37D1362001 (115VAC)

Ø 32 with pitch 4 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE

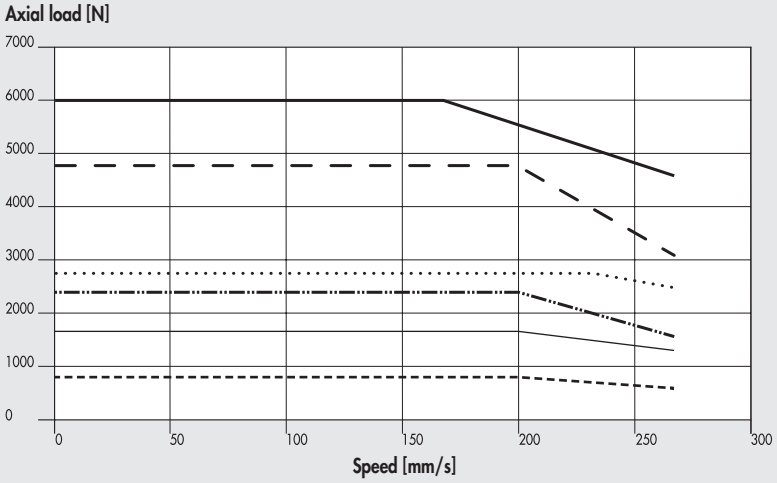

- Nominal 37M2200000/1 or 37M4200000/1 (with brake) + 37D2400008 / 37D2200001 (200W)
- Nominal 37M2220000/1 or 37M4220000/1 (with brake) + 37D2400008 / 37D2300001 (400W)
- Maximum 37M2200001 or 37M4200001 (with brake) + 37D2200001 (200W)
- Maximum 37M2200000 or 37M4200000 (with brake) + 37D2400008 (200W)
- Maximum 37M2220001 or 37M4220001 (with brake) + 37D2300001 (400W)
- Maximum 37M2220000 or 37M4220000 (with brake) + 37D2400008 (400W)

Ø 32 with pitch 12 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE

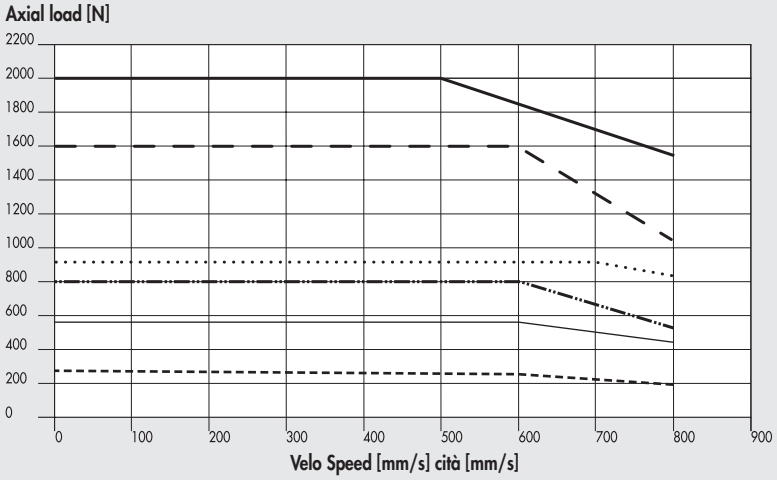

- Nominal 37M2200000/1 or 37M4200000/1 (with brake) + 37D2400008 / 37D2200001 (200W)
- Nominal 37M2220000/1 or 37M4220000/1 (with brake) + 37D2400008 / 37D2300001 (400W)
- Maximum 37M2200001 or 37M4200001 (with brake) + 37D2200001 (200W)
- Maximum 37M2200000 or 37M4200000 (con freno) + 37D2400008 (200W)
- Maximum 37M2220001 or 37M4220001 (with brake) + 37D2300001 (400W)
- Maximum 37M2220000 or 37M4220000 (with brake) + 37D2400008 (400W)

Ø 50 with pitch 5 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE

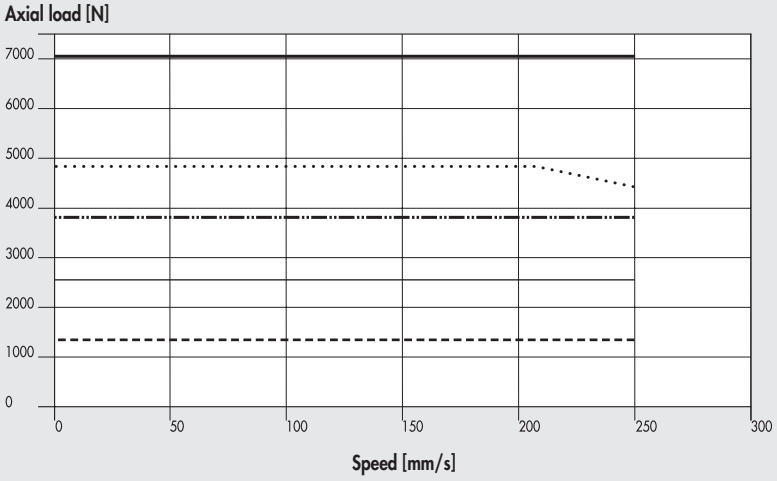

- Nominal 37M2220000/1 or 37M4220000/1 (with brake) + 37D2400008 / 37D2300001 (400W)
- Nominal 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008 / 37D2400007 (750W)
- Maximum 37M2220001 or 37M4220001 (with brake) + 37D2300001 (400W)
- Maximum 37M2220000 or 37M4220000 (with brake) + 37D2400008 (400W)
- Maximum 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008/37D2400007 (750W)

Ø 50 with pitch 10 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE

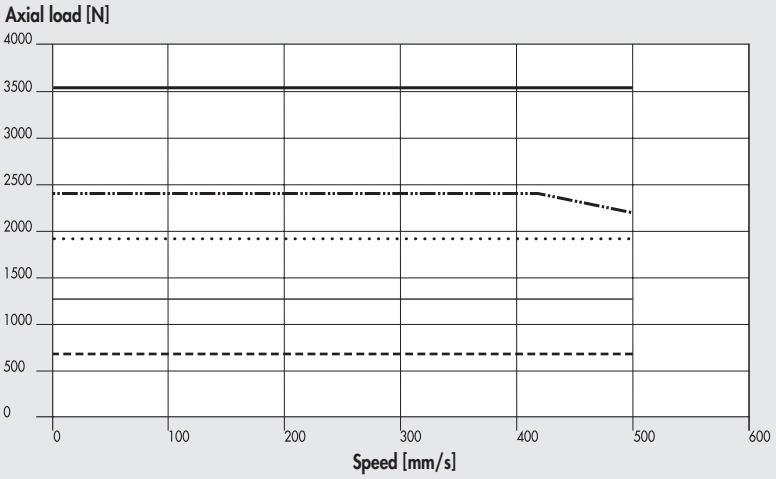

- Nominal 37M2220000/1 or 37M4220000/1 (with brake) + 37D2400008 / 37D2300001 (400W)
- Nominal 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008 / 37D2400007 (750W)
- Maximum 37M2220001 or 37M4220001 (with brake) + 37D2300001 (400W)
- Maximum 37M2220000 or 37M4220000 (with brake) + 37D2400008 (400W)
- Maximum 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008/37D2400007 (750W)

Ø 50 with pitch 16 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE

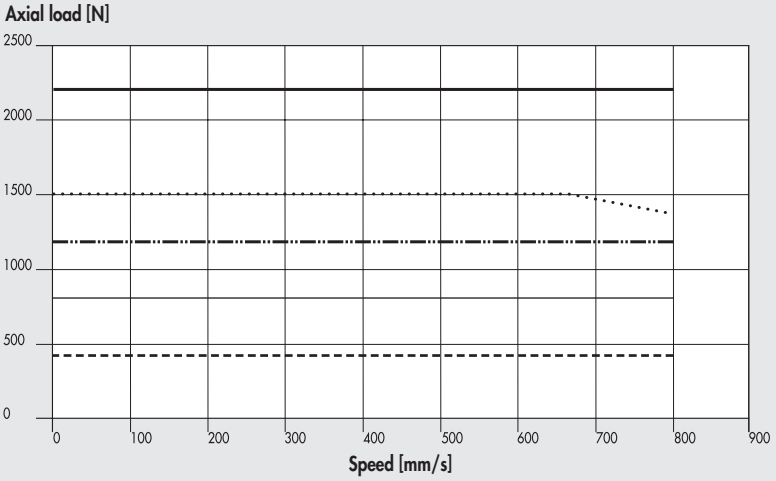

- Nominal 37M2220000/1 or 37M4220000/1 (with brake) + 37D2400008 / 37D2300001 (400W)
- Nominal 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008 / 37D2400007 (750W)
- Maximum 37M2220001 or 37M4220001 (with brake) + 37D2300001 (400W)
- Maximum 37M2220000 or 37M4220000 (with brake) + 37D2400008 (400W)
- Maximum 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008/37D2400007 (750W)

Ø 63 - Ø 63 HD with pitch 5 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE (750 W)

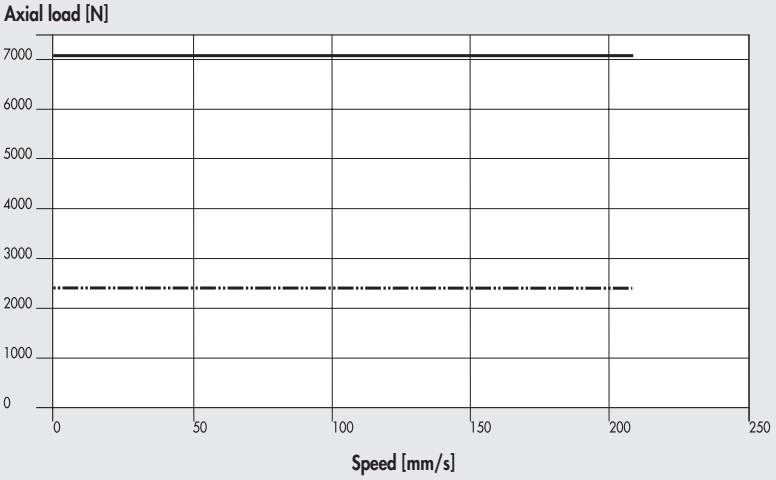

- Nominal 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008 / 37D2400007 (750W)
- Maximum 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008/37D2400007 (750W)

Ø 63 HD with pitch 5 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE (1000 W)

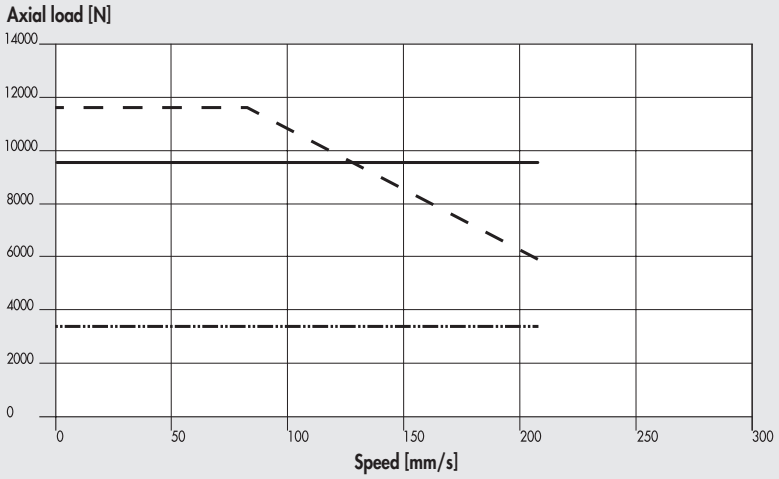

Nominal 37M2540000/37M2640000 or 37M4540000/37M4640000 (with brake) + 37D2400008/37D2400006 (1000W)

Maximum 37M2640000 or 37M4640000 (with brake) + 37D2400006 (1000W)

Maximum 37M2540000 or 37M4540000 (with brake) + 37D2400008 (1000W)

Ø 63 - Ø 63 HD with pitch 10 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE (750 W)

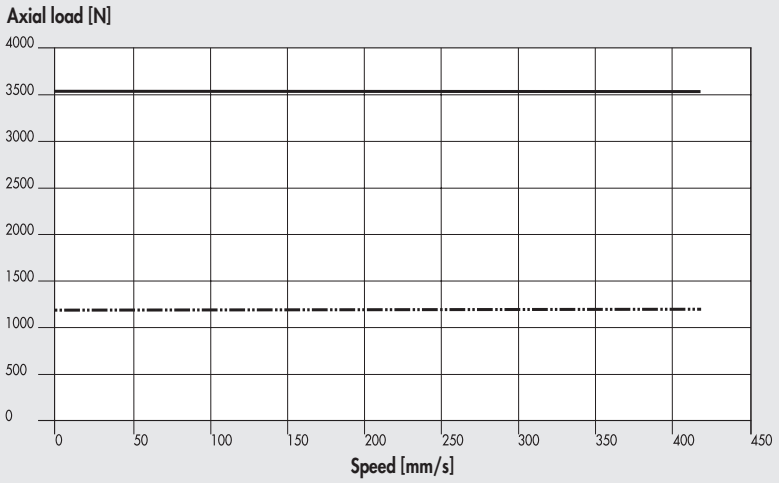

Nominal 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008 / 37D2400007 (750W)

Maximum 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008/37D2400007 (750W)

Ø 63 HD with pitch 10 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE (1000 W)

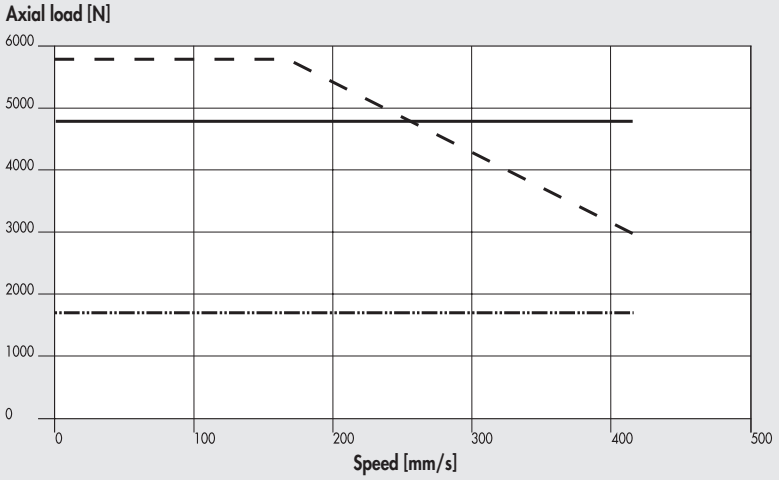

Nominal 37M2540000/37M2640000 or 37M4540000/37M4640000 (with brake) + 37D2400008/37D2400006 (1000W)

Maximum 37M2640000 or 37M4640000 (with brake) + 37D2400006 (1000W)

Maximum 37M2540000 or 37M4540000 (with brake) + 37D2400008 (1000W)

Ø 63 with pitch 20 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE

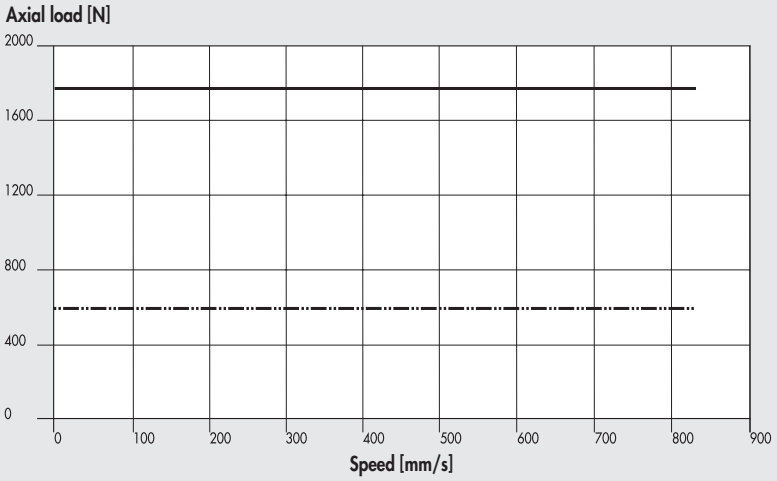

- Nominal 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008 / 37D2400007 (750W)
- Maximum 37M2330000/1 or 37M4330000/1 (with brake) + 37D2400008/37D2400007 (750W)

Ø 80 with pitch 5 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE (1000W)

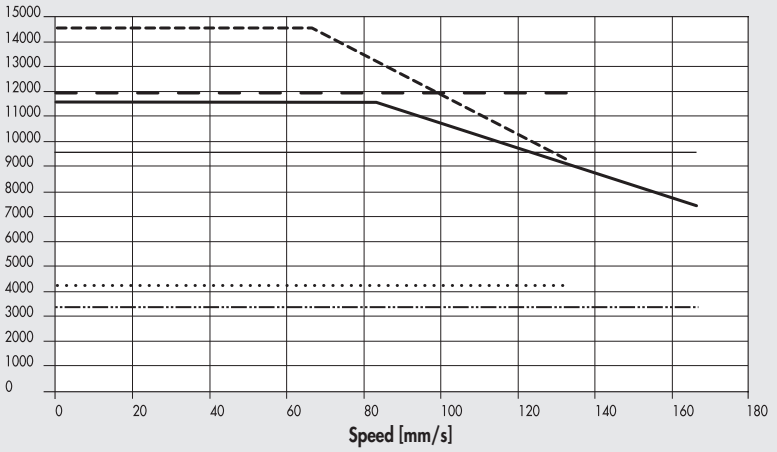

- Nominal 37M2540000/37M2640000 or 37M4540000/37M4640000 (with brake) + 37D2400008/37D2400006 (1000W) in-line version
- Nominal 37M2540000/37M2640000 or 37M4540000/37M4640000 (with brake) + 37D2400008/37D2400006 (1000W) geared version (1:1.25)
- Maximum 37M2640000 or 37M4640000 (with brake) + 37D2400006 (1000W) in-line version
- Maximum 37M2540000 or 37M4540000 (with brake) + 37D2400008 (1000W) in-line version
- Maximum 37M2640000 or 37M4640000 (with brake) + 37D2400006 (1000W) geared version (1:1.25)
- Maximum 37M2540000 or 37M4540000 (with brake) + 37D2400008 (1000W) geared version (1:1.25)

Ø 80 with pitch 10 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE (1000W)

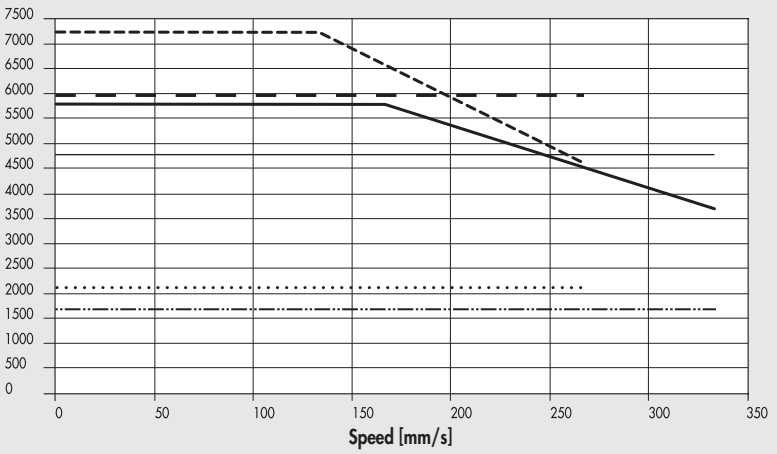

- Nominal 37M2540000/37M2640000 or 37M4540000/37M4640000 (with brake) + 37D2400008/37D2400006 (1000W) in-line version
- Nominal 37M2540000/37M2640000 or 37M4540000/37M4640000 (with brake) + 37D2400008/37D2400006 (1000W) geared version (1:1.25)
- Maximum 37M2640000 or 37M4640000 (with brake) + 37D2400006 (1000W) in-line version
- Maximum 37M2540000 or 37M4540000 (with brake) + 37D2400008 (1000W) in-line version
- Maximum 37M2640000 or 37M4640000 (with brake) + 37D2400006 (1000W) geared version (1:1.25)
- Maximum 37M2540000 or 37M4540000 (with brake) + 37D2400008 (1000W) geared version (1:1.25)

Ø 80 with pitch 10 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE (3000W)

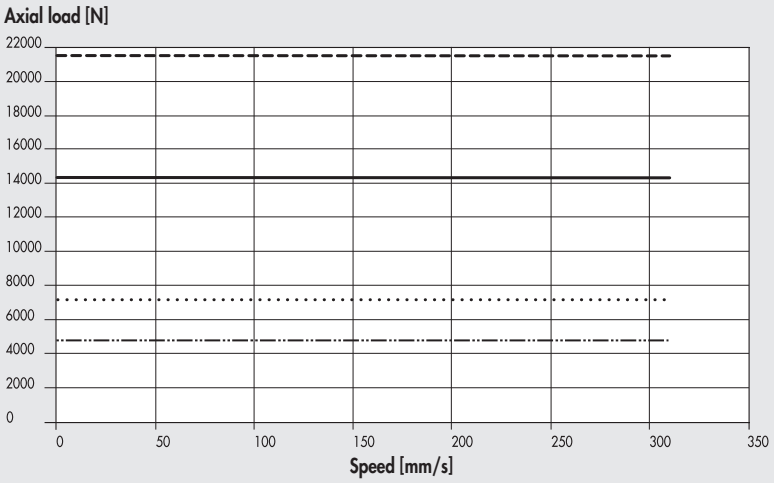

Maximum 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version (1:1)

Nominal 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version (1:1)

Maximum 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) geared version (1:1.5)

Nominal 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) geared version (1:1.5)

Ø 80 with pitch 32 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE (3000W)

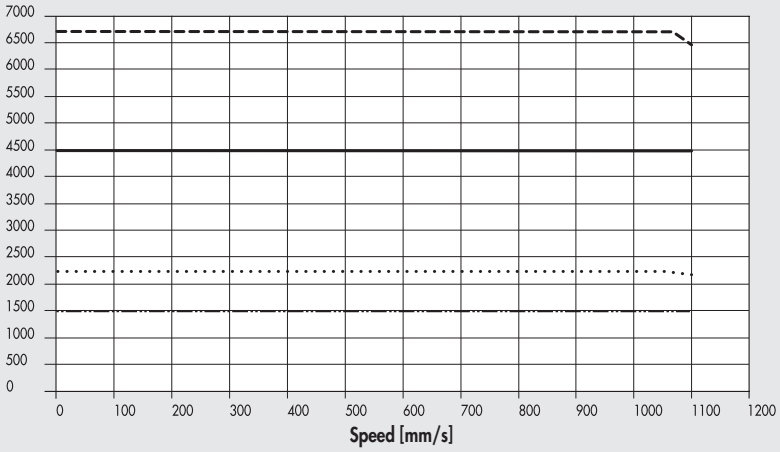

Maximum 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version (1:1)

Nominal 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version (1:1)

Maximum 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) geared version (1:1.5)

Nominal 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) geared version (1:1.5)

Ø 100 - Ø 100 HD with pitch 10 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE (3000W)

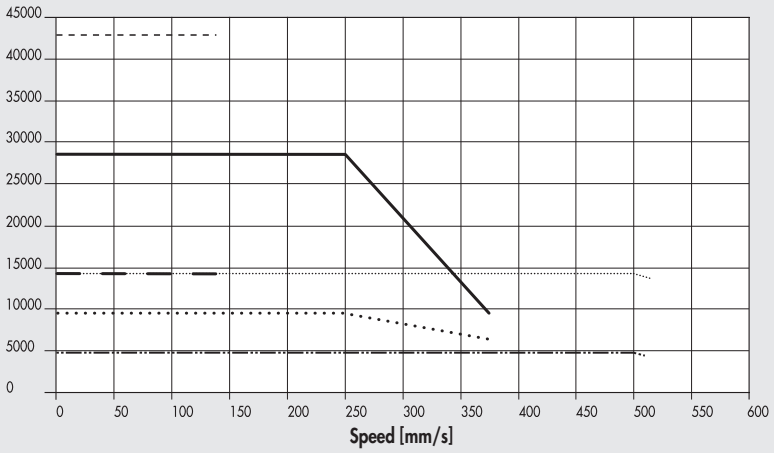

Maximum 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version with gearbox (1:3)*

Nominal 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version with gearbox (1:3)*

Maximum 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) geared version (1:2)

Nominal 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) geared version (1:2)

Maximum 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version (1:1)

Nominal 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version (1:1)

* For the Ø 100 HD, the postponed version with reducer is also available.

Ø 100 with pitch 40 screw, BRUSHLESS motors and BRUSHLESS motors with BRAKE (3000W)

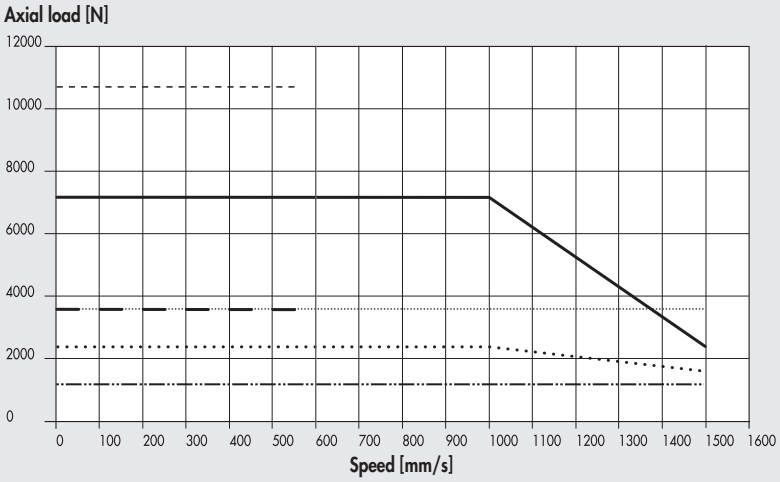

- Maximum 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version with gearbox (1:3)
- Nominal 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version with gearbox (1:3)
- Maximum 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) geared version (1:2)
- Nominal 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) geared version (1:2)
- Maximum 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version (1:1)
- Nominal 37M2770000 or 37M4770000 (with brake) + 37D2600001 (3000W) in-line version (1:1)

LUBRICATION DIAGRAMS

Our electric rod cylinders are pre-greased with permanent grease. It is, however, possible to maintain them by re-lubricating, but before this operation we recommend periodic maintenance, at least once a year, which includes checks of: functionality, noise, wears and plays, if possible motor absorption (to be compared with the previous ones), and only after adding, in case, grease according to the instructions in the manual: a continuous addition of grease, since it is not disposable, could be worse. The quantities in the manual are valid for strokes up to approximately 500 mm. Between 500 mm and 1000 mm double the quantity. Between 1000 mm and 1500 mm triple the quantity.

LUBRICATION OF VERSION WITH NON-ROTATING PISTON ROD

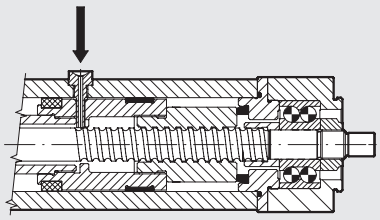

- Retract the piston rod towards the rear head. The piston rod/piston/ball screw system must rest against the buffer of the rear head.
- Unscrew the cap on the lubricator port (see note 1 in the drawing on **next page**).
- Screw the lubricating pin (see accessory on page **A5**.39) into the thread. Make sure you enter the corresponding hole in the piston below.
- Pump grease (code 9910506) using the suitable lubricator according to the quantity in table.
- Unscrew the lubricating pin and make the piston rod perform four complete strokes. The piston rod should end up in the initial (retracted) position.
- Repeat the last two operations.

LUBRICATION OF VERSION WITHOUT NON-ROTATING PISTON ROD

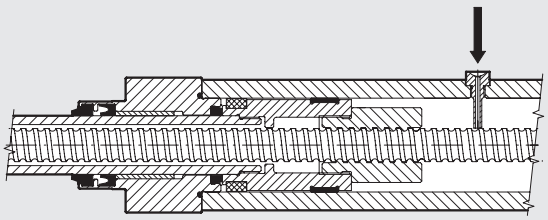

- Extend the piston rod completely. The piston rod/piston/ball screw system must rest against the buffer of the front head.
- Unscrew the cap on the lubricator port (see note 1 in the drawing on **next page**).
- Screw the lubricating pin (see accessory on page **A5**.39) into the thread. Make sure you enter the corresponding hole in the piston below.
- Pump grease (code 9910506) using the suitable lubricator according to the quantity in table.
- Unscrew the lubricating pin and make the piston rod perform four complete strokes. The piston rod should end up in the initial (extended) position.
- Repeat the last two operations.

		Ø 32		Ø 50			Ø 63			Ø 63 HD		Ø 80			Ø 100		Ø 100 HD
Screw pitch (p)	mm	4	12	5	10	16	5	10	20	5	10	5	10	32	10	40	10
Relube grease quantity	g	0.3	0.6	0.9	1.5	2.1	1.5	1.8	3	1.5	1.8	2.1	3.3	4.8	7.2	12.9	7.2
	cc	0.26	0.52	0.77	1.30	1.81	1.30	1.55	2.60	1.30	1.55	1.81	2.84	4.13	6.20	11.10	6.20

N.B.: These are indicative values that can change as a function of the stroke

DIMENSIONS

CYLINDER DIMENSIONS (WITHOUT MOTOR)

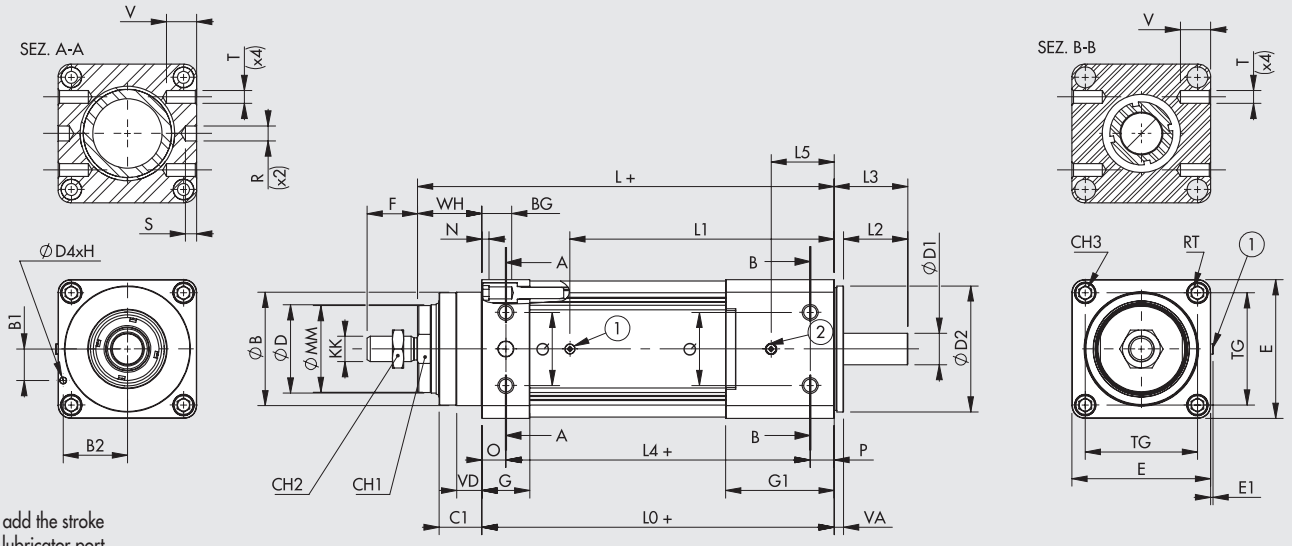

\+ = add the stroke
① = lubricator port
② = lubricator port for the Ø 100 HD (present on all sides)

Ø	ØB (d11)	B1	B2	BG	C1	CH1	CH2	CH3	ØD (f7)	ØD1 (h7)	ØD2	ØD4 (h7)	E	E1	F	G	G1	H	KK	L
32	30	7	19.5	14.5	16	17	17	6	20	6.35	32	3	46	-	22	26	26	9	M10x1.25	160
50	40	7	28	17.5	25	21	24	8	25	10	50	3	64.5	-	32	30	30	9	M16x1.5	194
63	45	9	34.5	17.5	25	26	24	8	30	12	63	3	75.5	0.65	32	32	32	9	M16x1.5	210
63 HD	45	9	34.5	17.5	25	26	24	8	30	12	63	3	75.5	0.65	32	32	46	9	M16x1.5	230
80	60	15	42.5	21	31	41	30	10	45	19	80	3	93	0.5	40	38	67	9	M20x1.5	294
100	90	25	21	21	34	65	30	10	70	24	100	5	110	1.9	40	38	77	9	M20x1.5	321.5
100 HD	90	25	21	21	34	65	30	10	70	25	100	5	110	1.9	40	38	86	9	M20x1.5	330.5

Ø	L0	L1	L2	L3	L4	L5	ØMM	N	O	P	Q	R (h7)	S	T	V	RT	TG	VA	VD	WH
32	134	86.3	23	27	-	-	19	4.5	-	-	-	-	-	-	-	M6	32.5	3	4.5	26
50	157	100.8	24	28.4	-	-	24	5.5	-	-	-	-	-	-	-	M8	46.5	5.5	5.5	37
63	173	112.3	34	39.5	-	-	29	5.5	-	-	-	-	-	-	-	M8	56.5	5.5	6.5	37
63 HD	193	132.3	34	39.5	-	-	29.5	5.5	-	-	-	-	-	-	-	M8	56.5	5.5	6.5	37
80	248	181.1	41.7	47.2	215	-	42	5	19	14	44	10	9	M10	17.5	M10	72	5.5	17.5	46
100	270.5	200.6	46.9	54.9	232.5	-	69	5	19	19	58	12	9	M12	20	M10	89	8	20	51
100 HD	279.5	209.6	50.95	58.45	241.5	50	69	5	19	19	58	12	9	M12	20	M10	89	7.5	20	51

NOTES

DIMENSIONS OF CYLINDERS WITH IN-LINE MOTOR

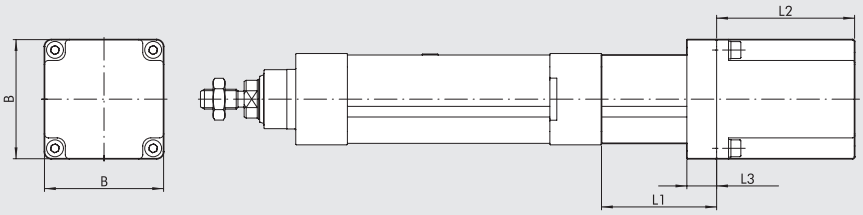

For any missing dimensions, please refer to page **A5**.25

VERSION WITH MOTOR

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	B	L1	L2	L3
32	BRUSHLESS	371032_ _ _ _ _2200	37M2200000	0.64	60	60	62	69.5	15
		371032_ _ _ _ _2220	37M2220000	1.27	60	60	62	95.5	15
		371032_ _ _ _ _220E	37M2200001	0.64	60	60	69.5	105.5	13.5
		371032_ _ _ _ _222E	37M2220001	1.27	60	60	69.5	130.7	13.5
	STEPPING	371032_ _ _ _ _1110	37M1110000	0.8	NEMA 23	56	45	53.8	12
		371032_ _ _ _ _1120	37M1120000	1.2	NEMA 23	56	45	75.8	12
		371032_ _ _ _ _1121	37M1120001	1.2	NEMA 23	56	45	75.8	12
50	BRUSHLESS	371050_ _ _ _ _2330	37M2330000	2.39	80	80	77.4	107.3	35
63	STEPPING	371063_ _ _ _ _1450	37M1450000	6.7	NEMA 34	85.5	63.5	127	16
63 HD	STEPPING	371H63_ _ _ _ _1450	37M1450000	6.7	NEMA 34	85.5	63.5	127	16
		371H63_ _ _ _ _1470	37M1470000	9.3	NEMA 34	86.6	63.5	130	16
80	BRUSHLESS	371080_ _ _ _ _2770	37M2770000	9.5	130	130	120	187.5	26
100	BRUSHLESS	371100_ _ _ _ _2770	37M2770000	9.5	130	130	126	187.5	40
100 HD	BRUSHLESS	371HA1_ _ _ _ _2770	37M2770000	9.5	130	130	133.5	187.5	40

VERSION WITH MOTOR AND BRAKE

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	B	L1	L2	L3
32	BRUSHLESS	371032_ _ _ _ _4200	37M4200000	0.64	60	60	62	97.5	15
		371032_ _ _ _ _4220	37M4220000	1.27	60	60	62	123.5	15
		371032_ _ _ _ _420E	37M4200001	0.64	60	60	69.5	141.6	13.5
		371032_ _ _ _ _422E	37M4220001	1.27	60	60	69.5	166.8	13.5
	STEPPING	371032_ _ _ _ _3220	37M3220000	1.2	60	60	45	151.8	7
		371032_ _ _ _ _3230	37M3230000	2.5	60	60	45	184.5	7
		371032_ _ _ _ _5120	37M5120000	1.2	NEMA 23	56	45	112	12
50	BRUSHLESS	371050_ _ _ _ _4330	37M4330000	2.39	80	80	77.4	143	35
	STEPPING	371050_ _ _ _ _3430	37M3430000	2.9	NEMA 34	86.6	63.4	156.5	9.9
		371050_ _ _ _ _3460	37M3460000	5.5	NEMA 34	86.6	63.4	188.5	9.9
63	STEPPING	371063_ _ _ _ _3460	37M3460000	5.5	NEMA 34	86.6	63.5	188.5	9.9
		371063_ _ _ _ _3450	37M3450000	6.3	NEMA 34	86.6	63.5	188.5	9.9
63 HD	STEPPING	371H63_ _ _ _ _3450	37M3450000	6.3	NEMA 34	86.6	63.5	188.5	16
		371H63_ _ _ _ _3460	37M3460000	5.5	NEMA 34	86.6	63.5	188.5	16
		371H63_ _ _ _ _3470	37M3470000	9.3	NEMA 34	86.6	63.5	220.5	16
80	BRUSHLESS	371080_ _ _ _ _4770	37M4770000	9.5	130	130	120	216	26
100	BRUSHLESS	371100_ _ _ _ _4770	37M4770000	9.5	130	130	126	216	40
100 HD	BRUSHLESS	371HA1_ _ _ _ _4770	37M4770000	9.5	130	130	133.5	216	40

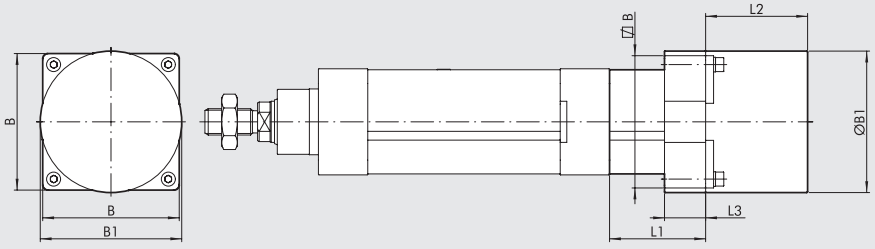

For any missing dimensions, please refer to page **A5**.25

VERSION WITH MOTOR

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	B	Ø B1	L1	L2	L3
50	STEPPING	371050_ _ _ _ _1430	37M1430000	2.4	NEMA 34	83	86	61.4	62	25
		371050_ _ _ _ _1440	37M1440000	4.2	NEMA 34	83	86	61.4	92.2	25
80	STEPPING	371080_ _ _ _ _1890	37M1890000	17.5	NEMA 42	106.4	106.4	102	221	35
100	STEPPING	371100_ _ _ _ _1890	37M1890000	17.5	NEMA 42	110	106.4	109	221	35

DIMENSIONS OF CYLINDERS WITH IN-LINE MOTOR

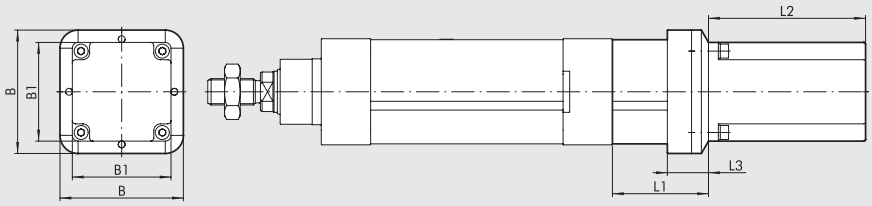

For any missing dimensions, please refer to page **A5**.25

VERSION WITH MOTOR

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	B	B1	L1	L2	L3
50	BRUSHLESS	371050_ _ _ _ _2220	37M2220000	1.27	60	74.5	60	61.4	95.5	25
		371050_ _ _ _ _222E	37M2220001	1.27	60	74.5	60	70.5	130.7	25
		371050_ _ _ _ _233E	37M2330001	2.39	80	92	80	78.1	138.3	29
63	BRUSHLESS	371063_ _ _ _ _2330	37M2330000	2.39	80	94	80	78.5	107.3	25
		371063_ _ _ _ _233E	37M2330001	2.39	80	94	80	89.2	138.3	25
63 HD	BRUSHLESS	371H63_ _ _ _ _2330	37M2330000	2.39	80	94	80	78.5	107.3	25
		371H63_ _ _ _ _2540	37M2540000	3.18	86	94	84.4	78.5	137.1	25
		371H63_ _ _ _ _233E	37M2330001	2.39	80	94	80	89.2	138.3	25
		371H63_ _ _ _ _264E	37M2640000	3.18	100	100	100	99.2	153.3	35
80	BRUSHLESS	371080_ _ _ _ _2540	37M2540000	3.18	86	93	84.4	102	137.1	35
		371080_ _ _ _ _264E	37M2640000	3.18	100	100	100	111	153.3	44

VERSION WITH MOTOR AND BRAKE

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	B	B1	L1	L2	L3
50	BRUSHLESS	371050_ _ _ _ _4220	37M4220000	1.27	60	74.5	60	61.4	123.5	25
		371050_ _ _ _ _422E	37M4220001	1.27	60	74.5	60	70.5	166.8	25
		371050_ _ _ _ _433E	37M4330001	2.39	80	92	80	78.1	178	29
63	BRUSHLESS	371063_ _ _ _ _4330	37M4330000	2.39	80	94	80	78.5	143	25
		371063_ _ _ _ _433E	37M4330001	2.39	80	94	80	89.2	178	25
63 HD	BRUSHLESS	371H63_ _ _ _ _4330	37M4330000	2.39	80	94	80	78.5	143	25
		371H63_ _ _ _ _4540	37M4540000	3.18	86	94	84.4	78.5	163	25
		371H63_ _ _ _ _433E	37M4330001	2.39	80	94	80	89.2	178	25
		371H63_ _ _ _ _464E	37M4640000	3.18	100	100	100	99.2	192.5	35
80	BRUSHLESS	371080_ _ _ _ _4540	37M4540000	3.18	86	93	84.4	102	163	35
		371080_ _ _ _ _464E	37M4640000	3.18	100	100	100	111	192.5	44

DIMENSIONS OF CYLINDERS WITH IN-LINE MOTOR AND GEARBOX

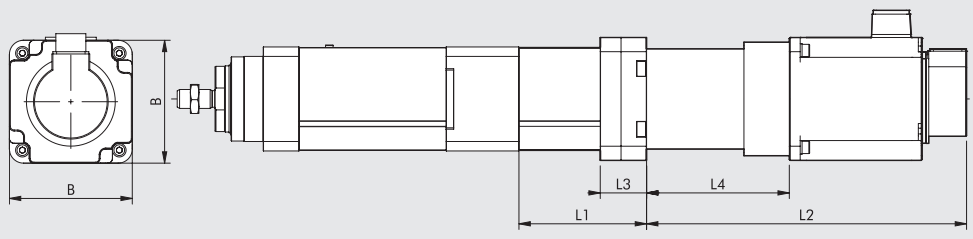

For any missing dimensions, please refer to page **A5**.25

VERSION WITH MOTOR

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Code for gear mounted on the cylinder	Motor torque [Nm]	Coupling flange	B	L1	L2	L3	L4
100	BRUSHLESS	371100_ _ _ _ _6770	37M2770000	37R0364000	9.5	130	130	135	338.5	49	151
100 HD	BRUSHLESS	371HA1_ _ _ _ _6770	37M2770000	37R0364000	9.5	130	130	140.5	338.5	49	151

VERSION WITH MOTOR AND BRAKE

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Code for gear mounted on the cylinder	Motor torque [Nm]	Coupling flange	B	L1	L2	L3	L4
100	BRUSHLESS	371100_ _ _ _ _7770	37M4770000	37R0364000	9.5	130	130	135	367	49	151
100 HD	BRUSHLESS	371HA1_ _ _ _ _7770	37M4770000	37R0364000	9.5	130	130	140.5	367	49	151

DIMENSIONS OF CYLINDERS WITH GEARED MOTOR

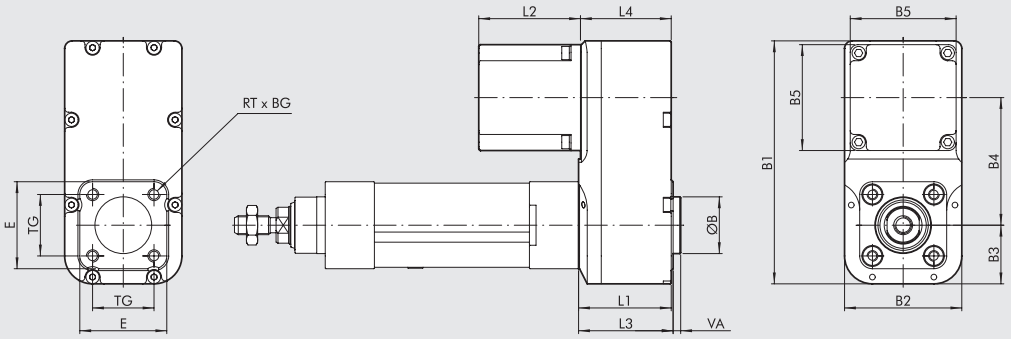

For any missing dimensions, please refer to page **A5**.25

VERSION WITH MOTOR

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	ØB (d11)	B1	B2	B3	B4	B5	BG	E	L1	L2	L3	L4	TG	RT	VA
32	STEPPING	371032_ _ _ _ _ _1110	37M1110000	0.8	NEMA 23	30	128.5	62	31	67.5	56	15	46	49	53.8	50	48	32.5	M6	4
		371032_ _ _ _ _ _1120	37M1120000	1.2	NEMA 23	30	128.5	62	31	67.5	56	15	46	49	75.8	50	48	32.5	M6	4
		371032_ _ _ _ _ _1121	37M1120001	1.2	NEMA 23	30	128.5	62	31	67.5	56	15	46	49	75.8	50	48	32.5	M6	4
63	STEPPING	371063_ _ _ _ _ _1450	37M1450000	6.7	NEMA 34	45	179.5	92	46	87.5	84.5	17	75.5	70	127	72	68	56.5	M8	4
63 HD	STEPPING	371H63_ _ _ _ _ _1450	37M1450000	6.7	NEMA 34	45	179.5	92	46	87.5	85.5	17	75.5	70	127	72	68	56.5	M8	4
80	BRUSHLESS	371080_ _ _ _ _ _2540	37M2540000	3.18	86	45	204.5	115	57	97.5	86	21	-	80.5	137.1	-	-	72	M10	4

VERSION WITH MOTOR AND BRAKE

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	ØB (d11)	B1	B2	B3	B4	B5	BG	E	L1	L2	L3	L4	TG	RT	VA
32	STEPPING	371032_ _ _ _ _ _3220	37M3220000	1.2	60	30	128.5	62	31	67.5	60	15	46	49	151.8	50	48	32.5	M6	4
		371032_ _ _ _ _ _3230	37M3230000	2.5	60	30	128.5	62	31	67.5	60	15	46	49	184.5	50	48	32.5	M6	4
		371032_ _ _ _ _ _5120	37M5120000	1.2	NEMA 23	30	128.5	62	31	67.5	56	15	46	49	112	50	48	32.5	M6	4
80	BRUSHLESS	371080_ _ _ _ _ _4540	37M4540000	3.18	86	45	204.5	115	57	97.5	86	21	-	80.5	163	-	-	72	M10	4

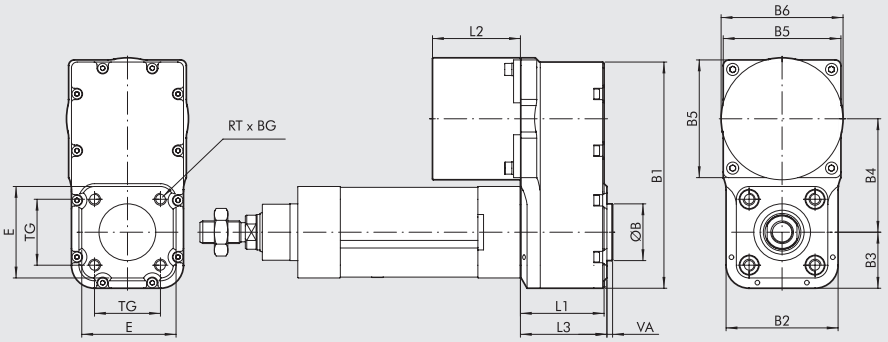

For any missing dimensions, please refer to page **A5**.25

VERSION WITH MOTOR

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	ØB (d11)	B1	B2	B3	B4	B5	ØB6	BG	E	L1	L2	L3	TG	RT	VA
50	STEPPING	371050_ _ _ _ _ _1430	37M1430000	2.4	NEMA 34	40	159.5	79	39.5	80	80	86	17	64.5	59	62	61	46.5	M8	4
		371050_ _ _ _ _ _1440	37M1440000	4.2	NEMA 34	40	159.5	79	39.5	80	83	86	17	64.5	59	92.2	61	46.5	M8	4

METAL WORK PNEUMATIC

DIMENSIONS OF CYLINDERS WITH GEARED MOTOR

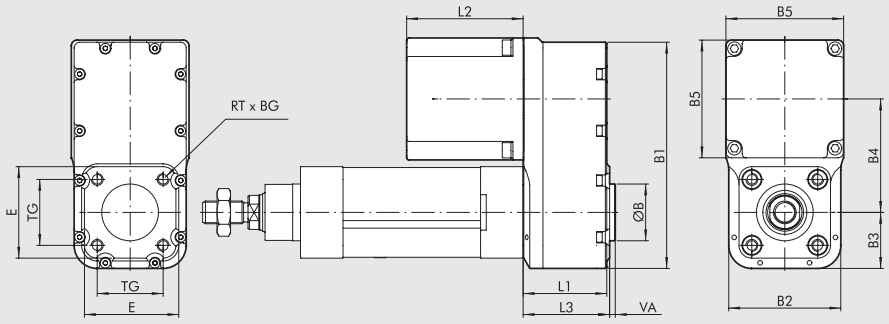

For any missing dimensions, please refer to page **A5**.25

VERSION WITH MOTOR AND BRAKE

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	ØB (d11)	B1	B2	B3	B4	B5	BG	E	L1	L2	L3	TG	RT	VA
50	STEPPING	371050_ _ _ _ _3430	37M3430000	2.9	NEMA 34	40	159.5	79	39.5	80	86.6	17	64.5	59	156.5	61	46.5	M8	4
		371050_ _ _ _ _3460	37M3460000	5.5	NEMA 34	40	159.5	79	39.5	80	86.6	17	64.5	59	188.5	61	46.5	M8	4

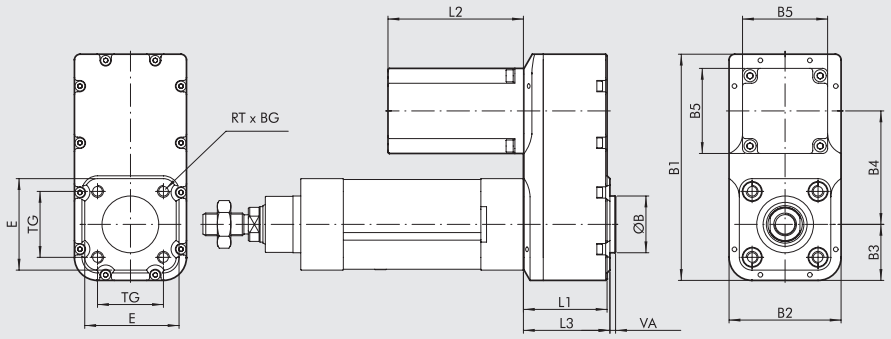

For any missing dimensions, please refer to page **A5**.25

VERSION WITH MOTOR

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	ØB (d11)	B1	B2	B3	B4	B5	BG	E	L1	L2	L3	TG	RT	VA
50	BRUSHLESS	371050_ _ _ _ _2220	37M2220000	1.27	60	40	159.5	79	39.5	80	60	17	64.5	59	95.5	61	46.5	M8	4
		371050_ _ _ _ _222E	37M2220001	1.27	60	40	159.5	79	39.5	80	60	17	64.5	59	130.7	61	46.5	M8	4
		371050_ _ _ _ _233E	37M2330001	2.39	80	40	159.5	80	39.5	75	80	17	64.5	59	138.3	61	46.5	M8	4
63	BRUSHLESS	371063_ _ _ _ _2330	37M2330000	2.39	80	45	179.5	92	46	87.5	80	17	75.5	70	107.3	72	56.5	M8	4
		371063_ _ _ _ _233E	37M2330001	2.39	80	45	179.5	92	46	87.5	80	17	75.5	70	138.3	72	56.5	M8	4
63 HD	BRUSHLESS	371H63_ _ _ _ _2330	37M2330000	2.39	80	45	179.5	92	46	87.5	80	17	75.5	70	107.3	72	56.5	M8	4
		371H63_ _ _ _ _2540	37M2540000	3.18	86	45	179.5	92	46	87.5	86	17	75.5	70	137.1	72	56.5	M8	4
		371H63_ _ _ _ _233E	37M2330001	2.39	80	45	179.5	92	46	87.5	80	17	75.5	70	138.3	72	56.5	M8	4
		371H63_ _ _ _ _264E	37M2640000	3.18	100	45	191.4	100	46	95	100	17	75.5	74.8	153.3	76.8	56.5	M8	4
	STEPPING	371H63_ _ _ _ _1470	37M1470000	9.3	NEMA 34	45	179.5	92	46	87.5	86.6	17	75.5	70	130	72	56.5	M8	4
80	BRUSHLESS	371080_ _ _ _ _264E	37M2640000	3.18	100	45	224.8	130	59	109.8	100	17	-	76.5	153.3	-	72	M10	4

VERSION WITH MOTOR AND BRAKE

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	ØB (d11)	B1	B2	B3	B4	B5	BG	E	L1	L2	L3	TG	RT	VA
50	BRUSHLESS	371050_ _ _ _ _4220	37M4220000	1.27	60	40	159.5	79	39.5	80	60	17	64.5	59	123.5	61	46.5	M8	4
		371050_ _ _ _ _422E	37M4220001	1.27	60	40	159.5	79	39.5	80	60	17	64.5	59	166.8	61	46.5	M8	4
		371050_ _ _ _ _433E	37M4330001	2.39	80	40	159.5	80	39.5	75	80	17	64.5	59	178	61	46.5	M8	4
63	BRUSHLESS	371063_ _ _ _ _4330	37M4330000	2.39	80	45	179.5	92	46	87.5	80	17	75.5	70	143	72	56.5	M8	4
		371063_ _ _ _ _433E	37M4330001	2.39	80	45	179.5	92	46	87.5	80	17	75.5	70	178	72	56.5	M8	4
	STEPPING	371063_ _ _ _ _3460	37M3460000	5.5	NEMA 34	45	179.5	92	46	87.5	86.6	17	75.5	70	188.5	72	56.5	M8	4
		371063_ _ _ _ _3450	37M3450000	6.3	NEMA 34	45	179.5	92	46	87.5	86.6	17	75.5	70	188.5	72	56.5	M8	4
63 HD	BRUSHLESS	371H63_ _ _ _ _4330	37M4330000	2.39	80	45	179.5	92	46	87.5	80	17	75.5	70	143	72	56.5	M8	4
		371H63_ _ _ _ _4540	37M4540000	3.18	86	45	179.5	92	46	87.5	86	17	75.5	70	163	72	56.5	M8	4
		371H63_ _ _ _ _433E	37M4330001	2.39	80	45	179.5	92	46	87.5	80	17	75.5	70	178	72	56.5	M8	4
		371H63_ _ _ _ _464E	37M4640000	3.18	100	45	191.4	100	46	95	100	17	75.5	74.8	192.5	76.8	56.5	M8	4
	STEPPING	371H63_ _ _ _ _3470	37M3470000	9.3	NEMA 34	45	179.5	92	46	87.5	86.6	17	75.5	70	220.5	72	56.5	M8	4
		371H63_ _ _ _ _3450	37M3450000	6.3	NEMA 34	45	179.5	92	46	87.5	86.6	17	75.5	70	188.5	72	56.5	M8	4
		371H63_ _ _ _ _3460	37M3460000	5.5	NEMA 34	45	179.5	92	46	87.5	86.6	17	75.5	70	188.5	72	56.5	M8	4
80	BRUSHLESS	371080_ _ _ _ _464E	37M4640000	3.18	100	45	224.8	130	59	109.8	100	17	-	76.5	192.5	-	72	M10	4

DIMENSIONS OF CYLINDERS WITH GEARED MOTOR

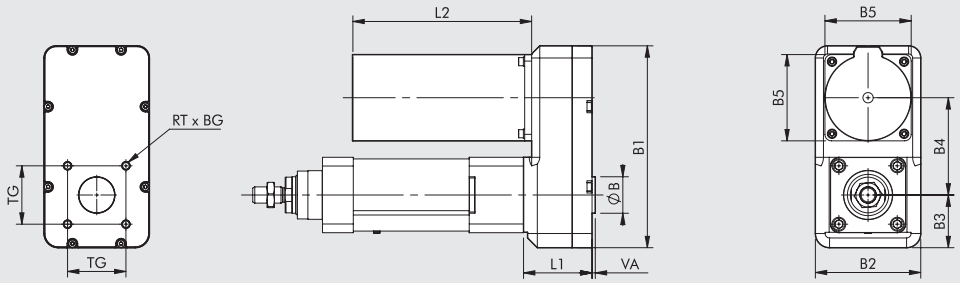

For any missing dimensions, please refer to page **A5**.25

VERSION WITH MOTOR

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	ØB (d11)	B1	B2	B3	B4	B5	BG	L1	L2	TG	RT	VA
80	STEPPING	**371080_ _ _ _ _ _1890**	**37M1890000**	**17.5**	**NEMA 42**	45	249	130	65	120	106.4	21	84.5	221	72	M10	4
100	STEPPING	**371100_ _ _ _ _ _1890**	**37M1890000**	**17.5**	**NEMA 42**	55	285	150	75	120	106.4	21	91.5	221	89	M10	4

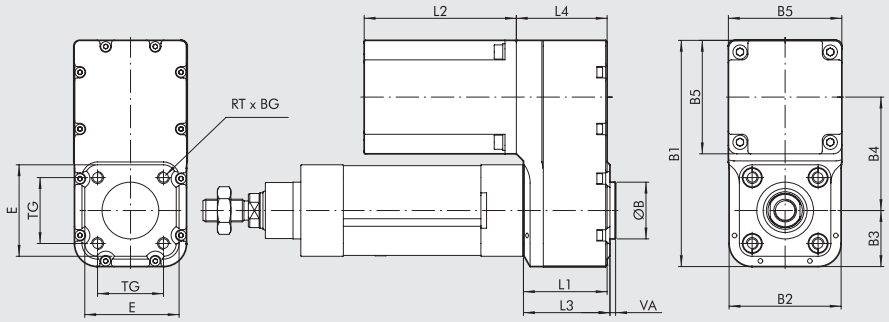

For any missing dimensions, please refer to page **A5**.25

VERSION WITH MOTOR

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	ØB (d11)	B1	B2	B3	B4	B5	BG	E	L1	L2	L3	L4	TG	RT	VA
32	BRUSHLESS	**371032_ _ _ _ _ _2200**	**37M2200000**	**0.64**	**60**	30	128.5	62	31	67.5	60	15	46	49	69.5	50	51	32.5	M6	4
		371032_ _ _ _ _ _2220	**37M2220000**	**1.27**	**60**	30	128.5	62	31	67.5	60	15	46	49	95.5	50	51	32.5	M6	4
		371032_ _ _ _ _ _220E	**37M2200001**	**0.64**	**60**	30	128.5	62	31	67.5	60	15	46	49	105.5	50	51	32.5	M6	4
		371032_ _ _ _ _ _222E	**37M2220001**	**1.27**	**60**	30	128.5	62	31	67.5	60	15	46	49	130.7	50	51	32.5	M6	4
50	BRUSHLESS	**371050_ _ _ _ _ _2330**	**37M2330000**	**2.39**	**80**	40	159.5	79	39.5	80	80	17	64.5	59	107.3	61	64	46.5	M8	4
80	BRUSHLESS	**371080_ _ _ _ _ _2770**	**37M2770000**	**9.5**	**130**	45	249	130	65	119	130	21	-	84.5	187.5	-	-	72	M10	4
100	BRUSHLESS	**371100_ _ _ _ _ _2770**	**37M2770000**	**9.5**	**130**	55	285	150	75	145	130	21	-	91.5	187.5	-	-	89	M10	4
100 HD	BRUSHLESS	**371HA1_ _ _ _ _ _2770**	**37M2770000**	**9.5**	**130**	55	285	150	75	145	130	21	-	91.5	188	-	-	89	M10	4

VERSION WITH MOTOR AND BRAKE

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Motor torque [Nm]	Coupling flange	ØB (d11)	B1	B2	B3	B4	B5	BG	E	L1	L2	L3	L4	TG	RT	VA
32	BRUSHLESS	**371032_ _ _ _ _ _4200**	**37M4200000**	**0.64**	**60**	30	128.5	62	31	67.5	60	15	46	49	67.5	50	51	32.5	M6	4
		371032_ _ _ _ _ _4220	**37M4220000**	**1.27**	**60**	30	128.5	62	31	67.5	60	15	46	49	123.5	50	51	32.5	M6	4
		371032_ _ _ _ _ _420E	**37M4200001**	**0.64**	**60**	30	128.5	62	31	67.5	60	15	46	49	141.6	50	51	32.5	M6	4
		371032_ _ _ _ _ _422E	**37M4220001**	**1.27**	**60**	30	128.5	62	31	67.5	60	15	46	49	166.8	50	51	32.5	M6	4
50	BRUSHLESS	**371050_ _ _ _ _ _4330**	**37M4330000**	**2.39**	**80**	40	159.5	79	39.5	80	80	17	64.5	59	143	61	64	46.5	M8	4
80	BRUSHLESS	**371080_ _ _ _ _ _4770**	**37M4770000**	**9.5**	**130**	45	249	130	65	119	130	21	-	84.5	216	-	-	72	M10	4
100	BRUSHLESS	**371100_ _ _ _ _ _4770**	**37M4770000**	**9.5**	**130**	55	285	150	75	145	130	21	-	91.5	216	-	-	89	M10	4
100 HD	BRUSHLESS	**371HA1_ _ _ _ _ _4770**	**37M4770000**	**9.5**	**130**	55	285	150	75	145	130	21	-	91.5	216	-	-	89	M10	4

METAL WORK PNEUMATIC

DIMENSIONS OF CYLINDERS WITH GEARED MOTOR AND GEARBOX

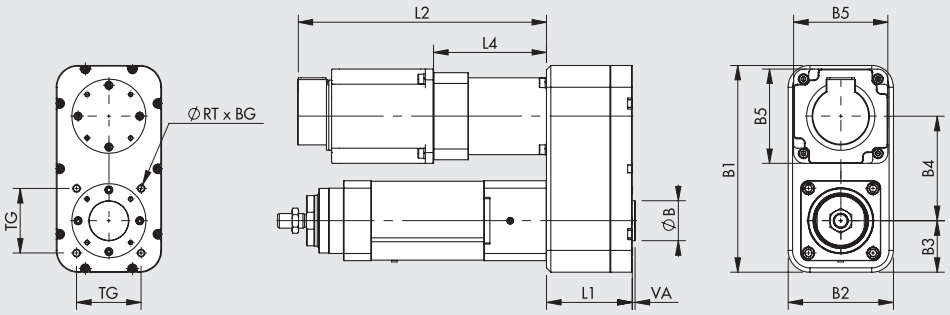

For any missing dimensions, please refer to page **A5**.25

VERSION WITH MOTOR

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Code for gearbox mounted on the cylinder	Motor torque [Nm]	Coupling flange	ØB (d11)	B1	B2	B3	B4	B5	BG	L1	L2	L4	TG	RT	VA
100 HD	BRUSHLESS	**371HA1_____6770**	**37M2770000**	**37R0364000**	**9.5**	**130**	55	285	145	71	144	130	21	118	343	156	89	M10	4

VERSION WITH MOTOR AND BRAKE

Size	Motor type	Code for cylinder complete with motor	Code for motor mounted on the cylinder	Code for gearbox mounted on the cylinder	Motor torque [Nm]	Coupling flange	ØB (d11)	B1	B2	B3	B4	B5	BG	L1	L2	L4	TG	RT	VA
100 HD	BRUSHLESS	**371HA1_____7770**	**37M4770000**	**37R0364000**	**9.5**	**130**	55	285	145	71	144	130	21	118	371.5	156	89	M10	4

NOTES

MOTOR-DRIVE COUPLINGS

MOTOR CODES			DRIVES CODES				
		Metal Work	37D1222000 *	37D1332000 *	37D1442000	37D1552000	37D1362001
		Manufacturer	RTA CSD 94	RTA NDC 96	RTA PLUS A4	RTA PLUS B7	X-MIND B6
Metal Work	Manufacturer		(4.4A 24-48VDC)	(6A 2-75VDC)	(6A 77-140VDC)	(10A 28-62VAC) ●	(6A 110-230VAC) ●
STEPPING MOTORS							
37M1110000	SANYO DENKI 103-H7123-1749 (4A 75V max)		Ø32	Ø32 ◆	-	Ø32 ■	-
37M1120000	SANYO DENKI 103-H7126-1740 (4A 75V max)		Ø32	Ø32 ◆	-	Ø32 ■	-
37M1120001	SANYO DENKI 103-H7126-6640 (5.6A 75V max)		-	Ø32	-	Ø32 ■	-
37M1430000	SANYO DENKI 103-H8221-6241 (6A 140V max)		-	Ø50	Ø 50	Ø50 ◆	Ø50 ▲
37M1440000	SANYO DENKI 103-H8222-6340 (6A 140V max)		-	Ø50	Ø 50	Ø50 ◆	Ø50 ▲
37M1450000	SANYO DENKI SM-2863-5255 (6A 140V max)		-	Ø63 - Ø63 HD	Ø63 - Ø63 HD	Ø63 - Ø63 HD ◆	Ø63 - Ø63 HD ▲
37M1470000	B&R 80MPH6.101S000-01 (10A 80V max)		-	-	-	Ø63 HD	-
37M1890000	SANYO DENKI 103-H89223-6341 (6A 230V max)		-	-	-	-	Ø80 - Ø100
STEPPING MOTORS WITH BRAKE							
37M5120000	SANYO DENKI 103-H7126-1710B (4A 75V max)		Ø32	Ø32 ◆	-	Ø32 ■	-
STEPPING MOTORS WITH BRAKE + ENCODER							
37M3220000	B&R 80MPF3.500D114-01 (5A 80V max)		-	Ø32 ◆	Ø32 ■	Ø32 ■	
37M3230000	B&R 80MPF5.500D114-01 (5A 80V max)		-	Ø32 ◆	Ø32 ■	Ø32 ■	
37M3430000	B&R 80MPH1.600D114-01 (6A 80V max)		-	Ø50	Ø50 ▲	Ø50 ◆	
37M3460000	B&R 80MPH3.600D114-01 (6A 80V max)		-	Ø50 - Ø63 - Ø63 HD	Ø50 - Ø63 - Ø63 HD ▲	Ø50 - Ø63 - Ø63 HD ◆	
37M3450000	B&R 80MPH4.101D114-01 (10A 80V max)		-	-	-	Ø63 - Ø63 HD	
37M3470000	B&R 80MPH6.101D114-01 (10A 80V max)		-	-	-	Ø63 HD	

✱ In all applications requiring motor powered up to 6A / 55VDC, the programmable drive **e**.drive, code 37D1332002, can be used.
◆ **Important!** Limit current
■ **Important!** Limit current and voltage
▲ **Important!** Limit voltage
● **Important!** AC drive to continuous voltage VDC = VAC · $\sqrt{2}$

MOTOR CODES			DRIVES CODES					
		Metal Work	37D2400008	37D2200001	37D2300000	37D2400007	37D2400006	37D2600001
		Manufacturer	SANYO DENKI RS3A03	DELTA ASD-A2-0221-M	DELTA ASD-A2-0421-M	DELTA ASD-A2-0721-M	DELTA ASD-A2-1021-M	DELTA ASD-A2-3043-M
Metal Work	Manufacturer		(30A 200-1000 W)	(200W)	(400W)	(750W)	(1000W)	(3000W)
BRUSHLESS MOTORS								
37M2200000	SANYO DENKI R2AA06020FXH11M (200W)		Ø32	-	-	-	-	-
37M2220000	SANYO DENKI R2AA06040FXH11M (400W)		Ø32 - Ø50	-	-	-	-	-
37M2330000	SANYO DENKI R2AA08075FXH11M (750W)		Ø50 - Ø63 - Ø63 HD	-	-	-	-	-
37M2540000	SANYO DENKI R2AAB8100HXH29M (1000W)		Ø63 HD - Ø80	-	-	-	-	-
37M2200001	DELTA ECMA-C20602RS (200W)		-	Ø32	-	-	-	-
37M2220001	DELTA ECMA-C20604RS (400W)		-	-	Ø32 - Ø50	-	-	-
37M2330001	DELTA ECMA-C20807RS (750W)		-	-	-	Ø50 - Ø63 - Ø63HD	-	-
37M2640000	DELTA ECMA-C21010R9 (1000W)		-	-	-	-	Ø63HD - Ø80	-
37M2770000	DELTA ECMA-J11330R4 (3000W)		-					Ø80 - Ø100 - Ø100 HD
BRUSHLESS MOTORS WITH BRAKE								
37M4200000	SANYO DENKI R2AA06020FCH11M (200W)		Ø32					-
37M4220000	SANYO DENKI R2AA06040FCH11M (400W)		Ø32 - Ø50					-
37M4330000	SANYO DENKI R2AA08075FCH11M (750W)		Ø50 - Ø63 - Ø63 HD					-
37M4540000	SANYO DENKI R2AAB8100HCH29M (1000W)		Ø63 HD - Ø80					-
37M4200001	DELTA ECMA-C20602SS (200W)		-	Ø32	-	-	-	-
37M4220001	DELTA ECMA-C20604SS (400W)		-	-	Ø32 - Ø50	-	-	-
37M4330001	DELTA ECMA-C20807SS (750W)		-	-	-	Ø50 - Ø63 - Ø63HD	-	-
37M4640000	DELTA ECMA-C21010S9 (1000W)		-	-	-	-	Ø63HD - Ø80	-
37M4770000	DELTA ECMA-J11330S4 (3000W)		-					Ø80 - Ø100 - Ø100 HD

KEY TO CODES FOR ELECTRIC CYLINDER SERIE ELEKTRO ISO 15552

KEY TO CODES CYLINDER WITHOUT MOTOR

CYL	37 TYPE	1	032 SIZE	0100 STROKE	1 SCREW PITCH	5 VERSION
	37 Electric actuators	**1** ISO 15552 electric cylinder	**032** 32 **050** 50 **063** 63 ◆ **H63** 63 Heavy Duty ◀ **080** 80 ◀ **100** 100 ▼ **HA1** 100 Heavy Duty		**1** Pitch 4 **2** Pitch 5 **4** Pitch 10 **5** Pitch 12 **6** Pitch 16 **7** Pitch 20 **8** Pitch 32 **9** Pitch 40	**5** Without non-rotating IP40 **6** With non-rotating IP40 **7** Without non-rotating IP55/IP65 **8** With non-rotating IP55/IP65

N.B.: For the possible ordering codes, please refer to the next page.
◆ Only with screw pitch 5 or pitch 10.
◀ Only for versions 7 and 8.
▼ Only with screw pitch 10.

N.B.: An piston rod anti-rotation system must be used. If the piston rod is not fixed firmly to an element, a flange or to any other device preventing it from rotating, a cylinder in the anti-rotation version must be used.

KEY TO CODES CYLINDER WITH MOTOR

							DRIVE			
CYL	37 TYPE	1	032 SIZE	0100 STROKE	1 SCREW PITCH	1 VERSION	1 MOTOR ✱	2 FLANGE	2 TORQUE	0
	37 Electric actuators	**1** ISO 15552 electric cylinder	**032** 32 **050** 50 **063** 63 ◆ **H63** 63 Heavy Duty ◀ **080** 80 ◀ **100** 100 ▼ **HA1** 100 Heavy Duty		**1** Pitch 4 **2** Pitch 5 **4** Pitch 10 **5** Pitch 12 **6** Pitch 16 **7** Pitch 20 **8** Pitch 32 **9** Pitch 40	**IN-LINE** ● **1** Without non-rotating IP40/IP20 ● **2** With non-rotating IP40/IP20 ■ **3** Without non-rotating IP55/IP65 ■ **4** With non-rotating IP55/IP65 **GEARED** ● **5** Without non-rotating IP40/IP20 ● **6** With non-rotating IP40/IP20 ■ **7** Without non-rotating IP55/IP65 ■ **8** With non-rotating IP55/IP65	**1** STEPPING **2** BRUSHLESS **3** STEPPING with BRAKE + Encoder **4** BRUSHLESS with BRAKE **5** STEPPING with BRAKE without Encoder **6** BRUSHLESS with gearbox **7** BRUSHLESS with BRAKE + gearbox	**1** NEMA 23 **2** 60 **3** 80 **4** NEMA 34 **5** 86 **6** 100 **7** 130 **8** NEMA 42	**0** 0 - 0.79 Nm **1** 0.8 - 1.19 Nm **2** 1.2 - 2.19 Nm **3** 2.2 - 3 Nm **4** 3.01 - 5 Nm **5** 6.21 - 7 Nm **6** 5.01 - 6.2 Nm **7** 7.01 - 10 Nm **9** 15.01 - 25 Nm	**0** Base **1** Greater rpm ✚ **E** Type "E"

N.B.: The Orderable configurations are shown on the next page.
◆ Only with screw pitch 5 or pitch 10.
◀ Only for versions 3, 4, 7 and 8.
▼ Only with screw pitch 10.
● Version IP40 available for all STEPPING and BRUSHLESS motors, for only the sizes 32, 50 and 63, with the exception of motor code 37M5120000 which it is IP20.
■ Version IP55 available for STEPPING motors, for only the sizes 50, 63, 80 and 100 all the motors, with the exception of motor code 37M1470000; for Ø 32 only for motor code 37M1120001; version IP65 available for BRUSHLESS motors, BRUSHLESS with BRAKE and STEPPING with BRAKE + ENCODER motors (all sizes).
✚ Identifies configuration with Delta BRUSHLESS motors.
✱ On request available versions with gearbox with reduction ratios other than those eventually foreseen as standard.

N.B.: An piston rod anti-rotation system must be used. If the piston rod is not fixed firmly to an element, a flange or to any other device preventing it from rotating, a cylinder in the anti-rotation version must be used.

POSSIBLE ORDERING CODES

Ø 32

Drive / Version / Screw pitch

371032_ _ _ _			
	1	1	1110
	5	2	1120
		5	1121
		6	5120
			2200
			220E
			2220
			222E
			3220
			3230
			4200
			420E
			4220
			422E
		3	1121
		4	2200
		7	220E
		8	2220
			222E
			3220
			3230
			4200
			420E
			4220
			422E

_ _ _ _ = Enter the stroke in mm

Ø 50

Drive / Version / Screw pitch

371050_ _ _ _			
	2	1	1430
	4	2	1440
	6	3	2220
		4	222E
		5	2330
		6	233E
		7	3430
		8	3460
			4220
			422E
			4330
			433E

_ _ _ _ = Enter the stroke in mm

Ø 63

Drive / Version / Screw pitch

371063_ _ _ _			
	2	1	1450
	4	2	2330
	7	3	233E
		4	3450
		5	3460
		6	4330
		7	433E
		8	

_ _ _ _ = Enter the stroke in mm

Ø 63 HD

Drive / Version / Screw pitch

371H63_ _ _ _			
	2	1	1450
	4	2	1470
		5	2330
		6	233E
			2540
			264E
			3450
			3460
			3470
			4330
			433E
			4540
			464E
		3	1450
		4	2330
		7	233E
		8	2540
			264E
			3450
			3460
			3470
			4330
			433E
			4540
			464E

_ _ _ _ = Enter the stroke in mm

Ø 80

Drive / Version / Screw pitch

371080_ _ _ _				Transmission ratio ✱
	2	3	1890	1
		4	2540	1
			264E	1
			4540	1
			464E	1
		7	1890	1
		8	2540	4/5
			264E	4/5
			4540	4/5
			464E	4/5
	4	3	1890	1
	8	4	2540	1
			264E	1
			2770	1
			4540	1
			464E	1
			4770	1
		7	1890	1
		8	2540	4/5
			264E	4/5
			2770	2/3
			4540	4/5
			464E	4/5
			4770	2/3

_ _ _ _ = Enter the stroke in mm

Ø 100

Drive / Version / Screw pitch

371100_ _ _ _				Transmission ratio ✱
	4	3	1890	1
	9	4	2770	1
			4770	1
			6770	1/3
			7770	1/3
		7	1890	1
		8	2770	1/2
			4770	1/2

_ _ _ _ = Enter the stroke in mm

Ø 100 HD

Drive / Version / Screw pitch

371HA1_ _ _ _				Transmission ratio ✱
	4	3	2770	1
		4	4770	1
			6770	1/3
			7770	1/3
		7	2770	1/2
		8	4770	1/2
			6770	1/3
			7770	1/3

_ _ _ _ = Enter the stroke in mm

✱ For sizes Ø80, Ø100 and Ø100 HD the standard transmission ratio depends on screw pitch, version and motorization. For the other sizes the standard transmission ratio is 1.

METAL WORK PNEUMATIC

NOTES

ACCESSORIES FOR ELECTRIC CYLINDER SERIES ELEKTRO ISO 15552

N.B.: Where specified, limit the maximum axial loads (Fmax) according to the electric cylinders

FOOT - MODEL A

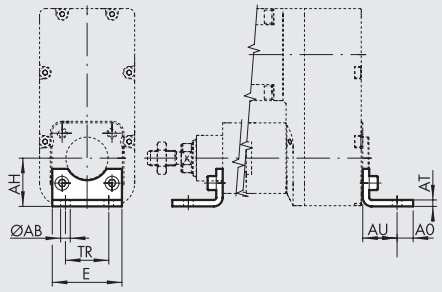

STEEL

Code	Ø	Ø AB	AH	AO	AT	AU	TR	E	Weight [g]	Fmax [N]
W0950322001	32	7	32	11	4	24	32	45	76	1600
W0950502001	50	9	45	15	5	32	45	65	162	4000
W0950632001	63	9	50	15	5	32	50	75	266	6000
W0950632001	63 HD	9	50	15	5	32	50	75	266	6000
W095E802001	80	12	68.5*	20	6	41	63	95	414	10000
W095EA12001	100	14	79*	25	6	41	75	115	518	16000
W095EA12001	100 HD	14	79*	25	6	41	75	115	518	16000

* Dimensions not to ISO 15552
Note: Individually packed with 2 screws

FOOT ON CYLINDER HEADS

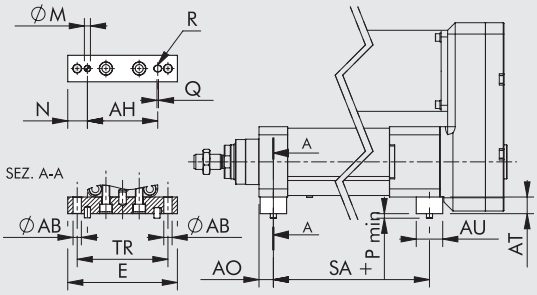

STEEL

Code	Ø	Ø AB	AH	AO	AT	AU	TR	E	ØM H7	N	P	Q	R H7	SA	Weight [g]	Fmax [N]
0950807042	80	11	93	19	22	35	120	145	8	26	6	2	8	215	770	10000
0951007042	100	13	111	19	24	35	140	165	8	27	6	2	8	232.5	945	16000
0951007042	100 HD	13	111	19	24	35	140	165	8	27	6	2	8	241.5	945	16000

Note: Individually packed with 2 screws, 3 pins

FEMALE HINGE - MODEL B

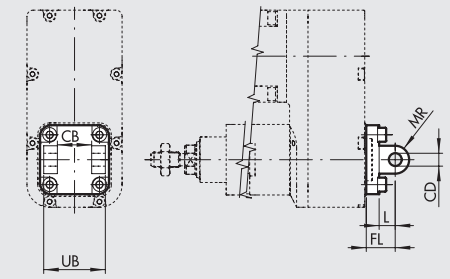

ALUMINIUM

Code	Ø	UB	CB H14	FL	CD H9	MR	L	Weight [g]	Fmax [N]
W0950322003	32	45	26	22	10	10	12	116	800
W0950502003	50	60	32	27	12	12	15	252	2000
W0950632003	63	70	40	32	16	16	20	394	3000
W0950632003	63 HD	70	40	32	16	16	20	394	3000

STEEL

Code	Ø	UB	CB H14	FL	CD H9	MR	L	Weight [g]	Fmax [N]
W095E322003	32	45	26	22	10	10	13	348	1600
W095E502003	50	60	32	27	12	12	16	756	4000
W095E632003	63	70	40	32	16	15	22	1182	6000
W095E632003	63 HD	70	40	32	16	15	22	1182	6000
W095E802003	80	90	50	36	16	16	22	2010	10000
W095EA12003	100	110	60	41	20	20	27	3255	16000
W095EA12003	100 HD	110	60	41	20	20	27	3255	16000

Note: Supplied with 4 screws, 4 washers, 2 snap-rings, 1 pin

MALE HINGE - MODEL BA

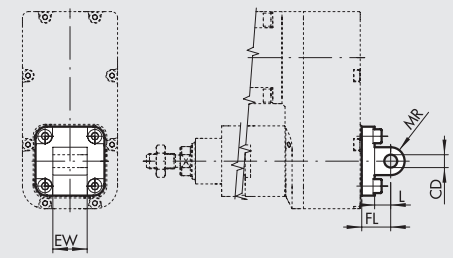

ALUMINIUM

Code	Ø	EW	FL	MR	CD H9	L	Weight [g]	Fmax [N]
W0950322004	32	26	22	10	10	13	94	800
W0950502004	50	32	27	12	12	16	220	2000
W0950632004	63	40	32	16	16	22	316	3000
W0950632004	63 HD	40	32	16	16	22	316	3000

STEEL

Code	Ø	EW	FL	MR	CD H9	L	Weight [g]	Fmax [N]
W095E322004	32	26	22	10	10	13	282	1600
W095E502004	50	32	27	12	12	16	660	4000
W095E632004	63	40	32	16	16	22	948	6000
W095E632004	63 HD	40	32	16	16	22	948	6000
W095E802004	80	50	36	16	16	22	1734	10000
W095EA12004	100	60	41	20	20	27	2550	16000
W095EA12004	100 HD	60	41	20	20	27	2550	16000

Note: Supplied with 4 screws.

METAL WORK PNEUMATIC

ARTICULATED MALE HINGE - MODEL BAS

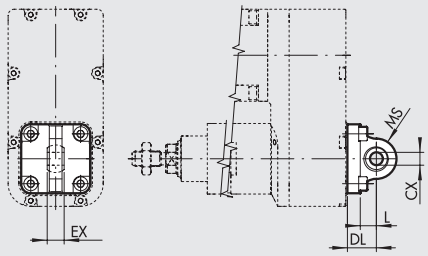

ALUMINIUM

Code	Ø	DL	MS	L	CX H9	EX	Weight [g]	Fmax [N]
W0950322006	32	22	16	12	10	14	106	800
W0950502006	50	27	21	15	12	16	236	2000
W0950632006	63	32	23	20	16	21	336	3000
W0950632006	63 HD	32	23	20	16	21	336	3000

STEEL

Code	Ø	DL	MS	L	CX H9	EX	Weight [g]	Fmax [N]
W095E322006	32	22	15	14	10	14	318	1600
W095E502006	50	27	20	17	16	21	708	4000
W095E632006	63	32	23	22	16	21	1008	6000
W095E632006	63 HD	32	23	22	16	21	1008	6000
W095E802006	80	36	27	23	20	25	1716	10000
W095EA12006	100	41	30	28	20	25	2520	16000
W095EA12006	100 HD	41	30	28	20	25	2520	16000

Note: Supplied with 4 screws, 4 washers

CETOP HINGE FOR MODEL B - MODEL GL

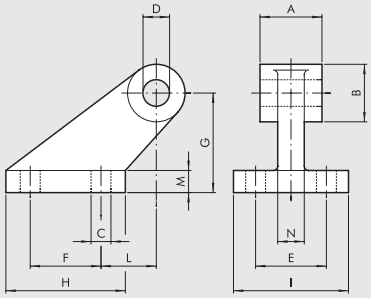

ALUMINIUM

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]	Fmax [N]
W0950322008	32	26	19	7	10	25	20	32	37	41	18	8	10	96	800
W0950502008	50	32	26	9	12	32	32	45	54	52	25	10	12	212	2000
W0950632008	63	40	33	11	16	40	50	63	75	63	32	12	15	440	3000
W0950632008	63 HD	40	33	11	16	40	50	63	75	63	32	12	15	440	3000

Note: Supplied with 4 screws, 4 washers

COUNTER-HINGE FOR MODEL B - MODEL GS

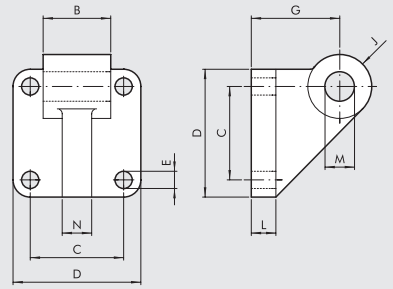

ALUMINIUM

Code	Ø	B	C	D	E	G	J	L	M	N	Weight [g]	Fmax [N]
W0950322108	32	26	32.5	45	7	32	11	10	10	10	106	800
W0950502108	50	32	46.5	65	9	45	13	12	12	12	252	2000
W0950632108	63	40	56.5	75	9	50	17	12	16	15	350	3000
W0950632108	63 HD	40	56.5	75	9	50	17	12	16	15	350	3000

Note: Supplied with 4 screws, 4 washers

ISO 15552 COUNTER-HINGE FOR MODEL B - MODEL AB7



ALUMINIUM

Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]	Fmax [N]
W0950322017	32	26	20	6.6	10	38	18	32	31	51	3	8	10	21	3	60	800
W0950502017	50	32	26	9	12	50	30	45	45	65	3	12	16	21	3	162	2000
W0950632017	63	40	30	9	16	52	35	50	50	67	2	14*	16	21	3	191	3000
W0950632017	63 HD	40	30	9	16	52	35	50	50	67	2	14*	16	21	3	191	3000

STEEL

Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]	Fmax [N]
W095E322017	32	26	20	6.6	10	38	18	32	31	51	3	8	8.5	20	5	180	1600
W095E502017	50	32	26	9	12	50	30	45	45	65	3	12	13.5	30	5	486	4000
W095E632017	63	40	30	9	16	52	35	50	50	67	2	12	13.5	35	5	573	6000
W095E632017	63 HD	40	30	9	16	52	35	50	50	67	2	12	13.5	35	5	573	6000
W095E802017	80	50	30	11	16	66	40	63	60	86	7	14	15	45	5	996	10000
W095EA12017	100	60	38	11	20	76	50	71	70	96	5	15	15	55	5	1566	16000
W095EA12017	100 HD	60	38	11	20	76	50	71	70	96	5	15	15	55	5	1566	16000

* Dimensions not to ISO 15552

FRONT FLANGE - MODEL C

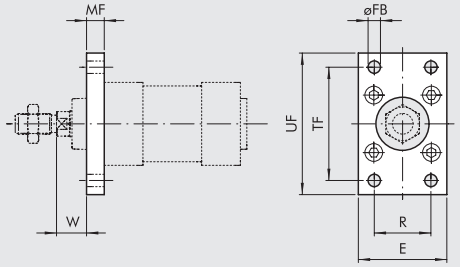

Code	Ø	TF	UF	E	MF	R	øFB	W	Weight [g]	Fmax [N]
W0950322002	32	64	80	50	10	32	7	16	246	1600
W0950502002	50	90	110	65	12	45	9	25	522	5000
W0950632002	63	100	120	75	12	50	9	25	670	7000
W0950632002	63 HD	100	120	75	12	50	9	25	670	7000

Note: Supplied with 4 screws

ROD NUT - MODEL S



Code	Ø	F	H	CH	Weight [g]
0950322010	32	M10x1.25	6	17	6
0950502010	50	M16x1.5	8	24	20
0950502010	63	M16x1.5	8	24	20
0950502010	63 HD	M16x1.5	8	24	20
0950802010	80	M20x1.5	9	30	32
0950802010	100	M20x1.5	9	30	32
0950802010	100 HD	M20x1.5	9	30	32

Note: Individually packed

FORK MODEL GK-M



Code	Ø	øM	C	B	A	L	F	D	N	Weight [g]
W0950322020	32	10	20	10	20	52	40	M10x1.25	26	92
W0950502020	50	16	32	16	32	83	64	M16x1.5	40	340
W0950502020	63	16	32	16	32	83	64	M16x1.5	40	340
W0950502020	63 HD	16	32	16	32	83	64	M16x1.5	40	340
W0950802020	80	20	40	20	40	105	80	M20x1.5	40	690
W0950802020	100	20	40	20	40	105	80	M20x1.5	48	690
W0950802020	100 HD	20	40	20	40	105	80	M20x1.5	48	690

Note: Individually packed

ROD EYE - MODEL GA-M

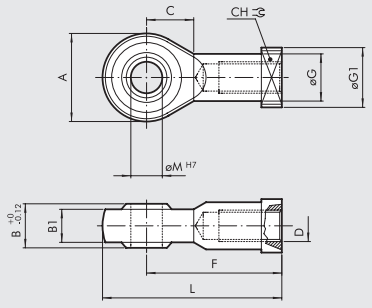

Code	Ø	øM	C	B1	B	A	L	F	D	øG	CH	øG1	Weight [g]
W0950322025	32	10	15	10.5	14	28	57	43	M10x1.25	15	17	19	70
W0950502025	50	16	22	15	21	42	85	64	M16x1.5	22	22	27	216
W0950502025	63	16	22	15	21	42	85	64	M16x1.5	22	22	27	216
W0950502025	63 HD	16	22	15	21	42	85	64	M16x1.5	22	22	27	216
W0950802025	80	20	26	18	25	50	102.5	77	M20x1.5	27.5	30	34	396
W0950802025	100	20	26	18	25	50	102.5	77	M20x1.5	27.5	30	34	396
W0950802025	100 HD	20	26	18	25	50	102.5	77	M20x1.5	27.5	30	34	396

Note: Individually packed

SELF ALIGNING ROD COUPLER - MODEL GA-K



Code	Ø	A	B	C	D	øF	øE	SW1	SW2	SW3	SW4	SW5	Weight [g]
W0950322030	32	M10x1.25	20	20	71	22	4	12	30	30	19	17	216
W0950502030	50	M16x1.5	32	32	103	32	4	20	41	41	30	24	620
W0950502030	63	M16x1.5	32	32	103	32	4	20	41	41	30	24	620
W0950502030	63 HD	M16x1.5	32	32	103	32	4	20	41	41	30	24	620
W0950802030	80	M20x1.5	40	40	119	32	4	20	41	41	30	30	680
W0950802030	100	M20x1.5	40	40	119	32	4	20	41	41	30	30	680
W0950802030	100 HD	M20x1.5	40	40	119	32	4	20	41	41	30	30	680

Note: Individually packed

METAL WORK PNEUMATIC

INTERMEDIATE HINGE - MODEL EN

+ = ADD THE STROKE

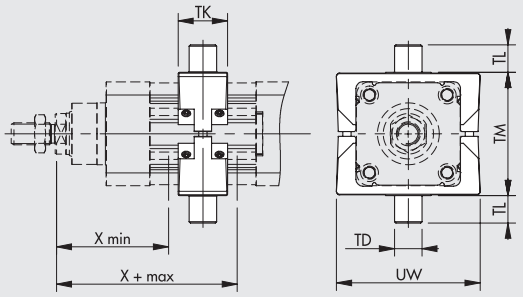

STEEL

Code	Ø	X (min)	X (max) IN LINE	X (max) GEARED	TM	TL	TD e 9	TK	UW	Weight [g]	Fmax [N]	T [Nm] ◆
0950322107	**32**	63	123	*	50	12	12	22	65	170	500	2
0950502107	**50**	83	148	*	75	16	16	28	95	595	1200	6
0950632107	**63**	88	163	*	90	20	20	36	105	960	2000	10
0950632107	**63 HD**	88	163	*	90	20	20	36	105	960	2000	10

* Depending on motor length
◆ Reccommended tightening torque of grub screws
Note: Supplied with 8 grub screws, 2 pins

COUNTER-HINGE FOR MODEL EN - MODEL EL



Code	Ø	A	A_1	B	C	C_1	D_1	D_2	D	E	H	øL	Weight [g]
W0950322009	**32**	46	32	18	30	15	11	7	12	6.5	10.5	22	162
W0950402009	**50**	55	36	21	36	18	15	9	16	8.5	12	28	278
W0950632009	**63**	65	42	23	40	20	18	11	20	10.5	13	35	414
W0950632009	**63 HD**	65	42	23	40	20	18	11	20	10.5	13	35	414

Note: 2-pieces pack with 4 screws

GREASING NEEDLE

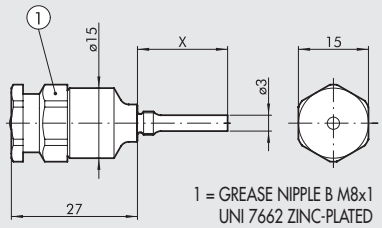

1 = GREASE NIPPLE B M8x1
UNI 7662 ZINC-PLATED

Code	Ø	Pitch	X
0950327108	**32**	-	12
0950507108	**50**	-	19.3
0950637108	**63**	-	23.6
0950637108	**80**	-	23.6
0950637108	**100**	10	23.6
0951007108	**100**	40	28.6

Note: Individually packed

GREASE



Code	Description	Weight [g]
9910506	Grease pipe RHEOLUBE 363 AX1	400

RETRACTABLE SENSOR

For codes and technical data, see **chapter A6**.

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



POSITION SENSORS

LTS



LTL



For technical data and usage strokes see chapter A6.

GUIDE UNIT



Version	Code	Bore	Type
Sliding on bronze bushings (GDH)			
	**W0700322...**	32*	UNIT MW DH 032...
	W0700502...	50	UNIT MW DH 050...
	W0700632...	63	UNIT MW DH 063...
	W0700E802...	80	UNIT MW DH 080...
	W070EA12...	100	UNIT MW DH 100...
	* Also available in V-Lock version (see **chapter A3**).		
	Note: The guide units must only be used with anti-rotation cylinders.		
	To complete the type and code, add the 3-digit stroke (e.g. 50=050)		
	For technical data and dimensions, see **chapter A1**.		
Sliding on ball bearing (GDM)			
	**W0700323...**	32*	UNIT MW DM 032...
	W0700503...	50	UNIT MW DM 050...
	W0700633...	63	UNIT MW DM 063...
	W0700E803...	80	UNIT MW DM 080...
	W070EA13...	100	UNIT MW DM 100...
	* Also available in V-Lock version (see **chapter A3**).		
	Note: The guide units must only be used with anti-rotation cylinders.		
	To complete the type and code, add the 3-digit stroke (e.g. 50=050)		
	For technical data and dimensions, see **chapter A1**.		

DRIVES

For motor-drive couplings see table on page **A5**.32

NOTES

METAL WORK PNEUMATIC

SPARE PARTS

ELEKTRO ISO 15552 Ø 100 - Ø 100 HD GEARBOX

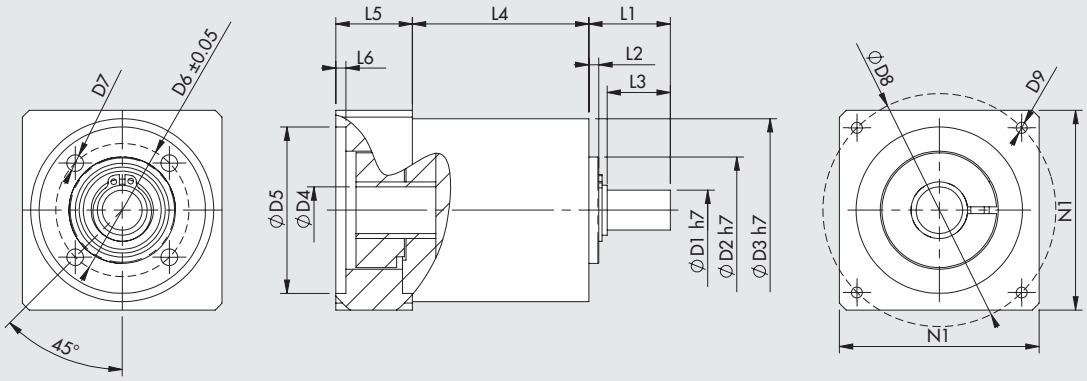

Code	Description	Application	C_{OUT} nominal [Nm]	N_{IN} nominal [1/min]	J reduced to motor shaft [kgmm²]	Mass [kg]	D1	D2	D3	D4	D5	D6	D7	D8	D9	L1	L2	L3	L4	L5	L6	N1
37R0364000	Gearbox MP105 1:3	Elektro ISO 15552 Ø 100 - Ø 100 HD	100	2500	222	6.5	25	70	106	24	110	85	M8	145	M8x20	57.5	5	50.5	107.5	48	6.5	120

C_{OUT} = nominal output torque N_{IN} = nominal input speed J = mass moment of inertia of the gearhead

ELECTRIC MOTORS

For motor-drive couplings see table on page **A5**.32

NOTES

ELECTRIC CYLINDER
SERIES ELEKTRO ISO 15552 EK

An electric cylinder with a connection interface in accordance with ISO 15552.
The ELEKTRO ISO 15552 EK series stands out for some design choices that made it possible to reduce the length and cut costs, with a few different technical characteristics.
The piston rod moves forward by means of either a hardened and tempered screw and a ball recirculating screw nut or a trapezoidal screw (acme) and bronze bushing.
The cylinder comes with a built-in anti-rotation system obtained with two technopolymer pads that slide in the liner along two longitudinal groves. The piston has a magnet and the liner has slots that accommodate magnetic sensors.
A greasing system is incorporated to lubricate the screw/ball screw nut.
Only a version with inline motor, which is shorter than the equivalent ELEKTRO ISO15552 cylinder, is provided. The version with geared motors is available on specific request.
A steel bracket to be fixed to the rear head, with an interface suitable for ISO 15552 cylinder accessories, is provided to be fixed to the cylinder from the rear side.
The cylinder can be supplied with a STEPPING or a BRUSHLESS motor, with or without parking brake.
Cylinders with a flange suitable for a motor brand that is most liked by the customer are available on request.

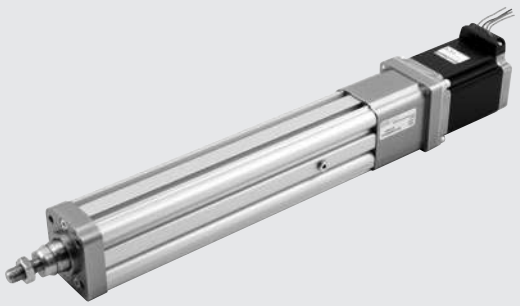

TECHNICAL DATA			Ø 32
Piston rod thread		mm	M10x1.25
Temperature range	WITH MOTOR	°C	see single motor data sheet
	ONLY MECHANICS	°C	from -10 to +50
Electrical protection rating with motors			IP40
Minimum stroke			Twice the screw pitch (to guarantee ball lubrication)
Maximum stroke		mm	500
Positioning repeatability		mm	± 0.02 with ball screw; ± 0.15 with trapezoidal screw (acme)
Positioning accuracy		mm	± 0.2 **
Overall radial oscillation of the piston rod (without load) for 100 mm of stroke		mm	0.4
Versions			Ball screw; trapezoidal screw (acme) with bronze bushing
Anti-rotation of the piston rod			YES
Maximum angle of twist of the piston rod			1°30'
Motor layout			In line with piston rod axis
Uncontrolled impact at the end of stroke			NOT ALLOWED (it provides an extra-stroke minimum 5 mm)
Sensor magnet			YES
Work position			Any

** indicative average data that gets influenced by various factors such as the stroke, the type of motor, the cylinder version, etc ...

METAL WORK PNEUMATIC

MECHANICAL FEATURES		Ball screw		Trapezoidal screw (acme)
Screw pitch (p)	mm	4	10	4
Screw diameter	mm	12	12	14
Static axial load (F_o)*	N	2500		2500
Dynamic axial load (F)	N	2700	2700	see graph force/speed
		Calculate mean axial load and the calculate life (see graphs on page **A5**.45)		**N.B**: 40% duty cycle, i.e. the cylinder must work maximum 40% of time to allow the screw/ball screw nut to cool down.
Maximum number of revs	1/min	3000	3000	750
Maximum speed (V_{max})	mm/s	200	500	50
"K" ratio of motor revs and piston rod speed	n/V	15	6	15

Example: V = 100 mm/s; pitch = 10 → K=6 n= V x K = 100 x 6 = 600 rpm

* **N.B.:** Static loads bearable without damage. Payloads are shown in the diagrams on page **A5**.46 onwards.

WEIGHTS (ONLY CYLINDER)		Ball screw		Trapezoidal screw (acme)
Screw pitch (p)	mm	4	10	4
Weight at stroke 0, without motor	g	610	620	720
Additional weight each mm of stroke	g	4.3	4.3	4.3
Moving mass at stroke 0 (Mx)	g	189.4	189.4	209.4
Additional moving mass each mm of stroke	g	1.3	1.3	1.3

N.B.: You get the total weight of a complete cylinder by adding: weight stroke 0 + stroke [mm] x weight for each mm of stroke + weight of the motor.

MASS MOMENTS OF INERTIA		Ball screw		Trapezoidal screw (acme)
Screw pitch	mm	4	10	4
J0 at stroke 0	$kgmm^2$	9.9849	10.0979	10.2979
J1 each metre of stroke	$kgmm^2/m$	12.76	13.76	16.81
J2 each kg of load	$kgmm^2/kg$	0.4053	2.533	0.4053

The total mass moment of inertia (Jtot) reduced for the motor is: Jtot = J0 + J1 · stroke [m] + J2 · (load [kg] + Mx [kg])
Mx is defined in the weights table.

CALCULATION OF MEAN AXIAL LOAD F_m AND VERIFICATION

Peak axial load in a work cycle must not exceed the static axial load F_o.
The peak value is usually achieved during upward acceleration in vertical installation. Exceeding this value leads to greater wear and hence shorter life of the recirculating ball screw.

Mean axial load F_m

$$F_m = \sqrt[3]{\sum F_x^3 \times \frac{V_x}{V_m} \times \frac{q}{100}} =$$

$$F_m = \sqrt[3]{F_{x1}^3 \times \frac{V_{x1}}{V_m} \times \frac{q_1}{100} + F_{x2}^3 \times \frac{V_{x2}}{V_m} + \frac{q_2}{100} + F_{x3}^3 \times \frac{V_{x3}}{V_m} \times \frac{q_3}{100} + \ldots}$$

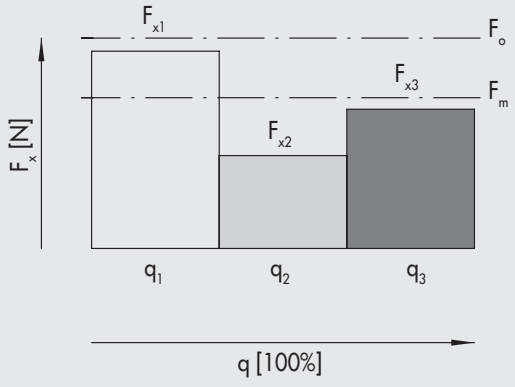

F_x = Axial load at stage x
F_m = Mean axial load during extension
F_o = Static axial load
q = Time segment
V_x = Speed in the phase x
V_m = Average speed

The mean axial load must not exceed the dynamic axial load: $F_m \leq F$
The graphs on page **A5**.46 show screw life as a function of F_m

COMPONENTS

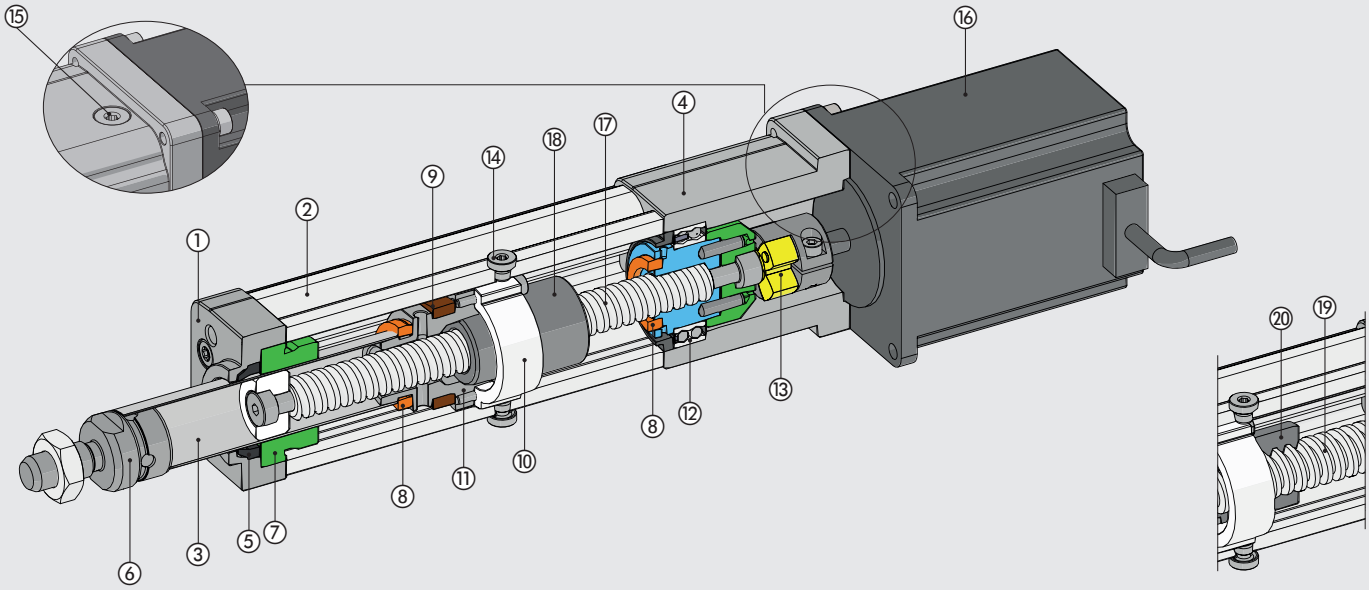

① FRONT CYLINDER HEAD: anodized aluminium
② BARREL: extruded and anodized aluminium alloy
③ PISTON ROD: stainless steel pipe
④ REAR CYLINDER HEAD: anodized aluminium
⑤ WIPER RING: polyurethane
⑥ NIPPLE: stainless steel
⑦ GUIDE BUSHING: technopolymer
⑧ BUFFER: polyurethane
⑨ MAGNET: plastoferrite
⑩ GUIDE AND ANTI-ROTATION RING: technopolymer
⑪ PISTON: aluminium
⑫ BEARING: oblique with two ball rings
⑬ ELASTIC COUPLING: aluminium / polyurethane
⑭ PLUG: remove it to insert the greaser
⑮ PLUG: for access to the elastic coupling screw
⑯ ELECTRIC MOTOR

Version with ball screw:
⑰ SCREW: hardened and rolled steel
⑱ NUT: ball recirculating

Version with trapezoidal screw (acme):
⑲ TRAPEZOIDAL SCREW (ACME): steel
⑳ NUT: bronze

FIXING OPTIONS

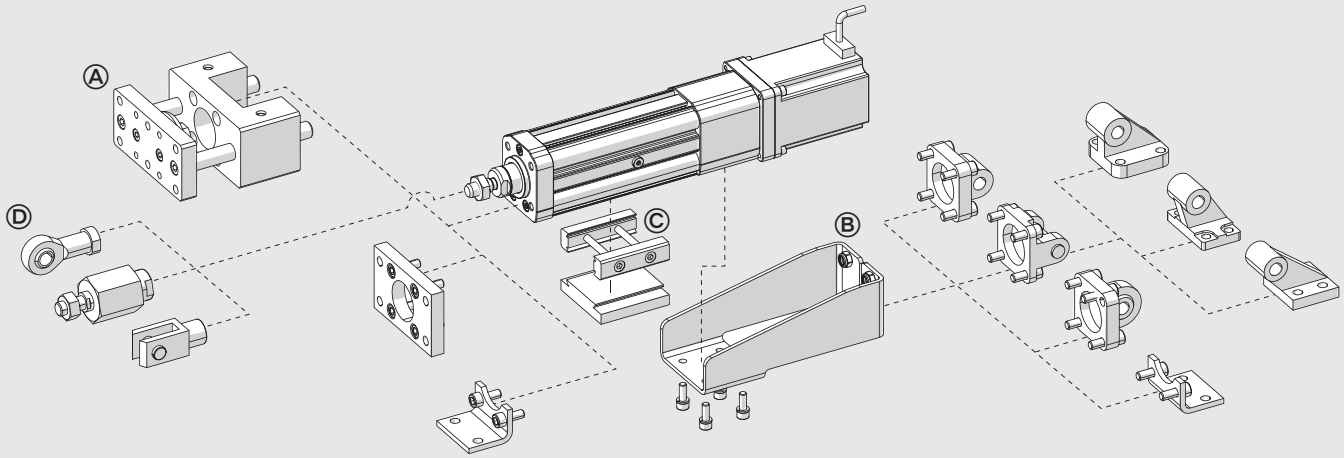

Ⓐ Fixing on the front head with 4 threaded holes according to ISO 15552 standard.
Ⓑ Fixing on the rear side, using the "rear fixing bracket". ISO 15552 accessories can be fitted onto this bracket.
Ⓒ Fixing on one side of the liner, using QS fixing elements. See page **A3**.15
Ⓓ Piston rod accessories.

PEAK LOADS

With vertical installations, the following load conditions applied to the piston rod must be met.

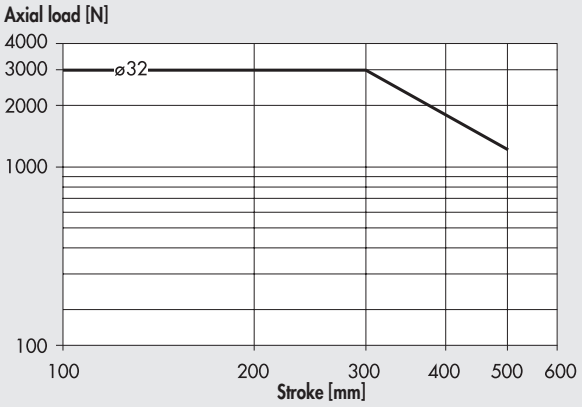

MAXIMUM RADIAL LOADS ON PISTON ROD

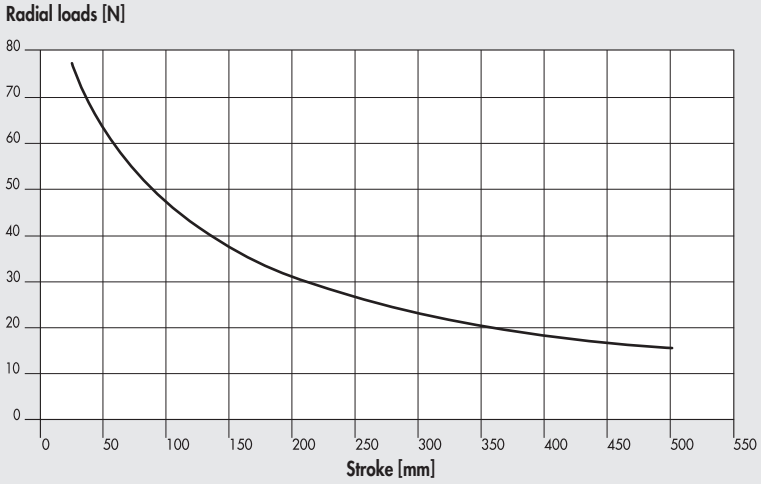

Radial loads can be applied to the piston rod.
They must not exceed the values in the adjacent chart, otherwise the guides on the rod and piston will be subjected to excessive wear.

LIFE CHARACTERISTICS AS A FUNCTION OF THE MEAN AXIAL LOAD, BALL SCREW VERSION

Life characteristics can vary considerably from those indicated in the graphs due to different operating conditions (radial loads, temperature, lubrication status, etc.).

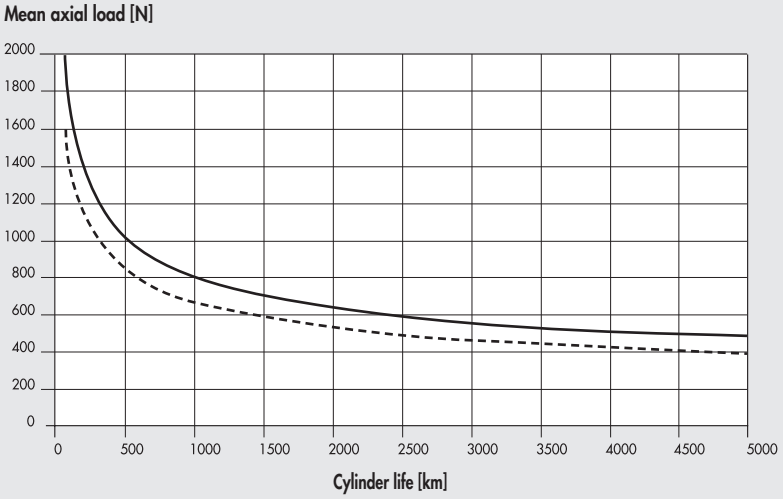

MAX. FORCE/SPEED CHART FOR VERSION WITH TRAPEZOIDAL SCREW (ACME) WITH BRONZE BUSHING

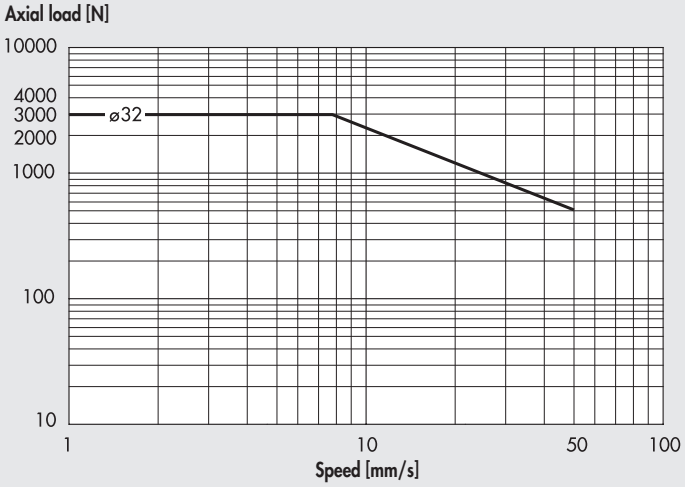

To prevent the bushing from excessive wear and tear, it is recommended to work below the curve indicated.

AXIAL LOAD CURVES AS A FUNCTION OF SPEED (CYLINDER COMPLETE WITH MOTOR AND DRIVE)

N.B.: The obtainable load values already take the efficiency of the system into account. For STEPPING motors, with the motor off, the drive current is automatically reduced by 50% to prevent overheating. Consequently, available axial load with the motor stopped is also reduced by 50%.

Ø 32 with pitch 4 ball screw, STEPPING motor and STEPPING motor with brake

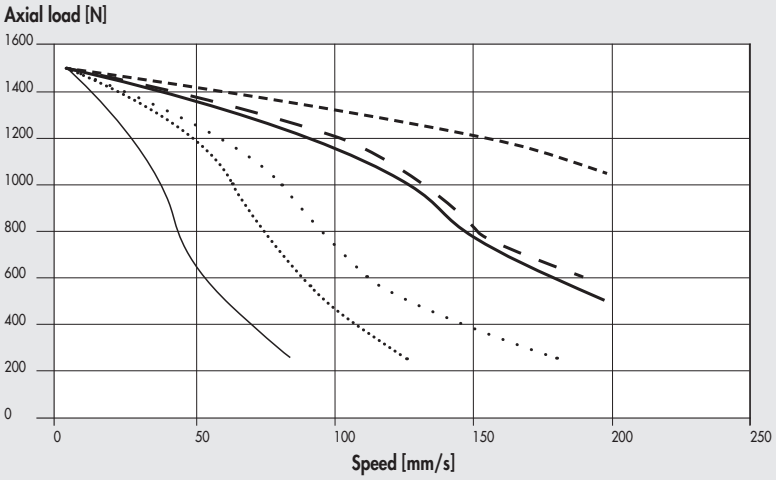

- 37M5120000 (with brake, 24VDC)
- 37M5120000 (with brake, 48VDC)
- 37M5120000 (with brake, 75VDC)
- 37M1120001 (24VDC)
- 37M1120001 (48VDC)
- 37M1120001 (75VDC)

Ø 32 with pitch 10 ball screw, STEPPING motor and STEPPING motor with brake

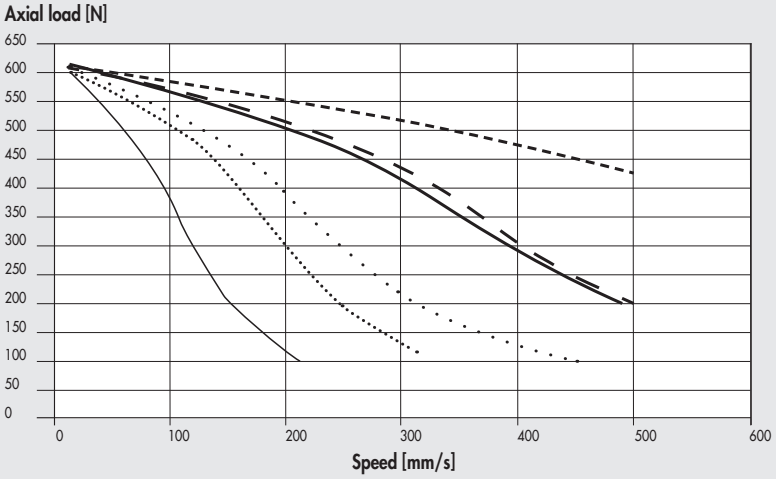

- 37M5120000 (with brake, 24VDC)
- 37M5120000 with brake, 48VDC)
- 37M5120000 (with brake, 75VDC)
- 37M1120001 (24VDC)
- 37M1120001 (48VDC)
- 37M1120001 (75VDC)

Ø 32 with pitch 4 ball screw, BRUSHLESS motor and BRUSHLESS motor with brake

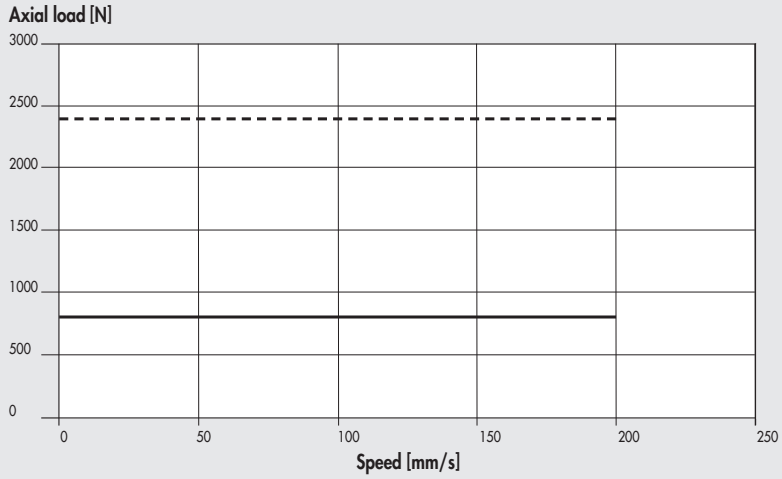

Ø 32 with pitch 10 ball screw, BRUSHLESS motor and BRUSHLESS motor with brake

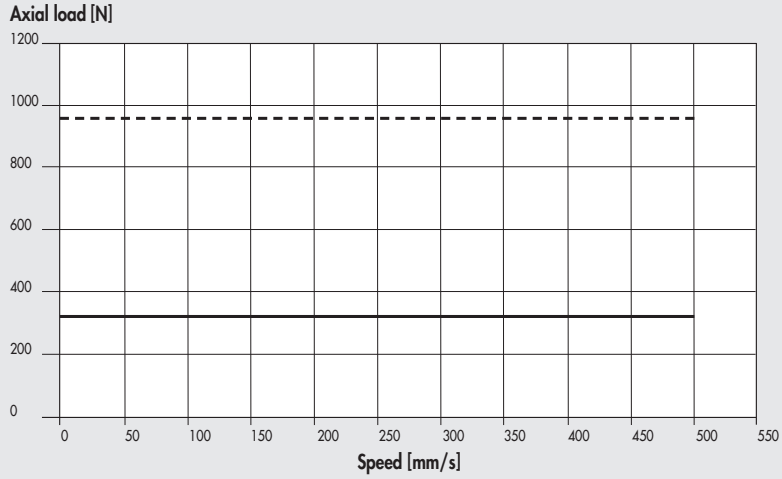

Ø 32 with pitch 4 trapezoidal screw (acme), STEPPING motor

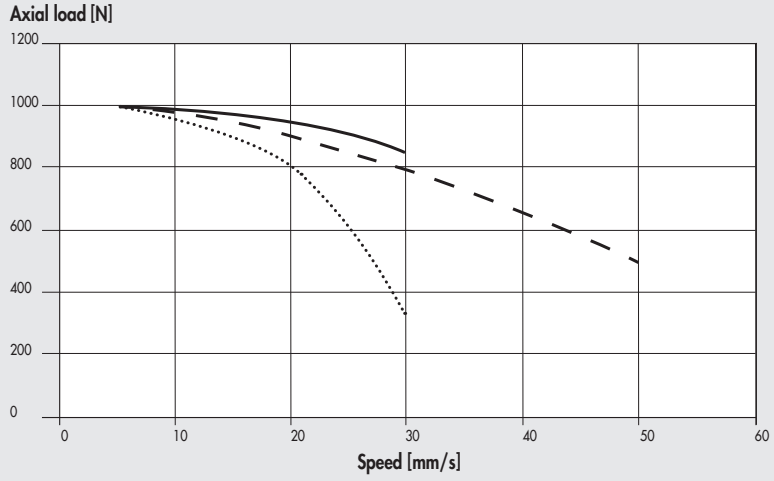

Ø 32 with pitch 4 trapezoidal screw (acme), BRUSHLESS motor

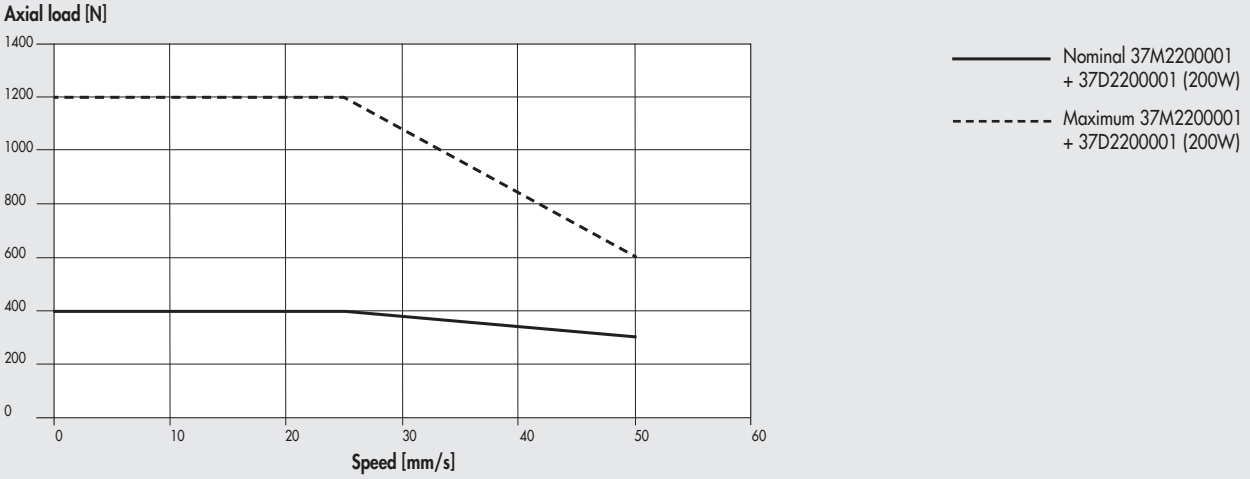

LUBRICATION DIAGRAMS

Our electric rod cylinders are pre-greased with permanent grease. It is, however, possible to maintain them by re-lubricating, but before this operation we recommend periodic maintenance, at least once a year, which includes checks of: functionality, noise, wears and plays, if possible motor absorption (to be compared with the previous ones), and only after adding, in case, grease according to the instructions in the manual: a continuous addition of grease, since it is not disposable, could be worse. The quantities in the manual are valid for strokes up to approximately 500 mm. Between 500 mm and 1000 mm double the quantity. Between 1000 mm and 1500 mm triple the quantity.

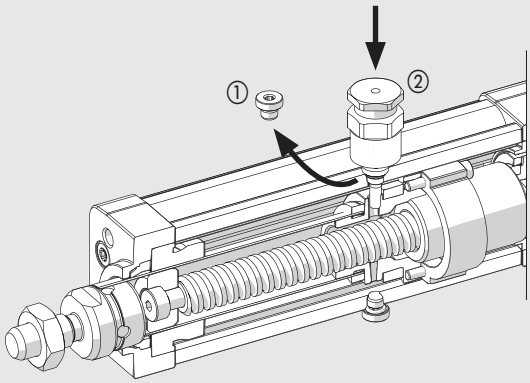

- Retract the piston rod towards the rear head. The piston rod/piston/ball screw system must rest against the buffer of the rear head.
- Unscrew the cap ① on the lubricator port.
- Screw the lubricating pin ② (code 0950327108) into the thread. Make sure you enter the corresponding hole in the piston below.
- Pump grease (code 9910506) using the suitable lubricator according to the quantity in table.
- Unscrew the lubricating pin and make the piston rod perform four complete strokes. The piston rod should end up in the initial (retracted) position.
- Repeat the last two operations.

		Ø 32	
Screw pitch (p)	mm	4	10
Relube grease quantity	g	0.3	0.5
	cc	0.26	0.42

N.B.: These are indicative values that can change as a function of the stroke

NOTES

METAL WORK PNEUMATIC

DIMENSIONS

WITHOUT MOTOR

+ = Add the stroke
① = Slots for sensors
② = Slots for anti-rotation
③ = Dovetail for QS fixing
④ = Threaded holes for fixing brackets with ISO 15552 accessories
⑤ = Lubricator port

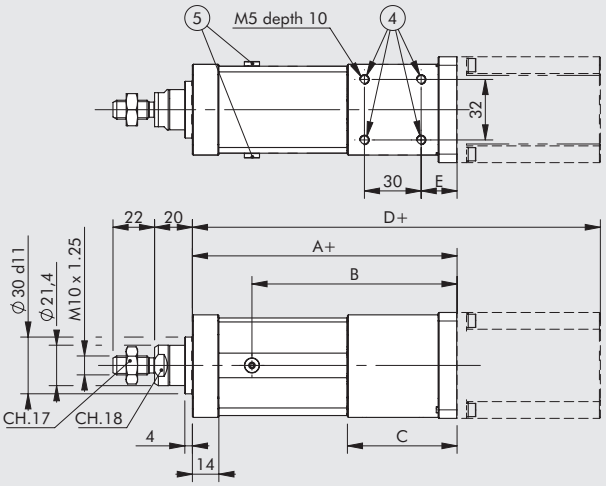



BARREL CROSS SECTION



WITH MOTOR

Overall dimensions for standard drive



STEPPING MOTOR code 37M1120001				
A	B	C	D	E
140	108.5	58	215.8	19



STEPPING MOTOR code 37M1230000				
A	B	C	D	E
141	109.5	59	226.8	20



BRUSHLESS MOTOR code 37M2200001				
A	B	C	D	E
150.5	119	68.5	256	20



STEPPING MOTOR WITH BRAKE WITHOUT ENCODER code 37M5120000				
A	B	C	D	E
140	108.5	58	251.8	19



BRUSHLESS MOTOR WITH BRAKE code 37M4200001				
A	B	C	D	E
150.5	119	68.5	292.1	20

NOTES

MOTOR-DRIVE COUPLINGS

MOTOR CODES			DRIVES CODES		
		Metal Work	37D1222000 *	37D1332000 *	37D1552000
		Manufacturer	RTA CSD 94	RTA NDC 96	RTA PLUS B7
Metal Work	Manufacturer		(4.4A 24-48VDC)	(6A 24-75VDC)	(10A 28-62VAC) ●
STEPPING MOTORS					
37M1120001	SANYO DENKI 103-H7126-6640 (5.6A 75V max)		-	√	√ ■
37M1230000 ▲	SANYO DENKI 103-H7823-1740 (4A 75V max)		√	√ ◆	√ ■
STEPPING MOTORS WITH BRAKE					
37M5120000	SANYO DENKI 103-H7126-1710B (4A 75V max)		√	√ ◆	√ ■

✱ In all applications requiring motor powered up to 6A / 55VDC, the programmable drive **e**.drive, code 37D1332002, can be used.
◆ **Important!** Limit current
■ **Important!** Limit current and voltage
● **Important!** AC drive to continuous voltage VDC = VAC · $\sqrt{2}$
▲ Used for trapezoidal screws only

MOTOR CODES			DRIVES CODES
		Metal Work	37D2200001
		Manufacturer	DELTA ASD-A2-0221-M
Metal Work	Manufacturer		(200W)
BRUSHLESS MOTORS			
37M2200001	DELTA ECMA-C20602RS (200W)		√
BRUSHLESS MOTORS WITH BRAKE			
37M4200001	DELTA ECMA-C20602SS (200W)		√

KEY TO CODES

									DRIVE		
CYL	37	1	E	32	0500	1	2	1	1	2	1
	TYPE	FAMILY	SERIES	SIZE	STROKE	SCREW PITCH	VERSION	MOTOR	FLANGE	TORQUE	
	37 Electric actuators	**1** ISO 15552 electric cylinder	**E** Elektro EK	**32** Ø32		**1** With pitch 4 ball screw **4** With pitch 10 ball screw **T** With pitch 4 trapezoidal screw (acme)	**2** With non-rotating, IP40	**1** STEPPING **2** BRUSHLESS **4** BRUSHLESS with BRAKE **5** STEPPING WITH BRAKE (without encoder)	**1** NEMA 23 **2** 60x60	**0** 0 - 0.79 Nm **2** 1.2 - 2.19 Nm **3** 2.2 - 3 Nm	**0** Base **1** Greater rpm

POSSIBLE ORDERING CODES

Ø 32 with ball screw

Drive
Version
Screw pitch

371E32_ _ _ _	1 4	2	1121 5120 2200 4200

_ _ _ _ = Enter the stroke in mm

Ø 32 with trapezoidal screw (acme)

Drive
Version
Screw pitch

371E32_ _ _ _	T	2	1230 2200

_ _ _ _ = Enter the stroke in mm

NOTE

ACCESSORIES FOR ELECTRIC CYLINDER SERIES ELEKTRO ISO 15552 EK

Note: Where specified, limit the maximum axial loads (Fmax) according to the electric cylinders

FIXING ELEMENTS QS



See V-Lock family.

BRACKET FOR REAR FIXING

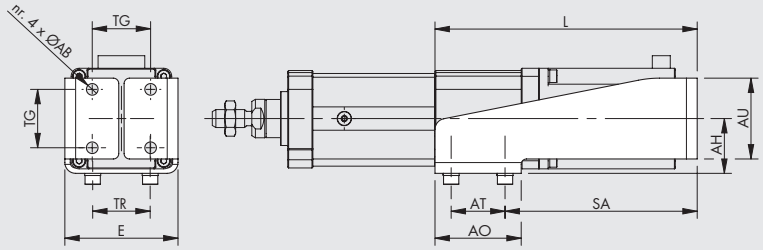

STEEL

Code	Ø	ØAB	TG	TR	E	AT	SA	AO	AU	AH	L	Weight [g]	Fmax [N]
0950327090	**32**	6.5	32.5	32	63	30	107	48	45	30.5	146	375	1600
0950327091	**32**	6.5	32.5	32	67	30	144.5	48	45	30.5	183.5	445	1600

Note: Supplied complete with 4 screws and 4 washers for fixing to the cylinder, 4 self-locking nuts and 4 screws for fixing the anchor clamp.

N.B.: Code 0950327090 can be used with motor 37M1120001.
Code 0950327091 can be used with motors 37M2200001, 37M1230000 and 37M5120000.
A bracket suitable for motor 37M4200001 is not provided.

FOOT MODEL A

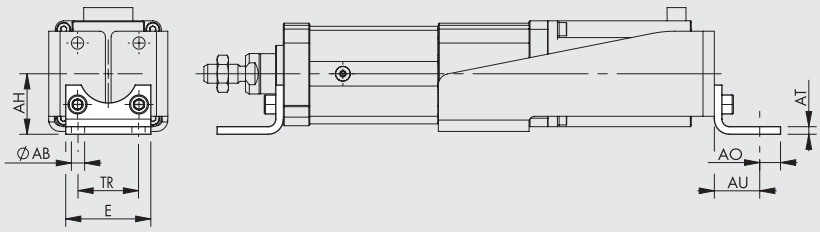

STEEL

Code	Ø	ØAB	AH	AO	AT	AU	TR	E	Weight [g]	Fmax [N]
W0950322001	**32**	7	32	11	4	24	32	45	76	1600

Note: Individually packed with 2 screws.

FEMALE HINGE - MODEL B

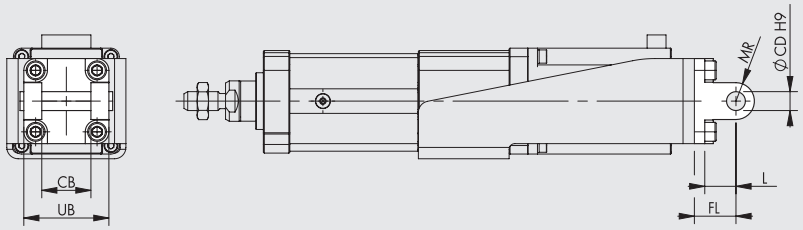

ALUMINIUM

Code	Ø	UB	CB	FL	ØCD	MR	L	Weight [g]	Fmax [N]
W0950322003	**32**	45	26	22	10	10	12	116	800

Note: Supplied with 4 screws, 4 washers, 2 snap rings and 1 pin.

STEEL

Code	Ø	UB	CB	FL	ØCD	MR	L	Weight [g]	Fmax [N]
W095E322003	**32**	45	26	22	10	10	13	348	1600

Note: Supplied with 4 screws, 4 washers, 2 snap rings and 1 pin.

MALE HINGE - MODEL BA

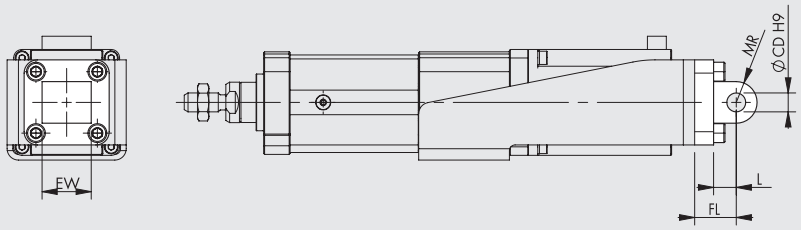

ALUMINIUM

Code	Ø	EW	FL	MR	ØCD	L	Weight [g]	Fmax [N]
W0950322004	32	26	22	10	10	13	94	800

Note: Supplied with 4 screws.

STEEL

Code	Ø	EW	FL	MR	ØCD	L	Weight [g]	Fmax [N]
W095E322004	32	26	22	10	10	13	282	1600

Note: Supplied with 4 screws.

ARTICULATED MALE HINGE - MODEL BAS

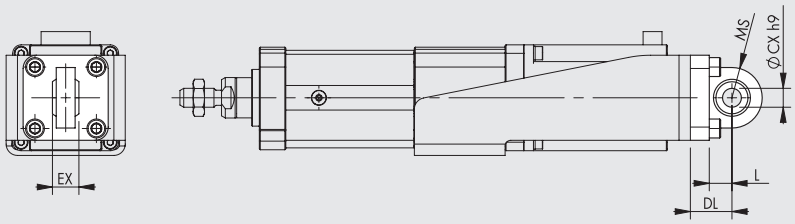

ALUMINIUM

Code	Ø	DL	MS	L	ØCX	EX	Weight [g]	Fmax [N]
W0950322006	32	22	16	12	10	14	106	800

Note: Supplied with 4 screws, 4 washers.

STEEL

Code	Ø	DL	MS	L	ØCX	EX	Weight [g]	Fmax [N]
W095E322006	32	22	15	14	10	14	318	1600

Note: Supplied with 4 screws, 4 washers.

CETOP HINGE FOR MODEL B - MODEL GL

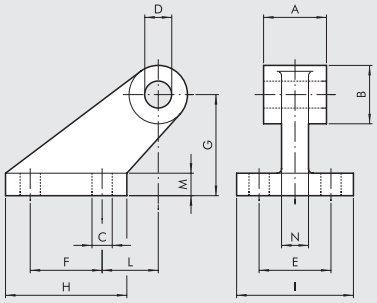

ALUMINIUM

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]	Fmax [N]
W0950322008	32	26	19	7	10	25	20	32	37	41	18	8	10	96	800

Note: Supplied with 4 screws, 4 washers.

COUNTER-HINGE FOR MODEL B - MODEL GS

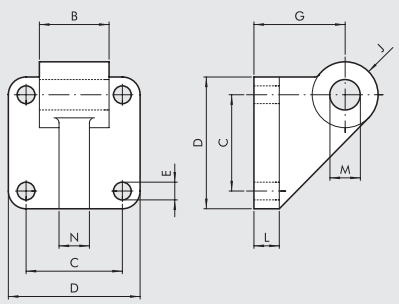

ALUMINIUM

Code	Ø	B	C	D	E	G	J	L	M	N	Weight [g]	Fmax [N]
W0950322108	32	26	32.5	45	7	32	11	10	10	10	106	800

Note: Supplied with 4 screws, 4 washers.

METAL WORK PNEUMATIC

ISO 15552 COUNTER-HINGE FOR MODEL B - MODEL AB7

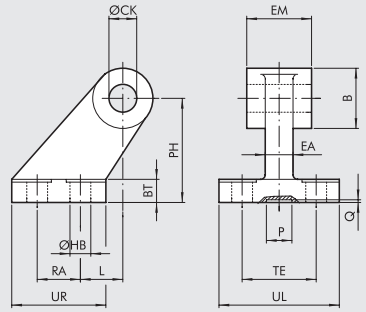

ALUMINIUM

Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]	Fmax [N]
W0950322017	32	26	20	6.6	10	38	18	32	31	51	3	8	10	21	3	60	800

STEEL

Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]	Fmax [N]
W095E322017	32	26	20	6.6	10	38	18	32	31	51	3	8	10	20	5	180	1600

FRONT FLANGE - MODEL C

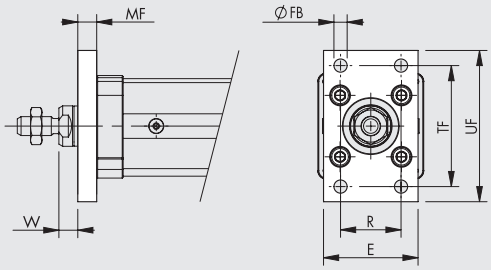

Code	Ø	TF	UF	E	MF	R	ØFB	W	Weight [g]	Fmax [N]
W0950322002	32	64	80	50	10	32	7	16	246	1600

Note: Supplied with 4 screws.

ROD NUT - MODEL S



Code	Ø	F	H	CH	Weight [g]
0950322010	32	M10x1.25	6	17	6

Note: Individually packed

FORK MODEL GK-M



Code	Ø	øM	C	B	A	L	F	D	N	Weight [g]
W0950322020	32	10	20	10	20	52	40	M10x1.25	26	92

Note: Individually packed

ROD EYE - MODEL GA-M



Code	Ø	øM	C	B1	B	A	L	F	D	øG	CH	øG1	Weight [g]
W0950322025	32	10	15	10.5	14	28	57	43	M10x1.25	15	17	19	70

Note: Individually packed

SELF ALIGNING ROD COUPLER - MODEL GA-K



Code	Ø	A	B	C	D	øF	øE	SW1	SW2	SW3	SW4	SW5	Weight [g]
W0950322030	**32**	M10x1.25	20	20	71	22	4	12	30	30	19	17	216

Note: Individually packed

GREASING NEEDLE

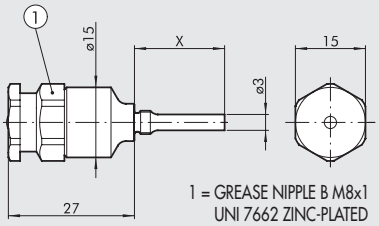

1 = GREASE NIPPLE B M8x1
UNI 7662 ZINC-PLATED

Code	Ø	X
0950327108	**32**	12

Note: Individually packed

GREASE



Code	Description	Weight [g]
9910506	Tube of RHEOLUBE 363 AX1 grease	400

RETRACTABLE SENSOR

For codes and technical data, see **chapter A6**.

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



POSITION SENSORS

For technical data and usage strokes see **chapter A6**.

LTS



NOTES

GUIDE UNIT

Version		Code	Bore	Type
	Sliding on bronze bushings (GDH)	**W0700322...**	32	UNIT MW DH 032...
				
		Note: The guide units must only be used with anti-rotation cylinders.		
		To complete the type and code, add the 3-digit stroke (e.g. 50=050)		
		For technical data and dimensions, see **chapter A1**.		
	Sliding on ball bearing (GDM)	**W0700323...**	32	UNIT MW DM 032...
				
		Note: The guide units must only be used with anti-rotation cylinders.		
		To complete the type and code, add the 3-digit stroke (e.g. 50=050).		
		For technical data and dimensions, see **chapter A1**.		

DRIVES



For motor-drive couplings see table on page **A5**.50

SPARE PARTS

ELECTRIC MOTORS

For motor-drive couplings see table on page **A5**.50

NOTES

NOTES

ELECTRIC CYLINDER SERIES ELEKTRO SSC

An electric cylinder with a connection interface in accordance with ISO 15552.
The ELEKTRO SSC series differs from the ISO 15552 ELEKTRO series in some design choices, including the absence of the front and rear heads.
The cylinder is available in defined strokes (different depending on the type of screw).
The piston rod moves forwards by either the hardened and tempered steel screw and a ball recirculating screw nut or a stainless steel screw and technopolymer lead nut.
The cylinder is equipped with an anti-rotation system that can be easily removed as required.
A magnet is fitted to the piston rod to provide a limit switch signal and two separate lengthwise slots are provided on the cylinder body to accommodate the Square-type sensors.
An easily removable plate is attached to the cylinder body to facilitate re-lubrication of the screw.
The cylinder is available in either in-line or geared version.
The motor can be selected from among an optimized range, which includes both STEPPING and BRUSHLESS motors.
The most suitable drives for the motors are also provided.
Special flanges and couplings are provided on request when motors of a make or model other than those specified in the catalogue are used.

N.B: It is essential for the piston rod to be provided with an anti-rotation system. Therefore, if the piston rod is not secured firmly to a flange or a similar element that prevents rotation, the anti-rotation version of the cylinder must be chosen

in-line version

geared version

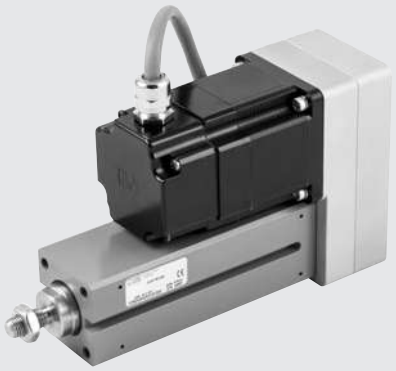

TECHNICAL DATA			Ø 32	
			Ball screw	Lead screw
Piston rod thread		mm	M10x1.25	
Temperature range	WITH MOTOR	°C	see single motor data sheet	
	ONLY MECHANICS	°C	from -10 to +50	
Electrical protection rating with	STEPPING motors		IP55 or IP65 (see key to codes on page **A5**.67)	
	BRUSHLESS motors		IP65 (see key to codes on page **A5**.67)	
Standard strokes (including 5 mm extra-stroke) for homing		mm	30	30
			55	55
			80	-
			100	-
			125	-
			150	-
			200	-
Positioning repeatability		mm	±0.02	±0.15
Positioning accuracy		mm	±0.2 *	±0.4 *
Versions			Ball screw;	
			Lead screw	
			With or without piston rod non-rotating	
			In line or geared motor	
Anti-rotation of the piston rod			YES (depending on the choice)	
Uncontrolled impact at the end of stroke			NOT ALLOWED (for rear buffer ONLY)	
Sensor magnet			YES	
Maximum angle of twist of the piston rod for non-rotating version			0°30'	
Work position			Any	

* Indicative average data that gets influenced by various factors such as the stroke, the type of motor, the cylinder version, etc ...

MECHANICAL FEATURES		Ball screw		Lead screw	
Screw pitch (p)	mm	4	10	5	12.7
Screw diameter	mm	12	12	12	12.7
Static axial load (F_o)*	N	2500		995	1155
Dynamic axial load (F)	N	2700	2700	600	300
		Calculate mean axial load and the calculate life (see graphs on page **A5**.60-61)			
				N.B: 25% duty cycle, i.e. the cylinder must work maximum 25% of time to allow the screw/ball screw nut to cool down.	
Maximum number of revs	1/min	3000	3000	600	940
Maximum speed (V_{max})	mm/s	200	500	50	200
"K" ratio of motor revs and piston rod speed	n/V	15	6	12	4.7

Example: V = 100 mm/s; pitch = 10 → K = 6 n = V x K = 100 x 6 = 600 rpm

* **N.B.:** Static loads bearable without damage. Payloads are shown in the diagrams on page **A5**.61 onwards

WEIGHTS		Ball screw		Lead screw	
Screw pitch (p)	mm	4	10	5	12.7
Weight at stroke 0, in-line version	g	767	777	577	582
Weight at stroke 0, geared version	g	1077	1087	927	932
Additional weight each mm of stroke	g	7.6	7.6	7.6	7.6
Moving mass at stroke 0 (non-rotating version) Mx	g	199	209	140	145
Additional moving mass each mm of stroke	g	2.5	2.5	2.5	2.5

N.B.: You get the total weight of a complete cylinder by adding: weight stroke 0 + stroke [mm] x weight for each mm of stroke + weight of the motor.

MASS MOMENTS OF INERTIA		Ball screw		Lead screw	
Screw pitch	mm	4	10	5	12.7
Transmission ratio (τ)		1:1	1:1	1:1	1:1
J0 at stroke 0	$kgmm^2$	7.821	7.934	5.708	6.123
J1 each metre of stroke	$kgmm^2/m$	12.76	13.76	11.6	14.7
J2 each kg of load	$kgmm^2/kg$	0.4053	2.5330	0.6333	4.0855
J3 in-line transmission	$kgmm^2$	2.879	2.879	2.879	2.879
J3 geared transmission	$kgmm^2$	3.237	3.237	3.237	3.237

The total mass moment of inertia (Jtot) reduced for the motor is: Jtot = [J1 . stroke [m] + J2 . (load [kg] + Mx [kg]) + J0] . τ^2 +J3
Mx is defined in the weights table.

CALCULATION OF MEAN AXIAL LOAD F_m AND VERIFICATION

Peak axial load in a work cycle must not exceed the static axial load F_o.
The peak value is usually achieved during upward acceleration in vertical installation. Exceeding this value leads to greater wear and hence shorter life of the screw.

Mean axial load F_m

$$F_m = \sqrt[3]{\sum F_x^3 \times \frac{V_x}{V_m} \times \frac{q}{100}} =$$

$$F_m = \sqrt[3]{F_{x1}^3 \times \frac{V_{X1}}{V_m} \times \frac{q_1}{100} + F_{x2}^3 \times \frac{V_{X2}}{V_m} + \frac{q_2}{100} + F_{x3}^3 \times \frac{V_{X3}}{V_m} \times \frac{q_3}{100} + \ldots}$$

F_x = Axial load at stage x
F_m = Mean axial load during extension
F_o = Static axial load
q = Time segment
V_x = Speed in the phase x
V_m = Average speed

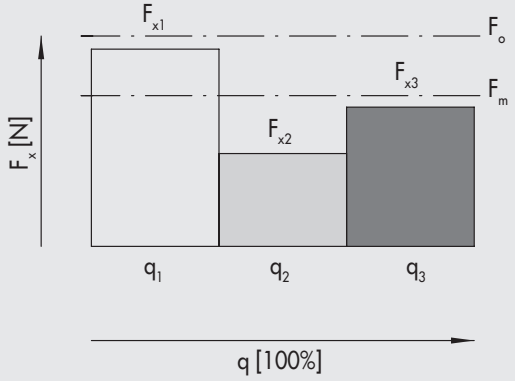

The mean axial load must not exceed the dynamic axial load: $F_m \leq F$
The graphs on page **A5**.60-61, show screw life as a function of F_m

METAL WORK PNEUMATIC

COMPONENTS

IN-LINE VERSION

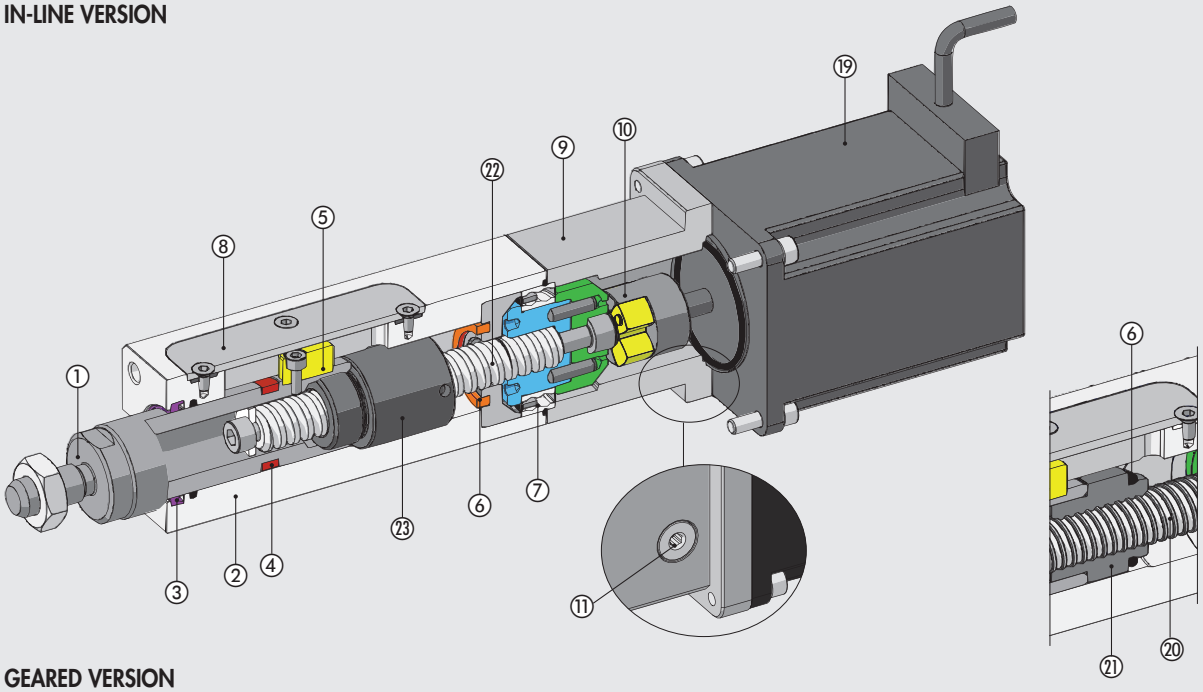

GEARED VERSION

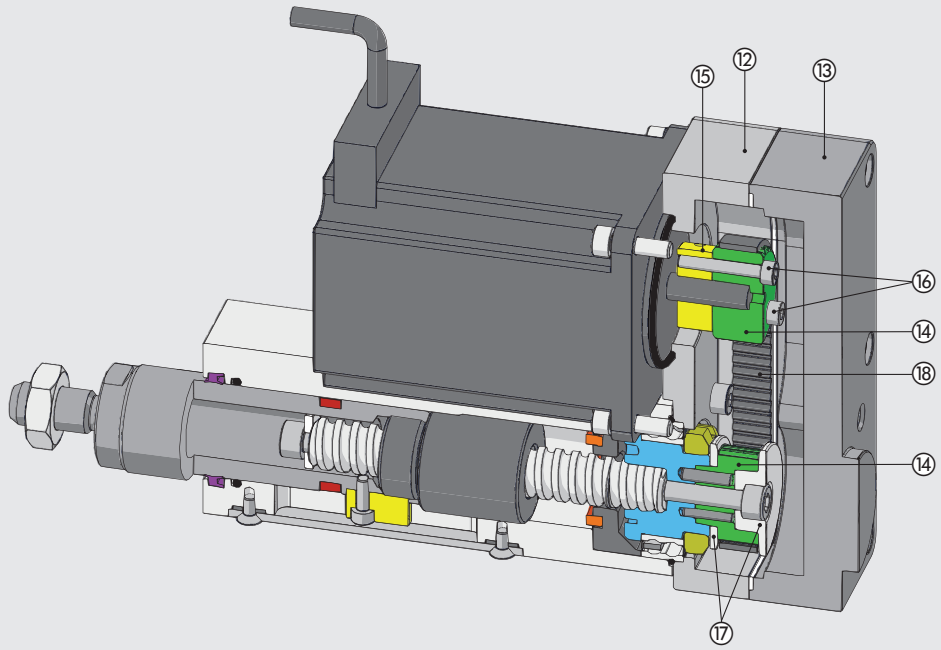

① PISTON ROD: stainless steel (AISI 316)
② BODY: aluminium alloy with wear-resistant coating
③ WIPER RING: polyurethane
④ MAGNET: plastoferrite (optional)
⑤ ANTI-ROTATION KEY: brass (optional)
⑥ BUFFER: polyurethane
⑦ BEARING: oblique with two ball rings
⑧ PLATE: stainless steel (AISI 304)
⑨ ADAPTOR PLATE: anodized aluminium
⑩ ELASTIC COUPLING: aluminium / polyurethane
⑪ PLUG: for access to the elastic coupling screw
⑫ TRANSMISSION PLATE: anodized aluminium
⑬ COVER: anodized aluminium
⑭ COG PULLEY: anodized aluminium
⑮ ELASTIC COLLAR: anodized aluminium
⑯ ELASTIC COLLAR-LOCKING SCREWS: zinc-plated steel
⑰ BELT FLANGES: anodized aluminium
⑱ TOOTHED BELT: polyurethane with steel cables
⑲ MOTOR

Version with lead screw:
⑳ LEAD SCREW: stainless steel (AISI 304)
㉑ NUT: technopolymer

Version with ball screw:
㉒ SCREW: hardened and rolled steel
㉓ NUT: steel

FIXING OPTIONS

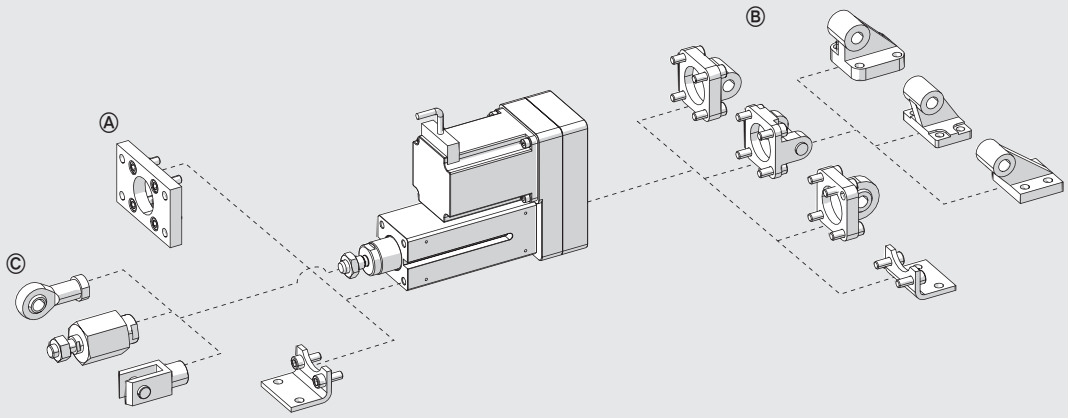

Ⓐ Fitted directly to the front of the cylinder body, using 4 threaded holes according to ISO 15552
Ⓑ Fitted to the rear (geared version only), using 4 threaded holes according to ISO 15552
Ⓒ Piston rod accessories.

MAXIMUM RADIAL LOADS ON PISTON ROD

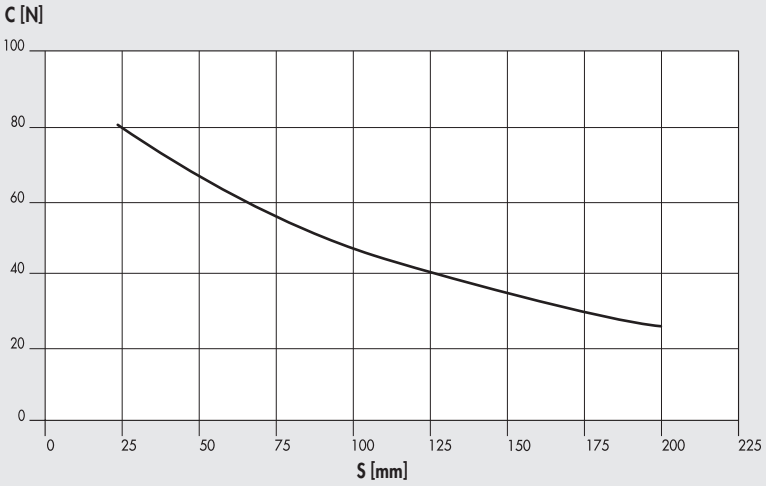

Radial loads can be applied to the piston rod.
They must not exceed the values in the adjacent chart, otherwise the guides on the rod and piston will be subjected to excessive wear.



B = Barycentre;
S = Projection;
C = Radial load

LIFE CHARACTERISTICS AS A FUNCTION OF THE MEAN AXIAL LOAD, VERSION WITH BALL SCREW

Life characteristics can vary considerably from those indicated in the graphs due to different operating conditions (radial loads, temperature, lubrication status, etc.).

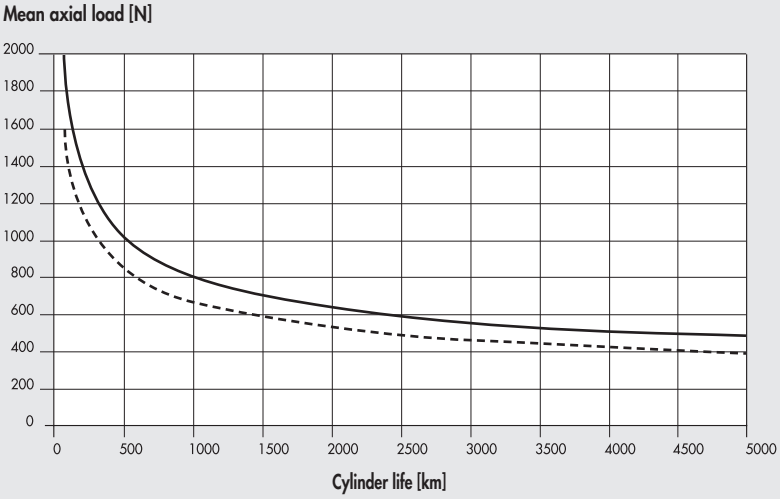

LIFE CHARACTERISTICS AS A FUNCTION OF THE MEAN AXIAL LOAD, VERSION WITH LEAD SCREW

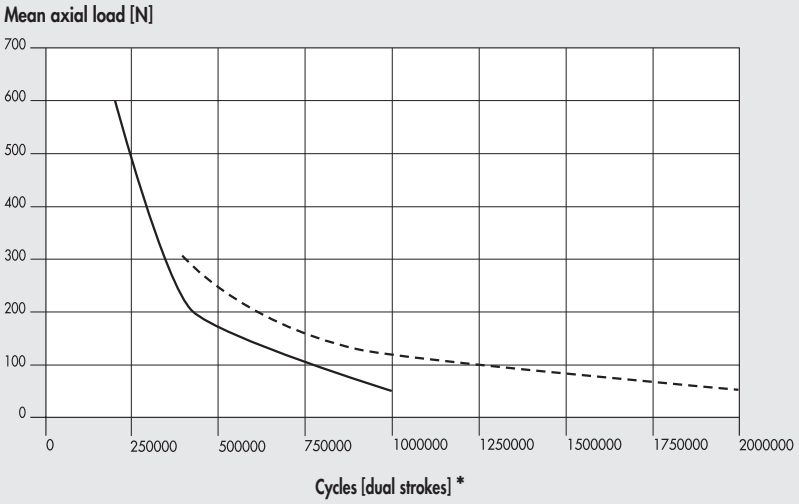

* Relative to cylinders stroke 55 mm. For 30 mm stroke cylinders, the data must be multiplied by 1.8

AXIAL LOAD CURVES AS A FUNCTION OF SPEED (CYLINDER COMPLETE WITH MOTOR AND DRIVE)

N.B.: The obtainable load values already take the efficiency of the system into account. For STEPPING motors, with the motor off, the drive current is automatically reduced by 50% to prevent overheating. Consequently, available axial load with the motor stopped is also reduced by 50%.

Ø 32 with pitch 4 ball screw, STEPPING motor, STEPPING motors with encoder, STEPPING motors with encoder + brake

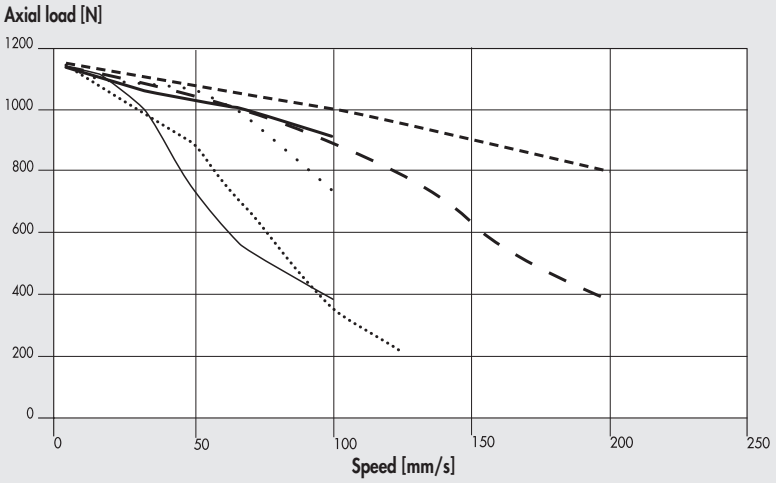

Ø 32 with pitch 10 ball screw, STEPPING motor, STEPPING motors with encoder, STEPPING motors with encoder + brake

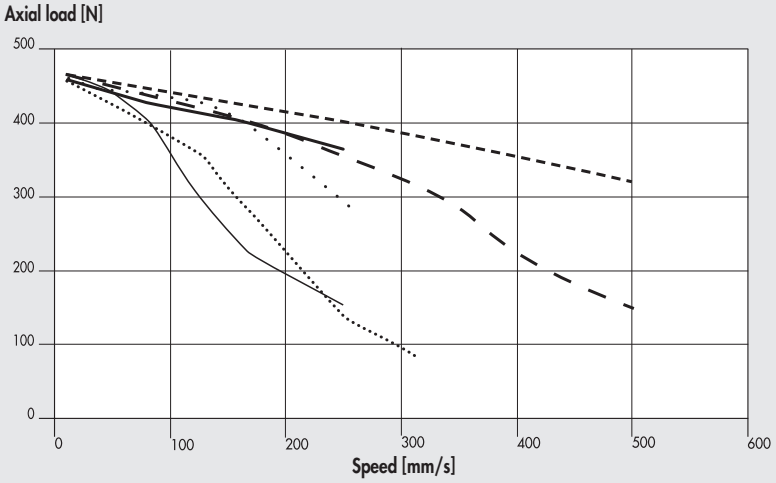

Ø 32 with pitch 5 lead screw, STEPPING motor

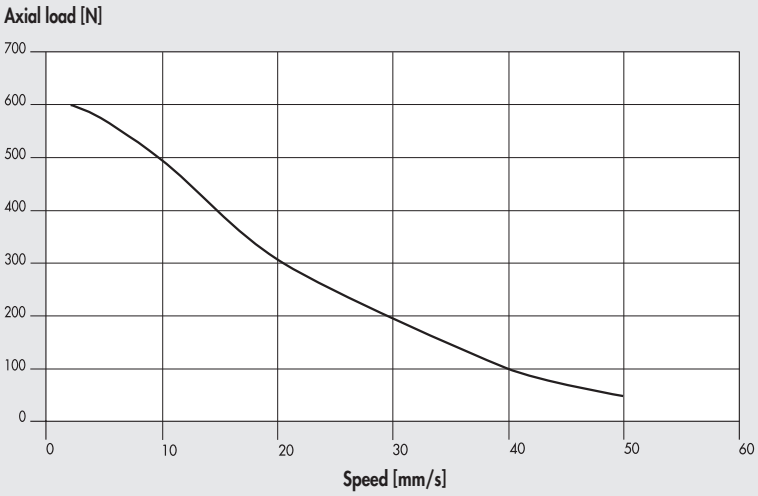

37M1120001 (24VDC)
or 37M1220000 (24VDC)
or 37M8220000 (with encoder, 24VDC)
or 37M3220000 (with encoder + brake, 24VDC)

Ø 32 with pitch 12.7 lead screw, STEPPING motor

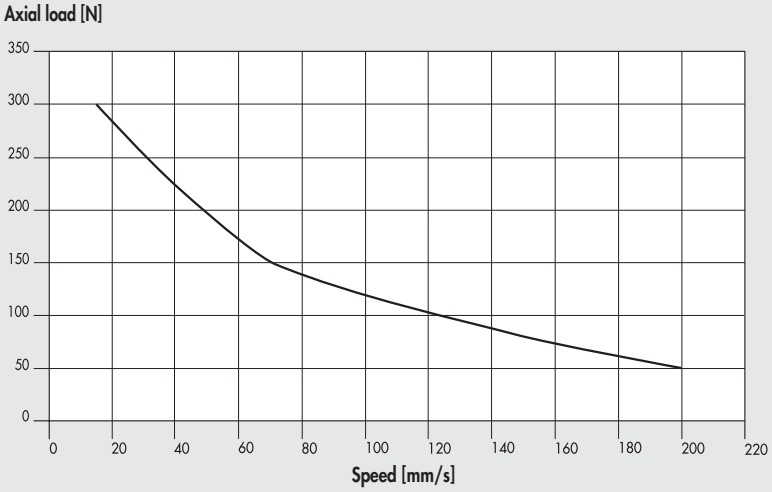

37M1120001 (24VDC)
or 37M1220000 (24VDC)
or 37M8220000 (with encoder, 24VDC)
or 37M3220000 (with encoder + brake, 24VDC)

Ø 32 with pitch 4 ball screw, BRUSHLESS motor and BRUSHLESS motor with brake

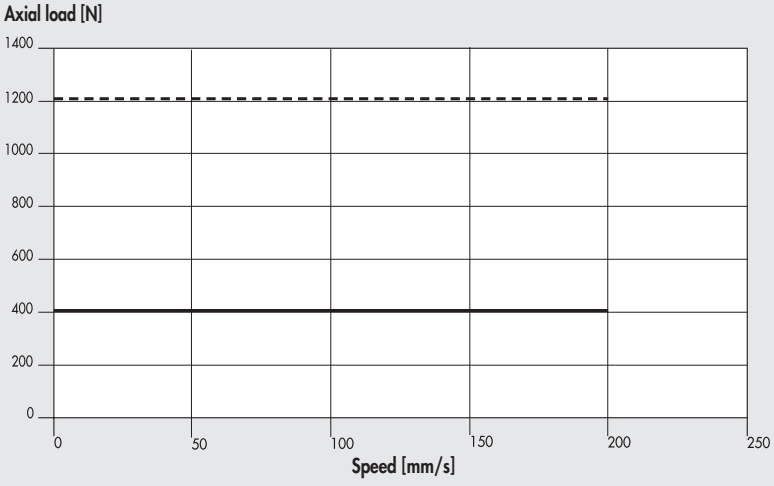

Nominal 37M2000000
or 37M4000000 (with brake)
+ 37D2100000 (100W)

Max 37M2000000
or 37M4000000 (with brake)
+ 37D2100000 (100W)

Ø 32 with pitch 10 ball screw, BRUSHLESS motor and BRUSHLESS motor with brake

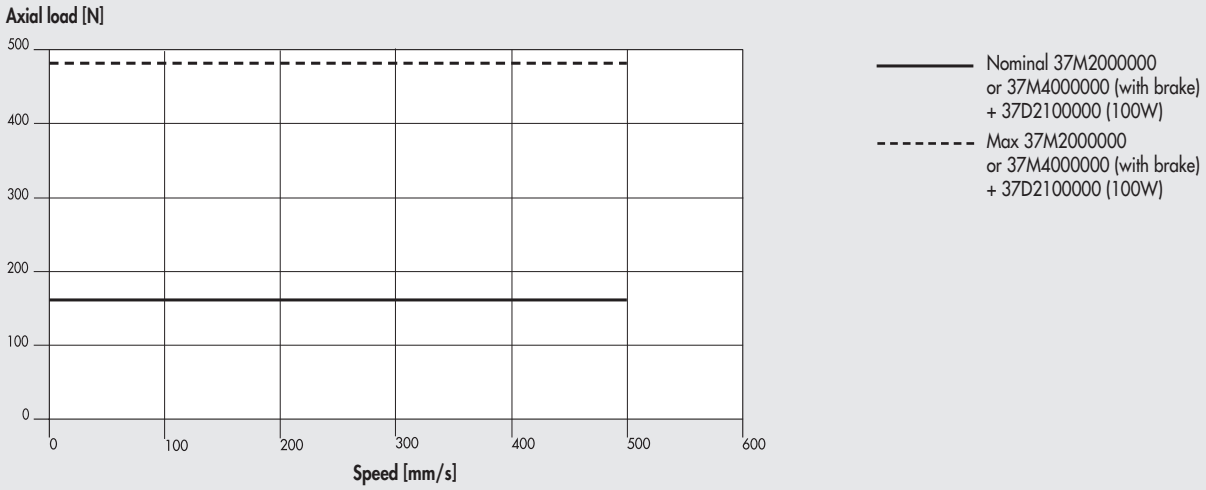

Ø 32 with pitch 5 lead screw, BRUSHLESS motor and BRUSHLESS motor with brake

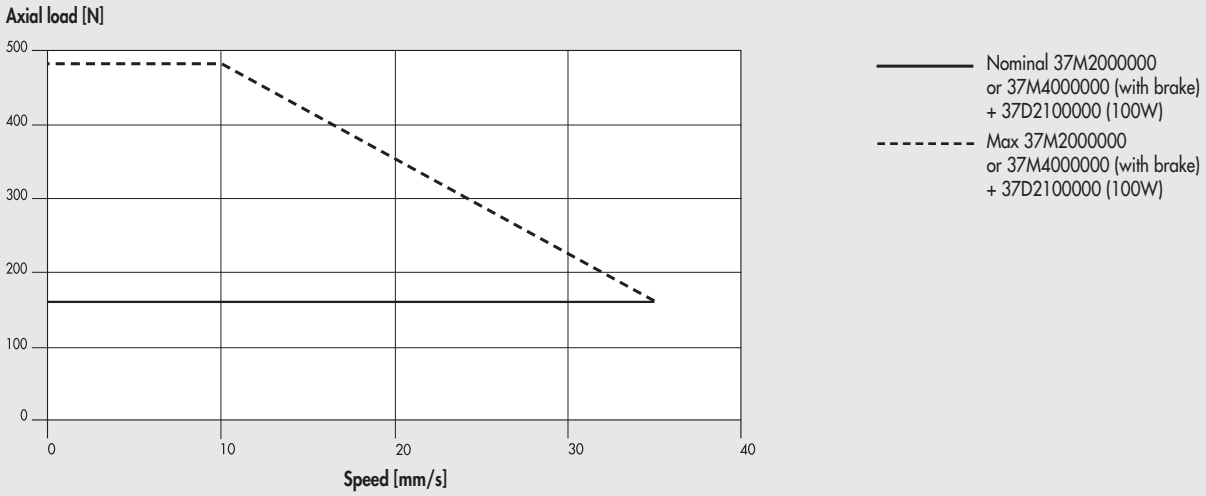

Ø 32 with pitch 12.7 lead screw, BRUSHLESS motor and BRUSHLESS motor with brake

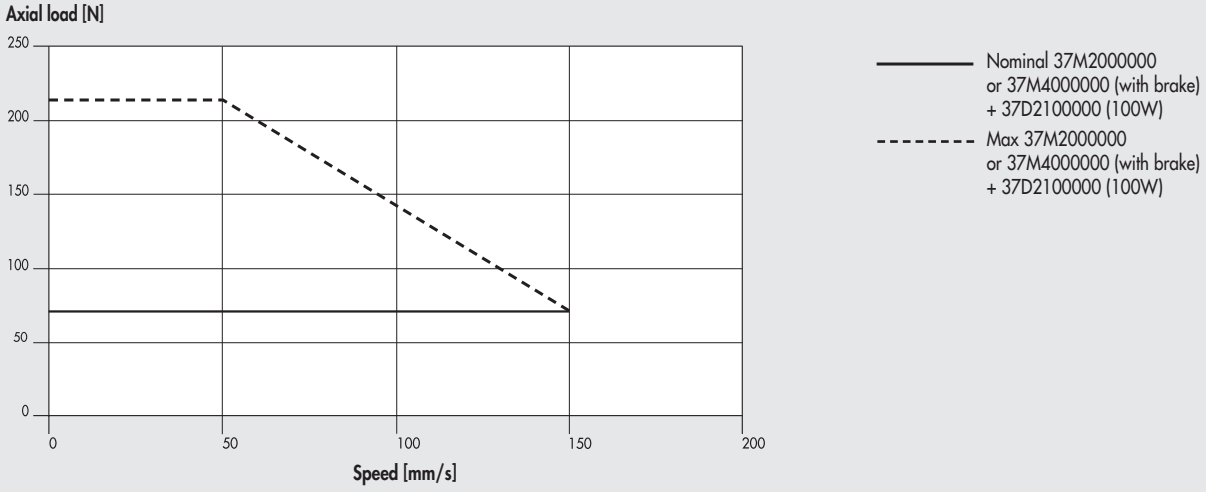

LUBRICATION DIAGRAMS

Our electric rod cylinders are pre-greased with permanent grease. It is, however, possible to maintain them by re-lubricating, but before this operation we recommend periodic maintenance, at least once a year, which includes checks of: functionality, noise, wears and plays, if possible motor absorption (to be compared with the previous ones), and only after adding, in case, grease according to the instructions in the manual: a continuous addition of grease, since it is not disposable, could be worse. The quantities in the manual are valid for strokes up to approximately 500 mm. Between 500 mm and 1000 mm double the quantity. Between 1000 mm and 1500 mm triple the quantity.

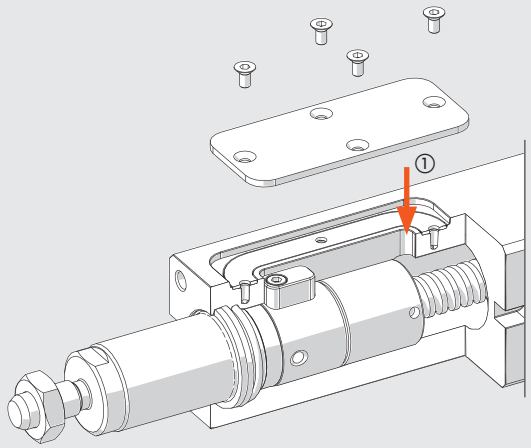

① Greasing point

- Retract the piston rod towards the motor adapter plate until the piston rod/ball scroll system rests against the rear buffer.
- Move the piston rod at low speed and/or controlled torque forwards by a value corresponding to the cylinder total stroke.
- Remove the plate by unscrewing the 4 screws.
- Lubricate the screw using a food-grade grease pump (code 9910514), according to the quantities shown in the table.
- Make the piston rod perform four complete strokes. The piston rod should end up in the initial (retracted) position.
- Repeat the last two operations
- Refit the plate by tightening the 4 screws.

		Ø 32			
Screw pitch (p)	mm	4	10	5	12.7
Relube grease quantity	g	0.3	0.5	0.3	0.5
	cc	0.26	0.42	0.26	0.42

NOTES

METAL WORK PNEUMATIC

DIMENSIONS CYLINDER IN-LINE

WITHOUT MOTOR

① = Slots for sensors

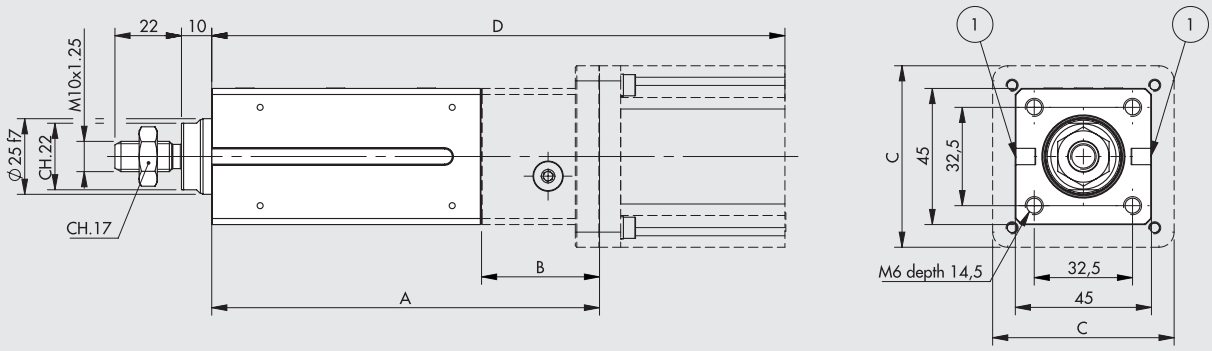

WITH MOTOR

CYLINDER WITH LEAD SCREW AND MOTOR

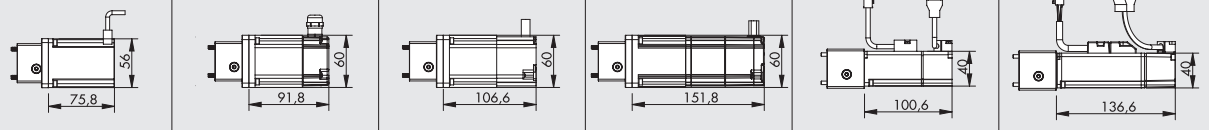

		1121 STEPPING MOTOR code 37M1120001				1220 STEPPING MOTOR code 37M1220000				8220 STEPPING MOTOR + ENCODER code 37M8220000				3220 STEPPING MOTOR + ENCODER + BRAKE code 37M3220000				2000 BRUSHLESS MOTOR code 37M2000000				4000 BRUSHLESS MOTOR + BRAKE code 37M4000000			
		A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D
STROKE	0030	125	36	56	201	128	39	60	220	128	39	60	235	128	39	60	280	132	43	45	233	132	43	45	269
	0055	150	36	56	226	153	39	60	245	153	39	60	260	153	39	60	305	157	43	45	258	157	43	45	294

3760320**0030**C3 _ _ _ _ 3760320**0030**C4 _ _ _ _ 3760320**0030**F3 _ _ _ _ 3760320**0030**F4 _ _ _ _
3760320**0055**C3 _ _ _ _ 3760320**0055**C4 _ _ _ _ 3760320**0055**F3 _ _ _ _ 3760320**0055**F4 _ _ _ _

To complete the code: _ _ _ _ = enter the type of drive

CYLINDER WITH BALL SCREW AND MOTOR

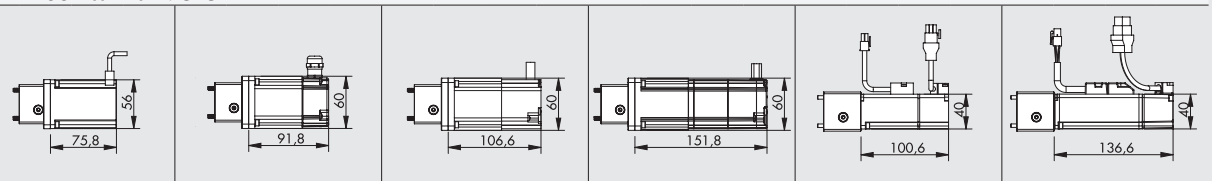

		1121 STEPPING MOTOR code 37M1120001				1220 STEPPING MOTOR code 37M1220000				8220 STEPPING MOTOR + ENCODER code 37M8220000				3220 STEPPING MOTOR + ENCODER + BRAKE code 37M3220000				2000 BRUSHLESS MOTOR code 37M2000000				4000 BRUSHLESS MOTOR + BRAKE code 37M4000000			
		A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D
STROKE	0030	160	48.5	56	236	160	48.5	60	252	160	48.5	60	267	160	48.5	60	312	165	53.5	45	266	165	53.5	45	302
	0055	185	48.5	56	261	185	48.5	60	277	185	48.5	60	292	185	48.5	60	337	190	53.5	45	291	190	53.5	45	327
	0080	210	48.5	56	286	210	48.5	60	302	210	48.5	60	317	210	48.5	60	362	215	53.5	45	316	215	53.5	45	352
	0100	230	48.5	56	306	230	48.5	60	322	230	48.5	60	337	230	48.5	60	382	235	53.5	45	336	235	53.5	45	372
	0125	255	48.5	56	331	255	48.5	60	347	255	48.5	60	362	255	48.5	60	407	260	53.5	45	361	260	53.5	45	397
	0150	280	48.5	56	356	280	48.5	60	372	280	48.5	60	387	280	48.5	60	432	285	53.5	45	386	285	53.5	45	422
	0200	330	48.5	56	406	330	48.5	60	422	330	48.5	60	437	330	48.5	60	482	335	53.5	45	436	335	53.5	45	472

376032 _ _ _ _ 13 _ _ _ _ 376032 _ _ _ _ 14 _ _ _ _ 376032 _ _ _ _ 43 _ _ _ _ 376032 _ _ _ _ 44 _ _ _ _

To complete the code: _ _ _ _ = enter the stroke _ _ _ _ = enter the type of drive

DIMENSIONS CYLINDER GEARED

WITHOUT MOTOR

① = Slots for sensors

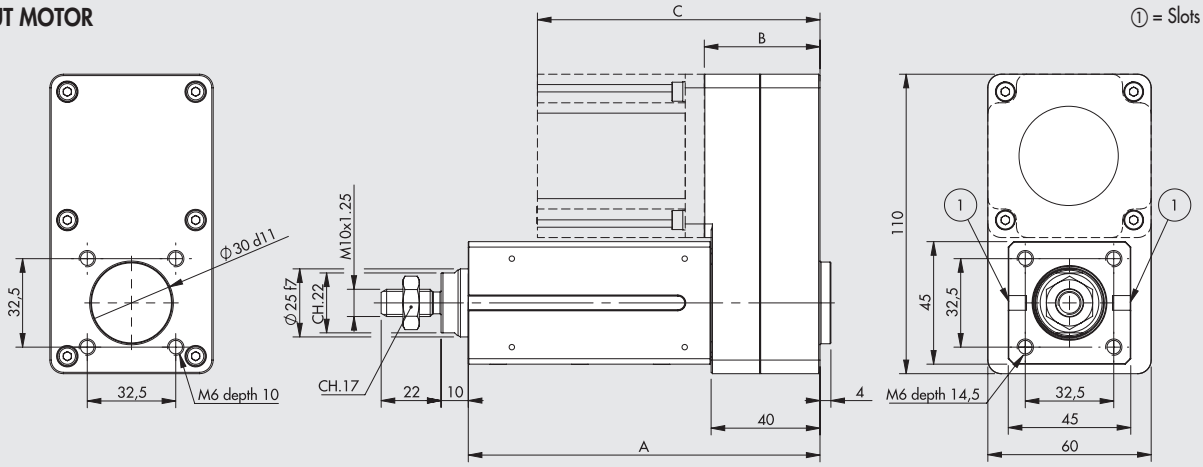

WITH MOTOR

CYLINDER WITH LEAD SCREW AND MOTOR

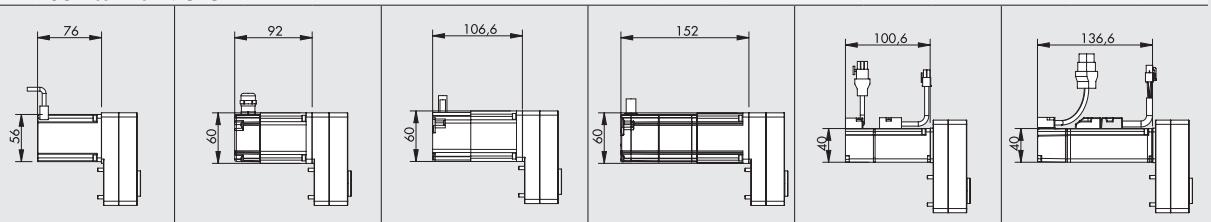

		1121 STEPPING MOTOR code 37M1120001			1220 STEPPING MOTOR code 37M1220000			8220 STEPPING MOTOR + ENCODER code 37M8220000			3220 STEPPING MOTOR + ENCODER + BRAKE code 37M3220000			2000 BRUSHLESS MOTOR code 37M2000000			4000 BRUSHLESS MOTOR + BRAKE code 37M4000000		
		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
STROKE	0030	129	42.5	118.5	129	42.5	134.5	129	42.5	149	129	42.5	194.5	129	43.5	144	129	43.5	180
	0055	154	42.5	118.5	154	42.5	134.5	154	42.5	149	154	42.5	194.5	154	43.5	144	154	43.5	180

376032**0030**C7 _ _ _ _ 376032**0030**C8 _ _ _ _ 376032**0030**F7 _ _ _ _ 376032**0030**F8 _ _ _ _
376032**0055**C7 _ _ _ _ 376032**0055**C8 _ _ _ _ 376032**0055**F7 _ _ _ _ 376032**0055**F8 _ _ _ _

To complete the code: _ _ _ _ = enter the type of drive

CYLINDER WITH BALL SCREW AND MOTOR

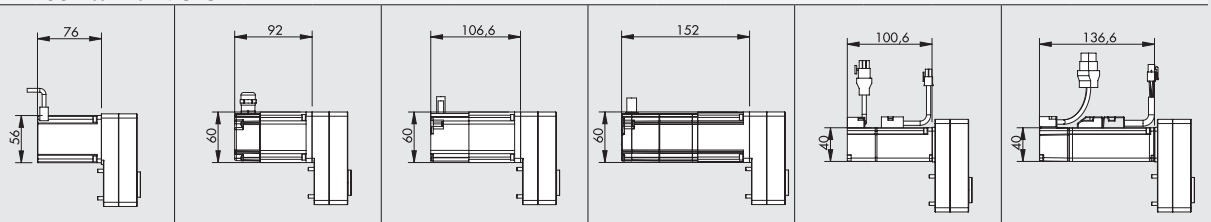

		1121 STEPPING MOTOR code 37M1120001			1220 STEPPING MOTOR code 37M1220000			8220 STEPPING MOTOR + ENCODER code 37M8220000			3220 STEPPING MOTOR + ENCODER + BRAKE code 37M3220000			2000 BRUSHLESS MOTOR code 37M2000000			4000 BRUSHLESS MOTOR + BRAKE code 37M4000000		
		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
STROKE	0030	152	42.5	118.5	152	42.5	134.5	152	42.5	149	152	42.5	194.5	152	43.5	144	152	43.5	180
	0055	177	42.5	118.5	177	42.5	134.5	177	42.5	149	177	42.5	194.5	177	43.5	144	177	43.5	180
	0080	202	42.5	118.5	202	42.5	134.5	202	42.5	149	202	42.5	194.5	202	43.5	144	202	43.5	180
	0100	222	42.5	118.5	222	42.5	134.5	222	42.5	149	222	42.5	194.5	222	43.5	144	222	43.5	180
	0125	247	42.5	118.5	247	42.5	134.5	247	42.5	149	247	42.5	194.5	247	43.5	144	247	43.5	180
	0150	272	42.5	118.5	272	42.5	134.5	272	42.5	149	272	42.5	194.5	272	43.5	144	272	43.5	180
	0200	322	42.5	118.5	322	42.5	134.5	322	42.5	149	322	42.5	194.5	322	43.5	144	322	43.5	180

376032 _ _ _ _ 17 _ _ _ _ 376032 _ _ _ _ 18 _ _ _ _ 376032 _ _ _ _ 47 _ _ _ _ 376032 _ _ _ _ 48 _ _ _ _

To complete the code: _ _ _ _ = enter the stroke _ _ _ _ = enter the type of drive

MOTOR-DRIVE COUPLINGS

MOTOR CODES		DRIVES CODES		
Metal Work		37D1332000 *	37D1442000	37D1552000
Manufacturer		RTA NDC 96	RTA PLUS A4	RTA PLUS B7
Metal Work	Manufacturer	(6A 24-75VDC)	(6A 24-75VDC)	(10A 28-62VAC) ●
STEPPING MOTORS				
37M1120001	SANYO DENKI 103-H7126-6640 (5.6A 75V max)	√	-	√ ■
37M1220000	B&R 80MPF3.250S000-01 + kit IP65 (5A 80V max)	√ ◆	√ ■	√ ■
STEPPING MOTORS + ENCODER				
37M8220000	B&R 80MPF3.500S114-01 (5A 80V max)	√ ◆	√ ■	√ ■
STEPPING MOTORS WITH BRAKE + ENCODER				
37M3220000	B&R 80MPF3.500D114-01 (5A 80V max)	√ ◆	√ ■	√ ■

* In all applications requiring motor powered up to 6A / 55VDC, the programmable drive **e**.drive, code 37D1332002, can be used.
● **Important!** AC drive to continuous voltage VDC = VAC · $\sqrt{2}$ ◆ **Important!** Limit current ■ **Important!** Limit current and voltage

MOTOR CODES		DRIVES CODES
Metal Work		37D2100000
Manufacturer		DELTA ASD-A2-0121-M
Metal Work	Manufacturer	(100W)
BRUSHLESS MOTORS		
37M2000000	DELTA ECMA-C20401RS (100W)	√
BRUSHLESS MOTORS WITH BRAKE		
37M4000000	DELTA ECMA-C20401SS (100W)	√

KEY TO CODES

						DRIVE			
CYL	37	6	032	0030	1	3	1	1	2	1
	TYPE	FAMILY	SIZE	STROKE	SCREW	VERSION	MOTOR	FLANGE	TORQUE	
	37 Electric actuators	**6** Electric cylinder SSC	**032** Ø32	**BALL SCREW** **0030** 30 mm **0055** 55 mm **0080** 80 mm **0100** 100 mm **0125** 125 mm **0150** 150 mm **0200** 200 mm **LEAD SCREW** **0030** 30 mm **0055** 55 mm	**1** Pitch 4 ball screw **4** Pitch 10 ball screw **C** Pitch 5 lead screw **F** Pitch 12.7 lead screw	**IN-LINE** ● **3** Without non-rotating IP55/IP65 ● **4** With antirotation, IP55/IP65 **GEARED** ● **7** Without non-rotating IP55/IP65 ● **8** With antirotation, IP55/IP65	**1** STEPPING **2** BRUSHLESS **3** STEPPING with BRAKE + encoder **4** BRUSHLESS with BRAKE **8** STEPPING + encoder	**0** 40x40 **1** NEMA 23 **2** 60x60	**0** 0 - 0.79 Nm **2** 1.2 - 2.19 Nm	**0** Base **1** Greater rpm

● IP65 version available for all drives, except for motor code 37M1120001, which is IP55 protected.

POSSIBLE ORDERING CODES

Ø 32 with ball screw

	Drive	Version	Screw pitch
376032_ _ _ _	1	3	1121
	4	4	1220
		7	8220
		8	3220
			2000
			4000

_ _ _ _ = enter the stroke in mm

Ø 32 with lead screw

	Drive	Version	Screw pitch
376032_ _ _ _	C	3	1121
	F	4	1220
		7	8220
		8	3220
			2000
			4000

_ _ _ _ = enter the stroke in mm

NOTES

ACCESSORIES FOR ELECTRIC CYLINDER SERIES ELEKTRO SSC

Note: Where specified, limit the maximum axial loads (Fmax) according to the electric cylinders

FOOT MODEL A

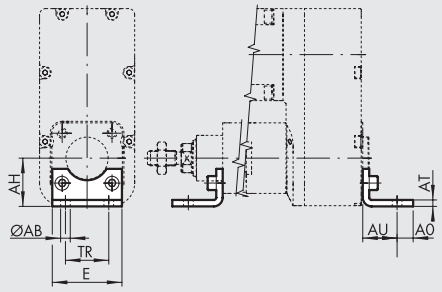

STEEL

Code	Ø	Ø AB	AH	AO	AT	AU	TR	E	Weight [g]	Fmax [N]
W0950322001	32	7	32	11	4	24	32	45	76	1600

Note: Individually packed with 2 screws.
N.B.: Rear mounting requires 2 M6x14 UNI 5931 screws.

FEMALE HINGE - MODEL B

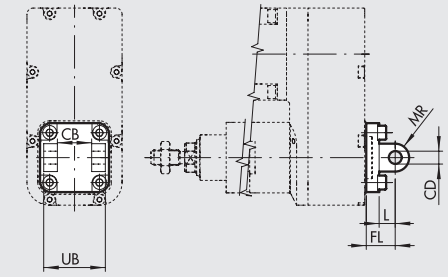

ALUMINIUM

Code	Ø	UB	CB H14	FL	CD H9	MR	L	Weight [g]	Fmax [N]
W0950322003	32	45	26	22	10	10	12	116	800

STEEL

Code	Ø	UB	CB H14	FL	CD H9	MR	L	Weight [g]	Fmax [N]
W095E322003	32	45	26	22	10	10	13	348	1600

Note: Supplied with 4 screws, 4 washers, 2 snap rings and 1 pin.
N.B.: Mounting requires 4 M6x16 UNI 5931 screws.

MALE HINGE - MODEL BA

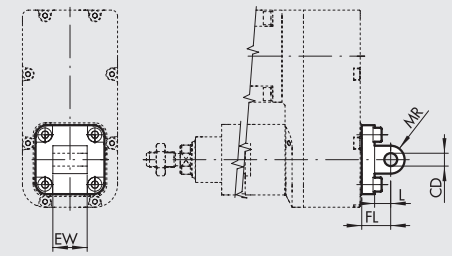

ALUMINIUM

Code	Ø	EW	FL	MR	CD H9	L	Weight [g]	Fmax [N]
W0950322004	32	26	22	10	10	13	94	800

STEEL

Code	Ø	EW	FL	MR	CD H9	L	Weight [g]	Fmax [N]
W095E322004	32	26	22	10	10	13	282	1600

Note: Supplied with 4 screws.
N.B.: Mounting requires 4 M6x14 UNI 5931 screws.

ARTICULATED MALE HINGE - MODEL BAS

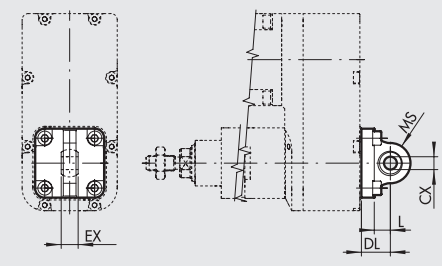

ALUMINIUM

Code	Ø	DL	MS	L	CX H9	EX	Weight [g]	Fmax [N]
W0950322006	32	22	16	12	10	14	106	800

STEEL

Code	Ø	DL	MS	L	CX H9	EX	Weight [g]	Fmax [N]
W095E322006	32	22	15	14	10	14	318	1600

Note: Supplied with 4 screws, 4 washers.
N.B.: Mounting requires 4 M6x16 UNI 5931 screws.

METAL WORK PNEUMATIC

CETOP HINGE FOR MODEL B - MODEL GL

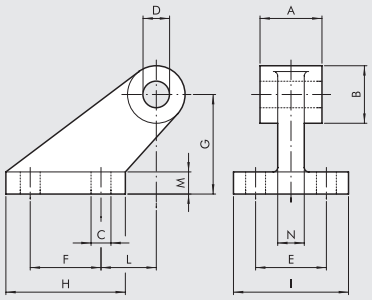

ALUMINIUM

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]	Fmax [N]
W0950322008	32	26	19	7	10	25	20	32	37	41	18	8	10	96	800

Note: Supplied with 4 screws, 4 washers.

COUNTER-HINGE FOR MODEL B - MODEL GS



ALUMINIUM

Code	Ø	B	C	D	E	G	J	L	M	N	Weight [g]	Fmax [N]
W0950322108	32	26	32.5	45	7	32	11	10	10	10	106	800

Note: Supplied with 4 screws, 4 washers.

ISO 15552 COUNTER-HINGE FOR MODEL B - MODEL AB7



ALUMINIUM

Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]	Fmax [N]
W0950322017	32	26	20	6.6	10	38	18	32	31	51	3	8	10	21	3	60	800

STEEL

Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]	Fmax [N]
W095E322017	32	26	20	6.6	10	38	18	32	31	51	3	8	10	20	5	180	1600

FRONT FLANGE - MODEL C

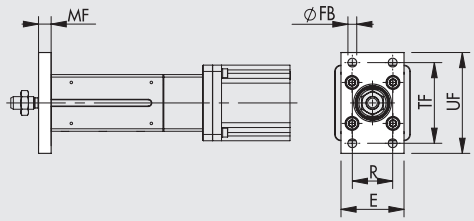

Code	Ø	TF	UF	E	MF	R	øFB	Weight [g]	Fmax [N]
W0950322002	32	64	80	50	10	32	7	246	1600

Note: Supplied with 4 screws.

ROD NUT - MODEL S



Code	Ø	F	H	CH	Weight [g]
0950322010	32	M10x1.25	6	17	6

Note: Individually packed.

FORK MODEL GK-M



Code	Ø	øM	C	B	A	L	F	D	N	Weight [g]
W0950322020	**32**	10	20	10	20	52	40	M10x1.25	26	92

Note: Individually packed.

ROD EYE - MODEL GA-M

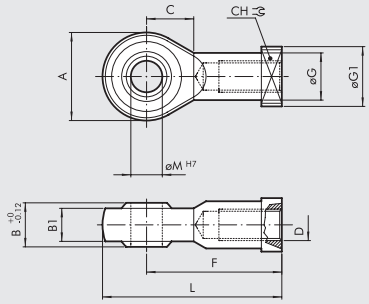

Code	Ø	øM	C	B1	B	A	L	F	D	øG	CH	øG1	Weight [g]
W0950322025	**32**	10	15	10.5	14	28	57	43	M10x1.25	15	17	19	70

Note: Individually packed.

SELF ALIGNING ROD COUPLER - MODEL GA-K



Code	Ø	A	B	C	D	øF	øE	SW1	SW2	SW3	SW4	SW5	Weight [g]
W0950322030	**32**	M10x1.25	20	20	71	22	4	12	30	30	19	17	216

Note: Individually packed.

GREASE



Code	Description	Weight [g]
9910514	Grease pipe ULTRAPLEX FG1 NSF CAT H1	400

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



For codes and technical data, see **chapter A6**.

METAL WORK PNEUMATIC

DRIVES



For motor-drive couplings see table on page **A5**.67

SPARE PARTS

ELECTRIC MOTORS

For motor-drive couplings see table on page **A5**.67

NOTES

ELECTRIC CYLINDER SERIES ELEKTRO MINI DC

The ELEKTRO MINI DC cylinder features space-saving and lightweight design, as well as easy and immediate operation.
The piston rod is driven by a trapezoidal screw with a self-lubricating techno-polymer nut. The construction characteristics make the movement of the piston rod irreversible, thereby preventing it from rotating.
The piston comes with a magnet that can be detected by dedicated sensors to be fitted to the liner edging.
The system's 24VDC driving motor comes with a resettable overload protection fuse; a version with an encoder is also available to locate the piston rod position.
The actuator is in a gear-driven version, with different gear ratios (1/12, 1/27, 1/48 and 1/108) and IP40 degree of protection.
Solutions with a trapezoidal screw are generally suitable for applications where the number of operations in a unit of time is relatively low (due to overheating of the screw/lead screw-nut assembly), the required precision is not particularly high, wear over time is minimized and high strengths and high speeds are not required all at the same time.

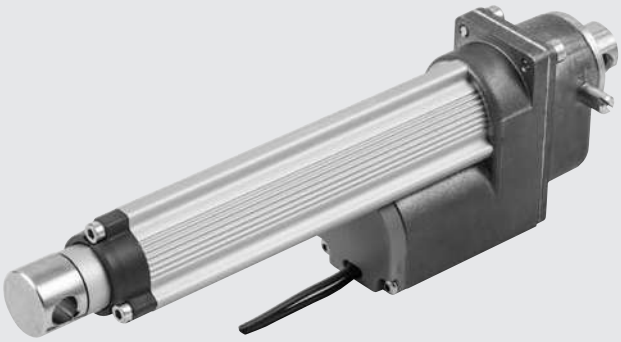

TECHNICAL DATA		Ø 25 pitch 3					
Temperature range	°C	from-20 to +60					
Degree of protection		IP40					
Gearing ratio		1/12 - 1/27 - 1/48 - 1/108					
Standard strokes (special execution on request)	mm	50	100	150	200	250	300
Weight	g	650	700	750	800	850	900
Piston rod diameter	mm	19					
Maximum thrust	N	See graphs on page **A5**.74					
Maximum speed	mm/s	See graphs on page **A5**.74					
Maximum load in vertical position and motor powered off (reversibility)	N	Irreversible (max recommended 2300)					
Work cycle at 25°C (duty cycle)	%	20					
Overall radial oscillation of the piston rod (without load) for 100 mm of stroke	mm	0.4					
Versions		Geared					
Uncontrolled impact at the end of stroke		NOT ALLOWED (it provides an extra-stroke minimum 20 mm)					
Sensor magnet		YES (see specifications and assembly on page **A5**.76)					
Work position		Any					
Motor		Direct current DC					
Supply voltage	VDC	24					
Input power with MAX torque	W	72					
Input current with MAX torque	A	3 (24VDC)					
Direction of rotation		According to polarity (concordant 1/12 - 1/48 - 1/108 discordant for 1/27)					
Encoder (optional)		Effetto Hall, two-channel, two motor pulses/revolution per channel, NPN					
Motor protection		Overload and short-circuiting protection using resettable fuse					
Power cable		Standard free wire length 230 mm					

METAL WORK PNEUMATIC

COMPONENTS

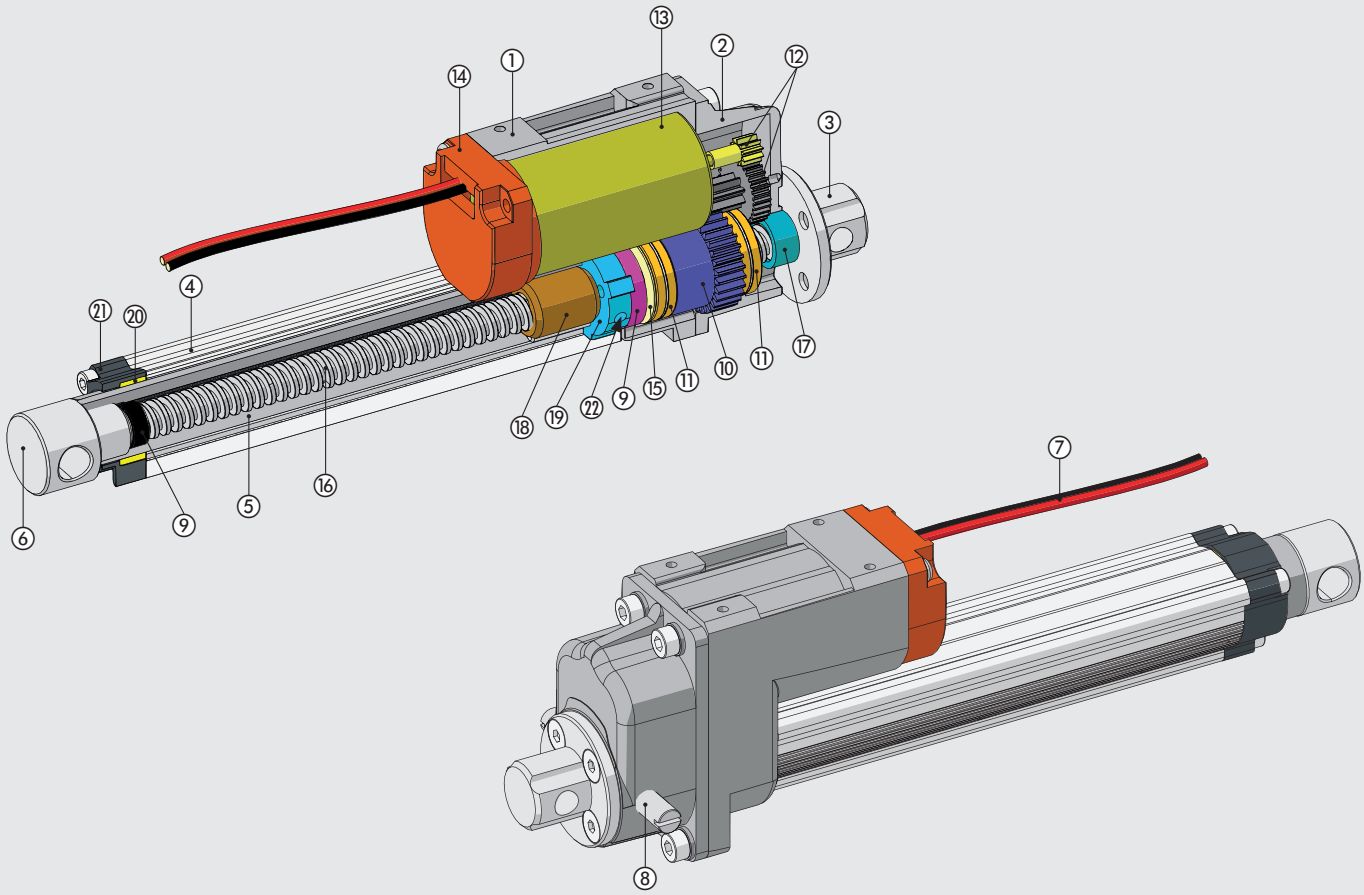

① TRANSMISSION PLATE: die-cast zamak
② COVER: die-cast zamak
③ REAR FLANGE: zinc-plated steel
④ BARREL: anodized aluminium
⑤ PISTON ROD: anodized aluminium
⑥ NIPPLE: zinc-plated steel
⑦ POWER CABLE (+ ENCODER)
⑧ PIN: zinc-plated steel
⑨ BUFFER: polyurethane
⑩ LEAD SCREW NUT ASSEMBLY
⑪ THRUST BEARING RING: technopolymer - steel
⑫ GEAR: sintered steel
⑬ MOTOR
⑭ MOTOR COVER: technopolymer
⑮ BELLEVILLE WASHER: steel
⑯ SCREW: stainless steel
⑰ BUSHING: sintered steel
⑱ BALL SCREW: technopolymer
⑲ NON-ROTATING: technopolymer
⑳ FRONT BUSHING: technopolymer
㉑ FRONT CYLINDER HEAD: technopolymer
㉒ MAGNET: neodymium

CYLINDER CONNECTION AND WIRING DIAGRAM

WITHOUT ENCODER



WITH ENCODER



Function	Corresponding wire colour
Motor power supply +	Red
Encoder V+ 5-24 VDC supply	Brown
Encoder channel A (NPN)	Violet
Encoder channel B (NPN)	Blue
Encoder 0 V supply	Yellow
Motor power supply -	Black

DIMENSIONS

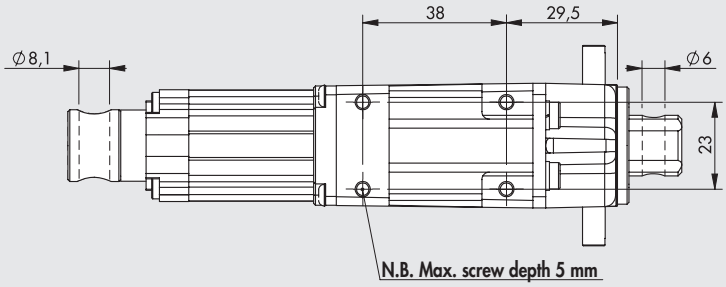

+ = ADD THE STROKE

Version	Code	E
Motor 24VDC	372025___36_5	80.5
Motor 24VDC + Encoder	372025___38_5	85

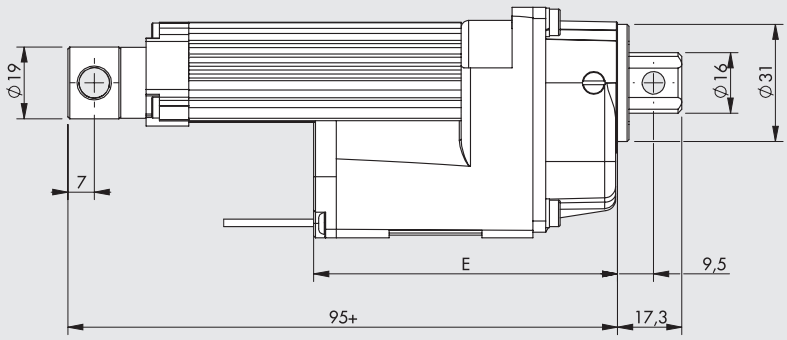



AXIAL LOAD CURVES AS A FUNCTION OF SPEED

Speed [mm/s]

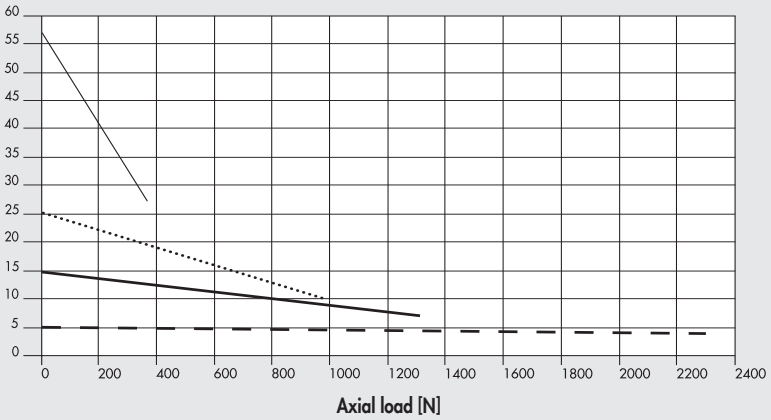

372025_ _ _ 363_25 (1/12 gear ratio)
372025_ _ _ 363_35 (1/27 gear ratio)
372025_ _ _ 363_45 (1/48 gear ratio)
372025_ _ _ 363_55 (1/108 gear ratio)

Current [A]

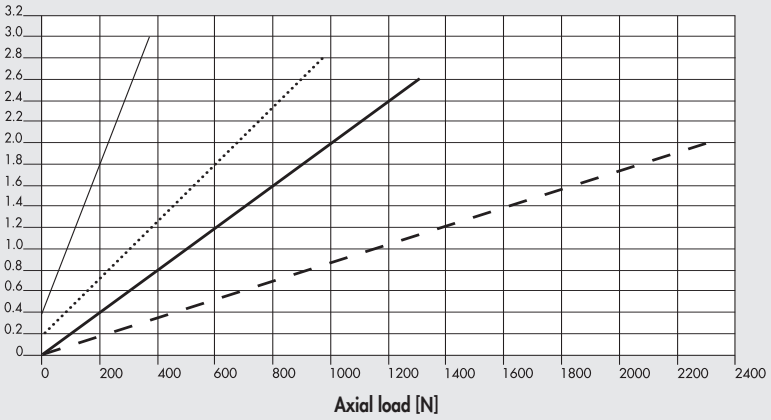

372025_ _ _ 363_25 (1/12 gear ratio)
372025_ _ _ 363_35 (1/27 gear ratio)
372025_ _ _ 363_45 (1/48 gear ratio)
372025_ _ _ 363_55 (1/108 gear ratio)

ACTUATOR-DRIVE COUPLING

ACTUATOR		DRIVE	
Code	Description	Code	Description
3720250___363__5	ELECTRIC CYLINDER SERIES ELEKTRO MINI DC	37D3112000	E.DIRECT DRIVE FOR DIRECT CURRENT MOTORS

N.B.: The Mini DC cylinder needs no drive for "basic" operation.

KEY TO CODES

CYL	37 TYPE	2	0	25 BORE	0050 STROKE	3 SCREW PITCH	6 VERSION	3 DRIVE	6 SUPPLY VOLTAGE	2 GEAR RATIO	5 CYLINDER END TYPES
	37 Electric actuators	**2** Cylinder Elektro DC	**0** STD	25	50 100 150 200 250 300	**3** Screw pitch 3	**6** Geared with non-rotating IP40	**3** Motor direct current	**6** 24VDC + fuse **8** 24VDC + Encoder + fuse	**2** 1/12 **3** 1/27 **4** 1/48 **5** 1/108	**5** Nose piece drilled and rear hinge

ACCESSORIES: FIXINGS

FOOT







Fixing from below with M5 screw, or from above with through M4 screw.



Code	Weight [g]
095D25E042	41

Note: 1 piece per pack complete with 4 screws

V-LOCK FOOT







Code	Weight [g]
095D25E042K	90

Note: 1 piece per pack complete with 4 screws

ACCESSORIES: MAGNETIC SENSORS

OVERALL DIMENSIONS AND ORDERING CODES

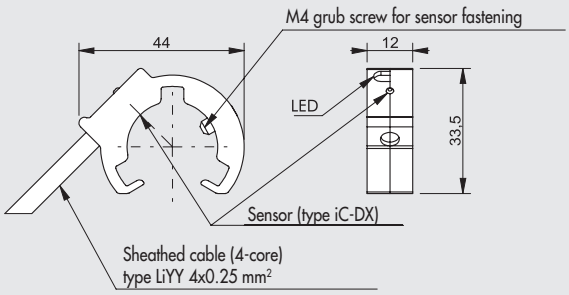

Code	Description
W095839	PNP/NPN switching sensor, 4 wires, cable 1.8 m

Note: Individually packed

TECHNICAL DATA

		HALL EFFECT
Type of contact		N.O.
Switch		PNP / NPN
Supply voltage (Ub)	V	10 to 24 DC
Output current	mA	≤ 100
Connecting cable	m	1.8
Temperature range	°C	-10 to +70
Degree of protection		IP40

WIRING DIAGRAM

Version PNP



Version NPN



INSTALLATION

The figure shows the correct sensor mounting alignment, as the magnet is only present on one side of the cylinder.

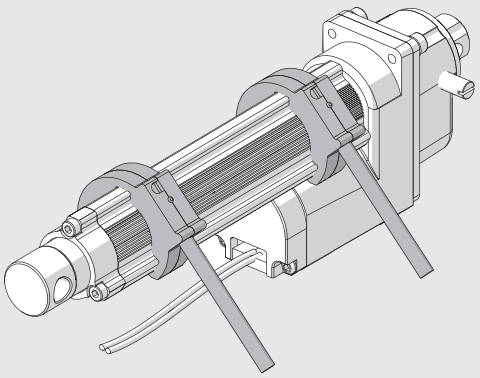

NOTES

ELECTRIC CYLINDER
SERIES ELEKTRO ROUND DC

METAL WORK PNEUMATIC

In the ELEKTRO ROUND DC cylinder, the forward movement of the piston rod is obtained via trapezoidal (acme) or lead screw and a self-lubricating technopolymer nut. This piston has a guide ring that is calibrated to minimize the backlash with the cylinder liner and reduce vibration during rotation of the screw. The piston also comes with a magnet for magnetic sensors.
The system is driven by a 24VDC direct current motor. The position of the motor can be controlled using an optional encoder. A resettable fuse is inserted in the cylinder for motor thermal overload protection. The motor used has a planetary gearbox with a 1/13 or 1/25 ratio.
Depending on the configuration (screw pitch and gear ratio), this cylinder can be either irreversible (supporting the load with the motor off) or reversible under load.
Both versions are supplied without piston rod anti-rotation device, which will be provided by the customer outside the cylinder.
It is available in two versions:
- with an in-line motor, where the motor shaft is connected directly to the screw via a coupling.
- with a geared motor, where the transmission of motion is ensured by belt and pulleys with a ratio of 1:1.

This cylinder is designed for use with IP65 protection rating.
The solutions with the trapezoidal screw (acme) are generally suitable for applications where the number of operations per time unit is reduced; the degree of accuracy is not particularly high due to heating of the screw-leadscrew assembly; wear over time does not create inconveniences, no high forces and speeds are required at the same time.

in-line version

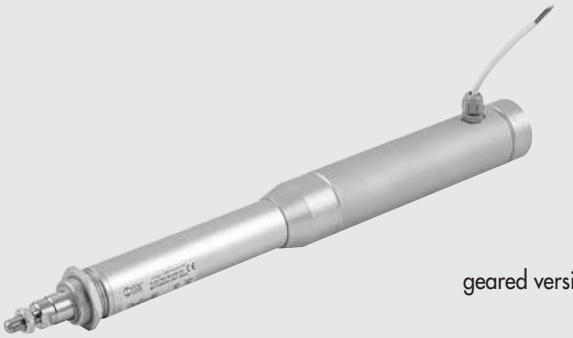

geared version

TECHNICAL DATA			Ø 32 pitch 4	Ø 32 pitch 25
Temperature range		°C	from -20 to +60	
Degree of protection			IP65	
Gearing ratio of the planetary gearbox		mm	1/13 or 1/25	
Minimum stroke		mm	30	
Maximum stroke		mm	1000	
Piston rod diameter		mm	20	
Maximum thrust		N	see graphs on page **A5**.81	
Maximum speed		mm/s	see graphs on page **A5**.81	
Maximum load in vertical position and motor powered off (reversibility)		N	irreversible (max recommended 1000)	70 with 1/25 gear ratio
				20 with 1/13.44 gear ratio
Work cycle at 25°C (duty cycle)		%	20 (example: 2 min. ON 8 min. OFF)	
Overall radial oscillation of the piston rod (without load) for 100 mm of stroke		mm	0.4	
Versions			In-line or geared	
Uncontrolled impact at the end of stroke			NOT ALLOWED (it provides an extra-stroke minimum 5 mm)	
Sensor magnet			YES	
Work position			Any	
Motor			Direct current DC	
Supply voltage		VDC	24	
Input power with MAX torque		W	24	
Input current with MAX torque		A	1 (24VDC)	
Interference suppression			VDR and capacitors	
Direction of rotation			according to polarity	
Encoder (optional)			two channels, three pulses/motor rev for each channel, NPN	
Motor protection			Overload and short-circuiting protection using resettable fuse	
Power cable (length)		m	2	
Weight				
	at stroke 0, in-line version	g	1282	1256
	at stroke 0, geared version	g	1415	1389
	additional for each mm stroke	g	2.5	

COMPONENTS

IN-LINE VERSION

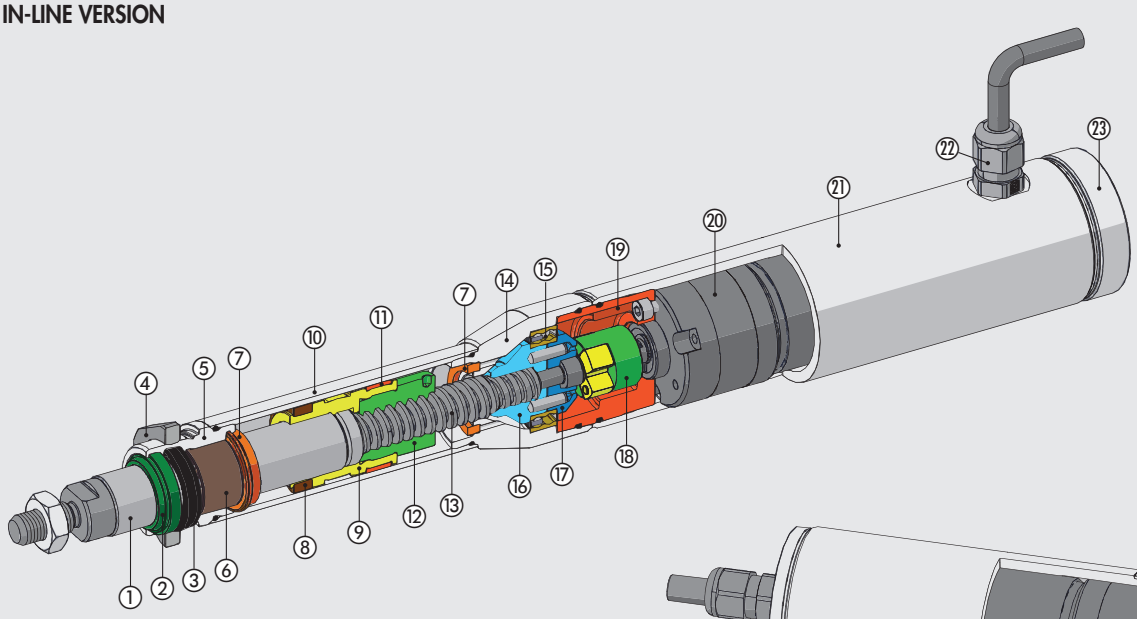

GEARED VERSION

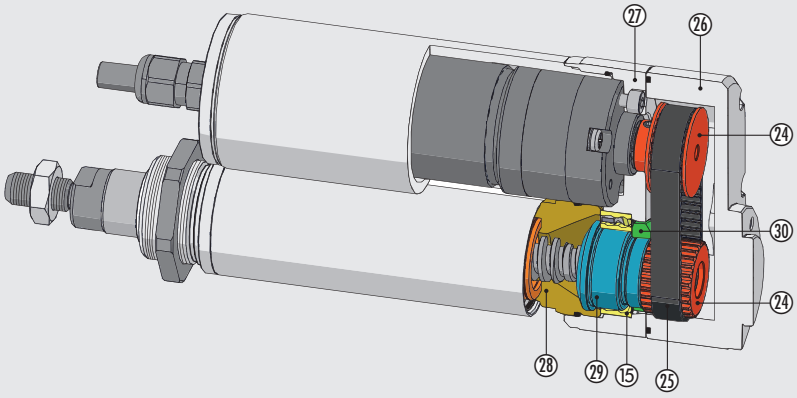

① PISTON ROD: ground chrome steel
② WIPER RING: polyurethane
③ PISTON ROD GASKET: NBR
④ FRONT FIXING RING NUT: anodized aluminium
⑤ FRONT CYLINDER HEAD: anodized aluminium
⑥ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑦ BUFFER: polyurethane
⑧ MAGNET: plastoferrite
⑨ PISTON: alumunium
⑩ BARREL: anodized aluminium alloy
⑪ GUIDE STRIP: self-lubricated calibrated technopolymer
⑫ BALL SCREW: technopolymer
⑬ SCREW (ACME): hardened steel
⑭ REAR CYLINDER HEAD: anodized aluminium
⑮ BEARING: oblique with two ball rings
⑯ BEARING ADAPTER 1: anodized aluminium
⑰ BEARING ADAPTER 2: anodized aluminium
⑱ COUPLING
⑲ MOTOR PLATE: anodized aluminium
⑳ GEARED MOTOR
㉑ MOTOR COVER PIPE: anodized aluminium
㉒ FAIRLEAD
㉓ MOTOR COVER PLUG: anodized aluminium
㉔ PULLEY: aluminium
㉕ DRIVE TOOTHED BELT
㉖ COVER: anodized aluminium
㉗ TRANSMISSION PLATE: anodized aluminium
㉘ THREADED RING: anodized aluminium
㉙ BEARING ADAPTER 3: anodized aluminium
㉚ RING NUT

CYLINDER CONNECTION AND WIRING DIAGRAM

WITHOUT ENCODER



WITH ENCODER



Function	Corresponding wire colour
Motor power supply +	Brown
Motor power supply -	White
Encoder V+ 5-24 VDC supply	Green
Encoder 0 V supply	Yellow
Encoder channel A (NPN)	Rose
Encoder channel B (NPN)	Grey

METAL WORK PNEUMATIC

DIMENSIONS FOR IN-LINE VERSIONS

+ = ADD THE STROKE

Male thread

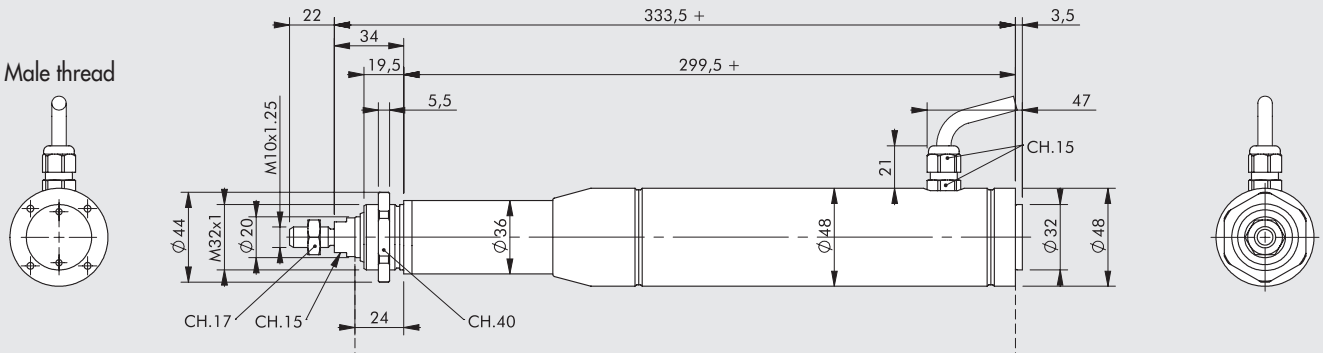

Drilled nose piece

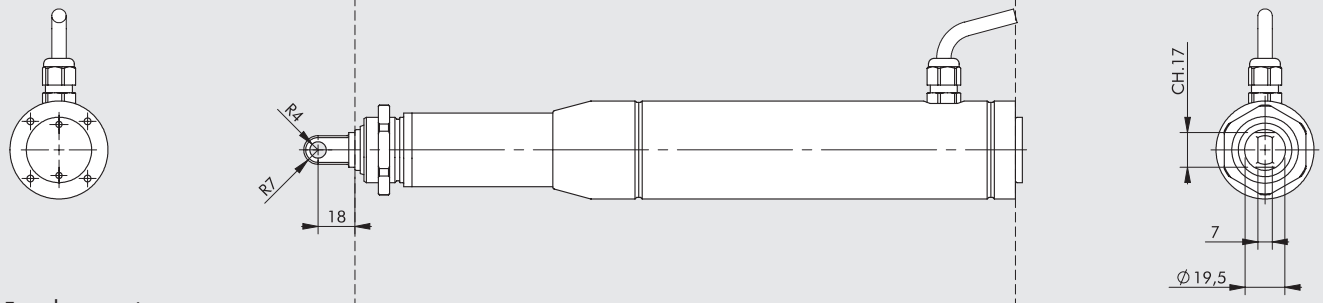

Female nose piece

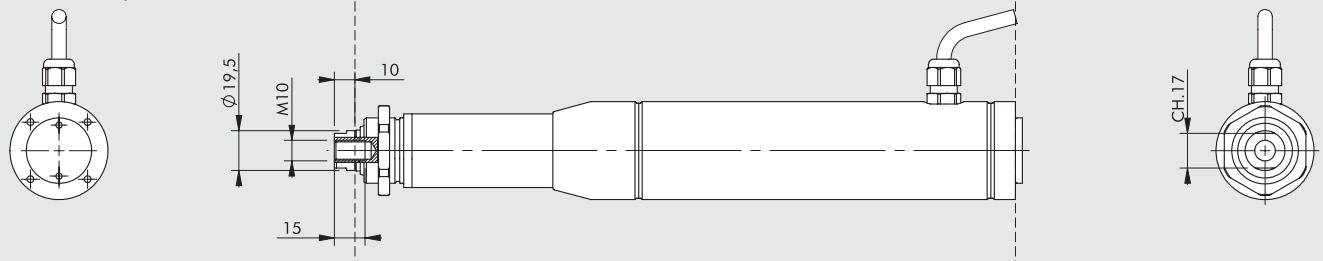

Female piston rod

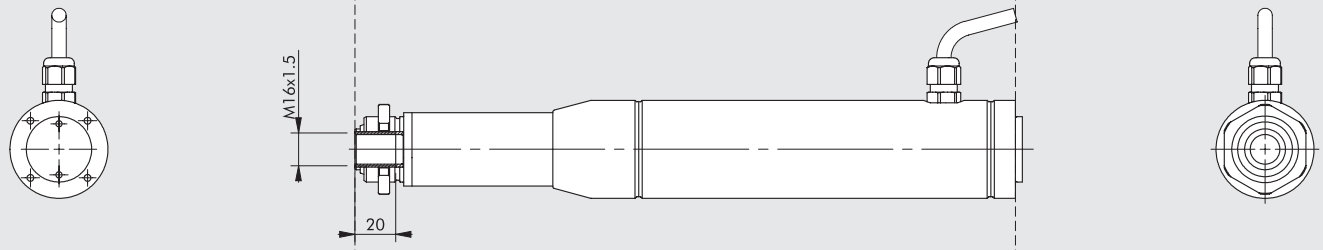

Drilled nose piece and rear hinge

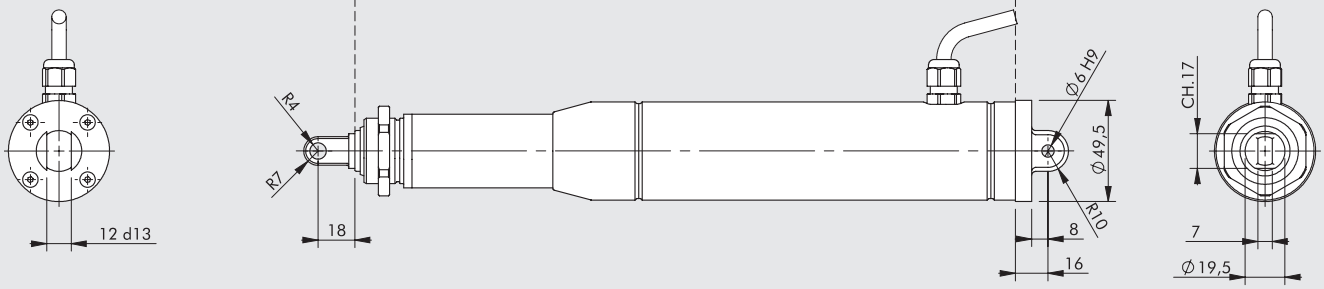

DIMENSIONS FOR GEARED VERSIONS

+ = ADD THE STROKE

Male thread



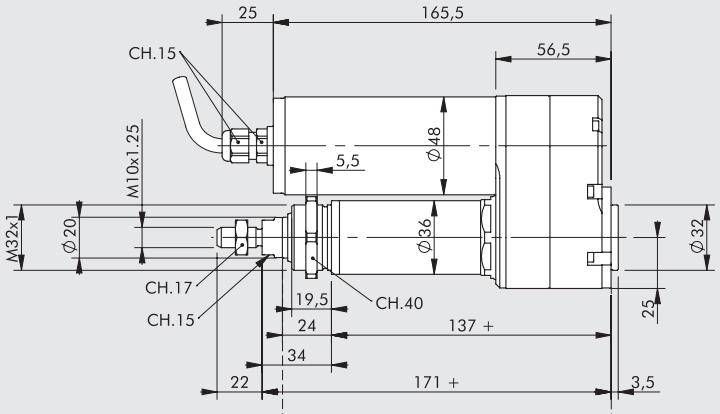



Drilled nose piece



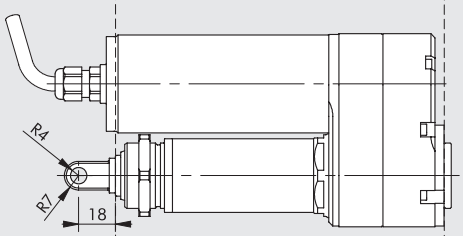



Female nose piece



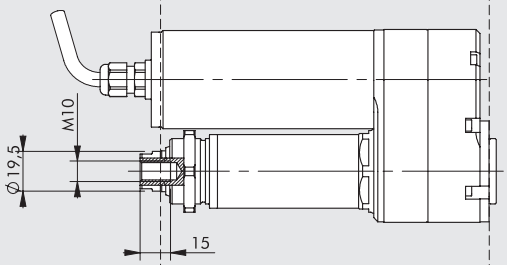



Female piston rod



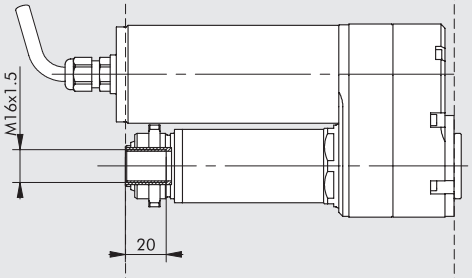



Drilled nose piece and rear hinge



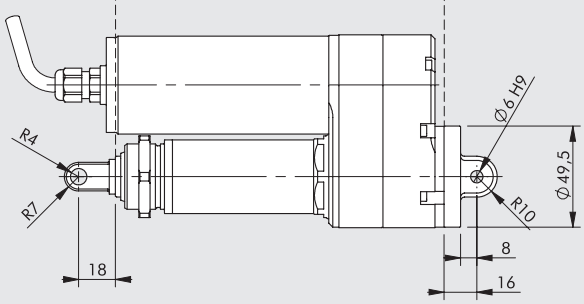



AXIAL LOAD CURVES AS A FUNCTION OF SPEED

Ø32 WITH PITCH 4 WITH DC MOTOR

Speed [mm/s]

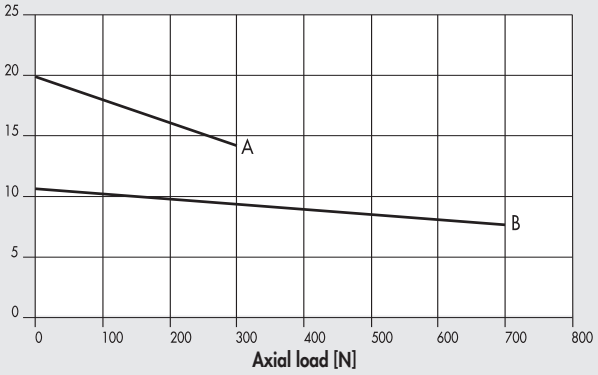

A = 372032___1_3_0_ (1/13 gear ratio) B = 372032___1_3_1_ (1/25 gear ratio)

Current [A]

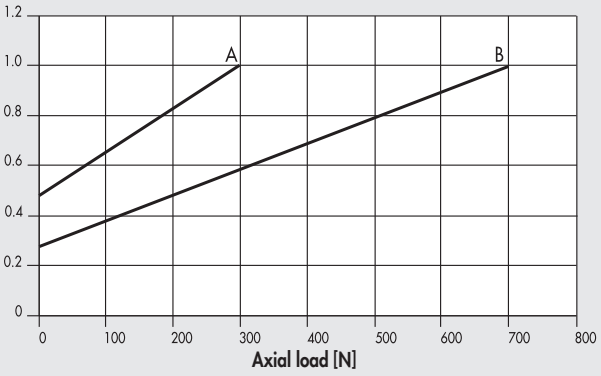

A = 372032___1_3_0_ B = 372032___1_3_1_

Ø32 PITCH 25 WITH DC MOTOR

Speed [mm/s]

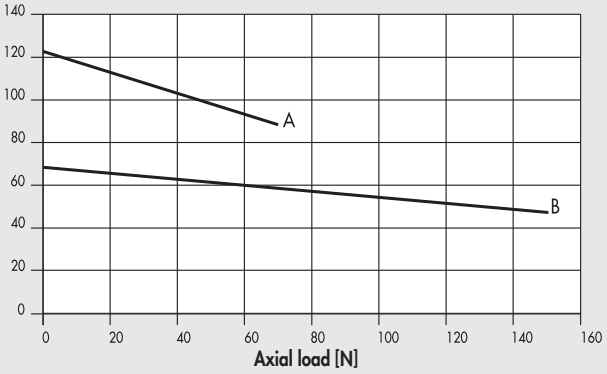

A = 372032___L_3_0_ (1/13 gear ratio) B = 372032___L_3_1_ (1/25 gear ratio)

Current [A]

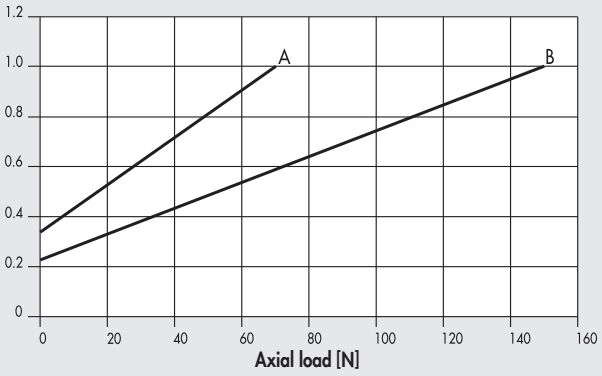

A = 372032___L_3_0_ B = 372032___L_3_1_

ACTUATOR-DRIVE COUPLING

ACTUATOR			DRIVE	
Code		Description	Code	Description
372032_____3___		ELECTRIC CYLINDER SERIES ELEKTRO ROUND DC	37D3112000	E.DIRECT DRIVE FOR DIRECT CURRENT MOTORS

N.B.: The Round DC cylinder needs no drive for "basic" operation.

KEY TO CODES

CYL	37 TYPE	2	0	32 BORE	0100 STROKE	1 SCREW PITCH	3 VERSION	3 DRIVE	6 SUPPLY VOLTAGE	0 GEAR RATIO	1 CYLINDER END TYPES
	37 Electric actuators	**2** Cylinder Elektro DC	**0** STD	32		**1** Screw pitch 4 **L** Screw pitch 25	**3** In-line without non-rotating IP65 **7** Geared without non-rotating IP65	**3** Motor direct current	**6** 24VDC + fuse **8** 24VDC + Encoder + fuse	**0** 1/13 **1** 1/25	**1** Thread male **2** Nose piece drilled **3** Nose piece female ◆ **4** Piston rod female **5** Nose piece drilled and rear hinge

◆ For the version with a female piston rod, a cap must be provided on the piston rod to ensure IP65 protection.

ACCESSORIES: FIXINGS

FOOT

+ = ADD THE STROKE

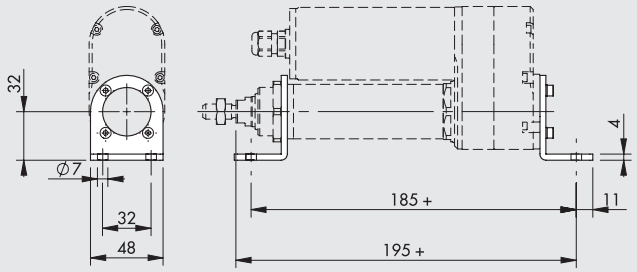

Code	Weight [g]
W095032C001	111

Note: 1 piece per pack complete with 4 screws and 4 roses

ARTICULATED MALE HINGE

+ = ADD THE STROKE

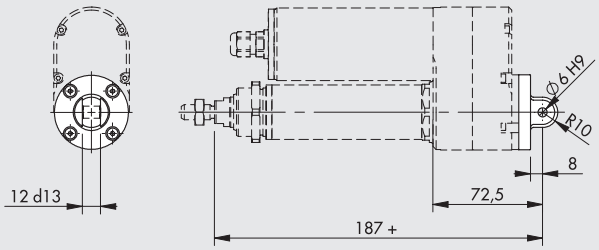

Code	Weight [g]
W095032C006	41

Note: supplied complete with 4 screws and 1 dry bearing

INTERMEDIATE HINGE

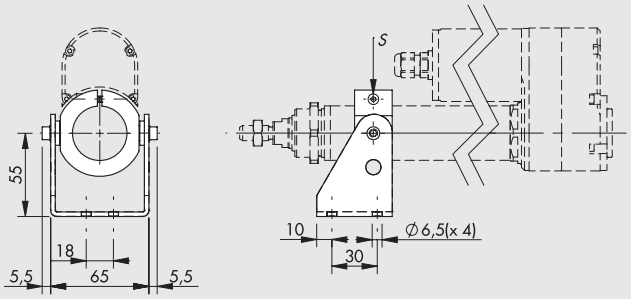

Code	Weight [g]
W095032C027	302

Note: supplied complete with 2 screws
IMPORTANT:: Screw tightening torque S: 2 Nm max

HEAD PIECE RING NUT



Code	Weight [g]
W095032C010	11

Note: individually packed

ROD NUT - MODEL S



Code	Weight [g]
0950322010	6

Note: individually packed

NOTES

ACCESSORIES: MAGNETIC SENSORS

SENSOR SERIES DSM



For codes and technical data, see **chapter A6**.

SENSOR BRACKET DSM

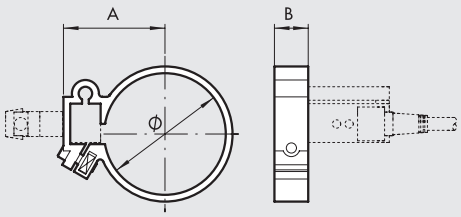

Code	Model	Ø	A	B
W0950000132	Bracket DXF 36-32	36	29.5	10

SENSOR, SQUARE TYPE



For codes and technical data, see **chapter A6**.

Note: Latest generation, secure fixing

SENSOR BRACKET, SQUARE TYPE



Code	Model
W0950001103	Sensor bracket 8 to 63

Note: Individually packed

MATERIAL

Bracket: stainless steel

Sensor holder: zamak

NOTES

ELECTRIC AXIS
SERIES ELEKTRO SHAK

Belt-driven rodless electric cylinder with V-Lock type interface.
The cylinder structure features a sturdy anodized aluminium extruded profile to ensure optimal rigidity. The typical V-Lock dovetail (no grooves) is provided for easy installation using QS elements. The V-Lock interface with a dovetail and standard grooves is mounted on the moving plate to fix the other components using K or QS elements. The slide is moved by means of adjustable casters running along hardened and tempered guides inserted into the extruded profile, to obtain a rigid system with adjustable clearance. Guide lubrication nipples are also mounted on the slide plate. The slide is driven by a reinforced belt that is in turn operated by a pulley keyed onto the motor; a mechanical belt-tensioning system is mounted on the cylinder.
Different drives are available, both brushless and stepping. The versions with a brushless motor can be equipped with a 1:3 speed gearbox, when you want to make the most of the available torque.
In addition to the standard drives included in the catalogue, custom cylinder can also mount other types of motor. The homing position is identified by a inductive sensor included in the supply.
Two different size are available, SHAK 340 and SHAK 470, with pre-set standard strokes. For each size it is possible to choose side on which to mount the motor (4 positions). A version with a smooth tree-type output, mounted in a pre-set position, is also available. The SHAK cylinder can be mounted both horizontally and vertically. With vertical installation, it is advisable to use motors with a holding brake that only activates in the event of a power failure but not when there is a motor overload. For the correct operation of the brake, it is necessary to meet the limits required by the axial load curves according to the speed. Among the accessories available there is a cable guiding system with a handy cable channel and bracket.

SHAK 340

SHAK 470

TECHNICAL DATA			SHAK 340	SHAK 470
WITH STEPPING MOTORS				
Temperature range	WITH MOTOR	°C	see single motor data sheet	
	ONLY MECHANICS	°C	from -10 to +50	
Maximum value of duty cycle			50%	
Maximum value of axial force available (with Metal Work motors)				
without brake		N	150	250
with brake		N	180	250
Maximum speed without load				
without brake and without gearbox		m/s	2.5	2
with brake and without gearbox		m/s	2	2
Maximum acceleration without load		m/s^2	50	50
Maximum admissible mass		kg	5	7.5
WITH BRUSHLESS MOTORS				
Temperature range	WITH MOTOR	°C	see single motor data sheet	
	ONLY MECHANICS	°C	from -10 to +50	
Maximum value of duty cycle			100%	
Maximum value of axial force available (with Metal Work motors)				
without gearbox		N	70	80
with gearbox		N	600	700
Maximum speed without load				
without gearbox		m/s	5	5
with gearbox		m/s	2.4	2.7
Maximum acceleration without load		m/s^2	50	50
Maximum admissible mass				
without gearbox, vertical orientation		kg	3	3
with gearbox, vertical orientation		kg	15	25
without gearbox, horizontal orientation		kg	5	5
with gearbox, horizontal orientation		kg	15	25

METAL WORK PNEUMATIC

MECHANICAL CHARACTERISTICS		SHAK 340	SHAK 470
Maximum movable mass	kg	15	25
Maximum speed (empty)	m/s	5	5
Maximum acceleration (empty)	m/s^2	50	50
Maximum axial force	N	800	1000
Maximum force applicable on the pulley	Nm	15	25
Standard strokes (special execution on request)	mm	400	800
		600	1200
		800	1600
		1000	2000
		1200	2400
Repetition accuracy	mm	±0.05	
Noise level	dBA	<66	
Mounting position		Any	
Protection level		IP30	
Toothed belt pitch	mm	5	
Type of belt		PowerGrip® LL GT 5MR 25 FV	PowerGrip® LL GT 5MR 30 ST
Belt elongation at maximum load		0.15%	0.25%
Pulley pitch diameter	mm	35.01	44.56
Stroke / Revolution	mm/rev	110	140
Homing position sensor		Inductive sensor switch	

MASS AND MOMENT OF INERTIA		SHAK 340	SHAK 470
Weight without motor	kg	7.7 (stroke 400)	15.9 (stroke 800)
		9 (stroke 600)	19.8 (stroke 1200)
		10.4 (stroke 800)	23.6 (stroke 1600)
		11.7 (stroke 1000)	27.5 (stroke 2000)
		13 (stroke 1200)	31.2 (stroke 2400)
Motor weight	kg		
Stepping motor without brake		2.5	4.2
Stepping motor with brake		3.7	4.5
Brushless motor without brake		1.3	2.6
Brushless motor with brake		1.7	2.2
Moving mass	kg	1.28 (stroke 400)	2.18 (stroke 800)
		1.32 (stroke 600)	2.28 (stroke 1200)
		1.36 (stroke 800)	2.38 (stroke 1600)
		1.40 (stroke 1000)	2.48 (stroke 2000)
		1.44 (stroke 1200)	2.58 (stroke 2400)
Gearbox weight	kg	0.8	4
Reduced inertia at motor (without load)	$kg\ mm^2$		
Versions without gearbox (without motor)		451 (stroke 400)	1414 (stroke 800)
		462 (stroke 600)	1467 (stroke 1200)
		474 (stroke 800)	1521 (stroke 1600)
		485 (stroke 1000)	1574 (stroke 2000)
		497 (stroke 1200)	1627 (stroke 2400)
Versions with gearbox (without motor)		58 (stroke 400)	216 (stroke 800)
		59 (stroke 600)	222 (stroke 1200)
		61 (stroke 800)	228 (stroke 1600)
		62 (stroke 1000)	234 (stroke 2000)
		63 (stroke 1200)	240 (stroke 2400)

COMPONENTS

① INTERFACE PLATE: anodized aluminium
② SLIDE: aluminium
③ BODY: anodized aluminium
④ TOOTHED TRANSMISSION BELT: loaded polychloroprene (CR)
⑤ HARDENED GUIDE: hardened ground chromed steel
⑥ DRIVE PULLEY: steel
⑦ IDLE PULLEY: aluminium
⑧ INDUCTIVE SENSOR
⑨ GUARD: aluminium - technopolymer
⑩ COVER PROFILE: anodized aluminium
⑪ ECCENTRIC ROLLER
⑫ CONCENTRIC ROLLER
⑬ DRIVING PULLEY: aluminium
⑭ BUFFER: rubber

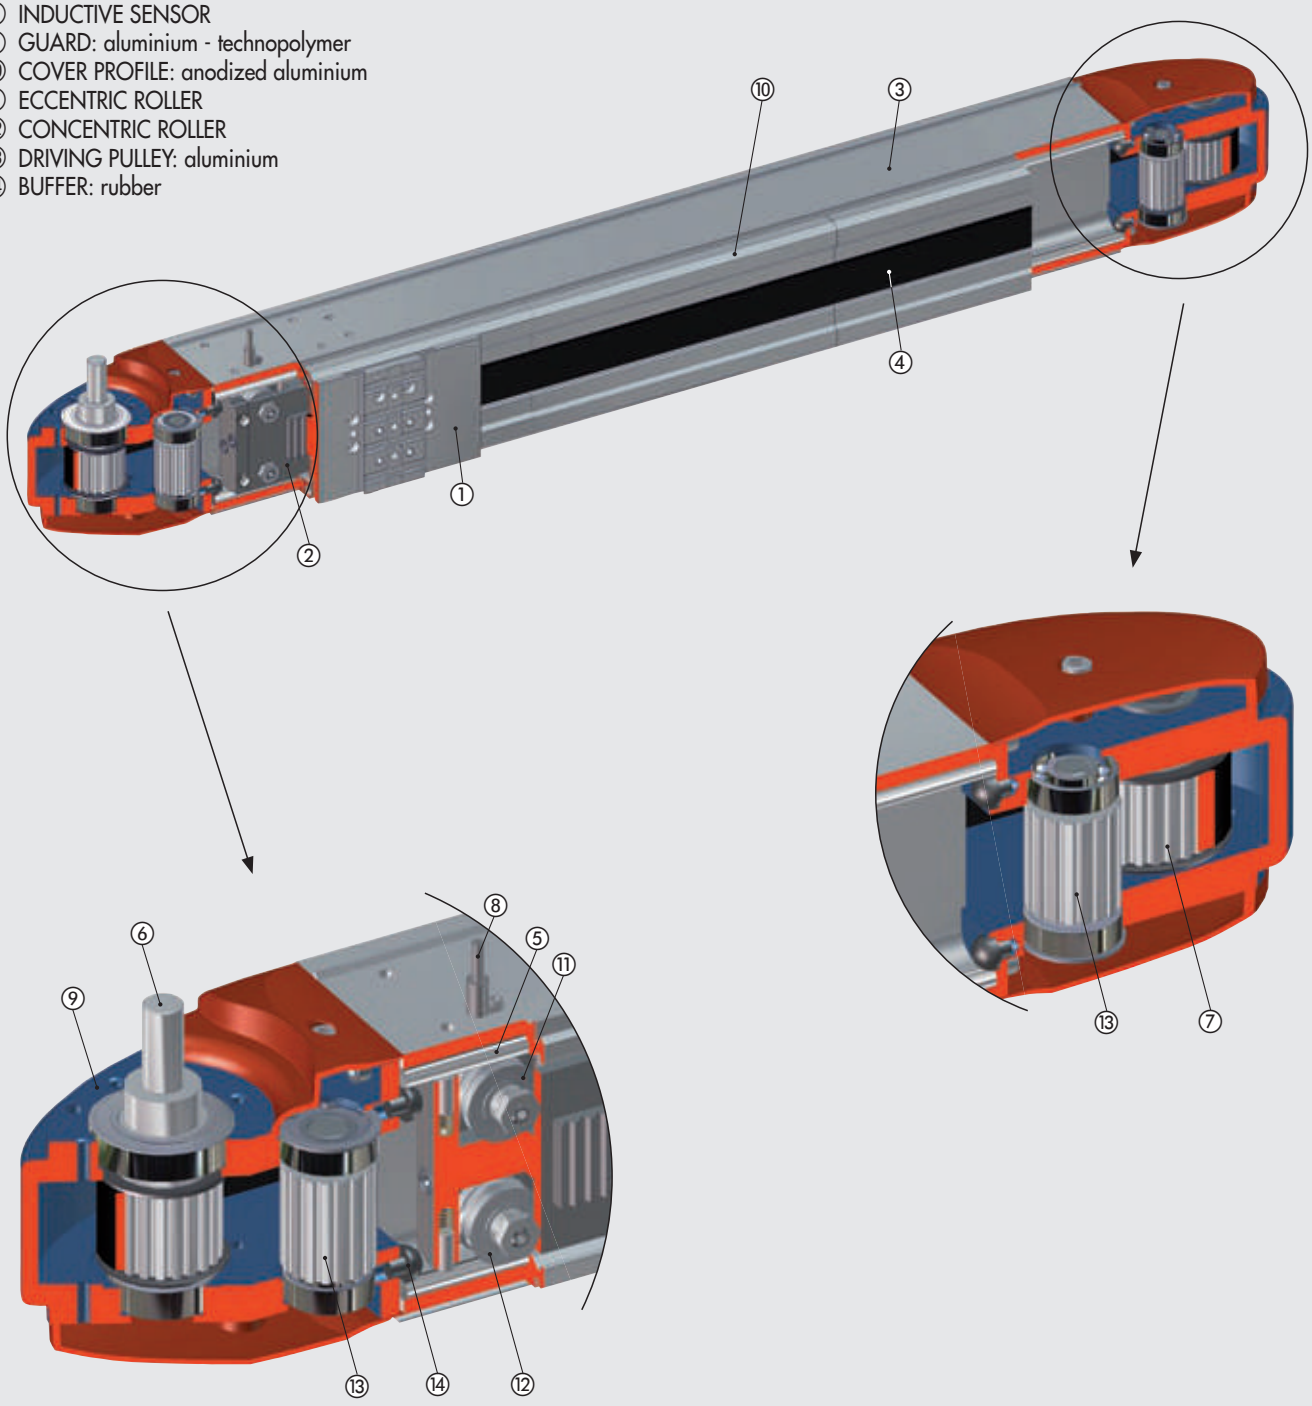

VERSIONS

VERSION WITHOUT MOTOR (attachment on the top left side only)

VERSION WITH MOTOR AND GEARBOX

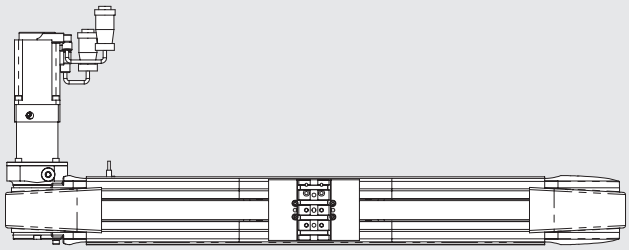

VERSION WITH MOTOR WITHOUT GEARBOX



The versions supplied with **MOTOR** or with **MOTOR AND GEARBOX** are available in the following configurations:

VERSION WITH MOTOR OR MOTOR AND GEARBOX TOP LEFT

VERSION WITH MOTOR OR MOTOR AND GEARBOX TOP RIGHT

VERSION WITH MOTOR OR MOTOR AND GEARBOX BOTTOM LEFT



VERSION WITH MOTOR OR MOTOR AND GEARBOX BOTTOM RIGHT

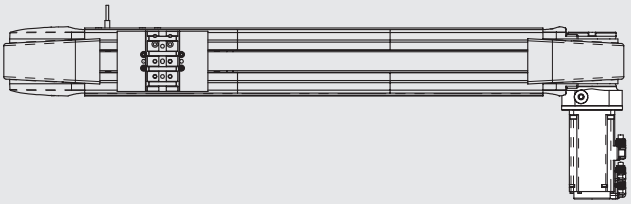

DIAGRAM OF FORCES AND MOMENTS

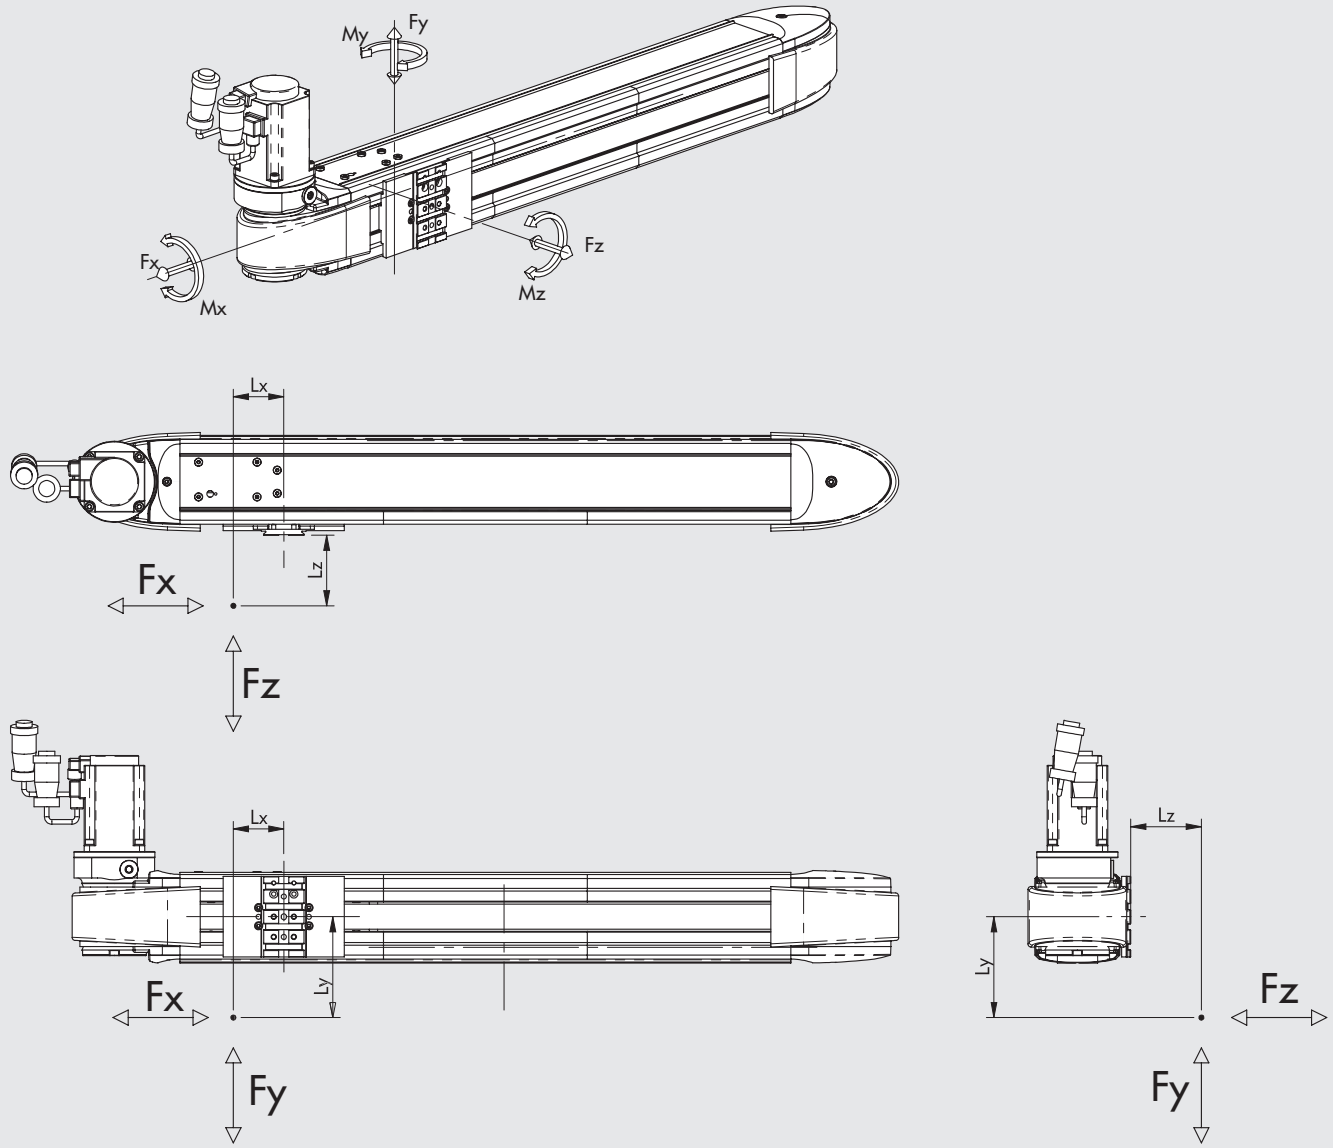

Size	Fy max [N]	Fz max [N]	Mx max [Nm]	My max [Nm]	Mz max [Nm]
SHAK 340	800	600	24	42	52
SHAK 470	1000	800	32	50	70

N.B.: The values are calculated on the basis of theoretical useful life of 10000 km.

N.B.: For the maximum value of Fx see the general technical data and the axial load curves depending on the speed.

N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where Lx, Ly and Lz have to be given in metre.

$Mx = Fz \cdot Ly + Fy \cdot Lz \qquad My = Fz \cdot Lx + Fx \cdot Lz \qquad Mz = Fy \cdot Lx + Fx \cdot Ly$

$$\frac{(Mx)}{Mx\ max} + \frac{(My)}{My\ max} + \frac{(Mz)}{Mz\ max} + \frac{(Fy)}{Fy\ max} + \frac{(Fz)}{Fz\ max} \leq 1$$

METAL WORK PNEUMATIC

DEFORMATION ACCORDING TO LOAD

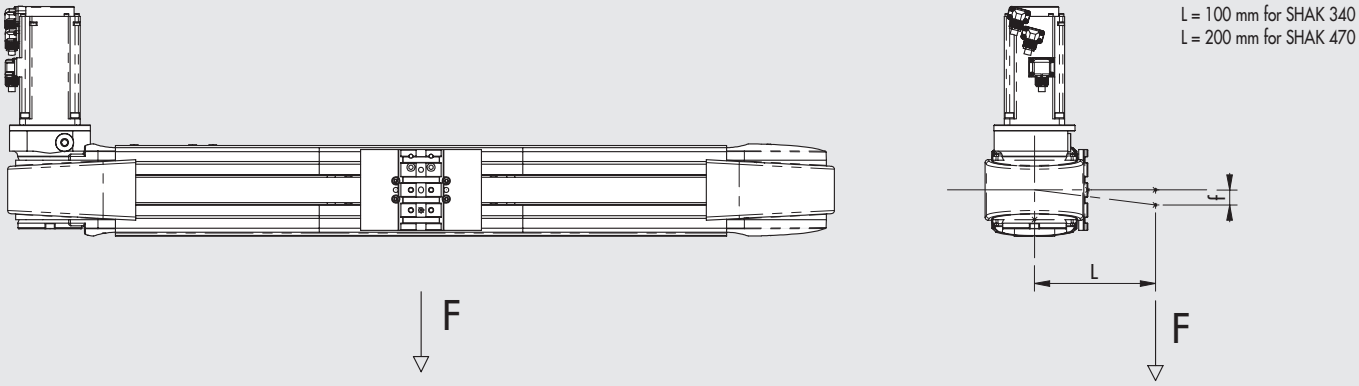

SHAK 340

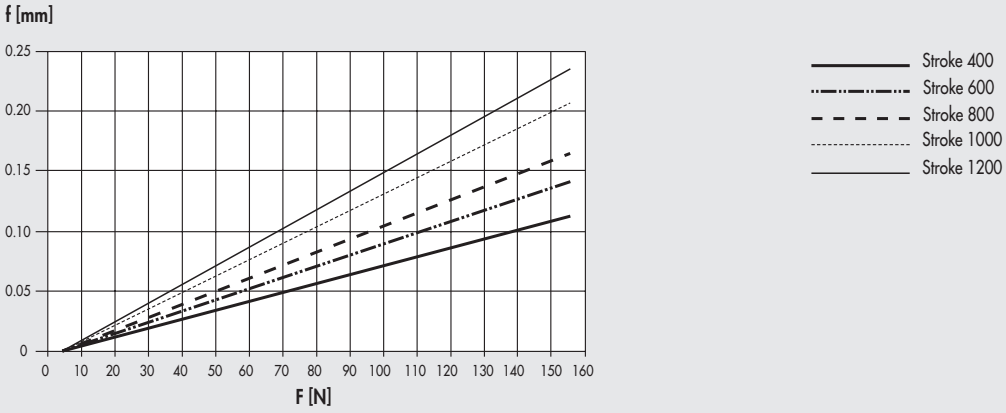

SHAK 470

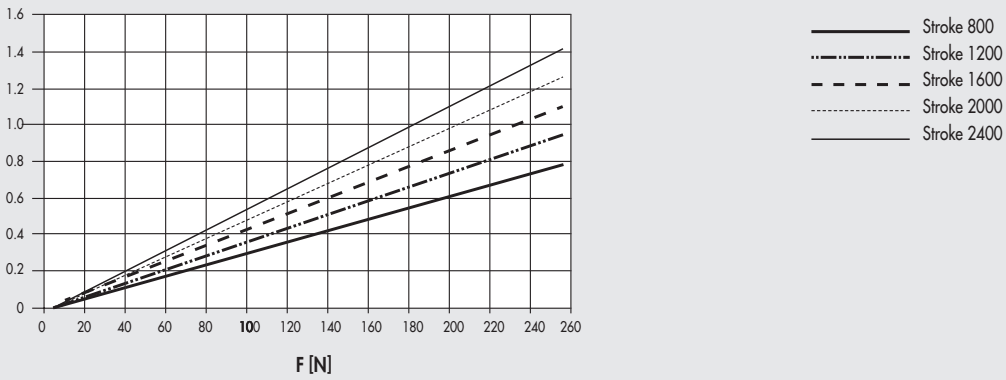

AXIAL LOAD-SPEED CURVES

N.B.: Check that the following constraints are met for each cycle phase:
- the maximum movable masses and related acceleration values specified in the data sheets;
- the values specified in the force and moment calculation diagram (including moment of inertia).

The following diagrams show the axial load with changing speed (mm/s). Each diagram shows two separate curves:
- **NOMINAL AXIAL LOAD** curve: the nominal axial load delivered by the motor with a duty cycle of 100%
- **MAXIMUM AXIAL LOAD** curve: the axial load delivered by the motor with a duty cycle of less than 100%.

SHAK 340
BRUSHLESS and BRUSHLESS with BRAKE drives (versions with 1:3 gearbox)

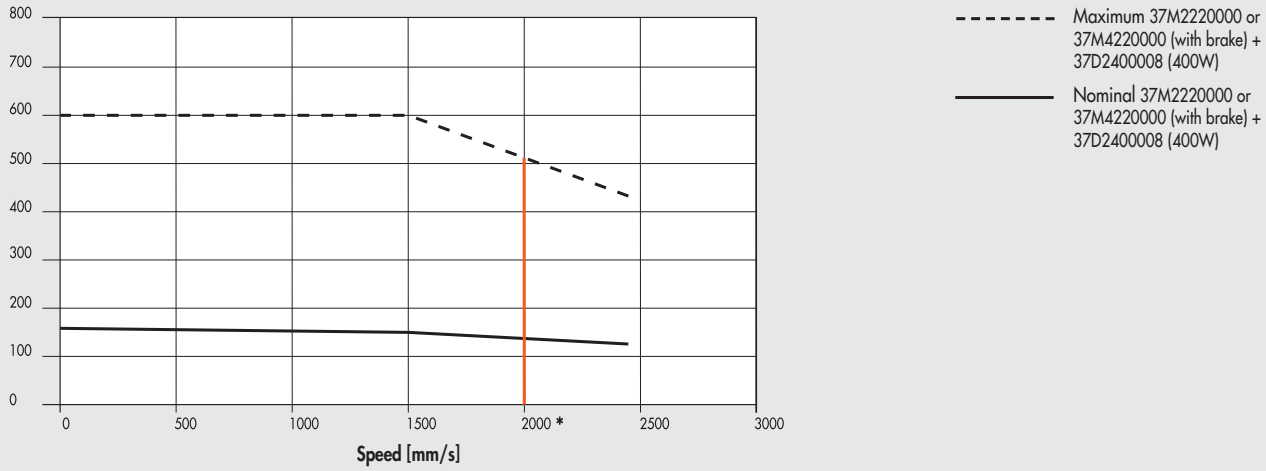

* = limit of gearbox continuous operation: higher speeds can be reached only for "duty cycle" ≤60% and for a maximum number of 1000 accelerations per hour.

SHAK 470
BRUSHLESS and BRUSHLESS with BRAKE drives (versions with 1:3 gearbox)

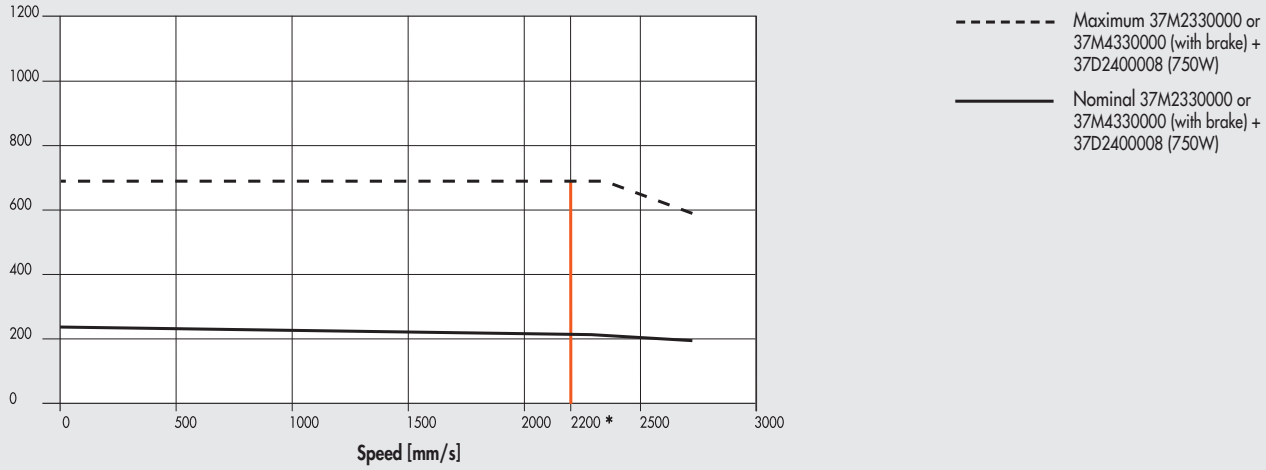

* = limit of gearbox continuous operation: higher speeds can be reached only for "duty cycle" ≤60% and for a maximum number of 1000 accelerations per hour.

SHAK 340
BRUSHLESS and BRUSHLESS with BRAKE drives

Axial load [N]

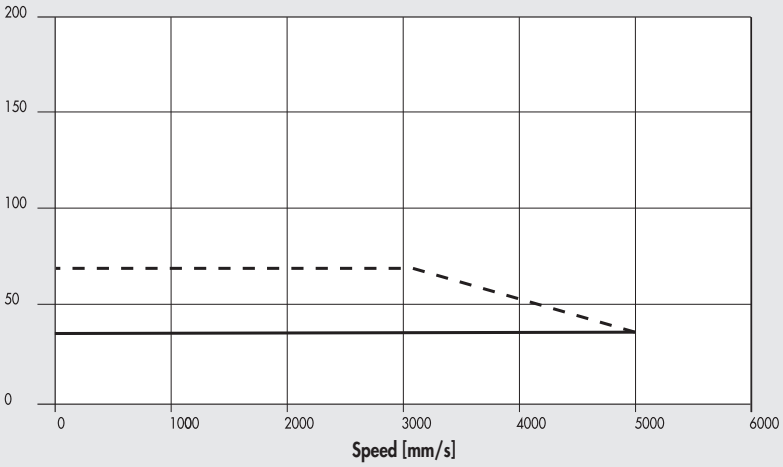

SHAK 470
BRUSHLESS and BRUSHLESS with BRAKE drives

Axial load [N]

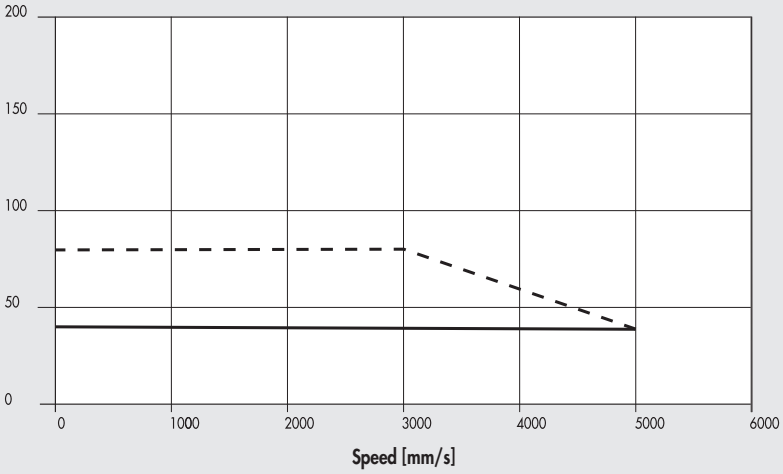

N.B.: The obtainable load values already take the efficiency of the system into account. For STEPPING motors, with the motor off, the drive current is automatically reduced by 50% to prevent overheating. Consequently, available axial load with the motor stopped is also reduced by 50%.

SHAK 340
STEPPING drives code 37M1440000

Axial load [N]

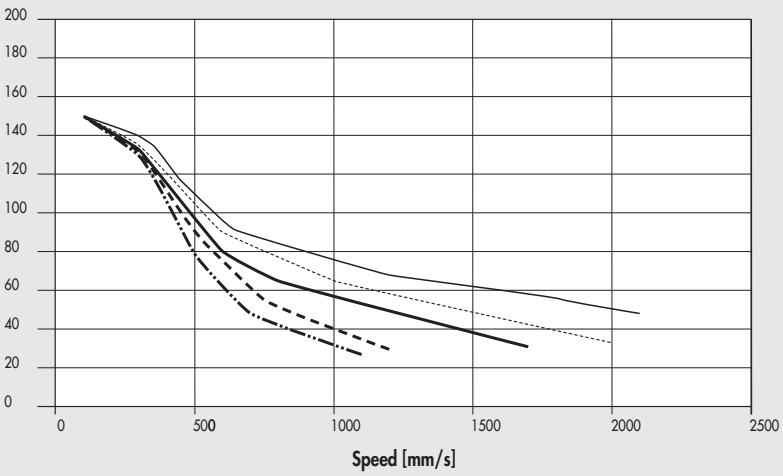

SHAK 470
STEPPING DRIVES code 37M1470000

Axial load [N]

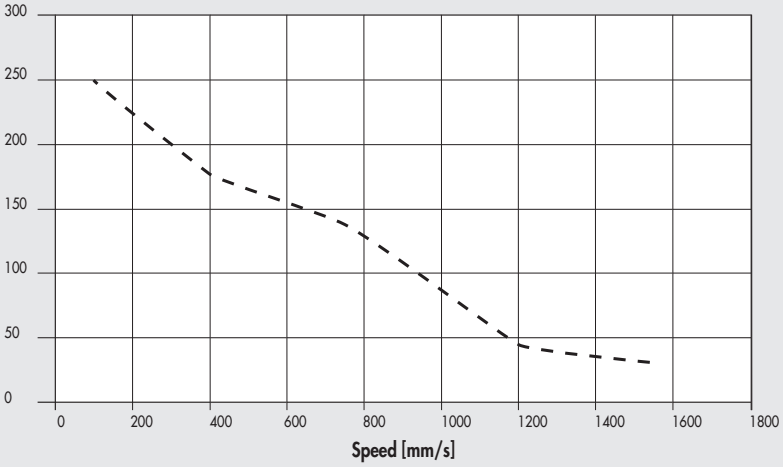

SHAK 340
STEPPING + BRAKE AND ENCODER DRIVES code 37M3450000

Axial load [N]

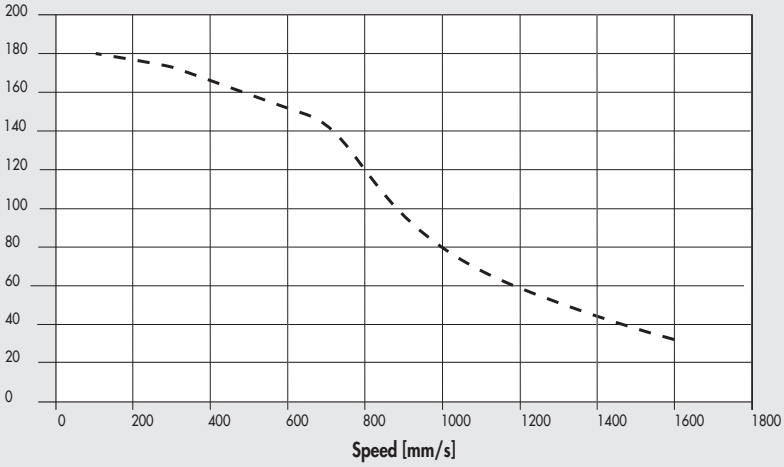

SHAK 470
STEPPING + BRAKE and ENCODER drives code 37M3470000

Axial load [N]

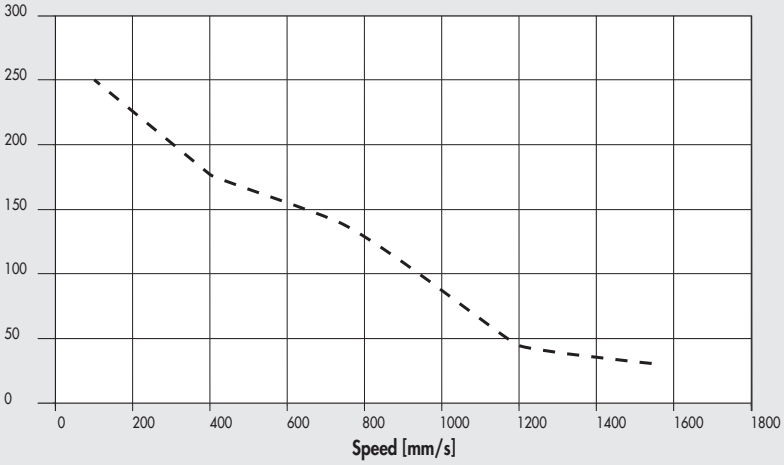

METAL WORK PNEUMATIC

EXAMPLES OF APPLICATION

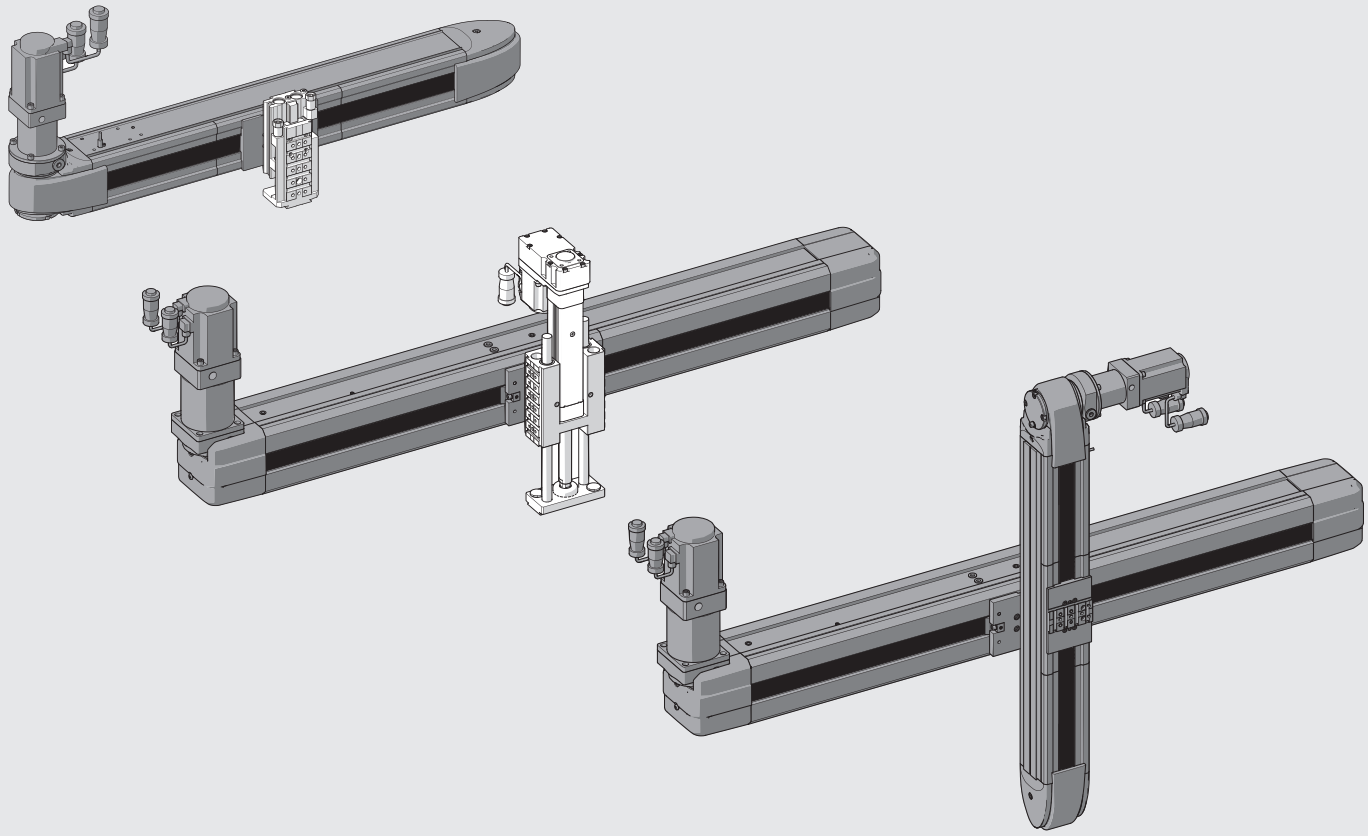

NOTES

DIMENSIONS SHAK 340

VERSION WITHOUT MOTOR

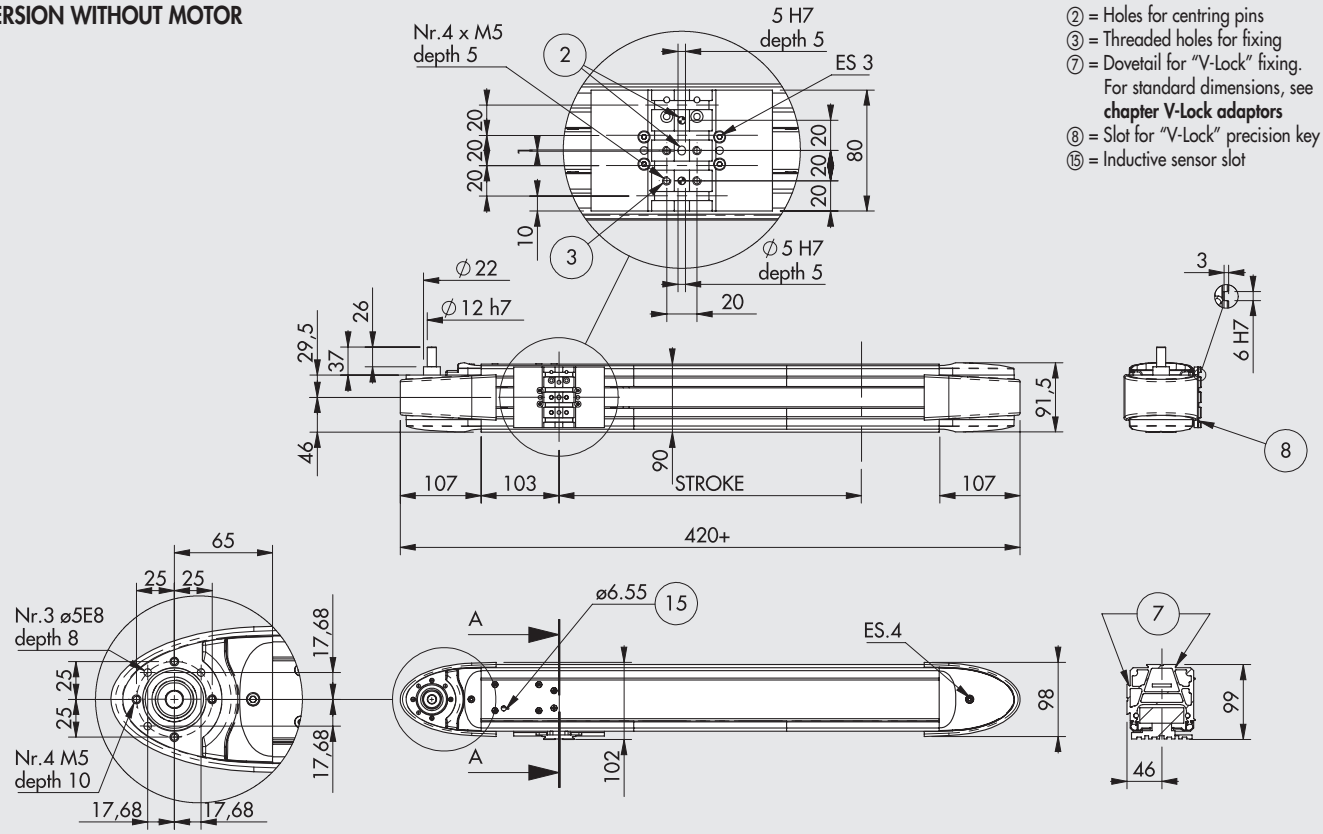

② = Holes for centring pins
③ = Threaded holes for fixing
⑦ = Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
⑧ = Slot for "V-Lock" precision key
⑮ = Inductive sensor slot

VERSION WITH MOTOR

Examples of overall dimensions referring to the version with motor on the top left; these values apply to the other versions as well.

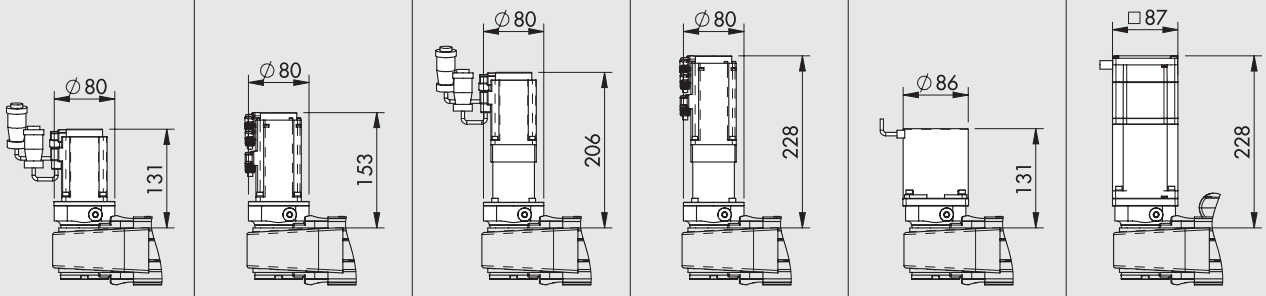

ORDERING CODES	BRUSHLESS MOTOR	BRUSHLESS MOTOR WITH BRAKE	BRUSHLESS MOTOR WITH GEARBOX	BRUSHLESS MOTOR WITH GEARBOX AND BRAKE	STEPPING MOTOR	STEPPING MOTOR WITH BRAKE
	375010_ _ _ _0002220	375010_ _ _ _0004220	375010_ _ _ _0102220	375010_ _ _ _0104220	375010_ _ _ _0001440	375010_ _ _ _0003450
	375010_ _ _ _0012220	375010_ _ _ _0014220	375010_ _ _ _0112220	375010_ _ _ _0114220	375010_ _ _ _0011440	375010_ _ _ _0013450
	375010_ _ _ _0022220	375010_ _ _ _0024220	375010_ _ _ _0122220	375010_ _ _ _0124220	375010_ _ _ _0021440	375010_ _ _ _0023450
	375010_ _ _ _0032220	375010_ _ _ _0034220	375010_ _ _ _0132220	375010_ _ _ _0134220	375010_ _ _ _0031440	375010_ _ _ _0033450

_ _ _ _ = Standard stroke (0400; 0600; 0800; 1000; 1200)

METAL WORK PNEUMATIC

DIMENSIONS SHAK 470

VERSION WITHOUT MOTOR

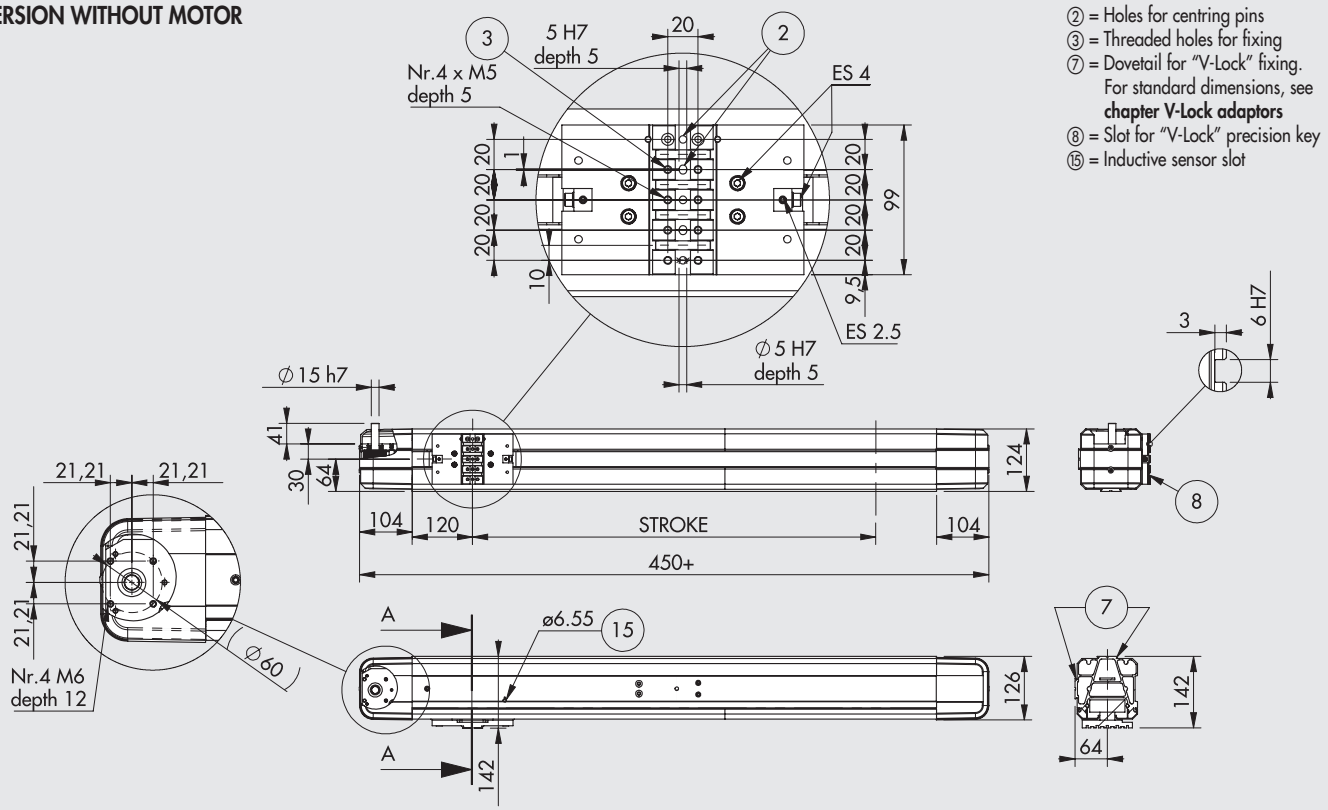

VERSION WITH MOTOR

Examples of overall dimensions referring to the version with motor on the top left; these values apply to the other versions as well.

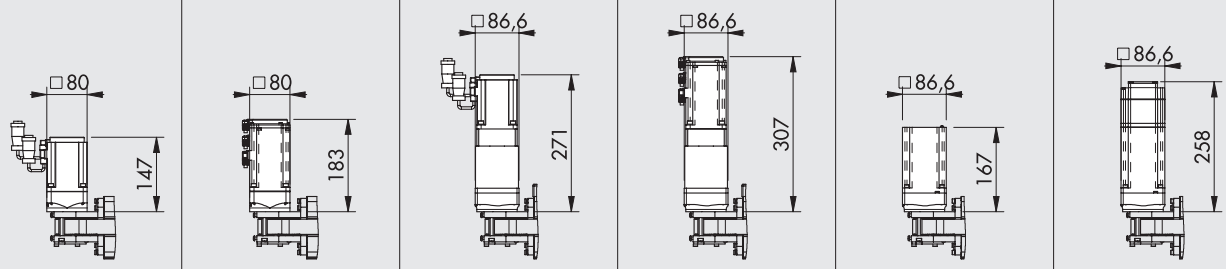

ORDERING CODES	BRUSHLESS MOTOR	BRUSHLESS MOTOR WITH BRAKE	BRUSHLESS MOTOR WITH GEARBOX	BRUSHLESS MOTOR WITH GEARBOX AND BRAKE	STEPPING MOTOR	STEPPING MOTOR WITH BRAKE
	375020_ _ _ _0002330	375020_ _ _ _0004330	375020_ _ _ _0102330	375020_ _ _ _0104330	375020_ _ _ _0001470	375020_ _ _ _0003470
	375020_ _ _ _0012330	375020_ _ _ _0014330	375020_ _ _ _0112330	375020_ _ _ _0114330	375020_ _ _ _0011470	375020_ _ _ _0013470
	375020_ _ _ _0022330	375020_ _ _ _0024330	375020_ _ _ _0122330	375020_ _ _ _0124330	375020_ _ _ _0021470	375020_ _ _ _0023470
	375020_ _ _ _0032330	375020_ _ _ _0034330	375020_ _ _ _0132330	375020_ _ _ _0134330	375020_ _ _ _0031470	375020_ _ _ _0033470

_ _ _ _ = Standard stroke (0800; 1200; 1600; 2000; 2400)

MOTOR-DRIVE COUPLINGS

MOTOR CODES		DRIVES CODES		
	Metal Work	37D1332000 *	37D1442000	37D1552000
	Manufacturer	RTA NDC 96	RTA PLUS A4	RTA PLUS B7
Metal Work	Manufacturer	(6A 24-75VDC)	(6A 77-140VDC)	(10A 28-62VAC) ●
STEPPING MOTORS				
37M1440000	SANYO DENKI 103-H8222-6340 (6A 140V max)	SHAK 340	SHAK 340	SHAK 340 ◆
37M1470000	B&R 80MPH6.101S000-01 (10A 80V max)	-	-	SHAK 470
STEPPING MOTORS WITH BRAKE + ENCODER				
37M3450000	B&R 80MPH4.101D114-01 (10A 80V max)	-	-	SHAK 340
37M3470000	B&R 80MPH6.101D114-01 (10A 80V max)	-	-	SHAK 470

✱ In all applications requiring motor powered up to 6A / 55VDC, the programmable drive **e**.drive, code 37D1332002, can be used.
◆ Important! Limit current
● Important! AC drive to continuous voltage VDC = VAC · $\sqrt{2}$

MOTOR CODES		DRIVES CODES
	Metal Work	37D2400008
	Manufacturer	SANYO DENKI RS3A03
Metal Work	Manufacturer	(30A 400-750 W)
BRUSHLESS MOTORS		
37M2220000	SANYO DENKI R2AA06040FXH11M (400W)	SHAK 340
37M2330000	SANYO DENKI R2AA08075FXH11M (750W)	SHAK 470
BRUSHLESS MOTORS WITH BRAKE		
37M4220000	SANYO DENKI R2AA06040FCH11M (400W)	SHAK 340
37M4330000	SANYO DENKI R2AA08075FCH11M (750W)	SHAK 470

The motor must be controlled in such a way as to avoid sudden changes in speed.



KEY TO CODES (WITHOUT MOTOR)

CYL	37	5	0	1	0	0800	0
	TYPE			SIZE		STROKE ◆	
	37 Electric actuators	**5** SHAK electric axes	**0** STD	**1** Size 340	**0** STD	400 600 800 1000 1200	**0** STD
				2 Size 470		800 1200 1600 2000 2400	

◆ Other strokes on request.

METAL WORK PNEUMATIC

KEY TO CODES AXIS ELECTRIC MOTOR

CYL	37	5	0	1	0	0800	0	0	0	2	2	2	0
	TYPE			SIZE		STROKE ◆		REDUCTION ✱	MOTOR POSITION	MOTOR	DRIVE FLANGE	TORQUE	
	37 Electric actuators	**5** SHAK electric axes	**0** STD	**1** Size 340 **2** Size 470	**0** STD	400 600 800 1000 1200 800 1200 1600 2000 2400	**0** STD	**0** No reduction **1** 1:3 ratio	**0** Top left **1** Bottom left **2** Top right **3** Bottom right	**1** STEPPING **2** BRUSHLESS **3** STEPPING with BRAKE (+ Encoder) **4** BRUSHLESS with BRAKE	**2** 60 **3** 80 **4** NEMA 34	**2** 1.2-2.19 Nm **3** 2.2-3 Nm **4** 3.01-5 Nm **5** 6.21-7 Nm **7** > 7 Nm	**0** STD

◆ Other strokes on request.
✱ On request, the versions with gearbox are available with reduction ratios other than those foreseen as standard.
N.B.: The Orderable configurations are shown on the previous pages.

ACCESSORIES

OIL

Code	Description	Volume [ml]
9910490	PARALIQ P 460	80

CABLE TRAY CHAIN

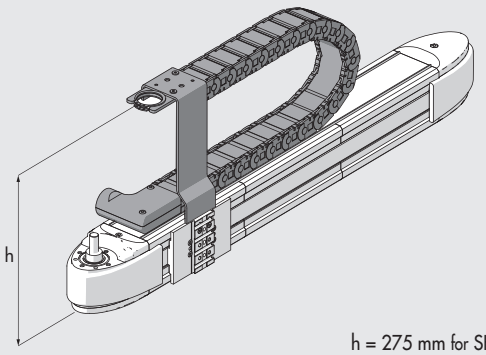

h = 275 mm for SHAK 340
h = 310 mm for SHAK 470

Code	Description
095340A0400	Cable tray chain accessory kit SHAK-340-400
095340A0600	Cable tray chain accessory kit SHAK-340-600
095340A0800	Cable tray chain accessory kit SHAK-340-800
095340A1000	Cable tray chain accessory kit SHAK-340-1000
095340A1200	Cable tray chain accessory kit SHAK-340-1200
095470A0800	Cable tray chain accessory kit SHAK-470-800
095470A1200	Cable tray chain accessory kit SHAK-470-1200
095470A1600	Cable tray chain accessory kit SHAK-470-1600
095470A2000	Cable tray chain accessory kit SHAK-470-2000
095470A2400	Cable tray chain accessory kit SHAK-470-2400

WARNING! You cannot mount the chain on versions with motor or gearmotor at the top right

DRIVES

For motor-drive couplings see table on page **A5**.96

SPARE PARTS

SHAK GEARBOXES

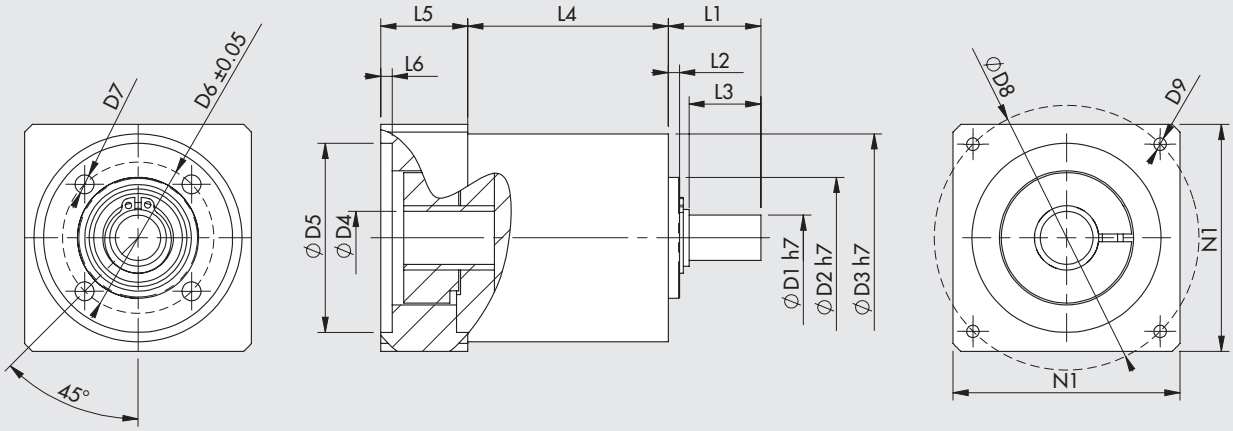

Code	Description	Application	C_{OUT} nominal [Nm]	N_{IN} nominal [1/min]	J reduced to motor shaft [kgmm²]	Mass [kg]	D1	D2	D3	D4	D5	D6	D7	D8	D9	L1	L2	L3	L4	L5	L6	N1
37R0341000	Gearbox MP053 1:3	SHAK 340	12	3300	8	0.8	12	32	55	14	50	40	M5	70	M4x10	24.5	3	19	53	23	3	60
37R0343000	Gearbox MP080 1:3	SHAK 470	40	2900	59	4	19	50	85	16	70	65	M6	90	M5x16	46	5	39	83.5	34	4	80

C_{OUT} = nominal output torque N_{IN} = nominal input speed J = mass moment of inertia of the gearhead

SHAK INDUCTIVE SENSOR



Code	Description
095340A0000	SHAK inductive sensor accessory kit

Note: Individually packed with locking plate and screw

ELECTRIC MOTORS

For motor-drive couplings see table on page **A5**.96

NOTES

METAL WORK PNEUMATIC

NOTES

ELECTRIC AXIS
SERIES ELEKTRO SHAK GANTRY

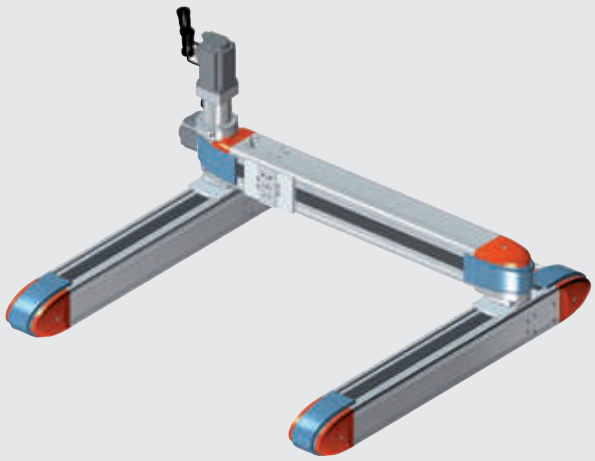

The gantry consists of two parallel belt-driven axes, of which one acts as drive axis (drive X-axis) and the other as driven axis (geared X-axis). Both axes are connected one to the other by means of an anodized aluminium shaft and two flexible couplings that compensate for any minor misalignments between the axes caused by the support base. The shape of both coupling and drive shaft is designed to facilitate disassembly.
The carriages of the drive axis and the driven axis (both with a V-Lock interface featuring a typical shape and grooves) move synchronously thanks to the drive shaft. On the extruded body of both axes, on the side opposite to the carriages, the typical (no grooves) V-Lock dovetail is provided for easy fixing to the support to the support structure using QS elements. On the carriages of the X-axes another SHAK electric axis (Y-axis) is mounted transversally.
The motion is the same as for the single axis and has the same advantages: rigid structure, movement of the carriage with adjustable clearance, the presence of guide lubrication nozzles, the possibility of adjusting belt tensioning.
A BRUSHLESS motor with a 1:5 speed gearbox has been adopted as it ensures optimal load capacity without sacrificing the dynamic and speed performance typical of this product.
In addition to the standard drives proposed in the catalogue, the cylinder can be customised with the installation of other motors.
The homing position is identified by an inductive proximity sensor included in the supply.
Two sizes are available, SHAK-GANTRY 340 and SHAK-GANTRY 470, with standard pre-set strokes. For each size, it is also possible to choose on which side to mount the motors (right- or left-hand).
The Elektro SHAK-GANTRY was designed and optimized for horizontal installation. On request, the motors can be supplied with a holding brake, which activates only in the event of a power failure but not when there is a motor overload. For correct operation of the brake, it is important to comply with the limits required by the axial load curves according to speed. Among the accessories available there is a cable-guiding system with a handy cable channel and bracket (in the version with motors on the left-hand side).

TECHNICAL DATA			SHAK GANTRY 340	SHAK GANTRY 470
Temperature range	WITH MOTOR	°C	see single motor data sheet	
	ONLY MECHANICS	°C	from -10 to +50	
Maximum value of duty cycle			100%	
Maximum X-axis empty speed		m/s	1.8	2.1
Maximum Y-axis empty speed		m/s	2.4	2.7
Maximum X-axis empty acceleration		m/s^2	35	25
Maximum Y-axis empty acceleration		m/s^2	50	50
Maximum admissible mass (on Y axis)		kg	15	25

MECHANICAL CHARACTERISTICS		SHAK GANTRY 340		SHAK GANTRY 470	
Maximum axial force	N	800		1000	
Maximum force applicable on the pulley	Nm	15		25	
Standard strokes (special execution on request)		**X-axis**	**Y-axis**	**X-axis**	**Y-axis**
(see dimensional drawings for standard combinations)	mm	400	400	800	600
	mm	600	600	1200	1000
	mm	800	800	1600	1400
	mm	1000	1000	2000	1800
	mm	1200	1200	2400	2200
Repetition accuracy	mm	±0.05			
Noise level	dBA	<66			
Mounting position		Horizontal			
Planarity required for the support surface	mm/m	0.1			
Protection level		IP30			
Toothed belt pitch	mm	5			
Type of belt		PowerGrip® LL GT 5MR 25 FV		PowerGrip® LL GT 5MR 30 ST	
Belt elongation at maximum load		0.15%		0.25%	
Pulley pitch diameter	mm	35.01		44.56	
Stroke / Revolution	mm/rev	110		140	
Homing position sensor		Inductive sensor switch			

METAL WORK PNEUMATIC

MASS AND MOMENT OF INERTIA SHAK GANTRY 340		X-AXIS					Y-AXIS				
Strokes	mm	400	600	800	1000	1200	400	600	800	1000	1200
Weight (without motor and gearbox)	kg	16.2	19	21.9	24.6	27.5	7.7	9	10.4	11.7	13
Motor weight	kg			1.3					1.3		
Gearbox weight	kg			0.8					0.8		
Moving mass (without motor and gearbox)	kg	10.3	11.6	13.1	14.5	15.9	1.28	1.32	1.36	1.40	1.44
J_X Reduced inertia at motor	kg mm²	476	523	573	620	667			-		
J_y Reduced inertia at motor	kg mm²			-			99	101	102	103	104
J_T Inertia connection joint	kg mm²			-			238	306	374	442	510

MASS AND MOMENT OF INERTIA SHAK GANTRY 470		X-AXIS					Y-AXIS				
Strokes	mm	800	1200	1600	2000	2400	600	1000	1400	1800	2200
Weight (without motor and gearbox)	kg	32.7	40.9	48.8	56.9	64.6	15.9	19.8	23.6	27.5	31.2
Motor weight	kg			2.6					2.6		
Gearbox weight	kg			4					4		
Moving mass (without motor and gearbox)	kg	20.3	24.4	28.4	32.5	36.4	2.18	2.28	2.38	2.48	2.58
J_X Reduced inertia at motor	kg mm²	1759	1986	2207	2434	2650			-		
J_y Reduced inertia at motor	kg mm²			-			399	404	410	416	422
J_T Inertia connection joint	kg mm²			-			315	451	587	723	859

Size	d_p [mm]	τ	J_R [kg mm²]	J_M [kg mm²]
SHAK GANTRY 340	35.01	1:5	6	41.2
SHAK GANTRY 470	44.56	1:5	37	182

$$J_{tot} = [2 \cdot J_X + J_T + M \cdot (\frac{d_p}{2})^2] \cdot \tau^2 + J_R + J_M$$

N.B.: M = weight axis Y + mass applied on Y axis

CONNECTION JOINT		SHAK GANTRY 340 Y-AXIS	SHAK GANTRY 470 Y-AXIS
Max. number of revs	rpm	2000 (all strokes)	2000 (stroke 600/1000/1400)
			1400 (stroke 1800)
			1000 (stroke 2200)
Maximum transmissible torque	Nm	25 (hole Ø12)	32 (hole Ø15)

COMPONENTS

① Drive X-axis (for bill of materials, please refer to SHAK)
② Driven X-axis (for bill of materials, please refer to SHAK)
③ Y-axis (for bill of materials, please refer to SHAK)
④ Connection joint (aluminium and polyurethane)
⑤ QS fixing elements

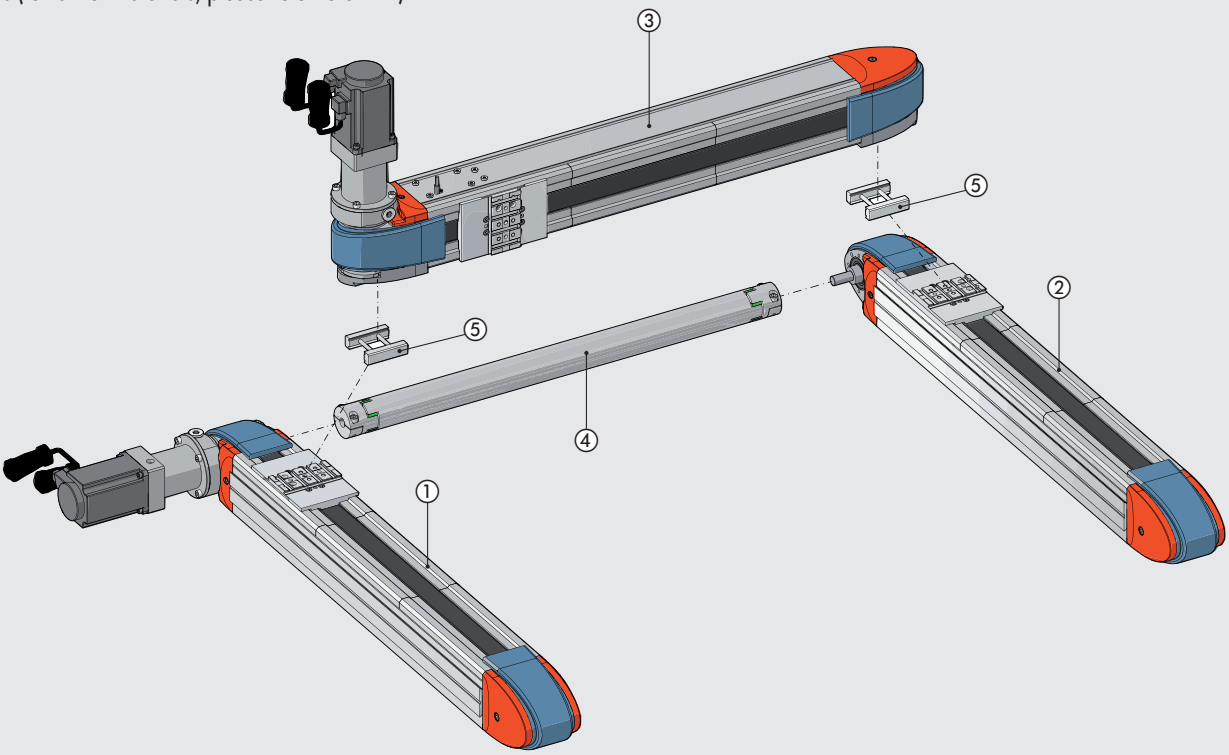

VERSIONS

VERSION WITH MOTORS ON THE LEFT-HAND SIDE

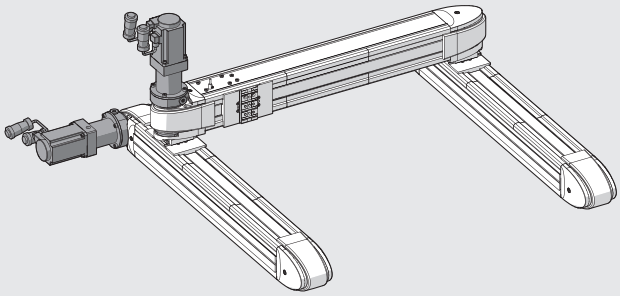

VERSION WITH MOTORS ON THE RIGHT-HAND SIDE

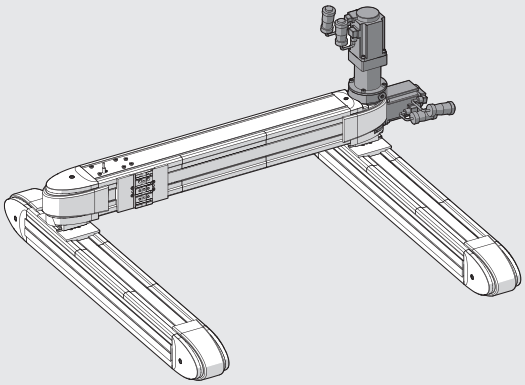

DIAGRAM OF FORCES AND MOMENTS

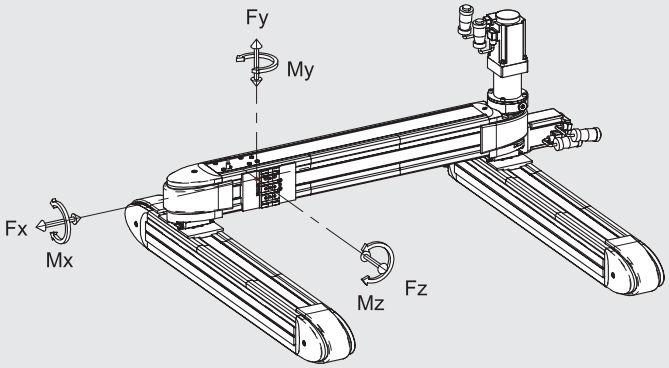

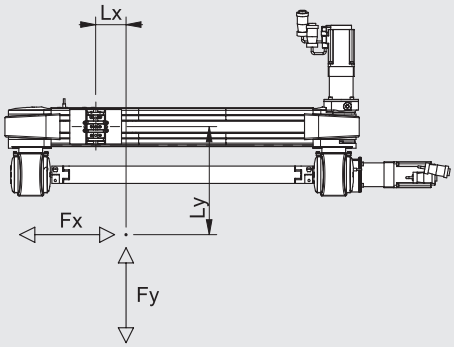

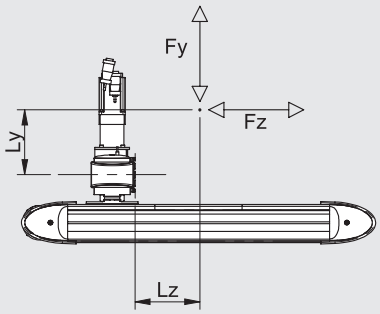

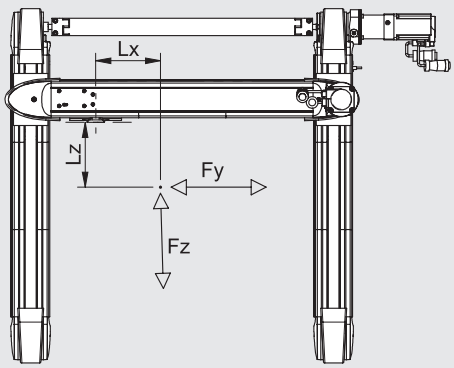

Size	Fy max [N]	Fz max [N]	Mx max [Nm]	My max [Nm]	Mz max [Nm]
SHAK GANTRY 340	800	600	24	42	52
SHAK GANTRY 470	1000	800	32	50	70

N.B.: The values are calculated on the basis of theoretical useful life of 10000 km.

N.B.: For the maximum value of Fx see the general technical data and the axial load curves depending on the speed for SHAK single axes. For the maximum value of Fz, please also refer to general technical data and axial load curves, depending on the speed for SHAK portal axes.

N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where Lx, Ly and Lz have to be given in metre.

$$Mx = Fz \cdot Ly + Fy \cdot Lz \qquad My = Fz \cdot Lx + Fx \cdot Lz \qquad Mz = Fy \cdot Lx + Fx \cdot Ly$$

$$\frac{(Mx)}{Mx\ max} + \frac{(My)}{My\ max} + \frac{(Mz)}{Mz\ max} + \frac{(Fy)}{Fy\ max} + \frac{(Fz)}{Fz\ max} \leq 1 \quad e \quad \frac{(Fx)}{2Fy\ max} \leq 1$$

METAL WORK PNEUMATIC

DEFORMATION ACCORDING TO LOAD

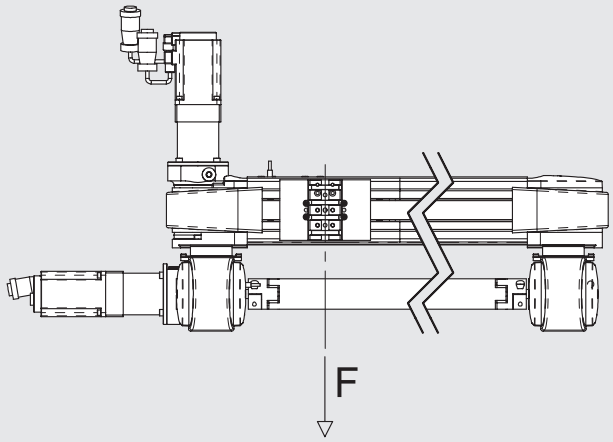

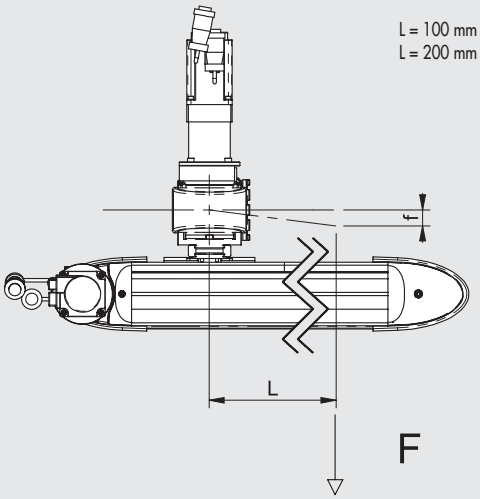

L = 100 mm for SHAK GANTRY 340
L = 200 mm for SHAK GANTRY 470

SHAK GANTRY 340

f [mm]

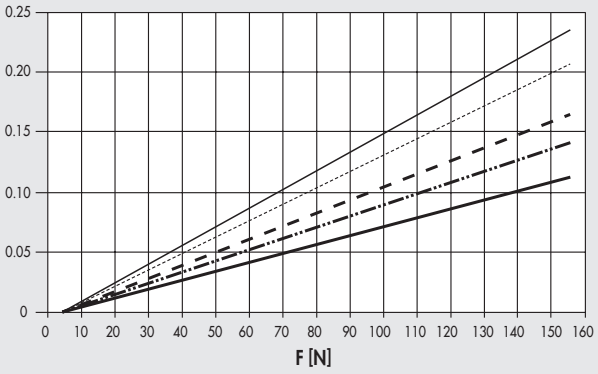

Stroke Y 400
Stroke Y 600
Stroke Y 800
Stroke Y 1000
Stroke Y 1200

SHAK GANTRY 470

f [mm]

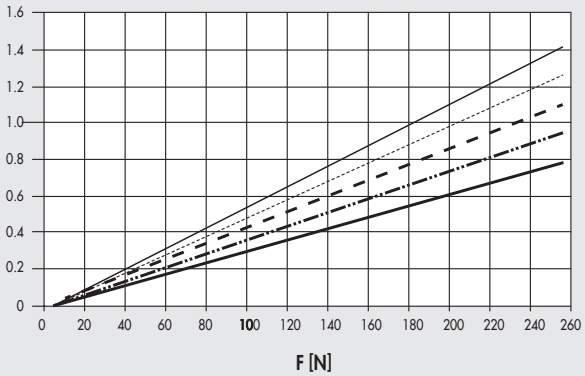

Stroke Y 600
Stroke Y 1000
Stroke Y 1400
Stroke Y 1800
Stroke Y 2200

AVERAGE TRAVERSE TIMES

N.B.: Check that the following constraints are met for each cycle phase:
- the maximum movable masses and related acceleration values specified in the data sheets;
- the values specified in the force and moment calculation diagram (including moment of inertia).

SHAK GANTRY 340 TRAVERSE TIMES

Size	Stroke X - Stroke Y	t X [s]	t Y [s]
340	400 - 400	0.50	0.45
	400 - 600		0.50
	400 - 800		0.60
	400 - 1000		0.70
	400 - 1200		0.80
	600 - 400	0.60	0.45
	600 - 600		0.50
	600 - 800		0.60
	600 - 1000		0.70
	600 - 1200		0.80
	800 - 400	0.70	0.45
	800 - 600		0.50
	800 - 800		0.60
	800 - 1000		0.70
	800 - 1200		0.80
	1000 - 400	0.80	0.45
	1000 - 600		0.50
	1000 - 800		0.60
	1000 - 1000		0.70
	1000 - 1200		0.80
	1200 - 400	0.90	0.45
	1200 - 600		0.50
	1200 - 800		0.60
	1200 - 1000		0.70
	1200 - 1200		0.80

N.B.: Maximum moving mass 15 kg

SHAK GANTRY 470 TRAVERSE TIMES

Size	Stroke X - Stroke Y	t X [s]	t Y [s]
470	800 - 600	0.90	0.55
	800 - 1000		0.75
	800 - 1400		0.90
	800 - 1800		1.00
	800 - 2200		1.20
	1200 - 600	1.20	0.55
	1200 - 1000		0.75
	1200 - 1400		0.90
	1200 - 1800		1.00
	1200 - 2200		1.20
	1600 - 600	1.40	0.55
	1600 - 1000		0.75
	1600 - 1400		0.90
	1600 - 1800		1.00
	1600 - 2200		1.20
	2000 - 600	1.75	0.55
	2000 - 1000		0.75
	2000 - 1400		0.90
	2000 - 1800		1.00
	2000 - 2200		1.20
	2400 - 600	2.00	0.55
	2400 - 1000		0.75
	2400 - 1400		0.90
	2400 - 1800		1.00
	2400 - 2200		1.20

N.B.: Maximum moving mass 25 kg

Traverse times relate to operation with motors supplied by Metal Work, using max. 200% of the nominal torque.

EXAMPLE:
Average traverse times with SHAK GANTRY 340, 800-1200.
The following can be obtained from the tables: tX = 0.7 and tY = 0.80

NOTES

METAL WORK PNEUMATIC

EXAMPLES OF APPLICATION

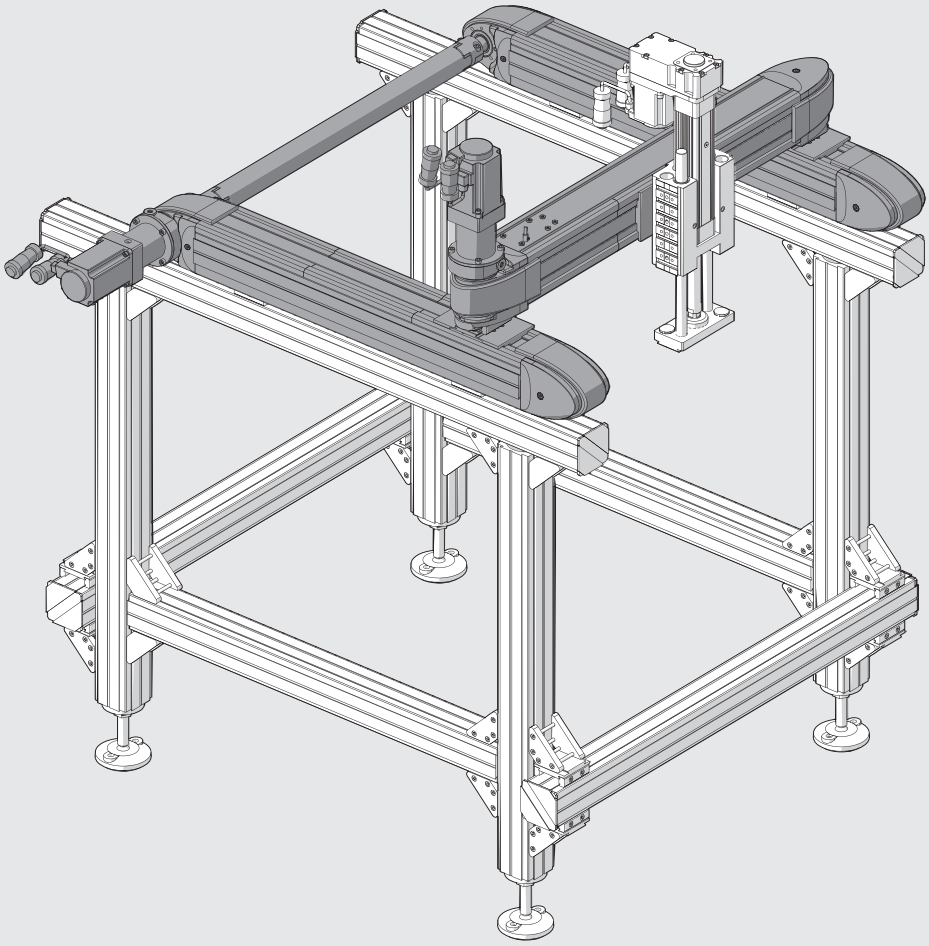

NOTES

DIMENSIONS SHAK GANTRY 340

VERSION WITH MOTORS ON THE RIGHT-HAND SIDE

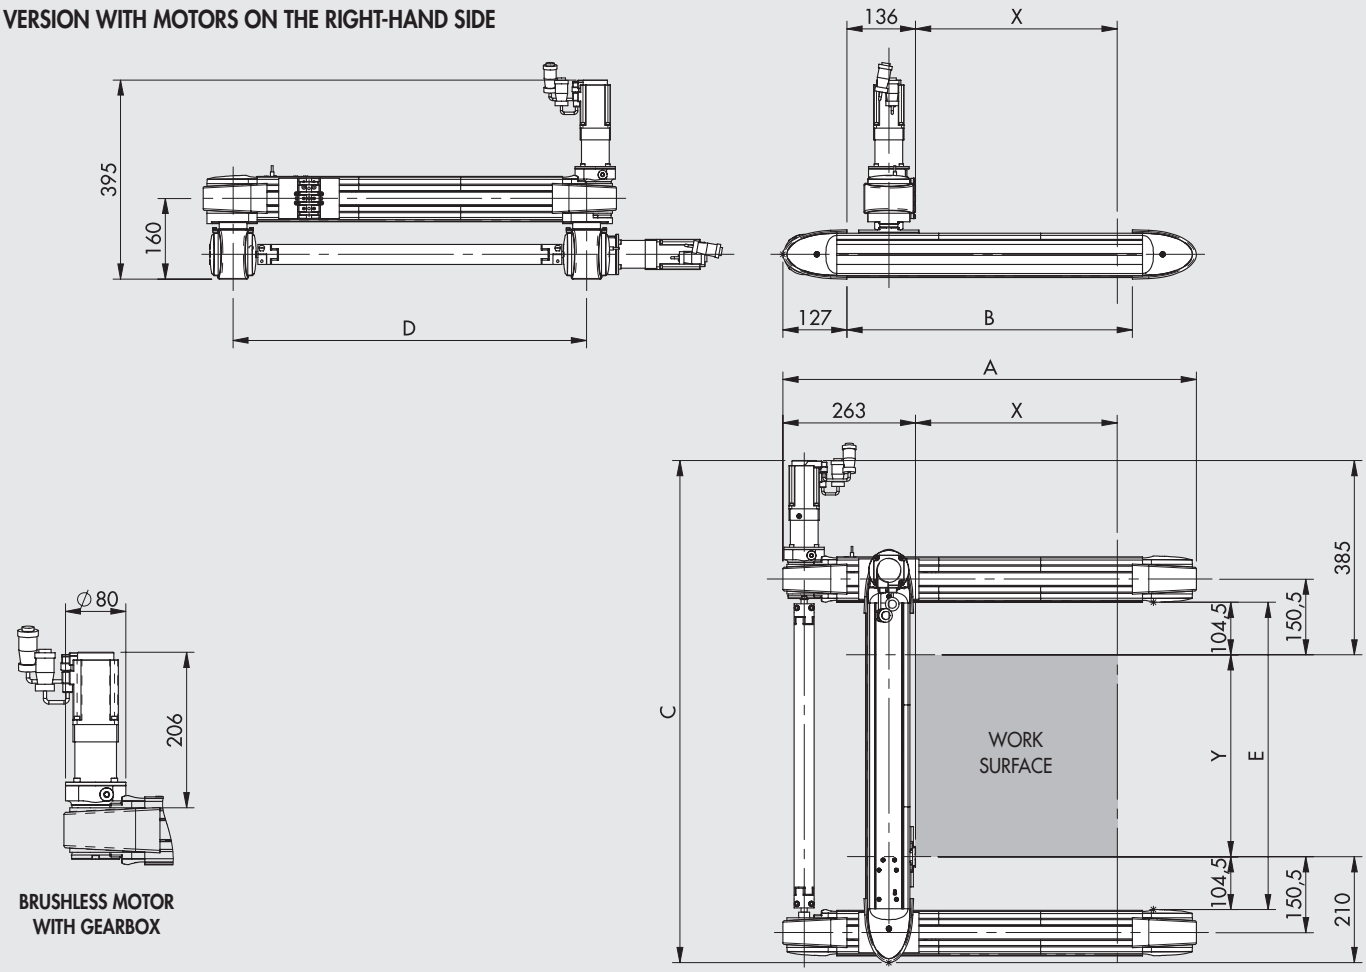

BRUSHLESS MOTOR
WITH GEARBOX

Table of dimensions referring to the version with motors on the right. The version with motor on the left is specular.

Code	Description	X	Y	A	B	C	D	E
375G1040004001_200	SHAK GANTRY-340-X400-Y400	400	400	820	566	996	701	609
375G1040006001_200	SHAK GANTRY-340-X400-Y600	400	600	820	566	1196	901	809
375G1040008001_200	SHAK GANTRY-340-X400-Y800	400	800	820	566	1396	1101	1009
375G1040010001_200	SHAK GANTRY-340-X400-Y1000	400	1000	820	566	1596	1301	1209
375G1040012001_200	SHAK GANTRY-340-X400-Y1200	400	1200	820	566	1796	1501	1409
375G1060004001_200	SHAK GANTRY-340-X600-Y400	600	400	1020	766	996	701	609
375G1060006001_200	SHAK GANTRY-340-X600-Y600	600	600	1020	766	1196	901	809
375G1060008001_200	SHAK GANTRY-340-X600-Y800	600	800	1020	766	1396	1101	1009
375G1060010001_200	SHAK GANTRY-340-X600-Y1000	600	1000	1020	766	1596	1301	1209
375G1060012001_200	SHAK GANTRY-340-X600-Y1200	600	1200	1020	766	1796	1501	1409
375G1080004001_200	SHAK GANTRY-340-X800-Y400	800	400	1220	966	996	701	609
375G1080006001_200	SHAK GANTRY-340-X800-Y600	800	600	1220	966	1196	901	809
375G1080008001_200	SHAK GANTRY-340-X800-Y800	800	800	1220	966	1396	1101	1009
375G1080010001_200	SHAK GANTRY-340-X800-Y1000	800	1000	1220	966	1596	1301	1209
375G1080012001_200	SHAK GANTRY-340-X800-Y1200	800	1200	1220	966	1796	1501	1409
375G1100004001_200	SHAK GANTRY-340-X1000-Y400	1000	400	1420	1166	996	701	609
375G1100006001_200	SHAK GANTRY-340-X1000-Y600	1000	600	1420	1166	1196	901	809
375G1100008001_200	SHAK GANTRY-340-X1000-Y800	1000	800	1420	1166	1396	1101	1009
375G1100010001_200	SHAK GANTRY-340-X1000-Y1000	1000	1000	1420	1166	1596	1301	1209
375G1100012001_200	SHAK GANTRY-340-X1000-Y1200	1000	1200	1420	1166	1796	1501	1409
375G1120004001_200	SHAK GANTRY-340-X1200-Y400	1200	400	1620	1366	996	701	609
375G1120006001_200	SHAK GANTRY-340-X1200-Y600	1200	600	1620	1366	1196	901	809
375G1120008001_200	SHAK GANTRY-340-X1200-Y800	1200	800	1620	1366	1396	1101	1009
375G1120010001_200	SHAK GANTRY-340-X1200-Y1000	1200	1000	1620	1366	1596	1301	1209
375G1120012001_200	SHAK GANTRY-340-X1200-Y1200	1200	1200	1620	1366	1796	1501	1409

N.B.: _ To complete the code, enter **1** for motors on the left and **2** for motors on the right

METAL WORK PNEUMATIC

DIMENSIONS SHAK GANTRY 470

VERSION WITH MOTORS ON THE RIGHT-HAND SIDE

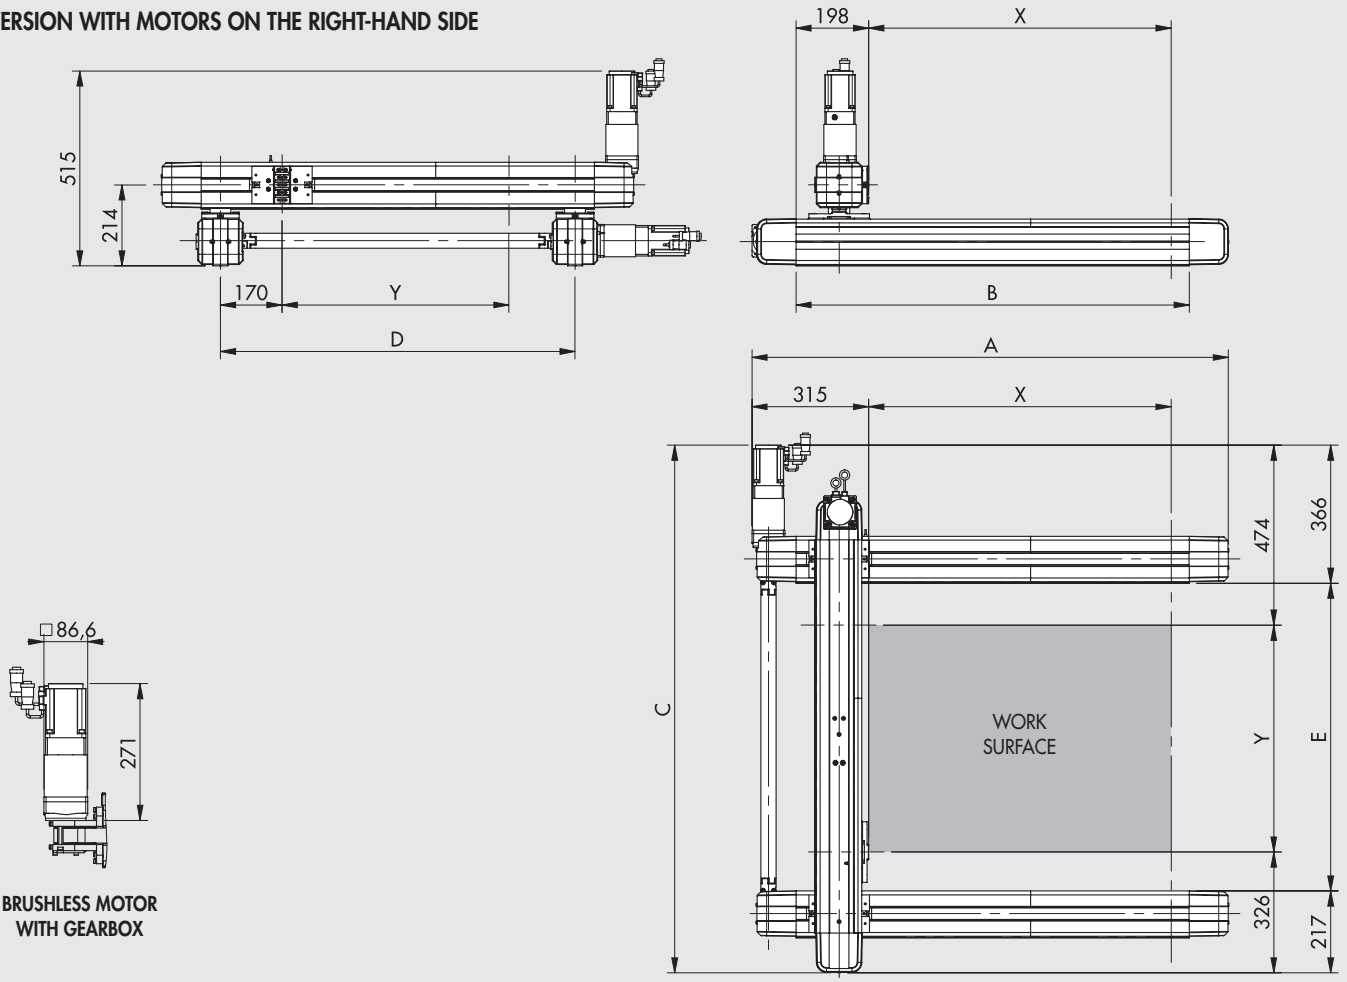

BRUSHLESS MOTOR
WITH GEARBOX

Table of dimensions referring to the version with motors on the right. The version with motor on the left is specular.

Code	Description	X	Y	A	B	C	D	E
375G2080006001_200	SHAK GANTRY-470-X800-Y600	800	600	1260	1040	1400	940	817
375G2080010001_200	SHAK GANTRY-470-X800-Y1000	800	1000	1260	1040	1800	1340	1217
375G2080014001_200	SHAK GANTRY-470-X800-Y1400	800	1400	1260	1040	2200	1740	1617
375G2080018001_200	SHAK GANTRY-470-X800-Y1800	800	1800	1260	1040	2600	2140	2017
375G2080022001_200	SHAK GANTRY-470-X800-Y2200	800	2200	1260	1040	3000	2540	2417
375G2120006001_200	SHAK GANTRY-470-X1200-Y600	1200	600	1660	1440	1400	940	817
375G2120010001_200	SHAK GANTRY-470-X1200-Y1000	1200	1000	1660	1440	1800	1340	1217
375G2120014001_200	SHAK GANTRY-470-X1200-Y1400	1200	1400	1660	1440	2200	1740	1617
375G2120018001_200	SHAK GANTRY-470-X1200-Y1800	1200	1800	1660	1440	2600	2140	2017
375G2120022001_200	SHAK GANTRY-470-X1200-Y2200	1200	2200	1660	1440	3000	2540	2417
375G2160006001_200	SHAK GANTRY-470-X1600-Y600	1600	600	2060	1840	1400	940	817
375G2160010001_200	SHAK GANTRY-470-X1600-Y1000	1600	1000	2060	1840	1800	1340	1217
375G2160014001_200	SHAK GANTRY-470-X1600-Y1400	1600	1400	2060	1840	2200	1740	1617
375G2160018001_200	SHAK GANTRY-470-X1600-Y1800	1600	1800	2060	1840	2600	2140	2017
375G2160022001_200	SHAK GANTRY-470-X1600-Y2200	1600	2200	2060	1840	3000	2540	2417
375G2200006001_200	SHAK GANTRY-470-X2000-Y600	2000	600	2460	2240	1400	940	817
375G2200010001_200	SHAK GANTRY-470-X2000-Y1000	2000	1000	2460	2240	1800	1340	1217
375G2200014001_200	SHAK GANTRY-470-X2000-Y1400	2000	1400	2460	2240	2200	1740	1617
375G2200018001_200	SHAK GANTRY-470-X2000-Y1800	2000	1800	2460	2240	2600	2140	2017
375G2200022001_200	SHAK GANTRY-470-X2000-Y2200	2000	2200	2460	2240	3000	2540	2417
375G2240006001_200	SHAK GANTRY-470-X2400-Y600	2400	600	2860	2640	1400	940	817
375G2240010001_200	SHAK GANTRY-470-X2400-Y1000	2400	1000	2860	2640	1800	1340	1217
375G2240014001_200	SHAK GANTRY-470-X2400-Y1400	2400	1400	2860	2640	2200	1740	1617
375G2240018001_200	SHAK GANTRY-470-X2400-Y1800	2400	1800	2860	2640	2600	2140	2017
375G2240022001_200	SHAK GANTRY-470-X2400-Y2200	2400	2200	2860	2640	3000	2540	2417

N.B.: _ To complete the code, enter **1** for motors on the left and **2** for motors on the right

MOTOR-DRIVE COUPLINGS

MOTOR CODES		DRIVES CODES
	Metal Work	37D2400008
	Manufacturer	SANYO DENKI RS3A03
Metal Work	Manufacturer	(30A 400-750 W)
37M2220000	SANYO DENKI R2AA06040FXH11M (400W)	SHAK GANTRY 340
37M2330000	SANYO DENKI R2AA08075FXH11M (750W)	SHAK GANTRY 470

The motor must be controlled in such a way as to avoid sudden changes in speed.



KEY TO CODES

CYL	37 TYPE	5	G	1 SIZE	0800 X-AXIS STROKE ◆	0600 Y-AXIS STROKE ◆	1 REDUCTION ✱	1 MOTORS POSITION	200 DRIVE		
	37 Electric actuators	**5** SHAK electric axes	**G** GANTRY	**1** Size 340	400 600 800 1000 1200	400 600 800 1000 1200	**1** 1:5 ratio (X axis) 1:3 ratio (Y axis)	**1** Left **2** Right	**2** BRUSHLESS motor	**0** Standard	**0** Standard
				2 Size 470	800 1200 1600 2000 2400	600 1000 1400 1800 2200					

◆ For standard combinations, please refer to dimensional drawings.
✱ On request, the versions with gearbox are available with reduction ratios other than those foreseen as standard.

ACCESSORIES

CABLE TRAY CHAIN

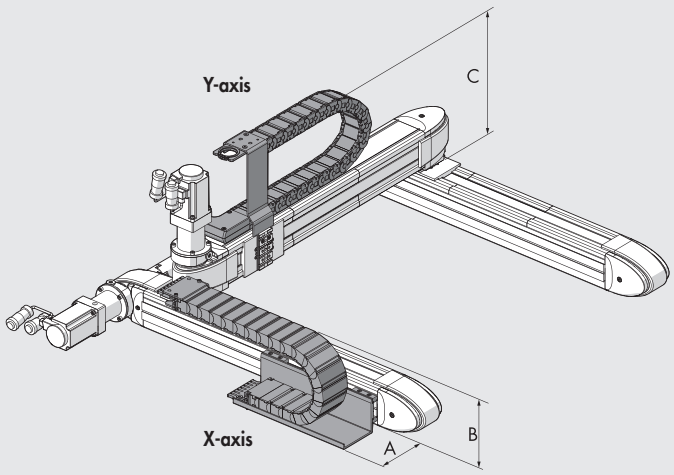

	SHAK GANTRY 340	SHAK GANTRY 470
A	95	120
B	180	182
C	275	310

WARNING! The chain cannot be mounted on versions with motor or geared motor on the right

ASSE X

Code	Description
095340B0400	Cable tray chain kit, SHAK GANTRY 340 - X400 X-axis
095340B0600	Cable tray chain kit, SHAK GANTRY 340 - X600 X-axis
095340B0800	Cable tray chain kit, SHAK GANTRY 340 - X800 X-axis
095340B1000	Cable tray chain kit, SHAK GANTRY 340 - X1000 X-axis
095340B1200	Cable tray chain kit, SHAK GANTRY 340 - X1200 X-axis
095470B0800	Cable tray chain kit, SHAK GANTRY 470 - X800 X-axis
095470B1200	Cable tray chain kit, SHAK GANTRY 470 - X1200 X-axis
095470B1600	Cable tray chain kit, SHAK GANTRY 470 - X1600 X-axis
095470B2000	Cable tray chain kit, SHAK GANTRY 470 - X2000 X-axis
095470B2400	Cable tray chain kit, SHAK GANTRY 470 - X2400 X-axis

ASSE Y

Code	Description
095340A0400	Cable tray chain kit, SHAK GANTRY 340 - Y400 Y-axis
095340A0600	Cable tray chain kit, SHAK GANTRY 340 - Y600 Y-axis
095340A0800	Cable tray chain kit, SHAK GANTRY 340 - Y800 Y-axis
095340A1000	Cable tray chain kit, SHAK GANTRY 340 - Y1000 Y-axis
095340A1200	Cable tray chain kit, SHAK GANTRY 340 - Y1200 Y-axis
095470A0800	Cable tray chain kit, SHAK GANTRY 470 - Y600 Y-axis
095470A1200	Cable tray chain kit, SHAK GANTRY 470 - Y1000 Y-axis
095470A1600	Cable tray chain kit, SHAK GANTRY 470 - Y1400 Y-axis
095470A2000	Cable tray chain kit, SHAK GANTRY 470 - Y1800 Y-axis
095470A2400	Cable tray chain kit, SHAK GANTRY 470 - Y2200 Y-axis

DRIVES

For motor-drive couplings see table on page **A5**.108

OIL

Code	Description	Volume [ml]
9910490	PARALIQ P 460	80

SPARE PARTS

SHAK GANTRY GEARBOXES

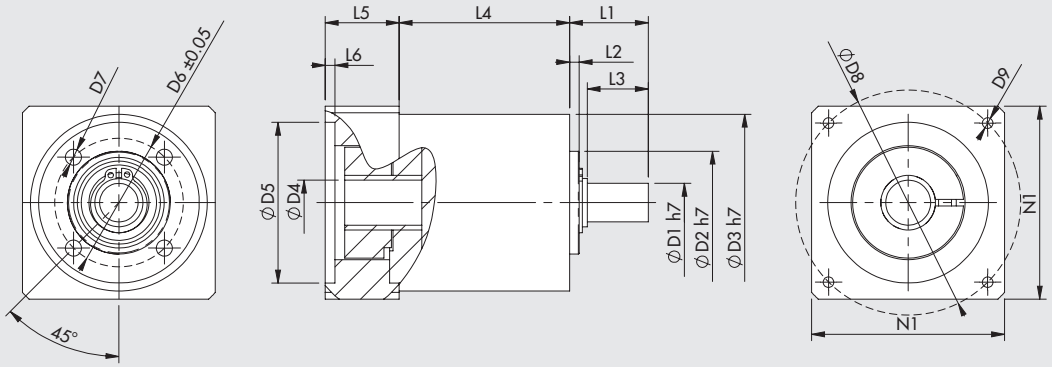

Code	Description	Application	C_{OUT} nominal [Nm]	N_{IN} nominal [1/min]	J reduced to motor shaft [kgmm²]	Mass [kg]	D1	D2	D3	D4	D5	D6	D7	D8	D9	L1	L2	L3	L4	L5	L6	N1
37R0541000	Gearbox MP053 1:5	SHAK GANTRY 340 (X axis)	15	3500	6	0.8	12	32	55	14	50	40	M5	70	M4x10	24.5	3	19	53	23	3	60
37R0543000	Gearbox MP080 1:5	SHAK GANTRY 470 (X axis)	50	3200	37	4	19	50	85	16	70	65	M6	90	M5x16	46	5	39	83.5	34	4	80
37R0341000	Gearbox MP053 1:3	SHAK GANTRY 340 (Y axis)	12	3300	8	0.8	12	32	55	14	50	40	M5	70	M4x10	24.5	3	19	53	23	3	60
37R0343000	Gearbox MP080 1:3	SHAK GANTRY 470 (Y axis)	40	2900	59	4	19	50	85	16	70	65	M6	90	M5x16	46	5	39	83.5	34	4	80

C_{OUT} = nominal output torque N_{IN} = nominal input speed J = mass moment of inertia of the gearbox

SHAK INDUCTIVE SENSOR



Code	Description
095340A0000	SHAK inductive sensor accessory kit

Note: Individually packed with locking plate and screw

ELECTRIC MOTORS

For motor-drive couplings see table on page **A5**.108

ELECTRIC CANTILEVER AXES

ELECTRIC AXIS
BELT-DRIVEN RODLESS, SERIES ELEKTRO VBK

Belt-driven rodless electric axis with load-bearing structure consisting of an anodized aluminum extruded profile and linear guide system comprising a rail and ball-recirculation pads.
The motor and gearbox unit is fixed to the central body (so-called "cantilever" solution).
The typical application foresees that the central body remains fixed and the extruded profile moves.
The VBK can be mounted in both horizontal and vertical orientations; for example can be used as a Z axis in a cartesian portal, typically with a BK Series Gantry.
Motion transmission is obtained by means of a polyurethane toothed belt reinforced with steel cables.
The parabolic profile of the belt tooth ensures high efficiency, reduced noise and vibrations.
The central body houses the transmission group consisting of a driving pulley and two idle rollers ("omega" configuration).
The axis, which can be ordered with a stroke per mm, comes complete with an adjustable belt-tensioning system and independent channels for pad re-lubrication.
Threaded and centering holes are present on the central body and on the heads allowing multiple mounting options.
The extrusion has the characteristic V-Lock profile as well as an internal opening where to pass cables and pipes.
It is possible to purchase the axis with or without drive. The standard drive includes a brushless motor with brake, combined with a precision planetary gearbox available in two different gear ratios.
The motor unit can be mounted on either side of the central body.

TECHNICAL DATA			
Temperature range	WITH MOTOR	°C	see single motor data sheet
	ONLY MECHANICS	°C	from -10 to +50
Maximum duty cycle			100%
Minimum stroke		mm	110
Maximum stroke		mm	1000
Repeatability		mm	± 0.05
Uncontrolled impact at the end of stroke			NOT ALLOWED (it provides an extra-stroke minimum 10 mm)
Homing position sensor			Inductive sensors
Work position			Any
Degree of protection			IP 20
Noise level		dBA	<66
Type belt			RPP 5 mm pitch in polyurethane with steel tensioning cables
Maximum belt extension			0.10%
Pulley feed/revolution		mm	110
Driving pulley pitch diameter		mm	35.01
Maximum axial force ■		N	550
Maximum number of revs		1/min	1000
Maximum speed (without load)		m/s	3
Maximum acceleration (without load)		m/s^2	30
Maximum driving torque applicable to the pulley		Nm	10
Maximum applicable motor shaft diameter ▲		mm	14

■ Maximum load admissible on the belt: for the sizing, perform the checks as shown in the following pages.
▲ Compact configuration with the motor shaft partially inserted into the pulley axle.

METAL WORK PNEUMATIC

MASS AND MOMENT OF INERTIA

Mass of carriage	kg	2.23
Moving mass at stroke 0 (Mx)	kg	1.46
Moving mass at stroke 0 (excluding drive)	kg	3.69
Moving mass of brushless motor with brake + gearbox + flange and screws	kg	3.18
Moving mass for each mm of stroke	g/mm	3.6
J_0 at stroke 0	kgmm^2	745
J_1 each metre of stroke	kgmm	1.1
J_2 each kg of load	mm^2	306.5
J_3 gearboxe 1:3	kgmm^2	8
J_3 gearboxe 1:5	kgmm^2	6

The reduced moment of inertia of total mass at the driving shaft is: $J_{tot} = [J_1 \cdot \text{Stroke [mm]} + J_2 \cdot \text{Load [kg]} + J_0] \cdot \tau^2 + J_3$

$\tau = 1/u$

u = Gearing ratio

$J_3 = J_{gearbox}$

In order to ensure the proper functioning of the system and avoid instability, it is necessary to limit the ratio K between the reduced moment of inertia at the motor shaft $\mathbf{J_{total}}$ and the moment of inertia at the motor $\mathbf{J_{motor}}$

$1<K= J_{total} / J_{motor} <40$

These figures apply to motors supplied by Metal Work. Motors of other makes could require different maximum values.
This limit also depends on the level of control of the required movement: e.g. if the movements need to be coordinated, the ratio between the inertias must be considerably reduced.
Indicatively, it is **advisable NOT to exceed** the following values:

1<K<10 with motors BRUSHLESS

It is worth noting that system operation can be enhanced by varying the drive parameters.
For BRUSHLESS motors supplied by Metal Work, a "tuning" procedure is envisaged to optimise motor operation depending on the mechanics applied to the axle.

MOMENTS OF INERTIA – ALUMINIUM SECTION

Moment of inertia in relation to the Y-axis (Iy)	10^3 mm^4	176.52
Moment of inertia in relation to the Z-axis (Iz)	10^3 mm^4	323.34



NOTES

COMPONENTS

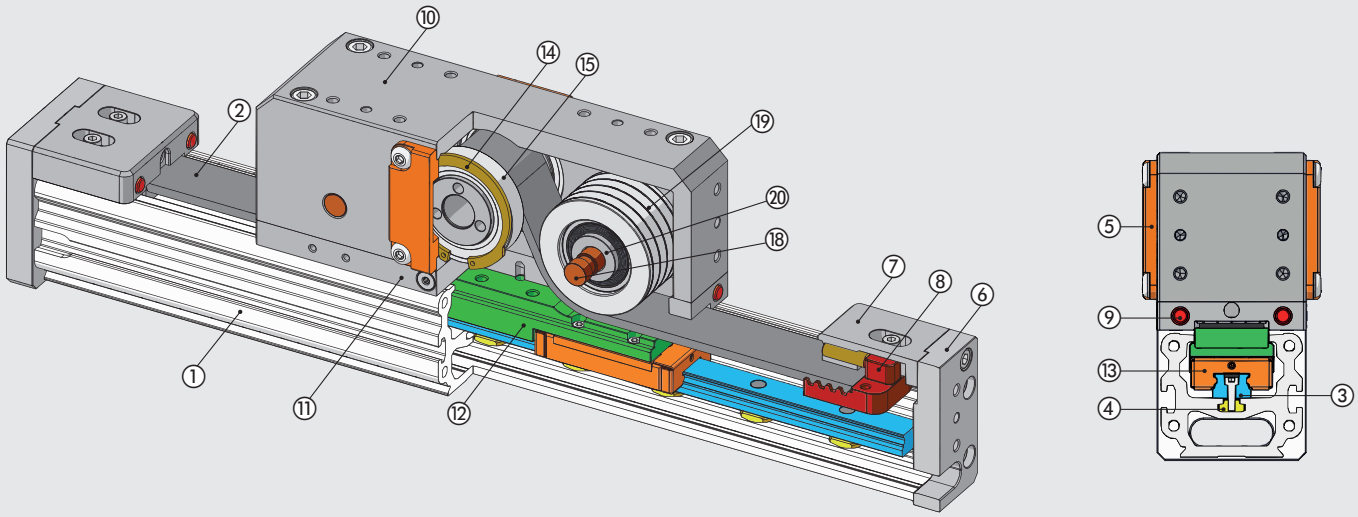

VERSION WITH MOTOR

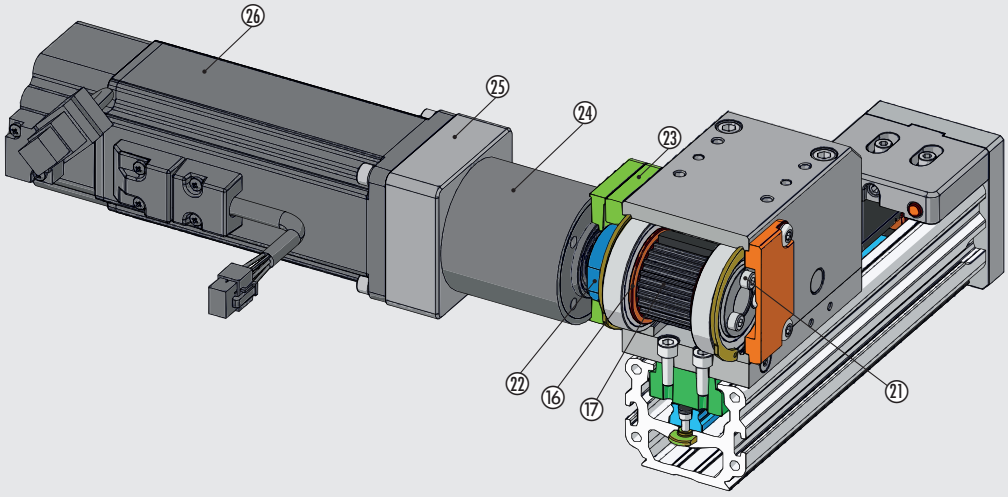

① BARREL: anodized aluminium
② TOOTHED BELT: polyurethane with steel cables
③ GUIDING RAIL FOR PADS: hardened steel
④ GUIDE-LOCKING INSERTS: stainless steel
⑤ COVER: painted aluminium
⑥ HEAD: anodized aluminium
⑦ UPPER BELT-LOCKING PLATE: anodized aluminium
⑧ LOWER BELT-LOCKING PLATE: anodized aluminium
⑨ BUFFER: polyurethane
⑩ CENTRAL BODY: anodized aluminium
⑪ INTERMEDIATE PLATE: anodized aluminium
⑫ PAD SUPPORT: anodized aluminium
⑬ BALL RECIRCULATION PAD: stainless steel / technopolymer
⑭ BEARING-LOCKING SNAP RING: zinc-plated steel
⑮ HIELDED BALL BEARING: hardened steel
⑯ BELT FLANGES: zinc-plated steel
⑰ TOOTHED PULLEY: nickel-plated aluminium
⑱ FIXED PINS: stainless steel
⑲ DRIVEN ROLLERS: nickel-plated aluminium
⑳ BEARING CONTAINMENT BUSHES: anodized aluminium
㉑ ELASTIC COLLAR-LOCKING SCREWS: zinc-plated steel
㉒ ELASTIC COLLAR: anodized aluminium
㉓ MOTOR-FIXING FLANGE: anodized aluminium
㉔ GEARBOX
㉕ MOTOR INTERFACE FLANGE: anodized aluminium
㉖ MOTOR

METAL WORK PNEUMATIC

DIAGRAM OF FORCES AND MOMENTS

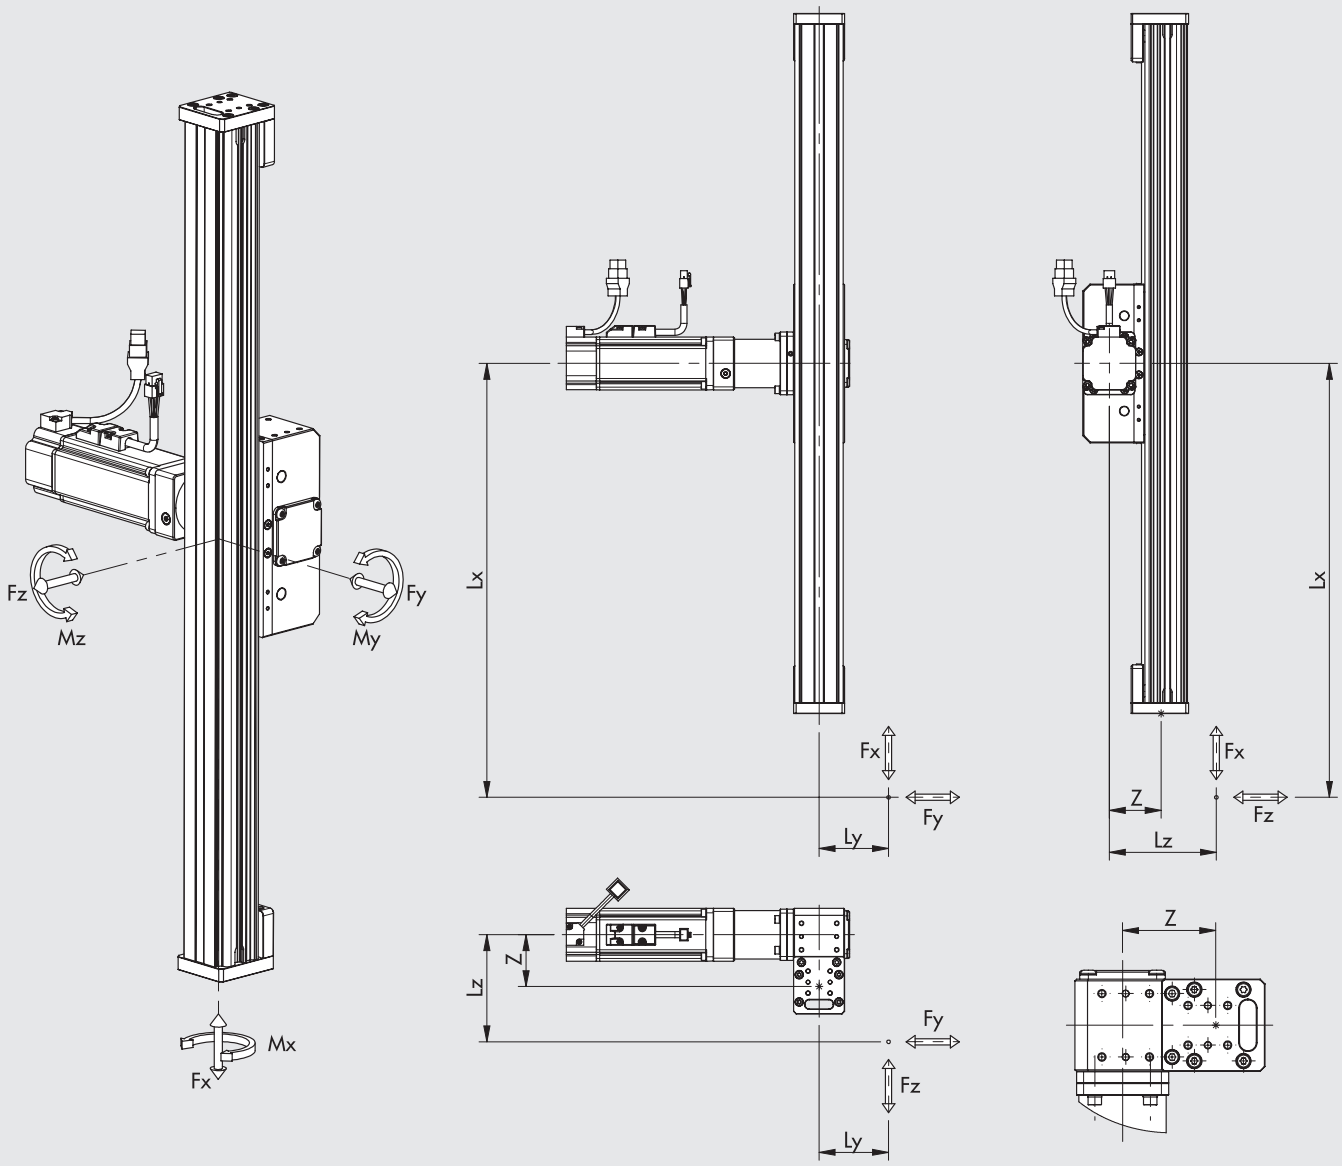

STATIC VERIFICATION

When the axis is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

Z [m]	Fy0 max [N]	Fz0 max [N]	Mx0 max [Nm]	My0 max [Nm]	Mz0 max [Nm]
0.059	9080	9080	70	642	642

N.B.: The table shows the maximum loads applicable to the guide system beyond which serious damage could be caused. Refer to the Deformation/Load charts on the following pages to verify the axles load conditions.

$Mx = Fz \cdot Ly + Fy \cdot (Lz - Z) \quad My = Fx \cdot (Lz - Z) + Fz \cdot Lx \quad Mz = Fx \cdot Ly + Fy \cdot Lx$

$$\frac{|Mx|}{Mx0\ max} + \frac{|My|}{My0\ max} + \frac{|Mz|}{Mz0\ max} + \frac{|Fx|}{Fx0\ max} + \frac{|Fy|}{Fy0\ max} \leq 1$$

DYNAMIC VERIFICATION

When the axis is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

Z [m]	Fy max [N]	Fz max [N]	Mx max [Nm]	My max [Nm]	Mz max [Nm]
0.059	4540	4540	35	321	321

N.B.: The values in the table refer to the guide system and are calculated on the basis of a theoretical operating life of 10,000 km.

$Mx = Fz \cdot Ly + Fy \cdot (Lz - Z) \quad My = Fx \cdot (Lz - Z) + Fz \cdot Lx \quad Mz = Fx \cdot Ly + Fy \cdot Lx$

$$\frac{|Mx|}{Mx\ max} + \frac{|My|}{My\ max} + \frac{|Mz|}{Mz\ max} + \frac{|Fx|}{Fx\ max} + \frac{|Fy|}{Fy\ max} \leq 1$$

DEFORMATION ACCORDING TO LOAD AND DISTANCE

DEFLECTION IN Y DIRECTION

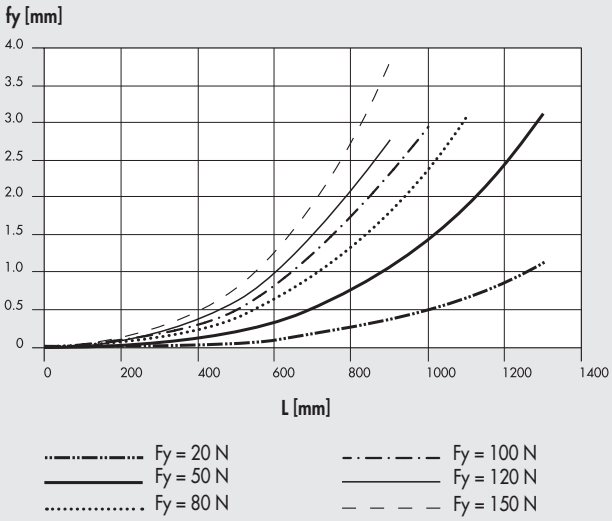

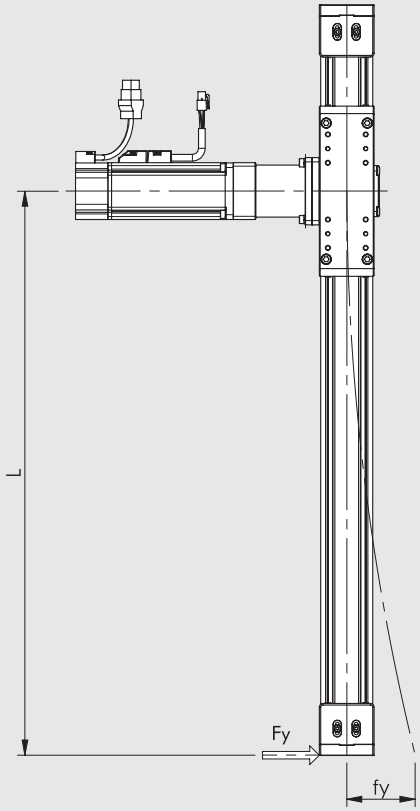

DEFLECTION IN Z DIRECTION

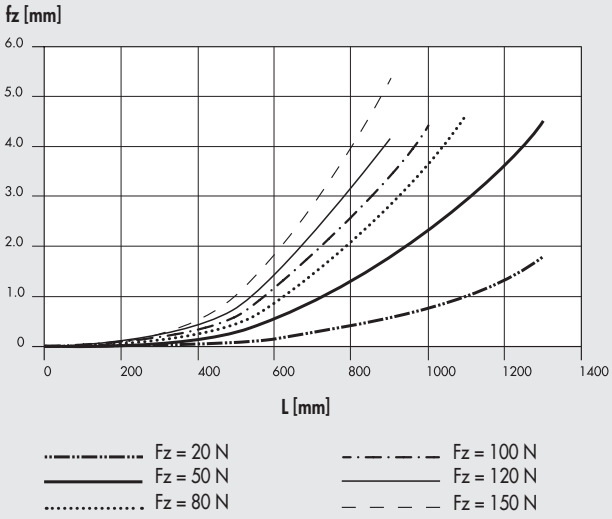

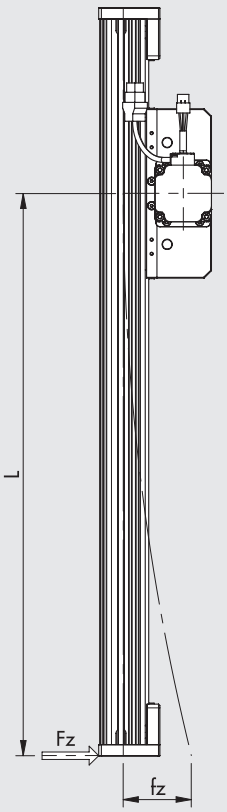

N.B.: The deformations shown in the graphs have been measured under static conditions.

VERSIONS

RIGHT MOTOR

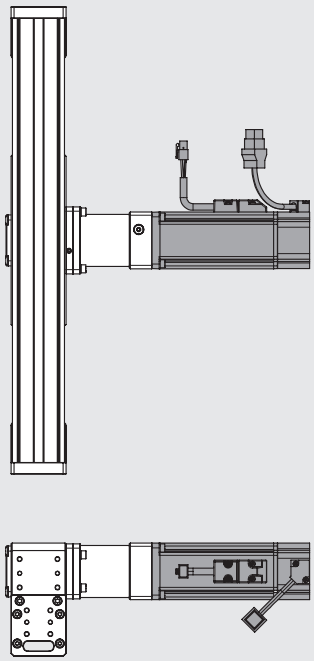

LEFT MOTOR

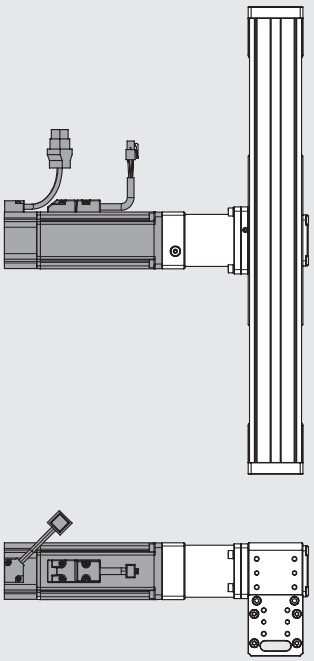

WITHOUT MOTOR



AXIAL LOAD CURVES AS A FUNCTION OF SPEED (AXIS COMPELTE WITH MOTOR AND DRIVE)

N.B.: Check that the following constraints are met for each cycle phase:
- the maximum premissible load and related acceleration values specified in the data sheets;
- the values specified in the force and moment calculation diagram (including moment of inertia).
- deformation according to load.

The following diagrams show the axial load with changing speed (mm/s). Each diagram shows two separate curves:
- **NOMINAL AXIAL LOAD** curve: the nominal axial load delivered by the motor with a duty cycle of 100%
- **MAXIMUM AXIAL LOAD** curve: the axial load delivered by the motor with a duty cycle of less than 100%.

With 1:3 gearbox

Axial load [N]

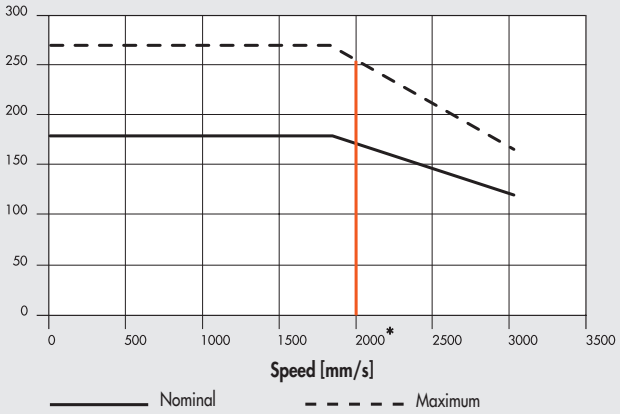

With 1:5 gearbox

Axial load [N]

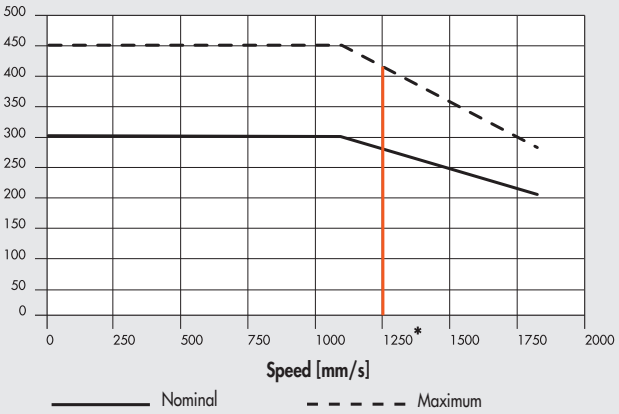

* = limit of gearbox continuous operation: higher speeds can be reached only for "duty cycle" ≤60% and for a maximum number of 1000 accelerations per hour.

EXAMPLES OF APPLICATION

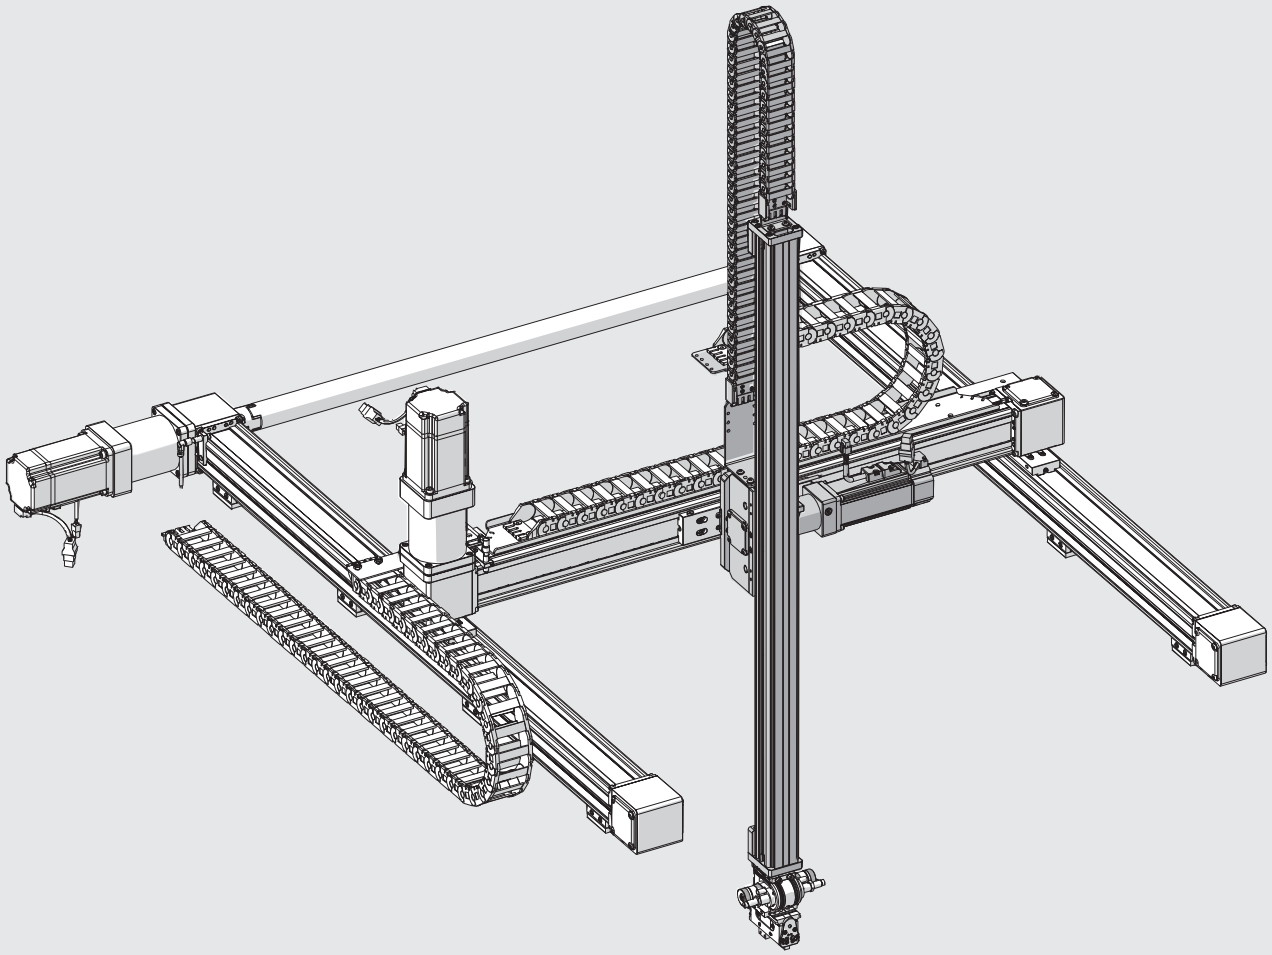

NOTES

METAL WORK PNEUMATIC

DIMENSIONS VERSION WITHOUT MOTOR

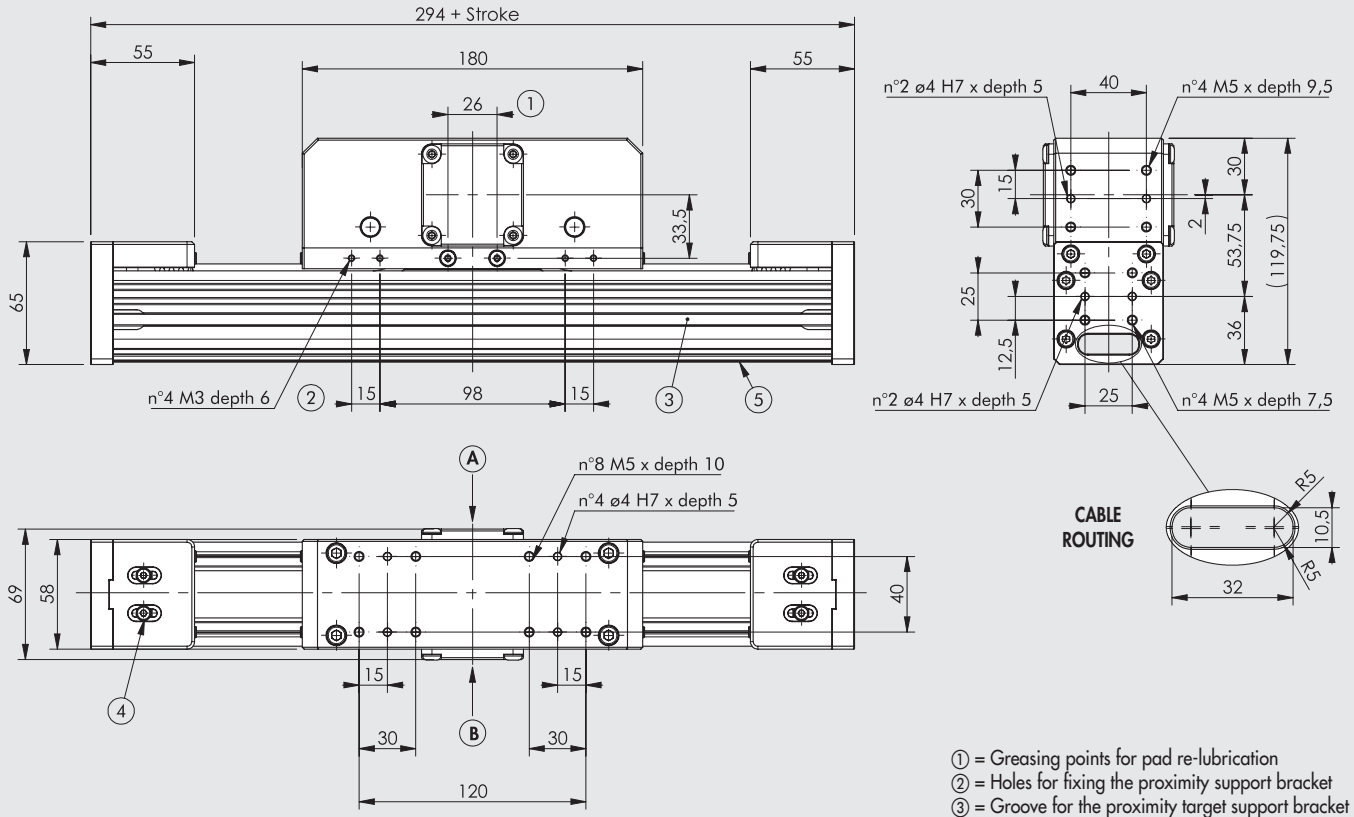

① = Greasing points for pad re-lubrication
② = Holes for fixing the proximity support bracket
③ = Groove for the proximity target support bracket
④ = Belt-tensioning screws
⑤ = Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**.

GEARBOX-MOTOR Ⓐ - Ⓑ INTERFACE

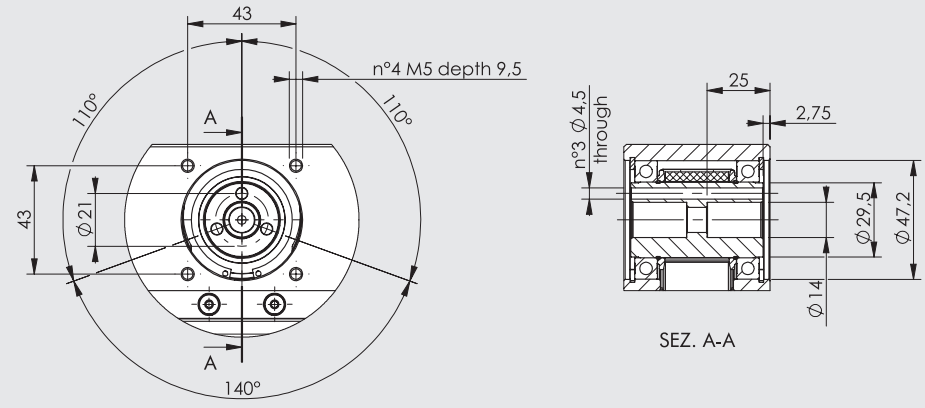

DIMENSIONS VERSION WITH MOTOR

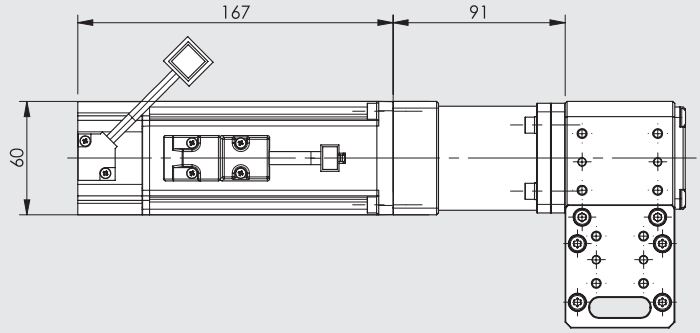

N.B.: The indicated dimensions are valid for both versions with motor installed on the right and on the left.

ORDERABLE CODES BRUSHLESS MOTOR + BRAKE WITH GEARBOX
Reduction 1:3
374V10_ _ _ _367220
374V10_ _ _ _397220
Reduction 1:5
374V10_ _ _ _369220
374V10_ _ _ _399220

_ _ _ _ = Enter the stroke in mm to complete the code.
See Key to Codes for an explanation of encoding.

MOTOR-DRIVE COUPLINGS

MOTOR CODES		DRIVES CODES
	Metal Work	37D2300000
	Manufacturer	DELTA ASD-A2-0421-M
Metal Work Manufacturer		(400W)
BRUSHLESS MOTORS WITH BRAKE		
37M4220001	DELTA ECMA-C20604SS (400W)	√

The motor must be controlled in such a way as to avoid sudden changes in speed.



KEY TO CODES AXIS ELECTRIC WITHOUT MOTOR

CYL	37	4	V	1	0	0500	3	T
	TYPE			SIZE	CARRIAGE TYPE	STROKE	GUIDE TYPE	
	37 Electric actuators	**4** Electric axis rodless elektro	**V** VBK	**1** VBK-1	**0** STD	from 110 to 1000 mm	**3** Heavy (steel guide and pads ball-recirculation)	**T** Without motor (plugged outlets)

KEY TO CODES AXIS ELECTRIC MOTOR

CYL	37	4	V	1	0	0500	3	6	9	DRIVE 2	2	0
	TYPE			SIZE	CARRIAGE TYPE	STROKE	GUIDE TYPE	MOTOR POSITION	MOTOR ◆	FLANGE	TORQUE	
	37 Electric actuators	**4** Electric axis rodless elektro	**V** VBK	**1** VBK-1	**0** STD	from 110 to 1000 mm	**3** Heavy (steel guide and pads ball-recirculation)	**6** Right **9** Left	**7** Brushless with BRAKE + 1:3 gearbox **9** Brushless with BRAKE + 1:5 gearbox	**2** 60	**2** 1.2÷2.19 Nm	**0** Base

◆ On request available versions with gearbox with reduction ratios other than those eventually foreseen as standard.

ACCESSORIES

INDUCTION SENSOR Ø 6.5



Code	Description
W095K030006	PNP Ø 6.5 PNP inductive sensor with LED 2 m

QUICK-FIT INDUCTIVE SENSOR Ø 6.5



Code	Description
W095K030009	PNP Ø 6.5 inductive sensor with push-in LED

QUICK-FIT INDUCTIVE SENSOR M8



Code	Description
W095K030010	PNP M8 inductive sensor with push-in LED

CABLE WITH STRAIGHT CONNECTOR FOR PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

CABLE WITH 90° CONNECTOR FOR PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

M8 M – M8 F CONNECTOR FOR PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital INPUT of the EB 80 and CM valves

BRACKET FOR INDUCTIVE SENSOR



Code	Description
095BK1V001	Bracket for inductive sensor Ø8 VBK-1
095BK1V005	Bracket for inductive sensor Ø6.5 VBK-1

Note: supplied complete with 1 sensor support, 1 support with target assembly screws and insert

FRONT FIXING BRACKET VBK-1 ON BK





Code	Description	Weight [g]
095BK1V002	Front fixing bracket VBK-1 on BK	420

Note: supplied complete with n. 1 bracket, screws and pins for mounting

LATERAL FIXING BRACKET VBK-1 ON BK





Code	Description	Weight [g]
095BK1V003	Lateral fixing bracket VBK-1 on BK	384

Note: supplied complete with n. 1 bracket, screws and pins for mounting

V-LOCK INTERFACE







Code	Description	Weight [g]
095BK1V004	V-Lock interface VBK-1	65

Note: supplied complete with n. 1 V-Lock bracket, screws and pins for mounting
N.B. Can be mounted axially or at right angles

CABLE TRAY CHAIN

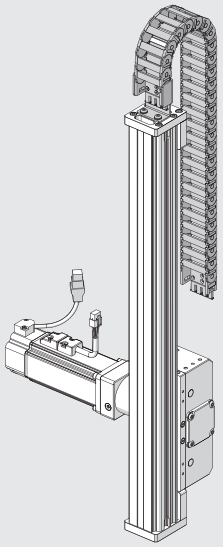





Code	Description
095BK1VC_ _ _ _	Cable tray chain kit for VBK-1

Note: Supplied complete with 1 bracket, 1 cable chain, screws and nuts for mounting

_ _ _ _ = to complete coding, enter the number of links, stroke function.

Use the following formula to identify the number of links required:

$$\text{no. of links} = \text{whole top}\left(10 + \frac{\text{stroke} - 5}{20}\right)$$ (stroke is expressed in mm)

Example: stroke 350 mm → no. of links = 28 → ordering code 095BK1VC0028

DRIVES

For motor-drive couplings see table on page **A5**.118

SPARE PARTS

GEARBOXES

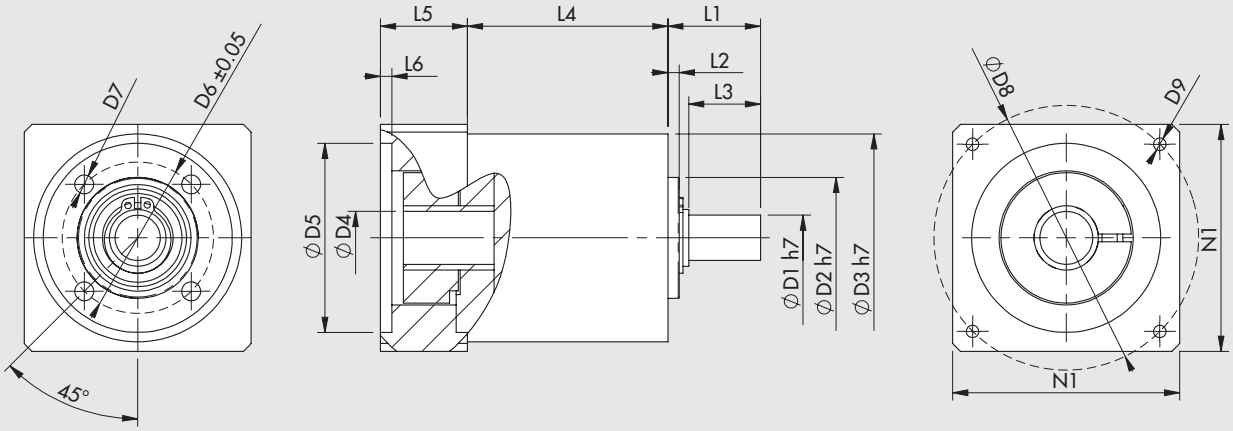

Code	Description	C_{OUT} nominal [Nm]	N_{IN} nominal [1/min]	J reduced to motor shaft [kgmm²]	Mass [kg]	D1	D2	D3	D4	D5	D6	D7	D8	D9	L1	L2	L3	L4	L5	L6	N1
37R0341000	Gearbox MP053 1:3	12	3300	8	0.8	12	32	55	14	50	40	M5	70	M5x12	24.5	3	19	53	24	3	60
37R0541000	Gearbox MP053 1:5	15	3500	6	0.8	12	32	55	14	50	40	M5	70	M5x12	24.5	3	19	53	24	3	60

C_{OUT} = nominal output torque N_{IN} = nominal input speed J = mass moment of inertia of the gearbox

ELECTRIC MOTORS

For motor-drive couplings see table on page **A5**.118

NOTES

ELECTRIC AXIS
SERIES ELEKTRO SVAK

This belt-driven rodless electric actuator is characterised by the fact that the motor and reducer unit is integral with the carriage, instead of being fitted to one end of the extruded section.
This solution is known as "cantilever". In the typical application the carriage is fixed while the extruded section moves.
The SVAK can be used either horizontally or vertically, but the most common use is in vertical applications, which explains why the motor is supplied complete with a brake that causes the axis to remain still even when it is not electrically powered.
The SVAK can be applied to the SHAK GANTRY series to obtain an X-Y-Z Cartesian manipulator robot featuring high performance and rigidity.
The SVAK uses the universal V-Lock modular system for fixing the carriage to external auxiliaries and the various components to one end of the extruded section.
The sides of the extruded section, which is made of anodized aluminium, houses two hardened and ground guides that slide on adjustable wheels that are integral with the carriage. The carriage is moved by a toothed belt, complete with a tensioning system. Guide lubrication nozzles are also provided on the carriage.
A BRUSHLESS motor with a toothed belt 1:2 gear speed reducer for the pulleys was also chosen. This design was opted for because it ensures excellent load capacities without sacrificing dynamics and the typical speed of this product. In addition to the standard drive proposed in the catalogue, it is also possible to customise the cylinder by using other motors.
The homing position is detected by an inductive proximity sensor included in the supply.
A cable guiding system with cable-carrying chain and mounting bracket is also available on request as an accessory.

TECHNICAL DATA

Temperature range	WITH MOTOR	°C	see single motor data sheet
	ONLY MECHANICS	°C	from -10 to +50
Maximum value of duty cycle			100%
Maximum speed without load		m/s	3.5
Maximum acceleration without load		m/s^2	50
Maximum additional load limit		kg	8
Maximum value of axial force available (with Metal Work motors)		N	300
Maximum axial force supportable by mechanical devices		N	600
Maximum torque applicable to the drive pulley		Nm	5
Standard strokes		mm	200
			400
			600
			800
Repetition accuracy		mm	± 0.05
Toothed belt reduction gear			1:2 ratio
Noise level		dBA	<66
Mounting position			Any
Degree of protection			IP30
Toothed belt pitch		mm	5
Type of belt			PowerGrip® LL GT 5MR 25 FV
Belt elongation at maximum load		mm	
Stroke 200			0.05
Stroke 400			0.06
Stroke 600			0.07
Stroke 800			0.08
Drive shaft pulley pitch diameter		mm	27.06
Stroke per motor rev.		mm/rev	42.5
Homing position sensor			Inductive sensor switch

METAL WORK PNEUMATIC

MASS AND MOMENT OF INERTIA

Stroke	mm	200	400	600	800
Weight without motor	kg	2.9	3.2	3.5	3.8
Weight of Brushless 200W motor with brake	kg	1.23			
Moving mass	kg	0.8	1.1	1.4	1.7
Reduced inertia at motor (without load)	kg mm²	66	80	94	108
Moment of inertia reduced at motor for each kg of load	kg mm²	45			

COMPONENTS

① EXTRUDED SECTION: anodized aluminium
② UPPER CLOSING PLATE: anodized aluminium
③ LOWER CLOSING PLATE: anodized aluminium
④ BELT TENSIONER: anodized aluminium
⑤ TOOTHED TRANSMISSION BELT: Polychloroprene (CR) loaded with fibreglass
⑥ HARDENED GUIDE: hardened ground chromed steel
⑦ LEFT-HAND GUARD: painted steel
⑧ RIGHT-HAND GUARD: painted steel
⑨ MOTOR: 200W BRUSHLESS with brake
⑩ FIXING PLATE: anodized aluminium
⑪ BUFFER: rubber
⑫ DRIVE PULLEY: hard-anodized aluminium
⑬ IDLE PULLEY: hard-anodized aluminium
⑭ REDUCTION BELT: loaded polychloroprene (CR)
⑮ LEFT-HAND PLATE: anodized aluminium
⑯ DRIVE SHAFT: steel
⑰ IDLE AXIS: steel
⑱ ROLLER
⑲ RIGHT-HAND PLATE: anodized aluminium
⑳ INDUCTION SENSOR

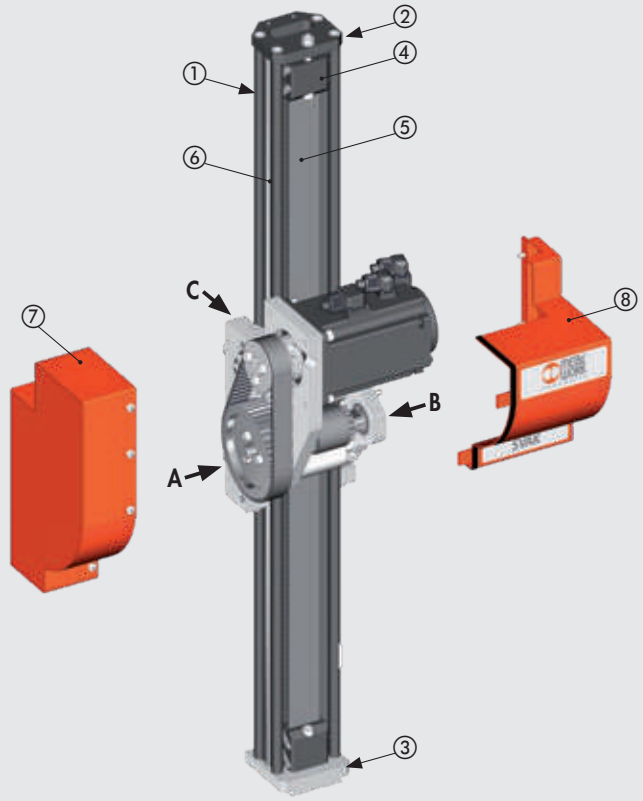

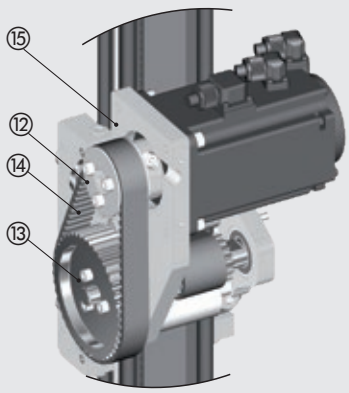

Viewed from A

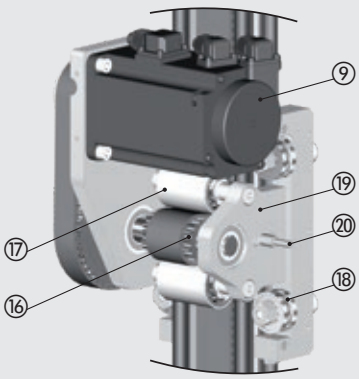

Viewed from B

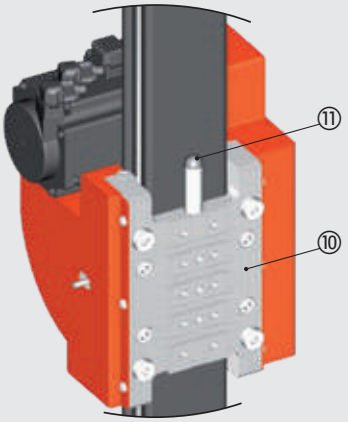

Viewed from C

DIAGRAM OF FORCES AND MOMENTS

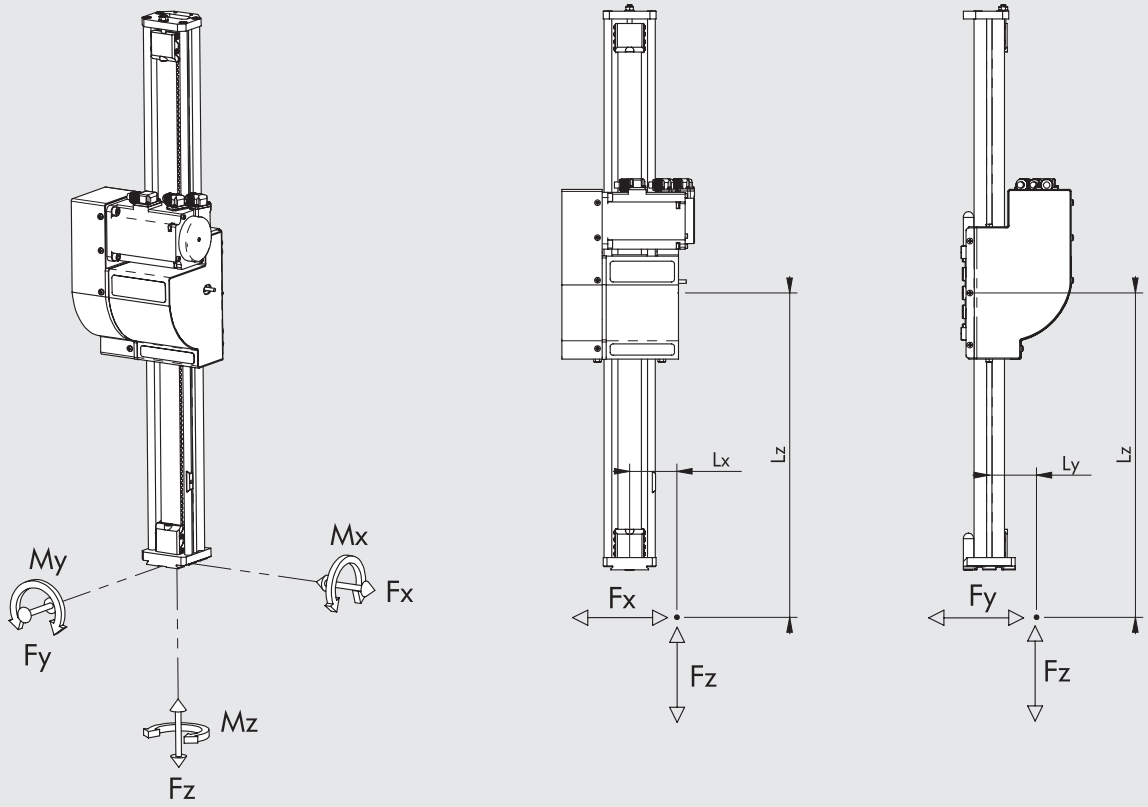

Fx max [N]	Fy max [N]	Mx max [Nm]	My max [Nm]	Mz max [Nm]
800	600	20	27	26

N.B.: The values are calculated on the basis of theoretical useful life of 10000 km.

N.B.: For the maximum value of Fz see the general technical data and the axial load curves depending on the speed.

N.B.: When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where Lx, Ly and Lz have to be given in metre.

$Mx = Fz \cdot Ly + Fy \cdot Lz \qquad My = Fz \cdot Lx + Fx \cdot Lz \qquad Mz = Fy \cdot Lx + Fx \cdot Ly$

$$\frac{(Mx)}{Mx\ max} + \frac{(My)}{My\ max} + \frac{(Mz)}{Mz\ max} + \frac{(Fx)}{Fx\ max} + \frac{(Fy)}{Fy\ max} \leq 1$$

METAL WORK PNEUMATIC

DEFORMATION ACCORDING TO LOAD

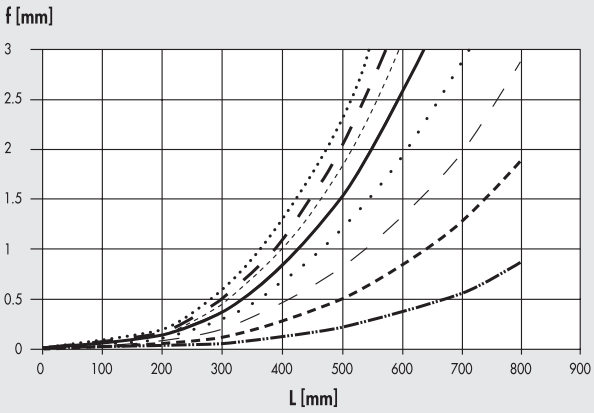

F = 10 N
F = 20 N
F = 30 N
F = 40 N
F = 50 N
F = 60 N
F = 70 N
F = 80 N

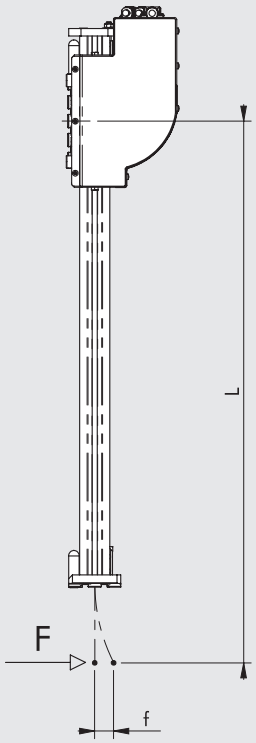

AXIAL LOAD-SPEED CURVES

N.B.: Check that the following constraints are met for each cycle phase:
- the maximum movable masses and related acceleration values specified in the data sheets;
- the values specified in the force and moment calculation diagram (including moment of inertia).
- deformation according to load.

The following diagrams show the axial load with changing speed (m/s). Each diagram shows two separate curves:
- **NOMINAL AXIAL LOAD** curve: the nominal axial load delivered by the motor with a duty cycle of 100%
- **MAXIMUM AXIAL LOAD** curve: the axial load delivered by the motor with a duty cycle of less than 100%.

BRUSHLESS WITH BRAKE DRIVES

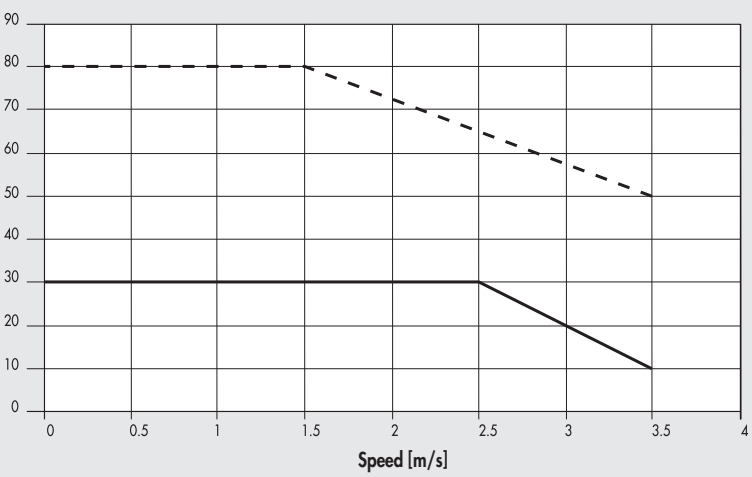

Maximum 37M4200000 (with brake) + 37D2400008 (200W)

Nominal 37M4200000 (with brake) + 37D2400008 (200W)

EXAMPLES OF APPLICATION

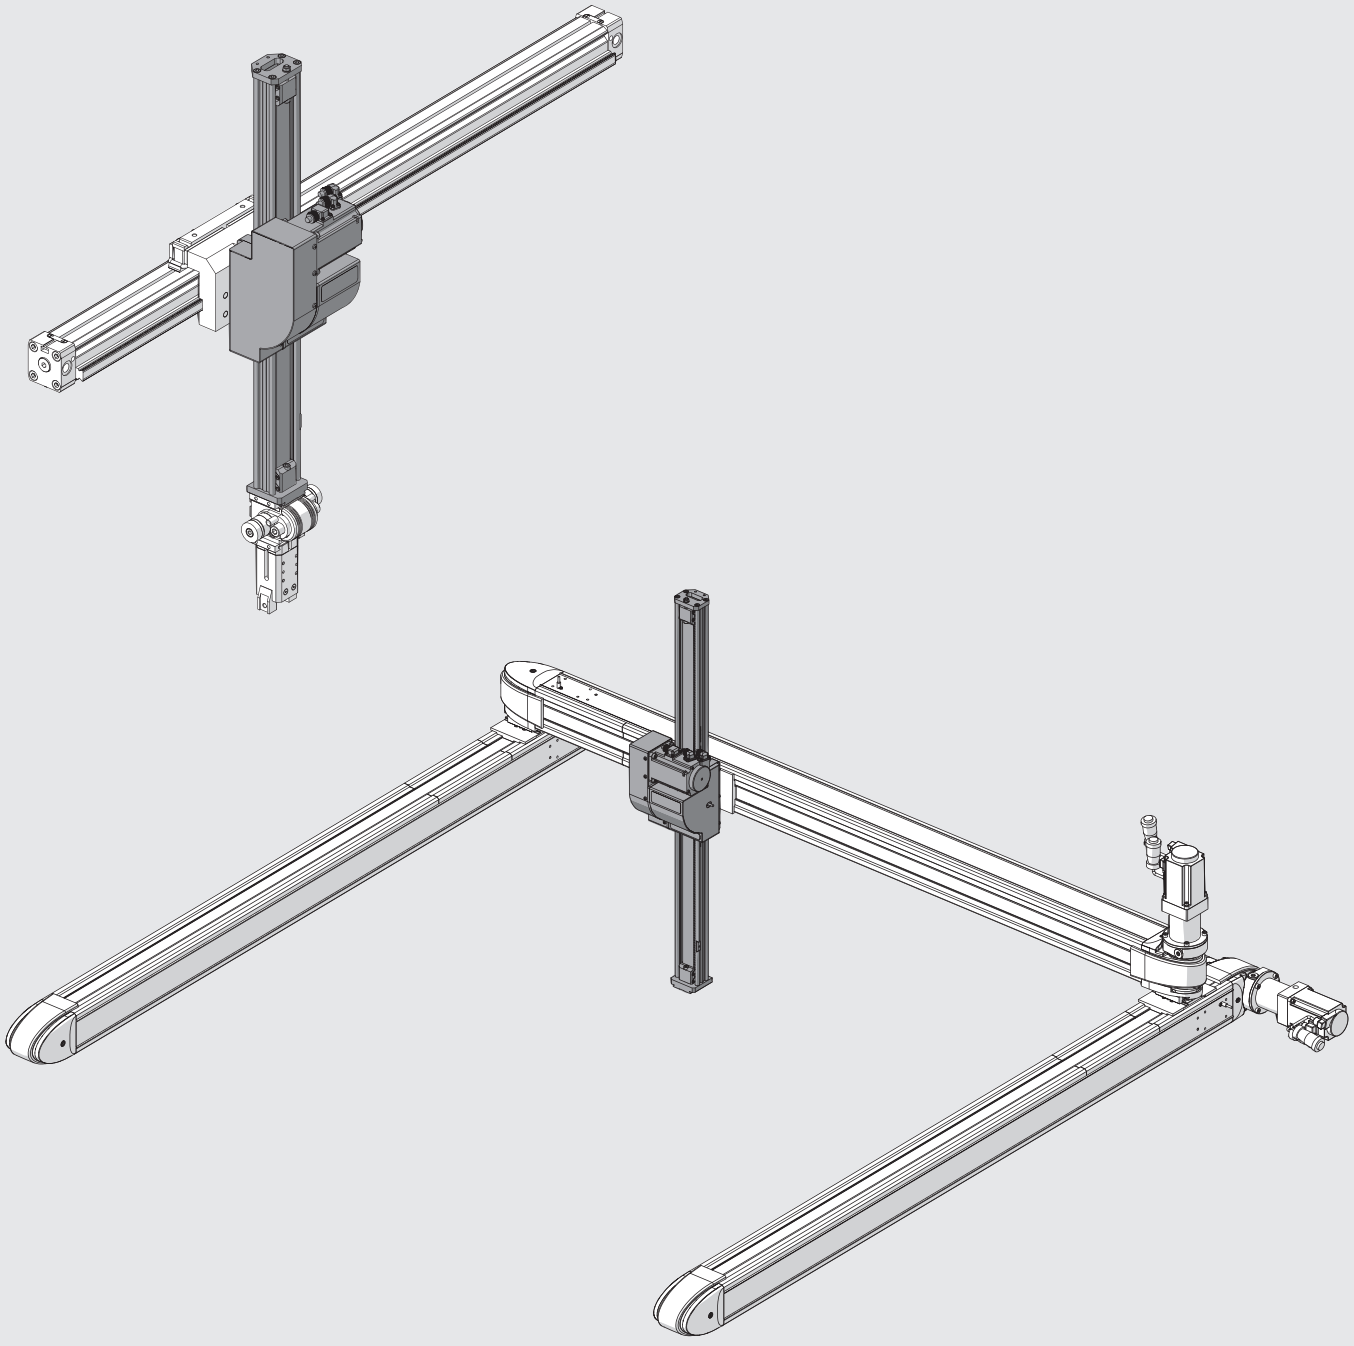

NOTES

METAL WORK PNEUMATIC

DIMENSIONS

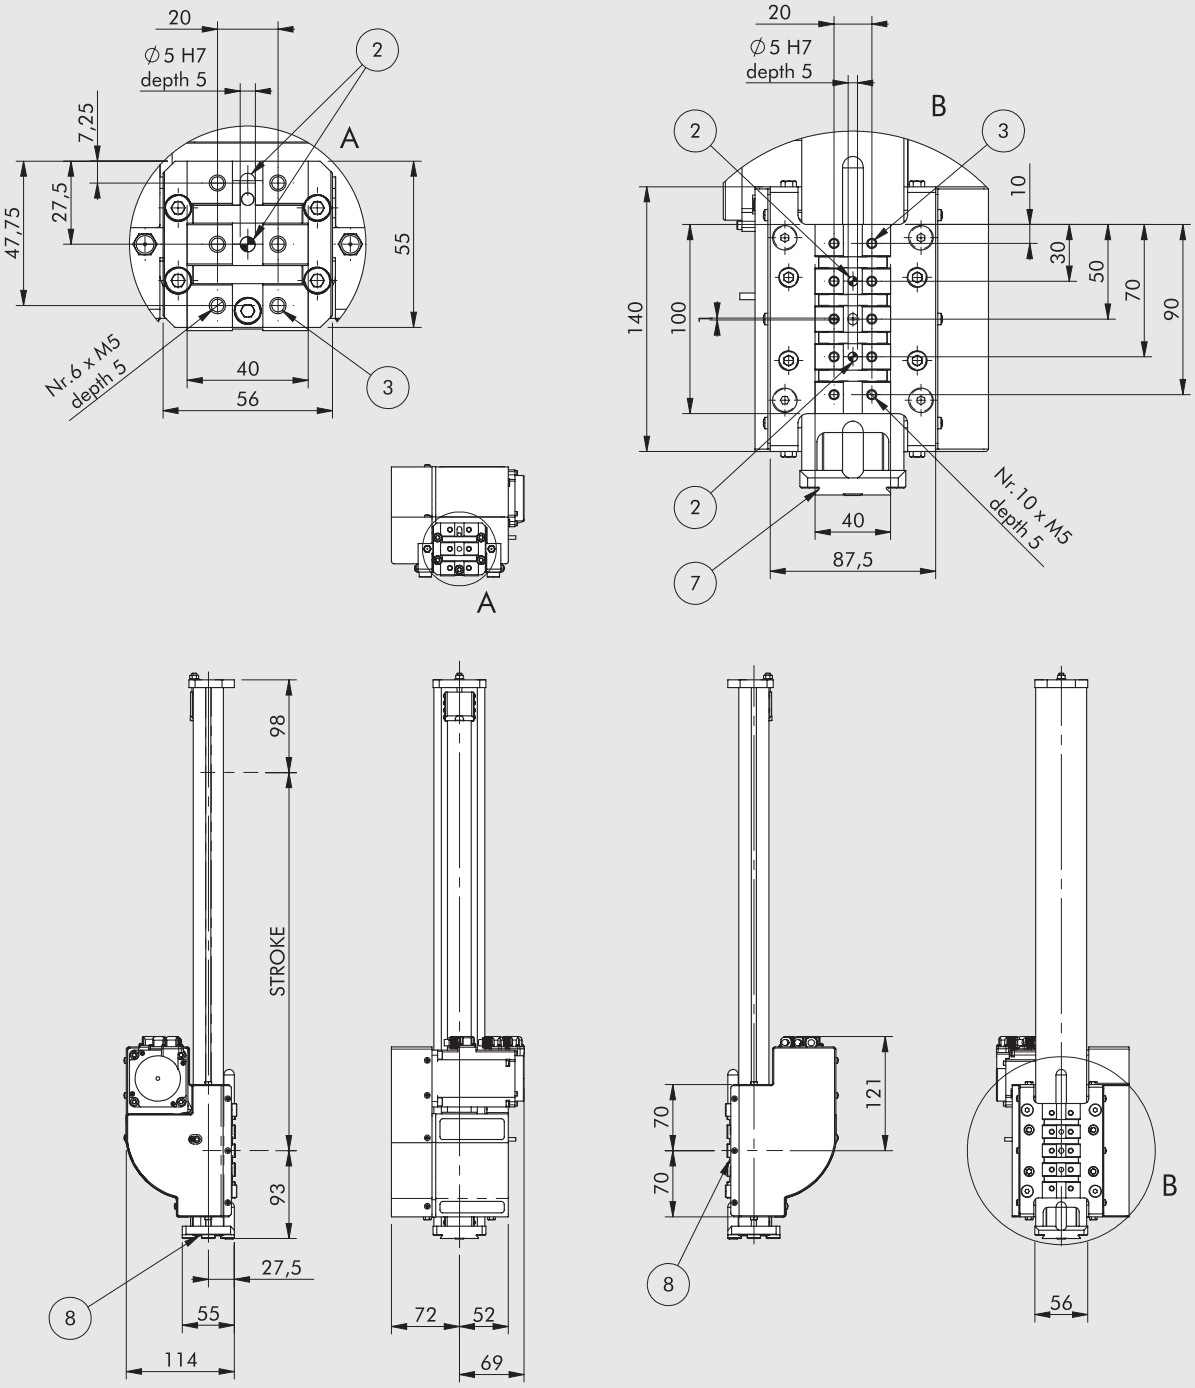

② Holes for centring pins
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

Code	Description
375V00020004200	SVAK stroke 200
375V00040004200	SVAK stroke 400
375V00060004200	SVAK stroke 600
375V00080004200	SVAK stroke 800

MOTOR-DRIVE COUPLINGS

BRUSHLESS MOTOR WITH BRAKE			DRIVES	
Code Metal Work		Manufacturer	Code Metal Work	Manufacturer
37M4200000		SANYO DENKI R2AA06020FCH11M (200W)	37D2400008	SANYO DENKI RS3A03

The motor must be controlled in such a way as to avoid sudden changes in speed.



KEY TO CODES

									DRIVE		
CYL	37	5	V	0	0	0200	0	4	2	0	0
	TYPE					STROKE ◆		MOTOR	FLANGE	TORQUE	
	37 Electric actuators	5 Belt-driven electric axes	V SVAK	0 STD	0 STD	0200 0400 0600 0800	0 STD	4 BRUSHLESS with BRAKE	2 60	0 0 - 0.79 Nm	0 STD

◆ Other strokes on request.

ACCESSORIES

CABLE TRAY CHAIN





Code	Description	A
095000C0200	Cable tray chain accessory kit SVAK stroke 200	~ 550
095000C0400	Cable tray chain accessory kit SVAK stroke 400	~ 750
095000C0600	Cable tray chain accessory kit SVAK stroke 600	~ 950
095000C0800	Cable tray chain accessory kit SVAK stroke 800	~ 1150

Note: suitable for connection with SHAK 340 and SHAK 470

OIL

Code	Description	Volume [ml]
9910490	PARALIQ P 460	80

DRIVES

For motor-drive couplings see the table above

SPARE PARTS

SHAK INDUCTIVE SENSOR



Code	Description
095340A0000	SHAK inductive sensor accessory kit

Note: Individually packed with locking plate and screw

ELECTRIC MOTORS

For motor-drive couplings see the table above

ELECTRIC AXIS SCREW-DRIVEN RODLESS SERIES ELEKTRO SK

METAL WORK PNEUMATIC

Screw-driven rodless electric axis with a load-bearing frame made of anodised extruded aluminium, which gives the cylinder optimal torsional and flexural rigidity. It comes in two sizes, SK-0 and SK-2.

For the SK-0 size, two V-shaped guides run directly on the outer edge of the extruded section and support a moving carriage fitted with two wear-resistant acetal resin pads. The pad clearance can be adjusted by means of threaded grub screws placed to the side of the carriage that can be used to make up any play caused by wear. Due to pad support, the carriage only conveys axial forces to the feed system consisting of a self-lubricating techno-polymer nut and a lead screw stainless steel. Two slots are provided on each side of the liner for fixing magnetic sensors.



SK-0

Size SK-2 features a carriage driven by two sturdy preloaded ball recirculation pads that ensure great accuracy of movement.
Threaded holes for the lubrication of the guides and the ball recirculation screws are provided on both sides of the carriage.
The carriage is driven by a system consisting of a hardened and tempered screw and a ball-recirculation lead nut. In order to reduce vibration, hence noise level, and increase the system useful life, the screw is pre-stressed with an elastic load device by means of cup springs.
The slots on both sides of the liner are provided for fixing magnetic sensors.
For size SK-2 only, the motors can be installed either in line with the liner or geared using toothed-belt transmission gears.

SK-2

The carriage features an interchangeable fixing interface plate, which can be ordered with such attachments as the axial V-Lock or orthogonal V-Lock ports or the blank type for custom solutions.

Various STEPPING and BRUSHLESS motor drives are available with optional motor brake and/or built-in encoder.
This axis can also be supplied without motor drive or, on request, with modules for interfacing with motors from the trade.

TECHNICAL DATA			SK-0	SK-2
Temperature range	WITH MOTOR	°C	see single motor data sheet	
	ONLY MECHANICS	°C	from -10 to +50	
Electrical protection rating with	STEPPING motors		IP30	IP20/IP40 (see key to codes on page **A5**.143)
	BRUSHLESS motors		IP30	IP40
Maximum duty cycle for	STEPPING motors		25% *	50%
	BRUSHLESS motors		25% *	100%
Minimum stroke		mm	50	100
Maximum stroke		mm	500	1200
Positioning repeatability		mm	± 0.15	± 0.02
Positioning accuracy		mm	± 0.4 **	± 0.2 **
Uncontrolled impact at the end of stroke			NOT ALLOWED (it provides an extra-stroke minimum 5 mm)	
Sensor magnet			YES	
Work position			Any	
Interface for fixing on carriage			Threaded holes	Axial V-Lock / Orthogonal V-Lock / Blank

* The axis must run within the specified duty cycle to allow the screw/nut to cool down.
** Indicative average data that gets influenced by various factors such as the stroke, the type of motor, the cylinder version, etc ...

MECHANICAL FEATURES		SK-0			SK-2	
Screw pitch	mm	5	12.7	25	4	10
Screw diameter	mm	12	12.7	12	12	
Static axial load ●	N	1135	1026	958	2800	
Dynamic axial load	N	600	300	150	5000	3600
Maximum number of revs	1/min	600	945	960	3000	4000
Maximum speed (V_{max})	mm/s	50	200	400	200	670
Maximum acceleration without load	m/s^2		-		5	
Maximum drive torque applicable to the worm screw shank	Nm		2.5		5	

● Static loads bearable without damage.
Calculate mean axial load and the calculate life: see graphs on page **A5**.133
N.B.: For the verification of the linear guide system and screw, see page **A5**.132

WEIGHTS		SK-0			SK-2	
Screw pitch	mm	5	12.7	25	4	10
Weight at stroke 0 (excluding the carriage fixing interface in the case of SK-2)	g		750		2990	3000
Additional weight each mm of stroke	g		2.6		7	
Weight of the in-line transmission (without motor)	g		120		400	
Weight of the geared transmission (without motor)	g		-		600	
Moving mass at stroke 0 (M0)	g		348		1050	

MASS MOMENTS OF INERTIA		SK-0			SK-2	
Worm screw pitch	mm	5	12.7	25	4	10
J0 at stroke 0	kg mm^2	2.15	2.539	2.008	2.5	2.6
J1 each metre of stroke	kg mm^2/m	12.3	14.7	11.6	12.24	12.8
J2 each kg of load	kg mm^2/kg	0.6332	4.0855	15.83	0.4053	2.5333
J3 in-line transmission	kg mm^2	0.0850	0.0850	0.085	5.2	
J3 geared transmission	kg mm^2				19	

The total mass moment of inertia (Jtot) reduced for the motor is: Jtot = [J1 · stroke [m] + J2 · (M0 + load) + J0] · τ^2 +J3
M0 is defined in the weight table.

COMPONENTS SK-0

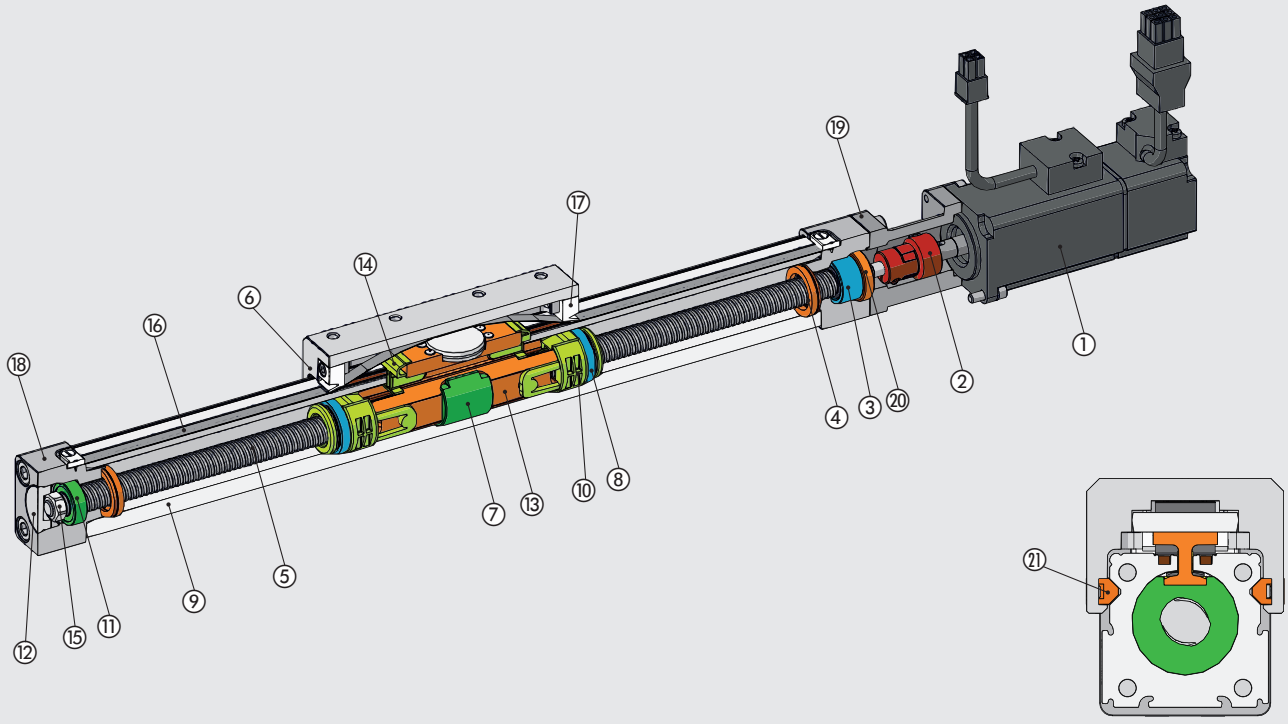

① MOTOR
② ELASTIC COUPLING: aluminium / polyurethane
③ DOUBLE-ROW ANGULAR BALL BEARING
④ BUFFER: polyurethane
⑤ LEAD SCREW: stainless steel
⑥ CARRIAGE WITH GUIDING SYSTEM: aluminium
⑦ NUT: technopolymer
⑧ MAGNET: plastoferrite
⑨ CYLINDER LINER: anodized aluminium
⑩ CARRIAGE LIMIT SWITCH: technopolymer
⑪ SINGLE-ROW BALL BEARING
⑫ HEAD COVER: anodized aluminium
⑬ CARRIAGE BODY: anodized aluminium
⑭ LOWER STRAP PAD: technopolymer
⑮ LOCKING NUT: zinc-plated steell
⑯ PROTECTIVE STRAP: stainless steel
⑰ UPPER STRAP PAD: technopolymer
⑱ HEAD: anodized aluminium
⑲ MOTOR BELL: anodized aluminium
⑳ BEARING LOCKING RING NUT: zinc-plated steel
㉑ "V" GUIDE PLATE: technopolymer

METAL WORK PNEUMATIC

COMPONENTS SK-2

ELECTRIC AXIS WITH IN-LINE MOTOR

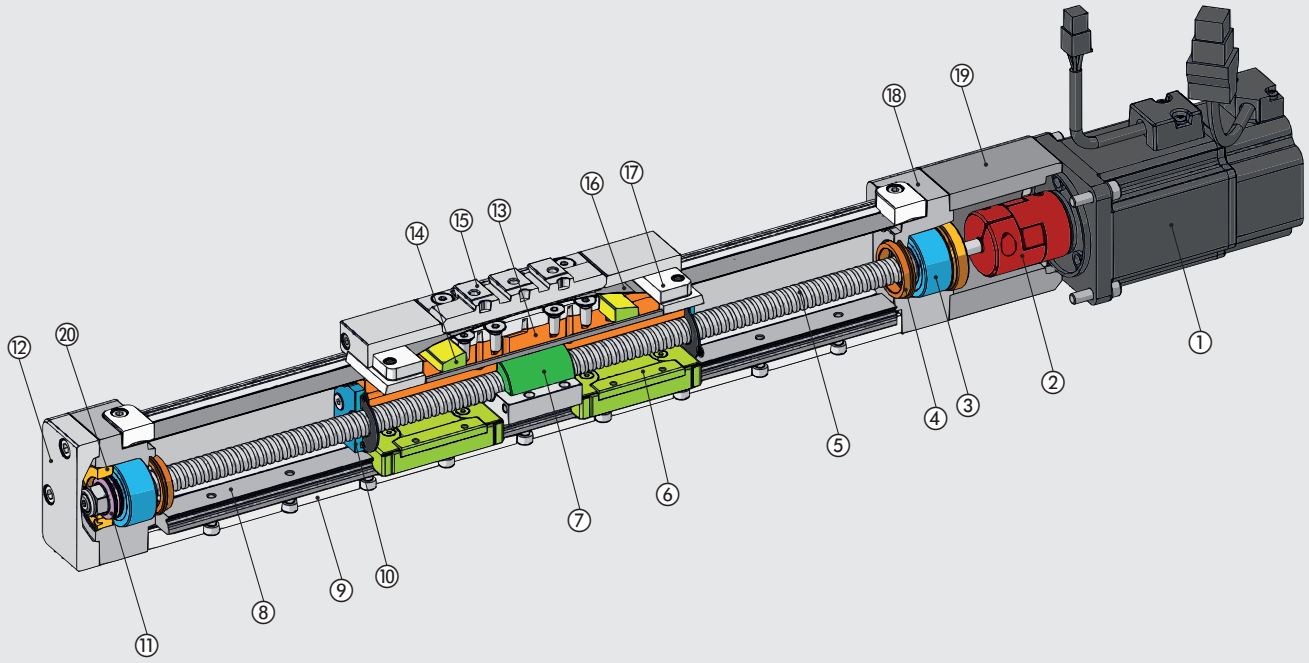

ELECTRIC AXIS WITH GEARED MOTOR

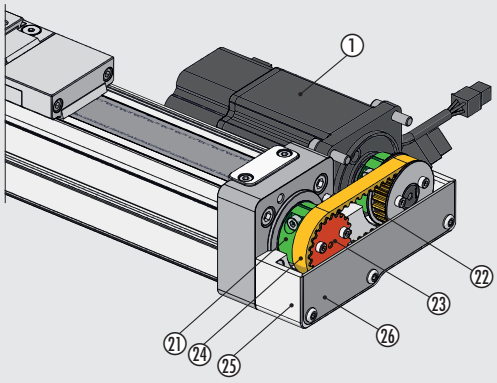

① MOTOR
② ELASTIC COUPLING: aluminium / polyurethane
③ DOUBLE-ROW ANGULAR BALL BEARING
④ BUFFER: polyurethane
⑤ BALL SCREW: hardened steel
⑥ BALL RECIRCULATION PAD: stainless steel / technopolymer
⑦ RECIRCULATING BALL SCROLL: hardened steel
⑧ RAIL: hardened steel
⑨ CYLINDER LINER: anodized aluminium
⑩ CARRIAGE LIMIT SWITCH: anodized aluminium
⑪ PRETENSIONING CUP SPRING: hardened steel
⑫ HEAD COVER: anodized aluminium
⑬ CARRIAGE BODY: anodized aluminium
⑭ LOWER STRAP PAD: technopolymer
⑮ INTERFACE FOR FIXING: anodized aluminium
⑯ PROTECTIVE STRAP: stainless steel
⑰ UPPER STRAP PAD: technopolymer
⑱ HEAD: anodized aluminium
⑲ MOTOR BEARING: anodized aluminium
⑳ BEARING LOCKING RING NUT: zinc-plated steel
㉑ ELASTIC COLLAR: aluminium
㉒ DRIVE GEAR PULLEY: aluminium
㉓ DRIVEN GEAR PULLEY: aluminium
㉔ TOOTHED TRANSMISSION BELT: reinforced rubber
㉕ GEARED MOTOR BEARING: aluminium
㉖ TRANSMISSION GUARD: aluminium

DIAGRAM OF FORCES AND MOMENTS

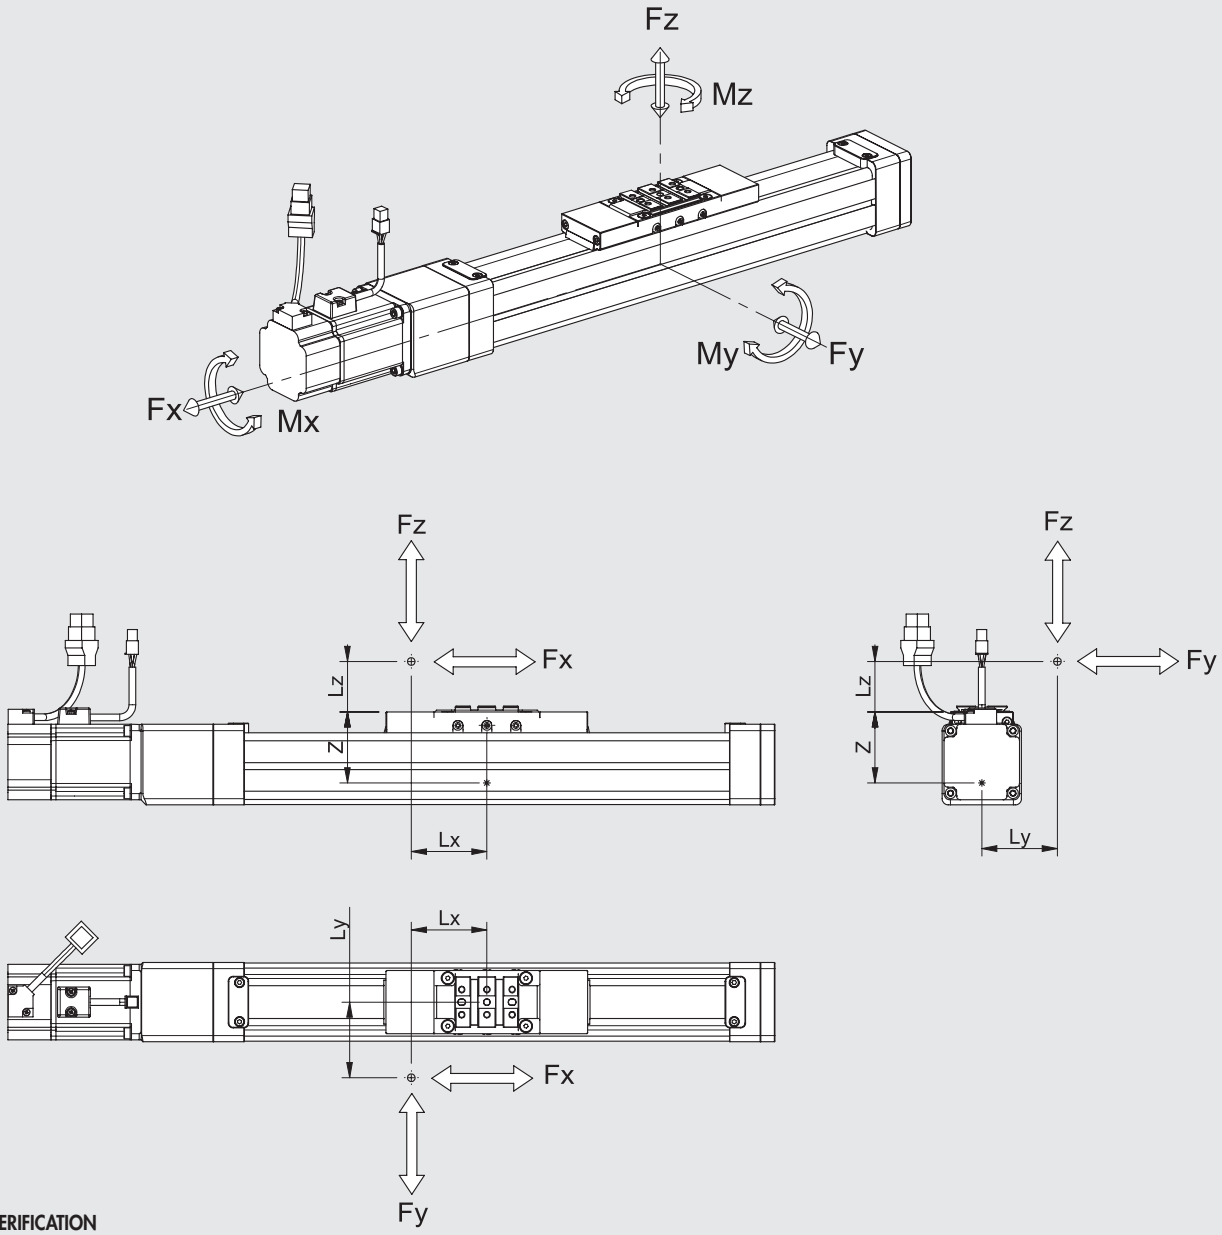

STATIC VERIFICATION

When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

SIZE	Z [mm]	Fy0 max [N]	Fz0 max [N]	Mx0 max [Nm]	My0 max [Nm]	Mz0 max [Nm]
SK-0	14	350	350	5	22	22
SK-2	57	4500	4500	70	450	450

N.B.: The values in the table relates to the maximum admissible loads beyond which serious damage is likely to occur.

$Mx = Fz \cdot Ly + Fy \cdot (Lz + z)$ $My = Fz \cdot Lx + Fx \cdot (Lz + z)$ $Mz = Fy \cdot Lx + Fx \cdot Ly$

$$\frac{(Mx)}{Mx0\ max} + \frac{(My)}{My0\ max} + \frac{(Mz)}{Mz0\ max} + \frac{(Fy)}{Fy0\ max} + \frac{(Fz)}{Fz0\ max} \leq 1$$

DYNAMIC VERIFICATION

When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

SIZE	Z [mm]	Fy max [N]	Fz max [N]	Mx max [Nm]	My max [Nm]	Mz max [Nm]
SK-0	-	-	-	-	-	-
SK-2	57	2500	2500	35	250	250

N.B.: The values are calculated on the basis of theoretical useful life of 10000 km.

$Mx = Fz \cdot Ly + Fy \cdot (Lz + z)$ $My = Fz \cdot Lx + Fx \cdot (Lz + z)$ $Mz = Fy \cdot Lx + Fx \cdot Ly$

$$\frac{(Mx)}{Mx\ max} + \frac{(My)}{My\ max} + \frac{(Mz)}{Mz\ max} + \frac{(Fy)}{Fy\ max} + \frac{(Fz)}{Fz\ max} \leq 1$$

CALCULATION OF MEAN AXIAL LOAD F_m AND VERIFICATION

Peak axial load in a work cycle must not exceed the static axial load F_o.
The peak value is usually achieved during upward acceleration in vertical installation. Exceeding this value leads to greater wear and hence shorter life of the screw.

Mean axial load F_m

$$F_m = \sqrt[3]{\sum F_x^3 \times \frac{V_x}{V_m} \times \frac{q}{100}} =$$

$$F_m = \sqrt[3]{F_{x1}^3 \times \frac{V_{x1}}{V_m} \times \frac{q_1}{100} + F_{x2}^3 \times \frac{V_{x2}}{V_m} + \frac{q_2}{100} + F_{x3}^3 \times \frac{V_{x3}}{V_m} \times \frac{q_3}{100} + \ldots}$$

F_x = Axial load at stage x
F_o = Static axial load
V_x = Speed in the phase x
F_m = Mean axial load during extension
q = Time segment
V_m = Average speed

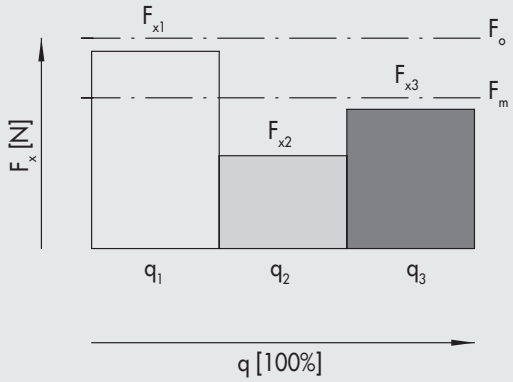

The mean axial load must not exceed the dynamic axial load: $F_m \leq F$
The graph below shows the lifecycle of the screw as a function of F_m

LIFE CHARACTERISTICS AS A FUNCTION OF THE MEAN AXIAL LOAD

SK-0

Mean axial load [N]

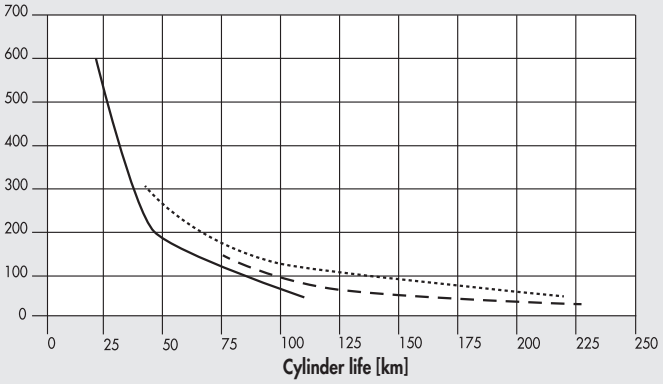

screw pitch 5 ---------- screw pitch 12.7 – – – screw pitch 25

SK-2

Mean axial load [N]

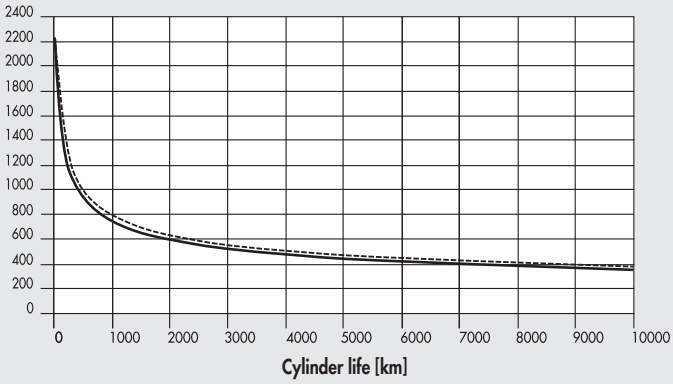

---------- screw pitch 4 ——— screw pitch 10

MAXIMUM AXIAL LOAD SK-2

The two variables (axial load and stroke) must comply with the conditions indicated in the graph, otherwise this could cause a serious damage.

Axial load [N]

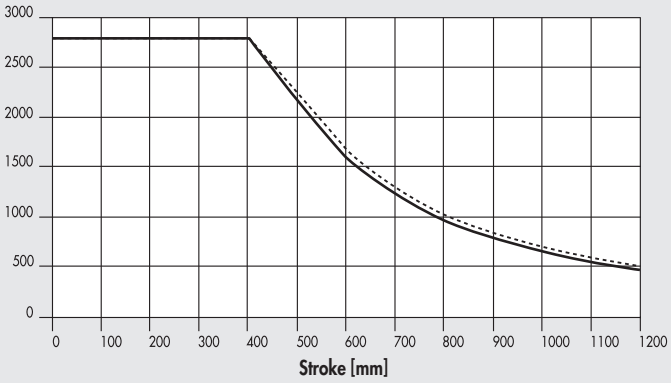

---------- screw pitch 4 ——— screw pitch 10

CRITICAL SPEED SK-2

The two variables (axial load and stroke) must comply with the conditions indicated in the graph, otherwise this could trigger resonance phenomena that could impair the good functioning of the system.

Speed [mm/s]

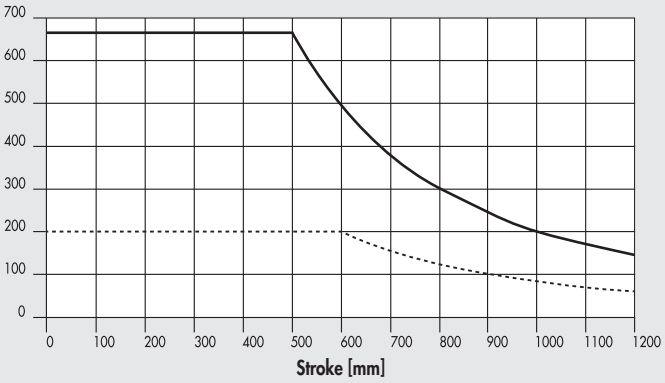

---------- screw pitch 4 ——— screw pitch 10

VERSIONS

TYPE OF CARRIAGE INTERFACE

SK-0

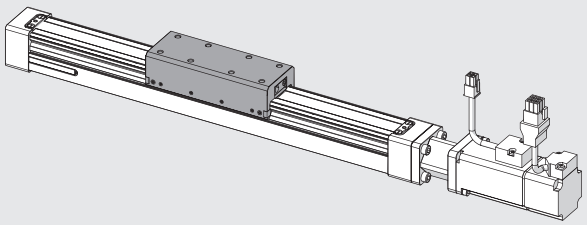

SK-2

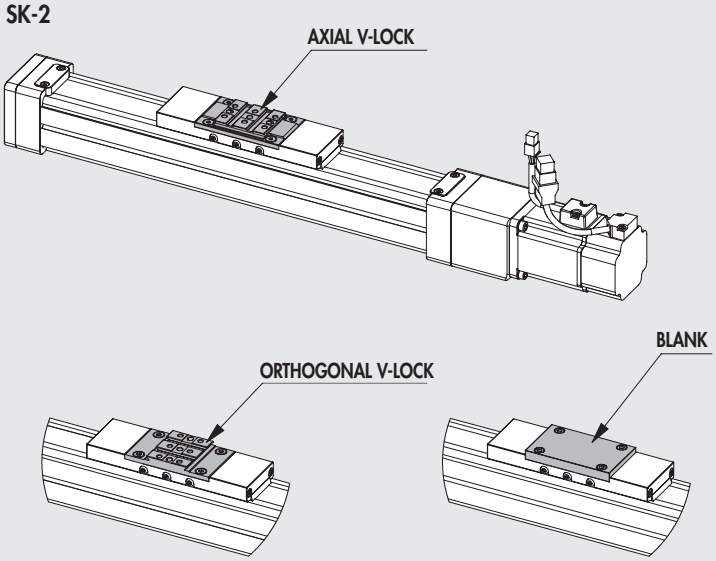

MOTOR POSITIONING

SK-0

IN-LINE MOTOR



SK-2

RIGHT GEARED MOTOR

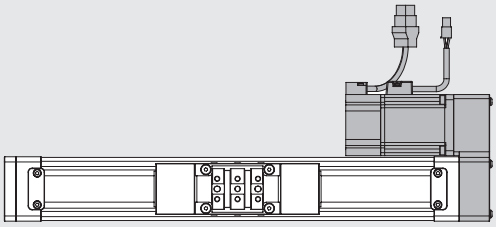

IN-LINE MOTOR



LEFT GEARED MOTOR

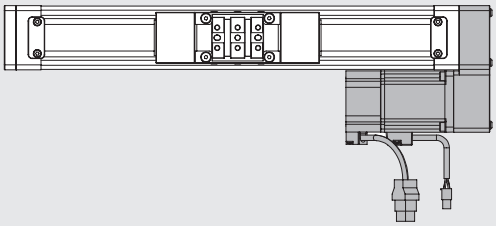

VERSION WITHOUT MOTOR

SK-0



SK-2



AXIAL LOAD CURVES AS A FUNCTION OF SPEED (CYLINDER COMPELTE WITH MOTOR AND DRIVE) SK-0

N.B.: Check that the following constraints are met for each cycle phase:
- the maximum movable masses and related acceleration values specified in the data sheets;
- the values specified in the force and moment calculation diagram (including moment of inertia);
- calculation of average axial load and peak axial load.

N.B.: The obtainable load values already take the efficiency of the system into account.
For STEPPING motors, with the motor off, the drive current is automatically reduced by 50% to prevent overheating.
Consequently, available axial load with the motor stopped is also reduced by 50%.

STEPPING motor code 37M1120000

Electric axis with a 5 mm-pitch screw

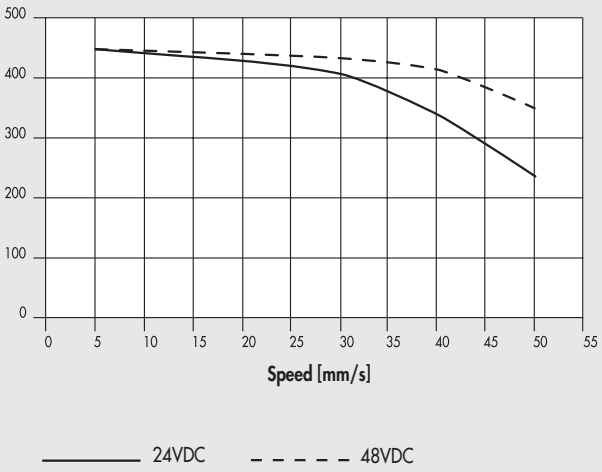

Electric axis with a 12.7 mm-pitch screw

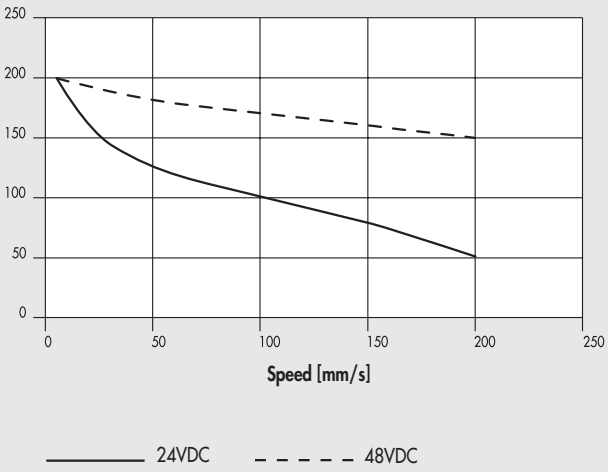

Electric axis with a 25 mm-pitch screw

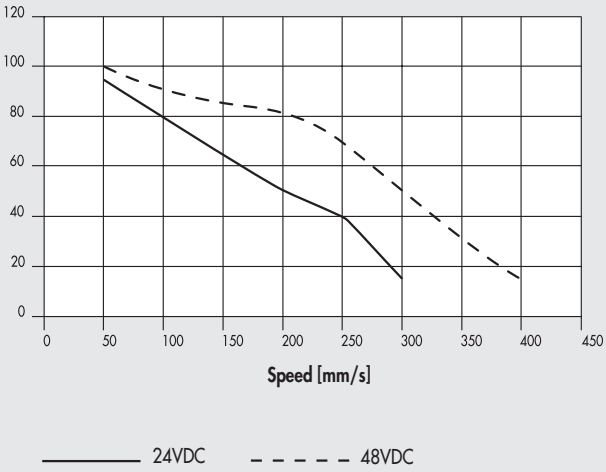

STEPPING motor code 37M1820000 (with ENCODER) and code 37M1320000 (with BRAKE + ENCODER)

Electric axis with a 5 mm-pitch screw

Axial load [N]

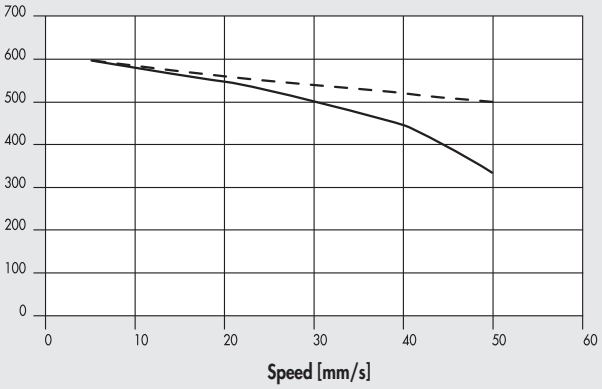

24VDC 48VDC

Electric axis with a 12.7 mm-pitch screw

Axial load [N]

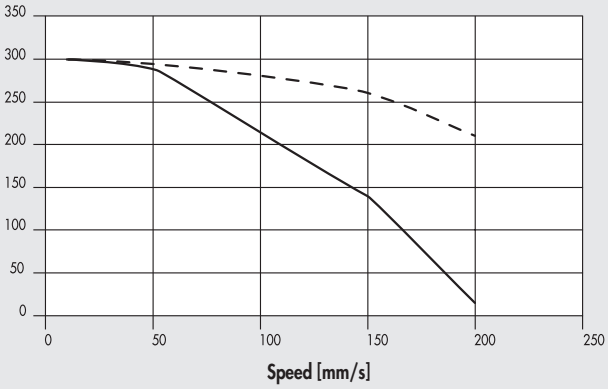

24VDC 48VDC

Electric axis with a 25 mm-pitch screw

Axial load [N]

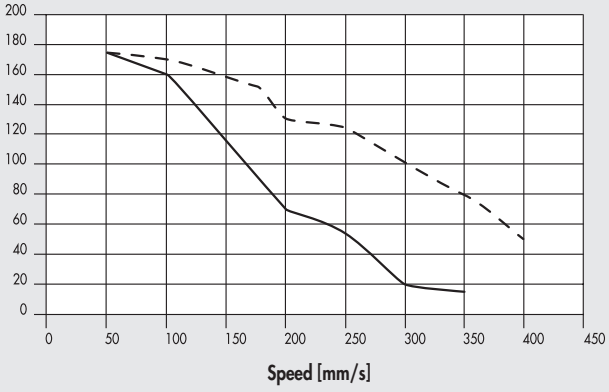

24VDC 48VDC

BRUSHLESS motor code 37M2000000 and code 37M4000000 (with BRAKE)

Electric axis with a 5 mm-pitch screw

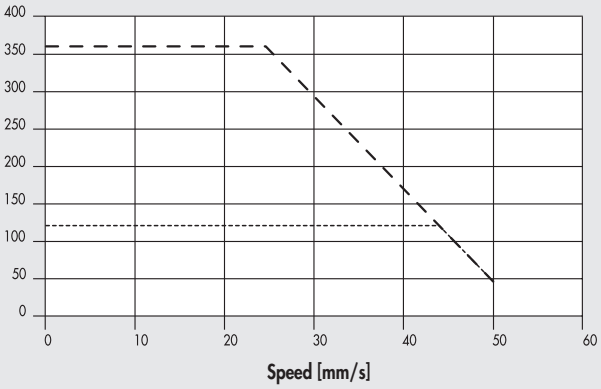

Nominal 100 W Maximum 100 W

Electric axis with a 12.7 mm-pitch screw

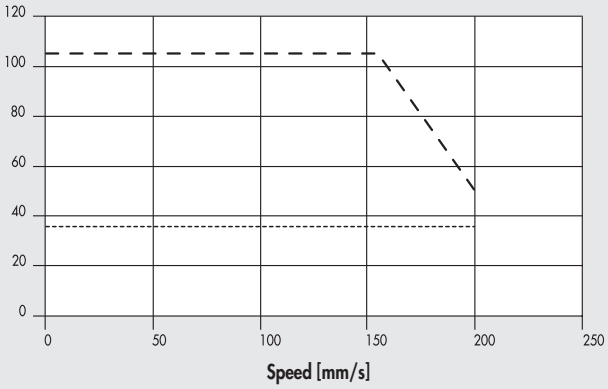

Nominal 100 W Maximum 100 W

Electric axis with a 25 mm-pitch screw

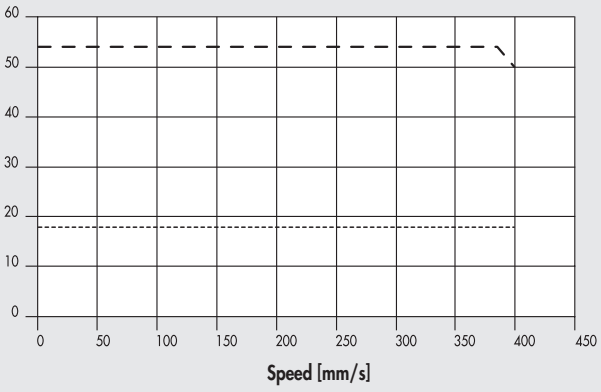

Nominal 100 W Maximum 100 W

AXIAL LOAD CURVES AS A FUNCTION OF SPEED (CYLINDER COMPELTE WITH MOTOR AND DRIVE) SK-2

N.B.: Check that the following constraints are met for each cycle phase:
- the maximum movable masses and related acceleration values specified in the data sheets;
- the values specified in the force and moment calculation diagram (including moment of inertia);
- calculation of average axial load and peak axial load.

N.B.: The obtainable load values already take the efficiency of the system into account.
For STEPPING motors, with the motor off, the drive current is automatically reduced by 50% to prevent overheating.
Consequently, available axial load with the motor stopped is also reduced by 50%.

STEPPING motor code 37M1120001 (uprated revs)

Electric axis with a 4 mm-pitch screw

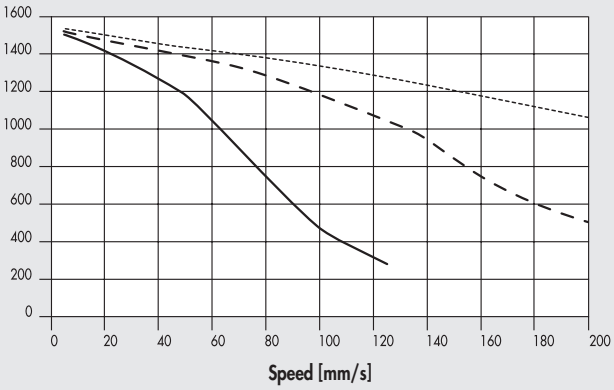

24VDC 48VDC 75VDC

Electric axis with a 10 mm-pitch screw

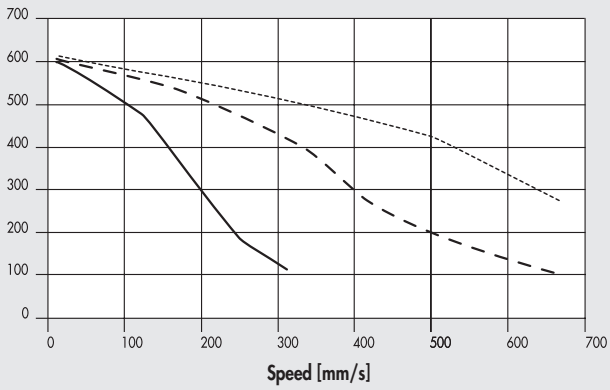

24VDC 48VDC 75VDC

STEPPING motor code 37M5120000 (with brake)

Electric axis with a 4 mm-pitch screw

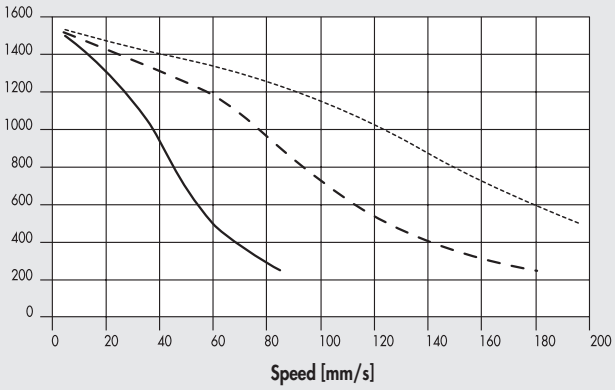

24VDC 48VDC 75VDC

Electric axis with a 10 mm-pitch screw

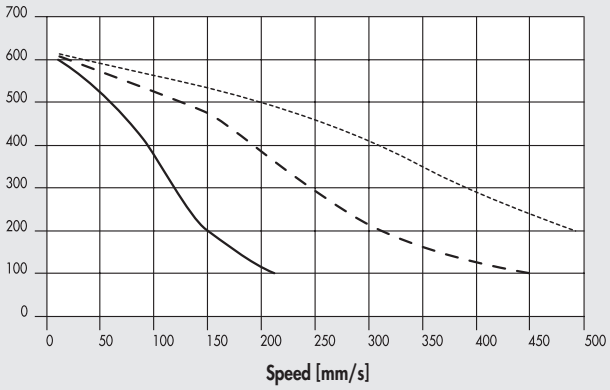

24VDC 48VDC 75VDC

STEPPING motor code 37M3230000 (with brake + encoder)

Electric axis with a 4 mm-pitch screw

Axial load [N]

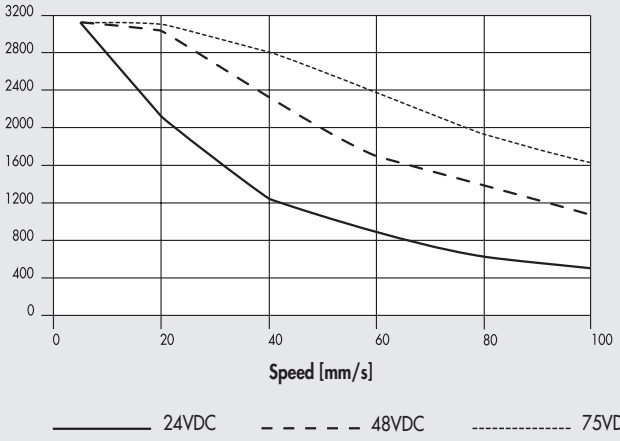

Electric axis with a 10 mm-pitch screw

Axial load [N]

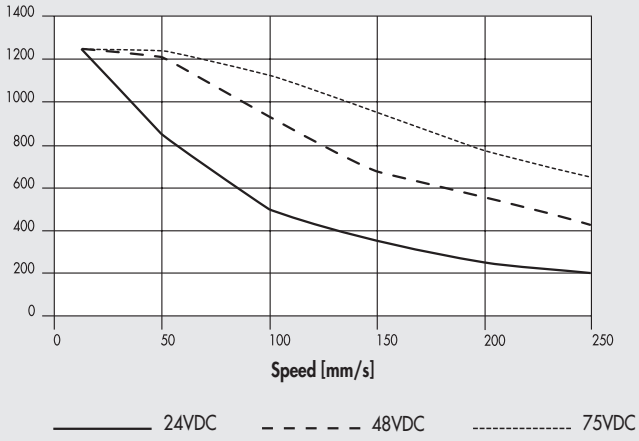

BRUSHLESS motors code 37M2220001 and code 37M4220001 (with brake)

Electric axis with a 4 mm-pitch screw

Axial load [N]

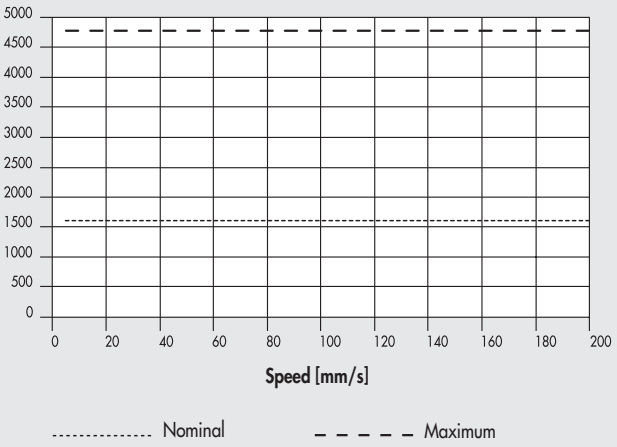

Electric axis with a 10 mm-pitch screw

Axial load [N]

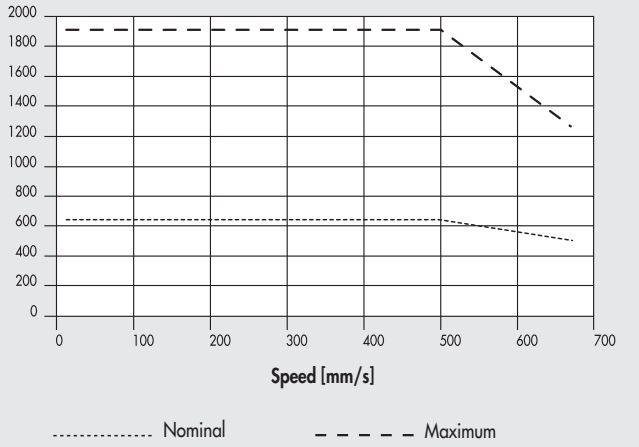

EXAMPLES OF APPLICATION

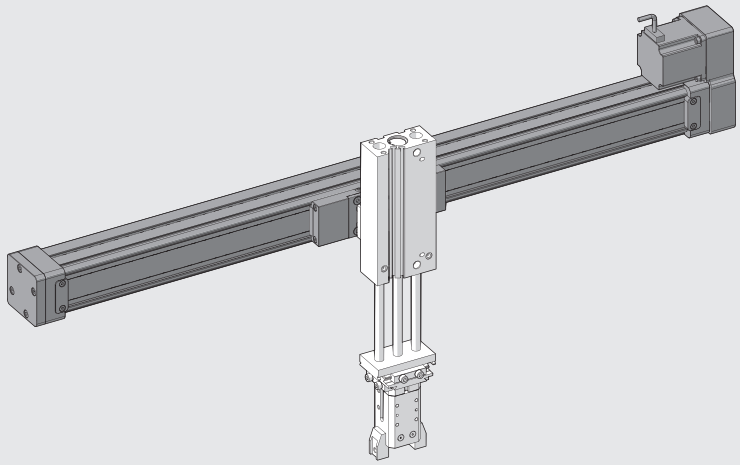

DIMENSIONS ELECTRIC AXIS SK-0

VERSION WITHOUT MOTOR

③ Threaded holes for fixing
⑥ Sensor fixing slots

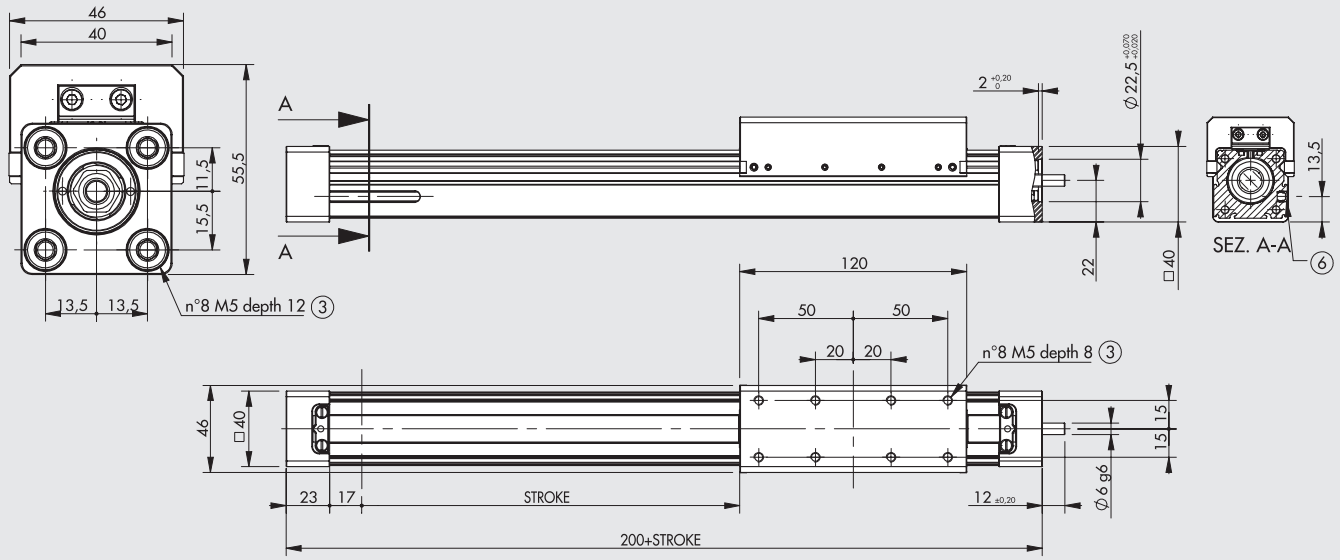

VERSION WITH MOTOR











ORDERABLE CODES

STEPPING MOTOR code 37M1120000	STEPPING MOTOR WITH ENCODER code 37M1820000	STEPPING MOTOR WITH ENCODER AND BRAKE code 37M1320000	BRUSHLESS MOTOR code 37M2000000	BRUSHLESS MOTOR WITH BRAKE code 37M4000000
373005_ _ _ _ 21120	373005_ _ _ _ 28120	373005_ _ _ _ 23120	373005_ _ _ _ 22000	373005_ _ _ _ 24000

_ _ _ _ = Enter the stroke in mm to complete the code. See Key to Codes for an explanation of encoding.

METAL WORK PNEUMATIC

DIMENSIONS ELECTRIC AXIS SK-2

VERSION WITHOUT MOTOR

② Holes for centring pins
③ Threaded holes for fixing
⑥ Sensor fixing slots
⑦ Dovetail for "V-Lock" fixing.
For standard dimensions, see **chapter V-Lock adaptors**
⑧ Slot for "V-Lock" precision key

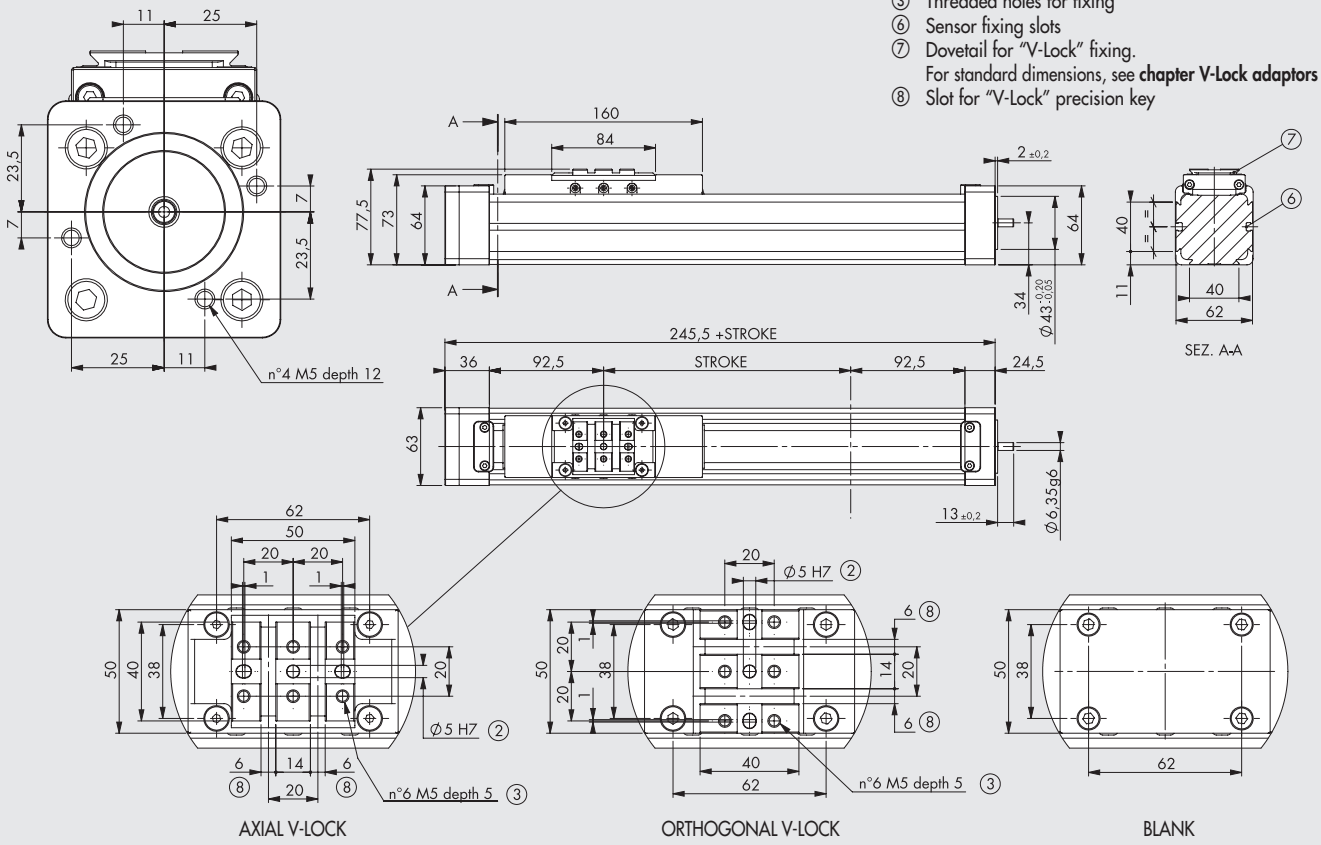

VERSION WITH MOTOR

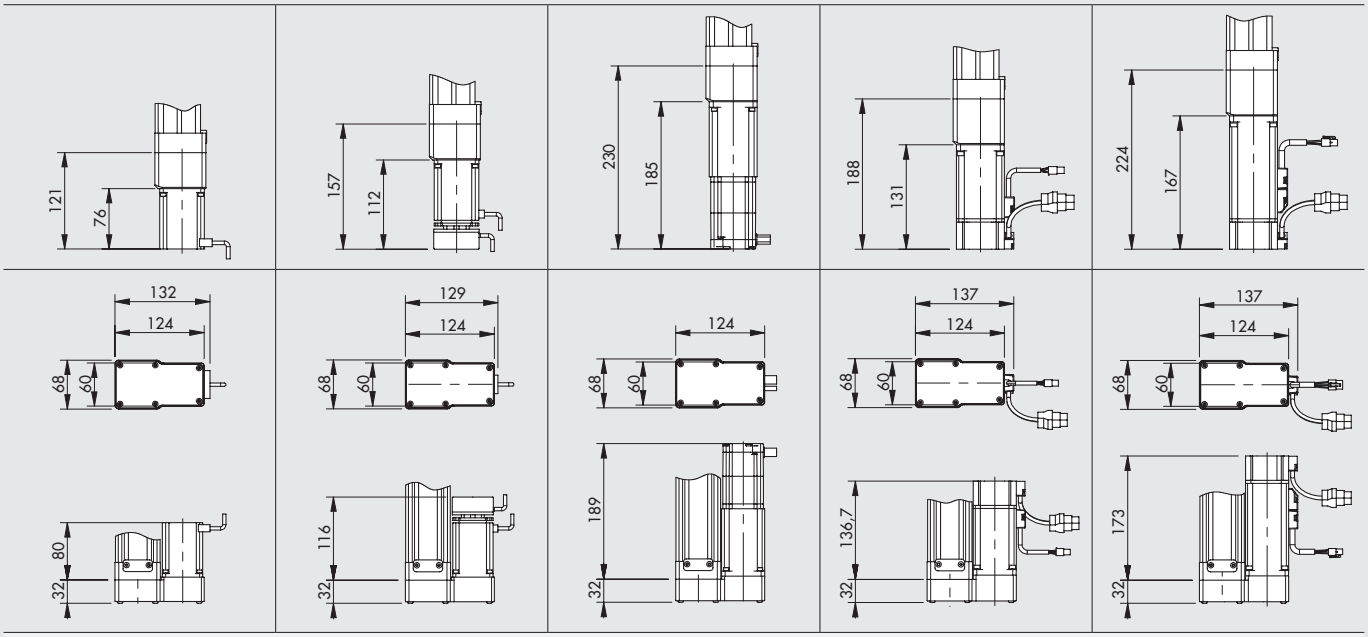

ORDERABLE CODES

STEPPING MOTOR code 37M1120001	STEPPING MOTOR WITH BRAKE code 37M5120000	STEPPING MOTOR WITH ENCODER AND BRAKE code 37M3230000	BRUSHLESS MOTOR code 37M2220001	BRUSHLESS MOTOR AND BRAKE code 37M4220001
37302_ _ _ _21121	37302_ _ _ _25120	37302_ _ _ _23230	37302_ _ _ _22220	37302_ _ _ _24220
37302_ _ _ _91121	37302_ _ _ _95120	37302_ _ _ _93230	37302_ _ _ _92220	37302_ _ _ _94220
37302_ _ _ _61121	37302_ _ _ _65120	37302_ _ _ _63230	37302_ _ _ _62220	37302_ _ _ _64220

N.B.: The indicated dimensions are valid for both versions with motor installed on the right and on the left.
_ _ _ _ = Enter the stroke in mm to complete the code. See Key to Codes for an explanation of encoding.

LUBRICATION DIAGRAM SK-2

Our electric rod cylinders are pre-greased with permanent grease. It is, however, possible to maintain them by re-lubricating, but before this operation we recommend periodic maintenance, at least once a year, which includes checks of: functionality, noise, wears and plays, if possible motor absorption (to be compared with the previous ones), and only after adding, in case, grease according to the instructions in the manual: a continuous addition of grease, since it is not disposable, could be worse. The quantities in the manual are valid for strokes up to approximately 500 mm. Between 500 mm and 1000 mm double the quantity. Between 1000 mm and 1500 mm triple the quantity.



		① - ③	②	
Screw pitch (p)	mm	-	4	10
Relube grease quantity	g	0.7	0.3	0.5
	cc	0.61	0.26	0.43

The actuator is provided with a series of sealing passages - made in the carriage - which directly connect the lubrication points of the sliding blocks and of the ball bearing screw nut with the outside.
The lubrication points are 3, on both sides of the carriage, in order to ensure greater accessibility in case of maintenance, closed by M4 screws, so identified:
① Lubrication point for the left ball bearing sliding block.
② Lubrication point for the ball bearing screw nut.
③ Lubrication point for the right ball bearing sliding block.
It is recommended to use the provided accessory (code 0950T2R108), which has spherical head according to UNI 7663 A and RHEOLUBE 363 AX1 grease (code 9910506).

Once you identify the most accessible side on the carriage:
- Unscrew the screw that closes the grease nipple.
- Screw, in the same thread, the provided accessory (0950T2R108).
- Pump grease (code 9910506) using the suitable lubricator according to the quantity in table.
- Let the actuator effect 4 complete strokes.
- Repeat the last two operations.
- Remove the grease nipple and stop the thread.
- Switch to the next lubrication point.

MOTOR-DRIVE COUPLINGS

MOTOR CODES		DRIVES CODES			
Metal Work		37D1222000 *	37D1332000 *	37D1552000	37D1442000
Manufacturer		RTA CSD 94	RTA NDC 96	RTA PLUS B7	RTA PLUS A4
Metal Work	Manufacturer	(4.4A 24-75VDC)	(6A 24-75VDC)	(10A 28-62VAC) ●	(6A 77-140VDC) ●
STEPPING MOTORS					
37M1120000	SANYO DENKI 103-H7126-1740 (4A 75V max)	SK-0	SK-0 ◆	SK-0 ■	-
37M1120001	SANYO DENKI 103-H7126-6640 (5.6A 75V max)	-	SK-2	SK-2 ■	-
STEPPING MOTORS WITH ENCODER					
37M1820000	STEPPERONLINE 23HS30-5004D-E1000 (5A 48V max)	-	SK-0 ■	SK-0 ■	-
STEPPING MOTORS WITH BRAKE					
37M5120000	SANYO DENKI 103-H7126-1710.B (4A 75V max)	SK-2	SK-2 ◆	SK-2 ■	-
STEPPING MOTORS WITH BRAKE + ENCODER					
37M1320000	STEPPERONLINE 23E1KBK20-20 (5A 48V max)	-	SK-0 ■	SK-0 ■	-
37M3230000	B&R 80MPF5.500D114-01 (5A 80V max)	-	SK-2 ◆	SK-2 ■	SK-2 ■

✱ In all applications requiring motor powered up to 6A / 55VDC, the programmable drive **e**.drive, code 37D1332002, can be used.
◆ Important! Limit current ■ Important! Limit current and voltage ● Important! AC drive to continuous voltage VDC = VAC · $\sqrt{2}$

MOTOR CODES		DRIVES CODES	
Metal Work		37D2100000	37D2300000
Manufacturer		DELTA ASD-A2-0121-M	DELTA ASD-A2-0421-M
Metal Work	Manufacturer	(100W)	(400W)
BRUSHLESS MOTORS			
37M2000000	DELTA ECMA-C20401RS (100W)	SK-0	-
37M2220001	DELTA ECMA-C20604RS (400W)	-	SK-2
BRUSHLESS MOTORS WITH BRAKE			
37M4000000	DELTA ECMA-C20401SS (100W)	SK-0	-
37M4220001	DELTA ECMA-C20604SS (400W)	-	SK-2

The motor must be controlled in such a way as to avoid sudden changes in speed.



METAL WORK PNEUMATIC

KEY TO CODES AXIS ELECTRIC (WITHOUT MOTOR)

CYL	37 TYPE	3	0	2 SIZE	1 CARRIAGE TYPE	0300 STROKE	1 SCREW PITCH
	37 Electric actuators	**3** Electric axis rodless elektro SK	**0** STD	**0** Size 0	**5** With threaded holes	From 50 to 500 mm	**C** Pitch 5 **F** Pitch 12.7 **L** Pitch 25
				2 Size 2	**1** Axial V-lock **2** Orthogonal V-lock **3** Blank	From 100 to 1200 mm	**1** Pitch 4 **4** Pitch 10

KEY TO CODES AXIS ELECTRIC MOTOR

CYL	37 TYPE	3	0	2 SIZE	1 CARRIAGE TYPE	0300 STROKE	1 SCREW PITCH	2 VERSION	DRIVE 1 MOTOR	DRIVE 1 FLANGE	DRIVE 2 TORQUE	DRIVE 0
	37 Electric actuators	**3** Electric axis rodless elektro SK	**0** STD	**0** Size 0	**5** With threaded holes	From 50 to 500 mm	**C** Pitch 5 **F** Pitch 12.7 **L** Pitch 25	**2** In-line	**1** STEPPING **2** BRUSHLESS **3** STEPPING with BRAKE + Encoder **4** BRUSHLESS with BRAKE **5** STEPPING with BRAKE without Encoder **8** STEPPING with Encoder	**0** 40 **1** NEMA 23 **2** 60	**0** 0 - 0.79 Nm **2** 1.2 - 2.19 Nm **3** 2.2 - 3 Nm	**0** Base **1** Greater rpm
				2 Size 2	**1** Axial V-lock **2** Orthogonal V-lock **3** Blank	From 100 to 1200 mm	**1** Pitch 4 **4** Pitch 10	● **2** In-line ● **6** Geared right ● **9** Geared left				

● Version IP40 available for all STEPPING and BRUSHLESS motors, with the exception of motor code 37M5120000 which it is IP20.
N.B.: The Orderable configurations are shown on the previous pages.

NOTES

ACCESSORIES

FIXING ELEMENTS





See V-Lock family.

FOOT SK-0







Code	Description	Weight [g]
0950T0R042	SK-0 flat foot	26

Note: Supplied complete with 4 screws

SK-0 V-LOCK FOOT WITH INTERFACE





Code	Description	Weight [g]
0950T0R042K	V-Lock SK-0 foot	30

Note: Supplied complete with 2 screws

⑦ Dovetail for "V-Lock" fixing

CARRIAGE INTERFACE KIT SK-2



Code	Description	Weight [g]
0950T2R016K	V-Lock axial interface kit	95

Note: supplied complete with 4 screws, 1 adhesive pad



0950T2R017K	V-Lock orthogonal interface kit	91

Note: supplied complete with 4 screws, 1 adhesive pad



0950T2R015	BLANK interface kit	127

Note: supplied complete with 4 screws, 1 adhesive pad

GREASE SK-2



Code	Description	Weight [g]
9910506	Tube of RHEOLUBE 363 AX1 grease	400

GREASE NIPPLE SK-2



Code	Description
0950T2R108	Complete grease nipple for Elektro rodless SK cylinders

Note: Individually packed

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

DRIVES

For motor-drive couplings see table on page **A5**.142

SPARE PARTS

ELECTRIC MOTORS

For motor-drive couplings see table on page **A5**.142

NOTES

ELECTRIC AXIS BELT-DRIVEN RODLESS, SERIES ELEKTRO BK

Electric belt-drive rodless axis with a bearing structure made up of anodized extruded aluminium.
The typical V-Lock dovetail is fitted to the extruded side (opposite the slide), which facilitates the fixing using QS elements; at both sides there are grooves for the installation of the bracket fixing the proximity switch (optional), which detects the position of the slide.
The slide is moved by the polyurethane toothed belt with steel cables.
The parabolic profile of the belt tooth makes it possible to maintain a high efficiency level, contain the level of noise and vibration from transmission gears.
The axis is available in two sizes, BK-1 and BK-2.
The slide interface is characterised by the V-Lock profile complete with M5 threaded holes, pinholes and key seats, which guarantees numerous fixing options (not present in the BK-2 heavy XL version).
All the versions have in-line steel guides that are housed in an extruded structure. The BK-1 size is available in two variants: the "Medium" uses castors running along hardened and tempered guides with double-row ball bearings, and the more performing "Heavy" version consists of a guiding system with a rail and ball recirculation pads.
The BK-2 size is available in two variants, both with rail and ball recirculation pads, the "Heavy" type has two pads and the "Heavy XL" has a longer slide and four pads. In the BK-2 size, the belt has a special profile that, when coupled with the extruded profile, prevents any dirt or foreign bodies from entering inside. BRUSHLESS and STEPPING motors are available, with optional motor brake and/or built-in encoder.
The versions with a BRUSHLESS motor can be equipped with a toothed belt speed reducer or a planetary gearbox.



BK-1

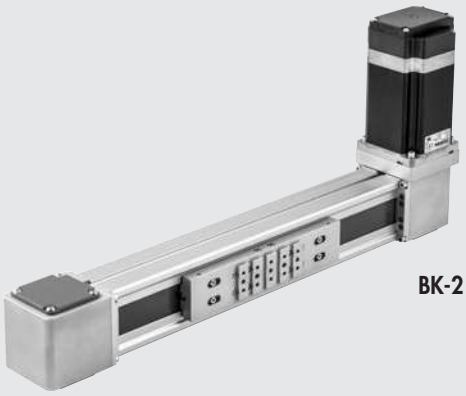

BK-2

The electric axis can be ordered without drive or, on request, with modules for interfacing with motors available from the trade.
The motors can be installed on all the four hubs of the heads, and their position can be changed at any time, without requiring any additional operation.
Various accessory kits for the installation of a gantry system starting from one axis are also available.

TECHNICAL DATA			BK-1		BK-2	
			Medium	Heavy	Heavy	Heavy XL
Temperature range	WITH MOTOR	°C	see single motor data sheet			
	ONLY MECHANICS	°C	from -10 to +50			
Electrical protection rating with	STEPPING motors		50%			
	BRUSHLESS motors		100%			
Minimum stroke		mm	110		140	
Maximum stroke		mm	3800	2800 ◆	3800	3600
Repeatability		mm	± 0.05			
Positioning accuracy ●		mm	± 0.4			
Uncontrolled impact at the end of stroke			NOT ALLOWED (it provides an extra-stroke minimum 5 mm)			
Homing position sensor			Inductive sensors			
Work position			Any			
Noise level		dBA	<66			
Type belt			RPP5 in polyurethane with steel tensioning cables		HTD5 in polyurethane with steel tensioning cables	
Maximum belt extension			0.1%			
Pulley feed/revolution		mm	110		140	
Pulley pitch diameter		mm	35.01		44.56	
Maximum axial force ■		N	800		1250	
Maximum number of revs		1/min	3500	3500 (2500 ✱)	1500	
Maximum speed (without load)		m/s	6	6 (4 ✱)	3.5	
Maximum acceleration (without load)		m/s^2	50		50	
Maximum driving torque applicable to the pulley		Nm	15		32	
Maximum applicable motor shaft diameter ▲		mm	14		19	

● Indicative average data that gets influenced by various factors such as the stroke, the type of motor, the cylinder version, etc.
■ Maximum load admissible on the belt: for the sizing, perform the checks as shown in the following pages.
▲ Compact configuration with the motor shaft partially inserted into the pulley axle.
◆ A different version of guide and recirculating pads are required for travels over 1800 mm, with reduced speed.
✱ Values referring to travels >1800

WEIGHTS		BK-1		BK-2	
		Medium	Heavy	Heavy	Heavy XL
Weight at stroke 0 (drive excluded)	g	2324	2325	5356	8628
Additional weight each mm of stroke	g	4	3.7	7.6	
Weight of standard motors with flange, joint and bolts and nuts	g				
STEPPING		1560		4632	
STEPPING with encoder		-		4732	
STEPPING with encoder + brake		-		5332	
BRUSHLESS		1750		3356	
BRUSHLESS with brake		2150		4156	
BRUSHLESS with belt transmission gear ratio1:2		2330		4455	
BRUSHLESS with brake + belt transmission gear ratio 1:2		2730		5255	
BRUSHLESS with 1:3 gearbox		2600		7980	
BRUSHLESS with brake + 1:3 gearbox		3000		8780	
BRUSHLESS with 1:5 gearbox		2600		7980	
BRUSHLESS with brake + 1:5 gearbox		3000		8780	

MASS AND MOMENT OF INERTIA		BK-1		BK-2	
		Medium	Heavy	Heavy	Heavy XL
Moving mass at stroke 0 (Mx)	g	570	625	1125	3038
Moving mass for each mm of stroke	g	0.22		0.33	
J_0 at stroke 0	kg mm^2	72		411	
J_1 each metre of stroke	kgmm^2/m	68		164	
J_2 each kg of load	kgmm^2/kg	307		497	
$J_{belt\ transmission\ 1:2}$	kg mm^2	32		130	

The reduced moment of inertia of total mass at the driving shaft is: $J_{tot} = [J_1 \cdot \text{Stroke [m]} + J_2 \cdot (\text{Load [kg]} + \text{Mx [kg]}) + J_0] \cdot \tau^2 + J_3$

$\tau = 1/u$

u = Gearing ratio

$J_3 = J_{belt\ transmission}$ (to be used, if present)

$J3 = J_{gearbox}$ (to be used, if present)

In order to ensure the proper functioning of the system and avoid instability, it is necessary to limit the ratio K between the reduced moment of inertia at the motor shaft $\mathbf{J_{total}}$ and the moment of inertia at the motor $\mathbf{J_{motor}}$.

$$K = \frac{J_{total}}{J_{motor}}$$

1<K<15 with STEPPING motors

1<K<40 with BRUSHLESS motors

These figures apply to motors supplied by Metal Work. Motors of other makes could require different maximum values.
This limit also depends on the level of control of the required movement: e.g. if the movements need to be coordinated, the ratio between the inertias must be considerably reduced.
Indicatively, it is **advisable NOT to exceed** the following values:

1<K<5 with STEPPING motors

1<K<10 with BRUSHLESS motors

It is worth noting that system operation can be enhanced by varying the drive parameters.
For BRUSHLESS motors supplied by Metal Work, a "tuning" procedure is envisaged to optimise motor operation depending on the mechanics applied to the axle. For STEPPING motors, it is advisable to try to select a different step of rotation.

NOTES

COMPONENTS BK-1

Medium (GUIDE AND STEEL WHEELS)

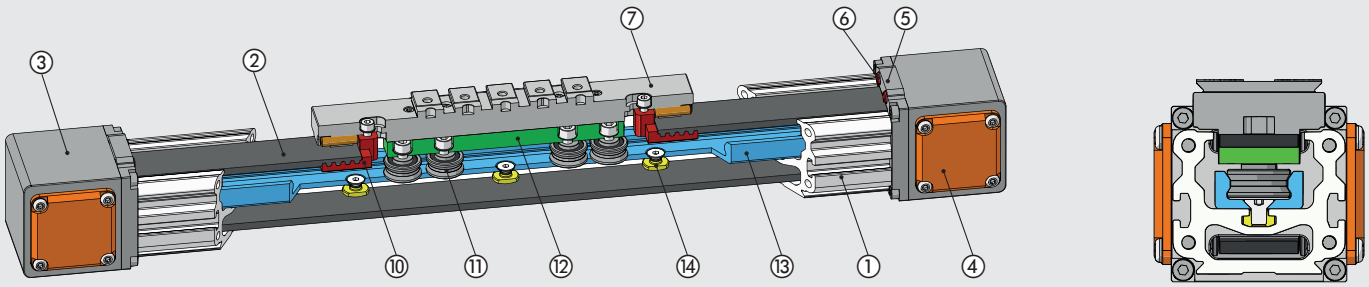

Heavy (STEEL GUIDE AND PADS BALL-RECIRCULATION)

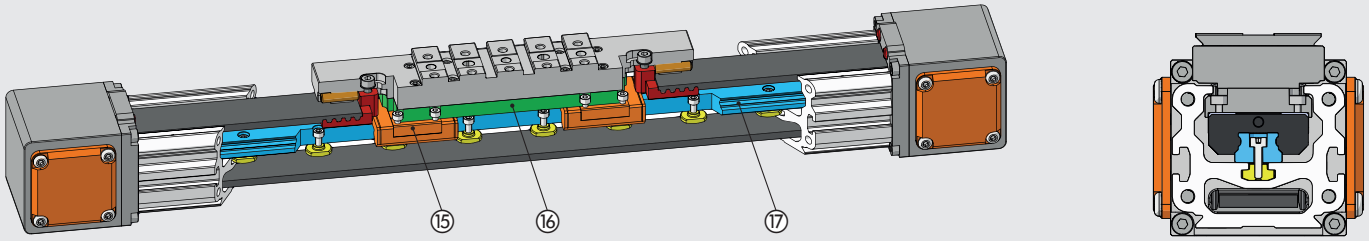

VERSION WITH MOTOR

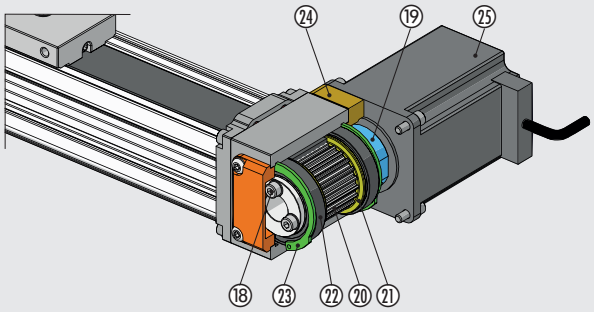

VERSION WITH 1:2 BELT GEARED MOTOR

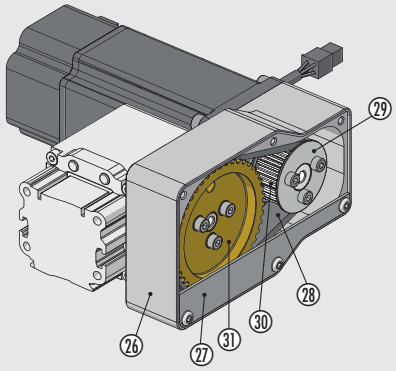

① BARREL: anodized aluminium
② TOOTHED BELT: polyurethane with steel cables
③ HEAD: anodized aluminium
④ COVER: painted aluminium
⑤ HEAD SUPPORT: anodized aluminium
⑥ BUFFER: polyurethane
⑦ SLIDE WITH V-LOCK INTERFACE: anodized aluminium
⑩ BELT-LOCKING PLATE: anodized aluminium
⑪ WHEEL WITH DOUBLE-ROW BALL BEARING: hardened steel
⑫ SLIDING BEARING SUPPORT: anodized aluminium
⑬ GUIDING RAIL FOR STEEL WHEELS: hardened steel
⑭ GUIDE-LOCKING INSERT: stainless steel
⑮ BALL RECIRCULATION PAD: stainless steel / technopolymer
⑯ PAD SUPPORT: anodized aluminium
⑰ GUIDING RAIL FOR PADS: hardened stainless steel
⑱ ELASTIC COLLAR-LOCKING SCREWS: zinc-plated steel
⑲ ELASTIC COLLAR: anodized aluminium
⑳ COG PULLEY: nickel-plated aluminium
㉑ BELT FLANGES: zinc-plated steel
㉒ SHIELDED BALL BEARING: hardened steel
㉓ BEARING-LOCKING SNAP RING: zinc-plated steel
㉔ MOTOR-FIXING FLANGE: anodized aluminium
㉕ MOTOR
㉖ GEARED MOTOR BEARING: anodized aluminium
㉗ TRANSMISSION GUARD: anodized aluminium
㉘ TOOTHED BELT: polychloroprene with glass fiber cables
㉙ BELT FLANGES: anodized aluminium
㉚ DRIVE PULLEY: nickel-plated aluminium
㉛ IDLE PULLEY: nickel-plated aluminium

METAL WORK PNEUMATIC

COMPONENTS BK-2

Heavy (STEEL GUIDE AND 2 PADS BALL-RECIRCULATION)

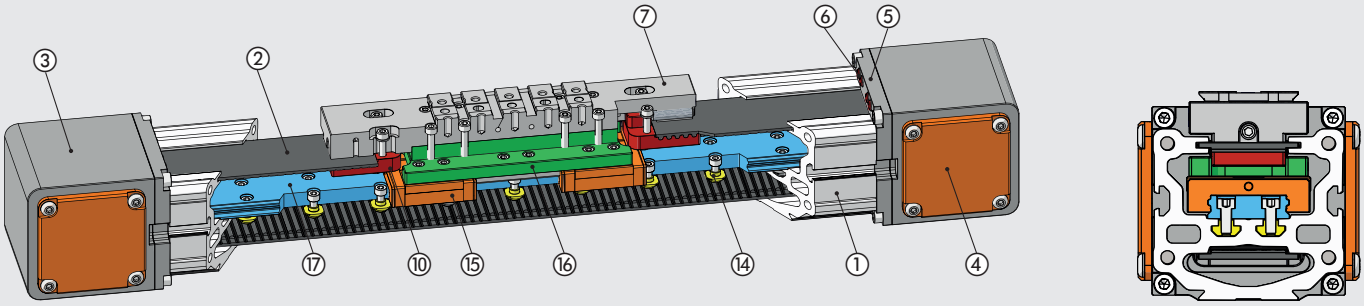

Heavy XL (LONG SLIDE, STEEL GUIDE AND 4 BALL RECIRCULATION PADS)

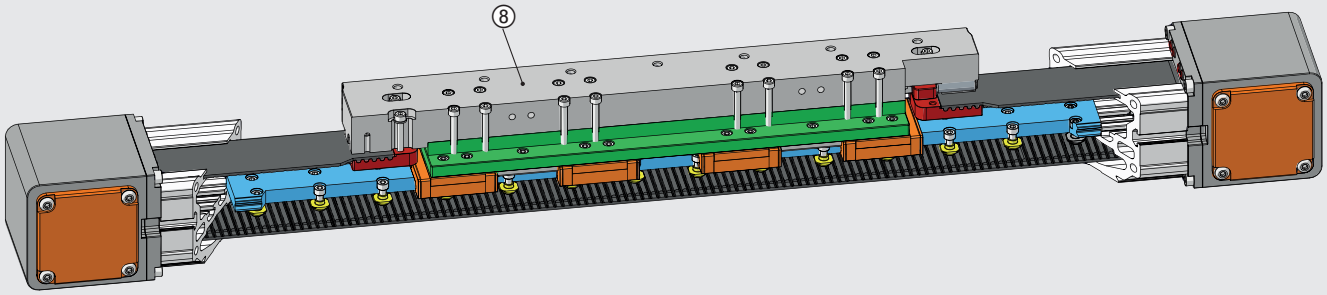

VERSION WITH MOTOR

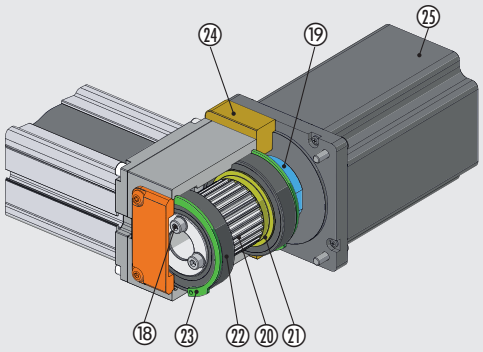

VERSION WITH 1:2 BELT GEARED MOTOR

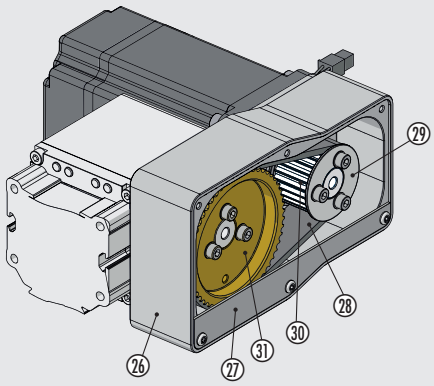

① BARREL: anodized aluminium
② TOOTHED BELT: polyurethane with steel cables
③ HEAD: anodized aluminium
④ COVER: painted aluminium
⑤ HEAD SUPPORT: anodized aluminium
⑥ BUFFER: polyurethane
⑦ SLIDE WITH V-LOCK INTERFACE: anodized aluminium
⑧ LONG SLIDE WITH THREADED HOLES: anodized aluminium
⑩ BELT-LOCKING PLATE: anodized aluminium
⑭ GUIDE-LOCKING INSERT: stainless steel
⑮ BALL RECIRCULATION PAD: stainless steel / technopolymer
⑯ PAD SUPPORT: anodized aluminium
⑰ GUIDING RAIL FOR PADS: hardened stainless steel
⑱ ELASTIC COLLAR-LOCKING SCREWS: zinc-plated steel
⑲ ELASTIC COLLAR: anodized aluminium
⑳ COG PULLEY: nickel-plated aluminium
㉑ BELT FLANGES: zinc-plated steel
㉒ SHIELDED BALL BEARING: hardened steel
㉓ BEARING-LOCKING SNAP RING: zinc-plated steel
㉔ MOTOR-FIXING FLANGE: anodized aluminium
㉕ MOTOR
㉖ GEARED MOTOR BEARING: anodized aluminium
㉗ TRANSMISSION GUARD: anodized aluminium
㉘ TOOTHED BELT: polychloroprene with glass fiber cables
㉙ BELT FLANGES: anodized aluminium
㉚ DRIVE PULLEY: nickel-plated aluminium
㉛ IDLE PULLEY: nickel-plated aluminium

DIAGRAM OF FORCES AND MOMENTS

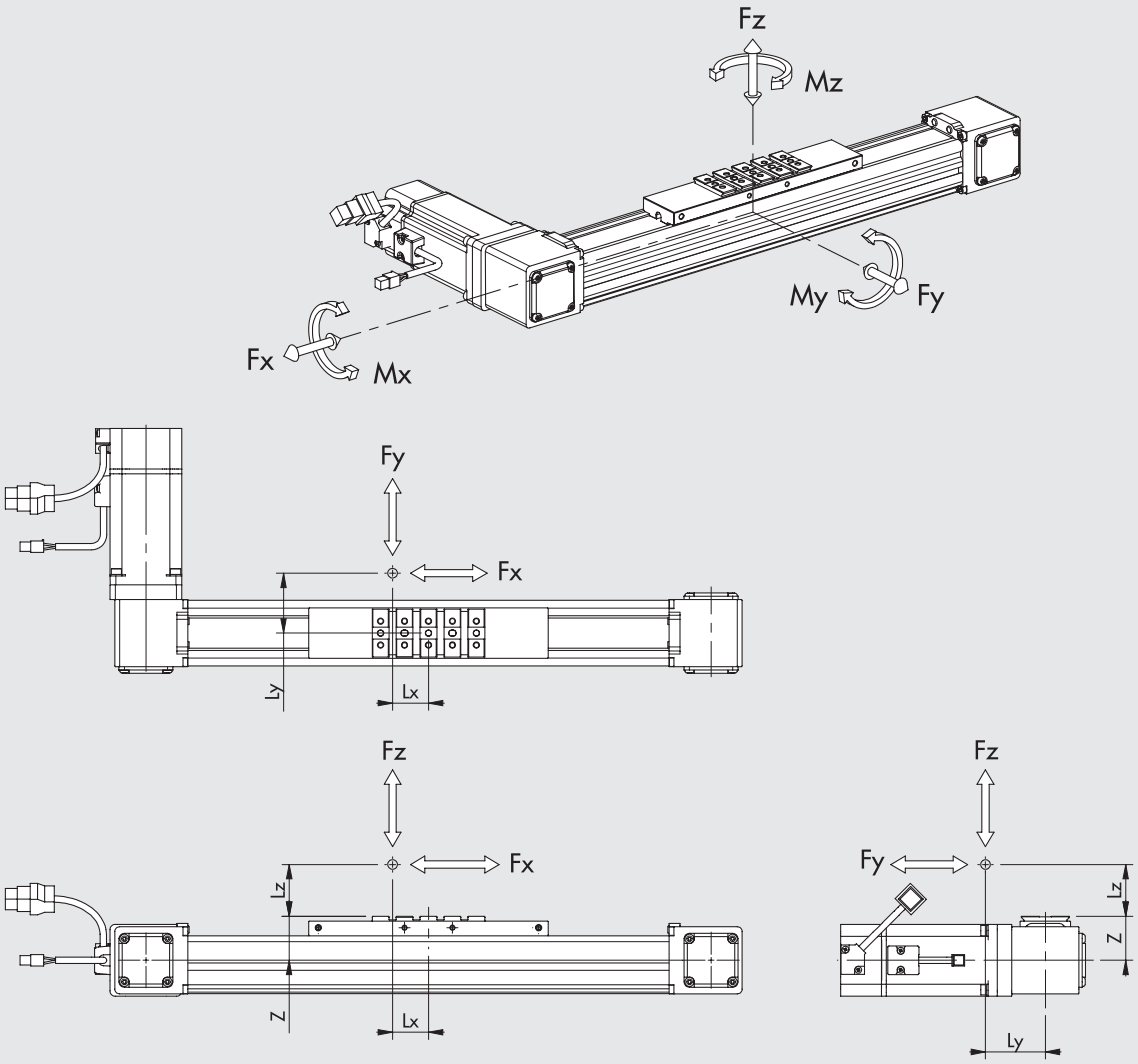

STATIC VERIFICATION

When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

SIZE	VERSION	Z [mm]	Fy0 max [N]	Fz0 max [N]	Mx0 max [Nm]	My0 max [Nm]	Mz0 max [Nm]
BK-1	Medium	33	1600	900	18	60	140
	Heavy	35	5700	5700	40	570	570
BK-2	Heavy	45	9600	9600	150	970	970
	Heavy XL	45	19200	19200	300	3400	3400

N.B.: The table shows the maximum loads applicable to the guide system beyond which serious damage could be caused.
Refer to the Deformation/Load charts on the following pages to verify the axles load conditions.

$Mx = Fz \cdot Ly + Fy \cdot (Lz + z)$ $My = Fz \cdot Lx + Fx \cdot (Lz + z)$ $Mz = Fy \cdot Lx + Fx \cdot Ly$

$$\frac{(Mx)}{Mx0\ max} + \frac{(My)}{My0\ max} + \frac{(Mz)}{Mz0\ max} + \frac{(Fy)}{Fy0\ max} + \frac{(Fz)}{Fz0\ max} \leq 1$$

DYNAMIC VERIFICATION

When the cylinder is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

SIZE	VERSION	Z [mm]	Fy max [N]	Fz max [N]	Mx max [Nm]	My max [Nm]	Mz max [Nm]
BK-1	Medium	33	1000	600	12	40	90
	Heavy	35	2850	2850	20	285	285
BK-2	Heavy	45	4800	4800	75	485	485
	Heavy XL	45	9600	9600	150	1700	1700

N.B.: The values in the table refer to the guide system and are calculated on the basis of a theoretical operating life of 10,000 km.

$Mx = Fz \cdot Ly + Fy \cdot (Lz + z)$ $My = Fz \cdot Lx + Fx \cdot (Lz + z)$ $Mz = Fy \cdot Lx + Fx \cdot Ly$

$$\frac{(Mx)}{Mx\ max} + \frac{(My)}{My\ max} + \frac{(Mz)}{Mz\ max} + \frac{(Fy)}{Fy\ max} + \frac{(Fz)}{Fz\ max} \leq 1$$

METAL WORK PNEUMATIC

DEFORMATION ACCORDING TO LOAD WITH MISALIGNED LOAD

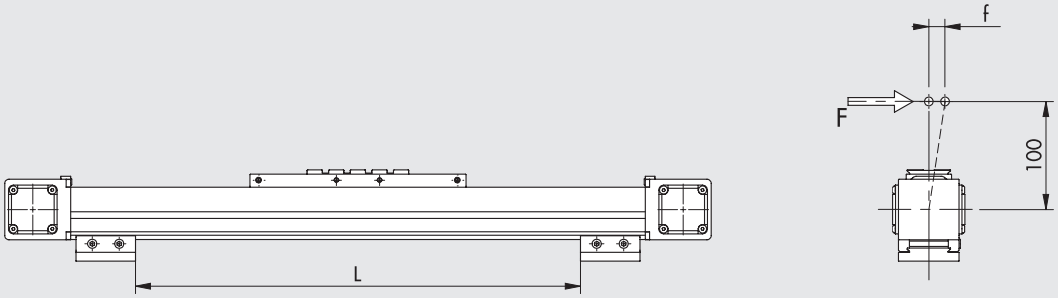

BK-1 Medium
(guide and steel wheels)

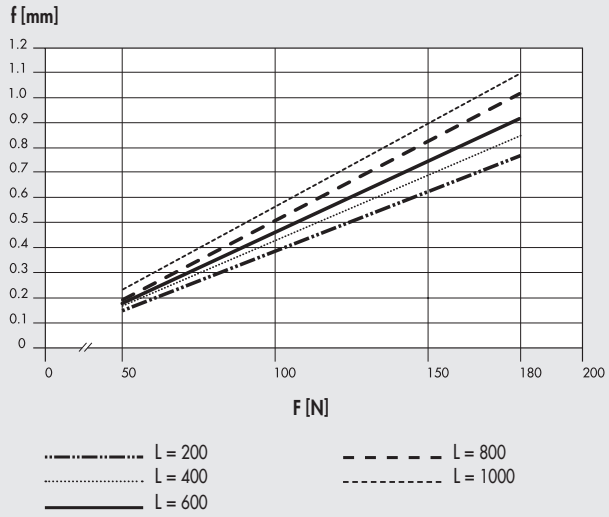

BK-1 Heavy
(steel guide and pads ball-recirculation)

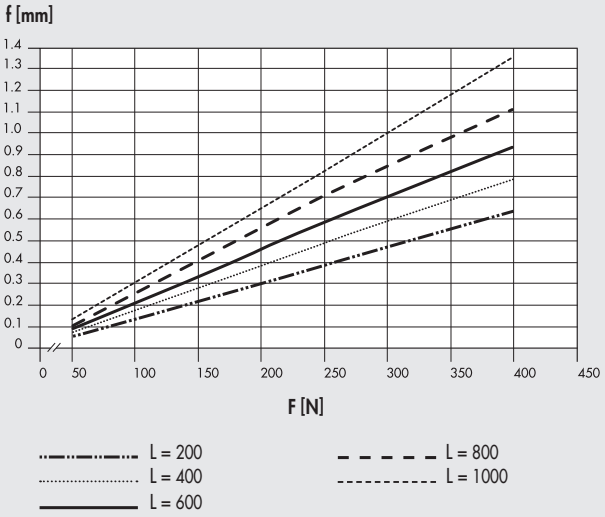

BK-2 Heavy and BK-2 Heavy XL

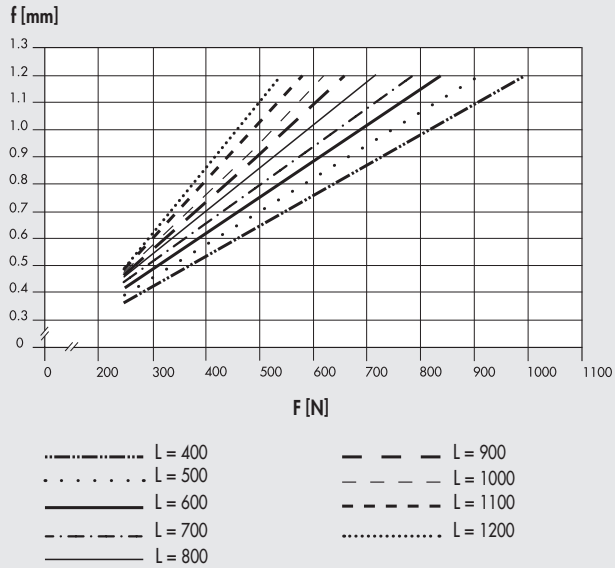

N.B.: The deformations shown in the graphs have been measured under static conditions.

DEFORMATION ACCORDING TO LOAD WITH ALIGNED LOAD

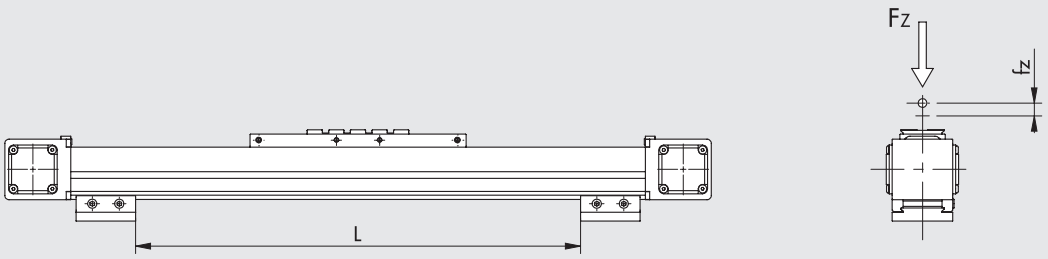

BK-1 Medium
(guide and steel wheels)

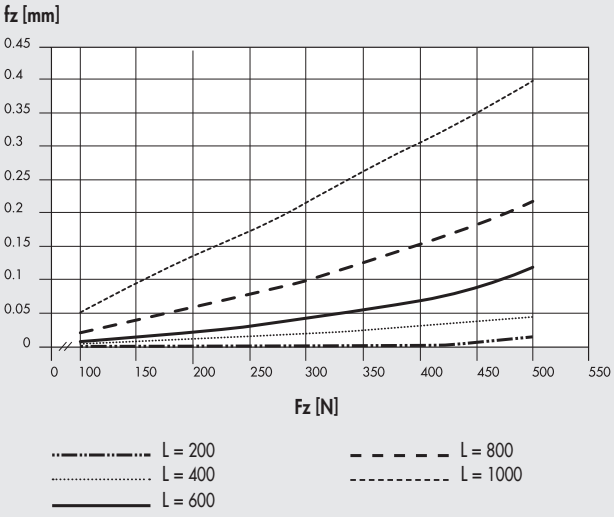

BK-1 Heavy
(steel guide and pads ball-recirculation)

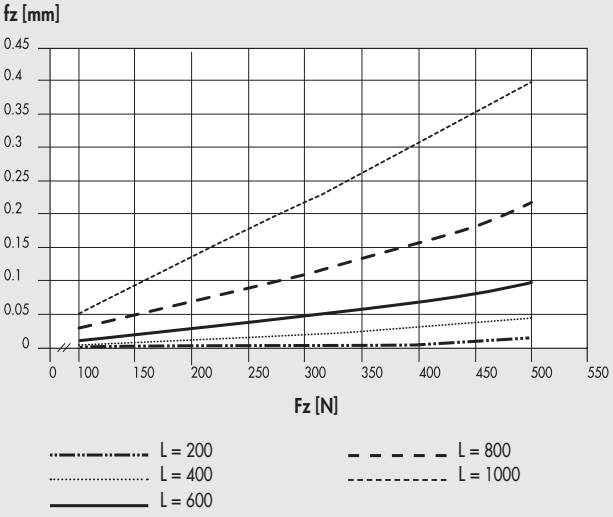

BK-2 Heavy and BK-2 Heavy XL

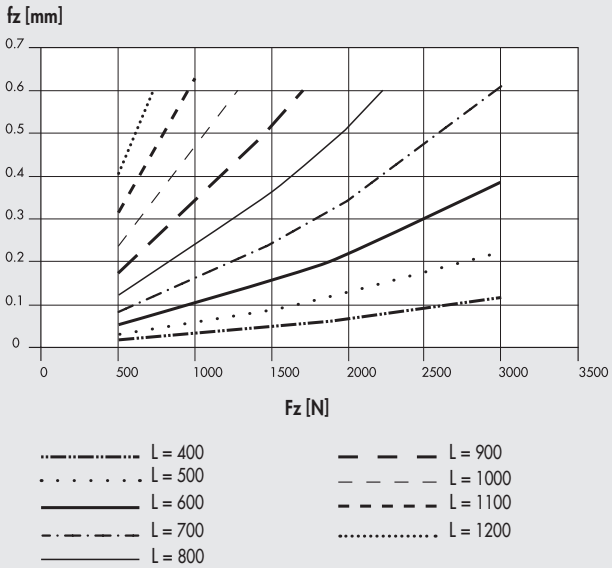

N.B.: The deformations shown in the graphs have been measured under static conditions.

VERSIONS

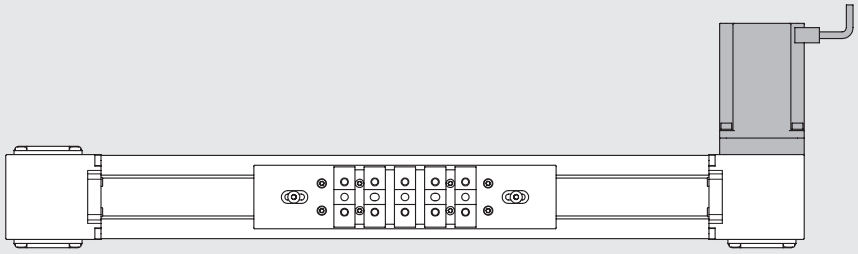

RIGHT MOTOR

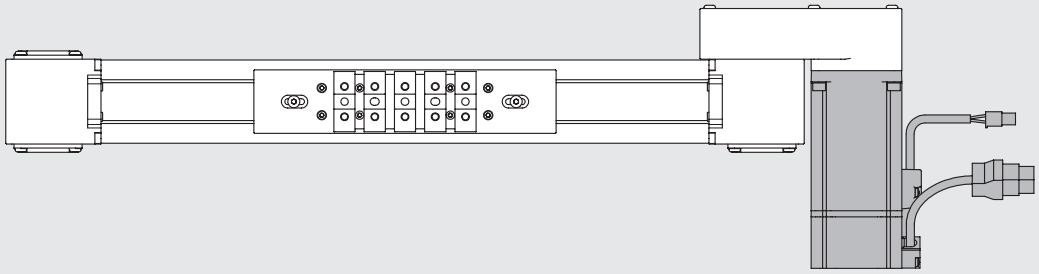

RIGHT GEARED MOTOR

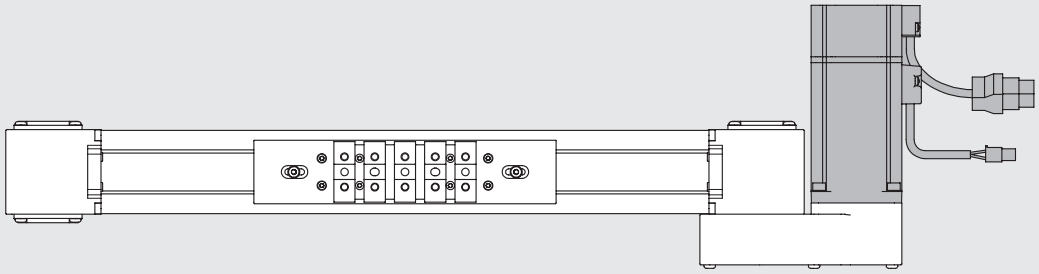

LEFT GEARED MOTOR

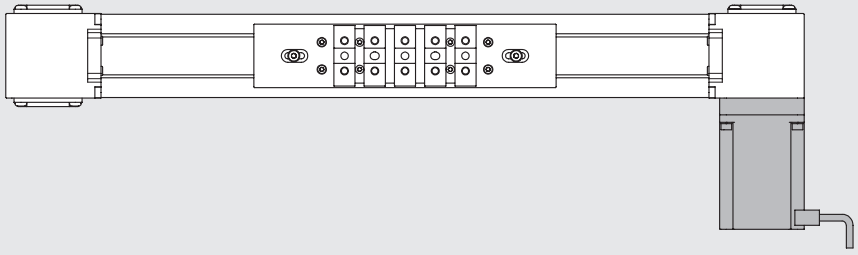

LEFT MOTOR



WITHOUT MOTOR

AXIAL LOAD CURVES AS A FUNCTION OF SPEED (AXIS COMPELTE WITH MOTOR AND DRIVE) BK-1

N.B.: Check that the following constraints are met for each cycle phase:
- the maximum movable masses and related acceleration values specified in the data sheets;
- the values specified in the force and moment calculation diagram (including moment of inertia);
- the maximum axial load of the belt.

N.B.: The obtainable load values already take the efficiency of the system into account.
For STEPPING motors, with the motor off, the drive current is automatically reduced by 50% to prevent overheating.
Consequently, available axial load with the motor stopped is also reduced by 50%.

STEPPING motor code 37M1230000

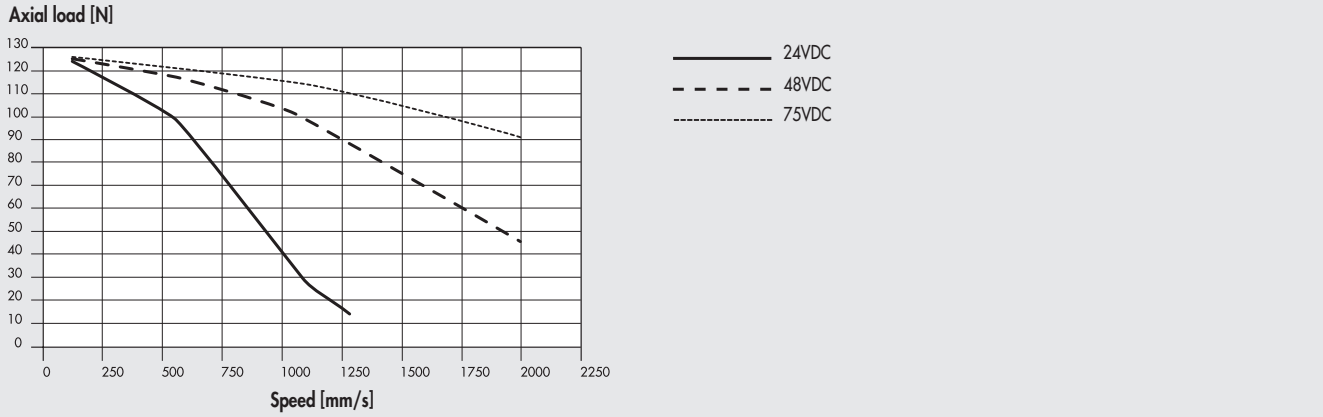

BRUSHLESS motors code 37M2220001 and code 37M4220001 (with brake)

Direct type

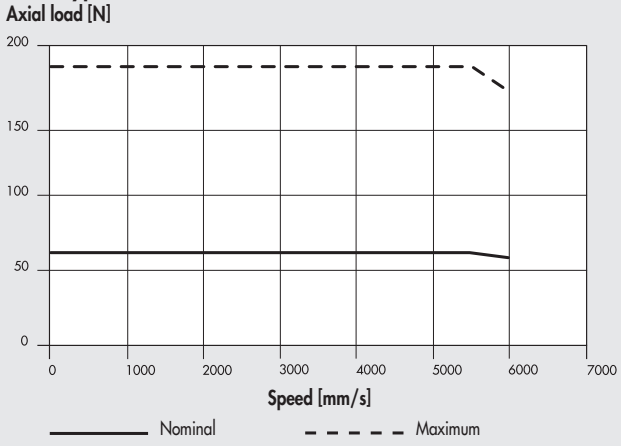

Belt reduction gear 1:2

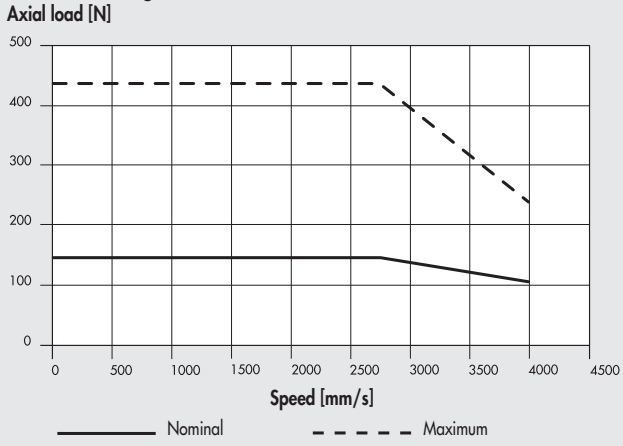

With 1:3 gearbox

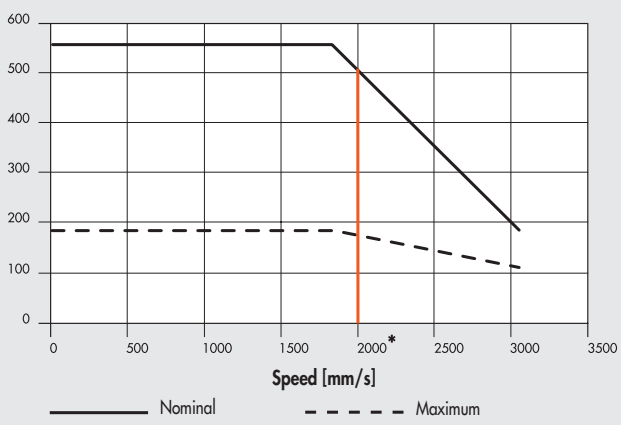

With 1:5 gearbox

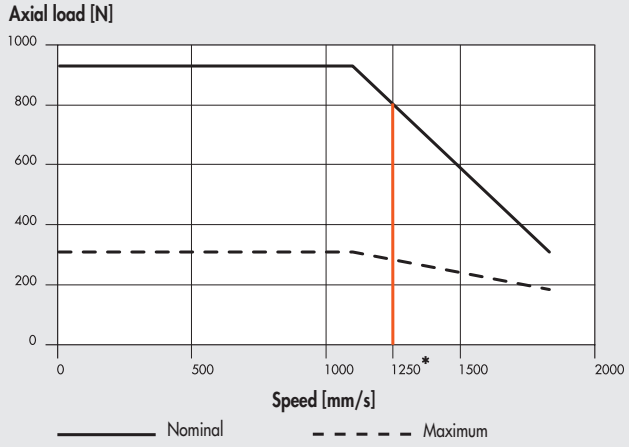

* = limit of gearbox continuous operation: higher speeds can be reached only for "duty cycle" ≤60% and for a maximum number of 1000 accelerations per hour.

AXIAL LOAD CURVES AS A FUNCTION OF SPEED (AXIS COMPELTE WITH MOTOR AND DRIVE) BK-2 / BK-2 XL

N.B.: Check that the following constraints are met for each cycle phase:
- the maximum movable masses and related acceleration values specified in the data sheets;
- the values specified in the force and moment calculation diagram (including moment of inertia);
- the maximum axial load of the belt.

N.B.: The obtainable load values already take the efficiency of the system into account.
For STEPPING motors, with the motor off, the drive current is automatically reduced by 50% to prevent overheating.
Consequently, available axial load with the motor stopped is also reduced by 50%.

STEPPING motor code 37M1470000, code 37M8470000 (with encoder) and code 37M3470000 (with encoder and brake)

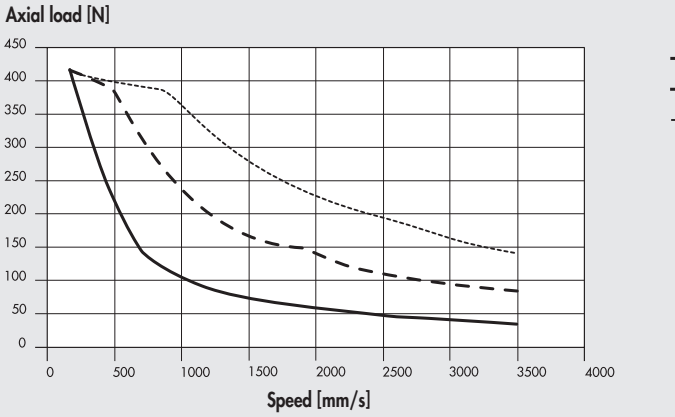

BRUSHLESS motors code 37M2330001 and code 37M4330001 (with brake)

Direct type

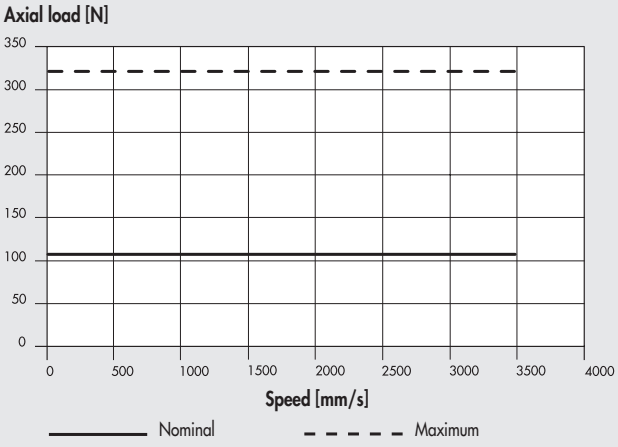

Belt reduction gear 1:2

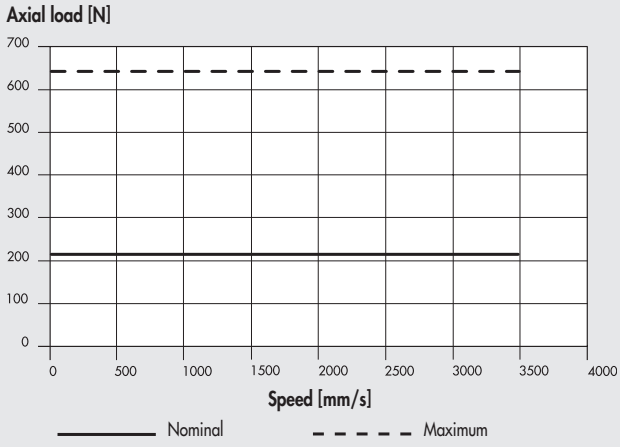

With 1:3 gearbox

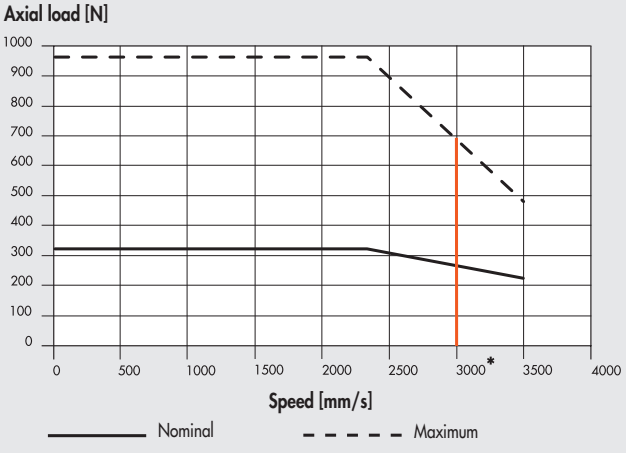

With 1:5 gearbox

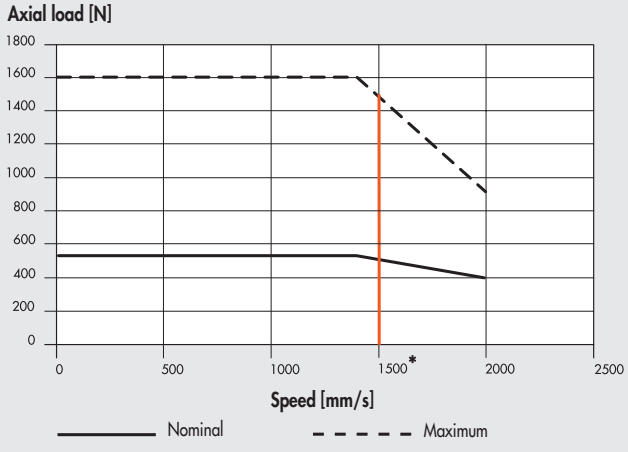

* = limit of gearbox continuous operation: higher speeds can be reached only for "duty cycle" ≤60% and for a maximum number of 1000 accelerations per hour.

EXAMPLES OF APPLICATION

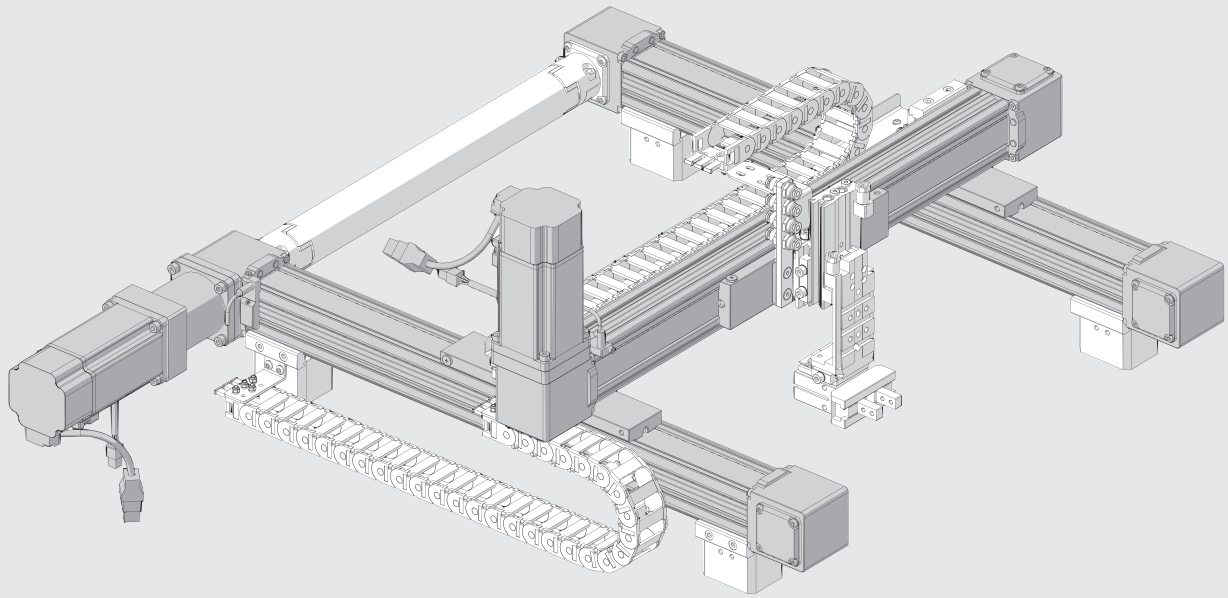

NOTES

METAL WORK PNEUMATIC

DIMENSIONS BK-1

Medium and Heavy VERSION WITHOUT MOTOR

② = Holes for centring pins
③ = Threaded holes for fixing
⑦ = Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**..
⑧ = Slot for "V-Lock" precision key
⑨ = Groove for proximity sensor bracket

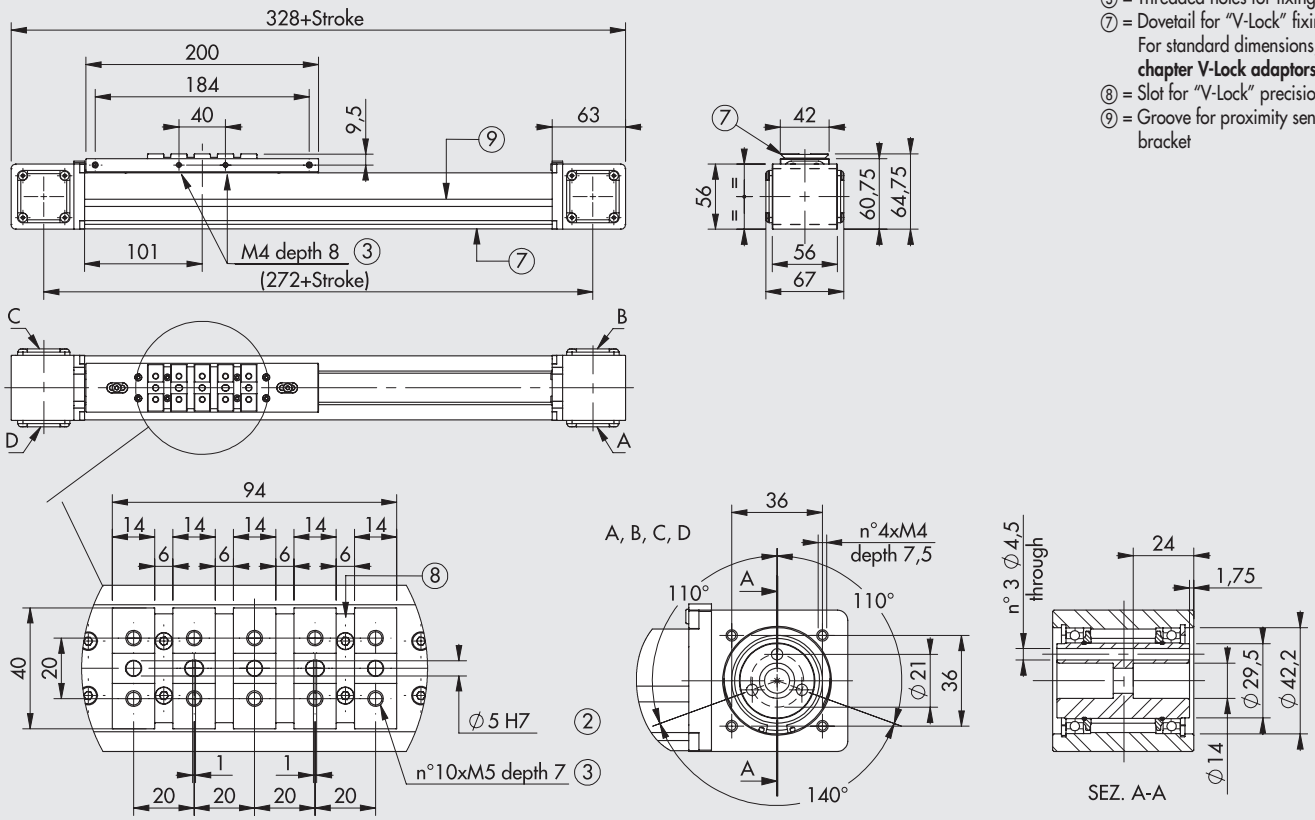

Medium and Heavy VERSION WITH MOTOR

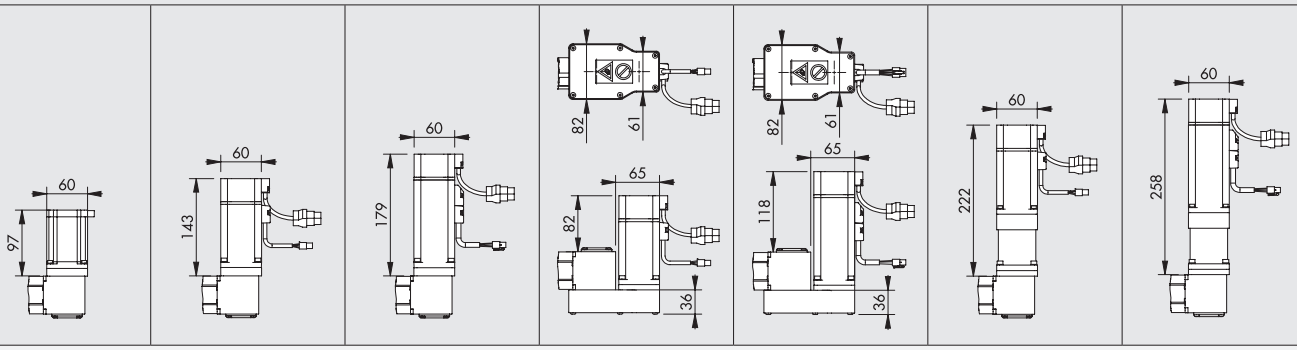

ORDERABLE CODES

STEPPING MOTOR	BRUSHLESS MOTOR	BRUSHLESS MOTOR WITH BRAKE	BRUSHLESS MOTOR WITH BELT TRANSMISSION	BRUSHLESS MOTOR + BRAKE WITH BELT TRANSMISSION	BRUSHLESS MOTOR WITH GEARBOX	BRUSHLESS MOTOR + BRAKE WITH GEARBOX
			Reduction 1:2	Reduction 1:2	Reduction 1:3	Reduction 1:3
374011____261230	374011____262220	374011____264220	374011____26F220	374011____26E220	374011____266220	374011____267220
374011____291230	374011____292220	374011____294220	374011____29F220	374011____29E220	374011____296220	374011____297220
374011____361230	374011____362220	374011____364220	374011____36F220	374011____36E220	374011____366220	374011____367220
374011____391230	374011____392220	374011____394220	374011____39F220	374011____39E220	374011____396220	374011____397220
					Reduction 1:5	Reduction 1:5
					374011____268220	374011____269220
					374011____298220	374011____299220
					374011____368220	374011____369220
					374011____398220	374011____399220

N.B.: The indicated dimensions are valid for both versions with motor installed on the right and on the left.

____ = Enter the stroke in mm to complete the code. See Key to Codes for an explanation of encoding.

DIMENSIONS BK-2 VERSION WITHOUT MOTOR

Heavy

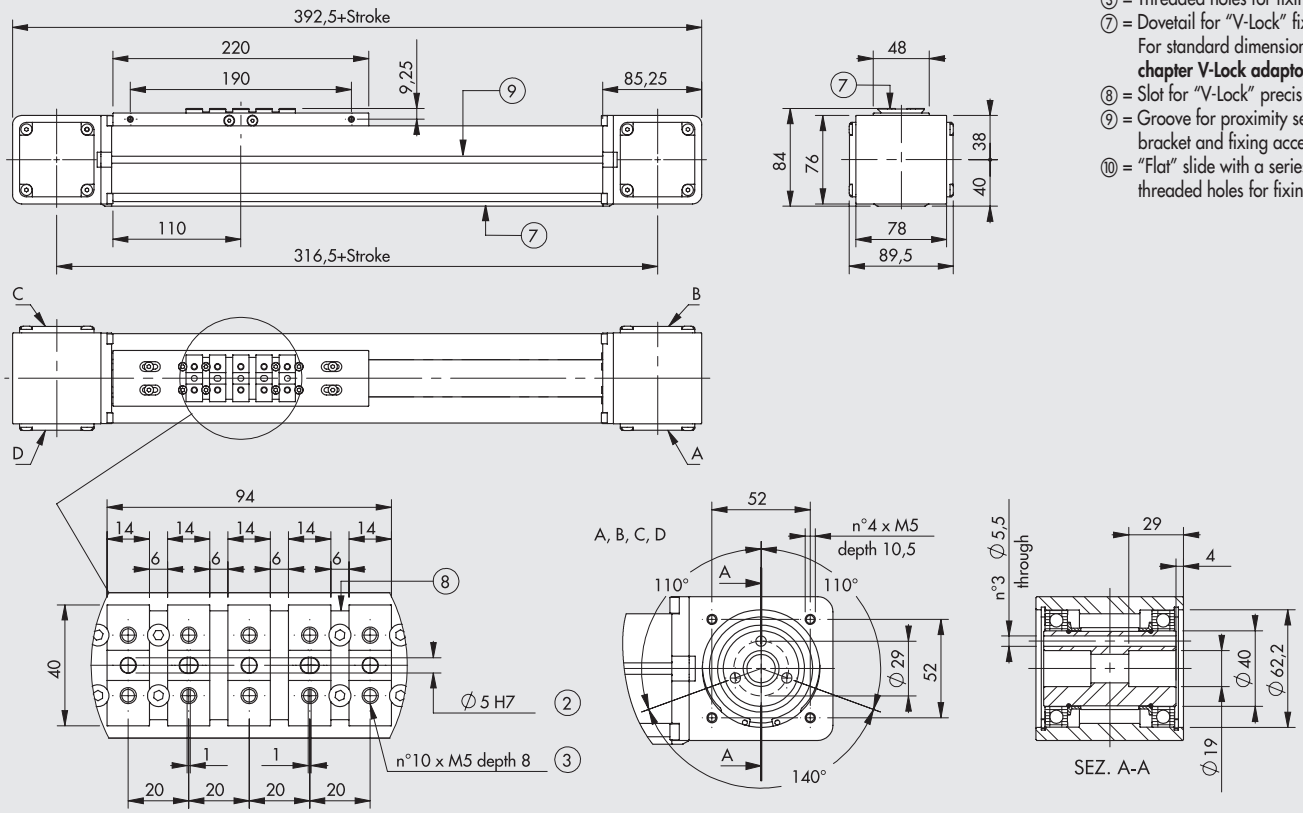

② = Holes for centring pins
③ = Threaded holes for fixing
⑦ = Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**..
⑧ = Slot for "V-Lock" precision key
⑨ = Groove for proximity sensor bracket and fixing accessories
⑩ = "Flat" slide with a series of threaded holes for fixing.

Heavy XL

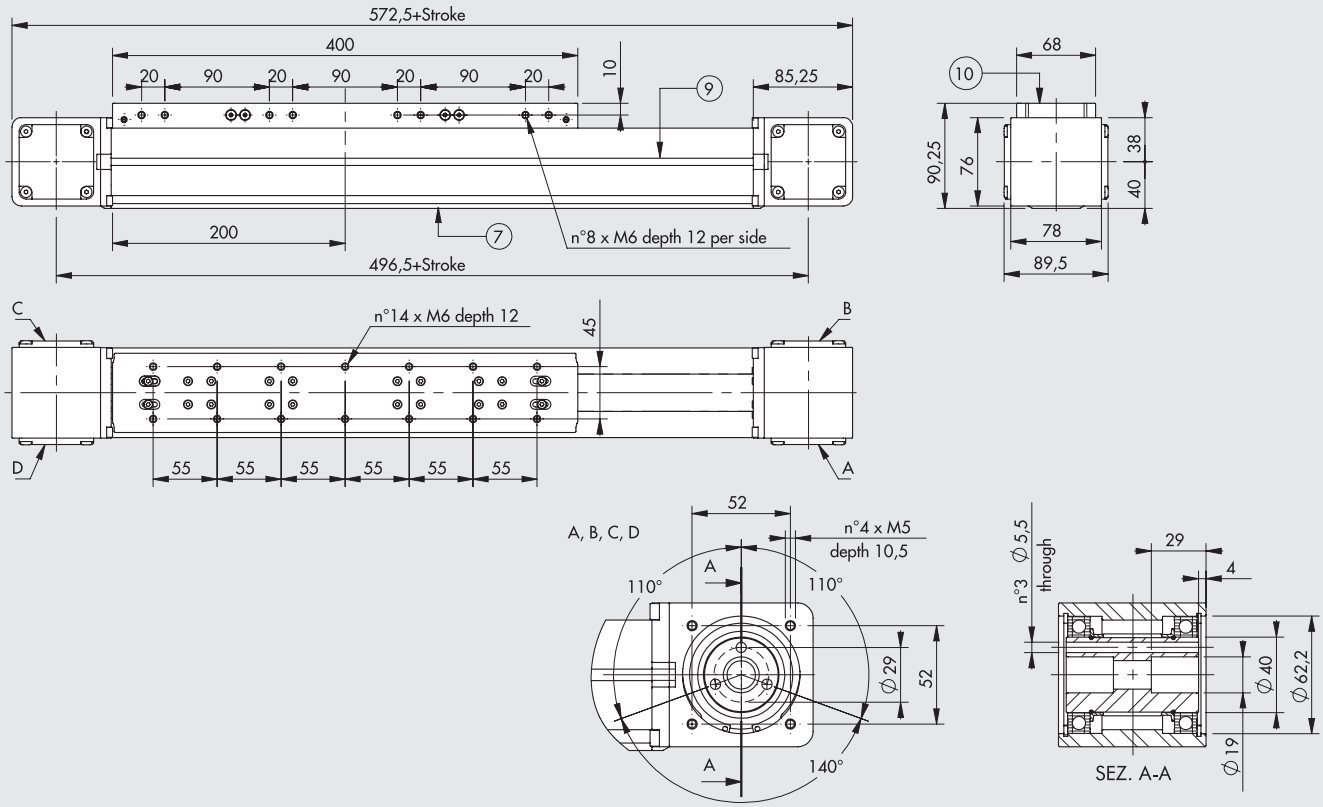

DIMENSIONS BK-2 VERSION WITH MOTOR

Heavy / Heavy XL

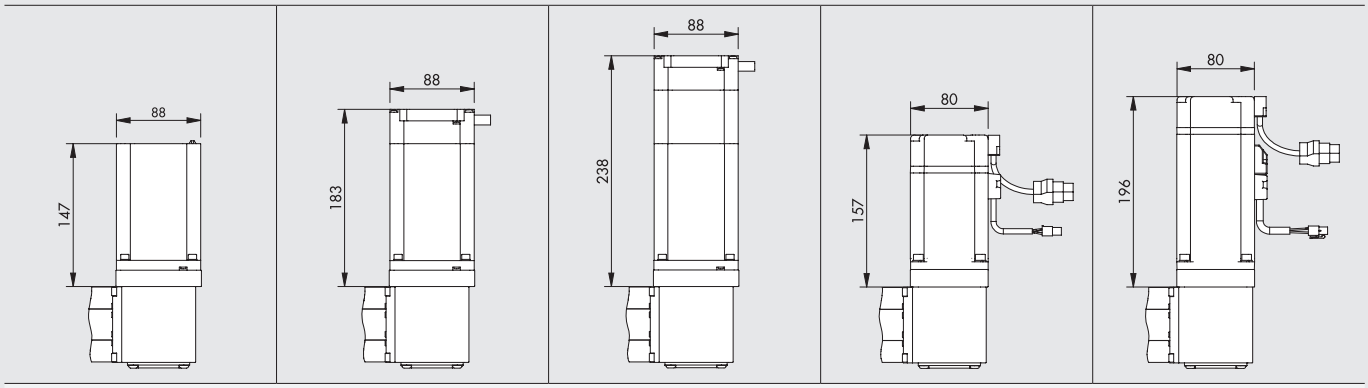

ORDERABLE CODES

STEPPING MOTOR	STEPPING MOTOR WITH ENCODER	STEPPING MOTOR + BRAKE WITH ENCODER	BRUSHLESS MOTOR	BRUSHLESS MOTOR WITH BRAKE
374021_ _ _ _361470	374021_ _ _ _36C470	374021_ _ _ _363470	374021_ _ _ _362330	374021_ _ _ _364330
374021_ _ _ _391470	374021_ _ _ _39C470	374021_ _ _ _393470	374021_ _ _ _392330	374021_ _ _ _394330
374025_ _ _ _361470	374025_ _ _ _36C470	374025_ _ _ _363470	374025_ _ _ _362330	374025_ _ _ _364330
374025_ _ _ _391470	374025_ _ _ _39C470	374025_ _ _ _393470	374025_ _ _ _392330	374025_ _ _ _394330

N.B.: The indicated dimensions are valid for both versions with motor installed on the right and on the left.

_ _ _ _ = Enter the stroke in mm to complete the code. See Key to Codes for an explanation of encoding.

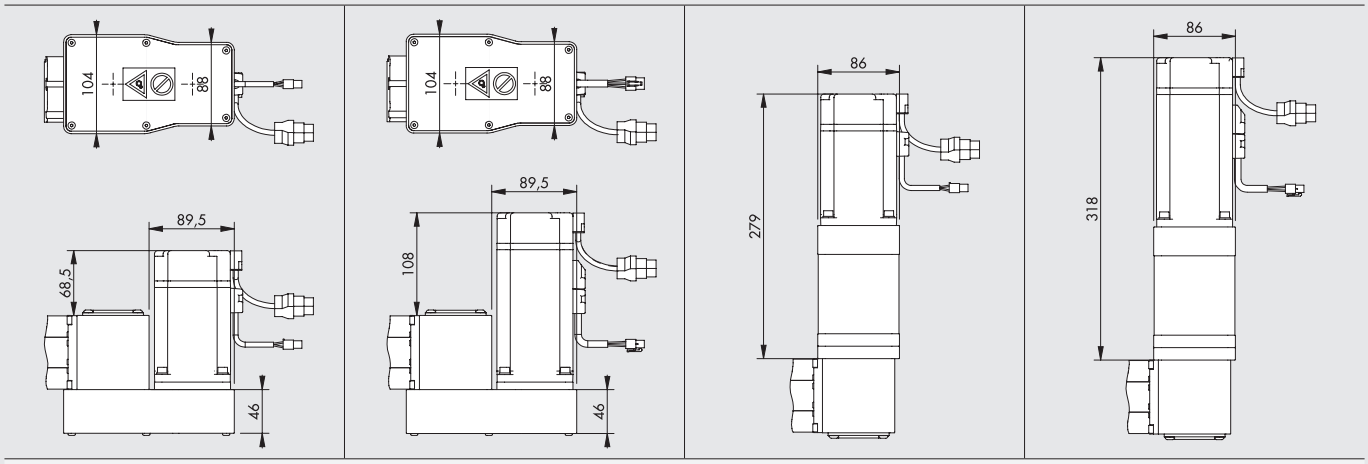

ORDERABLE CODES

BRUSHLESS MOTOR WITH BELT TRANSMISSION	BRUSHLESS MOTOR + BRAKE WITH BELT TRANSMISSION	BRUSHLESS MOTOR WITH GEARBOX	BRUSHLESS MOTOR + BRAKE WITH GEARBOX
Reduction 1:2	Reduction 1:2	Reduction 1:3	Reduction 1:3
374021_ _ _ _36F330	374021_ _ _ _36E330	374021_ _ _ _366330	374021_ _ _ _367330
374021_ _ _ _39F330	374021_ _ _ _39E330	374021_ _ _ _396330	374021_ _ _ _397330
374025_ _ _ _36F330	374025_ _ _ _36E330	374025_ _ _ _366330	374025_ _ _ _367330
374025_ _ _ _39F330	374025_ _ _ _39E330	374025_ _ _ _396330	374025_ _ _ _397330
		Reduction 1:5	Reduction 1:5
		374021_ _ _ _368330	374021_ _ _ _369330
		374021_ _ _ _398330	374021_ _ _ _399330
		374025_ _ _ _368330	374025_ _ _ _369330
		374025_ _ _ _398330	374025_ _ _ _399330

N.B.: The indicated dimensions are valid for both versions with motor installed on the right and on the left.

_ _ _ _ = Enter the stroke in mm to complete the code. See Key to Codes for an explanation of encoding.

MOTOR-DRIVE COUPLINGS

MOTOR CODES		DRIVES CODES		
Metal Work		37D1222000 *	37D1332000 *	37D1552000
Manufacturer		RTA CSD 94	RTA NDC 96	RTA PLUS B7
Metal Work	Manufacturer	(4.4A 24-48VDC)	(6A 24-75VDC)	(10A 28-62VAC) ●
STEPPING MOTORS				
37M1230000	SANYO DENKI 103-H7823-1740 (4A 75V max)	√	√ ◆	√ ■
37M1470000	B&R 80MPH6.101S000-01 (10A 80V max)	-	-	√
STEPPING MOTORS WITH ENCODER				
37M8470000	B&R 80MPH6,101S114-01 (10A 80V max)	-	-	√
STEPPING MOTORS WITH ENCODER + BRAKE				
37M3470000	B&R 80MPH6.101SD114-01 (10A 80V max)	-	-	√

✱ In all applications requiring motor powered up to 6A / 55VDC, the programmable drive ***e***.drive, code 37D1332002, can be used.
◆ **Important!** Limit current.
■ **Important!** Limit current and voltage.
● **Important!** AC drive to continuous voltage VDC = VAC · $\sqrt{2}$

MOTOR CODES		DRIVES CODES	
Metal Work		37D2300000	37D2400007
Manufacturer		DELTA ASD-A2-0421-M	DELTA ASD-A2-0721-M
Metal Work	Manufacturer	(400W)	(750W)
BRUSHLESS MOTORS			
37M2220001	DELTA ECMA-C20604RS (400W)	√	-
37M2330001	DELTA ECMA-C20807RS (750W)	-	√
BRUSHLESS MOTORS WITH BRAKE			
37M4220001	DELTA ECMA-C20604SS (400W)	√	-
37M4330001	DELTA ECMA-C20807SS (750W)	-	√

The motor must be controlled in such a way as to avoid sudden changes in speed.



METAL WORK PNEUMATIC

KEY TO CODES AXIS ELECTRIC WITHOUT MOTOR

CYL	37 TYPE	4	0	1 SIZE	1 CARRIAGE TYPE	0300 STROKE	2 GUIDE TYPE	T
	37 Electric actuators	**4** Electric axis rodless elektro	**0** STD	**1** BK-1 **2** BK-2	**1** STD (Standard V-lock axial length) ● **5** XL (long with threaded holes)	**BK-1 Medium** from 110 to 3800 mm **BK-1 Heavy** from 110 to 2800 mm **BK-2 Heavy** from 140 to 3800 mm **BK-2 Heavy XL** from 140 to 3600 mm	◆ **2** Medium (guide and steel wheels) **3** Heavy - Heavy XL (steel guide and pads ball-recirculation)	**T** Without motor (plugged outlets)

● Only available for BK-2.
◆ Only available for BK-1.

KEY TO CODES AXIS ELECTRIC MOTOR

CYL	37 TYPE	4	0	1 SIZE	1 CARRIAGE TYPE	0300 STROKE	2 GUIDE TYPE	6 MOTOR POSITION	■ DRIVE 1 MOTOR ✱	2 FLANGE	3 TORQUE	0
	37 Electric actuators	**4** Electric axis rodless elektro	**0** STD	**1** BK-1 **2** BK-2	**1** STD (Standard V-lock axial length) ● **5** XL (long with threaded holes)	**BK-1 Medium** from 110 to 3800 mm **BK-1 Heavy** from 110 to 2800 mm **BK-2 Heavy** from 140 to 3800 mm **BK-2 Heavy XL** from 140 to 3600 mm	◆ **2** Medium (guide and steel wheels) **3** Heavy - Heavy XL (steel guide and pads ball-recirculation)	**6** Right **9** Left	**1** Stepping **2** Brushless **3** Stepping with BRAKE + Encoder **4** Brushless with BRAKE **6** Brushless with 1:3 gearbox **7** Brushless with BRAKE + 1:3 gearbox **8** Brushless with 1:5 gearbox **9** Brushless with BRAKE + 1:5 gearbox **C** Stepping with Encoder **E** Brushless with BRAKE and reduction 1: 2 (toothed belt) **F** Brushless with reduction 1: 2 (toothed belt)	**2** 60 **3** 80 **4** NEMA 34	**2** 1.2 to 2.19 Nm **3** 2.2 to 3 Nm **7** 7.01 to 10 Nm	**0** Base

● Only available for BK-2.
◆ Only available for BK-1.
■ The Orderable configurations of the motorizations are shown on page **A5**.157 for the BK-1 and on page **A5**.159 for the BK-2.
✱ On request available versions with gearbox with reduction ratios other than those eventually foreseen as standard.

ACCESSORIES

FIXING ELEMENTS



See V-Lock family.

FIXING ELEMENTS FOR GANTRY SYSTEMS

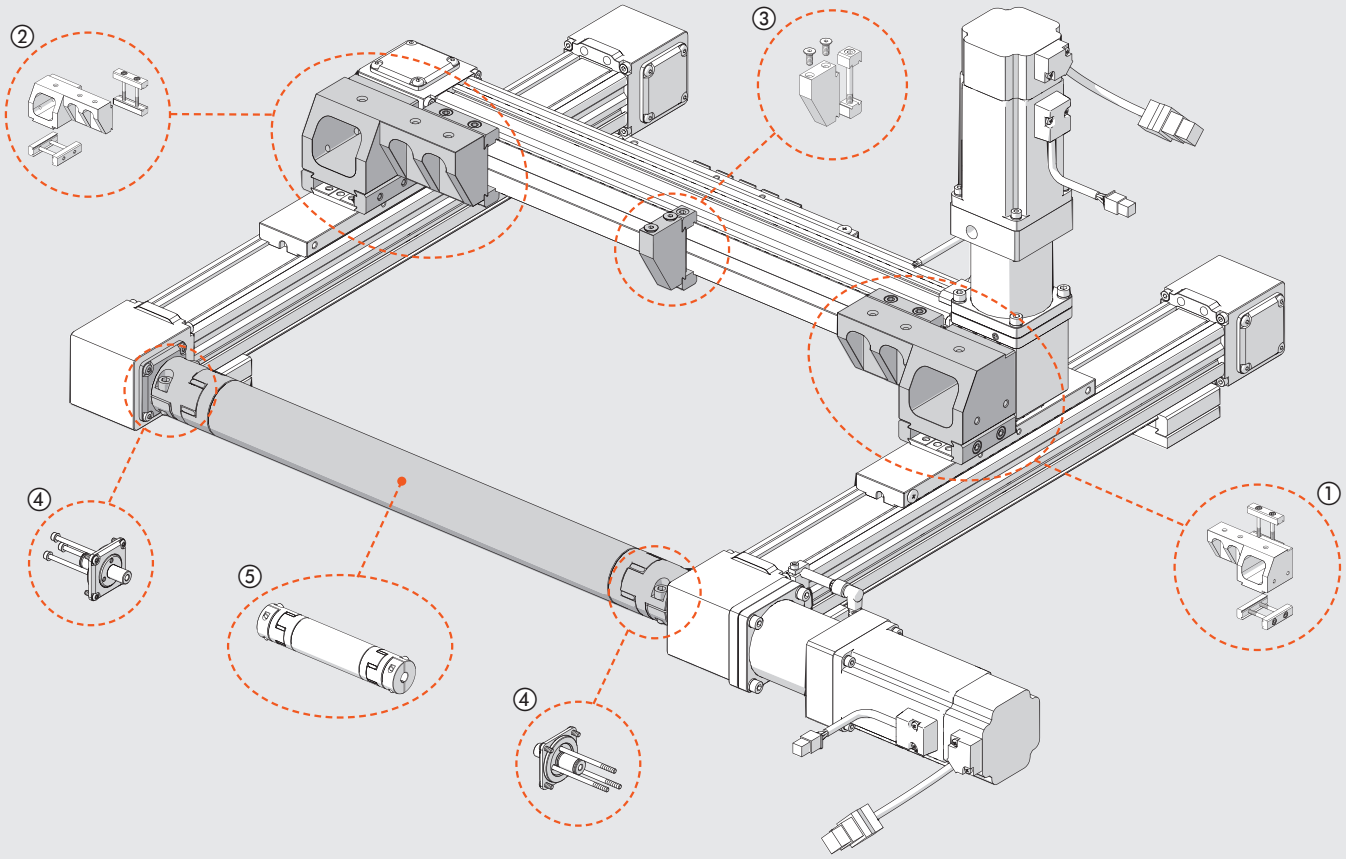

① LEFT BRACKET

Code	Description
095BK1R003	Left bracket for Gantry BK-1
095BK2R003	Left bracket for Gantry BK-2 / BK-2 XL

② RIGHT BRACKET

Code	Description
095BK1R002	Right bracket for Gantry BK-1
095BK2R002	Right bracket for Gantry BK-2 / BK-2 XL

③ BRACKET CABLE CHAIN GIUDE

Code	Description
095BK2R004	Bracket cable chain giude for Gantry BK-1 / BK-2 / BK-2 XL

④ JOINT FOR TRANSMISSION SHAFT

Code	Description
095BK1R190	Joint for transmission shaft BK-1
095BK2R190	Joint for transmission shaft BK-2

⑤ TRANSMISSION SHAFT

Code	Description
095TSV12_ _ _ _	Transmission shaft BK-1
095TSV15_ _ _ _	Transmission shaft BK-2

_ _ _ _ Enter the length L1 in mm to complete the code.
Example: 095TSV120800 = transmission shaft BK-1 L1 = 800 mm

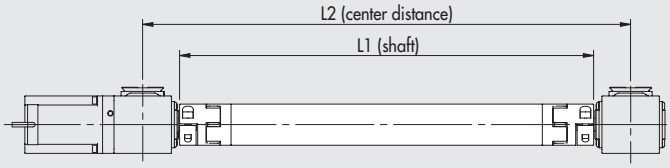

L1 min = 200 mm
L1 max = 2500 mm

L1 BK-1 = L2 - 72 mm
L1 BK-2 = L2 - 95 mm

INDUCTION SENSOR Ø 6.5



Code	Description
W095K030006	PNP Ø 6.5 PNP inductive sensor with LED 2 m

QUICK-FIT INDUCTIVE SENSOR Ø 6.5



Code	Description
W095K030009	PNP Ø 6.5 inductive sensor with push-in LED

QUICK-FIT INDUCTIVE SENSOR M8 (ONLY FOR BK-2)



Code	Description
W095K030010	PNP M8 inductive sensor with push-in LED

CABLE WITH STRAIGHT CONNECTOR FOR PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

CABLE WITH 90° CONNECTOR FOR PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

M8 M – M8 F CONNECTOR FOR PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital INPUT of the EB 80 and CM valves

BRACKET FOR INDUCTION SENSOR

BK-1



BK-2



BK-2 XL



Code	Description
095BK1R001	Bracket for inductive sensor Ø 6.5 BK-1
095BK2R001	Bracket for inductive sensor Ø 6.5 BK-2
095BK2R006	Bracket for inductive sensor Ø 8 BK-2
095BK2R007	Bracket for inductive sensor Ø 6.5 BK-2 XL
095BK2R005	Bracket for inductive sensor Ø 8 BK-2 XL

DRIVES

For motor-drive couplings see table on page **A5**.160

SPARE PARTS

BK GEARBOXES

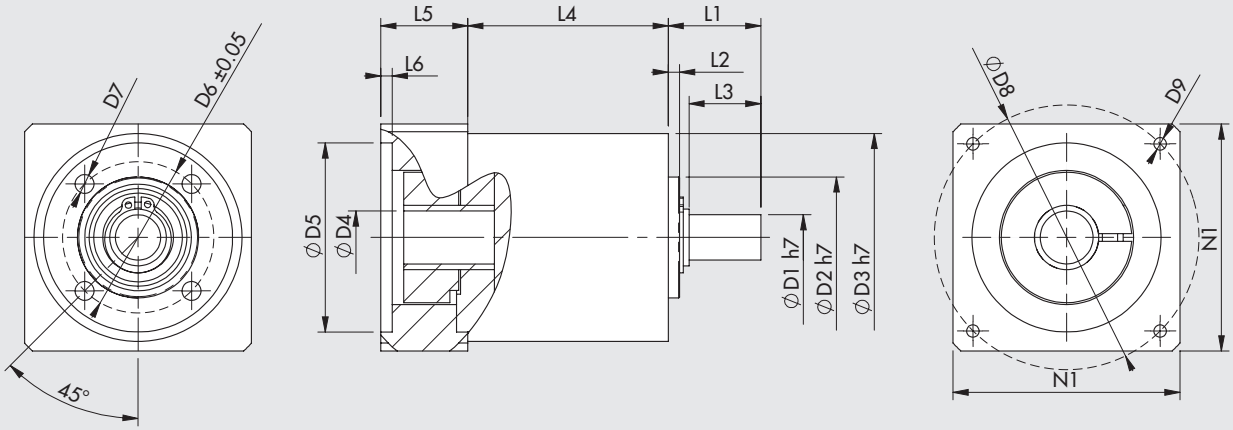

Code	Description	C_{OUT} nominal [Nm]	N_{IN} nominal [1/min]	J reduced to motor shaft [kgmm²]	Mass [kg]	D1	D2	D3	D4	D5	D6	D7	D8	D9	L1	L2	L3	L4	L5	L6	N1
37R0341000	Gearbox MP053 1:3	12	3300	8	0.8	12	32	55	14	50	40	M5	70	M4x10	24.5	3	19	53	23	3	60
37R0541000	Gearbox MP053 1:5	15	3500	6	0.8	12	32	55	14	50	40	M5	70	M4x10	24.5	3	19	53	23	3	60
37R0343000	Gearbox MP080 1:3	40	2900	59	4	19	50	85	16	70	65	M6	90	M5x16	46	5	39	83.5	34	4	80
37R0543000	Gearbox MP080 1:5	50	3200	37	4	19	50	85	16	70	65	M6	90	M5x16	46	5	39	83.5	34	4	80

C_{OUT} = nominal output torque N_{IN} = nominal input speed J = mass moment of inertia of the gearbox

ELECTRIC MOTORS

For motor-drive couplings see table on page **A5**.160

NOTES

METAL WORK PNEUMATIC

NOTES

ELECTRIC SLIDE
SERIES ELEKTRO CS

Compact electric slide, equipped with a guideway and a ball-recirculating pad capable of withstanding high radial loads on the piston rod.
The slide in the ELEKTRO CS series features the same technical choices as those made in the ELEKTRO SSC series in terms of extreme compactness and pure design, including the
wear-resistant aluminium body.
Driven by a hardened steel screw and recirculating ball screw nut, the stainless-steel piston rod is coupled, via a rigid aluminium structure, to a recirculating pad that runs along a guide rail integral with the main body.
The coupling system prevents the piston rod from rotating.
A magnet is integral with the piston rod to ensure an end-stop signal, while two longitudinal slots are provided on the body to accommodate Square-type sensors.
For easy re-greasing of the screw and nut, the cylinder body comes with a special hole that is normally closed with a silencer (to ensure IP65 protection this hole must be directed to the outside).
The ELEKTRO CS series slide is available in either a standard profile version or a V-Lock interface version.
The electric motor can be either connected in-line with the slide or by means of a transmission system; in the latter case, three different configurations are available.
The motor can be selected from an optimised range comprising both STEPPING and BRUSHLESS motors.
Drives most suitable for motor control are also provided. When using motors of a make or model other than those offered in the catalogue, special flanges and couplings can be made and supplied on request.

in-line version

geared version

TECHNICAL DATA			Ø 32
Temperature range	WITH MOTOR	°C	see single motor data sheet
	ONLY MECHANICS	°C	from -10 to +50
Electrical protection rating with	STEPPING motors		IP55 or IP65 (see key to codes on page **A5**.178) **
	BRUSHLESS motors		IP65 (see key to codes on page **A5**.178) **
Standard strokes (including 5 mm extra-stroke) for homing		mm	55-80-100-125-150-200
Positioning repeatability		mm	±0.02
Positioning accuracy		mm	±0.2 *
Versions			Ball screw
			In line or geared motor
Anti-rotation of the piston rod			YES
Uncontrolled impact at the end of stroke			NOT ALLOWED (for rear buffer ONLY)
Sensor magnet			YES
Work position			Any
Interface for fixing on carriage			Standard / V-Lock

* Indicative average data that gets influenced by various factors such as the type of motor, the cylinder version, etc ...
** Degree of protection guaranteed with greasing hole conveyed outside

METAL WORK PNEUMATIC

MECHANICAL FEATURES			
Screw pitch (p)	mm	4	10
Screw diameter	mm	12	12
Static axial load (F_o) *	N	2500	2500
Dynamic axial load (F) **	N	2700	2700
Maximum number of revs	1/min	3000	3000
Maximum speed (V_{max})	mm/s	200	500
"K" ratio of motor revs and piston rod speed	n/V	15	6
Maximum acceleration without load	m/s^2	5	
Maximum driving torque applicable to the screw	Nm	2.5	

Example: V = 100 mm/s; pitch = 10 → K = 6 n = V · K = 100 · 6 = 600 rpm

* Static loads bearable without damage.
** Calculate mean axial load and the calculate life (see graphs on page **A5**.170).
N.B.: For the verification of the linear guide system, please refer to page **A5**.169. For the verification of the screw, see bottom of page.

WEIGHTS			
Screw pitch (p)	mm	4	10
Weight at stroke 0, in-line version	g	1188	1198
Weight at stroke 0, geared version	g	1498	1508
Additional weight each mm of stroke	g	7.6	7.6
Moving mass at stroke 0 (M0)	g	546	553
Additional moving mass each mm of stroke (MX)	g	2.5	2.5

N.B.: You get the total weight of a complete slide by adding: weight stroke 0 + stroke [mm] · weight for each mm of stroke + weight of the motor.

MASS MOMENTS OF INERTIA			
Screw pitch	mm	4	10
Transmission ratio (τ)		1:1	1:1
J0 at stroke 0	$kgmm^2$	7.821	7.934
J1 each metre of stroke	$kgmm^2/m$	12.76	13.76
J2 each kg of load	$kgmm^2/kg$	0.4053	2.5330
J3 in-line transmission	$kgmm^2$	2.879	2.879
J3 geared transmission	$kgmm^2$	3.237	3.237

The total mass moment of inertia (Jtot) reduced for the motor is: Jtot = {J1 · stroke [m] + J2 · [(MX · stroke) + M0 + load] + J0} · τ^2 +J3
MX and M0 are defined in the WEIGHTS table.

CALCULATION OF MEAN AXIAL LOAD F_m AND VERIFICATION

Peak axial load in a work cycle must not exceed the static axial load Fo.
The peak value is usually achieved during upward acceleration in vertical installation. Exceeding this value leads to greater wear and hence shorter life of the recirculating ball screw.

Mean axial load F_m

$$F_m = \sqrt[3]{\sum F_x^3 \times \frac{V_x}{V_m} \times \frac{q}{100}} =$$

$$F_m = \sqrt[3]{F_{x1}^3 \times \frac{V_{X1}}{V_m} \times \frac{q_1}{100} + F_{x2}^3 \times \frac{V_{X2}}{V_m} + \frac{q_2}{100} + F_{x3}^3 \times \frac{V_{X3}}{V_m} \times \frac{q_3}{100} + \ldots}$$

F_x = Axial load at stage x
F_m = Mean axial load during extension
F_o = Static axial load
q = Time segment
V_x = Speed in the phase x
V_m = Average speed

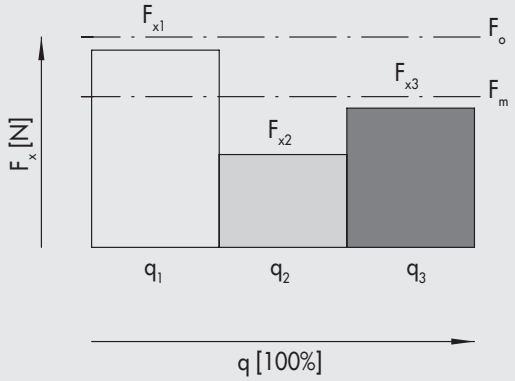

The mean axial load must not exceed the dynamic axial load: $F_m \leq F$
The graphs on page **A5**.170, show screw life as a function of F_m

COMPONENTS

IN-LINE VERSION

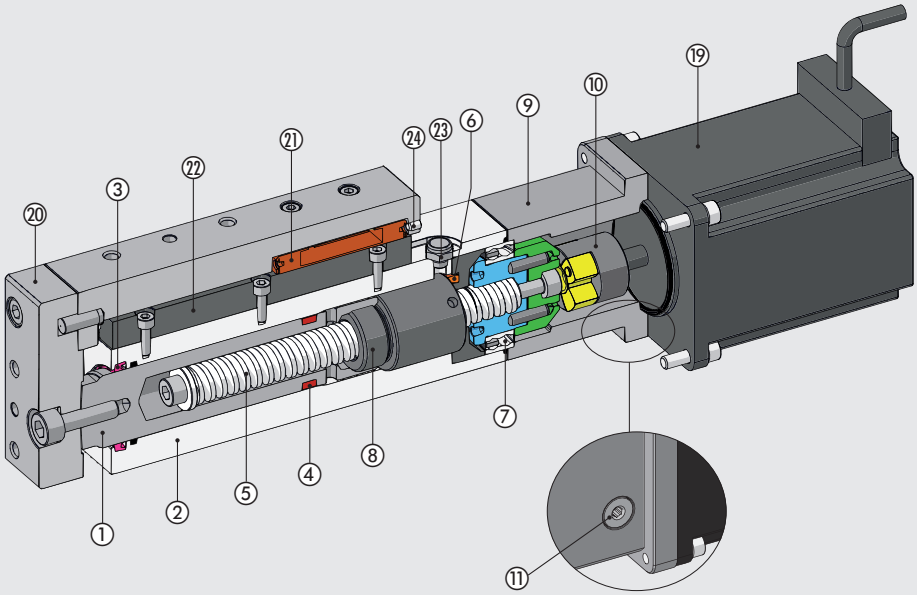

GEARED VERSION

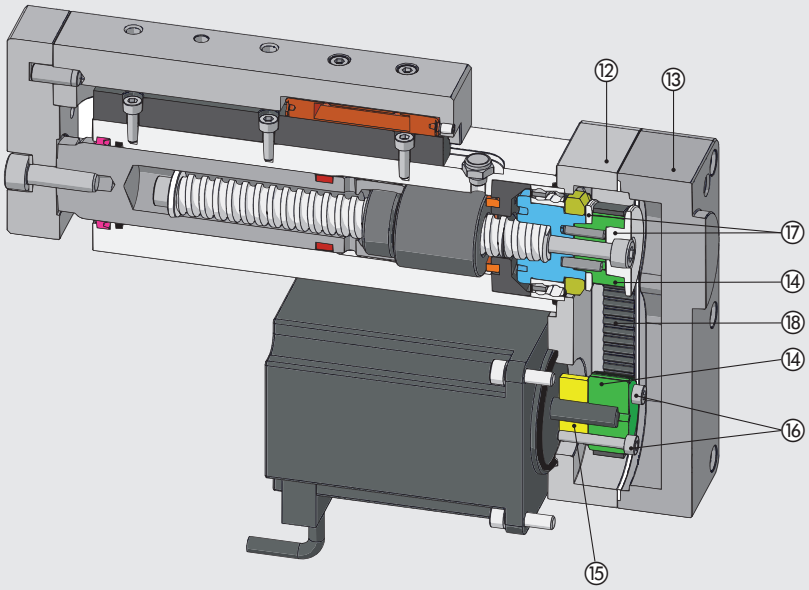

① PISTON ROD: stainless steel (AISI 316)
② BODY: aluminium alloy with wear-resistant coating
③ WIPER RING: polyurethane
④ MAGNET: plastoferrite (optional)
⑤ SCREW: hardened and rolled steel
⑥ BUFFER: polyurethane
⑦ BEARING: oblique with two ball rings
⑧ RECIRCULATING BALL SCROLL: steel
⑨ ADAPTOR PLATE: anodized aluminium
⑩ ELASTIC COUPLING: aluminium / polyurethane
⑪ PLUG: for access to the elastic coupling screw
⑫ TRANSMISSION PLATE: anodized aluminium
⑬ COVER: anodized aluminium
⑭ COG PULLEY: anodized aluminium
⑮ ELASTIC COLLAR: anodized aluminium
⑯ ELASTIC COLLAR-LOCKING SCREWS: zinc-plated steel
⑰ BELT FLANGES: anodized aluminium
⑱ TOOTHED BELT: polyurethane with steel cables
⑲ MOTOR
⑳ SLIDE: anodized aluminium
㉑ BALL RECIRCULATION PAD: stainless steel / technopolymer
㉒ GUIDING RAIL FOR PADS: hardened stainless steel
㉓ SILENCER: access to the greasing screw and air exhaust
㉔ GRUB SCREW: for pad greasing

METAL WORK PNEUMATIC

DIAGRAM OF FORCES AND MOMENTS

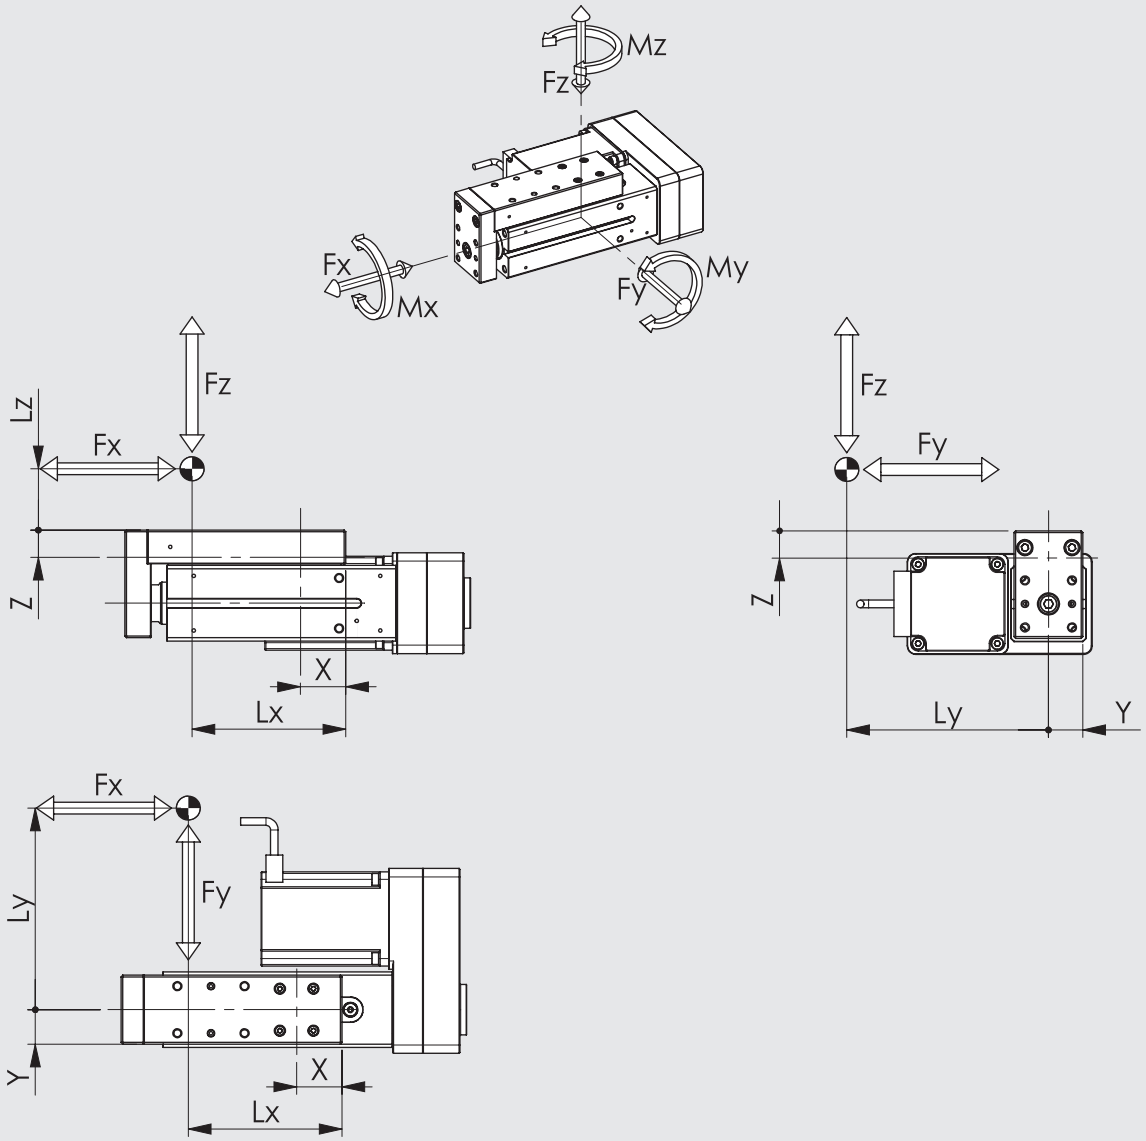

STATIC VERIFICATION

When on the slide is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

X [mm]	Y [mm]	Z [mm]	Fy max [N]	Fz max [N]	Mx max [Nm]	My max [Nm]	Mz max [Nm]
27	20.5	16.25	2790	2790	21.8	13.5	13.5

N.B.: The values in the table relates to the maximum admissible loads beyond which serious damage is likely to occur.

$Mx = Fy \cdot (Lz + z) + Fz \cdot Ly \qquad My = Fz \cdot (Lx - x) + Fx \cdot (Lz + z) \qquad Mz = Fy \cdot Lx + (Lx - x) \cdot Ly$

$$\frac{(Mx)}{Mx0\ max} + \frac{(My)}{My0\ max} + \frac{(Mz)}{Mz0\ max} + \frac{(Fy)}{Fy0\ max} + \frac{(Fz)}{Fz0\ max} \leq 1$$

DYNAMIC VERIFICATION

When on the slide is subjected simultaneously to torque and force, keep to the following equations, where the lengths have to be given in metres.

X [mm]	Y [mm]	Z [mm]	Fy max [N]	Fz max [N]	Mx max [Nm]	My max [Nm]	Mz max [Nm]
27	20.5	16.25	1395	1395	10.9	6.75	6.75

N.B.: The values are calculated on the basis of theoretical useful life of 10000 km.

$Mx = Fy \cdot (Lz + z) + Fz \cdot Ly \qquad My = Fz \cdot (Lx - x) + Fx \cdot (Lz + z) \qquad Mz = Fy \cdot (Lx - x) + Fx \cdot Ly$

$$\frac{(Mx)}{Mx\ max} + \frac{(My)}{My\ max} + \frac{(Mz)}{Mz\ max} + \frac{(Fy)}{Fy\ max} + \frac{(Fz)}{Fz\ max} \leq 1$$

LIFE CHARACTERISTICS AS A FUNCTION OF THE MEAN AXIAL LOAD, VERSION WITH BALL SCREW

Life characteristics can vary considerably from those indicated in the graphs due to different operating conditions (radial loads, temperature, lubrication status, etc.).

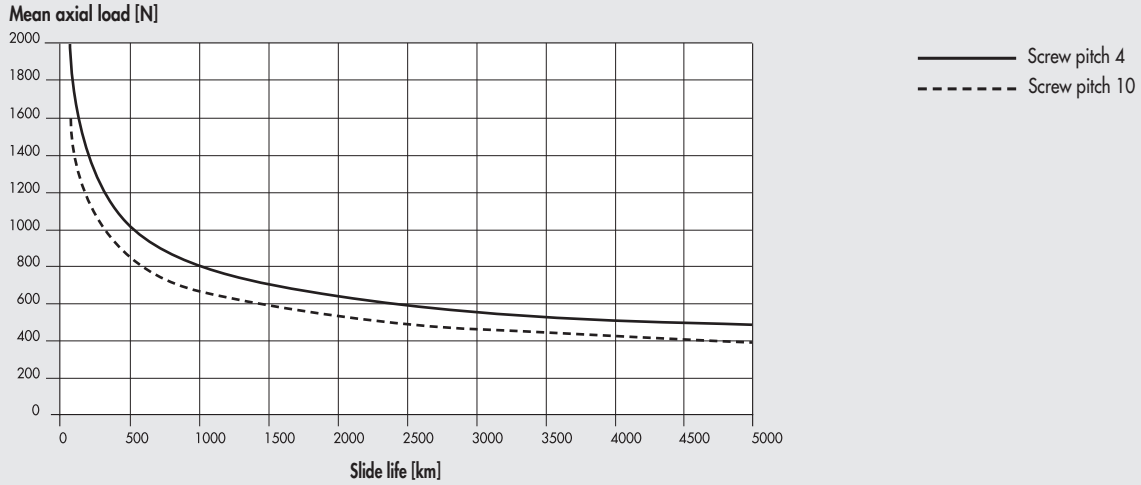

AXIAL LOAD CURVES AS A FUNCTION OF SPEED (SLIDE COMPLETE WITH MOTOR AND DRIVE)

N.B.: The obtainable load values already take the efficiency of the system into account.
For STEPPING motors, with the motor off, the drive current is automatically reduced by 50% to prevent overheating.
Consequently, available axial load with the motor stopped is also reduced by 50%.

Ø 32 with pitch 4 ball screw, STEPPING motor, STEPPING motors with encoder, STEPPING motors with encoder + brake

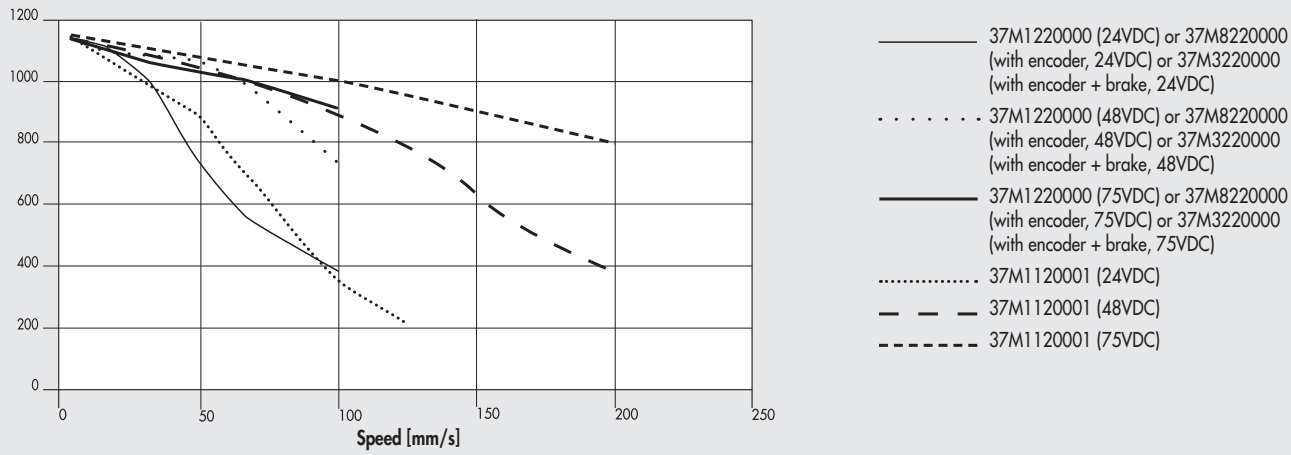

Ø 32 with pitch 10 ball screw, STEPPING motor, STEPPING motors with encoder, STEPPING motors with encoder + brake

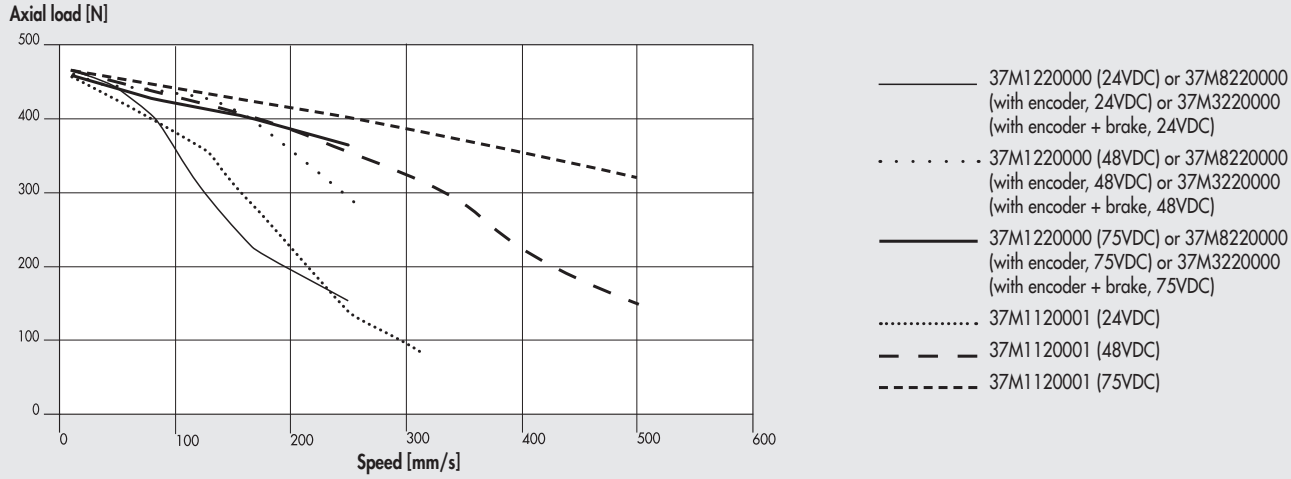

Ø 32 with pitch 4 ball screw, BRUSHLESS motor and BRUSHLESS motor with brake

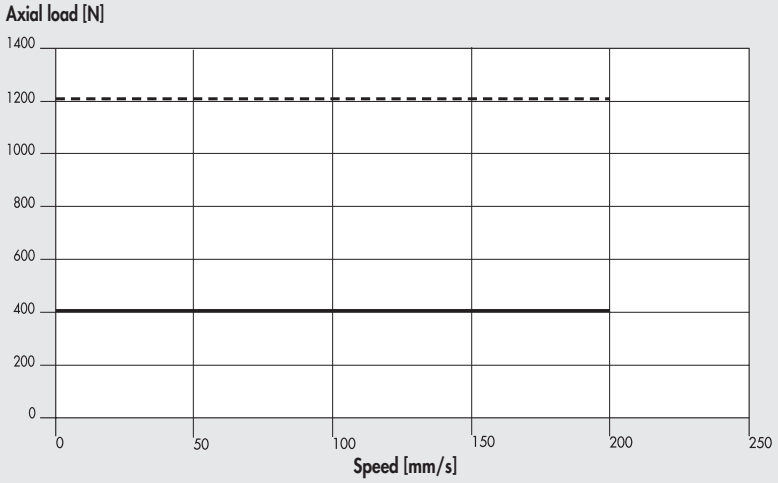

Nominal 37M2000000
or 37M4000000 (with brake)
+ 37D2100000 (100W)

Max 37M2000000
or 37M4000000 (with brake)
+ 37D2100000 (100W)

Ø 32 with pitch 10 ball screw, BRUSHLESS motor and BRUSHLESS motor with brake

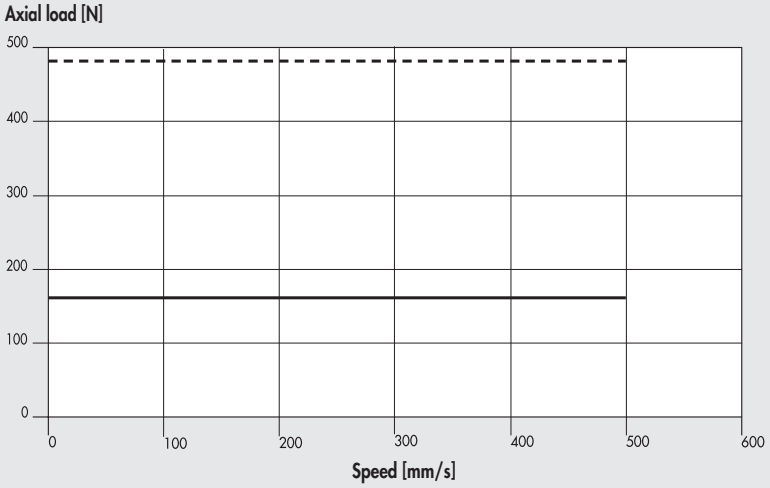

Nominal 37M2000000
or 37M4000000 (with brake)
+ 37D2100000 (100W)

Max 37M2000000
or 37M4000000 (with brake)
+ 37D2100000 (100W)

VERSIONS

TYPE OF CARRIAGE INTERFACE

STANDARD

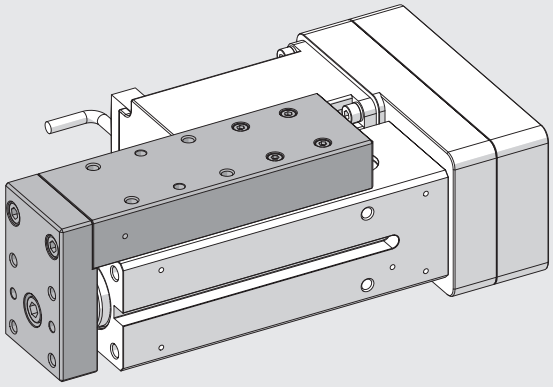

V-LOCK

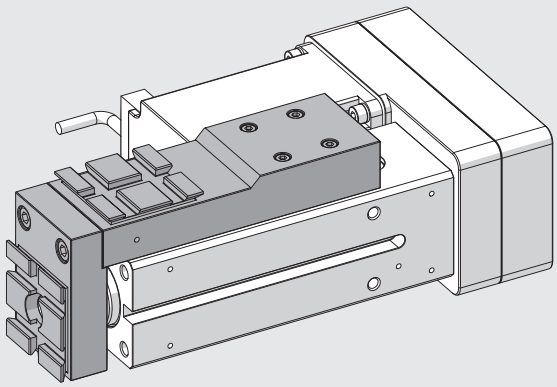

MOTOR POSITIONING

IN-LINE



RIGHT GEARED

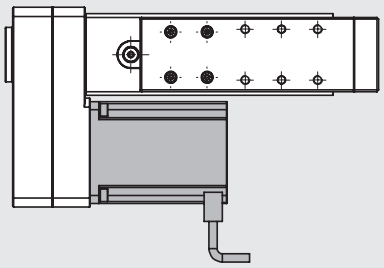

GEARED WITH MOTOR OPPOSITE TO THE SLIDE



LEFT GEARED

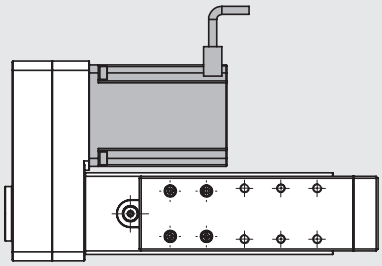

LUBRICATION DIAGRAMS

Our electric rod cylinders are pre-greased with permanent grease. It is, however, possible to maintain them by re-lubricating, but before this operation we recommend periodic maintenance, at least once a year, which includes checks of: functionality, noise, wears and plays, if possible motor absorption (to be compared with the previous ones), and only after adding, in case, grease according to the instructions in the manual: a continuous addition of grease, since it is not disposable, could be worse. The quantities in the manual are valid for strokes up to approximately 500 mm. Between 500 mm and 1000 mm double the quantity. Between 1000 mm and 1500 mm triple the quantity.

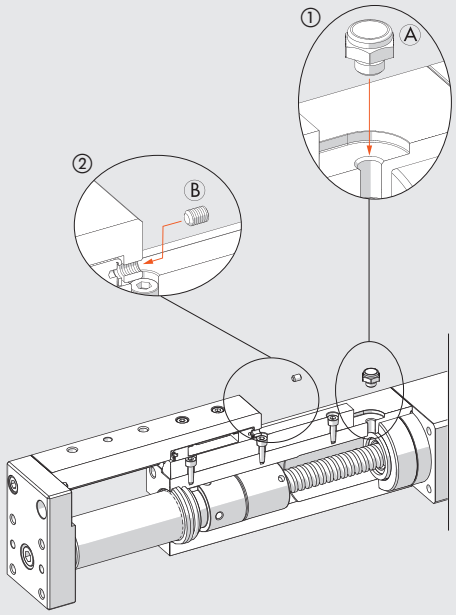

The slide features two specific lubrication zones:
① greasing point for the recirculating ball nut;
② greasing point for the recirculating ball pad.
Only use food-grade grease for re-greasing ULTRAPLEX FG1 NSF CAT H1 (code 9910514), according to the quantities indicated in the table.

Follow the steps below:

- retract the piston rod towards the motor adapter plate, as far as it will go;
- move the piston rod at low speed and/or controlled torque forwards by a value corresponding to the cylinder total stroke;
- remove silencer Ⓐ and grub screw Ⓑ;
- use a grease gun to pump grease into the two grease nipples;
- make the slide complete 4 strokes (at the end of which the piston rod will be back in its initial position);
- repeat the latter two steps;
- replace silencer Ⓐ grub screw Ⓑ.

		Pad	Screw	
Screw pitch (p)	mm	-	4	10
Relube grease quantity	g	0.7	0.3	0.5
	cc	0.61	0.26	0.42

NOTES

DIMENSIONS SLIDE IN-LINE

WITHOUT MOTOR

+ = ADD THE STROKE

① N° 2 slots for sensors
② Holes for centring pins
③ Threaded holes for fixing

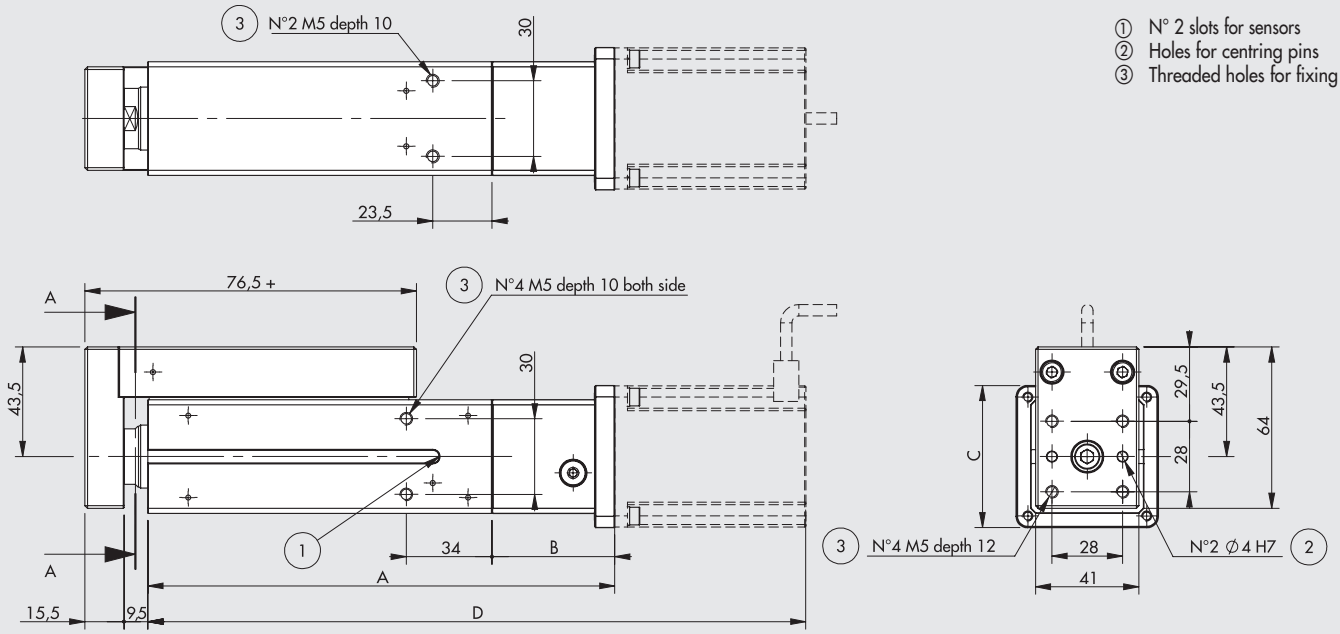

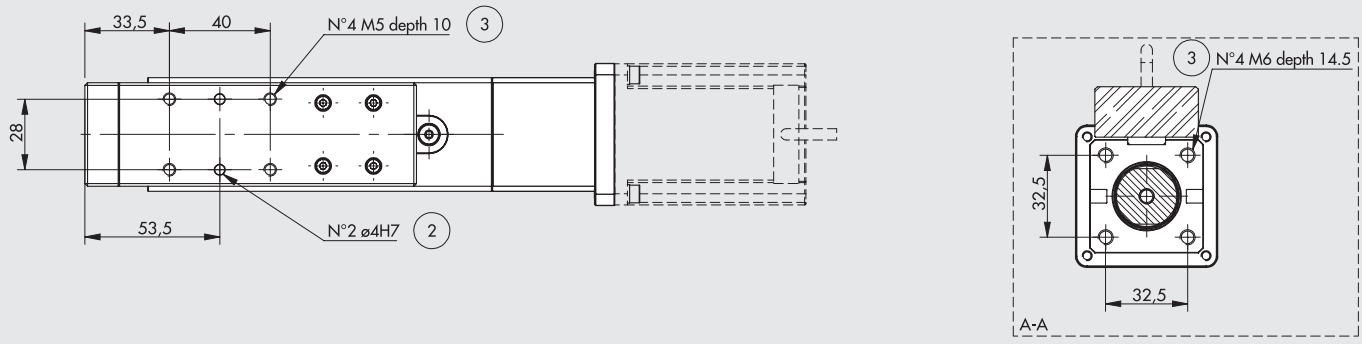

SLIDE WITH MOTOR

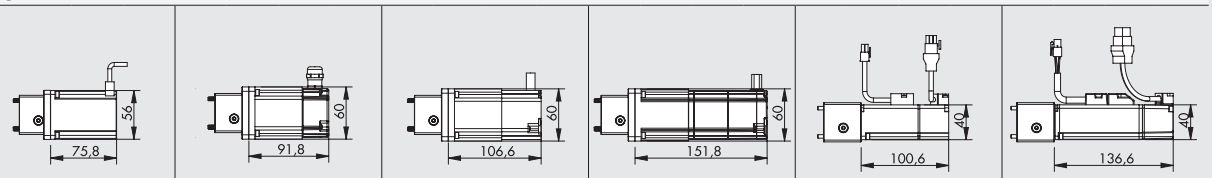

		1121				1220				8220				3220				2000				4000			
		STEPPING MOTOR code 37M1120001				STEPPING MOTOR code 37M1220000				STEPPING MOTOR + ENCODER code 37M8220000				STEPPING MOTOR + ENCODER + BRAKE code 37M3220000				BRUSHLESS MOTOR code 37M2000000				BRUSHLESS MOTOR + BRAKE code 37M4000000			
		A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D
STROKE	0055	185	48.5	56	261	185	48.5	60	277	185	48.5	60	292	185	48.5	60	337	190	53.5	45	291	190	53.5	45	327
	0080	210	48.5	56	286	210	48.5	60	302	210	48.5	60	317	210	48.5	60	362	215	53.5	45	316	215	53.5	45	352
	0100	230	48.5	56	306	230	48.5	60	322	230	48.5	60	337	230	48.5	60	382	235	53.5	45	336	235	53.5	45	372
	0125	255	48.5	56	331	255	48.5	60	347	255	48.5	60	362	255	48.5	60	407	260	53.5	45	361	260	53.5	45	397
	0150	280	48.5	56	356	280	48.5	60	372	280	48.5	60	387	280	48.5	60	432	285	53.5	45	386	285	53.5	45	422
	0200	330	48.5	56	406	330	48.5	60	422	330	48.5	60	437	330	48.5	60	482	335	53.5	45	436	335	53.5	45	472

377032 _ _ _ _12 _ _ _ _
377032 _ _ _ _42 _ _ _ _

To complete the code: _ _ _ _ = enter the stroke _ _ _ _ = enter the type of drive

METAL WORK PNEUMATIC

V-LOCK IN-LINE SLIDE DIMENSIONS

WITHOUT MOTOR

+ = ADD THE STROKE

① N° 2 slots for sensors
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**.
⑧ Slot for "V-Lock" precision key

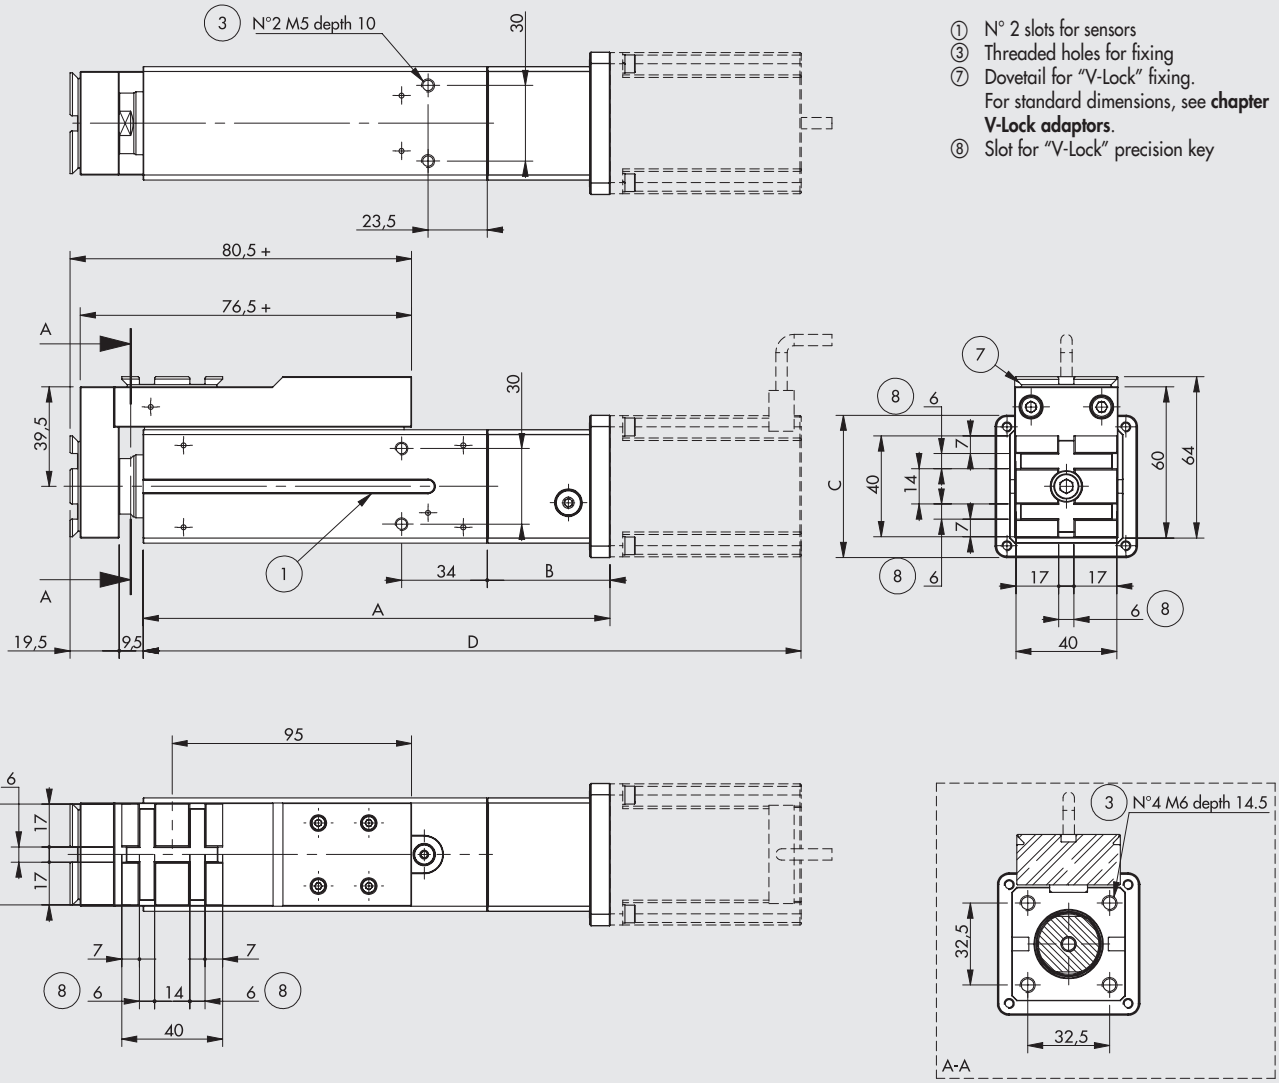

SLIDE WITH MOTOR

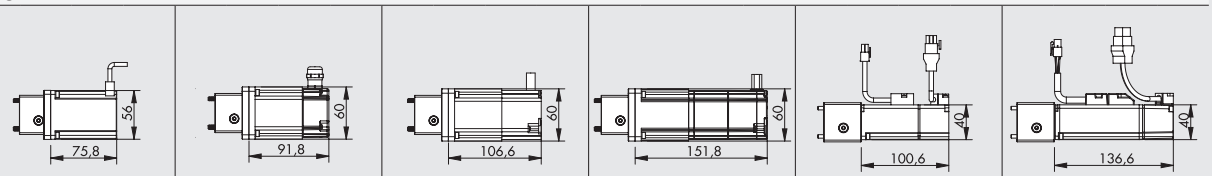

		1121				1220				8220				3220				2000				4000			
		STEPPING MOTOR code 37M1120001				STEPPING MOTOR code 37M1220000				STEPPING MOTOR + ENCODER code 37M8220000				STEPPING MOTOR + ENCODER + BRAKE code 37M3220000				BRUSHLESS MOTOR code 37M2000000				BRUSHLESS MOTOR + BRAKE code 37M4000000			
		A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D
STROKE	0055	185	48.5	56	261	185	48.5	60	277	185	48.5	60	292	185	48.5	60	337	190	53.5	45	291	190	53.5	45	327
	0080	210	48.5	56	286	210	48.5	60	302	210	48.5	60	317	210	48.5	60	362	215	53.5	45	316	215	53.5	45	352
	0100	230	48.5	56	306	230	48.5	60	322	230	48.5	60	337	230	48.5	60	382	235	53.5	45	336	235	53.5	45	372
	0125	255	48.5	56	331	255	48.5	60	347	255	48.5	60	362	255	48.5	60	407	260	53.5	45	361	260	53.5	45	397
	0150	280	48.5	56	356	280	48.5	60	372	280	48.5	60	387	280	48.5	60	432	285	53.5	45	386	285	53.5	45	422
	0200	330	48.5	56	406	330	48.5	60	422	330	48.5	60	437	330	48.5	60	482	335	53.5	45	436	335	53.5	45	472

377K32 _ _ _ _12 _ _ _ _
377K32 _ _ _ _42 _ _ _ _

To complete the code: _ _ _ _ = enter the stroke _ _ _ _ = enter the type of drive

DIMENSIONS SLIDE GEARED

WITHOUT MOTOR

+ = ADD THE STROKE

① N° 2 slots for sensors
② Holes for centring pins
③ Threaded holes for fixing

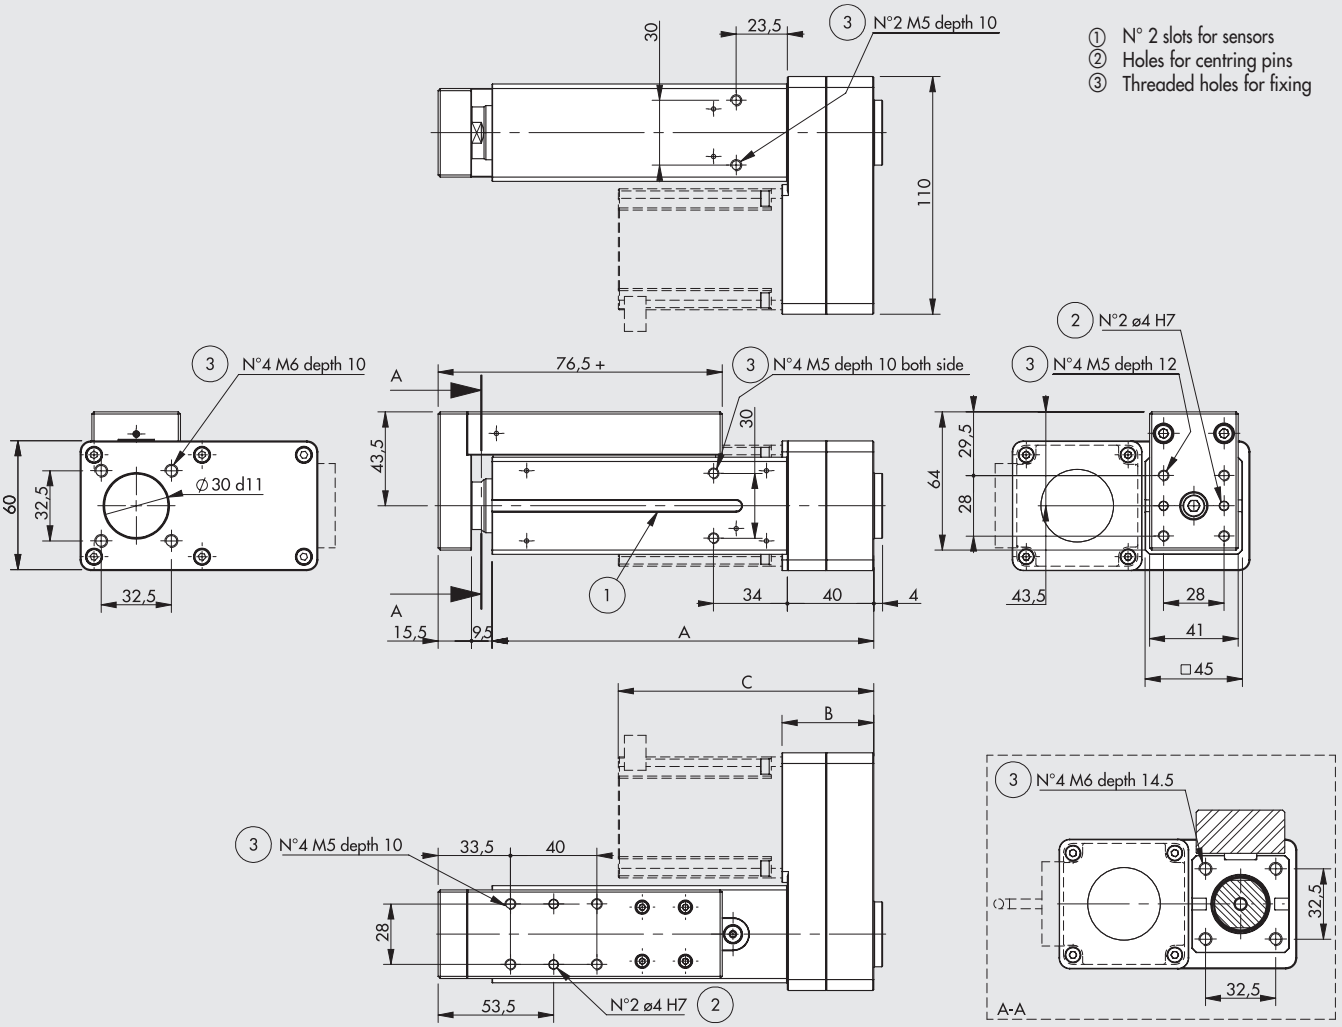

SLIDE WITH MOTOR

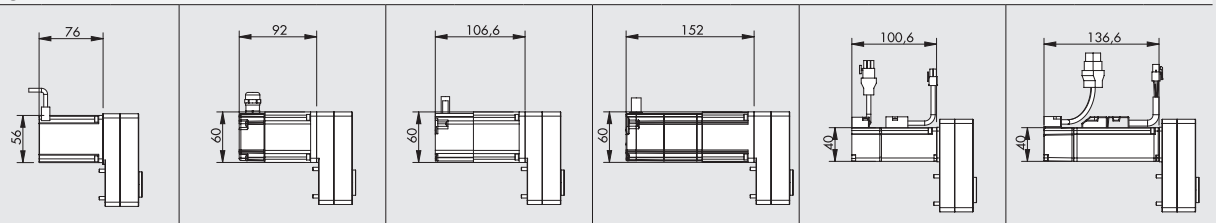

		1121 STEPPING MOTOR code 37M1120001			1220 STEPPING MOTOR code 37M1220000			8220 STEPPING MOTOR + ENCODER code 37M8220000			3220 STEPPING MOTOR + ENCODER + BRAKE code 37M3220000			2000 BRUSHLESS MOTOR code 37M2000000			4000 BRUSHLESS MOTOR + BRAKE code 37M4000000		
		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
STROKE	0055	177	42.5	118.5	177	42.5	134.5	177	42.5	149	177	42.5	194.5	177	43.5	144	177	43.5	180
	0080	202	42.5	119	202	42.5	135	202	42.5	149	202	42.5	194.5	202	43.5	144	202	43.5	180
	0100	222	42.5	119	222	42.5	135	222	42.5	149	222	42.5	194.5	222	43.5	144	222	43.5	180
	0125	247	42.5	119	247	42.5	135	247	42.5	149	247	42.5	194.5	247	43.5	144	247	43.5	180
	0150	272	42.5	119	272	42.5	135	272	42.5	149	272	42.5	194.5	272	43.5	144	272	43.5	180
	0200	322	42.5	119	322	42.5	135	322	42.5	149	322	42.5	194.5	322	43.5	144	322	43.5	180

377032 _ _ _ _1N _ _ _ _
377032 _ _ _ _4N _ _ _ _

377032 _ _ _ _16 _ _ _ _
377032 _ _ _ _46 _ _ _ _

377032 _ _ _ _19 _ _ _ _
377032 _ _ _ _49 _ _ _ _

To complete the code: _ _ _ _ = enter the stroke _ _ _ _ = enter the type of drive

METAL WORK PNEUMATIC

V-LOCK IN-LINE SLIDE DIMENSIONS

WITHOUT MOTOR

+ = ADD THE STROKE

① N° 2 slots for sensors
③ Threaded holes for fixing
⑦ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**.
⑧ Slot for "V-Lock" precision key

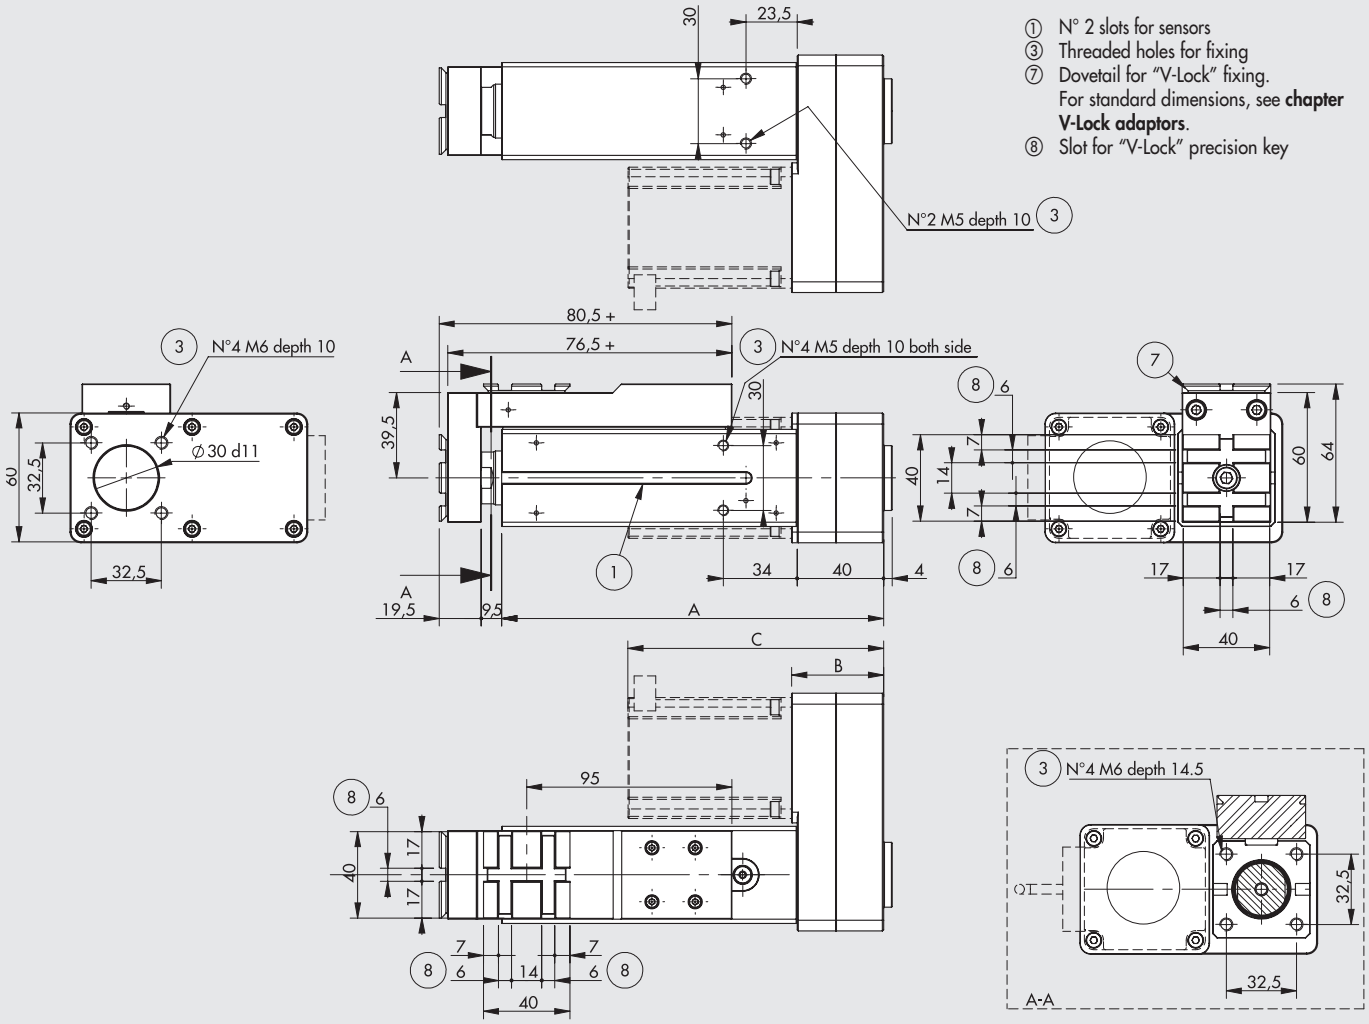

SLIDE WITH MOTOR

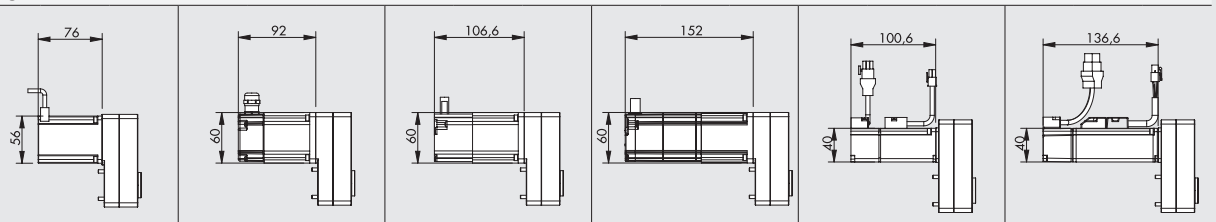

		1121 STEPPING MOTOR code 37M1120001			1220 STEPPING MOTOR code 37M1220000			8220 STEPPING MOTOR + ENCODER code 37M8220000			3220 STEPPING MOTOR + ENCODER + BRAKE code 37M3220000			2000 BRUSHLESS MOTOR code 37M2000000			4000 BRUSHLESS MOTOR + BRAKE code 37M4000000		
		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
STROKE	0055	177	42.5	118.5	177	42.5	134.5	177	42.5	149	177	42.5	194.5	177	43.5	144	177	43.5	180
	0080	202	42.5	119	202	42.5	135	202	42.5	149	202	42.5	194.5	202	43.5	144	202	43.5	180
	0100	222	42.5	119	222	42.5	135	222	42.5	149	222	42.5	194.5	222	43.5	144	222	43.5	180
	0125	247	42.5	119	247	42.5	135	247	42.5	149	247	42.5	194.5	247	43.5	144	247	43.5	180
	0150	272	42.5	119	272	42.5	135	272	42.5	149	272	42.5	194.5	272	43.5	144	272	43.5	180
	0200	322	42.5	119	322	42.5	135	322	42.5	149	322	42.5	194.5	322	43.5	144	322	43.5	180

377K32 _ _ _ _1N _ _ _ _
377K32 _ _ _ _4N _ _ _ _

377K32 _ _ _ _16 _ _ _ _
377K32 _ _ _ _46 _ _ _ _

377K32 _ _ _ _19 _ _ _ _
377K32 _ _ _ _49 _ _ _ _

To complete the code: _ _ _ _ = enter the stroke _ _ _ _ = enter the type of drive

MOTOR-DRIVE COUPLINGS

MOTOR CODES		DRIVES CODES		
Metal Work		37D1332000 *	37D1442000	37D1552000
Manufacturer		RTA NDC 96	RTA PLUS A4	RTA PLUS B7
Metal Work	Manufacturer	(6A 24-75VDC)	(6A 24-75VDC)	(10A 28-62VAC) ●
STEPPING MOTORS				
37M1120001	SANYO DENKI 103-H7126-6640 (5.6A 75V max)	√	-	√ ■
37M1220000	B&R 80MPF3.250S000-01 + kit IP65 (5A 80V max)	√ ◆	√ ■	√ ■
STEPPING MOTORS + ENCODER				
37M8220000	B&R 80MPF3.500S114-01 (5A 80V max)	√ ◆	√ ■	√ ■
STEPPING MOTORS WITH BRAKE + ENCODER				
37M3220000	B&R 80MPF3.500D114-01 (5A 80V max)	√ ◆	√ ■	√ ■

✱ In all applications requiring motor powered up to 6A / 55VDC, the programmable drive e.drive, code 37D1332002, can be used.

● **Important!** AC drive to continuous voltage VDC = VAC · $\sqrt{2}$ ◆ **Important!** Limit current ■ **Important!** lLimit current and voltage

MOTOR CODES		DRIVES CODES
Metal Work		37D2100000
Manufacturer		DELTA ASD-A2-0121-M
Metal Work	Manufacturer	(100W)
BRUSHLESS MOTORS		
37M2000000	DELTA ECMA-C20401RS (100W)	√
BRUSHLESS MOTORS WITH BRAKE		
37M4000000	DELTA ECMA-C20401SS (100W)	√

KEY TO CODES

CYL	37	7	0	32	0055	1	2	1	DRIVE 0	0	0
	TYPE	FAMILY	CARRIAGE TYPE	SIZE	STROKE	SCREW	VERSION	MOTOR	FLANGE	TORQUE	
	37 Electric actuators	**7** Electric slide CS	**0** Standard **K** V-Lock	**32** Ø32	**0055** 55 mm **0080** 80 mm **0100** 100 mm **0125** 125 mm **0150** 150 mm **0200** 200 mm	**1** Pitch 4 ball screw **4** Pitch 10 ball screw	● **2** In-line IP55/65 ● **6** Geared right IP55/65 ● **9** Geared left IP55/65 ● **N** Geared with motor opposite to the slide IP55/65	**1** STEPPING **2** BRUSHLESS **3** STEPPING with BRAKE + encoder **4** BRUSHLESS with BRAKE **8** STEPPING + encoder	**0** 40x40 **1** NEMA 23 **2** 60x60	**0** 0 - 0.79 Nm **2** 1.2 - 2.19 Nm	**0** Base **1** Greater rpm

● IP65 version available for all drives, except for motor code 37M1120001, which is IP55 protected.
Degree of protection guaranteed with greasing hole conveyed outside.

POSSIBLE ORDERING CODES

Drive
Version
Screw pitch

377032_ _ _ _	1	2	1121*
377K32_ _ _ _	4	6	1220
		9	8220
		N	3220
			2000
			4000

_ _ _ _ = enter the stroke in mm

* Only IP55 rating applies for this type of motor drive

NOTES

ACCESSORIES FOR ELECTRIC SLIDE SERIES ELEKTRO CS

Note: Where specified, limit the maximum axial loads (Fmax) according to the electric slides.

FIXING OPTIONS

IN-LINE VERSION

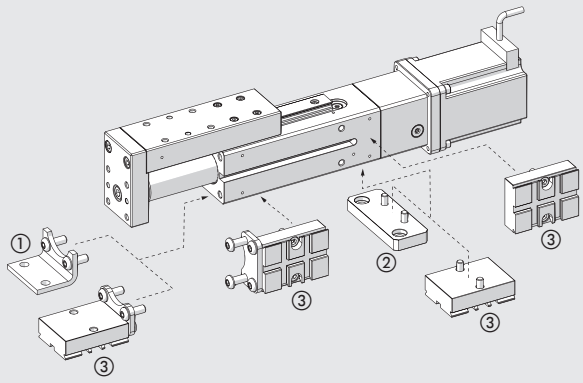

GEARED VERSION

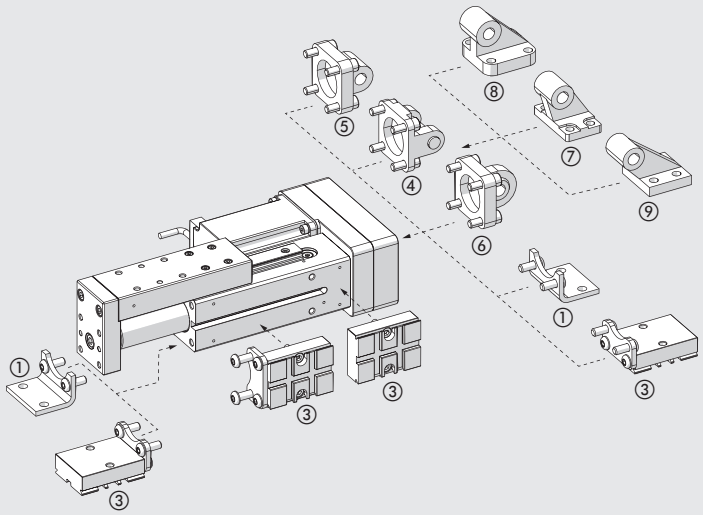

① FOOT MODEL A ELEKTRO CS

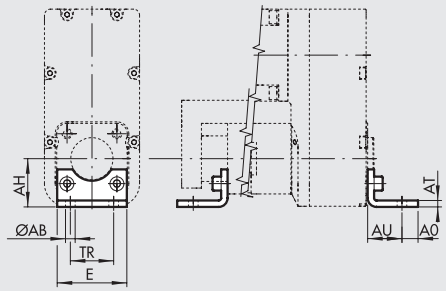

STEEL

Code	Ø	Ø AB	AH	AO	AT	AU	TR	E	Weight [g]	Fmax [N]
0950327111	32	7	32	11	4	24	32	45	76	1600

Note: Individually packed with 2 screws.

② ELEKTRO CS IN-LINE BACK FOOT

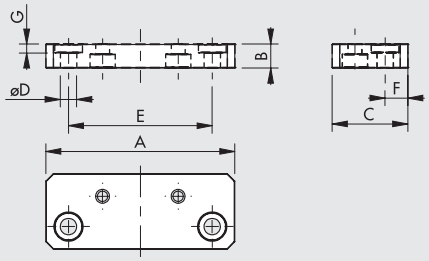

ALUMINIUM

Code	Ø	A	B	C	D	E	F	G	Weight [g]	Fmax [N]
0950327110	32	75	9.5	30	6.5	57	9	3.5	60	1600

Note: Individually packed with 2 screws.
N.B.: Use in the In-Line version only.

③ ELEKTRO CS V-LOCK FITTING

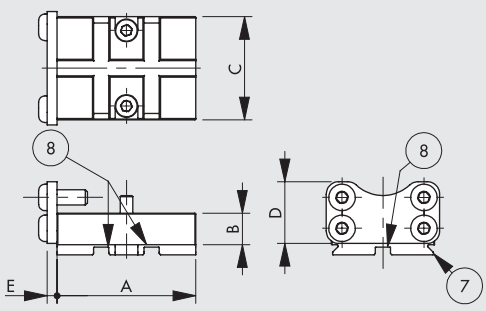

ALUMINIUM

Code	Ø	A	B	C	D	E	Weight [g]
0950327112K	32	55	13	41	25	4	150

Note: Individually packed with 6 screws.

⑦ Dovetail for "V-Lock" fixing. For standard dimensions, see **chapter V-Lock adaptors**.
⑧ Slot for "V-Lock" precision key

④ FEMALE HINGE - MODEL B

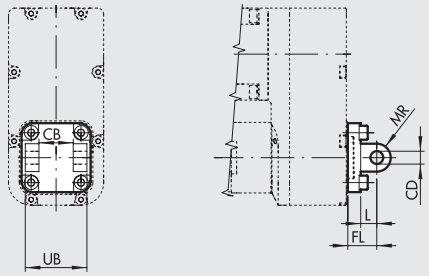

ALUMINIUM

Code	Ø	UB	CB H14	FL	CD H9	MR	L	Weight [g]	Fmax [N]
W0950322003	32	45	26	22	10	10	12	116	800

STEEL

Code	Ø	UB	CB H14	FL	CD H9	MR	L	Weight [g]	Fmax [N]
W095E322003	32	45	26	22	10	10	13	348	1600

Note: Supplied with 4 screws, 4 washers, 2 snap rings and 1 pin.
N.B.: Mounting requires 4 M6x16 UNI 5931screws.

⑤ MALE HINGE - MODEL BA

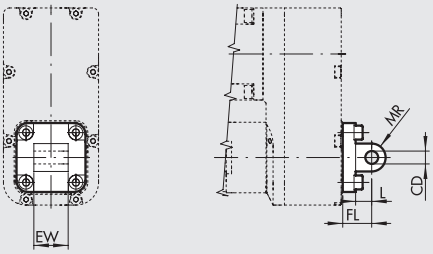

ALUMINIUM

Code	Ø	EW	FL	MR	CD H9	L	Weight [g]	Fmax [N]
W0950322004	32	26	22	10	10	13	94	800

STEEL

Code	Ø	EW	FL	MR	CD H9	L	Weight [g]	Fmax [N]
W095E322004	32	26	22	10	10	13	282	1600

Note: Supplied with 4 screws.
N.B.: Mounting requires 4 M6x14 UNI 5931screws.

⑥ ARTICULATED MALE HINGE - MODEL BAS

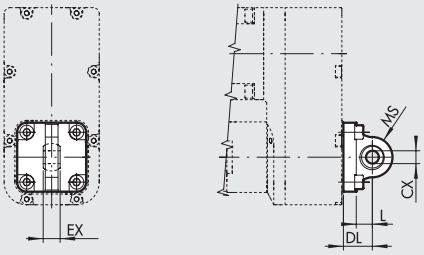

ALUMINIUM

Code	Ø	DL	MS	L	CX H9	EX	Weight [g]	Fmax [N]
W0950322006	32	22	16	12	10	14	106	800

STEEL

Code	Ø	DL	MS	L	CX H9	EX	Weight [g]	Fmax [N]
W095E322006	32	22	15	14	10	14	318	1600

Note: Supplied with 4 screws, 4 washers.
N.B.: Mounting requires 4 M6x16 UNI 5931screws.

⑦ CETOP HINGE FOR MODEL B - MODEL GL

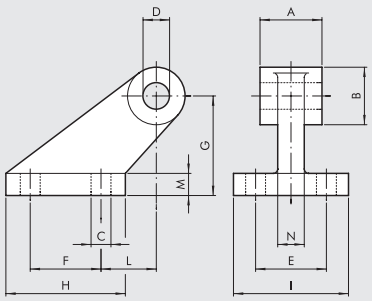

ALUMINIUM

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]	Fmax [N]
W0950322008	32	26	19	7	10	25	20	32	37	41	18	8	10	96	800

Note: Supplied with 4 screws, 4 washers.

⑧ COUNTER-HINGE FOR MODEL B - MODEL GS

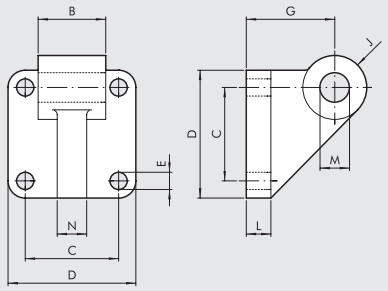

ALUMINIUM

Code	Ø	B	C	D	E	G	J	L	M	N	Weight [g]	Fmax [N]
W0950322108	**32**	26	32.5	45	7	32	11	10	10	10	106	800

Note: Supplied with 4 screws, 4 washers.

⑨ ISO 15552 COUNTER-HINGE FOR MODEL B - MODEL AB7



ALUMINIUM

Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]	Fmax [N]
W0950322017	**32**	26	20	6.6	10	38	18	32	31	51	3	8	10	21	3	60	800

STEEL

Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]	Fmax [N]
W095E322017	**32**	26	20	6.6	10	38	18	32	31	51	3	8	10	20	5	180	1600

GREASE



Code	Description	Weight [g]
9910514	Grease pipe ULTRAPLEX FG1 NSF CAT H1	400

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



For codes and technical data, see **chapter A6**.

DRIVES

For motor-drive couplings see table on page **A5**.178

SPARE PARTS

ELECTRIC MOTORS

For motor-drive couplings see table on page **A5**.178

ELECTRIC CYLINDER
SERIES ELEKTRO MULTIFIX

The cylinder in the Elektro Multifix series is an electric actuator with a guided piston rod supported by two columns sliding along bushings mounted in the main extruded and anodized aluminum body. As a result, the piston rod can withstand heavy side loads. You can choose either sintered bronze bushings with grinded, chrome-plated carbon steel rods or ball recirculating bearings with hardened, chrome-plated and grinded steel piston rods.
The axial movement of the piston rod is achieved by connecting it to a ball screw nut, which is in turn moved by a hardened steel screw, which is controlled by an electric motor.
A magnet integral with the piston rod is provided to send an end-of-stroke signal and 2 longitudinal slots are provided on the body to house Square-type sensors.
A special hole, normally closed with a tight stopper, is provided on the cylinder body to facilitate the re-greasing of the screw and the screw nut.
The electric motor can be connected in line with the cylinder or by means of a gear system; in the latter case you can choose among three different configurations.
The motor can be selected from among a wide optimized range, including either STEPPING or BRUSHLESS motors.
The most suitable motor drives are also provided.
When using motors other than the ones in our catalogue, we can provide special flange and joints on request.

in-line version

geared version

TECHNICAL DATA			Ø 25
Temperature range	WITH MOTOR	°C	See single motor data sheet
	ONLY MECHANICS	°C	from -10 to +50
Electrical protection rating with	STEPPING motors		IP55 or IP65 (see key to codes on page **A5**.191)
	BRUSHLESS motors		IP65 (see key to codes on page **A5**.191)
Positioning repeatability		mm	±0.02 with ball screw
Positioning accuracy		mm	±0.2 * with ball screw
Versions			Ball screw; In line or geared motor
			With bronze bushings, with ball recirculating bearings
Uncontrolled impact at the end of stroke			NOT ALLOWED
Sensor magnet			YES
Work position			Any

* Indicative average data that gets influenced by various factors such as the stroke, the type of motor, the cylinder version, etc ...

MECHANICAL FEATURES		Ø 25 Ball screw	
Screw pitch (p)	mm	4	10
Screw diameter	mm	12	12
Static axial load (F_o)*	N	2500	
Dynamic axial load (F)	N	2700	
		Calculate mean axial load and the calculate life (see graphs on page **A5**.185)	
Maximum number of revs	1/min	3000	
Maximum speed (V_{max})	mm/s	200	500
"K" ratio of motor revs and piston rod speed	n/V	15	6

Example: V = 100 mm/s; pitch = 10 → K = 6 n = V x K = 100 x 6 = 600 rpm

* **N.B.:** Static loads bearable without damage. Payloads are shown in the diagrams on page **A5**.185 onwards.

WEIGHTS [kg] - STROKES

IN-LINE VERSION

Bore	Screw pitch [mm]	Motor type	Strokes [mm] 50		75		100		125		150		200		250		300	
			Mass M tot	Mx	M tot	Mx	M tot	Mx	M tot	Mx	M tot	Mx	M tot	Mx	M tot	Mx	M tot	Mx
25	4	STEPPING	2.60	0.81	2.89	0.89	3.21	1.00	3.53	1.11	3.85	1.22	4.48	1.44	5.16	1.70	5.80	1.93
		BRUSHLESS	2.57	0.81	2.86	0.89	3.18	1.00	3.50	1.11	3.82	1.22	4.45	1.44	5.13	1.70	5.77	1.93
	10	STEPPING	2.60	0.81	2.89	1.00	3.21	1.11	3.53	1.22	3.85	1.44	4.48	1.70	5.16	1.70	5.80	1.93
		BRUSHLESS	2.57	0.81	2.86	1.00	3.18	1.11	3.50	1.22	3.82	1.44	4.45	1.70	5.13	1.70	5.77	1.93

GEARED VERSION

Bore	Screw pitch [mm]	Motor type	Strokes [mm] 50		75		100		125		150		200		250		300	
			Mass M tot	Mx	M tot	Mx	M tot	Mx	M tot	Mx	M tot	Mx	M tot	Mx	M tot	Mx	M tot	Mx
25	4	STEPPING	3.04	0.81	3.33	0.89	3.65	1.00	3.97	1.11	4.29	1.22	4.92	1.44	5.60	1.70	6.24	1.93
		BRUSHLESS	3.07	0.81	3.36	0.89	3.68	1.00	4.00	1.11	4.32	1.22	4.95	1.44	5.63	1.70	6.27	1.93
	10	STEPPING	3.04	0.81	3.33	1.00	3.65	1.11	3.97	1.22	4.29	1.44	4.92	1.70	5.60	1.70	6.24	1.93
		BRUSHLESS	3.07	0.81	3.36	1.00	3.68	1.11	4.00	1.22	4.32	1.44	4.95	1.70	5.63	1.70	6.27	1.93

M tot = Total mass **Mx** = Moving mass

N.B.: You get the total weight of a complete cylinder by adding: the weight of the cylinder for the chosen stroke (M tot) + weight of the motor.

MASS MOMENTS OF INERTIA

Screw pitch [mm]	Transmission ratio (τ)	Moment of inertia		Strokes [mm] 50	75	100	125	150	200	250	300
4	1:1	J1	kgmm²	1.594	1.884	2.174	2.464	2.754	3.334	3.914	4.494
		J2 each kg of load	kgmm²/kg	0.4053							
		J3 in-line transmission	kgmm²	12.21							
		J3 geared transmission	kgmm²	14.03							
10	1:1	J1	kgmm²	1.837	2.174	2.511	2.848	3.185	3.522	3.859	4.196
		J2 each kg of load	kgmm²/kg	2.5330							
		J3 in-line transmission	kgmm²	12.21							
		J3 geared transmission	kgmm²	14.03							

The total mass moment of inertia (Jtot) reduced for the motor is: $Jtot = \{J1 + J2 \cdot (Load\ [kg] + Mx\ [kg])\} \cdot \tau^2 + J3$
Mx is defined in the weights - strokes table.

CALCULATION OF MEAN AXIAL LOAD F_m AND VERIFICATION

Peak axial load in a work cycle must not exceed the static axial load F_o.
The peak value is usually achieved during upward acceleration in vertical installation. Exceeding this value leads to greater wear and hence shorter life of the screw.

Mean axial load F_m

$$F_m = \sqrt[3]{\sum F_x^3 \times \frac{V_x}{V_m} \times \frac{q}{100}} =$$

$$F_m = \sqrt[3]{F_{x1}^3 \times \frac{V_{X1}}{V_m} \times \frac{q_1}{100} + F_{x2}^3 \times \frac{V_{X2}}{V_m} + \frac{q_2}{100} + F_{x3}^3 \times \frac{V_{X3}}{V_m} \times \frac{q_3}{100} + \ldots}$$

F_x = Axial load at stage x
F_m = Mean axial load during extension
F_o = Static axial load
q = Time segment
V_x = Speed in the phase x
V_m = Average speed

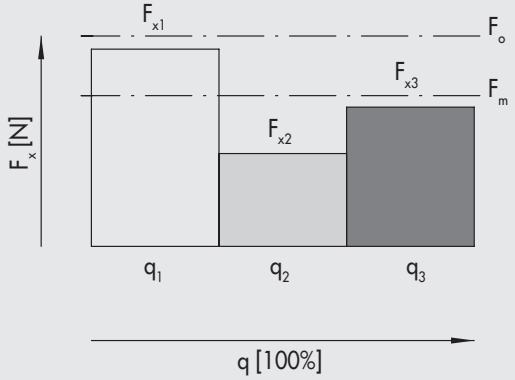

The mean axial load must not exceed the dynamic axial load: $F_m \leq F$
The graphs on page **A5**.185, show screw life as a function of F_m

COMPONENTS

IN-LINE VERSION

With bronze bushings

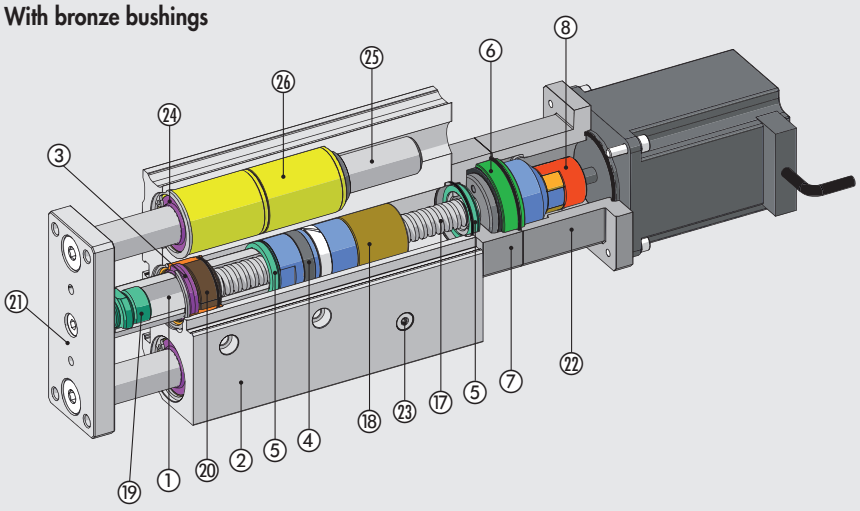

With ball recirculating bearings

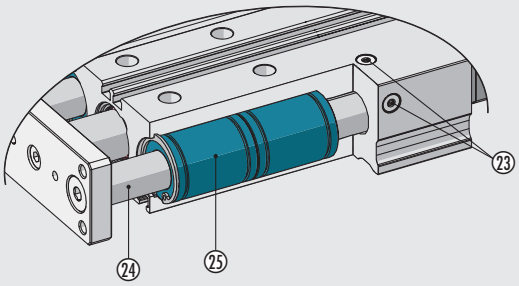

GEARED VERSION

With bronze bushings

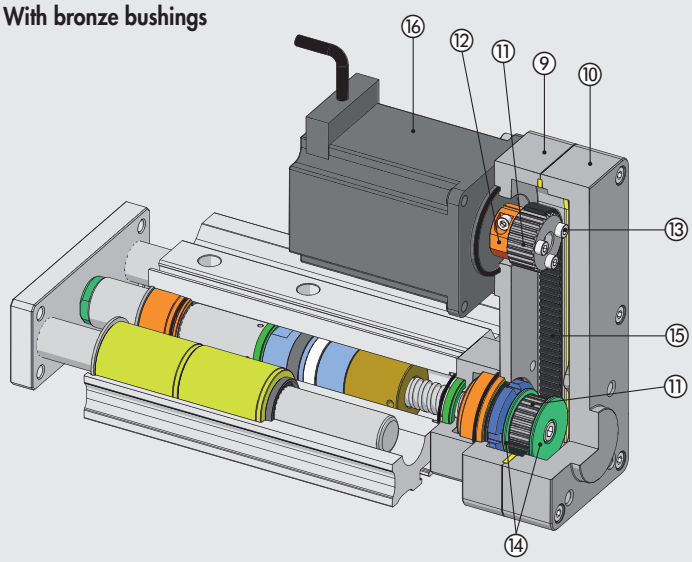

① PISTON ROD: chromed steel
② BODY: aluminium alloy with wear-resistant coating
③ WIPER RING: polyurethane
④ MAGNET: plastoferrite
⑤ BUFFER: polyurethane
⑥ BEARING: two ball rings
⑦ ADAPTOR PLATE: anodized aluminium
⑧ ELASTIC COUPLING: aluminium / polyurethane
⑨ TRANSMISSION PLATE: anodized aluminium
⑩ COVER: anodized aluminium
⑪ COG PULLEY: anodized aluminium
⑫ ELASTIC COLLAR: anodized aluminium
⑬ ELASTIC COLLAR-LOCKING SCREWS: zinc-plated steel
⑭ BELT FLANGES: anodized aluminium
⑮ TOOTHED BELT: polyurethane with steel cables
⑯ MOTOR
⑰ SCREW: hardened and rolled steel
⑱ RECIRCULATING BALL NUT: steel
⑲ NIPPLE: stainless steel
⑳ CENTRING COLLAR: anodized aluminium
㉑ FLANGE: anodized aluminium
㉒ MOTOR BEARING: anodized aluminium
㉓ PLUG: for screw greasing

Version with bronze bushings:
㉔ WIPER RING: NBR
㉕ GUIDE ROD: grinded chromed steel
㉖ SLIDE BUSHING: sintered bronze

Version with ball recirculating bearings:
㉕ GUIDE ROD: tempered and chromed chrome steel
㉖ BALL RECIRCULATING BEARING

MAXIMUM SIDE LOAD

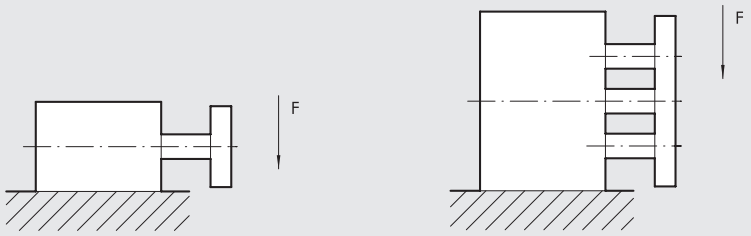

Ø	Guide unit	Strokes [mm]							
[mm]		50	75	100	125	150	200	250	300
25	Bushes	70	65	55	50	45	35	25	18
	Balls	55	62	52	45	42	30	23	15

Centre of gravity distance from the front plane = 50 mm

N.B.: Forces are expressed in N

MAXIMUM TORQUE ON PLATE



Ø	Guide unit	Strokes [mm]							
[mm]		50	75	100	125	150	200	250	300
25	Bushes	2.65	2.33	2.08	1.88	1.72	1.46	1.28	1.12
	Balls	2.03	2.11	1.83	1.63	1.45	1.19	1.01	0.88

N.B.: Forces are expressed in Nm

TORSIONAL BACKLASH

Torsional backlash β with piston rods retracted and without applied loads.

	Ø [mm]
Torsional backlash β [°]	**25**
With bronze bushings	±0.06
With ball recirculating bearings	±0.04



LIFE CHARACTERISTICS AS A FUNCTION OF THE MEAN AXIAL LOAD, VERSION WITH BALL SCREW

Life characteristics can vary considerably from those indicated in the graphs due to different operating conditions (radial loads, temperature, lubrication status, etc.).

Mean axial load [N]

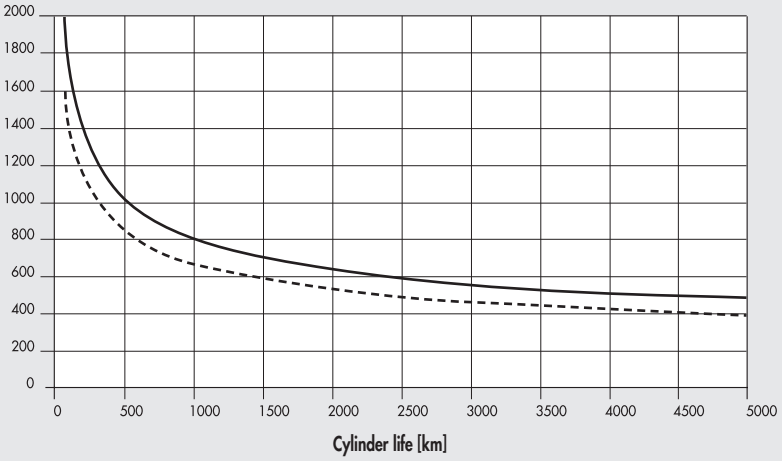

AXIAL LOAD CURVES AS A FUNCTION OF SPEED (CYLINDER COMPLETE WITH MOTOR AND DRIVE)

N.B.: The obtainable load values already take the efficiency of the system into account. For STEPPING motors, with the motor off, the drive current is automatically reduced by 50% to prevent overheating. Consequently, available axial load with the motor stopped is also reduced by 50%.

Ø 25 with pitch 4 ball screw, STEPPING motor, STEPPING motors with encoder, STEPPING motors with encoder + brake

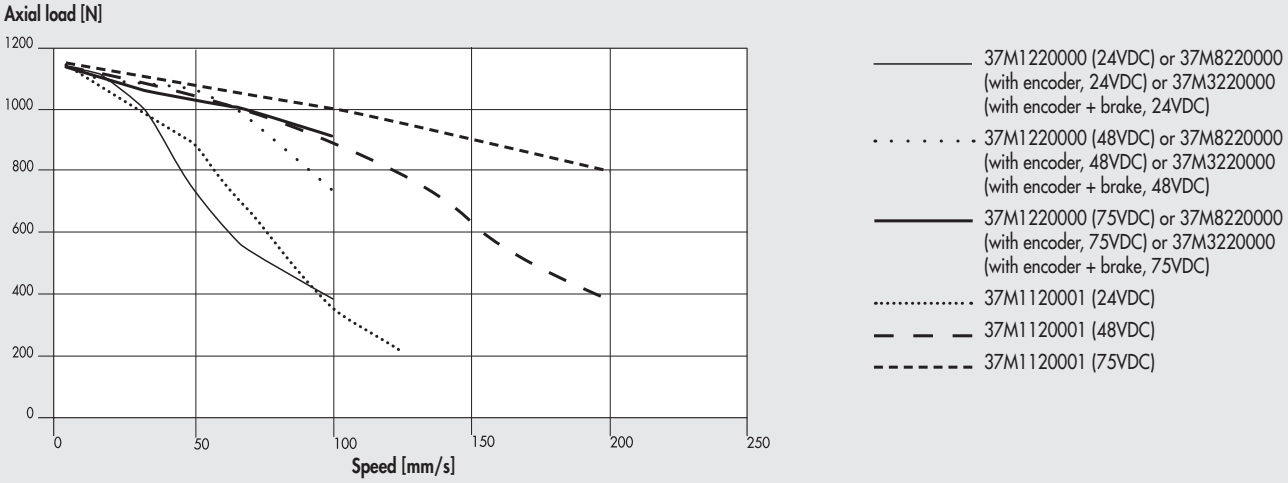

Ø 25 with pitch 10 ball screw, STEPPING motor, STEPPING motors with encoder, STEPPING motors with encoder + brake

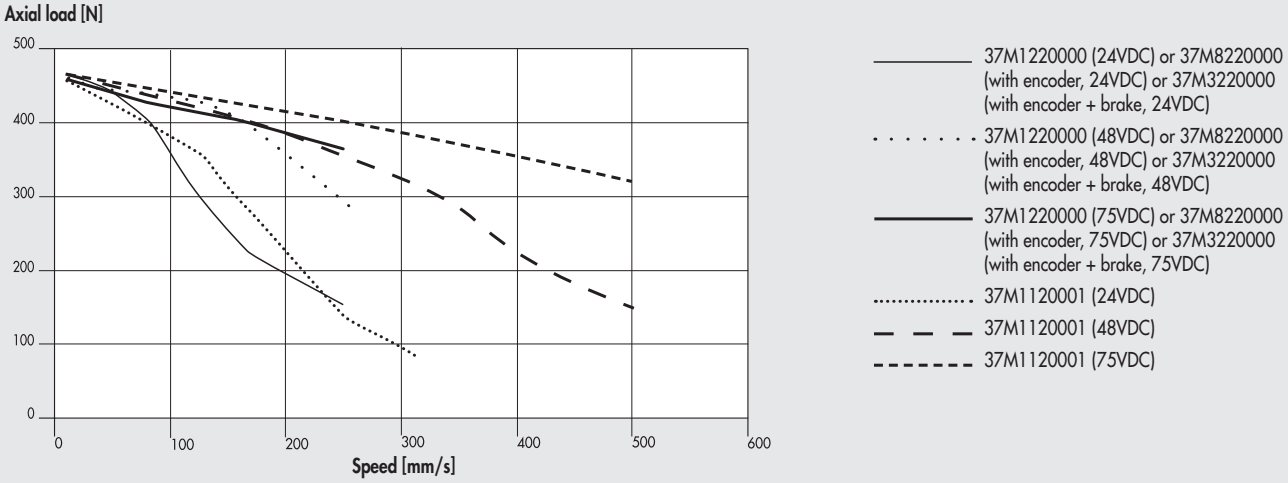

Ø 25 with pitch 4 ball screw, BRUSHLESS motor and BRUSHLESS motor with brake

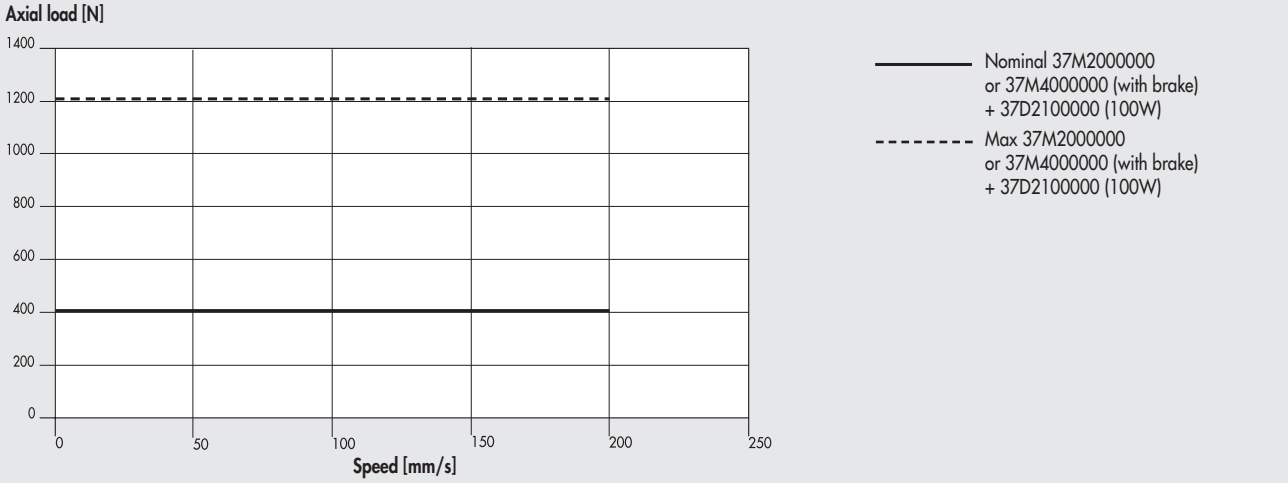

Ø 25 with pitch 10 ball screw, BRUSHLESS motor and BRUSHLESS motor with brake

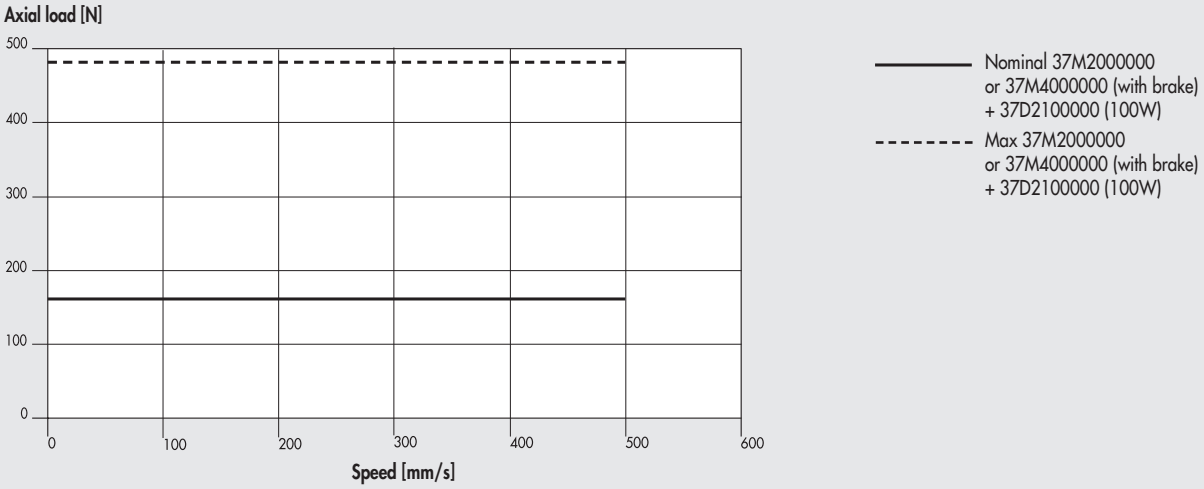

NOTES

LUBRICATION DIAGRAMS

Our electric rod cylinders are pre-greased with permanent grease. It is, however, possible to maintain them by re-lubricating, but before this operation we recommend periodic maintenance, at least once a year, which includes checks of: functionality, noise, wears and plays, if possible motor absorption (to be compared with the previous ones), and only after adding, in case, grease according to the instructions in the manual: a continuous addition of grease, since it is not disposable, could be worse. The quantities in the manual are valid for strokes up to approximately 500 mm. Between 500 mm and 1000 mm double the quantity. Between 1000 mm and 1500 mm triple the quantity.

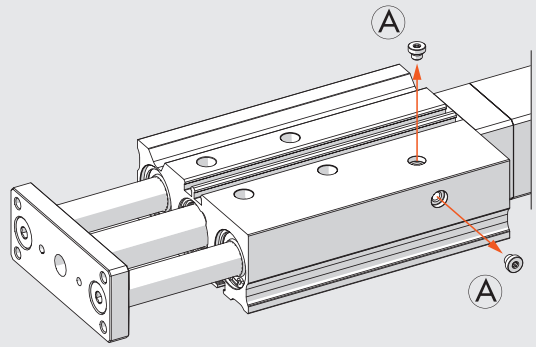

Two special lubrication areas are provided on the cylinder body.
Only use grease for re-greasing RHEOLUBE 363 AX1 (code 9910506), according to the quantities indicated in the table.

Follow the steps below:

- retract the piston rod towards the motor adapter plate, as far as it will go;
- move the piston rod at low speed and/or controlled torque forwards by a value corresponding to the cylinder total stroke;
- remove one of the 2 A7 Ⓐ plugs;
- use a grease gun to pump grease into the grease nipple;
- make the cylinder complete 4 strokes (at the end of which the piston rod will be back in its initial position);
- repeat the latter two steps;
- refit the A7 Ⓐ plug.

		Screw	
Screw pitch (p)	mm	4	10
Relube grease quantity	g	0.3	0.5
	cc	0.26	0.42

MOTOR POSITIONING

IN-LINE



ABOVE GEARED



LEFT GEARED



RIGHT GEARED



METAL WORK PNEUMATIC

DIMENSIONS CYLINDER IN-LINE

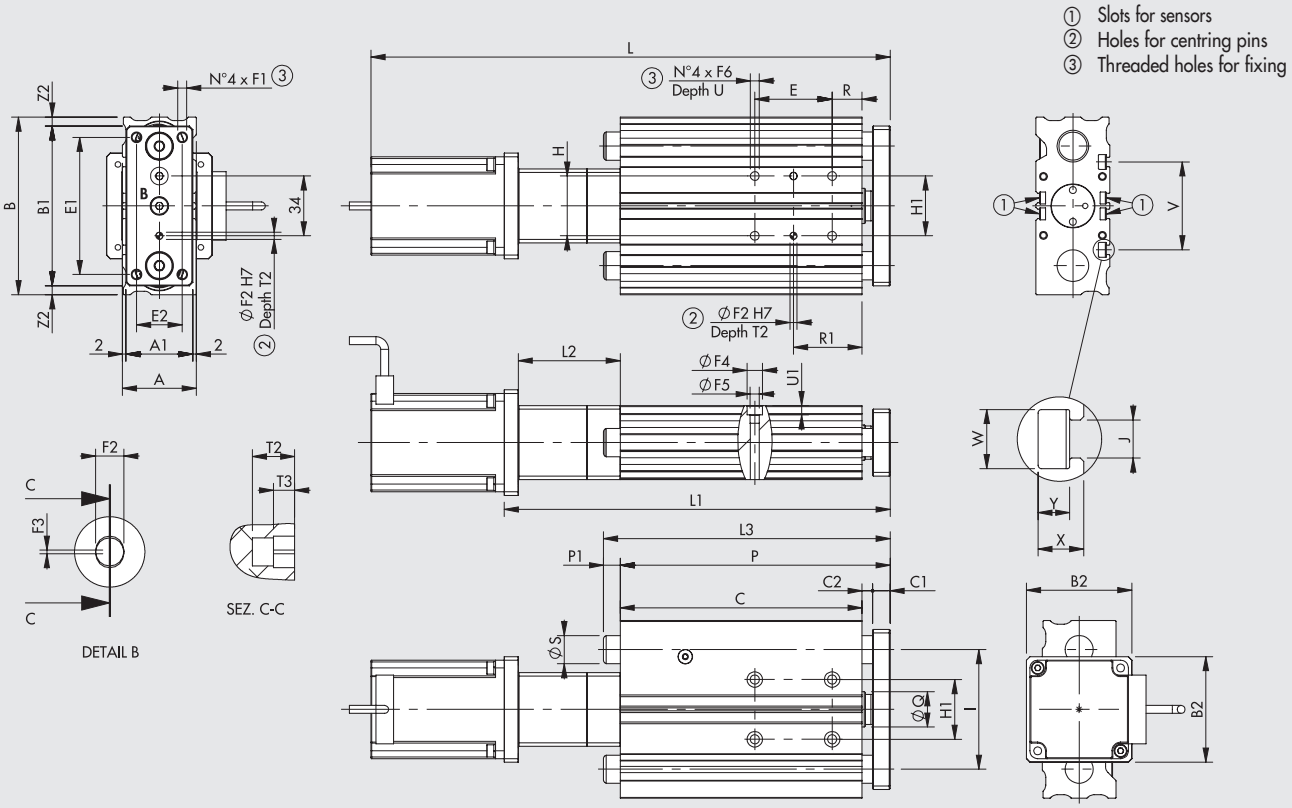

Ø	A	A1	B	B1	C1	C2	E1	E2	F1	F2	F3	F4	F5	F6	H±0.025	H1	I	J	Q	R	S	T2	T3	U	U1	V	W	X	Y	Z1	Z2
25	42	38	101	91	10	6	78	26	M6	4	0.5	8.8	5.2	M6	34	34	68	5.4	12	17	16	6	3	12	5.2	50	8.4	7	4.5	2	5

STROKE	Ø 25					
	C	E	L3	P	P1	R1
50	137.5	44	163	153.5	9.5	39
75	162.5	120	179	179	0	77
100	187.5	120	204	204	0	77
125	212.5	120	229	229	0	77
150	237.5	120	254	254	0	77
200	287.5	200	304	304	0	117
250	337.5	200	368	353.5	14.5	117
300	387.5	300	418	403.5	14.5	167

DRIVES

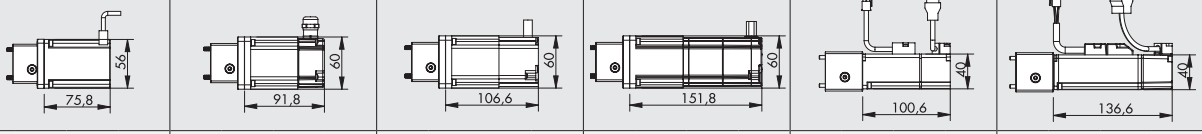

STROKE		1121 STEPPING MOTOR code 37M1120001				1220 STEPPING MOTOR code 37M1220000				8220 STEPPING MOTOR + ENCODER code 37M8220000				3220 STEPPING MOTOR + ENCODER + BRAKE code 37M3220000				2000 BRUSHLESS MOTOR code 37M2000000				4000 BRUSHLESS MOTOR + BRAKE code 37M4000000			
		L	L1	L2	B2	L	L1	L2	B2	L	L1	L2	B2	L	L1	L2	B2	L	L1	L2	B2	L	L1	L2	B2
	50	296	220	66	60	312	220	66	60	327	220	66	60	372	220	66	60	325	225	71	42	362	225	71	42
	75	321	245	66	60	337	245	66	60	352	245	66	60	397	245	66	60	350	250	71	42	387	250	71	42
	100	346	270	66	60	362	270	66	60	377	270	66	60	422	270	66	60	375	275	71	42	412	275	71	42
	125	371	295	66	60	387	295	66	60	402	295	66	60	447	295	66	60	400	300	71	42	437	300	71	42
	150	396	320	66	60	412	320	66	60	427	320	66	60	472	320	66	60	425	325	71	42	462	325	71	42
	200	446	370	66	60	462	370	66	60	477	370	66	60	522	370	66	60	475	375	71	42	512	375	71	42
	250	496	420	66	60	512	420	66	60	527	420	66	60	572	420	66	60	525	425	71	42	562	425	71	42
	300	546	470	66	60	562	470	66	60	577	470	66	60	622	470	66	60	575	475	71	42	612	475	71	42

DIMENSIONS CYLINDER GEARED

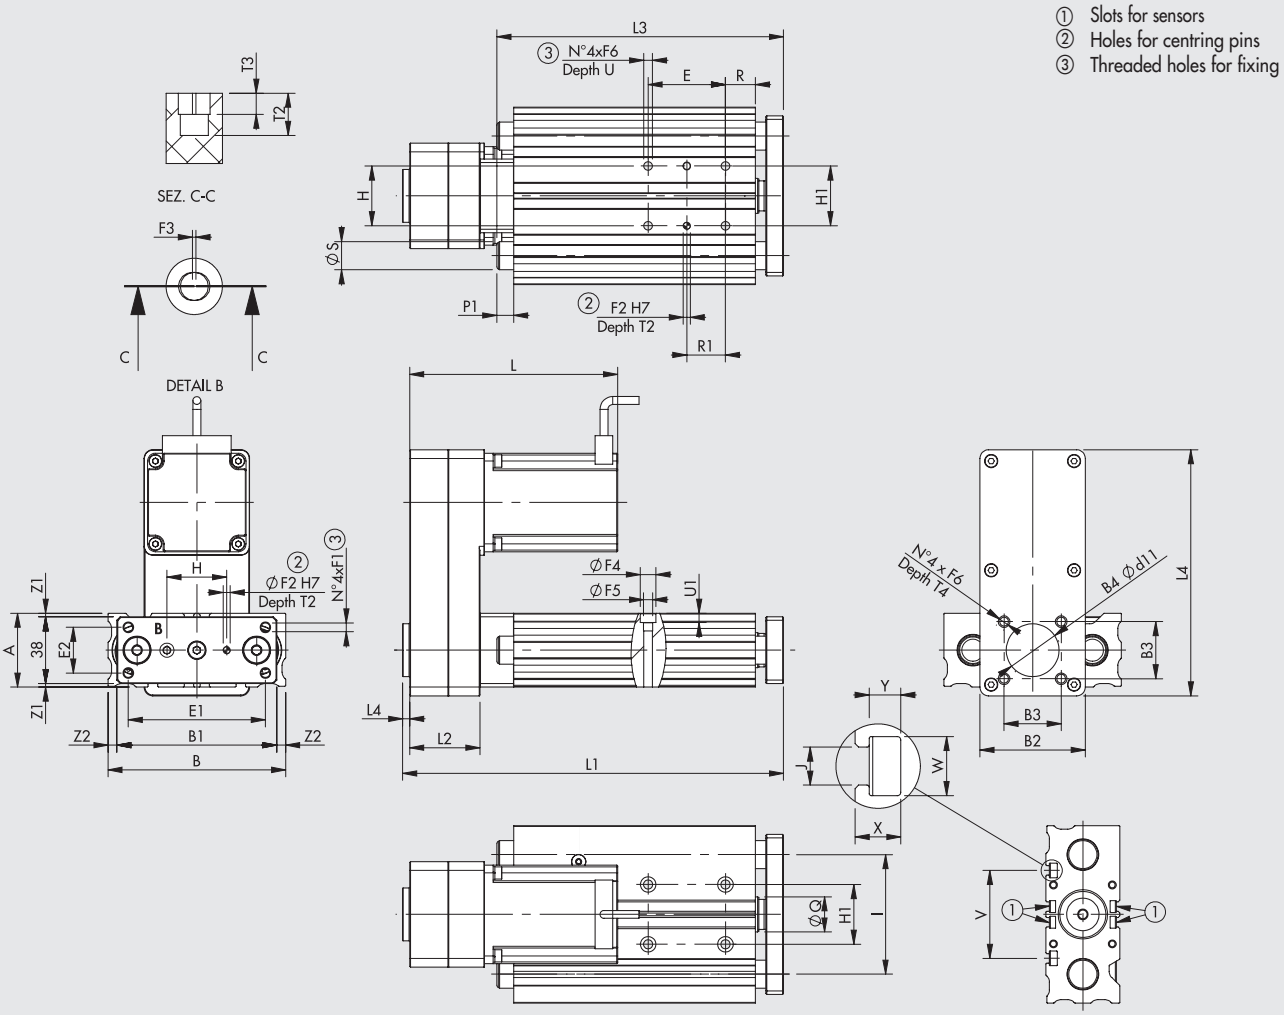

Ø	A	A1	B	B1	B2	B3	B4	C1	C2	E1	E2	F1	F2	F3	F4	F5	F6	H±0.025	H1	I	L2	L4	J	Q	R	S	T2	T3	T4	U	U1	V	W	X	Y	Z1	Z2
25	42	38	101	91	60	32.5	30	10	6	78	26	M6	4	0.5	8.8	5.2	M6	34	34	68	40	4	5.4	12	17	16	6	3	10	12	5.2	50	8.4	7	4.5	2	5

STROKE	C	E	L1	Ø 25 L3	P	P1	R1
50	137.5	44	216.5	163	153.5	9.5	39
75	162.5	120	241.5	179	179	0	77
100	187.5	120	266.5	204	204	0	77
125	212.5	120	291.5	229	229	0	77
150	237.5	120	316.5	254	254	0	77
200	287.5	200	366.5	304	304	0	117
250	337.5	200	416.5	368	353.5	14.5	117
300	387.5	300	466.5	418	403.5	14.5	167

DRIVES

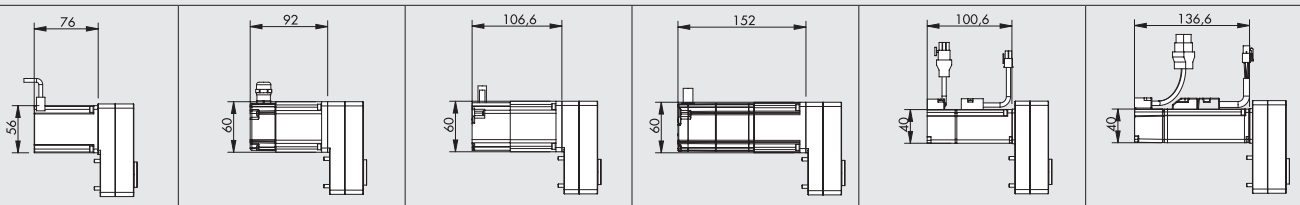

1121	1220	8220	3220	2000	4000
STEPPING MOTOR code 37M1120001	STEPPING MOTOR code 37M1220000	STEPPING MOTOR + ENCODER code 37M8220000	STEPPING MOTOR + ENCODER + BRAKE code 37M3220000	BRUSHLESS MOTOR code 37M2000000	BRUSHLESS MOTOR + BRAKE code 37M4000000
L	L	L	L	L	L
116	132	146.5	192	140.5	176.5

MOTOR-DRIVE COUPLINGS

MOTOR CODES			DRIVES CODES		
		Metal Work	37D1332000 *	37D1442000	37D1552000
		Manufacturer	RTA NDC 96	RTA PLUS A4	RTA PLUS B7
Metal Work	Manufacturer		(6A 24-75VDC)	(6A 24-75VDC)	(10A 28-62VAC) ●
STEPPING MOTORS					
37M1120001	SANYO DENKI 103-H7126-6640 (5.6A 75V max)		√	-	√ ■
37M1220000	B&R 80MPF3.250S000-01 + kit IP65 (5A 80V max)		√ ◆	√ ■	√ ■
STEPPING MOTORS + ENCODER					
37M8220000	B&R 80MPF3.500S114-01 (5A 80V max)		√ ◆	√ ■	√ ■
STEPPING MOTORS WITH BRAKE + ENCODER					
37M3220000	B&R 80MPF3.500D114-01 (5A 80V max)		√ ◆	√ ■	√ ■

* In all applications requiring motor powered up to 6A / 55VDC, the programmable drive **e**.drive, code 37D1332002, can be used.
● **Important!** AC drive to continuous voltage VDC = VAC · √2 ◆ **Important!** Limit currenti ■ **Important!** Limit current and voltage

MOTOR CODES			DRIVES CODES
		Metal Work	37D2100000
		Manufacturer	DELTA ASD-A2-0121-M
Metal Work	Manufacturer		(100W)
BRUSHLESS MOTORS			
37M2000000	DELTA ECMA-C20401RS (100W)		√
BRUSHLESS MOTORS WITH BRAKE			
37M4000000	DELTA ECMA-C20401SS (100W)		√

KEY TO CODES

									DRIVE			
CYL	37 TYPE	8 FAMILY	0	A GUIDING TYPE	25 SIZE	0050 STROKE	1 SCREW	2 VERSION	1 MOTOR	1 FLANGE	2 TORQUE	1
	37 Electric actuators	**8** Electric cylinder Multifix	**0** STD	**A** With bronze bearings **B** With ball recirculating bearings	**25** Ø25	0050 0075 0100 0125 0150 0200 0250 0300	**1** Pitch 4 ball screw **4** Pitch 10 ball screw	**IN-LINE** ● **2** IP55/IP65 **GEARED** ● **6** Right IP55/IP65 ● **9** Left IP55/IP65 ● **N** Above IP55/IP65	**1** STEPPING **2** BRUSHLESS **3** STEPPING with BRAKE + encoder **4** BRUSHLESS with BRAKE **8** STEPPING + encoder	**0** 40x40 **1** NEMA 23 **2** 60x60	**0** 0-0.79 Nm **2** 1.2-2.19 Nm	**0** Base **1** Greater rpm

● IP65 version available for all drives, except for motor code 37M1120001, which is IP55 protected.

POSSIBLE ORDERING CODES

Ø 25

	Drive	Version	Screw pitch
3780A25_ _ _ _	1	2	1121
3780B25_ _ _ _	4	6	1220
		9	8220
		N	3220
			2000
			4000

_ _ _ _ = enter the stroke in mm

NOTES

FIXING OPTIONS

Ⓐ Fixing with through screws
Ⓑ Fixing with threaded holes
Ⓒ Fixing with DIN 834 hexagonal nuts inserted into the T-slots

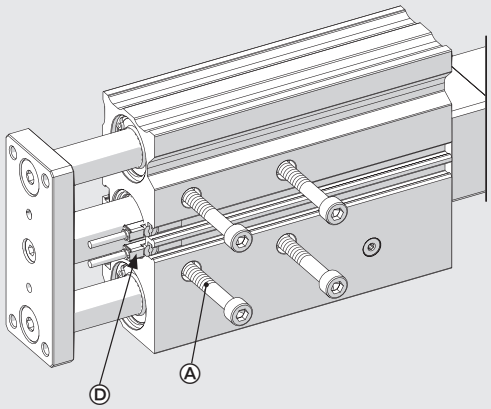

SENSOR FIXING

Ⓓ Two sensor slots on the upper side
Ⓔ Two sensor slots on the lower side

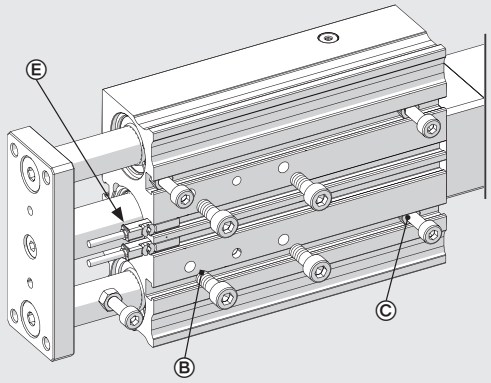



Ø	Hexanogal nut DIN 834 (UNI 5588)		
	D	m	S
25	M5	4	8

NOTES

ACCESSORIES

Note: Where specified, limit the maximum axial loads (Fmax) according to the electric cylinder.

IN-LINE VERSION

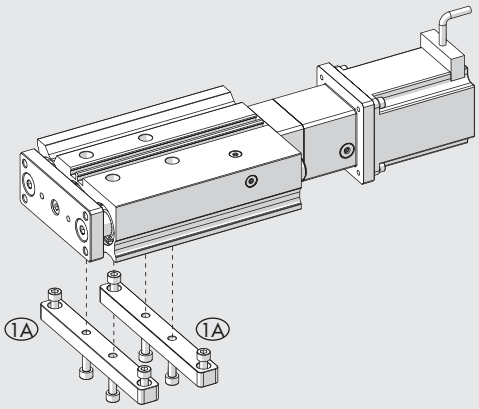

GEARED VERSION

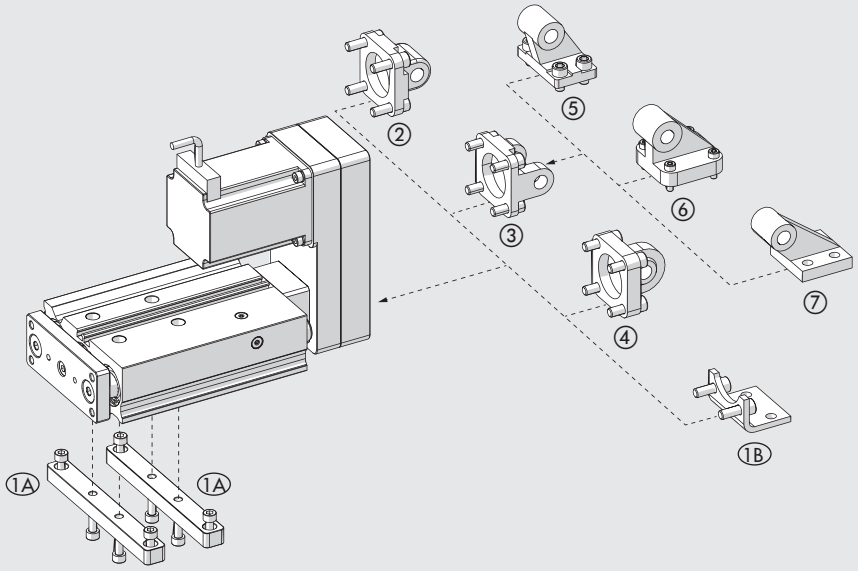

FOOTS

1A FRONT



ALUMINIUM

Code	Ø	AH	R	TR2	Weight [g]
095M25E042	25	32	17	115	70

Note: Individually packed with 4 screws.
N.B.: It is possible to use 1 or 2 depending on the application needs.

1B REAR

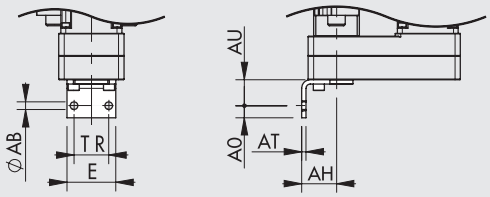

STEEL

Code	Ø	Ø AB	AH	AO	AT	AU	TR	E	Weight [g]	Fmax [N]
W0950322001	25	7	32	11	4	24	32	45	76	1600

Note: Individually packed with 2 screws.
N.B.: Mounting requires 2 M6x14 UNI 5931 screws.

② FEMALE HINGE - MODEL B

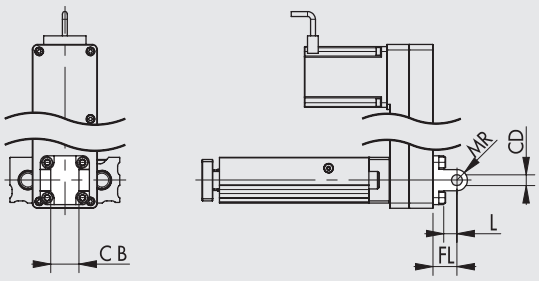

ALUMINIUM

Code	Ø	UB	CB H14	FL	CD H9	MR	L	Weight [g]	Fmax [N]
W0950322003	25	45	26	22	10	10	12	116	800

STEEL

Code	Ø	UB	CB H14	FL	CD H9	MR	L	Weight [g]	Fmax [N]
W095E322003	25	45	26	22	10	10	13	348	1600

Note: Supplied with 4 screws, 4 washers, 2 snap rings and 1 pin.
N.B.: Mounting requires 4 M6x16 UNI 5931 screws.

③ MALE HINGE - MODEL BA

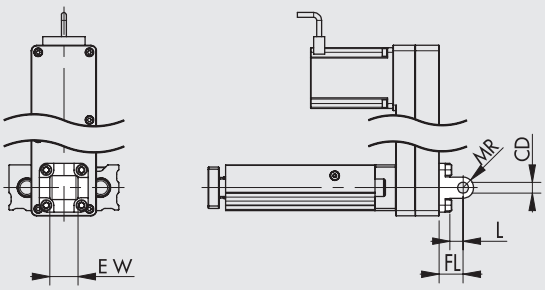

ALUMINIUM

Code	Ø	EW	FL	MR	CD H9	L	Weight [g]	Fmax [N]
W0950322004	25	26	22	10	10	13	94	800

STEEL

Code	Ø	EW	FL	MR	CD H9	L	Weight [g]	Fmax [N]
W095E322004	25	26	22	10	10	13	282	1600

Note: Supplied with 4 screws.
N.B.: Mounting requires 4 M6x14 UNI 5931 screws.

④ ARTICULATED MALE HINGE - MODEL BAS

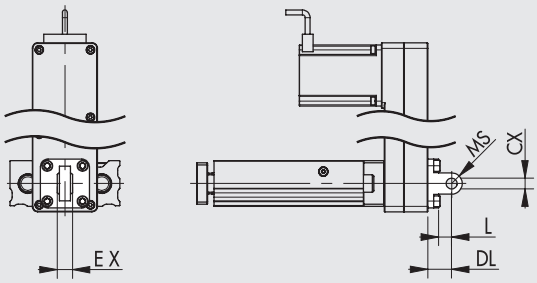

ALUMINIUM

Code	Ø	DL	MS	L	CX H9	EX	Weight [g]	Fmax [N]
W0950322006	25	22	16	12	10	14	106	800

STEEL

Code	Ø	DL	MS	L	CX H9	EX	Weight [g]	Fmax [N]
W095E322006	25	22	15	14	10	14	318	1600

Note: Supplied with 4 screws, 4 washers.
N.B.: Mounting requires 4 M6x16 UNI 5931 screws.

⑤ CETOP HINGE FOR MODEL B - MODEL GL

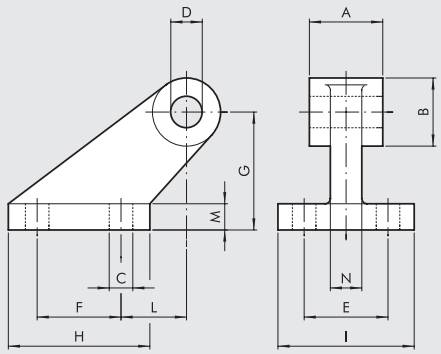

ALUMINIUM

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]	Fmax [N]
W0950322008	32	26	19	7	10	25	20	32	37	41	18	8	10	96	800

Note: Supplied with 4 screws, 4 washers.

⑥ COUNTER-HINGE FOR MODEL B - MODEL GS

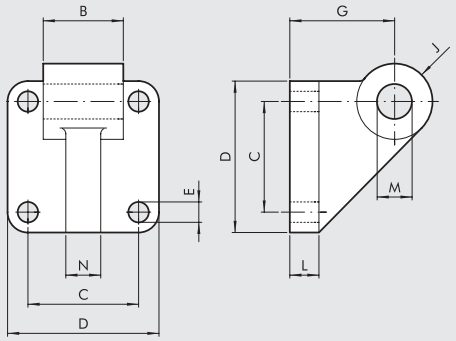

ALUMINIUM

Code	Ø	B	C	D	E	G	J	L	M	N	Weight [g]	Fmax [N]
W0950322108	32	26	32.5	45	7	32	11	10	10	10	106	800

Note: Supplied with 4 screws, 4 washers.

⑦ ISO 15552 COUNTER-HINGE FOR MODEL B - MODEL AB7

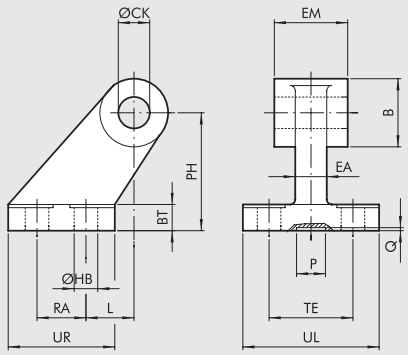

ALUMINIUM

Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]	Fmax [N]
W0950322017	32	26	20	6.6	10	38	18	32	31	51	3	8	10	21	3	60	800

STEEL

Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]	Fmax [N]
W095E322017	32	26	20	6.6	10	38	18	32	31	51	3	8	10	20	5	180	1600

GREASE



Code	Description	Weight [g]
9910506	Grease pipe RHEOLUBE 363 AX1	400

RETRACTABLE SENSOR

SENSOR, SQUARE TYPE
Latest generation, secure fixing



For codes and technical data, see **chapter A6**.

DRIVES

For motor-drive couplings see table on page **A5**.191

SPARE PARTS

ELECTRIC MOTORS

For motor-drive couplings see table on page **A5**.191

NOTES

ELECTRIC ROTARY ACTUATOR SERIES ELEKTRO RBA

Compact electric rotary actuator providing unlimited rotation angle in both directions.
Motor power is transmitted to the load by a toothed belt drive with a specific gear ratio, thereby ensuring high performance in reduced dimensions. The belt is maintained at the correct tension by an adjustable eccentric tensioner.
The driven pulley features a through-hole that allows pipes and cables to pass through to facilitate integration with other devices.
The actuator can be attached onto all the surfaces of the main body by threaded holes, thereby offering multiple installation options.
The rotary flange can be placed on the same side as the motor, either on the opposite side or on both sides, to meet any application requirement.
This actuator can be used either as a fixed rotary table or applied to a moving axis, like the VBK, thereby greatly increasing the range of applications. It is available in two sizes, RBA-1 and RBA-2, with or without motorization.
The standard drive of the RBA makes it possible to choose between a BRUSHLESS motor and a STEPPING motor with encoder.
Both versions are available with a holding brake.
In the case of the RBA-2 size, the BRUSHLESS motor is also available in version combined with a precision planetary gearbox.

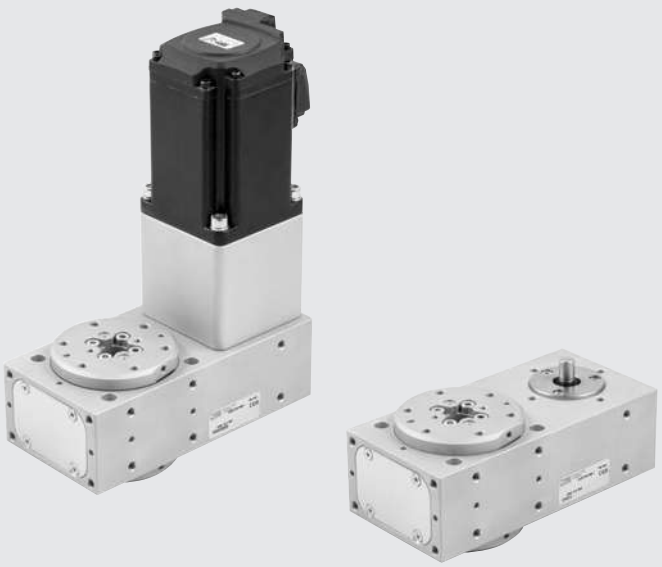

TECHNICAL DATA			RBA-1	RBA-2
Temperature range	WITH MOTOR	°C	see single motor data sheet	
	ONLY MECHANICS	°C	from -10 to +50	
Maximum duty cycle for motor	STEPPING		50%	
	BRUSHLESS		100%	
Rotation angle *		degrees	360°	
Positioning accuracy		degrees	± 0.30°	
Positioning repeatability with STEPPING motors		degrees	± 0.05°	
Positioning repeatability with BRUSHLESS motors		degrees	± 0.03°	
Uncontrolled impact			NOT ALLOWED	
Homing position sensor			Inductive sensors	
Work position			Any	
Degree of protection			IP 20 **	
Noise level		dBA	<66	
Approximate weight (without motor)		kg	1.2	2.9
Maximum size of the applicable motor flange		mm	60	86 (NEMA 34)

* No limits on the angle of rotation in both directions, even for multi-turn applications.
** On request, IP40 option can be created.

MECHANICAL FEATURES		RBA-1	RBA-2
Toothed belt pitch		3	5
Transmission ratio		1:4	1:3
Maximum input torque	Nm	1.5	5
Maximum input revs	rpm	1200	900
Maximum output torque (actual depending on rotational speed)	Nm	6	15
Maximum output revs	rpm	300	300
Moment of inertia of the actuator in the version with single rotary flange ***	$kgmm^2$	6.59	64.32
Moment of inertia of the actuator in the version with double rotary flange ***	$kgmm^2$	7.45	83.44

*** Seen from the drive shaft

METAL WORK PNEUMATIC

COMPONENTS

VERSION WITHOUT MOTOR

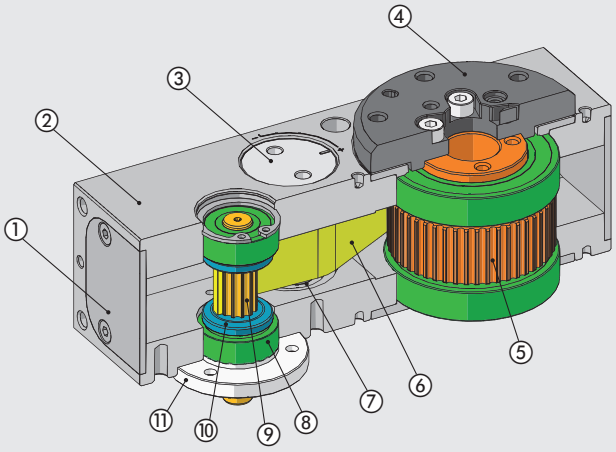

VERSION WITH MOTOR

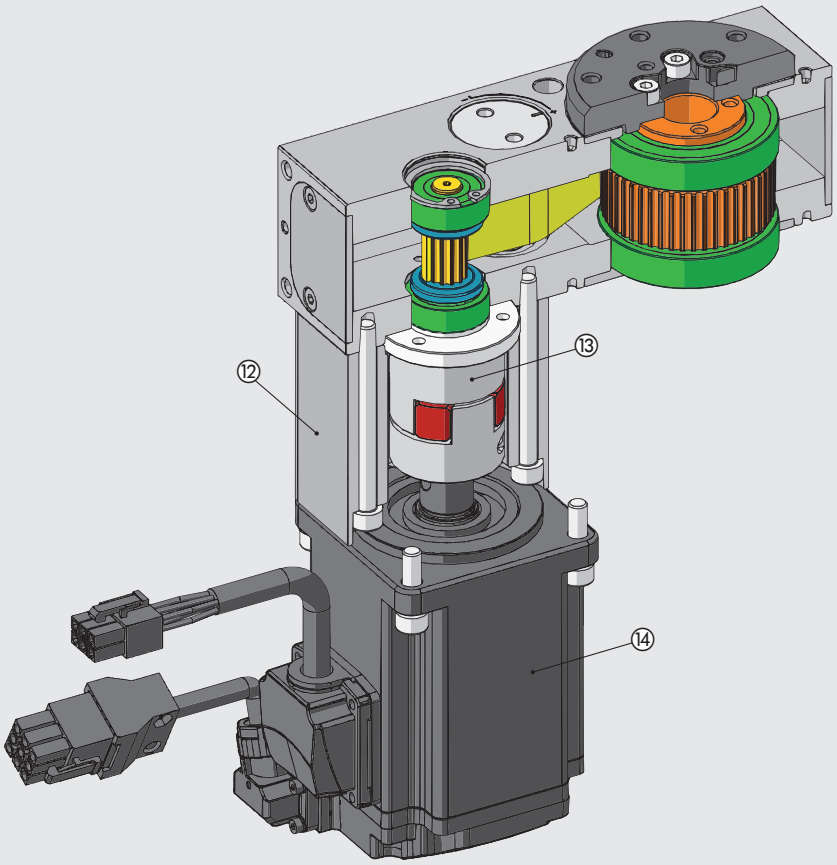

① COVER: anodized aluminium
② BODY: anodized aluminium
③ ECCENTRIC TENSIONER: stainless steel
④ ROTARY FLANGE: anodized aluminium
⑤ DRIVEN PULLEY: nickel-plated aluminium
⑥ TOOTHED BELT: elastomer with glass fibre strands
⑦ TENSIONING ROLLER: anodized aluminium
⑧ SEALED BALL BEARING
⑨ PIGNON: stainless steel
⑩ BELT RETAINING FLANGE: anodized aluminium
⑪ HOLDING BEARING FLANGE: stainless steel
⑫ MOTOR CONNECTION PLATE: anodized aluminium
⑬ ELASTIC COUPLING: aluminium / polyurethane
⑭ MOTOR

DIAGRAM OF FORCES AND MOMENTS

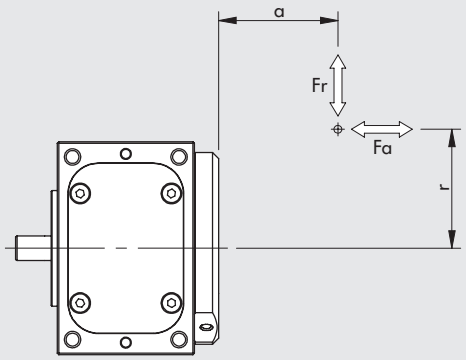

The following equations must be maintained when several forces act simultaneously on the actuator.

STATIC VERIFICATION

$$\frac{|Fr0|}{Fr0\ max} + \frac{|Fa0|}{Fa0\ max} \leq 1$$

DYNAMIC VERIFICATION

$$\frac{|Fr|}{Fr\ max} + \frac{|Fa|}{Fa\ max} \leq 1$$

The maximum force values can be obtained from the graphs shown below, as a function of the distance between the point of application and the rotary flange.

Static radial

Fr0 [N]

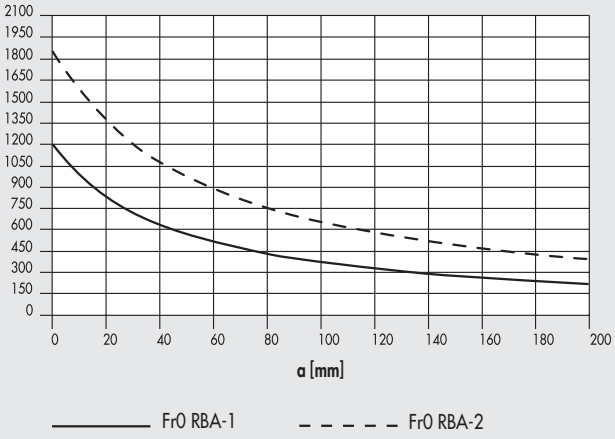

Dynamic radial

Fr [N]

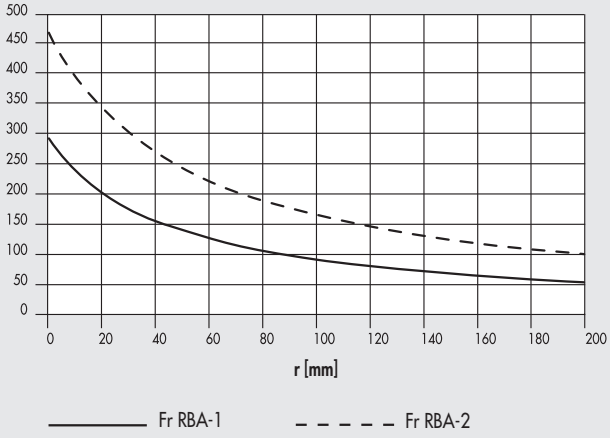

Static axial

Fa0 [N]

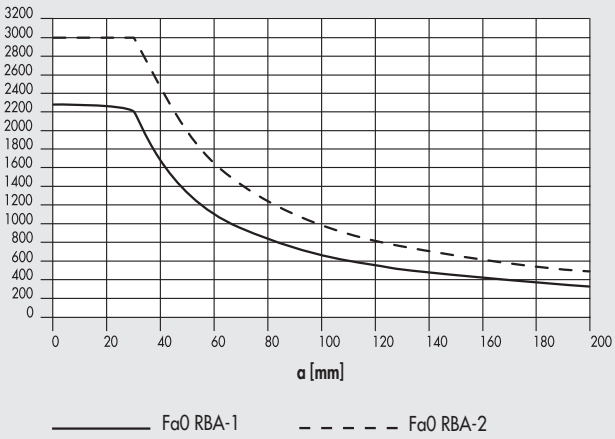

Dynamic axial

Fa [N]

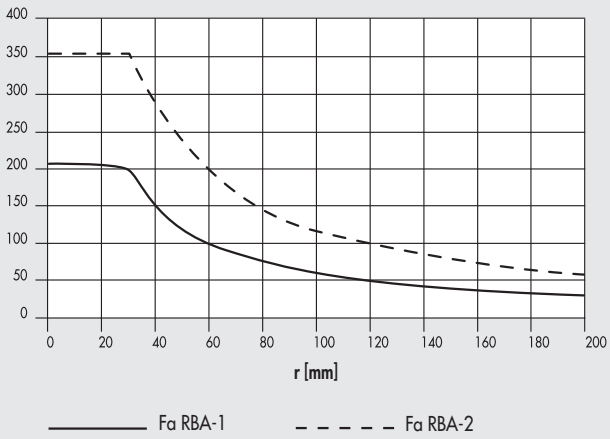

N.B.: The values given here refer to the maximum applicable bearing loads beyond which serious damage may occur.
Refer to the graphs on the following pages to check the actuator load conditions.

LIMIT OPERATING CURVES (ACTUATOR COMPLETE WITH MOTOR AND DRIVE)

N.B.: Check that the following constraints are met for each cycle phase:
- the maximum applicable moment of inertia as a function of angular output acceleration/deceleration;
- the transmissible torque as a function of angular output speed;
- the maximum axial, radial force and moment supported by the bearings.

N.B.: The effective torques already take the efficiency of the system into account.
For STEPPING motors, with the motor off, the drive current is automatically reduced by 50% to prevent overheating.
As a result, the torque available with the motor stopped is reduced by 50%.

With regard to BRUSHLESS motors, two curves can be identified:
- **NOMINAL TORQUE** curve: the nominal torque delivered by the motor with a duty cycle of 100%
- **MAXIMUM TORQUE** curve: the maximum torque delivered by the motor with a duty cycle of less than 100%.

The following graphs refer to the actuator with drive supplied by Metal Work.
The use of different motors and drives may result in different performances.

RBA-1 STEPPING motor with encoder, with and without brake

Moment of inertia - Angular acceleration/deceleration

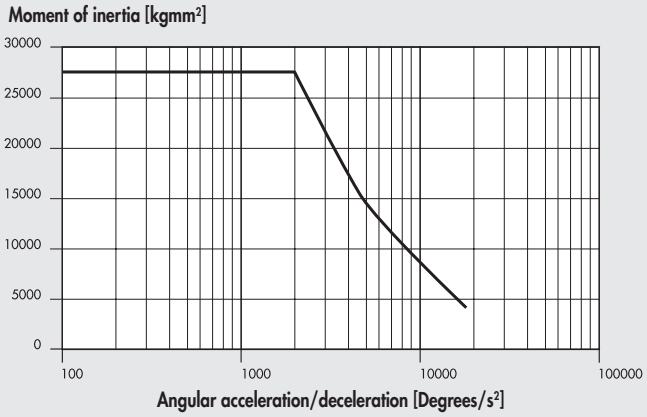

Torque - Angular speed

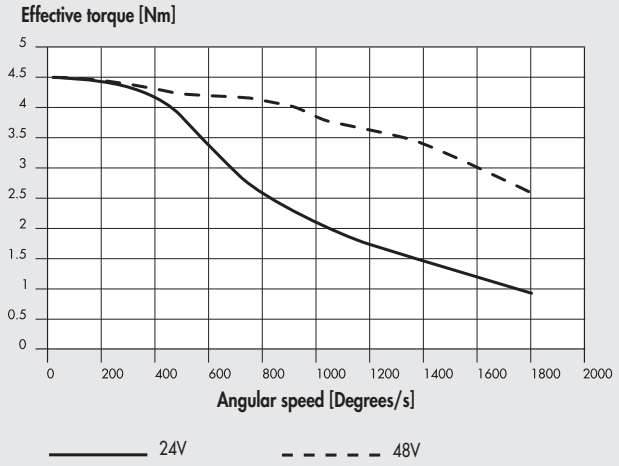

BRUSHLESS motor with and without brake

Moment of inertia - Angular acceleration/deceleration

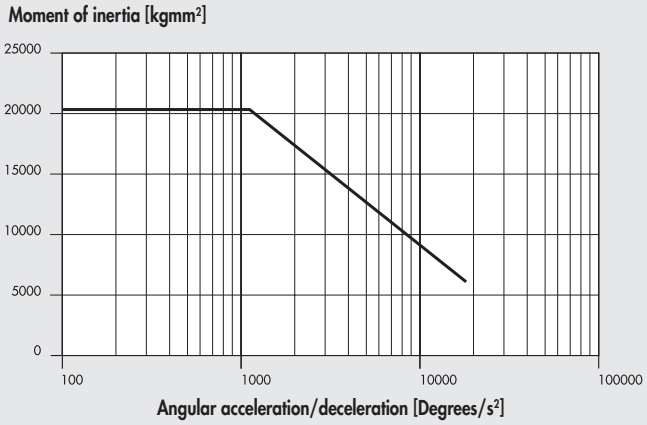

Torque - Angular speed

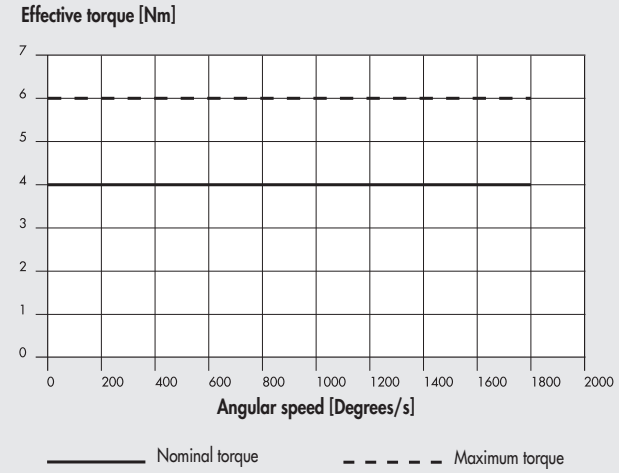

RBA-2 STEPPING motor with encoder, with and without brake

Moment of inertia - Angular acceleration/deceleration

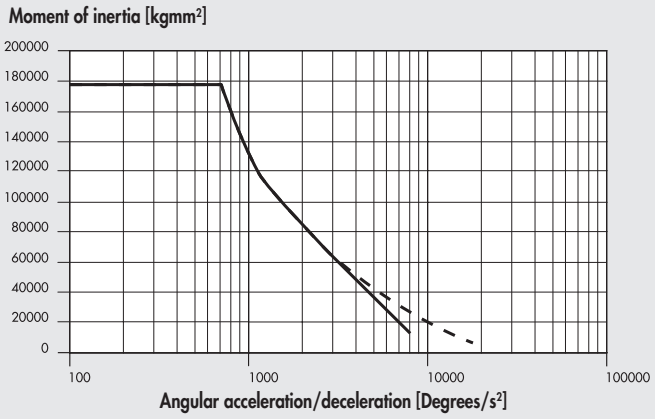

Torque - Angular speed

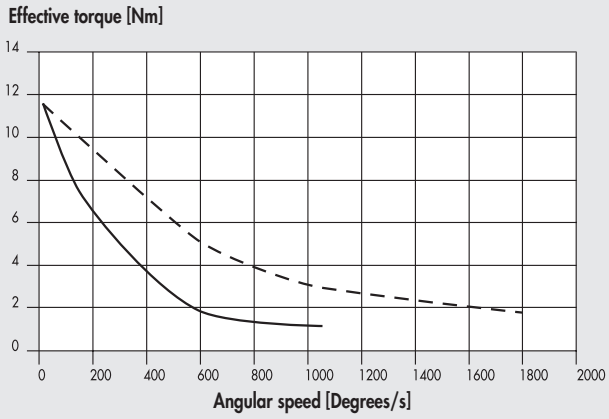

RBA-2 BRUSHLESS motor + Gearbox with and without brake

Moment of inertia - Angular acceleration/deceleration

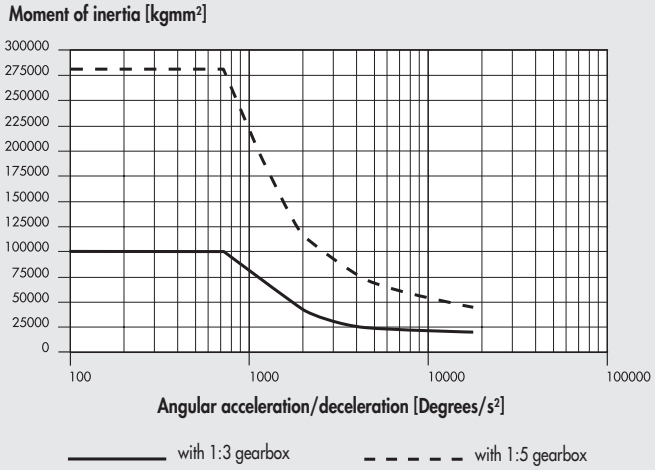

Torque - Angular speed

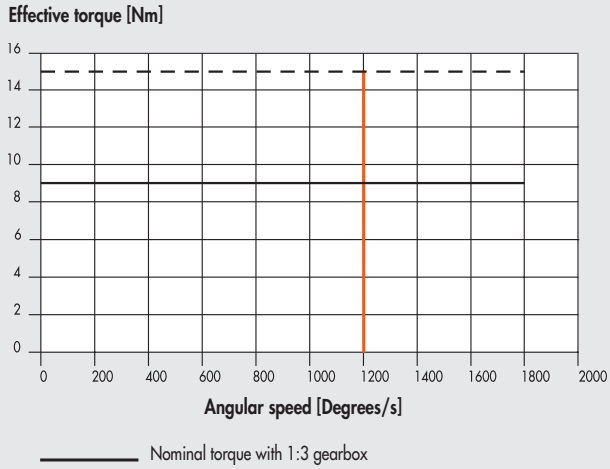

METAL WORK PNEUMATIC

VERSIONS

Version 37A0_0___
(rotary flange on the motor side)

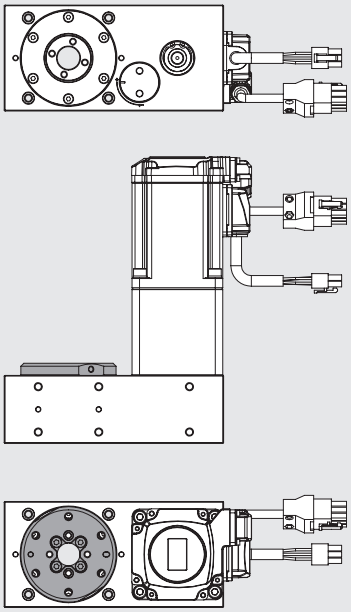

Version 37A0_1___
(rotary flange opposite side of the motor)

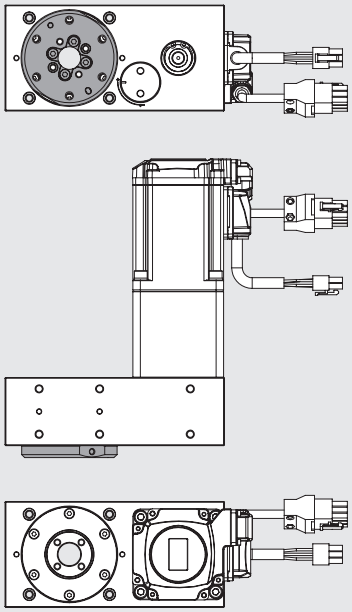

Version 37A0_2___
(rotary flange both sides)

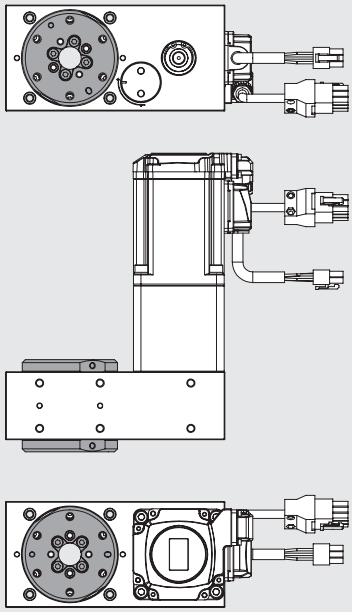

EXAMPLES OF APPLICATION

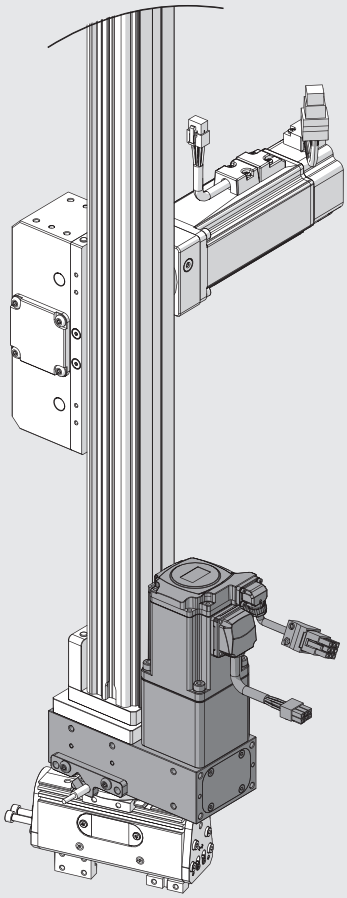

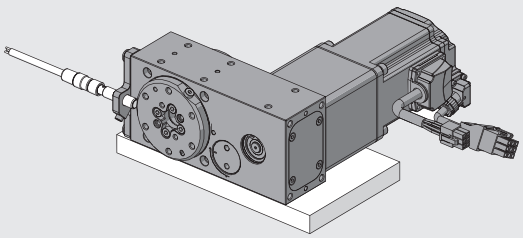



DIMENSIONS RBA-1

VERSION WITHOUT MOTOR

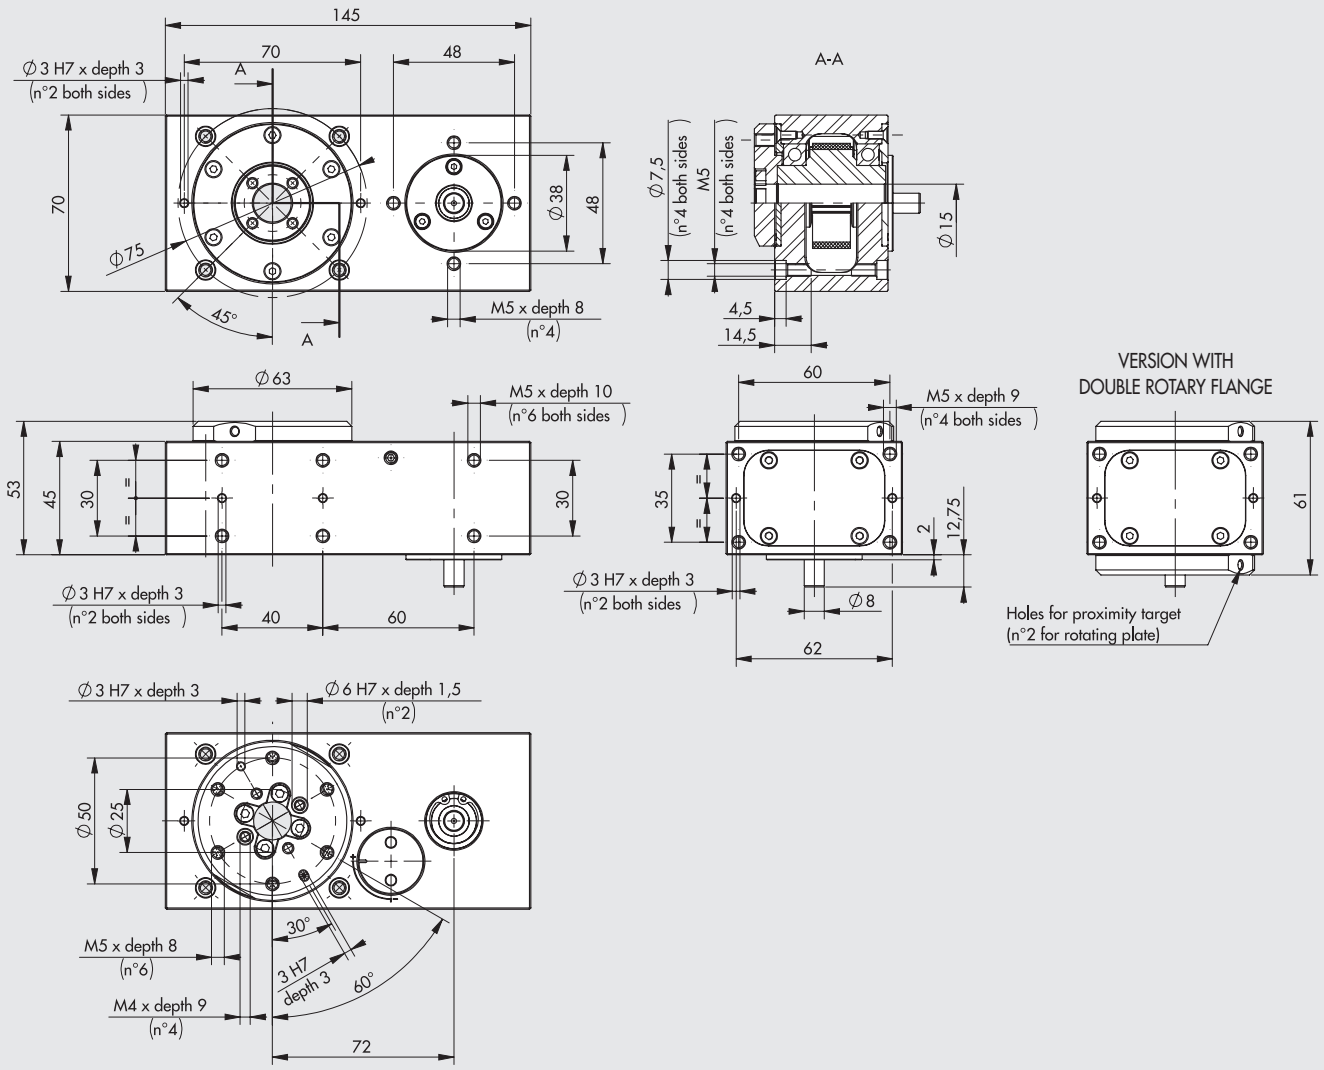

VERSION WITH MOTOR

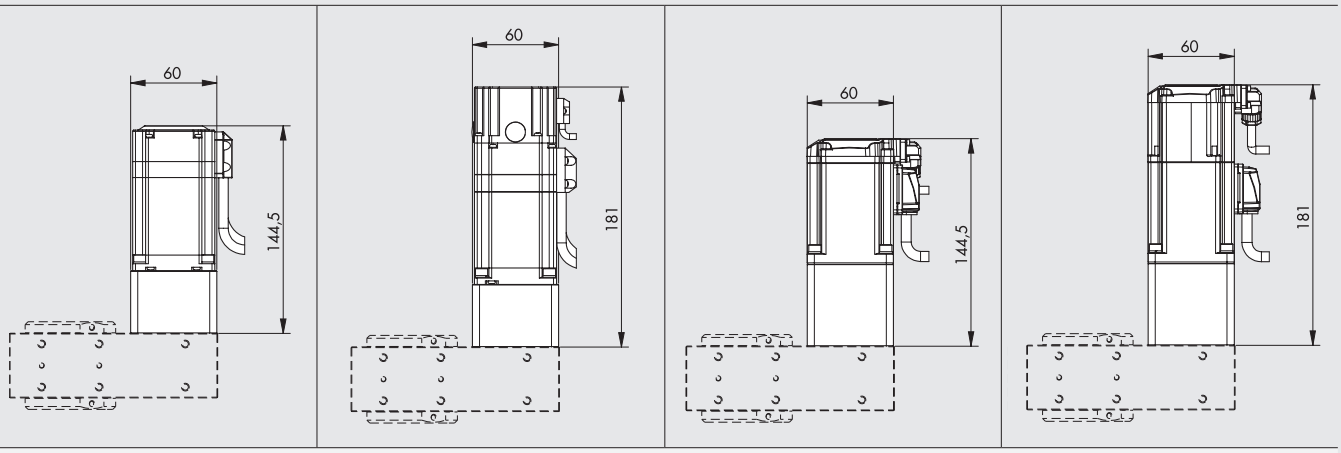

ORDERABLE CODES

STEPPING MOTOR + ENCODER	STEPPING MOTOR + ENCODER + BRAKE	BRUSHLESS MOTOR	BRUSHLESS MOTOR + BRAKE
37A0108120	37A0103120	37A0102220	37A0104220
37A0118120	37A0113120	37A0112220	37A0114220
37A0128120	37A0123120	37A0122220	37A0124220

METAL WORK PNEUMATIC

DIMENSIONS RBA-2

VERSION WITHOUT MOTOR

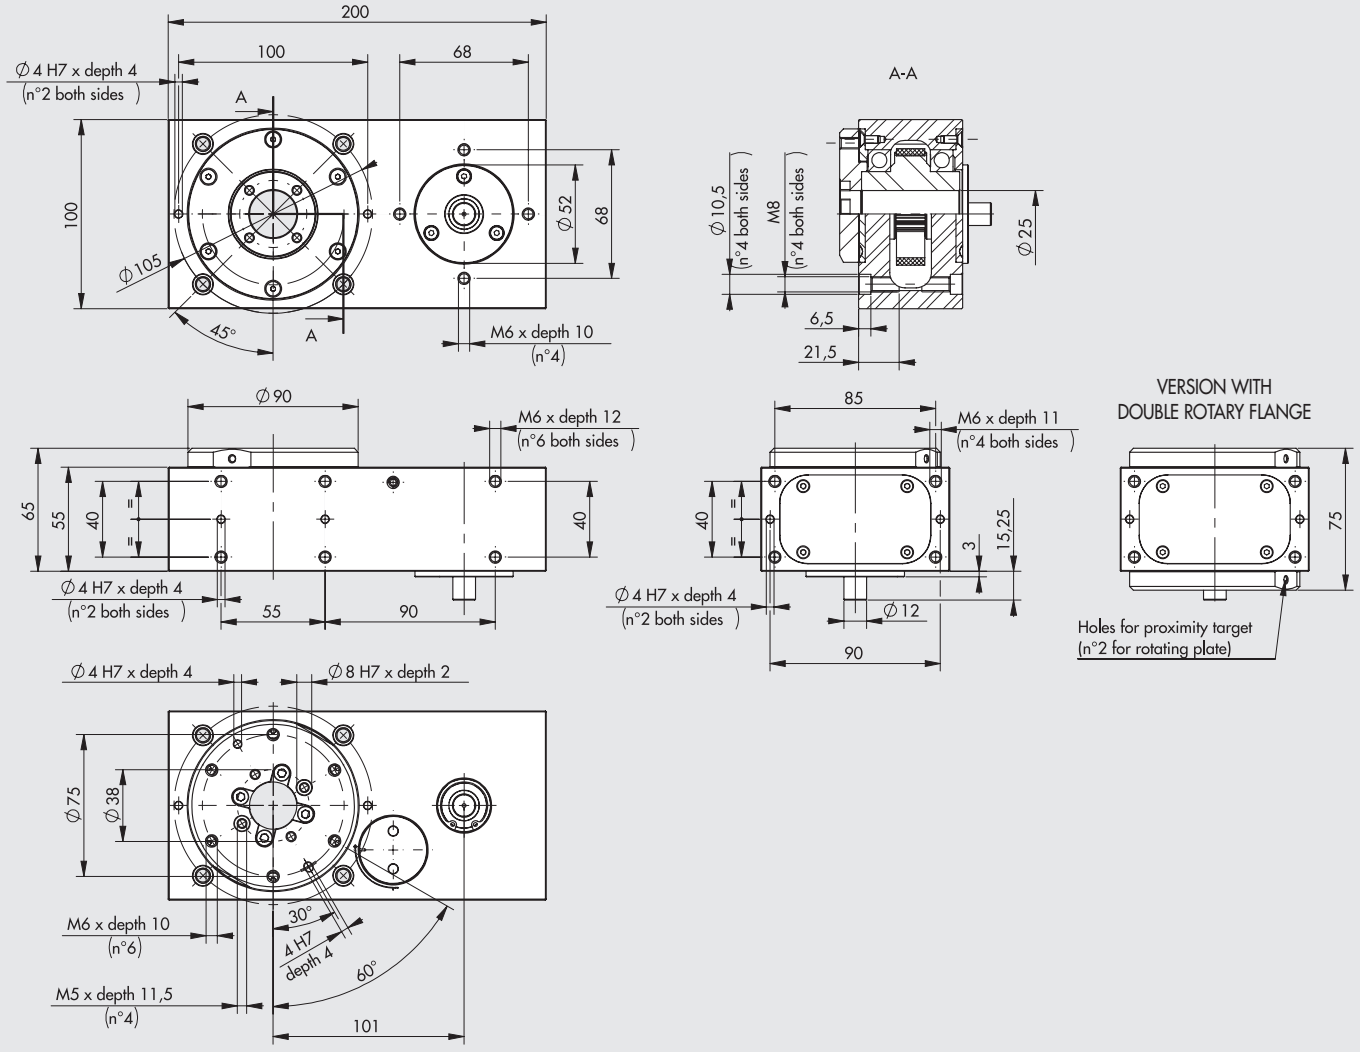

VERSION WITH MOTOR

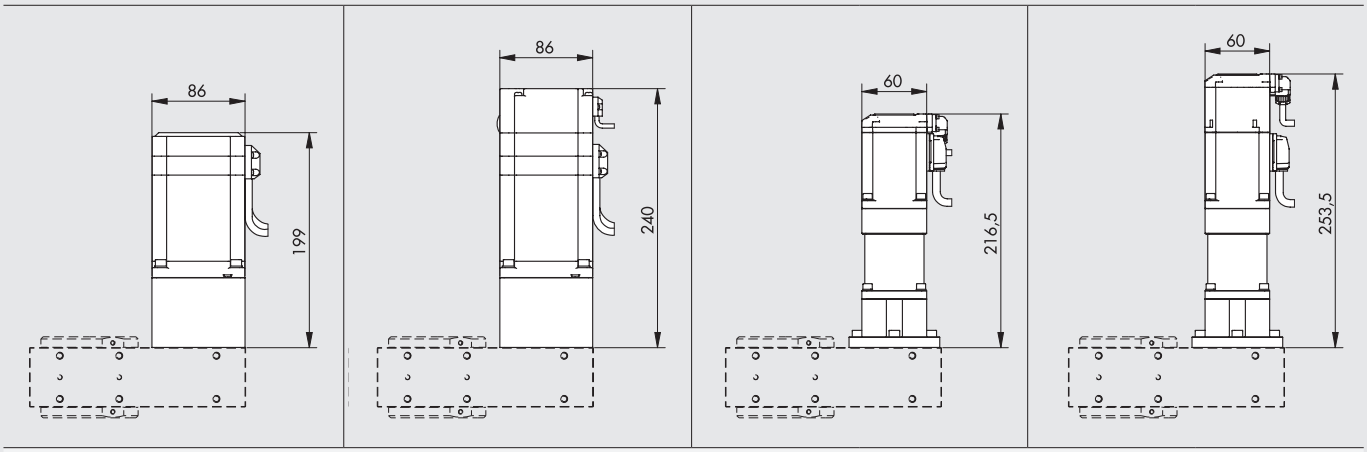

ORDERABLE CODES

STEPPING MOTOR + ENCODER	STEPPING MOTOR + ENCODER + BRAKE	BRUSHLESS MOTOR		BRUSHLESS MOTOR + BRAKE	
		With 1:3 gearbox	With 1:5 gearbox	With 1:3 gearbox	With 1:5 gearbox
37A0208440	37A0203440	37A0206220	37A020A220	37A0207220	37A020C220
37A0218440	37A0213440	37A0216220	37A021A220	37A0217220	37A021C220
37A0228440	37A0223440	37A0226220	37A022A220	37A0227220	37A022C220

MOTOR-DRIVE COUPLINGS

MOTOR CODES			DRIVES CODES
		Metal Work	37D1332000 *
		Manufacturer	RTA NDC 96
Metal Work	Manufacturer		(5A 24÷75 VDC)
STEPPING MOTORS WITH ENCODER			
37M1820000	STEPPERONLINE 23HS30-5004D-E1000		√ ◆
37M8440001	STEPPERONLINE 34E1K-85		√ ◆
STEPPING MOTORS WITH ENCODER + BRAKE			
37M1320000	STEPPERONLINE 23E1KBK20-20		√ ◆
37M3440000	STEPPERONLINE 34E1KBK50-85		√ ◆

✱ In all applications requiring motor powered up to 5A / 55VDC, the programmable drive **e**.drive, code 37D1332002, can be used.
◆ **Important!** Limit current.

MOTOR CODES			DRIVES CODES
		Metal Work	37D2300002
		Manufacturer	DELTA ASD-B3A-0421-M
Metal Work	Manufacturer		(400W)
BRUSHLESS MOTORS			
37M2220002	DELTA ECM-B3M-C20604RS1		√
BRUSHLESS MOTORS WITH BRAKE			
37M4220002	DELTA ECM-B3M-C20604SS1		√

The motor must be controlled in such a way as to avoid sudden changes in speed.



KEY TO CODES ACTUATOR WITHOUT MOTOR

CYL	37	A	0	1	0
	TYPE			SIZE	ROTARY FLANGE POSITION
	37 Electric actuators	**A** Rotary actuator RBA	**0** STD	**1** Size 1 **2** Size 2	**0** Motor side **1** Opposite side **2** Both sides

KEY TO CODES ACTUATOR MOTOR

						■ DRIVE			
CYL	37	A	0	1	0	3	1	2	0
	TYPE			SIZE	ROTARY FLANGE POSITION	MOTOR	FLANGE	TORQUE	TURNS NO.
	37 Electric actuators	**A** Rotary actuator RBA	**0** STD	**1** Size 1 **2** Size 2	**0** Motor side **1** Opposite side **2** Both sides	**2** BRUSHLESS **3** STEPPING with encoder and brake **4** BRUSHLESS with brake **6** BRUSHLESS with gearbox 1:3 **7** BRUSHLESS with brake and gearbox 1:3 **8** STEPPING with encoder **A** BRUSHLESS with gearbox 1:5 **C** BRUSHLESS with brake and gearbox 1:5	**1** NEMA 23 **2** 60 **4** NEMA 34	**2** 1.2 - 2.19 Nm **4** 3.01 - 5 Nm	**0** Base

■ The Orderable configurations of the motorizations are shown on page **A5**.202 for the RBA-1 and **A5**.203 for the RBA-2.

RBA-1 FIXING BRACKETS ON VBK-1



X-axis rotation



Y-axis rotation

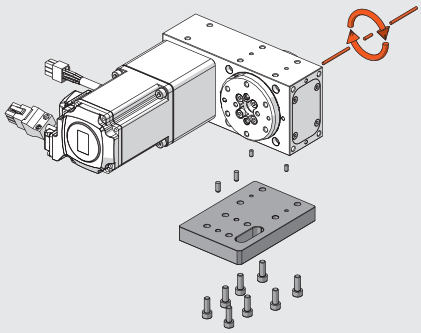

Z-axis rotation

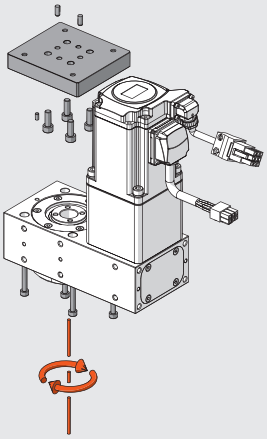

Code	Description	Weight [g]
095RE10004	RBA-1 fixing bracket on VBK, X-axis rotation	265
095RE10005	RBA-1 fixing bracket on VBK, Y-axis rotation	288
095RE10006	RBA-1 fixing bracket on VBK, Z-axis rotation	242

V-LOCK INTERFACE



Code	Description	Weight [g]
095RE10003	V-Lock interface RBA-1	82
095RE20003	V-Lock interface RBA-2	247

FIXING ELEMENTS



See V-Lock family.

DRIVES

For motor-drive couplings see table on page **A5**.204

ACCESSORIES: MAGNETIC SENSORS

USE SENSORS

FRONT

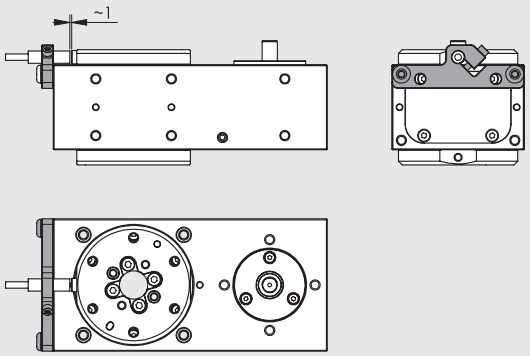

LATERAL

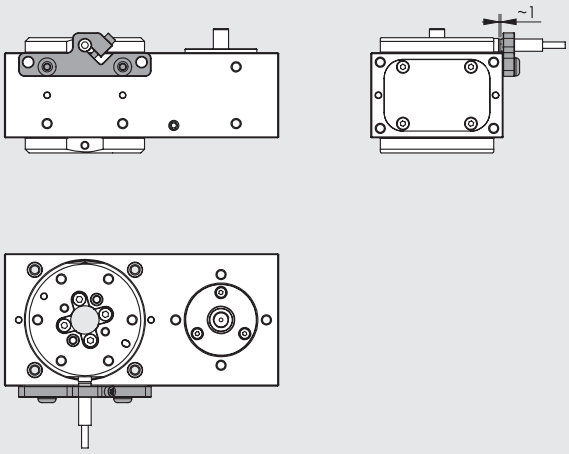

BRACKET FOR INDUCTIVE SENSOR



Code	Description	Weight [g]
095RE10001	Bracket for inductive sensor Ø 6.5 RBA-1	22
095RE20001	Bracket for inductive sensor Ø 6.5 RBA-2	33
095RE10002	Bracket for inductive sensor Ø 8 RBA-1	22
095RE20002	Bracket for inductive sensor Ø 8 RBA-2	33

INDUCTION SENSOR Ø 6.5



Code	Description
W095K030006	PNP Ø 6.5 PNP inductive sensor with LED 2 m

QUICK-FIT INDUCTIVE SENSOR Ø 6.5



Code	Description
W095K030009	PNP Ø 6.5 inductive sensor with push-in LED

QUICK-FIT INDUCTIVE SENSOR M8



Code	Description
W095K030010	PNP M8 inductive sensor with push-in LED

CABLE WITH STRAIGHT CONNECTOR FOR PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

CABLE WITH 90° CONNECTOR FOR PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

M8 M – M8 F CONNECTOR FOR PUSH-IN INDUCTIVE SENSOR (MOBILE INSTALLATION)



Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital INPUT of the EB 80 and CM valves

SPARE PARTS

GEARBOXES

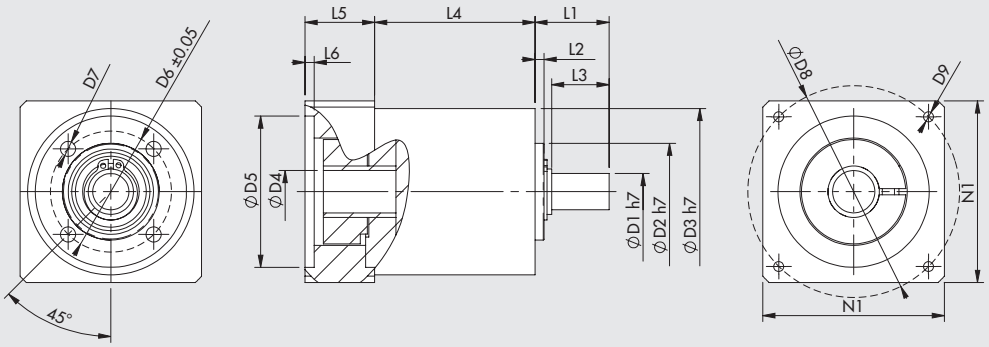

Code	Description	C_{OUT} nominal [Nm]	N_{IN} nominal [1/min]	J reduced to motor shaft [kgmm²]	Mass [kg]	D1	D2	D3	D4	D5	D6	D7	D8	D9	L1	L2	L3	L4	L5	L6	N1
37R0341000	Gearbox MP053 1:3	12	3300	8	0.8	12	32	55	14	50	40	M5	70	M4x10	24.5	3	19	53	23	3	60
37R0541000	Gearbox MP053 1:5	15	3500	6	0.8	12	32	55	14	50	40	M5	70	M4x10	24.5	3	19	53	23	3	60

C_{OUT} = nominal output torque N_{IN} = nominal input speed J = mass moment of inertia of the gearhead

ELECTRIC MOTORS

For motor-drive couplings see table on pagee **A5**.204

TOOTHED BELT

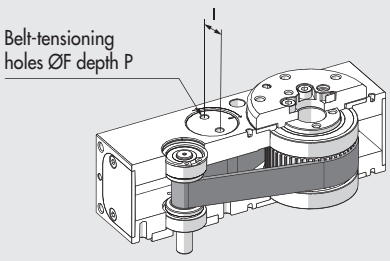

	I	ØF	P
RBA-1	15	4	4.5
RBA-2	20	5	4.5

Code	Description
095RE10007	RBA-1 toothed belt kit
095RE20007	RBA-2 toothed belt kit

STEPPING MOTORS

STEPPING MOTORS

N.B.: With motor off, the drive current is automatically reduced by 50% to prevent overheating. Consequently, available torque with the motor stopped is also reduced by 50%.

TORQUE CURVES / TECHNICAL FEATURES OF ELECTRIC STEPPING MOTORS

STEPPING motor code **37M1110000**

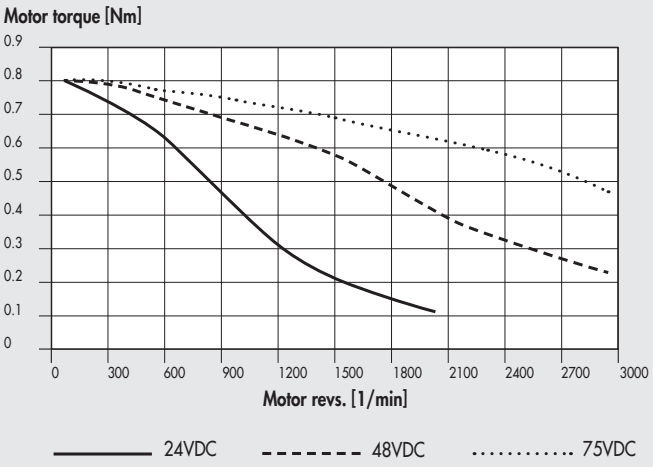

TECHNICAL DATA		MOTOR 37M1110000
Motor type		STEPPING
Temperature range	°C	from -10 to +60
Maximum relative humidity		90% with 40°C; 57% with 50°C; 35% with 60°C (no condensate)
Nominal torque	Nm	**0.8**
Coupling flange		**NEMA 23**
Base step angle		1.8°±0.09°
Bipolar current	A	4
Resistance	Ω	0.41
Inductance	mH	1.6
Bipolar holding torque	Nm	1.1
Rotor inertia	kgmm²	21
Theoretical acceleration	rad · s⁻²	50000
Back E.M.F.	V/krpm	20
Mass	kg	0.65
Degree of protection		IP40

STEPPING motor code **37M1120000**

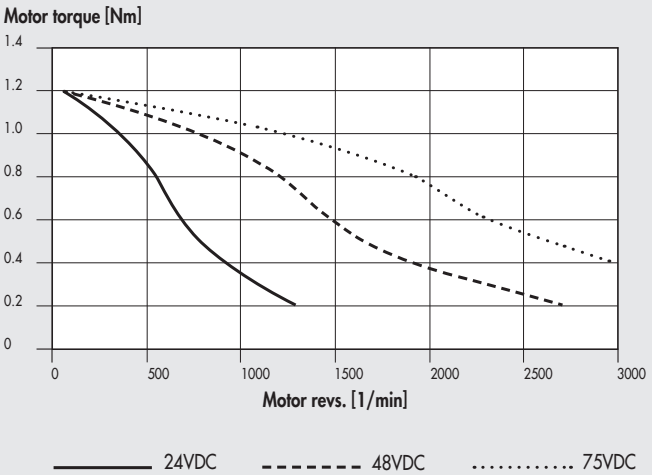

TECHNICAL DATA		MOTOR 37M1120000
Motor type		STEPPING
Temperature range	°C	from -10 to +60
Maximum relative humidity		90% with 40°C; 57% with 50°C; 35% with 60°C (no condensate)
Nominal torque	Nm	**1.2**
Coupling flange		**NEMA 23**
Base step angle		1.8°±0.09°
Bipolar current	A	4
Resistance	Ω	0.48
Inductance	mH	2.2
Bipolar holding torque	Nm	1.65
Rotor inertia	kgmm²	36
Theoretical acceleration	rad · s⁻²	45800
Back E.M.F.	V/krpm	31
Mass	kg	1
Degree of protection		IP40

METAL WORK PNEUMATIC

STEPPING motor code **37M1120001**

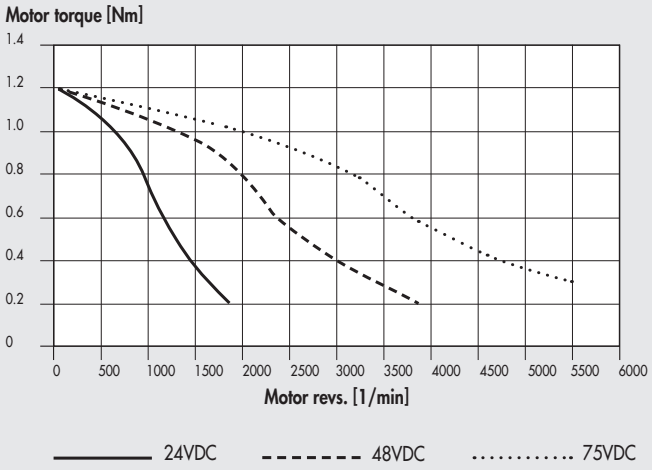

TECHNICAL DATA		MOTOR 37M1120001
Motor type		STEPPING
Temperature range	°C	from -10 to +60
Maximum relative humidity		90% with 40°C; 57% with 50°C; 35% with 60°C (no condensate)
Nominal torque	Nm	**1.2**
Coupling flange		**NEMA 23**
Base step angle		1.8°±0.09°
Bipolar current	A	5.6
Resistance	Ω	0.3
Inductance	mH	0.85
Bipolar holding torque	Nm	1.65
Rotor inertia	kgmm²	36
Theoretical acceleration	rad · s⁻²	45800
Back E.M.F.	V/krpm	23
Mass	kg	1
Degree of protection		IP43

STEPPING motor code **37M1220000**

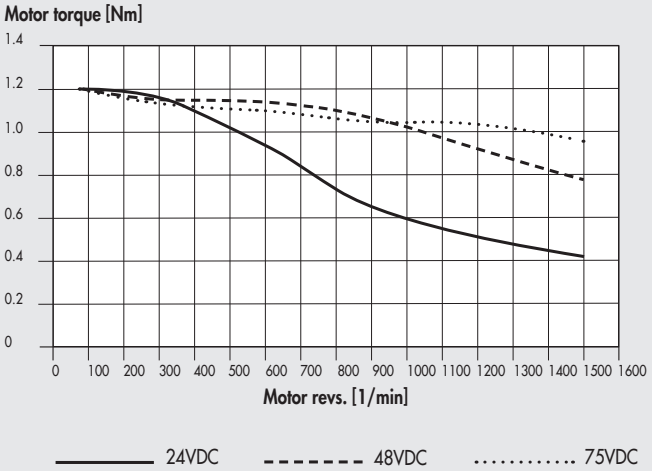

TECHNICAL DATA		MOTOR 37M1220000
Motor type		STEPPING
Temperature range	°C	from -20 to +40
Maximum relative humidity		5 to 95% (no condensate)
Nominal torque	Nm	**1.2**
Coupling flange (square)	mm	**60**
Base step angle		1.8°
Current	A	5
Resistance	Ω	0.38
Inductance	mH	1.4
Bipolar holding torque	Nm	1.7
Rotor inertia	kgmm²	44
Mass	kg	1.28
Degree of protection		IP65
CABLE		
Power for stepping motors with brake, 1 metre		supplied

STEPPING motor code **37M1230000**

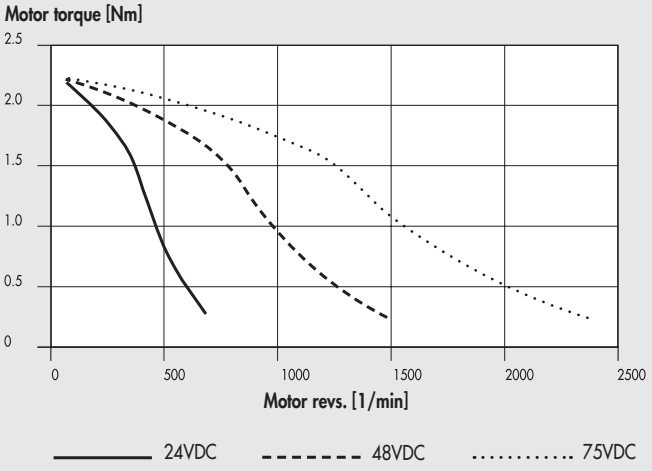

TECHNICAL DATA		MOTOR 37M1230000
Motor type		STEPPING
Temperature range	°C	from -10 to +60
Maximum relative humidity		90% with 40°C; 57% with 50°C; 35% with 60°C (no condensate)
Nominal torque	Nm	**2.2**
Coupling flange (square)	mm	**60**
Base step angle		1.8°±0.09°
Bipolar current	A	4
Resistance	Ω	0.65
Inductance	mH	2.4
Bipolar holding torque	Nm	3
Rotor inertia	kgmm²	84
Theoretical acceleration	rad · s⁻²	35700
Back E.M.F.	V/krpm	75
Mass	kg	1.4
Degree of protection		IP40

STEPPING motor code **37M1430000**

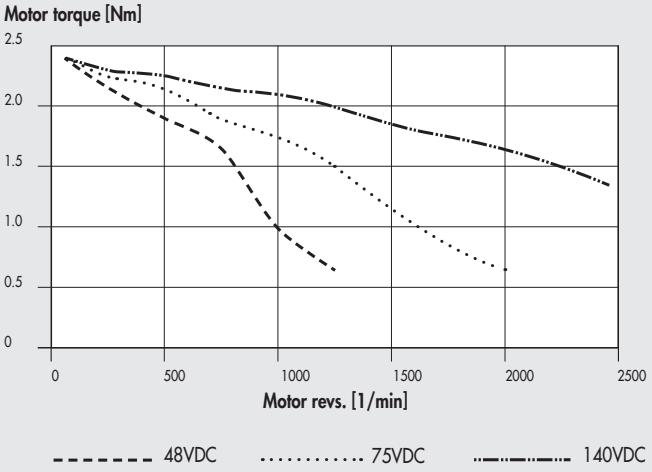

TECHNICAL DATA		MOTOR 37M1430000
Motor type		STEPPING
Temperature range	°C	from -10 to +60
Maximum relative humidity		90% with 40°C; 57% with 50°C; 35% with 60°C (no condensate)
Nominal torque	Nm	**2.4**
Coupling flange		**NEMA 34**
Base step angle		1.8°±0.09°
Bipolar current	A	6
Resistance	Ω	0.3
Inductance	mH	1.65
Bipolar holding torque	Nm	3
Rotor inertia	kgmm²	145
Theoretical acceleration	rad · s⁻²	20600
Back E.M.F.	V/krpm	50
Mass	kg	1.5
Degree of protection		IP43

STEPPING motor code **37M1440000**

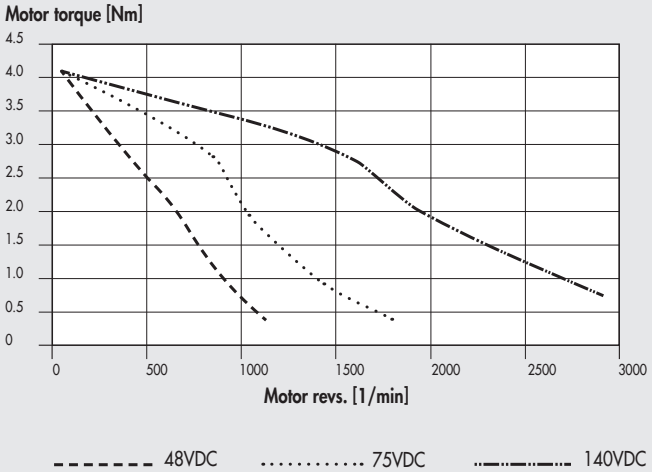

TECHNICAL DATA		MOTOR 37M1440000
Motor type		STEPPING
Temperature range	°C	from -10 to +60
Maximum relative humidity		90% with 40°C; 57% with 50°C; 35% with 60°C (no condensate)
Nominal torque	Nm	**4.2**
Coupling flange		**NEMA 34**
Base step angle		1.8°±0.09°
Bipolar current	A	6
Resistance	Ω	0.35
Inductance	mH	2.7
Bipolar holding torque	Nm	5.6
Rotor inertia	kgmm²	290
Theoretical acceleration	rad · s⁻²	19300
Back E.M.F.	V/krpm	93
Mass	kg	2.5
Degree of protection		IP43

STEPPING motor code **37M1450000**

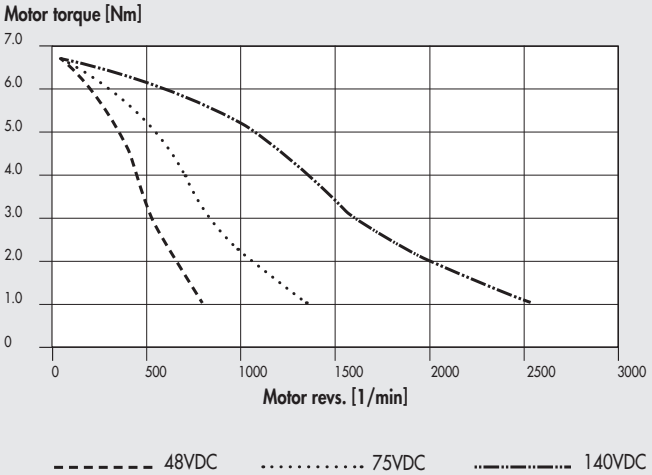

TECHNICAL DATA		MOTOR 37M1450000
Motor type		STEPPING
Temperature range	°C	from -10 to +60
Maximum relative humidity		90% with 40°C; 57% with 50°C; 35% with 60°C (no condensate)
Nominal torque	Nm	**6.7**
Coupling flange		**NEMA 34**
Base step angle		1.8°±0.09°
Bipolar current parallel	A	6
Resistance	Ω	0.46
Inductance	mH	3.8
Bipolar holding torque	Nm	9.2
Rotor inertia	kgmm²	450
Theoretical acceleration	rad · s⁻²	20500
Back E.M.F.	V/krpm	161
Mass	kg	4
Certifications		UL, CSA, CE, RoHS
Insulation voltage		250VAC (350VDC)
Degree of protection		IP43 - F

STEPPING motor code **37M1470000**

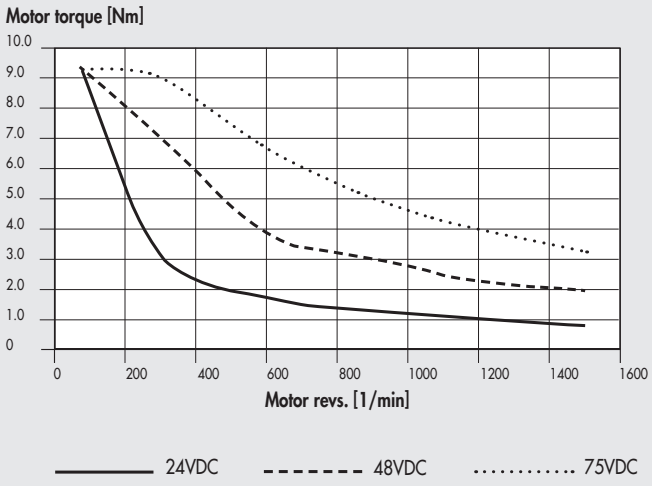

TECHNICAL DATA		MOTOR 37M1470000
Motor type		STEPPING
Temperature range	°C	from -20 to +40
Maximum relative humidity		5 to 95% (no condensate)
Nominal torque	Nm	**9.3**
Coupling flange		**NEMA 34**
Base step angle		1.8°
Bipolar current	A	10
Resistance	Ω	0.24
Inductance	mH	1.6
Bipolar holding torque	Nm	13.6
Rotor inertia	kgmm^2	392
Mass	kg	4.2
Degree of protection		IP40

STEPPING motor code **37M1890000**

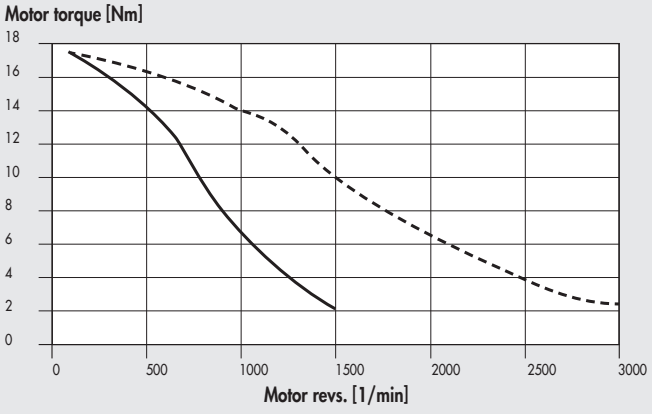

TECHNICAL DATA		MOTOR 37M1890000
Motor type		STEPPING
Temperature range	°C	from -10 to +60
Maximum relative humidity		90% with 40°C; 57% with 50°C; 35% with 60°C (no condensate)
Nominal torque	Nm	**17.5**
Coupling flange		**NEMA 42**
Base step angle		1.8°±0.09°
Bipolar current	A	6
Resistance	Ω	0.63
Inductance	mH	8
Bipolar holding torque	Nm	24.6
Rotor inertia	kgmm^2	2200
Theoretical acceleration	rad · s^{-2}	11100
Back E.M.F.	V/krpm	410
Mass	kg	10
Degree of protection		IP43

NOTES

STEPPING MOTORS WITH ENCODER

TORQUE CURVES / TECHNICAL FEATURES OF ELECTRIC STEPPING MOTORS WITH ENCODER

STEPPING motor + ENCODER code **37M1820000**

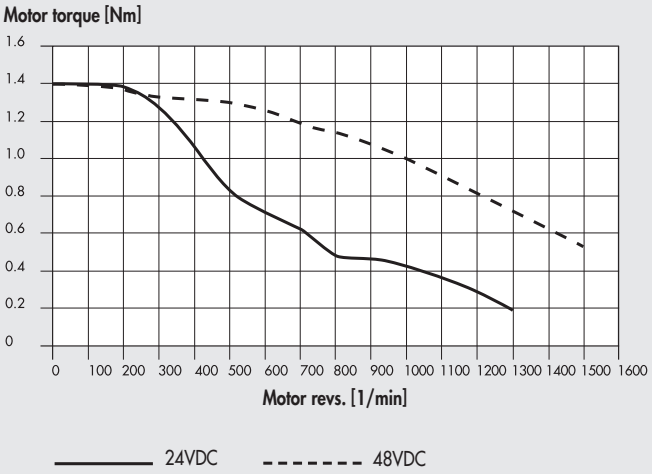

TECHNICAL DATA		MOTOR 37M1820000
Motor type		STEPPING + ENCODER
Temperature range	°C	from -10 to +50
Nominal torque	Nm	**1.4**
Coupling flange (square)	mm	**NEMA 23**
Base step angle		1.8°
Current	A	5
Resistance	Ω	0.42
Inductance	mH	1.7
Bipolar holding torque	Nm	2
Rotor inertia	kgmm²	43
Mass	kg	1.4
Degree of protection		IP40
ENCODER		
Number of outputs		2 (A / B differential)
Resolution		
pulses per revolution for single channel	PPR	1000
quadrature pulses per revolution	CPR	4000
Supply voltage	VDC	5±10%
CABLES		
Encoder stepping motors, 5 metres		**37C1250001**
Power stepping motors, 5 metres		**37C1150000**
Encoder stepping motors, 10 metres		**37C1200003**
Power stepping motors, 10 metres		**37C1100000**

STEPPING motor + ENCODER code **37M8220000**

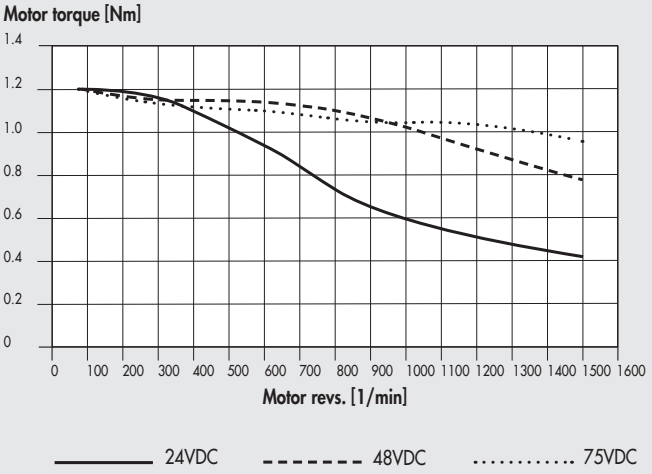

TECHNICAL DATA		MOTOR 37M8220000
Motor type		STEPPING + ENCODER
Temperature range	°C	from -20 to +40
Maximum relative humidity		5 to 95% (no condensate)
Nominal torque	Nm	**1.2**
Coupling flange (square)	mm	**60**
Base step angle		1.8°
Current	A	5
Resistance	Ω	0.38
Inductance	mH	1.4
Bipolar holding torque	Nm	1.7
Rotor inertia	kgmm²	44
Mass	kg	1.28
Degree of protection		IP65
ENCODER		
Number of outputs		3 (A / B / R)
Resolution		
pulses per revolution for single channel	PPR	256
quadrature pulses per revolution	CPR	1024
Supply voltage	VDC	18 - 30
CABLES		
Encoder stepping motors with brake, 3 metres		**37C1230000**
Power stepping motors with brake, 3 metres		**37C1330000**
Encoder stepping motors with brake, 5 metres		**37C1250000**
Power stepping motors with brake, 5 metres		**37C1350000**

STEPPING motor + ENCODER code **37M8440001**

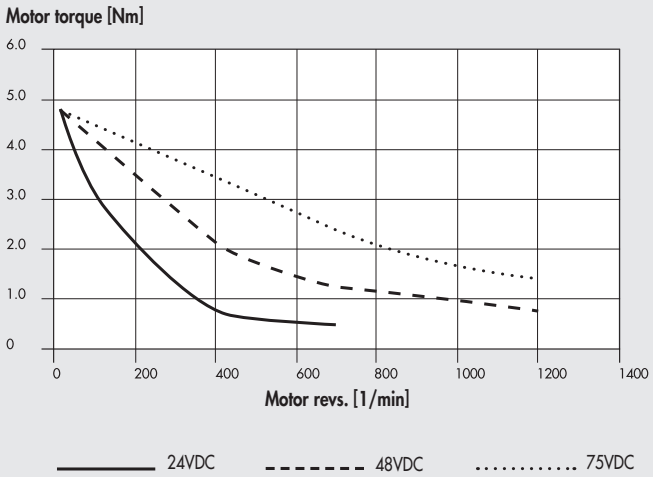

TECHNICAL DATA		MOTOR 37M8440001
Motor type		STEPPING + ENCODER
Temperature range	°C	from 0 to +50
Nominal torque	Nm	**4.8**
Coupling flange (square)	mm	**NEMA 34**
Base step angle		1.8°
Current	A	6
Resistance	Ω	0.54
Inductance	mH	5
Bipolar holding torque	Nm	8.5
Rotor inertia	kgmm²	360
Mass	kg	3.86
Degree of protection		IP40
ENCODER		
Number of outputs		2 (A / B differential)
Resolution		
pulses per revolution for single channel	PPR	1000
quadrature pulses per revolution	CPR	4000
Supply voltage	VDC	5±10%
CABLES		
Encoder stepping motors with brake, 5 metres		**37C1250001**
Power stepping motors with brake, 5 metres		**37C1150000**
Encoder stepping motors with brake, 10 metres		**37C1200003**
Power stepping motors with brake, 10 metres		**37C1100000**

STEPPING motor with ENCODER code **37M8470000**

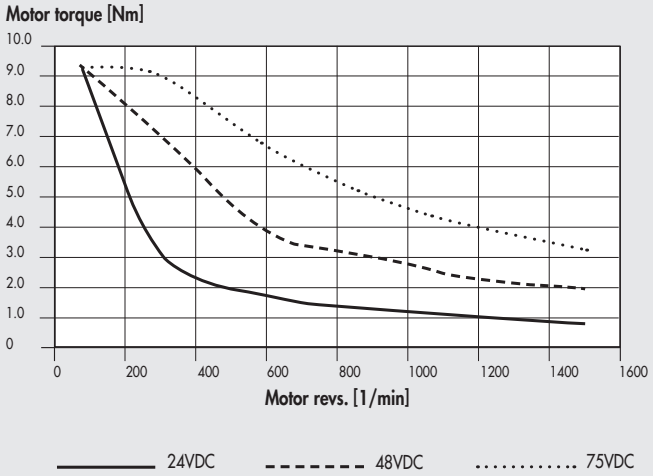

TECHNICAL DATA		MOTOR 37M8470000
Motor type		STEPPING with ENCODER
Temperature range	°C	from -20 to +40
Maximum relative humidity		5 to 95% (no condensate)
Nominal torque	Nm	**9.3**
Coupling flange		**NEMA 34**
Base step angle		1.8°
Bipolar current	A	10
Resistance	Ω	0.24
Inductance	mH	1.6
Bipolar holding torque	Nm	13.6
Rotor inertia	kgmm²	392
Mass	kg	4.3
Degree of protection		IP65
ENCODER		
Number of outputs		3 (A / B / R)
Resolution		
pulses per revolution for single channel	PPR	256
quadrature pulses per revolution	CPR	1024
Supply voltage	VDC	18 - 30
CABLES		
Encoder stepping motors with brake, 3 metres		**37C1230000**
Power stepping motors with brake, 3 metres		**37C1330000**
Encoder stepping motors with brake, 5 metres		**37C1250000**
Power stepping motors with brake, 5 metres		**37C1350000**

STEPPING MOTORS WITH BRAKE

TORQUE CURVES / TECHNICAL FEATURES OF ELECTRIC STEPPING MOTORS WITH BRAKE

STEPPING motor with BRAKE code **37M5120000**

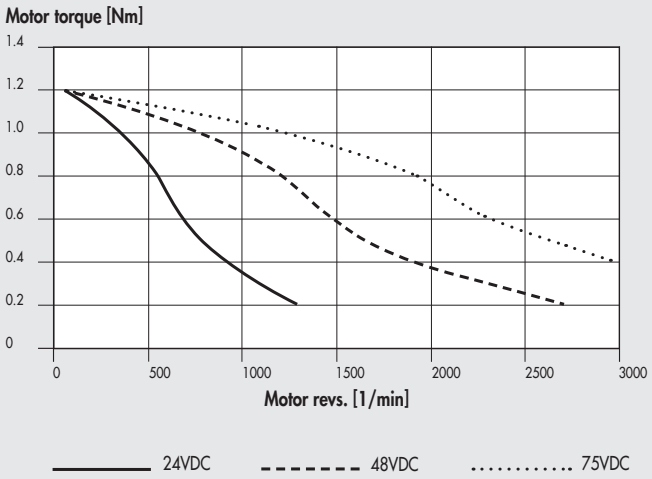

TECHNICAL DATA		MOTOR 37M5120000
Motor type		STEPPING with BRAKE
Temperature range	°C	from -10 to +60
Maximum relative humidity		90% with 40°C; 57% with 50°C; 35% with 60°C (no condensate)
Nominal torque	Nm	**1.2**
Coupling flange		**NEMA 23**
Base step angle		1.8°±0.09°
Bipolar current	A	4
Resistance	Ω	0.48
Inductance	mH	2.2
Bipolar holding torque	Nm	1.65
Rotor inertia	$kgmm^2$	36
Theoretical acceleration	$rad \cdot s^{-2}$	45800
Back E.M.F.	V/krpm	31
Mass	kg	1.5
Degree of protection		IP20
BRAKE		
Braking torque	Nm	3.3
Duty Cycle		50% max
Supply voltage	VDC	24
Power consumption	W	18
Connecting time	ms	300

NOTES

METAL WORK PNEUMATIC

STEPPING MOTORS WITH BRAKE + ENCODER

TORQUE CURVES / TECHNICAL FEATURES OF ELECTRIC STEPPING MOTORS WITH BRAKE + ENCODER

STEPPING motor with BRAKE + ENCODER code **37M1320000**

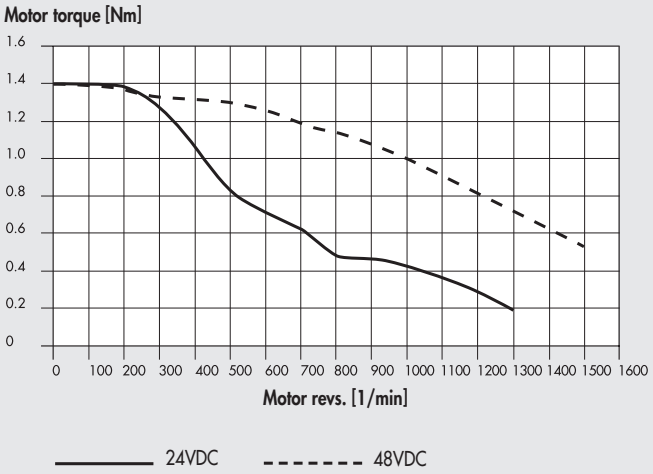

TECHNICAL DATA		MOTOR 37M1320000
Motor type		STEPPING with BRAKE + ENCODER
Temperature range	°C	from -10 to +50
Nominal torque	Nm	**1.4**
Coupling flange (square)	mm	**NEMA 23**
Base step angle		1.8°
Current	A	5
Resistance	Ω	0.4
Inductance	mH	1.8
Bipolar holding torque	Nm	2
Rotor inertia	kgmm²	48
Mass	kg	1.8
Degree of protection		IP40
ENCODER		
Number of outputs		2 (A / B differential)
Resolution		
pulses per revolution for single channel	PPR	1000
quadrature pulses per revolution	CPR	4000
Supply voltage	VDC	5±10%
BRAKE *		
Supply voltage	VDC	24±10%
Braking torque	Nm	2
Power consumption	W	4
CABLES		
Encoder stepping motors, 5 metres		**37C1250001**
Power stepping motors, 5 metres		**37C1150000**
Encoder stepping motors, 10 metres		**37C1200003**
Power stepping motors, 10 metres		**37C1100000**

* Pre-wired brake cable L = 300 mm

STEPPING motor with BRAKE + ENCODER code **37M3220000**

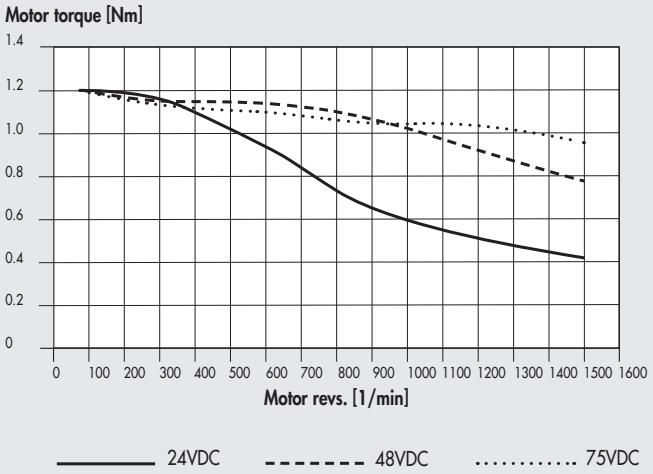

TECHNICAL DATA		MOTOR 37M3220000
Motor type		STEPPING with BRAKE + ENCODER
Temperature range	°C	from -20 to +40
Maximum relative humidity		5 to 95% (no condensate)
Nominal torque	Nm	**1.2**
Coupling flange (square)	mm	**60**
Base step angle		1.8°
Current	A	5
Resistance	Ω	0.38
Inductance	mH	1.4
Bipolar holding torque	Nm	1.7
Rotor inertia	kgmm²	44
Mass	kg	1.28
Degree of protection		IP65
ENCODER		
Number of outputs		3 (A / B / R)
Resolution		
pulses per revolution for single channel	PPR	256
quadrature pulses per revolution	CPR	1024
Supply voltage	VDC	18 - 30
BRAKE		
Supply voltage	VDC	24 +6% / -10%
Braking torque	Nm	2
Power consumption	W	11
Connecting time	ms	6
Delay time	ms	2
Disconnection time	ms	25
CABLES		
Encoder stepping motors with brake, 3 metres		**37C1230000**
Power stepping motors with brake, 3 metres		**37C1330000**
Encoder stepping motors with brake, 5 metres		**37C1250000**
Power stepping motors with brake, 5 metres		**37C1350000**

STEPPING motor with BRAKE + ENCODER code **37M3230000**

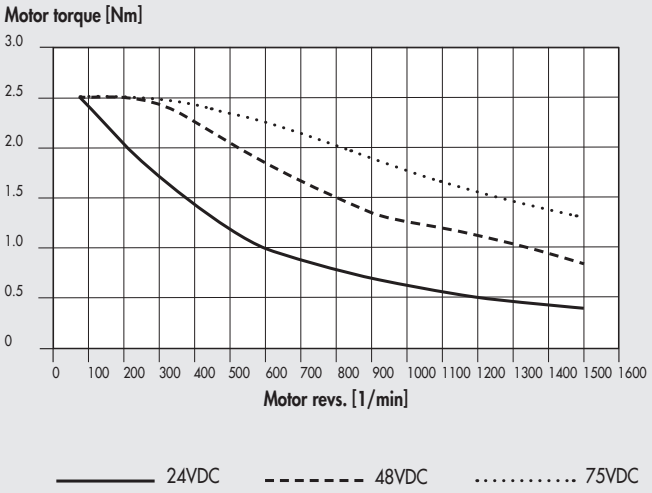

TECHNICAL DATA		MOTOR 37M3230000
Motor type		STEPPING with BRAKE + ENCODER
Temperature range	°C	from -20 to +40
Maximum relative humidity		5 to 95% (no condensate)
Nominal torque	Nm	**2.5**
Coupling flange (square)	mm	**60**
Base step angle		1.8°
Bipolar current	A	5
Resistance	Ω	0.6
Inductance	mH	2.8
Bipolar holding torque	Nm	3.5
Rotor inertia	kgmm²	92
Mass	kg	1.8
Degree of protection		IP65
ENCODER		
Number of outputs		3 (A / B / R)
Resolution		
pulses per revolution for single channel	PPR	256
quadrature pulses per revolution	CPR	1024
Supply voltage	VDC	18 - 30
BRAKE		
Supply voltage	VDC	24 +6% / -10%
Braking torque	Nm	2
Power consumption	W	11
Connecting time	ms	6
Delay time	ms	2
Disconnection time	ms	25
CABLES		
Encoder stepping motors with brake, 3 metres		**37C1230000**
Power stepping motors with brake, 3 metres		**37C1330000**
Encoder stepping motors with brake, 5 metres		**37C1250000**
Power stepping motors with brake, 5 metres		**37C1350000**

STEPPING motor with BRAKE + ENCODER code **37M3430000**

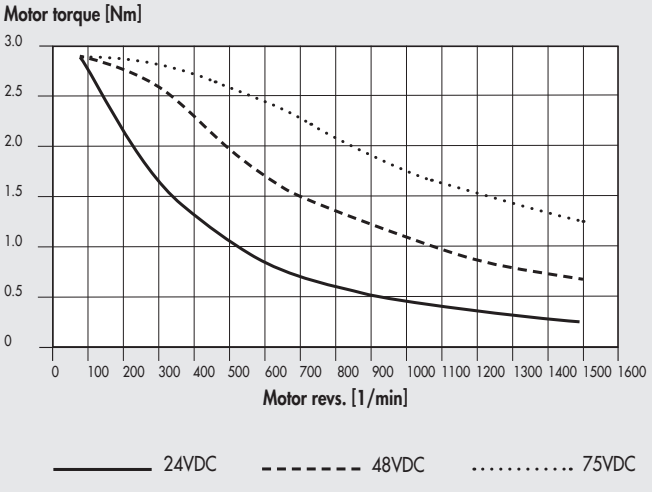

TECHNICAL DATA		MOTOR 37M3430000
Motor type		STEPPING with BRAKE + ENCODER
Temperature range	°C	from -20 to +40
Maximum relative humidity		5 to 95% (no condensate)
Nominal torque	Nm	**2.9**
Coupling flange		**NEMA 34**
Base step angle		1.8°
Bipolar current	A	6
Resistance	Ω	0.4
Inductance	mH	3.2
Bipolar holding torque	Nm	4
Rotor inertia	kgmm²	131
Mass	kg	2.5
Degree of protection		IP65
ENCODER		
Number of outputs		3 (A / B / R)
Resolution		
pulses per revolution for single channel	PPR	256
quadrature pulses per revolution	CPR	1024
Supply voltage	VDC	18 - 30
BRAKE		
Supply voltage	VDC	24 +6% / -10%
Braking torque	Nm	9
Power consumption	W	18
Connecting time	ms	7
Delay time	ms	2
Disconnection time	ms	40
CABLES		
Encoder stepping motors with brake, 3 metres		**37C1230000**
Power stepping motors with brake, 3 metres		**37C1330000**
Encoder stepping motors with brake, 5 metres		**37C1250000**
Power stepping motors with brake, 5 metres		**37C1350000**

METAL WORK PNEUMATIC

STEPPING motor with BRAKE + ENCODER code **37M3440000**

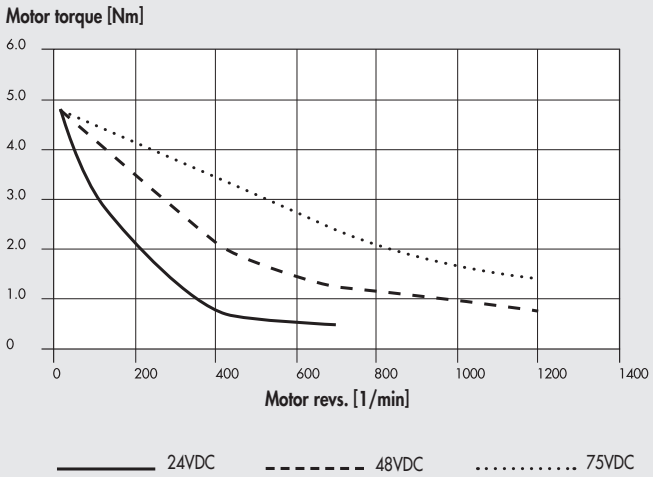

TECHNICAL DATA		MOTOR 37M3440000
Motor type		STEPPING with BRAKE + ENCODER
Temperature range	°C	from 0 to +50
Nominal torque	Nm	**4.8**
Coupling flange (square)	mm	**NEMA 34**
Base step angle		1.8°
Current	A	6
Resistance	Ω	0.54
Inductance	mH	5
Bipolar holding torque	Nm	8.5
Rotor inertia	kgmm²	360
Mass	kg	4.08
Degree of protection		IP40
ENCODER		
Number of outputs		2 (A / B differential)
Resolution		
pulses per revolution for single channel	PPR	1000
quadrature pulses per revolution	CPR	4000
Supply voltage	kg	5±10%
BRAKE		
Supply voltage	VDC	24±10%
Braking torque	Nm	5
Power consumption	W	4
CABLES		
Encoder stepping motors with brake, 5 metres		**37C1250001**
Power stepping motors with brake, 5 metres		**37C1150000**
Encoder stepping motors with brake, 10 metres		**37C1200003**
Power stepping motors with brake, 10 metres		**37C1100000**

STEPPING motor with BRAKE + ENCODER code **37M3450000**

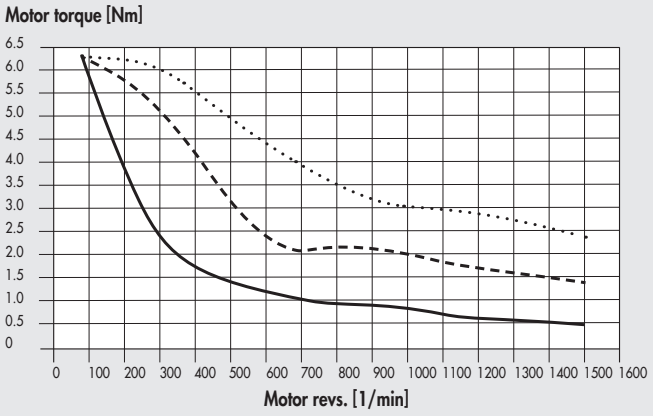

TECHNICAL DATA		MOTOR 37M3450000
Motor type		STEPPING with BRAKE + ENCODER
Temperature range	°C	from -20 to +40
Maximum relative humidity		5 to 95% (no condensate)
Nominal torque	Nm	**6.3**
Coupling flange		**NEMA 34**
Base step angle		1.8°
Bipolar current	A	10
Resistance	Ω	0.2
Inductance	mH	1.4
Bipolar holding torque	Nm	9.5
Rotor inertia	kgmm²	261
Mass	kg	3.7
Degree of protection		IP65
ENCODER		
Number of outputs		3 (A / B / R)
Resolution		
pulses per revolution for single channel	PPR	256
quadrature pulses per revolution	CPR	1024
Supply voltage	VDC	18 - 30
BRAKE		
Supply voltage	VDC	24 +6% / -10%
Braking torque	Nm	9
Power consumption	W	18
Connecting time	ms	7
Delay time	ms	2
Disconnection time	ms	40
CABLES		
Encoder stepping motors with brake, 3 metres		**37C1230000**
Power stepping motors with brake, 3 metres		**37C1330000**
Encoder stepping motors with brake, 5 metres		**37C1250000**
Power stepping motors with brake, 5 metres		**37C1350000**

STEPPING motor with BRAKE + ENCODER code **37M3460000**

Motor torque [Nm]

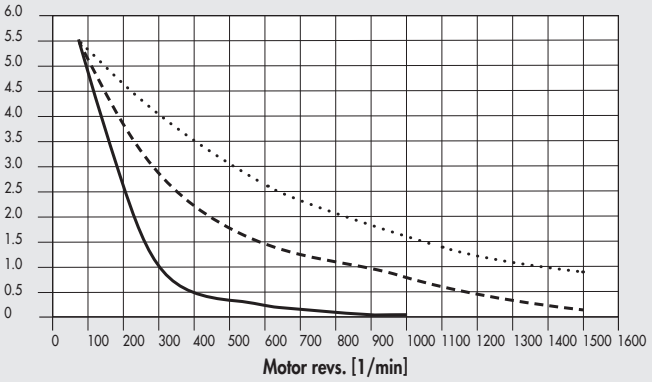

24VDC — 48VDC 75VDC

TECHNICAL DATA		MOTOR 37M3460000
Motor type		STEPPING with BRAKE + ENCODER
Temperature range	°C	from -20 to +40
Maximum relative humidity		5 to 95% (no condensate)
Nominal torque	Nm	**5.5**
Coupling flange		**NEMA 34**
Base step angle		1.8°
Bipolar current	A	6
Resistance	Ω	0.6
Inductance	mH	4.3
Bipolar holding torque	Nm	7.8
Rotor inertia	kgmm²	261
Mass	kg	3.7
Degree of protection		IP65
ENCODER		
Number of outputs		3 (A / B / R)
Resolution		
pulses per revolution for single channel	PPR	256
quadrature pulses per revolution	CPR	1024
Supply voltage	VDC	18 - 30
BRAKE		
Supply voltage	VDC	24 +6% / -10%
Braking torque	Nm	9
Power consumption	W	18
Connecting time	ms	7
Delay time	ms	2
Disconnection time	ms	40
CABLES		
Encoder stepping motors with brake, 3 metres		**37C1230000**
Power stepping motors with brake, 3 metres		**37C1330000**
Encoder stepping motors with brake, 5 metres		**37C1250000**
Power stepping motors with brake, 5 metres		**37C1350000**

STEPPING motor with BRAKE + ENCODER code **37M3470000**

Motor torque [Nm]

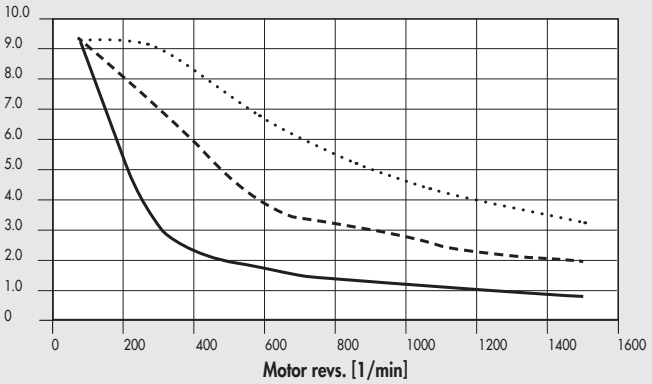

24VDC — 48VDC 75VDC

TECHNICAL DATA		MOTOR 37M3470000
Motor type		STEPPING with BRAKE + ENCODER
Temperature range	°C	from -20 to +40
Maximum relative humidity		5 to 95% (no condensate)
Nominal torque	Nm	**9.3**
Coupling flange		**NEMA 34**
Base step angle		1.8°
Bipolar current	A	10
Resistance	Ω	0.24
Inductance	mH	1.6
Bipolar holding torque	Nm	13.6
Rotor inertia	kgmm²	392
Mass	kg	4.9
Degree of protection		IP65
ENCODER		
Number of outputs		3 (A / B / R)
Resolution		
pulses per revolution for single channel	PPR	256
quadrature pulses per revolution	CPR	1024
Supply voltage	VDC	18 - 30
BRAKE		
Supply voltage	VDC	24 +6% / -10%
Braking torque	Nm	9
Power consumption	W	18
Connecting time	ms	7
Delay time	ms	2
Disconnection time	ms	40
CABLES		
Encoder stepping motors with brake, 3 metres		**37C1230000**
Power stepping motors with brake, 3 metres		**37C1330000**
Encoder stepping motors with brake, 5 metres		**37C1250000**
Power stepping motors with brake, 5 metres		**37C1350000**

BRUSHLESS MOTORS

OVERLOAD CURVES FOR ELECTRIC BRUSHLESS MOTORS (SANYO DENKI)

The torque used can exceed the nominal torque within the time limits shown in the diagram. Never exceed the maximum torque.



TORQUE CURVES / TECHNICAL FEATURES OF ELECTRIC BRUSHLESS MOTORS (SANYO DENKI)

The following diagrams show the torque delivered by the motor with changing speed (rpm). Each diagram shows two separate curves:

- **NOMINAL TORQUE** curve: the nominal torque delivered by the motor with a duty cycle of 100%
- **MAXIMUM TORQUE** curve: the torque delivered by the motor with a duty cycle of less than 100%

BRUSHLESS motor code **37M2200000** +
drive code **37D2400008** (200W)

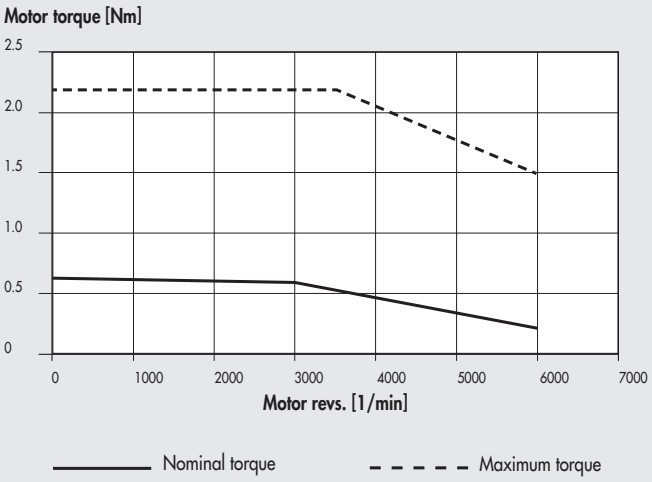

TECHNICAL DATA		MOTOR 37M2200000
Motor type		BRUSHLESS
Temperature range	°C	from 0 to +40
Maximum relative humidity		90% (no condensate)
Nominal torque	Nm	**0.64**
Coupling flange (square)	mm	**60**
Nominal power	W	200
Nominal speed	rpm	3000
Maximum speed	rpm	6000
Stall torque	Nm	0.686
Maximum torque	Nm	2.2
Rotor inertia	$kgmm^2$	21.9
Mass	kg	0.84
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP65
DRIVE	code	**37D2400008**
CABLES		
Brushless **motor-drive**, 3 metres		**37C2130005**
Brushless **motor-drive-encoder**, 3 metres		**37C2230005**
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130004**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230004**
Brushless **motor-drive**, 5 metres		**37C2150005**
Brushless **motor-drive-encoder**, 5 metres		**37C2250005**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150004**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250006**
Brushless **motor-drive**, **dynamic** cable, 10 metres		**37C2100004**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200004**

BRUSHLESS motor code **37M2220000** +
drive code **37D2400008** (400W)

Motor torque [Nm]

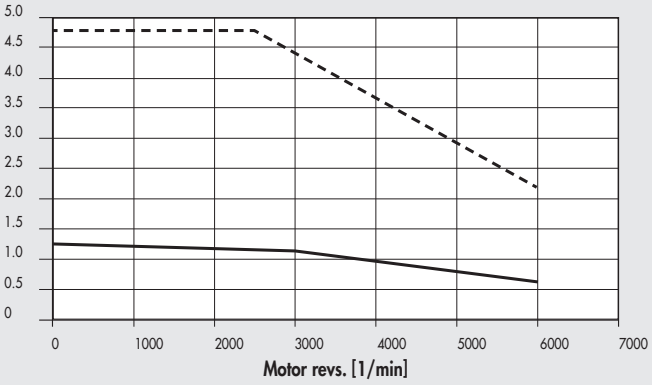

TECHNICAL DATA		MOTOR 37M2220000
Motor type		BRUSHLESS
Temperature range	°C	from 0 to +40
Maximum relative humidity		90% (no condensate)
Nominal torque	Nm	**1.27**
Coupling flange (square)	mm	**60**
Nominal power	W	400
Nominal speed	rpm	3000
Maximum speed	rpm	6000
Stall torque	Nm	1.37
Maximum torque	Nm	4.8
Rotor inertia	kgmm²	41.2
Mass	kg	1.3
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP65
DRIVE	code	**37D2400008**
CABLES		
Brushless **motor-drive**, 3 metres		**37C2130005**
Brushless **motor-drive-encoder**, 3 metres		**37C2230005**
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130004**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230004**
Brushless **motor-drive**, 5 metres		**37C2150005**
Brushless **motor-drive-encoder**, 5 metres		**37C2250005**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150004**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250006**
Brushless **motor-drive**, **dynamic** cable, 10 metres		**37C2100004**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200004**

BRUSHLESS motor code **37M2330000** +
drive code **37D2400008** (750W)

Motor torque [Nm]

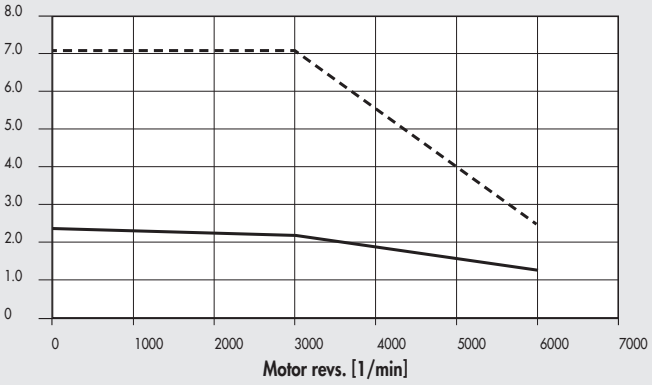

TECHNICAL DATA		MOTOR 37M2330000
Motor type		BRUSHLESS
Temperature range	°C	from 0 to +40
Maximum relative humidity		90% (no condensate)
Nominal torque	Nm	**2.39**
Coupling flange (square)	mm	**80**
Nominal power	W	750
Nominal speed	rpm	3000
Maximum speed	rpm	6000
Stall torque	Nm	2.55
Maximum torque	Nm	7.1
Rotor inertia	kgmm²	182
Mass	kg	2.6
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP65
DRIVE	code	**37D2400008**
CABLES		
Brushless **motor-drive**, 3 metres		**37C2130005**
Brushless **motor-drive-encoder**, 3 metres		**37C2230005**
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130004**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230004**
Brushless **motor-drive**, 5 metres		**37C2150005**
Brushless **motor-drive-encoder**, 5 metres		**37C2250005**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150004**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250006**
Brushless **motor-drive**, **dynamic** cable, 10 metres		**37C2100004**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200004**

METAL WORK PNEUMATIC

BRUSHLESS motor code **37M2540000** +
drive code **37D2400008** (1000W)

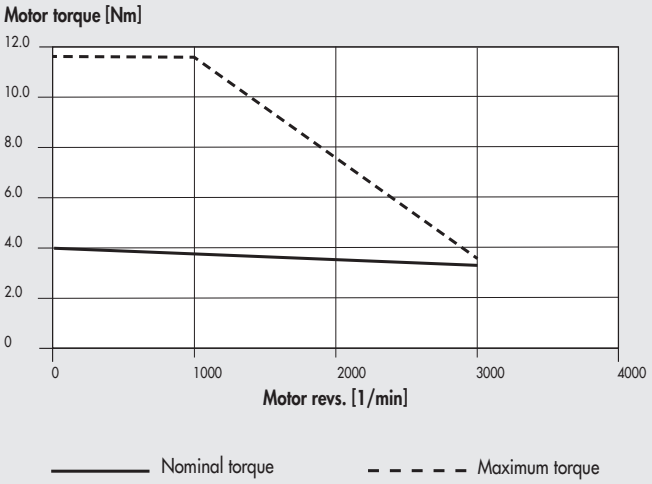

TECHNICAL DATA		MOTOR 37M2540000
Motor type		BRUSHLESS
Temperature range	°C	from 0 to +40
Maximum relative humidity		90% (no condensate)
Nominal torque	Nm	**3.18**
Coupling flange (square)	mm	**86**
Nominal power	W	1000
Nominal speed	rpm	3000
Maximum speed	rpm	3000
Stall torque	Nm	3.92
Maximum torque	Nm	11.6
Rotor inertia	$kgmm^2$	238.3
Mass	kg	3.5
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP65
DRIVE	code	**37D2400008**
CABLES		
Brushless **motor-drive**, 3 metres		**37C2130005**
Brushless **motor-drive-encoder**, 3 metres		**37C2230005**
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130004**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230004**
Brushless **motor-drive**, 5 metres		**37C2150005**
Brushless **motor-drive-encoder**, 5 metres		**37C2250005**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150004**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250006**
Brushless **motor-drive**, **dynamic** cable, 10 metres		**37C2100004**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200004**

NOTES

OVERLOAD CURVES FOR ELECTRIC BRUSHLESS MOTORS (DELTA)

The torque used can exceed the nominal torque within the time limits shown in the diagram. Never exceed the maximum torque.



TORQUE CURVES / TECHNICAL FEATURES OF ELECTRIC BRUSHLESS MOTORS (DELTA)

The following diagrams show the torque delivered by the motor with changing speed (rpm). Each diagram shows two separate curves:

- **NOMINAL TORQUE** curve: the nominal torque delivered by the motor with a duty cycle of 100%
- **MAXIMUM TORQUE** curve: the torque delivered by the motor with a duty cycle of less than 100%

BRUSHLESS motor code **37M2000000** + drive code **37D2100000** (100W)

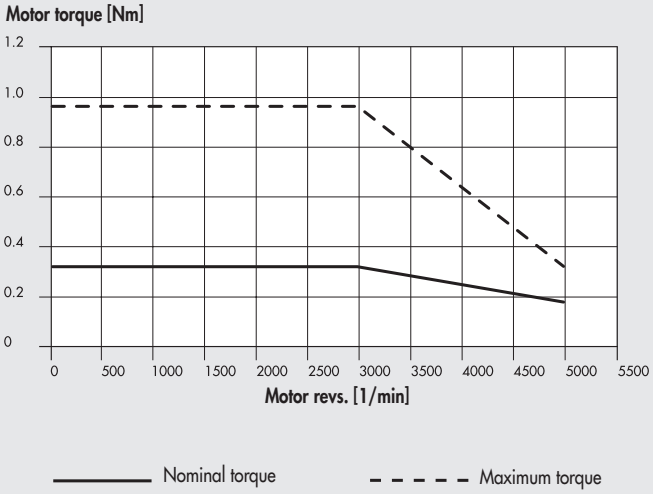

TECHNICAL DATA		MOTOR 37M2000000
Motor type		BRUSHLESS
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**0.32**
Coupling flange (square)	mm	**40**
Nominal power	W	100
Nominal speed	rpm	3000
Maximum speed	rpm	5000
Stall torque	Nm	0.32
Maximum torque	Nm	0.96
Rotor inertia	kgmm²	3.7
Mass	kg	0.5
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP65
DRIVE	code	**37D2100000**
CABLES		
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130002**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230002**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150002**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250002**
Brushless **motor-drive** connecting **dynamic** cable, 10 metres		**37C2100003**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200003**

METAL WORK PNEUMATIC

BRUSHLESS motor code **37M2200001** +
drive code **37D2200001** (200W)

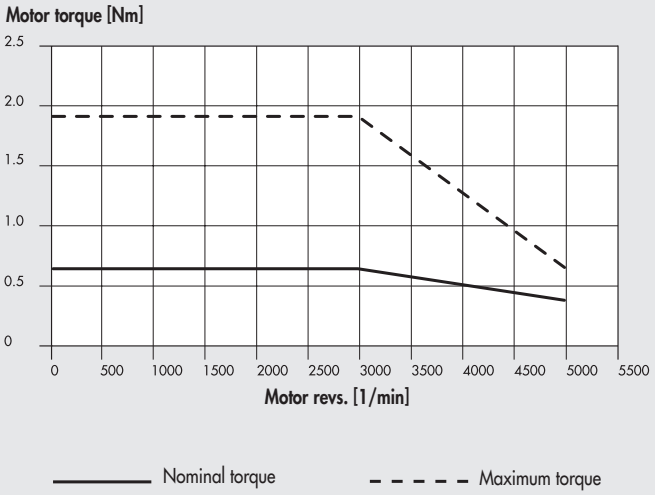

TECHNICAL DATA		MOTOR 37M2200001
Motor type		BRUSHLESS
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**0.64**
Coupling flange (square)	mm	**60**
Nominal power	W	200
Nominal speed	rpm	3000
Maximum speed	rpm	5000
Stall torque	Nm	0.64
Maximum torque	Nm	1.92
Rotor inertia	kgmm²	17.7
Mass	kg	1.2
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP65
DRIVE	code	**37D2200001**
CABLES		
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130002**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230002**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150002**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250002**
Brushless **motor-drive** connecting **dynamic** cable, 10 metres		**37C2100003**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200003**

BRUSHLESS motor code **37M2220001** +
drive code **37D2300000** (400W)

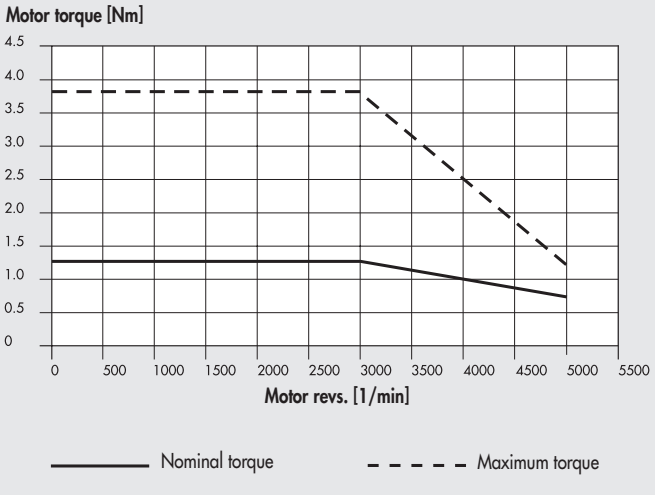

TECHNICAL DATA		MOTOR 37M2220001
Motor type		BRUSHLESS
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**1.27**
Coupling flange (square)	mm	**60**
Nominal power	W	400
Nominal speed	rpm	3000
Maximum speed	rpm	5000
Stall torque	Nm	1.27
Maximum torque	Nm	3.82
Rotor inertia	kgmm²	27.7
Mass	kg	1.6
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP65
DRIVE	code	**37D2300000**
CABLES		
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130002**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230002**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150002**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250002**
Brushless **motor-drive** connecting **dynamic** cable, 10 metres		**37C2100003**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200003**

BRUSHLESS motor code **37M2220002** +
drive code **37D2300002** (400W)

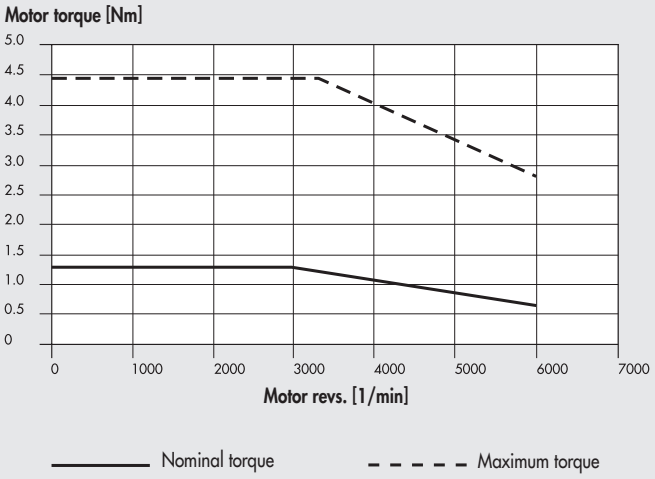

TECHNICAL DATA		MOTOR 37M2220002
Motor type		BRUSHLESS B3
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**1.27**
Coupling flange (square)	mm	**60**
Nominal power	W	400
Nominal speed	rpm	3000
Maximum speed	rpm	6000
Stall torque	Nm	1.3
Maximum torque	Nm	4.45
Rotor inertia	kgmm²	25.4
Mass	kg	1.2
Encoder	pulse/rev	16777216 (24 bit)
Degree of protection		IP67
DRIVE	code	**37D2300002**
CABLES		
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130002**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230006**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150002**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250007**
Brushless **motor-drive** connecting **dynamic** cable, 10 metres		**37C2100003**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200006**

BRUSHLESS motor code **37M2330001** +
drive code **37D2400007** (750W)

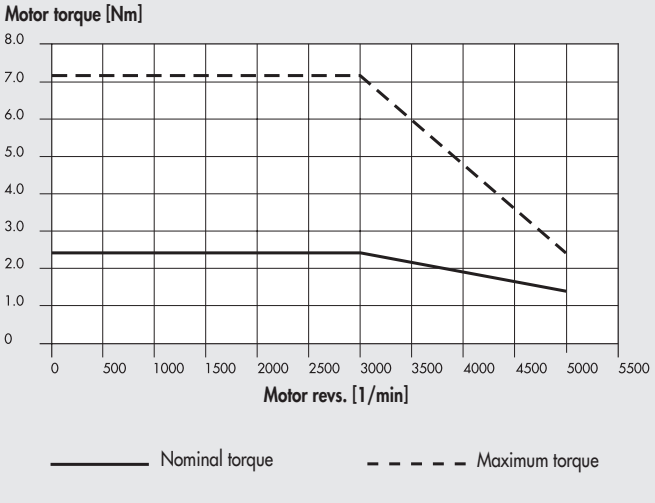

TECHNICAL DATA		MOTOR 37M2330001
Motor type		BRUSHLESS
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**2.39**
Coupling flange (square)	mm	**80**
Nominal power	W	750
Nominal speed	rpm	3000
Maximum speed	rpm	5000
Stall torque	Nm	2.39
Maximum torque	Nm	7.17
Rotor inertia	kgmm²	113
Mass	kg	3
Encoder	pulse/rev	1048576 (20 bit)
Degree of protection		IP65
DRIVE	code	**37D2400007**
CABLES		
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130002**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230002**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150002**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250002**
Brushless **motor-drive** connecting **dynamic** cable, 10 metres		**37C2100003**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200003**

BRUSHLESS motor code **37M2640000** +
drive code **37D2400006** (1000W)

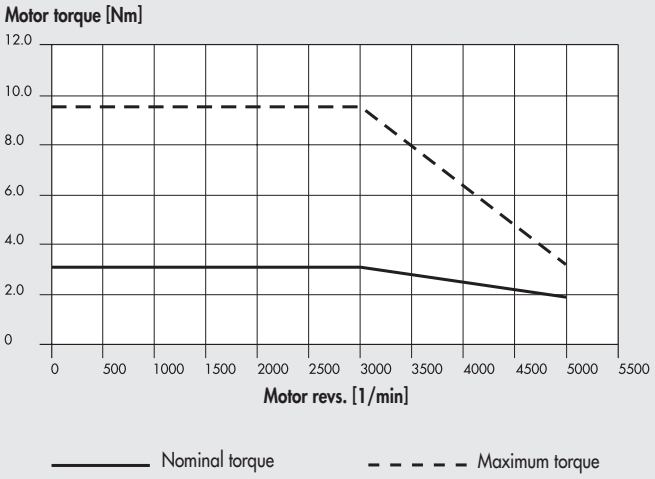

TECHNICAL DATA		MOTOR 37M2640000
Motor type		BRUSHLESS
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**3.18**
Coupling flange (square)	mm	**100**
Nominal power	W	1000
Nominal speed	rpm	3000
Maximum speed	rpm	5000
Stall torque	Nm	3.18
Maximum torque	Nm	9.54
Rotor inertia	kgmm²	265
Mass	kg	4.3
Encoder	pulse/rev	131072 (17bit)
Degree of protection		IP65
DRIVE	code	**37D2400006**
CABLES		
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130006**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230007**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150006**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250008**
Brushless **motor-drive** connecting **dynamic** cable, 10 metres		**37C2100006**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200007**

BRUSHLESS motor code **37M2770000** +
drive code **37D2600001** (3000W)

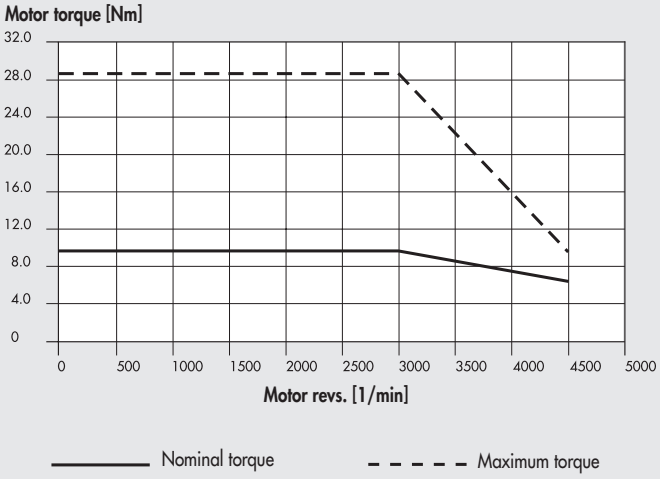

TECHNICAL DATA		MOTOR 37M2770000
Motor type		BRUSHLESS
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**9.55**
Coupling flange (square)	mm	**130**
Nominal power	W	3000
Nominal speed	rpm	3000
Maximum speed	rpm	4500
Stall torque	Nm	9.55
Maximum torque	Nm	28.65
Rotor inertia	kgmm²	1270
Mass	kg	7.8
Encoder	pulse/rev	1048576 (20 bit)
Degree of protection		IP65
DRIVE	code	**37D2600001**
CABLES		
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130006**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230007**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150006**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250008**
Brushless **motor-drive** connecting **dynamic** cable, 10 metres		**37C2100006**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200007**

NOTES

BRUSHLESS MOTORS WITH BRAKE

OVERLOAD CURVES FOR ELECTRIC BRUSHLESS MOTORS (SANYO DENKI)

The torque used can exceed the nominal torque within the time limits shown in the diagram. Never exceed the maximum torque.



TORQUE CURVES / TECHNICAL FEATURES OF ELECTRIC BRUSHLESS MOTORS WITH BRAKE (SANYO DENKI)

The following diagrams show the torque delivered by the motor with changing speed (rpm). Each diagram shows two separate curves:

- **NOMINAL TORQUE** curve: the nominal torque delivered by the motor with a duty cycle of 100%
- **MAXIMUM TORQUE** curve: the torque delivered by the motor with a duty cycle of less than 100%

BRUSHLESS motor with BRAKE code **37M4200000** + drive code **37D2400008** (200W)

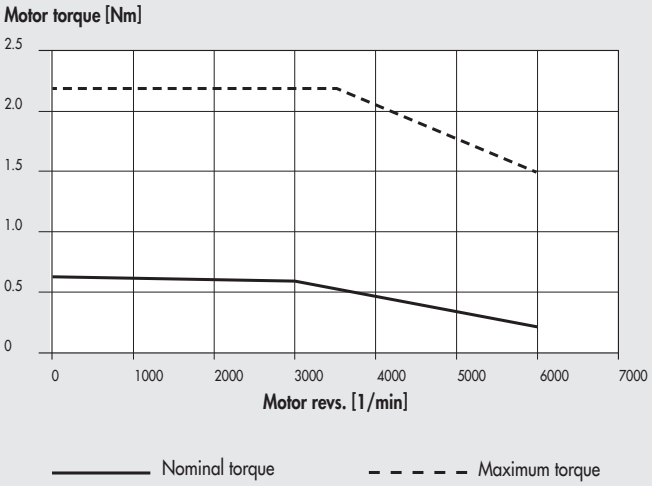

TECHNICAL DATA		MOTOR 37M4200000
Motor type		BRUSHLESS with BRAKE
Temperature range	°C	from 0 to +40
Maximum relative humidity		90% (no condensate)
Nominal torque	Nm	**0.64**
Coupling flange (square)	mm	**60**
Nominal power	W	200
Nominal speed	rpm	3000
Maximum speed	rpm	6000
Stall torque	Nm	0.686
Maximum torque	Nm	2.2
Rotor inertia	kgmm²	27.9
Mass	kg	1.23
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP65
BRAKE		
Supply voltage	VDC	24 ±10%
Braking torque static	Nm	1.37 min
DRIVE	code	**37D2400008**
CABLES		
Brushless **motor-drive**, 3 metres		**37C2130005**
Brushless **motor-drive-encoder**, 3 metres		**37C2230005**
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130004**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230004**
Brushless **motor-brake**, **dynamic** cable, 3 metres		**37C2330000**
Brushless **motor-drive**, 5 metres		**37C2150005**
Brushless **motor-drive-encoder**, 5 metres		**37C2250005**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150004**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250006**
Brushless **motor-brake**, **dynamic** cable, 5 metres		**37C2350000**
Brushless **motor-drive**, **dynamic** cable, 10 metres		**37C2100004**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200004**
Brushless **motor-brake**, **dynamic** cable, 10 metres		**37C2310000**

BRUSHLESS motor with BRAKE code **37M4220000** + drive code **37D2400008** (400W)

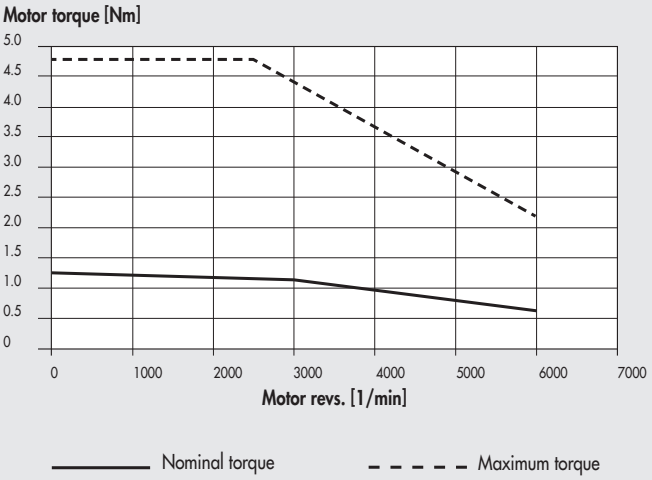

TECHNICAL DATA		MOTOR 37M4220000
Motor type		BRUSHLESS with BRAKE
Temperature range	°C	from 0 to +40
Maximum relative humidity		90% (no condensate)
Nominal torque	Nm	**1.27**
Coupling flange (square)	mm	**60**
Nominal power	W	400
Nominal speed	rpm	3000
Maximum speed	rpm	6000
Stall torque	Nm	1.37
Maximum torque	Nm	4.8
Rotor inertia	kgmm²	47.2
Mass	kg	1.69
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP65
BRAKE		
Supply voltage	VDC	24 ±10%
Braking torque static	Nm	1.37 min
DRIVE	code	**37D2400008**
CABLES		
Brushless **motor-drive**, 3 metres		**37C2130005**
Brushless **motor-drive-encoder**, 3 metres		**37C2230005**
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130004**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230004**
Brushless **motor-brake**, **dynamic** cable, 3 metres		**37C2330000**
Brushless **motor-drive**, 5 metres		**37C2150005**
Brushless **motor-drive-encoder**, 5 metres		**37C2250005**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150004**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250006**
Brushless **motor-brake**, **dynamic** cable, 5 metres		**37C2350000**
Brushless **motor-drive**, **dynamic** cable, 10 metres		**37C2100004**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200004**
Brushless **motor-brake**, **dynamic** cable, 10 metres		**37C2310000**

BRUSHLESS motor with BRAKE code **37M4330000** + drive code **37D2400008** (750W)

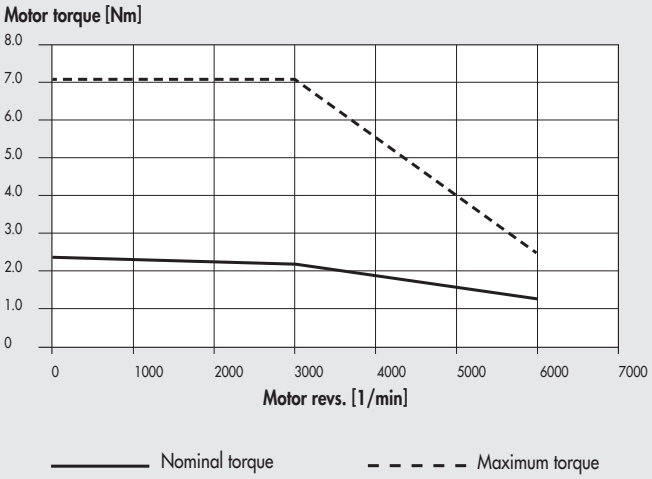

TECHNICAL DATA		MOTOR 37M4330000
Motor type		BRUSHLESS with BRAKE
Temperature range	°C	from 0 to +40
Maximum relative humidity		90% (no condensate)
Nominal torque	Nm	**2.39**
Coupling flange (square)	mm	**80**
Nominal power	W	750
Nominal speed	rpm	3000
Maximum speed	rpm	6000
Stall torque	Nm	2.55
Maximum torque	Nm	7.1
Rotor inertia	kgmm²	207
Mass	kg	2.19
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP65
BRAKE		
Supply voltage	VDC	24 ±10%
Braking torque static	Nm	2.55 min
DRIVE	code	**37D2400008**
CABLES		
Brushless **motor-drive**, 3 metres		**37C2130005**
Brushless **motor-drive-encoder**, 3 metres		**37C2230005**
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130004**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230004**
Brushless **motor-brake**, **dynamic** cable, 3 metres		**37C2330000**
Brushless **motor-drive**, 5 metres		**37C2150005**
Brushless **motor-drive-encoder**, 5 metres		**37C2250005**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150004**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250006**
Brushless **motor-brake**, **dynamic** cable, 5 metres		**37C2350000**
Brushless **motor-drive**, **dynamic** cable, 10 metres		**37C2100004**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200004**
Brushless **motor-brake**, **dynamic** cable, 10 metres		**37C2310000**

METAL WORK PNEUMATIC

BRUSHLESS motor with BRAKE code **37M4540000** + drive code **37D2400008** (1000W)

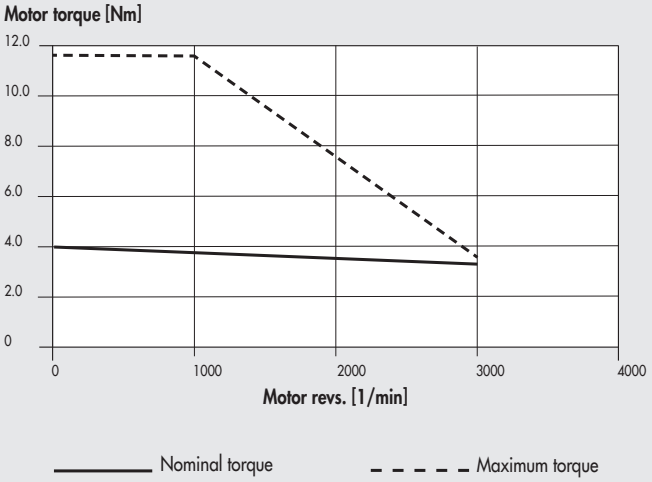

TECHNICAL DATA		MOTOR 37M4540000
Motor type		BRUSHLESS with BRAKE
Temperature range	°C	from 0 to +40
Maximum relative humidity		90% (no condensate)
Nominal torque	Nm	**3.18**
Coupling flange (square)	mm	**86**
Nominal power	W	1000
Nominal speed	rpm	3000
Maximum speed	rpm	3000
Stall torque	Nm	3.92
Maximum torque	Nm	11.6
Rotor inertia	$kgmm^2$	272.6
Mass	kg	4.34
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP65
BRAKE		
Supply voltage	VDC	24 ±10%
Braking torque static	Nm	3.92 min
DRIVE	code	**37D2400008**
CABLES		
Brushless **motor-drive**, 3 metres		**37C2130005**
Brushless **motor-drive-encoder**, 3 metres		**37C2230005**
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2130004**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230004**
Brushless **motor-brake**, **dynamic** cable, 3 metres		**37C2330000**
Brushless **motor-drive**, 5 metres		**37C2150005**
Brushless **motor-drive-encoder**, 5 metres		**37C2250005**
Brushless **motor-drive**, **dynamic** cable, 5 metres		**37C2150004**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250006**
Brushless **motor-brake**, **dynamic** cable, 5 metres		**37C2350000**
Brushless **motor-drive**, **dynamic** cable, 10 metres		**37C2100004**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200004**
Brushless **motor-brake**, **dynamic** cable, 10 metres		**37C2310000**

NOTES

OVERLOAD CURVES FOR ELECTRIC BRUSHLESS MOTORS (DELTA)

The torque used can exceed the nominal torque within the time limits shown in the diagram. Never exceed the maximum torque.



TORQUE CURVES / TECHNICAL FEATURES OF ELECTRIC BRUSHLESS MOTORS WITH BRAKE (DELTA)

The following diagrams show the torque delivered by the motor with changing speed (rpm). Each diagram shows two separate curves:

- **NOMINAL TORQUE** curve: the nominal torque delivered by the motor with a duty cycle of 100%
- **MAXIMUM TORQUE** curve: the torque delivered by the motor with a duty cycle of less than 100%

BRUSHLESS motor with BRAKE code **37M4000000** + drive code **37D2100000** (100W)

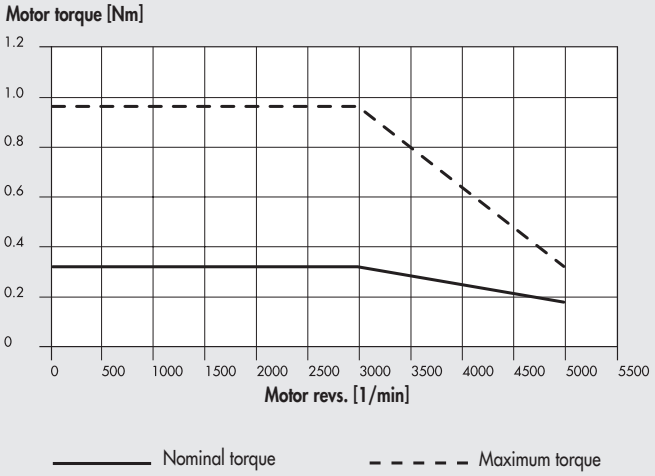

TECHNICAL DATA		MOTOR 37M4000000
Motor type		BRUSHLESS with BRAKE
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**0.32**
Coupling flange (square)	mm	**40**
Nominal power	W	100
Nominal speed	rpm	3000
Maximum speed	rpm	5000
Stall torque	Nm	0.32
Maximum torque	Nm	0.96
Rotor inertia	kgmm²	4
Mass	kg	0.8
Encoder	imp./giro	131072 (17 bit)
Degree of protection		IP40
BRAKE		
Supply voltage	VDC	24 ±10%
Braking torque static	Nm	0.3
Absorption	W	7.2
DRIVE	code	**37D2100000**
CABLES		
Brushless **motor-drive** with brake **dynamic** cable, 3 metres		**37C2730001**
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2230002**
Brushless **motor-drive** with brake **dynamic** cable, 5 metres		**37C2750001**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250002**
Brushless **motor-drive** with brake **dynamic** cable, 10 metres		**37C2700001**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200003**

BRUSHLESS motor with BRAKE code **37M4200001** + drive code **37D2200001** (200W)

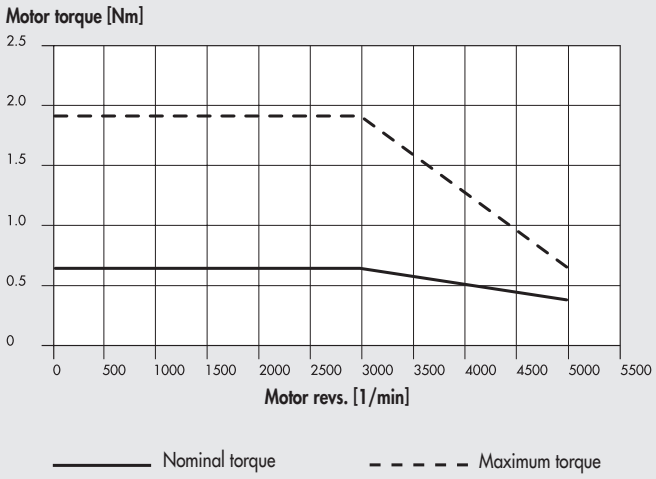

TECHNICAL DATA		MOTOR 37M4200001
Motor type		BRUSHLESS with BRAKE
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**0.64**
Coupling flange (square)	mm	**60**
Nominal power	W	200
Nominal speed	rpm	3000
Maximum speed	rpm	5000
Stall torque	Nm	0.64
Maximum torque	Nm	1.92
Rotor inertia	kgmm²	19.2
Mass	kg	1.5
Encoder	imp./giro	131072 (17 bit)
Degree of protection		IP40
BRAKE		
Supply voltage	VDC	24 ±10%
Braking torque static	Nm	1.3
Absorption	W	6.5
DRIVE	code	**37D2200001**
CABLES		
Brushless **motor-drive** with brake **dynamic** cable, 3 metres		**37C2730001**
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2230002**
Brushless **motor-drive** with brake **dynamic** cable, 5 metres		**37C2750001**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250002**
Brushless **motor-drive** with brake **dynamic** cable, 10 metres		**37C2700001**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200003**

BRUSHLESS motor with BRAKE code **37M4220001** + drive code **37D2300000** (400W)

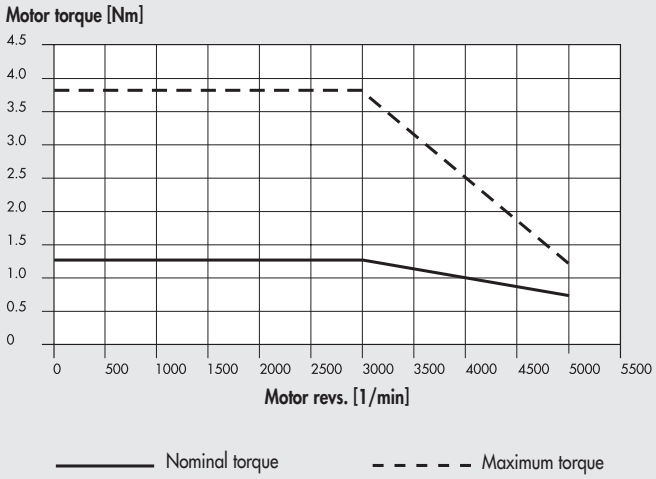

TECHNICAL DATA		MOTOR 37M4220001
Motor type		BRUSHLESS with BRAKE
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**1.27**
Coupling flange (square)	mm	**60**
Nominal power	W	400
Nominal speed	rpm	3000
Maximum speed	rpm	5000
Stall torque	Nm	1.27
Maximum torque	Nm	3.82
Rotor inertia	kgmm²	30
Mass	kg	2
Encoder	pulse/rev	131072 (17 bit)
Degree of protection		IP40
BRAKE		
Supply voltage	VDC	24 ±10%
Braking torque static	Nm	1.3
Absorption	W	6.5
DRIVE	code	**37D2300000**
CABLES		
Brushless **motor-drive** with brake **dynamic** cable, 3 metres		**37C2730001**
Brushless **motor-drive**, **dynamic** cable, 3 metres		**37C2230002**
Brushless **motor-drive** with brake **dynamic** cable, 5 metres		**37C2750001**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250002**
Brushless **motor-drive** with brake **dynamic** cable, 10 metres		**37C2700001**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200003**

BRUSHLESS motor with BRAKE code **37M4220002** + drive code **37D2300002** (400W)

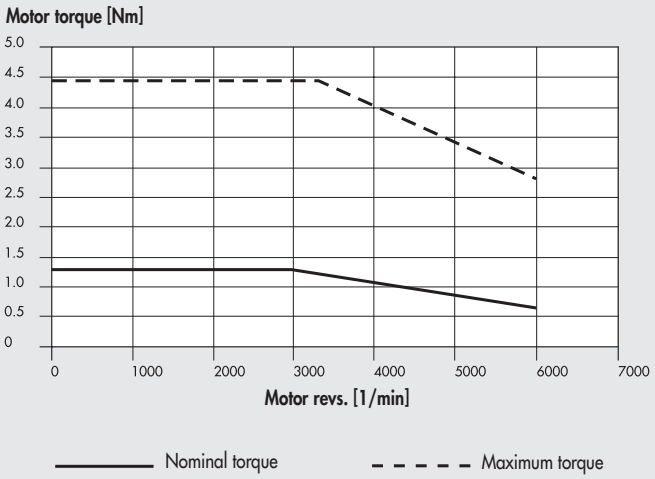

TECHNICAL DATA		MOTOR 37M4220002
Motor type		BRUSHLESS with BRAKE B3
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**1.27**
Coupling flange (square)	mm	**60**
Nominal power	W	400
Nominal speed	rpm	3000
Maximum speed	rpm	6000
Stall torque	Nm	1.3
Maximum torque	Nm	4.45
Rotor inertia	kgmm²	26.4
Mass	kg	1.6
Encoder	pulse/rev	16777216 (24 bit)
Degree of protection		IP67
BRAKE		
Supply voltage	VDC	24 ±10%
Braking torque static	Nm	1.3
Absorption	W	7.6
DRIVE	code	**37D2300002**
CABLES		
Brushless **motor-drive** with brake **dynamic** cable, 3 metres		**37C2730001**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230006**
Brushless **motor-drive** with brake **dynamic** cable, 5 metres		**37C2750001**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250007**
Brushless **motor-drive** with brake **dynamic** cable, 10 metres		**37C2700001**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200006**

BRUSHLESS motor with BRAKE code **37M4330001** + drive code **37D2400007** (750W)

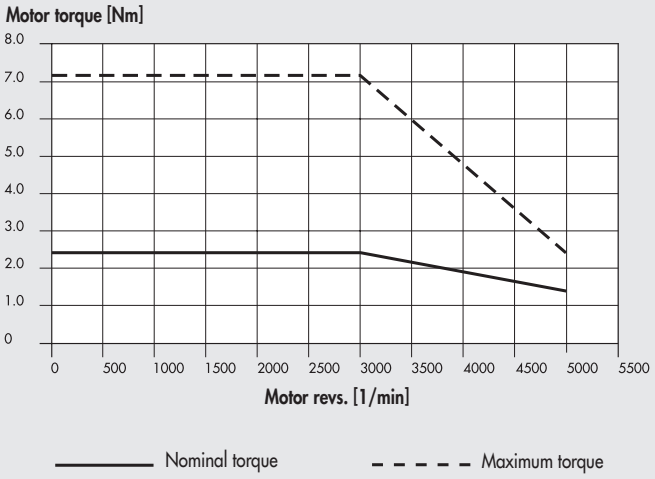

TECHNICAL DATA		MOTOR 37M4330001
Motor type		BRUSHLESS with BRAKE
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**2.39**
Coupling flange (square)	mm	**80**
Nominal power	W	750
Nominal speed	rpm	3000
Maximum speed	rpm	5000
Stall torque	Nm	2.39
Maximum torque	Nm	7.17
Rotor inertia	kgmm²	113
Mass	kg	3
Encoder	pulse/rev	1048576 (20 bit)
Degree of protection		IP40
BRAKE		
Supply voltage	VDC	24 ±10%
Braking torque static	Nm	2.5
Absorption	W	6.5
DRIVE	code	**37D2400007**
CABLES		
Brushless **motor-drive** with brake **dynamic** cable, 3 metres		**37C2730001**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230002**
Brushless **motor-drive** with brake **dynamic** cable, 5 metres		**37C2750001**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250002**
Brushless **motor-drive** with brake **dynamic** cable, 10 metres		**37C2700001**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200003**

BRUSHLESS motor with BRAKE code **37M4640000** + drive code **37D2400006** (1000W)

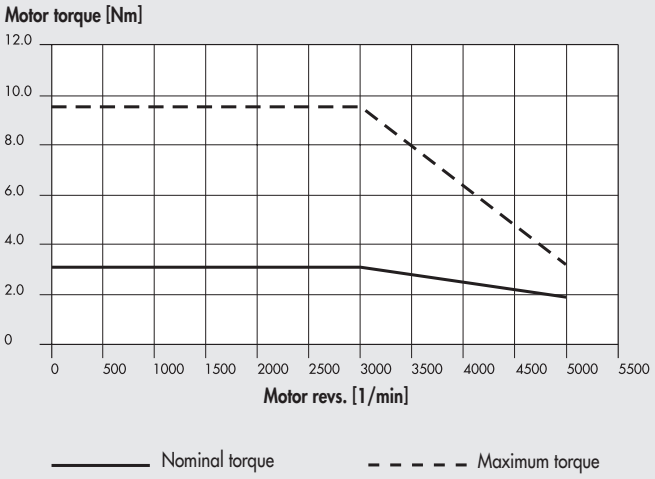

TECHNICAL DATA		MOTOR 37M4640000
Motor type		BRUSHLESS
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**3.18**
Coupling flange (square)	mm	**100**
Nominal power	W	1000
Nominal speed	rpm	3000
Maximum speed	rpm	5000
Stall torque	Nm	3.18
Maximum torque	Nm	9.54
Rotor inertia	kgmm²	333
Mass	kg	4.7
Encoder	pulse/rev	131072 (17bit)
Degree of protection		IP65
BRAKE		
Supply voltage	VDC	24 ±10%
Braking torque static	Nm	10
Absorption	W	19
DRIVE	code	**37D2400006**
CABLES		
Brushless **motor-drive** with brake **dynamic** cable, 3 metres		**37C2730002**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230007**
Brushless **motor-drive** with brake **dynamic** cable, 5 metres		**37C2750003**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250008**
Brushless **motor-drive** with brake **dynamic** cable, 10 metres		**37C2700002**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200007**

BRUSHLESS motor with BRAKE code **37M4770000** + drive code **37D2600001** (3000W)

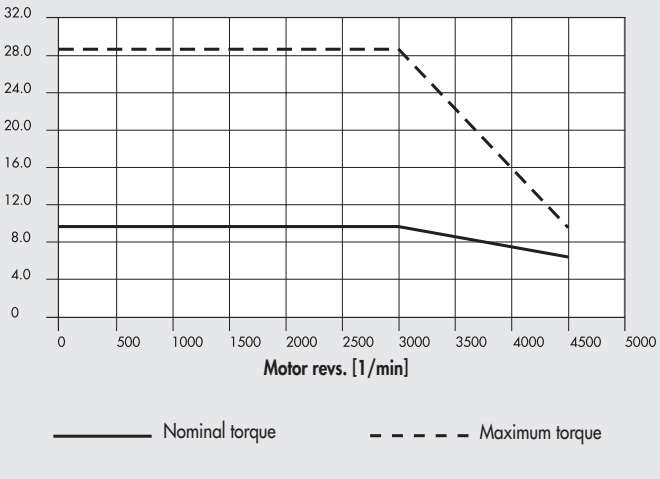

TECHNICAL DATA		MOTOR 37M4770000
Motor type		BRUSHLESS with BRAKE
Temperature range	°C	from 0 to +40
Maximum relative humidity		20 to 90% (no condensate)
Nominal torque	Nm	**9.55**
Coupling flange (square)	mm	**130**
Nominal power	W	3000
Nominal speed	rpm	3000
Maximum speed	rpm	4500
Stall torque	Nm	9.55
Maximum torque	Nm	28.65
Rotor inertia	kgmm²	1400
Mass	kg	9.2
Encoder	pulse/rev	1048576 (20 bit)
Degree of protection		IP65
BRAKE		
Supply voltage	VDC	24 ±10%
Braking torque static	Nm	10
Absorption	W	19
DRIVE	code	**37D2600001**
CABLES		
Brushless **motor-drive** with brake **dynamic** cable, 3 metres		**37C2730002**
Brushless **motor-drive-encoder**, **dynamic** cable, 3 metres		**37C2230007**
Brushless **motor-drive** with brake **dynamic** cable, 5 metres		**37C2750003**
Brushless **motor-drive-encoder**, **dynamic** cable, 5 metres		**37C2250008**
Brushless **motor-drive** with brake **dynamic** cable, 10 metres		**37C2700002**
Brushless **motor-drive-encoder**, **dynamic** cable, 10 metres		**37C2200007**

NOTES

DIMENSIONS OF ELECTRIC MOTORS

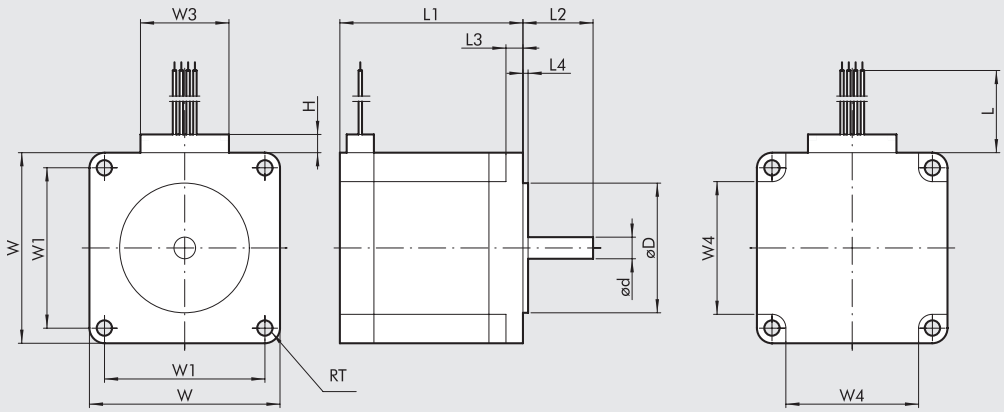

WIRING DIAGRAM



Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.013	øD ±0.025	H	L min	L1 ±0.8	L2 ±0.5	L3 ±0.25	L4 ±0.25	RT +0.5/0	W ±0.5	W1 ±0.13	W3 max	W4 ±0.5
STEPPING	37M1110000	0.8	NEMA 23	6.35	38.1	7	305	53.8	20.6	5	1.5	4.5	56	47.14	26	39
	37M1120000	1.2	NEMA 23	6.35	38.1	7	305	75.8	20.6	5	1.5	4.5	56	47.14	26	39
	37M1120001	1.2	NEMA 23	6.35	38.1	10	305	75.8	20.6	5	1.5	4.5	56	47.14	39	39

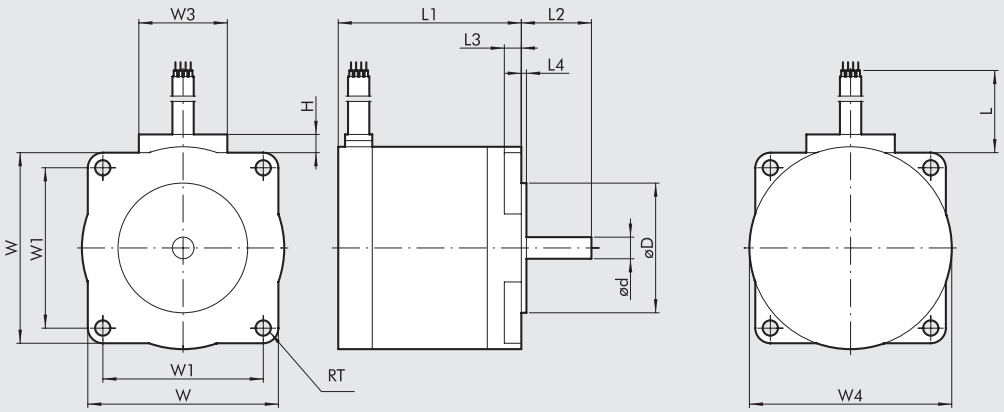

WIRING DIAGRAM



Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.018	øD ±0.025	H	L min	L1	L2 ±0.5	L3 ±0.50	L4 ±0.25	RT +0.5/0	W ±0.5	W1 ±0.2	W3	W4 ±0.5
STEPPING	37M1430000	2.4	NEMA 34	9.525	73.02	10	305	62	30	4.8	1.5	5.4	82.5	69.6	37	85.8
	37M1440000	4.2	NEMA 34	12	73.02	10	305	92.2	30	4.8	1.5	5.4	82.5	69.6	37	85.8
	37M1890000	17.5	NEMA 42	16	55.52	10	305	221	35	8.6	1.5	6.9	106.4	88.9	37	106.4

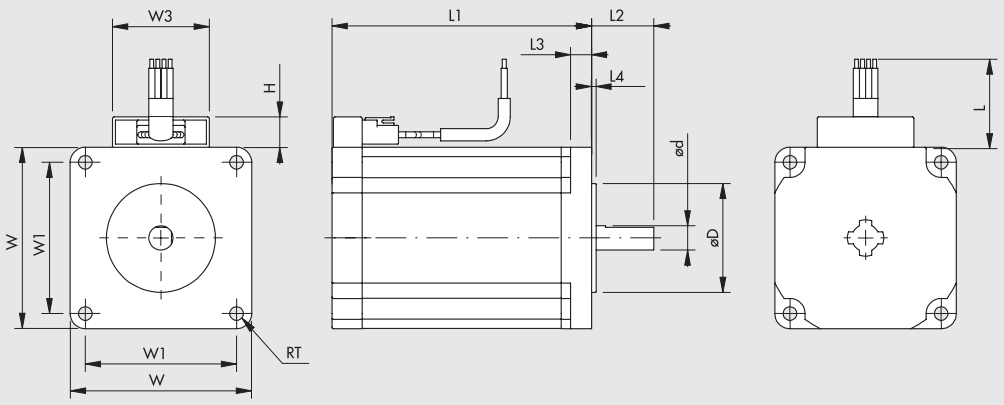

WIRING DIAGRAM



Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.018	øD ±0.025	H max	L min	L1 ±1	L2 ±0.5	L3 ±0.50	L4 ±0.25	RT +0.2	W ±0.5	W1 ±0.25	W3 max
STEPPING	37M1230000	2.2	60	8	36	10	300	86	20.6	7	1.5	4.5	60	50	32

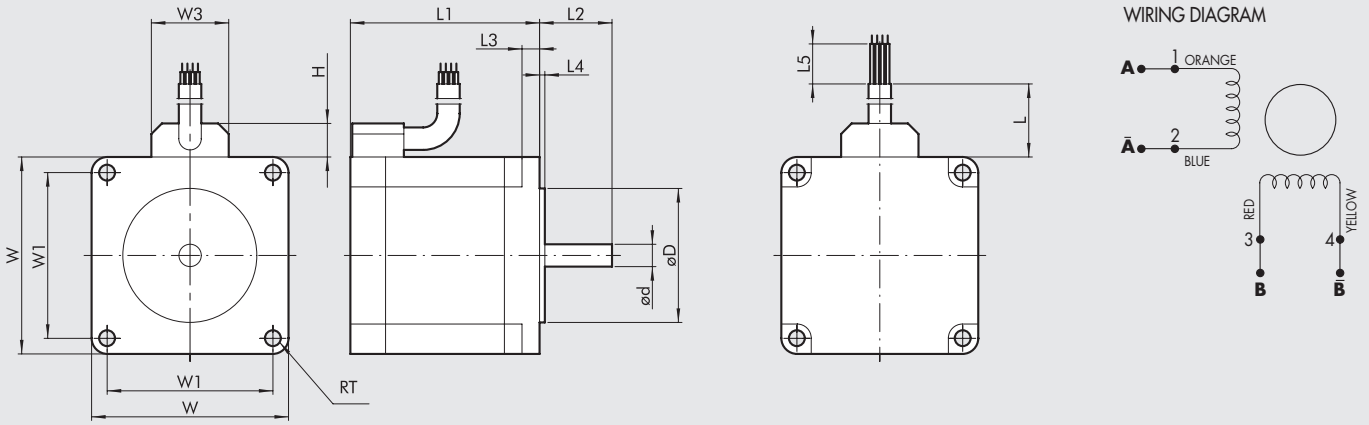

Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.018	øD ±0.025	H max	L min	L1 ±1	L2 ±0.5	L3 ±0.50	L4 ±0.25	L5	RT +0.2	W ±0.5	W1 ±0.25	W3 max
STEPPING	**37M1450000**	**6.7**	**NEMA 34**	14	73.025	12	305	127	30	8	1.5	50	5.6	85.5	69.6	27

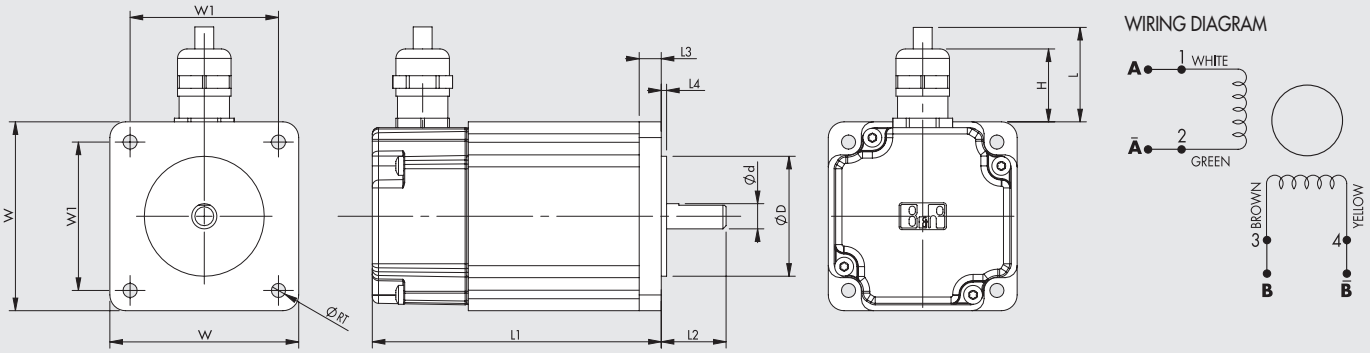

Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.013	øD ±0.025	H	L min	L1 ±1	L2 ±0.5	L3 ±0.50	L4 ±0.25	RT +0.2	W ±0.5	W1 ±0.13
STEPPING	**37M1220000**	**1.2**	**60**	8	38.1	23	1023	91.8	20.6	7	1.6	4.5	60	47.14

1 = access for power cable and brake
2 = access for encoder cable

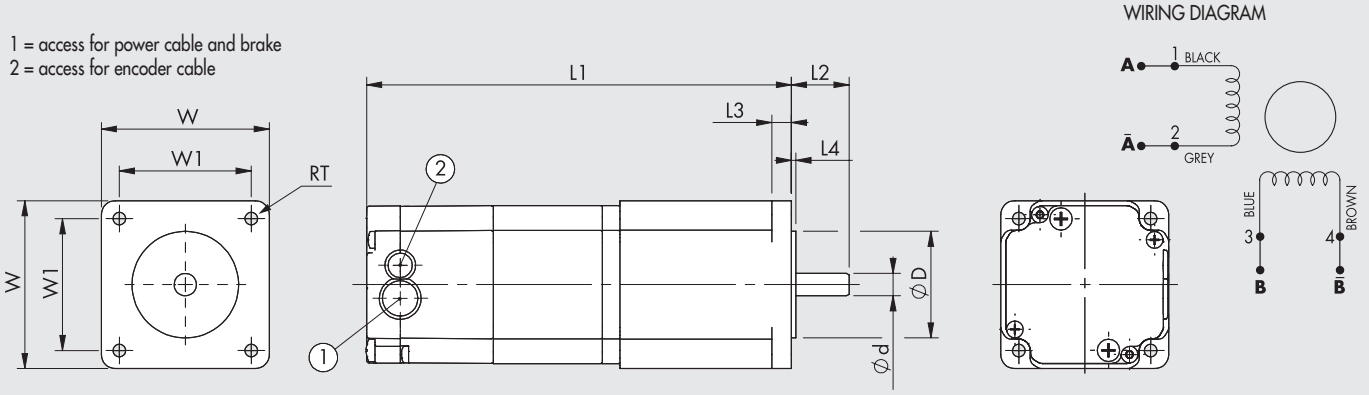

Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.013	øD ±0.025	L1	L2 ±0.51	L3	L4	RT	W	W1 ±0.13
STEPPING	**37M1470000**	**9.3**	**NEMA 34**	12.7	73.025	130	31.75	9.91	2.03	5.6	86.6	69.6
STEPPING	**37M8220000**	**1.2**	**60**	8	38.1	106.6	20.6	7	1.6	4.5	60	47.14
+ ENCODER	**37M8470000**	**9.3**	**NEMA 34**	12.7	73.025	165.4	31.75	9.91	2.03	5.6	86.6	69.6
STEPPING	**37M3220000**	**1.2**	**60**	8	38.1	151.8	20.6	7	1.6	4.5	60	47.14
+ BRAKE	**37M3230000**	**2.5**	**60**	8	38.1	184.5	20.6	7	1.6	4.5	60	47.14
+ ENCODER	**37M3430000**	**2.9**	**NEMA 34**	12.7	73.02	156.5	31.75	9.9	2	5.6	86.6	69.6
	37M3460000	**5.5**	**NEMA 34**	12.7	73.02	188.5	31.75	9.9	2	5.6	86.6	69.6
	37M3450000	**6.3**	**NEMA 34**	12.7	73.02	188.5	31.75	9.9	2	5.6	86.6	69.6
	37M3470000	**9.3**	**NEMA 34**	12.7	73.02	220.5	31.75	9.9	2	5.6	86.6	69.6

METAL WORK PNEUMATIC

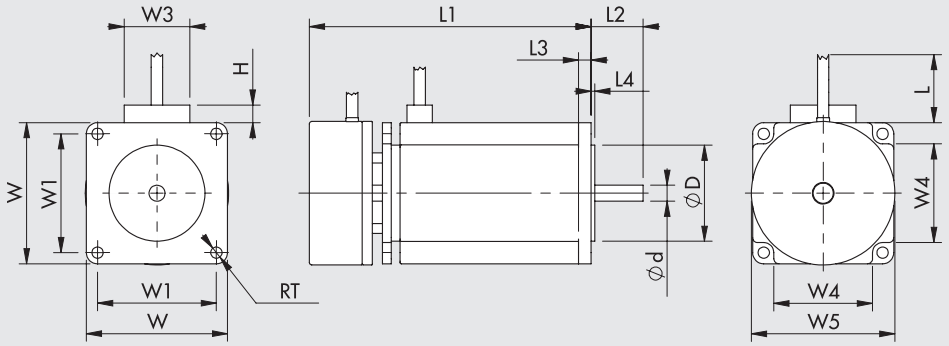

WIRING DIAGRAM



Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.013	øD ±0.025	H	L min	L1 ±0.8	L2 ±0.5	L3 ±0.25	L4 ±0.25	RT +0.5/0	W ±0.5	W1 ±0.13	W3 max	W4 ±0.5	W5 ±0.5
STEPPING + BRAKE	**37M5120000**	**1.2**	**NEMA 23**	6.35	38.1	7	305	111.8	20.6	5	1.5	4.5	56	47.14	26	39	56.9

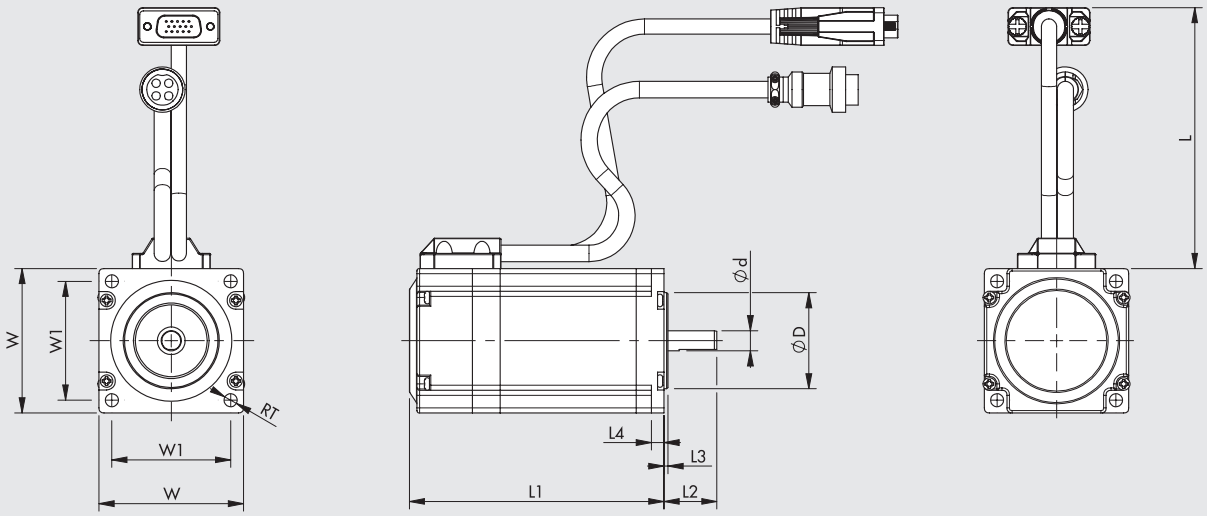

Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.013	øD 0/-0.05	L	L1	L2	L3	L4	RT	W	W1 ±0.25
STEPPING + ENCODER	**37M1820000**	**1.4**	**NEMA 23**	8	38.1	300	101	21	1.6	5	5.15	56.4	47.14
	37M8440001	**4.8**	**NEMA 34**	14	73	270	134.1	37	1.6	5	6.5	85.85	69.58
STEPPING + BRAKE + ENCODER	**37M1320000**	**1.4**	**NEMA 23**	8	38.1	270	137.5	21	1.6	5	5.15	57.15	47.14
	37M3440000	**4.8**	**NEMA 34**	14	73	270	174.8	37	1.6	5	6.5	85.85	69.58

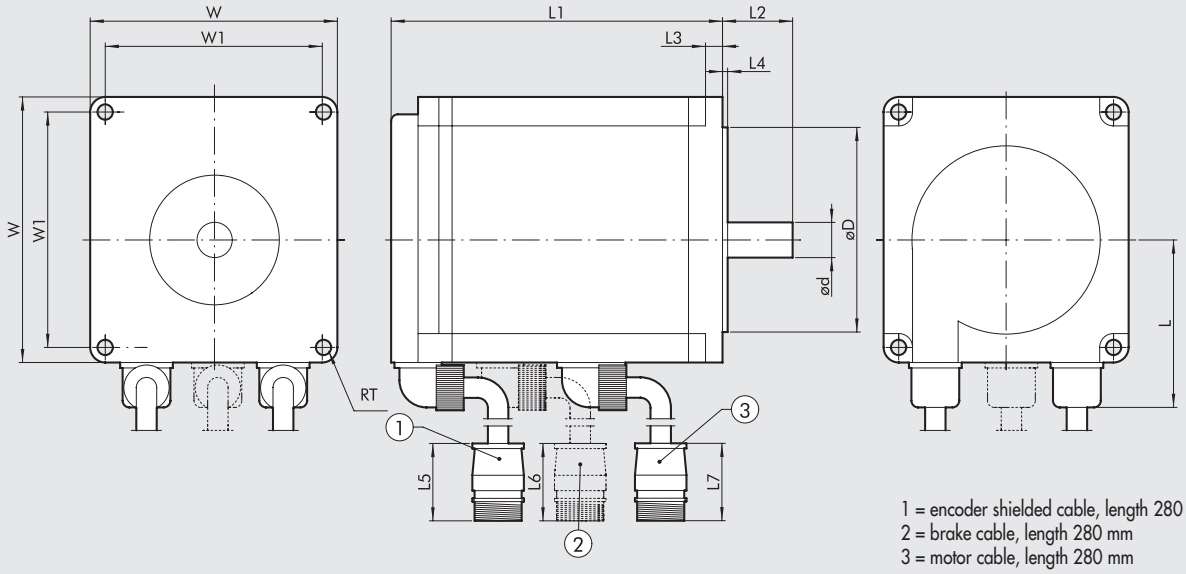

1 = encoder shielded cable, length 280 mm
2 = brake cable, length 280 mm
3 = motor cable, length 280 mm

Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.011	øD h7	L	L1 ±1	L2 ±1	L3	L4	L5	L6	L7	RT	W	W1
BRUSHLESS (SANYO DENKI)	**37M2200000**	**0.64**	**60**	14	50	44.6	69.5	30	6	3	55	-	58	5.5	60	49.5
	37M2220000	**1.27**	**60**	14	50	44.6	95.5	30	6	3	55	-	58	5.5	60	49.5
	37M2330000	**2.39**	**80**	16	70	54.4	107.3	40	8	3	55	-	58	6.6	80	63.6
	37M2540000	**3.18**	**86**	16	80	59.55	137.1	35	8	3	55	-	58	6.6	86	70.7
BRUSHLESS + BRAKE (SANYO DENKI)	**37M4200000**	**0.64**	**60**	14	50	44.6	97.5	30	6	3	55	55	58	5.5	60	49.5
	37M4220000	**1.27**	**60**	14	50	44.6	117.5	30	6	3	55	55	58	5.5	60	49.5
	37M4330000	**2.39**	**80**	16	70	54.4	143	40	8	3	55	55	58	6.6	80	63.4
	37M4540000	**3.18**	**86**	16	80	59.55	162.95	35	8	3	55	55	58	6.6	86	70.7

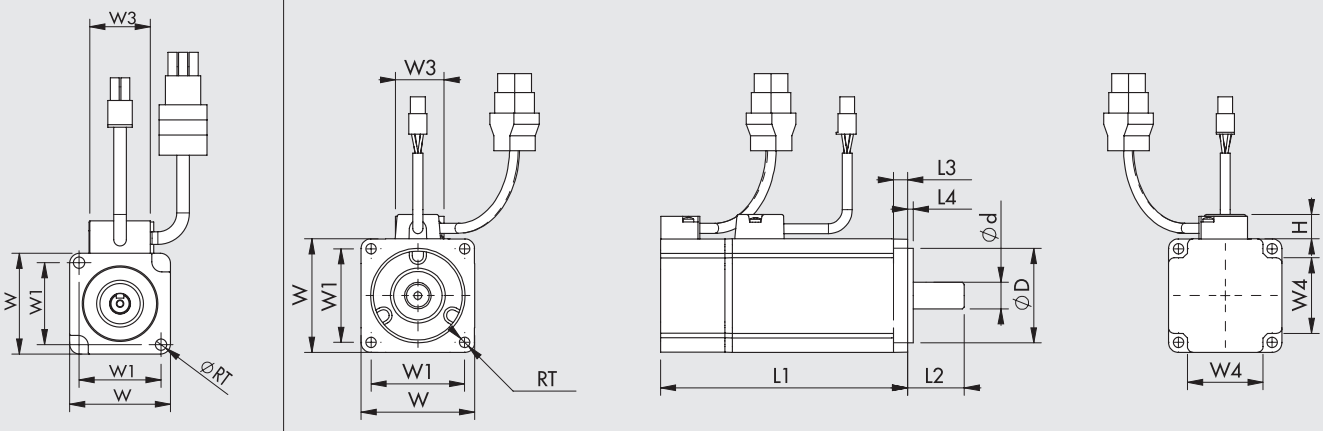

View for motor **37M2000000**

Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.011	øD 0/-0.025	H max	L1 ±0.3	L2 ±0.2	L3 ±0.2	L4 ±0.2	RT ±0.2	W ±0.25	W1 ±0.2	W3 max	W4 ±0.2
BRUSHLESS (DELTA)	**37M2000000**	**0.32**	**40**	8	30	13	100.6	25	5	2.5	4.5	40	32.53	25	-
	37M2200001	**0.64**	**60**	14	50	13	105.5	30	7.5	3	5.5	60	49.5	25	40
	37M2220001	**1.27**	**60**	14	50	13	130.7	30	7.5	3	5.5	60	49.5	30	40
	37M2330001	**2.39**	**80**	19	70	13	138.3	35	8	3	6.6	80	63.64	30	52

METAL WORK PNEUMATIC

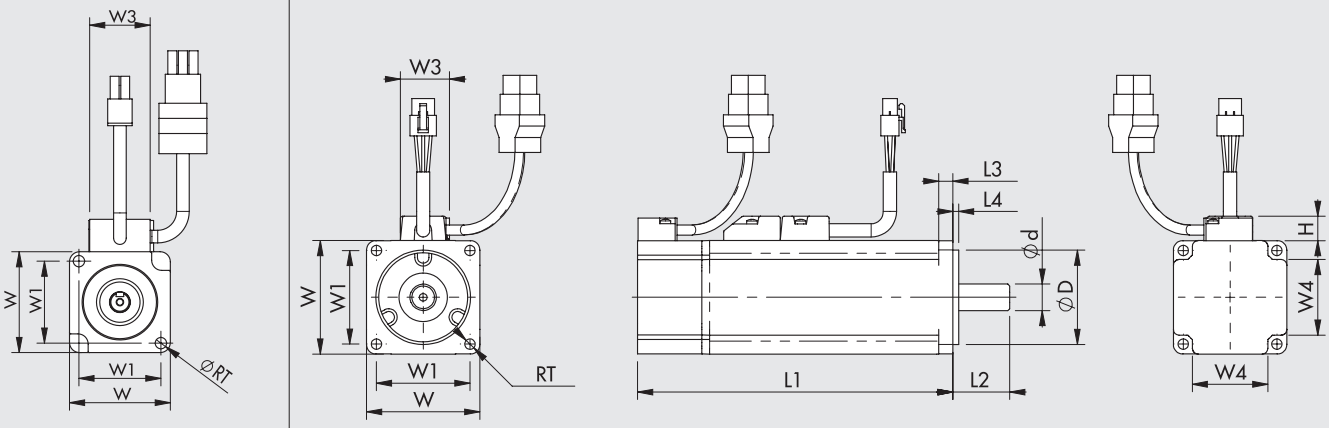

View for motor **37M4000000**

Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.011	øD 0/-0.025	H max	L1 ±0.3	L2 ±0.2	L3 ±0.2	L4 ±0.2	RT ±0.2	W ±0.25	W1 ±0.2	W3 max	W4 ±0.2
BRUSHLESS + BRAKE (DELTA)	**37M4000000**	**0.32**	**40**	8	30	13	136.6	25	5	2.5	4.5	40	32.53	25	-
	37M4200001	**0.64**	**60**	14	50	13	141.6	30	7.5	3	5.5	60	49.5	25	40
	37M4220001	**1.27**	**60**	14	50	13	166.8	30	7.5	3	5.5	60	49.5	30	40
	37M4330001	**2.39**	**80**	19	70	13	178	35	8	3	6.6	80	63.64	30	52

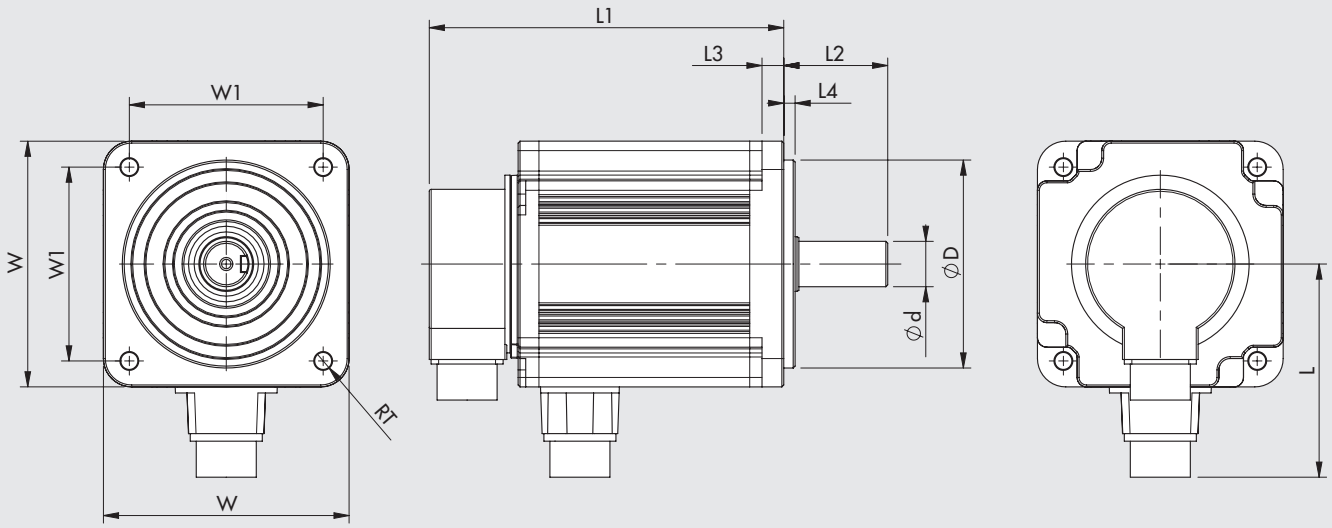

Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.013	øD 0/-0.035	L	L1	L2	L3	L4	RT	W	W1
BRUSHLESS (DELTA)	**37M2640000**	**3.18**	**100**	19	95	97.75	153.25	45	12	5	9	100	81.32
	37M2770000	**9.55**	**130**	24	110	113	187.5	55	11.5	6	9	130	102.53
BRUSHLESS + BRAKE (DELTA)	**37M4640000**	**3.18**	**100**	19	95	98.05	192.5	45	12	5	9	100	81.32
	37M4770000	**9.55**	**130**	24	110	111	216	55	11.5	6	9	130	102.53

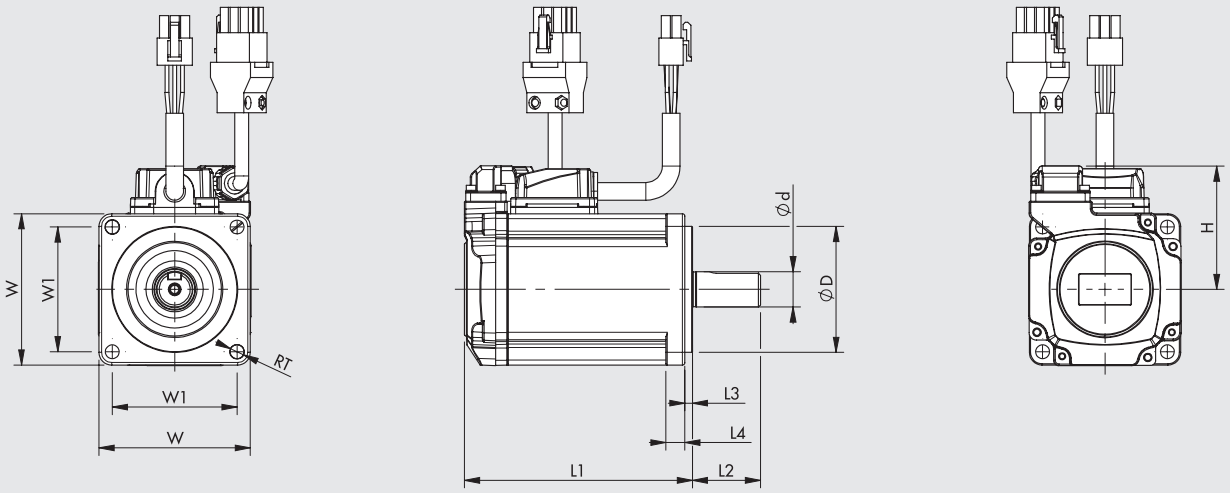

Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.011	øD 0/-0.025	H	L1	L2	L3	L4	RT	W	W1
BRUSHLESS (DELTA B3)	**37M2220002**	**1.27**	**60**	14	50	48.5	91	30	3	7.5	5.5	60	49.5
BRUSHLESS + BRAKE (DELTA B3)	**37M4220002**	**1.27**	**60**	14	50	48.5	127.9	30	3	7.5	5.5	60	49.5

NOTES

PROGRAMMABLE UNIT
e.motion

An independent system, ideal for stand-alone applications not requiring the use of any PLC. It can control electric cylinders simply and intuitively, or any other electric actuator, using either a STEPPING MOTOR or a BRUSHLESS motor of any size and capacity, connected to the relevant drive with a STEP/DIRECTION interface. It is connected to PC via USB port, and the user has access to a motion-control configuration, programming and debug environment irrespective of the type of motor/drive/actuator chosen, which uses a user-friendly language (MW POS) and a set of simple instructions and functions to create work cycles, including complex ones as it can handle both digital and analogue inputs and outputs.
It consists of an electronic board housed in a metal box, which is designed for fixing to a wall or on a DIN bar with a fitting, and is equipped with removable screw connectors for wiring purposes.

TECHNICAL DATA		
Code		**37D0000000**
Stand-alone motion programming unit for motors-drives with a STEP/DIRECTION interface, type		Metal box
Dimensions	mm	148 x 99 x 30
Weight	g	460
Connectors		Screw type
Temperature range		0 to 50 °C – relative humidity 10-90%, non-condensing
Degree of protection		IP 20
Voltage		24VDC ±10%
Communication interface		Serial USB port for connection to PC
Configuration/programming/debug and diagnosis software		MW POS in Windows® environment
Dedicated signals		Encoder input (A + B + Z), Line Driver type
		STEP/DIRECTION outputs, with frequency up to 100 kHz, Line Driver type
Digital inputs		16, optoisolati, configurabili PNP o NPN, liberamente programmabili
Analogue inputs		2, from 0 to 10V, freely programmable
Digital outputs		15, Line Driver type, PNP, freely programmable
Analogue outputs		1, from 0 to 10V, freely programmable
Controls available		- Search for home position on the end stop, up against the stop, on the end stop and the encoder mark, up against the stop and the encoder zero mark; - Positioning in relative or absolute mode; - Force control; - Closed-loop motion control and step-loss control in the case of STEPPING motors with encoder; - Integrated brake control in the case of motors with a brake; - Possible control of multiple separate drivers in parallel for concurrent applications; - Complementary and logical instructions for complex work cycles, such as: timings; repetitions; analogue and digital I/O control; variables control; tests

DIMENSIONS

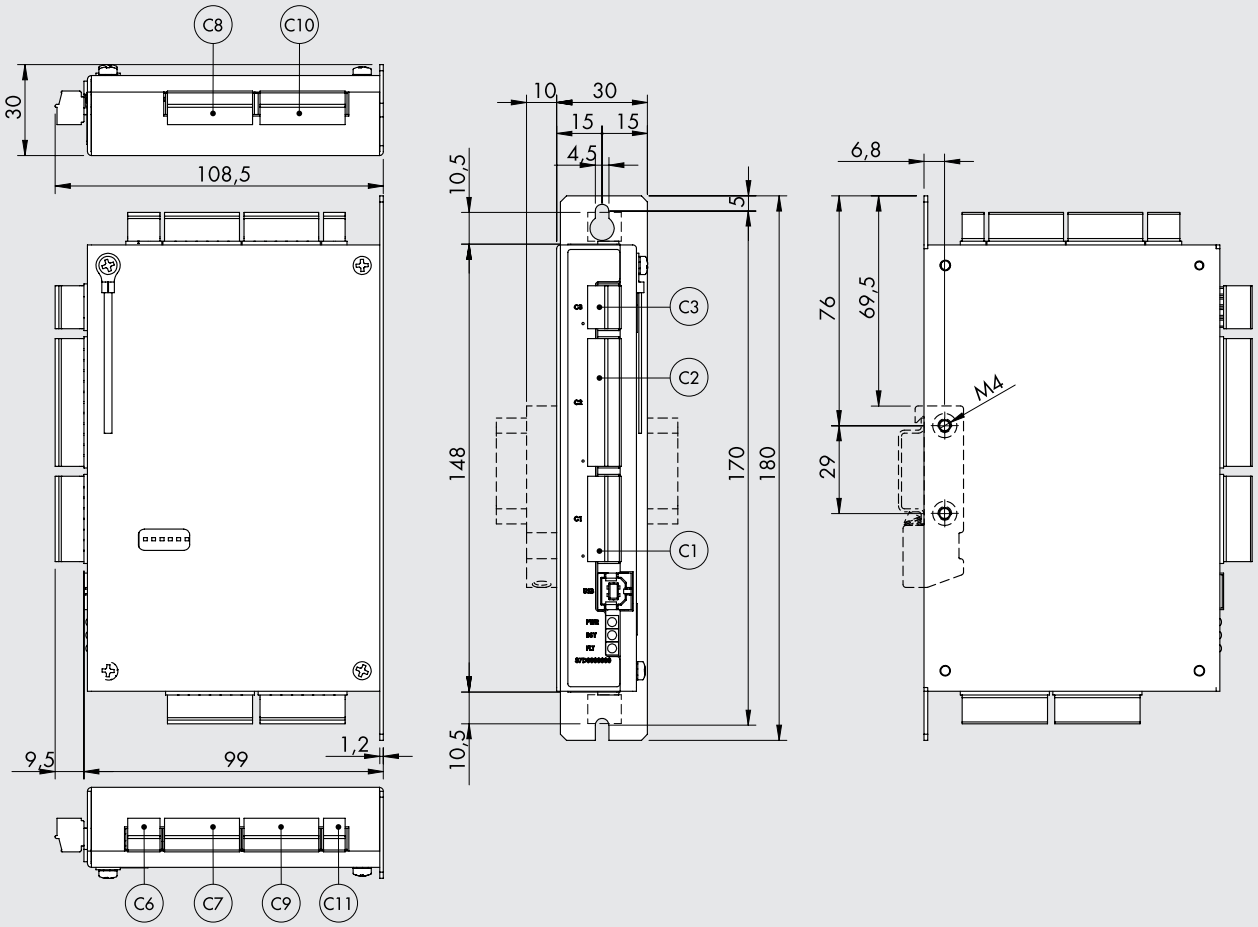

Below is a list of Phoenix Contact codes for the board connectors.

Connector	Description	Code Phoenix Contact
C11	2-pin plug with screw connection, MC 1.5/2-ST-3.5	1840366
C6	3-pin plug with screw connection, MC 1.5/3-ST-3.5	1840379
C3	4-pin plug with screw connection, MC 1.5/4-ST-3.5	1840382
C7, C9	7-pin plug with screw connection, MC 1.5/7-ST-3.5	1840418
C1, C8, C10	8-pin plug with screw connection, MC 1.5/8-ST-3.5	1840421
C2	12-pin plug with screw connection, MC 1.5/12-ST-3.5	1840463

ACCESSORIES

BRACKET MOUNTAING ON OMEGA BAR (DIN EN 50022)

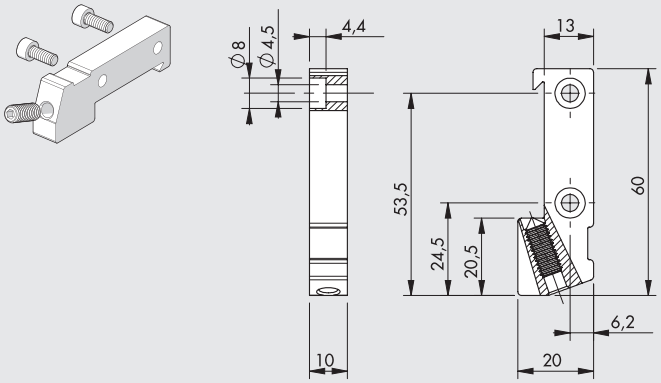

Code	Description	Weight [g]
095000M000	Bracket mountaing ***e***.motion / ***e***.drive on Omega bar (DIN EN 50022)	30

Note: Individually packed with 2 screws M4x10, 1 M6x16 grub screw

CABLE USB

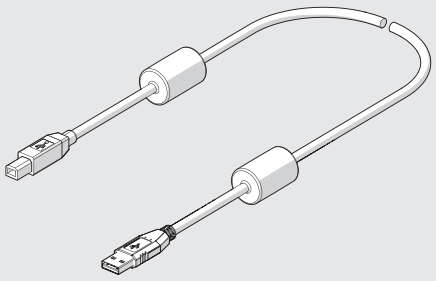

Code	Description	Weight [g]
37C0030000	Cable for USB 2.0 male A-B connector with ferrite core, for connecting the ***e***.motion / ***e***.drive board to a PC, 3 m	150

CABLE FOR BRUSHLESS DRIVERS

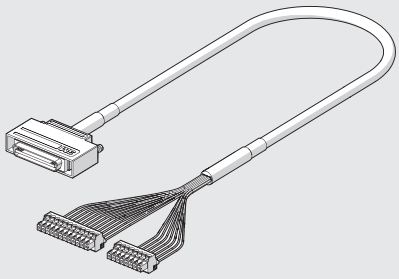

Code	Description	Weight [g]
37C2510000	Cable for connecting the ***e***.motion board to Sanyo Denki RS_A0_ driver, 1 m	130
37C2510001	Cable for connecting the ***e***.motion board to Delta ASDA A2 driver, 1 m	130

CONNECTION SCHEME

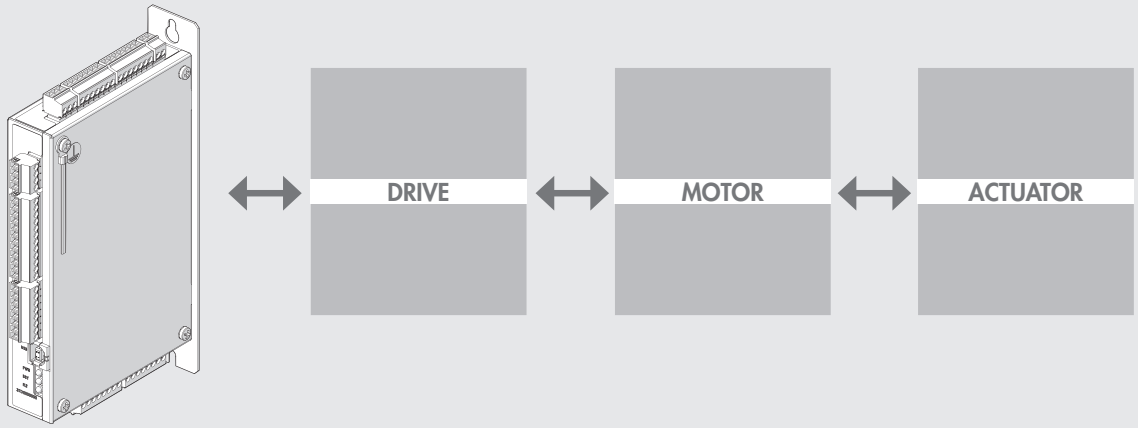

NOTES

PROGRAMMABLE STEPPING MOTOR DRIVE - *e*.drive

This self-contained system is ideal for stand-alone applications not requiring any PLC at hand.
You can use it to easily and intuitively operate electric cylinders and electric rotary actuators driven by a two-phase four, six or eight-wire STEPPING MOTOR rated at up to 6A. An USB port connects it to the PC, which provides the user with a configuration, programming and debugging environment for motion control.
Thanks to a user-friendly language (MW DRIVE) and a set of basic instructions and functions, you can create work cycles, even complex ones, and manage both digital and analogue inputs and outputs.
It consists of two printed circuit boards housed in a metal box designed to be fixed onto a wall or on a DIN bar through an adapter, and comes with removable screw connectors for wiring.
The PCBs control le logic stage for "motion control" and the power stage, respectively.
The power stage consists of a two-pole mini-step chopper drive. It features 55VDC maximum input voltage on the power side and 24VDC on the logic side, compact design and great flexibility of use.
A wireless version is also available which, through the dedicated "Metal Work driveUP" App, can communicate with Ethernet networks (via MQTT protocol) and mobile devices (smartphones and tablets) via Bluetooth®.
Using this App, in addition to displaying the values measured in real time, some drive settings can be changed and motor movements can be controlled.

TECHNICAL DATA		Standard	Wi-Fi®
Code		**37D1332002**	**37D1332003**
Communication interface		Serial USB port for connection to PC	Serial USB port for connection to PC Bluetooth - Wireless
Configuration / programming / debug and diagnosis software		MW DRIVE in Windows® environment	MW DRIVE in Windows® environment - APP driveUP
Motion control logic power supply	VDC	24	
Drive power supply	VDC	24 to 55	
Motor phase peak current	A	1 to 6	
Temperature range	°C	-20 to 40	
Relative humidity (without condensation)	%	5 to 85	
Bipolar motor inductance (1.8° angle)	mH	1 to 12	
Dimensions	mm	148 x 99 x 50.5	
Weight	g	790	
Degree of protection		IP20	
Dedicated signals		Encoder input (A + B + Z), 5V line driver or 24V Push-Pull/Open collector	
Digital inputs		14	
Digital outputs		7	
Analogue inputs		2 input (0 - 10V freely programmable)	
Analogue outputs		1 output (0 - 10V)	
Controls available		- Can be used with motors with a 1.8° base angle, 200 pulses/rev.; - Step Mode settable in various ways: Full Step, Half Step, 1/4, 1/8, 1/16 of step; - Integrated linear position transducer by connecting directly to the analogue output; - Automatic 60% reduction of the current supplied with motor stopped; - Possible dynamic regulation of the current supplied via cycle software instructions, for energy-saving purposes; - Home position search on limit switch, mechanical stop, encoder limit switch and zero mark, encoder mechanical stop and zero mark; - Positioning in relative or absolute mode; - Closed-loop motion control and step-loss control in the case of STEPPING motors with an encoder; - Integrated, automatic brake control via dedicated digital output in the case of motors with a brake; - Complementary and logical instructions for complex work cycles, such as: timings; variables control; test; analogue and digital I/O control	

METAL WORK PNEUMATIC

DIMENSIONS

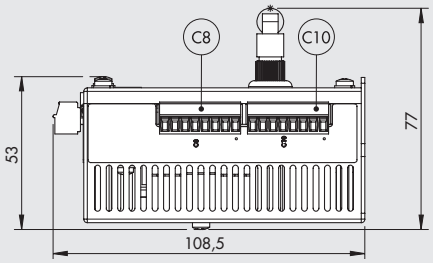

STD version



Wi-Fi® version



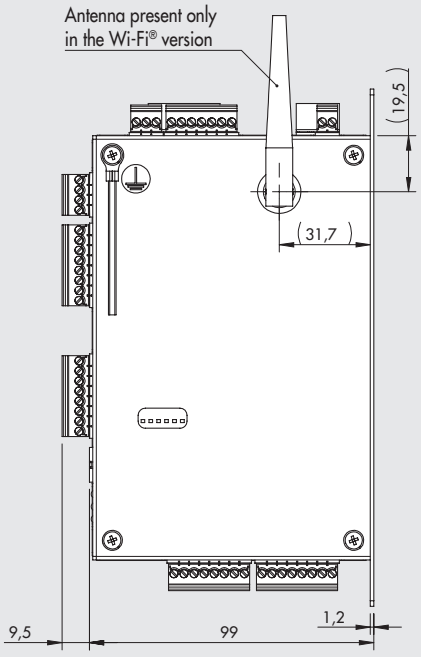

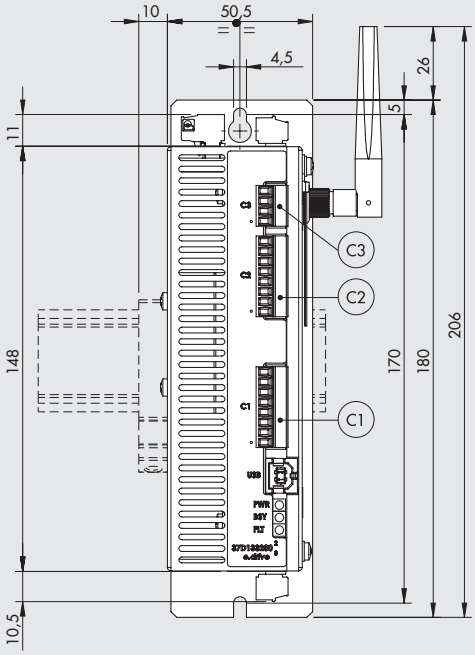

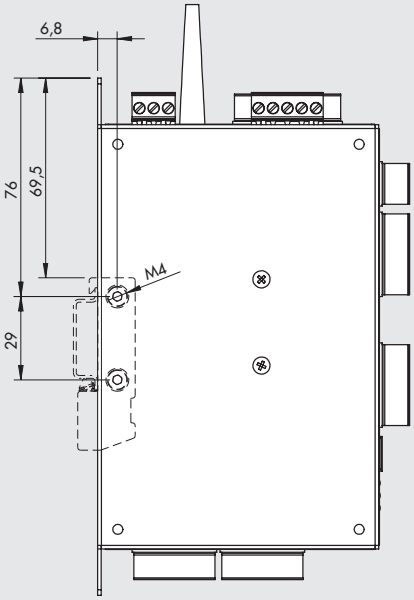

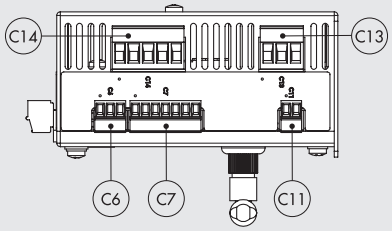

Below is a list of Phoenix Contact codes for the board connectors.

Connector	Description	Code Phoenix Contact
C11	2-pin plug with screw connection, MC 1.5/2 - ST - 3.5	1840366
C6	3-pin plug with screw connection, MC 1.5/3 - ST - 3.5	1840379
C3	4-pin plug with screw connection, MC 1.5/4 - ST - 3.5	1840382
C7	7-pin plug with screw connection, MC 1.5/7 - ST - 3.5	1840418
C1, C2, C8, C10	8-pin plug with screw connection, MC 1.5/8 - ST - 3.5	1840421
C13	3-pin plug with screw connection, MSTB 2.5/3 - ST - 5	1754465
C14	5-pin plug with screw connection, MSTB 2.5/5 - ST - 5	1754504

Code	Description
37D1332002	Programmable e.drive for STEPPING motors
37D1332003	Programmable e.drive Wi-Fi® for STEPPING motors

WIRELESS CONNECTION

In the Wireless version, the device connects to a Wi-Fi® network through an Access point or Gateway to monitor and acquire drive parameters.

Connection to a MQTT Broker via an Access point

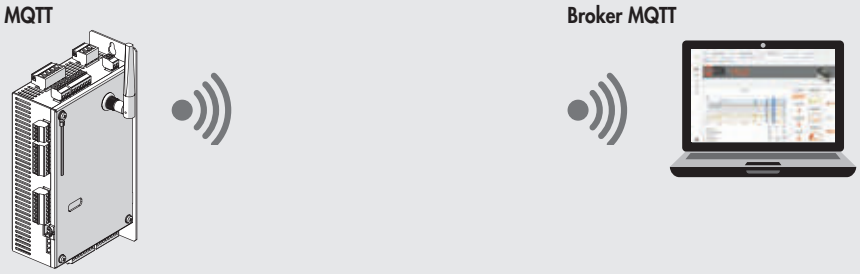

The "Metal Work driveUP" App allows you to connect, via Bluetooth, from Android® and iOS®, to the Metal Work drives of the e-drive series, equipped with a wireless interface.

Via the "Metal Work driveUP" App, you can:
- scan nearby e.drive devices;
- login and view device diagnostic data;
- set wireless network parameters;
- to control simple movements.

driveUP

Download on the App Store

GET IT ON Google Play

ACCESSORIES

BRACKET MOUNTAING ON OMEGA BAR (DIN EN 50022)



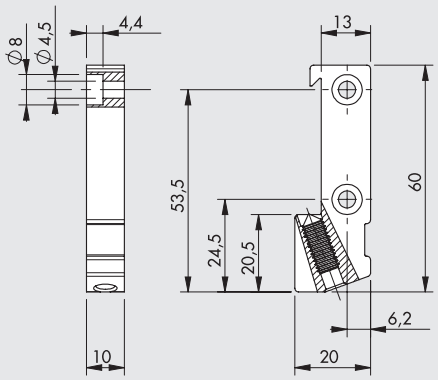

Code	Description	Weight [g]
095000M000	Bracket mountaing **e**.motion / **e**.drive on Omega bar (DIN EN 50022)	30

Note: Individually packed with 2 screws M4x10, 1 M6x16 grub screw

CABLE USB

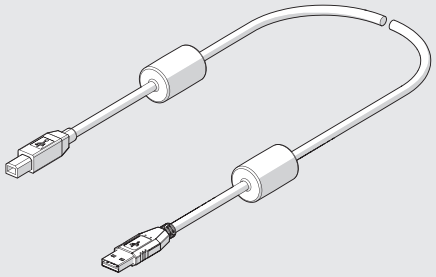

Code	Description	Weight [g]
37C0030000	Cable for USB 2.0 male A-B connector with ferrite core, for connecting the **e**.motion / **e**.drive board to a PC, 3 m	150

CONNECTION SCHEME



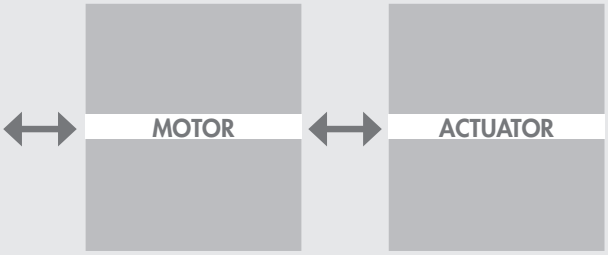

NOTES

e.direct DRIVE
FOR DIRECT CURRENT MOTORS

With the e.direct drive for direct current motors, a 24VDC motor can be easily controlled and run. The electronic board is enclosed in a plastic housing designed for DIN rail mounting.
When activating the "CW" and "CCW" inputs, the motor starts running alternately clockwise and anticlockwise.
Two digital sensor inputs are provided to stop motor rotation upon activation.
The two stop signals are made available as outputs for possible connection to PLCs.
When activated, two digital sensor inputs are provided to stop motor rotation. The two stop signals are made available as outputs for possible connection to a PLC.
During acceleration and braking, the drive prevents mechanical stress on the motor and excessive energy regeneration.
Braking takes place dynamically, stopping the rotation immediately to avoid unwanted extra travel.
The rotation speed can be varied locally via the multi-turn trimmer installed on the board, or remotely, even continuously, via the analog input.
The board is equipped with 2 Hall sensor encoder inputs, NPN type and 12VDC power supply, which are fed back on two 24VDC encoder outputs, which adapt the signals coming from the Hall sensors to PLC inputs type OPEN DRAIN - PNP 24VDC.
The maximum current to be supplied to the motor can range between 1A, 2A, 3.5A and 5A via two DIP switch selectors.
When the board is not powered and the motor is stopped, the motor phases are short-circuited to increase braking torque.

TECHNICAL DATA		
Code		**37D3112000**
Motor and auxiliary power supply	VDC	24 ±15%
Maximum power voltage	VDC	30
Wattage	W	150
Current	A	1, 2, 3.5, 5 (Dip-switch selectable)
Temperature range	°C	-20 to 40
Relative humidity (without condensation)	%	5 to 85
Dimensions	mm	110 x 121 x 36
Weight	g	160
Degree of protection		IP20
Digital inputs		- no. 2, type PNP 24VDC motor rotation control (CW/CCW); - no. 2, type OPEN DRAIN - PNP 24VDC limit switch (LS); - no. 2, type NPN 12VDC for encoder (Hall sensors).
Digital outputs		- no. 2, type 24VDC OPEN DRAIN - PNP suitable for PNP 24VDC PLC for limit switch (LS); - no. 2, 24VDC: adapting signals from Hall sensors to PLC inputs type OPEN DRAIN - PNP 24VDC.
Analogue inputs		- no. 1, 0-10VDC speed adjustment from PLC or potentiometer (31400 Ω input impedance); - Internal trimmer for manual speed adjustment (0-100%).
Protections		- Motor output overcurrent protection; - Phase-to-phase short-circuit protection on motor; - Microprocessor over-temperature protection (150°C).
Signals		- Overvoltage (Vsupply>30VDC) - Under-voltage (Vsupply<18VDC); - With fault diagnostic output (OPEN DRAIN - PNP); - Active output corresponds to one of the FAULT statuses.

N.B.: A delayed, external fuse of a value appropriate to the set current must be provided in the system.
An appropriate external mains filter must be placed on the power supply to avoid disturbances generated by the drive.

DIMENSIONS

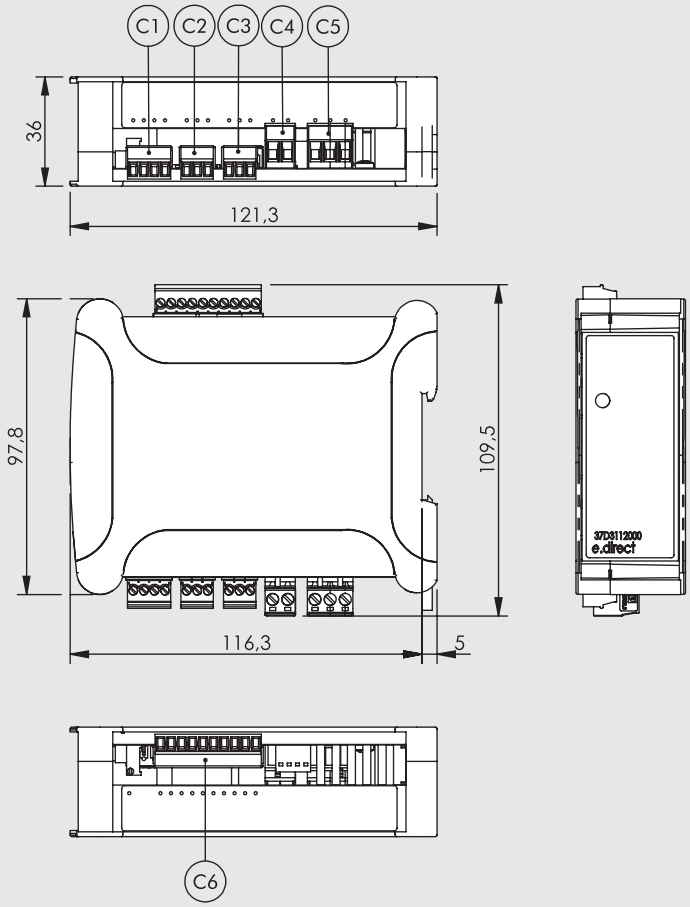

Below is a list of Phoenix Contact codes for the board connectors.

Connector	Description	Code Phoenix Contact	Code Phoenix Contact BASIC LINE
C1	4-pin plug with screw connection, MC 1.5/4 - ST - 3.5	1840382	5441223
C2, C3	3-pin plug with screw connection, MC 1.5/3 - ST - 3.5	1840379	5441210
C4	2-pin plug with screw connection, MC 2.5/2 - ST - 5	1754449	5441171
C5	3-pin plug with screw connection, MC 2.5/3 - ST - 5	1754465	5448242
C6	10-pin plug with screw connection, MC 1.5/10 - ST - 3.5	1840447	5447560

EXAMPLE OF CONNCETION

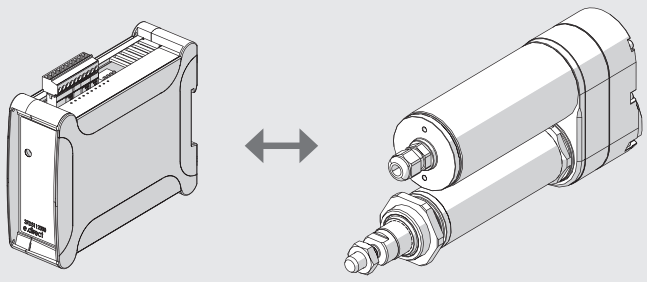

DRIVES FOR STEPPING MOTORS

4.4A - 48VDC DRIVE FOR STEPPING MOTORS

This is a ministep bipolar chopper drive made by RTA S.r.l. It comes with a STEP & DIRECTION interface for piloting low/medium-power two-stage STEPPING motors with four, six or eight terminals.
It has a supply voltage range up to 48VDC, compact dimensions and considerable operating flexibility. It consists of a board housed in a metal box, which does not require external ventilation, and comes with separate logic and power pull-out screw connectors. It can control STEPPING motors with a nominal current up to 4.4A, the perfect choice for low/medium-power applications using small motors.

DRIVE TECHNICAL DATA

Drive code		**37D1222000**
Type of STEPPING motor drive		Metal box
Dimensions	mm	90 x 99 x 21
Connectors		Screw type
Onboard power supply		NO
Control		Step and direction
Operating voltage range	VDC	24 - 48
Current range	A	2.6 - 4.4
Current values selected via a dip-switch		8
Pulses per rev values selected by dip-switch	pulse/rev	400, 800, 1600, 3200
Automatic current reduction with motor off		YES (50%)
Type of inputs		Pull-up or Pull-down, settable
Protections		Maximum and minimum voltage. Motor output short-circuiting. Thermal protection. Electronic damping circuit for maximum control of noise and vibration.

OVERALL DIMENSIONS AND WIRING DIAGRAM

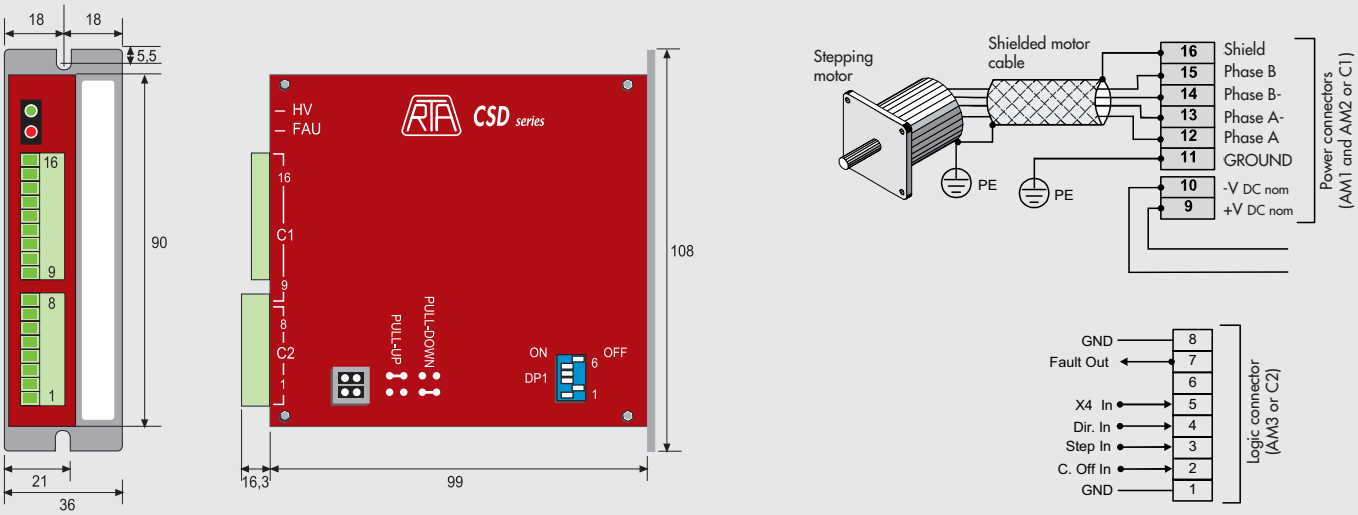

METAL WORK PNEUMATIC

6A - 75VDC DRIVE FOR STEPPING MOTORS

This is a ministep bipolar chopper drive made by RTA Srl. It comes with a STEP & DIRECTION interface for piloting medium-low power two-stage STEPPING motors with four, six or eight terminals.
It has a supply voltage range up to 75VDC, compact dimensions and considerable operating flexibility. It consists of a board housed in a metal box and comes with separate logic and power pull-out screw connectors. It can control STEPPING motors with a nominal current up to 6A, the perfect choice for medium power applications using small and medium-size motors.

DRIVE TECHNICAL DATA

Drive code		**37D1332000**
Type of STEPPING motor drive		Metal box
Dimensions	mm	110 x 108 x 34
Connectors		Screw type
Onboard power supply		NO
Control		Step and direction
Operating voltage range	VDC	24 - 75
Current range	A	1.9 - 6
Current values selected via a dip-switch		8
Pulses per rev values selected by dip-switch	pulse/rev	400, 500, 800, 1000, 1600, 2000, 3200, 4000
Automatic current reduction with motor off		YES (50%)
Type of inputs		Opto-isolated
Protections		Maximum and minimum voltage. Motor output short-circuiting. Thermal protection. Electronic damping circuit for maximum control of noise and vibration.

OVERALL DIMENSIONS AND WIRING DIAGRAM

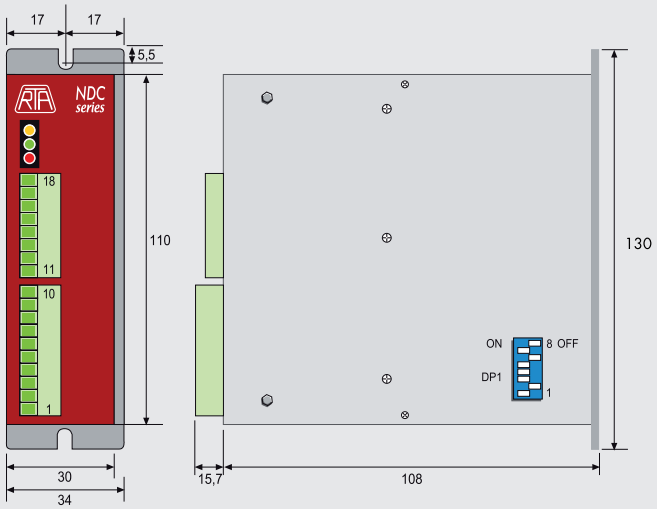

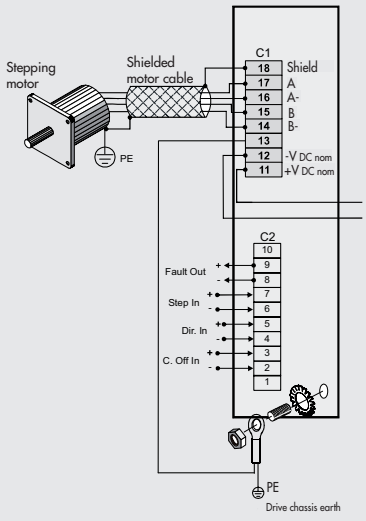

6A - 140VDC, 10A - 62VAC DRIVE FOR STEPPING MOTORS

These are two ministep bipolar chopper drives made by RTA S.r.l.
They come with a STEP & DIRECTION interface for piloting medium/high-power two-stage STEPPING motors with four, six or eight terminals.
They consist of a board housed in a metal box, which does not require external ventilation, and come with separate logic and power pull-out screw connectors.
Drive code 37D1442000 is characterised by a voltage range up to 140VDC, compact dimensions and considerable operating flexibility.
This drive can control STEPPING motors with a nominal current up to 6A, the perfect choice for medium-power applications requiring a DC supply.
Drive code 37D1552000 is characterised by a voltage range up to 62VAC, compact dimensions and considerable operating flexibility.
This drive can control STEPPING motors with a nominal current up to 10A, the perfect choice for medium-power applications requiring an AC supply.

DRIVE TECHNICAL DATA

Drive code		**37D1442000**	**37D1552000**
Type of STEPPING motor drive		Metal box	
Dimensions	mm	152 x 129 x 46	
Connectors		Screw type	
Onboard power supply		NO	
Control		Step and direction	
Operating voltage range		77 - 140 VDC	28 - 62 VAC
Current range	A	1.9 - 6	3 - 10
Current values selected via a dip-switch		8	
Pulses per rev values selected by dip-switch	pulse/rev	400, 500, 800, 1000, 1600, 2000, 3200, 4000	
Automatic current reduction with motor off		YES (50%)	YES (50%)
Type of inputs		Opto-isolated	
Protections		Maximum and minimum voltage. Motor output short-circuiting. Thermal protection. Electronic damping circuit for maximum control of noise and vibration.	

OVERALL DIMENSIONS AND WIRING DIAGRAM

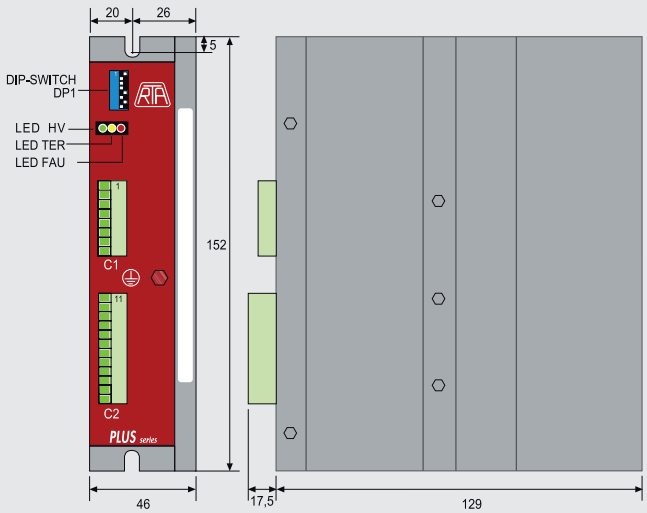

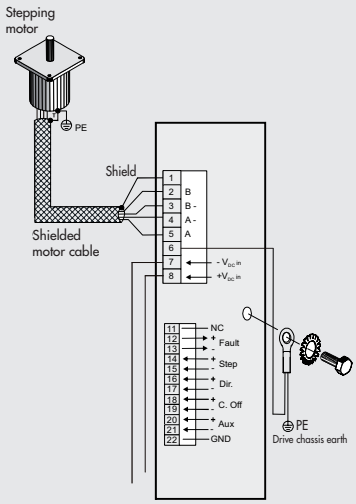

6A - 110 - 230VAC DRIVE FOR STEPPING MOTORS

This is a ministep bipolar chopper drive made by RTA Srl. It comes with a STEP & DIRECTION interface for piloting medium-low power two-stage STEPPING motors with four, six or eight terminals.
It has a supply voltage range up to 230VAC, compact dimensions and considerable operating flexibility. It consists of a board housed in a metal box and comes with separate logic and power pull-out screw connectors. It can control STEPPING motors with a nominal current up to 6A, the perfect choice for medium-high power applications using medium and big-size motors.

DRIVE TECHNICAL DATA

Drive code		**37D1362001**
Type of STEPPING motor drive		Metal box
Dimensions	mm	180 x 173 x 53
Connectors		Screw type
Onboard power supply		NO
Control		Step and direction
Operating voltage range	VAC	Single-phase 110 - 230
Current range	A	3.4 - 6
Motor output stage		High-efficiency CHOPPER with IGBT final stage output
Current values selected via a dip-switch		8
Pulses per rev values selected by dip-switch	pulse/rev	400, 500, 800, 1000, 1600, 2000, 3200, 4000
Automatic current reduction with motor off		YES
Type of inputs		Opto-isolated
Protections		Maximum and minimum voltage. Motor output short-circuiting. Thermal protection.
		Electronic damping circuit for maximum control of noise and vibration.
Standards		UL and CSA
Other features		Possibility to switch off motor current via an external logic control device.
		Electronic sound-damping circuit for enhanced reduced noise and mechanical vibration at low and medium speed.
		Storage and reporting of the intervention of protection circuits.
		It must be coupled with STEPPING motors designed for high-voltage rating and flanges not below 86 mm.
		No need for forced ventilation.

OVERALL DIMENSIONS AND WIRING DIAGRAM

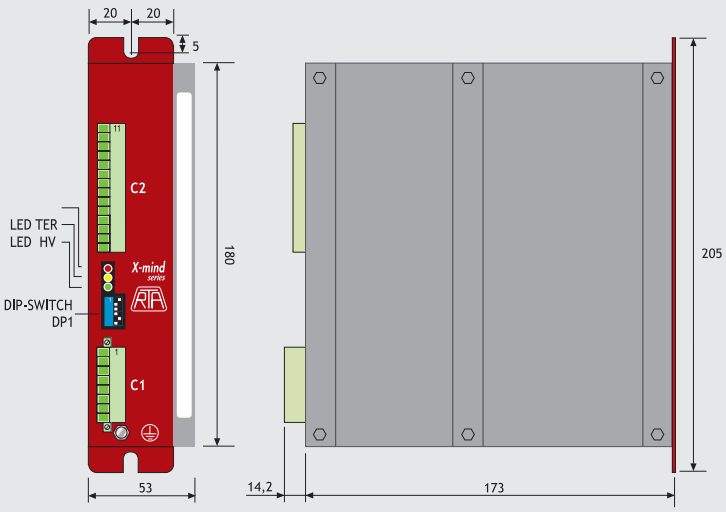

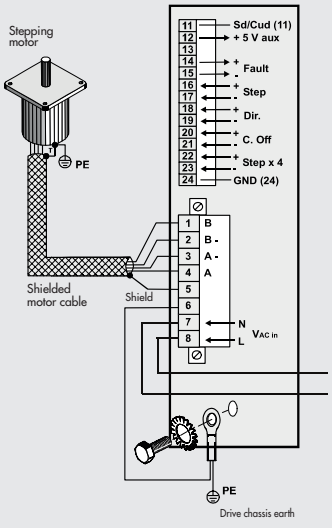

CABLES FOR B&R STEPPING MOTORS

POWER CABLE FOR MOTOR WITH BRAKE

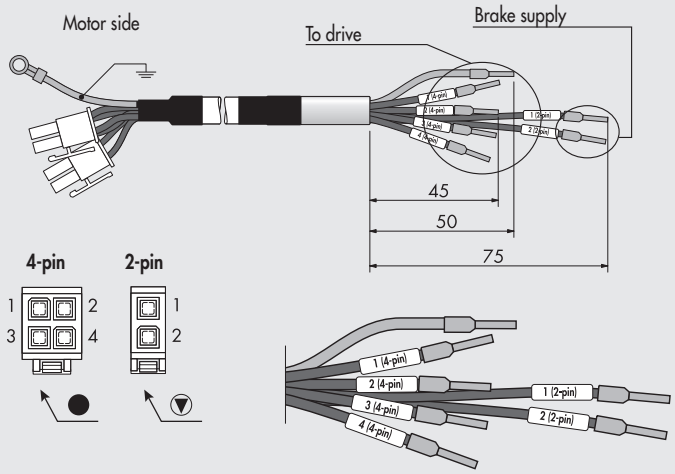

Code	Description
37C1330000	Power cable for stepping motor with brake, 3 metres
37C1350000	Power cable for stepping motor with brake, 5 metres

For use with STEPPING motors with brake and STEPPING motor code 37M1470000.

	Pin	Function	Corresponding wire colour
4-pin connector	1	A\	Black (1 4-pin)
	2	B\	Black (2 4-pin)
	3	A	Black (3 4-pin)
	4	B	Black (4 4-pin)
2-pin connector	1	24VDC brake	Black (1 2-pin)
	2	GND	Black (2 2-pin)

ENCODER CABLE

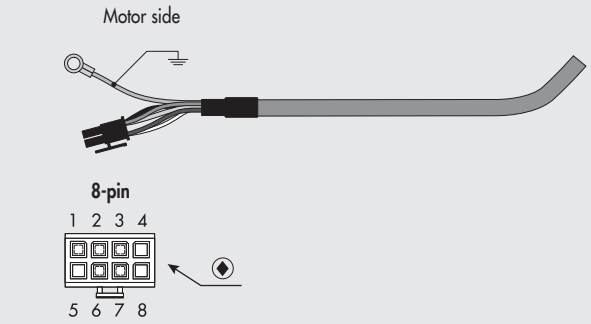

Code	Description
37C1230000	Encoder cable for stepping motors with brake, 3 metres
37C1250000	Encoder cable for stepping motors with brake, 5 metres

Optional – Can be used with STEPPING motor with encoder and brake.

Pin	Function		Corresponding wire colour
1	A	A	Green
2	B	B	Yellow
3	R	R	Gray
4	-	NC	-
5	-	NC	-
6	+ 24VDC	Encoder +24 V supply	Red
7	COM	Encoder 0 V supply	Blue
8	-	NC	-

REFERENCES FOR THE CONNECTORS

Below you find the codes of Molex to allow the customer to manufacture cables.

	Code Molex	Description
▼	**39-01-2020**	1 x 2 pin plug connector
	44476-1111	Crimping contacts
●	**39-01-2040**	1 x 4 pin plug connector
	44476-1111	Crimping contacts
◆	**43025-0800**	1 x 8 pin plug connector
	43030-0002	Crimping contacts

Special tools for crimping or pulling out contacts		
	Code Molex	**Description**
Crimping gripper	**0638190000**	For 8-pin connector
	0638190900	For 4-pin and 2-pin connectors
Contact pull-out tool	**0011030043**	For 8-pin connector
	0011030044	For 4-pin and 2-pin connectors

NOTES

CABLES FOR STEPPING MOTORS STEPPERONLINE

POWER CABLE FOR MOTOR





Code	Description
37C1150000	Power cable for stepping motor, 5 metres
37C1100000	Power cable for stepping motor, 10 metres

Pin	Function		Corresponding wire colour
1	A+	Motor phase A+	Black 1
2	A -	Motor phase A-	Black 2
3	B+	Motor phase B+	Black 3
4	B -	Motor phase B-	Black 4

ENCODER CABLE





Code	Description
37C1250001	Encoder cable for stepping motors, 5 metres
37C1200003	Encoder cable for stepping motors, 10 metres

Optional – Can be used with STEPPING motor with encoder (code 37M1320000 and 37M1820000)

Pin	Function		Corresponding wire colour
1	A+	Phase A+	Green
2	+5VDC	Encoder +5 V supply	Brown
3	COM	Encoder 0 V supply	White
4	-	NC	-
5	-	NC	-
6	-	NC	-
7	-	NC	-
8	-	NC	-
9	-	NC	-
10	-	NC	-
11	B+	Phase B+	Gray
12	B-	Phase B-	Pink
13	A-	Phase A-	Yellow
14	-	NC	-
15	-	NC	-

NOTES

DRIVES FOR BRUSHLESS MOTORS

DRIVE FOR 200W, 400W, 750W, 1000W SANYO DENKI BRUSHLESS MOTORS

This drive made by SANYO DENKI is suitable for piloting BRUSHLESS motors.
It features compact dimensions and considerable operating flexibility.
It consists of a board housed in a metal box. It comes with pull-out screw connectors for power and plug connectors for logic.
It can control BRUSHLESS motors with a nominal current up to 30A.
All the system parameters can be configured and controlled using SANMOTION software.

DRIVE TECHNICAL DATA		
Drive code		**37D2400008**
Nominal power		200 - 400 - 750 - 1000
Type of drive for BRUSHLESS motors		Metal box
Dimensions	mm	50 x 160 x 130
Power connectors and motor power		Plug-type 3M
Encoder connectors and signals		Plug-type 3M
Max output current	A	30
Motor output stage		IGBT, PWM control, sinusoidal current
Power voltage		Single-phase or three-phase (user configurable) 200-230VAC (+10%, -15%) 50/60 Hz (± 3 Hz)
Logic voltage		Single-phase 200-230VAC (+10%, -15%) 50/60 Hz (± 3 Hz)
Control		With analogue signal (proportional to speed and torque).
		Pulse-train (clock + direction; forward + backward pulse; 90° phase difference)
		8 inputs and 8 outputs, user configurable.
		In the event of pulse-train command, the control system outputs should be the Line Driver type.
		If the outputs are the open-collector type, you can use a 37D2000000 board,
		which is sold separately (see accessories).
Auto-tuning		YES
Communication interface		Mini USB for settings and monitoring via a personal computer.
Protections		Integrated against overloads, input extra-voltages,
		incorporated filters for suppressing the system's own resonance frequencies
Standards		CE, UL and CSA.
Other features		5-digit display and programming keypad.
		Integrated closed-loop system with position, speed and torque control modes.
		Instant changeover option: position + speed; position + torque; speed + torque.
		Automatic dynamic braking circuit in a alarm and power-off conditions.
		Connector for external braking resistance (optional).
		Configuration and control software.
Connecting cable:		
Brushless **motor-drive** connecting cable, 3 metres		**37C2130005**
Brushless **motor-drive-encoder** connecting cable, 3 metres		**37C2230005**
Brushless **motor-drive** connecting **dynamic** cable, 3 metres		**37C2130004**
Brushless **motor-drive-encoder** connecting **dynamic** cable, 3 metres		**37C2230004**
Brushless **motor-brake** connecting **dynamic** cable, 3 metres		**37C2330000**
Brushless **motor-drive** connecting cable, 5 metres		**37C2150005**
Brushless **motor-drive-encoder** connecting cable, 5 metres		**37C2250005**
Brushless **motor-drive** connecting **dynamic** cable, 5 metres		**37C2150004**
Brushless **motor-drive-encoder** connecting **dynamic** cable, 5 metres		**37C2250006**
Brushless **motor-brake** connecting **dynamic** cable, 5 metres		**37C2350000**
Brushless **motor-drive** connecting **dynamic** cable, 10 metres		**37C2100004**
Brushless **motor-drive-encoder** connecting **dynamic** cable, 10 metres		**37C2200004**
Brushless **motor-brake** connecting **dynamic** cable, 10 metres		**37C2310000**

WIRING DIAGRAM FOR BRUSHLESS MOTOR DRIVES

① 5-DIGIT DISPLAY and PROGRAMMING KEYPAD:
to display and modify parameters and monitor system operation in real time.
② PC CONNECTOR: settings and monitoring by PC via mini USB
③ POWER CONNECTOR: 230VAC, single-phase and three-phase (user configurable). **Included in the supply**.
Separate supply section for logic/signal and power electronics.
Integrated circuits protecting against overloads and input extra-voltages.
④ SIGNAL CONNECTOR: pulse-train command (clock + direction; forward + backward pulse; 90° phase difference) or with analogue signal (proportional to speed or torque) 8 inputs and 8 outputs, user configurable. **Included in the supply**.
⑤ CONNECTOR: for external braking resistance (optional)
⑥ ENCODER CONNECTOR
⑦ MOTOR POWER CONNECTOR
⑧ EARTH CONNECTION
⑨ MOTOR BRAKE CONNECTOR (only for version with brake)

Log on to www.metalwork.it to view the instruction manual.

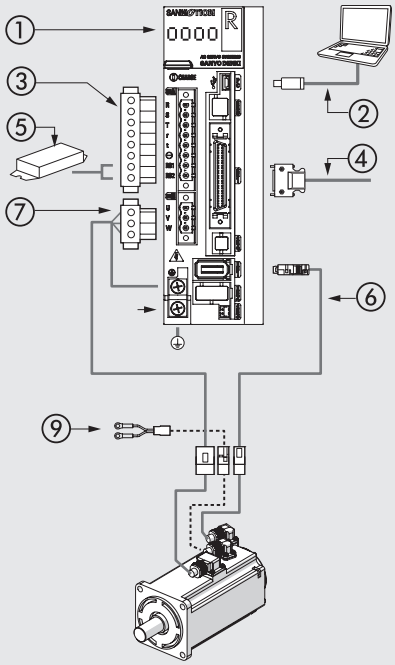

ACCESSORIES

⑥ ENCODER CABLE

Code	Description
37C2230005	Brushless motor-drive-encoder connecting cable, 3 m
37C2250005	Brushless motor-drive-encoder connecting cable, 5 m
37C2230004	Brushless motor-drive-encoder connecting dynamic cable, 3 m
37C2250006	Brushless motor-drive-encoder connecting dynamic cable, 5 m
37C2200004	Brushless motor-drive-encoder connecting dynamic cable, 10 m

⑦ MOTOR POWER CABLE

Code	Description
37C2130005	Brushless motor-drive connecting cable, 3 m
37C2150005	Brushless motor-drive connecting cable, 5 m
37C2130004	Brushless motor-drive connecting dynamic cable, 3 m
37C2150004	Brushless motor-drive connecting dynamic cable, 5 m
37C2100004	Brushless motor-drive connecting dynamic cable, 10 m

BRAKE CABLE



Code	Description
37C2330000	Brushless motor-brake connecting dynamic cable, 3 m
37C2350000	Brushless motor-brake connecting dynamic cable, 5 m
37C2310000	Brushless motor-brake connecting dynamic cable, 10 m

LINE-DRIVER INTERFACE BOARD



Code	Description
37D2000000	BRINT.A line driver interface board

EXTERNAL BRAKING RESISTANCES



Code	Description	For drive code
37D2R00000	220W 50 Ω braking resistance	37D2400008

Under certain operating conditions, such as sudden deceleration with high inertial load, it may be necessary to dissipate externally the reverse energy generated by the motor. The drive indicates this requirement via a specific alarm. Excess energy is dissipated externally via a braking resistance.

CONFIGURATION SOFTWARE

SANMOTION configuration software is used for parameter setting and complete control of all functions of the system.
The software includes a detailed description of each parameter.
In addition to parameter setting SANMOTION software can accurately analyze operation of the system via the following functions.

- Monitor: real-time display of all details about the system.
- Diagnosis: shows the state of servo amplifier, the type of alarms and the possible causes.
- Test operation: performs the velocity system test with JOG Operation, the positioning test with Positioning Operation, the detection of the origin signal and Serial Encoder Clear.
- Servo Tuning: performs auto-tuning notch filter and auto-tuning vibration suppression frequency.
- Operation Trace: this function shows operational state and parameters as speed and torque, in waveform display on an integrated oscilloscope.
- System Analysis: used to study the system's frequency response to identify and correct any mechanical resonance phenomena.

The software can freely be downloaded from Sanyo Denki website at the following link:
https://www.sanyodenki.com/products/sanmotion-softwareindex.html
file SANMOTION MOTOR Setup Software.

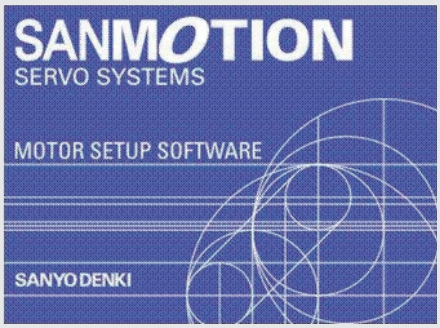

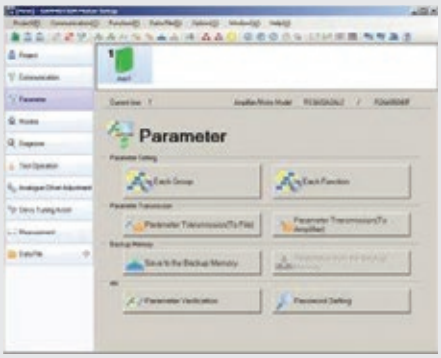

GRAPHIC MONITOR

Thanks to the integrated oscilloscope function, some important system parameters, such as speed and torque, can be displayed and saved on the PC monitor.
Data can be downloaded and saved in compatible Excel format.
The time setting range is 10 ms to 2 s.
Single values acquired and displayed can be read using the cursor.

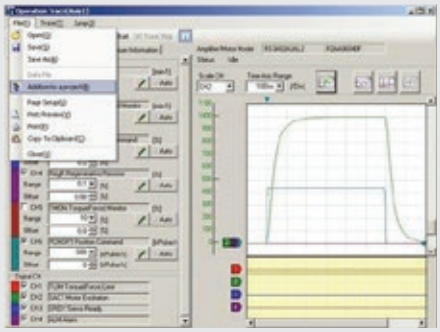

DRIVE FOR 100W, 200W, 400W, 750W DELTA BRUSHLESS MOTORS

The DELTA ASD-A2-0121-M drive can only be used with a DELTA 100W motor, the DELTA ASDA-A2-0221-M drive can only be used with a DELTA 200W motor, the DELTA ASDA-A2-0421-M drive can only be used with the DELTA 400W motor, and the DELTA ASD-A2-0721-M drive can only be used with a DELTA 750W motor.
The drives are characterized by overall contained dimensions and great versatility of use. They consist of a circuit board situated in a metal box, complete with extractible power screw connectors and logics connectors.

DRIVE TECHNICAL DATA

Drive code		**37D2100000**	**37D2200001**	**37D2300000**	**37D2400007**
Nominal power	W	100	200	400	750
Type of drive for BRUSHLESS motors		Metal box			
Dimensions	mm	170 x 173 x 45			180 x 173 x 65
Power connectors and motor power		Spring type			
Encoder connectors and signals		Plug-type 3M			
Max output current	A	2.7	4.65	7.80	15.30
Motor output stage		IGBT, PWM control, sinusoidal current			
Power voltage		Single-phase or three-phase (user configurable) 200VAC-230VAC (+10%, -15%) 50/60 Hz (± 3 Hz)			
Logic voltage		Single-phase 200-230VAC (+10%, -15%) 50/60 Hz (± 3 Hz)			
Control		With analogue signal (proportional to speed and torque).			
		Pulse-train (clock + direction; forward + backward pulse; 90° phase difference)			
		fieldbus with "CANopen" communication protocol			
		8 inputs and 5 outputs, user configurable.			
		In the event of pulse-train command, the control system outputs should be the Line Driver type.			
		If the outputs are the open-collector type, you can use a 37D2000000 board,			
		which is sold separately (see accessories).			
Auto-tuning		Yes			
Communication interface		Serial USB port for settings and monitoring via a personal computer			
Protections		Integrated against overloads, input extra-voltages,			
		incorporated filters for suppressing the system's own resonance frequencies.			
Standards		CE and UL			
Other features		5-digit display and programming keypad.			
		Integrated closed-loop system with position, speed and torque control modes.			
		Control mode: position + speed; position + torque; speed + torque.			
		Automatic dynamic braking circuit in a alarm and power-off conditions.			
		Connector for external braking resistance (optional).			
		Configuration and control software (optional).			
Suitable for motors code		**37M200000**	**37M2200001**	**37M2220001**	**37M2330001**
		37M400000	**37M4200001**	**37M4220001**	**37M4330001**
Connecting cable:					
Brushless **motor-drive** connecting cable, 3 metres		**37C2130001**			
Brushless **motor** with **brake-drive** connecting cable, 3 metres		**37C2730000**			
Brushless **motor-drive-encoder** connecting cable, 3 metres		**37C2230001**			
Brushless **motor-drive** connecting **dynamic** cable, 3 metres		**37C2130002**			
Brushless **motor-drive-encoder** connecting **dynamic** cable, 3 metres		**37C2230002**			
Brushless **motor** with **brake-drive** connecting **dynamic** cable, 3 metres		**37C2730001**			
Brushless **motor-drive** connecting cable, 5 metres		**37C2150001**			
Brushless **motor** with **brake-drive** connecting cable, 5 metres		**37C2750000**			
Brushless **motor-drive-encoder** connecting cable, 5 metres		**37C2250001**			
Brushless **motor-drive** connecting **dynamic** cable, 5 metres		**37C2150002**			
Brushless **motor-drive-encoder** connecting **dynamic** cable, 5 metres		**37C2250002**			
Brushless **motor** with **brake-drive** connecting **dynamic** cable, 5 metres		**37C2750001**			
Brushless **motor-drive** connecting **dynamic** cable, 10 metres		**37C2100003**			
Brushless **motor-drive-encoder** connecting **dynamic** cable, 10 metres		**37C2200003**			
Brushless **motor** with **brake-drive** connecting **dynamic** cable, 10 metres		**37C2700001**			

WIRING DIAGRAM FOR 100W - 200W - 400W - 750W BRUSHLESS MOTOR DRIVES

① POWER CONNECTOR: 230VAC, single-phase and three-phase (user configurable). **Included in the supply**.
Separate supply section for logic/signal and power electronics.
Integrated circuits protecting against overloads and input extra-voltages.
② CONNECTOR: for external braking resistance code 37D2R00000 (optional).
③ 5-DIGIT DISPLAY and PROGRAMMING KEYPAD: to display and modify parameters and monitor system operation in real time.
④ EXTERNAL ENCODER CONNECTOR (optional): possibility of connecting an external encoder to create a feedback of the linear axis position. Can support encoders A, B, Z, supplied at 5VDC.
⑤ CANopen CONNECTOR (optional): this drive is designed for communication with other devices via CANopen Fieldbus.
⑥ SIGNAL CONNECTOR: pulse-train command (clock + direction; forward + backward pulse; 90° phase difference) or with analogue signal (proportional to speed or torque) 8 inputs and 5 outputs, user configurable.
⑦ ENCODER CONNECTOR: connection for 100W - 200W - 400W - 750W BRUSHLESS motor encoder.
⑧ IEEE 1394 PC CONNECTOR: settings and possible connection to other devices via RS485 or RS232 (cable not included in the supply).
⑨ USB PC CONNECTOR: settings and monitor through personal computer (not included in the supply).
Data acquisition is only possible via this connection.
⑩ MOTOR POWER CONNECTOR

Log on to www.metalwork.it to view the instruction manual.

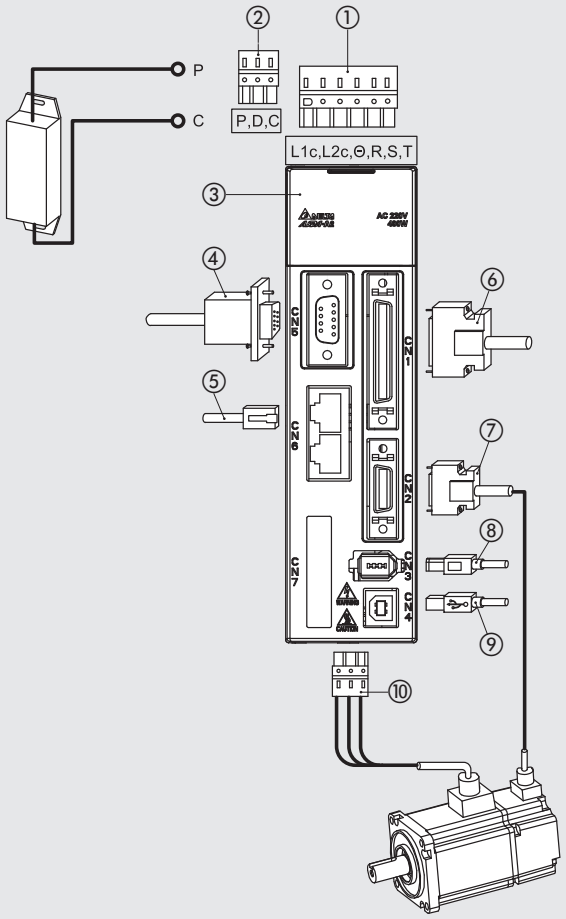

NOTES

DRIVE FOR 1kW DELTA BRUSHLESS MOTORS

It is a DELTA ASDA-A2-1021-M drive to be used only with a DELTA 1kW motor.
It features compact dimensions and considerable operating flexibility.
It consists of a board housed in a metal box. It comes with pull-out screw connectors for power and plug connectors for logic.

DRIVE TECHNICAL DATA		
Drive code		**37D2400006**
Nominal power		1kW
Type of drive for BRUSHLESS motors		Metal box
Dimensions	mm	180 x 173 x 65
Power connectors and motor power		Screw type
Encoder connectors and signals		Plug-type 3M
Max output current	A	21.90
Motor output stage		IGBT, PWM control, sinusoidal current
Power voltage		Single-phase or three-phase (user configurable) 200VAC-230VAC (+10%, -15%) 50/60 Hz (± 3 Hz)
Logic voltage		Single-phase 200-230VAC (+10%, -15%) 50/60 Hz (± 3 Hz)
Control		With analogue signal (proportional to speed and torque).
		Pulse-train (clock + direction; forward + backward pulse; 90° phase difference)
		fieldbus with "CANopen" communication protocol
		8 inputs and 5 outputs, user configurable.
		In the event of pulse-train command, the control system outputs should be the Line Driver type.
		If the outputs are the open-collector type, you can use a 37D2000000 board,
		which is sold separately (see accessories).
Auto-tuning		Yes
Communication interface		Serial USB port for settings and monitoring via a personal computer
Protections		Integrated against overloads, input extra-voltages,
		incorporated filters for suppressing the system's own resonance frequencies.
Standards		CE and UL
Other features		5-digit display and programming keypad.
		Integrated closed-loop system with position, speed and torque control modes.
		Control mode: position + speed; position + torque; speed + torque.
		Automatic dynamic braking circuit in a alarm and power-off conditions.
		Connector for external braking resistance (optional).
		Configuration and control software (optional).
Suitable for motors code		**37M2640000 - 37M4640000**
Connecting cable:		
Brushless **motor-drive** connecting cable, 3 metres		**37C3130001**
Brushless **motor** with **brake-drive** connecting cable, 3 metres		**37C3730000**
Brushless **motor-drive-encoder** connecting cable, 3 metres		**37C3230001**
Brushless **motor-drive** connecting **dynamic** cable, 3 metres		**37C2130006**
Brushless **motor-drive-encoder** connecting **dynamic** cable, 3 metres		**37C2230007**
Brushless **motor** with **brake-drive** connecting **dynamic** cable, 3 metres		**37C2730002**
Brushless **motor-drive** connecting cable, 5 metres		**37C3150001**
Brushless **motor** with **brake-drive** connecting cable, 5 metres		**37C3750000**
Brushless **motor-drive-encoder** connecting cable, 5 metres		**37C3250001**
Brushless **motor-drive** connecting **dynamic** cable, 5 metres		**37C2150006**
Brushless **motor-drive-encoder** connecting **dynamic** cable, 5 metres		**37C2250008**
Brushless **motor** with **brake-drive** connecting **dynamic** cable, 5 metres		**37C2750003**
Brushless **motor-drive** connecting **dynamic** cable, 10 metres		**37C2100006**
Brushless **motor-drive-encoder** connecting **dynamic** cable, 10 metres		**37C2200007**
Brushless **motor** with **brake-drive** connecting **dynamic** cable, 10 metres		**37C2700002**

WIRING DIAGRAM FOR 1kW BRUSHLESS MOTOR DRIVES

① POWER CONNECTOR: 230VAC, single-phase and three-phase (user configurable). **Included in the supply**.
Separate supply section for logic/signal and power electronics.
Integrated circuits protecting against overloads and input extra-voltages.
② CONNECTOR: for external braking resistance code 37D2R00000 (optional).
③ 5-DIGIT DISPLAY and PROGRAMMING KEYPAD: to display and modify parameters and monitor system operation in real time.
④ EXTERNAL ENCODER CONNECTOR (optional): possibility of connecting an external encoder to create a feedback of the linear axis position. Can support encoders A, B, Z, supplied at 5VDC.
⑤ CANopen CONNECTOR (optional): this drive is designed for communication with other devices via CANopen Fieldbus.
⑥ SIGNAL CONNECTOR: pulse-train command (clock + direction; forward + backward pulse; 90° phase difference) or with analogue signal (proportional to speed or torque) 8 inputs and 5 outputs, user configurable.
⑦ ENCODER CONNECTOR: connection for 100W - 200W - 400W - 750W BRUSHLESS motor encoder.
⑧ IEEE 1394 PC CONNECTOR: settings and possible connection to other devices via RS485 or RS232 (cable not included in the supply).
⑨ USB PC CONNECTOR: settings and monitor through personal computer (not included in the supply).
Data acquisition is only possible via this connection.
⑩ MOTOR POWER CONNECTOR

Log on to www.metalwork.it to view the instruction manual.

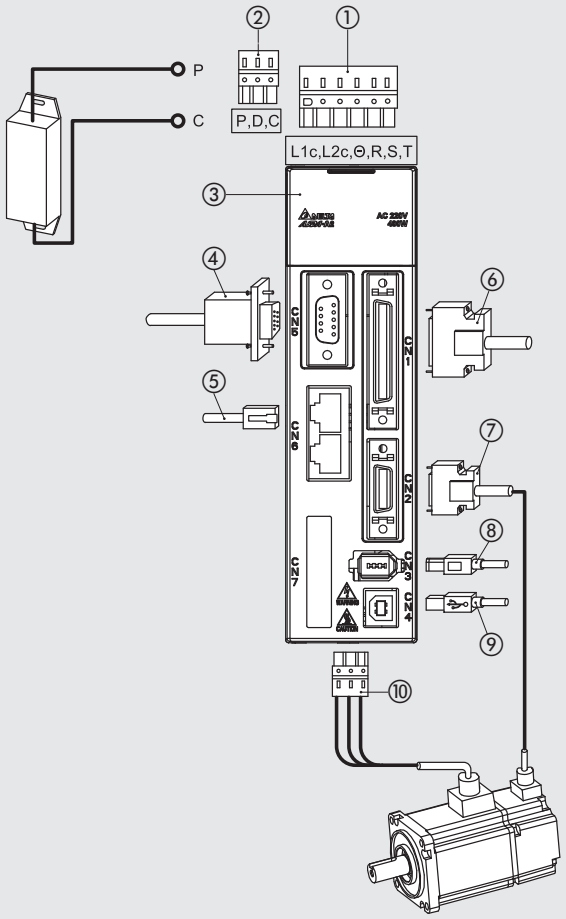

NOTES

DRIVE FOR 3kW DELTA BRUSHLESS MOTORS

It is a DELTA ASDA-A2-3043-M drive to be used only with a DELTA 3kW motor.
It features compact dimensions and considerable operating flexibility.
It consists of a board housed in a metal box. It comes with pull-out screw connectors for power and plug connectors for logic.

DRIVE TECHNICAL DATA		
Drive code		**37D2600001**
Nominal power		3kW
Type of drive for BRUSHLESS motors		Metal box
Dimensions	mm	245 x 205.4 x 123
Power connectors and motor power		Screw type
Encoder connectors and signals		Plug-type 3M
Max output current	A	33.32
Motor output stage		IGBT, PWM control, sinusoidal current
Power voltage		Three-phase from 380VAC to 480VAC ±10% 50/60 Hz (± 3 Hz)
Logic voltage		24VDC ±10%
Control		With analogue signal (proportional to speed and torque).
		Pulse-train (clock + direction; forward + backward pulse; 90° phase difference)
		fieldbus with "CANopen" communication protocol
		8 inputs and 5 outputs, user configurable.
		In the event of pulse-train command, the control system outputs should be the Line Driver type.
		If the outputs are the open-collector type, you can use a 37D2000000 board,
		which is sold separately (see accessories).
Auto-tuning		Yes
Communication interface		Serial USB port for settings and monitoring via a personal computer
Protections		Integrated against overloads, input extra-voltages,
		incorporated filters for suppressing the system's own resonance frequencies.
Standards		CE and UL
Other features		5-digit display and programming keypad.
		Integrated closed-loop system with position, speed and torque control modes.
		Control mode: position + speed; position + torque; speed + torque.
		Automatic dynamic braking circuit in a alarm and power-off conditions.
		Connector for external braking resistance (optional).
		Configuration and control software (optional).
Suitable for motors code		**37M2770000 - 37M4770000**
Connecting cable:		
Brushless **motor-drive** connecting cable, 3 metres		**37C3130001**
Brushless **motor** with **brake-drive** connecting cable, 3 metres		**37C3730000**
Brushless **motor-drive-encoder** connecting cable, 3 metres		**37C3230001**
Brushless **motor-drive** connecting **dynamic** cable, 3 metres		**37C2130006**
Brushless **motor-drive-encoder** connecting **dynamic** cable, 3 metres		**37C2230007**
Brushless **motor** with **brake-drive** connecting **dynamic** cable, 3 metres		**37C2730002**
Brushless **motor-drive** connecting cable, 5 metres		**37C3150001**
Brushless **motor** with **brake-drive** connecting cable, 5 metres		**37C3750000**
Brushless **motor-drive-encoder** connecting cable, 5 metres		**37C3250001**
Brushless **motor-drive** connecting **dynamic** cable, 5 metres		**37C2150006**
Brushless **motor-drive-encoder** connecting **dynamic** cable, 5 metres		**37C2250008**
Brushless **motor** with **brake-drive** connecting **dynamic** cable, 5 metres		**37C2750003**
Brushless **motor-drive** connecting **dynamic** cable, 10 metres		**37C2100006**
Brushless **motor-drive-encoder** connecting **dynamic** cable, 10 metres		**37C2200007**
Brushless **motor** with **brake-drive** connecting **dynamic** cable, 10 metres		**37C2700002**

WIRING DIAGRAM FOR 3kW BRUSHLESS MOTOR DRIVES

① LOGIC POWER CONNECTOR: 24VDC.
Included in the supply. Power section for logic electronics.
② POWER CONNECTOR: 400VAC, three-phase.
Included in the supply. Power signal supply section.
Integrated circuits protected against overload, input extra-voltages.
③ MOTOR POWER CONNECTOR
④ CONNECTOR: for external braking resistance code 37D2R00004 (optional).
⑤ 5-DIGIT DISPLAY and PROGRAMMING KEYPAD: to display and modify parameters and monitor system operation in real time.
⑥ EXTERNAL ENCODER CONNECTOR (optional): possibility of connecting an external encoder to create a feedback of the linear axis position. Can support encoders A, B, Z, supplied at 5VDC.
⑦ CANopen CONNECTOR (optional): this drive is designed for communication with other devices via CANopen Fieldbus.
⑧ SIGNAL CONNECTOR: pulse-train command (clock + direction; forward + backward pulse; 90° phase difference) or with analogue signal (proportional to speed or torque) 8 inputs and 5 outputs, user configurable. **Included in the supply**.
⑨ ENCODER CONNECTOR: connection for 3kW BRUSHLESS motor encoder.
⑩ IEEE 1394 PC CONNECTOR: settings and possible connection to other devices via RS485 or RS232 (cable not included in the supply).
⑪ USB PC CONNECTOR: settings and monitor through personal computer (not included in the supply).
Data acquisition is only possible via this connection.

Log on to www.metalwork.it to view the instruction manual.

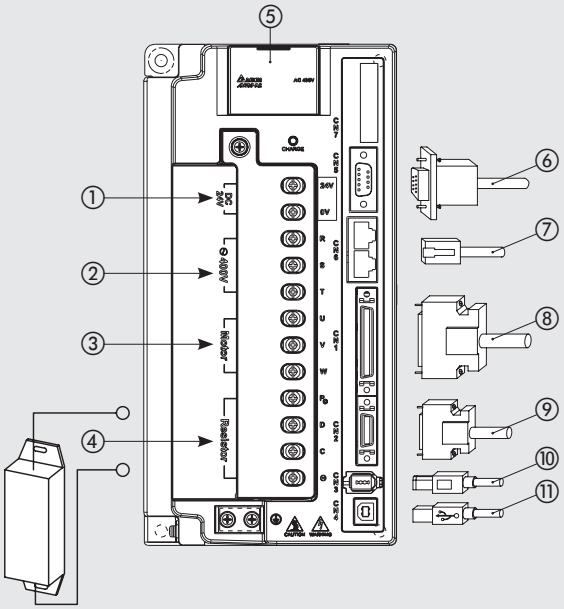

NOTES

DRIVE FOR B3 400W DELTA BRUSHLESS MOTORS

It is a DELTA ASD-B3A-0421-M drive to be used only with a DELTA B3 400W motor.
It features compact dimensions and considerable operating flexibility.
It consists of a board housed in a metal box. It comes with pull-out screw connectors for power and plug connectors for logic.

DRIVE TECHNICAL DATA		
Drive code		**37D2300002**
Nominal power	W	400
Type of drive for BRUSHLESS motors		Metal box
Dimensions	mm	60 x 162 x 156
Power connectors and motor power		Spring type
Encoder connectors and signals		Plug-type, D-Sub high density 26 poles
Max output current	A	10.6
Motor output stage		IGBT, PWM control, sinusoidal current
Power voltage		Single-phase or three-phase (user configurable) 200-230VAC (+10%, -15%) 50/60 Hz (± 3 Hz)
Logic voltage		Single-phase 200-230VAC (+10%, -15%) 50/60 Hz (± 3 Hz)
Control		With analogue signal (proportional to speed and torque).
		Pulse-train (clock + direction; forward + backward pulse; 90° phase difference)
		fieldbus with "CANopen" communication protocol
		4 inputs and 2 outputs, user configurable.
		In the event of pulse-train command, the control system outputs should be the Line Driver type.
		If the outputs are the open-collector type, you can use a 37D2000000 board,
		which is sold separately (see accessories).
Auto-tuning		Yes
Communication interface		Serial USB port for settings and monitoring via a personal computer
Protections		Integrated against overloads, input extra-voltages, STO (Safe Torque Off)
		incorporated filters for suppressing the system's own resonance frequencies.
Standards		CE and UL
Other features		5-digit display and programming keypad.
		Integrated closed-loop system with position, speed and torque control modes.
		Control mode: position + speed; position + torque; speed + torque.
		Automatic dynamic braking circuit in a alarm and power-off conditions.
		Connector for external braking resistance (optional).
		Configuration and control software (optional).
Suitable for motors code		**37M2220002 - 37M4220002**
Connecting cable:		
Brushless **motor-drive, dynamic** cable, 3 metres		**37C2130002**
Brushless **motor-drive** with brake **dynamic** cable, 3 metres		**37C2730001**
Brushless **motor-drive-encoder, dynamic** cable, 3 metres		**37C2230006**
Brushless **motor-drive, dynamic** cable, 5 metres		**37C2150002**
Brushless **motor-drive** with brake **dynamic** cable, 5 metres		**37C2750001**
Brushless **motor-drive-encoder, dynamic** cable, 5 metres		**37C2250007**
Brushless **motor-drive, dynamic** cable, 10 metres		**37C2100003**
Brushless **motor-drive** with brake **dynamic** cable, 10 metres		**37C2700001**
Brushless **motor-drive-encoder, dynamic** cable, 10 metres		**37C2200006**

WIRING DIAGRAM FOR BRUSHLESS MOTOR DRIVES

① POWER CONNECTOR: 230VAC, single-phase and three-phase (user configurable). Separate supply section for logic/signal and power electronics. Integrated circuits protecting against overloads and input extra-voltages.
② Braking resistor connection (optional).
③ 5-DIGIT DISPLAY and PROGRAMMING KEYPAD: to display and modify parameters and monitor system operation in real time.
④ BRUSHLESS motor power cable connection
⑤ Mini USB PC CONNECTOR: settings and monitor through personal computer (not included in the supply).
⑥ CANopen CONNECTOR (optional): this drive is designed for communication with other devices via CANopen Fieldbus.
⑦ SIGNAL CONNECTOR: pulse-train command (clock + direction; forward + backward pulse; 90° phase difference) or with analogue signal (proportional to speed or torque) 4 inputs and 2 outputs, user configurable.
⑧ STO CONNECTOR: connector for functionality management safety Safe Torque Off
⑨ ENCODER CONNECTOR: connection for BRUSHLESS motor encoder.

Log on to www.metalwork.it to view the instruction manual.

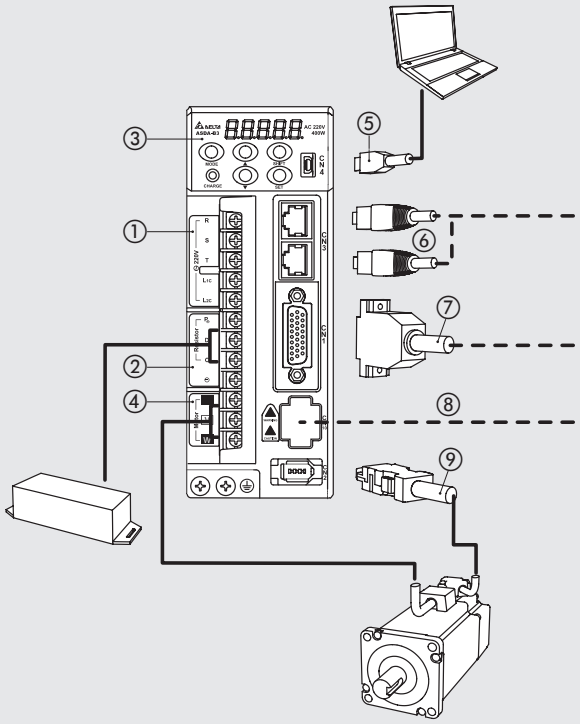

NOTES

CABLES FOR DELTA BRUSHLESS MOTORS

ENCODER CABLE 100W - 750W



Code	Description
37C2230001	100W-750W brushless motor-drive-encoder connecting cable, 3 metres
37C2250001	100W-750W brushless motor-drive-encoder connecting cable, 5 metres
37C2230002	100W-750W brushless motor-drive-encoder connecting dynamic cable, 3 metres
37C2250002	100W-750W brushless motor-drive-encoder connecting dynamic cable, 5 metres
37C2200003	100W-750W brushless motor-drive-encoder connecting dynamic cable, 10 metres

ENCODER CABLE 1kW - 3kW



Code	Description
37C3230001	1kW - 3kW brushless motor-drive-encoder connecting cable, 3 m
37C3250001	1kW - 3kW brushless motor-drive-encoder connecting cable, 5 m
37C2230007	1kW - 3kW brushless motor-drive-encoder connecting dynamic cable, 3 metres
37C2250008	1kW - 3kW brushless motor-drive-encoder connecting dynamic cable, 5 metres
37C2200007	1kW - 3kW brushless motor-drive-encoder connecting dynamic cable, 10 metres

ENCODER CABLE B3 400W

Code	Description
37C2230006	B3 400W brushless motor-drive-encoder connecting dynamic cable, 3 metres
37C2250007	B3 400W brushless motor-drive-encoder connecting dynamic cable, 5 metres
37C2200006	B3 400W brushless motor-drive-encoder connecting dynamic cable, 10 metres

MOTOR POWER CABLE 100W - 750W

Code	Description
37C2130001	100W-750W brushless motor-drive connecting cable, 3 metres
37C2150001	100W-750W brushless motor-drive connecting cable, 5 metres
37C2130002	100W-750W brushless motor-drive connecting dynamic cable, 3 metres
37C2150002	100W-750W brushless motor-drive connecting dynamic cable, 5 metres
37C2100003	100W-750W brushless motor-drive connecting dynamic cable, 10 metres



Pin	Function	Corresponding wire colour
1	Motor phase U	Black 1
2	Motor phase V	Black 2
3	Motor phase W	Black 3
4	GND	Yellow / Green

MOTOR POWER CABLE 1kW - 3kW



Code	Description
37C3130001	1kW - 3kW brushless motor-drive connecting cable, 3 m
37C3150001	1kW - 3kW brushless motor-drive connecting cable, 5 m
37C2130006	1kW - 3kW brushless motor-drive connecting dynamic cable, 3 metres
37C2150006	1kW - 3kW brushless motor-drive connecting dynamic cable, 5 metres
37C2100006	1kW - 3kW brushless motor-drive connecting dynamic cable, 10 metres

Pin	Function	Corresponding wire colour
A	-	-
B	Motor phase W	Black 4
C	-	-
D	-	-
E	GND	Yellow / Green
F	Motor phase U	Black 1
G	-	-
H	-	-
I	Motor phase V	Black 2

MOTOR POWER CABLE + BRAKE 100W - 750W



Code	Description
37C2730000	100W-750W brushless motor-drive connecting cable + brake, 3 metres
37C2750000	100W-750W brushless motor-drive connecting cable + brake, 5 metres
37C2730001	100W-750W brushless motor-drive connecting dynamic cable + brake, 3 metres
37C2750001	100W-750W brushless motor-drive connecting dynamic cable + brake, 5 metres
37C2700001	100W-750W brushless motor-drive connecting dynamic cable + brake, 10 metres



Pin	Function	Corresponding wire colour
1	Motor phase U	Black 1
2	Motor phase V	Black 2
3	24VDC brake	Black 3
4	Motor phase W	Black 4
5	GND	Yellow / Green
6	GND brake	Black 6

MOTOR POWER CABLE + BRAKE 1kW - 3kW



Code	Description
37C3730000	1kW - 3kW brushless motor drive connecting cable + brake, 3 m
37C3750000	1kW - 3kW brushless motor drive connecting cable + brake, 5 m
37C2730002	1kW - 3kW brushless motor-drive connecting dynamic cable + brake, 3 metres
37C2750003	1kW - 3kW brushless motor-drive connecting dynamic cable + brake, 5 metres
37C2700002	1kW - 3kW brushless motor-drive connecting dynamic cable + brake, 10 metres



Pin	Function	Corresponding wire colour
A	-	-
B	Motor phase W	Black 4
C	-	-
D	-	-
E	GND	Yellow / Green
F	Motor phase U	Black 1
G	24VDC brake	Black 3
H	GND brake	Black 6
I	Motor phase V	Black 2

NOTES

ACCESSORIES FOR DELTA DRIVES

LINE-DRIVER INTERFACE BOARD



Code	Description
37D2000000	BRINT.A line driver interface board

EXTERNAL BRAKING RESISTANCES

220W

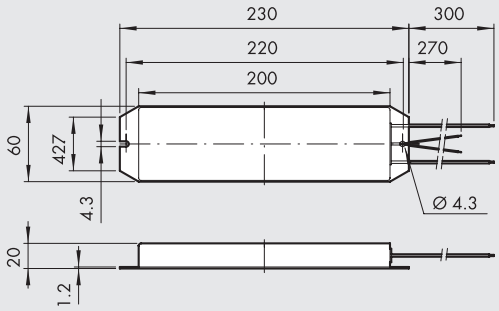

400W

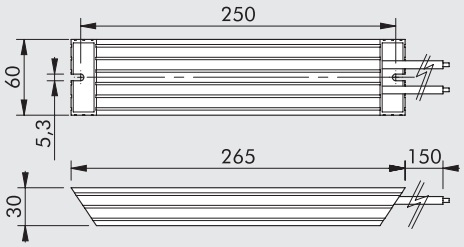

Code	Description	For drive code
37D2R00000	220W 50 Ω braking resistance	37D2100000 - 37D2200001 37D2300000
37D2R00004	400W 40 Ω braking resistance	37D2300002 - 37D2400006 37D2400007 - 37D2600001

Under certain operating conditions, such as sudden deceleration with high inertial load, it may be necessary to dissipate externally the reverse energy generated by the motor. The drive indicates this requirement via a specific alarm. Excess energy is dissipated externally via a braking resistance.

CABLE USB

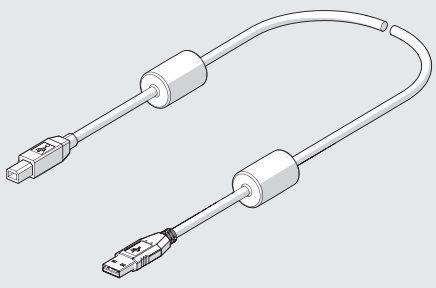

Code	Description	Weight [g]
37C0030000	Cable for USB 2.0 male A-B connector with ferrite core, for connecting the drive brushless to a PC, 3 m	150

CONFIGURATION SOFTWARE ASDASoft

ASDASoft communication software is used for parameter setting and complete control of all functions of the system.
The configuration software can be downloaded free from the website http://www.deltaww.com
Access to parameter setting is done through the setup menus.
The software includes a detailed description of each parameter.
In addition to parameter setting ASDASoft software can accurately analyse operation of the system via the following functions.

- Status Monitor: real-time display of all details about the system.
- Data Scope: a complete oscilloscope with 4 channels that can be selected as desired among analogue and digital signals.
- System Analisis: used to study the system's frequency response to identify and correct any mechancal resonance phenomena.

JOG speed modes are also available (Digital IO/Jog Control) and Gain Auto-Tuning.

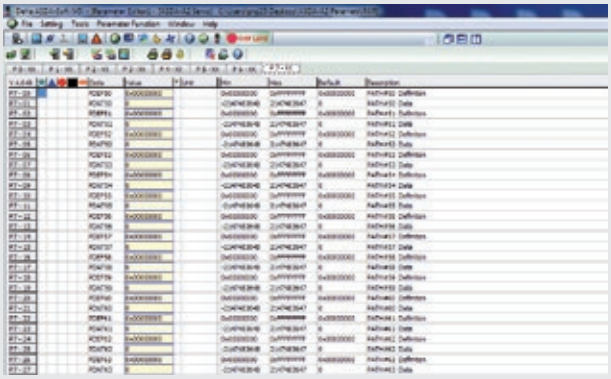

GRAPHIC MONITOR

Thanks to the integrated oscilloscope function, some important system parameters, such as speed and torque, can be displayed and saved on the PC monitor.
Data can be downloaded and saved in compatible Excel format.
Displayed can be read using the cursor.

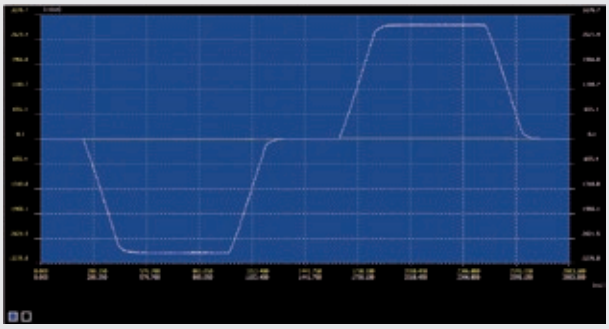

NOTES

SUMMARY SENSORS, POSITION SENSOR AND ACCESSORIES T-SLOT

MAGNETIC SENSORS

- RETRACTABLE SENSOR, TYPE SQUARE — A6.2

- RETRACTABLE SENSOR, TYPE OVAL — A6.4

- SENSOR Ø 4 — A6.6

- SENSOR SERIES DSM — A6.7

- SENSOR SERIES DCB — A6.8

- ACCESSORIES FOR SENSORS — A6.9

POSITION SENSORS

- POSITION SENSORS: INTRODUCTION — A6.10

- LTS POSITION SENSORS — A6.11

- LTL POSITION SENSORS — A6.16

ACCESSORIES

- ACCESSORIES FOR T-SLOT — A6.20

- SENSOR TESTER — A6.21

RETRACTABLE SENSOR, SQUARE TYPE

Traditional sensor, featuring:
- secure fixing by means of a steel eccentric pin that engages the sides of the seat;
- fixing screw suitable for flat screwdriver or a 2.5 mm Allen wrench;
- equipped with retaining tabs to hold the sensor in position during installation;
- increased resistance to atmospheric agents and moisture;
- compatible for use with both traditional T-slots and rectangular slots.

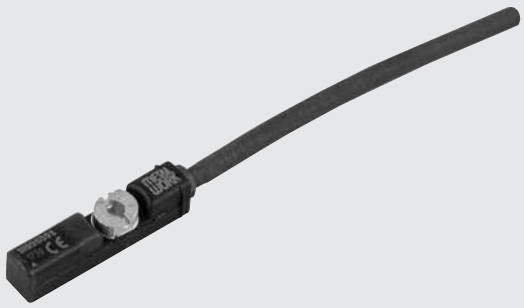

TECHNICAL DATA		RZT7	MRZT7	ATEX MZT8	HCR
		REED	HALL EFFECT	HALL EFFECT	HALL EFFECT
Type of contact		N.O.	N.O.	N.O.	N.O.
Switch		-	PNP	PNP	PNP
Supply voltage (Ub)	V	5 to 30 AC/DC	10 to 30 DC	10 to 26 DC	10 to 30 DC
Power	W	3 (peak value = 6)	-	≤ 1.7	-
Voltage variation		-	≤ 10% of Ub	≤ 10% of Ub	-
Voltage drop at Imax	V	≤ 3.5	≤ 2.5	≤ 2.2	≤ 2.2
Input current	mA	-	≤ 8	≤ 10	≤ 10
Output current	mA	≤ 100	≤ 100	≤ 50	≤ 200
Switching frequency	Hz	≤ 400	≤ 1000	≤ 1000	≤ 1000
Short-circuit protection		-	Yes	Yes	Yes
Over-voltage suppression		-	-	Yes	Yes
Polarity inversion protection		-	Yes	Yes	Yes
EMC		EN 60947-5-2	EN 60947-5-2	EN 60947-5-2	EN 60947-5-2
LED display		Yellow	Yellow	Yellow	Yellow
Magnetic sensitivity	mT	2.1 - 3.5	2.4 - 3.6	2.45 - 2.75	2.4 - 3.6
Repeatability	mT	≤ 0.1	≤ 0.1	≤ 0.1 (Ub and ta fixed)	≤ 0.1
Degree of protection (EN 60529)		IP 67	IP 67	IP 67	IP 68 (M8) - IP69K 2m
Vibration and shock resistance		30 g, 11 ms, 10 to 55 Hz, 1 mm			
Operating life		10^7 impulses	10^9 impulses	10^9 impulses	-
Temperature range	°C				
with polyurethane cable		-30 to 80 (static installation) / -20 to 80 (dynamic installation)		-	-30 to 80 (static installation)
with PVC cable		-30 to 80 (static installation) / -5 to 80 (dynamic installation)		-20 to 50	-
Sensor capsule material		PA	PA	PA12	PA12
2.5 m/2 m connecting cable		PVC; 2 x 0.12 mm²	PVC; 3 x 0.12 mm²	PVC; 3 x 0.12 mm²	PUR; 3 x 0.14 mm²
Connecting cable with M8x1		Polyurethane; 2 x 0.14 mm²	Polyurethane; 3 x 0.14 mm²	-	PUR; 3 x 0.14 mm²
Wire NO.		2	3	3	3
Category ATEX		-	-	II 3G Ex nA IIC T4 Gc X II 3D Ex tc IIIC T135°C Dc IP67 X	-
Certifications		CE	CE	CE Ex	CE cULus
ROBOTICS VERSIONS					
Angle of twist		±270° / 10 cm			-
No. of cycles torsion		> 350.000 (±270° / 0.1 mm)			-
Bending cycles		> 5 Mio (bending radius 29 mm)			-
Maximum acceleration	m/s²	max 5			-
Maximum traverse speed at 5 m horizontal path	m/min	max 200			-

METAL WORK PNEUMATIC

OVERALL DIMENSIONS AND ORDERING CODES

T7

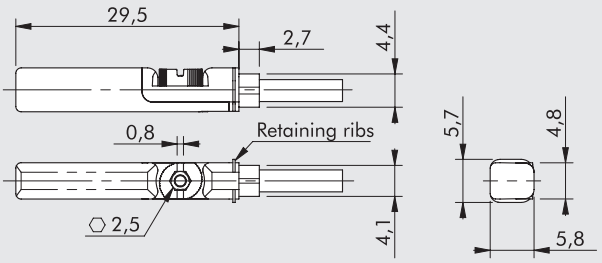

T8

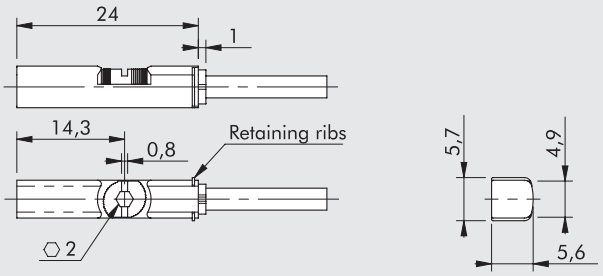

Code	Description
T7	
W095414	REED sensor, T7 SQUARE, 2 wires 2.5 m
W095415	REED sensor, T7 SQUARE, 2 wires 5 m
W095416	REED sensor, T7 SQUARE, 2 wires 10 m
W09541C	REED sensor, T7 SQUARE, 2 wires 2.5 m robotics
W095411	REED sensor, T7 SQUARE, 2 wires 300 mm M8 robotics
W095434	HALL sensor, T7 SQUARE, 3 wires 2.5 m
W095435	HALL sensor, T7 SQUARE, 3 wires 5 m
W09543C	HALL sensor, T7 SQUARE, 3 wires 2.5 m robotics
W095431	HALL sensor, T7 SQUARE, 3 wires 300 mm M8 robotics
T8 ATEX	
W0955A9	HALL sensor, T8 SQUARE, 3 wires ATEX 2 m SH.OV. robotics
T8 (for corrosive environments)	
W0952125396	HALL sensor, T8 SQUARE, 3 wires 2 m HCR
W0952129394	HALL sensor, T8 SQUARE, 3 wires 300 mm M8 HCR

Note: Not to be used with rodless cylinders Ø 25 having "V" guide.
For this type of cylinder use only the HS version of the oval type.

WIRING DIAGRAM

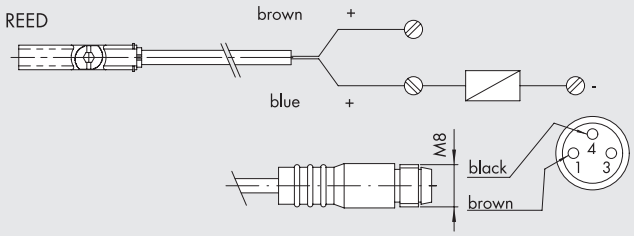

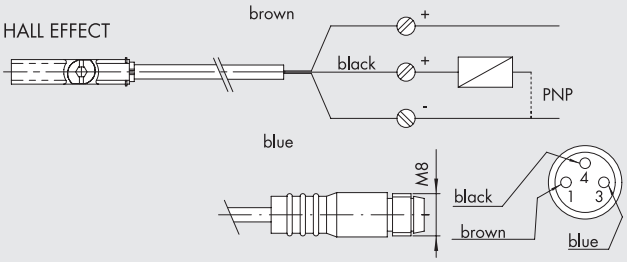

NOTES

RETRACTABLE SENSOR, TYPE OVAL

Traditional sensor, featuring:
- the sensor is inserted into the slot from the narrowest side and then rotated into the fixing position;
- fixing using a screw that is pressed against the bottom of the T-slot to cause the sensor to rest on the narrowest part of the T-slot;
- fixing screw suitable for a 1.5 mm Allen wrench;
- compatible for use with traditional T-slots.

TECHNICAL DATA			
		REED	HALL EFFECT
Type of contact		N.O.	N.O.
Switch		-	PNP
Supply voltage (Ub)	V	10 to 30 AC/DC	10 to 30 DC
Power	W	3 (peak value = 6)	3
Voltage variation		-	≤ 10% of Ub
Voltage drop	V	-	≤ 2
Input current	mA	-	≤ 10
Output current	mA	≤ 100	≤ 100
Switching frequency	Hz	≤ 400	≤ 5000
Short-circuit protection		-	Yes
Over-voltage suppression		-	Yes
Polarity inversion protection		-	Yes
EMC		EN 60 947-5-2	EN 60 947-5-2
LED display		Yellow	Yellow
Magnetic sensitivity		1.9 mT ± 20%	2.1 mT ± 20%
Repeatability		≤ 0.1 mT	≤ 0.1 mT
Degree of protection (EN 60529)		IP 67	IP 67
Vibration and shock resistance		30 g, 11 ms, 10 to 55 Hz, 1 mm	30 g, 11 ms, 10 to 55 Hz, 1 mm
Operating life		10^7 impulses	10^9 impulses
Temperature range	°C	-25 to +75	-25 to +75
Sensor capsule material		PA66 + PA6I/6T	PA66 + PA6I/6T
2.5 m/2 m connecting cable		PVC; 2 x 0.12 mm²	PVC; 3 x 0.14 mm²
Connecting cable with M8x1		Polyurethane; 2 x 0.14 mm²	Polyurethane; 3 x 0.14 mm²
Wire NO.		2	3
Certifications		CE	CE

OVERALL DIMENSIONS AND ORDERING CODES



Code	Description
W0952025500	HALL N.O. sensor, OVAL, HS 2.5 m
W0952029504	HALL N.O. sensor, OVAL, HS 300 mm M8
W0952022500	REED N.O. sensor, OVAL, HS 2.5 m
W0952128184	REED N.O. sensor, OVAL, HS 300 mm M8

N.B.: For use on the rodless cylinder "V" guide Ø25 or when standard sensors do not detect the magnet, e.g. near metal masses.

Note: Individually packed

WIRING DIAGRAM

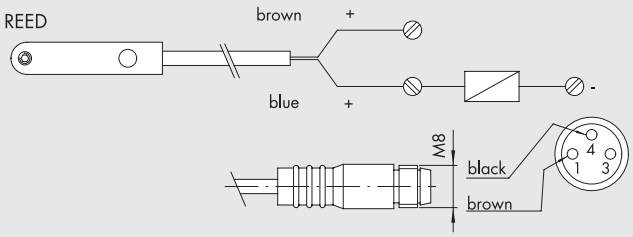

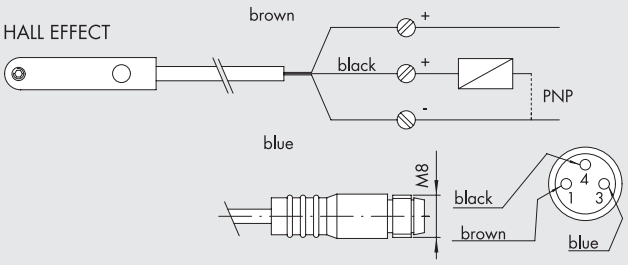

NOTES

SENSOR Ø 4

SENSOR Ø 4



Code	Description
W0950044180	Sensor REED 2 wires 2.5 m robotics
W0950045390	Sensor HALL 3 wires 2.5 m robotics

TECHNICAL DATA

		REED	HALL EFFECT
Type of contact		N.O.	N.O.
Switch		-	PNP
Supply voltage (Ub)	V	3 to 30 AC/DC	6 to 30 DC
Power (resistive load)	W	6	6
Voltage drop	V	< 3	< 1
Input current	mA	-	≤ 10
Output current	mA	≤ 200	≤ 200
Switching frequency	Hz	≤ 500	≤ 200000
Short-circuit protection		-	-
Over-voltage suppression		-	-
Polarity inversion protection		-	Yes
EMC		EN 60 947-5-2	EN 60 947-5-2
LED display		Yellow	Yellow
Magnetic sensitivity		2.3 mT ± 10%	2.8 mT ± 25%
Repeatability		≤ 0.1 mT	≤ 0.1 mT
Degree of protection (EN 60529)		IP 67	IP 67
Operating life		10^7 impulses	10^9 impulses
Temperature range	°C	-10 to +60	-10 to +60
Sensor capsule material		PET + AISI 303	PET + AISI 303
2.5 m connecting cable		Polyurethane; 2 x 0.13 mm²	Polyurethane; 3 x 0.13 mm²
Wire NO.		2	3
Certifications		CE UL	CE UL
Cable test conditions:	bending	> 5.000.000 cycles (bending radius 28 mm)	
	torsion	> 350.000 cycles (± 270°/0.1 mm)	

WIRING DIAGRAM

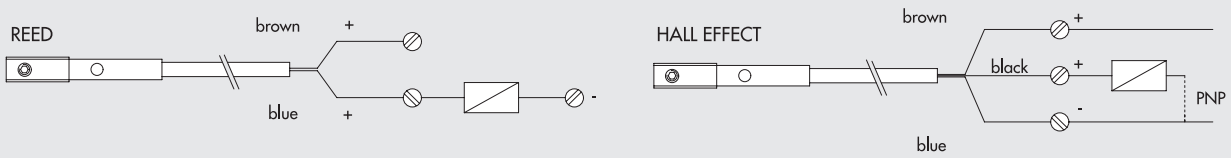

SENSOR SERIE DSM

SENSOR SERIES DSM

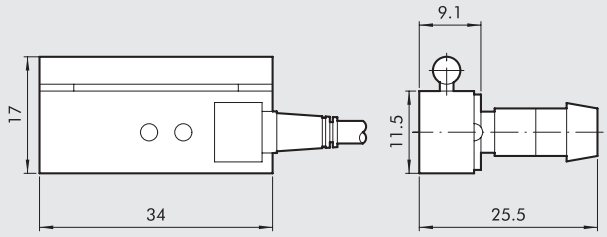

Code	Description
W0950000201	Reed sensor DSM2-C525 HS
W0950000222	E.HALL PNP sensor DSM3-N225
W0950000232	E. HALL NPN sensor DSM3-M225

TECHNICAL DATA SERIE DSM		REED	HALL EFFECT	
Type of contact		N.O.	N.O.	N.O.
Switch		-	PNP	NPN
Supply voltage (Ub)	V	3 to 250 AC/DC	6 to 30 DC	
Power	W	10	6	
Voltage drop	V	< 3	< 1	
Output current	mA	500	250	
Switching frequency	Hz	500	> 2000	
Polarity inversion protection		Sì	Sì	
EMC		EN 60 947-5-2	EN 60 947-5-2	
LED display		Yellow	Yellow	
Degree of protection (EN 60529)		IP 67	IP 67	
Operating life		10^7 impulses	10^9 impulses	
Temperature range	°C	-10 to +70	-10 to +70	
Sensor capsule material		PA; AISI 303; OT 63	PA; AISI 303; OT 63	
2.5 m connecting cable		PVC; 2 x 0.25 mm²	PVC; 3 x 0.25 mm²	
Wire NO.		2	3	
Certifications		CE	CE	

DC



Version NPN



AC



Version PNP



SENSOR SERIE DCB

SENSOR SERIE DCB

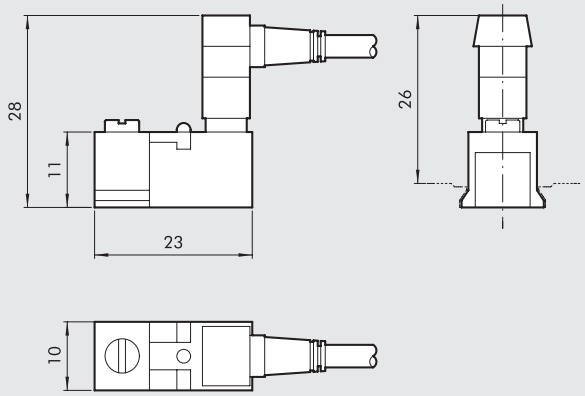

Code	Bore	Model	Version
W0950000252	12 to 100	REED sensor DCB 2C-425	Reed connector + bracket - CB
W0950000253	12 to 100	HALL PNP sensor DCB3-N225	Hall PNP connector + bracket - CB
W0950014360	12 to 100	HALL NPN sensor DCB3-M225	Hall NPN connector + bracket - CB

TECHNICAL DATA SERIE DCB

Type		REED + VARISTOR + LED 2 WIRES	HALL VERSION PNP/NPN 3 WIRES
Contact		REED + VARISTOR + LED NO	HALL EFFECT NO PNP/NPN
Max AC/DC voltage	V	3 to 48 (DC); 3 to 110 (AC)	6-30 V DC
Max current at 25°C	mA	300	250
Power with inductive load	VA	8	–
Power with resistive load	Watt	15	6
Switch-on time	m sec	0.5	0.8
Switch-off time	m sec	0.1	3
Switch-on point	Gauss	110	15
Switch-off point	Gauss	60	8
Operating life		10^7 impulses	10^9 impulses
Contact resistance		0.1	–
Cable length	m	2.5	2.5
Cable cross section	mm^2	0.35	0.35
Cable material		Soft PVC	Soft PVC
Circuit			

DC



Version NPN



AC



Version PNP



ACCESSORIES FOR SENSORS

EXTENSION WITH STRAIGHT CONNECTOR FOR M8 SENSORS



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

EXTENSION WITH 90° CONNECTOR FOR M8 SENSORS



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

EXTENSION WITH CONNECTOR M8 M - M8 F FOR SENSORS M8

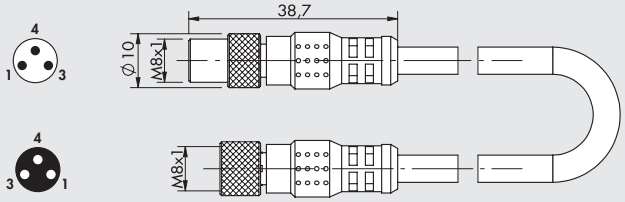

Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital INPUT of the EB 80 and CM valves

N.B.: Cannot be used with DSM and DCB series REED sensors

NOTES

POSITION SENSOR: INTRODUCTION

Magnetic position sensors are used for measuring the linear stroke of actuators. The position of the piston is measured without contact and given via a configurable analogue output signal, as voltage (0-10 V) or current (4-20 mA).
Our position sensors are divided into two types: LTS and LTL.
The LTS, suitable for strokes up to 256 mm, is used on ISO 15552 type A and series 3 cylinders, CMPC and ISO 21287 LINER compact cylinders, ELEKTRO ISO 15552 electric cylinders, R3 rotary actuators and integrated hydraulic brakes.
The LTL, suitable for strokes longer than 256 mm, is used on ISO 15552 type A, ELEKTRO ISO 15552 cylinders and integrated hydraulic brakes.

LTS

LTL

NOTES

LTS POSITION SENSOR

The LTS is a magnetic position sensor for measuring linear strokes of actuators. The position of the piston is measured without contact and given via a configurable analogue output signal, as voltage or current.
The body of the LTS is very compact, so it can be used in applications where limited space is available.
This position sensor can measure the strokes of various families of actuators up to 256 mm.
Correct operation requires a magnetic field strength of between 4 and 30 mT.
The measurement range can be regulated accurately using the Teach-in button (zero point and end point). Teach-in can be performed regardless of the polarity of the magnetic field and the position of the sensor.
The yellow ON light comes on when the piston is in measuring range; the position sensor is out of the measuring range when the yellow light is off.

TECHNICAL DATA		
Measuring length (± 1 mm)	mm	from 0 to 256
Electrical connection		M8x1 – 4 pin
Electromagnetic compatibility in accordance with standard		EN 60947-5-7
Sample time	ms	1
IEC 60068-2-6 shock test		30 g, 11 ms
IEC 60068-2-6 vibration test		10 Hz ... 55 Hz, 1 mm
Maximum displacement speed	m/s	< 3
Linearity*	mm	0.3
Resolution	mm	0.03 % FSR (≥ 0.05 mm)
Repeatability	mm	0.06 % FSR (≥ 0.1 mm)
Operating temperature	°C	–20 to +70
Index of protection		IP 67
Protection class		III
Voltage	V	15 - 30
Black current (without load)	mA	< 25
Analogue output (voltage)	V	0 to 10
Analogue output (current)	mA	4 to 20
Max. load resistance (current output)	Ω	500
Min. load resistance (voltage output)	Ω	2000
Polarity inversion protection		YES
Short-circuit protection		YES
Overload protection		YES

* In some applications, linearity may be higher than the value indicated.

DIMENSIONS AND ELECTRICAL CONNECTION

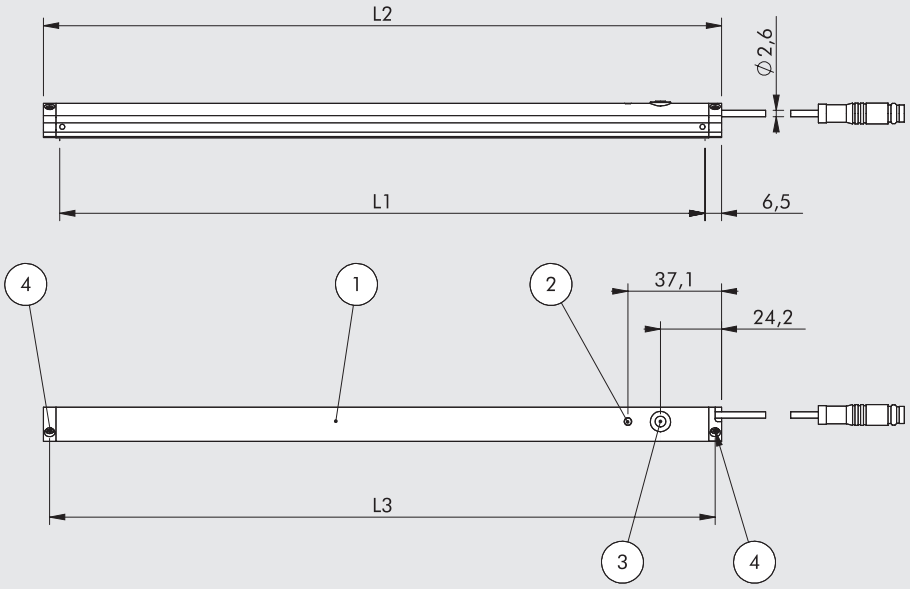



① LTS
② LED (yellow)
③ TEACH-IN button
④ Fixing screw

L1 = Measuring range
L2 = Total length
L3 = Fixing screws centre

Type	L1 [mm]	L2 [mm]	L3 [mm]
LTS-032	32	45	40
LTS-064	64	77	72
LTS-096	96	109	104
LTS-128	128	141	136
LTS-160	160	173	168
LTS-192	192	205	200
LTS-224	224	237	232
LTS-256	256	269	264



PIN	Colour	Function
1	Brown	Power supply +
2	White	Current output
3	Blue	Power supply -
4	Black	Voltage output

FIXING ON THE ACTUATOR AND START-UP

1. Connect the position sensor to the power supply using the M8x1 4-pin connector, wiring the voltage or the current output;
2. Insert the position sensor in one of the T-slots in the actuator (fig. A) and tighten the two screws using the key provided (fig. B);
3. If you wish to determine a specific measuring range, perform the procedure with the Teach-In button ③ (see instruction manual).

N.B. If a measuring range is not set, the maximum range is used automatically.





GRAPH OF THE VOLTAGE OR CURRENT ANALOGUE OUTPUT SIGNAL VALUE AND THE OUT-OF-RANGE VALUE

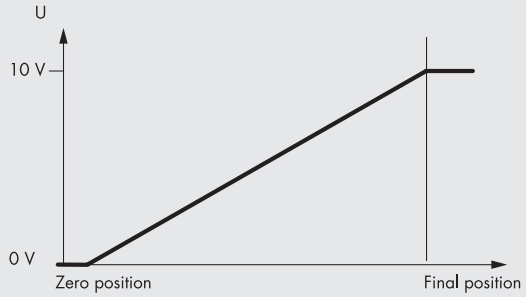

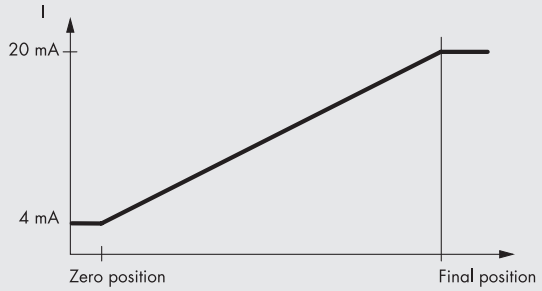

CHOICE OF POSITION SENSOR BASED ON THE MEASURING STROKE

The tables below show the recommended position sensors model for some families of actuators. For other products it is necessary to determine whether the LTS operates correctly.

ISO 15552 TYPE A CYLINDERS – SERIES 3

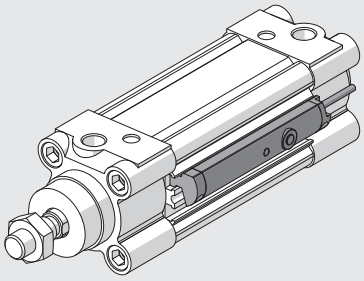

Ø 32* - Ø 40 - Ø 50 - Ø 63 - Ø 80 - Ø 100 - Ø 125	
Cylinder stroke [mm]	**Position sensors model**
up to 32	LTS-032
from 33 to 64	LTS-064
from 65 to 96	LTS-096
from 97 to 128	LTS-128
from 129 to 160	LTS-160
from 161 to 192	LTS-192
from 193 to 224	LTS-224
from 225 to 256	LTS-256

* ISO 15552 series 3 cylinders cannot be used for strokes up to 3 mm.

COMPACT CYLINDERS - SERIES CMPC

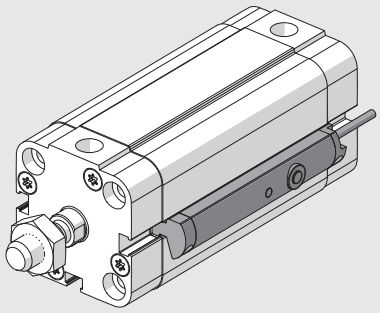

Ø 12 - Ø 16 - Ø 20		
Cylinder stroke [mm]	**Position sensors model**	**Strokes for which the LTS projects beyond the cylinder heads, despite being fixed correctly.**
up to 32	LTS-032	-
from 34 to 64	LTS-064	from 34 to 38
from 66 to 96	LTS-096	from 66 to 70
from 98 to 128	LTS-128	from 98 to 102
from 130 to 160	LTS-160	from 130 to 134
from 162 to 192	LTS-192	from 162 to 166
from 194 to 224	LTS-224	from 194 to 198
from 226 to 256	LTS-256	from 226 to 230

The LTS cannot be used with some strokes (e.g. 33 mm).

Ø 25		
Cylinder stroke [mm]	**Position sensors model**	**Strokes for which the LTS projects beyond the cylinder heads, despite being fixed correctly.**
up to 32	LTS-032	-
from 33 to 64	LTS-064	from 33 to 37
from 65 to 96	LTS-096	from 65 to 69
from 97 to 128	LTS-128	from 97 to 101
from 129 to 160	LTS-160	from 129 to 133
from 161 to 192	LTS-192	from 161 to 165
from 193 to 224	LTS-224	from 193 to 197
from 225 to 256	LTS-256	from 225 to 229

Ø 32 - Ø 40 - Ø 50 - Ø 63 - Ø 80 - Ø 100	
Cylinder stroke [mm]	**Position sensors model**
up to 32	LTS-032
from 33 to 64	LTS-064
from 65 to 96	LTS-096
from 97 to 128	LTS-128
from 129 to 160	LTS-160
from 161 to 192	LTS-192
from 193 to 224	LTS-224
from 225 to 256	LTS-256

ISO 21287 COMPACT CYLINDERS – LINER SERIES

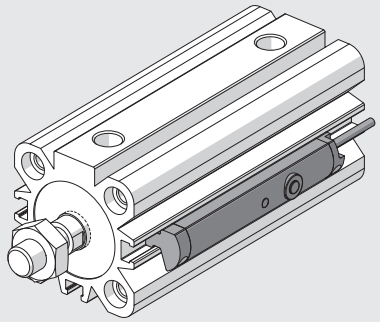

Ø 20		
Cylinder stroke [mm]	Position sensor model	Strokes for which the LTS projects beyond the cylinder heads, despite being fixed correctly.
up to 32	LTS-032	-
from 35 to 64	LTS-064	from 35 to 39
from 67 to 96	LTS-096	from 67 to 71
from 99 to 128	LTS-128	from 99 to 103
from 131 to 160	LTS-160	from 131 to 135
from 163 to 192	LTS-192	from 163 to 167
from 195 to 224	LTS-224	from 195 to 199
from 227 to 256	LTS-256	from 217 to 231

The LTS cannot be used with some strokes (e.g. 33 mm).

Ø 25		
Cylinder stroke [mm]	Position sensor model	Strokes for which the LTS projects beyond the cylinder heads, despite being fixed correctly.
up to 32	LTS-032	-
from 33 to 64	LTS-064	from 33 to 37
from 65 to 96	LTS-096	from 65 to 69
from 97 to 128	LTS-128	from 97 to 101
from 129 to 160	LTS-160	from 129 to 133
from 161 to 192	LTS-192	from 161 to 165
from 193 to 224	LTS-224	from 195 to 197
from 225 to 256	LTS-256	from 225 to 223

Ø 32 - Ø 40 - Ø 50 - Ø 63 - Ø 80 - Ø 100	
Cylinder stroke [mm]	Position sensor model
up to 32	LTS-032
from 33 to 64	LTS-064
from 65 to 96	LTS-096
from 97 to 128	LTS-128
from 129 to 160	LTS-160
from 161 to 192	LTS-192
from 193 to 224	LTS-224
from 225 to 256	LTS-256

INTEGRATED HYDRAULIC BRAKES



Ø 50 - Ø 63 - Ø 80 - Ø 100 - Ø125	
Integrated hydraulic brakes stroke [mm]	Position sensor model
50	LTS-064
100	LTS-128
150	LTS-160
200	LTS-224
250	LTS-256

ROTARY ACTUATORS - SERIES R3

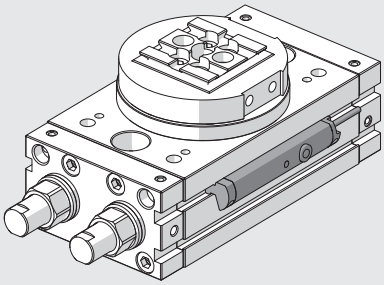

Bore [mm]	Position sensor model
16	LTS-64
20	LTS-64
22	LTS-64
25	LTS-64
30	LTS-64
40	LTS-64

METAL WORK PNEUMATIC

ELECTRIC CYLINDER SERIES ELEKTRO ISO 15552



Ø 32 - Ø 50 - Ø 63	
Cylinder stroke [mm]	**Position sensor model**
up to 32	LTS-032
from 33 to 64	LTS-064
from 65 to 96	LTS-096
from 97 to 128	LTS-128
from 129 to 160	LTS-160
from 161 to 192	LTS-192
from 193 to 224	LTS-224
from 225 to 256	LTS-256

ORDERING CODES

Code	Description
W0950000470	LTS-032 position sensor with M8 4-PIN 0.3 m connector
W0950000471	LTS-064 position sensor with M8 4-PIN 0.3 m connector
W0950000472	LTS-096 position sensor with M8 4-PIN 0.3 m connector
W0950000473	LTS-128 position sensor with M8 4-PIN 0.3 m connector
W0950000474	LTS-160 position sensor with M8 4-PIN 0.3 m connector
W0950000475	LTS-192 position sensor with M8 4-PIN 0.3 m connector
W0950000476	LTS-224 position sensor with M8 4-PIN 0.3 m connector
W0950000477	LTS-256 position sensor with M8 4-PIN 0.3 m connector

ACCESSORIES

STRAIGHT M8 CONNECTORS WITH SHIELDED CABLE



Pin	Cable colour
1	Brown
2	White
3	Blue
4	Black

Code	Description
0240009100	M8 4-pin female, straight connector with shielded cable L = 2 m
0240009101	M8 4-pin female, straight connector with shielded cable L = 5 m

90° M8 CONNECTORS WITH SHIELDED CABLE



Pin	Cable colour
1	Brown
2	White
3	Blue
4	Black

Code	Description
0240009102	M8 4-pin female, 90° connector with shielded cable L = 2 m
0240009103	M8 4-pin female, 90° connector with shielded cable L = 5 m

M8 SHIELDED ADAPTER CABLE FOR CONNECTION TO THE EB 80 ANALOGUE INPUTS MODULE

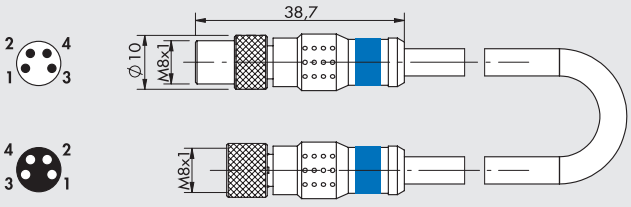

Code	Description
0240010601	M8-M, M8-F 4-pole adapter with shielded cable L = 0.3 m (**blue collar**)

Note: Can be used for connecting the **4/20 mA** analog output to the module of analog INPUT **S04** of the EB 80 valves.

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 2	pin 2	Signal 4/20 mA
pin 3	pin 3	Power supply –
pin 4	disconnect	

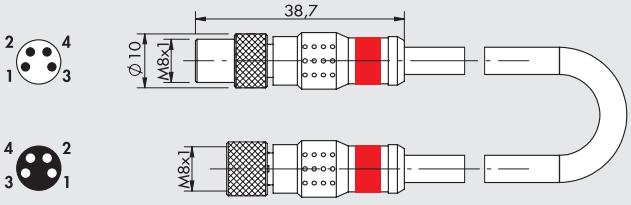

Code	Description
0240010701	M8-M, M8-F 4-pole adapter with shielded cable L = 0.3 m (**red collar**)

Note: Can be used for connecting the **0/10 VDC** analog output to the module of analog INPUT **S04** of the EB 80 valves

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 4	pin 2	Signal 0/10 V
pin 3	pin 3	Power supply –
pin 2	disconnect	

LTL POSITION SENSOR

The LTL position sensor uses an array of Hall sensors to measure positions without contact, thanks to the presence of a magnet inside the cylinder.
It uses a smart algorithm to adapt dynamically to the magnets during operation, so that the output signal is always linear and reproducible.
This technology allows the position sensor to adapt dynamically to changes in the intensity of the magnetic field connected with ageing of the magnet and the different operating temperatures.
A magnetic field intensity of between 2 and 15 mT is required for correct operation.
The LTL can be set by means of a TEACH-PAD capacitive button that allows rapid actuation of the position sensor and adaptation to the user's requirements. Just press slightly with the fingers to:

- select an output current (4-20 mA) or output voltage (0-10 V);
- establish the desired measuring range;
- reset the position sensor to the factory setting.

The button is designed to prevent unintentional changes to the parameters.
LED1 (operating light) comes on when the piston is in the measuring range:

- yellow on - optimal signal power;
- yellow on and red flashing - signal power not optimal.

When the piston is outside the measuring range, LED1 goes out.
LED2 tells you which analogue output is active:

- green – voltage analogue output;
- blue – current analogue output.

The position sensor is secured by means of brackets near one of the actuator T-slots.
For longer strokes please contact our sales department.

TECHNICAL DATA		
Measuring length (± 1 mm)	mm	from 257 to 503
Electrical connection		M8x1 – 4 pin
Electromagnetic compatibility in accordance with standard		EN 60947-5-7
Sample time	ms	1.15
IEC 60068-2-6 shock test		30 g, 11 ms
IEC 60068-2-6 vibration test		10 Hz ... 55 Hz, 1 mm
Maximum displacement speed	m/s	< 3
Linearity*	mm	0.5
Resolution	mm	0.03 % FSR (≥ 0.06 mm)
Repeatability	mm	0.06 % FSR (≥ 0.1 mm)
Operating temperature	°C	–20 to +70
Index of protection		IP 65, IP 67
Protection class		III
Voltage	V	15 to 30
Black current (without load)	mA	< 35
Analogue output (voltage)	V	0 to 10
Analogue output (current)	mA	4 to 20
Max. load resistance (current output)	Ω	< 500
Min. load resistance (voltage output)	Ω	> 2000
Polarity inversion protection		YES
Short-circuit protection		YES

* In some applications, linearity may be higher than the value indicated.

METAL WORK PNEUMATIC

DIMENSIONS AND ELECTRICAL CONNECTION

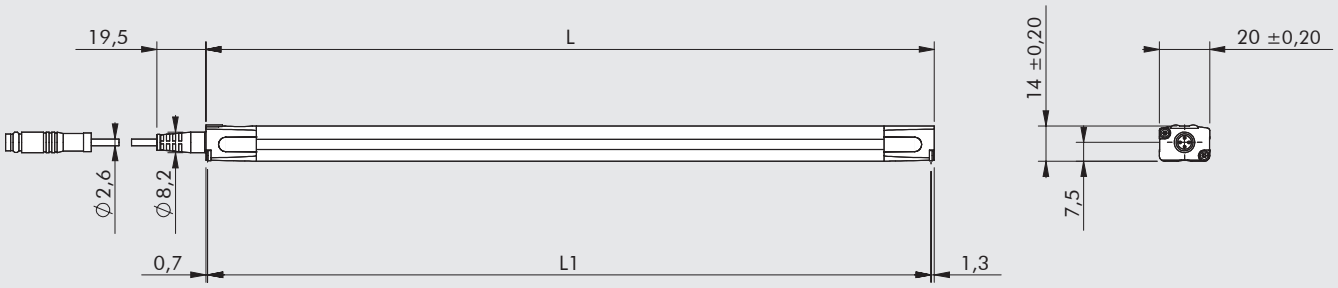

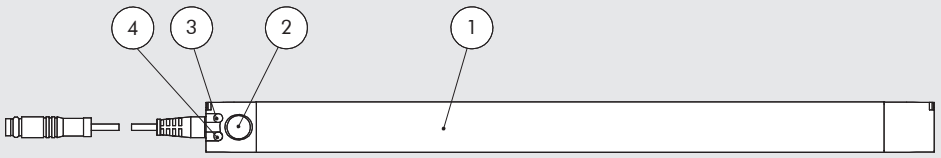

① LTL
② TEACH PAD button
③ LED1 (yellow/red)
④ LED2 (blue/green)

L = Total length
L1 = Measuring range

Type	L [mm]	L1 [mm]
LTL-287	289	287
LTL-359	361	359
LTL-431	433	431
LTL-503	505	503



PIN	Colour	Function
1	Brown	Power supply +
2	White	Current output
3	Blue	Power supply -
4	Black	Voltage output

FIXING ON THE ACTUATOR AND START-UP

1. Position the brackets (code W0950000721) in one of the T-slots in the cylinder liner (fig. A);
2. Fix the brackets in the position sensor slot at least 30 mm from the ends of the position sensor (fig. B). The brackets are used to adjust the position along the axis of the piston rod, including perpendicular to the T-slot (fig. C). This allows you to fix the position sensor in as central a position as possible (fig. D);
3. Connect the position sensor to the power supply using the M8x1 4-pin connector, wiring the voltage or the current output;
4. If you wish to determine a specific measuring range, perform the procedure with the Teach pad (②) (see user manual).

N.B. If a measuring range is not set, the maximum range is used automatically.

Ⓐ



Ⓑ



Ⓒ



Ⓓ



GRAPH OF THE VOLTAGE OR CURRENT ANALOGUE OUTPUT SIGNAL VALUE AND THE OUT-OF-RANGE VALUE

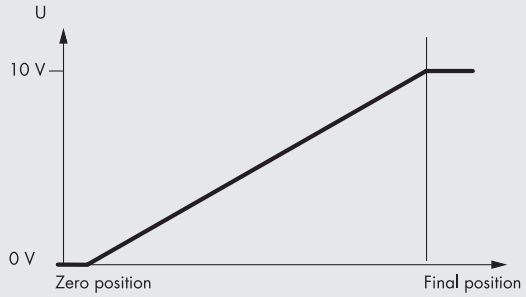

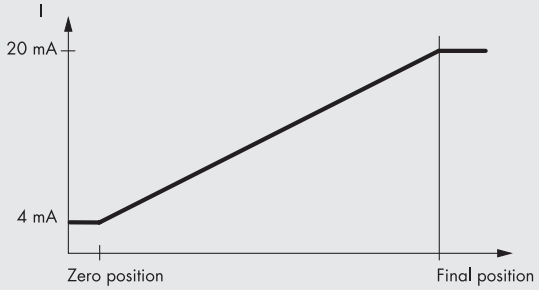

CHOICE OF POSITION SENSOR BASED ON THE ACTUATOR MEASURING STROKE

ISO 15552 TYPE A CYLINDERS



Ø 32 - Ø 40 - Ø 50 - Ø 63 - Ø 80 - Ø 100 - Ø 125	
Cylinder stroke [mm]	Position sensor model
from 255 to 287	LTL-287
from 288 to 359	LTL-359
from 360 to 431	LTL-431
from 432 to 503	LTL-503

INTEGRATED HYDRAULIC BRAKES



Ø 50 - Ø 63 - Ø 80 - Ø 100 - Ø125	
Integrated hydraulic brakes stroke [mm]	Position sensor model
350	LTL-359
400	LTL-431
500	LTL-503

ELECTRIC CYLINDER SERIES ELEKTRO ISO 15552



Ø 32 - Ø 50 - Ø 63	
Cylinder stroke [mm]	Position sensor model
from 255 to 287	LTL-287
from 288 to 359	LTL-359
from 360 to 431	LTL-431
from 432 to 503	LTL-503

ORDERING CODE

Code	Description
W0950000478	LTL-287 Position sensor with M8 4-PIN 0.3 m connector
W0950000479	LTL-359 Position sensor with M8 4-PIN 0.3 m connector
W0950000480	LTL-431 Position sensor with M8 4-PIN 0.3 m connector
W0950000481	LTL-503 Position sensor with M8 4-PIN 0.3 m connector

ACCESSORIES

STRAIGHT M8 CONNECTORS WITH SHIELDED CABLE



Pin	Cable colour
1	Brown
2	White
3	Blue
4	Black

Code	Description
0240009100	M8 4-pin female, straight connector with shielded cable L = 2 m
0240009101	M8 4-pin female, straight connector with shielded cable L = 5 m

90° M8 CONNECTORS WITH SHIELDED CABLE



Pin	Cable colour
1	Brown
2	White
3	Blue
4	Black

Code	Description
0240009102	M8 4-pin female, 90° connector with shielded cable L = 2 m
0240009103	M8 4-pin female, 90° connector with shielded cable L = 5 m

T-SLOT BRACKET



Code	Description
W0950000721	Bracket for mounting LTL on cylinder with T-slot

Bracket for fixing the LTL position sensor in the T-slot of the actuator.

SLOTTED FIXING PLATE WITH INSERTION FROM ABOVE



Code	Description	Weight [g]
0950003001	M4 T-slotted fixing plate	4

Note: Individually packed.
N.B. To be used with the T-slot bracket W0950000721 when the T-slot is not a through one (e.g. in cylinders series ELEKTRO ISO 15552 and in the integrated hydraulic brakes).

M8 SHIELDED ADAPTER CABLE FOR CONNECTION TO THE EB 80 ANALOGUE INPUTS MODULE

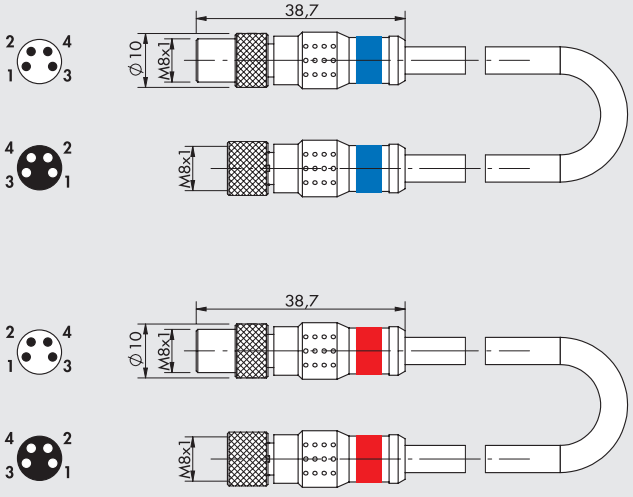

Code	Description
0240010601	M8-M, M8-F 4-pole adapter with shielded cable L = 0.3 m (**blue collar**)

Note: Can be used for connecting the **4/20 mA** analog output to the module of analog INPUT **S04** of the EB 80 valves.

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 2	pin 2	Signal 4/20 mA
pin 3	pin 3	Power supply –
pin 4	disconnect	

Code	Description
0240010701	M8-M, M8-F 4-pole adapter with shielded cable L = 0.3 m (**red collar**)

Note: Can be used for connecting the **0/10 VDC** analog output to the module of analog INPUT **S04** of the EB 80 valves

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 4	pin 2	Signal 0/10 V
pin 3	pin 3	Power supply –
pin 2	disconnect	

NOTES

ACCESSORIES T-SLOT

BAR FOR GROOVING



Code	Description
W0950000160	Bar for grooving L = 500 mm

Note: The code corresponds to 1 piece.

SLOTTED FIXING PLATE



Code	Description	Weight [g]
0950003001	M4 T-slotted fixing plate	1
0950003002	M3 T-slotted fixing plate	1

Note: Individually packed

SLOTTED FIXING PLATE



Code	Description	Weight [g]
0950003000	Fixing block	2

Note: Supplied complete with 1 M3 grub screw and 1 M4 grub screw

NOTES

SENSOR TESTER

This sensor tester features the following:
- a green light and acoustic signal indicating correct operation
- sensors can be checked without having to be disassembled
- M8 and M12 connections, and terminal board for direct connection to the wires
- PNP or NPN switching button
- 9V battery power supply
- automatic switch-off

TECHNICAL DATA

Container material	PA 6.6 blue
Degree of protection	IP00
Connections	M8 and M12 plug-socket type with 40 cm cable
Additional connections	3 terminals for wire connection
Power supply	9V DC (battery type 6LR61)
Internal voltage	15V DC
Green light	tester switched on
Yellow light	sensor in operation
Red light	battery flat

COMPONENTS

① CONTAINER (PA 6.6 blue)
② START BUTTON
③ WIRE CONNECTION + (brown)
④ WIRE CONNECTION – (blue)
⑤ OUTPUT CONNECTION (black)
⑥ PNP/NPN SELECTOR
⑦ M8x1 CONNECTOR
⑧ M12x1 CONNECTOR
⑨ LED COVER

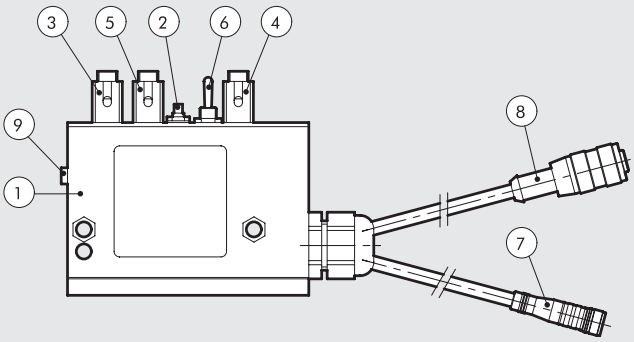

Code	Description	Dimension [mm]	Weight [g]
W0950060000	Sensor tester	63x88x24	192

METAL WORK®
PNEUMATIC

VALVES

- VALVES B1
- VALVES ISLANDS AND FIELDBUS B2
- PROCESS VALVES MULTIPLE FLUIDS B3

VALVES SUMMARY

- **MINIVALVES SERIES VME-1 MECHANICALLY/HAND OPERATED** — B1.4

- **VALVES SERIES PEV PEDAL OPERATED** — B1.8



- **TWO HAND SAFETY VALVE SERIE SAFE AIR®** — B1.10

- **VALVES SERIES 70** — B1.12

- **VALVES SERIES 70, HAND OPERATED** — B1.14

- **VALVES SERIES 70, MECHANICALLY OPERATED** — B1.20

- **VALVES SERIES 70, PNEUMATIC** — B1.23

- **VALVES SERIES 70, SOLENOID/PNEUMATIC** — B1.29

- **VALVES SERIES 70 LT (LOW TEMPERATURE)** — MAN PN ELPN — B1.37

- **ACCESSORIES VALVES SERIES 70** — B1.43

- **VALVES SERIES 70 ON BASE** — B1.48

- **VALVES NAMUR** — B1.53

- **VALVES SERIES BASIC** — B1.56

- **COILS AND CONNECTORS FOR SERIES 70, NAMUR AND SERIES BASIC VALVES** — B1.60

- **10-mm SOLENOID VALVES SERIES PLT-10** — B1.63

- **BASES FOR PLT-10 MULTIPLE CONNECTION** — B1.68

- **SOLENOID VALVES PIV.M 15-mm** — B1.74

- **SOLENOID VALVES PIV ON BASE** — B1.76

- **SOLENOID VALVES PIV IN LINE** — B1.81

METAL WORK PNEUMATIC

● **SOLENOID VALVE CNOMO** B1.84

● **VALVES MINIMACH** B1.87

● **VALVES MACH 11** B1.92

● **VALVES MACH 16** B1.98


● **MULTIPLE CONNECTOR MACH 16** B1.106

● **REDUCER WITH GAUGE FOR VALVES, SERIES RMV** B1.119

● **VALVES MACH 18, ISO 15407-1/VDMA 24563-02** B1.120

● **VALVES ISO 5599/1, SERIES IPV-ISV** B1.127

● **VALVE ISO 5599/1 SOLENOID/PNEUMATIC, SERIE ISV WITH M12 CONNECTOR** B1.135

● **SANDWICH REGULATORS FOR ISO 5599/1 BASES ISO 1-2** B1.143

● **VALVES SERIES 70 SAFE AIR®** B1.144

● **VALVES ISO 5599/1 SERIE SAFE AIR®** B1.156

MINIVALVES, MECHANICALLY AND HAND OPERATED SERIES VME

- Minivalves with 3/2 NO NC poppet,
- Installation in any position
- Push-in fittings for pipe Ø 4 mm and M5
- Low actuation force
- Rapid, accurate signal
- Mechanical actuation
- The 2 places adapter allows manual actuation of 1 or 2 VME valves with manual Ø 22 panel actuators. Thus it is possible to obtain 3/2, 5/2, 5/3 open centre and 5/3 pressure centre pneumatic functions.
- On request, it is possible to place a NC-NO electric switch next to VME valve for mixed solenoid/pneumatic signals.

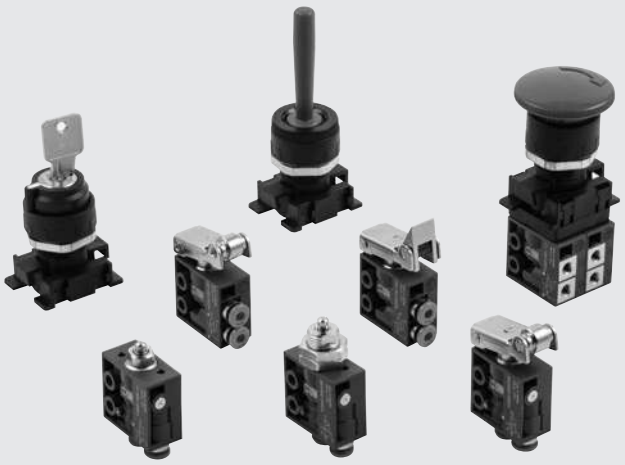

TECHNICAL DATA

Valve fitting port		Push-in fitting for pipe diam. 4 and M5 (axial or side)
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous
Type		With poppet
Versions		Mechanical and manual
Operators:		
mechanical		With Plunger – Plunger for wall-mounting – Roller lever – Unidirectional roller lever
manual		Depending on the type of actuation panel selected
Thread forming torque of the self-tapping screws for the plunger version	Nm	0.6
Operating pressure	bar	0.5 to 10
Operating temperature range	°C	-10° to +60
Nominal diameter	mm	2.5
Conductance C	Nl/min · bar	16.5
Critical ratio b	bar/bar	0.03
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	35
Flow rate at 6 bar ΔP 1 bar	Nl/min	60
Actuation force – Plunger at 6 Bar	N	8
Installation		In any position
Compatibility with oils		See **chapter Z1**

COMPONENTS

① VALVE BODY: technopolymer
② BUTTON: chemically nickel-plated brass
③ DISTANCE PLATES: brass
④ GASKETS: NBR
⑤ PUSH-IN FITTING CARTRIDGES: stainless steel, brass and plastic
⑥ SPRINGS: stainless steel
⑦ LEVER: nickel-plated steel

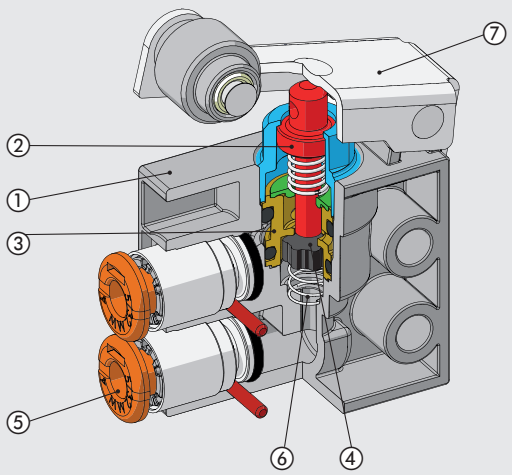

METAL WORK PNEUMATIC

PLUNGER 3/2 NO - AXIAL FITTINGS

Ø 4



M5

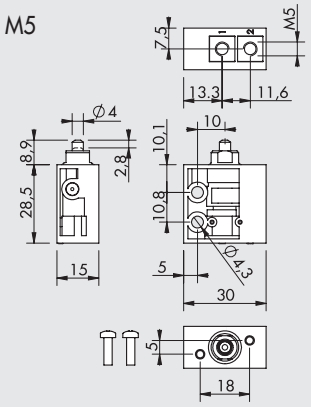

Symbol	Code	Description	Weight [g]
	W3501000101	VME1-10 NO Ø 4	22
	W3501000110	VME1-16 NO M5	24

PLUNGER 3/2 NO - SIDE FITTINGS

Ø 4



M5



Symbol	Code	Description	Weight [g]
	W3501001100	VME2-00 NO Ø 4	22
	W3501001110	VME2-10 NO M5	24

PLUNGER 3/2 NC - AXIAL FITTINGS

Ø 4



M5

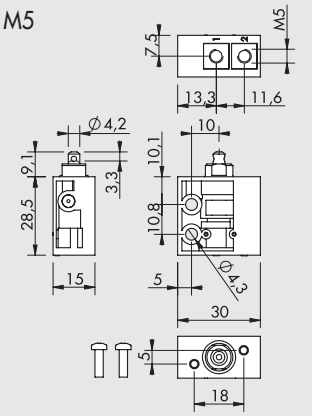

Symbol	Code	Description	Weight [g]
	W3501000100	VME1-01 NC Ø 4	22
	W3501000111	VME1-11 NC M5	24

PLUNGER 3/2 NC - SIDE FITTINGS

Ø 4



M5



Symbol	Code	Description	Weight [g]
	W3501001101	VME2-01 NC Ø 4	22
	W3501001111	VME2-11 NC M5	24

PLUNGER FOR WALL MOUNTING, 3/2 NC - AXIAL FITTINGS

Ø 4

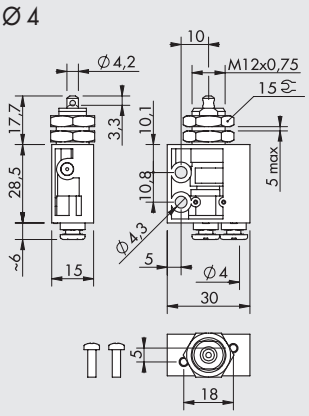

M5

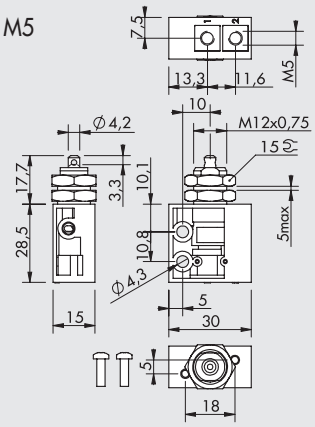

Symbol	Code	Description	Weight [g]
	W3501000400	VME1-04 NC Ø 4	36
	W3501000411	VME1-14 NC M5	38

PLUNGER FOR WALL MOUNTING, 3/2 NC - SIDE FITTINGS

Ø 4

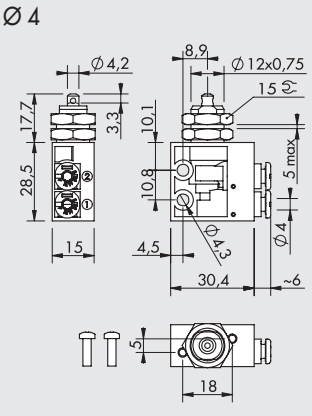

M5

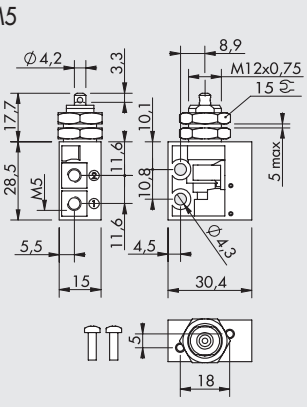

Symbol	Code	Description	Weight [g]
	W3501001401	VME2-04 NC Ø 4	36
	W3501001411	VME2-14 NC M5	38

UNIDIRECTIONAL ROLLER LEVER, 3/2 NC - AXIAL FITTINGS

Ø 4



M5



Symbol	Code	Description	Weight [g]
	W3501000300	VME1-03 NC Ø 4	38
	W3501000311	VME1-13 NC M5	40

UNIDIRECTIONAL ROLLER LEVER, 3/2 NC - SIDE FITTINGS

Ø 4



M5



Symbol	Code	Description	Weight [g]
	W3501001301	VME2-03 NC Ø 4	38
	W3501001311	VME2-13 NC M5	40

ROLLER LEVER, 3/2 NO - AXIAL FITTINGS

Ø 4



M5

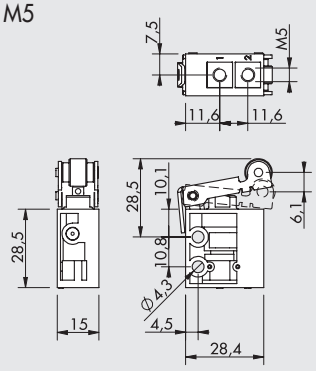

Symbol	Code	Description	Weight [g]
	W3501000201	VME1-05 NO Ø 4	36
	W3501000210	VME1-15 NO M5	38

ROLLER LEVER, 3/2 NO - SIDE FITTINGS

Ø 4



M5



Symbol	Code	Description	Weight [g]
	W3501001200	VME2-05 NO Ø 4	36
	W3501001210	VME2-15 NO M5	38

ROLLER LEVER, 3/2 NC - AXIAL FITTINGS

Ø 4



M5

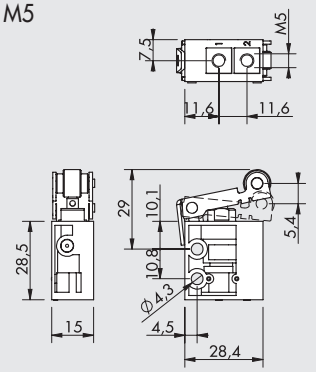

Symbol	Code	Description	Weight [g]
	**W3501000200**	VME1-02 NC Ø 4	36
	W3501000211	VME1-12 NC M5	38

ROLLER LEVER, 3/2 NC - SIDE FITTINGS

Ø 4



M5



Symbol	Code	Description	Weight [g]
	**W3501001201**	VME2-02 NC Ø 4	36
	W3501001211	VME2-12 NC M5	38

METAL WORK PNEUMATIC

MANUAL VME VALVES – ASSEMBLY DIAGRAM

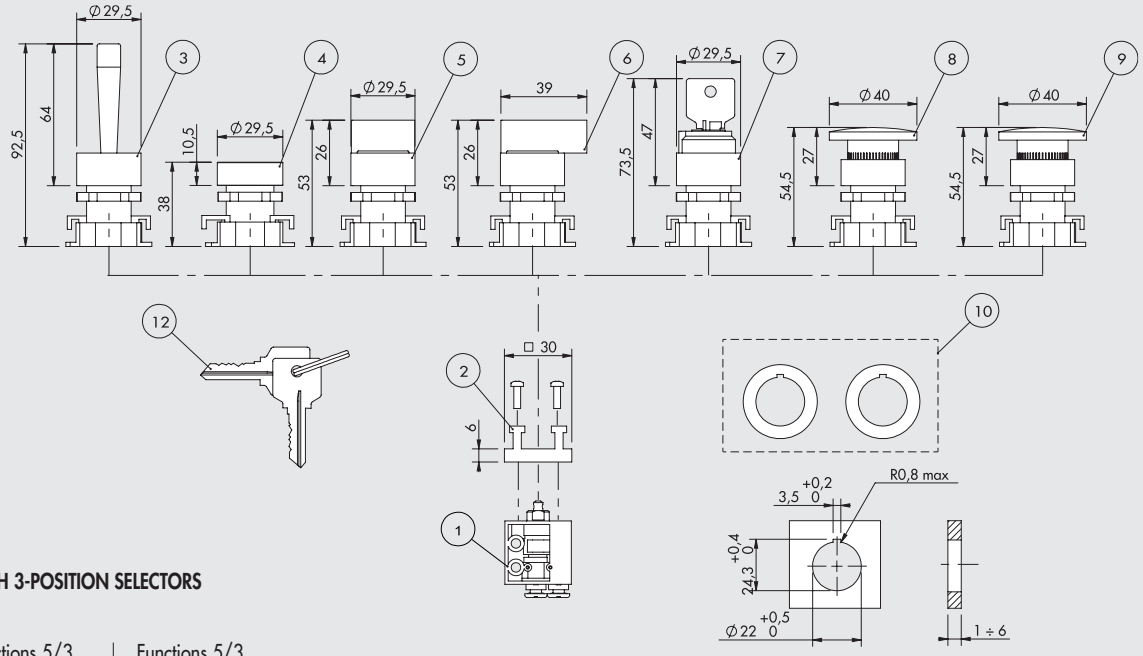

WITH 2-POSITION SELECTORS

Functions 5/2



WITH 3-POSITION SELECTORS

Functions 5/3 open centers



Functions 5/3 pressure centers



NOTES:

- For VME valve bodies in technopolymer, use the self-tapping screws supplied with the valve.
- For before modification VME valve bodies (aluminum version), use the M3 screws supplied with the selector or button kit.

ORDERING CODES

Rif.	Symbol	Code	Description	Weight [g]
①		**W3501000100**	3/2 NC Axial fittings Ø 4	22
		W3501000111	3/2 NC Axial fittings M5	24
		W3501001101	3/2 NC Side fittings Ø 4	22
		W3501001111	3/2 NC Side fittings M5	24
①		**W3501000101**	3/2 NO Axial fittings Ø 4	22
		W3501000110	3/2 NO Axial fittings M5	24
		W3501001100	3/2 NO Side fittings Ø 4	22
		W3501001110	3/2 NO Side fittings M5	24
②		**0351000050**	2 places adaptor thickness 6.8 mm	5
③		**W0351000015**	Red handler with horizontally pivoted leve	25
④		**W0351000011**	Fat push button + 2 red/black coloured disks	15
		W0351000056	Green disk for push button ④	
⑤		**W0351000030**	Black selector short lever at 2 positions with return	20
		W0351000031	Black selector short lever at 2 positions	20

Rif.	Symbol	Code	Description	Weight [g]
⑤		**W0351000032**	Black selector short lever at 3 positions with return	20
		W0351000033	Black selector short lever at 3 positions	20
⑥		**W0351000034**	Black selector long lever at 2 positions with return	26
		W0351000035	Black selector long lever at 2 positions	26
⑥		**W0351000036**	Black selector long lever at 3 positions with return	26
		W0351000037	Black selector long lever at 3 positions	26
⑦		**W0351000016**	2 positions key selector with extractable key in 2 positions	50
		W0351000018	2 positions key selector with extractable key in 0	50
⑧		**W0351000013**	Red mushroom-head push button Ø 40	27
		W0351000017	Black mushroom-head push button Ø 40	27
⑨		**W0351000014**	Red mushroom-head push button with lock Ø 40	29
⑩		**W0351000049**	Reducer from 30 to 22.5 mm	
⑫		**W0351000021**	Key for ESC selectors	

VALVES SERIES PEV
PEDAL OPERATED

The valves series PEV with pedal are available in a wide range:
- 5/2 1/4" monostable and bistable with guarded pedal
- 3/2 M5 monostable, pedal not guarded
- 3/2 Ø 4 monostable, pedal not guarded
- 3/2 M5 in monostable and bistable configuration with guarded pedal
- 3/2 Ø 4 in monostable and bistable configuration with guarded pedal

TECHNICAL DATA

Valve fitting port		Ø 4	M5	1/4"
Type		Mono/ bistable guarded	Monostable not guarded	Mono/ bistable guarded
		Monostable not guarded	Mono/ bistable guarded	–
Operating pressure	bar	2.5 to 10		
	Mpa	0.25 to 1		
	psi	36 to 145		
Operating temperature range	°C	–10 + 60		
Nominal diameter	mm	2.5	2.5	7.5
Conductance C	Nl/min · bar	16.5	16.5	264.26
Critical ratio b	bar/bar	0.03	0.03	0.32
Flow rate at 6.3 bar ΔP 0.5 bar	Nl/min	60	60	640
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	95	95	840
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous		
Compatibility with oils		See **chapter Z1**		

FLOW CHARTS

1/4"

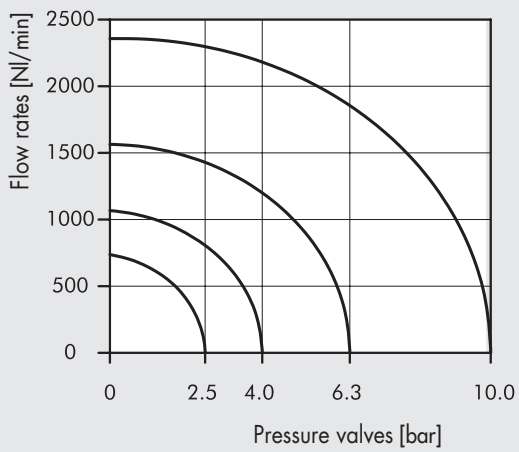

M5/Ø 4 mm

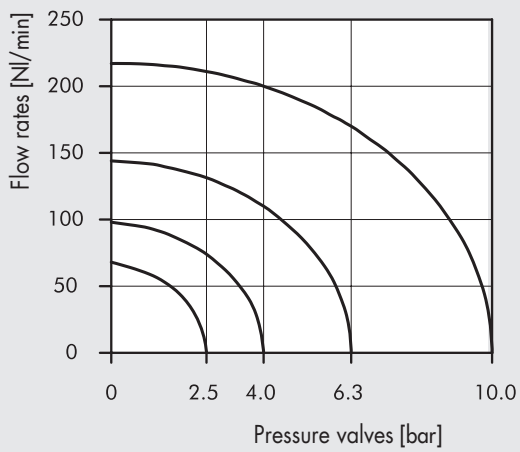

METAL WORK PNEUMATIC

GUARDED PEDAL WITH VALVES 5/2 1/4" - 3/2 M5 - 3/2 Ø 4

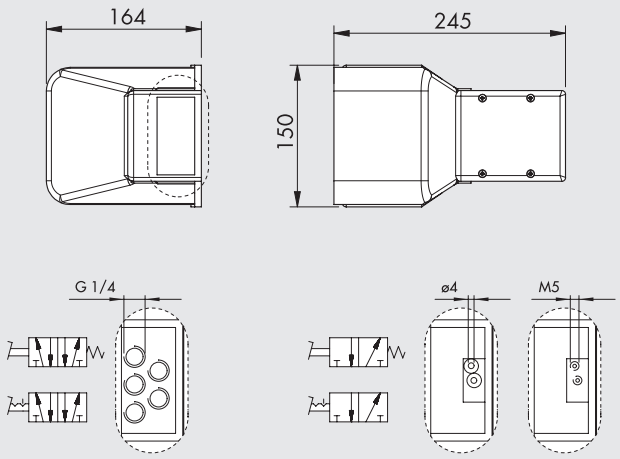

Symbol	Code	Description	Abbrev.	Weight [g]
	W3120000001	5/2 - 1/4" monostable, guarded	PEV 35 PES PR	1027
	W3120000011	5/2 - 1/4" bistable, guarded ●	PEV 35 PEB PR	1035
	W3120000301	3/2 M5 monostable, guarded	PEV 03 PES PR	883
	W3120000321	3/2 Ø 4 monostable, guarded	PEV F3 PES PR	887
	W3120000331	3/2 M5 bistable, guarded ●	PEV 03 PEB PR	890
	W3120000311	3/2 Ø 4 bistable, guarded ●	PEV F3 PEB PR	914
	W3120000021	5/2 - 1/4" monostable, with mechanical block and guarden ■	PEV 35 PEC PR	1014

● The pedal-down position is maintained by a lever.
When the foot presses on the lever, the pedal releases and can rise.
■ When the foot presses on a locking lever, the pedal can be lowered.

NOT-GUARDED PEDAL WITH VALVES 3/2 M5 - 3/2 Ø 4

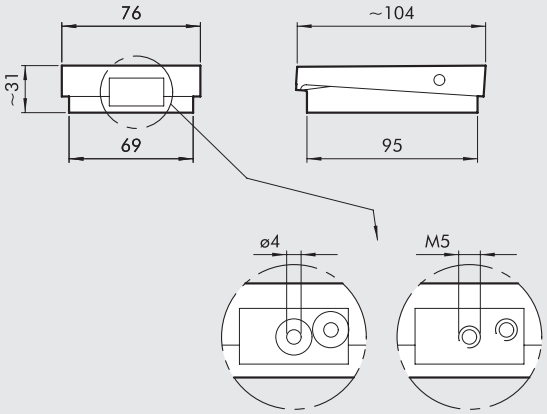

Symbol	Code	Description	Abbrev.	Weight [g]
	W3120000411	3/2 - M5 monostable, not guarded	PEV 03 PES WP	188
	W3120000401	3/2 Ø 4 monostable, not guarded	PEV F3 PES WP	192

SYNOPTIC, SIZES AND VERSIONS

P E V	F	3	P E	C	W P
FAMILY	DIMENSIONS	FUNCTION	OPERATORS 14	RESETTING (12)	FURTHER DETAILS
PEV valve with pedal	**3** 1/4	**3** 3/2	**PE** pedal operated	**S** mechanical springs	**WP** not guarded
	0 M5	**5** 5/2		**C** mechanical block	**PR** guarded
	F Ø 4			**B** bistable	

TWO HAND SAFETY VALVE SERIES SAFE AIR®

The two hand safety valve generates an output signal only if two synchronised pneumatic input signals are received.
If one input signal is interrupted, the output signal is interrupted as well.
The most common application involves connecting a manual button-controlled valve to each of the inputs and using the output signal as a start-of-cycle control for a pneumatically-operated machine.

- The two hand safety valve can be secured with through screws or a DIN bar adaptor.
- The complete pushbutton panel includes the dual manual control valve, two manual pushbuttons, and an emergency stop valve, all housed in a metal box to be mounted on a wall or stand.
- The pushbutton housing is supplied on request for anyone wishing to get a personalised pneumatic connection or drill holes to secure the unit.

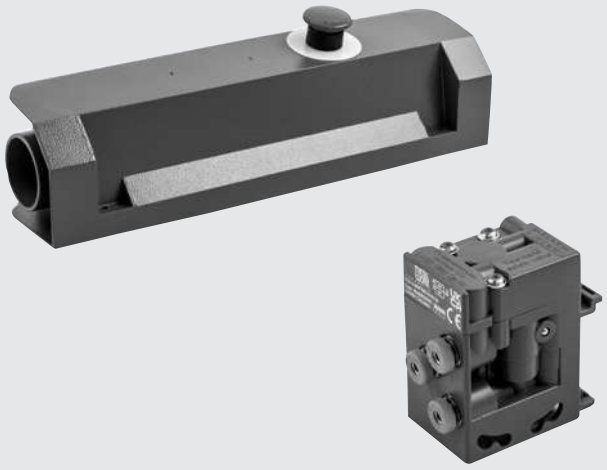

TECHNICAL DATA

Compressed air couplings	mm	Push-in fitting for Ø 4 pipe
Fluid		Filtered, unlubricated compressed air, max 50 µm
Version		Single-control – Complete pushbutton panel
Standard		• EN ISO 13851 type IIIA, TÜV approvated according to 2006/42/EC
		Certified TÜV-A-MHF/MG18-00134V (code W3605000001)
		• Certified Bureau Veritas BV-23-MAC-CV-0001 (code 0227700000)
Synchronisation, max. time between two signals	s	0.4
De-activation time, with pipe L = max 1000 mm	s	< 0.05
Actuation		pneumatic
Reset		spring operated
Operating pressure	bar	2.5 to 8
Temperature range	°C	- 10 to +60
Nominal diameter	mm	2.7
Flow rate at 6 bar (0.6 Mpa - 87 psi) ΔP 1 bar (0.1MPa -1.45 psi)	Nl/min	85
Mounting position		In any direction
Compatibility with oils		See **chapter Z1**

TWO HAND SAFETY VALVE

Code	Description
W3605000001	Two hand safety valve

Materials
Body: technopolymer
Internal parts: brass and technopolymer
Gaskets: NBR
Spring: alloy steel

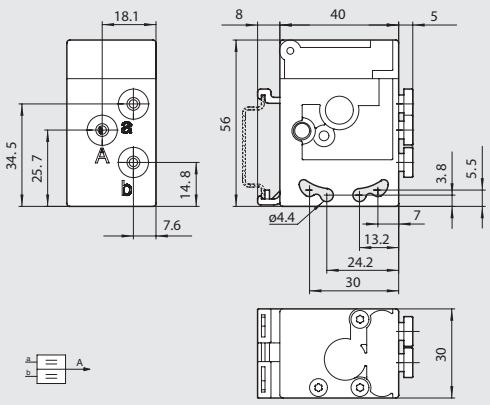

PUSHBUTTON HOUSING

Code	Description
W3120000212	Pushbutton housing



METAL WORK PNEUMATIC

COMPLETE PUSHBUTTON PANEL

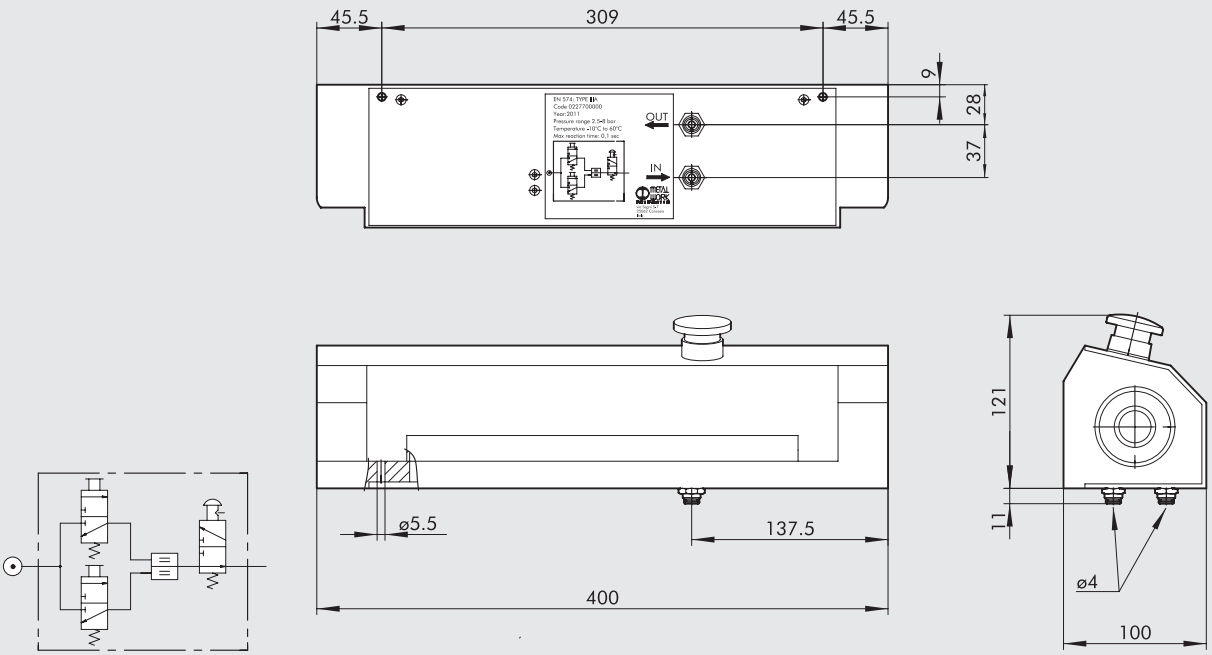

Code	Description
0227700000	Complete pushbutton panel

Materials

Pressure die-cast and painted aluminium alloy

MAIN COMPONENTS

Code	Description	Quantity
W3605000001	Dual manual safety valve	1
W0351000011	Monostable protected button - black disk	2
W0351000014	Emergency stop button	1
W3501000100	VME1-01 NC Ø 4	2
W3501001100	VME2-01 NO Ø 4	1
0351000050	Valve-button connecting base	3
2L11001	RL10 Ø 4	2

ACCESSORIES

CONNECTION BRACKETS ON THE BAR (DIN EN50022)



Code	Description
0227300600	Connection brackets on DIN bar

Individually packed

VALVES SERIES 70

The Series 70 forms part of Metal Work's full range of traditional valves.
They are available in sizes 1/8", 1/4", 3/8" and 1/2", versions 3/2, 5/2, 5/3 and double 3/2, with mechanical, manual, pneumatic and electric drives.
They can be installed in line, onto a wall, on the cylinder (using a special bracket) or in series (on a multiple or modular base) to suit all possible applications.
A range of valves (Series 70 LT) designed using components for specific low-temperature applications is now available for the most commonly used types and sizes.
These highly reliable valves comply with the main applicable standards, including Atex, ISO 13849 and SIL, as stated in the documents and certificates available online.

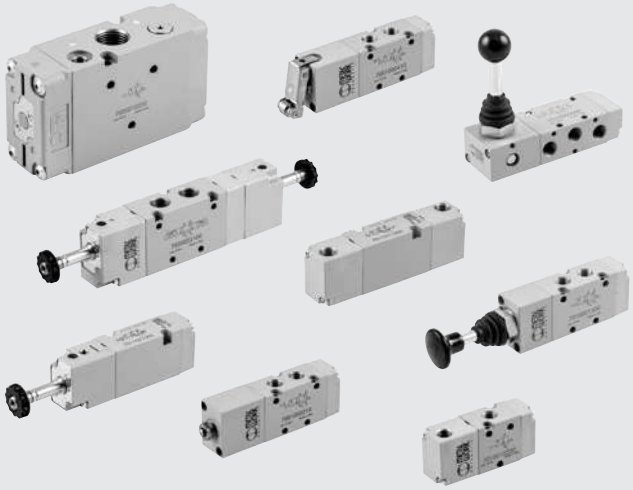

TECHNICAL DATA			1/8"	1/4"	3/8"	1/2"
Thread on the valve ports			1/8"	1/4"	3/8"	1/2"
Operating pressure series 70 versions		bar				
monostable and bistable differential			2.5 to 10			
bistable			1 to 10			
asserved			vacuum to 10			
Operating pressure series 70 LT (low temperature) versions		bar				
hand operated			vacuum to 10		-	
pneumatic and solenoid/pneumatic	t = -40°C to -10°C		5 to 10		-	
	t = -10°C to +60°C		3 to 10		-	
Minimum pilot pressure		bar	2.5			
Operating temperature range		°C				
series 70 versions			−10 to +60			
series 70 LT (low temperature) versions			−40 to +60			
Nominal diameter		mm	5	7.5	13.3	15
Conductance C		Nl/min · bar	121.43	264.26	505.52	971.43
Critical ratio b		bar/bar	0.32	0.27	0.32	0.43
Flow rate at 6 bar ΔP 0.5 bar		Nl/min	400	750	1560	3200
Flow rate at 6 bar ΔP 1 bar		Nl/min	550	1100	2150	4600
Installation			In any position (vertical assembly is not recommended for bistable valves subjected to vibration)			
Fluid			Filtered air without lubrication; lubrication, if used, must be continuous.			
			For series 70 LT (low-temperature) versions, it is recommended to use of perfectly dried air.			
Maximum coil nut torque		Nm	1			
Compatibility with oils			See **chapter Z1**			

COMPONENTS SERIES 70

① VALVE BODY: Aluminium
② CONTROL/END CAP: plastic
③ SPOOL: chemically nickel-plated aluminium
④ DISTANCE PLATES: plastic
⑤ GASKETS: NBR
⑥ PISTONS: Hostaform®
⑦ PISTON GASKET: NBR
⑧ FILTER: plastic
⑨ SPRINGS: special steel
⑩ OPERATOR: Brass pipe - Stainless steel core

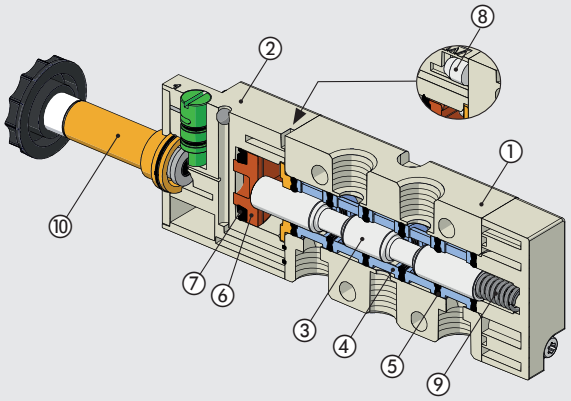

METAL WORK PNEUMATIC

COMPONENTS SERIES 70 LT (LOW TEMPERATURE)

① VALVE BODY: aluminium
② CONTROL/END CAP: aluminium
③ SPOOL: chemically nickel-plated aluminium
④ DISTANCE PLATES: plastic
⑤ GASKETS: HNBR
⑥ PISTONS: aluminium
⑦ PISTON GASKET: HNBR
⑧ FILTER: plastic
⑨ SPRINGS: special steel
⑩ OPERATOR: brass pipe - Stainless steel core
(version specific for low-temperature applications)

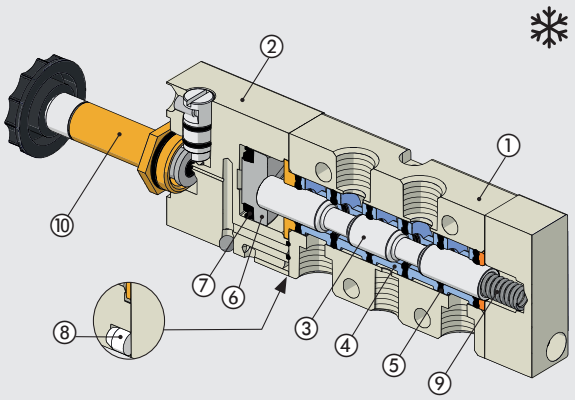

FLOW CHARTS

VALVES SERIES 70 1/8"

Flow rates

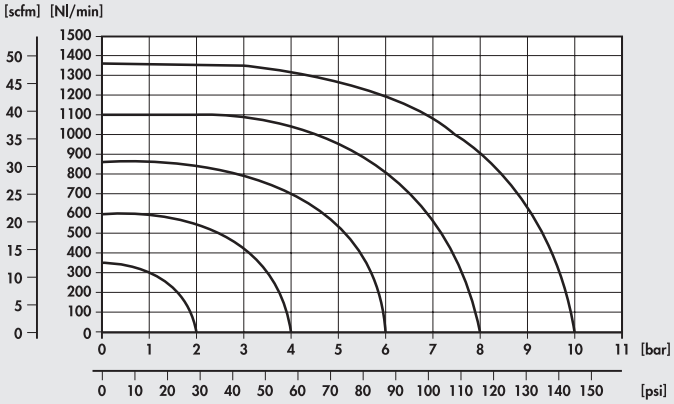

Pressures

VALVES SERIES 70 1/4"

Flow rates

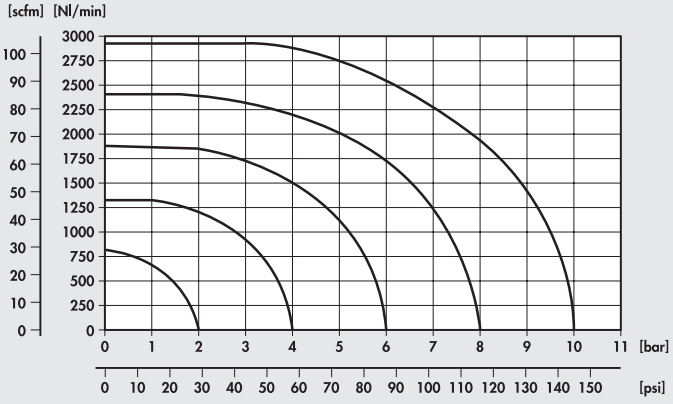

Pressures

VALVES SERIES 70 3/8"

Flow rates

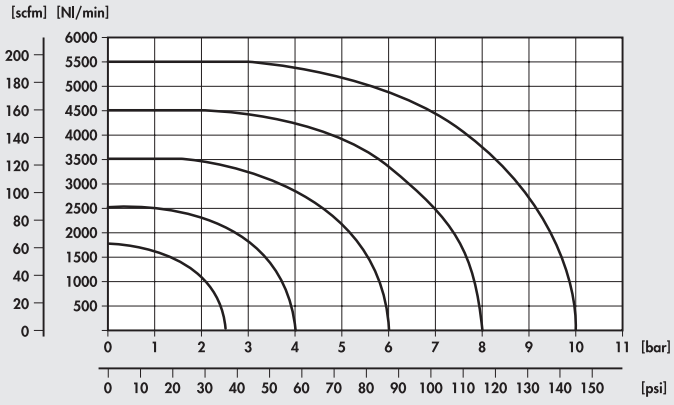

Pressures

VALVES SERIES 70 1/2"

Flow rates

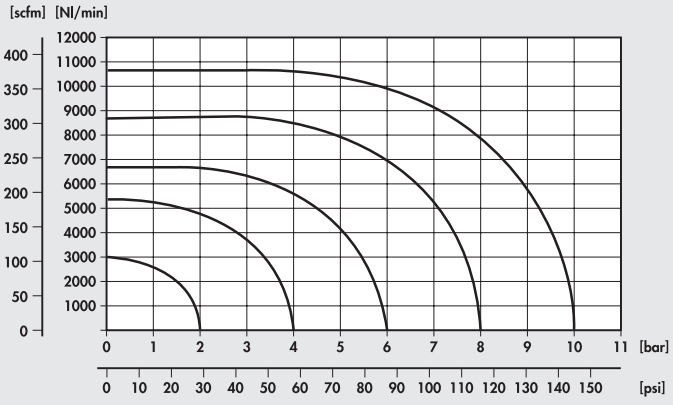

Pressures

VALVES SERIES 70, HAND OPERATED

TECHNICAL DATA		1/8"	1/4"	1/2"
Operating pressure range:				
• version with direct control	bar		Vacuum to 10	
• pilot-assisted version	bar		2.5 to 10	
Operating temperature range	°C		-10 to +60	
Nominal diameter	mm	5	7.5	15
Conductance C	Nl/min · bar	121.43	264.26	971.43
Critical ratio b	bar/bar	0.32	0.27	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	400	750	3200
Flow rate at 6 bar ΔP 1 bar	Nl/min	550	1100	4600

SYNOPTIC, SIZES AND VERSIONS

MAV	2	3	PP	S	NC
FAMILY	DIMENSIONS	FUNCTION	OPERATORS 14	RESETTING (12)	FURTHER DETAILS
MAV manual valves	**2** 1/8" **3** 1/4" **4** 1/2"	**3** 3/2 **5** 5/2 **6** 5/3 **8** 2 x 3/2	**PP** drawer **VL** axial lever **LE** 90° lever **BRE** arranged for manual panel actuators	**A** pneumatic/ mechanical springs* **S** mechanical springs **B** bistable **D** differential **O** stable for 5/3 *on demand	**NC** normally closed **NO** normally open **OO** no indication **CC** closed centres **OC** open centres **PC** pressure centres

VALVES SERIES 70, HAND OPERATED, 1/8"

90° LEVER 3/2 1/8"

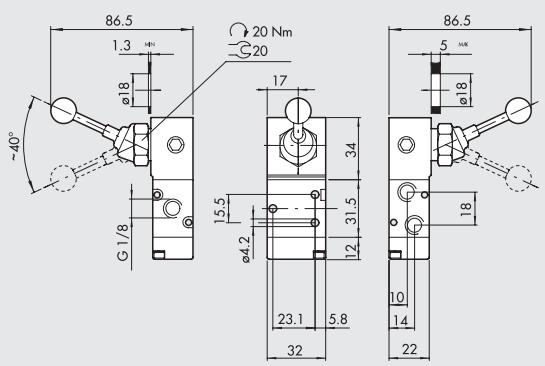

Symbol	Code	Abbrev.	Weight [g]
	7010000100	MAV 23 LES NC	168
	7010000200	MAV 23 LEB OO	171

90° LEVER 5/2 1/8"

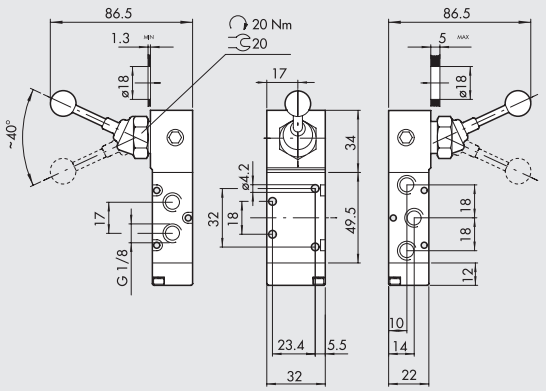

Symbol	Code	Abbrev.	Weight [g]
	7010000300	MAV 25 LES OO	194
	7010000400	MAV 25 LEB OO	197

METAL WORK PNEUMATIC

FRONT LEVER 3/2, 1/8"

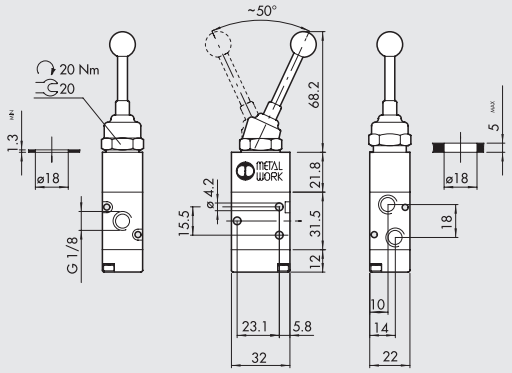

Symbol	Code	Abbrev.	Weight [g]
	7010001400	MAV 23 VLB OO	130

FRONT LEVER 5/2, 1/8"

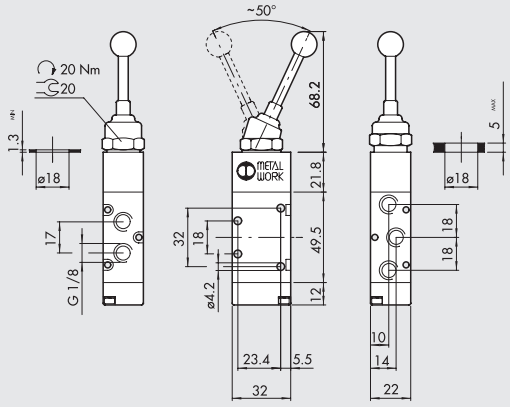

Symbol	Code	Abbrev.	Weight [g]
	7010001700	MAV 25 VLB OO	156

FRONT LEVER 5/3, 1/8"

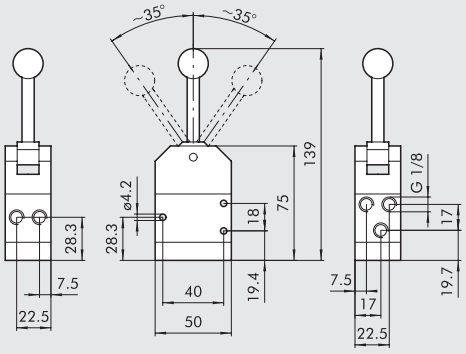

Symbol	Code	Abbrev.	Weight [g]
	7010001150	MAV 28 VLO OC	316
	7010001160	MAV 28 VLS OC	325

90° LEVER 5/3, 1/8"

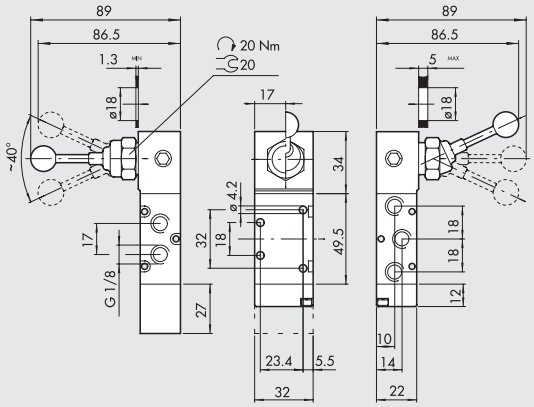

Symbol	Code	Abbrev.	Weight [g]
	7010001000	MAV 26 LES CC	242
	7010000900	MAV 26 LES OC	242
	7010001100	MAV 26 LES PC	242
	7010000500	MAV 26 LEO CC	194
	7010000600	MAV 26 LEO OC	194
	7010000700	MAV 26 LEO PC	194

DRAWER 3/2, 1/8"

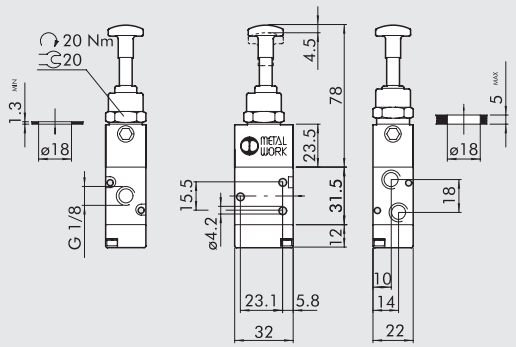

Symbol	Code	Abbrev.	Weight [g]
	7010001300	MAV 23 PPB OO	134
	7010001200	MAV 23 PPS NC	134

DRAWER 5/2, 1/8"

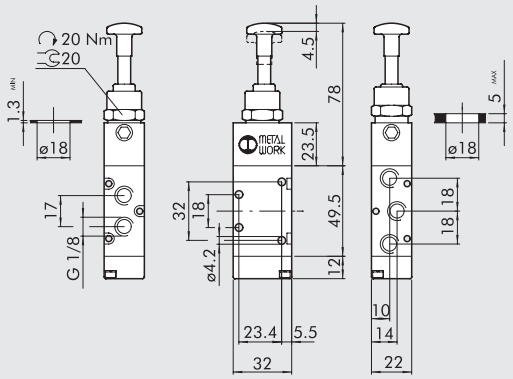

Symbol	Code	Abbrev.	Weight [g]
	7010001600	MAV 25 PPB OO	160
	7010001500	MAV 25 PPS OO	160

PILOT-ASSISTED PLUNGER 3/2 1/8" FOR PANEL ACTUATORS

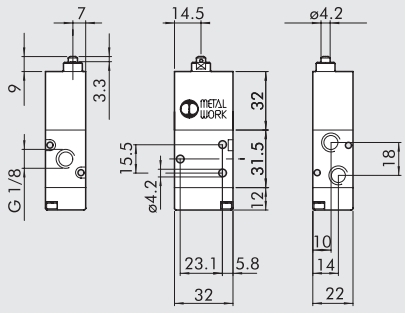

Symbol	Code	Abbrev.	Weight [g]
	7010001800	MAV 23 BRE NC	124

PILOT-ASSISTED PLUNGER 5/2 1/8" FOR PANEL ACTUATORS

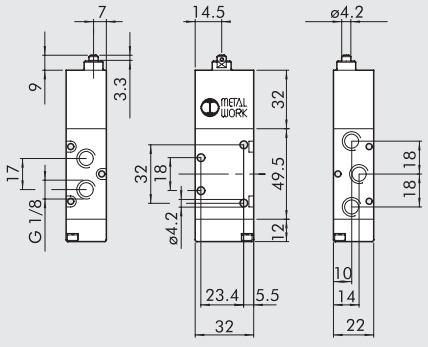

Symbol	Code	Abbrev.	Weight [g]
	7010001900	MAV 25 BRE OO	150

METAL WORK PNEUMATIC

ASSEMBLY DIAGRAM FOR PILOT-ASSISTED HAND-OPERATED VALVES SERIES 70 WITH PANEL ACTUATORS

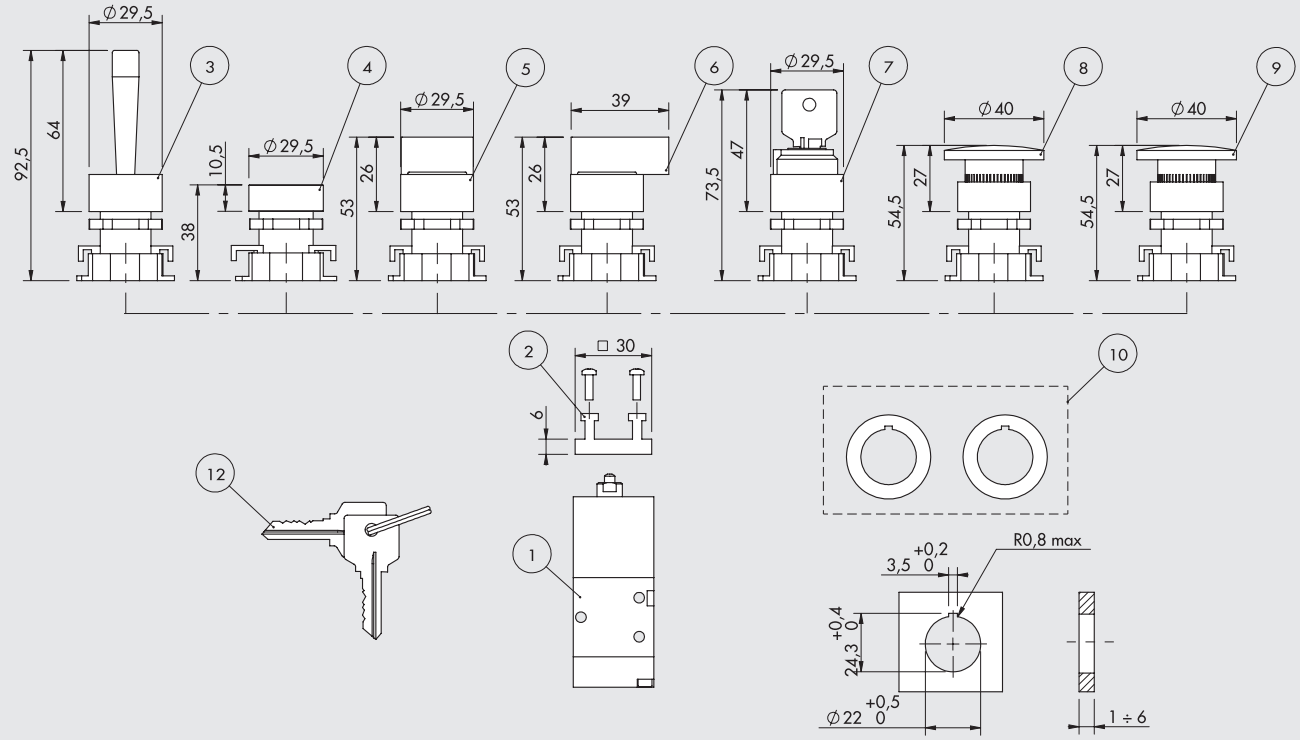

ORDERING CODES

Rif.	Symbol	Code	Description	Weight [g]
①		7010001800	Pilot-assisted plunger 3/2, 1/8"	124
		7010001900	Pilot-assisted plunger 5/2, 1/8"	150
②		0351000050	2 places adaptor thickness 6.8 mm	5
③		W0351000015	Red handler with horizontally pivoted leve	25
④		W0351000011	Fat push button + 2 red/black coloured disks	15
		W0351000056	Green disk for push button ④	
⑤		W0351000030	Black selector short lever at 2 positions with return	20
		W0351000031	Black selector short lever at 2 positions	20
⑤		W0351000032	Black selector short lever at 3 positions with return	20
		W0351000033	Black selector short lever at 3 positions	20
⑥		W0351000034	Black selector long lever at 2 positions with return	26
		W0351000035	Black selector long lever at 2 positions	26
⑥		W0351000036	Black selector long lever at 3 positions with return	26
		W0351000037	Black selector long lever at 3 positions	26

Rif.	Symbol	Code	Description	Weight [g]
⑦		W0351000016	2 positions key selector with extractable key in 2 positions	50
		W0351000018	2 positions key selector with extractable key in 0	50
⑧		W0351000013	Red mushroom-head push button Ø 40	27
		W0351000017	Black mushroom-head push button Ø 40	27
⑨		W0351000014	Red mushroom-head push button with lock Ø 40	29
⑩		W0351000049	Reducer from 30 to 22.5 mm	
⑫		W0351000021	Key for ESC selectors	

VALVES SERIES 70, HAND-OPERATED, 1/4"

90° LEVER 3/2, 1/4"

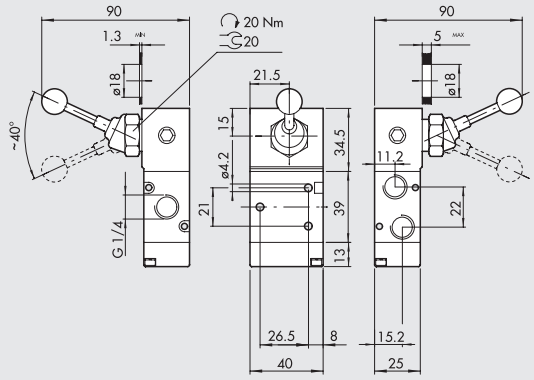

Symbol	Code	Abbrev.	Weight [g]
	7020000100	MAV 33 LES NC	244
	7020000200	MAV 33 LEB OO	244

90° LEVER 5/2, 1/4"

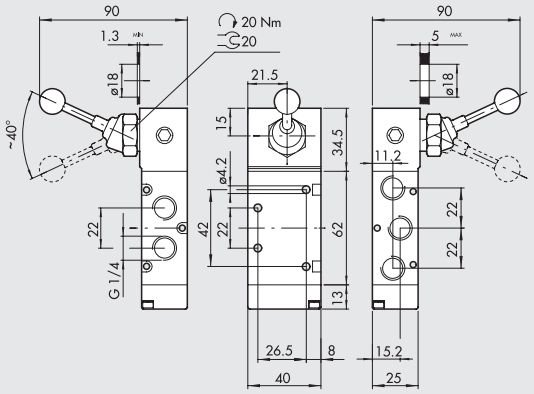

Symbol	Code	Abbrev.	Weight [g]
	7020000300	MAV 35 LES OO	290
	7020000400	MAV 35 LEB OO	290

FRONT LEVER 3/2, 1/4"

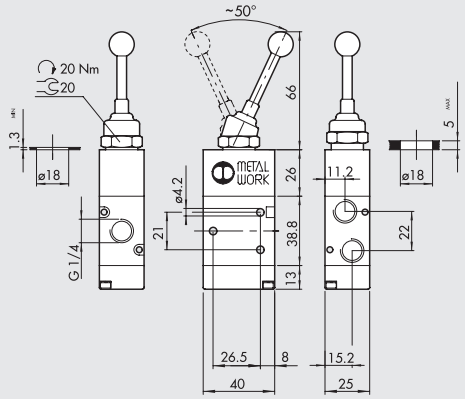

Symbol	Code	Abbrev.	Weight [g]
	7020001400	MAV 33 VLB OO	194

FRONT LEVER 5/2, 1/4"

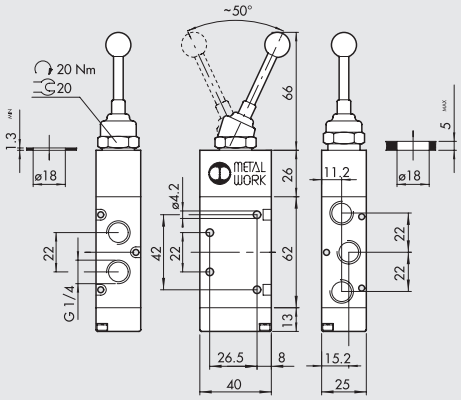

Symbol	Code	Abbrev.	Weight [g]
	7020001700	MAV 35 VLB OO	244

90° LEVER 5/3, 1/4"

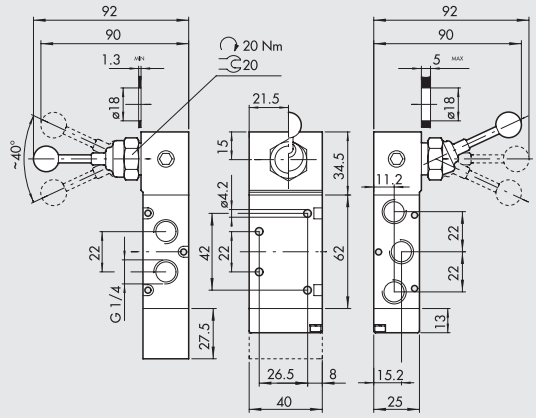

Symbol	Code	Abbrev.	Weight [g]
	7020001000	MAV 36 LES CC	354
	7020000900	MAV 36 LES OC	354
	7020001100	MAV 36 LES PC	354
	7020000500	MAV 36 LEO CC	288
	7020000600	MAV 36 LEO OC	288
	7020000700	MAV 36 LEO PC	288

VALVES SERIES 70, HAND OPERATED, 1/2"

90° LEVER 3/2, 1/2"

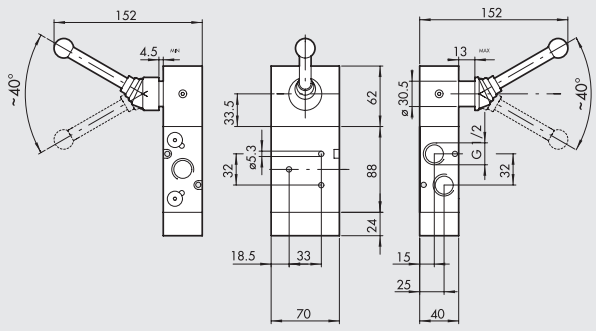

Symbol	Code	Abbrev.	Weight [g]
	7030000100	MAV 43 LES NC	1443
	7030000200	MAV 43 LEB OO	1435

90° LEVER 5/2, 1/2"

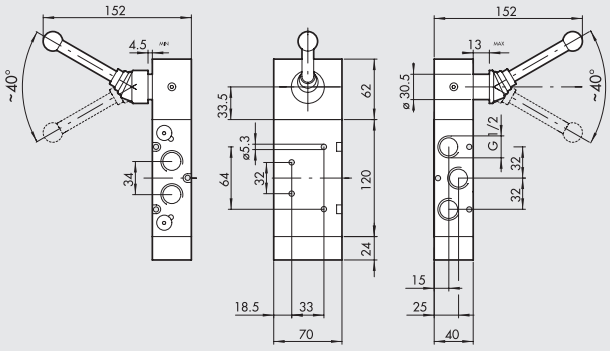

Symbol	Code	Abbrev.	Weight [g]
	7030000300	MAV 45 LES OO	1588
	7030000400	MAV 45 LEB OO	1630

90° LEVER 5/3, 1/2"

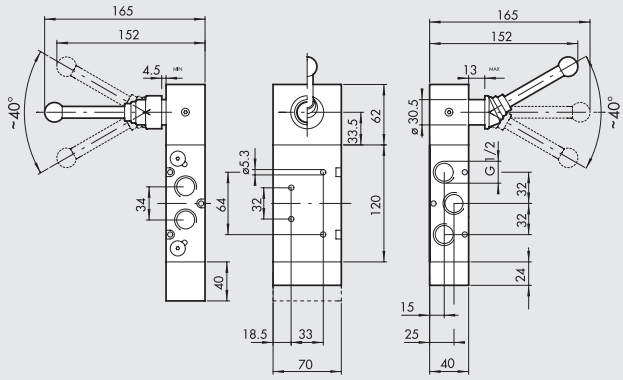

Symbol	Code	Abbrev.	Weight [g]
	7030001000	MAV 46 LES CC	1810
	7030000900	MAV 46 LES OC	1800
	7030001100	MAV 46 LES PC	1800
	7030000500	MAV 46 LEO CC	1615
	7030000600	MAV 46 LEO OC	1605
	7030000700	MAV 46 LEO PC	1605

NOTES

VALVES SERIES 70, MECHANICALLY OPERATED, 1/8"

TECHNICAL DATA

Thread at valve ports		1/8"
Operation force at 6 bar:		
• version with direct control	N	50
• pilot-assisted version	N	6
Operating pressure:		
• version with direct control	bar	Vacuum to 10
• pilot-assisted version	bar	2.5 to 10
Operating temperature range	°C	-10 to +60
Nominal diameter	mm	5
Conductance C	Nl/min · bar	121.43
Critical ratio b	bar/bar	0.32
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	400
Flow rate at 6 bar ΔP 1 bar	Nl/min	550

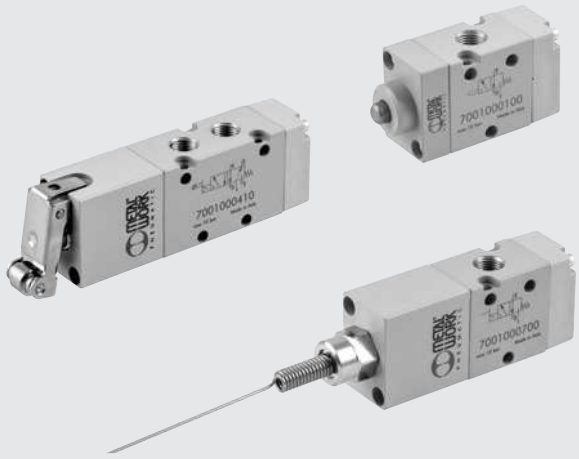

SYNOPTIC, SIZES AND VERSIONS

M E V	2	3	T A	S	N C
FAMILY	DIMENSIONS	FUNCTION	OPERATORS 14	RESETTING (12)	FURTHER DETAILS
MEV mechanically-operated valves	**2** 1/8"	**3** 3/2 **5** 5/2	**TA** plunger **BR** bidirectional roller **UR** unidirectional roller **TS** sensitive plunger **RS** sensitive roller **AS** sensitive aerial **LL** frontal roller lever	**S** mechanical springs **A** pneumatic/mechanical spring* *on demand	**NC** normally closed **OO** no indication

PLUNGER 3/2, 1/8"

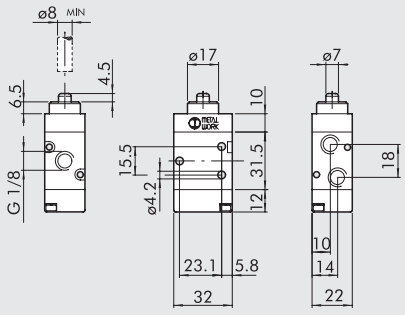

Symbol	Code	Abbrev.	Weight [g]
	7001000100	MEV 23 TAS NC	88

PLUNGER 5/2, 1/8"

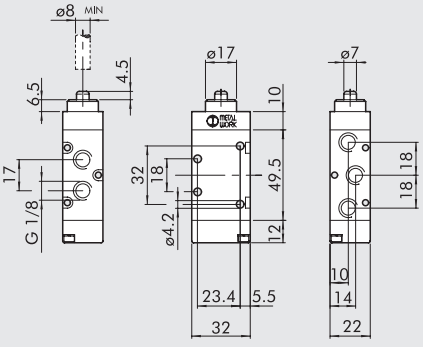

Symbol	Code	Abbrev.	Weight [g]
	7001000110	MEV 25 TAS OO	114

ROLLER LEVER 3/2, 1/8"

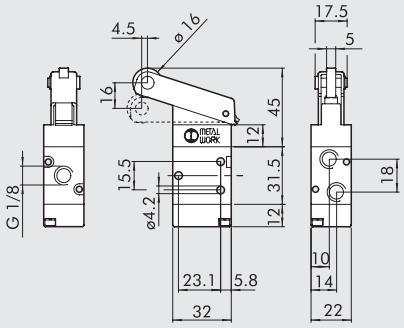

Symbol	Code	Abbrev.	Weight [g]
	7001000500	MEV 23 BRS NC	130

ROLLER LEVER 5/2, 1/8"

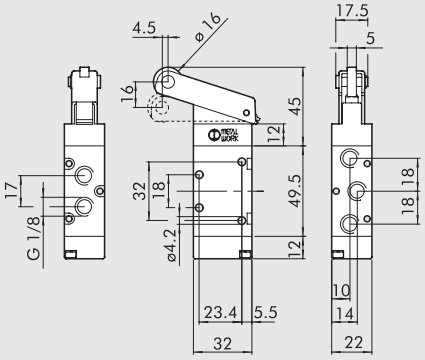

Symbol	Code	Abbrev.	Weight [g]
	7001000510	MEV 25 BRS OO	156

UNIDIRECTIONAL ROLLER 3/2, 1/8" LEVERS

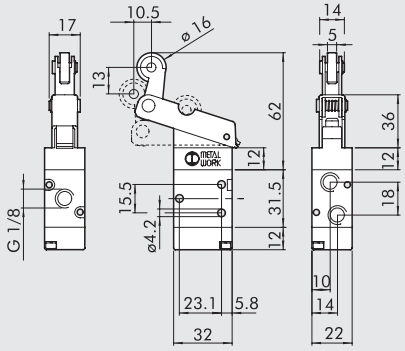

Symbol	Code	Abbrev.	Weight [g]
	7001000600	MEV 23 URS NC	136

UNIDIRECTIONAL ROLLER 5/2, 1/8" LEVERS

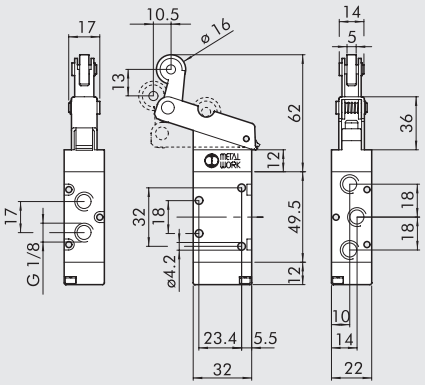

Symbol	Code	Abbrev.	Weight [g]
	7001000610	MEV 25 URS OO	162

PILOT-ASSISTED PLUNGER 3/2 NC, 1/8"

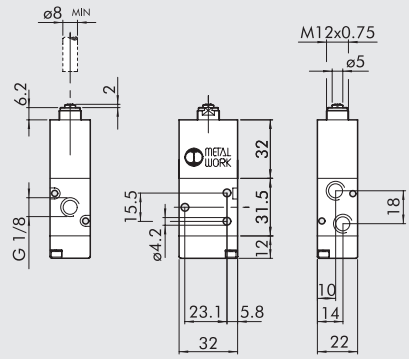

Symbol	Code	Abbrev.	Weight [g]
	7001000200	MEV 23 TSS NC	126

PILOT-ASSISTED PLUNGER 5/2, 1/8"

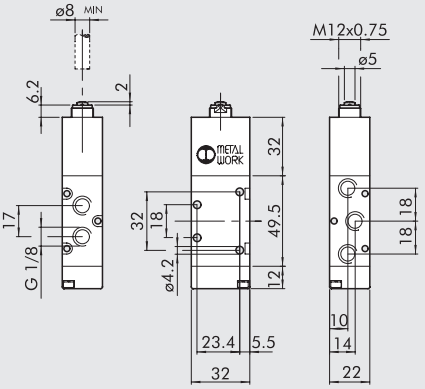

Symbol	Code	Abbrev.	Weight [g]
	7001000210	MEV 25 TSS OO	152

PILOT-ASSISTED ROLLER LEVER 3/2 NC, 1/8"

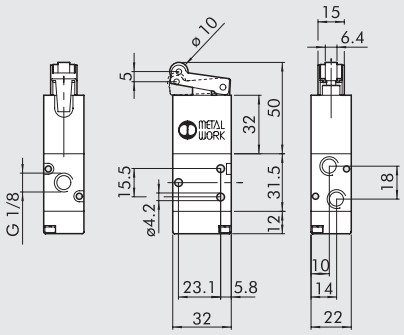

Symbol	Code	Abbrev.	Weight [g]
	7001000400	MEV 23 RSS NC	138

PILOT-ASSISTED ROLLER LEVER 5/2, 1/8"

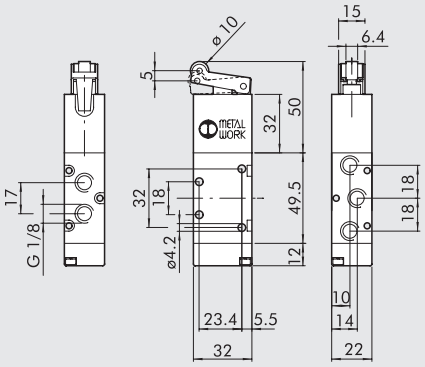

Symbol	Code	Abbrev.	Weight [g]
	7001000410	MEV 25 RSS OO	164

PILOT-ASSISTED AERIAL 3/2 NC, 1/8"

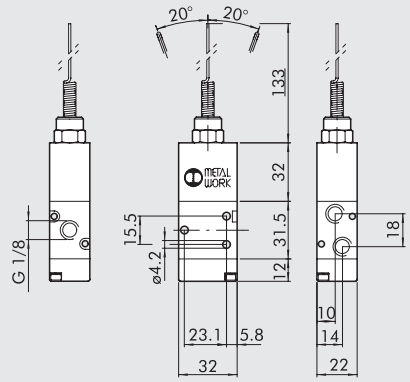

Symbol	Code	Abbrev.	Weight [g]
	7001000700	MEV 23 ASS NC	142

PILOT-ASSISTED AERIAL 5/2 NC, 1/8"

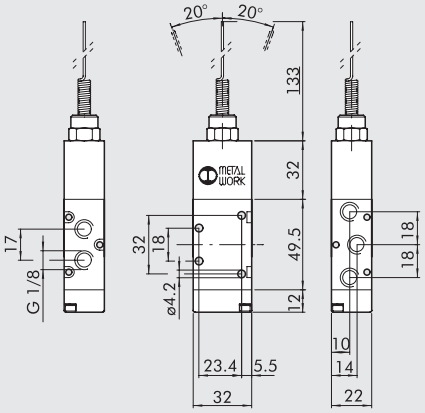

Symbol	Code	Abbrev.	Weight [g]
	7001000710	MEV 25 ASS OO	168

ROLLER-LEVER 3/2 1/8"

Operating torque: 0.5 Nm

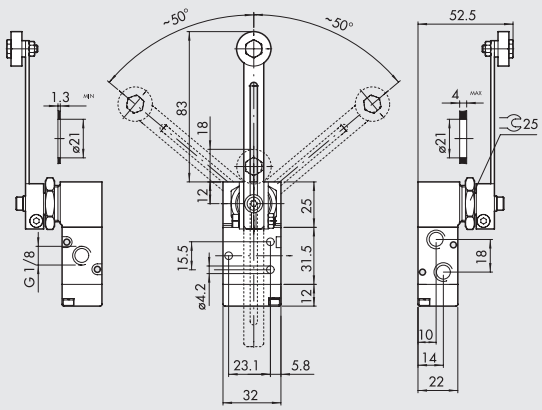

Symbol	Code	Abbrev.	Weight [g]
	7001000900	MEV 23 LLS NC	189

ROLLER-LEVER 5/2 1/8"

Operating torque: 0.5 Nm

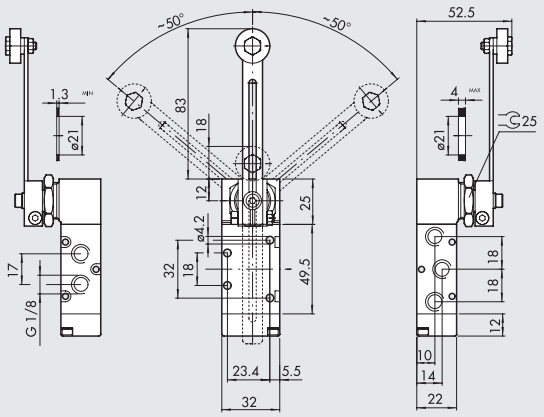

Symbol	Code	Abbrev.	Weight [g]
	7001000910	MEV 25 LLS OO	216

VALVES SERIES 70, PNEUMATIC

TECHNICAL DATA		1/8"	1/4"	3/8"	1/2"
Operating pressure	bar	Vacuum to 10			
Minimum pilot pressure					
• monostable and bistable differential	bar	2.5			
• bistable	bar	1			
Operating temperature range	°C	-10 to +60			
Nominal diameter	mm	5	7.5	13.3	15
Conductance C	Nl/min · bar	121.43	264.26	505.52	971.43
Critical ratio b	bar/bar	0.32	0.27	0.32	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	400	750	1560	3200
Flow rate at 6 bar ΔP 1 bar	Nl/min	550	1100	2150	4600
TRA / TRR monostable at 6 bar	ms	6/15	7/15	5/28	16/80
TRA / TRR bistable at 6 bar	ms	7/7	7/7	13/13	25/25

SYNOPTIC, SIZES AND VERSIONS

P N V FAMILY	2 DIMENSIONS	3 FUNCTION	P N OPERATORS 14	S RESETTING (12)	N C FURTHER DETAILS
PNV pneumatic valves	**2** 1/8" **3** 1/4" **C** 3/8" **4** 1/2"	**3** 3/2 **5** 5/2 **6** 5/3 ■ **8** 2-3/2	**PN** pneumatic	**S** mechanical springs **B** bistable **D** differential **O** stable for 5/3 ◆ **A** pneumatic/mechanical spring	**OO** no indication **NC** normally closed **NO** normally open **CC** closed centres **OC** open centres **PC** pressure centres ▲ **NC-NO** normally closed - normally open

■ Only available for size 1/8" and 1/4"
◆ On demand
▲ Only available for function 2-3/2

VALVES SERIES 70, PNEUMATIC, 1/8"

MONOSTABLE 3/2 NO, 1/8"

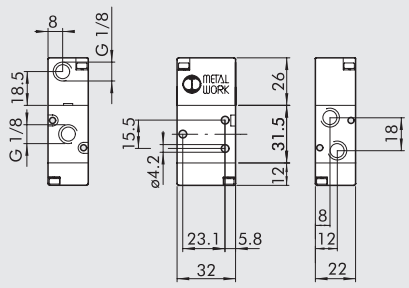

Symbol	Code	Abbrev.	Weight [g]
	7010010400	PNV 23 PNS NO	82

MONOSTABLE 3/2 NC, 1/8"

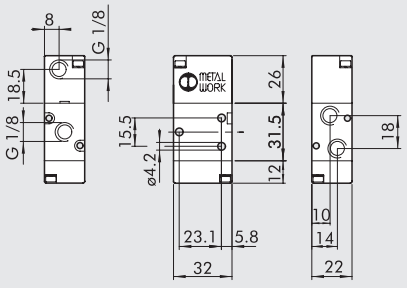

Symbol	Code	Abbrev.	Weight [g]
	7010010200	PNV 23 PNS NC	82

MONOSTABLE 5/2, 1/8"

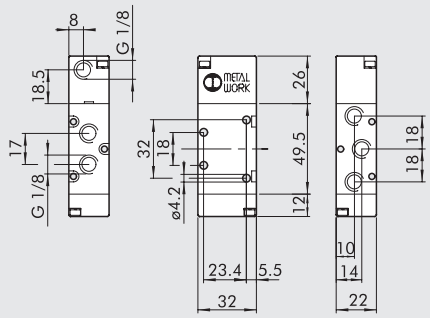

Symbol	Code	Abbrev.	Weight [g]
	7010011100	PNV 25 PNS OO	108

BISTABLE 5/2, 1/8"

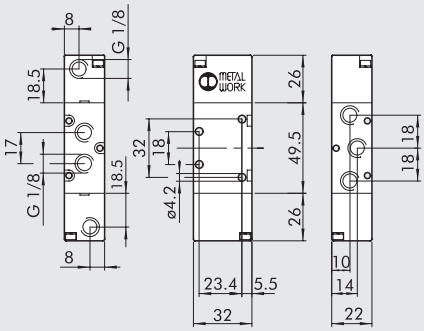

Symbol	Code	Abbrev.	Weight [g]
	7010011200	PNV 25 PNB OO	122
	7010011300	PNV 25 PND OO	128

BISTABLE 3/2, 1/8"

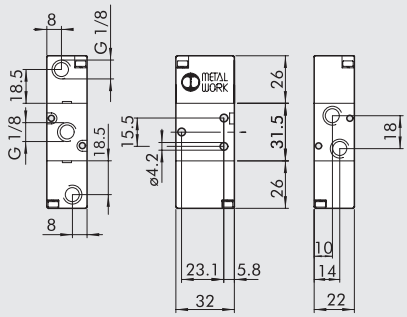

Symbol	Code	Abbrev.	Weight [g]
	7010010100	PNV 23 PNB OO	96

DOUBLE 3/2 1/8"

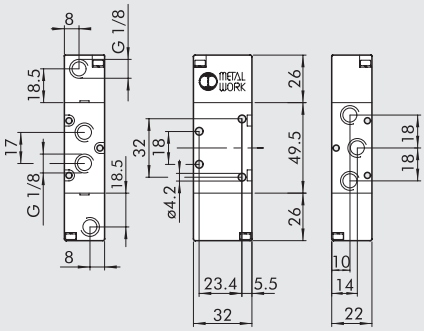

Symbol	Code	Abbrev.	Weight [g]
	7010013100	PNV 28 PNS NC	136
	7010013200	PNV 28 PNS NO	136
	7010013300	PNV 28 PNS NC-NO	136

MONOSTABLE 5/3, 1/8"

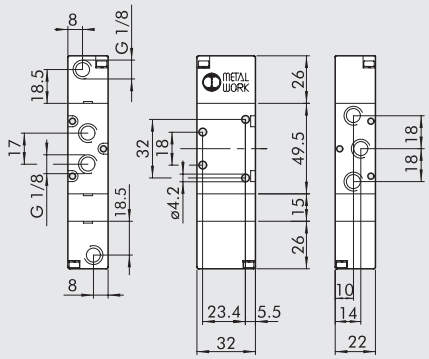

Symbol	Code	Abbrev.	Weight [g]
	7010012100	PNV 26 PNS CC	150
	7010012200	PNV 26 PNS OC	150
	7010012300	PNV 26 PNS PC	150

NOTES

VALVES SERIES 70, PNEUMATIC, 1/4"

MONOSTABLE 3/2 NO, 1/4"

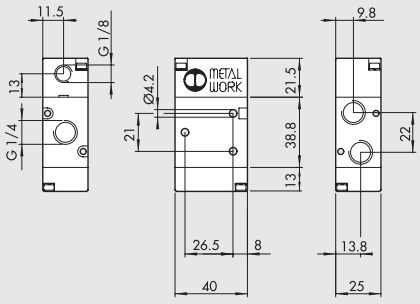

Symbol	Code	Abbrev.	Weight [g]
	7020010400	PNV 33 PNS NO	124

MONOSTABLE 3/2 NC, 1/4"

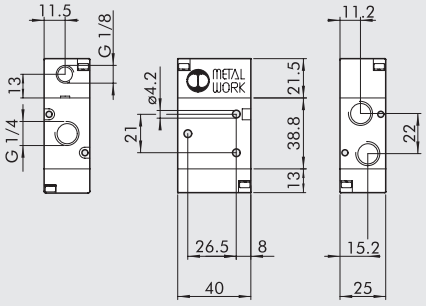

Symbol	Code	Abbrev.	Weight [g]
	7020010200	PNV 33 PNS NC	122

MONOSTABLE 5/2, 1/4"

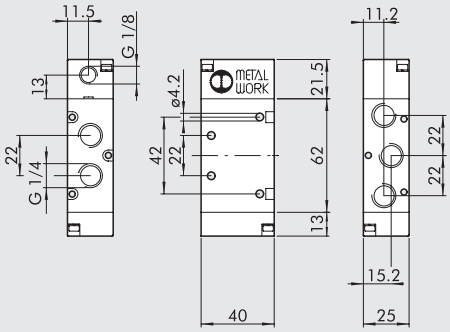

Symbol	Code	Abbrev.	Weight [g]
	7020011100	PNV 35 PNS OO	174

BISTABLE 5/2, 1/4"

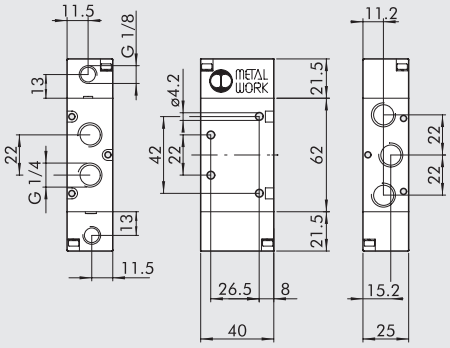

Symbol	Code	Abbrev.	Weight [g]
	7020011200	PNV 35 PNB OO	174
	7020011300	PNV 35 PND OO	198

BISTABLE 3/2, 1/4"

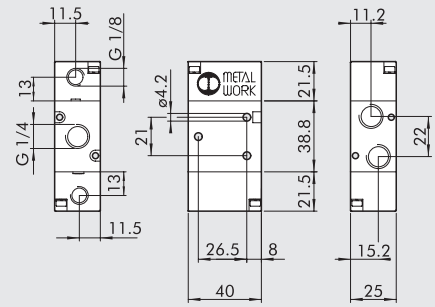

Symbol	Code	Abbrev.	Weight [g]
	7020010100	PNV 33 PNB OO	134

DOUBLE 3/2, 1/4"

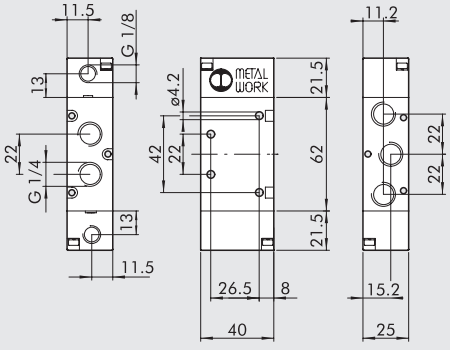

Symbol	Code	Abbrev.	Weight [g]
	7020013100	PNV 38 PNS NC	223
	7020013200	PNV 38 PNS NO	223
	7020013300	PNV 38 PNS NC-NO	223

MONOSTABLE 5/3, 1/4"

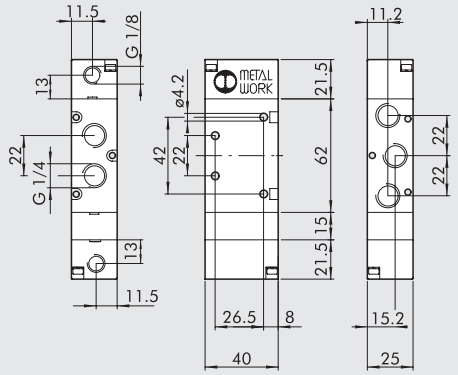

Symbol	Code	Abbrev.	Weight [g]
	7020012100	PNV 36 PNS CC	124
	7020012200	PNV 36 PNS OC	124
	7020012300	PNV 36 PNS PC	124

NOTES

VALVES SERIES 70, PNEUMATIC, 3/8"

MONOSTABLE 3/2 NO, 3/8"

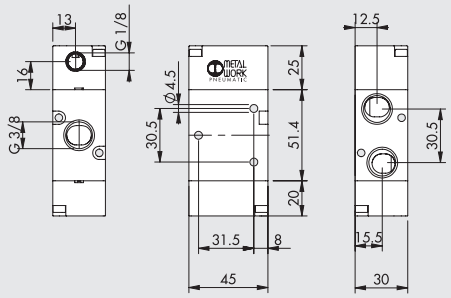

Symbol	Code	Abbrev.	Weight [g]
	7040010400	PNV C3 PNS NO	223

MONOSTABLE 3/2 NC, 3/2"

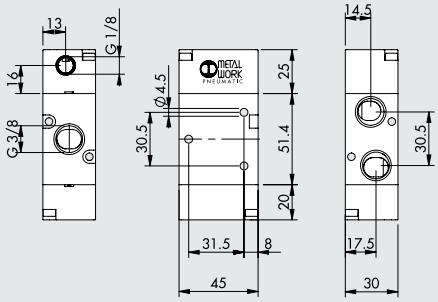

Symbol	Code	Abbrev.	Weight [g]
	7040010200	PNV C3 PNS NC	223

MONOSTABLE 5/2, 3/8"

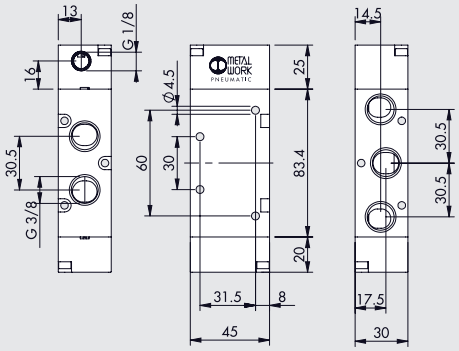

Symbol	Code	Abbrev.	Weight [g]
	7040011100	PNV C5 PNS OO	329

BISTABLE 5/2, 3/8"

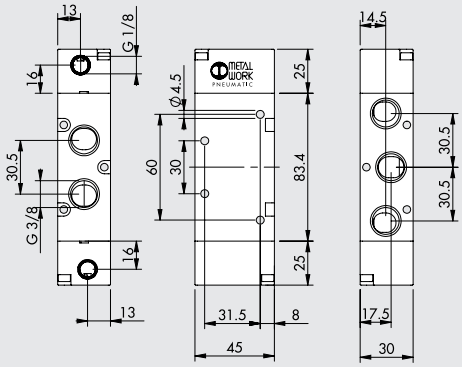

Symbol	Code	Abbrev.	Weight [g]
	7040011200	PNV C5 PNB OO	324
	7040011300	PNV C5 PND OO	360

BISTABLE 3/2, 3/8”

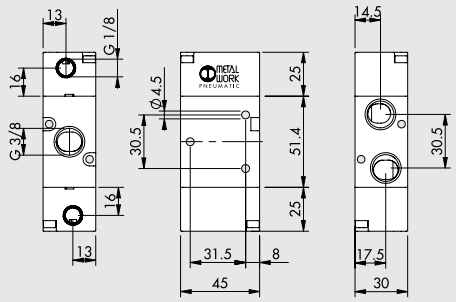

Symbol	Code	Abbrev.	Weight [g]
	7040010100	PNV C3 PNB OO	230

MONOSTABLE 5/3, 3/8”

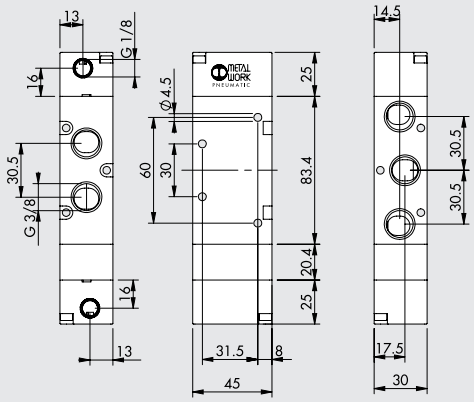

Symbol	Code	Abbrev.	Weight [g]
	7040012100	PNV C6 PNS CC	411
	7040012200	PNV C6 PNS OC	409
	7040012300	PNV C6 PNS PC	409

VALVES SERIES 70, PNEUMATIC, 1/2”

MONOSTABLE 3/2 NO, 1/2”

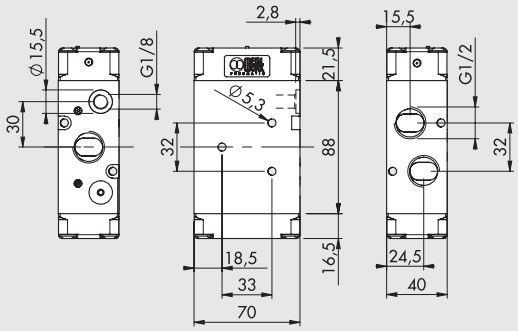

Symbol	Code	Abbrev.	Weight [g]
	7030010400	PNV 43 PNS NO	640

MONOSTABLE 3/2 NC, 1/2”

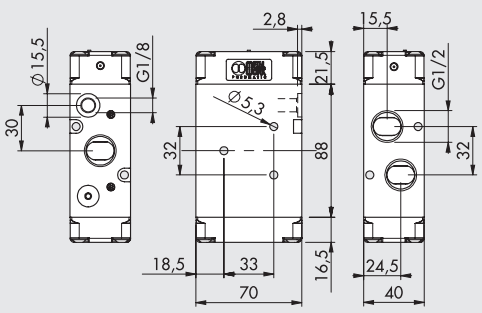

Symbol	Code	Abbrev.	Weight [g]
	7030010200	PNV 43 PNS NC	640

MONOSTABLE 5/2, 1/2”

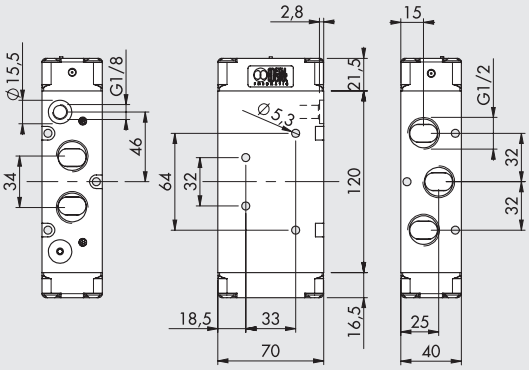

Symbol	Code	Abbrev.	Weight [g]
	7030011100	PNV 45 PNS OO	812

BISTABLE 5/2, 1/2”

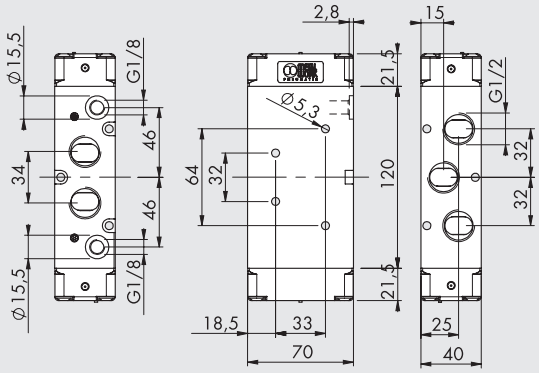

Symbol	Code	Abbrev.	Weight [g]
	7030011200	PNV 45 PNB OO	816
	7030011300	PNV 45 PND OO	828

BISTABLE 3/2, 1/2"

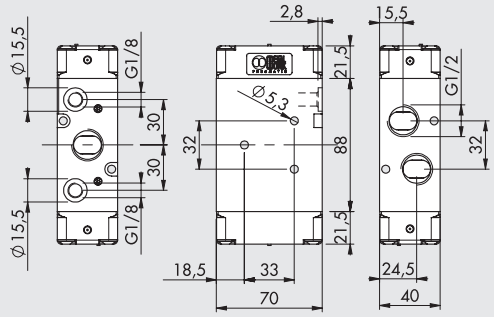

Symbol	Code	Abbrev.	Weight [g]
	**7030010100**	PNV 43 PNB OO	650

MONOSTABLE 5/3, 1/2"

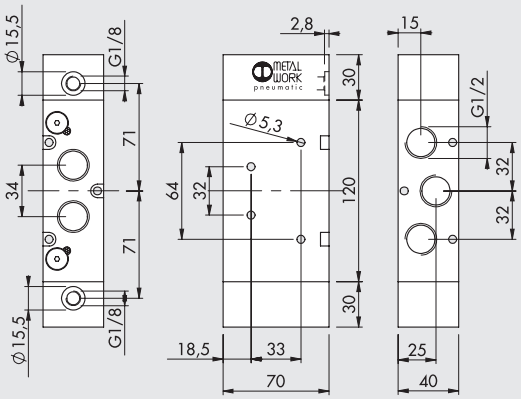

Symbol	Code	Abbrev.	Weight [g]
	**7030012100**	PNV 46 PNS CC	1200
	7030012200	PNV 46 PNS OC	1194
	**7030012300**	PNV 46 PNS PC	1196

NOTES

VALVES SERIES 70, SOLENOID/PNEUMATIC

TECHNICAL DATA		1/8"	1/4"	3/8"	1/2"
Operating pressure:					
• monostable and bistable differential	bar	2.5 to10			
• bistable	bar	1 to 10			
• asserved	bar	Vacuum to 10			
Minimum pilot pressure	bar	2.5			
Operating temperature range	°C	-10 to +60			
Nominal diameter	mm	5	7.5	13.3	15
Conductance C	Nl/min · bar	121.43	264.26	505.52	971.43
Critical ratio b	bar/bar	0.32	0.27	0.32	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	400	750	1560	3200
Flow rate at 6 bar ΔP 1 bar	Nl/min	550	1100	2150	4600
TRA / TRR monostable at 6 bar	ms	15/35	19/45	21/72	36/100
TRA / TRR bistable at 6 bar	ms	20/20	21/21	18/18	25/25
Coil voltage values		12; 24 VDC - 24; 110; 220V AC 50/60Hz			
Power		2 W (DC) 3.5VA (AC)			
Voltage tolerance	%	-10 to +15			
Insulation class		F 155			
Maximum coil nut torque	Nm	1			
Hand operator		Bistable			

SYNOPTIC, SIZES AND VERSIONS

SOV FAMILY	2 DIMENSIONS	3 FUNCTION	SO OPERATORS 14	S RESETTING (12)	NC FURTHER DETAILS
SOV solenoid/ pneumatic	**2** 1/8"	**3** 3/2	**SO** solenoid	**S** mechanical springs	**OO** no indication
	3 1/4"	**5** 5/2	**SE** solenoid assisted	**B** bistable	**NC** normally closed
	C 3/8"	**6** 5/3		**D** differential	**NO** normally open
	4 1/2"	■ **8** 2-3/2		**P** pneumatic	**CC** closed centres
				◆ **A** pneumatic/mechanical spring	**OC** open centres
					PC pressure centres
					▲ **NC-NO** normally closed - normally open

■ Only available for size 1/8" and 1/4"
◆ On demand
▲ Only available for function 2-3/2

VALVES SERIES 70, SOLENOID/PNEUMATIC, PILOT-ASSISTED SOLENOID/PNEUMATIC, 1/8"

MONOSTABLE 3/2 NO, 1/8"

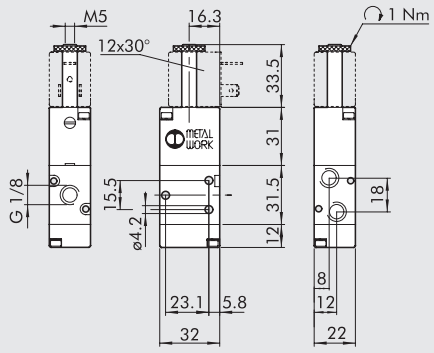

Symbol	Code	Abbrev.	Weight [g]
	7010020400	SOV 23 SOS NO	100

MONOSTABLE 3/2 NC, 1/8"

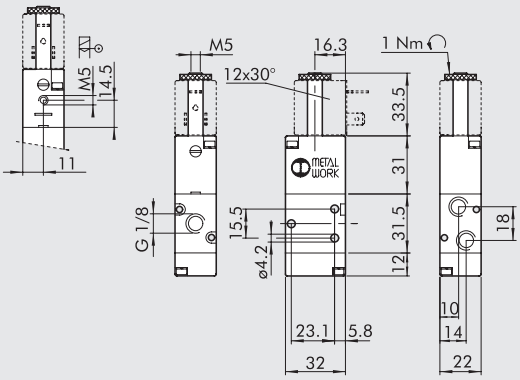

Symbol	Code	Abbrev.	Weight [g]
	**7010020200**	SOV 23 SOS NC	100
	**7010020500**	SOV 23 SES NC	100

MONOSTABLE 5/2, 1/8"

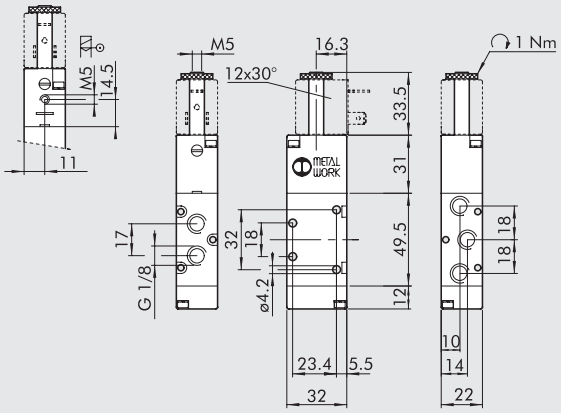

Symbol	Code	Abbrev.	Weight [g]
	7010021100	SOV 25 SOS OO	128
	7010021500	SOV 25 SES OO	129

BISTABLE 5/2, 1/8"

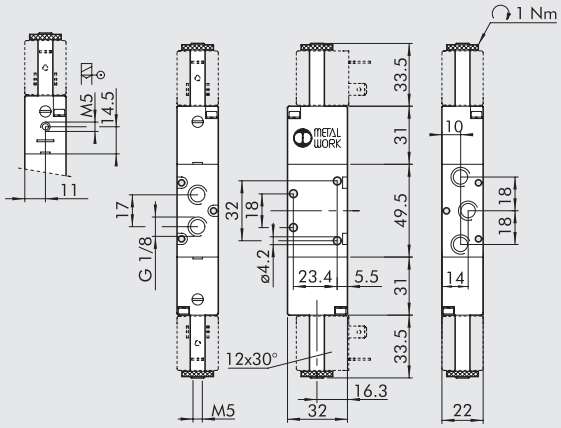

Symbol	Code	Abbrev.	Weight [g]
	7010021200	SOV 25 SOB OO	160
	7010021300	SOV 25 SOD OO	166
	7010021600	SOV 25 SEB OO	160

BISTABLE 3/2, 1/8"

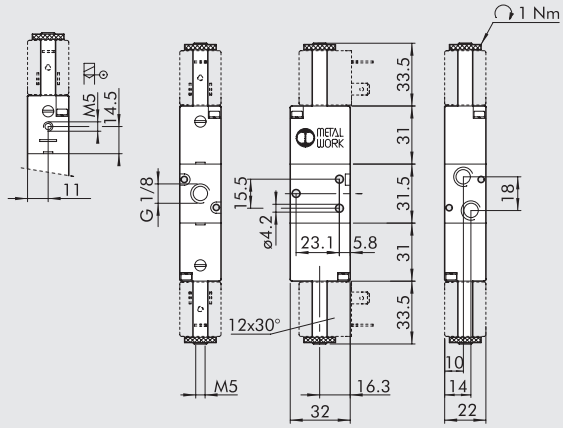

Symbol	Code	Abbrev.	Weight [g]
	7010020100	SOV 23 SOB OO	135
	7010020300	SOV 23 SEB OO	136

DOUBLE 3/2, 1/8"

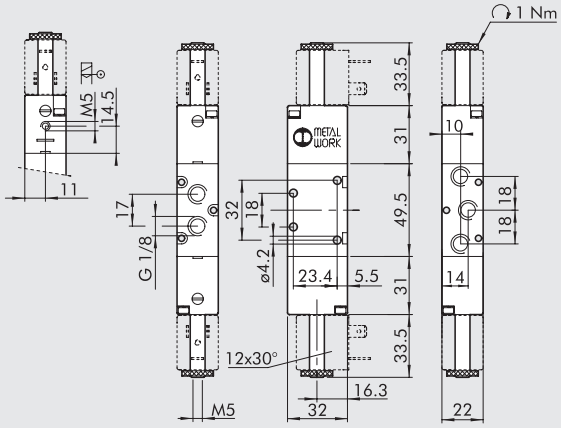

Symbol	Code	Abbrev.	Weight [g]
	7010023100	SOV 28 SOS NC	186
	7010023200	SOV 28 SOS NO	186
	7010023300	SOV 28 SOS NC-NO	186
	7010023400	SOV 28 SES NC	186
	7010023500	SOV 28 SES NO	186
	7010023600	SOV 28 SES NC-NO	186

MONOSTABLE 5/3, 1/8”

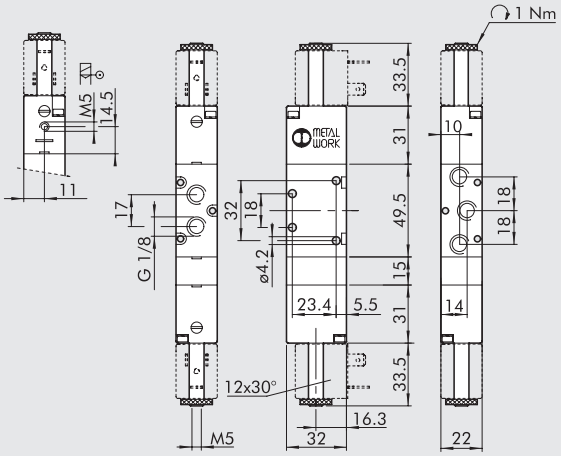

Symbol	Code	Abbrev.	Weight [g]
	7010022100	SOV 26 SOS CC	190
	7010022200	SOV 26 SOS OC	190
	7010022300	SOV 26 SOS PC	190
	7010022400	SOV 26 SES CC	188
	7010022500	SOV 26 SES OC	188
	7010022600	SOV 26 SES PC	188

NOTES

VALVES SERIES 70, SOLENOID/PNEUMATIC, PILOT-ASSISTED SOLENOID/ PNEUMATIC, 1/4”

MONOSTABLE 3/2 NO, 1/4”

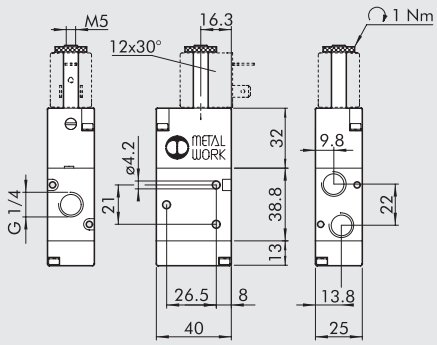

Symbol	Code	Abbrev.	Weight [g]
	7020020400	SOV 33 SOS NO	152

MONOSTABLE 3/2 NC, 1/4”

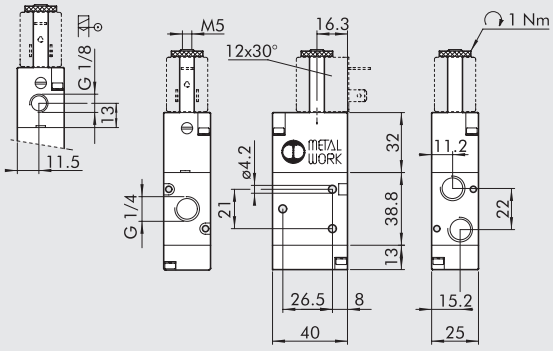

Symbol	Code	Abbrev.	Weight [g]
	7020020200	SOV 33 SOS NC	152
	7020020500	SOV 33 SES NC	152

MONOSTABLE 5/2, 1/4"

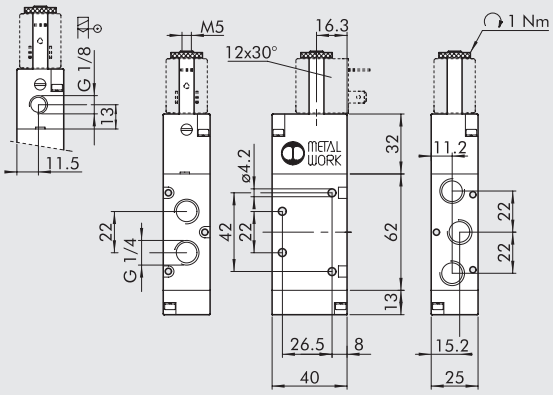

Symbol	Code	Abbrev.	Weight [g]
	7020021100	SOV 35 SOS OO	200
	7020021500	SOV 35 SES OO	200

BISTABLE 5/2, 1/4"

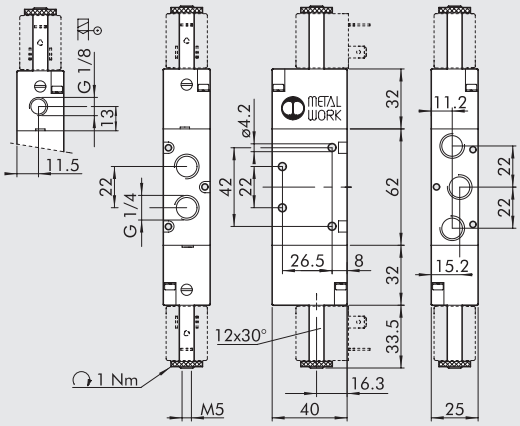

Symbol	Code	Abbrev.	Weight [g]
	7020021200	SOV 35 SOB OO	236
	7020021300	SOV 35 SOD OO	252
	7020021600	SOV 35 SEB OO	242

BISTABLE 3/2, 1/4"

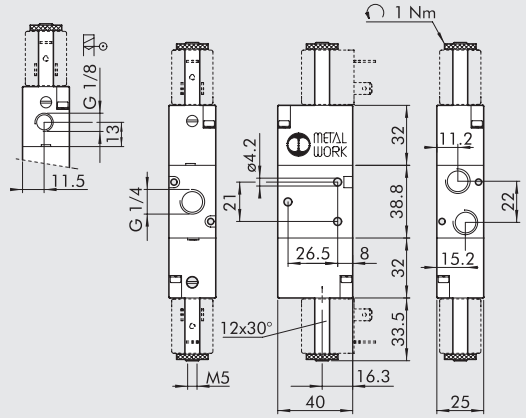

Symbol	Code	Abbrev.	Weight [g]
	7020020100	SOV 33 SOB OO	190
	7020020300	SOV 33 SEB OO	190

DOUBLE 3/2, 1/4"

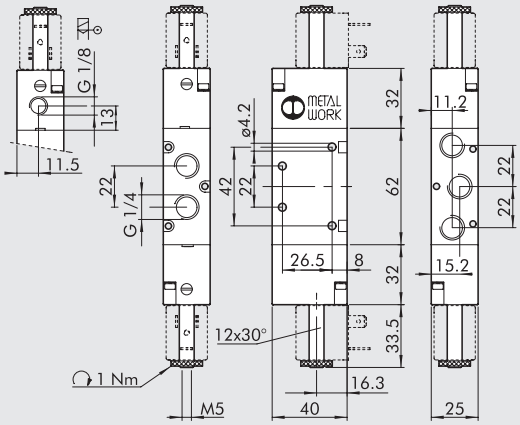

Symbol	Code	Abbrev.	Weight [g]
	7020023100	SOV 38 SOS NC	286
	7020023200	SOV 38 SOS NO	286
	7020023300	SOV 38 SOS NC-NO	286
	7020023400	SOV 38 SES NC	286
	7020023500	SOV 38 SES NO	286
	7020023600	SOV 38 SES NC-NO	286

MONOSTABLE 5/3, 1/4”

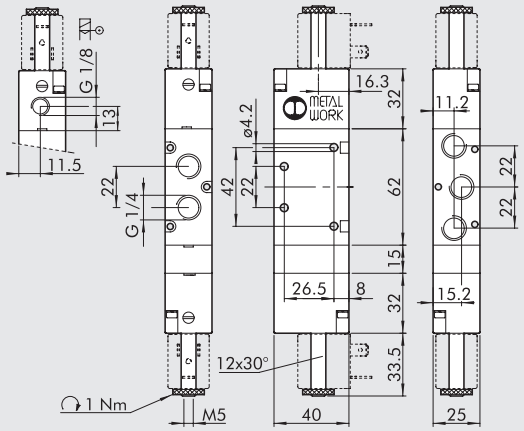

Symbol	Code	Abbrev.	Weight [g]
	7020022100	SOV 36 SOS CC	274
	7020022200	SOV 36 SOS OC	274
	7020022300	SOV 36 SOS PC	274
	7020022400	SOV 36 SES CC	277
	7020022500	SOV 36 SES OC	277
	7020022600	SOV 36 SES PC	277

NOTES

VALVES SERIES 70, SOLENOID/PNEUMATIC, PILOT-ASSISTED SOLENOID/ PNEUMATIC, 3/8”

MONOSTABLE 3/2 NO, 3/8”

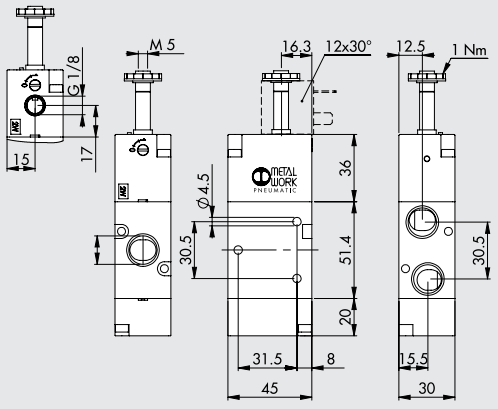

Symbol	Code	Abbrev.	Weight [g]
	7040020400	SOV C3 SOS NO	256
	7040020600	SOV C3 SES NO	255

MONOSTABLE 3/2 NC, 3/8”

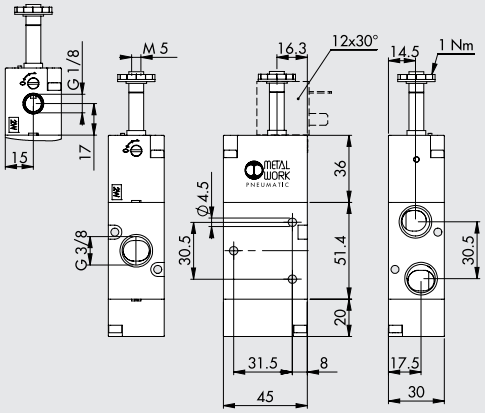

Symbol	Code	Abbrev.	Weight [g]
	7040020200	SOV C3 SOS NC	256
	7040020500	SOV C3 SES NC	255

MONOSTABLE 5/2, 3/8"

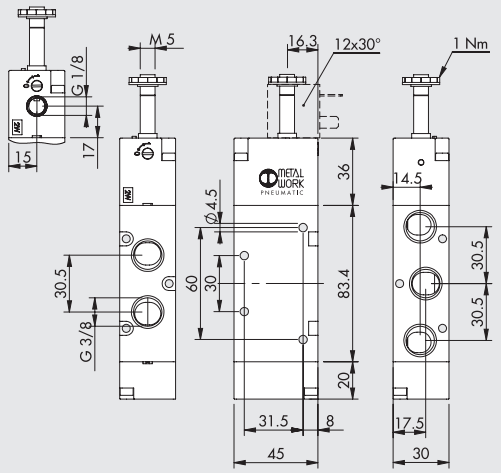

Symbol	Code	Abbrev.	Weight [g]
	7040021100	SOV C5 SOS OO	361
	7040021500	SOV C5 SES OO	361

BISTABLE 5/2, 3/8"

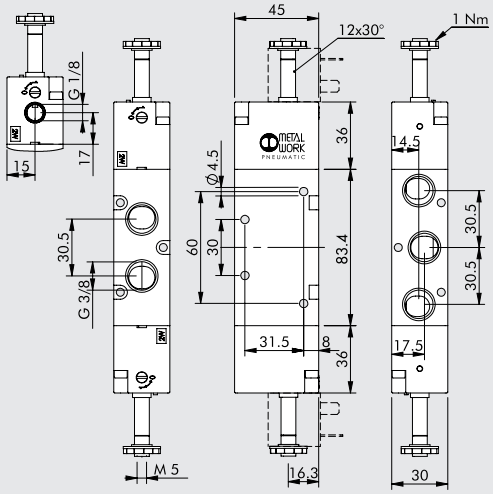

Symbol	Code	Abbrev.	Weight [g]
	7040021200	SOV C5 SOB OO	400
	7040021300	SOV C5 SOD OO	425
	7040021600	SOV C5 SEB OO	400

BISTABLE 3/2, 3/8"

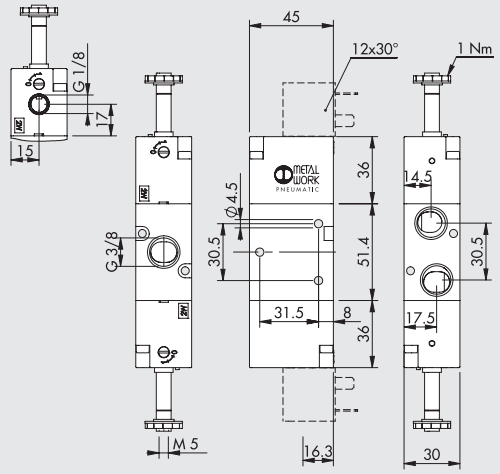

Symbol	Code	Abbrev.	Weight [g]
	7040020100	SOV C3 SOB OO	307
	7040020300	SOV C3 SEB OO	307

MONOSTABLE 5/3, 3/8"

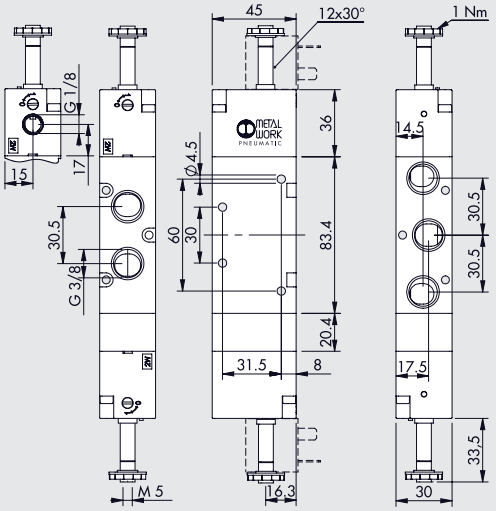

Symbol	Code	Abbrev.	Weight [g]
	7040022100	SOV C6 SOS CC	476
	7040022200	SOV C6 SOS OC	474
	7040022300	SOV C6 SOS PC	474
	7040022400	SOV C6 SES CC	476
	7040022500	SOV C6 SES OC	474
	7040022600	SOV C6 SES PC	474

VALVES SERIES 70, SOLENOID/PNEUMATIC, PILOT-ASSISTED SOLENOID/PNEUMATIC, 1/2"

MONOSTABLE 3/2 NO, 1/2"

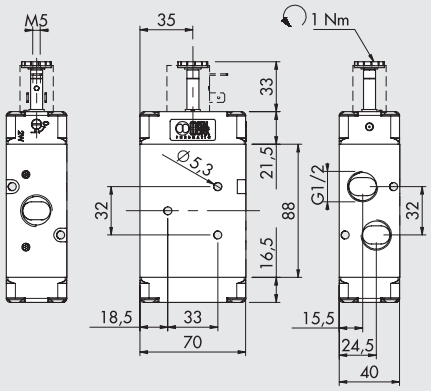

Symbol	Code	Abbrev.	Weight [g]
	7030020400	SOV 43 SOS NO	660

MONOSTABLE 3/2 NC, 1/2"

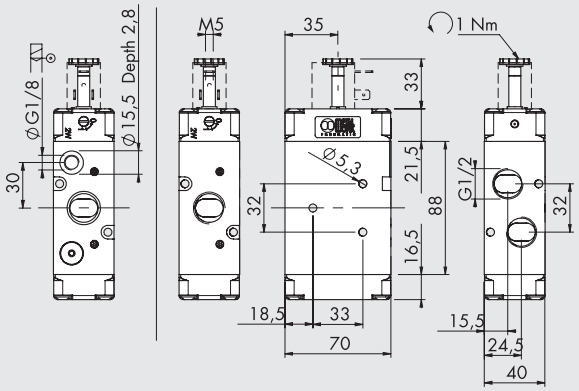

Symbol	Code	Abbrev.	Weight [g]
	7030020200	SOV 43 SOS NC	660
	7030020500	SOV 43 SES NC	654

MONOSTABLE 5/2, 1/2"

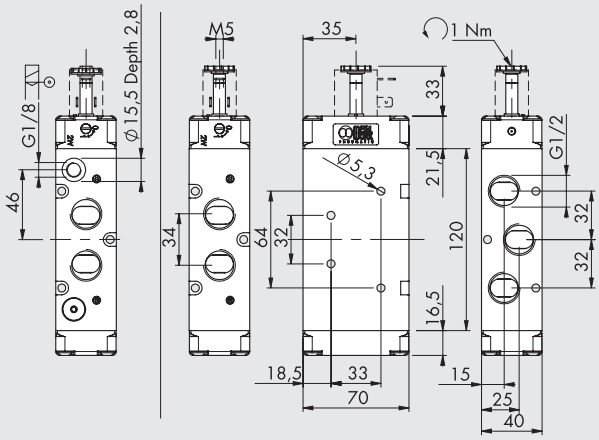

Symbol	Code	Abbrev.	Weight [g]
	7030021100	SOV 45 SOS OO	828
	7030021500	SOV 45 SES OO	830

BISTABLE 5/2, 1/2"

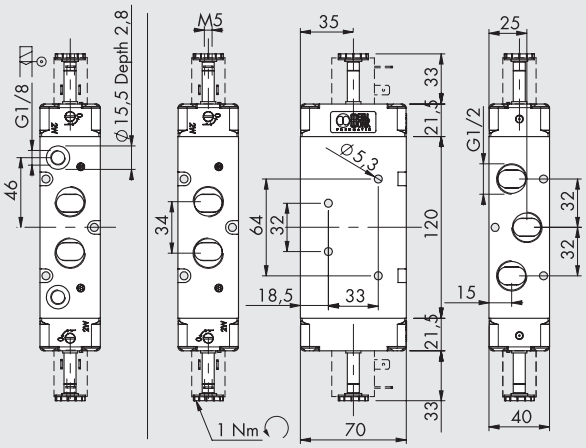

Symbol	Code	Abbrev.	Weight [g]
	7030021200	SOV 45 SOB OO	860
	7030021300	SOV 45 SOD OO	868
	7030021600	SOV 45 SEB OO	854

BISTABLE 3/2, 1/2"

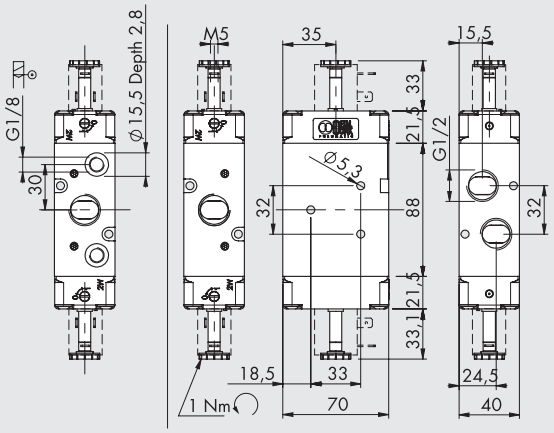

Symbol	Code	Abbrev.	Weight [g]
	7030020100	SOV 43 SOB OO	686
	7030020300	SOV 43 SEB OO	678

MONOSTABLE 5/3, 1/2"

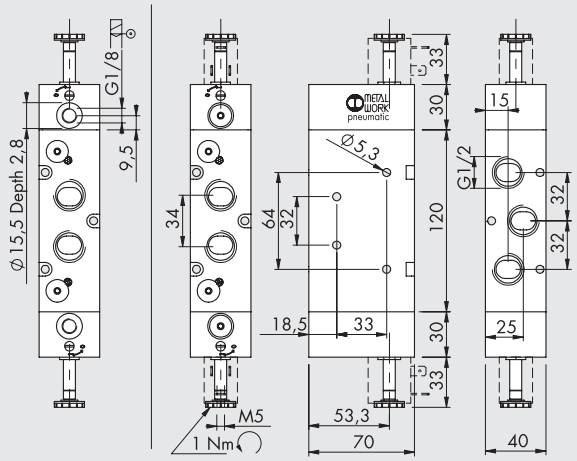

Symbol	Code	Abbrev.	Weight [g]
	**7030022100**	SOV 46 SOS CC	1265
	7030022200	SOV 46 SOS OC	1265
	**7030022300**	SOV 46 SOS PC	1265
	**7030022400**	SOV 46 SES CC	1252
	7030022500	SOV 46 SES OC	1252
	**7030022600**	SOV 46 SES PC	1252

ACCESSORIES FOR SERIES 70 SOLENOID/PNEUMATIC VALVES

Refer to page **B1**.60 for coils and connectors

NOTES

VALVES SERIES 70 LT (LOW TEMPERATURE)

TECHNICAL DATA			1/8"	1/4"	3/8"
Operating pressure standard		bar			
hand operated			Vacuum to 10		
pneumatic and solenoid/pneumatic	t = -40°C to -10°C		5 to 10		
	t = -10°C to +60°C		3 to 10		
Operating temperature range		°C	–40 to +60		
Nominal diameter		mm	5	7.5	13.3
Conductance C		Nl/min · bar	121.43	264.26	505.52
Critical ratio b		bar/bar	0.32	0.27	0.32
Flow rate at 6 bar ΔP 0.5 bar		Nl/min	400	750	1560
Flow rate at 6 bar ΔP 1 bar		Nl/min	550	1100	2150
PNEUMATIC					
Minimum pilot pressure		bar			
t = -40°C to -10°C			5		
t = -10°C to +60°C			3		
TRA / TRR monostable at 6 bar (at 20°C)		ms	6/15	7/15	5/28
TRA / TRR bistable at 6 bar (at 20°C)		ms	7/7	7/7	13/13
SOLENOID/PNEUMATIC					
TRA / TRR monostable at 6 bar (at 20°C)		ms	15/35	19/45	21/72
TRA / TRR bistable at 6 bar (at 20°C)		ms	20/20	21/21	18/18
Coil voltage values			12; 24 VDC		
			24; 110; 220V AC 50/60Hz		
Power	t = -40°C to -10°C		5 W (DC) - 5 VA (AC)		
	t = -10°C to +60°C		2 W (DC) - 3.5 VA (AC)		
Voltage tolerance		%	-10 to +15		
Insulation class			F 155		
Maximum coil nut torque		Nm	1		
Hand operator			Bistable		

Notes: after a long stop and with very low temperatures the movement of the first drives may be slower. It recommends the use of perfectly dry air.

SYNOPTIC, SIZES AND VERSIONS

P N V FAMILY	2 DIMENSIONS	3 FUNCTION	P N OPERATORS 14	S RESETTING (12)	OO FURTHER DETAILS	L T
MAV manual valves	**2** 1/8"	**3** 3/2	**LE** leva 90°	**S** mechanical springs	**OO** no indication	**LT** low temperature
PNV pneumatic valves	**3** 1/4"	**5** 5/2	**PN** pneumatic	**B** bistable	**NC** normally closed	
SOV solenoid/ pneumatic	**C** 3/8"	**6** 5/3	**SO** solenoid	**O** stable for 5/3	**NO** normally open	
					CC closed centres	
					OC open centres	
					PC pressure centres	

VALVES SERIES 70 LT, HAND OPERATED (LOW TEMPERATURE)

90° LEVER 3/2 1/8"

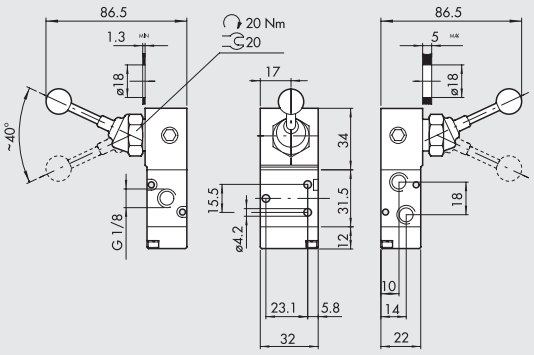

Symbol		Code	Abbrev.	Weight [g]
	❄	**70L1000100**	MAV 23 LES NC LT	184
	❄	**70L1000200**	MAV 23 LEB OO LT	187

90° LEVER 5/2 1/8"

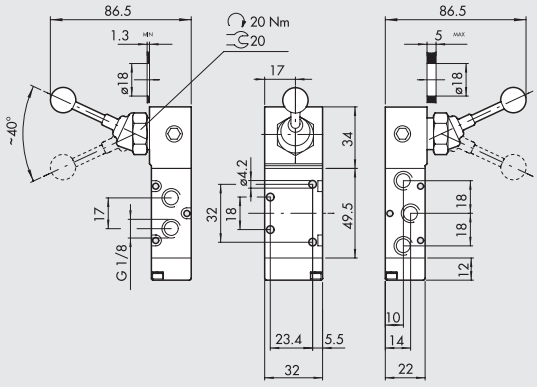

Symbol		Code	Abbrev.	Weight [g]
	❄	**70L1000300**	MAV 25 LES OO LT	210
	❄	**70L1000400**	MAV 25 LEB OO LT	213

90° LEVER 5/3, 1/8"

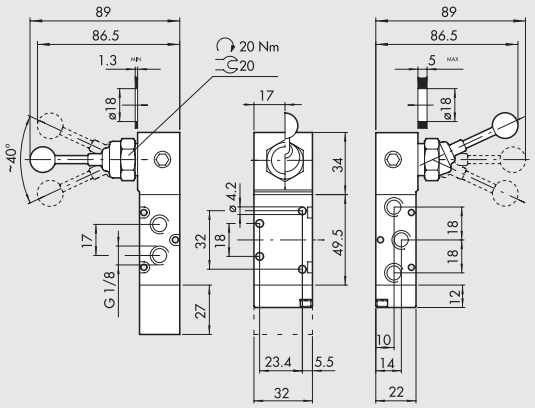

Symbol		Code	Abbrev.	Weight [g]
	❄	**70L1001000**	MAV 26 LES CC LT	242
	❄	**70L1000900**	MAV 26 LES OC LT	242
	❄	**70L1001100**	MAV 26 LES PC LT	242
	❄	**70L1000500**	MAV 26 LEO CC LT	194
	❄	**70L1000600**	MAV 26 LEO OC LT	194
	❄	**70L1000700**	MAV 26 LEO PC LT	194

90° LEVER 3/2, 1/4"

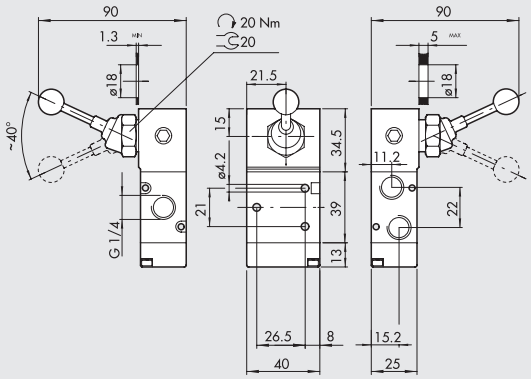

Symbol		Code	Abbrev.	Weight [g]
	❄	**70L2000100**	MAV 33 LES NC LT	272
	❄	**70L2000200**	MAV 33 LEB OO LT	272

90° LEVER 5/2, 1/4"

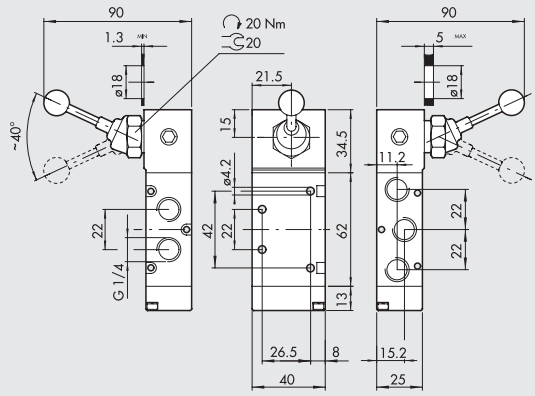

Symbol		Code	Abbrev.	Weight [g]
	❄	**70L2000300**	MAV 35 LES OO LT	326
	❄	**70L2000400**	MAV 35 LEB OO LT	326

90° LEVER 5/3, 1/4"

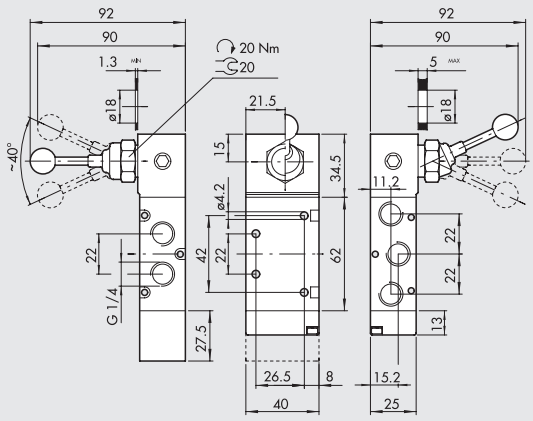

Symbol		Code	Abbrev.	Weight [g]
	❄	**70L2001000**	MAV 36 LES CC LT	354
	❄	**70L2000900**	MAV 36 LES OC LT	354
	❄	**70L2001100**	MAV 36 LES PC LT	354
	❄	**70L2000500**	MAV 36 LEO CC LT	288
	❄	**70L2000600**	MAV 36 LEO OC LT	288
	❄	**70L2000700**	MAV 36 LEO PC LT	288

VALVES SERIES 70 LT, PNEUMATIC (LOW TEMPERATURE)

BISTABLE 5/2 1/8"

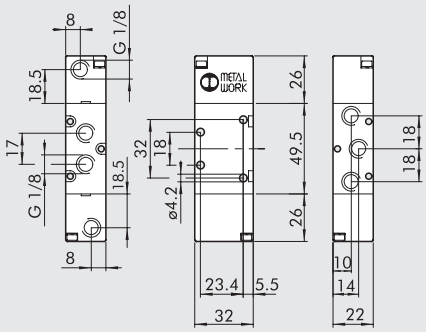

Symbol	Code	Abbrev.	Weight [g]
	❄ 70L1011200	PNV 25 PNB OO LT	176

BISTABLE 3/2 1/8"

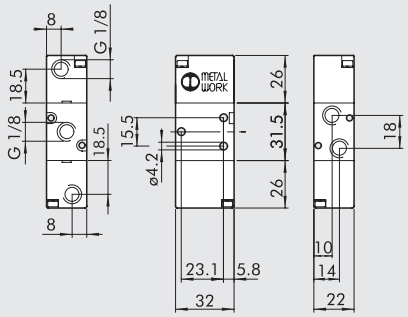

Symbol	Code	Abbrev.	Weight [g]
	❄ 70L1010100	PNV 23 PNB OO LT	150

BISTABLE 5/2 1/4"

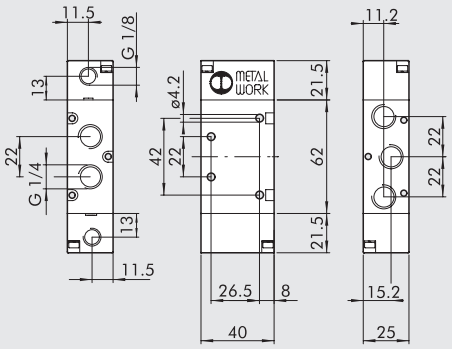

Symbol	Code	Abbrev.	Weight [g]
	❄ 70L2011200	PNV 35 PNB OO LT	233

BISTABLE 3/2 1/4"

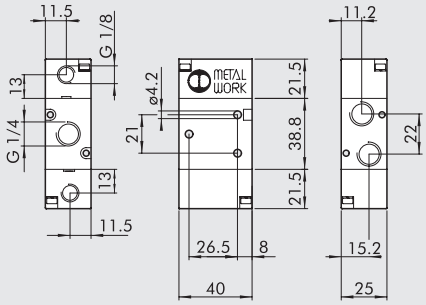

Symbol	Code	Abbrev.	Weight [g]
	❄ 70L2010100	PNV 33 PNB OO LT	194

BISTABLE 5/2 3/8"

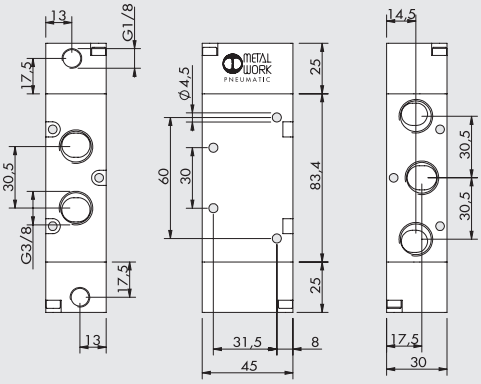

Symbol	Code	Abbrev	Weight [g]
	❄ 70L4011200	PNV C5 PNB OO LT	405

BISTABLE 3/2 3/8"

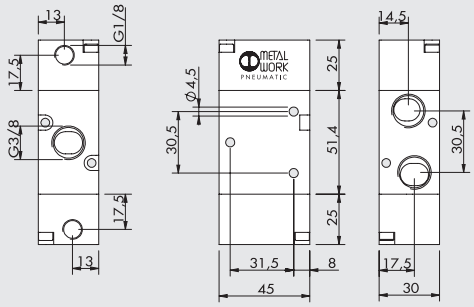

Symbol	Code	Abbrev	Weight [g]
	❄ 70L4010100	PNV C3 PNB OO LT	305

VALVES SERIES 70 LT, SOLENOID/PNEUMATIC (LOW TEMPERATURE)

MONOSTABLE 3/2 NO 1/8"

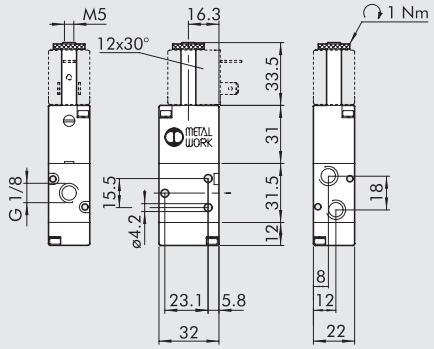

Symbol		Code	Abbrev.	Weight [g]
	❄	70L1020400	SOV 23 SOS NO LT	147

MONOSTABLE 3/2 NC 1/8"

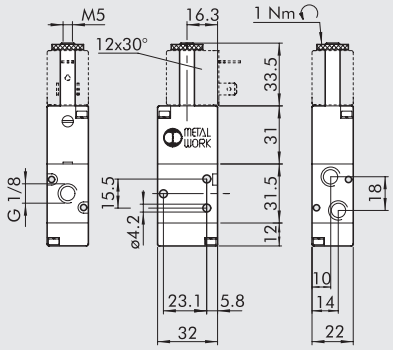

Symbol		Code	Abbrev.	Weight [g]
	❄	70L1020200	SOV 23 SOS NC LT	147

MONOSTABLE 5/2 1/8"

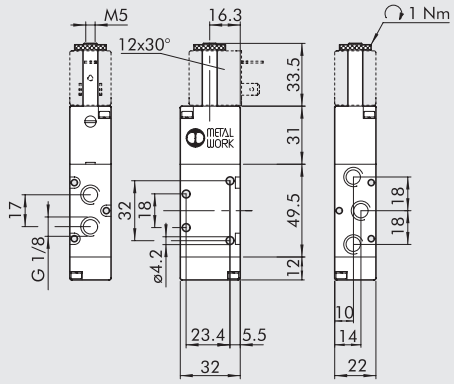

Symbol		Code	Abbrev.	Weight [g]
	❄	70L1021100	SOV 25 SOS OO LT	175

BISTABLE 5/2 1/8"

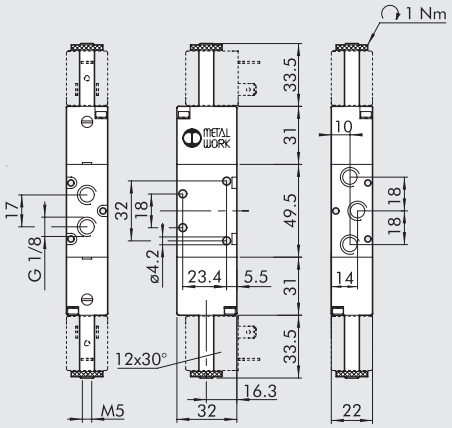

Symbol		Code	Abbrev.	Weight [g]
	❄	70L1021200	SOV 25 SOB OO LT	228

BISTABLE 3/2 1/8"

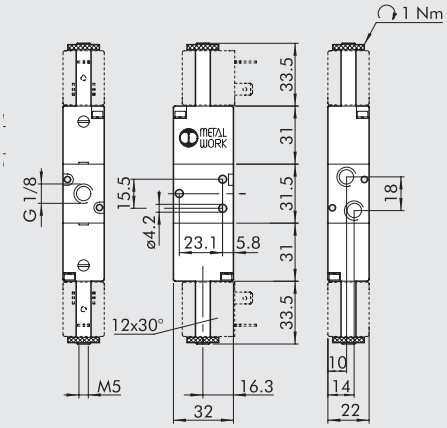

Symbol		Code	Abbrev.	Weight [g]
	❄	70L1020100	SOV 23 SOB OO LT	203

MONOSTABLE 3/2 NO 1/4"

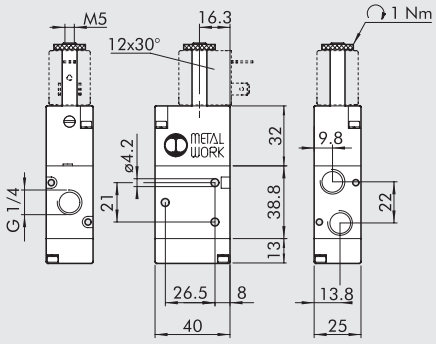

Symbol		Code	Abbrev.	Weight [g]
	❄	70L2020400	SOV 33 SOS NO LT	230

METAL WORK PNEUMATIC

MONOSTABLE 3/2 NC 1/4"

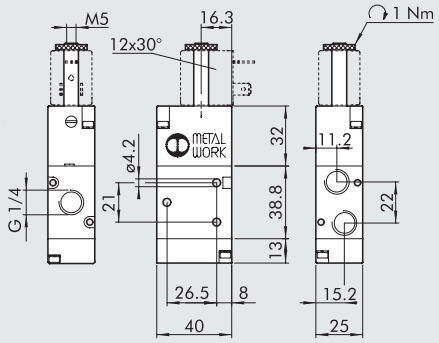

Symbol		Code	Abbrev.	Weight [g]
	❄	70L2020200	SOV 33 SOS NC LT	230

MONOSTABLE 5/2 1/4"

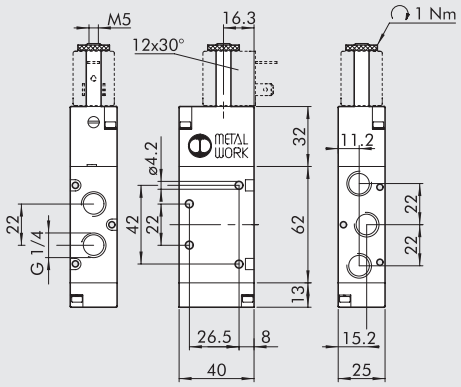

Symbol		Code	Abbrev.	Weight [g]
	❄	70L2021100	SOV 35 SOS OO LT	278

BISTABLE 5/2 1/4"

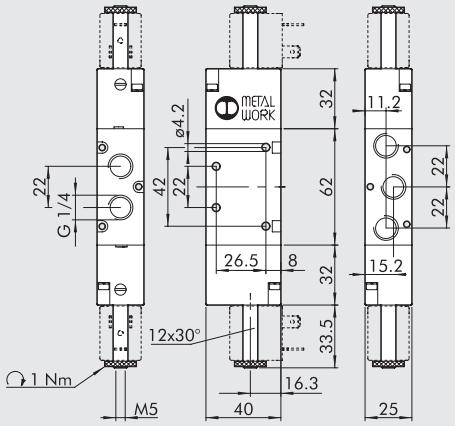

Symbol		Code	Abbrev.	Weight [g]
	❄	70L2021200	SOV 35 SOB OO LT	332

BISTABLE 3/2 1/4"

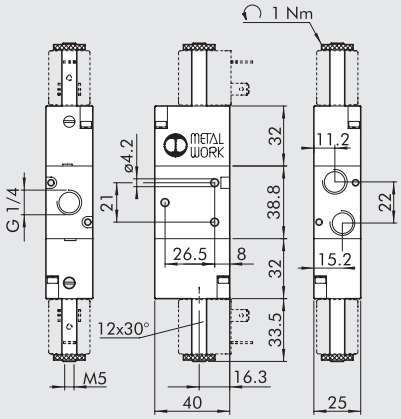

Symbol		Code	Abbrev.	Weight [g]
	❄	70L2020100	SOV 33 SOB OO LT	286

MONOSTABLE 3/2 NO 3/8"

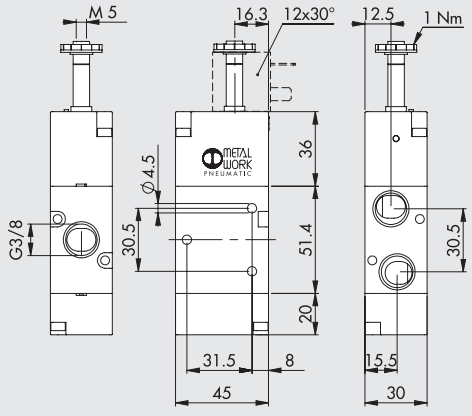

Symbol		Code	Abbrev.	Weight [g]
	❄	70L4020400	SOV C3 SOS NO LT	358

MONOSTABLE 3/2 NC 3/8"

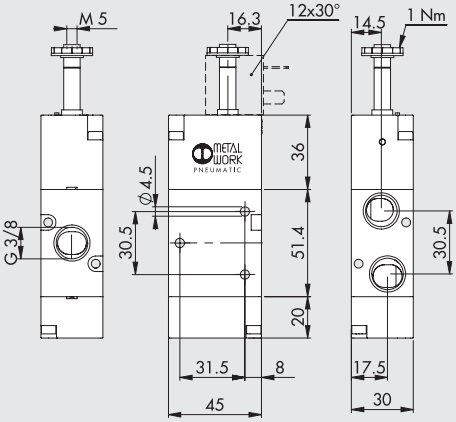

Symbol		Code	Abbrev.	Weight [g]
	❄	70L4020200	SOV C3 SOS NC LT	358

MONOSTABLE 5/2 3/8"

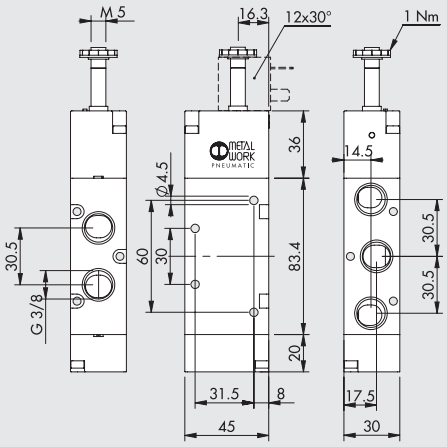

Symbol		Code	Abbrev.	Weight [g]
	❄	**70L4021100**	SOV C5 SOS OO LT	460

BISTABLE 5/2 3/8"

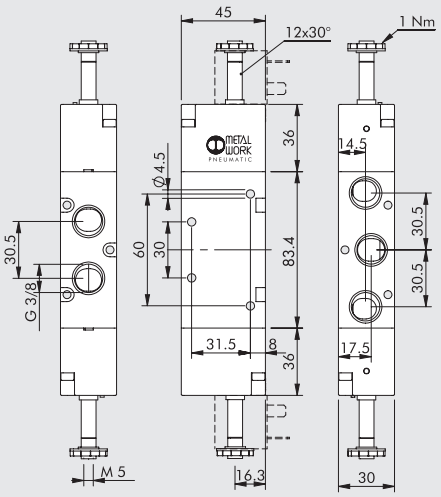

Symbol		Code	Abbrev.	Weight [g]
	❄	**70L4021200**	SOV C5 SOB OO LT	526

BISTABLE 3/2 3/8"

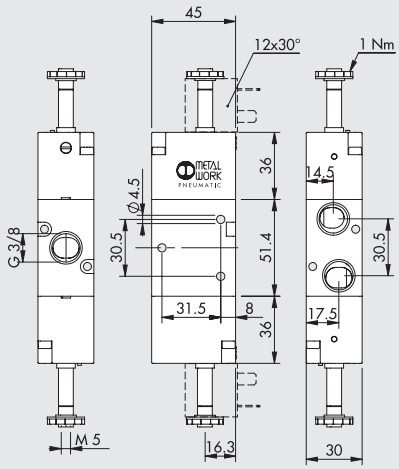

Symbol		Code	Abbrev.	Weight [g]
	❄	**70L4020100**	SOV C3 SOB OO LT	426

NOTES

ACCESSORIES

COILS AND CONNECTORS

Refer to page **B1**.60 for coils and connectors

For temperatures T <-10 ° C it is necessary to use coils side 22 mm from 5 W or 5 VA .
(see page B1.79)

ACCESSORIES: 1/8 MANIFOLDS FOR SERIES 70 PNV-SOV AND SERIES BASIC VALVES

MANIFOLD WITH 2 TO 7 POSITIONS + FITTINGS



Code	Description	Weight [g]
0221000200	CSA-18-02	70
0221000300	CSA-18-03	99
0221000400	CSA-18-04	131
0221000500	CSA-18-05	162
0221000600	CSA-18-06	192
0221000700	CSA-18-07	229

BRACKET SET H120



Code	Description	Weight [g]
0221000190	CSA-18-OO	309

BRACKET SET H60



Code	Description	Weight [g]
0221000191	CSA-18-OC	213

BRACKET SET H30



Code	Description	Weight [g]
0221000192	CSA-18-OE	181

ACCESSORIES: 1/4 MANIFOLDS FOR SERIES 70 PNV-SOV AND SERIES BASIC VALVES

MANIFOLD WITH 2 TO 7 POSITIONS + FITTINGS



Code	Description	Weight [g]
0222000200	CSA-14-02	89
0222000300	CSA-14-03	131
0222000400	CSA-14-04	174
0222000500	CSA-14-05	213
0222000600	CSA-14-06	252
0222000700	CSA-14-07	328

BRACKET SET H120



Code	Description	Weight [g]
0222000190	CSA-14-OO	338

BRACKET SET H60



Code	Description	Weight [g]
0222000191	CSA-14-OC	242

BRACKET SET H30



Code	Description	Weight [g]
0222000192	CSA-14-OE	209

ACCESSORIES: MANIFOLD BASES FOR SERIES 70 PNV-SOV AND SERIES BASIC VALVES

MODULAR BASES FOR SERIES 70 SOV-PNV VALVES

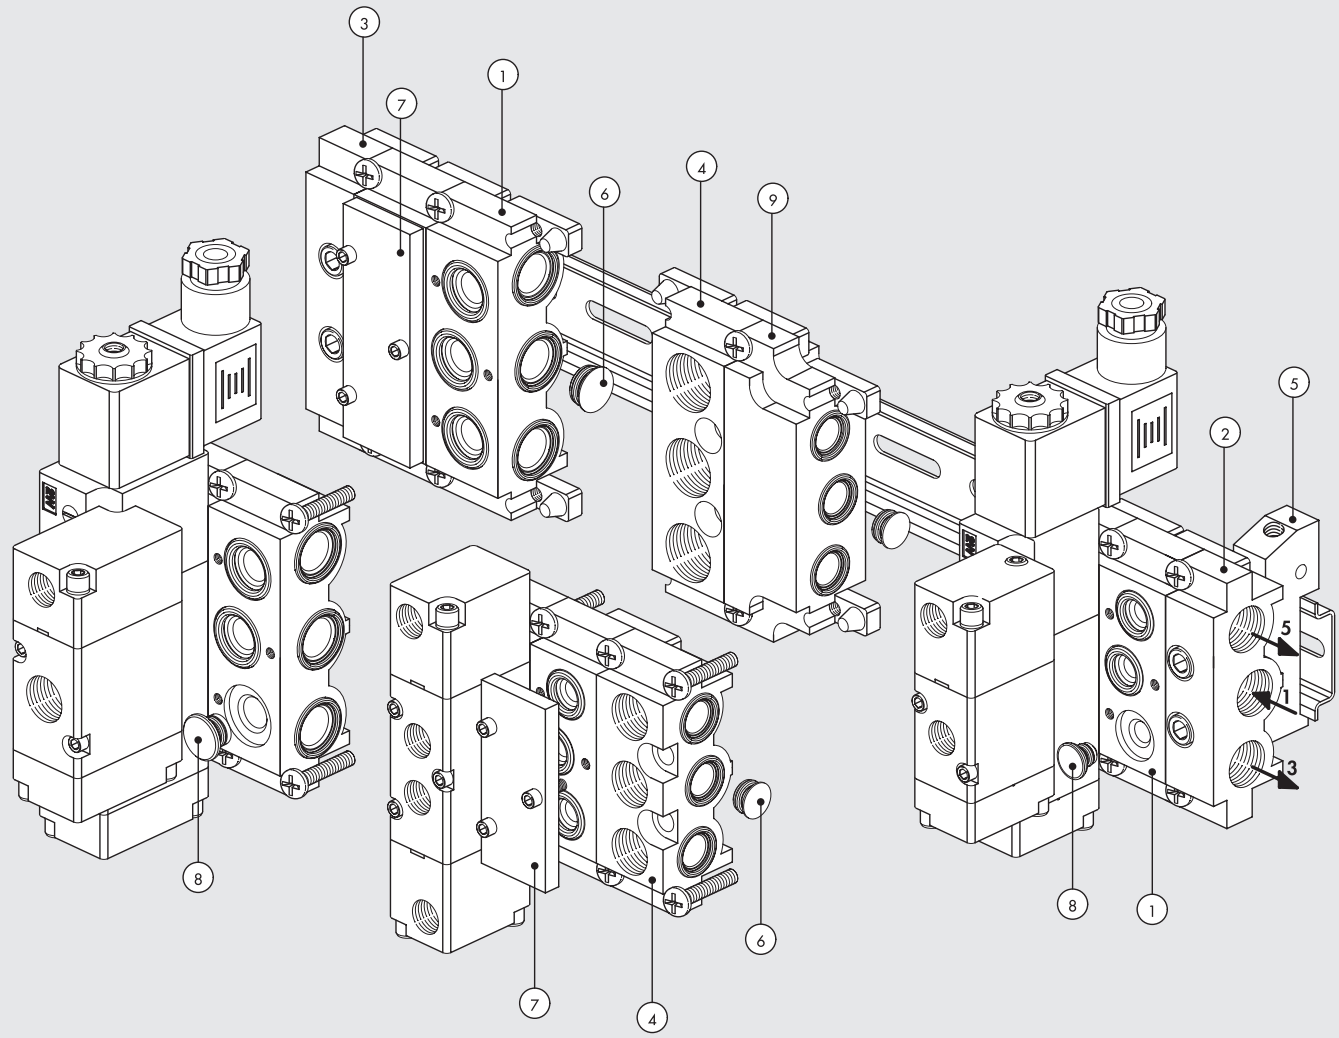

Note: Tightening torque for M4 base screws: 1.5 Nm
Tightening torque for M3 valve screws: 0.8 Nm

	1/8"	1/4"	
Reference	Code	Code	Description
①	0226004150	0226005150	Modular manifold base
②	0226004201	0226005201	End plate without OR
③	0226004200	0226005200	End plate with OR
④	0226004300	0226005300	Intermediate part for upper feed
⑤	0226004600	0226005600	Adapter for omega bar
⑥	0226004000	0226005000	Intermediate diaphragm
⑦	0226004500	0226005500	Blanking plate
⑧	0226004001	0226005001	3/2 cap
⑨	0226006600	–	Dimensional adapter

METAL WORK PNEUMATIC

① MODULAR BASE MANIFOLD

1/8″



1/4″

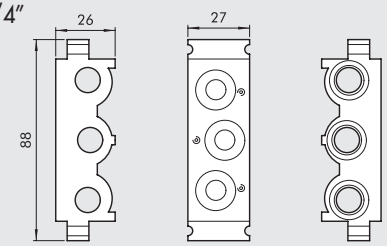

Code	Description	Weight [g]
0226004150	Modular base MANIFOLD 1/8″	110
0226005150	Modular base MANIFOLD 1/4″	131

② END PLATE WITHOUT OR

1/8″

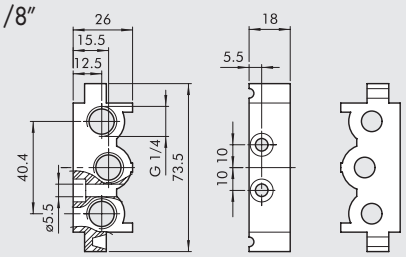

1/4″

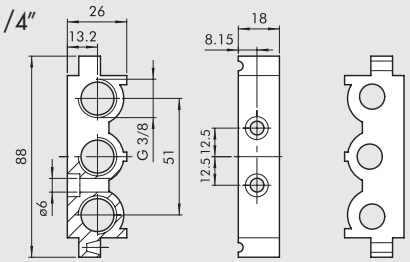

Code	Description	Weight [g]
0226004201	End plate without OR 1/8″	52
0226005201	End plate without OR 1/4″	57

③ END PLATE WITH OR

1/8″

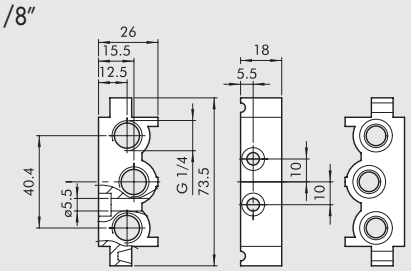

1/4″

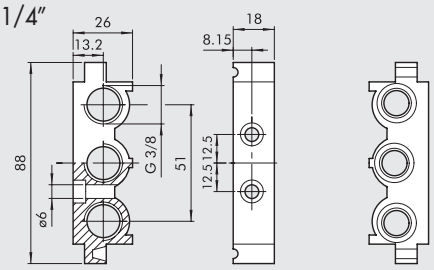

Code	Description	Weight [g]
0226004200	End plate with OR 1/8″	74
0226005200	End plate with OR 1/4″	80

④ INTERMEDIATE PART FOR UPPER FEED

1/8″

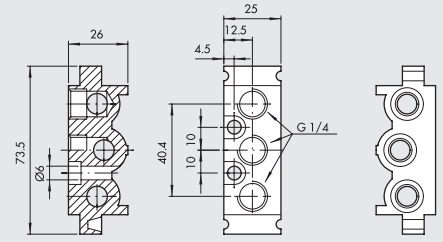

1/4″

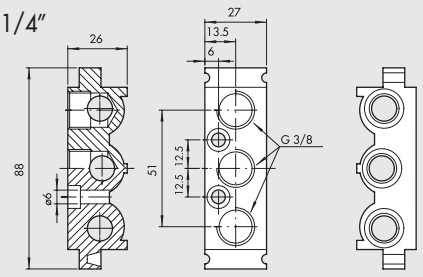

Code	Description	Weight [g]
0226004300	Intermediate part for upper feed 1/8″	93
0226005300	Intermediate part for upper feed 1/4″	109

⑤ ADAPTER FOR OMEGA BAR BASES (DIN EN 50022)

1/8″



1/4″



Code	Description	Weight [g]
0226004600	Adapter 1/8″	46
0226005600	Adapter 1/4″	46

N.B.: Also for multiple bases

⑥ INTERMEDIATE DIAPHGRAM

1/8″



1/4″



Code	Description	Weight [g]
0226004000	Intermediate diaphgram 1/8″	2
0226005000	Intermediate diaphgram 1/4″	3

⑦ BLANKING PLATE FOR UNUSED POSITIONS

1/8″



1/4″



Code	Description	Weight [g]
0226004500	Blanking plate 1/8″	23
0226005500	Blanking plate 1/4″	29

⑧ PLUG FOR 3/2

1/8″



1/4″



Code	Description	Weight [g]
0226004001	Blanking plate 3/2 1/8″	2
0226005001	Blanking plate 3/2 1/4″	4

⑨ DIMENSIONAL ADAPTER 1/8″ – 1/4″

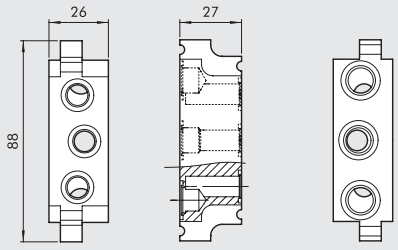

Code	Description	Weight [g]
0226006600	Adapter 1/8″, 1/4″	177

NOTES

ACCESSORIES: MULTIPLE BASES FOR SERIES 70 PNV-SOV VALVES

MULTIPLE BASE 1/8"

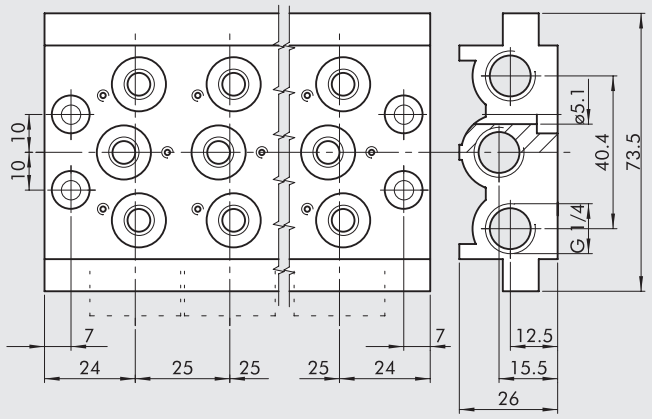

Code	Description	Abbrev.	Weight [g]
0223000201	2-position base	CVM-18-02	236
0223000301	3-position base	CVM-18-03	321
0223000401	4-position base	CVM-18-04	407
0223000501	5-position base	CVM-18-05	494
0223000601	6-position base	CVM-18-06	587
0223000701	7-position base	CVM-18-07	711
0223000801	8-position base	CVM-18-08	760
0223000901	9-position base	CVM-18-09	842
0223001001	10-position base	CVM-18-10	923

MULTIPLE BASE 1/4"

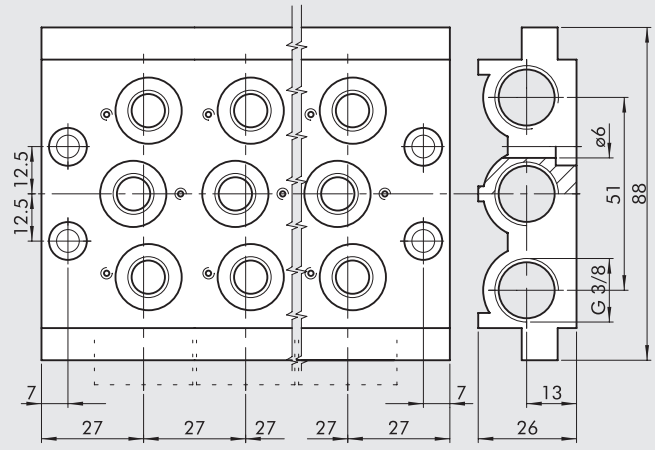

Code	Description	Abbrev.	Weight [g]
0224000201	2-position base	CVM-14-02	296
0224000301	3-position base	CVM-14-03	406
0224000401	4-position base	CVM-14-04	515
0224000501	5-position base	CVM-14-05	624
0224000601	6-position base	CVM-14-06	733
0224000701	7-position base	CVM-14-07	845
0224000801	8-position base	CVM-14-08	956
0224000901	9-position base	CVM-14-09	1055
0224001001	10-position base	CVM-14-10	1086

GASKET KIT



Code	Description	Weight [g]
0226004701	Gasket kit for 1/8" base	5
0226005701	Gasket kit for 1/4" base	5

VALVES SERIES 70 ON BASE

The series 70 valves on base, available in the air- and solenoid-actuated versions, is an excellent clean solution for use when it is necessary to intervene on the valves without disconnecting the pipes.
Here, the inlet, output and utility ports are in the base.

TECHNICAL DATA

Operating pressure:		
• monostable and bistable differential	bar	2.5 to 10
• bistable	bar	1 to 10
• pilot-assisted	bar	Vacuum to 10
Minimum pilot pressure	bar	2.5
Operating temperature range	°C	-10 to +60
Nominal diameter	mm	5
Conductance C	Nl/min · bar	107.69
Critical ratio b	bar/bar	0.29
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	320
Flow rate at 6 bar ΔP 1 bar	Nl/min	450
Maximum torque coil nut	Nm	1
Tightening torque M3 valve / base screws	Nm	0.8

COMPONENTS

① VALVE BODY: Aluminium
② CONTROL/BASE: Hostaform®
③ SPOOL: chemically nickel-plated aluminium
④ DISTANCE PLATES: plastic
⑤ GASKETS: NBR
⑥ PISTONS: Hostaform®
⑦ PISTON GASKET: NBR
⑧ FILTER: sintered Bronze
⑨ SPRINGS: special steel
⑩ OPERATOR: Brass pipe – Stainless steel core

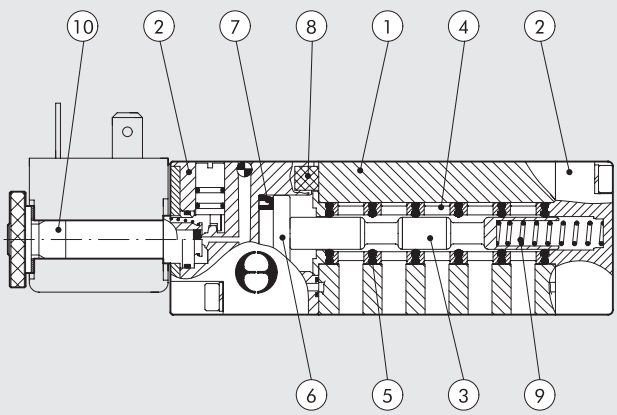

FLOW CHART

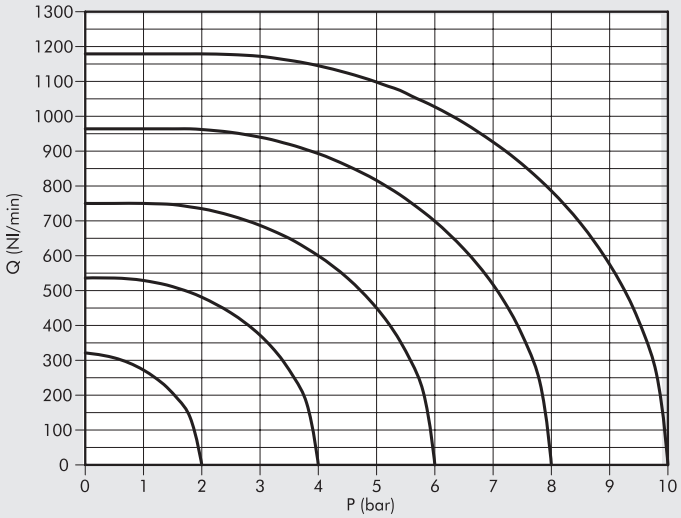

METAL WORK PNEUMATIC

MULTI-PURPOSE BASE FOR VALVES SERIES 70 ON BASE

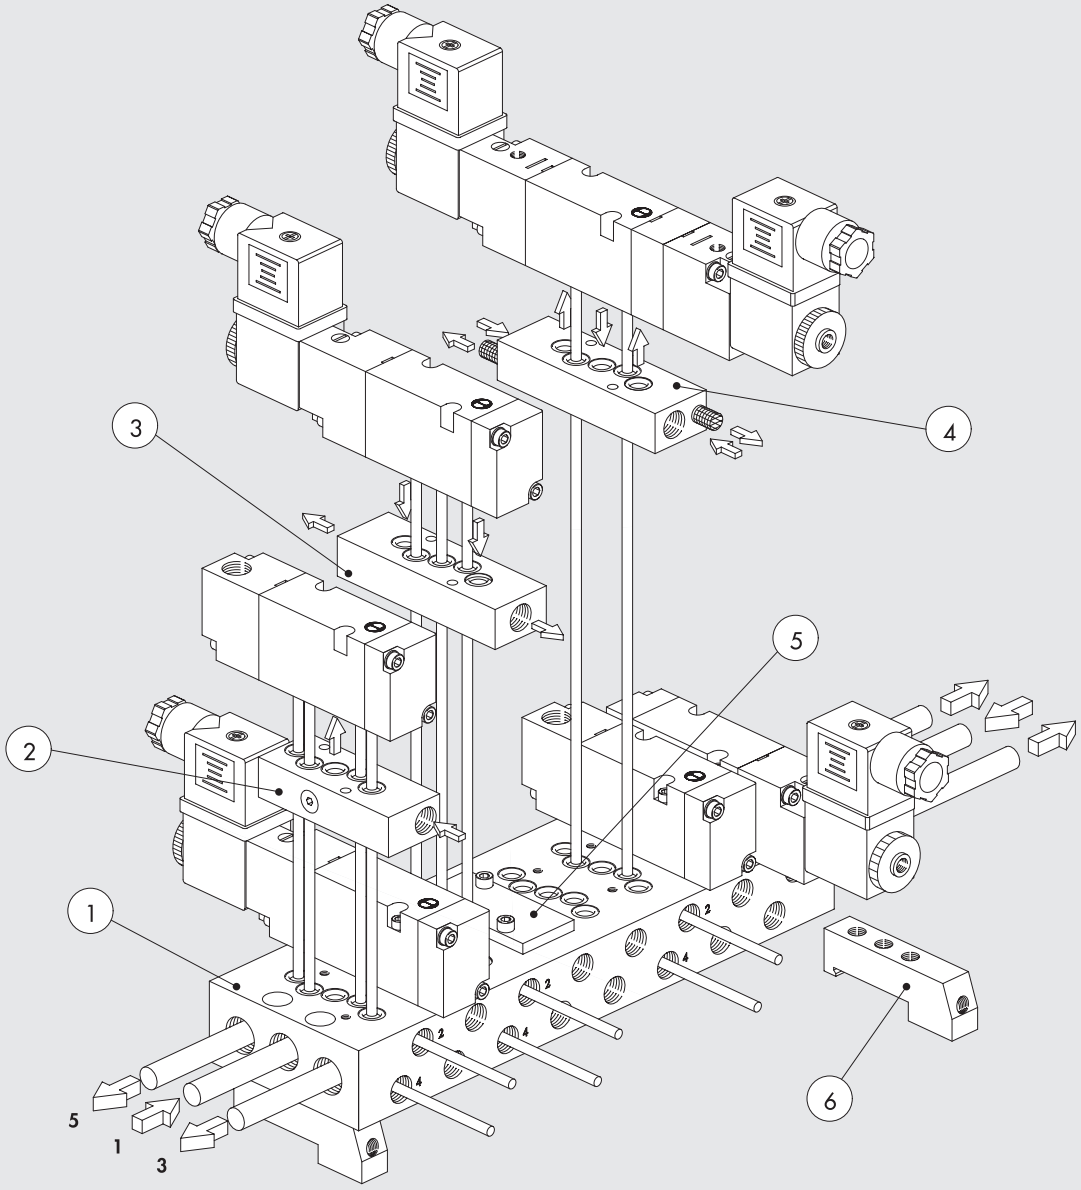

Reference	Code	Description
①	**0223100201**	2-position base 1/8 on base
	0223100401	4-position base 1/8 on base
	0223100601	6-position base 1/8 on base
	0223100801	8-position base 1/8 on base
	0223101001	10-position base 1/8 on base
②	**0223106301**	Separate feed kit
③	**0223106303**	Exhaust regulation kit
④	**0223106302**	Exhaust feed kit
⑤	**0223106500**	Blanking plate
⑥	**0226004600**	Adapter for omega bar

SYNOPTIC, SIZES AND VERSIONS

P N V FAMILY	B DIMENSIONS	5 FUNCTION	P N OPERATORS 14	S RESETTING (12)	O O FURTHER DETAILS
PNV pneumatic **SOV** elettro-pneumatic	**B** 1/8" on base	**5** 5/2 **6** 5/3	**PN** pneumatic **SO** solenoid **SE** solenoid assisted	**S** mechanical springs **B** bistable **D** differential	**OO** no indication **CC** closed centres **OC** open centres **PC** pressure centres

VALVES, SERIES 70, PNEUMATIC, ON BASE

TECHNICAL DATA

Operating pressure	bar	Vacuum to 10
Minimum actuation pressure:		
• monostable and bistable differential	bar	2.5
• bistable	bar	1
Operating temperature range	°C	-10 to +60
Nominal diameter	mm	5
Conductance C	Nl/min · bar	107.69
Critical ratio b	bar/bar	0.29
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	320
Flow rate at 6 bar ΔP 1 bar	Nl/min	450
TRA / TRR monostable at 6 bar	ms	6/15
TRA / TRR bistable at 6 bar	ms	7/7
Tightening torque M3 valve / base screws	Nm	0.8

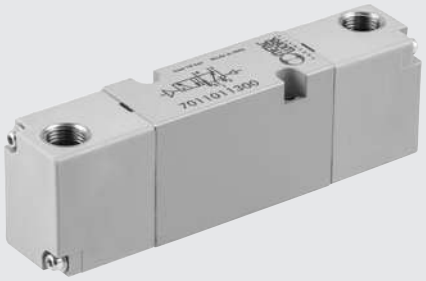

MONOSTABLE 5/2



Symbol	Code	Abbrev.	Weight [g]
	**7011011100**	PNV B5 PNS OO	125

BISTABLE 5/2



Symbol	Code	Abbrev.	Weight [g]
	**7011011200**	PNV B5 PNB OO	136
	7011011300	PNV B5 PND OO	142

MONOSTABLE 5/3



Symbol	Code	Abbrev.	Weight [g]
	7011012100	PNV B6 PNS CC	164
	7011012200	PNV B6 PNS OC	164
	7011012300	PNV B6 PNS PC	164

NOTES

VALVES SERIES 70, SOLENOID/PNEUMATIC ON BASE

TECHNICAL DATA

Operating pressure:		
• monostable and bistable differential	bar	2.5 to 10
• bistable	bar	1 to 10
• pilot-assisted	bar	Vacuum to 10
Minimum pilot pressure	bar	2.5
Operating temperature range	°C	-10 to +60
Nominal diameter	mm	5
Conductance C	Nl/min · bar	107.69
Critical ratio b	bar/bar	0.29
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	320
Flow rate at 6 bar ΔP 1 bar	Nl/min	450
TRA / TRR monostable at 6 bar	ms	15 / 35
TRA / TRR bistable at 6 bar	ms	20 / 20
Electrical technical data		
Coil voltage values		12; 24VDC - 24; 110; 220VAC 50/60Hz
Power		2 W (DC) 3.5VA (AC)
Voltage tolerance	%	-10 to +15
Insulation class		F 155
Maximum coil nut torque	Nm	1
Tightening torque M3 valve / base screws	Nm	0.8

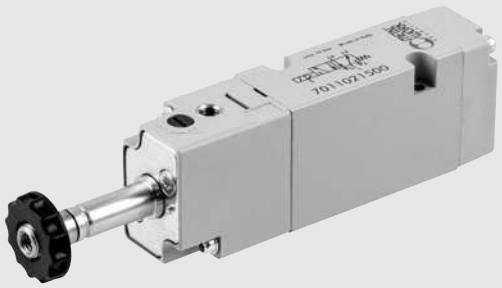

MONOSTABLE 5/2

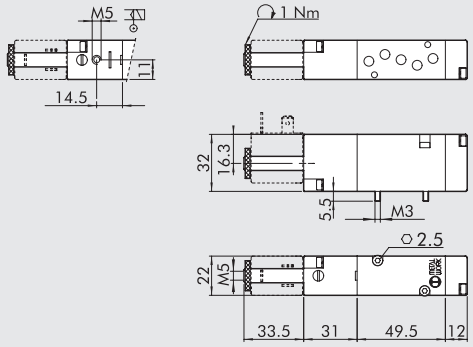

Symbol	Code	Abbrev.	Weight [g]
	7011021100	SOV B5 SOS OO	142
	7011021500	SOV B5 SES OO	143

BISTABLE 5/2

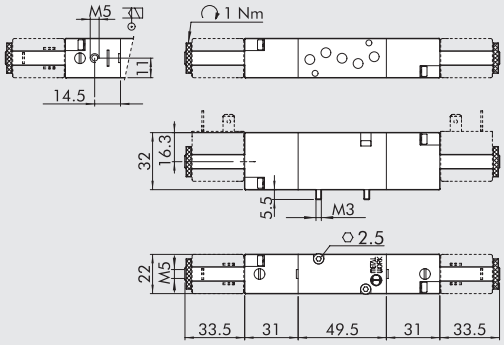

Symbol	Code	Abbrev.	Weight [g]
	7011021200	SOV B5 SOB OO	174
	7011021300	SOV B5 SOD OO	180
	7011021600	SOV B5 SEB OO	174

MONOSTABLE 5/3

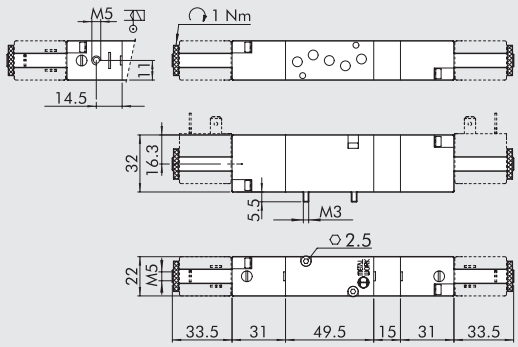

Symbol	Code	Abbrev.	Weight [g]
	7011022100	SOV B6 SOS CC	204
	7011022200	SOV B6 SOS OC	204
	7011022300	SOV B6 SOS PC	204
	7011022400	SOV B6 SES CC	202
	7011022500	SOV B6 SES OC	202
	7011022600	SOV B6 SES PC	202

ACCESSORIES

Refer to page **B1**.60 for coils and connectors

ACCESSORIES: MULTIPLE BASES

① MULTIPLE BASE

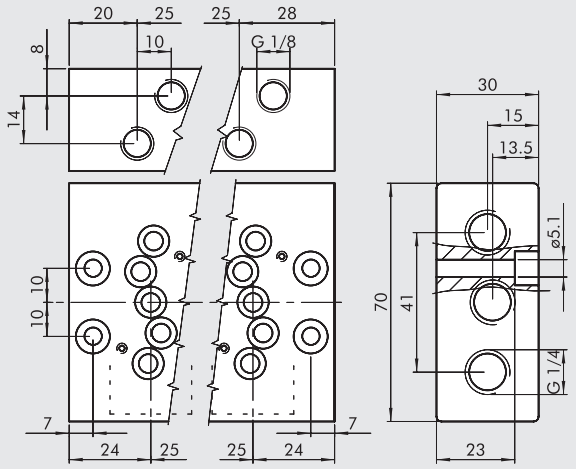

Code	Description	Weight [g]
0223100201	2-position base 1/8 on base	341
0223100401	4-position base 1/8 on base	591
0223100601	6-position base 1/8 on base	855
0223100801	8-position base 1/8 on base	1093
0223101001	10-position base 1/8 on base	1352

② SEPARATE FEED KIT

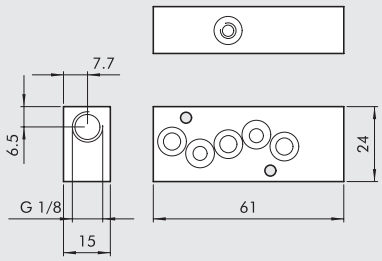

Code	Description	Weight [g]
0223106301	Separate feed kit 1/8	65

③ EXHAUST REGULATION KIT

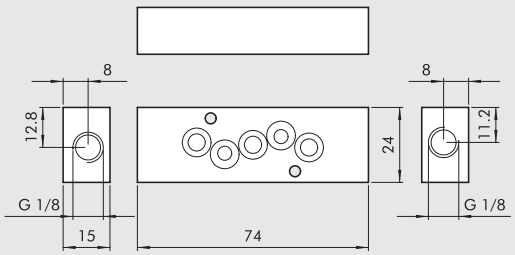

Code	Description	Weight [g]
0223106303	Exhaust regulation kit 1/8	75

④ EXHAUST FEED KIT

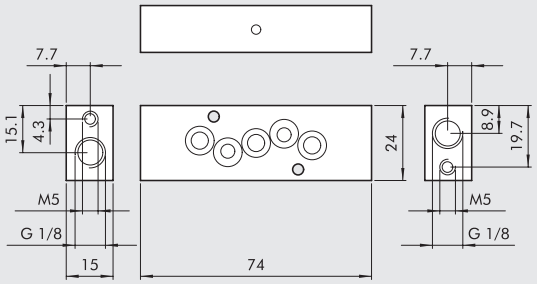

Code	Description	Weight [g]
0223106302	Exhaust feed kit 1/8	75

⑤ BLANKING PLATE



Code	Description	Weight [g]
0223106500	Blanking plate 1/8	15

⑥ ADAPTER FOR BAR OMEGA (DIN EN 50022)



Code	Description	Weight [g]
0226004600	Adapter for bar omega 1/8"	46

VALVES NAMUR

METAL WORK PNEUMATIC

TECHNICAL DATA

Operating pressure:		
• monostable, electric	bar	2.5 to 10
• bistable, electric	bar	1to10
• pilot-assisted, electric	bar	Vacuum to 10
Minimum actuation pressure:		
• monostable, pneumatic	bar	2.5
• bistable, pneumatic	bar	1
Operating temperature range	°C	–10 to +60
Nominal diameter	mm	7.5
Conductance C	Nl/min · bar	264.26
Critical ratio b	bar/bar	0.27
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	750
Flow rate at 6 bar ΔP 1 bar (0.1 Mpa - 14.5 psi)	Nl/min	1100
Response time at 6 bar:		
• TRA/TRR monostable, pneumatic at 6 bar	ms	7 / 15
• TRA/TRR bistable, pneumatic at 6 bar	ms	7 / 7
• TRA/TRR monostable electric at 6 bar	ms	19 / 45
• TRA/TRR bistable electric at 6 bar	ms	21 / 21
Tightening torque for M5 valve / base screws	Nm	3 - 4
Compatibility with oils		See **chapter Z1**

SYNOPTIC, SIZES AND VERSIONS

P N V	A	5	P N	S	O O
FAMILY	**DIMENSIONS**	**FUNCTION**	**OPERATORS 14**	**RESETTING (12)**	**FURTHER DETAILS**
PNV pneumatic	**A** NAMUR	**5** 5/2	**PN** pneumatic	**S** mechanical springs	**OO** no indication
SOV electro-pneumatic		**4** 4/2	**SO** solenoid	**B** bistable	**NC** normally closed

COMPONENTS

① VALVE BODY: Aluminium
② CONTROL/BASE: Hostaform®
③ SPOOL: chemically nickel-plated aluminium
④ DISTANCE PLATES: plastic
⑤ GASKETS: NBR nitrile rubber
⑥ PISTONS: Hostaform®
⑦ PISTON GASKET: NBR nitrile rubber
⑧ INTERFACE GASKETS: NBR nitrile rubber
⑨ SPRINGS: special steel
⑩ OPERATOR: Brass pipe – Stainless steel core

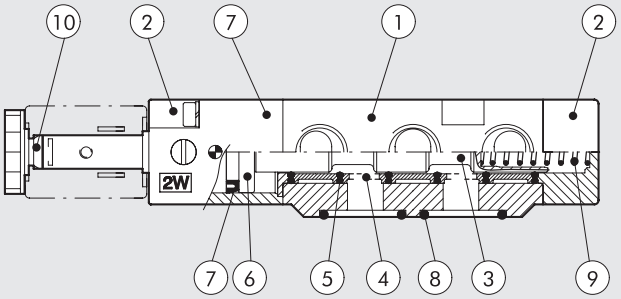

FUNCTIONING DIAGRAM 4/2 NAMUR VALVE

During the piston retraction stage, the air for chamber A is taken from the air leaving chamber B. This prevents the dirty air from getting in from the outside enviroment.

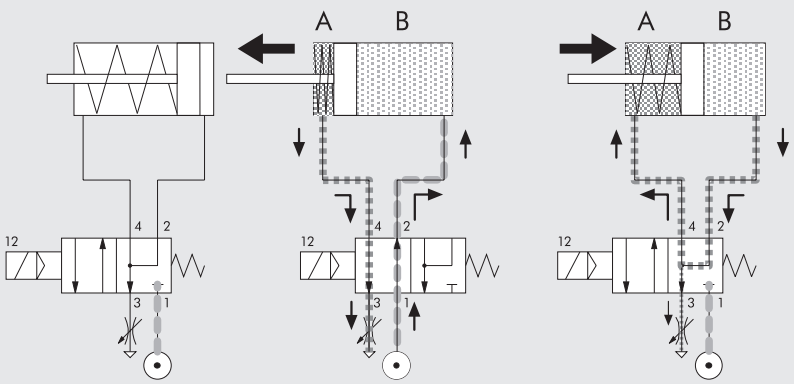

MONOSTABLE, PNEUMATIC 4/2

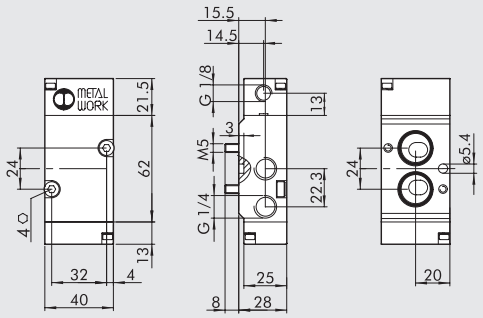

Symbol	Code	Abbrev.	Weight [g]
	7021010110	PNV A4 PNS NC	208

BISTABLE, PNEUMATIC 4/2

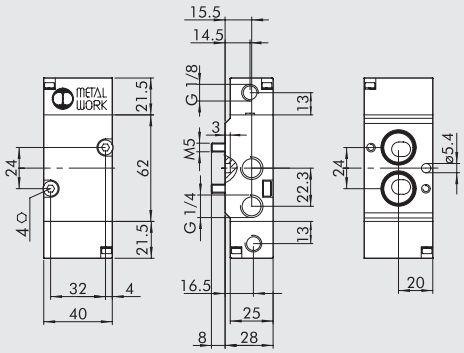

Symbol	Code	Abbrev.	Weight [g]
	7021010210	PNV A4 PNB OO	216

MONOSTABLE, SOLENOID/PNEUMATIC 4/2

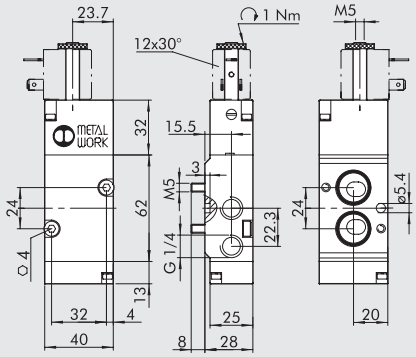

Symbol	Code	Abbrev.	Weight [g]
	7021020110	SOV A4 SOS NC	234

BISTABLE, SOLENOID/PNEUMATIC 4/2

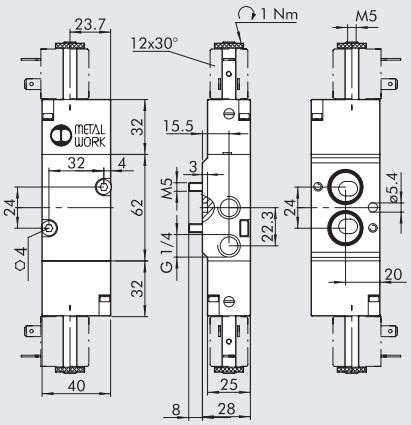

Symbol	Code	Abbrev.	Weight [g]
	7021020210	SOV A4 SOB OO	270

MONOSTABLE, PNEUMATIC 5/2

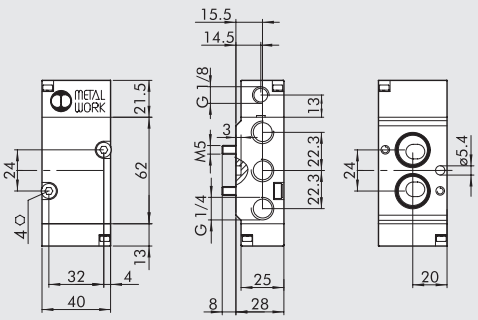

Symbol	Code	Abbrev.	Weight [g]
	7021010100	PNV A5 PNS OO	208

BISTABLE, PNEUMATIC 5/2

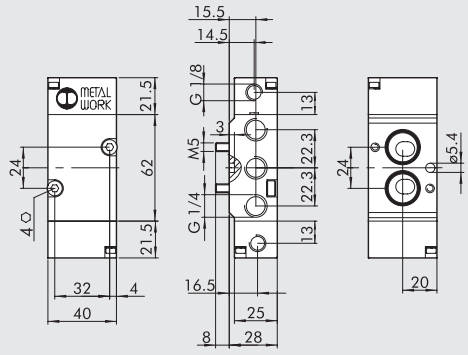

Symbol	Code	Abbrev.	Weight [g]
	7021010200	PNV A5 PNB OO	216

MONOSTABLE, SOLENOID/PNEUMATIC 5/2

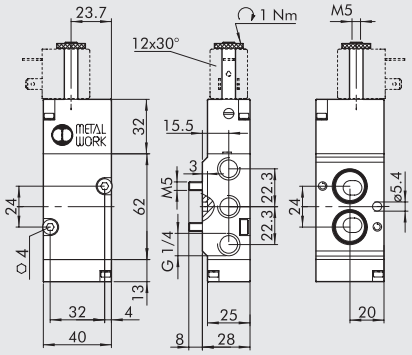

Symbol	Code	Abbrev.	Weight [g]
	7021020100	SOV A5 SOS OO	234

BISTABLE, SOLENOID/PNEUMATIC 5/2

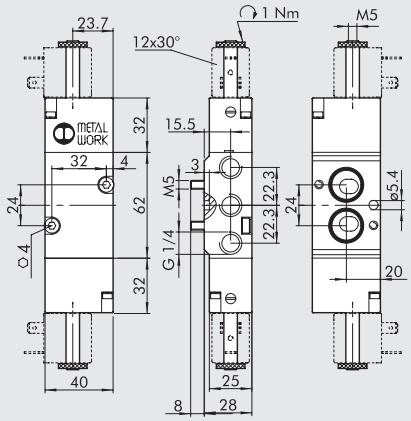

Symbol	Code	Abbrev.	Weight [g]
	7021020200	SOV A5 SOB OO	270

ACCESSORIES FOR NAMUR VALVES SOV, SOLENOID/PNEUMATIC

Refer to page **B1**.60 for coils and connectors

NOTES

VALVES SERIES BASIC

The valves in the BASIC series are a numerically-reduced selection of some types of the most commonly used solenoid valves.
They come in sizes 1/8" and 1/4" and in the 3/2 monostable, 5/2 monostable and 5/2 bistable versions.
Some production processes have been simplified, without affecting product quality and performance.
The body is made of anodized aluminium (without painting) and controls are in dark grey technopolymer.
BASIC valves can be assembled with accessories of other families of valves, in particular with 22 mm coils, a 8 mm hole and related connectors, modular bases and the multi-position connectors of the series 70 valves.

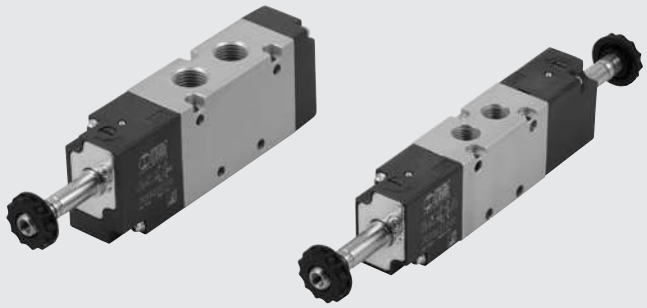

TECHNICAL DATA		1/8"	1/4"
Operating pressure:			
• monostable	bar	2.5 to 10	
• bistable	bar	1 to 10	
Operating temperature range	°C	–10 to +60	
Nominal diameter	mm	5	7.5
Conductance C	Nl/min · bar	121.43	264.26
Critical ratio b	bar/bar	0.32	0.27
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	400	750
Flow rate at 6 bar ΔP 1 bar	Nl/min	550	1100
TRA / TRR monostable at 6 bar	ms	15/35	19/45
TRA / TRR bistable at 6 bar	ms	20/20	21/21
Coil voltage values		12; 24 VDC - 24; 110; 220V AC 50/60Hz	
Power		2 W (DC) 3.5VA (AC)	
Voltage tolerance	%	-10 to +15	
Insulation class		F 155	
Maximum coil nut torque	Nm	1	
Hand operator		Bistable	
Installation		In any position (vertical assembly is not recommended for bistable valves subjected to vibration)	
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous	
Maximum coil nut torque	Nm	1	
Compatibility with oils		See **chapter Z1**	

COMPONENTS

① VALVE BODY: anodized aluminium
② CONTROL/END CAP: plastic
③ SPOOL: chemically nickel-plated aluminium
④ DISTANCE PLATES: plastic
⑤ GASKETS: NBR
⑥ PISTONS: Hostaform®
⑦ PISTON GASKET: NBR
⑧ SPRINGS: special steel
⑨ OPERATOR: Brass pipe - Stainless steel core

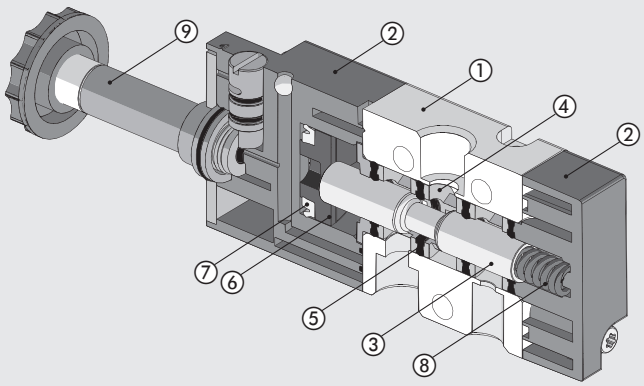

FLOW CHARTS

VALVES SERIES BASIC 1/8”

Flow rates

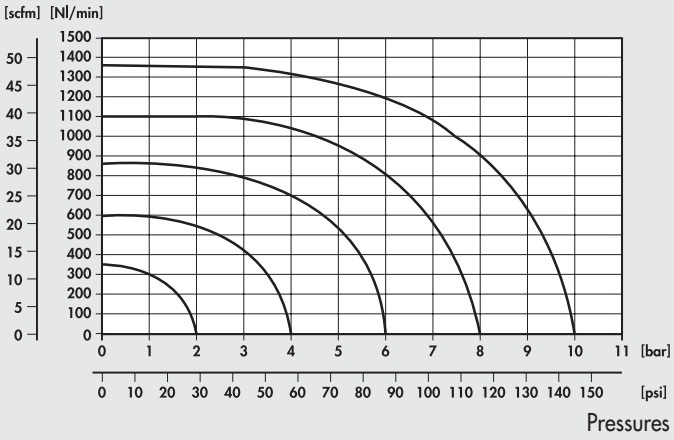

VALVES SERIES BASIC 1/4”

Flow rates

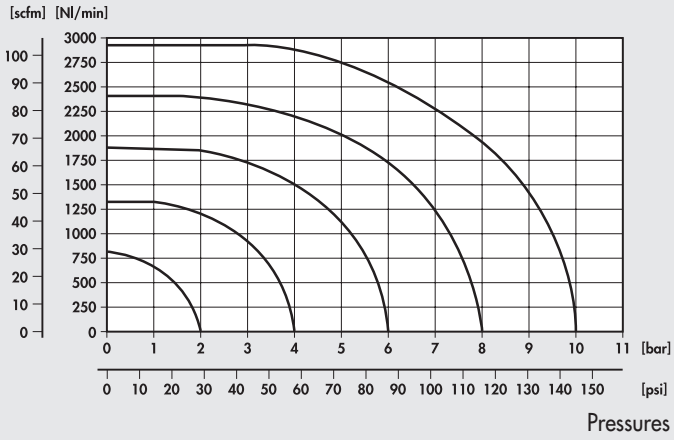

VALVES SERIES BASIC, 1/8”

MONOSTABLE 3/2 NC 1/8”

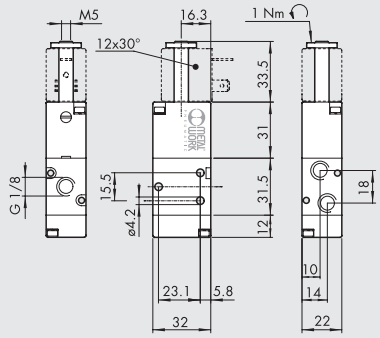

Symbol	Code	Abbrev.	Weight [g]
	7090020200	ELPN 1/8 3/2 MON NC	100

MONOSTABLE 5/2 1/8”

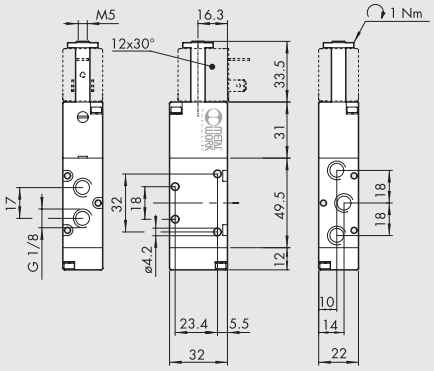

Symbol	Code	Abbrev.	Weight [g]
	7090021100	ELPN 1/8 5/2 MON	128

BISTABLE 5/2 1/8”

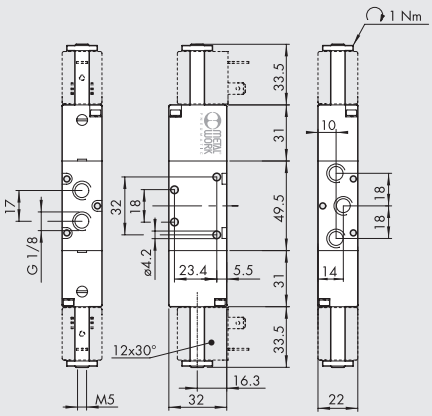

Symbol	Code	Abbrev.	Weight [g]
	7090021200	ELPN 1/8 5/2 BIS	160

NOTES

VALVES SERIES BASIC, 1/4”

MONOSTABLE 3/2 NC 1/4”

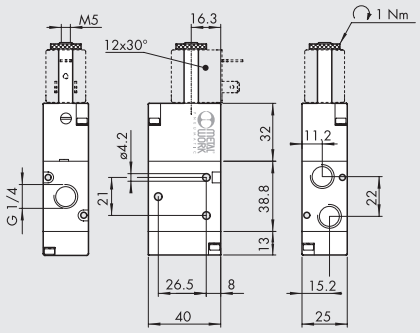

Symbol	Code	Abbrev.	Weight [g]
	**7091020200**	ELPN 1/4 3/2 MON NC	152

MONOSTABLE 5/2 1/4”

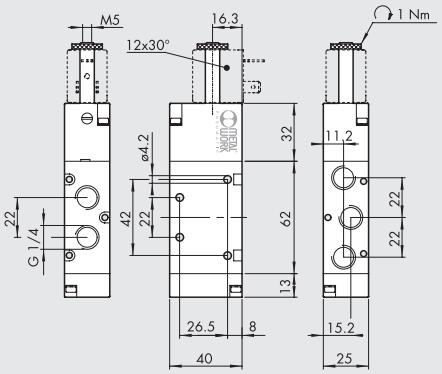

Symbol	Code	Abbrev.	Weight [g]
	**7091021100**	ELPN 1/4 5/2 MON	200

BISTABLE 5/2 1/4”

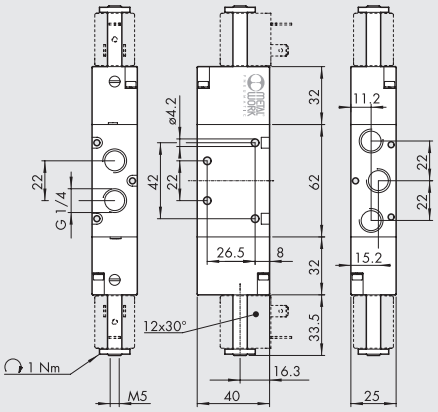

Symbol	Code	Abbrev.	Weight [g]
	**7091021200**	ELPN 1/4 5/2 BIS	236

NOTES

ACCESSORIES

MULTIPLE BASE 1/8”

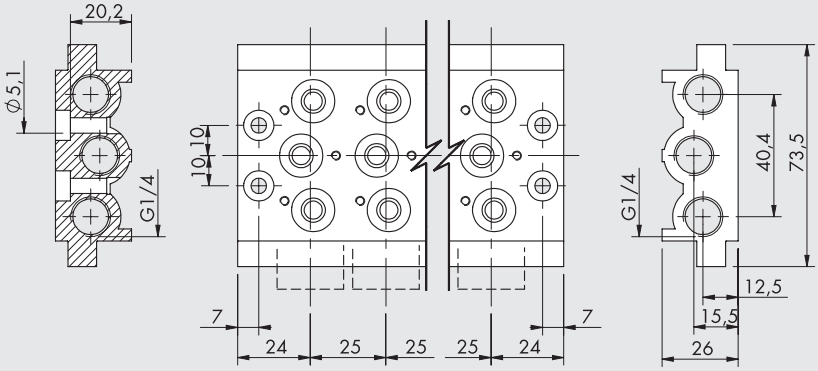

Code	Description	Weight [g]
0223200201	2 positions multiple base BASIC 1/8	236
0223200301	3 positions multiple base BASIC 1/8	321
0223200401	4 positions multiple base BASIC 1/8	407
0223200501	5 positions multiple base BASIC 1/8	494
0223200601	6 positions multiple base BASIC 1/8	587
0223200701	7 positions multiple base BASIC 1/8	711
0223200801	8 positions multiple base BASIC 1/8	760
0223200901	9 positions multiple base BASIC 1/8	842
0223201001	10 positions multiple base BASIC 1/8	923

Note: Supplied complete with screws and gaskets
Tightening torque for M5 valve / base screws: 3-4 Nm

MULTIPLE BASE 1/4"

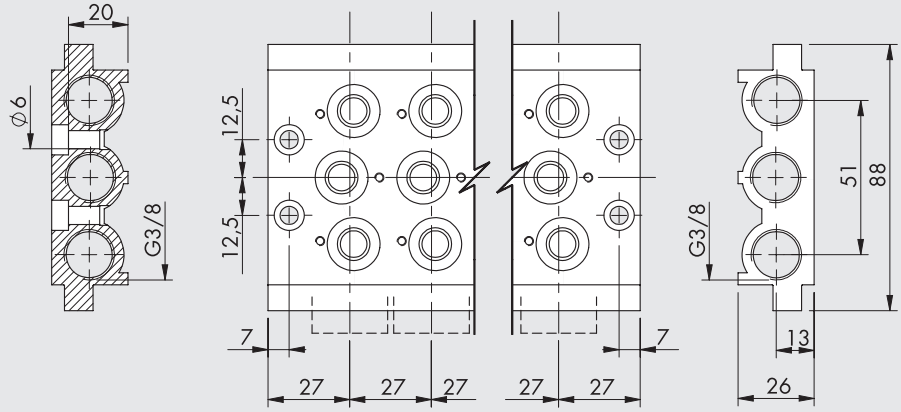

Code	Description	Weight [g]
0224200201	2 positions multiple base BASIC 1/4	296
0224200301	3 positions multiple base BASIC 1/4	406
0224200401	4 positions multiple base BASIC 1/4	515
0224200501	5 positions multiple base BASIC 1/4	624
0224200601	6 positions multiple base BASIC 1/4	733
0224200701	7 positions multiple base BASIC 1/4	845
0224200801	8 positions multiple base BASIC 1/4	956
0224200901	9 positions multiple base BASIC 1/4	1055
0224201001	10 positions multiple base BASIC 1/4	1086

Note: Supplied complete with screws and gaskets
Tightening torque for M5 valve / base screws: 3-4 Nm

GASKET KIT



Code	Description	Weight [g]
0226004701	Gasket kit for 1/8 base	5
0226005701	Gasket kit for 1/4 base	5

MANIFOLD BASES

Refer to page **B1**.44 for manifold bases

MANIFOLDS

Refer to page **B1**.43 for manifolds

COILS AND CONNECTORS

Refer to page **B1**.60 for coils and connectors

COILS AND CONNECTORS FOR SERIES 70, NAMUR AND SERIES BASIC VALVES

COILS SIDE 22 mm



- Voltage tolerance: -10% + 15%
- Insulation class: F155
- Degree of protection: IP65 DIN 40050 with connector
- Avoid prolonged exposure to atmospheric agents
- Coil temperature 100% ED: 55°C at 20°C ambient temperature
- According to Atex 2014/34/EU rule, group 2, category 3 GD
- Electrical connection DIN 43650 B-IND

Code	Abbrev.	Nominal voltage	Absorption	
			Inrush	Holding
W0215000151	Coil 22 Ø 8 BA 2W-12VDC	12Vcc	2W	2W
W0215000101	Coil 22 Ø 8 BA 2W-24VDC	24Vcc	2W	2W
W0215000111	Coil 22 Ø 8 BA 3.5VA-24VAC	24V 50/60Hz	5.3VA	3.5VA
W0215000121	Coil 22 Ø 8 BA 3.5VA-110VAC	110V 50/60Hz	5.3VA	3.5VA
W0215000131	Coil 22 Ø 8 BA 3.5VA-220VAC	220V 50/60Hz	5.3VA	3.5VA

"UL" AND "CSA" COILS 22 mm



c UL us

- Voltage tolerance: –10% to + 15%
- Insulation class: F155
- Degree of protection: IP65 EN60529 with connector
- Avoid prolonged exposure to the atmospheric agents
- Coil temperature 100% ED: 55°C at 20°C ambient temperature
- Electrical connection DIN 43650 B-IND

Code	Abbrev.	Nominal voltage	Absorption	
			Inrush	Holding
W0215000251	Coil 22 Ø 8 BA 2W-12VDC UR	12Vcc	2W	2W
W0215000201	Coil 22 Ø 8 BA 2W-24VDC UR	24Vcc	2W	2W
W0215000211	Coil 22 Ø 8 BA 3.5VA-24VAC UR	24V 50/60Hz	5.3VA	3.5VA
W0215000221	Coil 22 Ø 8 BA 3.5VA-110VAC UR	110V 50/60Hz	5.3VA	3.5VA
W0215000231	Coil 22 Ø 8 BA 3.5VA-220VAC UR	220V 50/60Hz	5.3VA	3.5VA

CONNECTOR FOR COILS SIDE 22 mm DIN 43650 B-IND



Code	Tipo	Colour	Ø Cable
W0970510011	Standard	Black	PG9
W0970510012	LED 24V	Transparent	PG9
W0970510013	LED 110V	Transparent	PG9
W0970510014	LED 220V	Transparent	PG9
W0970510015	LED + VDR 24V	Transparent	PG9
W0970510016	LED + VDR 110V	Transparent	PG9
W0970510017	LED + VDR 220V	Transparent	PG9
W0970510070	Atex II 2 GD	Black	PG9

KIT COIL EEXM



Code	Description
0227606913	Kit for coil 30 24VDC EEXMT5 cable 3 m
0227606915	Kit for coil 30 24VDC EEXMT5 cable 5 m
0227608013	Kit for coil 30 24VAC EEXMT5 cable 3 m
0227608015	Kit for coil 30 24VAC EEXMT5 cable 5 m
0227608023	Kit for coil 30 110VAC EEXMT5 cable 3 m
0227608025	Kit for coil 30 110VAC EEXMT5 cable 5 m
0227608033	Kit for coil 30 230VAC EEXMT5 cable 3 m
0227608035	Kit for coil 30 230VAC EEXMT5 cable 5 m

Atex (2014/34/EU), IECEx and CCC certified coils: Ⓔx II 2G Ex mb IIC T4/T5 Gb
Ⓔx II 2D Ex tb IIIC T130/T95 °C Db

N.B.: Supplied complete with adapter for Ø8 mm sleeve.

N.B.: It's not possible to mount valves having these coils on bases or on manifolds, because the width of 29.5 mm is higher than the distance between the valves. Special bases can be manufactured on request.

KIT COILS SIDE 22 IP65

Code	Description
0222100100	Kit for coils 22 - IP65

Improved IP65 protection, even after prolonged exposure to atmospheric agents.
Applicable to valves with a technopolymer control.

24VDC ENERGY SAVING CONNECTOR

The 24VDC energy-saving connector type DIN 43650 B-IND for coils, side 22 mm, thanks to an internal electronic board, reduces by 65% the power consumed by the solenoid valve during the supply phase. Energy consumption is reduced by a 'speed-up & holding' control. This technology consists of supplying the electro-pilot with full power for 150 ms and subsequently reducing it via a PWM control that regulates the current circulating in the coil. The full power supplied for a few milliseconds guarantees high performance and a quick and safe valve switching; energy saving is hence guaranteed during the holding phase by a reduction in power, thereby allowing a reduction in temperature as well.



TECHNICAL DATA

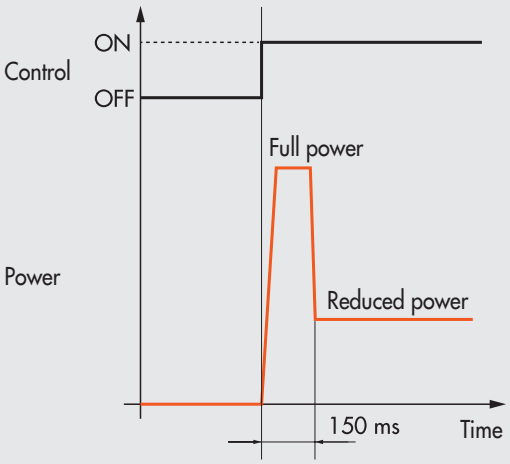

Below is a comparison of the reduction values between input power during the full power phase and the reduced power holding phase (PWM Power).

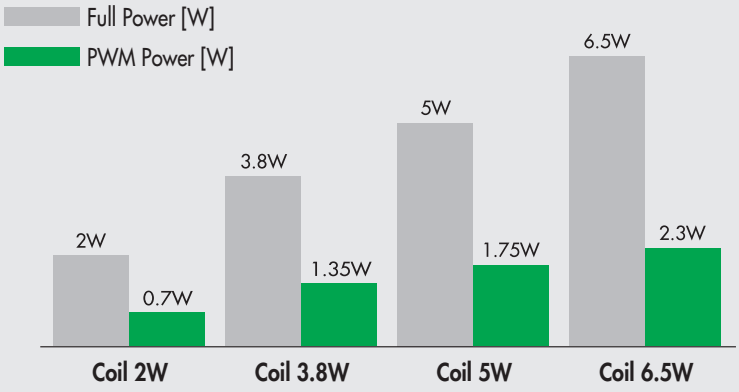

DIMENSIONS AND ORDERING CODES



Code	Description	Ø Cable	Voltage
W0970510051	24VDC energy saving connector	PG9	24VDC ±10%

N.B.: The Energy Saving Connector can be used with coils up to 6.5W

ASSEMBLY INSTRUCTIONS

The two cables (24VDC and GND) are connected to the connector via the two screw terminals (J1 and J2) on the circuit board.
The two terminals have no polarity (thanks to a diode bridge on the circuit board), making it possible to connect either positive or negative wiring of the controller without the risk of damaging the internal board.

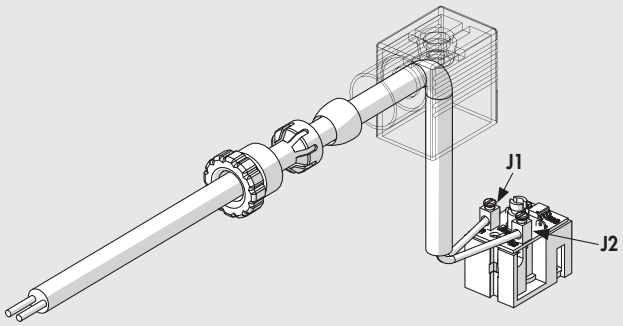

Screw terminal	Function
J1	24V or GND
J2	GND or 24V

The connector circuit board has a green LED that comes on when the coil is energised.



N.B.: For correct operation, both connector and coil need to be connected for the entire duty cycle (full power and reduced power); any electrical connection of the Energy-Saving connector to the coil during the reduced power phase **may cause the solenoid valve to be uncorrected switch**.

NOTES

10-mm SOLENOID VALVES SERIES PLT-10

METAL WORK PNEUMATIC

PLT-10 solenoid valves are the latest development in modern pneumatic design, where the main trends focus on miniaturisation, enhanced performance, reduced power and reliability.
Numerous versions are available, all with an ISO 15218 pneumatic interface. The power required to operate the PLT-10 has been greatly reduced, ranging from 0.3 to 0.8 Watts.
It is available with a LED indicating when it is active. Monostable manual control is also possible. None of the versions will get damaged if the polarity is accidentally inverted.

TECHNICAL DATA

Type		3/2 NC
Operating temperature range (Te)	°C	5 to 50
Fluid temperature (Tg)	°C	5 to 50
Fluid		Filtered, lubricated or unlubricated air
Operating life		Over 50 million cycles
Actuation response time	ms	~ 4
Weight	g	12
Voltage tolerance	ΔV	± 10 %
Max operating frequency	f	30 Hz
Switching factor	ED	100 %
Insulation class		F155
Index of protection		IP51 for PLUG-IN version
		IP65 for M8 version
Valve / base screw tightening torque	Nm	0.1 - 0.15

COMPONENTS

① TRANSPARENT COVER: PA612-transparent
② ASSEMBLY SCREWS: zinc-plated steel
③ COVER: PA66
④ PIN
⑤ MOBILE CORE OVER-STAMPING: FKM/FPM
⑥ MOBILE CORE: AISI 403F
⑦ COIL OVER-STAMPING: PA66
⑧ BODY-COIL GASKET: NBR70
⑨ ASSEMBLY SCREWS: zinc-plated steel
⑩ BODY GASKET: NBR
⑪ BODY: PA66
⑫ MANUAL GASKET: NBR (only for version with manual operated)
⑬ MANUAL CONTROL: AISI 303 (only for version with manual operated)
⑭ MANUAL SPRING: AISI 302 (only for version with manual operated)
⑮ SPRING: AISI 302
⑯ WINDING: PPS - Copper wire
⑰ FIXED CORE: AISI 430F
⑱ COIL-COVER GASKET: NBR
⑲ ELECTRONIC BOARD (only for version with electronic board)

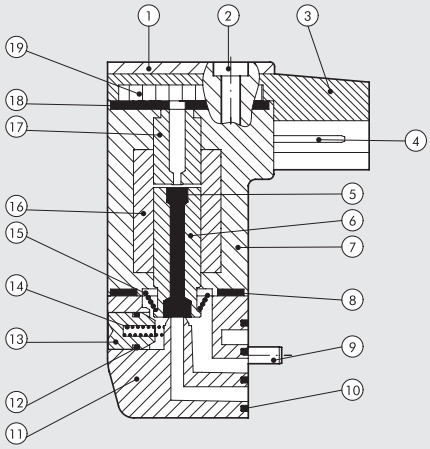

OPERATING CHART

DE-ENERGIZED



ENERGIZED



DE-ENERGIZED



PLT-10 WITH BASE AND PLUG-IN CONNECTION ON THE SAME SIDE

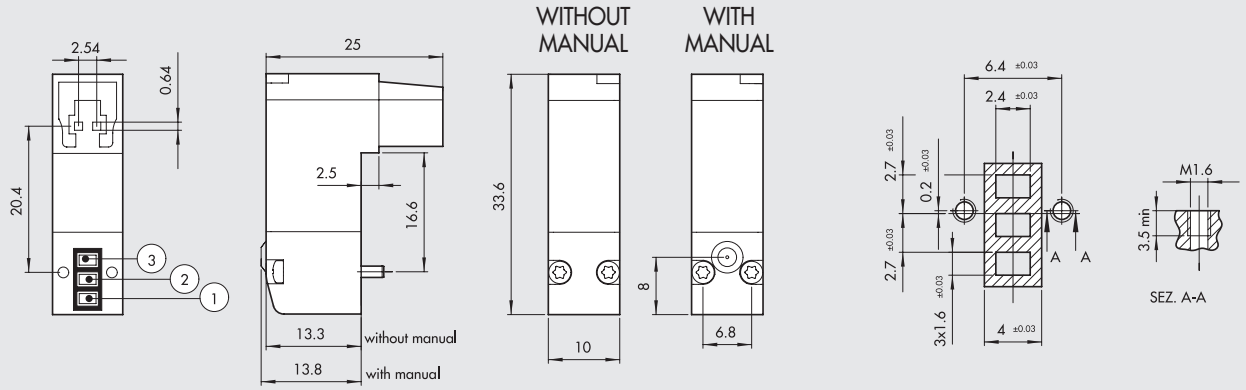

Version 3/2 NC	Code	Manual	Voltage [Volt]	Power [Watt]	Through Ø [mm]	Operating press. [bar]	Flow rate at 6 bar ΔP=1 bar [Nl/min]	Tmax coil Te 20°C a ED100% [°C]	Weight [g]
Without LED	**722113330000**	without	12 VDC	0.7	0.6	3 to 7	9	93	12
	722113330100	with	12 VDC	0.7	0.6	3 to 7	9	93	12
	722113340000	without	24 VDC	0.7	0.6	3 to 7	9	93	12
	722113340100	with	24 VDC	0.7	0.6	3 to 7	9	93	12
With LED	**722113531000**	without	12 VDC	0.8	0.6	3 to 7	9	93	12
	722113531100	with	12 VDC	0.8	0.6	3 to 7	9	93	12
	722113541000	without	24 VDC	0.8	0.6	3 to 7	9	93	12
	722113541100	with	24 VDC	0.8	0.6	3 to 7	9	93	12
SPEED-UP and LED	**722116841000**	without	24 VDC	3/0.3	1.2	2 to 7	16	51	12
	722116841100	with	24 VDC	3/0.3	1.2	2 to 7	16	51	12
	722116941000	without	24 VDC	4.2/0.7	1.2	2 to 7	30	51	12
	722116941100	with	24 VDC	4.2/0.7	1.2	2 to 7	30	51	12

PLT-10 WITH BASE AND PLUG-IN CONNECTION ON OPPOSITE SIDES

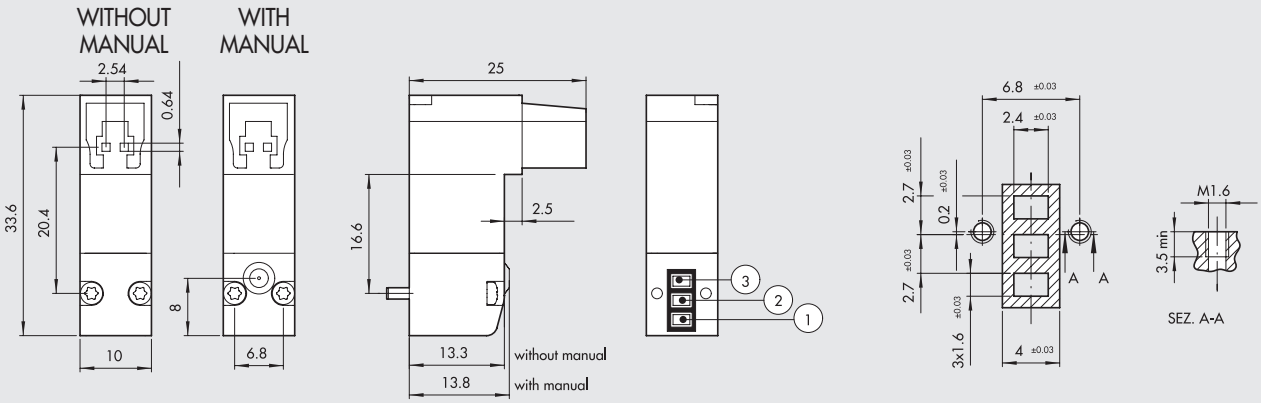

Version 3/2 NC	Code	Manuale	Voltage [Volt]	Power [Watt]	Through Ø [mm]	Operating press. [bar]	Flow rate at 6 bar ΔP=1 bar [Nl/min]	Tmax coil Te 20°C a ED100% [°C]	Weight [g]
Without LED	**722213330000**	without	12 VDC	0.7	0.6	3 to 7	9	93	12
	722213330100	with	12 VDC	0.7	0.6	3 to 7	9	93	12
	722213340000	without	24 VDC	0.7	0.6	3 to 7	9	93	12
	722213340100	with	24 VDC	0.7	0.6	3 to 7	9	93	12
With LED	**722213531000**	without	12 VDC	0.8	0.6	3 to 7	9	93	12
	722213531100	with	12 VDC	0.8	0.6	3 to 7	9	93	12
	722213541000	without	24 VDC	0.8	0.6	3 to 7	9	93	12
	722213541100	with	24 VDC	0.8	0.6	3 to 7	9	93	12
SPEED-UP e LED	**722216841000**	without	24 VDC	3/0.3	1.2	2 to 7	16	51	12
	722216841100	with	24 VDC	3/0.3	1.2	2 to 7	16	51	12
	722216941000	without	24 VDC	4.2/0.7	1.2	2 to 7	30	51	12
	722216941100	with	24 VDC	4.2/0.7	1.2	2 to 7	30	51	12

METAL WORK PNEUMATIC

PLT-10 WITH BASE AND M8 CONNECTION ON OPPOSITE SIDES

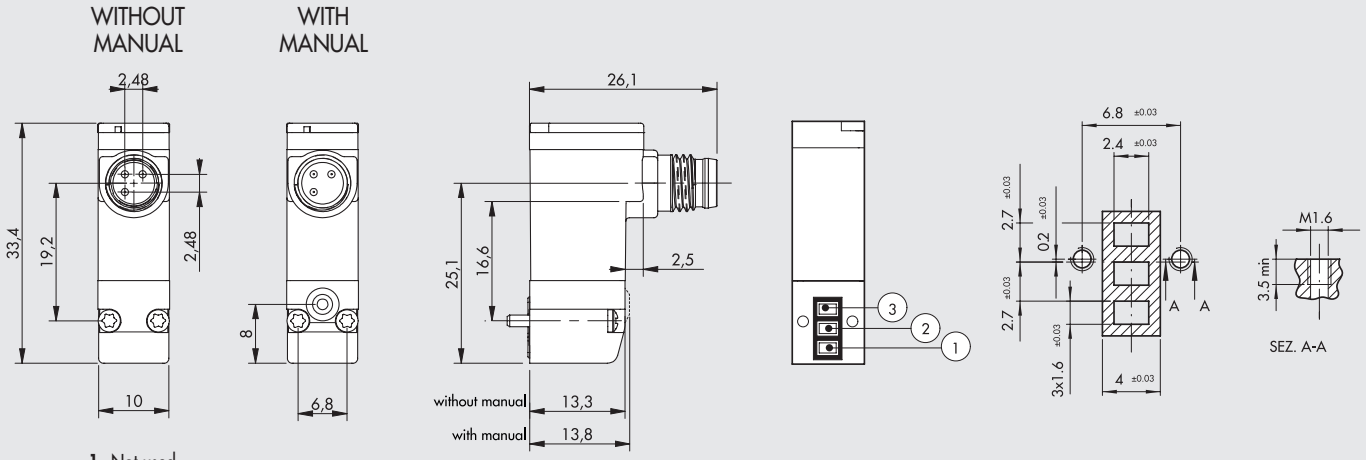

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

Version 3/2 NC		Code	Manual	Voltage [Volt]	Power [Watt]	Through Ø [mm]	Operating press. [bar]	Flow rate at 6 bar ΔP=1 bar [Nl/min]	Tmax coil Te 20°C a ED100% [°C]	Weight [g]
With LED		**7222M3541000**	without	24 VDC	0.8	0.6	3 to 7	9	93	12
		7222M3541100	with	24 VDC	0.8	0.6	3 to 7	9	93	12
SPEED-UP and LED		**7222M6941000**	without	24 VDC	4.2/0.7	1.2	2 to 7	30	51	12
		7222M6941100	with	24 VDC	4.2/0.7	1.2	2 to 7	30	51	12

KEY TO CODES

7 2 2	1	1	3	3	4	0	1	00
FAMILY	**POSITIONING**	**POWER CONNECTION**	**Ø THROUGH**	**POWER**	**VOLTAGE**	**LED**	**MANUAL CONTROL**	**VERSION**
Solenoid valves series "PLT-10"	**1** Base and connection on same side	**1** Plug-in	**3** 0.6 mm	**3** 0.7 W	**3** 12 VDC	**0** -	**0** -	**00** Standard
	2 Base and connection opposite sides		**6** 1.2 mm	**5** 0.8 W	**4** 24 VDC	**1** LED	**1** Manual monostable	
	2 Base and connection opposite sides	**M** M8x1		**8** 3/0.3 W				
				9 4.2/0.7 W				
				5 0.8 W	**4** 24 VDC	**1** LED		
				9 4.2/0.7 W				

MULTIPLE BASES FOR PLT-10

1 POSITION



+ POSITIONS

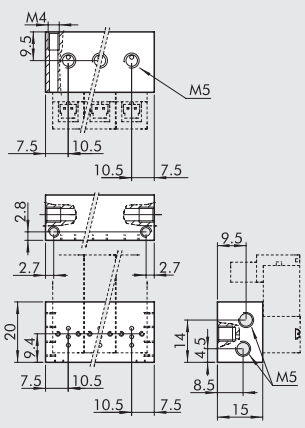

Code	Description
W0400100101	Base 1 position for PLT-10
W0400100102	Base 2 positions for PLT-10
W0400100103	Base 3 positions for PLT-10
W0400100104	Base 4 positions for PLT-10
W0400100105	Base 5 positions for PLT-10
W0400100106	Base 6 positions for PLT-10
W0400100107	Base 7 positions for PLT-10
W0400100108	Base 8 positions for PLT-10
W0400100109	Base 9 positions for PLT-10
W0400100110	Base 10 positions for PLT-10

N.B.: For multiple manifold bases with PLT-10 M8 connection, only use straight connectors code 02400A___

ACCESSORIES

PLUG-IN CONNECTOR



Code	Description
W0970512000	Mach 11 plug-in connector L = 300 mm
W0970512007	Mach 11 plug-in connector L = 1 m
W0970512002	Mach 11 plug-in connector L = 2 m

M8 STRAIGHT CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

90° M8 CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228
N.B.: cannot be used on multiple manifold bases W0400100__

M8 M - M8 F CONNECTOR

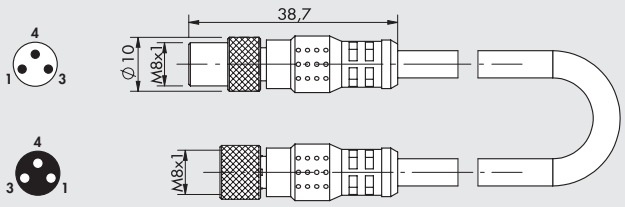

Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital OUTPUT of the EB 80 valves

CAP FOR UNUSED POSITION



Code	Description	Weight [g]
W0400100200	Cap 10 mm	6

NOTES

SPARE PARTS

INTERFACE GASKET



Code	Description
0226009701	PLT-10 gasket

N.B.: 50 for pack

STANDARD SECURING SCREW (FOR ALUMINIUM)

Code	Description
0226009702	PLT-10 screw for aluminium

N.B.: 100 for pack

SECURING SCREWS FOR TECHNOPOLYMER



Code	Description
0226009703	Screw PLT-10 for technopolymer

N.B.: 100 for pack

When mounting on technopolymer bodies, use these screws instead of the ones supplied with the PLT-10.

ATTENTION: approximative dimensions for not added glass plastic materials It's always advisable to effect assembling tests.

NOTES

BASES FOR PLT-10 MULTIPLE CONNECTION

Series PLT-10 solenoid valves can be mounted on bases complete with electrical and pneumatic connections, from 4 to 24 positions. The electric contacts of each valve are linked to a single multiple connector via a printed circuit board.
The connector has 9 pins or 25 pins, depending on the model and the number of valves that can be mounted. **Versions with 25-pin connectors can interface with standard field buses by means of Profibus-DP modules for Multimach (see page B2**.185).
The compressed-air supply is common to all the valves and can be provided on either side of the base by means of a 1/8" fitting.
Connection to the utilities is via automatic integrated cartridges for Ø 4 pipe. The solenoid valve outlet is free, in a slot in the base.
The bases can be secured from above using M3 screws, or on a DIN bar using a bracket (see accessories).
The bases can mount various types of PLT-10 solenoid valves: 3/2 NC, 3/2 NO, with or without a manual actuator.
With this modular system, you can select the desired sequence of valves (NC, NO, blind) and change it at any time.

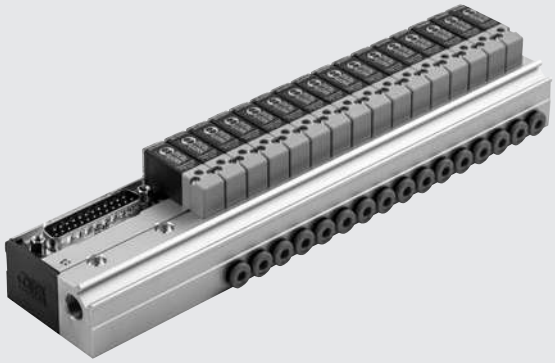

TECHNICAL DATA

Supply voltage		12 VDC or 24 VDC
Max input	W	0.7 per position for PLT-10 STD without LED
		0.9 per position for PLT-10 STD with LED
		3/0.3 per position for PLT-10 NC with Speed-up
		3/0.7 per position for PLT-10 NO with Speed-up
		4.2/0.7 per position for PLT-10 NC with Speed-up high flow
Valve actuation indicator		Led mounted on the PLT-10 (on versions of solenoid valve where envisaged)
Operating temperature range	°C	5 to 50
Actuation response time	ms	~ 4
Protection degree (with valves and connectors mounted)		IP 40
Maximum number of mountable PLT-10s		24
Number of contacts		9, of which 1 common, for versions with 4 and 8 positions
		25, of which 1 common, for versions with 4, 8, 12, 16, 20, 24 positions
Valve / base screw tightening torque	Nm	0.1 - 0.15

COMPONENTS

① Anodized aluminium base
② Multi-pin electrical connector
③ Automatic integrated cartridges for Ø 4 pipe
④ Electrical connectors for PLT-10 solenoid valves mounted on printed circuit board
⑤ Securing screw
⑥ Technopolymer cover

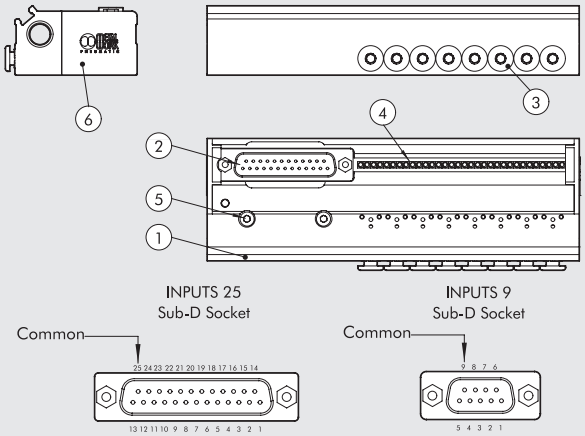

CONNECTION DIAGRAM

9 PIN

Position of electrical contact	N° PLT	Position of electrical contact	N° PLT
1	PLT1	6	PLT6
2	PLT2	7	PLT7
3	PLT3	8	PLT8
4	PLT4	9	COMMON (-)
5	PLT5		

25 PIN

Position of electrical contact	N° PLT	Position of electrical contact	N° PLT
1	PLT1	14	PLT14
2	PLT2	15	PLT15
3	PLT3	16	PLT16
4	PLT4	17	PLT17
5	PLT5	18	PLT18
6	PLT6	19	PLT19
7	PLT7	20	PLT20
8	PLT8	21	PLT21
9	PLT9	22	PLT22
10	PLT10	23	PLT23
11	PLT11	24	PLT24
12	PLT12	25	COMMON (-)
13	PLT13		

Pilot numbering from left to right, starting from the position closest to the connection.

ASSEMBLY OF SOLENOID VALVES AND ACCESSORIES

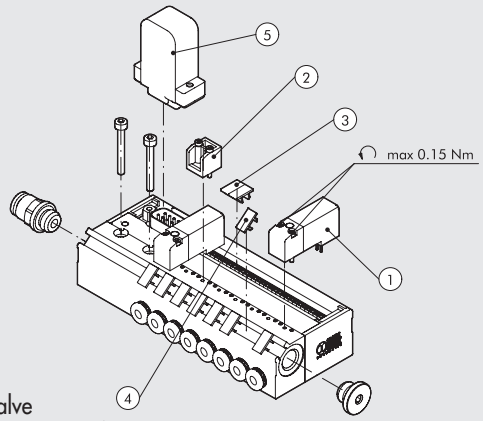

① Solenoid valve
② Pneumatic circuit cap for blind position
③ Electric circuit cap for blind position
(use two identification labels)
④ Identification label
⑤ Electrical connector

HOW TO SECURE THE BASE

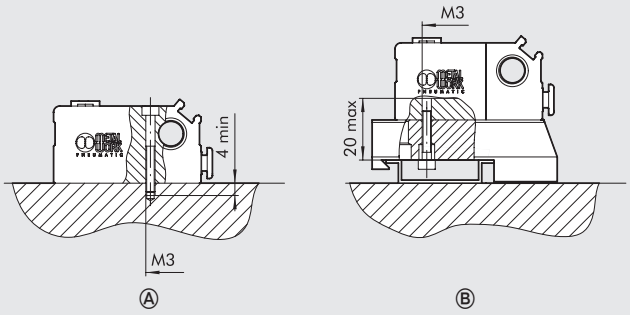

Ⓐ From above using M3 screws
Ⓑ On a DIN bar, using the bracket and screws provided
The bases come with the rear holes plugged by provided dowels.

CODES AND DIMENSIONS FOR BASES 9 AND 25 PINS

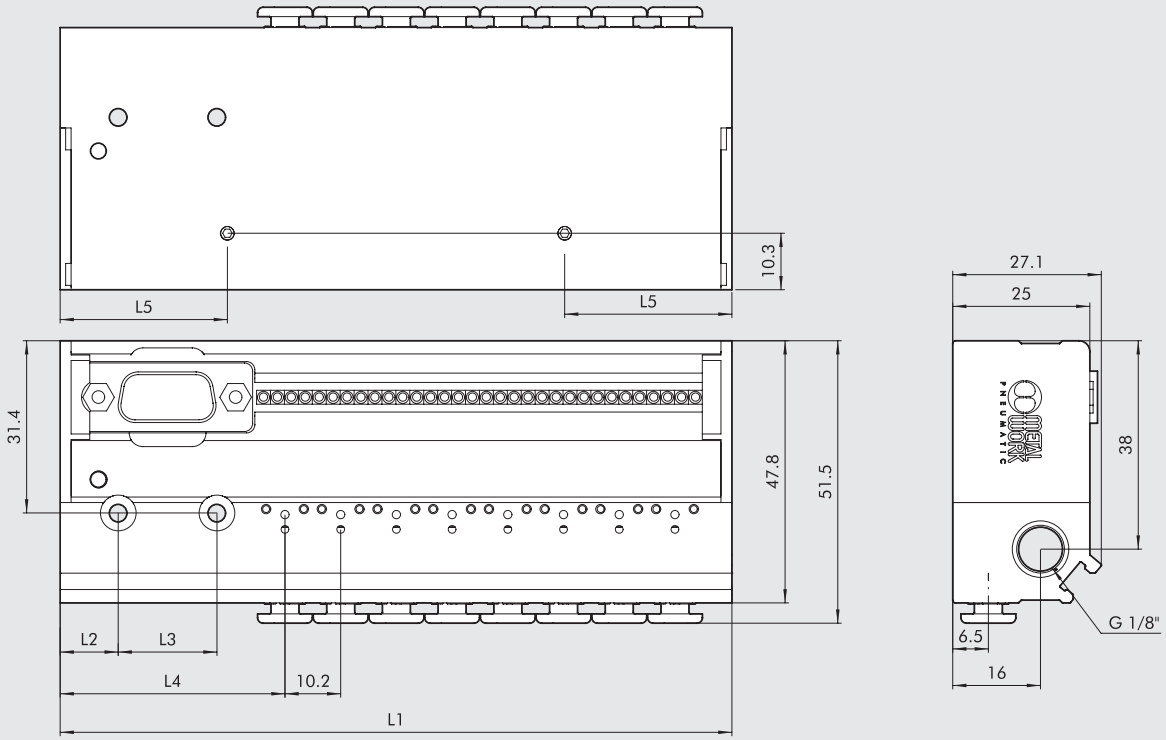

Code	Description	N° of PINS	N° of positions	L1	L2	L3	L4	L5	Weight [g]
0210040004	4-posn. base PLT 10 9-PIN mult conn.	9	4	81.9	10.6	18	41	19.6	160
0210040008	8-posn. base PLT 10 9-PIN mult conn.	9	8	122.5	10.6	18	41	19.6	235
0210240004	4-posn. base PLT 10 25-PIN mult conn.	25	4	104.8	15.5	30	63.9	30.5	210
0210240008	8-posn. base PLT 10 25-PIN mult conn.	25	8	145.4	15.5	30	63.9	30.5	280
0210240012	12-posn. base PLT 10 25-PIN mult conn.	25	12	186	15.5	30	63.9	30.5	355
0210240016	16-posn. base PLT 10 25-PIN mult conn.	25	16	226.6	15.5	30	63.9	30.5	430
0210240020	20-posn. base PLT 10 25-PIN mult conn.	25	20	267.2	15.5	30	63.9	30.5	500
0210240024	24-posn. base PLT 10 25-PIN mult conn.	25	24	307.8	15.5	30	63.9	30.5	575

PLT-10 FOR MULTIPLE ELECTRIC CONNECTION

TECHNICAL DATA		NC	NO
Type		3/2 NC ed NO	
Operating temperature range (Te)	°C	5 to 50	
Fluid temperature (Tg)	°C	5 to 50	
Fluid		Filtered, lubricated or unlubricated air	
Operating life		Over 50 million cycles	
Weight	g	12	
Voltage tolerance	ΔV	± 10 %	
Max operating frequency	f	30 Hz	
Switching factor	ED	100 %	
Insulation class		F155	
Degree of protection		IP 51	IP 50

OPERATING CHART

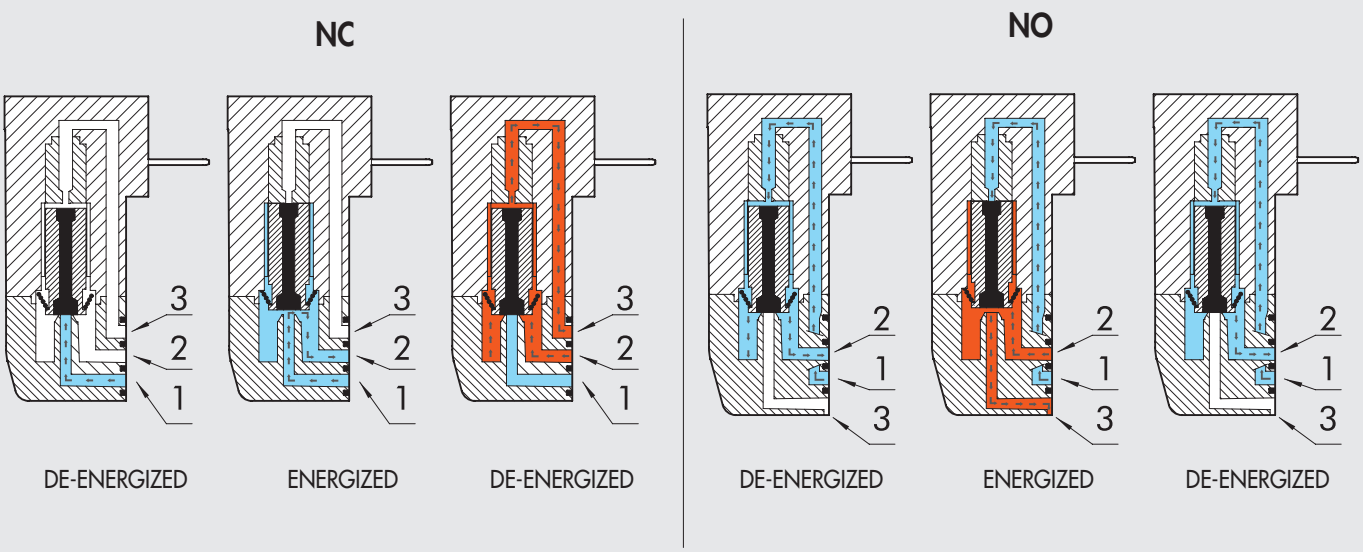

COMPONENTS

① TRANSPARENT COVER: PA612-transparent
② ASSEMBLY SCREWS: zinc-plated steel
③ PIN
④ MOBILE CORE OVER-STAMPING: FKM/FPM
⑤ MOBILE CORE: AISI 403F
⑥ COIL OVER-STAMPING: PA66
⑦ BODY-COIL GASKET: NBR70
⑧ ASSEMBLY SCREWS: zinc-plated steel
⑨ BODY GASKET: NBR
⑩ BODY: PA66
⑪ MANUAL GASKET: NBR (only for version with manual operated)
⑫ MANUAL CONTROL: AISI 303 (only for version with manual operated)
⑬ MANUAL SPRING: AISI 302 (only for version with manual operated)
⑭ SPRING: AISI 302
⑮ WINDING: PPS - Copper wire
⑯ FIXED CORE: AISI 430F
⑰ COIL-COVER GASKET: NBR
⑱ ELECTRONIC BOARD (only for version with electronic board)

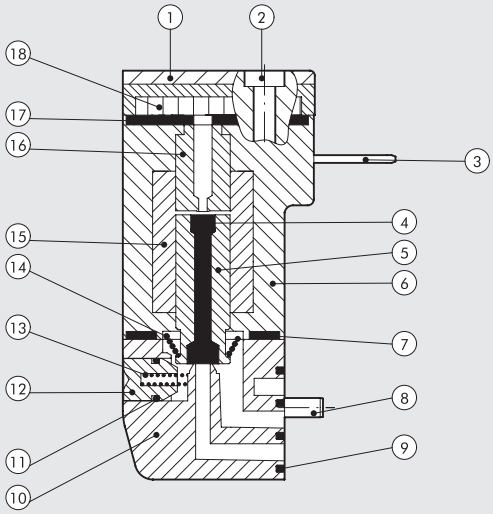

METAL WORK PNEUMATIC

PLT-10 NC-NO FOR MULTIPLE ELECTRIC CONNECTION

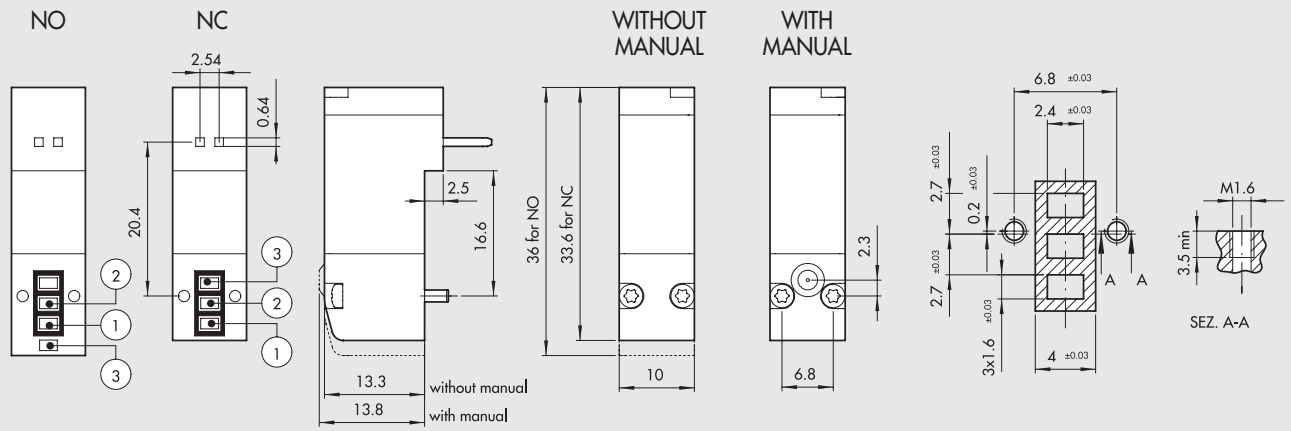

Version (3/2 NC)	Code	Manual	Voltage [Volt]	Power [Watt]	Ø Through [mm]	Operating pressure [bar]	Flow rate at 6 ΔP=1 bar [Nl/min]	TMax coil Te 20°C a ED100% [°C]	Weight [g]
Without LED	**722123330000**	without	12 VDC	0.7	0.6	3 to 7	9	93	12
	722123330100	with	12 VDC	0.7	0.6	3 to 7	9	93	12
	722123340000	without	24 VDC	0.7	0.6	3 to 7	9	93	12
	722123340100	with	24 VDC	0.7	0.6	3 to 7	9	93	12
With LED	**722123531000**	without	12 VDC	0.8	0.6	3 to 7	9	93	12
	722123531100	with	12 VDC	0.8	0.6	3 to 7	9	93	12
	722123541000	without	24 VDC	0.8	0.6	3 to 7	9	93	12
	722123541100	with	24 VDC	0.8	0.6	3 to 7	9	93	12
SPEED-UP and LED	**722126841000**	without	24 VDC	3/0.3	1.2	2 to 7	16	51	12
	722126841100	with	24 VDC	3/0.3	1.2	2 to 7	16	51	12
	722126941000	without	24 VDC	4.2/0.7	1.2	2 to 7	30	51	12
	722126941100	with	24 VDC	4.2/0.7	1.2	2 to 7	30	51	12

Version (3/2 NO)	Code	Manual	Voltage [Volt]	Power [Watt]	Ø Through [mm]	Operating pressure [bar]	Flow rate at 6 ΔP=1 bar [Nl/min]	TMax coil Te 20°C a ED100% [°C]	Weight [g]
SPEED-UP and LED	**722126841010**	without	24 VDC	3/0.7	1.0	2 to 7	14	51	12
	722126841110	with	24 VDC	3/0.7	1.0	2 to 7	14	51	12

KEY TO CODES

7 2 2	1	2	3	3	4	0	1	0	0
FAMILY	**POSITIONING**	**POWER CONNECTION**	**Ø THROUGH**	**POWER**	**VOLTAGE**	**LED**	**MANUAL CONTROL**	**VERSION**	
Solenoid valves series "PLT-10"	**1** Base and connection on same side	**2** for multiple base	**3** 0.6 mm **6** 1.2 mm	**3** 0.7 W **5** 0.8 W **8** 3/0.3 W for NC 3/0.7 W for NO **9** 4.2/0.7 W	**3** 12 VDC **4** 24 VDC	**0** - **1** LED	**0** - **1** manual monostable	**0** NC **1** NO	**0** Standard

ACCESSORIES

CONNECTION BRACKETS ON BAR OMEGA (DIN EN 50022)

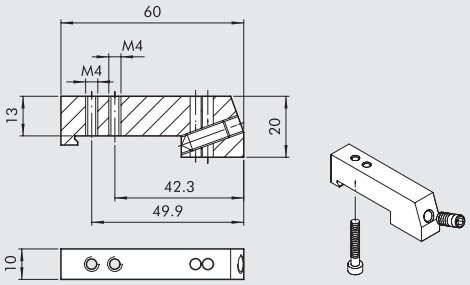

Code	Description	Weight [g]
0227301610	Connection brackets on din BAR for bases PLT-10	30

Supplied complete with one M3x20 screws and one M6 grub screw
Individually packed

CAP FOR UNUSED POSITION



Code	Description	Weight [g]
W0400100200	Cap 10 mm	6

STRAIGHT PRE-WIRED CONNECTOR KIT

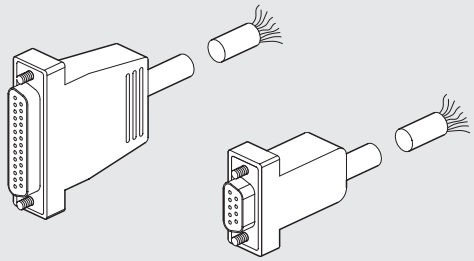

Code	Description	Weight [g]
0226900100	Straight D-Sub 9-PIN connector + cable L = 1 m	80
0226900250	Straight D-Sub 9-PIN connector + cable L = 2.5 m	170
0226900500	Straight D-Sub 9-PIN connector + cable L = 5 m	320
0226900750	Straight D-Sub 9-PIN connector + cable L = 7.5 m	470
0226901000	Straight D-Sub 9-PIN connector + cable L = 10 m	620
0226901500	Straight D-Sub 9-PIN connector + cable L = 15 m	920
0226902000	Straight D-Sub 9-PIN connector + cable L = 20 m	1220
0226905000	Straight D-Sub 9-PIN connector + cable L = 50 m	3020
0226920100	Straight D-Sub 25-PIN connector + cable L = 1 m	132
0226920250	Straight D-Sub 25-PIN connector + cable L = 2.5 m	320
0226920500	Straight D-Sub 25-PIN connector + cable L = 5 m	636

PRE-WIRED 90° CONNECTOR

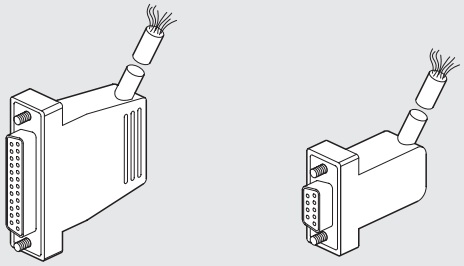

Code	Description	Weight [g]
0226910100	90° D-Sub 9-PIN connector + cable L = 1 m	80
0226910250	90° D-Sub 9-PIN connector + cable L = 2.5 m	170
0226910500	90° D-Sub 9-PIN connector + cable L = 5 m	320
0226910750	90° D-Sub 9-PIN connector + cable L = 7.5 m	470
0226911000	90° D-Sub 9-PIN connector + cable L = 10 m	620
0226911500	90° D-Sub 9-PIN connector + cable L = 15 m	920
0226930100	90° D-Sub 25-PIN connector + cable L = 1 m	132
0226930250	90° D-Sub 25-PIN connector + cable L = 2.5 m	320
0226930500	90° D-Sub 25-PIN connector + cable L = 5 m	636

WIRING DIAGRAM FOR PRE-WIRED PLUG CONNECTORS

25 PIN						9 PIN	
Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire
1	blue/black	10	brown/white	19	yellow/black	1	green/black
2	red/brown	11	red/orange	20	white	2	white
3	white/black	12	light blue	21	blue/white	3	blue/black
4	red/blue	13	yellow/white	22	brown	4	blue
5	black/orange	14	yellow	23	green/white	5	yellow/black
6	yellow/red	15	red/green	24	red	6	yellow
7	black/brown	16	orange	25	green/black	7	red/black
8	white/red	17	orange/white			8	green
9	red/black	18	green			9	white/black

IDENTIFICATION PLATE KIT



Code	Description	Weight [g]
0226107000	Identification plate kit	30

Comes in 16-pc. packs

R17 - PIPE RELEASE SPANNER



Lenght = 140 mm

Code	Description	Ø Pipe
2L17001	RL17	from Ø 3 to Ø 10

NOTES

SOLENOID VALVES PIV.M 15-mm

- 3/2 NC/NO direct control microvalves
- Possible assembly on single and multiple bases
- Monostable manual actuation as standard
- Assembly in any position
- Operation with filtered lubricated or unlubricated air
- Maximum ambient temperature: 50°C
- Low power absorption

TECHNICAL DATA

Voltage tolerance	%	–10 to +15
Alternating current frequency (AC)	Hz	50/60
Max operating frequency	Hz	30
Solenoid rating		100% ED
Response time	ms	~ 10
Type of protection		IP 65 EN 60529
Power connection		Type C industrial, 9.4 mm centre distance
Insulation class		155
Ambient temperature	°C	–10 to + 50
Fluid temperature	°C	–10 to + 50
Fluid		Filtered lubricated or unlubricated air
Operating life		100 million cycles
Materials		Body: PPS
		Spring: 302 stainless steel
		FKM/FPM gaskets
Weight	g	30
Hand operator		Monostable
Assembly position		In any position
Tightening torque M3 valve / base screws	Nm	0.8

SYNOPTIC, SIZES AND VERSIONS

P I V	1	3	M	0	1	N C
FAMILY	AIR HOLE	NUMBER OF WAYS	DIMENSIONS	THREAD	VERSION	FURTHER DETAILS
	1 1 mm	**3** 3 ways	**M** 15 x 15	**0** on base	**1** 24 VDC	**NC** normally closed
	3 1.1 mm				**3** 24 VAC	**NO** normally open
	6 1.5 mm				**5** 110 VAC	
					7 220 VAC	

METAL WORK PNEUMATIC

PIV.M STD DIMENSIONS

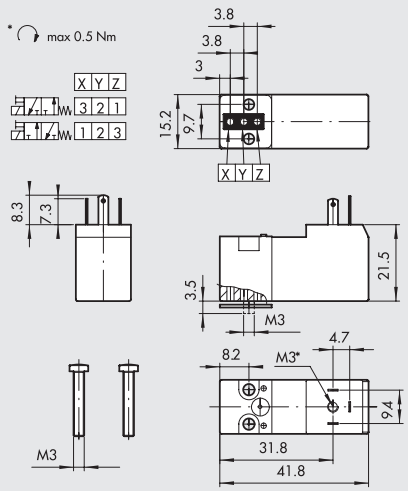

Symbol	Code	Abbrev.	Voltage [Volt]	Flow rate [Watt]	Air Ø [mm]	kv Factor	Operating press. [bar]
	W4015001000	PIV33M01 NC	24VDC	2.5W	1.1	0.42	-0.99 to 10
	W4015001010	PIV33M03 NC	24VAC	2W - 3VA	1.1	0.42	-0.99 to 10
	W4015001020	PIV33M05 NC	110VAC	2W - 3VA	1.1	0.42	-0.99 to 10
	W4015001030	PIV33M07 NC	220VAC	2W - 3VA	1.1	0.42	-0.99 to 10
	W4015001100	PIV63M01 NC	24VDC	2.5W	1.5	0.55	0 to 6
	W4015001110	PIV63M03 NC	24VAC	2W - 3VA	1.5	0.55	0 to 6
	W4015001120	PIV63M05 NC	110VAC	2W - 3VA	1.5	0.55	0 to 6
	W4015001130	PIV63M07 NC	220VAC	2W - 3VA	1.5	0.55	0 to 6
	W4015002000	PIV13M01 NO	24VDC	2.5W	1	0.33	-0.99 to 6
	W4015002010	PIV13M03 NO	24VAC	2W - 3VA	1	0.33	-0.99 to 6
	W4015002020	PIV13M05 NO	110VAC	2W - 3VA	1	0.33	-0.99 to 6
	W4015002030	PIV13M07 NO	220VAC	2W - 3VA	1	0.33	-0.99 to 6

MULTIPLE BASE FOR PIV.M

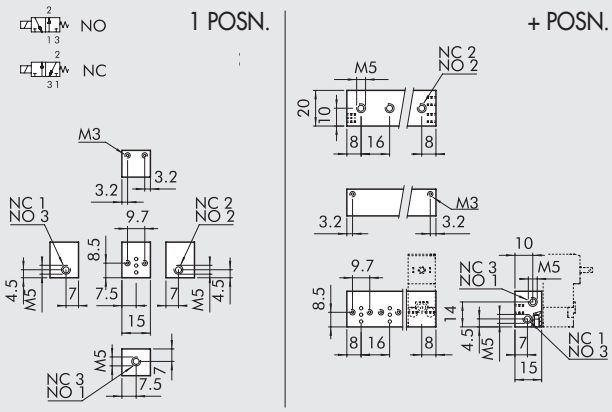

Code	Description	Abbrev.	Weight [g]
W0400101001	Single base 1 position	B5001	6
W0400101002	Multiple base 2 positions	B5002	24
W0400101003	Multiple base 3 positions	B5003	34
W0400101004	Multiple base 4 positions	B5004	46
W0400101005	Multiple base 5 positions	B5005	58
W0400101006	Multiple base 6 positions	B5006	70
W0400101007	Multiple base 7 positions	B5007	82
W0400101008	Multiple base 8 positions	B5008	98
W0400101009	Multiple base 9 positions	B5009	106
W0400101010	Multiple base 10 positions	B5010	114

END PLUG - UNUSED POSITION



Code	Description	Weight [g]
W0400102000	End plug	6

END PLUG - PORT 1



Code	Description	Weight [g]
W0400102002	End plug – port 1	4

TYPE C INDUSTRIAL ELECTRIC CONNECTOR 15 mm



Code	Colour	Type
W0970500011	Black	Standard
W0970500012	Transparent	LED 24V
W0970500013	Transparent	LED 110V
W0970500015	Transparent	LED + VDR 24V
W0970500016	Transparent	LED + VDR 110V

SOLENOID VALVES PIV ON BASE

- PIV.I - PIV.T and PIV.B solenoid valves
- Assembly on base
- Bistable manual actuation
- Normally closed/normally open solenoid valves 2/2 – 3/2
- Installation in any position
- Particularly suitable for high operating frequencies and low response times

TECHNICAL DATA		PIV.I ON BASE	PIV.T ON BASE	PIV.B ON BASE
Absorption		5W - 5VA	3.8W - 6.5VA	10W - 13VA
Voltage available		12-24 VDC / 24-110-220 VAC	24VDC / 24-110-220 VAC	24VDC / 24-110-220 VAC
		50/60 Hz	50/60 Hz	50/60 Hz
Voltage tolerance	%	–10 to +15	–10 to +15	–10 to +15
Max operating frequency	Hz	30	30	15
Solenoid rating	%	100	100	100
Response time	ms	8 to 15	8 to 15	10 to 15
Type of protection		IP 65	IP 65	IP 65
Type of coil		Coil side 22 Ø 8	Coil side 22 Ø 9	Coil side 30
		DIN 43650	DIN 43650	DIN 43650
Insulation class		155	155	155
Ambient temperature	°C	–15 to 50	–15 to 50	–15 to 50
Fluid temperature	°C	–15 to 50	–15 to 50	–15 to 50
Fluid		Filtered lubricated	Filtered lubricated	Filtered lubricated
		or unlubricated air	or unlubricated air	or unlubricated air
Woking life		25 million cycles	25 million cycles	–
Weight	g	80 to 120 (according to the version)	85	250
Maximum coil nut torque	Nm	1	1	1
Tightening torque M3 valve / base screws	Nm	0.8	0.8	0.8

COMPONENTS

① Manual control: technopolymer
② Body: technopolymer
③ Sleeve locking plate
④ Spring: stainless steel
⑤ Sleeve: brass OT 58
⑥ Ring nut for coil fixing
⑦ Gasket: NBR
⑧ Mobile core
⑨ Spring: stainless steel
⑩ Spring: stainless steel
⑪ Gasket: NBR

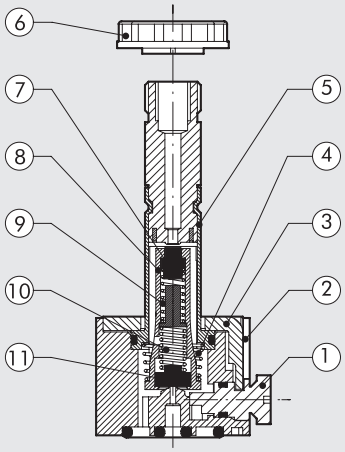

METAL WORK PNEUMATIC

PIV.I VALVES, OPERATOR Ø 8, ON BASE

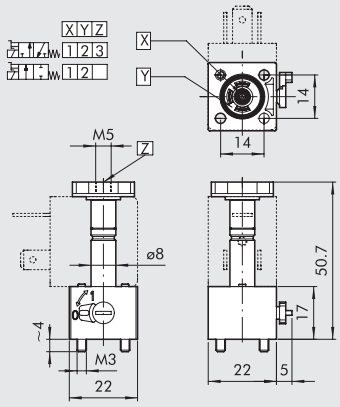

Symbol	Code	Abbrev.	Air hole Ø [mm]	kv Factor	Pressure range [bar] DC 5W	AC 5VA
	W4018000200	PIV42I0S NC	1.2	0.65	-0.99 to 10	-0.99 to 10
	W4018000300	PIV72I0S NC	1.5	1	-0.99 to 8	-0.99 to 8
	W4018001200	PIV43I0S NC	1.2	0.65	-0.99 to 10	-0.99 to 10
	W4018001300	PIV73I0S NC	1.5	1	-0.99 to 8	-0.99 to 8

PIV.T VALVES, OPERATOR Ø 9, ON BASE

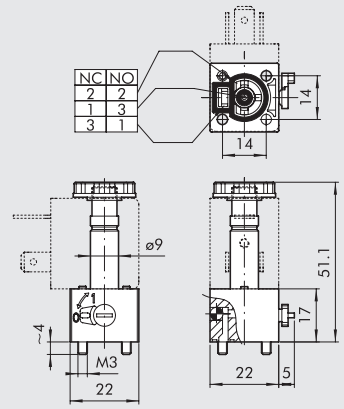

Symbol	Code	Abbrev.	Air hole Ø [mm]	kv Factor	Pressure range [bar] DC 3.8W	AC 6.5VA
	W4025002101	PIV73T0B NO	1.6	0.75	0.5 to 7	0.5 to 7
	W4025002301	PIV83T0B NO	1.8	0.85	0.5 to 6.5	0.5 to 6.5
	W4025002100	PIV73T0B NC	1.6	0.8	0.5 to 10	0.5 to 10
	W4025002300	PIV83T0B NC	1.8	1	0.5 to 8	0.5 to 8

PIV.T VALVES, OPERATOR Ø 9, ON BASE WITH CONVEYED EXHAUST

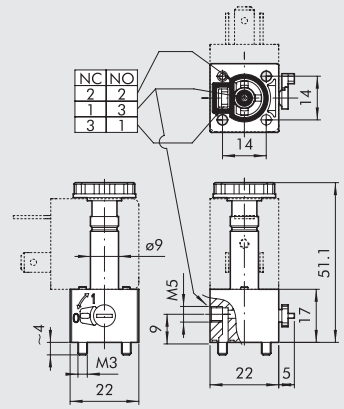

Symbol	Code	Abbrev.	Air hole Ø [mm]	kv Factor	Pressure range [bar] DC 3.8W	AC 6.5VA
	W4025002001	PIV73T00 NO	1.6	0.75	0.5 to 7	0.5 to 7
	W4025002501	PIV83T00 NO	1.8	0.85	0 to 6	0.5 to 6.5
	W4025002000	PIV73T00 NC	1.6	0.8	0.5 to 10	0.5 to 10
	W4025002500	PIV83T00 NC	1.8	1	0.5 to 8	0.5 to 8

PIV.B VALVES, OPERATOR Ø 13, ON BASE

NORMALLY CLOSED

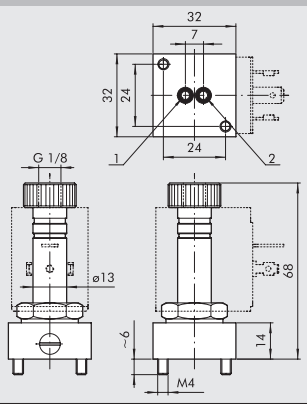

Symbol	Code	Abbrev.	Air hole Ø [mm]	kv Factor	Pressure range [bar] DC 10W	AC 13VA
	W4026003000	PIVY3B0S NC	2.4	2.2	0 to 8	0 to 10

SYNOPTIC, SIZES AND VERSIONS

P I V FAMILY	7 AIR HOLE	3 NUMBER OF WAYS	T CONNECTION	0 THREAD	0 VERSION	N C FURTHER DETAILS
	4 1.2 mm **7** 1.5 / 1.6 mm **8** 1.8 mm **Y** 2.4 mm	**2** 2 ways **3** 3 ways	**I** 22x22 operator Ø 8 **T** 22x22 operator Ø 9 **B** 30x30 operator Ø 13	**0** on base	**0** on base with conveyed exhaust **B** on base **S** standard	**NC** normally closed **NO** normally open

ACCESSORIES

MULTIPLE BASES FOR PIV.I SOLENOID VALVES, OPERATOR Ø 8

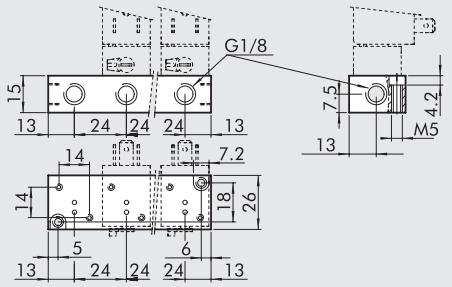

Code	Description	Abbrev.	Weight [g]
W0400111101	Base 1 position	EB 6001	22
W0400111102	Base 2 positions	EB 6002	50
W0400111103	Base 3 positions	EB 6003	76
W0400111104	Base 4 positions	EB 6004	102
W0400111105	Base 5 positions	EB 6005	128
W0400111106	Base 6 positions	EB 6006	154
W0400111107	Base 7 positions	EB 6007	180
W0400111108	Base 8 positions	EB 6008	206
W0400111109	Base 9 positions	EB 6009	232
W0400111110	Base 10 positions	EB 6010	258

MANIFOLD BASES FOR PIV.I SOLENOID VALVES, OPERATOR Ø 8

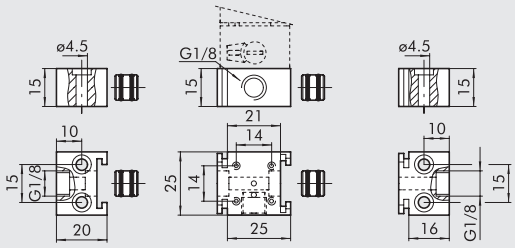

Code	Description	Abbrev.	Weight [g]
W0400111200	Manifold base	EB 8000 I	24
W0400111201	LH end plate	EB 8000 TI	17
W0400111202	RH end plate	EB 8000 T2	15

BLANKING PLATE FOR PIV.I PIV.T VALVES, UNUSED POSITION



Code	Description	Abbrev.	Weight [g]
W0400112000	Unused position	B 6000	5

MULTIPLE BASES FOR PIV.T SOLENOID VALVES, OPERATOR Ø 9

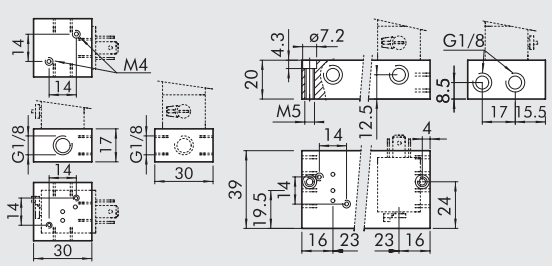

Code	Description	Abbrev.	Weight [g]
W0400101101	Base 1 position	19001	36
W0400101102	Base 2 positions	19002	104
W0400101103	Base 3 positions	19003	148
W0400101104	Base 4 positions	19004	192
W0400101105	Base 5 positions	19005	236
W0400101106	Base 6 positions	19006	280
W0400101107	Base 7 positions	19007	324
W0400101108	Base 8 positions	19008	368
W0400101109	Base 9 positions	19009	452
W0400101110	Base 10 positions	19010	456

METAL WORK PNEUMATIC

NC/NO ADAPTER FOR PIV.T VALVES



Code	Description	Abbrev.	Weight [g]
W0400101190	NC/NO adapter	I-9000	15

BASE BLANKING PLATE FOR PIV.T VALVES, UNUSED POSITIONS



Code	Description	Abbrev.	Weight [g]
W0400112000	Blanking plate	B6000	5

MULTIPLE BASES FOR PIV.B VALVES

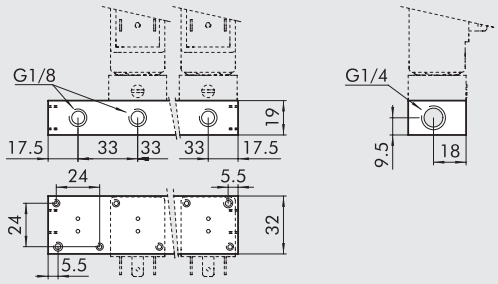

Code	Description	Abbrev.	Weight [g]
W0400101201	Base 1 position	B4001	42
W0400101202	Base 2 positions	B4002	94
W0400101203	Base 3 positions	B4003	142
W0400101204	Base 4 positions	B4004	188
W0400101205	Base 5 positions	B4005	234
W0400101206	Base 6 positions	B4006	280
W0400101207	Base 7 positions	B4007	326
W0400101208	Base 8 positions	B4008	372
W0400101209	Base 9 positions	B4009	418

BASE BLANKING PLATE FOR PIV.B VALVES, UNUSED POSITIONS

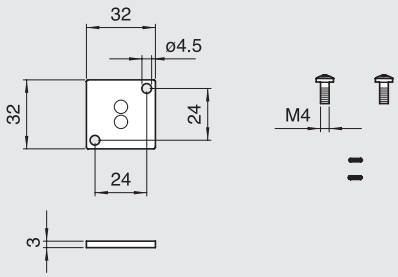

Code	Description	Weight [g]
W0400112001	Blanking plate	14

COILS, SIDE 22 mm FOR PIV.I SOLENOID VALVES, OPERATOR Ø 8



- Voltage tolerance: –10 to +15%
- Insulation class: F155
- Degree of protection: IP65 – EN60529 with connector
- Avoid prolonged exposure to the atmospheric agents.
- Maximum coil temperature at 100% use: 70°C at 20° ambient temperature
- According to Atex 2014/34/EU rule, group 2, category 3 GD
- Electrical connection DIN 43650 B-IND

Code	Abbrev.	Nominal voltage	Absorption	
			Inrush	Holding
W0215000051	Coil 22 Ø 8 5W-12VDC	12Vcc	5W	5W
W0215000001	Coil 22 Ø 8 5W-24VDC	24Vcc	5W	5W
W0215000011	Coil 22 Ø 8 5VA-24VAC	24V 50/60Hz	8VA	5VA
W0215000021	Coil 22 Ø 8 5VA-110VAC	110V 50/60Hz	8VA	5VA
W0215000031	Coil 22 Ø 8 5VA-220VAC	220V 50/60Hz	8VA	5VA

COILS, SIDE 22 mm FOR PIV.T SOLENOID VALVES, OPERATOR Ø 9



- Voltage tolerance: –10 to +15%
- Insulation class: F155
- Degree of protection: IP65 – EN60529 with connector
- Avoid prolonged exposure to the atmospheric agents
- Maximum coil temperature at 100% use: 70°C at 20° ambient temperature
- According to Atex 2014/34/EU rule, group 2, category 3 GD
- Electrical connection DIN 43650 B-IND

Code	Abbrev.	Nominal voltage	Absorption	
			Inrush	Holding
W0216000001	Coil 22 Ø9 3.8W-24VDC	24Vcc	3.8W	3.8W
W0216000011	Coil 22 Ø9 6.5VA-24VAC	24V 50/60Hz	9VA	6.5VA
W0216000021	Coil 22 Ø9 6.5VA-110VAC	110V 50/60Hz	9VA	6.5VA
W0216000031	Coil 22 Ø9 6.5VA-220VAC	220V 50/60Hz	9VA	6.5VA

COILS, SIDE 30 mm FOR PIV.B SOLENOID VALVES



- Voltage tolerance: –10 to +15%
- Insulation class: M180
- Degree of protection: IP65 – EN60529 with connector
- Avoid prolonged exposure to the atmospheric agents
- According to Atex 2014/34/EU rule, group 2, category 3 GD
- Electrical connection DIN 43650 - A

Code	Abbrev.	Nominal voltage	Power absorption (average power input)
W0216001001	Coil 30 Ø13 10W-24VDC	24Vcc	10W
W0216001011	Coil 30 Ø13 13VA-24VAC	24V 50/60Hz	13VA
W0216001021	Coil 30 Ø13 13VA-110VAC	110V 50/60Hz	13VA
W0216001031	Coil 30 Ø13 13VA-220VAC	220V 50/60Hz	13VA

CONNECTORS, SIDE 22 mm DIN 43650 B-IND FOR PIV.I-PIV.T



Code	Type	Colour	Ø Cable
W0970510011	Standard	Black	PG9
W0970510012	LED 24V	Transparent	PG9
W0970510013	LED 110V	Transparent	PG9
W0970510014	LED 220V	Transparent	PG9
W0970510015	LED + VDR 24V	Transparent	PG9
W0970510016	LED + VDR 110V	Transparent	PG9
W0970510017	LED + VDR 220V	Transparent	PG9
W0970510070	Atex II 2 GD	Black	PG9

Code	Type	Colour	Ø Cable
W0970510051	LED 24VDC Energy Saving	Transparent	PG9

For technical data see page **B1**.61

CONNECTORS, SIDE 30 mm DIN 43650-A FOR PIV.B



Code	Type	Colour	Ø Cable
W0970520033	Standard	Black	PG11
W0970520034	LED 24V	Transparent	PG11
W0970520035	LED 110V	Transparent	PG11
W0970520036	LED 220V	Transparent	PG11
W0970520037	LED + VDR 24V	Transparent	PG11
W0970520038	LED + VDR 110V	Transparent	PG11
W0970520039	LED + VDR 220V	Transparent	PG11
W0970520070	Atex II 2 GD	Black	PG11

SOLENOID VALVES PIV IN LINE

METAL WORK PNEUMATIC

- PIV.I – PIV.B in-line solenoid valves
- Threaded ports: M5, G1/8", G1/4"
- 2/2 – 3/2 solenoid valves - normally closed/normally open
- Installation in any position
- Particularly suitable for high operating frequencies and low response times.

TECHNICAL DATA		PIV.I IN LINE	PIV.B IN LINE
Absorption		5W to 5VA	10W - 13VA
Voltage available		12; 24VDC - 24; 110; 220VAC 50/60Hz	24VDC - 24; 110; 220VAC 50/60 Hz
Voltage tolerance	%	–10 to 15	–10 to 15
Max operating frequency	Hz	30	15
Solenoid rating	%	100	100
Response time	ms	8 to 15	10 to 15
Type of protection		IP 65	IP 65
Type of coil		Coil side 22 Ø 8 DIN 43650	Coil side 30 DIN 43650
Insulation class		155	155
Ambient temperature	°C	–15 to 50	–15 to 50
Fluid temperature	°C	–15 to 50	–15 to 50
Fluid		Filtered lubricated or unlubricated air	Filtered lubricated or unlubricated air
Working life		25 million cycles	–
Weight		35 to 40 (depending on version)	130
Maximum coil/nut torque	Nm	1	1

Note on use:
The 2/2 NC and 2/2 NO valves work only with inlet pressure ≥ outlet pressure.

COMPONENTS

① Body: aluminium
② Springs: steel
③ Sleeve
④ Gasket: NBR
⑤ Springs: steel
⑥ Mobile core
⑦ Gasket: FKM/FPM
⑧ Coil locking ring

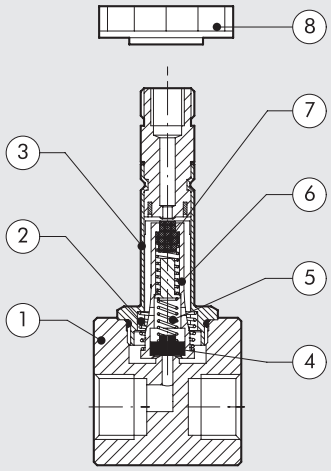

PIV.I VALVES, OPERATOR Ø 8 mm, IN LINE – M5 – 1/8"

M5

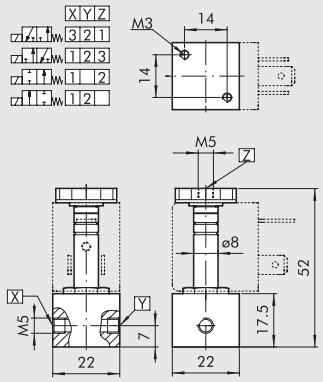

1/8"

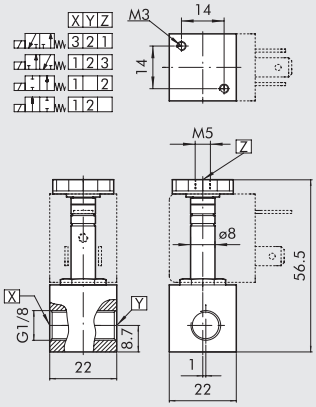

Symbol	Code	Abbrev.	Input thread	Air hole Ø [mm]	kv Factor	Pressure range [bar] DC 5W	Pressure range [bar] AC 5VA
	**W4017000100**	PIV42I5S NC	M5	1.2	0.65	-0.99 to 30	-0.99 to 30
	W4017001300	PIV92I8S NC	G1/8"	2.4	2	-0.99 to 6	-0.99 to 7
	W4017001100	PIV42I8S NC	G1/8"	1.2	0.65	-0.99 to 30	-0.99 to 30
	W4017001200	PIV72I8S NC	G1/8"	1.6	1.2	-0.99 to 15	-0.99 to 14
	**W4017000101**	PIV72I5S NO	M5	1.4	0.8	-0.99 to 10	-0.99 to 10
	W4017001201	PIV72I8S NO	G1/8"	1.4	0.8	-0.99 to 10	-0.99 to 10
	**W4017003100**	PIV43I5S NC	M5	1.2	0.65	-0.99 to 10	-0.99 to 10
	W4017004100	PIV43I8S NC	G1/8"	1.2	0.65	-0.99 to 10	-0.99 to 10
	W4017004200	PIV73I8S NC	G1/8"	1.6	1	-0.99 to 6.5	-0.99 to 6.5
	**W4017004201**	PIV73I8S NO	G1/8"	1.4	0.7	0 to 6	0 to 7

PIV.B VALVES, OPERATOR Ø 13, IN LINE

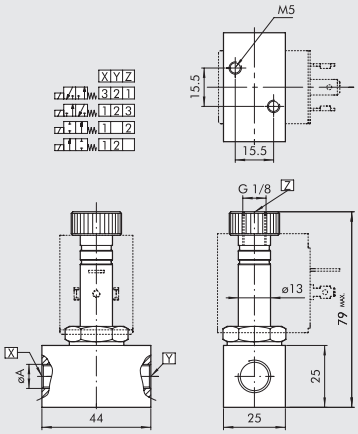

Symbol	Code	Abbrev.	Input thread	Ø Air hole [mm]	kv Factor	Pressure range [bar] DC 10W	Pressure range [bar] AC 13VA
	**W4026005001**	PIV73B8S NO	G1/8"	1.6	1.2	-0.99 to 6	-0.99 to 12
	W4026005101	PIV73B4S NO	G1/4"	1.6	1.2	-0.99 to 6	-0.99 to 12
	W4026005111	PIV93B4S NO	G1/4"	2.4	2	-0.99 to 3	-0.99 to 4
	**W4026005010**	PIV93B8S NC	G1/8"	2.4	2.8	0 to 8	0 to 10
	W4026005020	PIVW3B8S NC	G1/8"	3	4	0 to 5.5	0 to 6
	W4026005000	PIV73B8S NC	G1/8"	1.6	1.4	0 to 14	0 to 17
	W4026005100	PIV73B4S NC	G1/4"	1.6	1.4	0 to 14	0 to 17
	W4026005110	PIV93B4S NC	G1/4"	2.4	2.8	0 to 8	0 to 8
	W4026005120	PIVW3B4S NC	G1/4"	3	4	0 to 5.5	0 to 6
	**W4026004000**	PIV92B4S NC	G1/4"	2.4	3	0 to 15	0 to 30
	W4026004010	PIVX2B4S NC	G1/4"	4	7	0 to 6	0 to 12
	W4026004020	PIVZ2B4S NC	G1/4"	6	9	0 to 1.5	0 to 5
	**W4026004001**	PIV92B4S NO	G1/4"	2.4	2.6	0 to 13	0 to 15

SYNOPTIC, SIZES AND VERSIONS

P I V FAMILY	7 AIR HOLE	2 NUMBER OF WAYS	B CONNECTION	4 THREAD	S VERSION	N C FURTHER DETAILS
	4 1.2 mm **7** 1.6 mm **9** 2.4 mm **W** 3 mm **X** 4 mm **Z** 6 mm	**2** 2 ways **3** 3 ways	**I** 22 x 22 operator Ø 8 **B** 30 x 30 operator Ø 13	**5** M5 **4** G1/4" **8** G1/8"	**S** standard	**NC** normally closed **NO** normally open

ACCESSORIES

COIL, SIDE 30 mm - FOR PIV.B SOLENOID VALVES



- Voltage tolerance: –10 to +15%
- Insulation class: M180
- Degree of protection: IP65 – EN60529 with connector
- Avoid prolonged exposure to the atmospheric agents
- According to Atex 2014/34/EU rule, group 2, category 3 GD
- Electrical connection DIN 43650 - A

Code	Abbrev.	Nominal voltage	Absorption (average)
W0216001001	Coil 30 Ø13 10W-24VDC	24Vcc	10W
W0216001011	Coil 30 Ø13 13VA-24VAC	24V 50/60Hz	13VA
W0216001021	Coil 30 Ø13 13VA-110VAC	110V 50/60Hz	13VA
W0216001031	Coil 30 Ø13 13VA-220VAC	220V 50/60Hz	13VA

COIL, SIDE 22 mm - FOR PIV.I SOLENOID VALVES



- Voltage tolerance: –10 to +15%
- Insulation class: F155
- Degree of protection: IP65 – EN60529 with connector
- Avoid prolonged exposure to the atmospheric agents
- Maximum temperature of coil at 100% use: 70°C at 20° ambient temperature
- According to Atex 2014/34/EU rule, group 2, category 3 GD
- Electrical connection DIN 43650 B-IND

Code	Abbrev.	Nominal voltage	Absorption Inrush	Absorption Holding
W0215000051	Coil 22 Ø8 5W-12VDC	12Vcc	5W	5W
W0215000001	Coil 22 Ø8 5W-24VDC	24Vcc	5W	5W
W0215000011	Coil 22 Ø8 5VA-24VAC	24V 50/60Hz	8VA	5VA
W0215000021	Coil 22 Ø8 5VA-110VAC	110V 50/60Hz	8VA	5VA
W0215000031	Coil 22 Ø8 5VA-220VAC	220V 50/60Hz	8VA	5VA

CONNECTOR, SIDE 22 mm DIN 43650 B-IND



Code	Type	Colour	Ø Cable
W0970510011	Standard	Black	PG9
W0970510012	LED 24V	Transparent	PG9
W0970510013	LED 110V	Transparent	PG9
W0970510014	LED 220V	Transparent	PG9
W0970510015	LED + VDR 24V	Transparent	PG9
W0970510016	LED + VDR 110V	Transparent	PG9
W0970510017	LED + VDR 220V	Transparent	PG9
W0970510070	Atex II 2 GD	Black	PG9

Code	Type	Colour	Ø Cable
W0970510051	LED 24VDC Energy Saving	Transparent	PG9

For technical data see page **B1**.61

CONNECTOR, SIDE 30 mm DIN 43650-A



Code	Type	Colour	Ø Cable
W0970520033	Standard	Black	PG11
W0970520034	LED 24V	Transparent	PG11
W0970520035	LED 110V	Transparent	PG11
W0970520036	LED 220V	Transparent	PG11
W0970520037	LED + VDR 24V	Transparent	PG11
W0970520038	LED + VDR 110V	Transparent	PG11
W0970520039	LED + VDR 220V	Transparent	PG11
W0970520070	Atex II 2 GD	Black	PG11

SOLENOID VALVE CNOMO

Solenoid valve to CNOMO 060580.
- 3/2 version normally closed
- Bistable and monostable manual actuation
- Assembly on manifold base

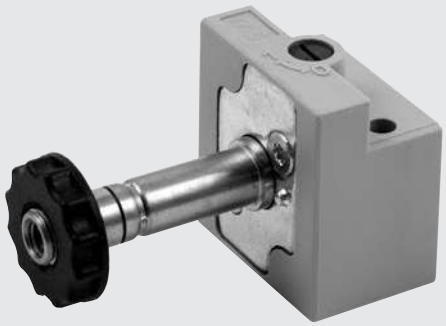

TECHNICAL DATA

Operating pressure	bar	Max 10
Operating temperature range	°C	–10 to 60
Solenoid rating		100% ED
Fluid		Filtered lubricated or unlubricated air
System		With poppet
Nominal flow rate	Nl/min	40
TRA/TRR at 6 bar	ms	22/32
Maximum coil nut torque	Nm	1
Tightening torque for M4 fixing screws	Nm	1

COMPONENTS

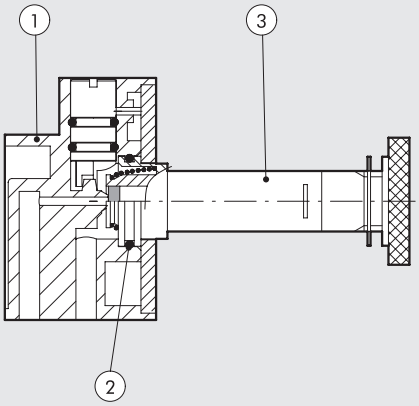

① VALVE BODY: HOSTAFORM®
② GASKETS: NBR
③ OPERATOR: Brass pipe – Stainless steel core

DIMENSIONS

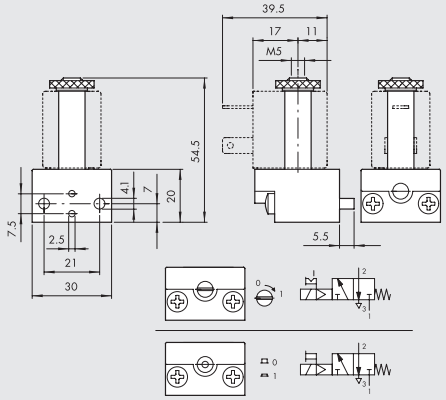

Code	Description
9453920	Cnomo 3/2 with monostable manual actuation
9453922	Cnomo 3/2 with bistable manual actuation

MODULAR CONFIGURATION OF CNOMO BASES

① Two fixing screws (included in input kit)
② CNOMO manifold base kit
③ CNOMO manifold base input kit

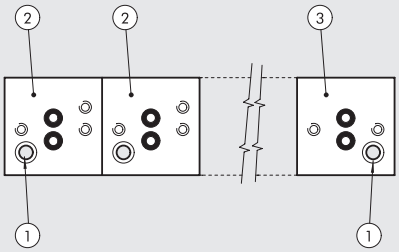

ACCESSORIES

CNOMO MANIFOLD BASE INPUT KIT

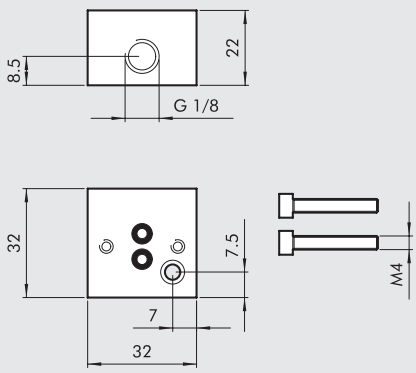

Code	Description
0227000200	Cnomo manifold base input kit

CNOMO MANIFOLD BASE KIT

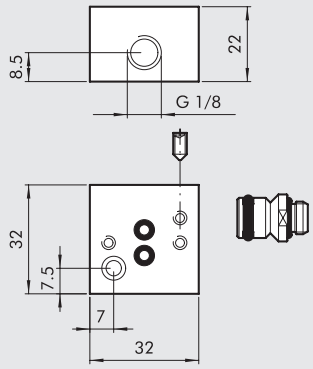

Code	Description
0227000150	Cnomo manifold base kit

COILS SIDE 22 mm



- Voltage tolerance: –10% to + 15%
- Insulation class: F155
- Degree of protection: IP65 EN60529 with connector
- Avoid prolonged exposure to the atmospheric agents
- Coil temperature 100% ED: 55°C at 20°C ambient temperature
- According to Atex 2014/34/EU rule, group 2, category 3 GD
- Electrical connection DIN 43650 B-IND

Code	Abbrev.	Nominal voltage	Absorption	
			Inrush	Holding
W0215000151	Coil 22 Ø 8 BA 2W-12VDC	12Vcc	2W	2W
W0215000101	Coil 22 Ø 8 BA 2W-24VDC	24Vcc	2W	2W
W0215000111	Coil 22 Ø 8 BA 3.5VA-24VAC	24V 50/60Hz	5.3VA	3.5VA
W0215000121	Coil 22 Ø 8 BA 3.5VA-110VAC	110V 50/60Hz	5.3VA	3.5VA
W0215000131	Coil 22 Ø 8 BA 3.5VA-220VAC	220V 50/60Hz	5.3VA	3.5VA

"UL" AND "CSA" COILS 22 mm



- Voltage tolerance: –10% to + 15%
- Insulation class: F155
- Degree of protection: IP65 EN60529 with connector
- Avoid prolonged exposure to the atmospheric agents
- Coil temperature 100% ED: 55°C at 20°C ambient temperature
- Electrical connection DIN 43650 B-IND

Code	Abbrev.	Nominal voltage	Absorption	
			Inrush	Holding
W0215000251	Coil 22 Ø 8 BA 2W-12VDC UR	12Vcc	2W	2W
W0215000201	Coil 22 Ø 8 BA 2W-24VDC UR	24Vcc	2W	2W
W0215000211	Coil 22 Ø 8 BA 3.5VA-24VAC UR	24V 50/60Hz	5.3VA	3.5VA
W0215000221	Coil 22 Ø 8 BA 3.5VA-110VAC UR	110V 50/60Hz	5.3VA	3.5VA
W0215000231	Coil 22 Ø 8 BA 3.5VA-220VAC UR	220V 50/60Hz	5.3VA	3.5VA

c UL us

CONNECTOR FOR COILS SIDE 22 mm DIN 43650 B-IND



Code	Type	Colour	Ø Cable
W0970510011	Standard	Black	PG9
W0970510012	LED 24V	Transparent	PG9
W0970510013	LED 110V	Transparent	PG9
W0970510014	LED 220V	Transparent	PG9
W0970510015	LED + VDR 24V	Transparent	PG9
W0970510016	LED + VDR 110V	Transparent	PG9
W0970510017	LED + VDR 220V	Transparent	PG9
W0970510070	Atex II 2 GD	Black	PG9

Code	Type	Colour	Ø Cable
W0970510051	LED 24VDC Energy Saving	Transparent	PG9

For technical data see page **B1**.61

COILS, SIDE 30 mm



- Electric contact DIN 43650 Shape A - ISO 4400
- Voltage tolerance: −10% to +10%
- Insulation class: F155
- Degree of protection: IP65 EN 60529 with connector
- Solenoid rating: 100% ED
- Maximum coil temperature at 100% ED use 70°C at 20° ambient temperature
- Electrical connection DIN 43650 - A

Code	Abbrev.	Nominal voltage	Absorption	
			Inrush	Holding
W0210010100	Coil 30 Ø8 2W-24VDC	24Vcc	5W	2W
W0210011100	Coil 30 Ø8 3.5VA-24VAC	24V 50/60Hz	10VA	3.5VA
W0210012100	Coil 30 Ø8 3.5VA-110VAC	110V 50/60Hz	10VA	3.5VA
W0210013100	Coil 30 Ø8 3.5VA-220VAC	220V 50/60Hz	10VA	3.5VA

CONNECTOR ON SIDE 30 mm DIN 43650-A



Code	Type	Colour	Ø Cable
W0970520033	Standard	Black	PG11
W0970520034	LED 24V	Transparent	PG11
W0970520035	LED 110V	Transparent	PG11
W0970520036	LED 220V	Transparent	PG11
W0970520037	LED + VDR 24V	Transparent	PG11
W0970520038	LED + VDR 110V	Transparent	PG11
W0970520039	LED + VDR 220V	Transparent	PG11
W0970520070	Atex II 2 GD	Black	PG11

NOTES

VALVES MINIMACH

METAL WORK PNEUMATIC

Space-saving valve, ideal for in industrial automation applications.
Made according to the well-proven design of the Mach series, the MINIMACH has a painted aluminium body to ensure extra sturdiness and reliable operation in even the harshest of environments.
The internal seals are made of FKM/FPM and are compatible with all oils used in compressors.
The pneumatic couplings are M5 threaded, allowing the user to choose the diameter, type and angle of the fitting.
The valve can be mounted in line or on a panel or multiple-port base.
The following versions are available:

- 3/2 normally open or normally closed
- 5/2 monostable or bistable
- 5/3 closed centres, open centres, pressure centres.

Electropneumatic actuation with a 24V DC pilot.

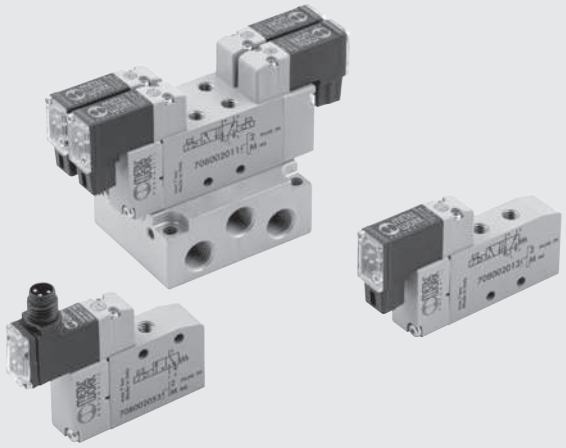

TECHNICAL DATA

Valve port thread		M5
Type of actuation		electric-pneumatic
Maximum external diameter of fittings	mm	Ø 11
Operating temperature range	°C	-10 to +60
	°F	14 to +140
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous
Pressure range	MPa	0.3 to 0.7
	bar	3 to 7
	psi	44 to 102
Flow rate at 6 bar ΔP 1 3/2	Nl/min	140
Flow rate at 6 bar ΔP 1 5/2	Nl/min	170
Flow rate at 6 bar ΔP 1 5/3	Nl/min	80
Voltage range		24 VDC ± 10%
Power	W	0.9
Solenoid rating		100% ED
Manual operator		Monostable
TRA/TRR 3/2 at 6 bar	ms	8/23
TRA/TRR 5/2 monostable at 6 bar	ms	8/30
TRA/TRR 5/2 bistable at 6 bar	ms	15/15
TRA/TRR 5/3 at 6 bar	ms	9/30
Insulation class		F155
Degree of protection		IP51 for PLUG-IN version
		IP65 for M8 version
Tightening torque M4 valve / base screws	Nm	0.8
Installation		In any position. As for the bistable ones, if subject to vibration, the vertical assembly is not advisable
Compatibility with oils		See **chapter Z1**

COMPONENTS

① VALVE BODY: chemically nickel-plated aluminium
② CONTROL/END CAP: Hostaform®
③ SPOOL: chemically nickel-plated aluminium
④ DISTANCE PLATES: tecnopolymer
⑤ GASKETS: FKM-FPM
⑥ PISTONS: Hostaform®
⑦ PISTON GASKET: Polyurethane
⑧ FILTER: sintered bronze
⑨ SPRINGS: special steel
⑩ PILOT: with integrated coil

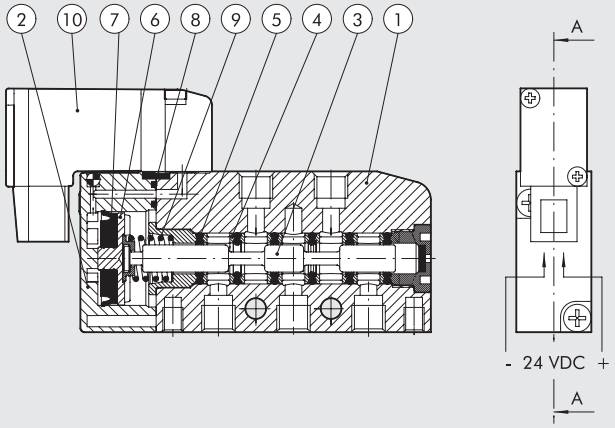

FLOW CHART

Flow rates [Nl/min]

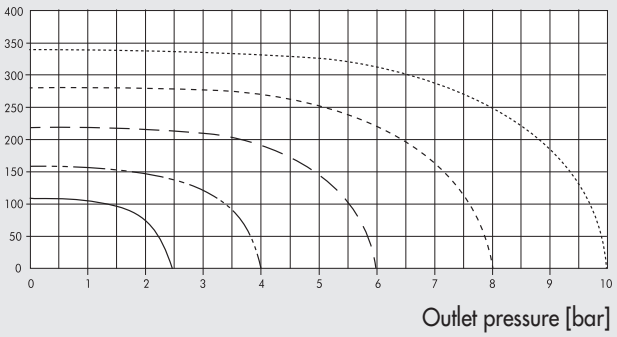

Flow rates [Nl/min]

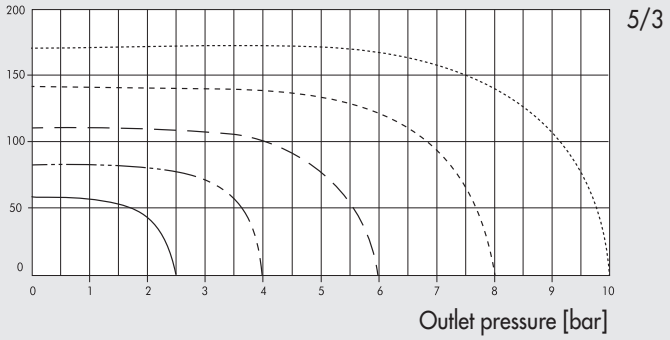

Flow rates [Nl/min]

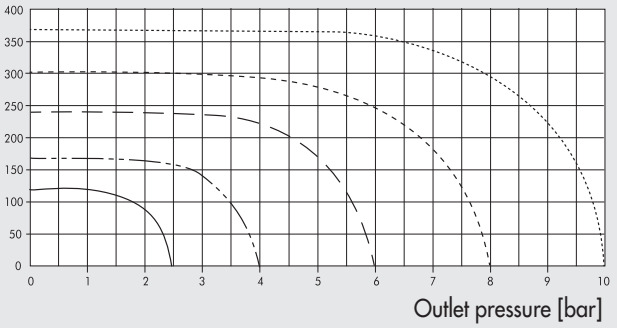

HOW TO FIX THE VALVE TO THE BASE

Proceed as follows:
1. screw the pins Ⓐ onto the valve
2. secure them with the ready-mounted grub screws Ⓑ on the base (0.5 Nm max)

IMPORTANT
To secure properly, press the valve down onto the base while tightening the two grub screws.
Do not tighten one grub screw completely before starting to tighten the other.



HOW TO FIX THE BASE

Ⓐ From the top using M4 screws
Ⓑ From below using M5 screws
Ⓒ From the side using M4 screws
Ⓓ From the top on the DIN bar via the M4 screws and bracket code 0225004600 (using 1 screw per bracket)

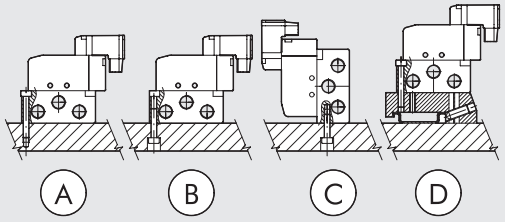

SYNOPTIC, SIZES AND VERSIONS

M S V	0	5	S O	B	O O	2 4 V D C
FAMILY	DIMENSIONS	FUNCTION	OPERATORS 14	RESETTING (12)	FURTHER DETAILS	
MSV minivalves solenoid	**0** M5	**3** 3/2 **5** 5/2 **6** 5/3	**SO** solenoid	**B** bistable **S** mechanical springs	**OO** no indication **NC** normally closed **NO** normally open **CC** closed centres **OC** open centres **PC** pressure centres	**24VDC** PLUG-IN 24VDC connector **M8** M8 24VDC connector

MINIMACH VALVES SOLENOID-PNEUMATIC

MONOSTABLE 3/2

PLUG-IN VERSION

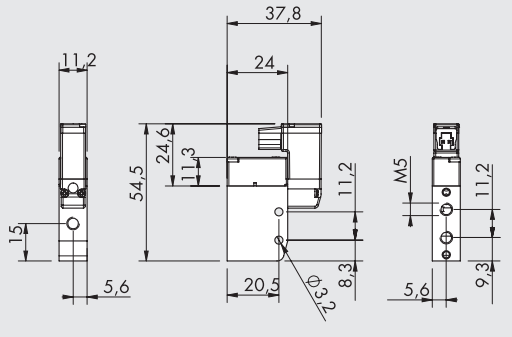

M8 VERSION



M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

Symbol	Code	Abbrev.	Weight [g]
	**7080020532**	MSV 03 SOS NC 24VDC PLUG-IN	36.2
	708002053M	MSV 03 SOS NC 24VDC M8	36.2
	**7080020632**	MSV 03 SOS NO 24VDC PLUG-IN	36.2
	708002063M	MSV 03 SOS NO 24VDC M8	36.2

MONOSTABLE 5/2

PLUG-IN VERSION

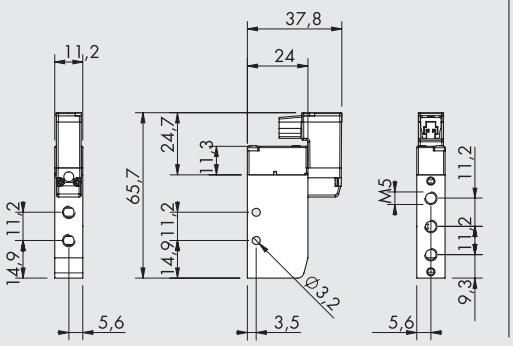

M8 VERSION



M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

Symbol	Code	Abbrev.	Weight [g]
	**7080020132**	MSV 05 SOS OO 24VDC PLUG-IN	43.3
	708002013M	MSV 05 SOS OO 24VDC M8	43.3

BISTABLE 5/2

PLUG-IN VERSION

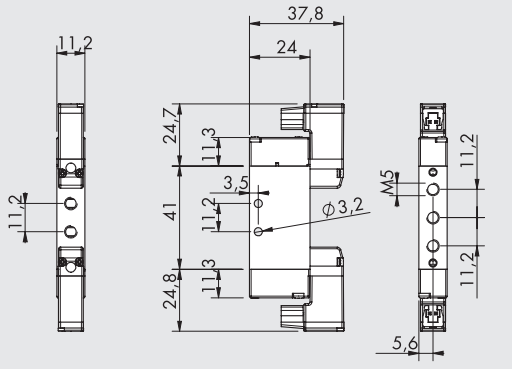

M8 VERSION



M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

Symbol	Code	Abbrev.	Weight [g]
	**7080020112**	MSV 05 SOB OO 24VDC PLUG-IN	57
	708002011M	MSV 05 SOB OO 24VDC M8	57

MONOSTABLE 5/3

PLUG-IN VERSION

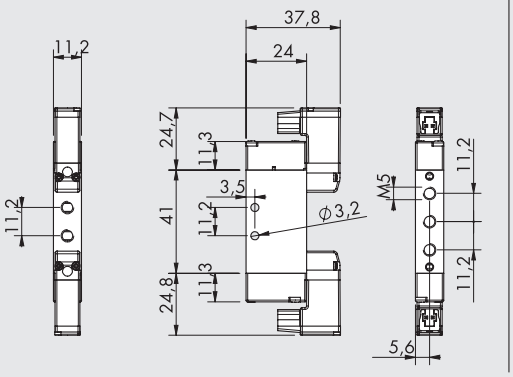

M8 VERSION



M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

Symbol	Code	Abbrev.	Weight [g]
	**7080020212**	MSV 06 SOS CC 24VDC PLUG-IN	57
	708002021M	MSV 06 SOS CC 24VDC M8	57
	**7080020312**	MSV 06 SOS OC 24VDC PLUG-IN	57
	708002031M	MSV 06 SOS OC 24VDC M8	57
	**7080020412**	MSV 06 SOS PC 24VDC PLUG-IN	57
	708002041M	MSV 06 SOS PC 24VDC M8	57

ACCESSORIES: MULTIPLE BASE

3/2 MULTIPLE BASE

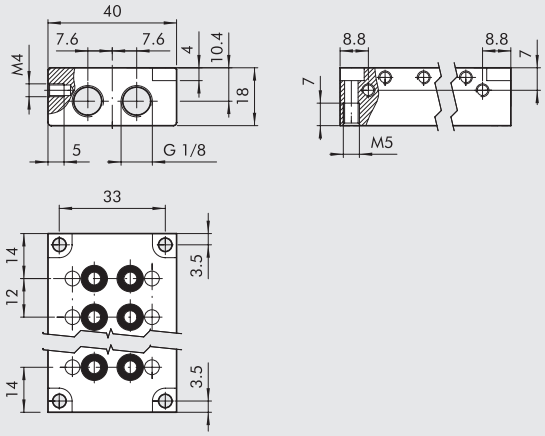

Code	Description	Position	Weight [g]
0225010201	Base 2 position for 3/2 valves Minimach	2	60
0225010401	Base 4 position for 3/2 valves Minimach	4	99
0225010601	Base 6 position for 3/2 valves Minimach	6	135
0225010801	Base 8 position for 3/2 valves Minimach	8	178

N.B.: It is advisable to use straight connectors code 02400A____

5/2 - 5/3 MULTIPLE BASE

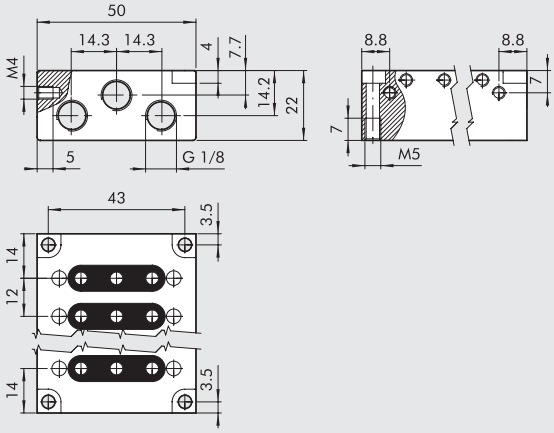

Code	Description	Position	Weight [g]
0225020201	Base 2 position for 5/2-5/3 valves Minimach	2	95
0225020401	Base 4 position for 5/2-5/3 valves Minimach	4	154
0225020601	Base 6 position for 5/2-5/3 valves Minimach	6	211
0225020801	Base 8 position for 5/2-5/3 valves Minimach	8	270

N.B.: It is advisable to use straight connectors code 02400A____

ADAPTER FOR BAR OMEGA (DIN EN 50022)



Code	Description	Weight [g]
0225004600	Omega-adapter Mach 16	46

BLANKING PLATE FOR 3/2 VALVES

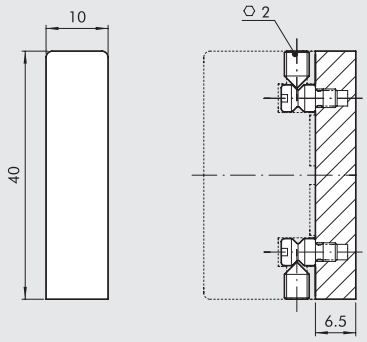

Code	Description	Weight [g]
0226009500	Blanking plate for 3/2 bases Minimach	9.5

BLANKING PLATE FOR 5/2 - 5/3 VALVES

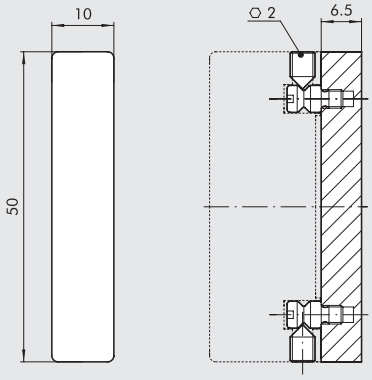

Code	Description	Weight [g]
0226009501	Blanking plate for 5/2-5/3 bases Minimach	11

INTERMEDIATE DIAPHRAGM

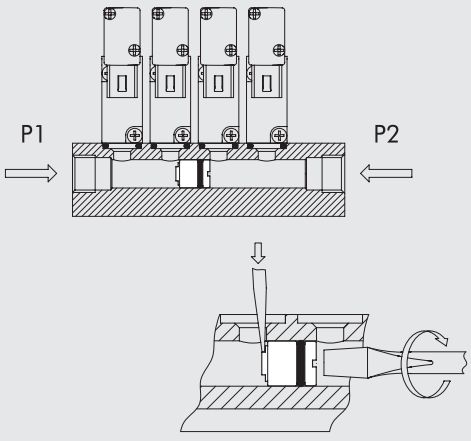

Code	Description	Weight [g]
0226009010	Minimach base diaphragm	3.5

ACCESSORIES: CONNECTORS

PLUG-IN CONNECTOR



Code	Description
W0970512000	Plug-in connector for Mach 11 L = 300 mm
W0970512007	Plug-in connector for Mach 11 L = 1 m
W0970512002	Plug-in connector for Mach 11 L = 2 m

M8 STRAIGHT CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

90° M8 CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228
N.B.: It is inadvisable for use on multi-position bases 0225010___ and 0225020___

M8 M - M8 F CONNECTOR



Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital OUTPUT of the EB 80 valves

SPARE PARTS

PLUG-IN PILOT



Code	Description
722113541100	PLT-10 722113541100

KIT OF SPARE GASKET BASES FOR 3/2 VALVES



Code	Description	Weight [g]
0226009000	Gasket kit 3/2 multiple bases Minimach	2.5

M8 PILOT



Code	Description
7222M3541100	PLT-10 3/2 NC 0.8W 24VDC LED M8 with manual

KIT OF SPARE GASKET BASES FOR 5/2 - 5/3 VALVES



Code	Description	Weight [g]
0226009001	Gasket kit 5/2-5/3 multiple bases Minimach	2.5

VALVES MACH 11

The Mach 11 in-line valves with M7 threaded connection come in the following versions:
• 5/2 monostable and bistable
• 5/3 with closed, open or pressure centres.
Control:
• pneumatic
• solenoid/pneumatic 24 V
With an exceptional compact design only 11 mm wide, and excellent high performance, these valves can be used in numerous applications in industrial automation.

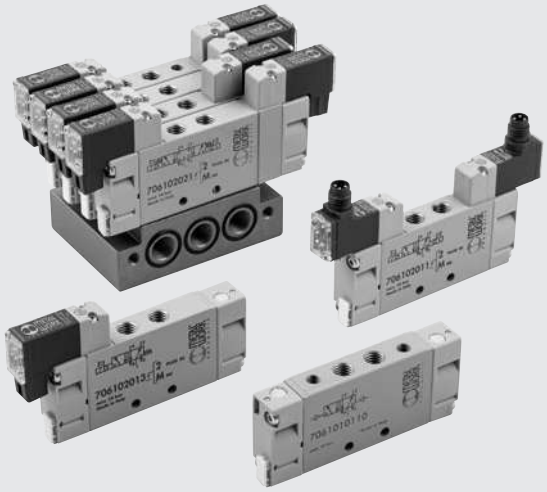

TECHNICAL DATA

Valve port thread		M7		
Pilot thread		M5		
Maximum external diameter of fittings	mm	Pneumatic: M7 = Ø 11 - M5 = Ø 9 - Electric: M7 - M5 = Ø 11		
Operating temperature range	°C	-10 to +60		
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous		
Screw for valve wall-mounting		M3		
Flow rate at 6 bar ΔP 1 bar	Nl/min	400		
Pressure range	bar	**Electric**	**Electric pilot-assisted**	**Pneumatic**
		monostable: 2 to 7	pilot pressure: 2 to 7	monostable control pres.values: 2 to 10
		bistable: 2 to 7	valve: vacuum to 10	bistable control pres. values: 1 to 10
		5/3: 2 to 7		control pressure 5/3: 2 to 10
				valve: vacuum to 10
Voltage range		24 VDC ± 10%		-
Power	W	0.9		-
Insulation class		F155		-
Degree of protection		IP51 for PLUG-IN version		-
		IP65 for M8 version		-
Solenoid rating		100% ED		-
TRA/TRR monostable at 6 bar	ms	10 / 45		4 / 9
TRA/TRR bistable at 6 bar	ms	22 / 22		4 / 4
TRA/TRR 5/3 monostable at 6 bar	ms	22 / 22		4 / 4
Tightening torque M3 valve / base screws	Nm	0.8		
Compatibility with oils		See **chapter Z1**		

COMPONENTS

① VALVE BODY: Aluminium
② CONTROL/BASE: Hostaform®
③ SPOOL: Aluminium
④ GASKETS: Polyurethane
⑤ PISTONS: Hostaform®
⑥ PISTON GASKET: Polyurethane
⑦ FILTER: sintered bronze
⑧ PILOT: with integrated coil
⑨ SPRINGS: special steel
⑩ REMOVABLE IDENTIFICATION PLATE

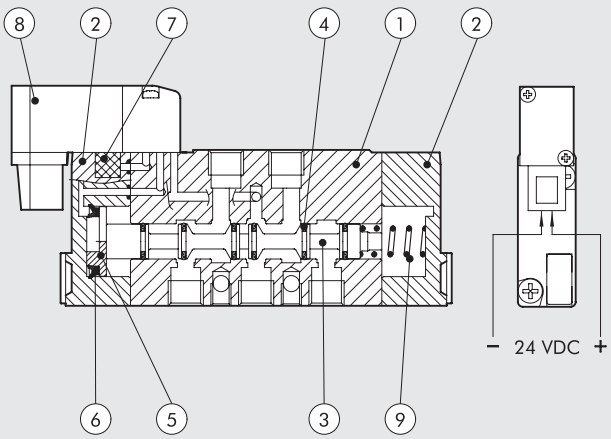

METAL WORK PNEUMATIC

MODULARITY

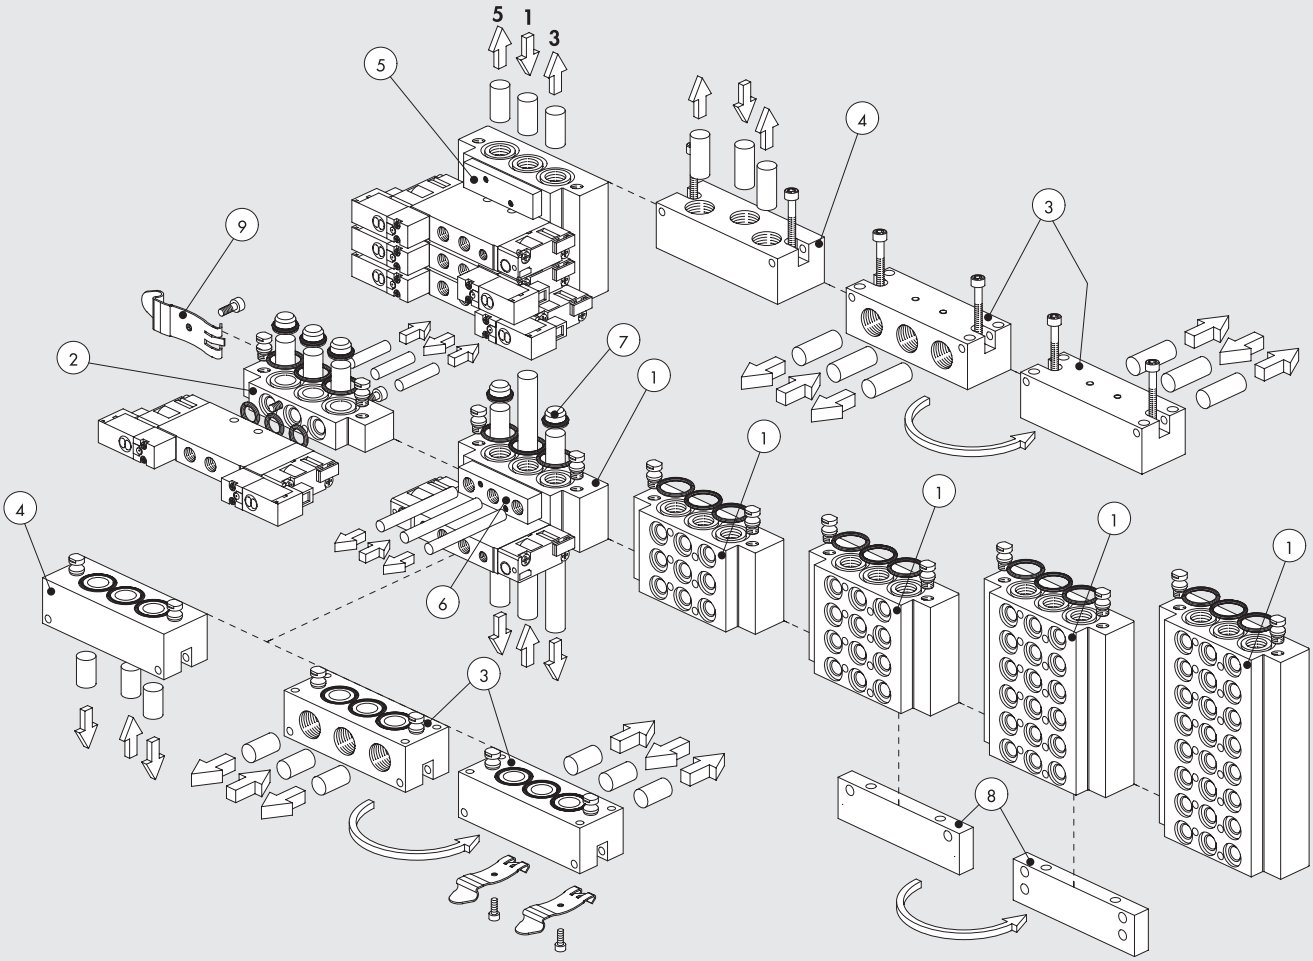

HOW TO FIX THE BASE

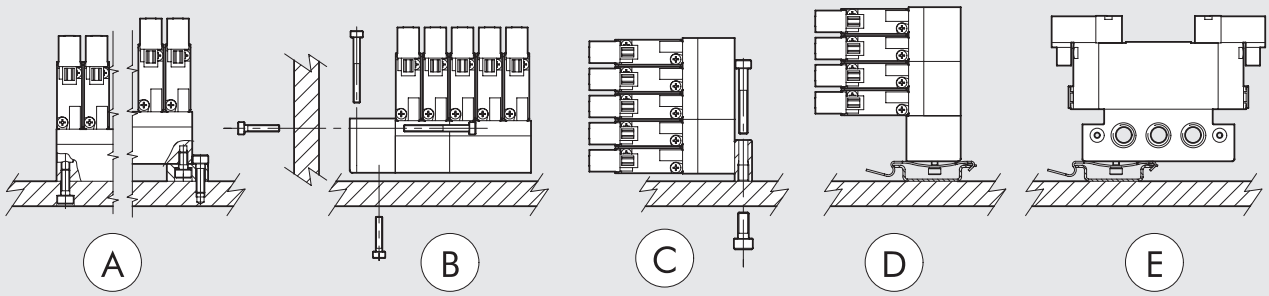

SYNOPTIC, SIZES AND VERSIONS

M S V	1	5	S O	B	O O	2 4 V D C
FAMILY	**DIMENSIONS**	**FUNCTION**	**OPERATORS 14**	**RESETTING (12)**	**FURTHER DETAILS**	
MSV mini-solenoid valve	**1** M7	**5** 5/2	**SO** solenoid	**B** bistable	**OO** no indication	**24VDC** PLUG-IN 24VDC connector
MPV mini-pneumatic valve		**6** 5/3	**SE** solenoid assisted	**S** mechanical springs	**CC** closed centres	**M8** M8 24VDC connector
			PN pneumatic		**OC** open centres	
					PC pressure centres	

VALVES MACH 11, PNEUMATIC

MONOSTABLE 5/2

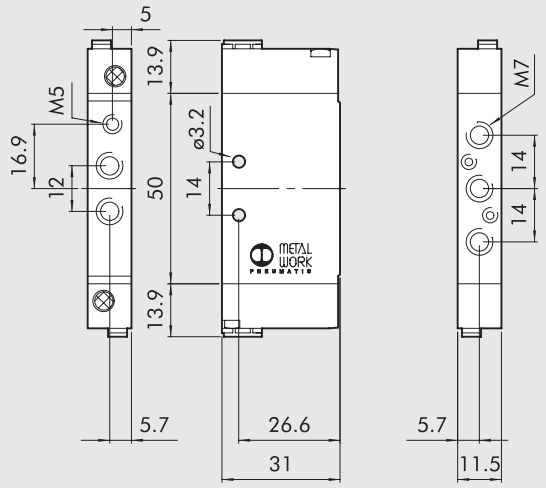

Symbol	Code	Abbrev.	Weight [g]
	7061010130	MPV 15 PNS OO	52

MONOSTABLE 5/3

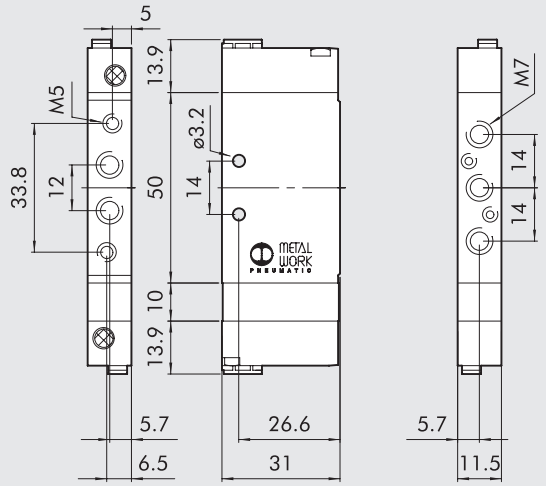

Symbol	Code	Abbrev.	Weight [g]
	7061010210	MPV 16 PNS CC	62
	7061010310	MPV 16 PNS OC	62
	7061010410	MPV 16 PNS PC	62

BISTABLE 5/2

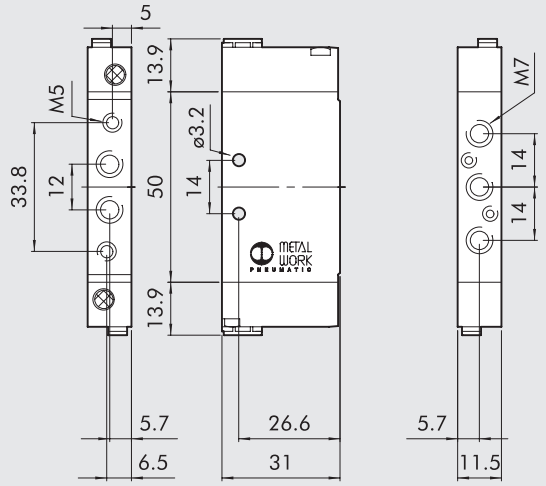

Symbol	Code	Abbrev.	Weight [g]
	7061010110	MPV 15 PNB OO	52

VALVES MACH 11, SOLENOID-PNEUMATIC

MONOSTABLE 5/2

PLUG-IN VERSION

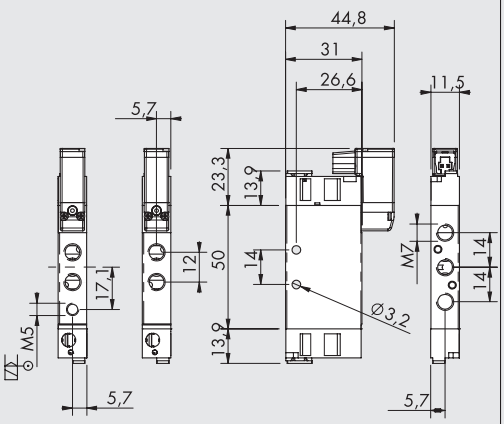

M8 VERSION



Symbol	Code	Abbrev.	Weight [g]
	7061020132	MSV 15 SOS OO 24VDC PLUG-IN	60
	706102013M	MSV 15 SOS OO 24VDC M8	60
	**7061030132**	MSV 15 SES OO 24VDC PLUG-IN	60
	706103013M	MSV 15 SES OO 24VDC M8	60

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

MONOSTABLE 5/3

PLUG-IN VERSION

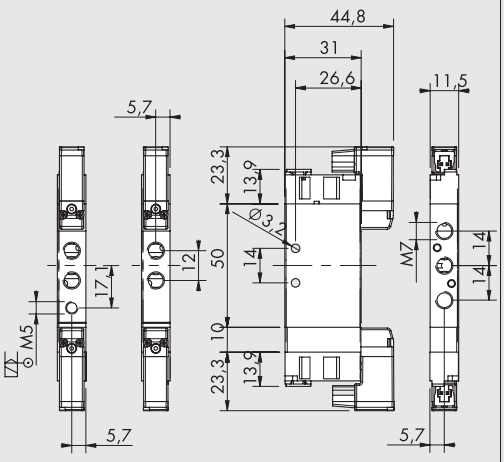

M8 VERSION



Symbol	Code	Abbrev.	Weight [g]
	**7061020212**	MSV 16 SOS CC 24VDC PLUG-IN	82
	706102021M	MSV 16 SOS CC 24VDC M8	82
	**7061020312**	MSV 16 SOS OC 24VDC PLUG-IN	82
	706102031M	MSV 16 SOS OC 24VDC M8	82
	**7061020412**	MSV 16 SOS PC 24VDC PLUG-IN	82
	706102041M	MSV 16 SOS PC 24VDC M8	82
	**7061030212**	MSV 16 SES CC 24VDC PLUG-IN	82
	706103021M	MSV 16 SES CC 24VDC M8	82
	7061030312	MSV 16 SES OC 24VDC PLUG-IN	82
	706103031M	MSV 16 SES OC 24VDC M8	82
	**7061030412**	MSV 16 SES PC 24VDC PLUG-IN	82
	706103041M	MSV 16 SES PC 24VDC M8	82

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

BISTABLE 5/2

PLUG-IN VERSION

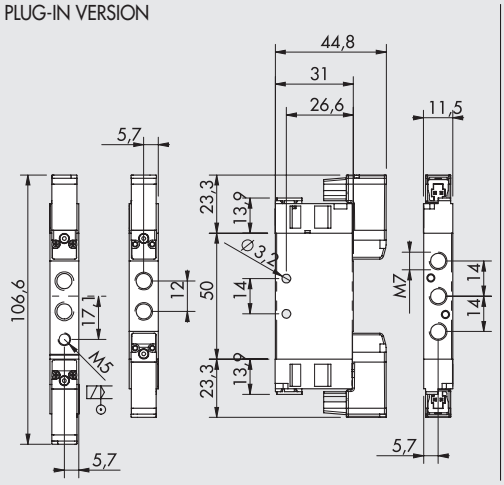

M8 VERSION



Symbol	Code	Abbrev.	Weight [g]
	**7061020112**	MSV 15 SOB OO 24VDC PLUG-IN	72
	706102011M	MSV 15 SOB OO 24VDC M8	72
	**7061030112**	MSV 15 SEB OO 24VDC PLUG-IN	88
	706103011M	MSV 15 SEB OO 24VDC M8	88

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

ACCESSORIES: MANIFOLD BASES

① MULTIPLE MANIFOLD BASE

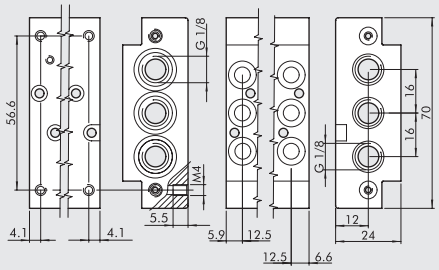

Code	Description	Weight [g]
0227400201	Base, 2 posn. for Mach 11	94
0227400301	Base, 3 posn. for Mach 11	140
0227400401	Base, 4 posn. for Mach 11	186
0227400601	Base, 6 posn. for Mach 11	282
0227400801	Base, 8 posn. for Mach 11	378

② SEPARATE FEED MANIFOLD BASE

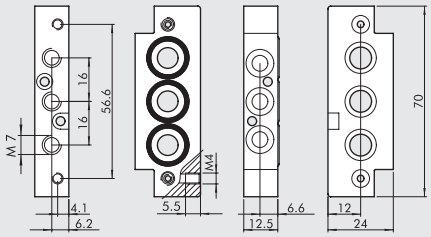

Code	Description	Weight [g]
0227400200	Separate feed manifold base for Mach 11	44

③ 90° END PLATE

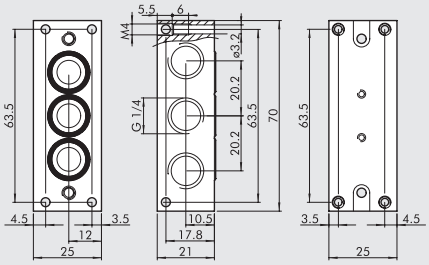

Code	Description	Weight [g]
0227400101	90° end plate 1/4 Mach 11	82

④ STRAIGHT END PLATE

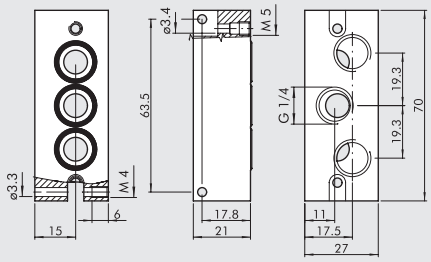

Code	Description	Weight [g]
0227400100	Straight end plate 1/4 for Mach 11	93

⑤ BLANKING PLATE



Code	Description	Weight [g]
0227400500	Blanking plate for Mach 11	13

⑥ FEED BLOCK



Code	Description	Weight [g]
0227400503	M7 feed block for Mach 11	11

⑦ DIAPHRAGM



Code	Description	Weight [g]
0227400000	Diaphragm for Mach 11 bases	3

⑧ BASE FIXING PLATE



Code	Description	Weight [g]
0227400504	Fixing plate for Mach 11 bases	28

ACCESSORIES

⑨ CONNECTION BRACKET ON BAR OMEGA (DIN EN 50022)



Code	Description
0227300600	Connection bracket on DIN bar

PLUG-IN CONNECTOR



Code	Description
W0970512000	Plug-in connector for Mach 11 L = 300 mm
W0970512007	Plug-in connector for Mach 11 L = 1 m
W0970512002	Plug-in connector for Mach 11 L = 2 m

M8 STRAIGHT CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

90° M8 CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

M8 M - M8 F CONNECTOR

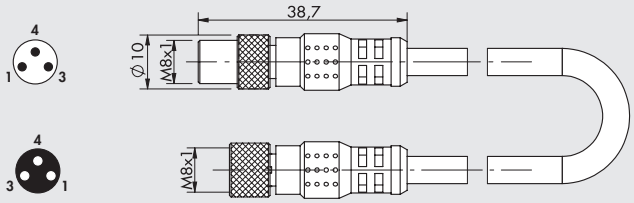

Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital OUTPUT of the EB 80 valves

NOTES

SPARE PARTS

PLUG-IN PILOT



Code	Description
722113541100	PLT-10 722113541100

M8 PILOT



Code	Description
7222M3541100	PLT-10 3/2 NC 0.8W 24VDC LED M8 with manual

VALVES MACH 16

Available in size 1/8" only, versions 5/2 and 5/3 and with pneumatic and solenoid actuation. The Mach 16 valve is a typical small size valve, only 16 mm wide, with excellent performance 750 Nl/min flow rate at 6 bar ΔP 1 bar.
The valve can be used in line, on a panel or on a base (multiple or manifold)
The Mach design is the result of the miniaturisation concept with the same durability, sturdiness and reliability.

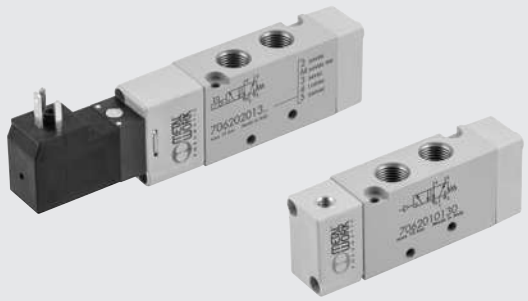

TECHNICAL DATA

Valve port thread		1/8"
Type of control		M5 pneumatic actuation - Solenoid/pneumatic operation with integrated coil
Maximum outer diameter of gaskets for ports 1 - 3 - 5	mm	15
Maximum outer diameter for ports 2 - 4	mm	15
Operating temperature range	°C	-10 to +60
Operating pressure	bar	
• monostable - monostable 5/3		Vacuum to 10 pneumatic/1.9 to 10 solenoid/pneumatic
• bistable		Vacuum to 10 pneumatic/1 to 10 solenoid/pneumatic
• pilot-assisted		Vacuum to 10
Fluid		Filtered lubricated or unlubricated air lubrication, if used, must be continuous
Solenoid pilot with integrated coil		DIN 43650 C-shape / EN 175301-803-C; M8 connection (available for 24VDC voltage)
Hand operator		Monostable on solenoid pilot (with bistable manual valve on request)
Number of ways in base		1-3-5 and pilot exhaust
Screws for wall-mounting single valve		2 screws M3
Screws for base-mounting valve		2 screws M2.5x30
Installation		In any position (vertical assembly is not recommended for bistable valves subjected to vibration)
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	540
Flow rate at 6 bar ΔP 1 bar	Nl/min	750
Conductance C	Nl/min · bar	149.8
Critical ratio b	bar/bar	0.525
Tightening torque M2.5 valve / base screws	Nm	0.5
Compatibility with oils		See **chapter Z1**

COMPONENTS

① VALVE BODY: Aluminium
② CONTROL/BASE: Hostaform®
③ SPOOL: Aluminium
④ GASKETS: Polyurethane
⑤ PISTONS: Hostaform®
⑥ PISTON GASKET: Polyurethane
⑦ INTERFACE GASKETS: sintered HDPE
⑧ PILOT: with integrated coil

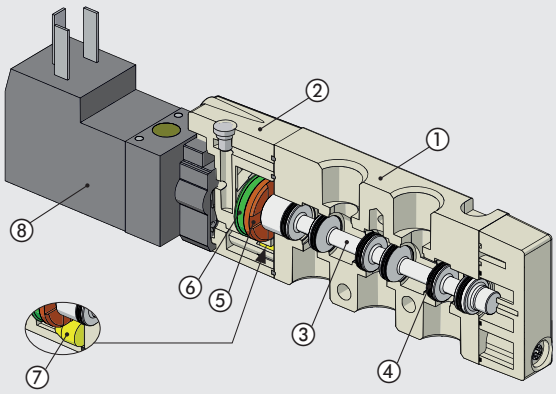

FLOW CHART

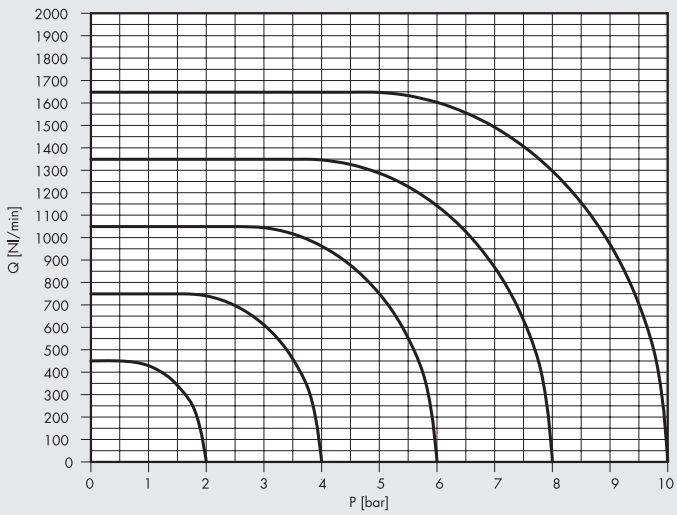

METAL WORK PNEUMATIC

MANIFOLD BASES

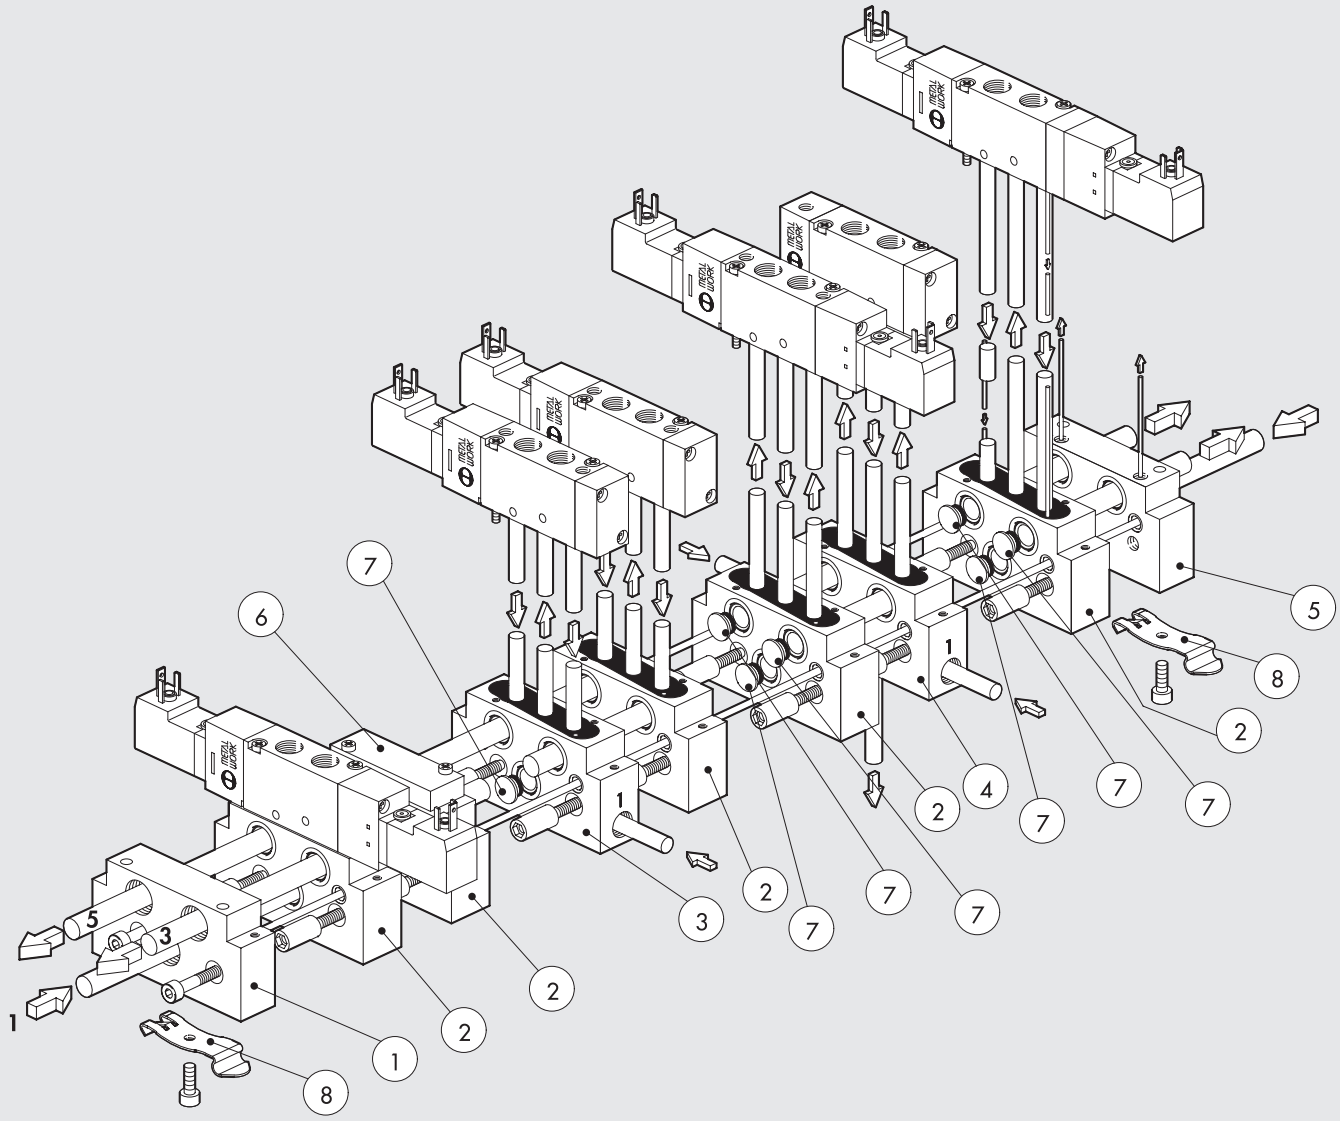

Reference	Code	Description
①	**0227100201**	M16/VDMA Input end-plate kit
②	**0227100150**	M16 manifold base kit
③	**0227100301**	M16 separate feed manifold base kit
④	**0227100302**	M16 exhaust feed manifold base kit
⑤	**0227100200**	M16/VDMA output end-plate kit
⑥	**0225004500**	M16 blanking plate
⑦	**0227100000**	Intermediate diaphragm
⑧	**0227300600**	Connection bracket on DIN-bar

SYNOPTIC, SIZES AND VERSIONS

M S V	2	5	S O	B	O O	2 4 V D C
FAMILY	**DIMENSIONS**	**FUNCTION**	**OPERATORS 14**	**RESETTING 12**	**FURTHER DETAILS**	**VOLTAGE**
MSV solenoid/pneumatic	**2** 1/8"	**5** 5/2	**SO** solenoid	**P** pneumatic spring	**OO** no indication	24VDC
MPV pneumatic		**6** 5/3	**SE** solenoid assisted	**S** mechanical springs	**CC** closed centres	24VDC M8
			PN pneumatic	**B** bistable	**OC** open centres	24VAC
					PC pressure centres	110VAC
						220VAC

VALVES MACH 16 MPV, PNEUMATIC

TECHNICAL DATA

Operating pressure	bar	Vacuum to10
Minimum operating pressure:	bar	
• monostable with pneumatic spring		see graph
• monostable with mechanical spring		1.6
• monostable 5/3		1.9
• bistable		1
Conductance C	Nl/min · bar	149.8
Critical ratio b	bar/bar	0.525
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	540
Flow rate at 6 bar ΔP 1 bar	Nl/min	750
Repositioning response times at 6 bar:		
• monostable	ms	4
• bistable	ms	4
Repositioning response times at 6 bar:		
• monostable	ms	8.4
• bistable	ms	4

MONOSTABLE 5/2

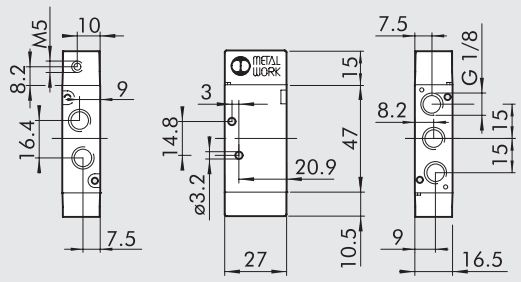

Symbol	Code	Abbrev.	Weight [g]
	**7062010100**	MPV 25 PNP OO	60
	**7062010130**	MPV 25 PNS OO	61

BISTABLE 5/2

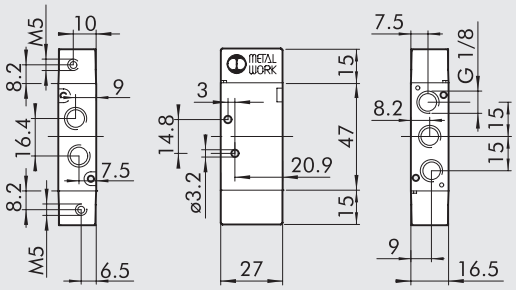

Symbol	Code	Abbrev.	Weight [g]
	**7062010110**	MPV 25 PNB OO	62

MONOSTABLE 5/3

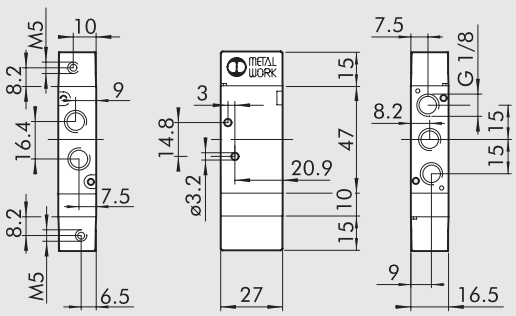

Symbol	Code	Abbrev.	Weight [g]
	7062010210	MPV 26 PNS CC	73
	7062010310	MPV 26 PNS OC	73
	7062010410	MPV 26 PNS PC	73

OPERATING PRESSURE

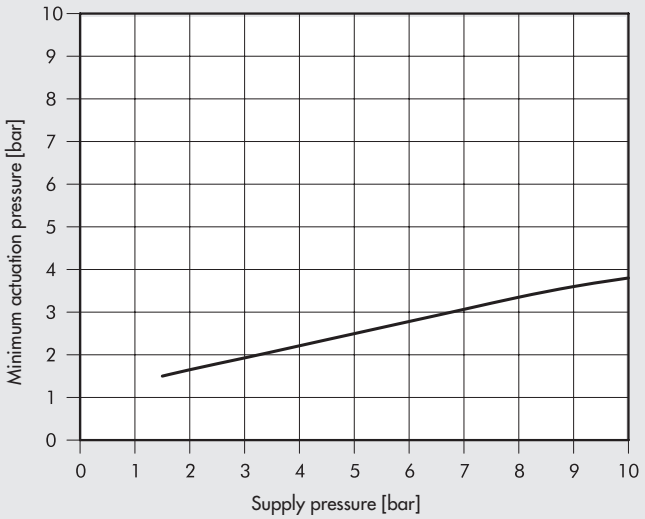

VALVES MACH 16 MSV, SOLENOID/PNEUMATIC

TECHNICAL DATA

Operating pressure:	bar	
• monostable, monostable 5/3		1.9 to 10
• bistable		1 to 10
• pilot-assisted		Vacuum to10
Minimum pilot pressure	bar	2
Operating temperature range	°C	-10 to +60
Conductance C	Nl/min · bar	149.8
Critical ratio b	bar/bar	0.525
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	540
Flow rate at 6 bar ΔP 1 bar	Nl/min	750
TRA / TRR monostable at 6 bar	ms	12 / 26
TRA / TRR bistable at 6 bar	ms	21 / 21
Hand operator		monostable on the solenoid pilot (also with bistable manual valve on request)
Pilot with integrated coil		24 VDC - 24 VAC - 110 VAC - 220 VAC
Power	W	1
Voltage tolerance		-10% to +15%
Insulation class		F 155
Degree of protection		IP 65 EN60529 with connector
Solenoid rating		100% ED
Electrical contacts		DIN 43650 C shape / EN 175301-803-C M8 connection*

* Available for 24VDC voltage

MONOSTABLE 5/2

DIN 43650-C VERSION / EN 175301-803-C

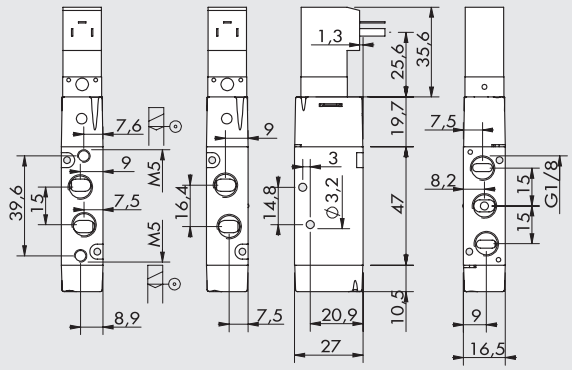

M8 VERSION



Symbol	Code	Abbrev.	Weight [g]
	7062020102	MSV 25 SOP OO 24VDC	92
	706202010M	MSV 25 SOP OO 24VDC M8	92
	7062020103	MSV 25 SOP OO 24VAC	92
	7062020104	MSV 25 SOP OO 110VAC	92
	7062020105	MSV 25 SOP OO 220VAC	92
	7062020132	MSV 25 SOS OO 24VDC	93
	706202013M	MSV 25 SOS OO 24VDC M8	93
	7062020133	MSV 25 SOS OO 24VAC	93
	7062020134	MSV 25 SOS OO 110VAC	93
	7062020135	MSV 25 SOS OO 220VAC	93
	7062030132	MSV 25 SES OO 24VDC	93
	706203013M	MSV 25 SES OO 24VDC M8	93
	7062030133	MSV 25 SES OO 24VAC	93
	7062030134	MSV 25 SES OO 110VAC	93
	7062030135	MSV 25 SES OO 220VAC	93

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

BISTABLE 5/2

DIN 43650-C VERSION / EN 175301-803-C

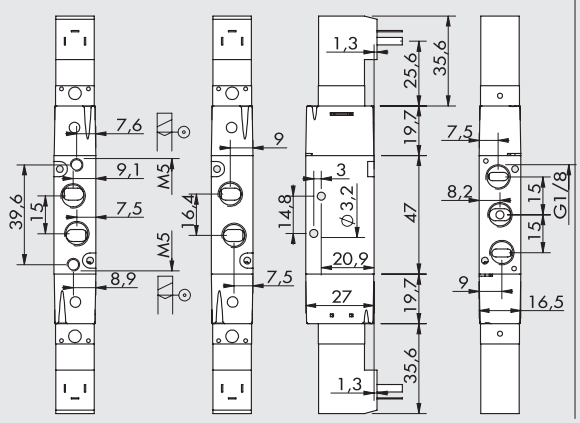

M8 VERSION



Symbol	Code	Abbrev.	Weight [g]
	7062020112	MSV 25 SOB OO 24VDC	124
	706202011M	MSV 25 SOB OO 24VDC M8	124
	7062020113	MSV 25 SOB OO 24VAC	124
	7062020114	MSV 25 SOB OO 110VAC	124
	7062020115	MSV 25 SOB OO 220VAC	124
	7062030112	MSV 25 SEB OO 24VDC	125
	706203011M	MSV 25 SEB OO 24VDC M8	125
	7062030113	MSV 25 SEB OO 24VAC	125
	7062030114	MSV 25 SEB OO 110VAC	125
	7062030115	MSV 25 SEB OO 220VAC	125

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

MONOSTABLE 5/3

DIN 43650-C VERSION / EN 175301-803-C

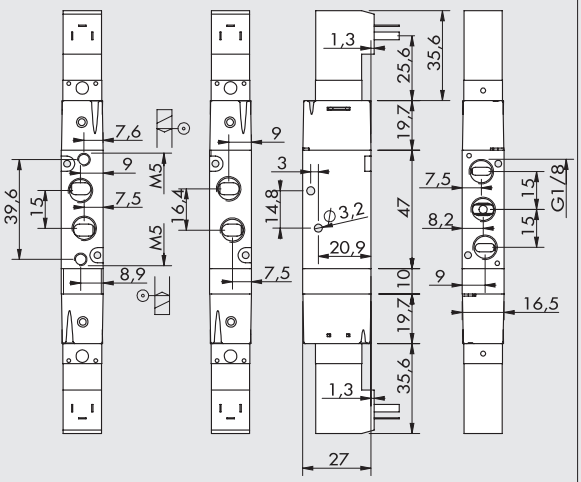

M8 VERSION



Symbol	Code	Abbrev.	Weight [g]
	**7062020212**	MSV 26 SOS CC 24VDC	142
	706202021M	MSV 26 SOS CC 24VDC M8	142
	7062020213	MSV 26 SOS CC 24VAC	142
	7062020214	MSV 26 SOS CC 110VAC	142
	7062020215	MSV 26 SOS CC 220VAC	142
	7062020312	MSV 26 SOS OC 24VDC	142
	706202031M	MSV 26 SOS OC 24VDC M8	142
	7062020313	MSV 26 SOS OC 24VAC	142
	7062020314	MSV 26 SOS OC 110VAC	142
	7062020315	MSV 26 SOS OC 220VAC	142
	**7062020412**	MSV 26 SOS PC 24VDC	142
	706202041M	MSV 26 SOS PC 24VDC M8	142
	7062020413	MSV 26 SOS PC 24VAC	142
	7062020414	MSV 26 SOS PC 110VAC	142
	7062020415	MSV 26 SOS PC 220VAC	142
	**7062030212**	MSV 26 SES CC 24VDC	143
	706203021M	MSV 26 SES CC 24VDC M8	143
	7062030213	MSV 26 SES CC 24VAC	143
	7062030214	MSV 26 SES CC 110VAC	143
	7062030215	MSV 26 SES CC 220VAC	143
	7062030312	MSV 26 SES OC 24VDC	143
	706203031M	MSV 26 SES OC 24VDC M8	143
	7062030313	MSV 26 SES OC 24VAC	143
	7062030314	MSV 26 SES OC 110VAC	143
	7062030315	MSV 26 SES OC 220VAC	143
	**7062030412**	MSV 26 SES PC 24VDC	143
	706203041M	MSV 26 SES PC 24VDC M8	143
	7062030413	MSV 26 SES PC 24VAC	143
	7062030414	MSV 26 SES PC 110VAC	143
	7062030415	MSV 26 SES PC 220VAC	143

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

ACCESSORIES FOR VALVES MACH 16 MSV, SOLENOID/PNEUMATIC

CONNECTOR 15 mm DIN 43650 SHAPE C / EN 175301-803-C



Code	Description
W0970501021	Connector 15 mm shape C
W0970501022	Connector 15 mm shape C LED 24V
W0970501025	Connector 15 mm shape C LED+VDR 24V

M8 STRAIGHT CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

90° M8 CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

M8 M - M8 F CONNECTOR



Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital OUTPUT of the EB 80 valves

SPARE PARTS FOR VALVES MACH 16 MSV, SOLENOID/PNEUMATIC

COIL MACH 16

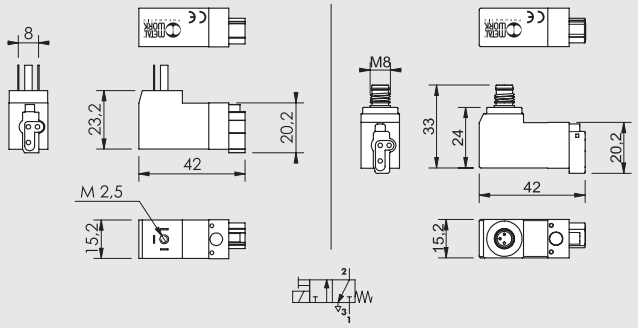

Code	Description
W4015301000	In-line pilot 24VDC
W4015301210	In-line pilot 24VDC M8
W4015301010	In-line pilot 24VAC 50/60 HZ
W4015301020	In-line pilot 110VAC 50/60 HZ
W4015301030	In-line pilot 220VAC 50/60 HZ

NOTES

MANIFOLD BASES FOR VALVES MACH 16

① MACH 16 INPUT END-PLATE

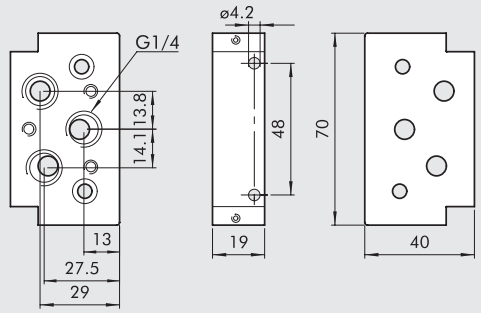

Code	Description	Weight [g]
0227100201	Input end-plate kit M16/VDMA	125

② MACH 16 MANIFOLD BASE

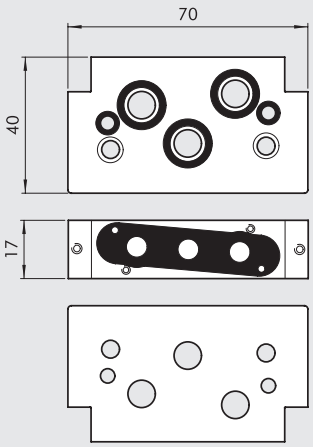

Code	Description	Weight [g]
0227100150	Manifold base kit M16	121

③ MACH 16 SEPARATE FEED MANIFOLD BASE

Ⓐ Separate feed
Ⓑ Separate exhaust

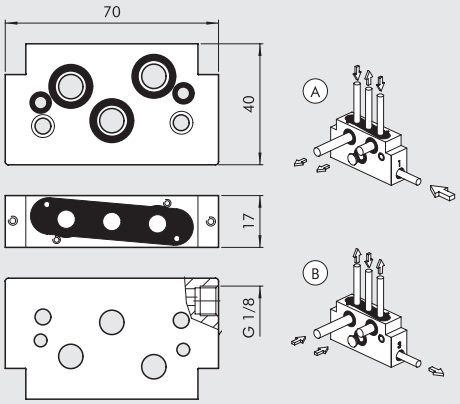

Code	Description	Weight [g]
0227100301	Manifold base kit-separate feed M16	119

④ MACH 16 EXHAUST FEED MANIFOLD BASE

Ⓐ Exhaust feed
Ⓑ Separate exhausts
Ⓒ Separate feed/exhausts

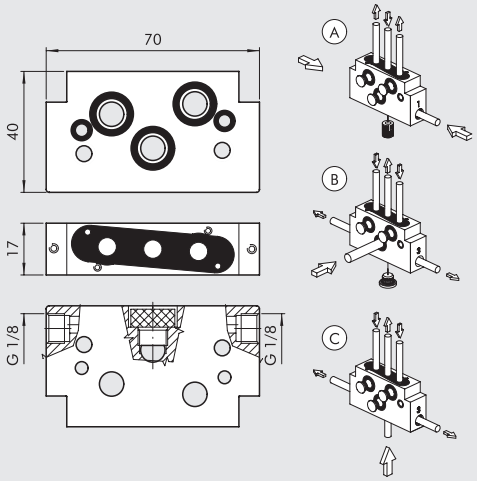

Code	Description	Weight [g]
0227100302	Manifold base kit-exhaust feed M16	113

⑤ MACH 16 OUTPUT END-PLATE

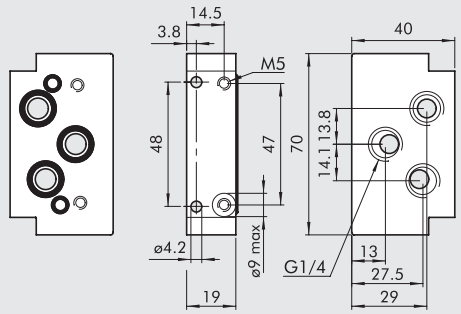

Code	Description	Weight [g]
0227100200	Output end-plate kit M16/VDMA	122

⑥ BLANKING PLATE – UNUSED POSITION



Code	Description	Weight [g]
0225004500	Accessories - blanking plate for Mach 16	18

METAL WORK PNEUMATIC

⑦ INTERMEDIATE DIAPHRAGM



Code	Description	Weight [g]
0227100000	Intermediate diaphragm	1

⑧ CONNECTION BRACKET ON BAR OMEGA (DIN EN 50022)



Code	Description	Weight [g]
0227300600	Connection bracket on DIN bar	7

MULTIPLE BASES FOR VALVES MACH 16

MULTIPLE BASE FOR MACH 16

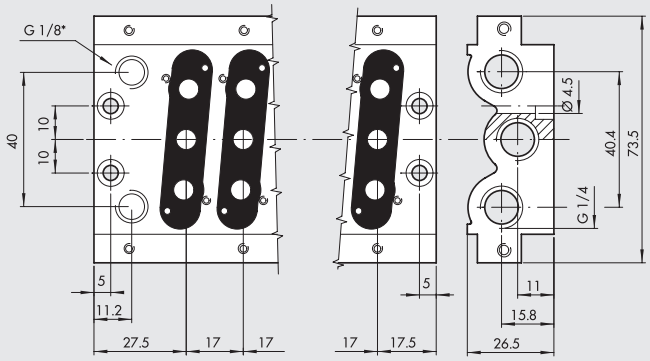

* Exhaust solenoid pilots

Code	Description	N° of positions	Weight [g]
0225000201	Base CVM.PN-08-02-0-000	2	180
0225000401	Base CVM.PN-08-04-0-000	4	286
0225000601	Base CVM.PN-08-06-0-000	6	390
0225000801	Base CVM.PN-08-08-0-000	8	500
0225001001	Base CVM.PN-08-10-0-000	10	613
0225001201	Base CVM.PN-08-12-0-000	12	706

ADAPTER FOR BAR OMEGA (DIN EN 50022)



Code	Description	Weight [g]
0225004600	Omega-adapter Mach 16	46

INTERMEDIATE DIAPHRAGM

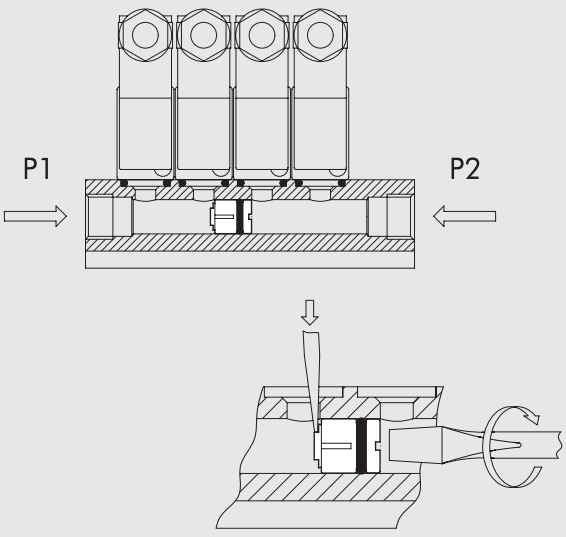

Code	Description	Weight [g]
0227100001	Acc. multiple base diaphragm	6

GASKET KIT (FOR OLD BASES)



Code	Description	Weight [g]
0226007001	M16 multiple base gasket kit	5

KIT OF SPARE INTEGRATED GASKET



Code	Description	Weight [g]
0226007003	M16 multiple base gasket kit	5

MULTIPLE CONNECTORS MACH 16

Mach 16 valves can be mounted on bases with pneumatic or electrical connection. The electric contacts of the individual valves are connected by means of a printed circuit board in a sealed conduit to a single connection point suitable for up to 16 controls.
The number 16 was chosen because the number of outputs of most PLC output boards is 16 or a multiple of it.
The system has numerous alternatives and variants for a wide range of requirements:

- Base for monostable or bistable valves.
- Connection via a multiple connector or wired cable.
- Supply of individual parts or ready prepared bases or complete valve units
- The configuration can be modified at any time to convert bases for monostable valves into bases for bistable valves.
- The return cable can be used to connect two monostable valve units to a single multiple connector.

All versions are certified for electromagnetic compatibility and hence they bear the CE mark. The system is prearranged for mounting a slave for field buses, which can be added at any time. Valve units with multiple pneumatic/electrical connection are supplied complete with valves and are tested.
System modularity means that the valve sequence can be ordered to meet your own requirements (see key to codes).

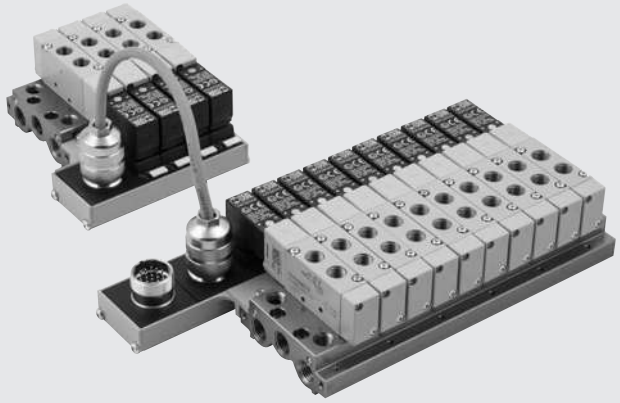

TECHNICAL DATA

Supply voltage		24VDC - 24VAC
Maximum absorption		50 mA for each position
Valve actuation indicator		Yellow LED
Protection		Fuse
Operating temperature range	°C	-10 to +60
Degree of protection with valves mounted		IP65
Insulation class		In compliance with IEC 664-1and VDE 0110 Group C
Electromagnetic compatibility		In compliance with EEC 366/89
Maximum number of solenoid valves which can be applied		16
n° of contacts		19, 16 of which for solenoid valves, 2 common and 1 earth
Pre-wired version		
Cable length	m	5
n° of wires		19, 16 of which for solenoid valves, 2 common and 1 earth
Wire section	mm^2	0.22
Shielding		Tin plated – covering 80 to 90%
Cable		Outer oil-proof and flame-proof PVC sheath
Cable outside diameter	mm	8.5

WIRING DIAGRAM FOR VERSION WITH CONNECTOR



Position of electrical contact	Colour of the corresponding wire
V1	Green /black
V2	Yellow
V3	White/black
V4	Blue
V5	Red
V6	Yellow/black
V7	White
V8	Brown/red
V9	Red/white
V10	Red/black
V11	Green/red
V12	Blue/red
V13	Brown
V14	Orange/black
V15	Orange
V16	Blue/black
GROUND	Yellow/red
– COM	Brown/black
– COM	Green

NOTES

METAL WORK PNEUMATIC

COMPONENTS

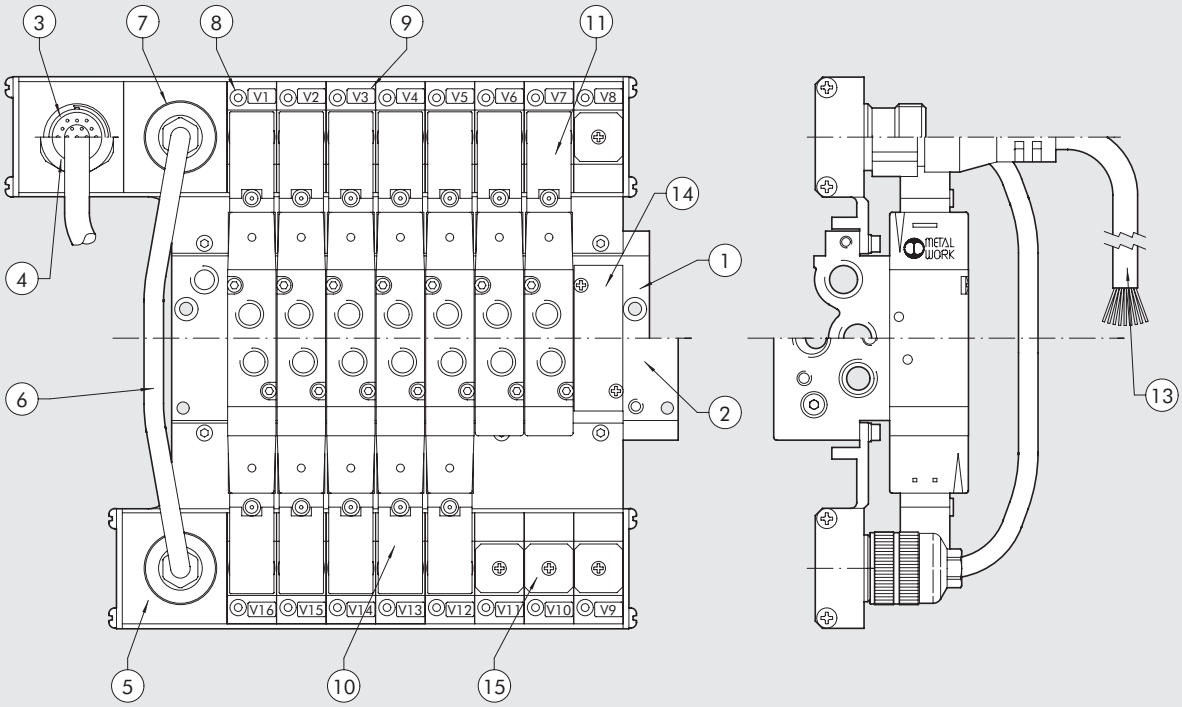

① Multiple base: extruded anodized aluminium
② Modular base: anodized aluminium
③ Main assembly, version with connector
④ Main assembly, pre-wired version
⑤ Secondary unit/additional secondary unit
⑥ 10-wire return cable
⑦ Socket for 10-wire return cable
⑧ LED (LED on = Solenoid valve energised)
⑨ Identification label (for writing on)
⑩ Bistable solenoid valve MACH 16
⑪ Monostable solenoid valve MACH 16
⑬ 19-wire cable for pre-wired version
⑭ Blanking plate - pneumatic position: anodized aluminium
⑮ Small blanking plate - electric connector: painted aluminium

SYNOPTIC, SIZES AND VERSIONS

A	0 8	B	W C 5	0 8	M M V L	2 4 V D C
FAMILY	**NO. OF POSITIONS**			**SIZE**		**VOLTAGE**
A multiple base for solenoid/pneumatic connection Mach 16	**04** 4 posn.	**M** electrical connection only for monostable valves	**MCN** electrical connection	**08** G 1/8"	**M** MSV 25 SMS OO	24VDC
B manifold base for Mach 16 solenoid/pneumatic connection	**06** 6 posn.	**B** electrical connection for bistable valves	**WC5** pre-wired cable 5 m		**V** MSV 25 SCS OO	24VAC
	08 8 posn.		**ACM** additional connection for monostable battery		**L** MSV 25 SMP OO	
	10 10 posn.				**J** MSV 25 SMB OO	
	12 12 posn.				**K** MSV 25 SCB OO	
					G MSV 26 SMS CC	
					O MSV 26 SCS CC	
					E MSV 26 SMS OC	
					F MSV 26 SCS OC	
					B MSV 26 SMS PC	
					C MSV 26 SCS PC	
					A blanking plate	
					D intermediate diaphragm	

N.B.: The valve insertion order inside the descriptive key is the following, starting from the connector, from the left towards the right: the first left square corresponds to the first valve close to the connector on the base. There are 12 squares available for the description: if you order a base with less than 12 positions, complete by placing a 0 in the remaining boxes.

MACH 16 VALVES FOR MULTIPLE CONNECTOR

Ⓜ MONOSTABLE 5/2, SOLENOID/PNEUMATIC - MECHANICAL SPRING



Symbol	Code	Description	Weight [g]
	**7062040132**	MSV 25 SMS OO 24VDC	92
	7062040133	MSV 25 SMS OO 24VAC	92

Ⓥ MONOSTABLE 5/2, SOLENOID/PNEUMATIC, PILOT-ASSISTED - MECHANICAL SPRING



Symbol	Code	Description	Weight [g]
	**7062060132**	MSV 25 SCS OO 24VDC	93
	7062060133	MSV 25 SCS OO 24VAC	93

Ⓛ MONOSTABLE 5/2, SOLENOID/PNEUMATIC - PNEUMATIC SPRING



Symbol	Code	Description	Weight [g]
	**7062040102**	MSV 25 SMP OO 24VDC	93
	7062040103	MSV 25 SMP OO 24VAC	93

Ⓙ BISTABLE 5/2, SOLENOID/PNEUMATIC



Symbol	Code	Description	Weight [g]
	**7062040112**	MSV 25 SMB OO 24VDC	139
	7062040113	MSV 25 SMB OO 24VAC	139

Ⓚ BISTABLE 5/2, SOLENOID/PNEUMATIC, PILOT-ASSISTED



Symbol	Code	Description	Weight [g]
	**7062060112**	MSV 25 SCB OO 24VDC	140
	7062060113	MSV 25 SCB OO 24VAC	140

Ⓖ MONOSTABLE 5/3, SOLENOID/PNEUMATIC - CLOSED CENTRES



Symbol	Code	Description	Weight [g]
	**7062040212**	MSV 26 SMS CC 24VDC	142
	7062040213	MSV 26 SMS CC 24VAC	142

Ⓞ MONOSTABLE 5/3, SOLENOID/PNEUMATIC, PILOT-ASSISTED - CLOSED CENTRES



Symbol	Code	Description	Weight [g]
	**7062060212**	MSV 26 SCS CC 24VDC	143
	7062060213	MSV 26 SCS CC 24VAC	143

Ⓔ MONOSTABLE 5/3 SOLENOID/PNEUMATIC - OPEN CENTRES



Symbol	Code	Description	Weight [g]
	**7062040312**	MSV 26 SMS OC 24VDC	142
	7062040313	MSV 26 SMS OC 24VAC	142

Ⓕ MONOSTABLE 5/3 SOLENOID/PNEUMATIC, PILOT-ASSISTED - OPEN CENTRES



Symbol	Code	Description	Weight [g]
	**7062060312**	MSV 26 SCS OO 24VDC	143
	7062060313	MSV 26 SCS OO 24VAC	143

Ⓑ MONOSTABLE 5/3, SOLENOID/PNEUMATIC - PRESSURE CENTRES



Symbol	Code	Description	Weight [g]
	**7062040412**	MSV 26 SMS PC 24VDC	142
	7062040413	MSV 26 SMS PC 24VAC	142

Ⓒ MONOSTABLE 5/3, SOLENOID/PNEUMATIC, PILOT-ASSISTED - PRESSURE CENTRES



Symbol	Code	Description	Weight [g]
	**7062060412**	MSV 26 SCS PC 24VDC	143
	7062060413	MSV 26 SCS PC 24VAC	143

SPARE PARTS

COIL MACH 16



Code	Description
W4015401000	In-line pilot 24VDC
W4015401010	In-line pilot 24VAC 50/60 Hz

BASES WITH MULTIPLE CONNECTION

MONOSTABLE SOLENOID/PNEUMATIC BASE WITH 4, 6, 8, 10, 12 POSITIONS

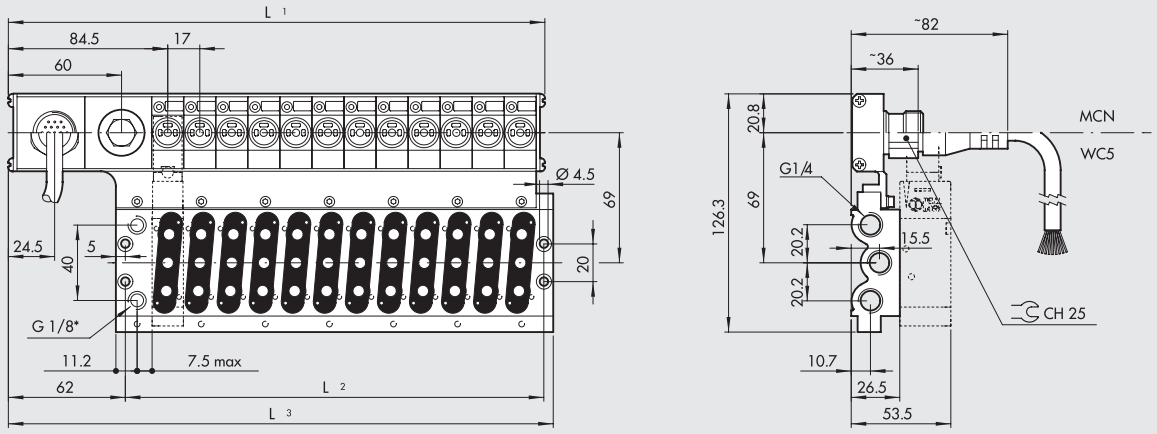

* Exhaust solenoid pilots

	Pos.-Nr.	L1	L2	L3	Description	Code 24VDC	Code 24VAC	Weight [g]
With multiple connector	4	148.5	86	153	CVM EP 08 04 M MCN	**0225100401**	**0225110401**	504
	6	182.5	120	187	CVM EP 08 06 M MCN	**0225100601**	**0225110601**	644
	8	216.5	154	221	CVM EP 08 08 M MCN	**0225100801**	**0225110801**	784
	10	250.5	188	255	CVM EP 08 10 M MCN	**0225101001**	**0225111001**	924
	12	284.5	222	289	CVM EP 08 12 M MCN	**0225101201**	**0225111201**	1264
With pre-wired cable	4	148.5	86	153	CVM EP 08 04 M WC5	**0225400401**	**0225410401**	3642
	6	182.5	120	187	CVM EP 08 06 M WC5	**0225400601**	**0225410601**	3781
	8	216.5	154	221	CVM EP 08 08 M WC5	**0225400801**	**0225410801**	3923
	10	250.5	188	255	CVM EP 08 10 M WC5	**0225401001**	**0225411001**	4070
	12	284.5	222	289	CVM EP 08 12 M WC5	**0225401201**	**0225411201**	4195

. . . . . : • 24VDC = direct current
• 24VAC = alternating current

BISTABLE SOLENOID/PNEUMATIC BASE WITH 12 POSITIONS

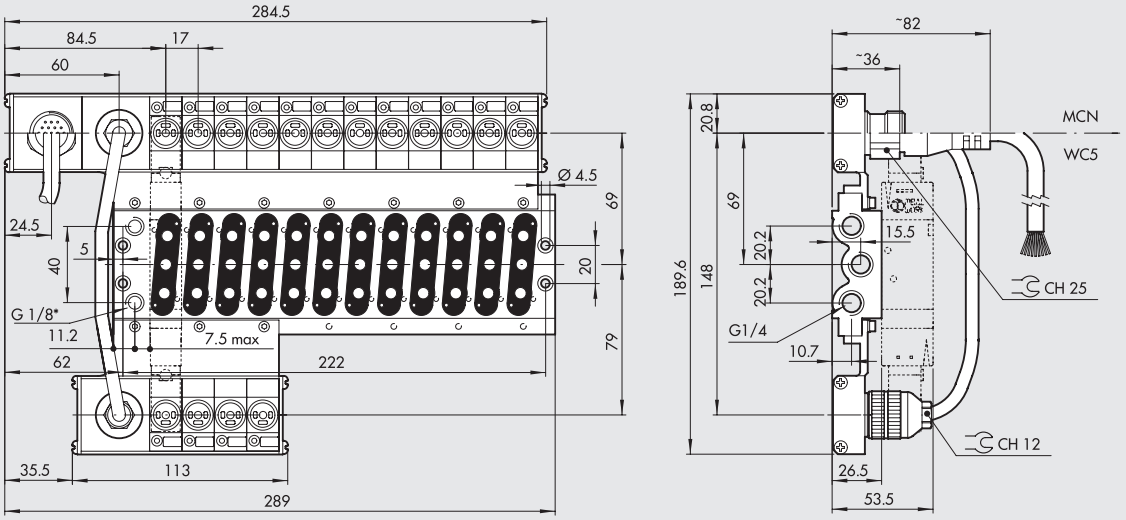

* Exhaust solenoid pilots

	Pos.-Nr.	Description	Code 24VDC	Code 24VAC	Weight [g]
With multiple connector	12	CVM EP 08 12 B MCN	**0225201201**	**0225211201**	1315
With pre-wired cable	12	CVM EP 08 12 B WC5	**0225501201**	**0225511201**	4700

. . . . . : • 24VDC = direct current
• 24VAC = alternating current

METAL WORK PNEUMATIC

BISTABLE SOLENOID/PNEUMATIC BASE WITH 10 POSITIONS

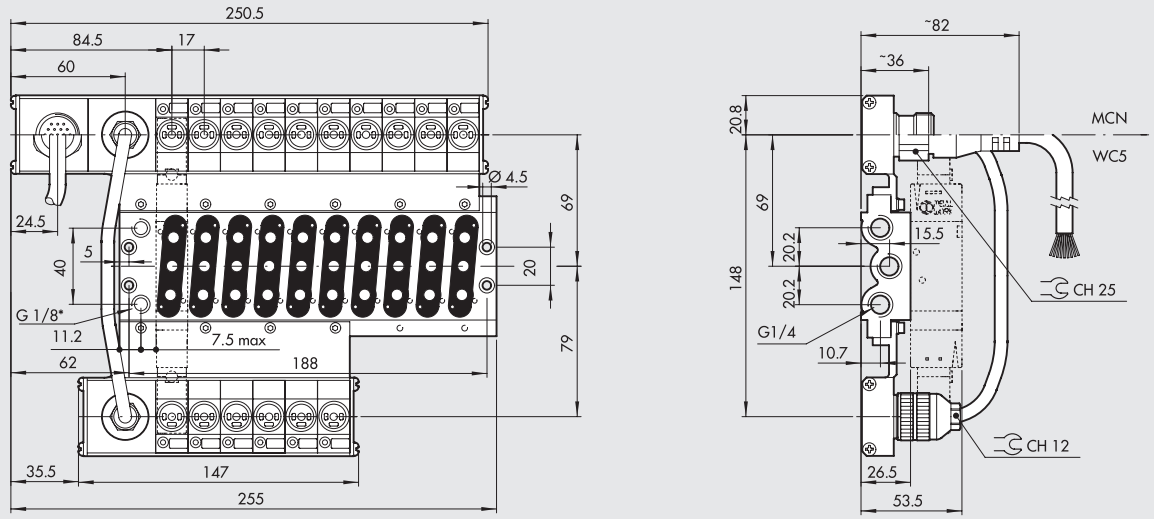

* Exhaust solenoid pilots

	Pos.-Nr.	Description	Code 24VDC	Code 24VAC	Weight [g]
With multiple connector	10	CVM EP 08 10 B MCN	**0225201001**	**0225211001**	1245
With pre-wired cable	10	CVM EP 08 10 B WC5	**0225501001**	**0225511001**	4600

. . . . . : • 24VDC = direct current
• 24VAC = alternating current

BISTABLE SOLENOID/PNEUMATIC BASE WITH 4, 6, 8 POSITIONS

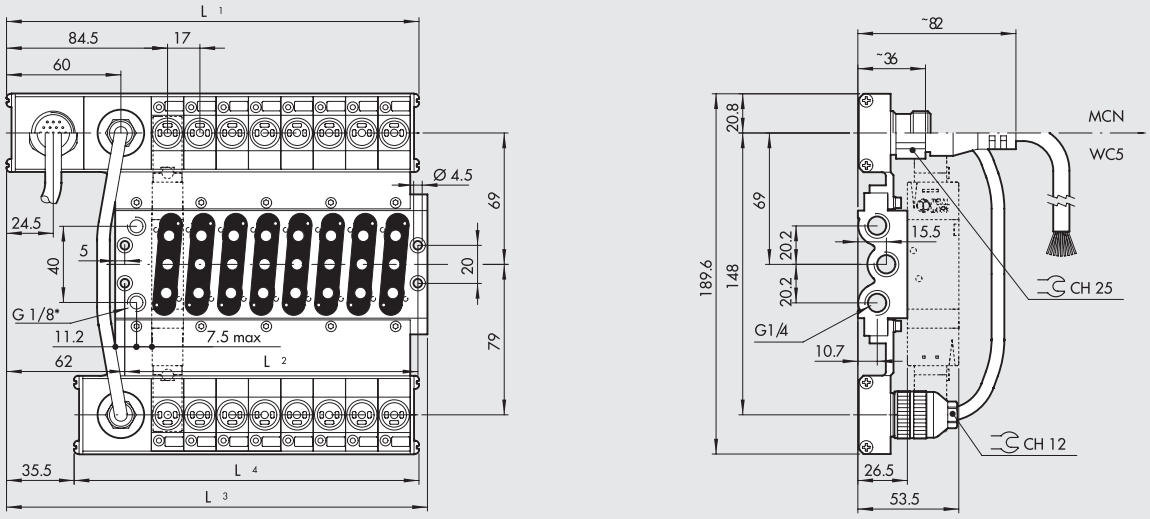

* Exhaust solenoid pilots

	Pos.-Nr.	L1	L2	L3	L4	Description	Code 24VDC	Code 24VAC	Weight [g]
With multiple connector	4	148.5	86	153	113	CVM EP 08 04 B MCN	**0225200401**	**0225210401**	770
	6	182.5	120	187	147	CVM EP 08 06 B MCN	**0225200601**	**0225210601**	965
	8	216.5	154	221	181	CVM EP 08 08 B MCN	**0225200801**	**0225210801**	1200
With pre-wired cable	4	148.5	86	153	113	CVM EP 08 04 B WC5	**0225500401**	**0225510401**	3910
	6	182.5	120	187	147	CVM EP 08 06 B WC5	**0225500601**	**0225510601**	4086
	8	216.5	154	221	181	CVM EP 08 08 B WC5	**0225500801**	**0225510801**	4264

. . . . . : • 24VDC = direct current
• 24VAC = alternating current

ADDITIONAL MONOSTABLE SOLENOID/PNEUMATIC BASE WITH 4, 6, 8 POSITIONS

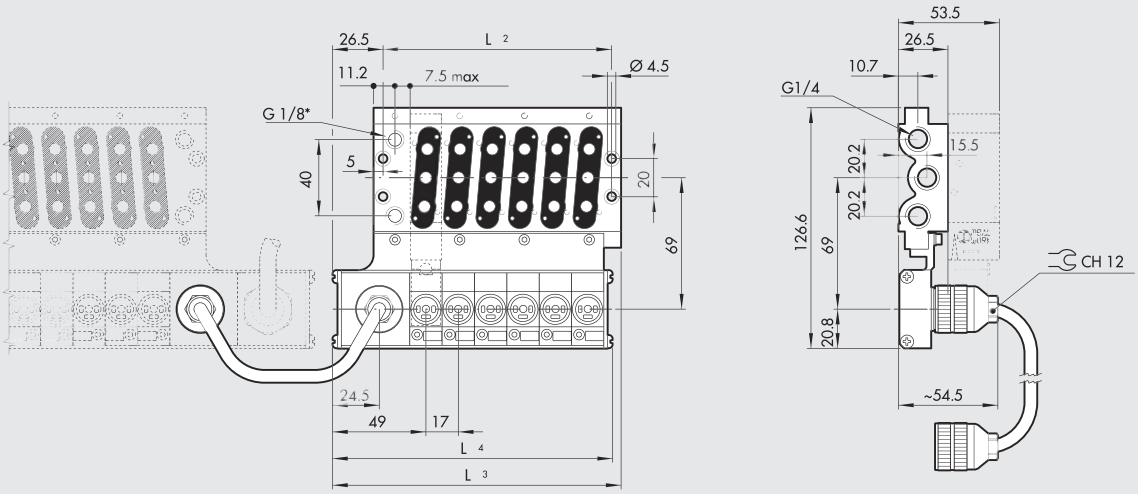

* Exhaust solenoid pilots

Pos.-Nr.	L2	L3	L4	Description	Code 24VDC	Code 24VAC	Weight [g]
4	86	117.5	113	CVM EP 08 04 M ACM	**0225300401**	**0225310401**	500
6	120	151.5	147	CVM EP 08 06 M ACM	**0225300601**	**0225310601**	640
8	154	185.5	181	CVM EP 08 08 M ACM	**0225300801**	**0225310801**	780

. . . . . : • 24VDC = direct current
• 24VAC = alternating current

NOTES

MODULAR MULTIPLE CONNECTOR KIT

It is possible to buy the various assembly kits separately, to obtain a wide range of customised applications.
The main units of the version with connector ① or the pre-wired version ② can easily be assembled with the multiple base ⑫ or the modular manifold base ⑬. The manifold base allows particular circuits on the individual valves (feed from exhaust outlets, pressure differentiation, etc.)
Likewise, on the other side it is also simple to mount the secondary unit ③. This possibility is very interesting because it allows you to convert a base for monostable valves into a base for bistable valves.
If you fit an additional secondary unit ④ on a base, you obtain an additional solenoid base that can be connected by means of return cables to a main base for monostable valves. The only thing to remember is that in all cases the total number of positions (connection to solenoid valve coil) must not exceed sixteen.
The 10 pin return cable ⑥ is used when a main unit and a secondary unit, or only one additional secondary unit, are mounted together on the multiple (or manifold) base. It has to be connected to the sockets shown in the diagram.
For different requirements, it is also possible to have return cables with a connector at one end only ⑦, or just the 10-wire cable ⑧.
These types are available in different lengths. A 10-wire connector kit ⑨ is also available if you need to complete the wiring.
In the version with a connector, the piloting of the entire assembled base is assigned to the 19-wire connector complete with cable ⑩ which is available in various lengths.
The male connector ⑰ allows the free electrical connection of the multiple connector to be used, in order to control the valves placed in the system or to control the bistable valves by a monostable multiple electrical connection base.

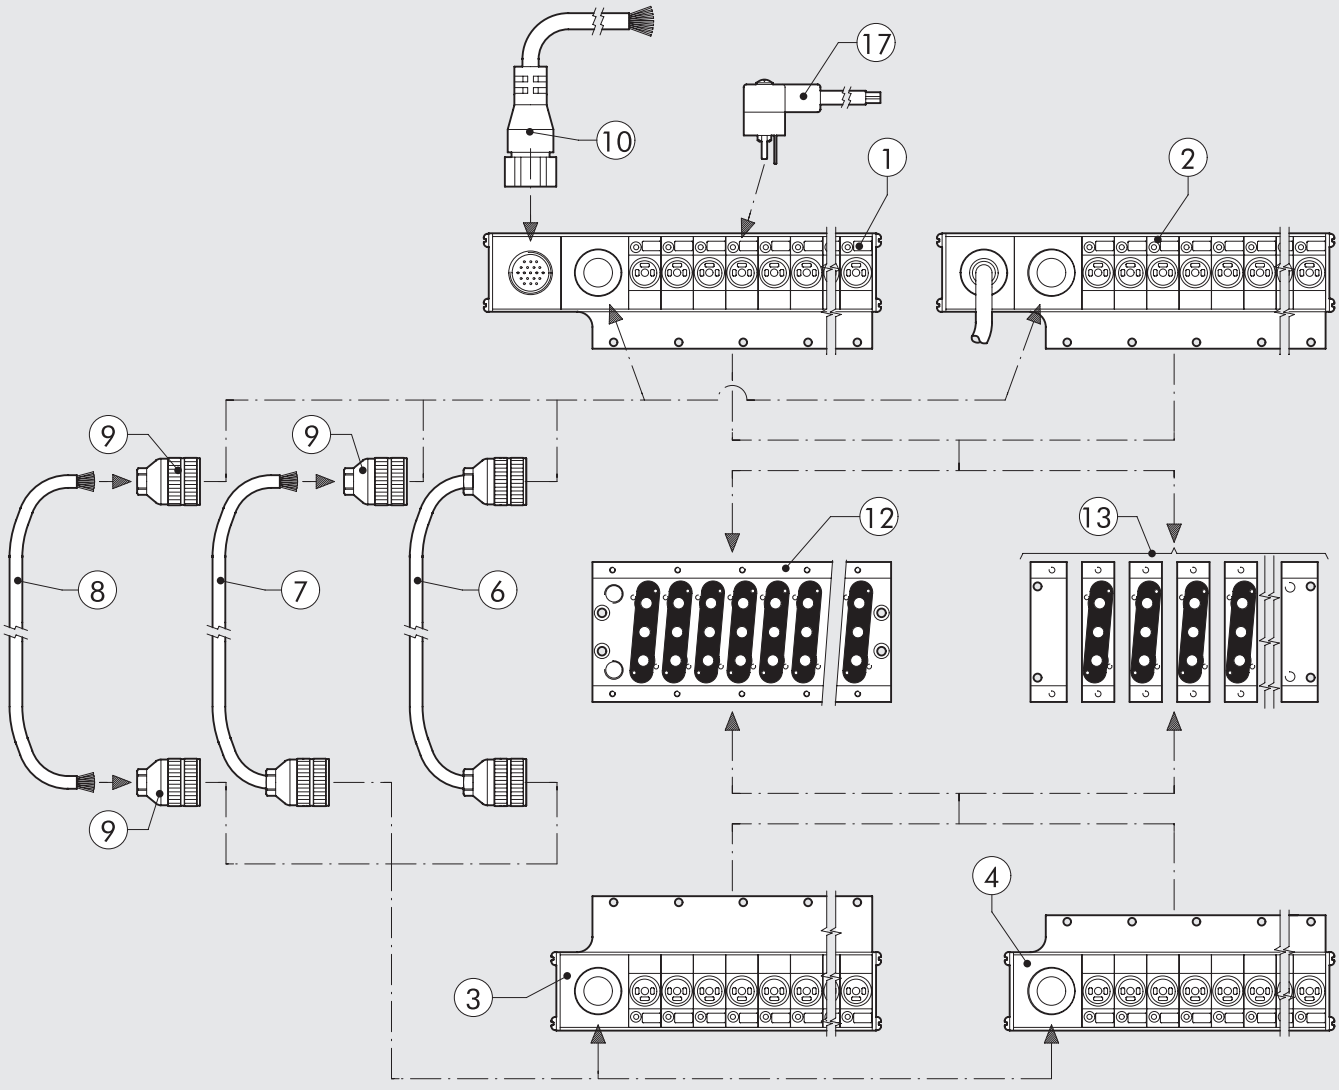

① MAIN KIT - VERSION WITH CONNECTOR



Code	Description	Weight [g]
0226500401	Main multiple connection kit, 4 positions 24VDC	245
0226510401	Main multiple connection kit, 4 positions 24VAC	245
0226500601	Main multiple connection kit, 6 positions 24VDC	280
0226510601	Main multiple connection kit, 6 positions 24VAC	280
0226500801	Main multiple connection kit, 8 positions 24VDC	308
0226510801	Main multiple connection kit, 8 positions 24VAC	308
0226501001	Main multiple connection kit, 10 positions 24VDC	344
0226511001	Main multiple connection kit, 10 positions 24VAC	344
0226501201	Main multiple connection kit, 12 positions 24VDC	396
0226511201	Main multiple connection kit, 12 positions 24VAC	396

② MAIN MULTIPLE PRE-WIRED CONNECTION KIT



Code	Description	Weight [g]
0226400401	Pre-wired multiple main connector kit, 4 positions 24VDC	3350
0226410401	Pre-wired multiple main connector kit, 4 positions 24VAC	3350
0226400601	Pre-wired multiple main connector kit, 6 positions 24VDC	3400
0226410601	Pre-wired multiple main connector kit, 6 positions 24VAC	3400
0226400801	Pre-wired multiple main connector kit, 8 positions 24VDC	3423
0226410801	Pre-wired multiple main connector kit, 8 positions 24VAC	3423
0226401001	Pre-wired multiple main connector kit, 10 positions 24VDC	3460
0226411001	Pre-wired multiple main connector kit, 10 positions 24VAC	3460
0226401201	Pre-wired multiple main connector kit, 12 positions 24VDC	3490
0226411201	Pre-wired multiple main connector kit, 12 positions 24VAC	3490

③ SECONDARY KIT



Code	Description	Weight [g]
0226200401	Multiple secondary connector kit, 4 positions 24VDC	166
0226210401	Multiple secondary connector kit, 4 positions 24VAC	166
0226200601	Multiple secondary connector kit, 6 positions 24VDC	210
0226210601	Multiple secondary connector kit, 6 positions 24VAC	210
0226200801	Multiple secondary connector kit, 8 positions 24VDC	257
0226210801	Multiple secondary connector kit, 8 positions 24VAC	257

④ ADDITIONAL SECONDARY KIT



Code	Description	Weight [g]
0226300401	Multiple secondary connector kit, 4 positions 24VDC	158
0226310401	Multiple secondary connector kit, 4 positions 24VAC	158
0226300601	Multiple secondary connector kit, 6 positions 24VDC	199
0226310601	Multiple secondary connector kit, 6 positions 24VAC	199
0226300801	Multiple secondary connector kit, 8 positions 24VDC	243
0226310801	Multiple secondary connector kit, 8 positions 24VAC	243

METAL WORK PNEUMATIC

⑥ 10-WIRE RETURN CABLE



Code	Description
0226150022	10-whire return cable L = 22 cm
022615....	10-whire return cable

....Length in cm
Please contact our sales offices

⑦ 10-WIRE RETURN CABLE - ONE END WITH CONNECTOR



Code	Description
022613....	10-wire return cable - one end with connector

....Length in cm
Please contact our sales offices

⑧ CABLE WITH 10 CONNECTORS



Code	Description
0226107201	10-wires cable

Please specify the desired length in metres

⑨ 10-WIRE CONNECTOR KIT

Code	Description
0226170002	10-wire connector kit

⑩ 19-WIRE CABLE, ONE END WITH CONNECTOR



Code	Description
0226140250	19-wire cable, one end with connector L = 2.5 m
0226140500	19-wire cable, one end with connector L = 5 m
0226141000	19-wire cable, one end with connector L = 10 m
0226141500	19-wire cable, one end with connector L = 15 m
0226142000	19-wire cable, one end with connector L = 20 m
0226143000	19-wire cable, one end with connector L = 30 m

⑫ SET OF IDENTIFICATION PLATES



Code	Description
0226107000	Set of identification plates

Package: 16 pieces

⑬ ELECTRIC CONTACT GASKETS



Code	Description
0226107001	Set of electric contact gaskets

Package: 10 pieces

⑭ SET OF MULTIPLE BASE GASKETS



Code	Description
0226007001	Set of M16 multiple base gaskets

⑮ ELECTRIC CONNECTION BLANKING PLATE



Code	Description
0225004502	Mach 16 electric connection blanking plate

⑯ BASE BLANKING PLATE



Code	Description
0225004500	Mach 16 base blanking plate

⑰ MALE CONNECTOR



Code	Description
W0970504021	Male connector 2 mm

Max power for each position = 5W
Max total power of multiple connector = 36W

Example of a male connector

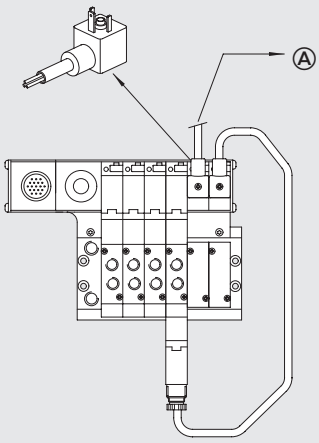

SOV 1/8″
SOV 1/4″
SOV 1/2″
SOV on base
MACH 16
MACH 18
ISO 1 – ISO 2
PIV valves
APR: progressive starter
V3V: circuit switching valve

⑱ KIT OF MULTIPLE BASE GASKETS



Code	Description
0226007003	Kit of M16 multiple base integrate gaskets

NOTES

REDUCER WITH GAUGE FOR VALVES, SERIES RMV

The RMV-series miniature pressure regulator with pressure gauge for valves is specifically conceived for mounting on the outlets of valves with a 1/8" port. With limited cross dimension, it can be fitted to a series of small valves.
The body is 16.5 mm wide and fits exactly on the valves of the Mach 16 series for multiple electrical connection.
Using the RMV, it is possible to differentiate the pressure of each single output of the valves. For example, if you mount it on port 2 and not on port 4, the pressure can be reduced on port 2 only. If you mount one for each port, the pressure on port 2 will differ from that on port 4, which in turn is less than the feed pressure (outlet 1).
There are three 1/8" threaded RMV ports that are pneumatically connected in parallel. A small pressure gauge is mounted in one port; another port is plugged by an A7-type fitting and a third can take a fitting.
The user, however, can decide whether the layout of components is to be modified or not. He might, for example, decide to mount three fittings to create a three-port reduced-pressure distributor.

TECHNICAL DATA

Threaded input connection		1/8" male
Threaded output connection		1/8" female
Regulation range	bar	1 to 8
	MPa	0.1 to 0.8
	psi	14.5 to 116
Input pressure	bar	2 to 10
	MPa	0.2 to 1
	psi	29 to 145
Flow rate at 6.3 bar (0.63 MPa - 91 psi) ΔP 1 bar	Nl/min	140
Flow rate at free exhaust at 6.3 bar (0.63 MPa - 91 psi)	Nl/min	360
Fluid		Filtered lubricated or unlubricated air
Maximum temperature at 10 bar (1 MPa - 145 psi)	°C	-10 to +60
	°F	+14 to + 140
Assembly position		On valves
Use instructions		The pressure must always be regulated in increasing values

DIMENSIONES

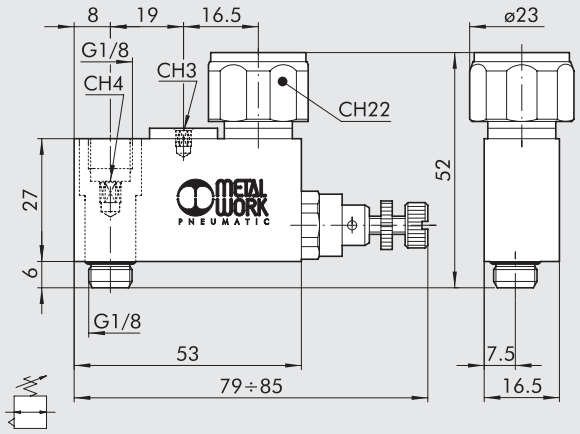

Code	Description
9061601	RMV 1/8"

APPLICATIONS - ASSEMBLY

Fixing the reducer onto the valve

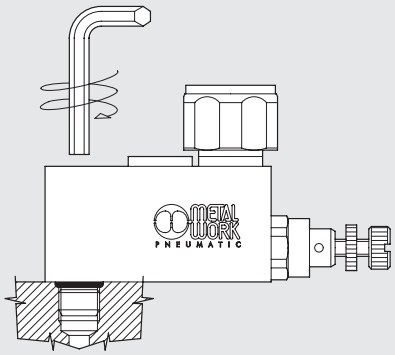

3 outputs with G1/8" thread



When mounting on valve units, with a pitch of less than 23 mm, alternate the gauge positions



VALVES MACH 18, ISO 15407-1/VDMA 24563-02

Mach 18 valve is manufactured according to the ISO 1507-1 standard, which in turn absorbs the VDMA 24563-02 rule. It comes in 5-way versions with 2 and 3 positions with solenoid or pneumatic actuation.

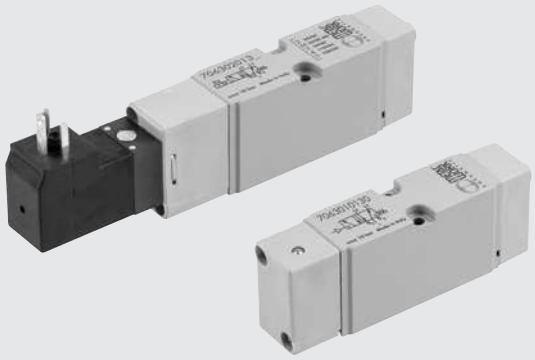

TECHNICAL DATA

Fluid		Filtered air without lubrication; lubrication, if used, must be continuous
Operating pressure:	bar	
• monostable		1.9 to 10
• monostable 5/3		Vacuum to 10 pneumatic/1.9 to 10 solenoid/pneumatic
• bistable		Vacuum to 10 pneumatic/1 to 10 solenoid/pneumatic
• pilot-assisted		Vacuum to 10
Minimum pilot pressure	bar	2 to 10
Operating temperature range	°C	-10 to +60
Conductance C	Nl/min · bar	114.86
Critical ratio b	bar/bar	0.25
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	340
Flow rate at 6 bar ΔP 1 bar	Nl/min	470
Installation		In any position (vertical assembly is not recommended for bistable valves subjected to vibration)
Assembly		On manifold bases
Solenoid pilot with integrated coil		DIN 43650 C-shape / EN 175301-803-C; M8 threaded connection (available for 24VDC voltage)
Hand operator		Monostable on solenoid pilot (with manual monostable on request)
Valve / base screw tightening torque	Nm	0.8
Compatibility with oils		See **chapter Z1**

COMPONENTS

① VALVE BODY: Aluminium
② CONTROL/END CAP: Hostaform®
③ SPOOL: Aluminium
④ GASKETS: Polyurethane
⑤ PISTONS: Hostaform®
⑥ PISTON GASKET: Polyurethane
⑦ FILTER: sintered HDPE
⑧ PILOT: with integrated coil
⑨ SPRINGS: special steel

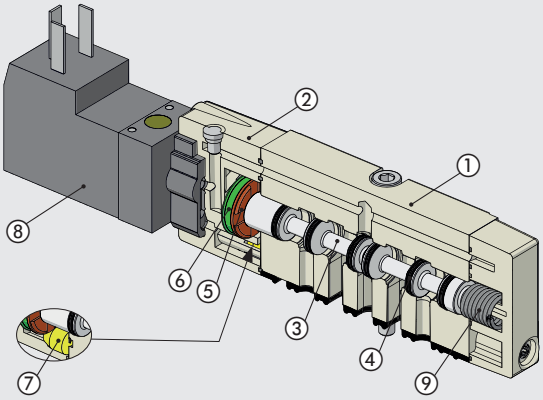

FLOW CHART

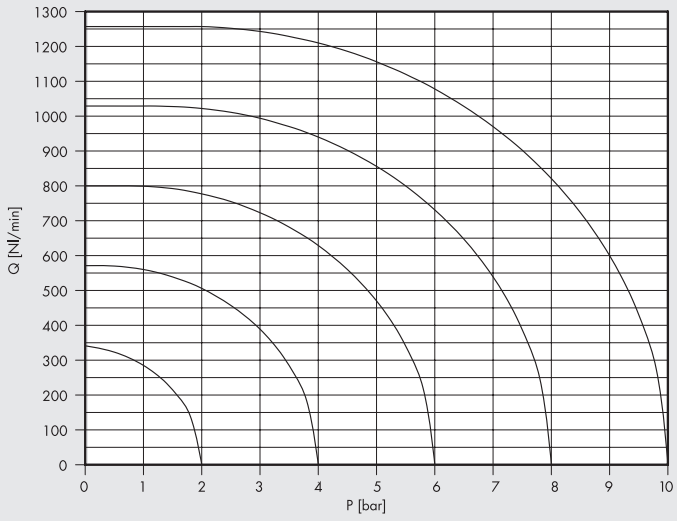

METAL WORK PNEUMATIC

MODULARITY

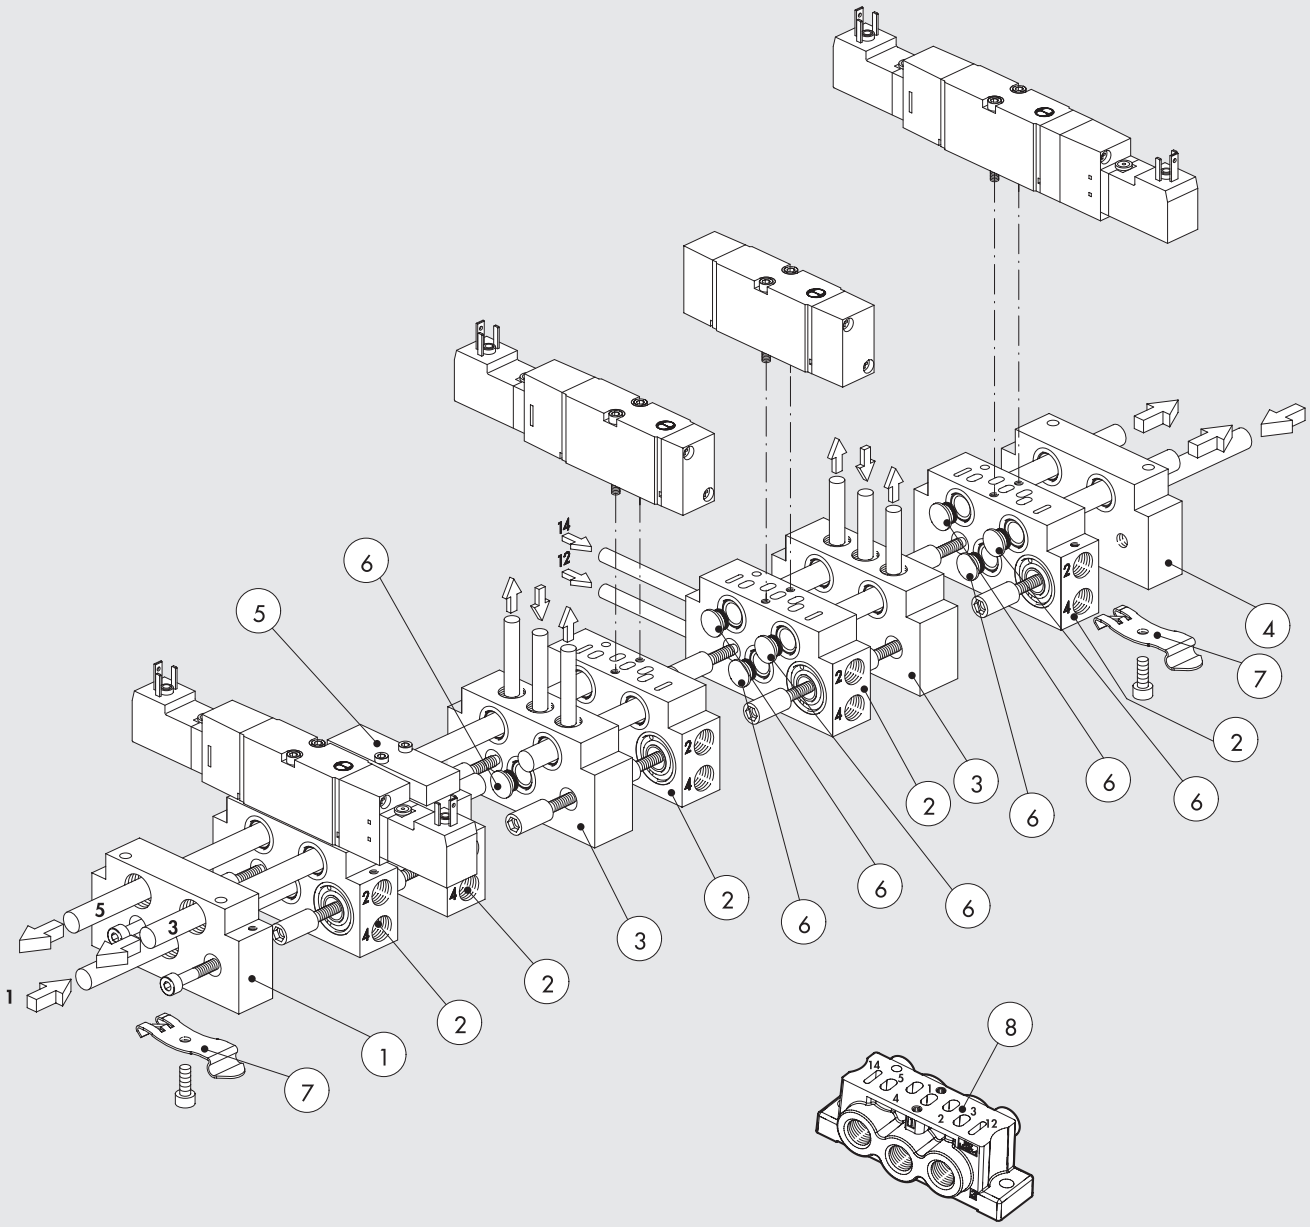

Reference	Code	Description
①	**0227100201**	ISO 15407-1 input end plate kit
②	**0227200150**	ISO 15407-1 manifold side base kit
③	**0227200300**	ISO 15407-1 intermediate bases
④	**0227100200**	ISO 15407-1 output end plate kit
⑤	**0227200500**	ISO 15407-1 blanking plate
⑥	**0227100000**	Intermediate diaphragm
⑦	**0227300600**	Connection bracket on DIN bar
⑧	**0227200800**	ISO 15407-1 individual base kit

SYNOPTIC, SIZES AND VERSIONS

M S V	D	5	S O	S	O O	2 4 V D C
FAMILY	**DIMENSIONS**	**FUNCTION**	**OPERATORS 14**	**RESETTING (12)**	**FURTHER DETAILS**	**VOLTAGE**
MSV solenoid/pneumatic	**D** ISO 15407-1/ VDMA 24563-02	**5** 5/2	**SO** solenoid	**S** mechanical springs	**OO** no indication	24VDC
MPV pneumatic		**6** 5/3	**SE** solenoid assisted	**B** bistable	**CC** closed centres	24VDC M8
			PN pneumatic		**OC** open centres	24VAC
					PC pressure centres	110VAC
						220VAC

MACH 18 ISO 15407-1/VDMA 24563-02
MPV PNEUMATIC

TECHNICAL DATA

Operating pressure:	bar	Vacuum to10
Minimum operating pressure:	bar	
• monostable, monostable 5/3		1.9
• bistable		1
Conductance C	Nl/min · bar	114.86
Critical ratio b	bar/bar	0.25
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	340
Flow rate at 6 bar ΔP 1 bar	Nl/min	470
Actuation response times at 6 bar:	ms	
• monostable		4
• bistable		4
Repositioning response times at 6 bar	ms	
• monostable		8.4
• bistable		4
Operating temperature range	°C	-10 to + 60

MONOSTABLE 5/2



Symbol	Code	Abbrev.	Weight [g]
	7063010130	MPV D5 PNS OO	80

MONOSTABLE 5/3



Symbol	Code	Abbrev.	Weight [g]
	7063010210	MPV D6 PNS CC	93
	7063010310	MPV D6 PNS OC	93
	7063010410	MPV D6 PNS PC	93

BISTABLE 5/2



Symbol	Code	Abbrev.	Weight [g]
	7063010110	MPV D5 PNB OO	78

NOTES

MACH 18 ISO 15407-1/VDMA 24563-02
SOLENOID/PNEUMATIC MSV

TECHNICAL DATA

Operating pressure:	bar	
• monostable, monostable 5/3		1.9 to 10
• bistable		1 to 10
• pilot-assisted		Vacuum to 10
Minimum pilot pressure	bar	2
Operating temperature range	°C	-10 to +60
Conductance C	Nl/min · bar	114.86
Critical ratio b	bar/bar	0.25
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	340
Flow rate at 6 bar ΔP 1 bar	Nl/min	470
TRA / TRR monostable at 6 bar	ms	12 / 26
TRA / TRR bistable at 6 bar	ms	21 / 21
Hand operator		Monostable on solenoid pilot (with bistable manual valve on request)
Pilot with integrated coil		24 VDC - 24 VAC - 110 VAC - 220 VAC
Power	W	1
Voltage tolerance		-10% to +15%
Insulation class		F 155
Degree of protection		IP 65 EN60529 with connector
Solenoid rating		100% ED
Electrical contacts		DIN 43650 C-shape / EN 175301-803-C M8 connection*

* Available for 24VDC voltage

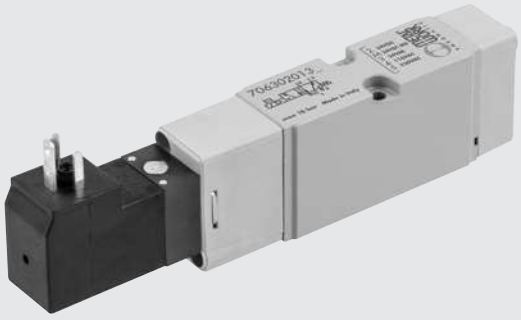

MONOSTABLE 5/2

DIN 43650-C VERSION
EN 175301-803-C

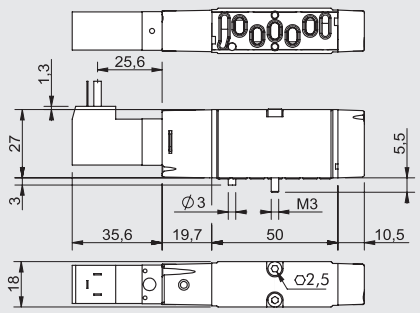

M8 VERSION

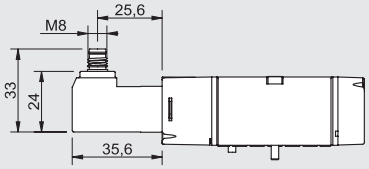

Symbol	Code	Abbrev.	Weight [g]
	**7063020132**	MSV D5 SOS OO 24VDC	110
	706302013M	MSV D5 SOS OO 24VDC M8	110
	7063020133	MSV D5 SOS OO 24VAC	110
	7063020134	MSV D5 SOS OO 110VAC	110
	7063020135	MSV D5 SOS OO 220VAC	110
	**7063030132**	MSV D5 SES OO 24VDC	110
	706303013M	MSV D5 SES OO 24VDC M8	110
	7063030133	MSV D5 SES OO 24VAC	110
	7063030134	MSV D5 SES OO 110VAC	110
	7063030135	MSV D5 SES OO 220VAC	110

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

BISTABLE 5/2

DIN 43650-C VERSION
EN 175301-803-C

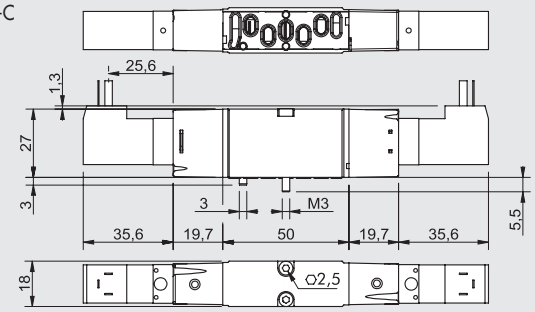

M8 VERSION



Symbol	Code	Abbrev.	Weight [g]
	**7063020112**	MSV D5 SOB OO 24VDC	143
	706302011M	MSV D5 SOB OO 24VDC M8	143
	7063020113	MSV D5 SOB OO 24VAC	143
	7063020114	MSV D5 SOB OO 110VAC	143
	7063020115	MSV D5 SOB OO 220VAC	143
	**7063030112**	MSV D5 SEB OO 24VDC	143
	706303011M	MSV D5 SEB OO 24VDC M8	143
	7063030113	MSV D5 SEB OO 24VAC	143
	7063030114	MSV D5 SEB OO 110VAC	143
	7063030115	MSV D5 SEB OO 220VAC	143

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

MONOSTABLE 5/3

DIN 43650-C VERSION
EN 175301-803-C

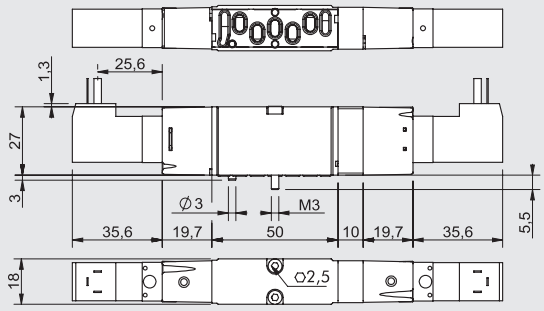

M8 VERSION

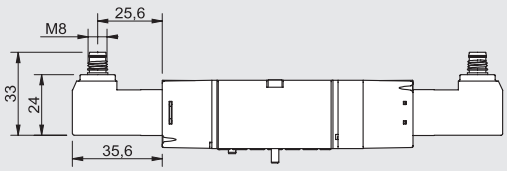

Symbol	Code	Abbrev.	Weight [g]
	**7063020212**	MSV D6 SOS CC 24VDC	156
	706302021M	MSV D6 SOS CC 24VDC M8	156
	7063020213	MSV D6 SOS CC 24VAC	156
	7063020214	MSV D6 SOS CC 110VAC	156
	7063020215	MSV D6 SOS CC 220VAC	156
	7063020312	MSV D6 SOS OC 24VDC	156
	706302031M	MSV D6 SOS OC 24VDC M8	156
	7063020313	MSV D6 SOS OC 24VAC	156
	7063020314	MSV D6 SOS OC 110VAC	156
	7063020315	MSV D6 SOS OC 220VAC	156
	**7063020412**	MSV D6 SOS PC 24VDC	156
	706302041M	MSV D6 SOS PC 24VDC M8	156
	7063020413	MSV D6 SOS PC 24VAC	156
	7063020414	MSV D6 SOS PC 110VAC	156
	7063020415	MSV D6 SOS PC 220VAC	156
	**7063030212**	MSV D6 SES CC 24VDC	156
	706303021M	MSVD6 SES CC 24VDC M8	156
	7063030213	MSV D6 SES CC 24VAC	156
	7063030214	MSV D6 SES CC 110VAC	156
	7063030215	MSV D6 SES CC 220VAC	156
	**7063030312**	MSV D6 SES OC 24VDC	156
	706303031M	MSV D6 SES OC 24VDC M8	156
	7063030313	MSV D6 SES OC 24VAC	156
	7063030314	MSV D6 SES OC 110VAC	156
	7063030315	MSV D6 SES OC 220VAC	156
	**7063030412**	MSV D6 SES PC 24VDC	156
	706303041M	MSV D6 SES PC 24VDC M8	156
	7063030413	MSV D6 SES PC 24VAC	156
	7063030414	MSV D6 SES PC 110VAC	156
	7063030415	MSV D6 SES PC 220VAC	156

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V

ACCESSORIES FOR VALVES MACH 18 MSV, SOLENOID/PNEUMATIC

CONNECTOR 15 mm DIN 43650 SHAPE C / EN 175301-803-C



Code	Description
W0970501021	Connector 15 mm C shape
W0970501022	Connector 15 mm C shape LED 24V
W0970501025	Connector 15 mm C shape LED+VDR 24V

M8 STRAIGHT CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

90° M8 CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

M8 M - M8 F CONNECTOR

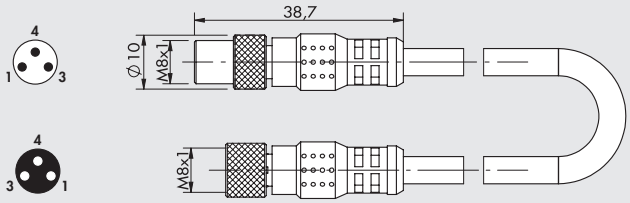

Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital OUTPUT of the EB 80 valves

SPARE PARTS FOR VALVES MACH 18 MSV, SOLENOID/PNEUMATIC

PILOT MACH 18

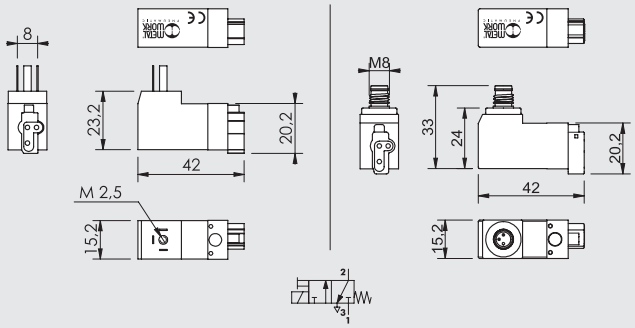

Code	Description
W4015301000	In-line pilot 24VDC
W4015301210	In-line pilot 24VDC M8
W4015301010	In-line pilot 24VAC 50/60 Hz
W4015301020	In-line pilot 110VAC 50/60 Hz
W4015301030	In-line pilot 220VAC 50/60 Hz

NOTES

BASES TO ISO 15407-1/VDMA 24563-02 FOR MACH 18 VALVES

① INPUT END PLATE

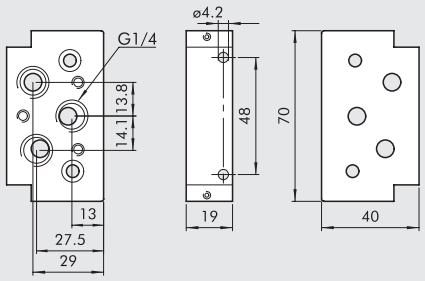

Code	Description	Weight [g]
0227100201	ISO 15407-1 input end plate kit	125

② MANIFOLD BASE, SIDE PORTS

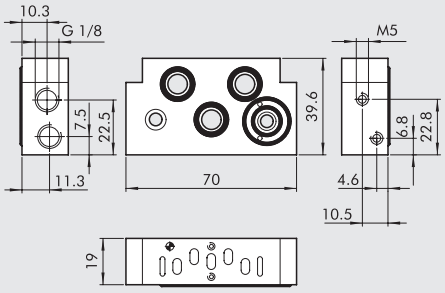

Code	Description	Weight [g]
0227200150	ISO 15407-1 manifold base, side ports kit	125

③ INTERMEDIATE UPPER PORTS

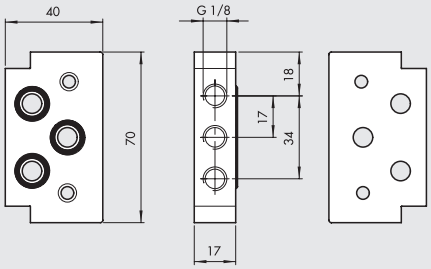

Code	Description	Weight [g]
0227200300	ISO 15407-1 intermediate upper ports kit	118

④ OUTPUT END PLATE

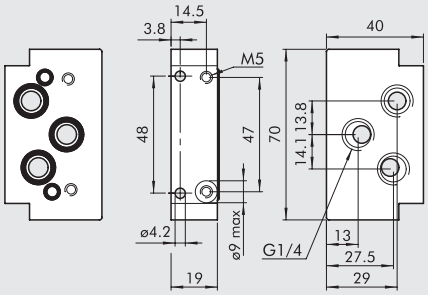

Code	Description	Weight [g]
0227100200	ISO 15407-1 output end-plate kit	122

⑤ BLANKING PLATE - UNUSED POSITION



Code	Description	Weight [g]
0227200500	ISO 15407-1 blanking plate	24

⑥ INTERMEDIATE DIAPHRAGM



Code	Description	Weight [g]
0227100000	Intermediate diaphragm	2

⑦ CONNECTION BRACKETS ON THE BAR OMEGA (DIN EN 50022)



Code	Description	Weight [g]
0227300600	Connection brackets on DIN bar	7

⑧ INDIVIDUAL BASE

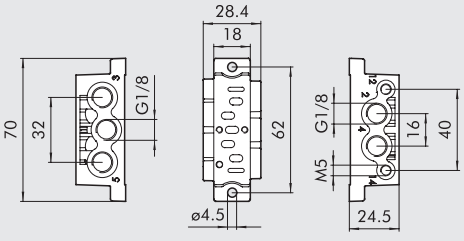

Code	Description	Weight [g]
0227200800	ISO 15407-1 individual base kit	51

VALVES ISO 5599/1, SERIES IPV-ISV

The assembly surface dimensions of ISO1, ISO2 and ISO 3 valves are to ISO5599-1. They are available in the 5-way versions with 2 and 3 positions and with pneumatic or solenoid actuation.

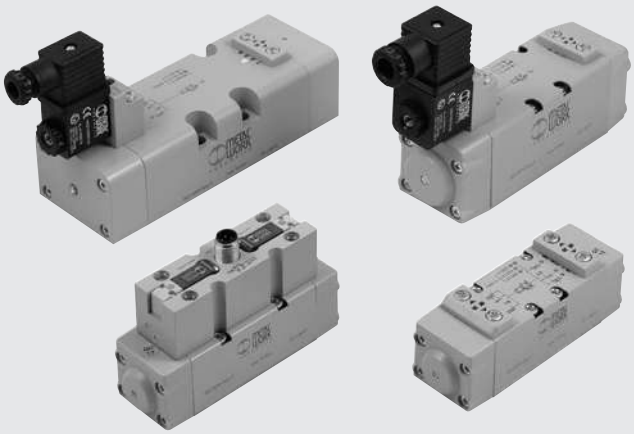

TECHNICAL DATA		ISO 1	ISO 2	ISO 3
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous		
Operating pressure:	bar			
• monostable and bistable differential		Vacuum to 10 pneumatic / 2.5 to 10 solenoid/pneumatic		
• bistable		Vacuum to 10 pneumatic / 1 to 10 solenoid/pneumatic		
• pilot-assisted		Vacuum to 10		
Minimum pilot pressure	bar	2.5		
Operating temperature range	°C	-10 to +60		
Nominal diameter	mm	7.5	12	15
Conductance C	Nl/min · bar	250	657.14	971.43
Critical ratio b	bar/bar	0.36	0.25	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	700	1800	3200
Flow rate at 6 bar ΔP 1 bar	Nl/min	1100	2700	4600
Valve / base screw tightening torque	Nm	3 - 4	6 - 7	10 - 12
Installation		In any position (vertical assembly is not recommended for bistable valves subjected to vibration)		
Assembly		On single and manifold bases according to ISO 5599/1		
Solenoid pilot		to CNOMO / in-line pilot / M12		to CNOMO
Hand operator		Bistable on solenoid pilot		
		Monostable on valve body		
Maximum coil nut torque	Nm	1		
Compatibility with oils		See **chapter Z1**		

COMPONENTS

① VALVE BODY: Aluminium
② END CAP: Hostaform®
③ SPOOL: chemically nickel-plated aluminium
④ DISTANCE PLATES: plastic
⑤ GASKETS: NBR
⑥ PISTONS: Hostaform®
⑦ PISTON GASKET: NBR
⑧ FILTER: sintered bronze
⑨ SPRINGS: special steel
⑩ OPERATOR: Brass pipe – Stainless steel core

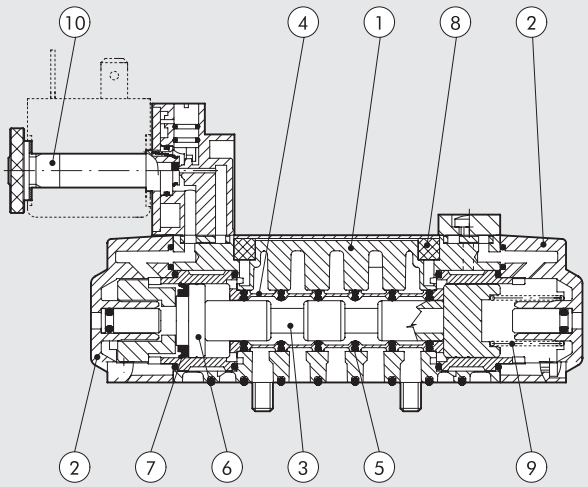

FLOW CHART

ISO 1

Flow rates [Nl/min]

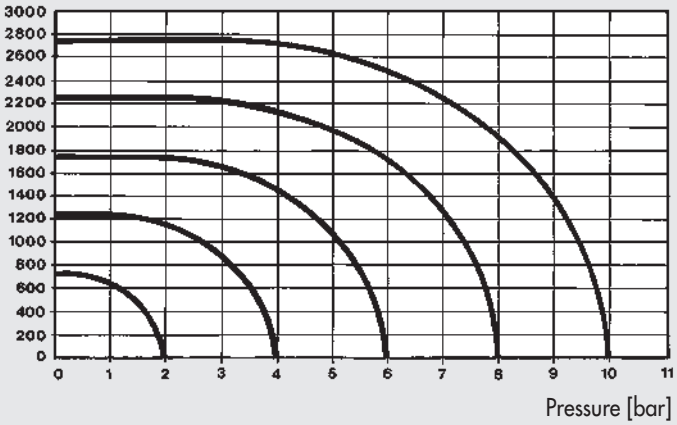

ISO 2

Flow rates [Nl/min]

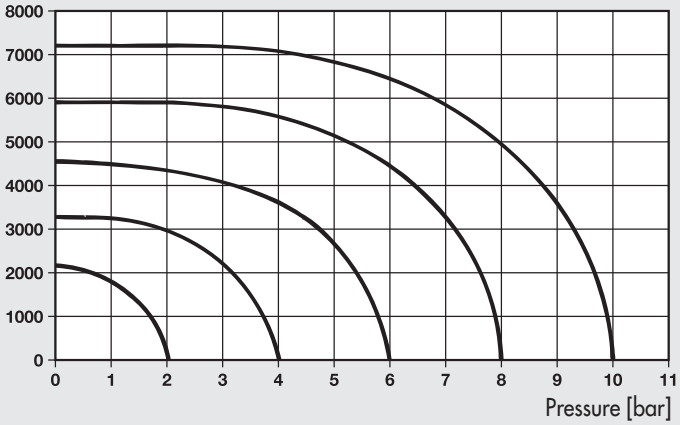

ISO 3

Flow rates [Nl/min]

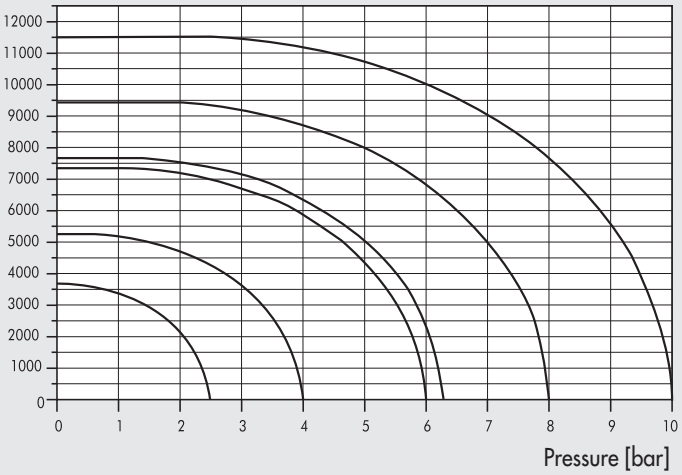

SYNOPTIC, SIZES AND VERSIONS

I P V	5	5	P N	S	O O
FAMILY	**DIMENSIONS**	**FUNCTION**	**OPERATORS 14**	**RESETTING (12)**	**FURTHER DETAILS**
IPV ISO pneumatic	**5** ISO 1	**5** 5/2	**PN** pneumatic	**S** mechanical springs	**OO** no indication
ISV ISO solenoid/pneumatic	**6** ISO 2	**6** 5/3	**SO** solenoid	**B** bistable	**CC** closed centres
	7 ISO 3		**SE** solenoid assisted	**D** differential	**OC** open centres
			✱ **DO** solenoid in line		**PC** pressure centres
			✱ **DE** solenoid assisted in line		
			● **CO** M12 solenoid		
			● **CE** M12 solenoid assisted		

✱ Only for ISO 1
● Only for ISO 1 and ISO 2

VALVES ISO 5599/1, PNEUMATIC
SERIES IPV

TECHNICAL DATA		ISO 1	ISO 2	ISO 3
Operating pressure	bar	Vacuum to 10		
Minimum operation pressure:				
• monostable and bistable differential	bar	2.5		
• bistable	bar	1		
Operating temperature range	°C	-10° to +60		
Nominal diameter	mm	7.5	12	15
Conductance C	Nl/min · bar	250	657.14	971.43
Critical ratio b	bar/bar	0.36	0.25	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	700	1800	3200
Flow rate at 6 bar ΔP 1 bar	Nl/min	1100	2700	4600
Response times at 6 Bar:				
• monostable	ms	12	24	35
• bistable	ms	20	30	45
Repositioning response times at 6 Bar:				
• monostable	ms	30	43	55
• bistable	ms	20	30	45
Hand operator		monostable on valve body		

PNEUMATIC ACTUATION ISO 1



Symbol	Code	Abbrev.	Weight [g]
	7051011100	IPV 55 PNS OO	310
	7051011200	IPV 55 PNB OO	310
	7051011300	IPV 55 PND OO	310
	7051012100	IPV 56 PNS CC	310
	7051012200	IPV 56 PNS OC	310
	7051012300	IPV 56 PNS PC	310

PNEUMATIC ACTUATION ISO 2



Symbol	Code	Abbrev.	Weight [g]
	7052011100	IPV 65 PNS OO	705
	7052011200	IPV 65 PNB OO	705
	7052011300	IPV 65 PND OO	705
	7052012100	IPV 66 PNS CC	705
	7052012200	IPV 66 PNS OC	705
	7052012300	IPV 66 PNS PC	705

PNEUMATIC ACTUATION ISO 3

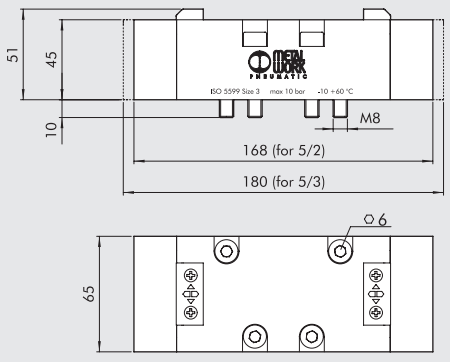

Symbol	Code	Abbrev.	Weight [g]
	7056011100	IPV 75 PNS OO	1175
	7056011200	IPV 75 PNB OO	1175
	7056011300	IPV 75 PND OO	1175
	7056012100	IPV 76 PNS CC	1290
	7056012200	IPV 76 PNS OC	1290
	7056012300	IPV 76 PNS PC	1290

VALVES ISO 5599/1, SOLENOID/PNEUMATIC, SERIES ISV

TECHNICAL DATA		ISO 1	ISO 2	ISO 3
Operating pressure:	bar			
• monostable and bistable differential		2.5 to 10		
• bistable		1 to 10		
• pilot-assisted		Vacuum to 10		
Minimum pilot pressure	bar	2.5		
Operating temperature range	°C	-10 to +60		
Nominal diameter	mm	7.5	12	15
Conductance C	Nl/min · bar	250	657.14	971.43
Critical ratio b	bar/bar	0.36	0.25	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	700	1800	3200
Flow rate at 6 bar ΔP 1 bar	Nl/min	1100	2700	4600
TRA / TRR monostable at 6 bar	ms	24 / 50	39 / 60	50 / 120
TRA / TRR bistable at 6 bar	ms	20 / 20	25 / 25	35 / 35
Solenoid pilot		Standards CNOMO		
Hand operator		Bistable on solenoid pilot		
		Monostable on valve body		
Coils		30 mm side DIN 43650 Form A – ISO 22 mm side		
Maximum coil nut torque	Nm	1		

MONOSTABLE 5/2 ISO 1



Symbol	Code	Abbrev.	Weight [g]
	7051021100	ISV 55 SOS OO	344
	7051021400	ISV 55 SES OO	344

MONOSTABLE 5/2 ISO 2

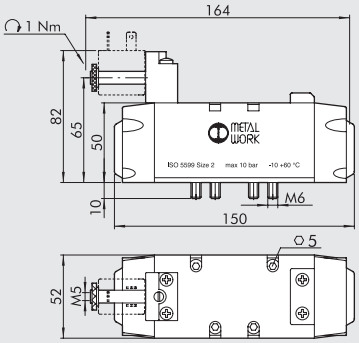

Symbol	Code	Abbrev.	Weight [g]
	7052021100	ISV 65 SOS OO	715
	7052021400	ISV 65 SES OO	715

MONOSTABLE 5/2 ISO 3

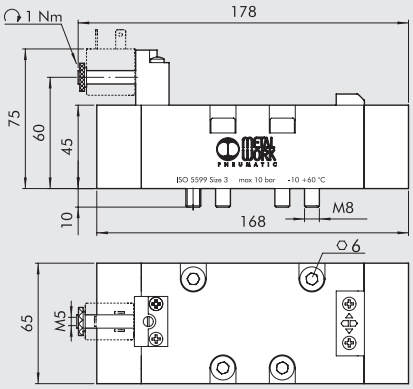

Symbol	Code	Abbrev.	Weight [g]
	7056021100	ISV 75 SOS OO	1207
	7056021400	ISV 75 SES OO	1207

METAL WORK PNEUMATIC

BISTABLE 5/2 ISO 1 - MONOSTABLE 5/3 ISO 1

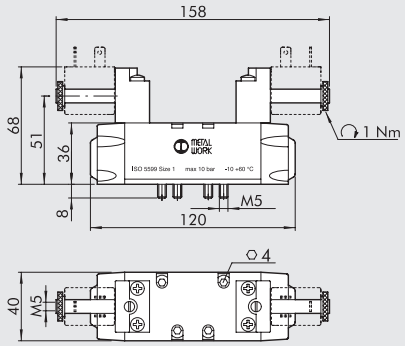

Symbol	Code	Abbrev.	Weight [g]
	7051021200	ISV 55 SOB OO	388
	7051021300	ISV 55 SOD OO	375
	7051022100	ISV 56 SOS CC	372
	7051022200	ISV 56 SOS OC	372
	7051022300	ISV 56 SOS PC	372
	7051021500	ISV 55 SEB OO	388
	7051021600	ISV 55 SED OO	375
	7051022400	ISV 56 SES CC	372
	7051022500	ISV 56 SES OC	372
	7051022600	ISV 56 SES PC	372

BISTABLE 5/2 ISO 2 - MONOSTABLE 5/3 ISO 2

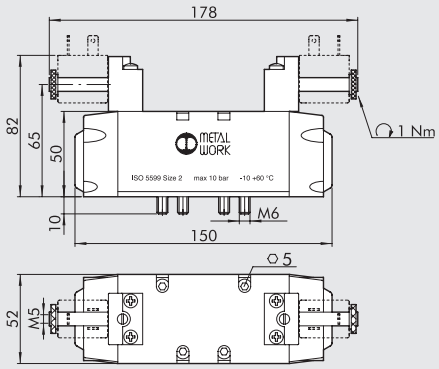

Symbol	Code	Abbrev.	Weight [g]
	7052021200	ISV 65 SOB OO	740
	7052021300	ISV 65 SOD OO	710
	7052022100	ISV 66 SOS CC	720
	7052022200	ISV 66 SOS OC	720
	7052022300	ISV 66 SOS PC	720
	7052021500	ISV 65 SEB OO	740
	7052021600	ISV 65 SED OO	710
	7052022400	ISV 66 SES CC	720
	7052022500	ISV 66 SES OC	720
	7052022600	ISV 66 SES PC	720

BISTABLE 5/2 ISO 3 - MONOSTABLE 5/3 ISO 3

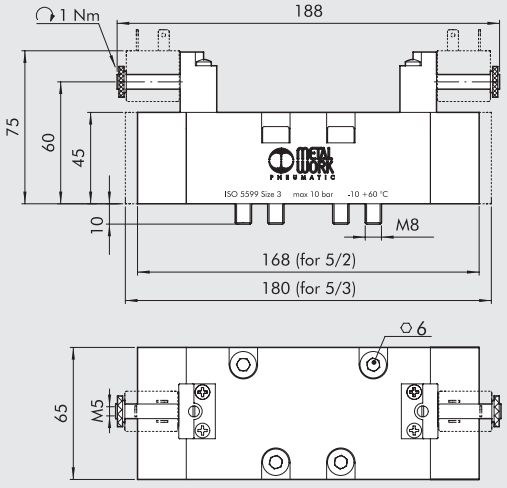

Symbol	Code	Abbrev.	Weight [g]
	7056021200	ISV 75 SOB OO	1230
	7056021300	ISV 75 SOD OO	1230
	7056022100	ISV 76 SOS CC	1355
	7056022200	ISV 76 SOS OC	1355
	7056022300	ISV 76 SOS PC	1355
	7056021500	ISV 75 SEB OO	1230
	7056021600	ISV 75 SED OO	1230
	7056022400	ISV 76 SES CC	1355
	7056022500	ISV 76 SES OC	1355
	7056022600	ISV 76 SES PC	1355

VALVES ISO 5599/1, PNEUMATIC, SERIES ISV WITH IN-LINE SOLENOID PILOT

TECHNICAL DATA		ISO 1
Operating pressure:	bar	
• monostable		2.5 to 10
• bistable		1 to 10
• pilot-assisted		Vacuum to 10
Minimum pilot pressure	bar	2.5
Operating temperature range	°C	-10 to +60
Nominal diameter	mm	7.5
Conductance C	Nl/min · bar	250
Critical ratio b	bar/bar	0.36
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	700
Flow rate at 6 bar ΔP 1 bar	Nl/min	1100
TRA / TRR monostable at 6 bar	ms	24 / 50
TRA / TRR bistable at 6 bar	ms	20 / 20
Solenoid pilot		In line pilot
Hand operator		Bistable on solenoid pilot
Coils		30 mm side DIN 43650
		Form A – ISO
		22 mm side
Maximum coil nut torque	Nm	1

MONOSTABLE 5/2 ISO 1

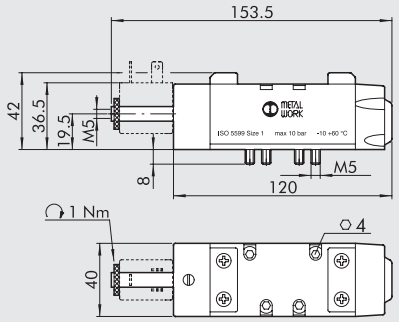

Symbol	Code	Abbrev.	Weight [g]
	7053021100	ISV 55 DOS OO	396
	7053021400	ISV 55 DES OO	396

BISTABLE 5/2 ISO 1

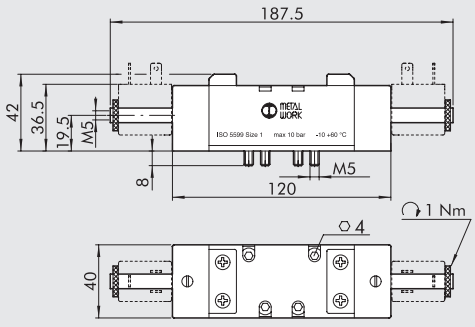

Symbol	Code	Abbrev.	Weight [g]
	7053021200	ISV 55 DOB OO	450
	7053021500	ISV 55 DEB OO	450

MONOSTABLE 5/3 ISO 1

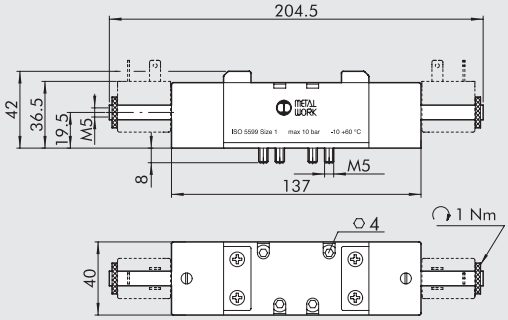

Symbol	Code	Abbrev.	Weight [g]
	7053022100	ISV 56 DOS CC	517
	7053022200	ISV 56 DOS OC	516
	7053022300	ISV 56 DOS PC	516
	7053022400	ISV 56 DES CC	517
	7053022500	ISV 56 DES OC	516
	7053022600	ISV 56 DES PC	515

COILS AND CONNECTORS FOR ISO 5599/1 SOLENOID VALVES SERIES ISV

COILS SIDE 22 mm



- Voltage tolerance: –10% to + 15%
- Insulation class: F155
- Degree of protection: IP65 EN60529 with connector
- Avoid prolonged exposure to the atmospheric agents
- Coil temperature 100% ED: 55°C at 20°C ambient temperature
- According to Atex 2014/34/EU rule, group 2, category 3 GD
- Electrical connection DIN 43650 B-IND

Code	Abbrev.	Nominal voltage	Absorption	
			Inrush	Holding
W0215000151	Coil 22 Ø 8 BA 2W-12VDC	12Vcc	2W	2W
W0215000101	Coil 22 Ø 8 BA 2W-24VDC	24Vcc	2W	2W
W0215000111	Coil 22 Ø 8 BA 3.5VA-24VAC	24V 50/60Hz	5.3VA	3.5VA
W0215000121	Coil 22 Ø 8 BA 3.5VA-110VAC	110V 50/60Hz	5.3VA	3.5VA
W0215000131	Coil 22 Ø 8 BA 3.5VA-220VAC	220V 50/60Hz	5.3VA	3.5VA

"UL" AND "CSA" COILS 22 mm



c UL us

- Voltage tolerance: –10% to + 15%
- Insulation class: F155
- Degree of protection: IP65 EN60529 with connector
- Avoid prolonged exposure to the atmospheric agents
- Coil temperature 100% ED: 55°C at 20°C ambient temperature
- Electrical connection DIN 43650 B-IND

Code	Abbrev.	Nominal voltage	Absorption	
			Inrush	Holding
W0215000251	Coil 22 Ø 8 BA 2W-12VDC UR	12Vcc	2W	2W
W0215000201	Coil 22 Ø 8 BA 2W-24VDC UR	24Vcc	2W	2W
W0215000211	Coil 22 Ø 8 BA 3.5VA-24VAC UR	24V 50/60Hz	5.3VA	3.5VA
W0215000221	Coil 22 Ø 8 BA 3.5VA-110VAC UR	110V 50/60Hz	5.3VA	3.5VA
W0215000231	Coil 22 Ø 8 BA 3.5VA-220VAC UR	220V 50/60Hz	5.3VA	3.5VA

COILS SIDE 30 mm



- Electric contact DIN43650 shape A – ISO 4400
- Voltage tolerance: -10% + 10%
- Insulation class: F155
- Degree of protection: IP65 EN60529 with connector
- Avoid prolonged exposure to the atmospheric agents
- According to Atex 2014/34/EU rule, group 2, category 3 GD
- Electrical connection DIN 43650 - A

Code	Abbrev.	Nominal voltage	Absorption	
			Inrush	Holding
W0210010100	Coil 30 Ø 8 2W-24VDC	24Vcc	5W	2W
W0210011100	Coil 30 Ø 8 3.5VA-24VAC	24V 50/60Hz	10VA	3.5VA
W0210012100	Coil 30 Ø 8 3.5VA-110VAC	110V 50/60Hz	10VA	3.5VA
W0210013100	Coil 30 Ø 8 3.5VA-220VAC	220V 50/60Hz	10VA	3.5VA

CONNECTOR FOR COILS SIDE 22 mm DIN 43650 B-IND



Code	Type	Colour	Ø Cable
W0970510011	Standard	Black	PG9
W0970510012	LED 24V	Transparent	PG9
W0970510013	LED 110V	Transparent	PG9
W0970510014	LED 220V	Transparent	PG9
W0970510015	LED + VDR 24V	Transparent	PG9
W0970510016	LED + VDR 110V	Transparent	PG9
W0970510017	LED + VDR 220V	Transparent	PG9
W0970510070	Atex II 2 GD	Black	PG9

Code	Type	Colour	Ø Cable
W0970510051	LED 24VDC Energy Saving	Transparent	PG9

For technical data see page **B1**.61

CONNECTOR FOR COILS SIDE 30 mm DIN 43650-A



Code	Type	Colour	Ø Cable
W0970520033	Standard	Black	PG11
W0970520034	LED 24V	Transparent	PG11
W0970520035	LED 110V	Transparent	PG11
W0970520036	LED 220V	Transparent	PG11
W0970520037	LED + VDR 24V	Transparent	PG11
W0970520038	LED + VDR 110V	Transparent	PG11
W0970520039	LED + VDR 220V	Transparent	PG11
W0970520070	Atex II 2 GD	Black	PG11

KIT COIL EEXM



Code	Description
0227606913	Kit for coil 30 24 VDC EEXMT5 cable 3 m
0227606915	Kit for coil 30 24 VDC EEXMT5 cable 5 m
0227608013	Kit for coil 30 24 VAC EEXMT5 cable 3 m
0227608015	Kit for coil 30 24 VAC EEXMT5 cable 5 m
0227608023	Kit for coil 30 110 VAC EEXMT5 cable 3 m
0227608025	Kit for coil 30 110 VAC EEXMT5 cable 5 m
0227608033	Kit for coil 30 230 VAC EEXMT5 cable 3 m
0227608035	Kit for coil 30 230 VAC EEXMT5 cable 5 m

Atex (2014/34/EU), IECEx and CCC certified coils: Ex II 2G Ex mb IIC T4/T5 Gb
Ex II 2D Ex tb IIIC T130/T95 °C Db

N.B.: Supplied complete with adapter for Ø8 mm sleeve.

KIT COILS SIDE 22 IP65

Code	Description
0222100100	Kit for coil 22 - IP65

Improved IP65 protection, even after prolonged exposure to atmospheric agents.
Applicable to valves with a technopolymer control.

NOTES

VALVES ISO 5599/1, SOLENOID/PNEUMATIC, SERIES ISV WITH M12 CONNECTOR

METAL WORK PNEUMATIC

TECHNICAL DATA		ISO 1	ISO 2
Operating pressure:	bar		
• monostable and bistable differential		2.5 to 10	
• bistable		1 to1 0	
• pilot-assisted		Vacuum to 10	
Minimum pilot pressure	bar	2.5	
Operating temperature range	°C	-10 to +60	
Nominal diameter	mm	7.5	12
Conductance C	Nl/min · bar	250	657.14
Critical ratio b	bar/bar	0.36	0.25
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	700	1800
Flow rate at 6 bar ΔP 1 bar	Nl/min	1100	2700
TRA / TRR monostable at 6 bar	ms	22 / 60	78 / 180
Solenoid pilot		With built-in coil	
Hand operator		Monostable on solenoid pilot	
		Monostable on valve body	
Coil power	W	1.2	
Voltage		24 VDC ±10%	
Electrical connection		M12	
Degree of protection		IP65 EN60529	
Electrical protection		Transil	

MONOSTABLE 5/2 ISO 1

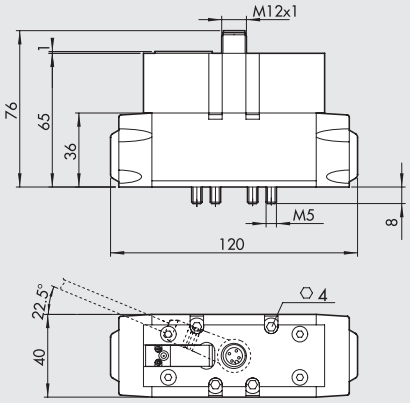

Symbol	Code	Abbrev.	Weight [g]
	7054021100	ISV 55 COS OO	508
	7054021400	ISV 55 CES OO	508

MONOSTABLE 5/2 ISO 2

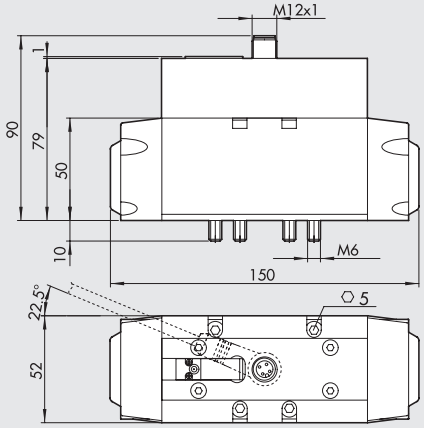

Symbol	Code	Abbrev.	Weight [g]
	7055021100	ISV 65 COS OO	901
	7055021400	ISV 65 CES OO	901

BISTABLE 5/2 ISO 1 - MONOSTABLE 5/3 ISO 1

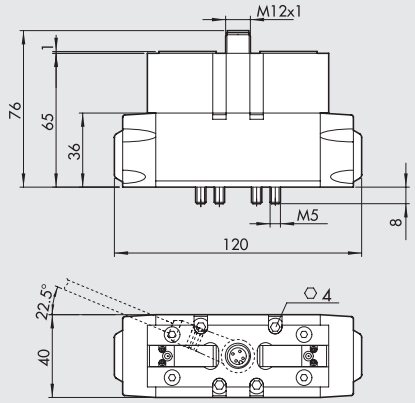

Symbol	Code	Abbrev.	Weight [g]
	7054021200	ISV 55 COB OO	512
	7054021300	ISV 55 COD OO	490
	7054022100	ISV 56 COS CC	496
	7054022200	ISV 56 COS OC	496
	7054022300	ISV 56 COS PC	496
	7054021500	ISV 55 CEB OO	512
	7054021600	ISV 55 CED OO	490
	7054022400	ISV 56 CES CC	496
	7054022500	ISV 56 CES OC	496
	7054022600	ISV 56 CES PC	496

BISTABLE 5/2 ISO 2 - MONOSTABLE 5/3 ISO 2

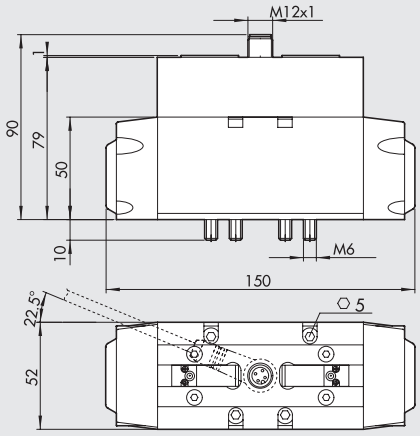

Symbol	Code	Abbrev.	Weight [g]
	7055021200	ISV 65 COB OO	860
	7055021300	ISV 65 COD OO	860
	7055022100	ISV 66 COS CC	868
	7055022200	ISV 66 COS OC	868
	7055022300	ISV 66 COS PC	868
	7055021500	ISV 65 CEB OO	860
	7055021600	ISV 65 CED OO	860
	7055022400	ISV 66 CES CC	868
	7055022500	ISV 66 CES OC	868
	7055022600	ISV 66 CES PC	868

WIRING DIAGRAM

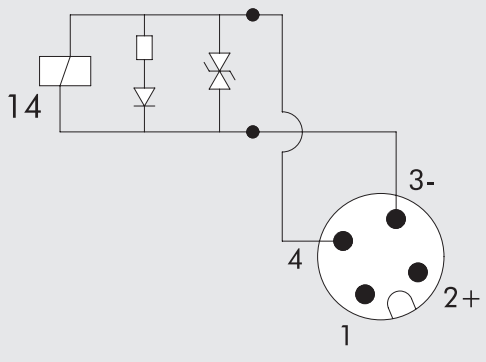

MONOSTABLE

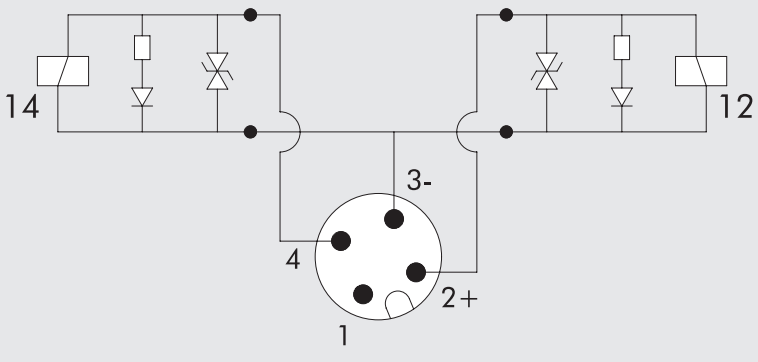

BISTABLE

N.B.: Can be used the M12x1 connectors on page **C5**.12, without wiring the central PIN.

BASES ISO 5599/1 FOR VALVES SERIES IPV-ISV SIZE 1 AND 2

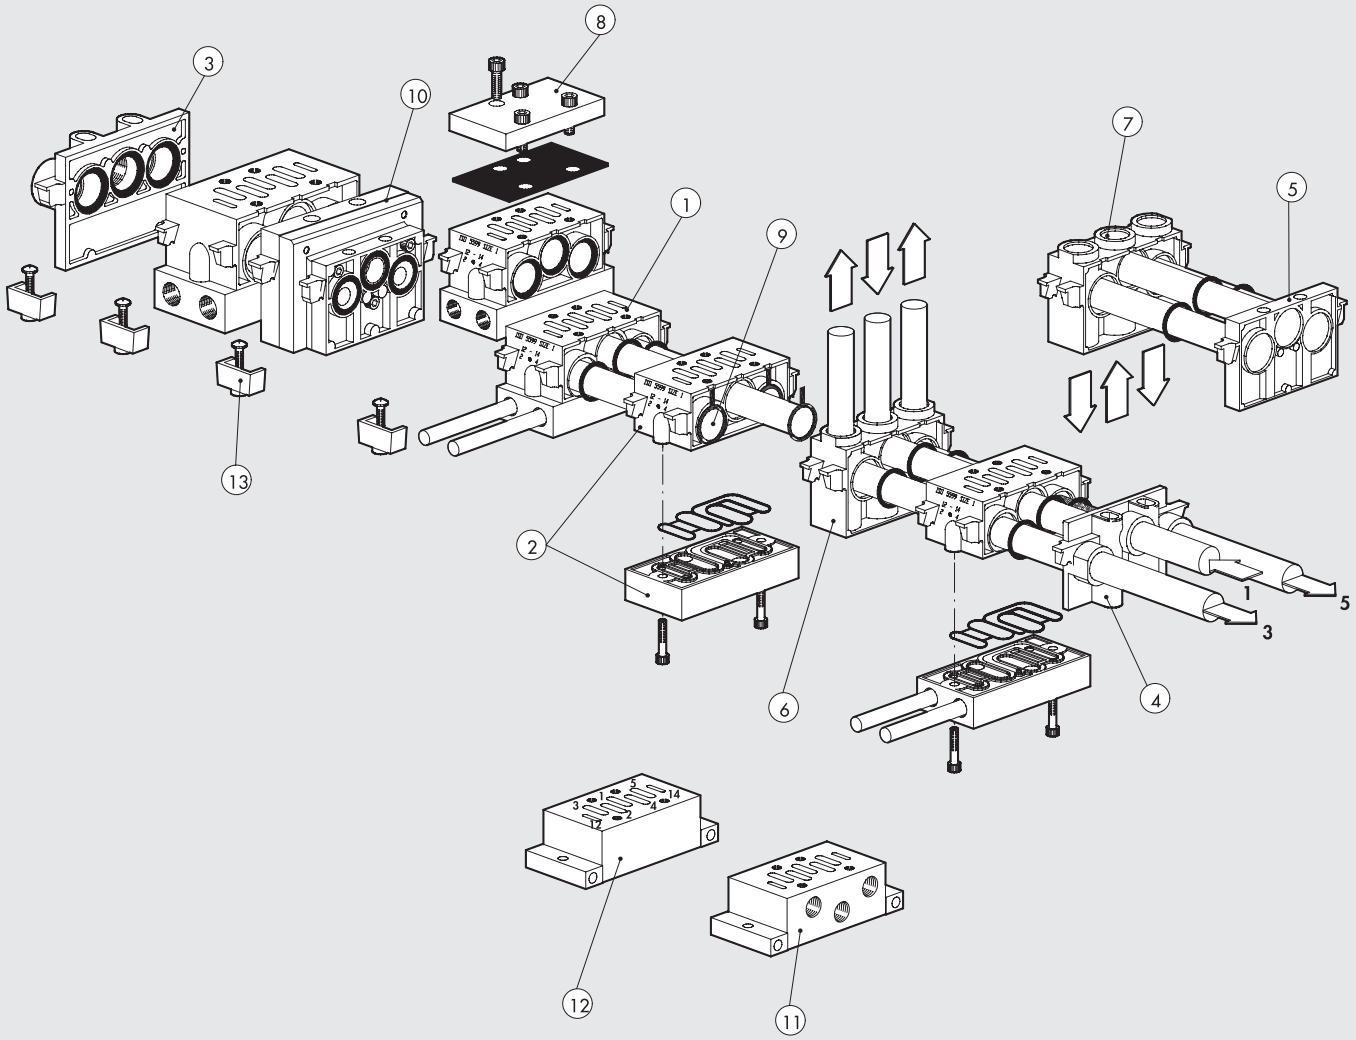

Reference	Code ISO 1	Code ISO 2	Description
①	0228000150	0228001150	Manifold base - side ports
②	0228000155	0228001155	Manifold base with bottom ports
③	0228000200	0228001200	Input end plate
④	0228000201	0228001201	Additional input end plate
⑤	0228000210	0228001210	Blind end plate
⑥	0228000300	0228001300	Intermediate - top ports
⑦	0228000301	0228001301	Intermediate - back ports
⑧	0228000500	0228001500	Blanking plate
⑨	0228000400	0228001400	Intermediate diaphragm
⑩	0228000600	–	ISO 1/ISO 2 port adapter
⑪	0228000100	0228001100	Individual base - side ports
⑫	0228000110	0228001110	Base - bottom ports
⑬	0228000700	0228001700	Assembly kit

① MANIFOLD BASE, SIDE PORTS

ISO 1

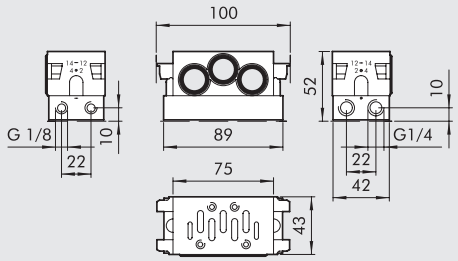

ISO 2

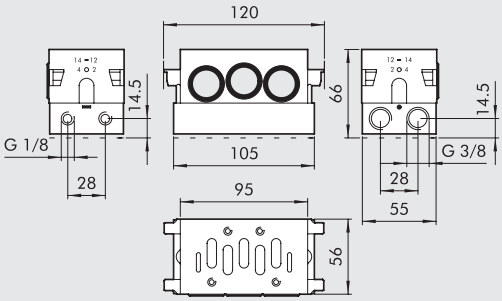

Code	Description	Weight [g]
0228000150	Manifold base, side ports, ISO 1	131
0228001150	Manifold base, side ports, ISO 2	314

② MANIFOLD BASE, BOTTOM PORTS

ISO 1

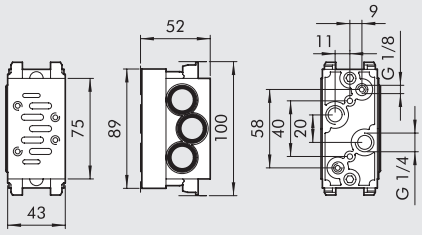

ISO 2

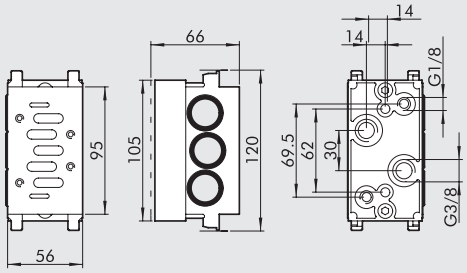

Code	Description	Weight [g]
0228000155	Manifold base, bottom ports, ISO 1	314
0228001155	Manifold base, bottom ports, ISO 2	505

③ INPUT END PLATE

ISO 1



ISO 2

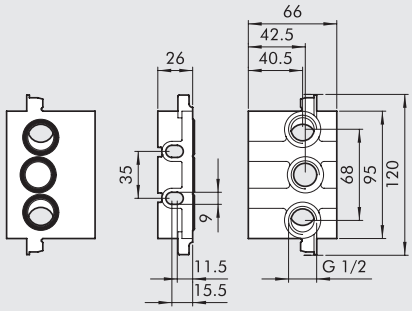

Code	Description	Weight [g]
0228000200	Input end plate ISO 1	129
0228001200	Input end plate ISO 2	206

④ ADDITIONAL INPUT END PLATE

ISO 1



ISO 2

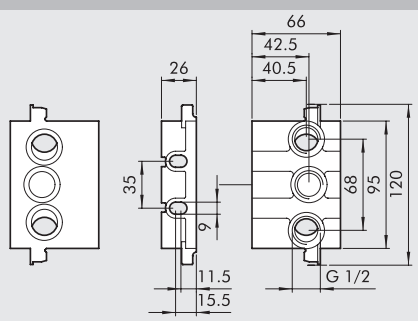

Code	Description	Weight [g]
0228000201	Additional input end plate, ISO 1	84
0228001201	Additional input end plate, ISO 2	162

METAL WORK PNEUMATIC

⑤ BLIND END PLATE

ISO 1



ISO 2



Code	Description	Weight [g]
0228000210	Blind end plate, ISO 1	79
0228001210	Blind end plate, ISO 2	130

⑥ INTERMEDIATE TOP PORTS

ISO 1



ISO 2



Code	Description	Weight [g]
0228000300	Intermediate top ports, ISO 1	235
0228001300	Intermediate top ports, ISO 2	299

⑦ INTERMEDIATE REAR PORTS

ISO 1



ISO 2



Code	Description	Weight [g]
0228000301	Intermediate rear ports, ISO 1	237
0228001301	Intermediate rear ports, ISO 2	299

⑧ BLANKING PLATE

ISO 1



ISO 2



Code	Description	Weight [g]
0228000500	Blanking plate, ISO 1	47
0228001500	Blanking plate, ISO 2	96

⑨ INTERMEDIATE DIAPHRAGM



Code	Description	Weight [g]
0228000400	Intermediate diaphragm, ISO 1	4
0228001400	Intermediate diaphragm, ISO 2	7

⑩ DIMENSION ADAPTER

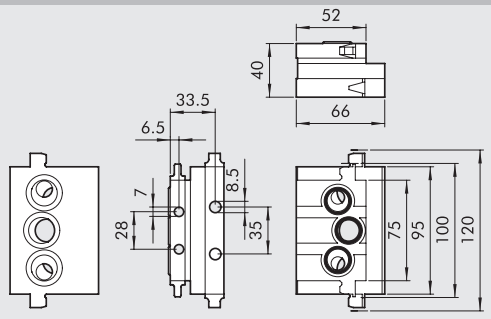

Code	Description	Weight [g]
0228000600	Dimension adapter ISO 1-2	454

⑪ INDIVIDUAL BASE SIDE PORTS

ISO 1

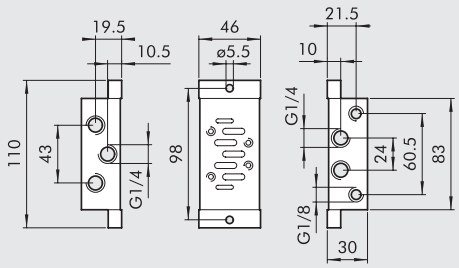

ISO 2

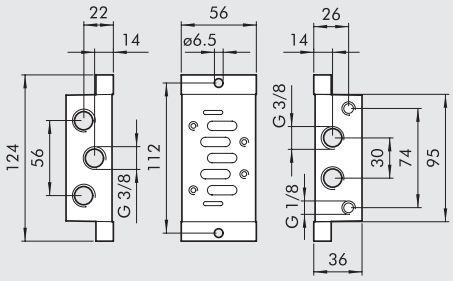

Code	Description	Weight [g]
0228000100	Individual base side ports, ISO 1	165
0228001100	Individual base side ports, ISO 2	257

⑫ INDIVIDUAL BASE BOTTOM PORTS

ISO 1



ISO 2

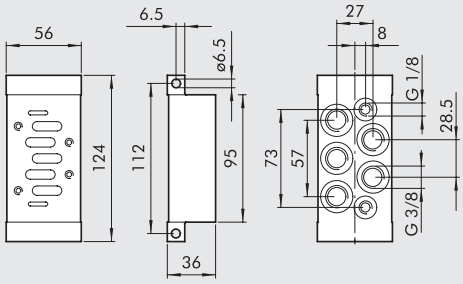

Code	Description	Weight [g]
0228000110	Individual base bottom ports, ISO 1	197
0228001110	Individual base bottom ports, ISO 2	304

⑬ ASSEMBLY KIT

ISO 1

ISO 2

Code	Description	Weight [g]
0228000700	Assembly kit, ISO 1	47
0228001700	Assembly kit, ISO 2	47

BASES ISO 5599/1
FOR VALVES SERIES IPV-ISV SIZE ISO 3

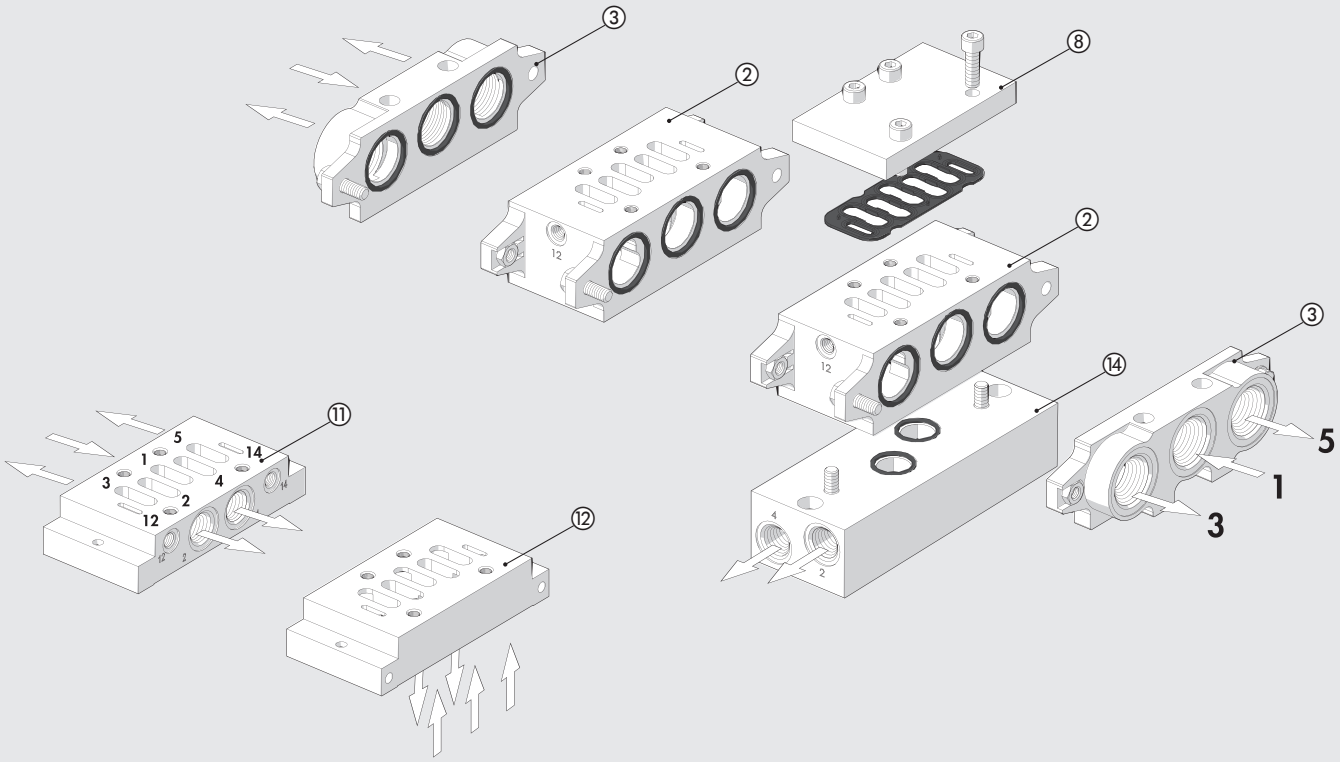

Reference	Code ISO 3	Description
②	**0228002155**	Manifold base with bottom ports
③	**0228002200**	Input end plate
⑧	**0228002500**	Blanking plate
⑪	**0228002100**	Individual base - side ports
⑫	**0228002110**	Base - bottom ports
⑭	**0228002150**	Side interface

② MANIFOLD BASE, BOTTOM PORTS

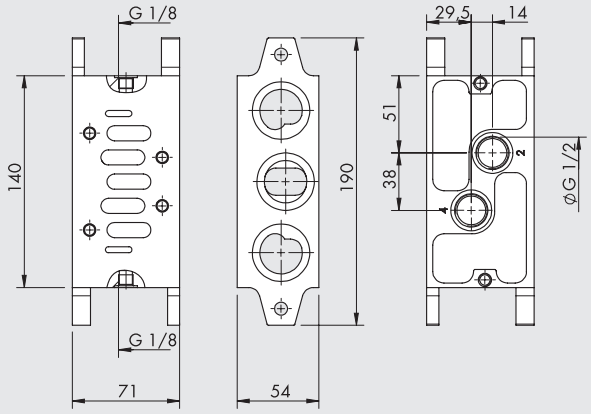

Code	Description	Weight [g]
0228002155	Manifold base, bottom ports, ISO 3	915

③ INPUT END PLATE

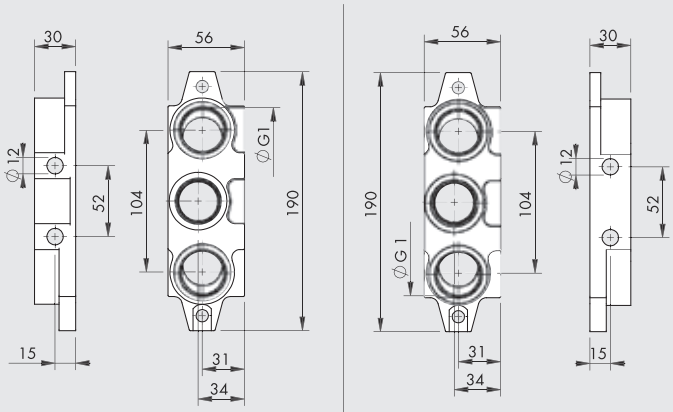

Code	Description	Weight [g]
0228002200	Input end plate, ISO 3	880

⑧ BLANKING PLATE

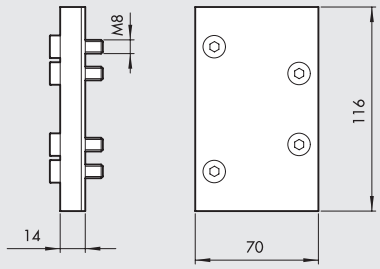

Code	Description	Weight [g]
0228002500	Blanking plate, ISO 3	350

⑪ INDIVIDUAL BASE SIDE PORTS

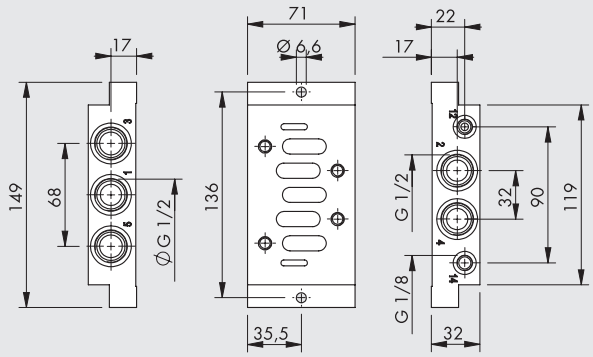

Code	Description	Weight [g]
0228002100	Individual base side ports, ISO 3	470

⑫ INDIVIDUAL BASE BOTTOM PORTS

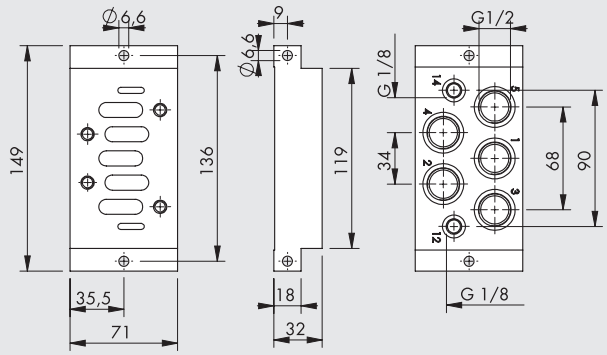

Code	Description	Weight [g]
0228002110	Individual base bottom ports, ISO 3	655

⑭ SIDE INTERFACE

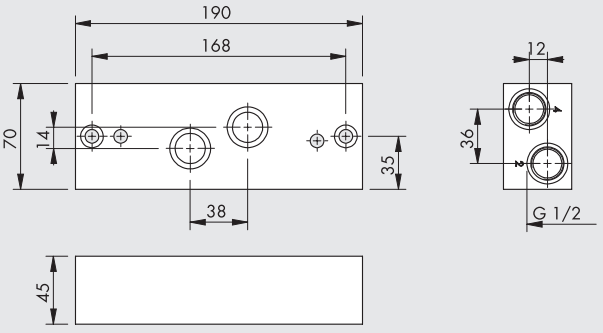

Code	Description	Weight [g]
0228002150	Side interface, ISO 3	1470

SANDWICH REGULATORS FOR ISO 5599/1 BASES ISO1-2

METAL WORK PNEUMATIC

TECHNICAL DATA		ISO 1	ISO 2
Max upstream pressure	bar	13	
Pressure range	bar	0 to 12	
Pressure gauge range	bar	0 to 12	
Flow rate at 6 bar ΔP 1 bar	Nl/min	400	550
Operating temperature range	°C	−10 to +60	
Fixing screw on ISO 5599/1 base		M5 ant-extraction	M6 anti-extraction
Installation		In any position	
Instructions for use		Downstream pressure must always be set to increasing values	

SANDWICH REGULATOR FOR ISO 1 VALVES

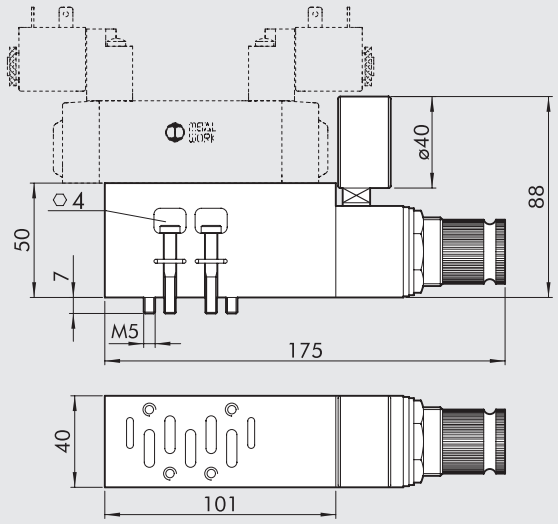

Symbol	Code	Description	Weight [g]
	0228000804	Sandwich regulator 1 0 to 12 bar ISO 1	760
	0228000814*	Sandwich regulator 3 0 to 12 bar ISO 1	760

* A pilot-assisted valve needs to be used since port 1 relieves pressure, it is not under pressure

SANDWICH REGULATOR FOR ISO 2 VALVES

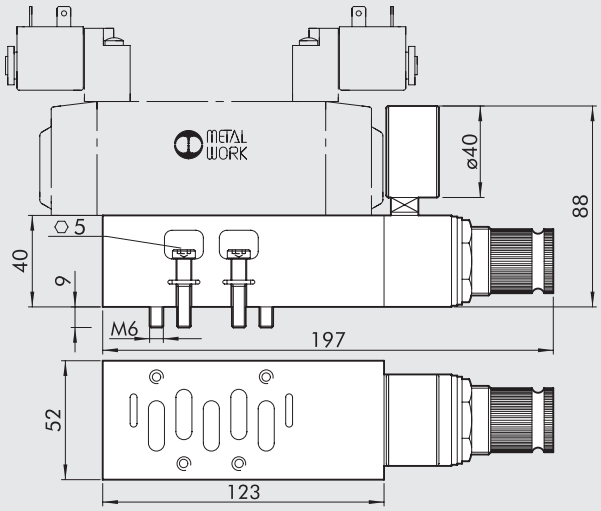

Symbol	Code	Description	Weight [g]
	0228001804	Sandwich regulator 1 0 to 12 bar ISO 2	900
	0228001814*	Sandwich regulator 3 0 to 12 bar ISO 2	900

* A pilot-assisted valve needs to be used since port 1 relieves pressure, it is not under pressure

VALVES SERIES 70
SAFE AIR®

Starting from the robust and reliable valves series 70, we have added a few distinctive features, such as the presence of a valve status diagnostic system and the creation of a double communication channel guaranteeing redundancy of the architecture.

The simplest version is obtained from a pneumatically-operated 3/2 monostable valve. It is well known that when this type of valve is in the idle state (coil de-energized), port 1 is not connected to the downstream pneumatic circuit and port 2 is on relief; when the valve is operated (coil energized), port 1 is connected to port 2. When the coil is de-energized again, the valve is returned to the idle state (and hence port 2 relieves) by means of a spring that returns the spool to the home position.

In the event of a failure, the spool may remain in the actuation position, even when the coil is de-energized, thus leaving port 2 pressurized.
To offset this problem, we have added a Hall-effect sensor that reads the spool position. This means that when the valve is deactivated, the sensor is in the ON state, when the valve is activated, the sensor is in the OFF state.
A status in which the sensor is OFF state and the coil de-energized indicates that there is a problem.
To reduce the probability of risk during plant maintenance, the manual actuator mounted on the electric control is the monostable type.
The sensor inside the valve is available in the standard version with a 2.5m three-wire cable (standard or ATEX certified) or with an M8 connector and 300 mm cable.
This valve, which is available in sizes 1/8", 1/4", 3/8" and 1/2", is a category 2 component, according to ISO EN 13849, and is suitable for use in safety circuits up to PL = c.

For applications requiring higher performance levels, we have also develop a double-channel version (redundant) that requires the use of two valves series 70 with a monitored spool arranged so that port 2 of valve 1 is connected with port 1 of valve 2. If just one of the valves de-energizes, port 2 relieves, so, even if one of the two spools remains blocked, the other guarantees relief of the compressed-air circuit. In this case, too, the presence of spool position sensors can be used to monitor the status.
The double valve, which is available in the size 1/8", 1/4", 3/8" and 1/2" as well, is a category 4 component according to ISO EN 13849 and is suitable for use in safety circuits up to PL = e.
Both the single- and double-channel valves come with:
- a voluntary examination certificate no. BVI-24-MAC-CV-0007, issued by Bureau Veritas in accordance with EN ISO 13849.

SINGLE VALVE SERIES 70 SAFE AIR®

TECHNICAL DATA		1/8"	1/4"	3/8"	1/2"
Fluid		Filtered unlubricated air (50µm); lubrication, if used, must be continuous			
Operation		3/2 monostable			
Operating pressure:	bar				
non-assisted		from 2.5 to 10			
pilot-assisted		from vacuum to 10			
Minimum pilot pressure	bar	2.5			
Operating temperature range	°C	from -10 to +60 (from -10 to +45 for Atex version)			
Nominal diameter	mm	5	7.5	13.3	15
Conductance C	Nl/min · bar	121	264	505	969.5
Critical ratio b	bar/bar	0.32	0.27	0.32	0.5
Flow rate at 6.3 bar Δp 0.5 bar	Nl/min	390	820	1600	3525
Flow rate at 6.3 bar Δp 1 bar	Nl/min	530	1130	2200	4800
Conductance C on relief	Nl/min · bar	128	270	491	969.5
Critical ratio b on relief	bar/bar	0.23	0.29	0.40	0.62
Flow rate on free exhaust at 6.3 bar	Nl/min	900	2050	3550	7000
TRA/TRR at 6.3 bar	ms/ms	15 / 35	19 / 45	21 / 72	38 / 110
Installation		Any position			
Assembly		In-line			
Manual actuator		Monostable			
Compatibility with oils		See **chapter Z1**			
Coils		22 mm side, ø 8 hole – EN175301-803 connection, type B			
		Certified EN 60204.1 and VDE 0580			
		For the electrical features see page **B1**.60 *			
Class of protection		IP65 with coil and connector mounted			
Noise level		Max. 78 dBA with silenced relief			
Max coil ring nut torque	Nm	1			
CE marking		In accordance with Machinery Directive, Annex V **			
ATEX category (only for versions with an ATEX sensor)		Ⓔx II 3G Ex nA IIC T4 Gc X -10°C<Ta<45°C			
		Ⓔx II 3G Ex h IIC T4 Gc X			
		Ⓔx II 3D Ex tc IIIC T135°C Dc IP65			
Safety function		Cuts off the power supply and relieves the air circuit connected to port 2			
Type of sensor used		Hall effect (refer to page **B1**.165 for sensor details)			
B10d		50 x 10^6 cycles			
Category - ISO EN 13849		2			
DC		Low (80 %)			
PL - ISO EN 13849		Suitable for use in safety circuits up to PL=c			

* To avoid malfunctions, we recommend using Metal Work accessories

** The declaration can be downloaded from www.metalwork.it

IMPORTANT: Do not mount 2 or more SAFE AIR® valves in adjacent positions. When mounting valves side by side, the minimum distance is specified in the user manual. Any ferromagnetic masses must be at least 40 mm from the sensor. Prevent magnetic fields from creating disturbance in the sensor area.

COMPONENTS

1/8"-1/4"-3/8"

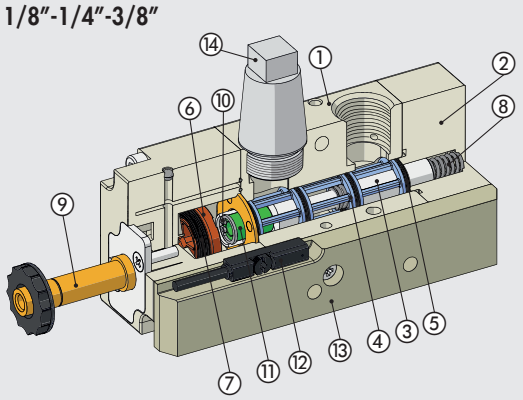

1/2"

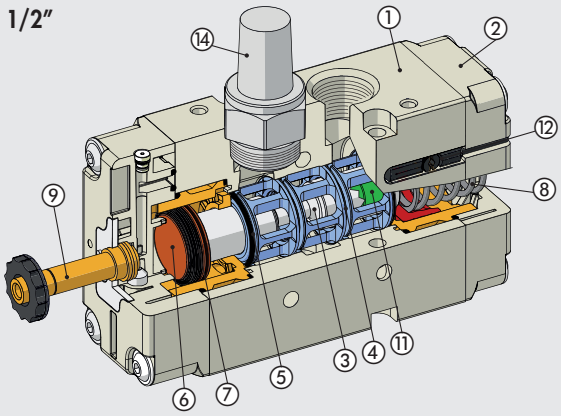

① VALVE BODY: Aluminium
② CONTROL/END CAP: plastic
③ SPOOL: chemically nickel-plated aluminium
④ DISTANCE PLATES: technopolymer
⑤ GASKETS: NBR
⑥ PISTONS: Hostaform®
⑦ PISTON GASKET: NBR
⑧ SPRINGS: special steel
⑨ OPERATOR: Brass pipe – Stainless steel core
⑩ LOCKING RING: special steel
⑪ MAGNET: Neodymium
⑫ SENSOR: Hall effect
⑬ SENSOR SUPPORTING PLATE: Aluminium (for 1/8"-1/4"-3/8" only)
⑭ SILENCER

FLOW CHARTS ON DELIVERY - SINGLE VALVE

Flow rates [Nl/min] 1/8″

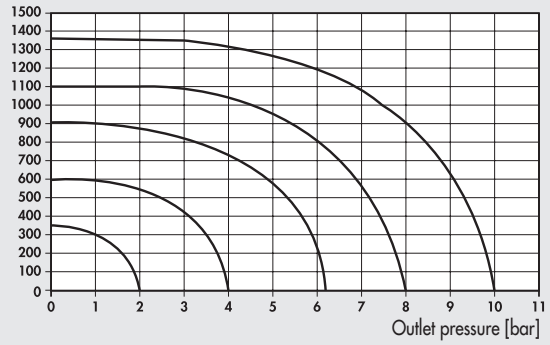

Flow rates [Nl/min] 1/4″

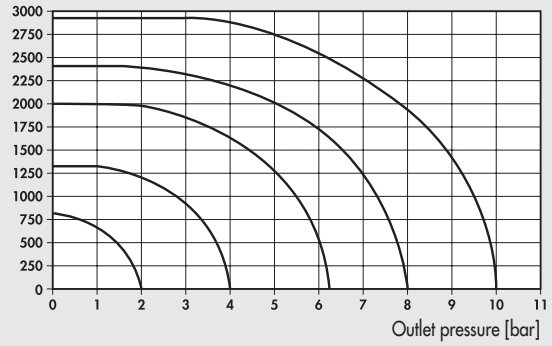

Flow rates [Nl/min] 3/8″

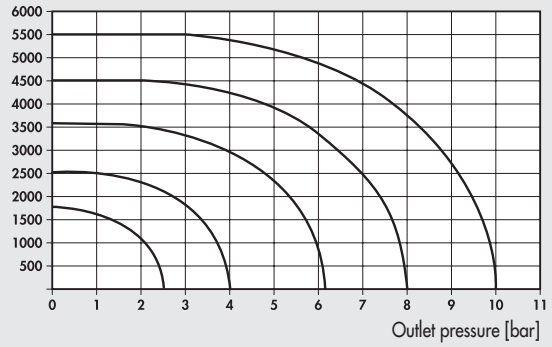

Flow rates [Nl/min] 1/2″

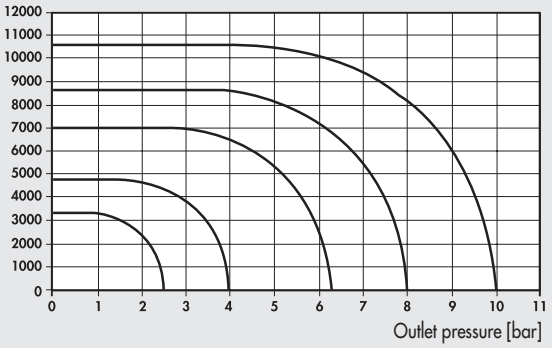

FLOW CHARTS ON RELIEF - SINGLE VALVE

Flow rates [Nl/min] 1/8″

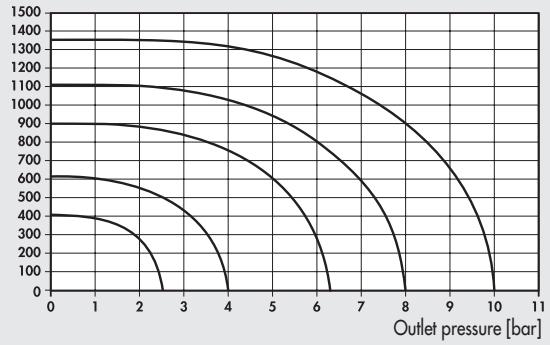

Flow rates [Nl/min] 1/4″

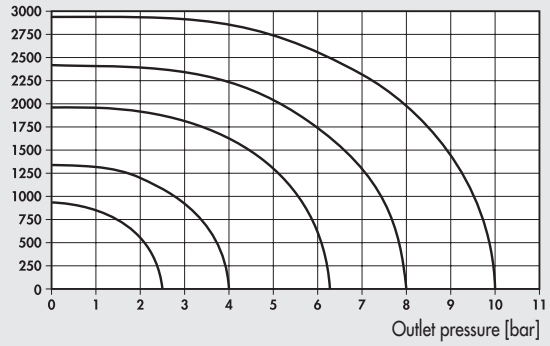

Flow rates [Nl/min] 3/8″

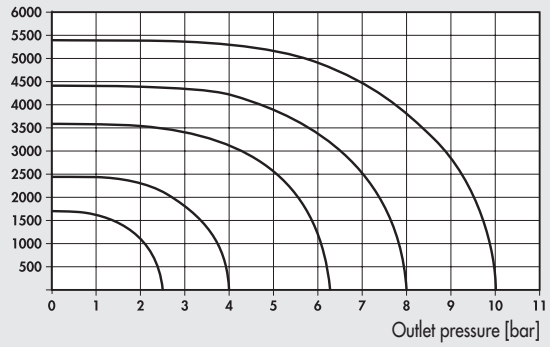

Flow rates [Nl/min] 1/2″

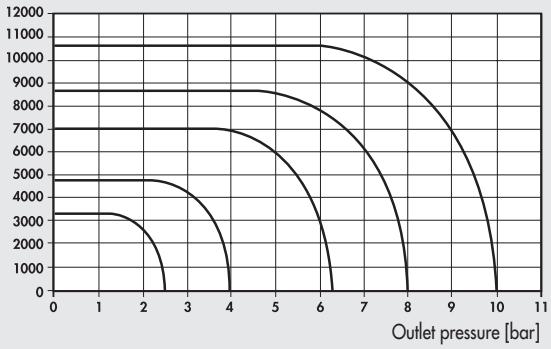

SYNOPTIC, SIZES AND VERSIONS

SOV	2	3	SO	S	NC	3F
FAMILY	DIMENSIONS	FUNCTION	OPERATORS 14	RESETTING 12	FURTHER DETAILS	SENSOR
SOV solenoid/ pneumatic	**2** 1/8″ **3** 1/4″ **C** 3/8″ **4** 1/2″	**3** 3/2	**SO** solenoid **SE** solenoid assisted	**S** mechanical springs	**NC** Normally-Closed	**3F** 2.5 m 3 wires **M8** 0.3 m M8 **AT** 2 m ATEX

METAL WORK PNEUMATIC

3/2 MONOSTABLE – 1/8"

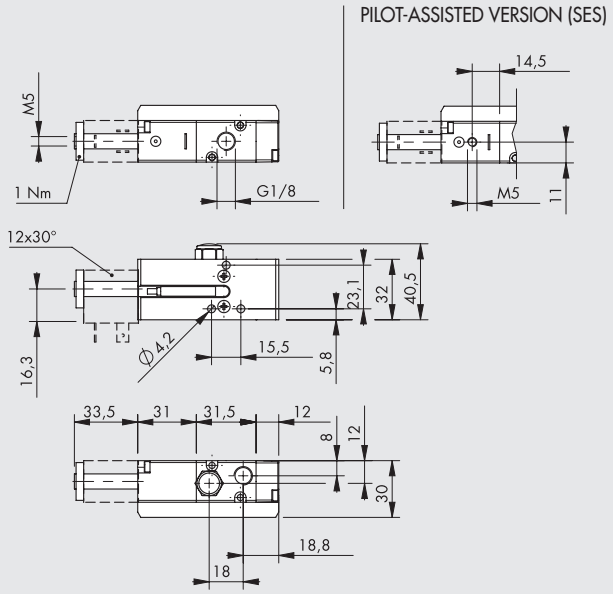

Symbol	Code	Abbrev.	Sensor	Weight [g]
	**7015020200**	SOV 23 SOS NC 3F	2.5 m 3 wires	182
	7015120200	SOV 23 SOS NC M8	0.3 m M8	178
	7015220200	SOV 23 SOS NC AT	2 m ATEX	174
	**7015020500**	SOV 23 SES NC 3F	2.5 m 3 wires	182
	7015120500	SOV 23 SES NC M8	0.3 m M8	178
	7015220500	SOV 23 SES NC AT	2 m ATEX	174

3/2 MONOSTABLE - 1/4"

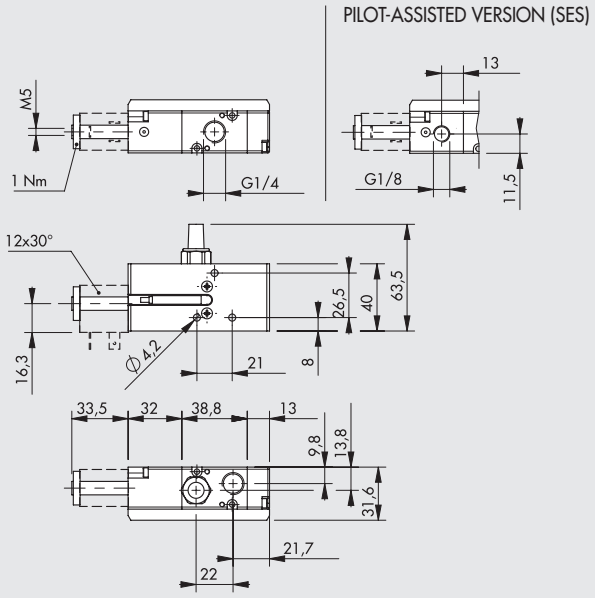

Symbol	Code	Abbrev.	Sensor	Weight [g]
	**7025020200**	SOV 33 SOS NC 3F	2.5 m 3 wires	252
	7025120200	SOV 33 SOS NC M8	0.3 m M8	248
	7025220200	SOV 33 SOS NC AT	2 m ATEX	244
	**7025020500**	SOV 33 SES NC 3F	2.5 m 3 wires	252
	7025120500	SOV 33 SES NC M8	0.3 m M8	248
	7025220500	SOV 33 SES NC AT	2 m ATEX	244

3/2 MONOSTABLE - 3/8"

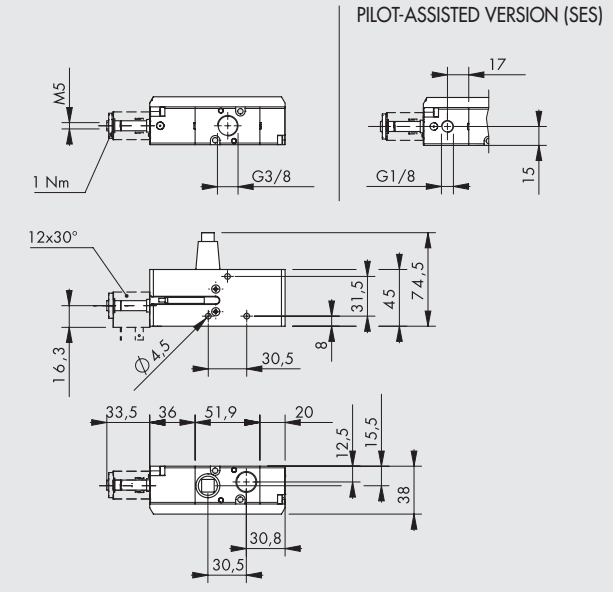

Symbol	Code	Abbrev.	Sensor	Weight [g]
	**7045020200**	SOV C3 SOS NC 3F	2.5 m 3 wires	402
	7045120200	SOV C3 SOS NC M8	0.3 m M8	398
	7045220200	SOV C3 SOS NC AT	2 m ATEX	394
	**7045020500**	SOV C3 SES NC 3F	2.5 m 3 wires	402
	7045120500	SOV C3 SES NC M8	0.3 m M8	398
	7045220500	SOV C3 SES NC AT	2 m ATEX	394

3/2 MONOSTABLE - 1/2"

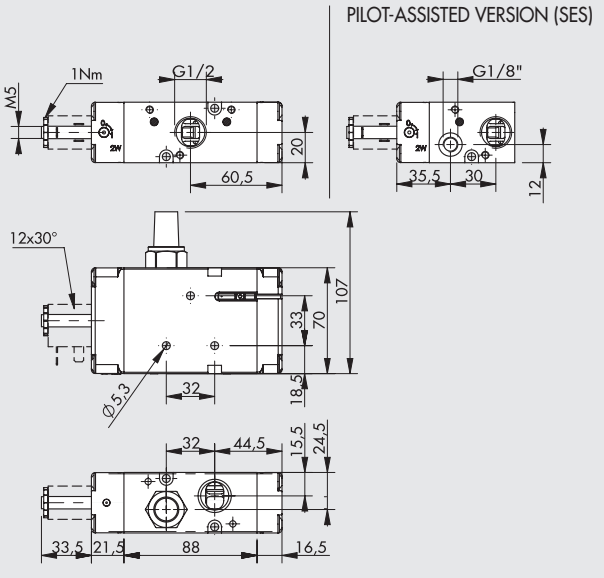

Symbol	Code	Abbrev.	Sensor	Weight [g]
	**7035020200**	SOV 43 SOS NC 3F	2.5 m 3 wires	705
	7035120200	SOV 43 SOS NC M8	0.3 m M8	705
	7035220200	SOV 43 SOS NC AT	2 m ATEX	705
	**7035020500**	SOV 43 SES NC 3F	2.5 m 3 wires	700
	7035120500	SOV 43 SES NC M8	0.3 m M8	700
	7035220500	SOV 43 SES NC AT	2 m ATEX	700

EXAMPLE OF A SAFETY CIRCUIT WITH A SINGLE VALVE

Below is an example of a wiring diagram for controlling Metal Work SAFE AIR® single valves using Pilz® components.
Circuit components:

- a Pilz® safety module PNOZ® s3 for controlling the emergency stop button; terminal Y32 indicates the status of the module, which can be relayed to the machine control logic
- an emergency stop button S1 (Pilz® - PIT® es Set) linked to terminals S11-S12-S22-S23 of the PNOZ® s3
- a Metal Work SAFE AIR® solenoid valve, the 24 VDC coil of which is fed by terminal 14 of the PNOZ® s3 (the other terminal of the coil is 0 V); the valve's Hall-effect sensor is 24 VDC
- a start/reset button S2
- a relay K1, controlled by the valve sensor; an NO contact of the relay is in series with button S2 of the PNOZ® s3.

Expected behaviour with the system operating correctly:

- system deactivated:
  - contact 14 is OFF
  - the coil is de-energized
  - the sensor is ON
  - relay K1 is energized
  - contact K1 is closed
  - contact Y32 is OFF
- with the system activated via the start/reset button S2:
  - contact 14 is ON
  - the coil is energized
  - the sensor is OFF
  - relay K1 is de-energized
  - contact K1 is open
  - contact Y32 is ON

In the event of a malfunction (e.g. spool jam), the coil is de-energized but the sensor remains OFF, relay K1 remains de-energized, contact K1 remains open (preventing subsequent restarts) and contact Y32 is OFF.
In the event of a valve fault, the circuit in the diagram below does not allow relief of the compressed air system. Sensor status must be monitored to assess valve operation. Contact Y32 indicates the status of the PNOZ® s3, not the status of the sensor.
All the electrical connections between the various components must comply with the applicable safety regulations.
If the emergency button is operated at a frequency of 1 actuation per hour, the circuit activates a safety function with PL = c (calculations made with the PAScal programme by Pilz®). Responsibility for final checking that PL lies with the person assembling the circuit.

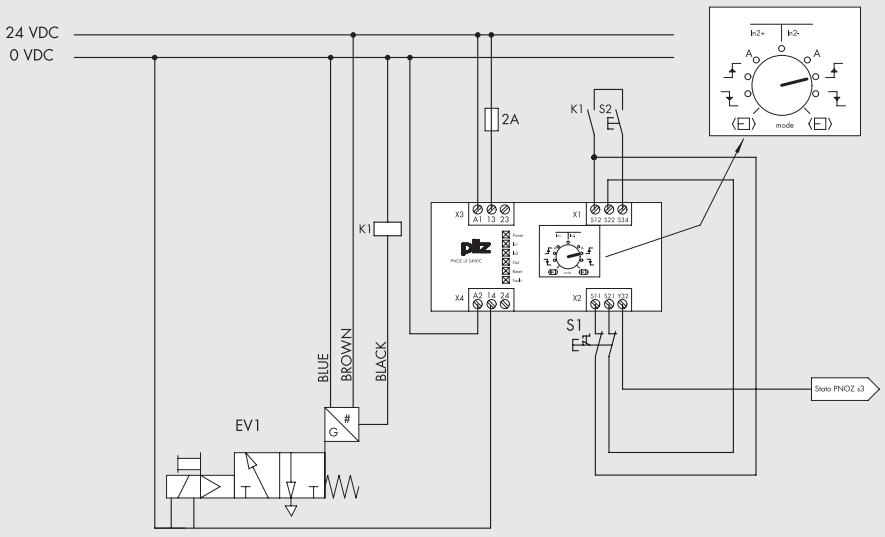

DOUBLE VALVE SERIES 70 SAFE AIR®

TECHNICAL DATA		1/8"	1/4"	3/8"	1/2"
Fluid		Filtered unlubricated air (50µm); lubrication, if used, must be continuous			
Operation		double 3/2 monostable			
Operating pressure:	bar				
non-assisted		from 2.5 to 10			
pilot-assisted		from vacuum to 10			
Minimum pilot pressure	bar	2.5			
Operating temperature range	°C	from -10 to +60 (from -10 to +45 for Atex version)			
Conductance C	Nl/min · bar	80	202	346	782.5
Critical ratio b	bar/bar	0.35	0.11	0.24	0.25
Flow rate at 6.3 bar Δp 0.5 bar	Nl/min	261	561	1038	2355
Flow rate at 6.3 bar Δp 1 bar	Nl/min	358	778	1433	3250
Conductance C on relief	Nl/min · bar	132	228	491	969.5
Critical ratio b on relief	bar/bar	0.27	0.21	0.21	0.54
Flow rate on free exhaust at 6.3 bar	Nl/min	930	1700	3550	7000
TRA/TRR a 6.3 bar	ms/ms	28 / 35	38 / 45	50 / 72	85/110
Installation		Any position			
Assembly		In-line			
Manual actuator		Monostable			
Compatibility with oils		See **chapter Z1**			
Coils		22 mm side, ø 8 hole – EN175301-803 connection, type B			
		Certified EN 60204.1 and VDE 0580			
		For the electrical features see page **B1**.60 *			
Class of protection		IP65 with coil and connector mounted			
Noise level		Max. 78 dBA with silenced relief			
Max coil ring nut torque	Nm	1			
CE marking		In accordance with Machinery Directive, Annex V **			
ATEX category (only for versions with an ATEX sensor)		Ⓔx II 3G Ex nA IIC T4 Gc X -10°C<Ta<45°C			
		Ⓔx II 3G Ex h IIC T4 Gc X			
		Ⓔx II 3D Ex tc IIIC T135°C Dc IP65			
Safety function		Cuts off the power supply and relieves the air circuit connected to port 2			
Type of sensor used		Hall effect (refer to page **B1**.165 for sensor details)			
B10d		50 x 10^6 cycles			
Category - ISO EN 13849		4			
DC		High (≥ 99 %)			
CCF		80			
PL - ISO EN 13849		Suitable for use in safety circuits up to PL = e			

* To avoid malfunctions, we recommend using Metal Work accessories
** The declaration can be downloaded from www.metalwork.it
IMPORTANT: Any ferromagnetic masses must be at least 40 mm from the sensor.
Prevent magnetic fields from creating disturbance in the sensor area.

WIRING DIAGRAM

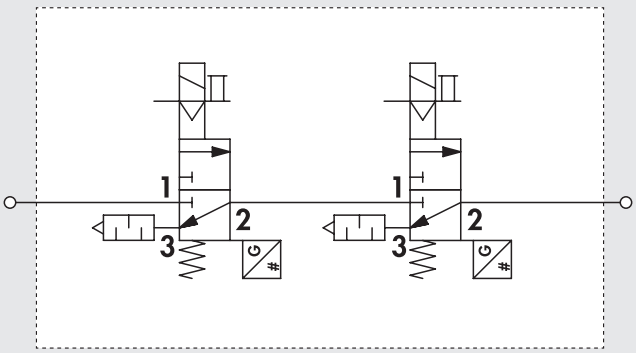

FLOW CHARTS ON DELIVERY - DOUBLE VALVE

Flow rates [Nl/min] 1/8″

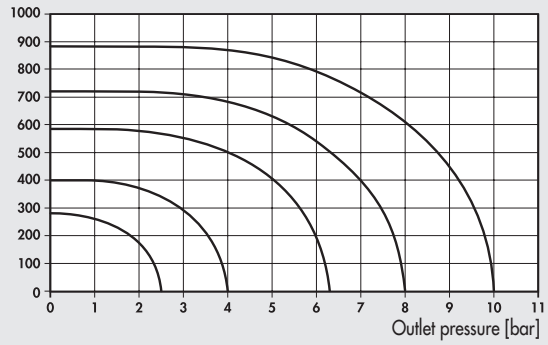

Flow rates [Nl/min] 1/4″

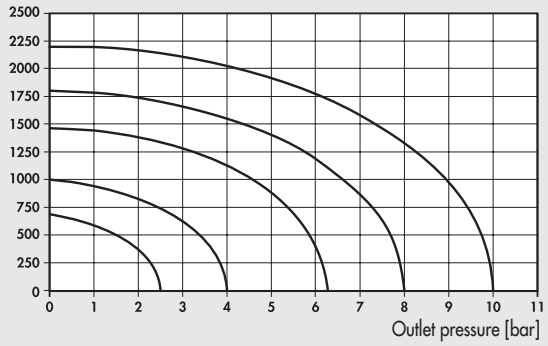

Flow rates [Nl/min] 3/8″

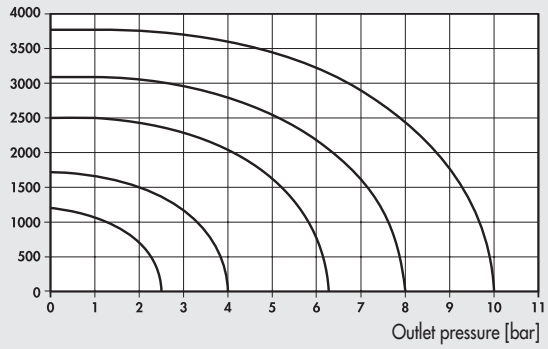

Flow rates [Nl/min] 1/2″

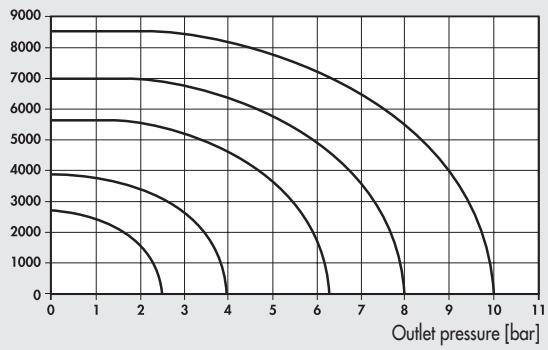

FLOW CHARTS ON RELIEF - DOUBLE VALVE

Flow rates [Nl/min] 1/8″

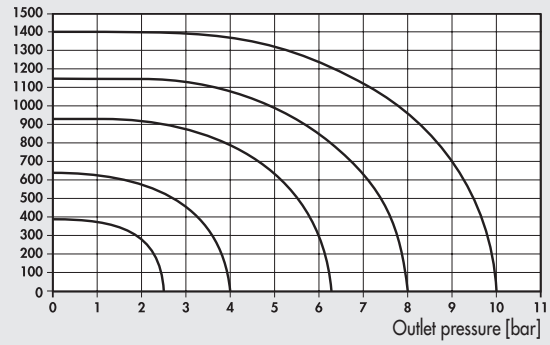

Flow rates [Nl/min] 1/4″

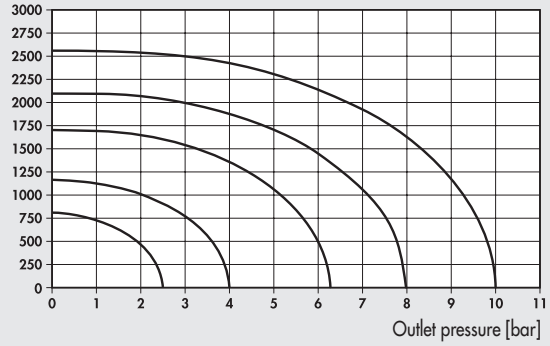

Flow rates [Nl/min] 3/8″

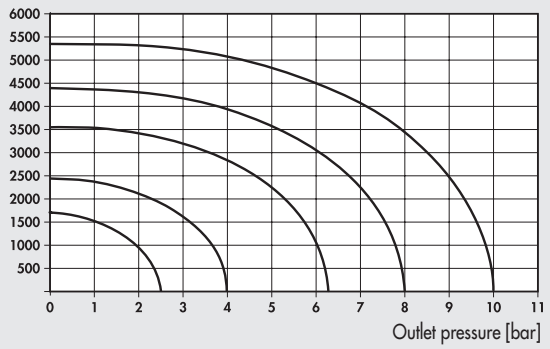

Flow rates [Nl/min] 1/2″

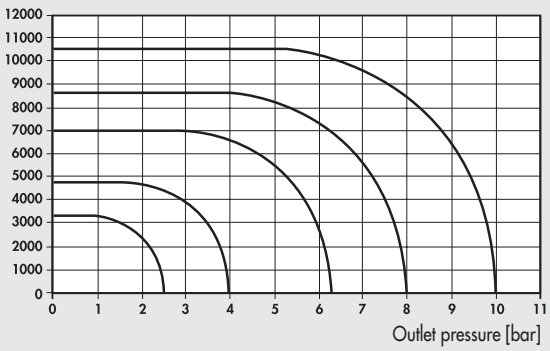

SYNOPTIC, SIZES AND VERSIONS

SOV	2	3	SO	S	DD	3F
FAMILY	**DIMENSIONS**	**FUNCTION**	**OPERATORS 14**	**RESETTING 12**	**FURTHER DETAILS**	**SENSOR**
SOV solenoid/ pneumatic	**2** 1/8″ **3** 1/4″ **C** 3/8″ **4** 1/2″	**3** 3/2	**SO** solenoid **SE** solenoid assisted	**S** mechanical springs	**DD** double 3/2	**3F** 2.5 m 3 wires **M8** 0.3 m M8 **AT** 2 m ATEX

METAL WORK PNEUMATIC

DOUBLE 3/2 MONOSTABLE 1/8"-1/4"-3/8"

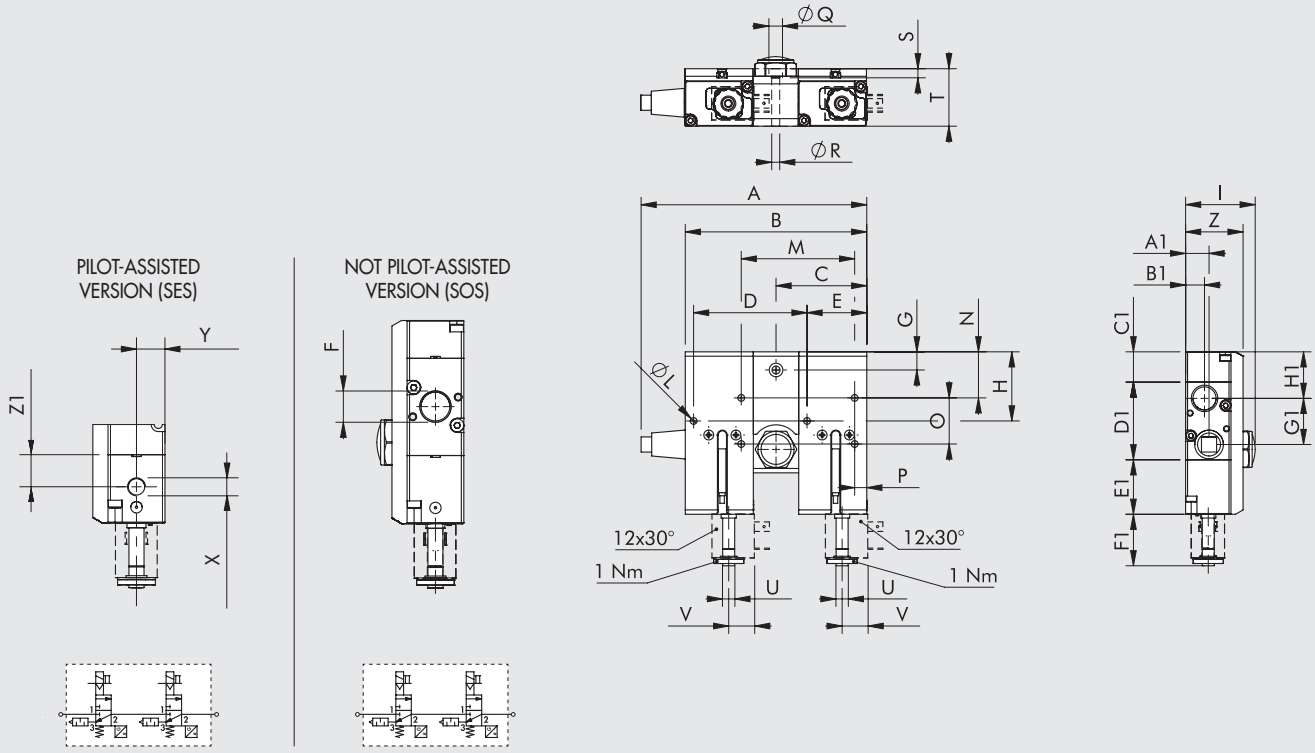

Code	Size	Abbrev.	A	B	C	D	E	F	G	H	I	ØL	M	N	O	P	ØQ	ØR	S	T
7015020210	1/8"	SOV 23 SOS DD 3F	102.5	94	-	62	28.9	1/8"	-	27.8	35.5	4.2	-	-	-	-	-	-	-	-
7015120210	1/8"	SOV 23 SOS DD M8	102.5	94	-	62	28.9	1/8"	-	27.8	35.5	4.2	-	-	-	-	-	-	-	-
7015220210	1/8"	SOV 23 SOS DD AT	102.5	94	-	62	28.9	1/8"	-	27.8	35.5	4.2	-	-	-	-	-	-	-	-
7015020510	1/8"	SOV 23 SES DD 3F	102.5	94	-	62	28.9	1/8"	-	27.8	35.5	4.2	-	-	-	-	-	-	-	-
7015120510	1/8"	SOV 23 SES DD M8	102.5	94	-	62	28.9	1/8"	-	27.8	35.5	4.2	-	-	-	-	-	-	-	-
7015220510	1/8"	SOV 23 SES DD AT	102.5	94	-	62	28.9	1/8"	-	27.8	35.5	4.2	-	-	-	-	-	-	-	-
7025020210	1/4"	SOV 33 SOS DD 3F	133.5	110	55	70	34.5	1/4"	9	32.7	37.5	4.2	-	-	-	-	7.5	4.3	5	31.5
7025120210	1/4"	SOV 33 SOS DD M8	133.5	110	55	70	34.5	1/4"	9	32.7	37.5	4.2	-	-	-	-	7.5	4.3	5	31.5
7025220210	1/4"	SOV 33 SOS DD AT	133.5	110	55	70	34.5	1/4"	9	32.7	37.5	4.2	-	-	-	-	7.5	4.3	5	31.5
7025020510	1/4"	SOV 33 SES DD 3F	133.5	110	55	70	34.5	1/4"	9	32.7	37.5	4.2	-	-	-	-	7.5	4.3	5	31.5
7025120510	1/4"	SOV 33 SES DD M8	133.5	110	55	70	34.5	1/4"	9	32.7	37.5	4.2	-	-	-	-	7.5	4.3	5	31.5
7025220510	1/4"	SOV 33 SES DD AT	133.5	110	55	70	34.5	1/4"	9	32.7	37.5	4.2	-	-	-	-	7.5	4.3	5	31.5
7045020210	3/8"	SOV C3 SOS DD 3F	149.5	120	60	75	39.5	3/8"	12	45.7	46	4.5	75	30.45	30.5	8	9	5.3	6	38
7045120210	3/8"	SOV C3 SOS DD M8	149.5	120	60	75	39.5	3/8"	12	45.7	46	4.5	75	30.45	30.5	8	9	5.3	6	38
7045220210	3/8"	SOV C3 SOS DD AT	149.5	120	60	75	39.5	3/8"	12	45.7	46	4.5	75	30.45	30.5	8	9	5.3	6	38
7045020510	3/8"	SOV C3 SES DD 3F	149.5	120	60	75	39.5	3/8"	12	45.7	46	4.5	75	30.45	30.5	8	9	5.3	6	38
7045120510	3/8"	SOV C3 SES DD M8	149.5	120	60	75	39.5	3/8"	12	45.7	46	4.5	75	30.45	30.5	8	9	5.3	6	38
7045220510	3/8"	SOV C3 SES DD AT	149.5	120	60	75	39.5	3/8"	12	45.7	46	4.5	75	30.45	30.5	8	9	5.3	6	38

Code	Size	Abbrev.	U	V	Z	X	Y	Z1	A1	B1	C1	D1	E1	F1	G1	H1	Sensor	Weight [g]
7015020210	1/8"	SOV 23 SOS DD 3F	M5	16.3	-	-	-	14.5	12	8	12	31.6	31	33.5	18	18.8	2.5 m 3 wires	482
7015120210	1/8"	SOV 23 SOS DD M8	M5	16.3	-	-	-	14.5	12	8	12	31.6	31	33.5	18	18.8	0.3 m M8	479
7015220210	1/8"	SOV 23 SOS DD AT	M5	16.3	-	-	-	14.5	12	8	12	31.6	31	33.5	18	18.8	2 m ATEX	466
7015020510	1/8"	SOV 23 SES DD 3F	M5	16.3	30	M5	11	14.5	12	8	12	31.6	31	33.5	18	18.8	2.5 m 3 wires	482
7015120510	1/8"	SOV 23 SES DD M8	M5	16.3	30	M5	11	14.5	12	8	12	31.6	31	33.5	18	18.8	0.3 m M8	474
7015220510	1/8"	SOV 23 SES DD AT	M5	16.3	30	M5	11	14.5	12	8	12	31.6	31	33.5	18	18.8	2 m ATEX	466
7025020210	1/4"	SOV 33 SOS DD 3F	M5	16.3	-	-	-	13	13.8	9.8	13.25	38.9	32	33.5	22	21.7	2.5 m 3 wires	632
7025120210	1/4"	SOV 33 SOS DD M8	M5	16.3	-	-	-	13	13.8	9.8	13.25	38.9	32	33.5	22	21.7	0.3 m M8	624
7025220210	1/4"	SOV 33 SOS DD AT	M5	16.3	-	-	-	13	13.8	9.8	13.25	38.9	32	33.5	22	21.7	2 m ATEX	616
7025020510	1/4"	SOV 33 SES DD 3F	M5	16.3	31.6	1/8"	11.5	13	13.8	9.8	13.25	38.9	32	33.5	22	21.7	2.5 m 3 wires	632
7025120510	1/4"	SOV 33 SES DD M8	M5	16.3	31.6	1/8"	11.5	13	13.8	9.8	13.25	38.9	32	33.5	22	21.7	0.3 m M8	624
7025220510	1/4"	SOV 33 SES DD AT	M5	16.3	31.6	1/8"	11.5	13	13.8	9.8	13.25	38.9	32	33.5	22	21.7	2 m ATEX	616
7045020210	3/8"	SOV C3 SOS DD 3F	M5	16.3	-	-	-	17	15.5	12.5	20	51.9	36	33.5	30.5	30.8	2.5 m 3 wires	972
7045120210	3/8"	SOV C3 SOS DD M8	M5	16.3	-	-	-	17	15.5	12.5	20	51.9	36	33.5	30.5	30.8	0.3 m M8	964
7045220210	3/8"	SOV C3 SOS DD AT	M5	16.3	-	-	-	17	15.5	12.5	20	51.9	36	33.5	30.5	30.8	2 m ATEX	956
7045020510	3/8"	SOV C3 SES DD 3F	M5	16.3	38	1/8"	15	17	15.5	12.5	20	51.9	36	33.5	30.5	30.8	2.5 m 3 wires	972
7045120510	3/8"	SOV C3 SES DD M8	M5	16.3	38	1/8"	15	17	15.5	12.5	20	51.9	36	33.5	30.5	30.8	0.3 m M8	964
7045220510	3/8"	SOV C3 SES DD AT	M5	16.3	38	1/8"	15	17	15.5	12.5	20	51.9	36	33.5	30.5	30.8	2 m ATEX	956

DOUBLE 3/2 MONOSTABLE 1/2"

PILOT-ASSISTED VERSION (SES)

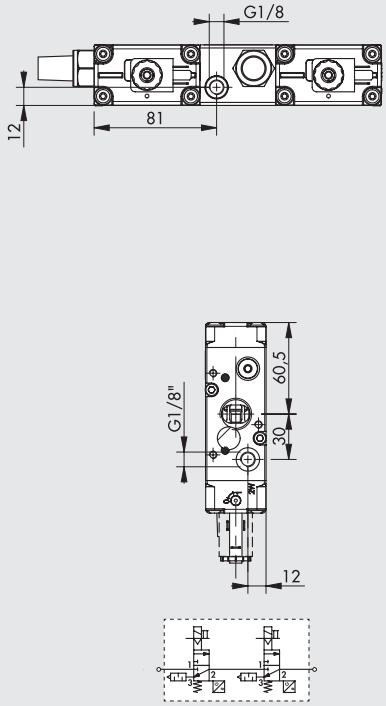

NOT PILOT-ASSISTED VERSION (SOS)

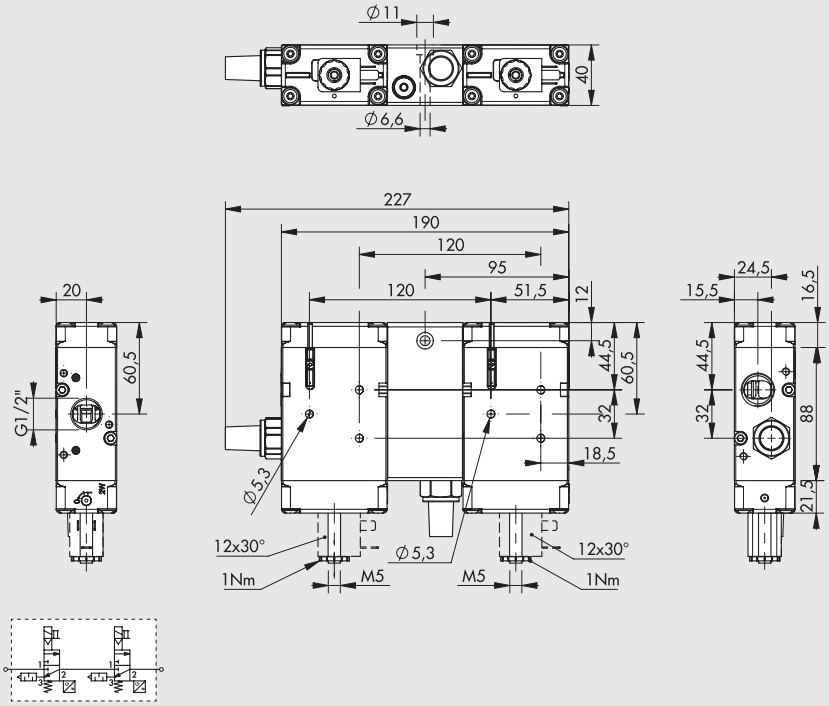

Code	Abbrev.	Sensor	Weight [g]
7035020210	SOV 43 SOS DD 3F	2.5 m 3 wires	1920
7035120210	SOV 43 SOS DD M8	0.3 m M8	1920
7035220210	SOV 43 SOS DD AT	2 m ATEX	1920
7035020510	SOV 43 SES DD 3F	2.5 m 3 wires	1915
7035120510	SOV 43 SES DD M8	0.3 m M8	1915
7035220510	SOV 43 SES DD AT	2 m ATEX	1915

NOTES

EXAMPLE OF A SAFETY CIRCUIT WITH A DOUBLE VALVE

Below is an example of a wiring diagram for controlling double valves SAFE AIR® a Metal Work using Pilz® components.
Circuit components:
- a Pilz® PNOZ® mm 0.1p modular safety system
- an emergency stop button S1 (Pilz® - PIT® es Set) linked to terminals T0-T1-I8-I9 of the PNOZ® mm 0.1p
- a Metal Work double solenoid valve SAFE AIR®, the 24 VDC coils of which are fed by terminals O0 (SV1) and O1 (SV2) of the PNOZ® mm 0.1p (the other terminals of the coils are OV); the valves' Hall-effect sensors are 24 VDC
- the sensor signals are relayed to terminals 16 (SV1) and 17 (SV2) of the PNOZ® mm 0.1p
- a start/reset button S2

Expected behaviour with the system operating correctly:
- system deactivated:
  - contacts O0 and O1 are OFF
  - the coils are de-energized
  - the sensors are ON (and hence signals to terminals 16 and 17)
  - if one of the sensors is OFF, the Pilz® module does not allow subsequent start/reset
- with the system activated via the start/reset button:
  - contacts O0 and O1 are ON
  - the coils are energized
  - the sensors are OFF (and hence signals to terminals 16 and 17)

The PNOZ® mm 0.1p module is programmed so that:
- when either sensor is OFF, and the coils are de-energized, the module does not allow subsequent restarts.
- when the valves are energized, the 2 sensors must go off within the valve actuation time (28 ms for Series 70 1/8", 38 ms for Series 70 1/4" and 50 ms for Series 70 3/8" and 85 ms Serie 70 1/2"), otherwise the 2 valves are switched off again.
  The programme can be downloaded from www.metalwork.it (the licence for programming Pilz® modules is not included).

All the electrical connections between the various components must comply with the applicable safety regulations.
If the emergency button is operated at a frequency of 1 actuation per hour, the circuit activates a safety function with PL = e (calculations made with the PAScal programme by Pilz®).
Responsibility for final checking that PL lies with the person assembling the circuit.

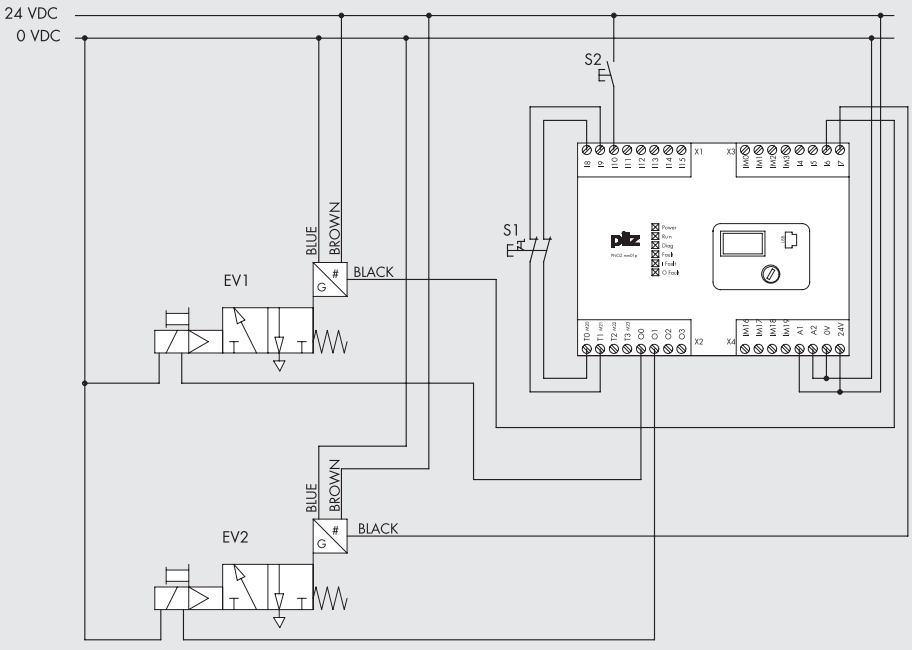

ACCESSORIES

COILS AND CONNECTORS

Refer to page **B1**.60 for coils and connectors

CONNECTORS FOR SENSORS M8

See page **A6**.9

KIT FOR CONNECTION 1/4 VALVES TO SYNTES 1

IN



OUT



* Wall fixing

Code	Description	Weight [g]
9210015	IN 1/4 SY1 block accessory	175
9210016	OUT 1/4 SY1 block accessory	180

Note: Individually packed with bushing, screws and gaskets.

KIT FOR CONNECTION 3/8 VALVES TO SYNTES 1 - SYNTESI 2

IN



OUT



* Wall fixing

Code	Description	Weight [g]
9210022	IN 3/8 SY1 block accessory	297
9210023	OUT 3/8 SY1 block accessory	302
9210017	IN 3/8 SY2 block accessory	325
9210018	OUT 3/8 SY2 block accessory	330

Note: Individually packed with bushing, screws and gaskets.

KIT FOR CONNECTION 1/2 VALVES TO SYNTESI 2

IN



OUT



* Wall fixing
◆ For pilot assisted version remove the G1/8 plug

Code	Description	Weight [g]
9210020	IN 1/2 SY2 block accessory	515
9210021	OUT 1/2 SY2 block accessory	503

Note: Individually packed with bushing, screws and gaskets.

ASSEMBLY DIAGRAM WITH SYNTESI®

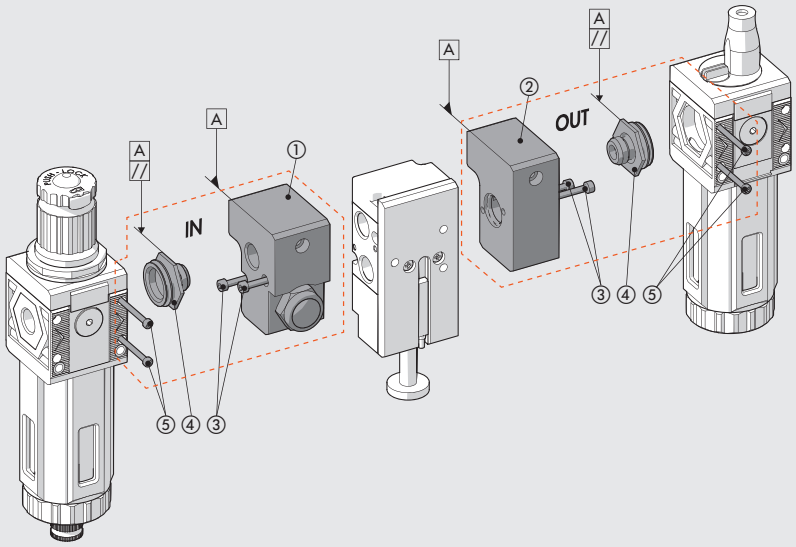

IN + SINGLE VALVE



IN + SINGLE VALVE + OUT



IN + DOUBLE VALVE



IN + DOUBLE VALVE + OUT



1) Connect the inlet ① or outlet ② plate to the safety component SAFE AIR® valve using the two TCE screws ③.
2) Screw the connecting bushing onto the input or output plate as far as it will go.
   (Use sealant on the G1/4", G3/8" or G1/2" thread to provide a further seal).
3) Unscrew the bushing slightly until two surfaces of the hexagon are parallel to the body of plate ① or ② (see diagram).
4) Insert the bushing ④ into the Syntesi® unit.
5) Tighten the two self-tapping screws ⑤ in the Syntesi® unit to a torque of 0.4 Nm max (SY1) and 2.5 Nm max (SY2).

SYNTESI® 1 with valves of 1/4



SYNTESI® 1 with valves of 3/8

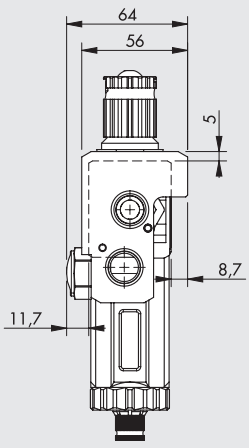

SYNTESI® 2 with valves of 3/8



SYNTESI® 2 with valves of 1/2



N.B. The output accessory for Syntesi® is optional. It should be used when you intend to mount a Syntesi® component downstream the SAFE AIR® safety device. The **REG**, **FR**, **V3V**, **APR** elements **cannot be mounted** downstream the safety valves because if the elements are blocked, safety relief is not guaranteed.

VALVES ISO 5599/1 SERIES SAFE AIR®

Starting from a series of sturdy, reliable valves, such as those to ISO 5599/1, some special features have been added, such as the presence of a valve status diagnostic system and the creation of a double channel guaranteeing architecture redundancy.

The simplest version features one electropneumatically-operated 5/2 monostable valve. It is common knowledge that when this type of valve is in the idle state (coil not energized), port 1 is connected to port 2, and port 4 relieves. When the valve is operated (coil energized), port 1 is connected to port 4, and port 2 relieves. When the coil is de-energized again, the valve is returned to the idle state (so port 4 relieves) by means of a spring that returns the spool to the home position.
In the event of a failure, the spool may remain in the actuating position, even with coil de-energized, leaving port 4 pressurized.

To offset this problem, we have added a Hall-effect sensor that reads the spool position. This means that when the valve is deactivated, the sensor is on, and when the valve is activated, the sensor is off. A status in which the sensor is off and the coil de-energized indicates a problem.

To reduce the probability of risk during plant maintenance, the manual actuator mounted on the Cnomo electric control is the monostable type.
The sensor inside the valve is available in the standard version with a 2.5m three-wire cable (standard or ATEX certified) or with an M8 connector and a 300 mm cable.
This valve, which is available in 3 sizes for the ISO 5599/1 series, is a category 2 component according to ISO EN 13849 and is suitable for use in safety circuits up to PL=c.

For those requiring higher PLs, we have also developed a double-channel version (redundant) that requires the use of ISO 5599/1 valves with a monitored coil arranged so that ports 2 are in parallel and ports 4 are in series. If just one of the valves de-energizes, port 4 relieves, so, even if one of the two coils remains blocked, the other guarantees relief of the compressed-air circuit. In this case, too, the presence of spool position sensors can be used to monitor the status.

The double valve is also available in 3 sizes for the ISO 5599/1 series. It is a category 4 component according to ISO EN 13849 and is suitable for use in safety circuits up to PL=e.
Both the single- and the double-channel valve come with:
- a voluntary examination certificate no. BVI-24-MAC-CV-0008 issued by Bureau Veritas in accordance with EN ISO 13849.

SINGLE VALVE ISO 5599/1 SERIES SAFE AIR®

TECHNICAL DATA		ISO 1	ISO 2	ISO 3
Fluid		Filtered unlubricated air (50µm); lubrication, if used, must be continuous		
Operation		5/2 monostable		
Operating pressure:	bar			
non-assisted		from 2.5 to 10		
pilot-assisted		from vacuum to 10		
Minimum pilot pressure	bar	2.5		
Operating temperature range	°C	from -10 to +60 (from -10 to +45 for Atex version)		
Nominal diameter	mm	7.5	12	15
Conductance C	Nl/min · bar	250	657	971
Critical ratio b	bar/bar	0.36	0.43	0.43
Flow rate at 6.3 bar Δp 0.5 bar	Nl/min	700	1800	3200
Flow rate at 6.3 bar Δp 1 bar	Nl/min	1100	2700	4600
Conductance C on relief	Nl/min · bar	267	817	1095
Critical ratio b on relief	bar/bar	0.34	0.24	0.56
Flow rate on free exhaust at 6.3 bar	Nl/min	1850	4900	8000
TRA/TRR a 6.3 bar	ms/ms	24 / 50	39 / 60	50 / 120
Valve / base screw tightening torque	Nm	3 - 4	6 - 7	10 - 12
Installation		Any position		
Assembly		On single or manifold bases to ISO 5599/1 (*)		
Solenoid pilot		to CNOMO		
Manual actuator		Monostable on solenoid pilot and valve body		
Compatibility with oils		See **chapter Z1**		
Coils		30 mm side, Ø 8 hole – EN175301-803 connection, type A		
		22 mm side, Ø 8 hole – EN175301-803 connection, type B		
		Certified EN 60204.1 and VDE 0580		
		Refer to the Accessories section for the electrical features page **B1**.133*		
Class of protection		IP65 with coil and connector mounted		
Noise level		Max. 78 dBA with silenced relief		
Max coil ring nut torque	Nm	1		
CE marking		In accordance with Machinery Directive, Annexe V **		
ATEX category (only for versions with an ATEX sensor)		Ⓔx II 3G Ex nA IIC T4 Gc X -10°C<Ta<45°C		
		Ⓔx II 3G Ex h IIC T4 Gc X		
		Ⓔx II 3D Ex tc IIIC T135°C Dc IP65		
Safety function		Cuts off the power supply and relieves the air circuit connected to port 4		
Type of sensor used		Hall effect (refer to page **B1**.165 for sensor details)		
B10d		50 x 10^6 cycles		
Category - ISO EN 13849		2		
DC		Low (80 %)		
PL - ISO EN 13849		Suitable for use in safety circuits up to PL=c		

* To avoid malfunctions, we recommend using Metal Work accessories
** The declaration can be downloaded from www.metalwork.it
IMPORTANT: Do not mount 2 or more SAFE AIR® valves in adjacent positions.
Any ferromagnetic masses must be at least 30 mm from the sensor.
Prevent magnetic fields from creating disturbance in the sensor area.

COMPONENTS

① VALVE BODY: Aluminium
② END CAP: Hostaform®
③ SPOOL: chemically nickel-plated aluminium
④ DISTANCE PLATES: plastic
⑤ GASKETS: NBR
⑥ PISTONS: Hostaform®
⑦ PISTON GASKET: NBR
⑧ FILTER: sintered bronze
⑨ SPRINGS: special steel
⑩ OPERATOR: Brass pipe – Stainless steel core
⑪ LOCKING RING: special steel
⑫ MAGNET: Neodymium
⑬ SENSOR: Hall effect

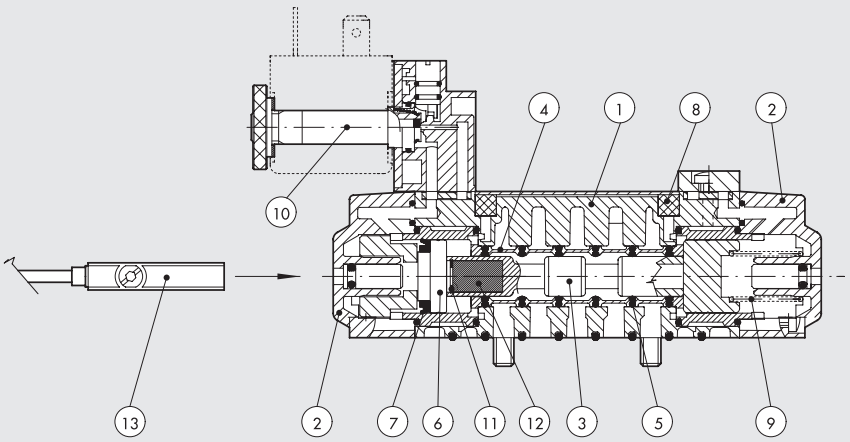

FLOW CHARTS - SINGLE VALVE

ISO 1 - ON DELIVERY

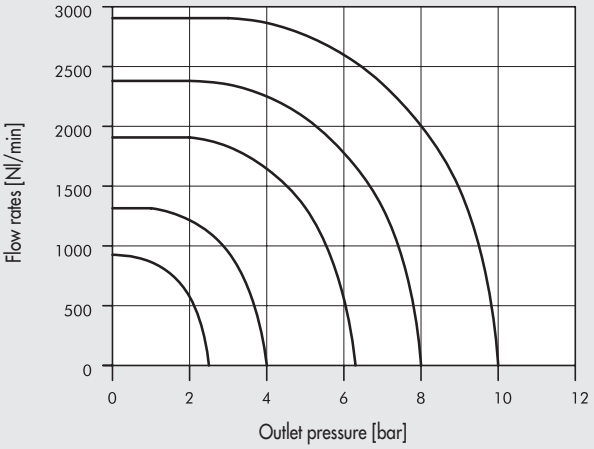

ISO 1 - ON RELIEF

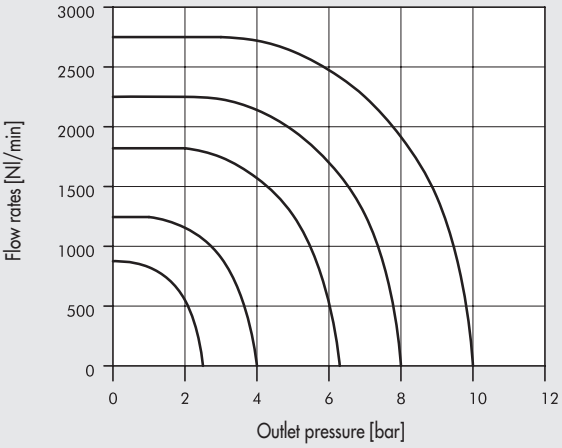

ISO 2 - ON DELIVERY

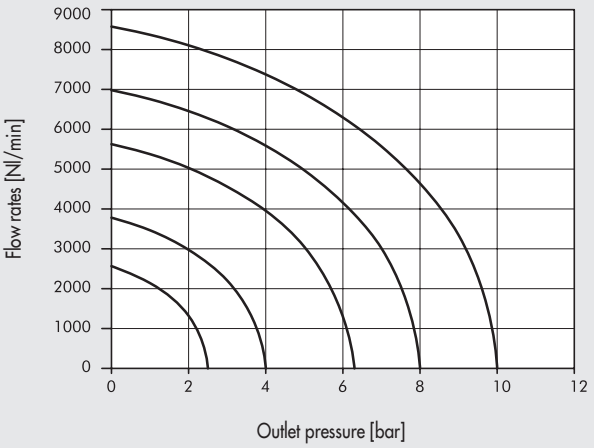

ISO 2 - ON RELIEF

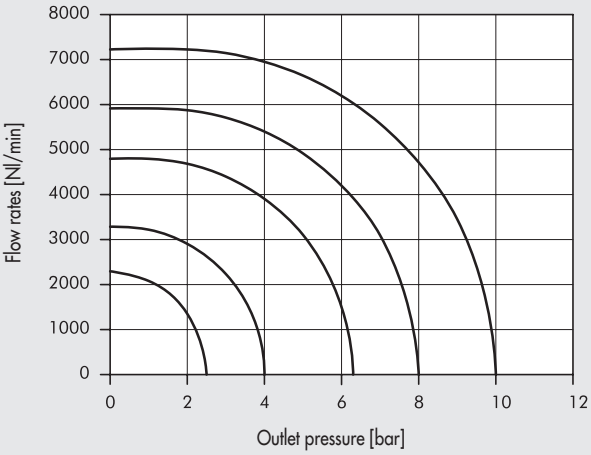

ISO 3 - ON DELIVERY

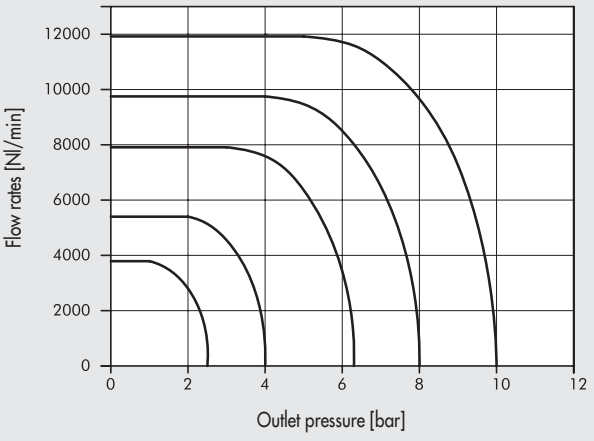

ISO 3 - ON RELIEF

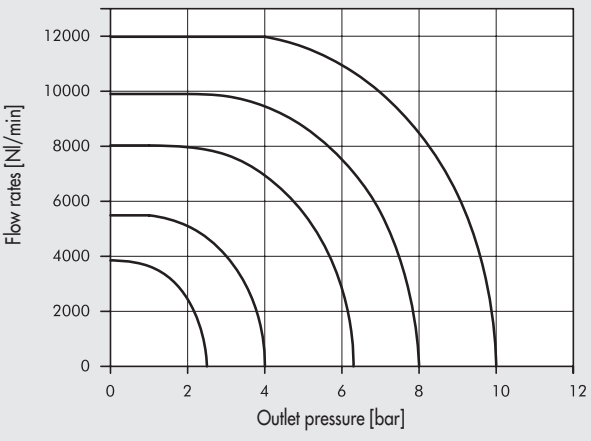

SYNOPTIC, SIZES AND VERSIONS

I S V	5	5	S O	S	O O	3 F
FAMILY	**DIMENSIONS**	**FUNCTION**	**OPERATORS 14**	**RESETTING 12**	**FURTHER DETAILS**	**SENSOR**
ISV ISO solenoid/ pneumatic	**5** ISO1 **6** ISO2 **7** ISO3	**5** 5/2	**SO** solenoid **SE** solenoid assisted	**S** mechanical springs	**OO** 5/2	**3F** 2.5 m 3 wires **M8** 0.3 m M8 **AT** 2 m ATEX

METAL WORK PNEUMATIC

5/2 MONOSTABLE - ISO 1

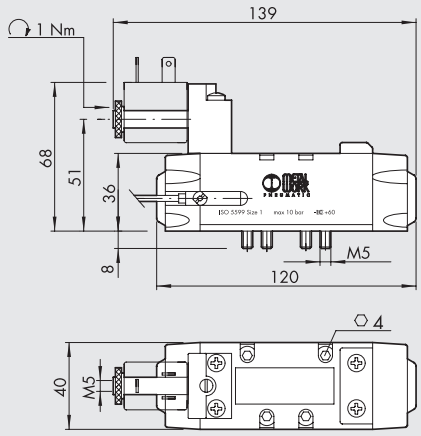

Symbol	Code	Abbrev.	Sensor	Weight [g]
	7057021100	ISV 55 SOS OO 3F	2.5 m 3 wires	380
	7057121100	ISV 55 SOS OO M8	0.3 m M8	350
	7057221100	ISV 55 SOS OO AT	2 m ATEX	370
	7057021400	ISV 55 SES OO 3F	2.5 m 3 wires	380
	7057121400	ISV 55 SES OO M8	0.3 m M8	350
	7057221400	ISV 55 SES OO AT	2 m ATEX	370

5/2 MONOSTABLE - ISO 2

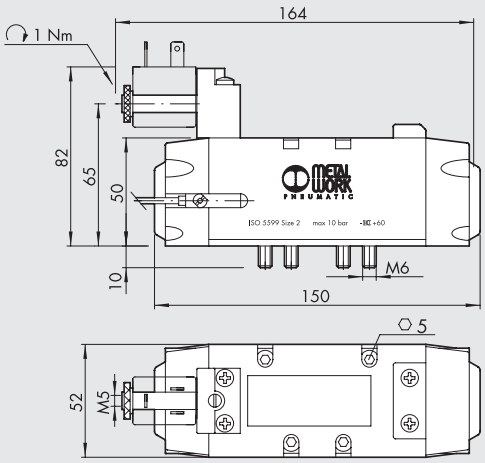

Symbol	Code	Abbrev.	Sensor	Weight [g]
	7058021100	ISV 65 SOS OO 3F	2.5 m 3 wires	750
	7058121100	ISV 65 SOS OO M8	0.3 m M8	720
	7058221100	ISV 65 SOS OO AT	2 m ATEX	740
	7058021400	ISV 65 SES OO 3F	2.5 m 3 wires	750
	7058121400	ISV 65 SES OO M8	0.3 m M8	720
	7058221400	ISV 65 SES OO AT	2 m ATEX	740

5/2 MONOSTABLE - ISO 3

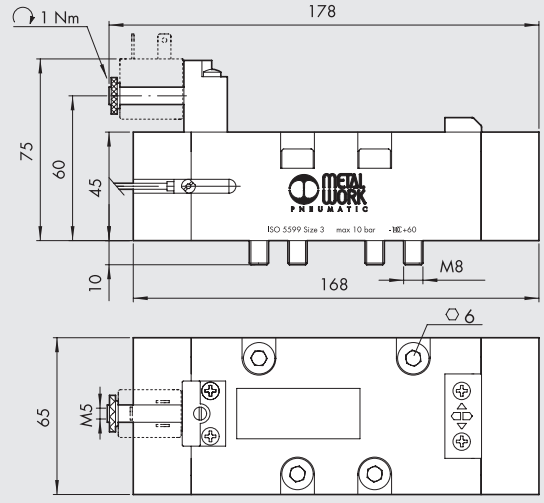

Symbol	Code	Abbrev.	Sensor	Weight [g]
	7059021100	ISV 75 SOS OO 3F	2.5 m 3 wires	1240
	7059121100	ISV 75 SOS OO M8	0.3 m M8	1210
	7059221100	ISV 75 SOS OO AT	2 m ATEX	1230
	7059021400	ISV 75 SES OO 3F	2.5 m 3 wires	1240
	7059121400	ISV 75 SES OO M8	0.3 m M8	1210
	7059221400	ISV 75 SES OO AT	2 m ATEX	1230

EXAMPLE OF A SAFETY CIRCUIT WITH A SINGLE VALVE

Below is an example of a wiring diagram for controlling Metal Work SAFE AIR® single valves using Pilz® components.
Circuit components:
- a Pilz® safety module PNOZ® s3 for controlling the emergency stop button; terminal Y32 indicates the status of the module, which can be relayed to the machine control logic
- an emergency stop button S1 (Pilz® - PIT® es Set) linked to terminals S11-S12-S22-S23 of the PNOZ® s3
- a Metal Work SAFE AIR® solenoid valve, the 24 VDC coil of which is fed by terminal 14 of the PNOZ® s3 (the other terminal of the coil is 0 V); the valve's Hall-effect sensor is 24 VDC
- a start/reset button S2
- a relay K1, controlled by the valve sensor; an NO contact of the relay is in series with button S2 of the PNOZ® s3.

Expected behaviour with the system operating correctly:
- system deactivated:
  - contact 14 is OFF
  - the coil is de-energized
  - the sensor is ON
  - relay K1 is energized
  - contact K1 is closed
  - contact Y32 is OFF
- with the system activated via the start/reset button:
  - contact 14 is ON
  - the coil is energized
  - the sensor is OFF
  - relay K1 is de-energized
  - contact K1 is open
  - contact Y32 is ON

In the event of a malfunction (e.g. spool jam), the coil is de-energized but the sensor remains OFF, relay K1 remains de-energized, contact K1 remains open (preventing subsequent restarts) and contact Y32 is OFF.
In the event of a valve fault, the circuit in the diagram below does not allow relief of the compressed air system. Sensor status must be monitored to assess valve operation. Contact Y32 indicates the status of the PNOZ® s3, not the status of the sensor.
All the electrical connections between the various components must comply with the applicable safety regulations.
If the emergency button is operated at a frequency of 1 actuation per hour, the circuit activates a safety function with PL = c (calculations made with the PAScal programme by Pilz®). Responsibility for final checking that PL lies with the person assembling the circuit.

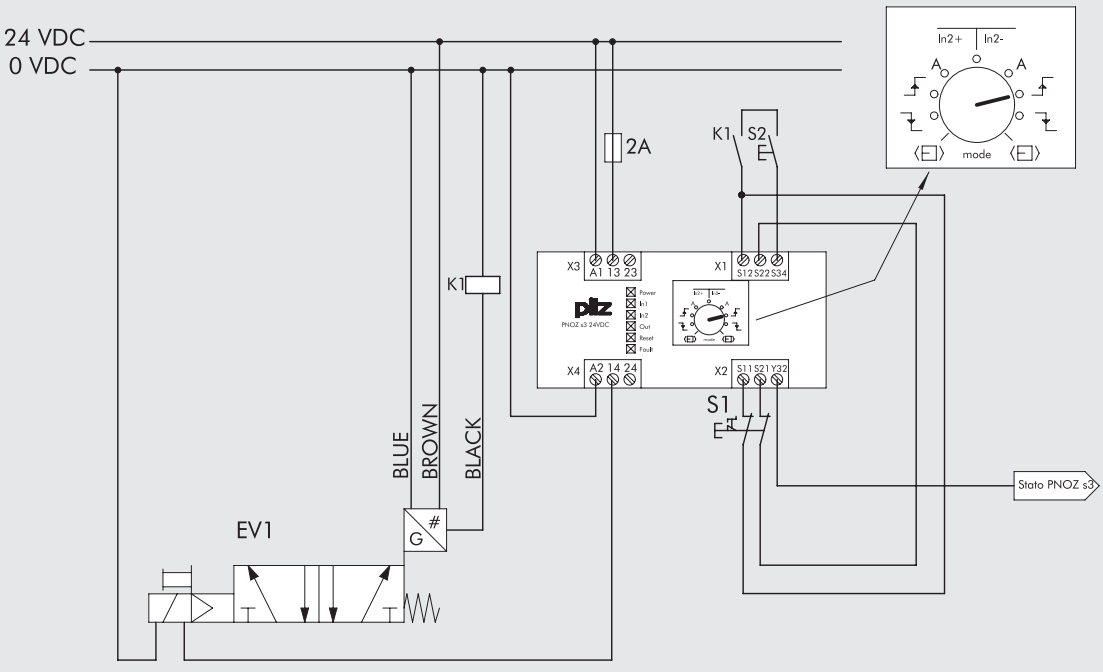

DOUBLE VALVE ISO 5599/1 SERIES SAFE AIR®

TECHNICAL DATA		ISO 1	ISO 2	ISO 3
Fluid		Filtered unlubricated air (50µm); lubrication, if used, must be continuous		
Operation		double 5/2 monostable		
Operating pressure:	bar			
non-assisted		from 2.5 to 10		
pilot-assisted		from vacuum to 10		
Minimum pilot pressure	bar	2.5		
Operating temperature range	°C	from -10 to +60 (from -10 to +45 for Atex version)		
Conductance C	Nl/min · bar	228	498	720
Critical ratio b	bar/bar	0.40	0.24	0.44
Flow rate at 6.3 bar Δp 0.5 bar	Nl/min	770	1250	2500
Flow rate at 6.3 bar Δp 1 bar	Nl/min	1050	1750	3400
Conductance C on relief	Nl/min · bar	222	554	724
Critical ratio b on relief	bar/bar	0.30	0.20	0.41
Flow rate on free exhaust at 6.3 bar	Nl/min	1600	4000	5300
TRA/TRR a 6.3 bar	ms/ms	24 / 50	39 / 60	50 / 120
Installation		Any position		
Solenoid pilot		to CNOMO		
Manual actuator		Monostable on solenoid pilot and valve body		
Compatibility with oils		See **chapter Z1**		
Coils		30 mm side, Ø 8 hole – EN175301-803 connection, type A		
		22 mm side, Ø 8 hole – EN175301-803 connection, type B		
		Certified EN 60204.1 and VDE 0580		
		Refer to the Accessories section for electrical features page **B1**.133 (*)		
Class of protection		IP65 with coil and connector mounted		
Noise level		Max. 78 dBA with silenced relief		
Max coil ring nut torque	Nm	1		
CE marking		In accordance with Machinery Directive, Annexe V **		
ATEX category (only for versions with an ATEX sensor)		Ⓔx II 3G Ex nA IIC T4 Gc X -10°C<Ta<45°C		
		Ⓔx II 3G Ex h IIC T4 Gc X		
		Ⓔx II 3D Ex tc IIIC T135°C Dc IP65		
Safety function		Cuts off the power supply and relieves the air circuit connected to port 4		
Type of sensor used		Hall effect (refer to page **B1**.165 for sensor details)		
B10d		50 x 10^6 cycles		
Category - ISO EN 13849		4		
DC		High (≥ 99 %)		
CCF		80		
PL - ISO EN 13849		Suitable for use in safety circuits up to PL=e		

* To avoid malfunctions, we recommend using Metal Work accessories
** The declaration can be downloaded from www.metalwork.it
IMPORTANT: Any ferromagnetic masses must be at least 30 mm from the sensor.
Prevent magnetic fields from creating disturbance in the sensor area.

WIRING DIAGRAM

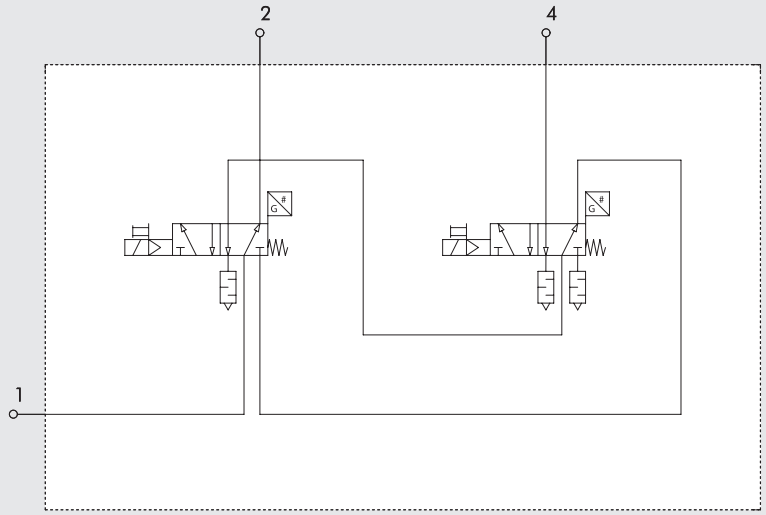

FLOW CHARTS - DOUBLE VALVE

ISO 1 - ON DELIVERY

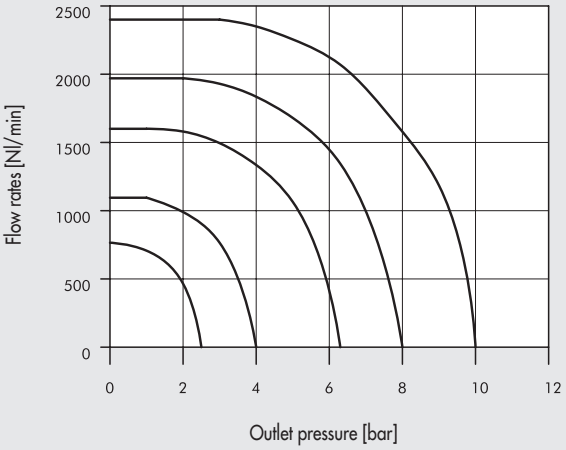

ISO 1 - ON RELIEF

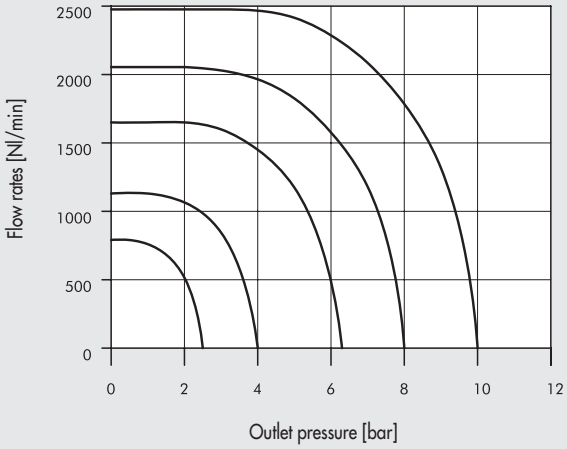

ISO 2 - ON DELIVERY

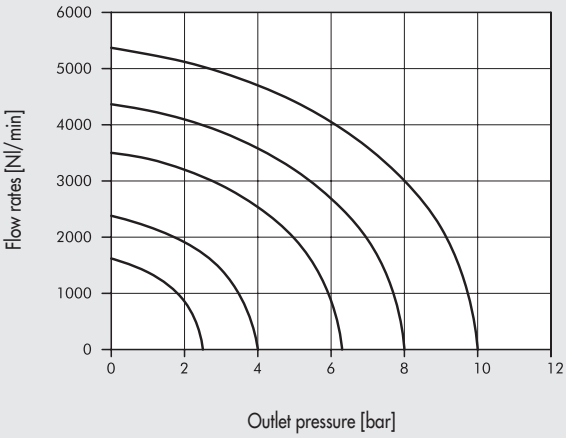

ISO 2 - ON RELIEF

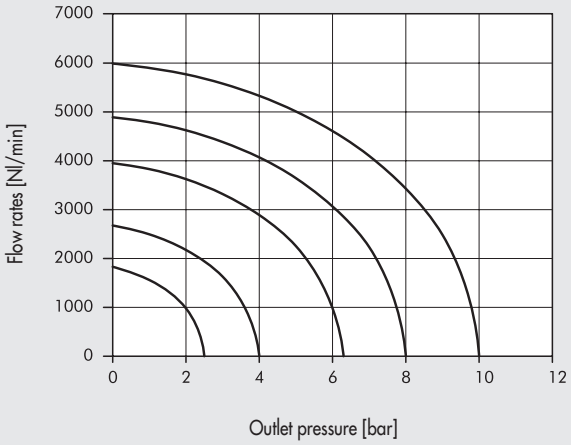

ISO 3 - ON DELIVERY

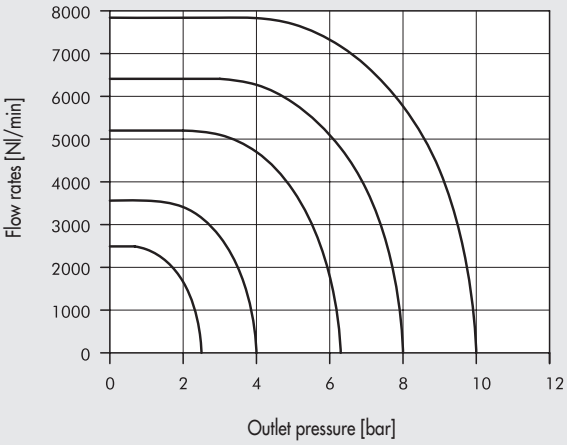

ISO 3 - ON RELIEF

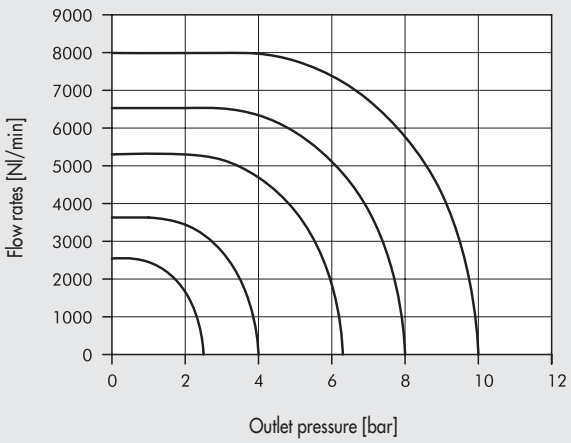

SYNOPTIC, SIZES AND VERSIONS

I S V	5	5	S O	S	D D	3 F
FAMILY	DIMENSIONS	FUNCTION	OPERATORS 14	RESETTING 12	FURTHER DETAILS	SENSOR
ISV ISO solenoid/ pneumatic	**5** ISO1 **6** ISO2 **7** ISO3	**5** 5/2	**SO** solenoid **SE** solenoid assisted	**S** mechanical springs	**DD** double 5/2	**3F** 2.5 m 3 wires **M8** 0.3 m M8 **AT** 2 m ATEX

METAL WORK PNEUMATIC

DOUBLE 5/2 MONOSTABLE

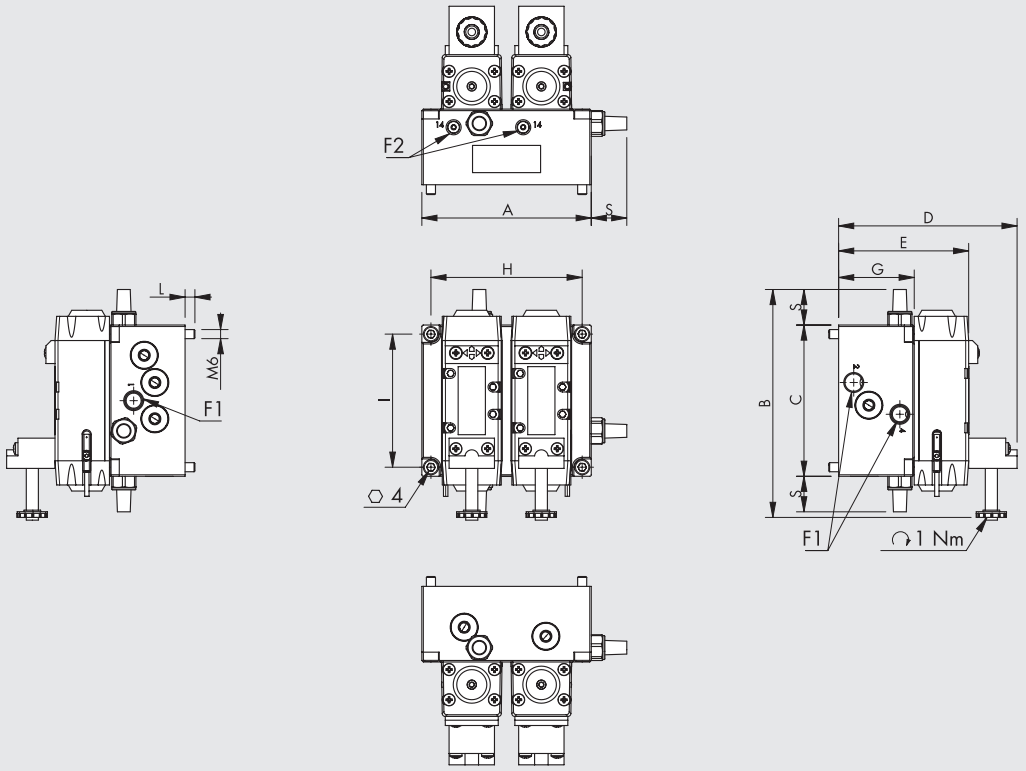

Code	Size	Abbrev.	A	B	C	D	E	F1	F2	G	H	I	L	S	Sensor	Weight [g]
7057021110	ISO 1	ISV 55 SOS DD 3F	112	152.5	100	118	86	G 1/4"	M5	50	100	88	6	23.5	2.5 m 3 wires	2100
7057121110	ISO 1	ISV 55 SOS DD M8	112	152.5	100	118	86	G 1/4"	M5	50	100	88	6	23.5	0.3 m M8	2100
7057221110	ISO 1	ISV 55 SOS DD AT	112	152.5	100	118	86	G 1/4"	M5	50	100	88	6	23.5	2 m ATEX	2100
7057021410	ISO 1	ISV 55 SES DD 3F	112	152.5	100	118	86	G 1/4"	M5	50	100	88	6	23.5	2.5 m 3 wires	2100
7057121410	ISO 1	ISV 55 SES DD M8	112	152.5	100	118	86	G 1/4"	M5	50	100	88	6	23.5	0.3 m M8	2100
7057221410	ISO 1	ISV 55 SES DD AT	112	152.5	100	118	86	G 1/4"	M5	50	100	88	6	23.5	2 m ATEX	2100
7058021110	ISO 2	ISV 65 SOS DD 3F	146	176	116	145	113	G 3/8"	G 1/8"	63	134	104	13	29	2.5 m 3 wires	4000
7058121110	ISO 2	ISV 65 SOS DD M8	146	176	116	145	113	G 3/8"	G 1/8"	63	134	104	13	29	0.3 m M8	4000
7058221110	ISO 2	ISV 65 SOS DD AT	146	176	116	145	113	G 3/8"	G 1/8"	63	134	104	13	29	2 m ATEX	4000
7058021410	ISO 2	ISV 65 SES DD 3F	146	176	116	145	113	G 3/8"	G 1/8"	63	134	104	13	29	2.5 m 3 wires	4000
7058121410	ISO 2	ISV 65 SES DD M8	146	176	116	145	113	G 3/8"	G 1/8"	63	134	104	13	29	0.3 m M8	4000
7058221410	ISO 2	ISV 65 SES DD AT	146	176	116	145	113	G 3/8"	G 1/8"	63	134	104	13	29	2 m ATEX	4000
7059021110	ISO 3	ISV 75 SOS DD 3F	186	188	116	155	123	G 1/2"	G 1/8"	78	174	104	9	31.5	2.5 m 3 wires	5300
7059121110	ISO 3	ISV 75 SOS DD M8	186	188	116	155	123	G 1/2"	G 1/8"	78	174	104	9	31.5	0.3 m M8	5300
7059221110	ISO 3	ISV 75 SOS DD AT	186	188	116	155	123	G 1/2"	G 1/8"	78	174	104	9	31.5	2 m ATEX	5300
7059021410	ISO 3	ISV 75 SES DD 3F	186	188	116	155	123	G 1/2"	G 1/8"	78	174	104	9	31.5	2.5 m 3 wires	5300
7059121410	ISO 3	ISV 75 SES DD M8	186	188	116	155	123	G 1/2"	G 1/8"	78	174	104	9	31.5	0.3 m M8	5300
7059221410	ISO 3	ISV 75 SES DD AT	186	188	116	155	123	G 1/2"	G 1/8"	78	174	104	9	31.5	2 m ATEX	5300

NOTES

EXAMPLE OF A SAFETY CIRCUIT WITH A DOUBLE VALVE

Below is an example of a wiring diagram for controlling double valves SAFE AIR® a Metal Work using Pilz® components.
Circuit components:
- a Pilz® PNOZ® mm 0.1p modular safety system
- an emergency stop button S1 (Pilz® - PIT® es Set) linked to terminals T0-T1-I8-I9 of the PNOZ® mm 0.1p
- a Metal+ Work double solenoid valve SAFE AIR®, the 24 VDC coils of which are fed by terminals O0 (SV1) and O1 (SV2) of the PNOZ® mm 0.1p (the other terminals of the coils are OV); the valves' Hall-effect sensors are 24 VDC
- the sensor signals are relayed to terminals 16 (SV1) and 17 (SV2) of the PNOZ® mm 0.1p
- a start/reset button S2

Expected behaviour with the system operating correctly:
- system deactivated:
  - contacts O0 and O1 are OFF
  - the coils are de-energized
  - the sensors are ON (and hence signals to terminals 16 and 17)
  - if one of the sensors is OFF, the Pilz® module does not allow subsequent start/reset
- with the system activated via the start/reset button:
  - contacts O0 and O1 are ON
  - the coils are energized
  - the sensors are OFF (and hence signals to terminals 16 and 17)

The PNOZ® mm0.1p module is programmed so that:
- when either sensor is OFF, and the coils are de-energized, the module does not allow subsequent restarts.
- when the valves are energized, the 2 sensors must go off within the valve actuation time (24 ms for ISO1s, 39 ms for ISO2s and 50 ms for ISO3s), otherwise the 2 valves are switched off again.
  The programme can be downloaded from www.metalwork.it (the licence for programming Pilz® modules is not included).

All the electrical connections between the various components must comply with the applicable safety regulations.
If the emergency button is operated at a frequency of 1 actuation per hour, the circuit activates a safety function with PL = e (calculations made with the PAScal programme by Pilz®).
Responsibility for final checking that PL lies with the person assembling the circuit.

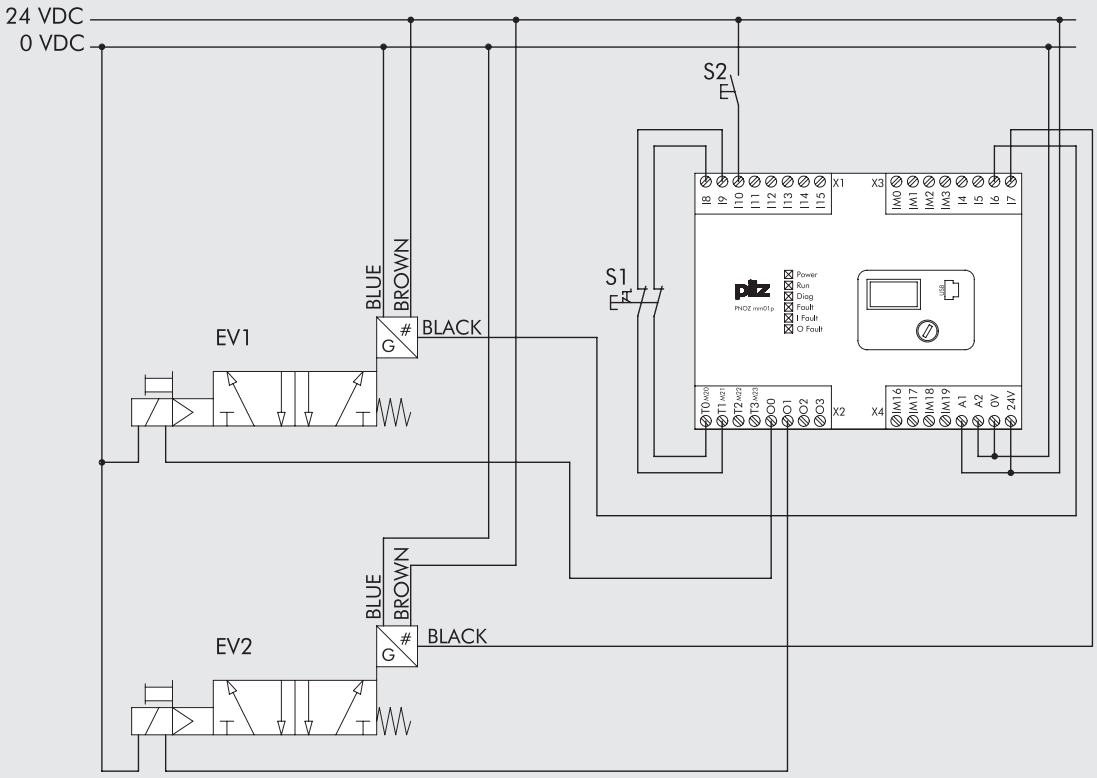

METAL WORK PNEUMATIC

TECHNICAL DATA SENSOR		MZT8	ATEX MZT8
		EFFECT HALL	EFFECT HALL
Type of contact		N.O.	N.O.
Switch		PNP	PNP
Supply voltage (Ub)	VDC	10 to 30	10 to 26
Power	W	-	≤ 1.7
Voltage variation		-	≤ 10% of Ub
Voltage dro at Imax	V	≤ 2.2	≤ 2.2
Consumo	mA	≤ 10	≤ 10
Corrente di uscita	mA	≤ 200	≤ 50
Switching frequency	Hz	≤ 1000	≤ 1000
Short-circuit protection		Yes	Yes
Over-voltage suppression		Yes	Yes
Polarity inversion protection		Yes	Yes
EMC		EN 60947-5-2	EN 60947-5-2
LED display		Yellow	Yellow
Magnetic sensitivity	mT	2.45 - 2.75	2.45 - 2.75
Repeatability	mT	≤ 0.1	≤ 0.1 mT (Ub and ta fixed)
Degree of protection (EN 60529)		IP67	IP67
Vibration and shock resistance		30 g, 11 ms, 10 to 55 Hz, 1 mm	30 g, 11 ms, 10 to 55 Hz, 1 mm
Temperature range	°C	-30 to +80	-20 to +50
Sensor capsule material		PA12	PA12
2.5 m/2 m connecting cable		PVC; 3 x 0.12 mm²	PVC; 3 x 0.12 mm²
Connecting cable with M8x1		Polyurethane; 3 x 0.14 mm²	-
Wire NO.		3	3
Category ATEX		-	II 3G Ex nA IIC T4 Gc X II 3D Ex tc IIIC T135°C Dc IP67 X
Certifications		CE	CE Ex

WIRING DIAGRAM SENSOR

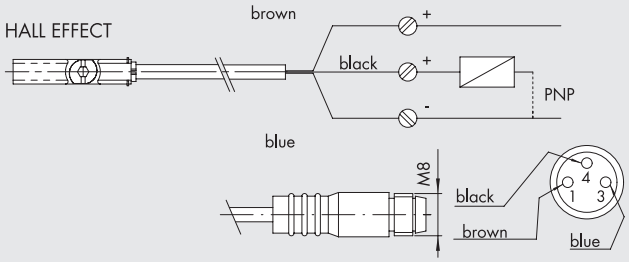

ACCESSORIES

Refer to page **B1**.133 for coils and connectors

CONNECTORS FOR SENSORS M8

See page **A6**.9

NOTES

METAL WORK PNEUMATIC

NOTES

SUMMARY OF VALVE ISLANDS AND FIELDBUS

EB 80

EB 80 ELECTRO-PNEUMATIC SYSTEM

- EB 80 ELECTRO-PNEUMATIC SYSTEM — B2.4
- EB 80 - ELECTRICAL MODULES - S — B2.15
  - EB 80 - WIRELESS MODULE - S — B2.15
  - EB 80 - SIGNAL MODULES - S — B2.17
- EB 80 - ELECTRICAL CONNECTION - E — B2.27
  - EB 80 - MULTI-POLE ELECTRICAL CONNECTION - E — B2.29
  - EB 80 - ELECTRICAL CONNECTION WITH FIELDBUS - E — B2.33
  - EB 80 - ADDITIONAL ELECTRICAL CONNECTION - E — B2.47
- EB 80 - COMPRESSED-AIR SUPPLY - P — B2.50
- EB 80 - BASES FOR VALVES - B — B2.53
- EB 80 - VALVES — B2.56
- EB 80 - PROPORTIONAL PRESSURE REGULATOR - A — B2.62
- EB 80 - INTERMEDIATE SUPPORT - M — B2.68
- EB 80 - CLOSED END-PLATE - C — B2.73

EB 80 BOXI

- EB 80 BOXI — B2.76
  - EB 80 BOXI - 4-POSITION VALVE ISLAND — B2.80
  - EB 80 BOXI - 6-8-12-POSITION VALVE ISLAND — B2.87

EB 80 ACCESSORIES

- EB 80 - MULTI-FUNCTION MODULE — B2.94
- EB 80 - SPLASH AREA — B2.111

METAL WORK PNEUMATIC

HDM

- HDM + MULTI-POLE CONNECTION — B2.114
- HDM + AS-Interface — B2.118
- HDM + PROFIBUS-DP — B2.123
- HDM + EtherNet/IP — B2.127
- HDM + CANopen — B2.133
- HDM + B&R — B2.139
- HDM – VALVES, INTERMEDIATES ELEMENTS AND ACCESSORIES — B2.142

CM

- CM CLEVER MULTIMACH — B2.147
- CM + MULTI-POLE CONNECTION — B2.152
- CM + Profinet IO — B2.157
- CM + EtherCAT — B2.161
- CM + EtherNet/IP — B2.165
- CM + CANopen — B2.169
- CM - VALVES, INTERMEDIATES ELEMENTS AND ACCESSORIES — B2.172

MULTIMACH

- MULTIMACH — B2.177
- MULTIMACH + PROFIBUS — B2.185
- MULTIMACH + B&R — B2.190

INPUT/OUTPUT PROFIBUS-DP

- INPUT/OUTPUT PROFIBUS-DP IP67 M12 — B2.191

- INPUT PROFIBUS-DP IP67 M8 — B2.196

EB 80 ELECTRO-PNEUMATIC SYSTEM

EB 80 is defined as an electro-pneumatic system as it would be simplistic to use the term "solenoid valve island". In effect, a single assembly can combine solenoid valves of all types, multi-position bases, pneumatic and electric supplies arranged as desired in a system, digital or analogue input or output signal control modules and much more besides.
The EB 80 system is protected by numerous patents and utility models, which enhance the most innovative design solutions.
The possible combinations are endless, but the most amazing thing is that they can be obtained using a small number of basic components.
In order to achieve this objective, a single size of small yet high-performance valves to cover the vast majority of applications was conceived.
A single electronic control unit is provided when supplying 12VDC or 24VDC valves with multi-pole cables or with a field bus for each protocol.
All EB 80 versions come with an efficient diagnostic system.
The EB 80 catalogue consists of a first overall introductory chapter followed by a chapter for each subsystem.
NSF H1-certified grease is used to lubricate the valve spool and seals.

TECHNICAL DATA

Supply voltage range	VDC	12 -10% 24 +30%					
Minimum operating voltage	VDC	10.8 *					
Maximum operating voltage	VDC	31.2					
Maximum admissible voltage	VDC	32 ***					
Power for each controlled pilot	W	3 for 15 ms, then holding 0.3					
Drive (for multi-pole)		PNP or NPN					
Solenoid rating		100% ED					
Solenoid valve supply power		See chapter "Electrical connection - E"					
Signal module supply power		See chapter "Signal module - S"					
Protection		Overload and short-circuit protected solenoid pilot Output					
Diagnostics		See chapter "Electrical connection - E"					
Maximum number of solenoid pilots		21 or 38 multi-pole connection; field bus 128					
Ambient temperature	°C	-10 to + 50 (at 8 bar)					
	°F	14 to 122 (at 8 bar)					
Operating pressure		**5/2 and 5/3**			**2/2 and 3/2**		
Non-assisted valves	bar	3 to 8			3.5 to 8		
	MPa	0.3 to 0.8			0.35 to 0.8		
	psi	43 to 116			51 to 116		
Assisted valves	bar	Vacuum to 10					
	MPa	Vacuum to 1					
	psi	Vacuum to 145					
Servo pressure	bar	3 to 8			min. (see graph on page **B2**.57) / max. 8		
	MPa	0.3 to 0.8			min. (see graph on page **B2**.57) / max. 0.8		
	psi	43 to 116			min. (see graph on page **B2**.57) / max. 116		
Valve flow rate, at 6.3 bar ΔP 1 bar		**Ø 4 (5/32")**	**Ø 6**	**Ø 8 (5/16")**	**Ø 1/4"**	**Ø 10 ****	**Ø 3/8" ****
valve 2/2	Nl/min	350	430	500	430	-	-
valve 3/2	Nl/min	350	600	700	600	1250	1250
valve 5/2	Nl/min	350	650	800	650	1250 - 1400	1250 - 1400
valve 5/3	Nl/min	350	460	500	460	1000 - 1250	1000 - 1250
valve V3V (R)	Nl/min	-	-	-	-	1000	1000
Actuation response time (TRA) / reset response time (TRR) at 6 bar							
TRA/TRR valve 2/2 and 3/2	ms	14 / 28					
TRA/TRR valves 5/2 monostable and shut-off valve	ms	12 / 45					
TRA/TRR valve 5/2 bistable	ms	12 / 14					
TRA/TRR valve 5/3	ms	15 / 45					
TRA/TRR valve 3/2 high flow	ms	13 / 36					
Fluid		Unlubricated air					
Air quality required		ISO 8573-1 class 4-7-3					
Degree of protection		IP65 (with connectors connected or plugged if not used)					
Category ATEX		Ⓔx II 3G Ex ec IIC T5 Gc X -10°C<Ta<50°C Ⓔx II 3D Ex tc IIIC T100°C Dc X					
Certifications		CE - EAC - c UL us - Ⓔx					

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28
** Using high-flow valves or connected valves - see pages **B2**.58
*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**
N.B.: Refer to the chapter of each EB 80 sub-assembly for specific technical data.

CERTIFICATIONS

The c UL us certification for the part concerning only CSA (Canadian market) is bound to the following conditions of use:

- environment temperature: max 45°C
- ED max 70%

If non-adjoining valves are used, ED max can reach 100% (environment temperature max 45°C)

COMPONENTS

EB 80 systems are identified by a set of sub-assemblies:

S Electrical Modules - **S**
E **E**lectrical connection
P **P**neumatic supply
B **B**ases for solenoid valves; the valves are fixed on the bases
M Inter**M**ediate Modules
C **C**losed end-plate

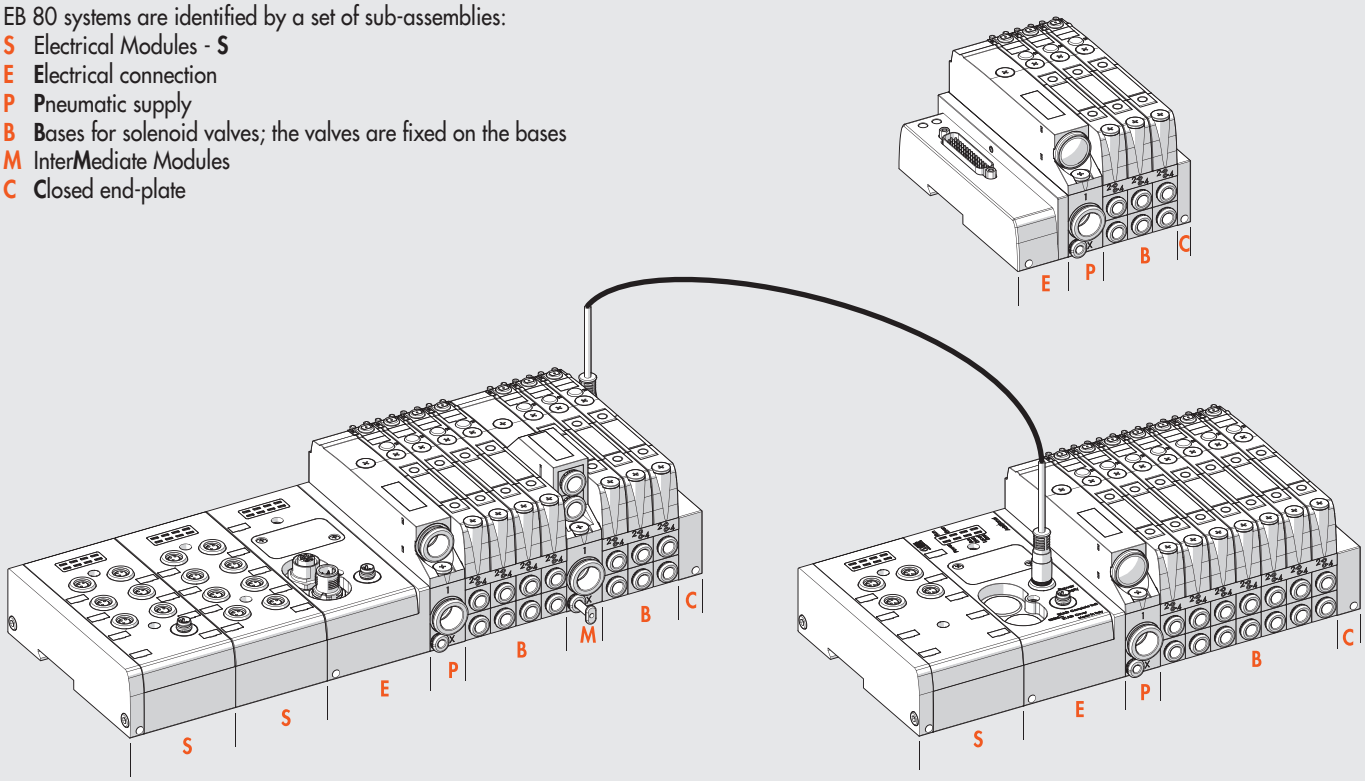

COMPONENTS – SOLENOID VALVE AND BASE

① BASE: technopolymer
② VALVE BODY: technopolymer
③ CONTROL: technopolymer
④ BASE: technopolymer
⑤ SPOOL: chemically nickel-plated aluminium
⑥ CONTROL PISTON: Stainless steel and NBR
⑦ SPRING: Oteva® steel and Dacromet treatment
⑧ SOLENOID VALVE
⑨ ELECTRONIC BOARD
⑩ LED light display: technopolymer
⑪ MANUAL CONTROL: nickel-plated brass
⑫ SCREW SECURING VALVE TO THE BASE: zinc-plated steel
⑬ SPOOL GASKET: NBR
⑭ Push-in fitting CARTRIDGE for port 2
⑮ Push-in fitting CARTRIDGE for port 4

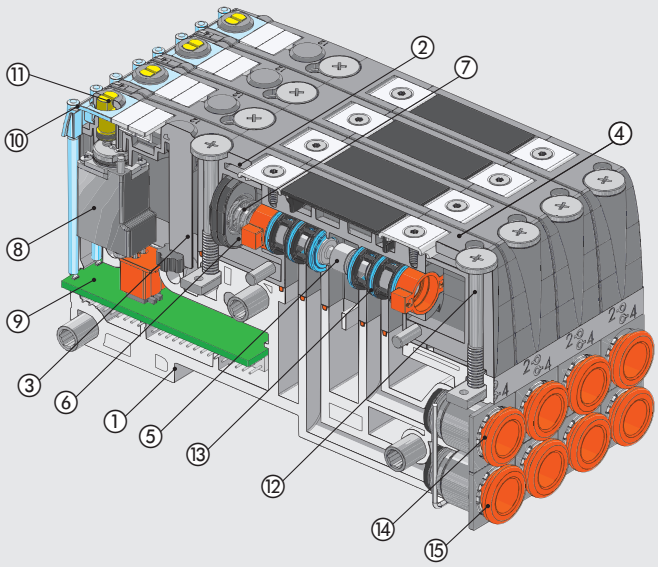

THE EB 80 WORLD

ELECTRICAL CONNECTION - E

E025	E044	E0EN	E0EC	E0PN	E0CN	E0PB	E0PL	E0IO	E0LK	E0CC	E0AD
											
25 PIN	44 PIN	EtherNet/IP	EtherCAT	Profinet IO	CANopen	Profibus-DP	Ethernet POWERLINK	IO-Link 32 IN/32 OUT	IO-Link 64 OUT	CC-Link IE Field Basic	Additional
page **B2**.30	page **B2**.30	page **B2**.43	page **B2**.43	page **B2**.43	page **B2**.43	page **B2**.43	page **B2**.43	page **B2**.43	page **B2**.43	page **B2**.43	page **B2**.48

SIGNAL MODULE - S

S01	S02	S03	S04	S05	S06	S07	S08	S21	S22
									
8 M8 digital inputs	8 M8 digital outputs	6 M8 digital outputs + electrical supply	4 M8 analogue inputs	4 M8 analogue outputs	16 digital terminal block inputs	16 digital terminal block outputs	4 M8 analogue inputs for temperature measurement	16 M8 configurable digital inputs/ outputs	16 M12 configurable digital inputs/ outputs
page **B2**.18	page **B2**.18	page **B2**.19	page **B2**.19	page **B2**.20	page **B2**.20	page **B2**.21	page **B2**.21	page **B2**.22	page **B2**.22

WIRELESS MODULE - S

S20

Wireless connection module
page **B2**.16

Part included in the **ELECTRICAL CONNECTION - E** with Fieldbus

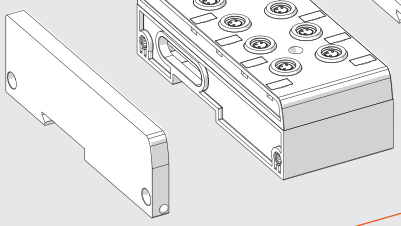

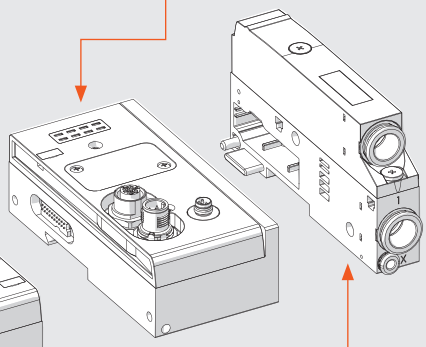

COMPRESSED-AIR SUPPLY - P

P_ _Z00	P_ _Z_ _	P_ _Z_0	P91Z90
			
Silenced relief	Conveyed relief	Separate reliefs	Module for electric version only
page **B2**.51	page **B2**.51	page **B2**.51	page **B2**.52

PROPORTIONAL PRESSURE REGULATOR - A

A40_Z_0	A41_Z_0
	
Base port 1 pass-through local outlet	Base port 1 sectioned in-series regulation
page **B2**.65	page **B2**.65

METAL WORK PNEUMATIC

VALVES

Z_ ▲	I_ ▲	W_ ▲	L_ ▲	V_	K_ ▲	O_ ▲	G_	J_	R_ ✚	N0	Y8
2 valves 2/2 NC	2 valves 3/2 NC (valid as 5/3 OC)	2 valves 3/2 NO (valid as 5/3 PC)	3/2 NC + 3/2 NO	monostable 5/2	bistable 5/2	5/3 CC	3/2 NC high flow	3/2 NO high flow	Shut-off valve	Dummy valve	Bypass
page **B2**.57	page **B2**.57	page **B2**.57	page **B2**.57	page **B2**.57	page **B2**.57	page **B2**.57	page **B2**.58	page **B2**.58	page **B2**.59	page **B2**.60	page **B2**.60

▲ Can only be used with 6 or 8 control bases.
✚ Requires inlet port X slave synchronisation.

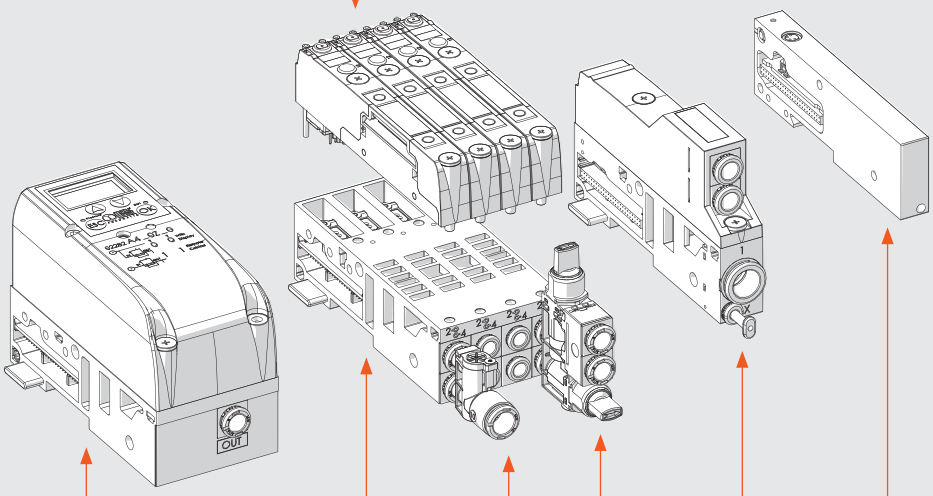

CLOSED END-PLATE - C

C1	C2	C3
		
For islands with multi-pole connector	For islands with fieldbus	For electrical connection of islands with fieldbus to additional islands
page **B2**.74	page **B2**.74	page **B2**.74

BASES FOR VALVES - B

B3_ _ _ _ _0	B4_ _ _ _ _ _
	
3-position base for valves	4-position base for valves
page **B2**.54	page **B2**.54

Y-FITTING

R2
Y-fitting
page **B2**.61

MULTI-FUNCTION MODULE


Fittings with pneumatic functions
page **B2**.94

INTERMEDIATE SUPPORT - M

M_ _ _ Z0_	M_ _ _ Z_ _	M_ _ _ Z_ _
		
Silenced relief	Conveyed relief	Separate relief
page **B2**.69	page **B2**.70	page **B2**.71

FIXING OPTIONS

1 - Fixing on a DIN bar: tighten the grub screws into modules E (electrical connection) and C (closed end-plate).
For islands with more than 40 valves or 5 modules, also use the additional plate code 02282R4001.

2 - Fixing on a flat surface: use the pair of brackets code 02282R4000 and the M5x20 screws supplied.
You can choose where to position the brackets in relation to the island:

2A - *Protruding brackets*: can be used to install the island + brackets unit from above. First secure the brackets to the modules E and C using the grub screws, then secure everything with M5x20 screws.

2B - *Concealed brackets*: the overall dimensions of the island are reduced. First secure the brackets to the flat top with M5x20 screws, then place the island onto the brackets and lock the two grub screws provided in the modules E and C.

3 - Fixing through a wall: use the brackets code 02282R4000. The brackets come with M6 threaded holes and can be fixed with M6 screws (not included in the supply) passing through the wall. The brackets can fixed either protruded or concealed.

N.B.: Planar surfaces are required to ensure correct fixing. Avoid twisting or bending the valve units.

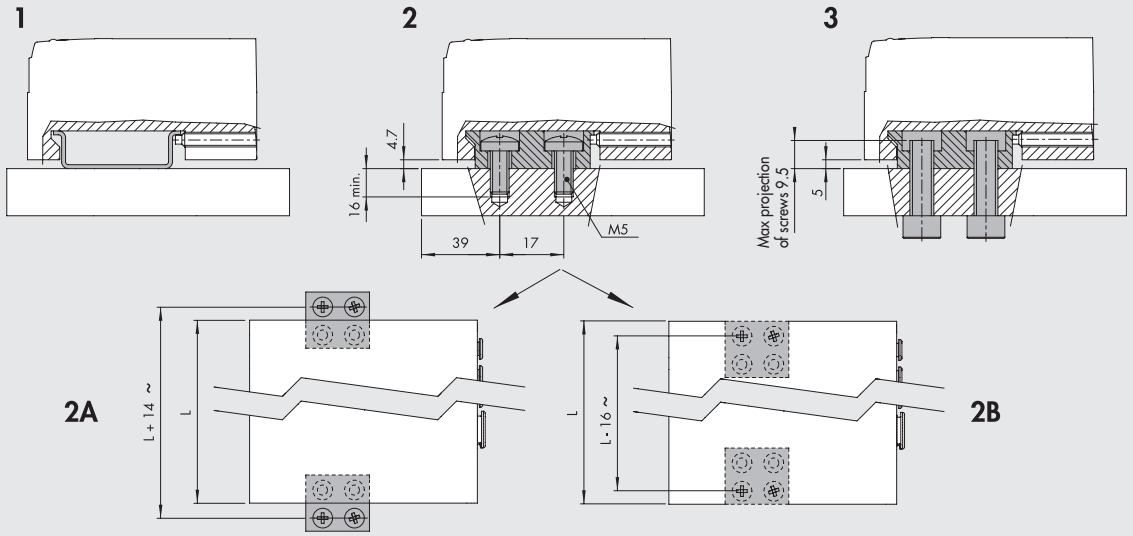

LUBRICATION



NO LUBE NO OIL

The EB 80 electro-pneumatic system is designed to run millions of cycles without the need for any lubrication. This is possible thanks to the optimisation of its components and the use of a special grease with excellent properties and NSF H1 certified. To avoid removing the grease, it is highly recommended not to lubricate the valve input and output ports and check the quality (to ISO 8573-1 class 4-7-3) of the compressed air used, which is often contaminated by particularly aggressive oils that are released by compressors and are not always compatible with the elastomers used in the valves.

SOME CHARACTERISTICS OF EB 80 SYSTEMS

HORIZONTAL MODULARITY

- Easy replacement or addition of any sub-assembly.
  The locking tie rods are included in each sub-assembly.

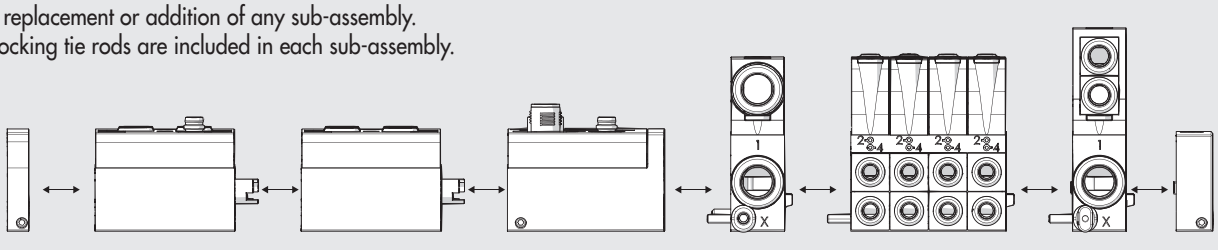

METAL WORK PNEUMATIC

VERTICAL MODULARITY

- Easy replacement – no need to disassemble the pack – of the valves on the Bases – B and also of the top part (cover) of subsystems **S**, **E**, **P**, **M** using a single Phillips-head screwdriver.

N.B.: All protocols can be mounted on the base for field buses and all input or output modules can be mounted on the same base for signals.

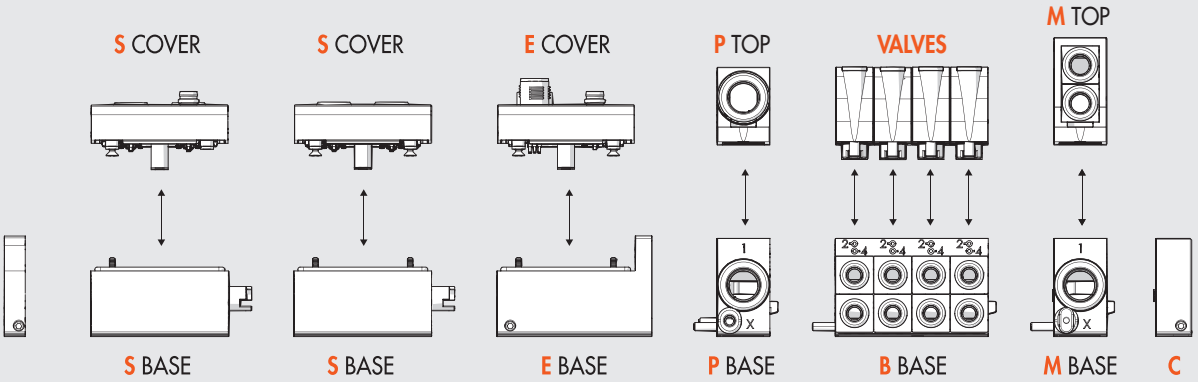

ONE SIZE FITS ALL

- Reduced dimensions
- High flow rate
- One warehouse and spares

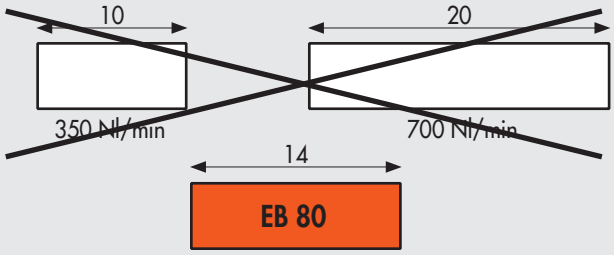

THE SAME BASE FITS BOTH MULTI-POLE CONNECTIONS AND FIELD BUSES

- Controls from multi-pole connection
- Controls from field buses
- Diagnostics

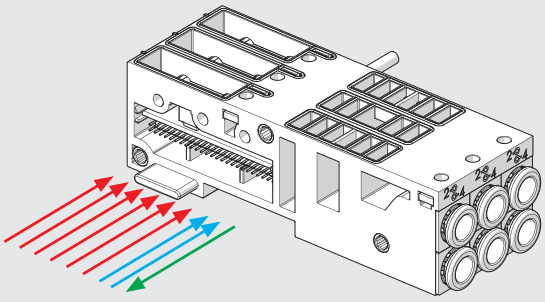

PATENTED

THE SAME ISLAND CAN BE SUPPLIED 10.8 - 31.2 VDC

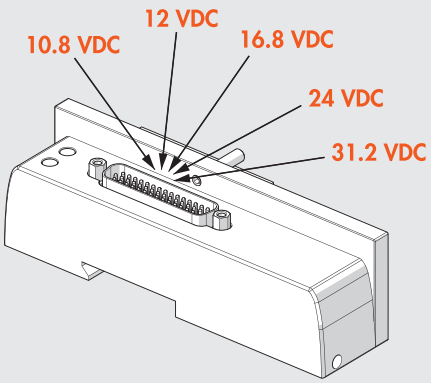

ONLY 0.3 W FOR EACH SOLENOID VALVE

- Speed-up solenoid valve control:
  - high power for a few milliseconds ensures high performance and rapid and safe switching;
  - reduced holding power resulting in reduced temperatures and energy saving.

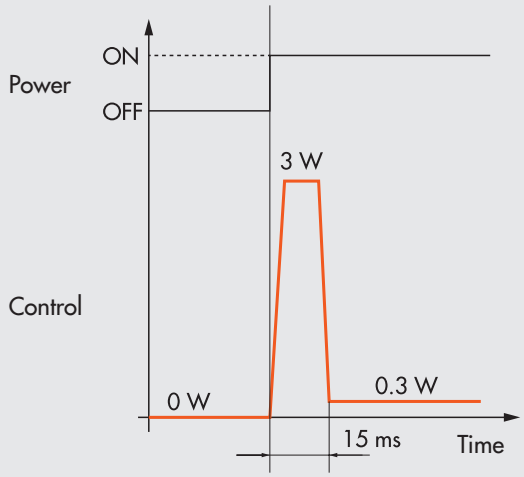

3- OR 4-POSITION BASES FOR VALVES

- Island layout options:
  - **3** 1 base with 3 positions
  - **4** 1 base with 4 positions
  - (**5** 2 bases with 3 positions and 1 dummy valve)
  - **6** 2 bases with 3 positions
  - **7** 1 base with 3 and 1 with 4 positions
  - **8** 2 bases with 4 positions
  - ...
- Compared to single-base solutions, this configuration is advantageous because:
  - just a few bases are required for multiple positions;
  - the base is sturdy and rigid;
  - there is plenty of space to accommodate smart electronics

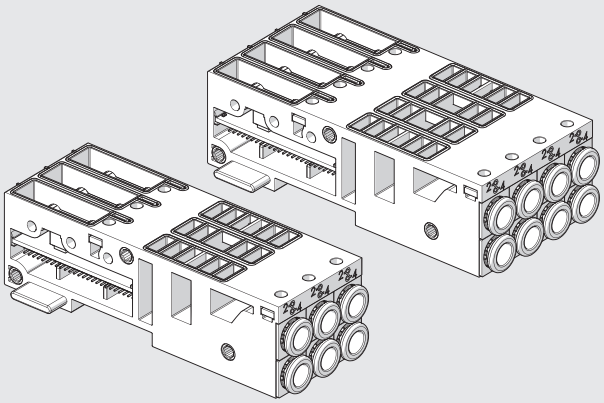

INTERCHANGEABLE CARTRIDGE FITTINGS

- For pipes Ø 4 (5/32"), 6, 8 (5/16"), 1/4"

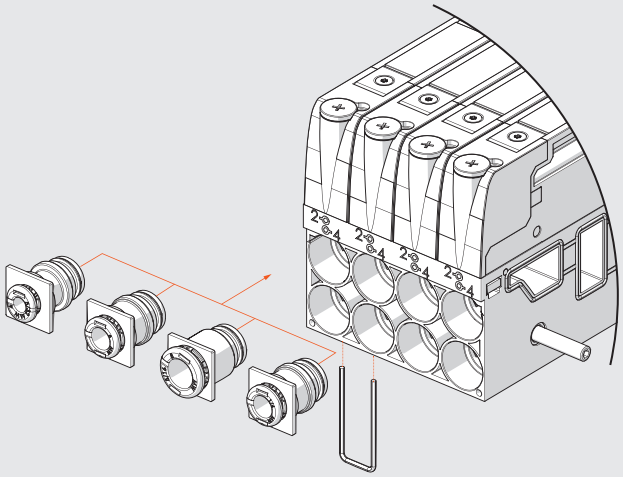

DIMENSIONS

DIMENSION OF VERSIONS WITH MULTI-POLE CONNECTION

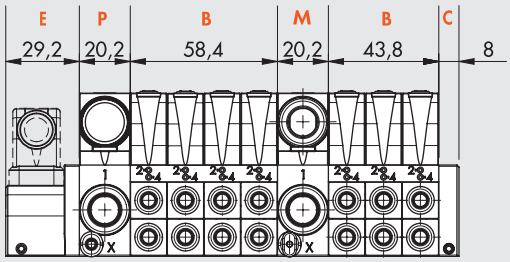

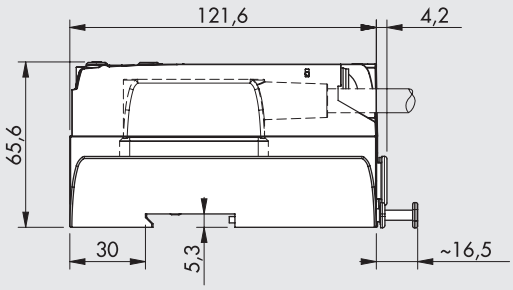

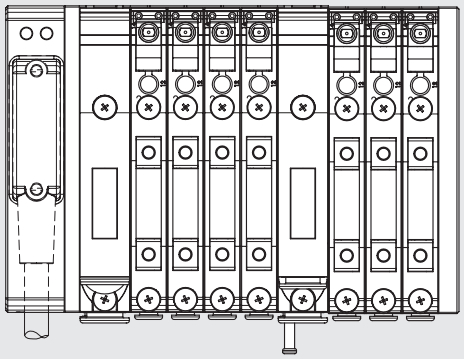

DIMENSION OF VERSIONS WITH FIELD BUS OR ADDITIONAL CONNECTION

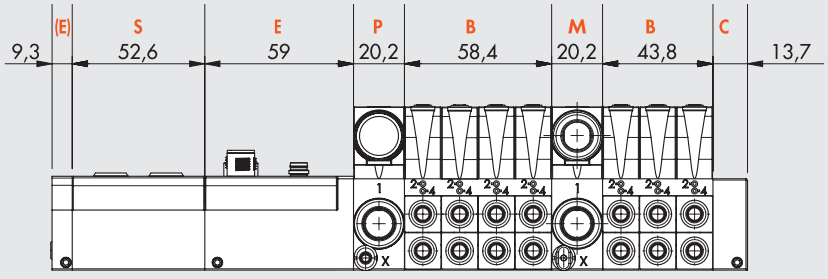

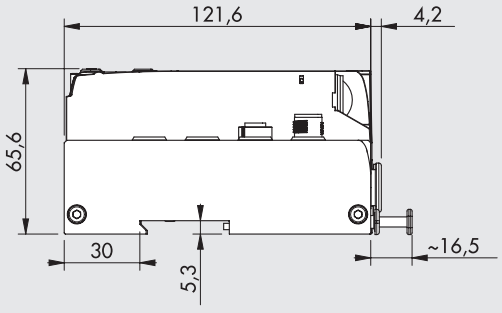

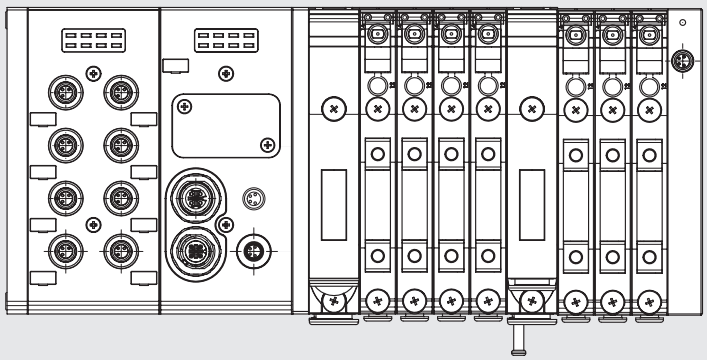

DESCRIPTION

A complete system has a compound **description** of all its subsystems listed in sequence from left to right, as shown below.
The abbreviation of each subsystem is obtained by taking the code and omitting the first digits 02282.
For example: the digital 8-input signal module is identified with code 02282S01; only write S01 in the description.

The abbreviation of each base for valves consists of:

Abbreviation of the Base	**Manual valve control**	**Type of valves**
Obtained from the code, after removing 02282	0 = monostable 1 = bistable	Valves Dummy valve Bypass
Example		
4-position base, 8 solenoid pilots, Ø 6 pipe; code 02282B4086666	Monostable	2 monostable 5/2 valves - V 1 double 3/2 NO - W 1 dummy valve - F
Abbreviation		
B4086666	0	VVWF

The description is therefore a sequence of this type:

EB 80	**- S_ _**	**- E_ _ _**	**- P_ _ _ _ _**	**- B_ _ _ _ _ _ _ _ _ _ _**	**- M_ _ _ _ _ _**	**- C_**
EB 80 system	**Electrical Module** (if present)	**Electrical connection**	**Compressed air supply**	**Base for valves** (as many as there are) with normal or dummy	**Intermediate** (if present)	**Closed end-plate**
For the codes:	see page **B2**.22	see page **B2**.28	see page **B2**.52	see page **B2**.55 and **B2**.60	see page **B2**.72	see page **B2**.75

Example:
EB 80-S01-E0EN-P3XZ00-B40866660VWKN-M300Z30-B30388800VVN-C2

EB 80	**- S01**	**- E0EN**	**- P3XZ00**	**- B40866660VWKN**	**- M300Z30**	**- B30388800VVN**	**- C2**
EB 80 system	**Signal module** complete 8 M8 digital inputs	**Electrical connection** EtherNet/IP	**Compressed air supply** - fitting Ø 12 - pilot servo Ø 4 - silenced relief	**Base for valves** - 4 positions - 8 controls - fittings for pipe Ø 6 - manual monostable control - 5/2 monostable valve - 2 3/2 NO valves - bistable 5/2 valve - dummy valve	**Intermediate** - fittings for pipe Ø 12 - through ports - without supplementary power supply	**Base** - 3 positions - 3 controls - fittings for pipe Ø 8 - manual monostable control - 5/2 monostable valve - 5/2 monostable valve - dummy valve	**Closed end-plate** for valve Island with field bus

Endless number of EB 80 systems can be obtained and their description is variable in length, which can be very extended.
The actual ordering CODE of an EB 80 system is created by Metal Work S.p.a. with a limited number of characters.
The ordering code is not explicative. The description only is univocal, complete and explicative.

ACCESSORIES

FIXING BRACKET





Code	**Description**	**Weight [g]**
02282R4000	EB 80 base fixing bracket	47

Note: 2 pieces per pack complete with 4 M5x20 screws

NOTES

Please refer to the subsystem chapter for other accessories (e.g. connectors) and spare parts.

EB 80 INDUSTRY 4.0

The new advanced EB 80 diagnostic functions, known as EB 80 I4.0, provide a powerful analysis tool for traditional maintenance operations, ensuring the safe, reliable and lasting operation of production units.
They are available for all electrical connections with fieldbuses and bases marked I4.0, with advanced diagnostics integrated in accordance with Industry 4.0 philosophy.
These functions use the original EB 80 diagnostics, integrating them with the ability of the station itself to control IOs.
They re-organise and optimise maintenance management by developing predictive maintenance in order to:
- predict faults;
- intervene early to avoid system downtime;
- have all information on equipment operation available in real time;
- monitor component end-of-lifetime;
- optimise warehouse spare parts management.

This makes it possible to turn the data collected into concrete actions using standard EB 80 stations without needing additional modules.

Description of EB 80 I4.0 functions:

• System data:
- EB 80 system startup counter;
- supply alert counter.

• Valve data. Each valve base for each solenoid valve permanently stores the following information:
- cycle counter;
- counter for total solenoid valve excitation time;
- activation of a flag to signal average lifetime exceeded;
- short circuit alert counter;
- open circuit alert counter.

• Electropneumatic system control functions (data updated with each cycle):
- measurement of the delay between activating the solenoid valve "A" and actuator movement commencing via the signal of sensor "B", with delays that exceed the limit flagged;
- measurement of actuator movement time using two linked sensors "B" and "C", with exceeded time limits flagged;
- measurement of the delay between deactivating the solenoid valve "A" (or activating a second valve) and actuator return commencing via the signal of sensor "B", with exceeded time limits flagged;
- measurement of actuator return time using two linked sensors "B" and "C", with exceeded time limits flagged;
- counter for actuator range of motion.

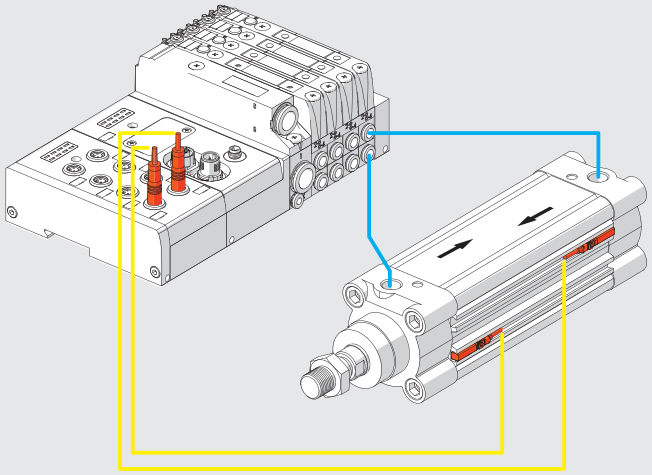

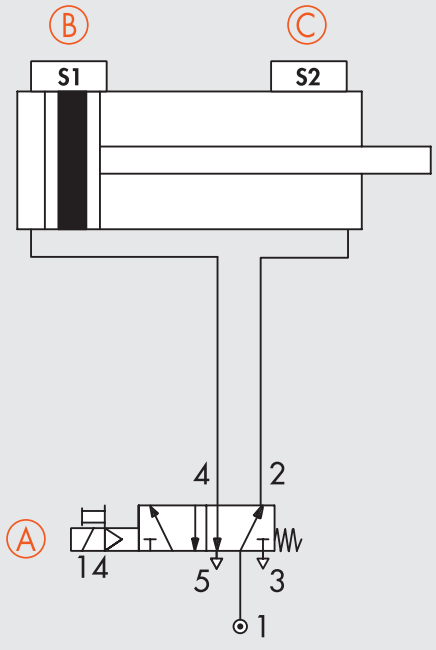

PLC-BASED DATA COLLECTION

Electrical connection modules can be used to complement the EB 80 with the main field buses available in the market. In this way, the control system (generally a PLC) can handle in real time the behaviour of the solenoid valve island, including signal modules.

With the introduction of the I4.0 version, the field bus connection modules also send to the network the historical and diagnostic data relating to the behaviour of the island (such as the number of cycles for each solenoid pilot, total activation time and alarms) and the controlled pneumatic circuit (such as the delay times in sensor switching and actuator activation times).

This data is also sent to the control system and can be handled differently depending on the situation: in some cases, it can be used in real time, like in the case of fault alarms; in other cases, it can be sent to a storage local unit or one remotely controlled on a cloud server, and is analysed in a subsequent stage; in other cases, the alarms can be sent to a teleservice station that can monitor the state of the system remotely.

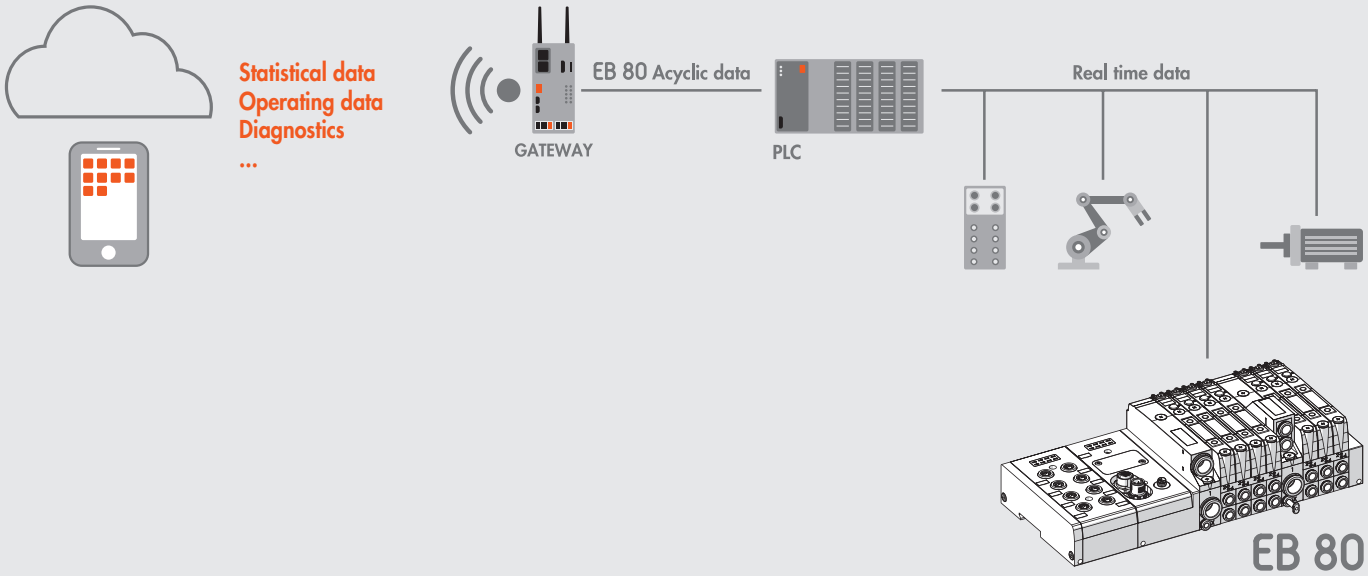

EB 80 WIRELESS DATA COLLECTION

Integrated into the EB 80, this module provides connection to Wi-Fi networks and Bluetooth® devices to display diagnostic and operating data.
The APP specifically developed by Metal Work, called EB80Up, can connect Android and IOS devices for easy viewing of diagnostic and operating data plus the setting of network parameters.

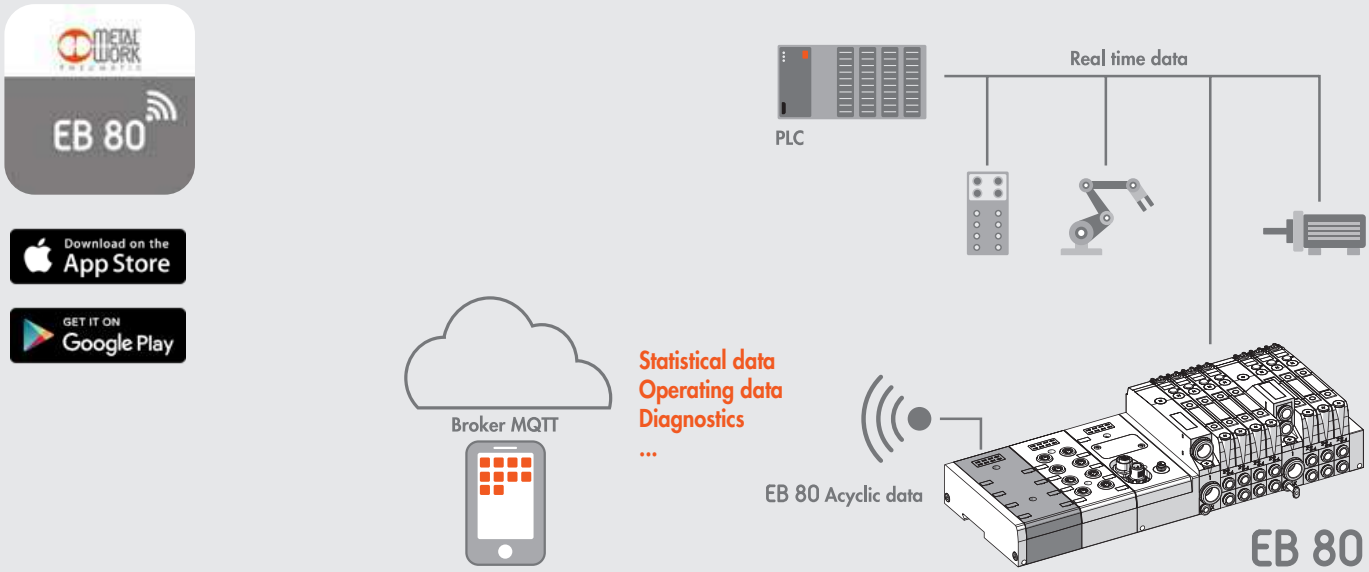

EB 80 ELECTRICAL MODULES - S

EB 80 WIRELESS MODULE - S

The EB 80 Wireless module complements both Bluetooth® and Wi-Fi communication and displays data made available by the EB 80's advanced diagnostics functions, called EB 80 I4.0.
These functions provide traditional servicing with a powerful analysis tool to ensure reliable, safe and long-lasting operation.
This module can be added at any time: simply unscrew the metal plate on the left side of the 'Electrical connection E' module or the 'Signal module S' module, fit the 'Wireless module S' (ready fitted with tie rods for fixing) and screw the locking plate back on the left side.
Fully compatible with all electrical fieldbus connections, it offers advanced diagnostics in accordance with Industry 4.0 requirements.
Via the dedicated 'Metal Work EB80Up', this module communicates via Bluetooth with mobile devices (smartphones and tablets) to display diagnostic and operating data. On top of that, all network parameters can be set for communication with Ethernet networks via the MQTT protocol.

TECHNICAL DATA

Communication protocols		Wi-Fi MQTT
		Bluetooth® LE
Connection status reporting		3 LED, Power - Wi-Fi - MQTT
Degree of protection		IP 65
Ambient temperature	°C	-10 to + 50
	°F	14 to 122

COMPONENTS

① UPPER PART BODY: technopolymer
② LOWER PART BODY: technopolymer
③ SCREW securing the upper part to the lower part
④ LED
⑤ TIE ROD to secure modules: nickel-plated brass + stainless steel grub screw
⑥ GASKET: NBR
⑦ FEMALE CONNECTOR for other modules - S or fieldbus connection - E
⑧ IDENTIFICATION of wording with laser

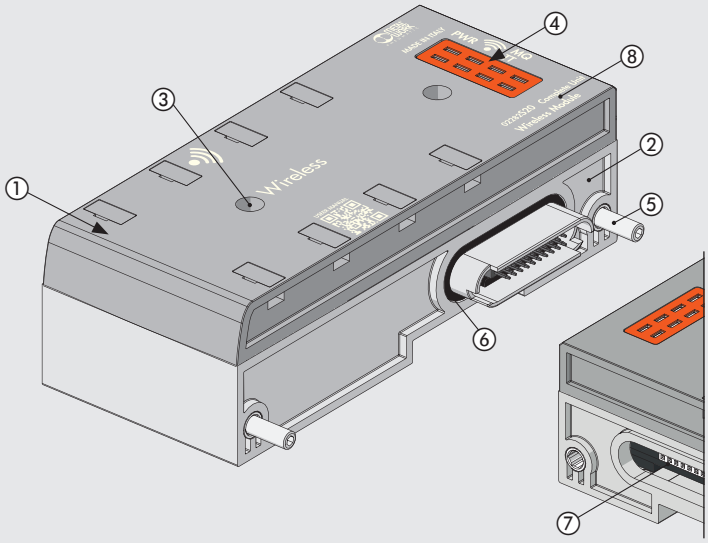

WIRELESS CONNECTION

Connecting to a Wi-Fi network via an Access point to display diagnostic data is also possible.

Layout of the connection via an Access point to an MQTT broker

MQTT **Broker MQTT**



Collecting data from the field provides predictive diagnostics of the plant, i.e:
- managing preventive maintenance;
- keeping the operating parameters under control at all times and optimising the operation of the machines and the pneumatic system.

The 'Metal Work EB80Up' App provides a Bluetooth connection from Android smartphones and the iOS to the EB 80 wireless module installed on the island.

Via the 'Metal Work EB80Up' App, you can:
- scan nearby EB 80 devices;
- login and view device diagnostic data;
- reset the number of valve cycles;
- reset the number of cycles of virtual actuators;
- set wireless network parameters.

DIMENSIONS - ORDERING CODES

WIRELESS MODULE









Code	Description	Weight [g]
02282**S20**	EB 80 Wireless module	180

KEY TO CODES

02282	S	20
FAMILY	**SUBSYSTEM**	**TYPE**
02282 EB 80	**S** Modules	**20** Wireless

EB 80 SIGNAL MODULES - S

The EB 80 systems come with numerous input or output signal modules, which can be mounted on systems with fieldbus electrical connection or additional systems.
The signal modules can be added at any time. You only need to unscrew the aluminium plate to the left side of the "Electrical connection - E" module and install the "Signal Modules - S" (ready fitted with fixing tie rods) and retighten the end plate to the left.
Each signal module consists of two parts: the lower part, which contains transmission electronics of the controls, is unique and valid for all modules; the upper part, which is specific for each type.
This design highlights the modular features of the EB 80 system: the upper part of the "Signal Module - S" can be replaced either with a similar one by simply unscrewing the screws in the event of failure or one of another type.
All this without having to remove anything from the system.

TECHNICAL DATA

Supply voltage range	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
Power and current		See individual "Signal Modules - S"
Protection		See individual "Signal Modules - S"
Diagnostics		Local via LED light and software message
		Undervoltage, overvoltage, short-circuit and overload of individual connector and the entire module,
Maximum number of signal modules		128 digital inputs ** - 128 digital outputs **
		16 analogue inputs - 16 analogue outputs
		16 inputs for temperature measurement
Ambient temperature	°C	-10 to + 50
	°F	14 to 122
Versions		digital input, digital output, analogue input, analogue output
Degree of protection		IP65 (with connectors connected or plugged if not used)
		IP40 for 16-position I/O modules

* **Minimum voltage 10.8V required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2.28**
** **Using S21-S22 modules only, the maximim number of signal is 64; reaching a quantity of 128 signals is possible by adding other modules, such as S01, S02, S06 and S07**
*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**
N.B.: Refer to the following pages for specific technical data of each module.

COMPONENTS

① UPPER PART BODY: technopolymer
② LOWER PART BODY: technopolymer
③ M8 CONNECTOR: signal connection
④ SCREW securing the upper part to the lower part
⑤ LED light
⑥ NAMEPLATE: removable
⑦ TIE ROD to secure modules: nickel-plated brass + stainless steel grub screw
⑧ GASKET: NBR
⑨ MALE CONNECTOR for other modules - S or fieldbus connection - E
⑩ FEMALE CONNECTOR for other modules - S or fieldbus connection - E
⑪ IDENTIFICATION of wording with laser

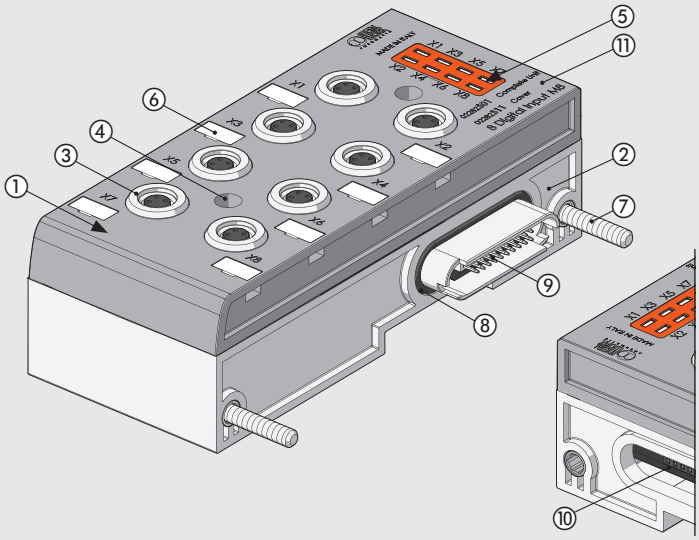

DIMENSIONS - ORDERING CODES

8 M8 DIGITAL INPUTS



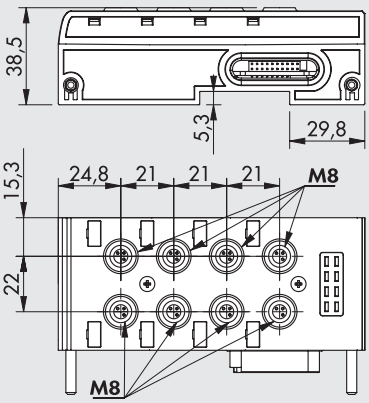



Code	Description	Weight [g]
02282**S01**	EB 80 module with 8 M8 digital inputs	250

TECHNICAL DATA		
Sensors supply voltage		Corresponding to the supply voltage
Current for each connector	mA	max 200
Current for each module	mA	max 500
Input impedance	kΩ	3.9
Type of input		Software-configurable PNP/NPN
Protection		Overload and short-circuit protected inputs
Connections		8 M8 3-pole female connectors
Input active signals		One LED for each input

8 M8 DIGITAL OUTPUTS



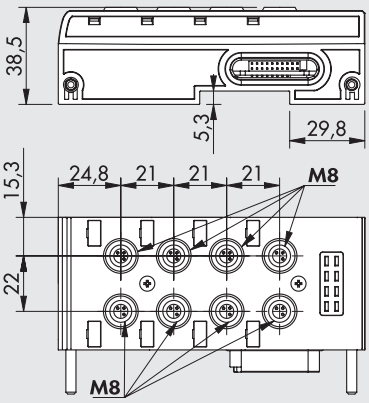



Code	Description	Weight [g]
02282**S02**	EB 80 module with 8 M8 digital outputs	250

TECHNICAL DATA		
Output voltage		Corresponding to the supply voltage
Current for each connector	mA	max 500
Current for each module	mA	max 3000 *
Type of output		Software-configurable PNP/NPN
Protection		Overload and short-circuit protected outputs
Connections		8 M8 3-pole female connectors
Outputs active signals		One LED for each output

*** IMPORTANT: the module is powered via the fieldbus. The total current of the connected outputs must not exceed 3.5 A.**

METAL WORK PNEUMATIC

6 M8 DIGITAL OUTPUTS + ELECTRICAL POWER SUPPLY



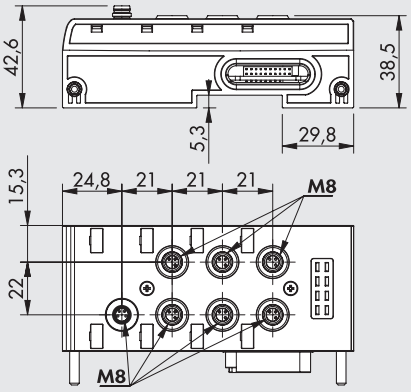



Code	Description	Weight [g]
02282**S03**	EB 80 module with 6 M8 digital outputs + electrical supply	240

TECHNICAL DATA		
Bus supply voltage range	VDC	12 -10% 24 +30%
Digital out supply voltage range	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
Output voltage		Corresponding to the supply voltage
Current for each connector	mA	max 1000
Current for each module	mA	max 4000
Type of output		Software-configurable PNP/NPN
Protection		Overload, short-circuit and polarity inversion protected outputs
Connections		6 M8 3-pole female connectors for Signals
		1 M8 4-pole male connector for Supply
Output active signals		One LED for each output

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2.28**

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

4 M8 ANALOGUE INPUTS



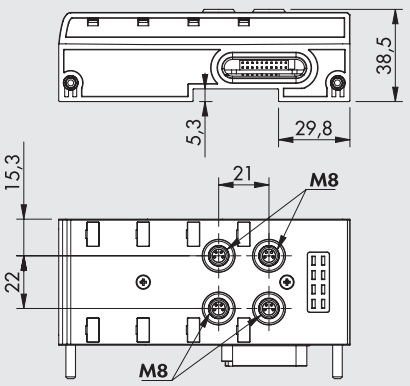



Code	Description	Weight [g]
02282**S04**	EB 80 module with 4 M8 analogue inputs	220

TECHNICAL DATA		
Sensors supply voltage		Corresponding to the supply voltage
Current for each connector	mA	max 200
Current for each module	mA	max 650
Type of input, software configurable		0/10VDC; 0/5VDC; +/-10VDC; +/-5VDC; 4/20 mA; 0/20 mA
Protection		Overload and short-circuit protected inputs
Connections		4 M8 4-pin female connectors
Local diagnostic signal via LED		Overload, short-circuit or type of input not complying with the configuration
Digital convert resolution		15 bit + prefix

4 M8 ANALOGUE OUTPUTS



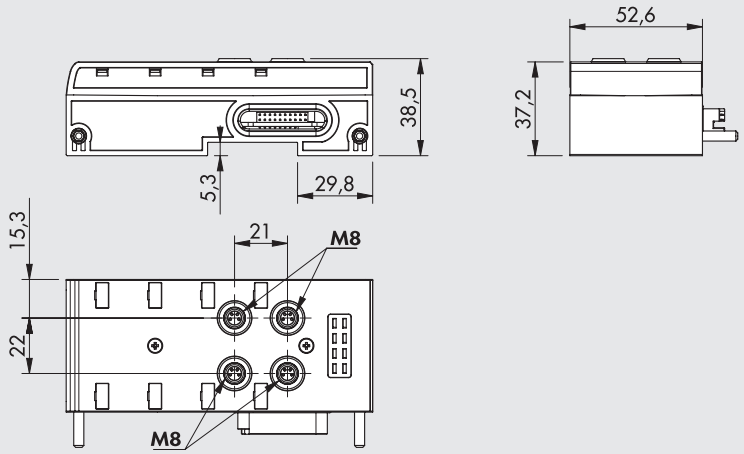

Code	Description	Weight [g]
02282**S05**	EB 80 module with 4 M8 analogue outputs	220

TECHNICAL DATA		
Devices supply voltage		Corresponding to the supply voltage
Current for each connector	mA	max 200
Current for each module	mA	max 650
Type of output		0/10VDC; 0/5VDC; +/-10VDC; +/-5VDC; 4/20 mA; 0/20 mA
Protection		Overload and short-circuit protected outputs
Connections		4 M8 4-pole female connectors
Local diagnostic signal via LED		Overload, short-circuit or type of connection not complying with the configuration
Digital convert resolution		15 bit + prefix

16 DIGITAL TERMINAL BLOCK INPUTS



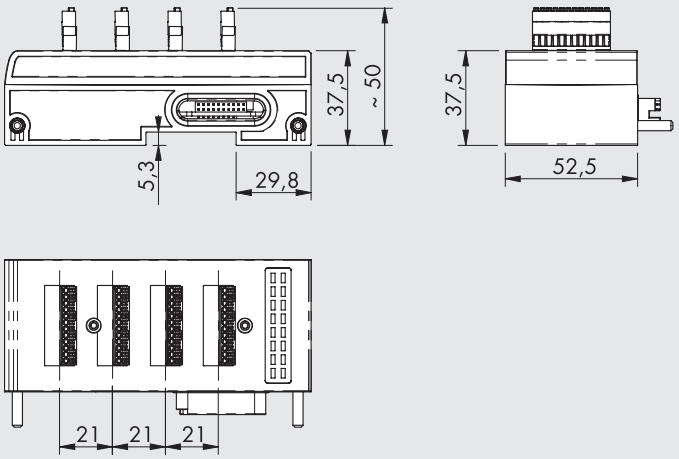

Code	Description	Weight [g]
02282**S06**	EB 80 module with 16 digital terminal block inputs	200

TECHNICAL DATA		
Sensors supply voltage		Corresponding to the supply voltage
Current for each connector	mA	max 200
Current for each module	mA	max 500
Input impedance	kΩ	3.9
Type of input		Software-configurable PNP/NPN
Protection		Overload and short-circuit protected inputs
Connections		4 12-pin connectors with spring clamping
Input active signals		One LED for each input
Degree of protection		IP40

16 DIGITAL TERMINAL BLOCK OUTPUTS



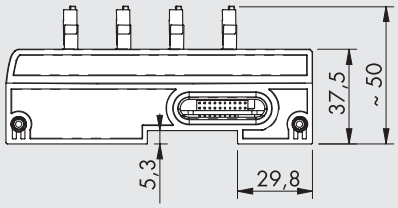





Code	Description	Weight [g]
02282**S07**	EB 80 module with 16 digital terminal block outputs	200

TECHNICAL DATA		
Output voltage		Corresponding to the supply voltage
Current for each connector	mA	max 500
Current for each module	mA	max 3000 *
Type of output		Software-configurable PNP/NPN
Protection		Overload and short-circuit protected outputs
Connections		4 12-pin connectors with spring clamping
Outputs active signals		One LED for each Output
Degree of protection		IP40

*** IMPORTANT: the module is powered via the fieldbus. The total current of the connected outputs must not exceed 3.5 A.**

4 M8 ANALOGUE INPUTS FOR TEMPERATURE MEASUREMENT



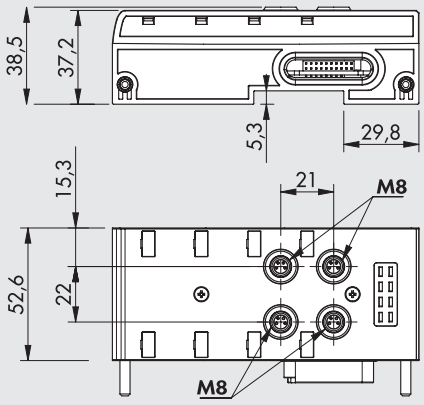

Code	Description	Weight [g]
02282**S08**	EB 80 module with 4 M8 analogue inputs for temperature measurement	220

TECHNICAL DATA		
Sensors supply voltage		Corresponding to the supply voltage
Maximum input voltage	VDC	30
Sensor type (RTD)		
platinum (-200 to +850°C)		Pt100, Pt200, Pt500, Pt1000 (TK = 0.00385 and TK = 0.00391)
nickel (-60 to +180°C)		Ni100, Ni120, Ni500, Ni1000 (TK = 0.00618)
Connections type (RTD)		2, 3 or 4-wire
Type of thermocouple (TC)		J, E, T, K, N, S, B, R
Cold junction compensation for thermocouples		
internal		With internal electronic sensor included
external (recommended in case of sudden changes in the ambient temperature)		PT1000 sensor for connection with the M8 thermocouple connector
Temperature range	°C	– 200 to + 800
	°F	– 328 to + 1472
Digital convert resolution		15 bit + prefix
Max error compared to ambient temperature		±0.5% (TC)
		±0.06% (RTD)
Max. basic error (ambient T 25°C)		±0.4% (TC)
	°C	±0.6 (with 4-wire RTD with 0.1 resolution)
	°C	±0.2 (with 4-wire RTD with 0.01 resolution)
Repeatability (ambient T 25°C)		±0.03%
Address employment		2 bytes for each input - 8 bytes per module
Cycle time (module)	ms	240
Software linearization		
for RTD		Piecewise linear approximation
for TC		NIST (National Institute of Standards and Technology) Linearization based on ITS-90 scale (International Temperature Scale of 1990) for the thermocouple linearization
Maximum length of shielded cable for the connection	m	< 30
Diagnostics		One LED for each input and reporting to the Master

16 CONFIGURABLE DIGITAL INPUTS/OUTPUTS M8 AND M12

These are innovative modules with 8 connectors and 16 digital signals, each configurable as a digital input or digital output.
Modules can be configurated via software by connecting the island's fieldbus module to a PLC. The signals of the first two connectors can also be used as inputs for reading direct current (VDC) motor encoders. Since each 4-pin connector allows the management of two signals (a pair of pins for each signal), dedicated connectors are also provided that allow the separation of the signals.



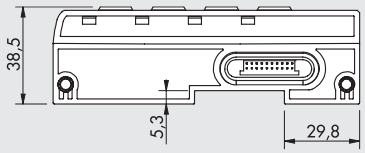



S21 module - M8 connector

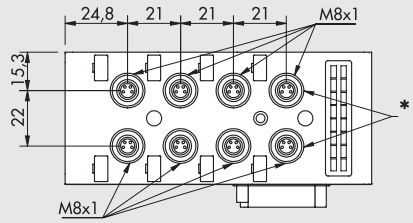

S22 module - M12 connector

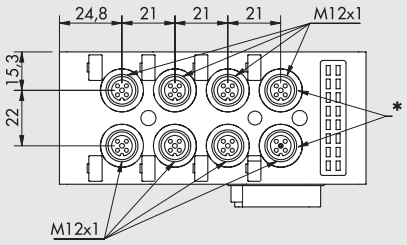

* Connectors usable also for reading direct current motor encoders

Code	Description	Weight [g]
02282**S21**	EB 80 module with16 M8 configurable digital inputs/outputs	230
02282**S22**	EB 80 module with16 M12 configurable digital inputs/outputs	230

TECHNICAL DATA		
Supply voltage		Corresponding to power voltage
Current for each connector	mA	max 1000
Current for each module	mA	max 3000 **
Current for each output	mA	max 500
Type of output		PNP
Input impedance	kΩ	3.9
Type of input		PNP
Protection		Overload and short-circuit protected inputs /outputs
Connections		S21 module: 8 M8 4-pole female connectors
		S22 module: 8 M12 4-pole female connectors
Input active signals		One LED for each input
Output active signals		One LED for each output
Default configuration		Port X1…X8 Digital inputs
		Port X9…X16 Digital outputs
Encoder Configuration		
Type of input		PNP
Input active signals	V	>12
Input not active signals	V	<12
Maximum Frequency	Hz	300
Value format		32 bit (DWORD)
Maximum count		4.294.967.295

**** IMPORTANT: the module is powered via the fieldbus. The total current of the connected outputs must not exceed 3.5 A.**

KEY TO CODES

02282	S	01
FAMILY	**SUBSYSTEM**	**TYPE**
02282 EB 80	**S** Modules	**01** 8 M8 digital inputs **02** 8 M8 digital outputs **03** 6 M8 digitaloutputs + electrical supply **04** 4 M8 analogue inputs **05** 4 M8 analogue outputs **06** 16 digital terminal block inputs **07** 16 digital terminal block outputs **08** 4 M8 analogue inputs for temperature measurement **21** 16 M8 configurable digital inputs/outputs **22** 16 M12 configurable digital inputs/outputs

M8 PLUG

Code	Description
0240009039	Plug for M8 connector

M8 CONNECTOR FOR DIGITAL INPUTS / OUTPUTS



Code	Description
0240009010	M8 3-pin straight connector

M8 CONNECTOR WITH CABLE FOR DIGITAL INPUTS /OUTPUTS

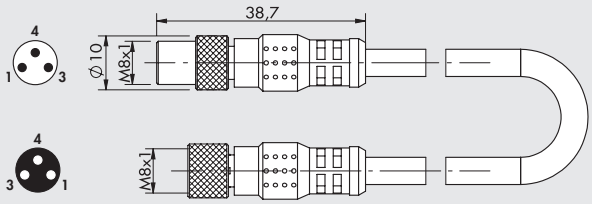

Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

M8 Y-CONNECTOR WITH CABLE FOR DIGITAL INPUT/OUTPUT

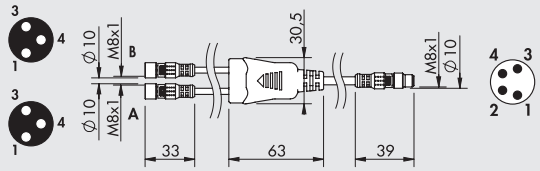

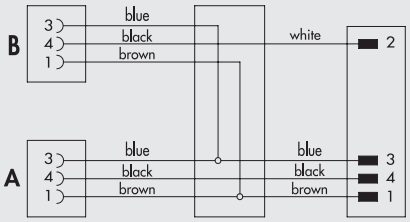

Code	Description
0240009048	Y-connector M8 4-pin M / double M8 3-pin F with cable L = 0.7 m

Note: Can only be used with S21 modules

M12 Y-CONNECTOR WITH CABLE FOR DIGITAL INPUT/OUTPUT

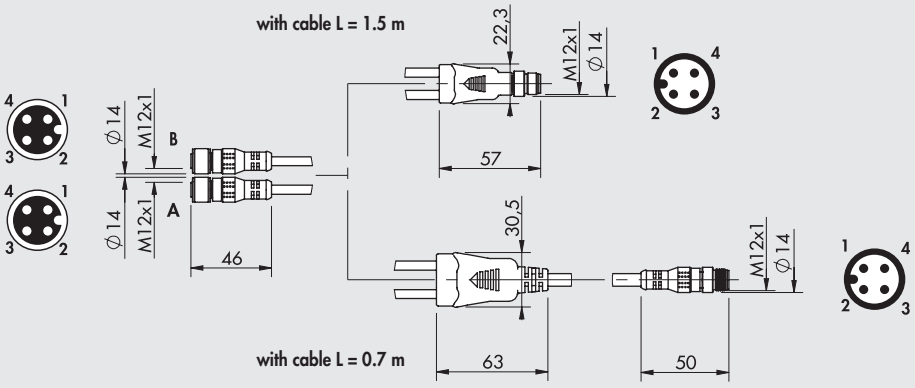

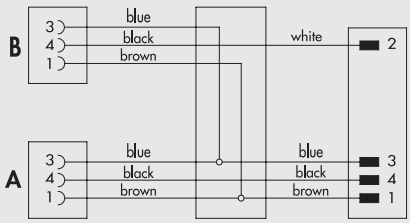

Code	Description
0240009032	Y-connector M12 4-pin M / double M12 4-pin F with cable L = 1.5 m
0240009049	Y-connector M12 4-pin M / double M12 4-pin F with cable L = 0.7 m

Note: Can only be used with S22 modules

M8 MALE CONNECTOR FOR ANALOGUE INPUTS/OUTPUTS



Code	Description
0240010300	M8 4-pin male connector

M8 CONNECTOR FOR POWER SUPPLY

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black



Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m
0240009P60 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 3 m
0240009P37 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 5 m
0240009P58 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 10 m
0240009P59 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 15 m

* Very flexible cables, class 6 according to IEC 60228

90° M8 CONNECTORS WITH SHIELDED CABLE

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black



Code	Description
0240009102	M8 4-pin female, 90° connector with shielded cable L = 2 m
0240009103	M8 4-pin female, 90° connector with shielded cable L = 5 m

M8 4-POLE MALE CONNECTOR

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black



Code	Description
0240010105	M8 4-pin connector shielded cable L = 5 m

M8 3-POLE MALE – M12 5-POLE FEMALE CONNECTOR WITH CABLE FOR DIGITAL INPUTS/OUTPUTS

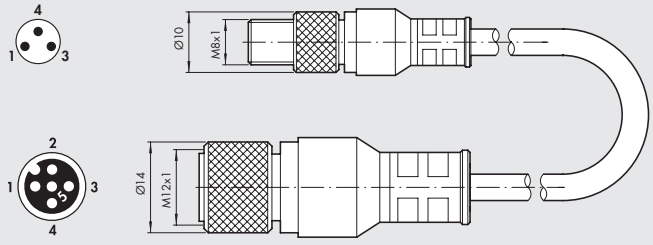

Code	Description
0240009045	M8 3-pole male straight - M12 5-pole female connector with cable L= 0.2 m

M8	M12
pin 1	pin 1
pin 4	pin 4
pin 3	pin 3

M8 4-POLE MALE – M12 8-POLE FEMALE CONNECTOR WITH CABLE FOR REGTRONIC CONNECTION

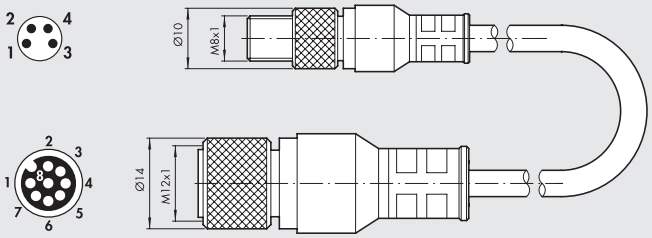

Code	Description
0240009046	M8 4-pole male straight - M12 8-pole female connector with cable L= 1 m

M8	M12
pin 1	pin 8
pin 2	pin 3
pin 3	pin 7
pin 4	disconnect

METAL WORK PNEUMATIC

M8 CONNECTOR WITH SHIELDED CABLE FOR ANALOGUE INPUTS/OUTPUTS

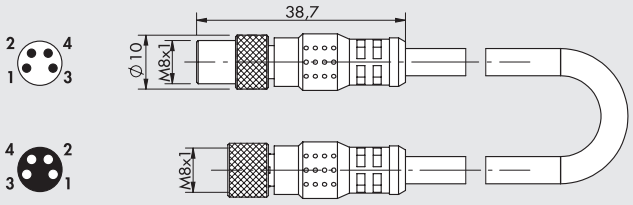

Code	Description
0240005005	M8-M, M8-F 4-pole straight connector with shielded cable L = 1 m
0240005006	M8-M, M8-F 4-pole straight connector with shielded cable L = 3 m
0240005003	M8-M, M8-F 4-pole straight connector with shielded cable L = 5 m
0240005008	M8-M, M8-F 4-pole straight connector with shielded cable L = 10 m

M8 ADAPTER CABLE FOR CONNECTING THE PRESSURE SWITCH TO THE DIGITAL INPUTS MODULE

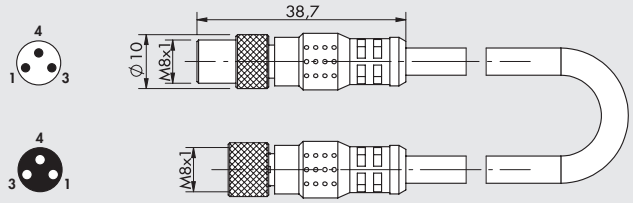

Code	Description
0240010501	M8-M, M8-F 3-pole adapter with cable L = 0.3 m

Note: Can be used for connecting **1/8-1/4**, **Syntesi®**, **Skillair®**, **PRS L** pressure switches to the module of digital INPUT **S01** of the EB 80 valves. Contact type NO (Normally-Open)

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 3	pin 4	Signal NO
pin 4	pin 3	Disconnect

M8 SHIELDED ADAPTER CABLE FOR CONNECTING THE LTS-LTL POSITION TRANSDUCERS TO THE ANALOGUE INPUTS MODULE

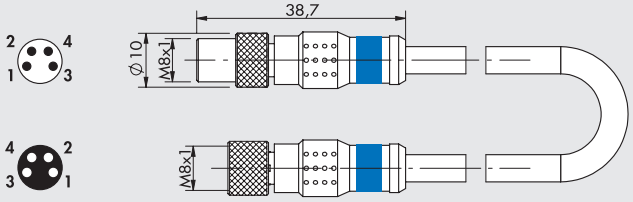

Code	Description
0240010601	M8-M, M8-F 4-pole adapter with shielded cable L = 0.3 m (**blue collar**)

Note: Can be used for connecting the **4/20 mA** analog output of the LTL-LTS position sensors to the module of analog INPUT **S04** of the EB 80 valves.

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 2	pin 2	Signal 4/20 mA
pin 3	pin 3	Power supply –
pin 4	disconnect	

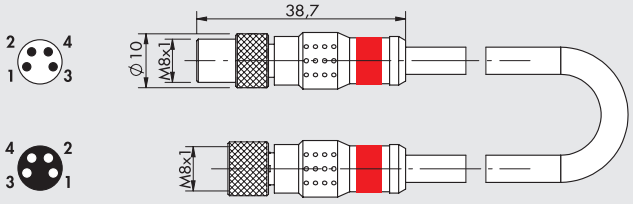

Code	Description
0240010701	M8-M, M8-F 4-pole adapter with shielded cable L = 0.3 m (**red collar**)

Note: Can be used for connecting the **0/10 VDC** analog output of the LTL-LTS position sensors to the module of analog INPUT **S04** of the EB 80 valves.

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 4	pin 2	Signal 0/10 V
pin 3	pin 3	Power supply –
pin 2	disconnect	

ADDITIONAL FIXING BRACKET TO OMEGA BAR



Code	Description	Weight [g]
02282R4001	Additional fixing bar accessory to EB 80 Omega bar	5

Individually packed

N.B.: to be used to improve the fixing to Omega bars of islands with more than 10 modules. The bracket must be positioned every 5-6 modules.

NOTES

SPARE PARTS

EB 80 BUS/SIGNAL INTERFACE OR SEAL

Code	Description
02282R1005	EB 80 BUS/Signal interface OR seal

Comes in 10-pc. packs

EB 80 GASKET BETWEEN BASE AND BUS/SIGNAL COVER



Code	Description
02282R1004	Kit of gaskets between base and BUS/Signal cover

Comes in 10-pc. packs

IDENTIFICATION PLATE KIT



Code	Description
0226107000	Identification plate kit

Comes in 16-pc. packs

CONNECTOR 12 POSITIONS



Code	Description
02282R5010	Connector 12 positions for modules S06 and S07

Comes in 4-pc. packs

NOTES

EB 80 ELECTRICAL CONNECTION - E

The job of the "Electrical Connection - E" subsystem is to power the EB 80 systems, transmit control signals for the solenoid valves, send and receive signals for the input/output management modules and control diagnostics. Versions with a multi-pole connector or fieldbus are also available.
It is worth noting that the island of solenoid valves functions equally with both systems. This means that all the valves, bases and intermediate elements can work both with parallel and serial controls (patented).
Smart electronics of all electrical connection modules, including multi-pole ones, can be used to control unexpected functions, including very interesting diagnostics.
The system can be supplied with a very wide voltage range, so much so that the EB 80 island can be controlled either at 12VDC or 24VDC (patented). Overvoltages up to 30% of the rated value, i.e. up to 31.2VDC, are admitted. The minimum voltage for solenoid pilots can be 10.8VDC, i.e. 12VDC-10%.
The body of the multi-pole version is made of metal in one piece (as the IO-Link 64 OUT version); simplified versions that can only manage solenoid valves, but that keeps the whole modularity and diagnostics of the EB 80 family.
Versions with a fieldbus instead consist of two parts: a lower part, with a single metal body separate from the bus protocol; an upper part with a technopolymer body dedicated to each specific bus protocol.

TECHNICAL DATA

Supply voltage range	VDC	12 -10% 24 +30%					
Minimum operating voltage	VDC	10.8 *					
Maximum operating voltage	VDC	31.2					
Maximum admissible voltage	VDC	32 ***					
Drive (for multi-pole)		PNP or NPN					
Solenoid rating		100% ED					
Power supply without controlled valves:							
steady rate, with multi-pole connection	W	0.1 for "Electrical connection - E" + 0.25 for each "Base - B"					
steady rate, with fieldbus connection	W	4 for "Electrical connection - E" + 0.25 for each "Base - B"					
Signal module supply power		See chapter "Signal module - S"					
Maximum operating power supply (data useful for the sizing of the power supply unit)	W	3.15 for each solenoid pilot operated simultaneously + input and output					
Maximum current admissible							
with multi-pole connection	A	6 continuous, 9 instantaneous					
with fieldbus connection	A	4 continuous, 6 instantaneous for valve supply					
		4 continuous, 6 instantaneous for bus and signal supply					
Protection		Overload and short-circuit protected solenoid pilot Output					
Diagnostics		LED signal on valve, LED light on electrical connection.					
		With multi-pole: fault signal OUT activation.					
		With field bus: software message.					
Faults signalled		Short-circuited solenoid pilot; Solenoid pilot broken or missing					
		Power supply out of range (under-voltage or over-voltage)					
		With fieldbus only, different configuration, on switching on, compared to that stored;					
		communication control between modules					
Ambient temperature	°C	-10 to + 50					
	°F	14 to 122					
Versions		Plug connectors, fieldbus with various protocols, additional island					
		25-pin connector	44-pin connector	Fieldbus	IO-link 32 IN / 32 OUT	IO-link 64 OUT	additional island
Maximum number of controllable solenoid pilots		21	38	128	32	64	128
Maximum number of controllable solenoid valves		Ditto as above, depending on the number of solenoid pilots and type of base					
Degree of protection		IP65 (with connectors connected or plugged if not used)					
Weight	g	180	180	350	350	180	320

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2.28**
*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

SYSTEM VOLTAGE DROP

Voltage drop depends on the input maximum current drawn by the system and the length of the cable for connection to the system.
In a 24VDC-powered system, with cable lengths up to 20 m, voltage drops do not need to be taken into account.
In a 12VDC-powered system, there must be enough voltage to ensure correct operation. It is necessary to take into account any voltage drops due to the number of active solenoid valves, the number of valves controlled simultaneously and the cable length.
The actual voltage supplied to the solenoid pilots must be at least 10.8VDC.
More details are given in the instruction manual (please refer to the Metal Work website).
A synthesis of the verification algorithm is shown here below.

$$\text{Maximum current: I max [A]} = \frac{\text{no. of solenoid pilots controlled simultaneously x 4 + no. of active solenoid valves x 0.5}}{\text{VDC}}$$

Voltage drop: with a 25-pole connector: ΔV = Imax [A] x Rs [0.067Ω/m] x 2L [m]
Voltage drop: with a 44-pole connector: ΔV = Imax [A] x Rs [0.067Ω/m] x L [m]
Where Rs is the cable resistance and L its length.

The voltage at the cable inlet, Vin must be at least 10.8VDC + ΔV

Example:
12VDC supply voltage, 5 m cable, 25-pin connector, 3 pilots activate while other 10 are already active:

$$\text{I max} = \frac{3x4 + 10x0.5}{12} = 1.41 \text{ A}$$

ΔV = (1.41 x 0.067 x 2x5) = 0.95VDC

This means that at the power supply voltage greater than or equal to 10.8 + 0.95 = 11.75VDC is required.
Vin =12VDC > 11.75 --> OK

KEY TO CODES

02282	E	0	25
FAMILY	**SUBSYSTEM**	**SUPPLY**	**TYPE**
02282 EB 80	**E** Electrical connection	**0** Complete	**25** 25-pin connector **44** 44-pin connector **EN** EtherNet/IP **EC** EtherCAT **PN** Profinet IO **CN** CANopen **PB** Profibus-DP **PL** Ethernet POWERLINK **IO** IO-Link 32 IN / 32 OUT **LK** IO-Link 64 OUT **CC** CC-Link IE Field Basic **AD** Additional island

NOTE

EB 80 MULTI-POLE ELECTRICAL CONNECTION - E

The job of the multi-pole version of the electrical connection subsystem is to power the EB solenoid valve islands. The system accepts to be supplied with a very wide range of voltages, to such an extent that the EB 80 island alone can be controlled at either 12VDC or 24VDC (patented).
Overvoltages up to 30% of the rated value, i.e. up to 31.2VDC, are admitted.
The minimum voltage for the solenoid pilots can be 10.8VDC, i.e. 12VDC - 10%.
The body of the multi-pole version is made of metal in a single piece.

TECHNICAL DATA

Supply voltage range	VDC	12 -10% 24 +30%	
Minimum operating voltage	VDC	10.8 *	
Maximum operating voltage	VDC	31.2	
Maximum admissible voltage	VDC	32 ***	
Drive		Configurable PNP or NPN	
Power supply without controlled valves	W	0.1 for "Electrical connection - E" + 0.25 for each "Base - B"	
Solenoid pilot power on start-up (Speed Up)	W	3 for 15 msec	
Solenoid pilot power after start-up (holding)	W	0.3	
Maximum admissible current	A	6 continuous, 9 instantaneous	
Protection		System protected against overload	
		short-circuit protected solenoid pilot Output	
Diagnostics		FAULT signal red light and Out signal on "Electrical connection - E"	
		LED light signal on valve	
Faults signalled		Short-circuited solenoid pilot; Solenoid pilot broken or missing	
		Power supply out of range (under-voltage or over-voltage)	
Ambient temperature	°C	-10 to + 50	
	°F	14 to 122	
Electrical connection		Plug connectors	
		25-pin connector	44-pin connector
Maximum number of controllable solenoid pilots **		21	38
Maximum number of controllable solenoid valves		Ditto as above, depending on the number of solenoid pilots and type of base	
Maximum number of simultaneously controllable solenoid pilots:			
at 24VDC		21	38
at 12VDC		Depending on the voltage drop – see page **B2**.28	
Maximum current at 24VDC	A	3	5
Maximum current at 12VDC	A	6	9
Degree of protection		IP65 (with connectors connected or plugged if not used)	
Weight	g	180	180

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28
** If the units are made up of bases exceeding the maximum number of controllable solenoid pilots (by mounting a dummy valve N or a bypass Y in the excess positions), operation is only possible on the islands with a positive signal (PNP), conversely (with an NPN signal), an error message is generated by the diagnostic system.
*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

COMPONENTS

① BODY: painted metal
② CONNECTOR: plug type
③ NAMEPLATE: with product code
④ LED: signal on and alarm
⑤ GRUB SCREW securing the DIN bar or bracket: zinc-plated steel

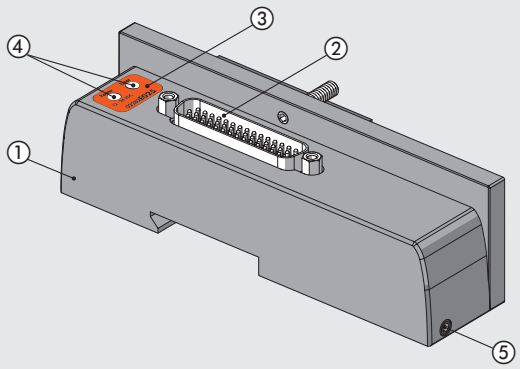

WIRING DIAGRAM

D-Sub 25-pin CONNECTOR



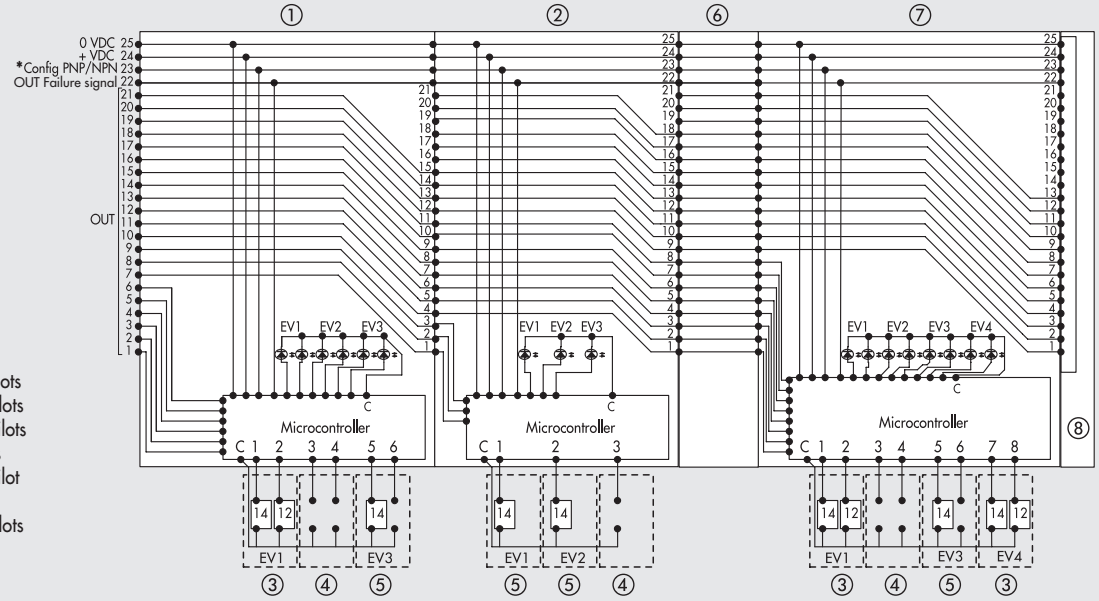

① 3-position base for 6 pilots
② 3-position base for 3 pilots
③ Valve with 2 solenoid pilots
④ Dummy valve or bypass
⑤ Valve with 1 solenoid pilot
⑥ Intermediate module
⑦ 4-position base for 8 pilots
⑧ Closed end-plate

D-Sub 44-pin CONNECTOR



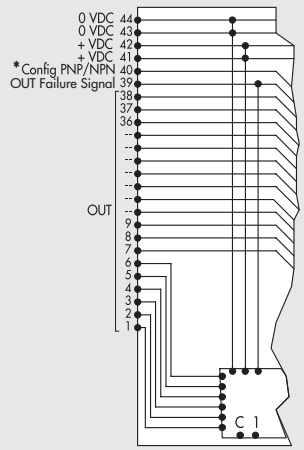

* Connect to +VDC if (Out) valves with a POSITIVE signal are to be controlled
Connect to 0VDC if (Out) valves with a NEGATIVE signal are to be controlled

DIMENSIONS - ORDERING CODES

DIMENSION OF A MULTI-POLE ELECTRICAL CONNECTION



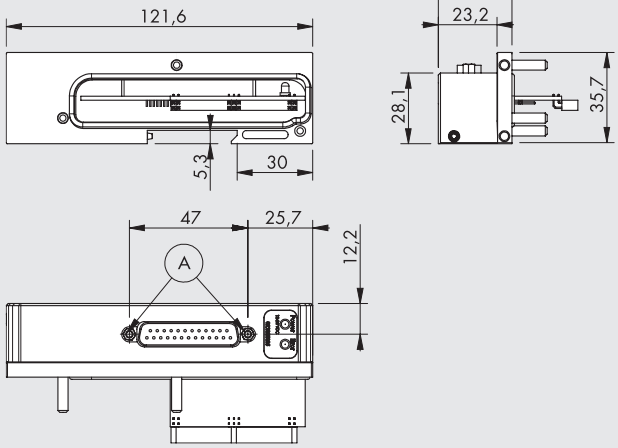

Ⓐ = Holes for D-Sub connector 25-pin or 44-pin

Code	Description	Weight [g]
02282**E025**	EB 80 25-pin electrical connection	260
02282**E044**	EB 80 44-pin electrical connection	260

ACCESSORIES

IP65 25-PIN PRE-WIRED PLUG CONNECTOR





Code	Description	Weight [g]
02269A0100	IP65 25-pin 90° connector, UL cable L = 1 m	180
02269A0250	IP65 25-pin 90° connector, UL cable L = 2.5 m	365
02269A0500	IP65 25-pin 90° connector, UL cable L = 5 m	680
02269A1000	IP65 25-pin 90° connector, UL cable L = 10 m	1220
02269A2000	IP65 25-pin 90° connector, UL cable L = 20 m	2350
02269C0100 **	IP65 25-pin 90° connector, UL H-FLEX CL6, cable L = 1 m	180
02269C0250 **	IP65 25-pin 90° connector, UL H-FLEX CL6, cable L = 2.5 m	365
02269C0500 **	IP65 25-pin 90° connector, UL H-FLEX CL6, cable L = 5 m	680
02269C1000 **	IP65 25-pin 90° connector, UL H-FLEX CL6, cable L = 10 m	1220

** Very flexible cables, class 6 according to IEC 60228

Position of electrical contact	Colour of the corresponding wire	Function
1	White	Out 1
2	Brown	Out 2
3	Green	Out 3
4	Yellow	Out 4
5	Grey	Out 5
6	Pink	Out 6
7	Blue	Out 7
8	Red	Out 8
9	Black	Out 9
10	Violet	Out 10
11	Grey + Pink ring	Out 11
12	Red + Blue ring	Out 12
13	White + Green ring	Out 13
14	Brown + Green ring	Out 14
15	White + Yellow ring	Out 15
16	Yellow + Brown ring	Out 16
17	White + Grey ring	Out 17
18	Grey + Brown ring	Out 18
19	White + Pink ring	Out 19
20	Pink + Brown ring	Out 20
21	White + Blue ring	Out 21
22	Brown + Blue ring	Fault reporting
23	White + Red ring	Config. PNP/NPN *
24	Brown + Red ring	+VDC
25	White + Black ring	0VDC

* Connect to +VDC if (Out) valves with a POSITIVE signal are to be controlled
Connect to 0VDC if (Out) valves with a NEGATIVE signal are to be controlled

IP65 44-PIN PRE-WIRED PLUG CONNECTOR





Code	Description	Weight [g]
02269B0100	IP65 44-pin 90° connector, UL cable L = 1 m	275
02269B0250	IP65 44-pin 90° connector, UL cable L = 2.5 m	630
02269B0500	IP65 44-pin 90° connector, UL cable L = 5 m	1180
02269B1000	IP65 44-pin 90° connector, UL cable L = 10 m	2210
02269B2000	IP65 44-pin 90° connector, UL cable L = 20 m	4340
02269D0100 **	IP65 44-pin 90° connector, UL H-FLEX CL6, cable L = 1 m	275
02269D0250 **	IP65 44-pin 90° connector, UL H-FLEX CL6, cable L = 2.5 m	630
02269D0500 **	IP65 44-pin 90° connector, UL H-FLEX CL6, cable L = 5 m	1180
02269D1000 **	IP65 44-pin 90° connector, UL H-FLEX CL6, cable L = 10 m	2210

** Very flexible cables, class 6 according to IEC 60228

Position of electrical contact	Colour of the corresponding wire	Function
1	White	Out 1
2	Brown	Out 2
3	Green	Out 3
4	Yellow	Out 4
5	Grey	Out 5
6	Pink	Out 6
7	Blue	Out 7
8	Red	Out 8
9	Black	Out 9
10	Violet	Out 10
11	Grey + Pink ring	Out 11
12	Red + Blue ring	Out 12
13	White + Green ring	Out 13
14	Brown + Green ring	Out 14
15	White + Yellow ring	Out 15
16	Yellow + Brown ring	Out 16
17	White + Grey ring	Out 17
18	Grey + Brown ring	Out 18
19	White + Pink ring	Out 19
20	Pink + Brown ring	Out 20
21	White + Blue ring	Out 21
22	Brown + Blue ring	Out 22
23	White + Red ring	Out 23
24	Brown + Red ring	Out 24
25	White + Black ring	Out 25
26	Brown + Black ring	Out 26
27	Grey + Green ring	Out 27
28	Yellow + Grey ring	Out 28
29	Pink + Green ring	Out 29
30	Yellow + Pink ring	Out 30
31	Green + Blue ring	Out 31
32	Yellow + Blue ring	Out 32
33	Green + Red ring	Out 33
34	Yellow + Red ring	Out 34
35	Green + Black ring	Out 35
36	Yellow + Black ring	Out 36
37	Grey + Blue ring	Out 37
38	Pink + Blue ring	Out 38
39	Grey + Red ring	Fault reporting
40	Pink + Red ring	Config. PNP/NPN *
41	Grey + Black ring	+VDC
42	Pink + Black ring	+VDC
43	Blue + Black ring	0VDC
44	Red + Black ring	0VDC

* Connect to +VDC if (Out) valves with a POSITIVE signal are to be controlled
Connect to 0VDC if (Out) valves with a NEGATIVE signal are to be controlled

SPARE PARTS

EB 80 ELECTRICAL CONNECTION INTERFACE OR SEAL



Code	Description
02282R1003	EB 80 electrical connection interface OR seal

Comes in 10-pc. packs

NOTES

EB 80 ELECTRICAL CONNECTION WITH FIELDBUS - E

The job of the electrical connection with fieldbus is to power the EB 80 systems, transmit control signals for the solenoid valves, send or receive signals for input/output management modules and control diagnostics.
The system can be supplied with a very wide voltage range, so much so that the EB 80 island can be controlled either at 12VDC or 24VDC (patented). Overvoltages up to 30% of the rated value, i.e. up to 31.2VDC, are admitted. The minimum voltage for solenoid pilots can be 10.8VDC, i.e. 12VDC - 10%.
The modules come into parts: a lower part, with a single aluminium body separate from the bus protocol; an upper part with a technopolymer body dedicated to each specific bus protocol.
The exception is the IO-Link 64 OUT version which is composed of a single aluminum element and can only manage solenoid valves (32 or 64) while maintaining all the modularity and diagnostic features of the EB 80 family.

TECHNICAL DATA

Supply voltage range	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
Power supply without controlled valves	W	4 for "Electrical connection - E" + 0.25 for each "Base - B"
Solenoid pilot power on start-up (Speed Up)	W	3 for 15 msec
Solenoid pilot power after start-up (holding)	W	0.3
Maximum admissible current	A	4 continuous, 6 instantaneous for valve supply
		4 continuous, 6 instantaneous for bus and signal supply
Protection		Overload and short-circuit protected solenoid pilot Output
Diagnostics		LED signal on valve, LED on electrical connection and software message regarding:
		short-circuited solenoid pilot; solenoid pilot with coil failure;
		voltage out of range (undervoltage and overvoltage); module communication control;
		on switching, configuration other than that stored
Maximum number of solenoid pilots		128 (32 for IO-Link 32 IN / 32 OUT; 64 for IO-Link 64 OUT)
Maximum number of simultaneously controllable solenoid pilots		38
to actuate a greater number of solenoid pilots at the same time, add "Intermediate modules - M" with electrical connection		
Maximum number of signals **		128 digital inputs, 128 digital outputs, 16 analogue inputs, 16 analogue outputs
		(32 for IO-Link 32 IN / 32 OUT)
Maximum number of nodes **		40 Bases for valves + 16 digital inputs + 16 digital outputs + 4 analogue inputs + 4 analogue outputs
Ambient temperature	°C	-10 to + 50
	°F	14 to 122
Versions		EtherNet/IP, EtherCAT, CANopen, Profinet IO, Profibus-DP, Ethernet POWERLINK, IO-Link, CC-Link IE Field Basic
Degree of protection		IP65 (with connectors connected or plugged if not used)
Weight	g	350 (180 for IO-Link 64 OUT)

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2.28**

** For topological limits (maximum lengths, etc.) see the instructions.

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

COMPONENTS

① UPPER PART BODY: technopolymer
② LOWER PART BODY: painted aluminium
③ CLOSING PLATE: painted aluminium
④ GRUB SCREW securing the DIN bar or bracket: zinc-plated steel
⑤ Fieldbus signal receive CONNECTOR
⑥ Fieldbus signal send CONNECTOR
⑦ M8 power supply CONNECTOR
⑧ COVER for access to bus address switches: technopolymer
⑨ SCREW securing the upper part to the lower part
⑩ LED light
⑪ NAMEPLATE: removable
⑫ IDENTIFICATION wording: laser etched
⑬ SCREW securing the end plate
⑭ CONNECTOR for solenoid valve base modules
⑮ CONNECTOR for input/output signal modules
⑯ GASKETS interfacing: NBR

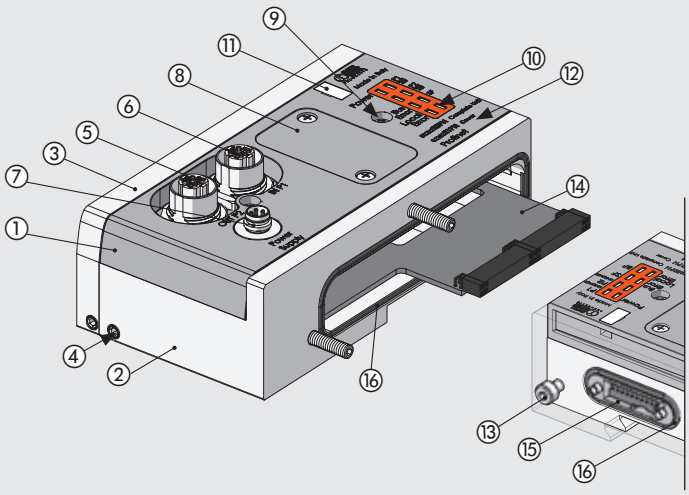

EtherNet/IP WIRING DIAGRAM

Connection to the EtherNet/IP network

IN (M12 female connector, D encoding)

1 = TD+
2 = RD+
3 = TD-
4 = RD-
Metal ring nut = Shield

OUT (M12 female connector, D encoding)

1 = TD+
2 = RD+
3 = TD-
4 = RD-
Metal ring nut = Shield



EtherNet/IP diagnostic signaling LED

EB 80 Net diagnostic signaling LED

Power Supply (M8 male connector)

Connection for node power supply and auxiliary valve power supply

1 = +24VDC bus (Brown)
2 = +24VDC valve (White)
3 = GND (Blue)
4 = GND (Black)

End plate with intermediate control

EB 80 Net (M8 female connector)

1 = CAN H
2 = CAN L
3 = Token
4 = GND

TECHNICAL DATA		
Fieldbus		10 - 100 Mbit/S - Full-duplex - Half-duplex - Supports auto-negotiation and Quick Connect
Factory settings		IP address: 192.168.192.32
Addressing		Software - DHCP hardware
Supply voltage range	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
Protection		Module protected from overload and polarity inversion. Outputs protected from overloads and short-circuits.
Connections		Fieldbus: 2 M12 F, D encoding, internal switch. Power supply: M8, 4-pin
Diagnostics **		EtherNet/IP: via local LED lights and software messages. Outputs: via local LED lights and state bytes
Bus power supply current absorption		nominal Icc 180 mA at 24VDC
Maximum number of pilots		128
Maximum number of digital inputs		128
Maximum number of digital outputs		128
Maximum number of analogue inputs		16
Maximum number of analogue outputs		16
Maximum number of inputs for temperatures		16
Data bit value		0 = non-active; 1= active
State of outputs in the absence of communication		Configurable for each output: non-active, holding of the state, setting of a preset state

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28

** Refer to the user manual for a detailed description.

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

EtherCAT WIRING DIAGRAM

Connection to the EtherCAT network

IN (M12 female connector, D encoding)

1 = TD+
2 = RD+
3 = TD-
4 = RD-
Metal ring nut = Shield

OUT (M12 female connector, D encoding)

1 = TD+
2 = RD+
3 = TD-
4 = RD-
Metal ring nut = Shield



EtherCAT diagnostic signaling LED

EB 80 Net diagnostic signaling LED

Power Supply (M8 male connector)

Connection for node power supply and auxiliary valve power supply

1 = +24VDC bus (Brown)
2 = +24VDC valve (White)
3 = GND (Blue)
4 = GND (Black)

End plate with intermediate control

EB 80 Net (M8 female connector)

1 = CAN H
2 = CAN L
3 = Token
4 = GND

TECHNICAL DATA		
Fieldbus		100 Mbit/S - Full-duplex - Supports auto-negotiation
Factory settings		module denomination: EB80series
Addressing		Automatic from the master depending on its topological position. Fixes with the second slave address function
Supply voltage range	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
Protection		Module protected from overload and polarity inversion. outputs protected from overloads and short-circuits.
Connections		Fieldbus: 2 M12 F D encoding, internal switch. Power supply: M8, 4-PIN
Diagnostics **		EtherCAT: via local LED lights and software messages. Outputs: via local LED lights and state bytes
Bus power supply current absorption		nominal Icc 180 mA at 24VDC
Maximum number of pilots		128
Maximum number of digital inputs		128
Maximum number of digital outputs		128
Maximum number of analogue inputs		16
Maximum number of analogue outputs		16
Maximum number of inputs for temperatures		16
Data bit value		0 = non-active; 1= active
State of outputs in the absence of communication		Configurable for each output: non-active, holding of the state, setting of a preset state

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28

** Refer to the user manual for a detailed description.

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

CANopen WIRING DIAGRAM

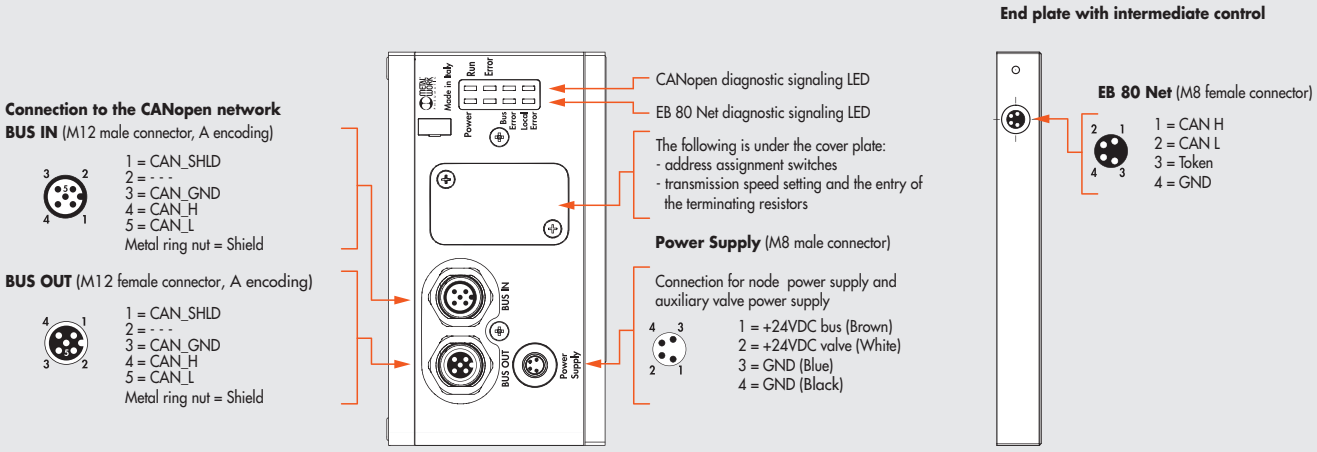

TECHNICAL DATA		
Fieldbus		Complying with CiA DS401 specification
Factory settings		Module denomination: EB80series - Address 5
Addressing		Hardware via DIP SWITCH
Supply voltage range	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
Protection		Module protected from overload and polarity inversion. Outputs protected from overloads and short-circuits.
Connections		Fieldbus: BUS IN M12 Male, 5 poles, A encoding - BUS OUT M12 Female, 5 poles, encoding A - Power supply: M8, 4-PIN
Diagnostics**		CANopen: via local LED lights and software messages. Outputs: via local LED lights and state bytes
Bus power supply current absorption		nominal Icc 180 mA at 24VDC
Maximum number of pilots		128
Maximum number of digital inputs		128
Maximum number of digital outputs		128
Maximum number of analogue inputs		16
Maximum number of analogue outputs		16
Maximum number of inputs for temperatures		16
Data bit value		0 = non-active; 1= active
State of outputs in the absence of communication		Configurable for each output: non-active, holding of the state, setting of a preset state

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28

** Refer to the user manual for a detailed description.

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

Profinet IO WIRING DIAGRAM

Connection to the Profinet IO network

P1 (M12 female connector, D encoding)

1 = TD+
2 = RD+
3 = TD-
4 = RD-
Metal ring nut = Shield

P2 (M12 female connector, D encoding)

1 = TD+
2 = RD+
3 = TD-
4 = RD-
Metal ring nut = Shield



Profinet IO diagnostic signaling LED

EB 80 Net diagnostic signaling LED

Power Supply (M8 male connector)

Connection for node power supply and auxiliary valve power supply

1 = +24VDC bus (Brown)
2 = +24VDC valve (White)
3 = GND (Blue)
4 = GND (Black)

End plate with intermediate control

EB 80 Net (M8 female connector)

1 = CAN H
2 = CAN L
3 = Token
4 = GND

TECHNICAL DATA		
Fieldbus		100 Mbit/s - Full-duplex – Supports Fast Start Up, RT communication, Shared Device, Identification & Maintenance 1-4
Factory settings		Module denomination: EB80series – IP address: 0.0.0.0
Addressing		DCP Software
Supply voltage range	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
Protection		Module protected from overload and polarity inversion. Outputs protected from overloads and short-circuits.
Connections		Fieldbus: 2 M12 Female, D encoding, internal switch. Power supply: M8, 4-PIN
Diagnostics **		Profinet IO: via local LED lights and software messages. Outputs: via local LED lights and state bytes
Bus power supply current absorption		nominal Icc 180 mA at 24VDC
Maximum number of pilots		128
Maximum number of digital inputs		128
Maximum number of digital outputs		128
Maximum number of analogue inputs		16
Maximum number of analogue outputs		16
Maximum number of inputs for temperatures		16
Data bit value		0 = non-active; 1= active
State of outputs in the absence of communication		Configurable for each output: non-active, holding of the state, setting of a preset state

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28

** Refer to the user manual for a detailed description.

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

Profibus-DP WIRING DIAGRAM

Connection to the Profibus-DP network

BUS IN (M12 Male Connector, B encoding)

1 = 5 VDC*
2 = A
3 = 0 VDC*
4 = B
5 = Shield

BUS OUT (M12 female connector, B encoding)

1 = 5 VDC*
2 = A
3 = 0 VDC*
4 = B
5 = Shield

* DO NOT CONNECT PIN 1 and PIN 3:
Only the power supply of external terminating resistors must be used.

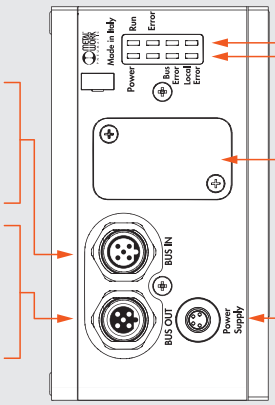

Profibus-DP diagnostic signaling LED

EB 80 Net diagnostic signaling LED

The following is under the cover plate:
- address assignment switches
- the entry of the terminating resistors

Power Supply (M8 male connector)

Connection for node power supply and auxiliary valve power supply

1 = +24VDC bus (Brown)
2 = +24VDC valve (White)
3 = GND (Blue)
4 = GND (Black)

End plate with intermediate control

EB 80 Net (M8 female connector)

1 = CAN H
2 = CAN L
3 = Token
4 = GND

TECHNICAL DATA		
Fieldbus		Complying with Profibus-DP DIN E 1924 specification
Factory settings		Module denomination: EB80series - Address 5
Addressing		Hardware via ROTARY SWITCH
Supply voltage range	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
Protection		Module protected from overload and polarity inversion. Outputs protected from overloads and short-circuits.
Connections		Fieldbus: BUS IN M12 Male, 5 poles, B encoding - BUS OUT M12 Female, 5 poles, B encoding - Power supply: M8, 4-PIN
Diagnostics **		Profibus-DP: via local LED lights and software messages. Outputs: via local LED lights and state bytes
Bus power supply current absorption		nominal Icc 180 mA at 24VDC
Maximum number of pilots		128
Maximum number of digital inputs		128
Maximum number of digital outputs		128
Maximum number of analogue inputs		16
Maximum number of analogue outputs		16
Maximum number of inputs for temperatures		16
Data bit value		0 = non-active; 1= active
State of outputs in the absence of communication		Configurable for each output: non-active, holding of the state, setting of a preset state

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2.28**

** Refer to the user manual for a detailed description.

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

Ethernet POWERLINK WIRING DIAGRAM

Connection to the Ethernet POWERLINK network

P1 (M12 female connector, D encoding)

1 = TD+
2 = RD+
3 = TD-
4 = RD-
Metal ring nut = Shield

P2 (M12 female connector, D encoding)

1 = TD+
2 = RD+
3 = TD-
4 = RD-
Metal ring nut = Shield



Ethernet POWERLINK diagnostic signaling LED

EB 80 Net diagnostic signaling LED

Power Supply (M8 male connector)

Connection for node power supply and auxiliary valve power supply

1 = +24VDC bus (Brown)
2 = +24VDC valve (White)
3 = GND (Blue)
4 = GND (Black)

End plate with intermediate control

EB 80 Net (M8 female connector)

1 = CAN H
2 = CAN L
3 = Token
4 = GND

TECHNICAL DATA		
Fieldbus		100 Mbit/S - Half-duplex - Supports auto-negotiation
Factory settings		module denomination: EB80series address number 2
Addressing		Hardware by rotary switch
Supply voltage range	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
Protection		Module protected from overload and polarity inversion. Outputs protected from overloads and short-circuits.
Connections		Fieldbus: 2 M12 Female, D encoding, internal switch. Power supply: M8, 4-PIN
Diagnostics **		Ethernet POWERLINK: via local LED lights and software messages. Outputs: via local LED lights and state bytes
Bus power supply current absorption		nominal Icc 180 mA at 24VDC
Maximum number of pilots		128
Maximum number of digital inputs		128
Maximum number of digital outputs		128
Maximum number of analogue inputs		16
Maximum number of analogue outputs		16
Maximum number of inputs for temperatures		16
Data bit value		0 = non-active; 1= active
State of outputs in the absence of communication		Configurable for each output: non-active, holding of the state, setting of a preset state

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28

** Refer to the user manual for a detailed description.

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

IO-Link 32 IN / 32 OUT WIRING DIAGRAM

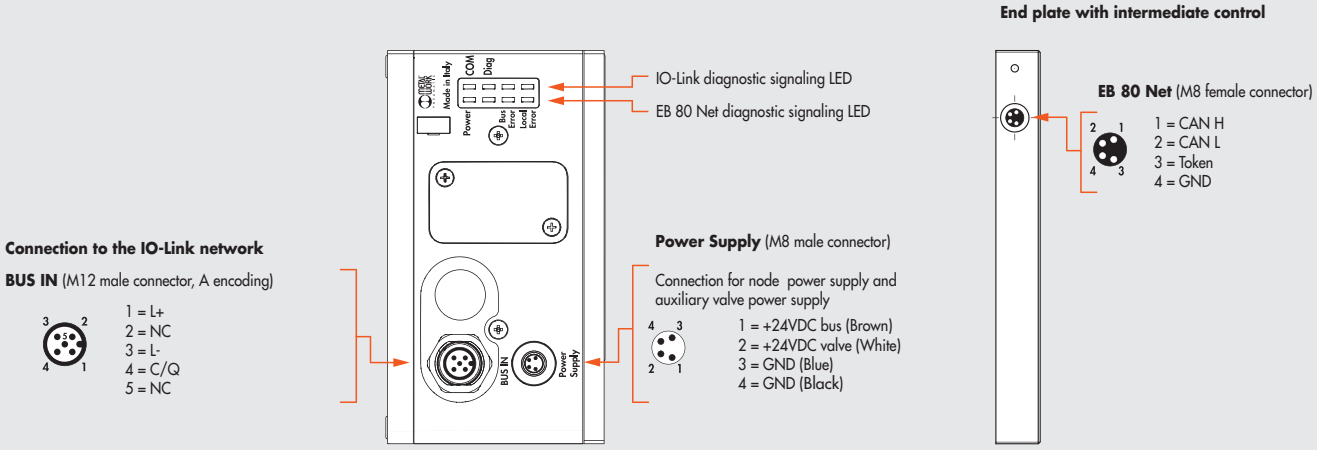

TECHNICAL DATA		
Fieldbus		IO-Link version 1.1
Communication speed	Kbps	230.4 (COM3)
Vendor ID / Device ID		1046 (hex 0x0416) / 32 (hex 0x000020)
Minimum cycle time	ms	2.8
Process data length		5 byte of Input / 4 byte of Output
Supply voltage range (M8 connector)	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
IO-Link power supply (L+L - Bus IN connector)	VDC	min 20, max 30
Protection		Module protected from overload and polarity inversion. Outputs protected from overloads and short-circuits.
Connections		Fieldbus: M12 male, A-coded - port class A. Power supply: M8, 4-PIN
Diagnostics **		IO-Link: via local LED lights and software messages. Outputs: via local LED lights and state bytes
Power supply current absorption		See IO-Link instruction manual
Maximum number of pilots		32
Maximum number of digital inputs		32
Data bit value		0 = non-active; 1= active
State of outputs in the absence of communication		Configurable for each output: non-active, holding of the state, setting of a preset state

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2.**28

** Refer to the user manual for a detailed description.

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

IO-Link 64 OUT WIRING DIAGRAM

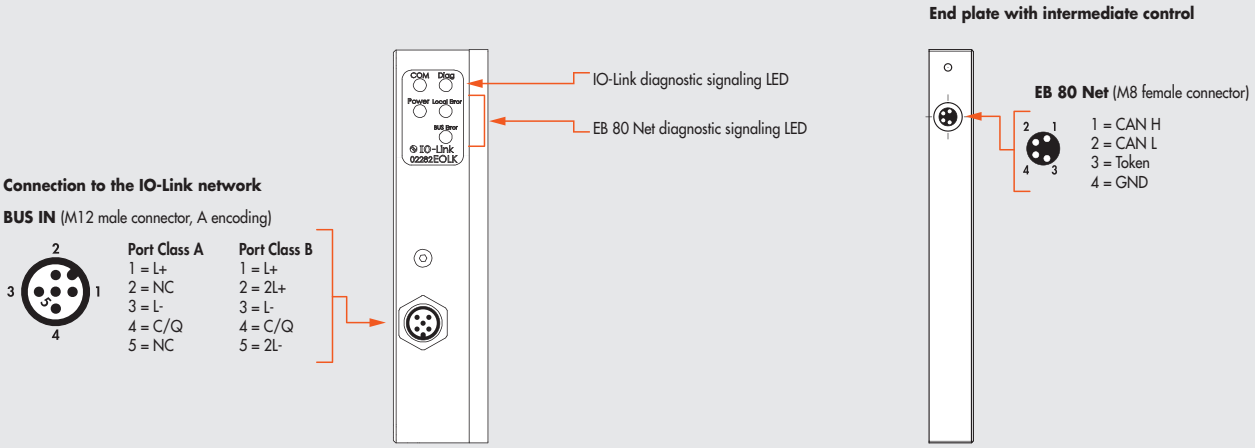

TECHNICAL DATA		
Fieldbus		IO-Link version 1.1
Communication speed	Kbps	230.4 (COM3)
Vendor ID / Device ID		1046 (hex 0x0416) / 64 (hex 0x000040)
Minimum cycle time	ms	2.8
Process data length		1 byte of Input / 8 byte of Output
Valves supply voltage range	VDC	12 -10% 24 +30%
Minimum valves operating voltage	VDC	10.8 *
Maximum valves operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
IO-Link power supply (L+L - Bus IN connector)	VDC	min 18, max 30
Protection		Module protected from overload and polarity inversion. Outputs protected from overloads and short-circuits.
Connections		Fieldbus: M12 male, A-coded - port class A - port class B
Diagnostics**		IO-Link: via local LED lights and software messages. Outputs: via local LED lights and state bytes
Power supply current absorption		See IO-Link 64 OUT instruction manual
Maximum number of pilots		64
Data bit value		0 = non-active; 1= active
State of outputs in the absence of communication		Configurable for each output: non-active, holding of the state, setting of a preset state

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28

** Refer to the user manual for a detailed description.

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

N.B.: The EB 80 island with IO-Link 64 OUT can be connected with an EB 80 island with Additional electrical control, but the latter cannot manage IN or OUT modules.

CC-Link IE Field Basic WIRING DIAGRAM

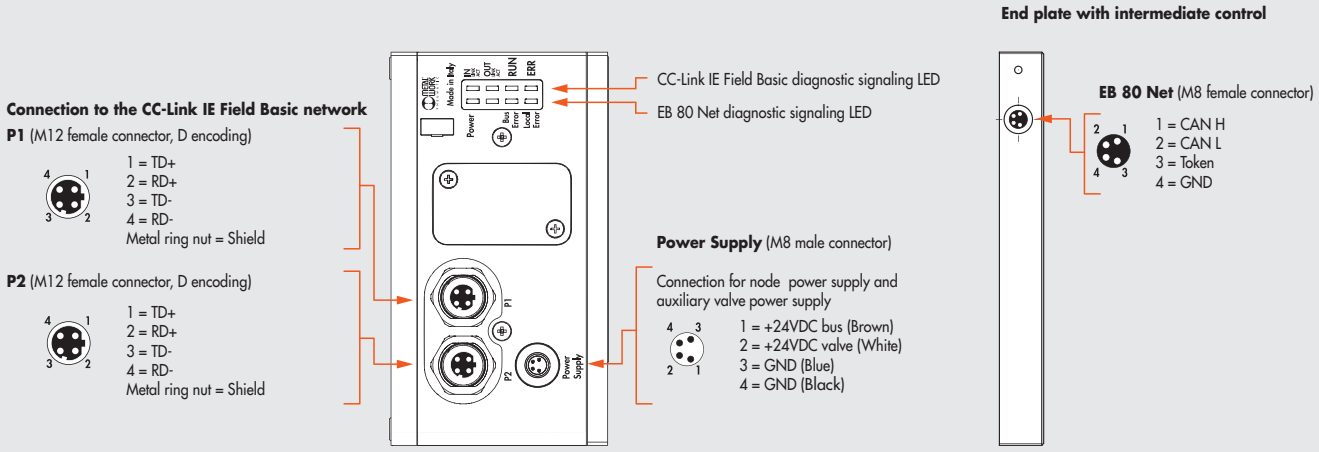

TECHNICAL DATA		
Fieldbus		100 Mbit/s Number of occupied stations: from 1 to 4
Factory settings		IP address: 192.168.3.32 Subnet Mask: 255.255.255.0
Addressing		Software
Supply voltage range	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
Protection		Module protected from overload and polarity inversion. Outputs protected from overloads and short-circuits.
Connections		Fieldbus: 2 M12 Female, D encoding, internal switch. Power supply: M8, 4-PIN
Diagnostics **		CC-Link IE Field Basic: via local LED lights and software messages. Outputs: via local LED lights and state bytes
Bus power supply current absorption		nominal Icc 180 mA at 24VDC
Maximum number of pilots		128
Maximum number of digital inputs		128
Maximum number of digital outputs		128
Maximum number of analogue inputs		16
Maximum number of analogue outputs		16
Maximum number of inputs for temperatures		16
Data bit value		0 = non-active; 1= active
State of outputs in the absence of communication		Configurable for each output: non-active, holding of the state, setting of a preset state

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28

** Refer to the user manual for a detailed description.

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

DIMENSIONS - ORDERING CODES

ELECTRICAL CONNECTION FIELDBUS DIMENSION

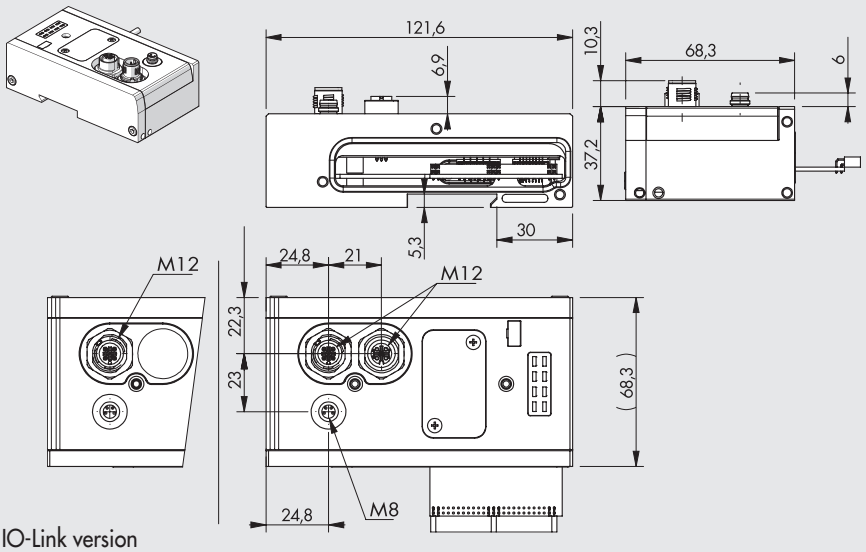

IO-Link version

Code	Description	Weight [g]
02282**E0EN**	EB 80 Electrical connection EtherNet/IP	600
02282**E0EC**	EB 80 Electrical connection EtherCAT	600
02282**E0PN**	EB 80 Electrical connection Profinet IO	600
02282**E0CN**	EB 80 Electrical connection CANopen	600
02282**E0PB**	EB 80 Electrical connection Profibus-DP	600
02282**E0PL**	EB 80 Electrical connection Ethernet POWERLINK	600
02282**E0IO**	EB 80 Electrical connection IO-Link 32 IN / 32 OUT	580
02282**E0LK**	EB 80 Electrical connection IO-Link 64 OUT	190
02282**E0CC**	EB 80 Electrical connection CC-Link IE Field Basic	580

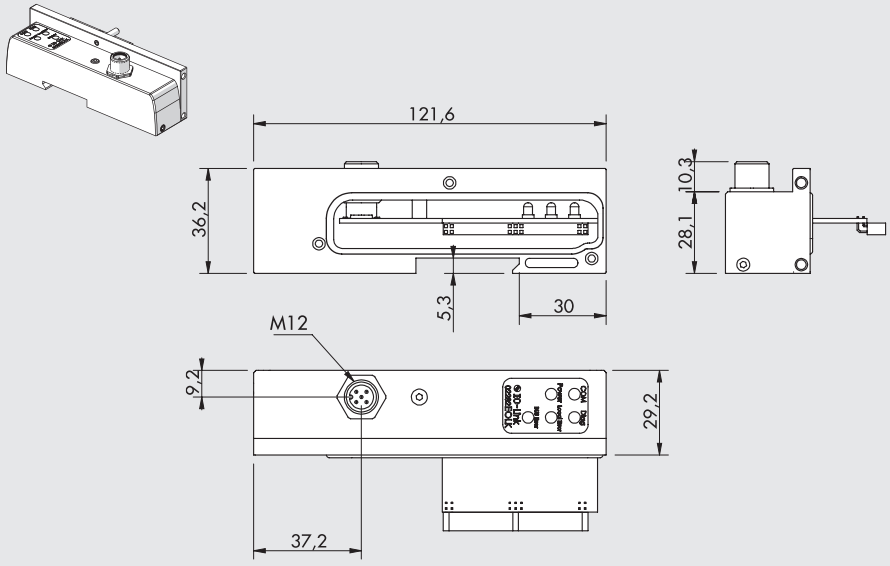

IO-Link 64 Output version

NOTES

ACCESSORIES

M12 FEMALE CONNECTOR FOR BUS-IN, A ENCODING



Code	Description
0240009055	M12 5-pin female connector, encoding A

Note: Can be used for Bus CANopen and IO-Link

M12 MALE CONNECTOR FOR BUS-IN, A ENCODING



Code	Description
0240009038	M12 5-pin male connector, encoding A

Note: Can be used for Bus CANopen

M12 FEMALE CONNECTOR FOR BUS-IN, B ENCODING



Code	Description
0240009036	M12 5-pin female connector, encoding B

Note: Can be used for Profibus-DP

M12 MALE CONNECTOR FOR BUS-IN, B ENCODING



Code	Description
0240009035	M12 5-pin male connector, encoding B

Note: Can be used for Profibus-DP

M12 BUS CONNECTOR, D ENCODING



Code	Description
0240005051	M12 4-pin BUS connector, D-coded

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP, Ethernet POWERLINK, CC-Link IE Field Basic)

STRAIGHT CONNECTOR FOR M12-M12 BUS, D-CODED



Code	Description
0240005103	Straight connector for M12-M12 4-pin BUS, D-coded, with 3 m cable
0240005105	Straight connector for M12-M12 4-pin BUS, D-coded, with 5 m cable
0240005110	Straight connector for M12-M12 4-pin BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP, Ethernet POWERLINK, CC-Link IE Field Basic)

STRAIGHT CONNECTOR FOR M12 BUS, D-CODED

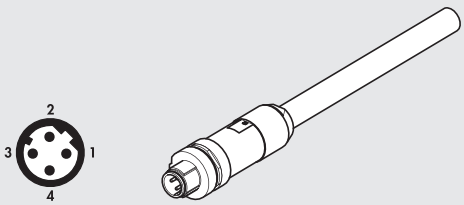

Pin	Cable color
1	Yellow
2	White
3	Red
4	Blue

Code	Description
0240005093	Straight connector for M12 4-pin BUS, D-coded, with 3 m cable
0240005095	Straight connector for M12 4-pin BUS, D-coded, with 5 m cable
0240005100	Straight connector for M12 4-pin BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP, Ethernet POWERLINK, CC-Link IE Field Basic)

STRAIGHT CONNECTOR FOR M12, A-CODED

Code	Description
W0970513001	5-PIN M12x1 straight connector

Note: Can be used for IO-Link

STRAIGHT CONNECTOR WITH WIRE FOR M12, A-CODED

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray

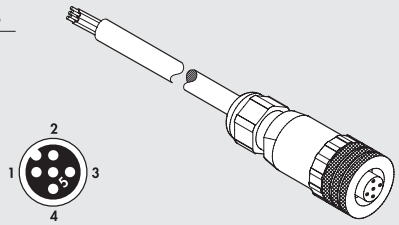

Code	Description
W0970513002	5-PIN M12x1 straight connector with wire L = 5 m

Note: Can be used for IO-Link

90° CONNECTOR FOR M12, A-CODED

Code	Description
W0970513003	M12x1 5-PIN 90° connector

Note: Can be used for IO-Link

90° CONNECTOR WITH WIRE FOR M12, A-CODED

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray



Code	Description
W0970513004	M12x1 5-PIN 90° connector with wire L = 5 m

Note: Can be used for IO-Link

T-CONNECTOR M12 A-CODED / M8 MALE FOR AUXILIARY POWER

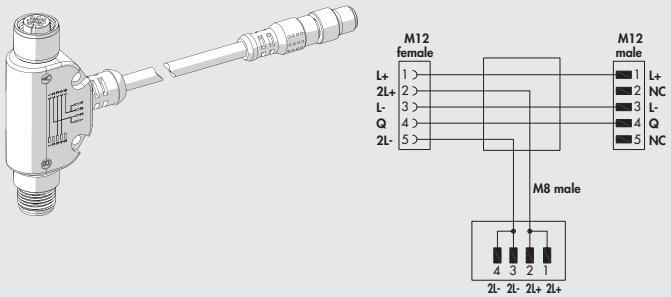

Code	Description
0240009070	T - connector for auxiliary power

Note: Can be used for IO-Link 64 OUT

CABLE FOR BUS

Code	Description
0240005220*	Cable for BUS 20 m
0240005250	Cable for BUS CANopen BUS 20 m

* Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP, Ethernet POWERLINK, CC-Link IE Field Basic)

RJ45 CONNECTOR



Code	Description
0240005050	RJ45 connector with 4 contacts according to IEC 60603-7

M8 CONNECTOR FOR POWER SUPPLY

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black



Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m
0240009P60 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 3 m
0240009P37 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 5 m
0240009P58 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 10 m
0240009P59 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 15 m

* Very flexible cables, class 6 according to IEC 60228

M8-M12 PLUG

Code	Description
0240009039	Plug for M8 connector
0240009040	Plug for M12 connector

SPARE PARTS

EB 80 ELECTRICAL CONNECTION INTERFACE OR-SEAL



Code	Description
02282R1003	EB 80 electrical connection interface or-seal

Comes in 10-pc. packs

GASKET BETWEEN EB 80 BASE AND COVER BUS/SIGNALS



Code	Description
02282R1004	Kit of gaskets between EB 80 base and cover bus/signals

Comes in 10-pc. packs

EB 80 BUS/SIGNAL INTERFACE OR-SEAL

Code	Description
02282R1005	EB 80 BUS/Signal interface OR-seal

Comes in 10-pc. packs

EB 80 ADDITIONAL ELECTRICAL CONNECTION - E

The additional electrical connection can be used to connect different EB 80 systems to a single bus node. To do this, the main island is equipped with a C3-type closed end-plate, equipped with an M8 connector.
An M8-M8 connected cable relays the signal to the additional system.
The system can be supplied with a very wide range of voltages, so much so that the EB 80 island can be controlled at either 12VDC or 24VDC (patented). Overvoltages up to 30% of the nominal value are admitted, i.e. up to 31.2VDC. The minimum voltage for the solenoid pilots can be 10.8VDC, i.e. 12VDC-10%. The modules consist of two parts: a lower part with a single aluminium body similar to that used for fieldbuses; an upper part with a technopolymer body specific for the additional model.

TECHNICAL DATA

Supply voltage range	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
Power supply without controlled valves	W	4 for "Electrical connection - E" + 0.25 for each "Base - B"
Solenoid pilot power on start-up (Speed Up)	W	3 for 15 msec
Solenoid pilot power after start-up (holding)	W	0.3
Maximum admissible current	A	4 continuous, 6 instantaneous for valve supply
		4 continuous, 6 instantaneous for bus and signal supply
Protection		Overload and short-circuit protected solenoid pilot Output
Diagnostics		LED signal on valve, LED on electrical connection and software message regarding:
		short-circuited solenoid pilot; solenoid pilot with coil failure;
		voltage out of range (undervoltage and overvoltage);
		module communication control; on switching, configuration other than that stored.
Maximum number of solenoid pilots		128 **
Maximum number of simultaneously controllable solenoid pilots		38
(to actuate a greater number of pilots at the same time, add "Intermediate modules - M" with "Electrical connection - E")		
Maximum number of signals **		128 digital inputs, 128 digital outputs, 16 analogue inputs, 16 analogue outputs
Maximum number of nodes **		40 Bases for valves + 16 Digital inputs + 16 Digital outputs + 4 Analogue inputs + 4 Analogue outputs
Maximum length of the connection cables ****	m	40
Ambient temperature	°C	-10 to + 50
	°F	14 to 122
Degree of protection		IP65 (with connectors connected or plugged if not used)
Weight	g	320

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28
** Total numbers, by summing up those of the fieldbus connection and all additional connections.
*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**
**** Sum of the lengths of the cables between the fieldbus electrical connection and any additional electrical connections.

COMPONENTS

① UPPER PART BODY: technopolymer
② LOWER PART BODY: painted aluminium
③ END PLATE: painted aluminium
④ GRUB SCREW securing the DIN bar or bracket: zinc-plated steel
⑤ CONNECTOR for connection to the valve island (main one)
⑥ GASKETS interfacing: NBR
⑦ M8 power supply CONNECTOR
⑧ COVER for access to bus address switches: technopolymer
⑨ SCREW securing the upper part to the lower part
⑩ LED light
⑪ NAMEPLATE: removable
⑫ IDENTIFICATION wording: laser etched
⑬ SCREW securing the end plate
⑭ CONNECTOR for solenoid valve base modules
⑮ CONNECTOR for Input/Output signal modules

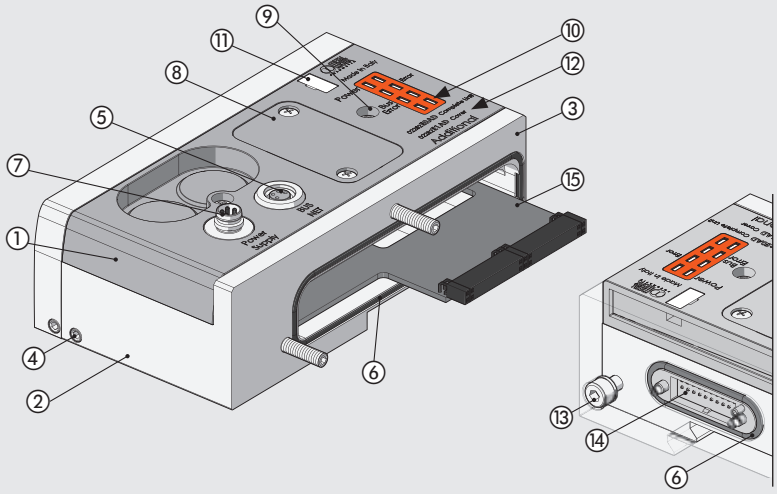

WIRING DIAGRAM

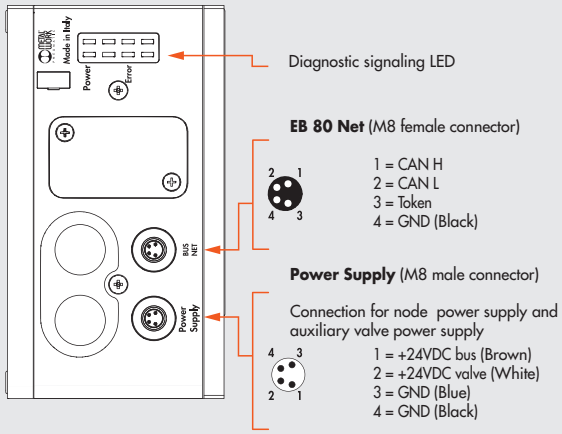

DIMENSIONS - ORDERING CODES

DIMENSION OF ADDITIONAL ELECTRICAL CONNECTION

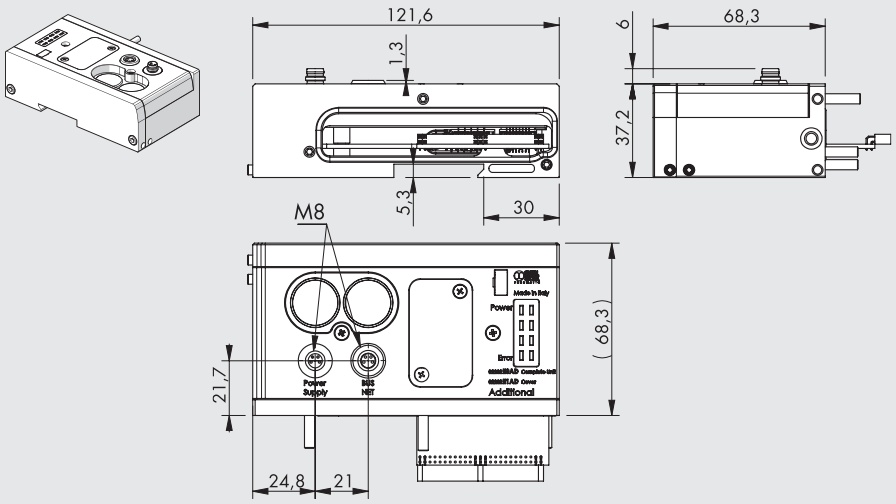

Code	Description	Weight [g]
02282**E0AD**	Additional electrical connection EB 80	570

ACCESSORIES

M8 CONNECTOR FOR POWER SUPPLY

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black



Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m
0240009P60 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 3 m
0240009P37 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 5 m
0240009P58 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 10 m
0240009P59 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 15 m

* Very flexible cables, class 6 according to IEC 60228

M8 PLUG

Code	Description
0240009039	Plug for M8 connector

M8 CONNECTOR WITH CABLE FOR CONNECTION BETWEEN EB 80 ISLANDS

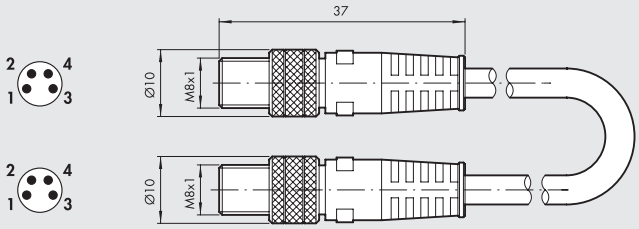

Code	Description	Weight [g]
0240010201	M8-M8 4-pin male straight connector with shielded cable L = 1 m	45
0240010205	M8-M8 4-pin male straight connector with shielded cable L = 5 m	185
0240010210	M8-M8 4-pin male straight connector with shielded cable L = 10 m	330
0240010215	M8-M8 4-pin male straight connector with shielded cable L = 15 m	475
0240010220	M8-M8 4-pin male straight connector with shielded cable L = 20 m	620
0240010405 *	M8-M8 4-pin male straight connector with shielded cable H-FLEX CL6, L = 5 m	185
0240010410 *	M8-M8 4-pin male straight connector with shielded cable H-FLEX CL6, L = 10 m	330
0240010415 *	M8-M8 4-pin male straight connector with shielded cable H-FLEX CL6, L = 15 m	475
0240010420 *	M8-M8 4-pin male straight connector with shielded cable H-FLEX CL6, L = 20 m	620

* Very flexible cables, class 6 according to IEC 60228

N.B.: For correct operation of the entire EB 80 system, use M8-M8 pre-wired, twisted and shielded cables only.

M8 ADAPTER CABLE

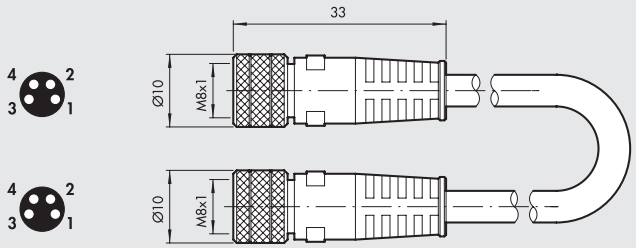

Code	Description	Weight [g]
0240010350	M8-M8 4-pin female adapter cable with shielded cable L = 200 mm	16

N.B.: Cannot be used with cables for mobile laying (H-FLEX CL6)

SPARE PARTS

EB 80 ELECTRICAL CONNECTION INTERFACE OR-SEAL



Code	Description
02282R1003	EB 80 electrical connection interface OR-seal

Comes in 10-pc. packs

GASKET BETWEEN EB 80 BASE AND COVER BUS/SIGNALS



Code	Description
02282R1004	Kit of gaskets between EB 80 base and cover bus/signals

Comes in 10-pc. packs

EB 80 BUS/SIGNAL INTERFACE OR-SEAL

Code	Description
02282R1005	EB 80 BUS/Signal interface OR-seal

Comes in 10-pc. packs

EB 80 COMPRESSED-AIR SUPPLY - P

The Compressed air supply - P modules power the valve base and collect the air coming from the relief ports. Various versions are available, with pipe fittings of different diameter. The product code also identifies whether the module is set to supply the pilots without servo-assistance, in which case you only need to connect compressed air to the supply fitting; or with servo-assistance (recommended), in which case you only need to connect the compressed air to the Ø 4 pilot fitting. Switching from servo to non-servo operation or vice versa is possible, however, by changing the position of the orange gasket situated between the lower and the upper part of the module; the configuration is identified by a tab protruding at the back.
Relief ports 3 and 5 can be either connected using a silencer or conveyed via a fitting.
A version with separate ports 3 and 5 is also available. This feature is useful in versions with pilot servo-assistance to power the valves from ports 3 and 5, at different pressures from vacuum to 8 bar at different pressures from vacuum to 8 bar, including the version to configure a fieldbus island with signal modules only, without the pneumatic part.

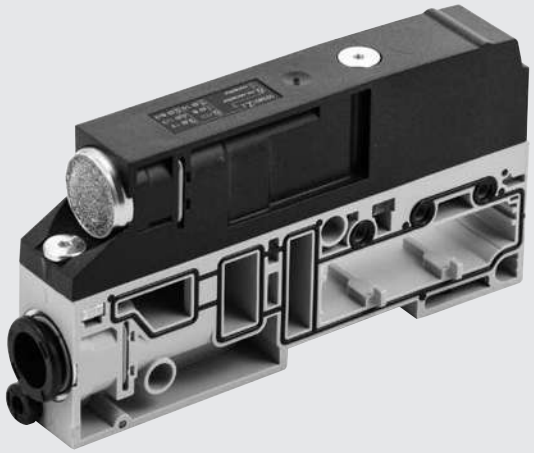

TECHNICAL DATA

Operating pressure					
Non-servo versions and solenoid pilot servo pressure		**5/2 and 5/3**		**2/2 and 3/2**	
	bar	3 to 8		min. (see graph on page **B2**.57) / max. 8	
	MPa	0.3 to 0.8		min. (see graph on page **B2**.57) / max. 0.8	
	psi	43 to 116		min. (see graph on page **B2**.57) / max. 116	
Assisted valves	bar	Vacuum to 10			
	MPa	Vacuum to 1			
	psi	Vacuum to 145			
Ambient temperature	°C	-10 to + 50			
	°F	14 to 122			
Flow rate at 6.3 bar ΔP 1 bar		**Ø 8 (5/16")**	**Ø 10**	**Ø 12**	**Ø 1/2"**
Feeding (port 1)	Nl/min	1800	2800	3500	3500
Exhaust with fitting (ports 3 and 5)	Nl/min	2000	3200	4400	4400
Separate exhausts Ø 8 (N.B.: Pmax 8 bar)	Nl/min	1800 x 2	-	-	-
Flow rate at 6.3 bar free exhaust					
Exhaust with fitting (ports 3 and 5)	Nl/min	2700	3900	6100	6100
Silenced exhaust	Nl/min	3600			
Exhaust with fitting Ø12 and silencer W0970530086	Nl/min	6000			
Separate exhausts Ø 8 (N.B.: Pmax 8 bar)	Nl/min	2700 x 2	-	-	-
Fluid		Unlubricated air			
Versions		Silenced relief or conveyed relief, fittings for pipes Ø 8, 10, 12, 1/2"			
Degree of protection		IP65			
Weight	g	140	130	125	125

COMPONENTS

① LOWER PART BODY: technopolymer
② UPPER PART BODY: technopolymer
③ SCREWS securing the island bodies: zinc-plated steel (Tightening torque: 1.2 Nm)
④ TAG: with laser etched wording - technopolymer
⑤ RELIEF: silencer or pipe fitting
⑥ POWER SUPPLY: pipe fitting
⑦ PILOTING (X): Ø 4 pipe fitting
⑧ INDICATOR: indicaes whether pilot power supply is separate or not
⑨ PILOT RELIEF: HDPE silencer
⑩ PICTOGRAM: showing compressed air system layout
⑪ TIE ROD: zinc-plated steel
⑫ GASKET: NBR
⑬ THREADED PLATE: zinc-plated steel
⑭ CARTRIDGE FIXING CLIP: stainless steel

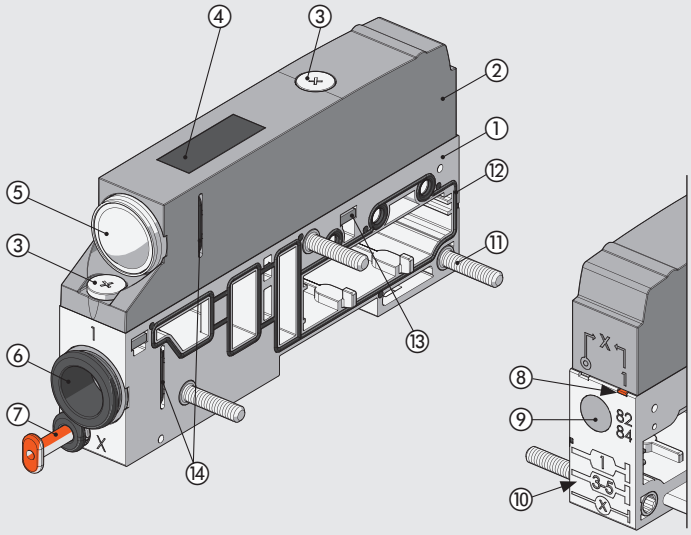

DIMENSIONS - ORDERING CODES

COMPRESSED AIR SUPPLY - SILENCED RELIEF

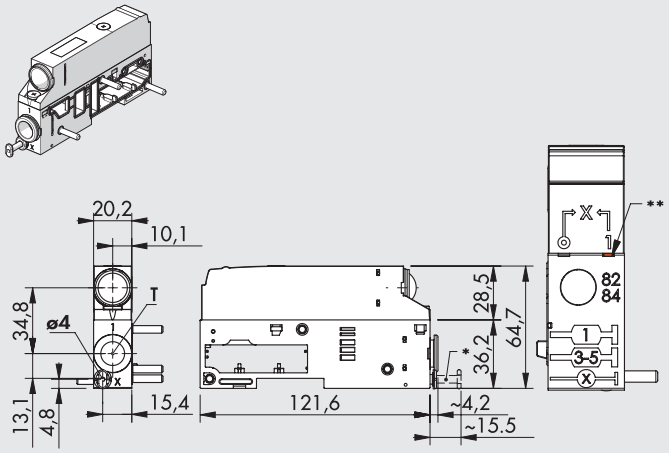

* R9 plug for NON-SERVO-ASSISTED versions
** Orange tab in SERVO-ASSISTED (◎) or NON-SERVO-ASSISTED (1) position

Symbol	T - Pipe fitting	Code	Weight [g]
Servo-assisted	Ø 8 (5/16")	02282**P1XZ00**	140
	Ø 10	02282**P2XZ00**	140
	Ø 12	02282**P3XZ00**	130
	Ø 1/2"	02282**P5XZ00**	130
Non-servo-assisted	Ø 8 (5/16")	02282**P11Z00**	140
	Ø 10	02282**P21Z00**	140
	Ø 12	02282**P31Z00**	130
	Ø 1/2"	02282**P51Z00**	130





COMPRESSED AIR SUPPLY - CONVEYED RELIEF

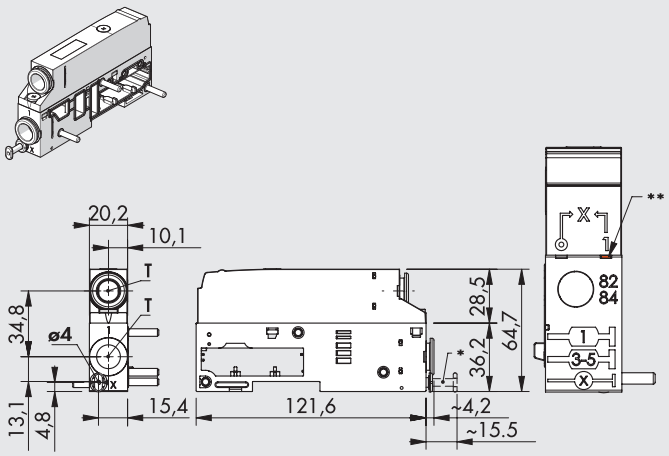

* R9 plug for NON-SERVO-ASSISTED versions
** Orange tab in SERVO-ASSISTED (◎) or NON-SERVO-ASSISTED (1) position

Symbol	T - Pipe fitting	Code	Weight [g]
Servo-assisted	Ø 8 (5/16")	02282**P1XZ10**	140
	Ø 10	02282**P2XZ20**	140
	Ø 12	02282**P3XZ30**	130
	Ø 1/2"	02282**P5XZ50**	130
Non-servo-assisted	Ø 8 (5/16")	02282**P11Z10**	140
	Ø 10	02282**P21Z20**	140
	Ø 12	02282**P31Z30**	130
	Ø 1/2"	02282**P51Z50**	130





COMPRESSED AIR SUPPLY - SEPARATE RELIEFS

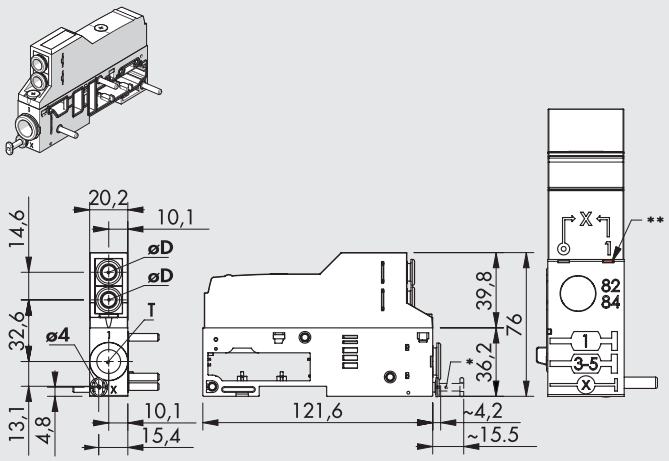

* R9 plug for NON-SERVO-ASSISTED versions
** Orange tab in SERVO-ASSISTED (◎) or NON-SERVO-ASSISTED (1) position

Symbol	T - Pipe fitting	Code	Weight [g]
Servo-assisted	Ø 8 (5/16")	02282**P1XZ_0**	150
	Ø 10	02282**P2XZ_0**	150
	Ø 12	02282**P3XZ_0**	140
	Ø 1/2"	02282**P5XZ_0**	140
Non-servo-assisted	Ø 8 (5/16")	02282**P11Z_0**	150
	Ø 10	02282**P21Z_0**	150
	Ø 12	02282**P31Z_0**	140
	Ø 1/2"	02282**P51Z_0**	140





_ = To complete the code enter:
6: øD = 8 mm; **7**: øD = 6 mm; **8**: øD = 4 mm

N.B.: Maximum pressure in the ports 3 and 5: 8 bar

MODULE FOR ELECTRIC VERSION ONLY

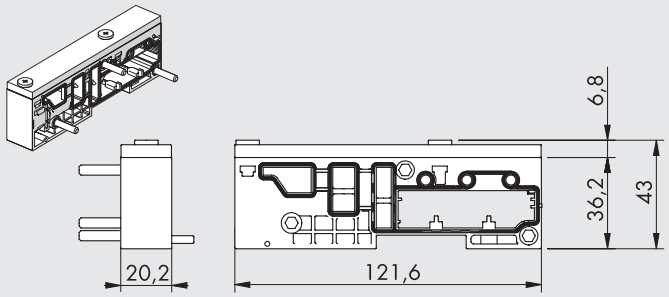

Code	Description	Weight [g]
02282**P91Z90**	Module for electric version only	120

N.B.: Version used to make up an EB 80 island without pneumatic part, but only with "S" signal modules and fieldbus or additional electrical connection "E". Bases and valves cannot be added.



KEY TO CODES

02282	P	3	1	Z	3	0
FAMILY	**SUBSYSTEM**	**PORT FITTING 1**	**PILOT SERVO-ASSISTED**	**UPPER PART**	**PORTS 3 AND 5 FITTING**	**SPECIALTY**
02282 EB 80	**P** Compressed air supply	**1** Pipe fitting Ø 8 (5/16") **2** Pipe fitting Ø 10 **3** Pipe fitting Ø 12 **5** Pipe fitting Ø 1/2" **9** Module for electric version only	**1** Non-servo-assisted **X** Servo-assisted **1** Non-servo-assisted	**Z** The upper part is present	**0** Silencer ▲ **1** Pipe fitting Ø 8 (5/16") ▲ **2** Pipe fitting Ø 10 ▲ **3** Pipe fitting Ø 12 ▲ **5** Pipe fitting Ø 1/2" **6** 2 pipes fitting Ø 8 (5/16") (one for port 3, one for port 5) **7** 2 pipes fitting Ø 6 (one for port 3, one for port 5) **8** 2 pipes fitting Ø 4 (5/32") (one for port 3, one for port 5) **9** Without connection	**0** Standard

▲ For ports 3 and 5 use the same pipe Ø of port 1.

ACCESSORIES

SILENCER FOR FITTING



Ø	Ø A	Ø B	C	D	S
8	6.5	14	23	42	24.5
12	10	18.8	29	51.5	31.5

Code	Description	Flow rate at 6.3 bar [Nl/min]	Weight [g]
W0970530084	Silencer for fitting, Ø 8	2400	15
W0970530086	Silencer for fitting, Ø 12	6000	24

SPARE PARTS

CARTRIDGE

Code	Description	Ø
02282R2110	EB 80 silencer cartridge kit	silencer
02282R2113	EB 80 Ø 8 power supply round cartridge kit	8 (5/16")
02282R2114	EB 80 Ø 10 power supply round cartridge kit	10
02282R2115	EB 80 Ø 12 power supply round cartridge kit	12
02282R2118	EB 80 Ø 1/2 power supply round cartridge kit	1/2"

Comes in 10-pc. packs

BASE INTERFACE GASKET



Code	Description
02282R1000	EB 80 base interface gasket kit

Comes in 10-pc. packs

LOWER /UPPER BODY GASKET



Code	Description
02282R1001	EB 80 lower/upper body gasket kit

Comes in 10-pc. packs

EB 80 BASES FOR VALVES - B

The EB 80 "Bases for valves - B" can be provided with 3 or 4 positions.
A version is available with an electrical connection for a single control of each position, suitable for 5/2 monostable solenoid valves (physically impossible to install other valves). Another version comes with two electrical connections for each position and is suitable for all types of valves.
The electronics in the base controls the signal coming from both the multi-pole connector and the fieldbus, so the base is the same, regardless of the control system of the island.
The air delivery ducts (ports 2 and 4) are made up of cartridge-type push-in fittings. The cartridge can be replaced, for example when the pipe diameter needs to be changed, by pulling out the clip placed under the base.
The air flow ducts (ports 1, 3, 5, X) of the 4-position base are the full flow type. For the 3-position base, either full-flow or one or more sectioned ports can be mounted. With this solution, islands with zones with differentiated pressure can be created.

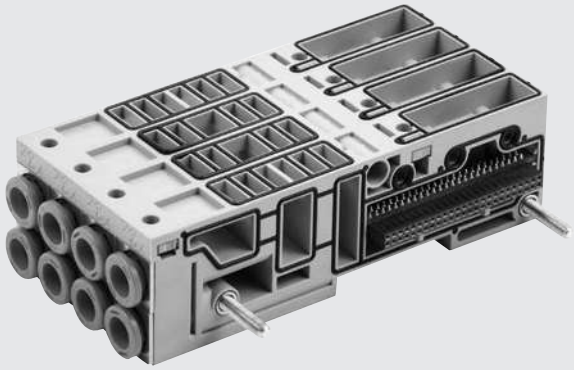

PATENTED

TECHNICAL DATA

Ambient temperature	°C	-10 to + 50
	°F	14 to 122
Fluid		Unlubricated air
Versions		3-position base for controlling 3 solenoid pilots; 3 positions for 6 solenoid pilots; 4 positions for 4 solenoid pilots; 4 positions for 8 solenoid pilots.
		Pipe fittings Ø 4 (5/32"), 6, 8 (5/16"), 1/4" Ducts
		1, 3, 5 and X full flow
		3-position base with 1 sectioned duct; 1, 3 a 5 sectioned; 3 and 5 sectioned (after the first position)
Degree of protection		IP65

COMPONENTS

① PORT 1 DUCT
② PORT 2 CARTRIDGE: push-in fitting
③ PORT 3 DUCT
④ PORT 4 CARTRIDGE: push-in fitting
⑤ PORT 5 DUCT
⑥ BODY: technopolymer
⑦ TIE ROD: nickel-plated brass + stainless steel grub screw
⑧ 82/84 DUCT: pilot air relief
⑨ X DUCT: pilot control
⑩ GASKET BETWEEN BASES: NBR
⑪ GASKET FOR THE VALVE: NBR
⑫ GASKET FOR IP65:NBR
⑬ THREADED PLATE for securing the valves: zinc-plated steel
⑭ CLIP for securing the cartridge: stainless steel
⑮ ELECTRONICS
⑯ PICTOGRAM: indication of compressed air system layout
⑰ INDICATION of the type of electronic board:
M = to 3 or 4 controls - B = to 6 or 8 controls

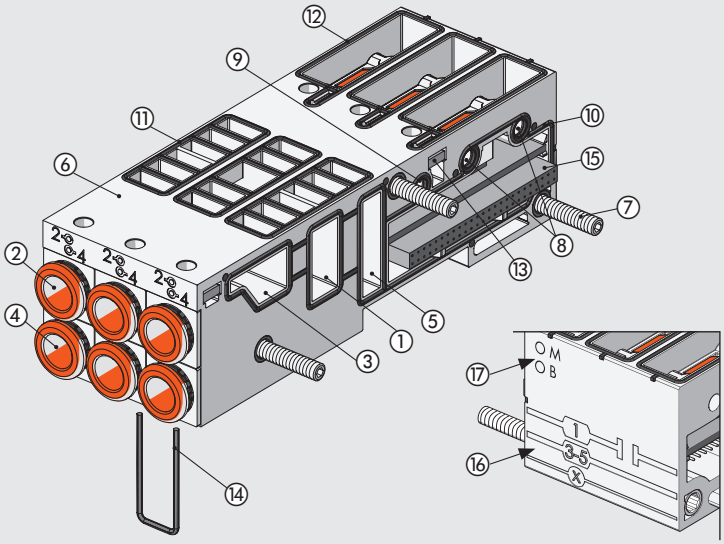

DIMENSIONS - ORDERING CODES

3-POSITION BASE FOR VALVES







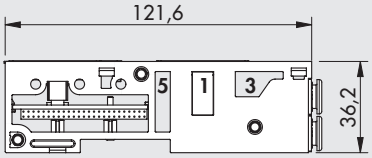





Symbol	T - Pipe fitting	Code 3 CONTROLS	Code 6 CONTROLS	Weight [g]
Full-flow ports	without cartridges	02282**B3031110**	02282**B3061110**	170
	Ø 4 (5/32")	02282**B3034440**	02282**B3064440**	230
	Ø 6	02282**B3036660**	02282**B3066660**	220
	Ø 8 (5/16")	02282**B3038880**	02282**B3068880**	210
	Ø 1/4"	02282**B3032220**	02282**B3062220**	220
Port 1 sectioned after the first position	without cartridges	02282**B3131110**	02282**B3161110**	170
	Ø 4 (5/32")	02282**B3134440**	02282**B3164440**	230
	Ø 6	02282**B3136660**	02282**B3166660**	220
	Ø 8 (5/16")	02282**B3138880**	02282**B3168880**	210
	Ø 1/4"	02282**B3132220**	02282**B3162220**	220
Ports 1, 3 and 5 sectioned after the first position	without cartridges	02282**B3231110**	02282**B3261110**	170
	Ø 4 (5/32")	02282**B3234440**	02282**B3264440**	230
	Ø 6	02282**B3236660**	02282**B3266660**	220
	Ø 8 (5/16")	02282**B3238880**	02282**B3268880**	210
	Ø 1/4"	02282**B3232220**	02282**B3262220**	220
Ports 3 and 5 sectioned after the first position	without cartridges	02282**B3331110**	02282**B3361110**	170
	Ø 4 (5/32")	02282**B3334440**	02282**B3364440**	230
	Ø 6	02282**B3336660**	02282**B3366660**	220
	Ø 8 (5/16")	02282**B3338880**	02282**B3368880**	210
	Ø 1/4"	02282**B3332220**	02282**B3362220**	220

















4-POSITION BASE FOR VALVES





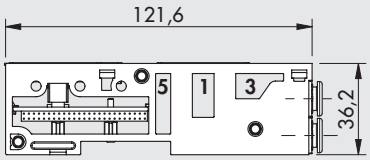

Symbol	T - Pipe fitting	Code 4 CONTROLS	Code 8 CONTROLS	Weight [g]
Full-flow ports	without cartridges	02282**B4041111**	02282**B4081111**	230
	Ø 4 (5/32")	02282**B4044444**	02282**B4084444**	310
	Ø 6	02282**B4046666**	02282**B4086666**	300
	Ø 8 (5/16")	02282**B4048888**	02282**B4088888**	270
	Ø 1/4"	02282**B4042222**	02282**B4082222**	290





KEY TO CODES

02282	B	3	0	6	8	8	8	0
FAMILY	SUBSYSTEM	NUMBER OF POSITIONS	PORTS IN THE BASE	NUMBER OF SOLENOID PILOT CONTROLS	FITTINGS 1st position (from left)	FITTINGS 2nd position	FITTINGS 3rd position	FITTINGS 4TH position
02282 EB 80	**B** Base for valve	**3** 3 positions	**0** Full-flow ports **1** Port 1 sectioned **2** Ports 1, 3 and 5 sectioned **3** Ports 3 and 5 sectioned	**3** 3 controls **6** 6 controls	**1** The whole base without cartridges **2** Pipe fitting Ø 1/4" **4** Pipe fitting Ø 4 (5/32") **6** Pipe fitting Ø 6 **8** Pipe fitting Ø 8 (5/16")			**0** (for 3-position base)
		4 4 positions	**0** Full-flow ports	**4** 4 controls **8** 8 controls	**1** The whole base without cartridges **2** Pipe fitting Ø 1/4" **4** Pipe fitting Ø 4 (5/32") **6** Pipe fitting Ø 6 **8** Pipe fitting Ø 8 (5/16")			**1** The whole base without cartridges **2** Pipe fitting Ø 1/4" **4** Pipe fitting Ø 4 (5/32") **6** Pipe fitting Ø 6 **8** Pipe fitting Ø 8 (5/16")

ACCESSORIES

SILENCER FOR FITTING, Ø 8



Code	Description	Flow rate at 6.3 bar [Nl/min]	Weight [g]
W0970530084	Silencer for fitting, Ø 8	2400	15

ADDITIONAL FIXING BRACKET TO OMEGA BAR



Code	Description	Weight [g]
02282R4001	Additional fixing bar accessory to EB 80 omega bar	5

Individually packed

N.B.: to be used to improve the fixing to Omega bars of islands with more than 40 valves. The bracket must be positioned every 20-25 valves.

SPARE PARTS

CARTRIDGE



Code	Description	Ø
02282R2001	EB 80 Ø 4 base square cartridge kit	4 (5/32")
02282R2002	EB 80 Ø 6 base square cartridge kit	6
02282R2003	EB 80 Ø 8 base square cartridge kit	8 (5/16")
02282R2006	EB 80 Ø 1/4 base square cartridge kit	1/4"

Comes in 10-pc. packs

BASE INTERFACE GASKET



Code	Description
02282R1000	EB 80 base interface gasket kit

Comes in 10-pc. packs

BASE-VALVE GASKET



Code	Description
02282R1002	EB 80 base-valve gasket kit

Comes in 10-pc. packs

EB 80 VALVES

The valves in the EB 80 series are designed to ensure high flow using only one small size valve (14 mm wide), without the need of installing a larger size one, to the benefit of component standardisation.
Versions are available with all the main air supply diagrams - from 2/2 to 5/3. The valves are secured to the base with two sturdy M4 captive screws. They come with all the accessories that facilitate their use: manual control, monostable or bistable, LED light, plate with air supply diagram and technical data, white plates available to the customer.
The range also includes:
- High-flow valves which have an innovative system that reaches flow rates that are uncommon for this size of valve.
- Bypass element that makes it possible to boost supply and reliefs or create special pneumatic circuits.
- Circuit shut-off valve (V3V) to connect/disconnect all station valves.
- Dummy valve to plug blank base positions.

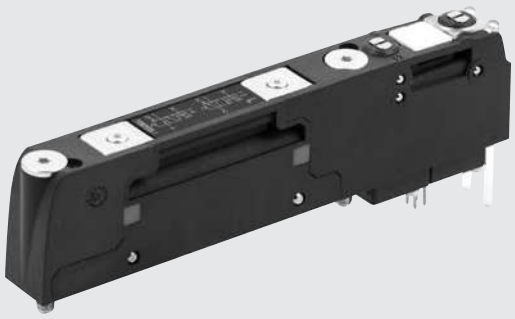

TECHNICAL DATA

Operating pressure		**5/2 and 5/3**			**2/2 and 3/2**		
Non-assisted valves	bar	3 to 8			3.5 to 8		
	MPa	0.3 to 0.8			0.35 to 0.8		
	psi	43 to 116			51 to 116		
Assisted valves	bar	Vacuum to 10					
	MPa	Vacuum to 1					
	psi	Vacuum to 145					
Servo pressure	bar	3 to 8			min. (see graph on page **B2**.57) / max. 8		
	MPa	0.3 to 0.8			min. (see graph on page **B2**.57) / max. 0.8		
	psi	43 to 116			min. (see graph on page **B2**.57) / max. 116		
Ambient temperature	°C	-10 to 50 (at 8 bar)					
	°F	14 to 122 (at 8 bar)					
Flow rate at 6.3 bar ΔP 1 bar		**Ø 4 (5/32")**	**Ø 6**	**Ø 8 (5/16")**	**Ø 1/4"**	**Ø 10 ****	**Ø 3/8" ****
valve 2/2	Nl/min	350	430	500	430	-	-
valve 3/2	Nl/min	350	600	700	600	1250	1250
valve 5/2	Nl/min	350	650	800	650	1250 - 1400	1250 - 1400
valve 5/3	Nl/min	350	460	500	460	1000 - 1250	1000 - 1250
valve V3V (R)	Nl/min	-	-	-	-	1000	1000
Actuation response time (TRA) / reset response time (TRR) at 6 bar							
TRA/TRR valves 2/2 and 3/2	ms	14 / 28					
TRA/TRR valves 5/2 monostable and shut-off valve	ms	12 / 45					
TRA/TRR valve 5/2 bistable	ms	12 / 14					
TRA/TRR valve 5/3	ms	15 / 45					
TRA/TRR valve 3/2 high flow	ms	13 / 36					
Fluid		Unlubricated air					
Air quality required		ISO 8573-1 class 4-7-3					
Supply voltage range	VDC	12 -10% 24 +30%					
Minimum operating voltage	VDC	10.8 *					
Maximum operating voltage	VDC	31.2					
Maximum admissible voltage	VDC	32 ***					
Power for each valve	W	3 for a few milliseconds. Holding 0.3					
Drive		PNP or NPN					
Solenoid rating		100% ED					
Versions		Manual monostable or bistable control. Various compressed air diagrams					
Degree of protection		IP65					

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power pack output using the calculations shown on page B2**.28
** Using high-flow valves or connected valves - see pages **B2**.58
*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

METAL WORK PNEUMATIC

COMPONENTS

① BODY: technopolymer
② CONTROL: technopolymer
③ BASE: technopolymer
④ SOLENOID PILOT
⑤ DISPLAY: LED light and optical tester in technopolymer
⑥ TAG: removable
⑦ MANUAL CONTROL 14, for port 4: monostable or bistable, in brass
⑧ MANUAL CONTROL 12, for port 2: monostable or bistable, in brass
⑨ SCREW FOR FIXING TO THE BASE: M4 with PH 1 cross-head, zinc-plated steel. Tightening torque: 1.2 Nm
⑩ TAG: technopolymer with laser-etched wording

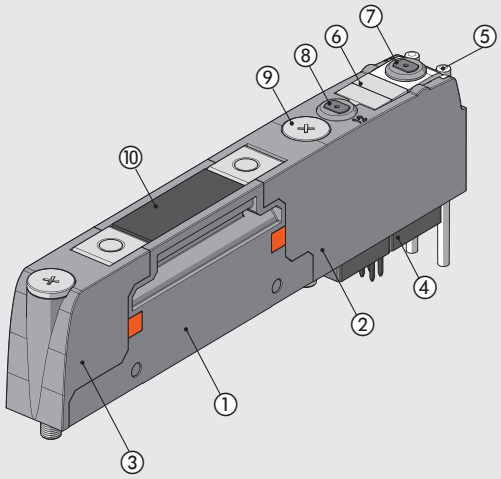

DIMENSIONS - ORDERING CODES

EB 80 VALVE



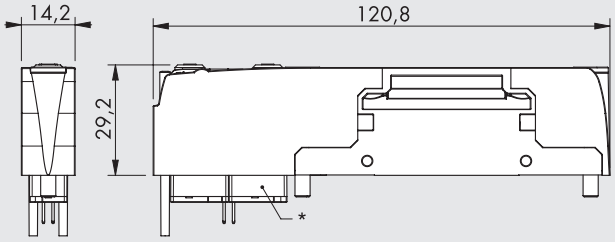

* The second solenoid pilot is not present in the valves V= 5/2 monostable.

N.B.: The valves Z, I, W, L, K, O can be mounted only on bases having 6 or 8 controls.

SERVO MINIMUM PRESSURE FOR VALVES 2/2 AND 3/2

If the island is configured without servo, minimum pressure 3.5 bar

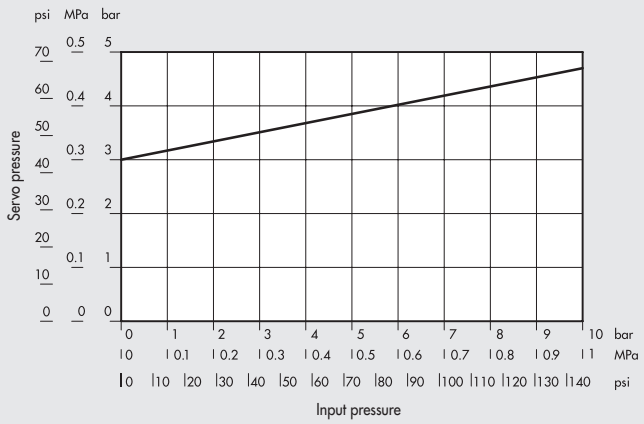

Symbol	Type	Code	Manual control	Weight [g]
Z	2 valves 2/2 NC	708203**Z0**	monostable	80
		708203**Z1**	bistable	80
I	2 valves 3/2 NC	708203**I0**	monostable	80
		708203**I1**	bistable	80
	valid as 5/3 OC			
W	2 valves 3/2 NO	708203**W0**	monostable	80
		708203**W1**	bistable	80
	valid as 5/3 PC			
L	3/2 NC + 3/2 NO	708203**L0**	monostable	80
		708203**L1**	bistable	80
V	monostable 5/2	708203**V0**	monostable	65
		708203**V1**	bistable	65
K	bistable 5/2	708203**K0**	monostable	80
		708203**K1**	bistable	80
O	5/3 CC	708203**O0**	monostable	80
		708203**O1**	bistable	80

EB 80 HIGH-FLOW VALVE



PATENTED

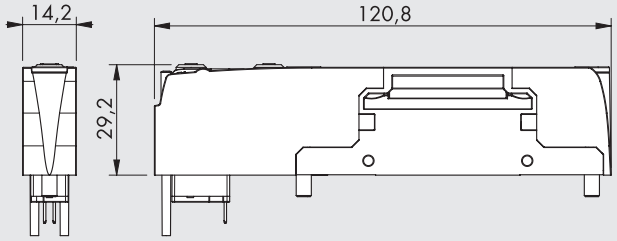

Symbol	Type	Code	Manual control	Weight [g]
G 	3/2 NC high flow	708203**G0**	monostable	65
		708203**G1**	bistable	65
J 	3/2 NO high flow	708203**J0**	monostable	65
		708203**J1**	bistable	65

SERVO MINIMUM PRESSURE

If the island is configured without servo, minimum pressure 3.5 bar

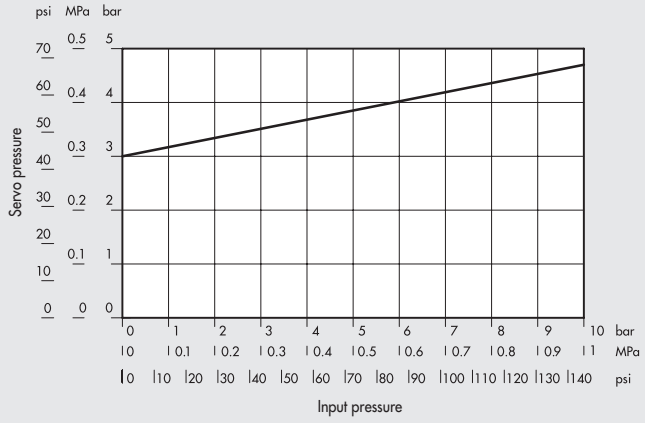

HOW TO GET HIGH-FLOW RATE FOR EACH PNEUMATIC FUNCTION

N.B. The two cartridges on the base (2 and 4) must fit the Ø 8 mm pipe.
Outputs 2 and 4 must be connected one to the other. To do this, you can use the special Y-fitting.
When connecting one or more valves using the Y-fitting, the pneumatic system functions must be configured according to the following diagram.

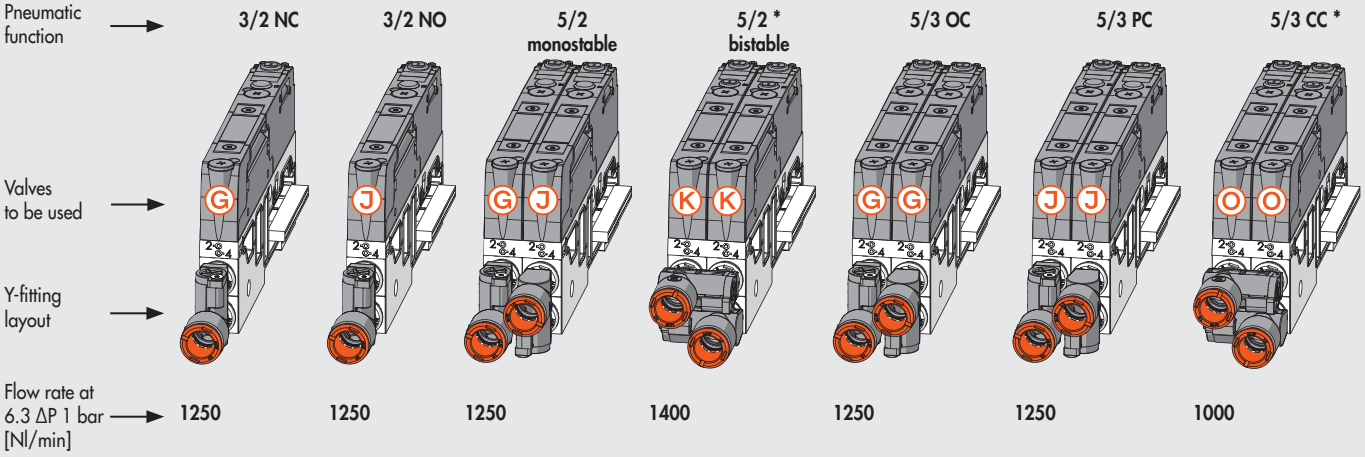

In order to get 5/2 monostable, 5/2 bistable and 5/3 DC high flow, use two parallel valves, by energizing the solenoids simultaneously.

* The Y-fittings of this valve must be installed longitudinally with one Y-fitting connecting the two outputs (2) and the other the two outputs (4).
The solenoid pilots must be operated simultaneously.

EB 80 SHUT-OFF VALVE (V3V)



PATENTED

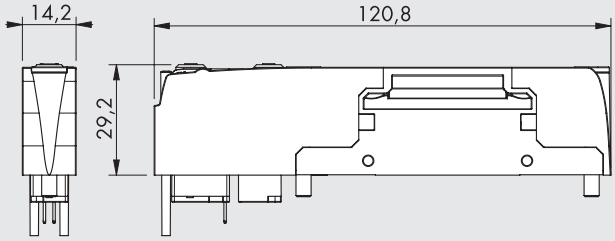

Symbol	Type	Code	Manual control	Weight [g]
R 	Shut-off valve	708203**R0**	monostable	65
		708203**R1**	bistable	65

SERVO MINIMUM PRESSURE

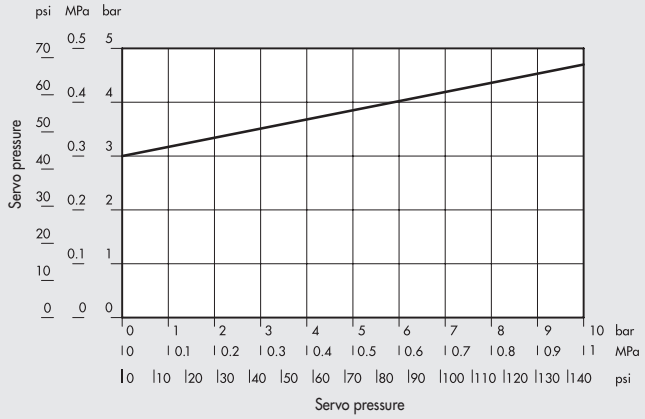

This valve enables the supply/relief of all station valves. The pneumatic supply is delivered via ports 2 and 4 on the base underneath the valve. It is discharged via ports 3 and 5 with general station discharge. Port 1 on pneumatic supply module P must be plugged for the system to operate and slave the island by supplying continuous pressure to port X.
The shut-off valve is designed for the following uses and benefits:
- the valve can be fitted in any position and not necessarily to the left of the others;
- if the station is split into areas with separate channels (1) via intermediate modules M or bases with port 1 selected, the shut-off valve only operates in the area where it is fitted.
- if the capacity of a shut-off valve is not sufficient for its use, two or more can be fitted and operated simultaneously.

TECHNICAL DATA		
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	1000 (with 2 Ø 8 fittings or a Y fitting, pipe Ø 10 mm or 3/8")
Exhaust flow rate at 6.3 bar	Nl/min	660
Actuation response time (TRA) / reset response time (TRR) at 6 bar	ms	12/45
Servo pressure		See technical data 3/2 valves (page **B2**.56)

SHUT-OFF VALVE DIAGRAM

V3V Shut-off valve, can be fitted in any position
1 Pneumatic supply
3 Relief
Y Y-fitting with black bush (page **B2**.59)
T Plug port 1 of pneumatic supply P module
X Always use the pneumatic supply servo version



DUMMY VALVE (PLUG)





Symbol	Description	Code	Weight [g]
N 	Dummy valve	708203**N0**	45

BYPASS



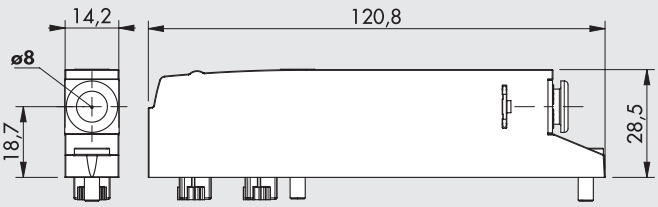

Symbol	Description	Code	Weight [g]
Y 	Bypass Ø8	708203**Y8**	45

N.B.: Maximum pressure in the ports 2 and 4: 8 bar

- Flow rate port 1 at 6.3 bar ΔP=1 bar: 1000 Nl/min
- Flow rate at 6.3 bar free exhaust: 2x1500 Nl/min (the air is discharged through the ports 2 and 4 of the base)

BYPASS FUNCTION

Connects port 3 of the base to port 2 and port 5 to port 4.
The fitting present is connected to port 1.

KEY TO CODES

7082	03	V	0
FAMILY	**TYPE**	**SCHEMA**	**MANUAL CONTROL**
7082 EB 80	**03** Electric, servo-assisted	▲ **Z** 2 valves 2/2NC ▲ **I** 2 valves 3/2 NC ▲ **W** 2 valves 3/2 NO ▲ **L** 3/2 NC + 3/2 NO **V** 5/2 monostable ▲ **K** 5/2 bistable ▲ **O** 5/3 CC **G** 3/2 NC high flow **J** 3/2 NO high flow ✚ **R** Shut-off valve **Y** Bypass **N** Dummy valve (plug)	**0** Monostable or for dummy valve **1** Bistable **8** For bypass only

▲ Can only be used with 6 or 8 control bases.
✚ Requires inlet port X slave synchronisation.

ACCESSORIES

Y-FITTING



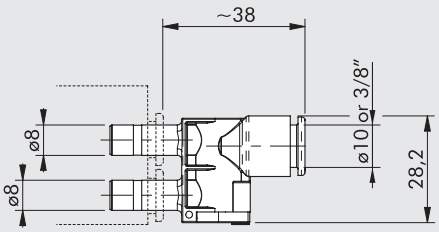

Code	Description	Release bushing color
02282R2Y04	Y-fitting for EB 80 Ø 8 (5/16") - Ø 10	Orange
02282R2Y14	Y-fitting for EB 80 Ø 8 (5/16") - Ø 10	Black
02282R2Y07	Y-fitting for EB 80 Ø 8 (5/16") - Ø 3/8"	Orange
02282R2Y17	Y-fitting for EB 80 Ø 8 (5/16") - Ø 3/8"	Black

SPARE PARTS

BASE FIXING SCREW

Code	Description
02282R3000	Kit of screws for fixing the EB 80 base

Comes in 10-pc. packs

IDENTIFICATION PLATE KIT



Code	Description
0226107000	Identification plate kit

Comes in 16-pc. packs

NOTES

EB 80 PROPORTIONAL PRESSURE REGULATOR - A

The EB 80 proportional pressure regulator is an extremely precise and reliable component part. It is designed to regulate the pressure of a system with varying values according to the electrical control setting.
It can be inserted in any position and on all EB 80 islands.
Highly flexible, it comes in various types: for the 25/44-pin multi-pole islands, it is possible to use the analogue regulator with external M12 electrical connection, it accepts commands in Volts, mA and via RS232 protocol; in all the versions with a fieldbus, the connections and electrical controls are directly incorporated in the internal hardware/software that can be easily managed by the user in a simple and intuitive way every island and can accommodate up to 16 pressure regulators that are connected to all the protocols available for the EB 80 (also in additional islands).
An island of electronic regulators arranged in a row can be created, without necessarily requiring solenoid valves.

The "closed loop" system has a precision sensor that detects the output pressure value; the control system compares the value read with the value set in real time and two mini-solenoid valves adjust the pressure until the target value is reached.
As for the Regtronic family, in this case too, you can opt for a regulator with a screen that displays the pressure and a whole series of information including diagnostics that facilitates the configuration or a version without display where the configuration is done remotely.
As to the pneumatic system, there are two possibilities: with Local Regulation or Series Regulation. In the former case, the air taken from port 1 of the island is regulated by a quick-fit coupling with the front side in the base; in this way, several regulators can be placed in succession. In the latter case, the pressure is regulated directly at port 1 of the island, so all the valves downstream are supplied with the pressure set by the regulator. The front outlet fitting, which has an RL9 cap in this version, is still present and operational.

TECHNICAL DATA		LOCAL OUTPUT VERSION		SERIES CONTROL VERSION	
Fluid		Filtered, unlubricated air. The air must be filtered at least 10 µm			
MIN inlet pressure	bar	Regulation pressure + 0.5 to 1			
MAX inlet pressure	bar	10.5			
Temperature range	°C	from -10 to 50			
Pressure regulation range	bar	from 0.05 to 10 (settable full scale and minimum pressure)			
Flow rate at 6.3 bar ΔP 0.5	Nl/min	720		850	
Flow rate at 6.3 bar ΔP 1	Nl/min	1000		1250	
Exhaust flow rate at 6.3 bar with 0.1 bar overpressure	Nl/min	380		450	
Exhaust flow rate at 6.3 bar with 0.5 bar overpressure	Nl/min	800		1100	
Response time	Volume [cc]	100	1000	100	1000
from 6 to 7 bar	s	0.1	0.15	0.1	0.15
from 7 to 6 bar	s	0.1	0.15	0.1	0.15
Weight	kg	0.6			
Class of protection		IP 65			
Hysteresis		≤ ± 0.2% (Full scale)			
Repeatability		≤ ± 0.2% (Full scale)			
Sensitivity/Dead-band		setting range 10 to 300 mbar			
Output pressure (display version)	Accuracy	≤ ± 0.3% (Full scale)			
	Unit of measurement	bar, MPa, psi			
	Minimum resolution	0.01 bar - 0.001 MPa - 0.01 psi			
Temperature characteristics		Max 2 mbar / °C			
Installation position		In any position			
Current input in the fieldbus version		Max 220 mA at 12VDC			
Supply voltage range analog version	VDC	12 -10% to 24 +30%			
Minimum operating voltage	VDC	10.8			
Maximum operating voltage	VDC	31.2			
Maximum admissible voltage	VDC	32 *			
Current absorption		Max 220 mA at 12VDC			
Input signal (input impedence)	Voltage	0 to 5 VDC, 0 to 10 VDC (approx. 6.3 KΩ)			
	Current	4 to 20 mA (approx. 100 Ω)			
	Serial ports	RS 232			
	Manual	Keypad			
Output signals in the analogue version					
	Analog in current	4 to 20 mA			
	Analog voltage	0 to 10 VDC (1 VDC = 1 bar) - 1 mA max			
	Digital	PNP open collector output: max 24VDC 60 mA			
		NPN open collector output: max 24VDC 60 mA			
	Analog output accuracy	≤ ± 0.4% (Full scale)			
Notes		The features shown refer to the static condition only. With air consumption the pressure may vary.			
		On all anolog versions you can set the parameters using the software "MWRegtronic" downloadable from the website www.metalwork.eu; to connect the PC to Regtronic you can use the cable code W0970513019			
		For more details, please refer to the User Manual.			

*** IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

METAL WORK PNEUMATIC

COMPONENTS

① PORT 1 DUCT
② CARTRIDGE Ø8: push-in fitting
③ PORT 3 DUCT
④ SOLENOID VALVE: 10 mm series PLT-10
⑤ PORT 5 DUCT
⑥ BODIES: aluminium
⑦ COVER: technopolymer
⑧ TIE ROD: nickel-plated brass with stainless stell grub screws
⑨ GASKETS: NBR
⑩ CLIP for securing the cartridge: stainless steel
⑪ Compensation DIAPHRAGM: PTFE
⑫ ELECTRONIC BOARDS
⑬ DISPLAY and keypad or cover
⑭ CONNECTOR M12 (for analog version)
⑮ INDICATOR LED
⑯ IDENTIFICATION of wording with laser

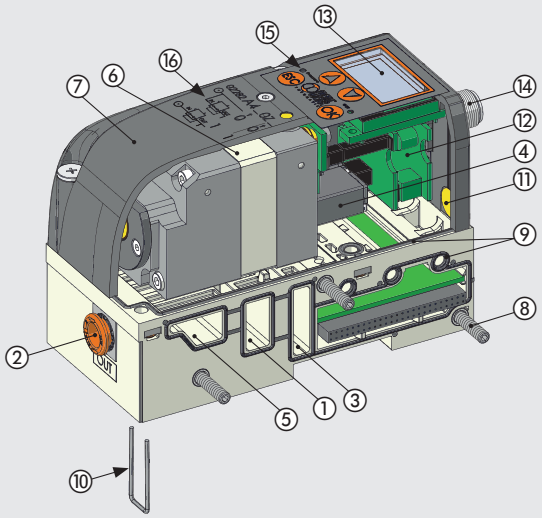

FLOW CHARTS

LOCAL OUTLET (Ø8)

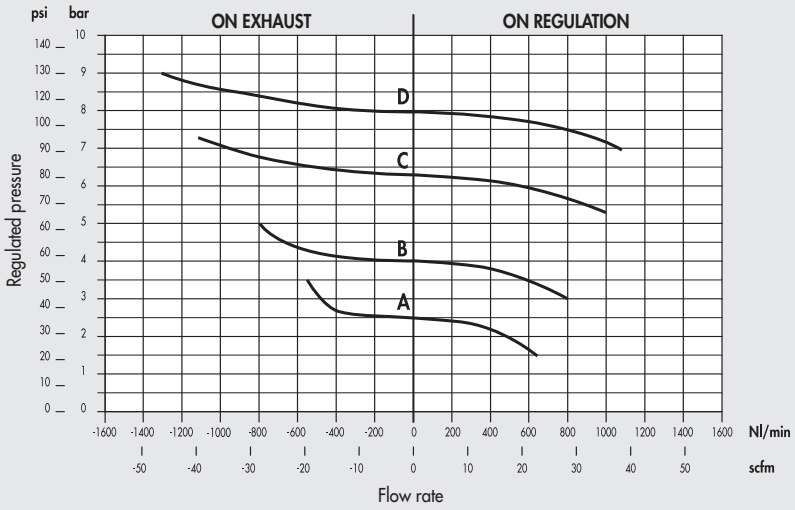

A = 2.5 bar
B = 4 bar
C = 6.3 bar
D = 8 bar
Pm = 10 bar

REGULATION IN SERIES

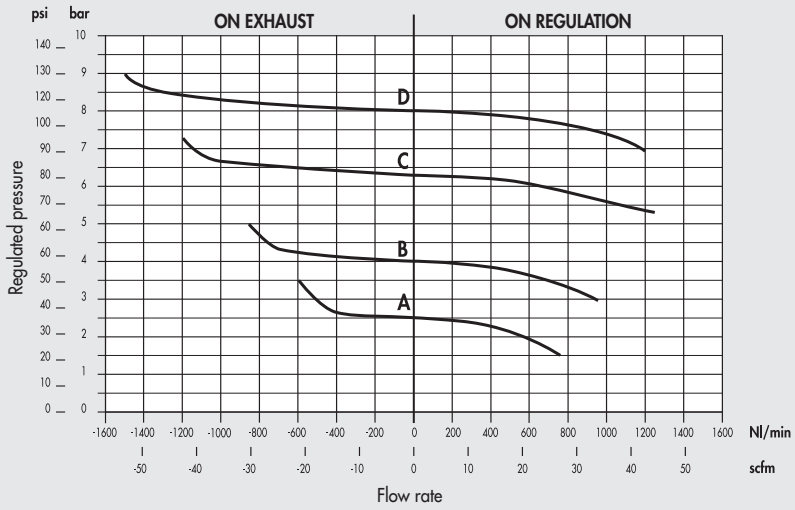

A = 2.5 bar
B = 4 bar
C = 6.3 bar
D = 8 bar
Pm = 10 bar

VERSIONS

PASS-THROUGH BASE – LOCAL OUTLET





Air outlet regulated only by the front Ø8 fitting.

REGULATION IN SERIES





Air outlet adjusted to the next bases.
Front outlet closed, however usable by removing the cap from the fitting.

M12 EXTERNAL ANALOGUE CONTROL (MULTI-POLE ISLANDS)



8 PIN M12x1

Pin	Signal	Description	Lead colour
1	TX	RS232	White
2	RX	RS232	Brown
3	Pressure set	0 to 10 VDC / 0 to 5 VDC	Green
		4 to 20 mA	
4	Digital out	NPN	Yellow
5	Analog out	Voltage version 0 to 10 VDC	Gray
		Current version 4 to 20 mA	
6	Digital out	PNP	Pink
7	0 VDC	Power supply	Blue
8	+ VDC	Power supply	Red

FIELDBUS CONTROL



WITH REMOTE-CONTROL

The remote-control version of the Regtronic has two diagnostic LEDs.

WITH DISPLAY

The display version also has buttons for entering the various parameters.

PROGRAMMABLE AND FLEXIBLE

Setting options:

- **LANGUAGE**
- **UNIT OF MEASUREMENT**
- **TYPE OF INPUT**
- **TYPE OF DIGITAL OUTPUT**
- **DEAD-BAND**
- **FULL SCALE**
- **MINIMUM PRESSURE**

PRECISION

Linearity
± 0.5 % (full scale)

Hysteresis
± 0.2 % (full scale)

Repeatability
± 0.2 % (full scale)

Sensitivity
range 10 to 300 mbar

FUNCTION DIAGRAM

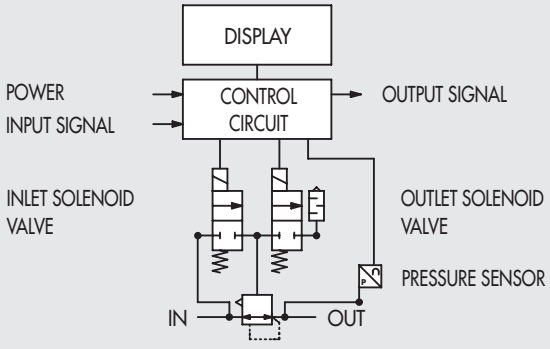

DIMENSIONS - ORDERING CODES

PROPORTIONAL PRESSURE REGULATOR





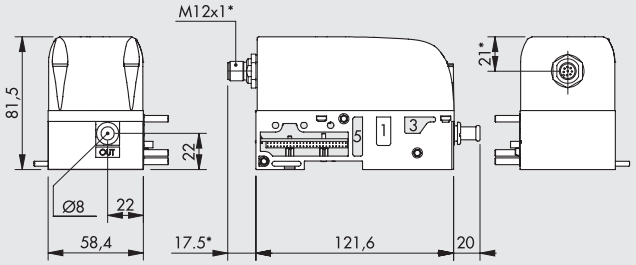

* For version with electrical analogue control only.

Electrical connection with M12 connector

Symbol	Display	Code 0-10V analogue OUT	Code 4-20 mA analogue OUT	Weight [g]
Port 1 pass-through	WITH	02282**A400Z00**	02282**A402Z00**	640
	WITHOUT	02282**A400Z10**	02282**A402Z10**	640





Port 1 sectioned	WITH	02282**A410Z00**	02282**A412Z00**	640
	WITHOUT	02282**A410Z10**	02282**A412Z10**	640





Electrical connection via fieldbus

Symbol	Display	Code	Weight [g]
Port 1 pass-through	WITH	02282**A401Z00**	630
	WITHOUT	02282**A401Z10**	630





Port 1 sectioned	WITH	02282**A411Z00**	630
	WITHOUT	02282**A411Z10**	630





KEY TO CODES

02282	A4	0	1	Z	0	0
FAMILY	**SUBSYSTEM**	**TYPE OF BASE**	**TYPE OF ELECTRICAL CONNECTION**	**SPECIALTY**	**DISPLAY**	**SPECIALTY**
02282 EB 80	**A4** Proportional pressure regulator	**0** Base port 1 pass-through local outlet **1** Base port 1 sectioned in-series regulation	**0** External electrical analogue control connector M12 0-10V analogue OUT **1** Electrical control via fieldbus **2** External electrical analogue control connector M12, 4-20 mA analogue OUT	**Z** Standard	**0** With **1** Without	**0** Standard

ACCESSORIES: ANALOG VERSION

CLOSING PLATE FOR EB 80 MANIFOLD PRESSURE REGULATOR



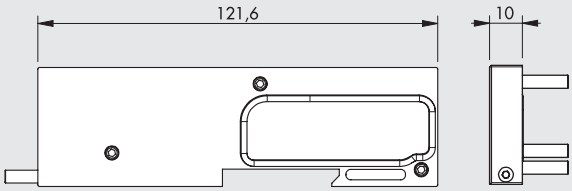

Code	Description	Weight [g]
02282R8000	Closing plate for EB 80 manifold proportional pressure regulator with M12 connector	120

N.B.: Can only be used with regulators code 02282**A400Z00** - 02282**A400Z10** - 02282**A410Z00** - 02282**A410Z10** - 02282**A402Z00** - 02282**A402Z10** - 02282**A412Z00** - 02282**A412Z10**

This terminal is used to fit multiple EB 80 pressure proportional regulators controlled by an M12 connector, without using EB 80 power supplies.
Each regular can be controlled individually via its own M12 connector.
Several configurable solutions can thus be obtained, as illustrated in examples below:

COMMON POWER SUPPLY

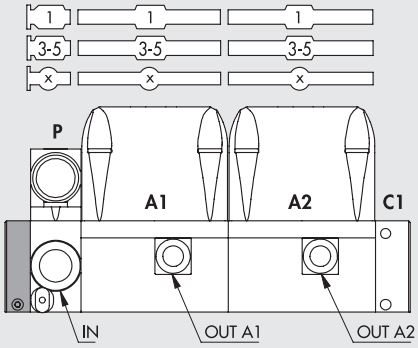

Island consisting of a single pneumatic supply (P) and front outlet from individual regulators.

INDEPENDENT POWER SUPPLY AND HIGH-FLOW RATE

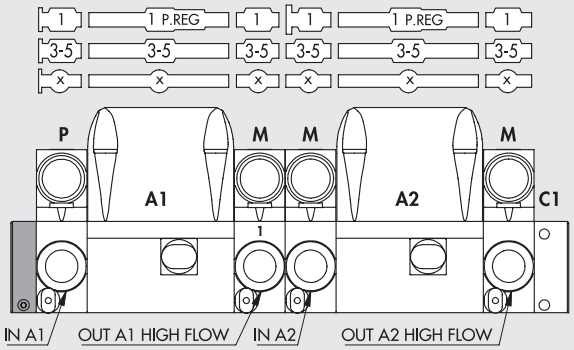

Island consisting of independent regulator power supply, via P supplies and intermediate elements M (with port 1 closed) placed upstream of the regulator. High-flow outputs are obtained via intermediate elements M placed downstream of the individual regulators.

HYBRID

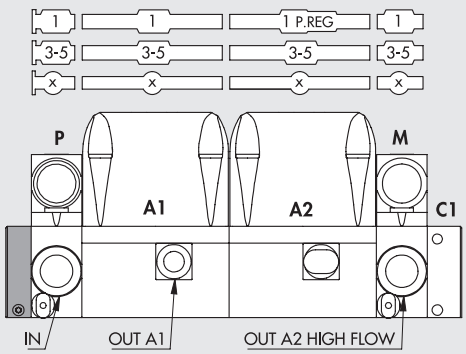

Hybrid island.
It consists of regulators with a local output (**A1**) and in-series high-flow rate regulators via intermediate element **M** downstream of regulator **A2**. Power supply **P** is in common.

P = compressed-air supply, page **B2**.50
M = intermediate support, page **B2**.68
C1 = closed end-plate for islands with multi-pole connector, page **B2**.74
A = proportional pressure regulator

CONNECTOR M12x1, 8-PIN, A-CODED, FEMALE, STRAIGHT



Pin	Cable color
1	White
2	Brown
3	Green
4	Yellow
5	Grey
6	Pink
7	Blue
8	Red

Code	Description
W0970513010	Connector M12x1, 8-pin, A-coded, female, straight, with cable L = 5 m

CONNECTOR M12x1, 8-PIN, A-CODED, FEMALE, 90°, WITH CABLE



Pin	Cable color
1	White
2	Brown
3	Green
4	Yellow
5	Grey
6	Pink
7	Blue
8	Red

Code	Description
W0970513011	Connector M12x1, 8-pin, A-coded, female, 90°, with cable L = 5 m

CONFIGURATION CABLE



Code	Description
W0970513019	Configuration cable

The cable consists of:
- M12 8-PIN female connector to be connected to regulator
- RS232 serial connector to be connected to PC
- 2 wires to supply 24VDC power

The package also includes a RS232-USB adapter

SPARE PARTS

CARTRIDGE



Code	Description	Ø
02282R2001	EB 80 Ø 4 base square cartridge kit	4 (5/32")
02282R2002	EB 80 Ø 6 base square cartridge kit	6
02282R2003	EB 80 Ø 8 base square cartridge kit	8 (5/16")
02282R2006	EB 80 Ø 1/4 base square cartridge kit	1/4"

Comes in 10-pc. packs

BASE INTERFACE GASKET



Code	Description
02282R1000	EB 80 base interface gasket kit

Comes in 10-pc. packs

EB 80 INTERMEDIATE SUPPORT - M

The "Intermediate modules - M" perform a series of functions.
They can help increase the flow rate available in an EB 80 island, when various valves are used at the same time. They can be used to divide an island in areas of different pressures.
They can also be used as additional electrical power supply, when there is a high number of solenoid pilots actuated simultaneously; or to electrically separate and cut out a part of the island, in the event of an emergency, for example.
Intermediate modules can be placed in any position in the EB 80 island.
Several versions are available, with fittings for pipes of different diameter.
Relief ports 3 and 5 can be either connected using a silencer or conveyed via a fitting.
A version with separate ports 3 and 5 is also available. This feature is useful in versions with pilot servo-assistance to power the valves from ports 3 and 5, at different pressures, from vacuum to 8 bar.
The lower body of the intermediate plate comes with different air flow ducts: with full flow ports or one or more closed ports.

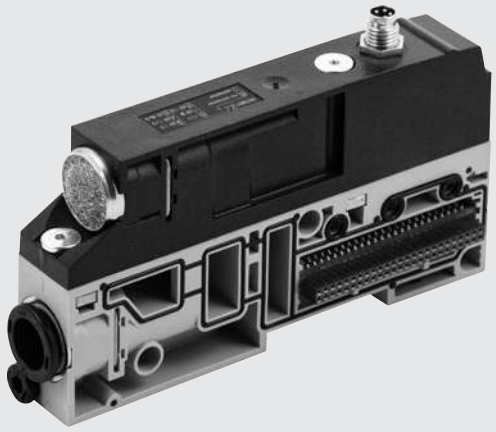

TECHNICAL DATA

Operating pressure		Vacuum to 10 bar / Vacuum to 1 MPa / Vacuum to 145 psi			
Ambient temperature		-10 to + 50 °C / 14 to 122 °F			
Flow rate at 6.3 bar ΔP 1 bar		Ø 8 (5/16")	Ø 10	Ø 12	Ø 1/2"
Feeding (port 1)	Nl/min	1800	2800	3500	3500
Exhaust with fitting (ports 3 and 5)	Nl/min	2000	3200	4400	4400
Separate exhausts Ø 8	Nl/min	1800 x 2	-	-	-
Flow rate at 6.3 bar free exhaust					
Exhaust with fitting (ports 3 and 5)	Nl/min	2700	3900	6100	6100
Silenced exhaust	Nl/min	3600			
Exhaust with fitting Ø 12 and silencer W0970530086	Nl/min	6000			
Separate exhausts Ø 8 (N.B.: Pmax 8 bar)	Nl/min	2700 x 2	-	-	-
Fluid		Unlubricated air			
Additional electrical power supply		M8 4-pin connector *			
Voltage range	VDC	12 to 31.2			
Maximum number of solenoid pilots that can be actuated simultaneously from the additional electrical connection:					
at 24VDC		With 100% simultaneity: 48 / With 60% simultaneity: 80			
at 12VDC		With 100% simultaneity: 32 / With 60% simultaneity: 64			
Versions		Pipe fittings Ø 8, 10, 12, 1/2"; Silenced relief, conveyed relief, ports 3 and 5 separate			
		Full-flow ports in the base, 1 closed, 1, 3 and 5 closed, 3 and 5 closed, 1, 3, 5 and X closed			
		With or without additional electrical power supply			
Degree of protection		IP65 (with connectors connected or plugged if not used)			

IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.

* If electric power is not supplied: the red power LED light comes on and the LEDs at the base keep flashing (voltage out of range); in the version with multi-pin electrical connection, the "OUT" fault signal is triggered; in the version with fieldbus, a software message is sent.

COMPONENTS

① LOWER PART BODY: technopolymer
② UPPER PART BODY: technopolymer
③ SCREWS for fixing between the bodies: zinc-plated steel (Tightening torque: 1.2 Nm)
④ TAG with laser-etched wording: technopolymer
⑤ AIR RELIEF: silencer or pipe fitting
⑥ POWER SUPPLY: pipe fitting
⑦ PILOTING (X): pipe fitting Ø 4
⑧ INDICATOR: indicating whether power supply to pilots is separate or not
⑨ PILOT RELIEF: silencer in HDPE
⑩ PICTOGRAM: indication of compressed air system layout
⑪ TIE RODS: zinc-plated steel
⑫ GASKET: NBR
⑬ THREADED PLATE: zinc-plated steel
⑭ CARTRIDGE FIXING CLIP: stainless steel
⑮ ELECTRONIC BOARD
⑯ M8 CONNECTOR: only for version with additional electrical power supply

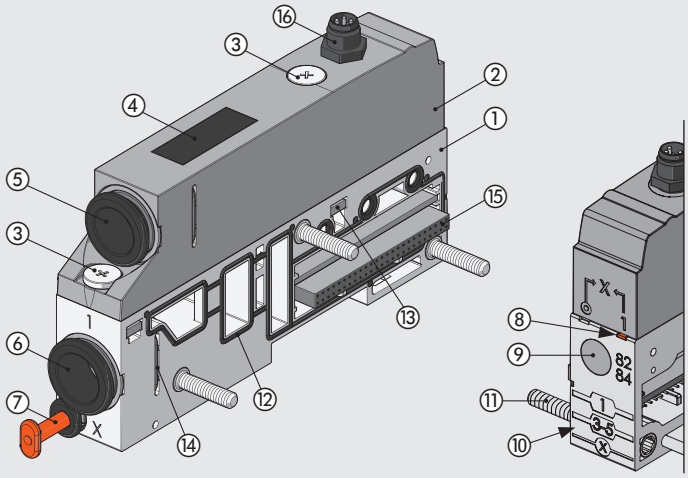

DIMENSIONS - ORDERING CODES

INTERMEDIATE MODULE - SILENCED RELIEF



WITHOUT additional electrical power supply



WITH additional electric power supply

WIRING DIAGRAM NTERMEDIATE MODULE - M, WITH ADDITIONAL POWER SUPPLY

M8 male connector



1 = + VDC
2 = + VDC
3 = GND
4 = GND



* M8 connector only for versions with additional power supply.
** Orange tab in the SERVO-ASSISTED (◎) position

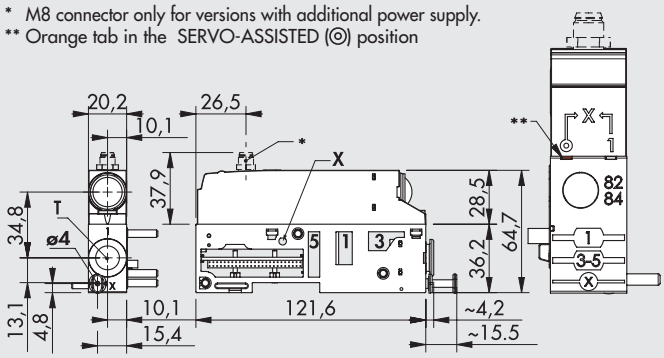









Symbol	T Pipe fitting	Code Additional electric power supply WITHOUT	 WITH	Weight [g]
Full-flow ports	Ø 8 (5/16")	02282**M100Z00**	02282**M101Z01**	160
	Ø 10	02282**M200Z00**	02282**M201Z01**	160
	Ø 12	02282**M300Z00**	02282**M301Z01**	150
	Ø 1/2"	02282**M500Z00**	02282**M501Z01**	150
Port 1 closed	Ø 8 (5/16")	02282**M110Z00**	02282**M111Z01**	160
	Ø 10	02282**M210Z00**	02282**M211Z01**	160
	Ø 12	02282**M310Z00**	02282**M311Z01**	150
	Ø 1/2"	02282**M510Z00**	02282**M511Z01**	150
Ports 1, 3 and 5 closed	Ø 8 (5/16")	02282**M120Z00**	02282**M121Z01**	160
	Ø 10	02282**M220Z00**	02282**M221Z01**	160
	Ø 12	02282**M320Z00**	02282**M321Z01**	150
	Ø 1/2"	02282**M520Z00**	02282**M521Z01**	150
Ports 3 and 5 closed	Ø 8 (5/16")	02282**M130Z00**	02282**M131Z01**	160
	Ø 10	02282**M230Z00**	02282**M231Z01**	160
	Ø 12	02282**M330Z00**	02282**M331Z01**	150
	Ø 1/2"	02282**M530Z00**	02282**M531Z01**	150
Ports 1, 3, 5 and X closed	Ø 8 (5/16")	02282**M140Z00**	02282**M141Z01**	160
	Ø 10	02282**M240Z00**	02282**M241Z01**	160
	Ø 12	02282**M340Z00**	02282**M341Z01**	150
	Ø 1/2"	02282**M540Z00**	02282**M541Z01**	150

INTERMEDIATE MODULE - CONVEYED RELIEF



WITHOUT additional electrical power supply



WITH additional electric power supply

WIRING DIAGRAM NTERMEDIATE MODULE - M, WITH ADDITIONAL POWER SUPPLY

M8 male connector



1 = + VDC
2 = + VDC
3 = GND
4 = GND



* M8 connector only for versions with additional power supply.
** Orange tab in the SERVO-ASSISTED (◎) position

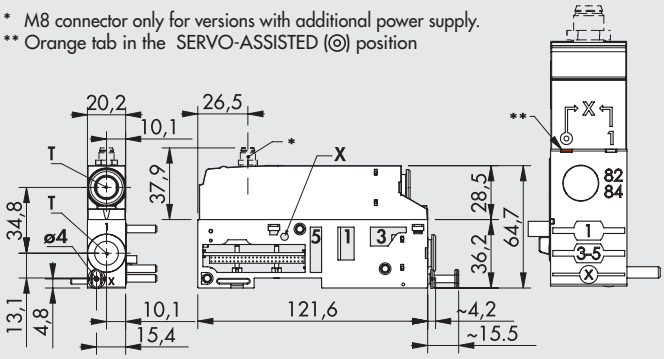









Symbol	T Pipe fitting	Code Additional electric power supply WITHOUT	 WITH	Weigh [g]
Full-flow ports	Ø 8 (5/16")	02282**M100Z10**	02282**M101Z11**	160
	Ø 10	02282**M200Z20**	02282**M201Z21**	160
	Ø 12	02282**M300Z30**	02282**M301Z31**	150
	Ø 1/2"	02282**M500Z50**	02282**M501Z51**	150
Port 1 closed	Ø 8 (5/16")	02282**M110Z10**	02282**M111Z11**	160
	Ø 10	02282**M210Z20**	02282**M211Z21**	160
	Ø 12	02282**M310Z30**	02282**M311Z31**	150
	Ø 1/2"	02282**M510Z50**	02282**M511Z51**	150
Ports 1, 3 and 5 closed	Ø 8 (5/16")	02282**M120Z10**	02282**M121Z11**	160
	Ø 10	02282**M220Z20**	02282**M221Z21**	160
	Ø 12	02282**M320Z30**	02282**M321Z31**	150
	Ø 1/2"	02282**M520Z50**	02282**M521Z51**	150
Ports 3 and 5 closed	Ø 8 (5/16")	02282**M130Z10**	02282**M131Z11**	160
	Ø 10	02282**M230Z20**	02282**M231Z21**	160
	Ø 12	02282**M330Z30**	02282**M331Z31**	150
	Ø 1/2"	02282**M530Z50**	02282**M531Z51**	150
Ports 1, 3, 5 and X closed	Ø 8 (5/16")	02282**M140Z10**	02282**M141Z11**	160
	Ø 10	02282**M240Z20**	02282**M241Z21**	160
	Ø 12	02282**M340Z30**	02282**M341Z31**	150
	Ø 1/2"	02282**M540Z50**	02282**M541Z51**	150











METAL WORK PNEUMATIC

INTERMEDIATE MODULE - SEPARATE RELIEF



WITHOUT additional electrical power supply



WITH additional electrical power supply

* M8 connector only for versions with additional power supply.
** Orange tab in the SERVO-ASSISTED (◎) position

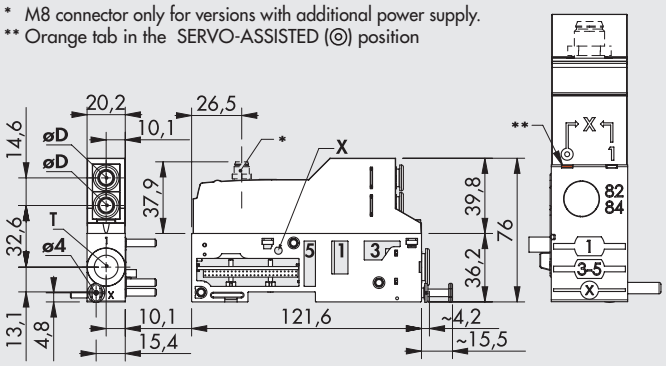









WIRING DIAGRAM NTERMEDIATE MODULE - M, WITH ADDITIONAL POWER SUPPLY

M8 male connector



1 = + VDC
2 = + VDC
3 = GND
4 = GND



N.B.: Maximum pressure in the ports 3 and 5: 8 bar

Symbol	T Pipe fitting	Code Additional electric power supply WITHOUT	Code Additional electric power supply WITH	Weight [g]
Full-flow ports	Ø 8 (5/16")	02282**M100Z_0**	02282**M101Z_1**	190
	Ø 10	02282**M200Z_0**	02282**M201Z_1**	190
	Ø 12	02282**M300Z_0**	02282**M301Z_1**	180
	Ø 1/2"	02282**M500Z_0**	02282**M501Z_1**	180
Port 1 closed	Ø 8 (5/16")	02282**M110Z_0**	02282**M111Z_1**	190
	Ø 10	02282**M210Z_0**	02282**M211Z_1**	190
	Ø 12	02282**M310Z_0**	02282**M311Z_1**	180
	Ø 1/2"	02282**M510Z_0**	02282**M511Z_1**	180
Ports 1, 3 and 5 closed	Ø 8 (5/16")	02282**M120Z_0**	02282**M121Z_1**	190
	Ø 10	02282**M220Z_0**	02282**M221Z_1**	190
	Ø 12	02282**M320Z_0**	02282**M321Z_1**	180
	Ø 1/2"	02282**M520Z_0**	02282**M521Z_1**	180
Ports 3 and 5 closed	Ø 8 (5/16")	02282**M130Z_0**	02282**M131Z_1**	190
	Ø 10	02282**M230Z_0**	02282**M231Z_1**	190
	Ø 12	02282**M330Z_0**	02282**M331Z_1**	180
	Ø 1/2"	02282**M530Z_0**	02282**M531Z_1**	180
Ports 1, 3, 5 and X closed	Ø 8 (5/16")	02282**M140Z_0**	02282**M141Z_1**	190
	Ø 10	02282**M240Z_0**	02282**M241Z_1**	190
	Ø 12	02282**M340Z_0**	02282**M341Z_1**	180
	Ø 1/2"	02282**M540Z_0**	02282**M541Z_1**	180

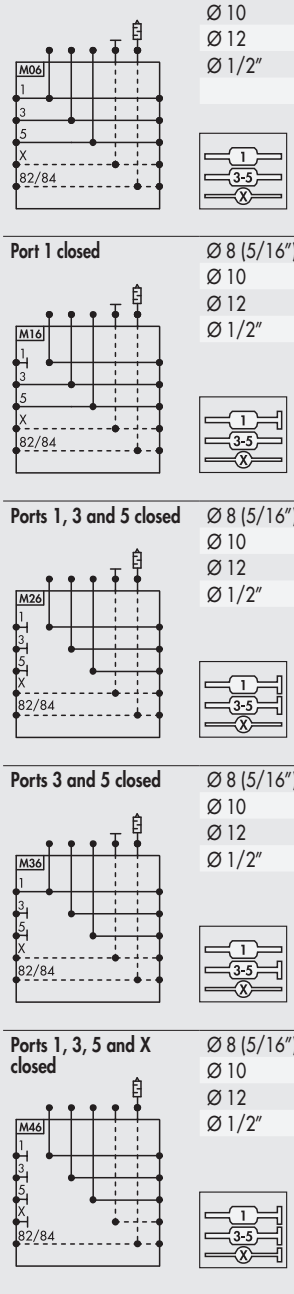

_ = To complete the code enter: **6**: øD = 8 mm; **7**: øD = 6 mm; **8**: øD = 4 mm

KEY TO CODES

02282	M	3	0	0	Z	3	0
FAMILY	SUBSYSTEM	PORT FITTING 1	PORTS IN THE BASE	ADDITIONAL ELECTRICAL POWER SUPPLY	UPPER PART	PORTS 3 AND 5 FITTING	ELECTRICAL CONNECTOR
02282 EB 80	**M** Intermediate	**1** Pipe fitting Ø 8 (5/16″) **2** Pipe fitting Ø 10 **3** Pipe fitting Ø 12 **5** Pipe fitting Ø 1/2″	**0** Full-flow ports **1** Port 1 closed **2** Ports 1, 3 and 5 closed **3** Ports 3 and 5 closed **4** Ports 1, 3, 5 and X closed	■ **0** Without ● **1** With	**Z** The upper part is present	**0** Silencer ▲ **1** Pipe fitting Ø 8 (5/16″) ▲ **2** Pipe fitting Ø 10 ▲ **3** Pipe fitting Ø 12 ▲ **5** Pipe fitting Ø 1/2″ **6** 2 pipes fitting Ø 8 (5/16″) (one for port 3, one for port 5) **7** 2 pipes fitting Ø 6 (one for port 3, one for port 5) **8** 2 pipes fitting Ø 4 (5/32″) (one for port 3, one for port 5)	■ **0** Without ● **1** With

▲ For ports 3/5, use the same Ø pipe as port 1. ■ Same number for both positions. ● Same number for both positions.

ACCESSORIES

M8 CONNECTOR FOR POWER SUPPLY

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black



Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m
0240009P60 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 3 m
0240009P37 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 5 m
0240009P58 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 10 m
0240009P59 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 15 m

* Very flexible cables, class 6 according to IEC 60228

M8 90° CONNECTOR FOR POWER SUPPLY

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black



Code	Description
0240009103	M8 4-pin connector - female, 90° angle L = 5 m

SILENCER FOR FITTING



Ø	Ø A	Ø B	C	D	S
8	6.5	14	23	42	24.5
12	10	18.8	29	51.5	31.5

Code	Description	Flow rate at 6.3 bar [Nl/min]	Weight [g]
W0970530084	Silencer for fitting, Ø 8	2400	15
W0970530086	Silencer for fitting, Ø 12	6000	24

SPARE PARTS

CARTRIDGE



Code	Description	Ø
02282R2110	EB 80 silencer cartridge kit	silencer
02282R2113	EB 80 Ø 8 power supply round cartridge kit	8 (5/16″)
02282R2114	EB 80 Ø 10 power supply round cartridge kit	10
02282R2115	EB 80 Ø 12 power supply round cartridge kit	12
02282R2118	EB 80 Ø 1/2 power supply round cartridge kit	1/2"

Comes in 10-pc. packs

BASE INTERFACE GASKET



Code	Description
02282R1000	EB 80 base interface gasket kit

Comes in 10-pc. packs

LOWER /UPPER BODY GASKET



Code	Description
02282R1001	EB 80 lower/upper body gasket kit

Comes in 10-pc. packs

EB 80 CLOSED END-PLATE - C

The "Closed end-plate - C" is the last element of each EB 80 system.
A version for islands with multi-pole connector is available.
One for islands with fieldbus, containing a small electronic board; one for connection to other additional EB 80 islands (only for systems with fieldbus).
The end plate houses the system for mechanically fixing the island to external supports.

TECHNICAL DATA

Ambient temperature	°C	-10 to + 50
	°F	14 to 122
Versions		For islands with multi-pole connection. For island with fieldbus. For connection to additional islands.
Degree of protection		IP65 (with connectors connected or plugged if not used)
Notes		All valve units (including multi-pole versions) require grounding protection. Use M4 thread on the end plate with braided cable code 02282R6000 provided or, when fixing the unit onto a DIN bar, connect the bar to grounding.

COMPONENTS

① BODY: painted metal
② FIXING SCREW: TCE M4x20 zinc-plated steel
③ GRUB SCREW securing the DIN bar or bracket: zinc-plated steel
④ RELIEF VALVE: safety in case of internal pressure increase due to temperature or losses
⑤ ELECTRONIC BOARD: none in the Closed end-plate for islands with multi-pole connector
⑥ M8 CONNECTOR: only in the Closed end-plate for connection with additional islands
⑦ GROUNDING ⏚

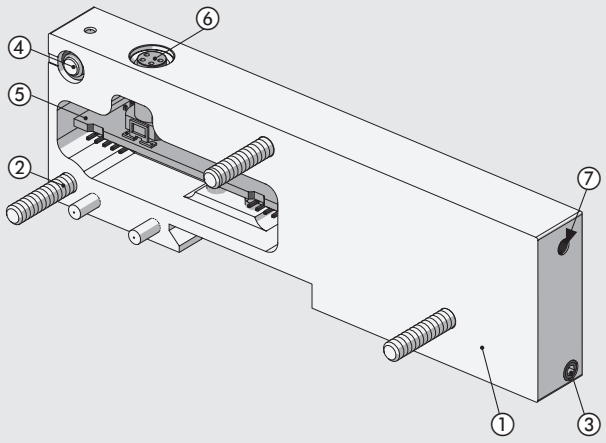

DIMENSIONS - ORDERING CODES

CLOSED END-PLATE FOR ISLANDS WITH MULTI-POLE CONNECTOR

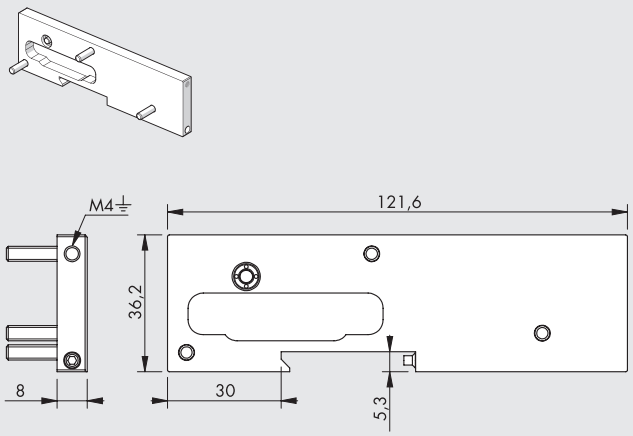

Symbol	Code	Description	Weight [g]
	02282**C1**	Closed end-plate for islands with multi-pole connector	150

CLOSED END-PLATE FOR ISLANDS WITH FIELDBUS

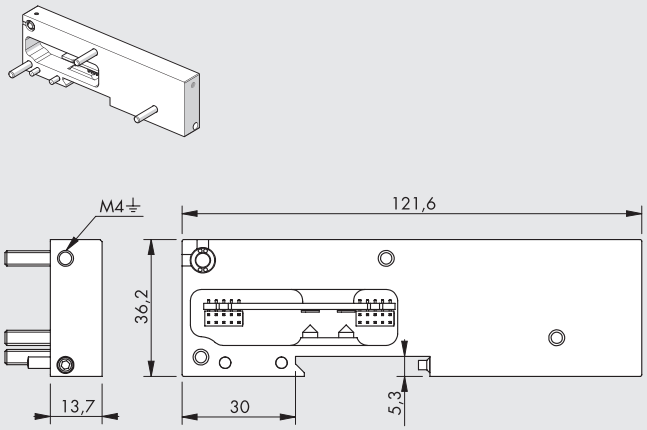

Symbol	Code	Description	Weight [g]
	02282**C2**	Closed end-plate for islands with fieldbus	220

Note: also usable for islands with multi-pole connector

CLOSED END-PLATE FOR ELECTRICAL CONNECTION OF ISLANDS WITH FIELDBUS TO ADDITIONAL ISLANDS

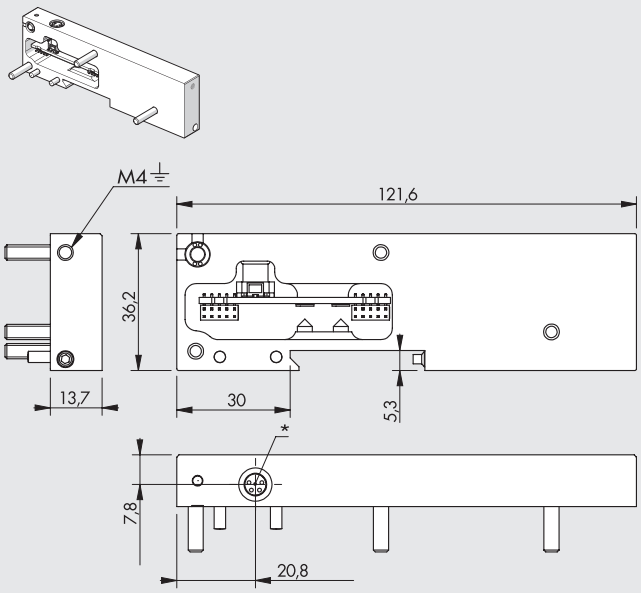

Symbol	Code	Description	Weight [g]
	02282**C3**	Closed end-plate for electrical connection to additional islands	150

Note: if you do not connect additional island you must mount the M8 end connector

* M8 connector for connection to additional islands.

N.B.: The system does not work until the connector is connected to the "Additional electrical connection - E" module.

METAL WORK PNEUMATIC

KEY TO CODES

02282	C	1
FAMILY	SUBSYSTEM	TYPE
02282 EB 80	**C** Closed end-plate	**1** For islands with multi-pole connection **2** For islands with fieldbus **3** For connection to additional islands

ACCESSORIES

M8 CONNECTOR WITH CABLE FOR CONNECTION BETWEEN EB 80 ISLANDS

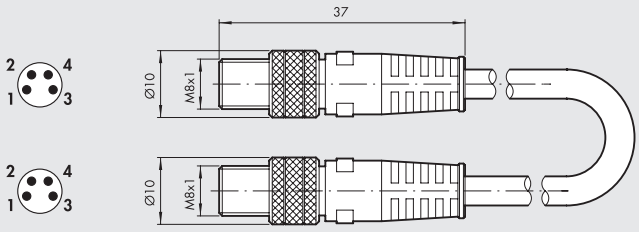

Code	Description	Weight [g]
0240010201	M8-M8 4-pin male straight connector with shielded cable L = 1 m	45
0240010205	M8-M8 4-pin male straight connector with shielded cable L = 5 m	185
0240010210	M8-M8 4-pin male straight connector with shielded cable L = 10 m	330
0240010215	M8-M8 4-pin male straight connector with shielded cable L = 15 m	475
0240010220	M8-M8 4-pin male straight connector with shielded cable L = 20 m	620
0240010405 *	M8-M8 4-pin male straight connector with shielded cable H-FLEX CL6, L = 5 m	185
0240010410 *	M8-M8 4-pin male straight connector with shielded cable H-FLEX CL6, L = 10 m	330
0240010415 *	M8-M8 4-pin male straight connector with shielded cable H-FLEX CL6, L = 15 m	475
0240010420 *	M8-M8 4-pin male straight connector with shielded cable H-FLEX CL6, L = 20 m	620

* Very flexible cables, class 6 according to IEC 60228

N.B.: For correct operation of the entire EB 80 system, use M8-M8 pre-wired, twisted and shielded cables only.

M8 ADAPTER CABLE

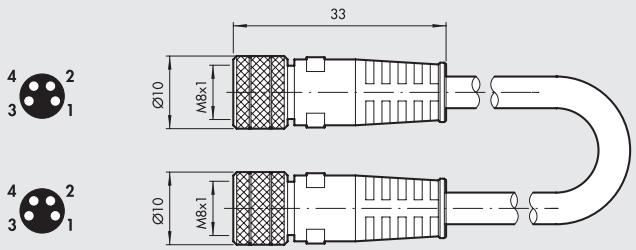

Code	Description	Weight [g]
0240010350	M8-M8 4-pin female adapter cable with shielded cable L = 200 mm	16

N.B.: Cannot be used with cables for mobile laying (H-FLEX CL6)

M8 END CONNECTOR FOR EB 80 VALVES



Code	Description
02282R5000	M8 end connector for EB 80 valves

BRAIDED GROUNDING CABLE



Code	Description
02282R6000	Braided grounding cable

EB 80 BOXI

Being extremely modular, the EB 80 electro-pneumatic system is ideal for the construction of all types of valve island and size. This great versatility is not always being utilized, especially in the case of applications where only a few valves are needed and where there is no need to handle input or output signals.
BOXI was designed to best meet this requirement for simplicity.
Each version includes pneumatic and electrical connections, control electronics and the possibility of installing 4, 6, 8 or 12 valves.
BOXI retains most of the features that have made the EB 80 so popular, namely:

- All the EB 80 valves, from the twin 2/2 to the high-flow models, can be installed.
- Can be powered at 12VDC or 24VDC.
- Bases with single or double electric control, featuring interchangeable cartridge fittings.
- Only 0.3 W to keep each valve controlled.
- Diagnostics (open circuit, overload, voltage short-circuit) with LED signal lights.
- Possibility of connecting multifunction modules to the outputs.

In addition, an extra supply and drain module to be fitted onto the 6, 8 or 12-position islands downstream the solenoid valves can be requested when ordering.

COMPONENTS

4-position valve island

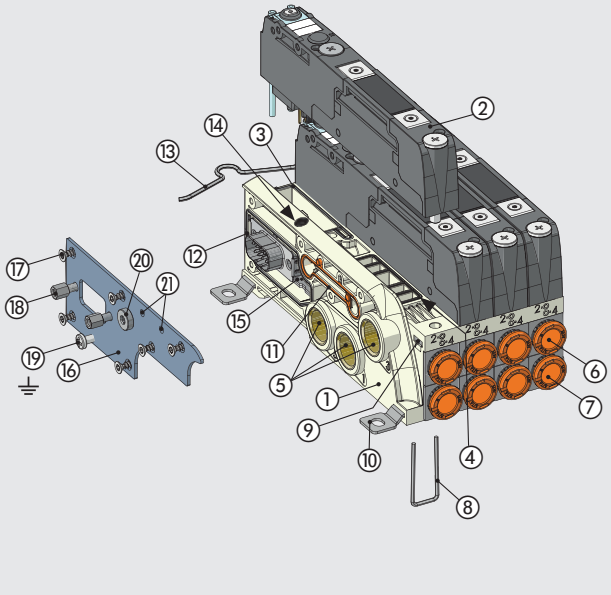

6-8-12-position valve island

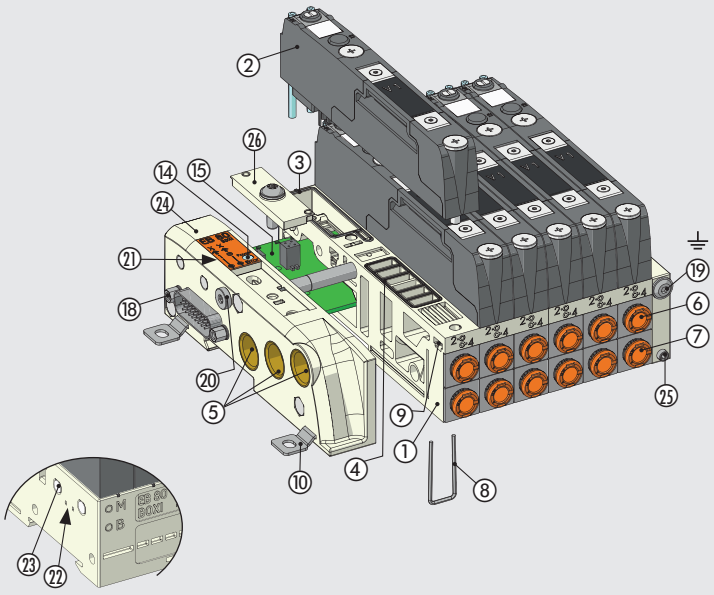

① BASE: technopolymer
② EB 80 VALVE (see page B2.5 and page B2.56)
③ GASKET: NBR
④ VALVE GASKET: NBR
⑤ PORTS 1-3-5: brass threaded element
⑥ PORT 2 CARTRIDGE: push-in fitting
⑦ PORT 4 CARTRIDGE: push-in fitting
⑧ CLIP for securing the cartridge: stainless steel
⑨ THREADED PLATE for securing the valves: zinc-plated steel
⑩ FIXING FOOT: zinc-plated steel
⑪ GASKET FOR SERVO-ASSISTING: NBR
⑫ GASKET FOR IP65: NBR
⑬ SPRING CLIP for omega bar: stainless steel
⑭ Alarm LED light display: technopolymer
⑮ ELECTRONIC BOARD
⑯ END PLATE: stainless steel
⑰ SCREW FOR FIXING THE CLOSING PLATE TO THE BASE: zinc-plated steel
⑱ ELECTRIC CONNECTOR FIXING COLUMNS: nickel-plated brass
⑲ GROUNDING SCREW: zinc-plated steel
⑳ A7/M5 PLUG (in the non-servo-assisted version only): nickel-plated brass
㉑ INDICATOR: indicaes whether pilot power supply is separate or not
㉒ RELIEF VALVE: safety in case of internal pressure increase due to temperature or losses
㉓ PILOT RELIEF: HDPE silencer
㉔ INPUT TERMINAL: technopolymer
㉕ GRUB SCREW securing the DIN bar or bracket: zinc-plated steel
㉖ INTERLOCKING SELECTOR SWITCH: zinc alloy

METAL WORK PNEUMATIC

TECHNICAL DATA

Supply voltage range	VDC	12 -10% 24 +30%					
Minimum operating voltage	VDC	10.8 *					
Maximum operating voltage	VDC	31.2					
Maximum admissible voltage	VDC	32 ***					
Power for each controlled pilot	W	3 for 15 ms, tthen holding 0.3					
Drive		PNP					
Solenoid rating		100% ED					
Protection		Overload protection					
Grounding		With screw on a metal closing plate					
Diagnostics		LED light signal on the base					
Faults signalled		Solenoid pilot broken or missing; solenoid pilot overload. power supply out of range					
Type of electric solenoid pilot control		Version with one electric control at each valve position (only multipole) Version with two electric controls at each valve position (multipole and IO-Link)					
Electrical connection		D-Sub 9-pin multipole (BOXI 4-position); D-Sub 26-pin multipole (BOXI 6, 8, 12-position) IO-Link with M12x1 connector					
Ambient temperature	°C	-10 to + 50 (at 8 bar)					
	°F	14 to 122 (at 8 bar)					
Operating pressure		**5/2 and 5/3**			**2/2 and 3/2**		
Non-assisted valves	bar	3 to 8			3.5 to 8		
	MPa	0.3 to 0.8			0.35 to 0.8		
	psi	43 to 116			51 to 116		
Assisted valves	bar	Vacuum to 10					
	MPa	Vacuum to 1					
	psi	Vacuum to 145					
Servo pressure	bar	3 to 8			min (see graph on page **B2**.57) / max. 8		
	MPa	0.3 to 0.8			min (see graph on page **B2**.57) / max. 0.8		
	psi	43 to 116			min (see graph on page **B2**.57) / max. 116		
Pneumatic fittings		Supply (port 1) and exhaust (ports 3 and 5): 1/4" G (BSP) or 1/4" NPT. Piloting (X): M5 or 10/32" UNF (with adapter)					
Pneumatic outputs		Pipe fittings Ø 4 (5/32"), 6, 8 (5/16"), 1/4"					
Flow rate at 6.3 bar ΔP 1 bar Feeding (port 1)	Nl/min	4500					
6.3 bar flow rate with free exhaust from ports 3 and 5	Nl/min	5500 + 5500					
Valve flow rate, at 6.3 bar ΔP 1 bar		**Ø 4 (5/32")**	**Ø 6**	**Ø 8 (5/16")**	**Ø 1/4"**	**Ø 10 ****	**Ø 3/8" ****
valve 2/2	Nl/min	350	430	500	430	-	-
valve 3/2	Nl/min	350	600	700	600	1250	1250
valve 5/2	Nl/min	350	650	800	650	1250 - 1400	1250 - 1400
valve 5/3	Nl/min	350	460	500	460	1000 - 1250	1000 - 1250
valve V3V (R)	Nl/min	-	-	-	-	1000	1000
Actuation response time (TRA) / reset response time (TRR) at 6 bar							
TRA/TRR valve 2/2 and 3/2	ms	14 / 28					
TRA/TRR valves 5/2 monostable and shut-off valve	ms	12 / 45					
TRA/TRR valve 5/2 bistable	ms	12 / 14					
TRA/TRR valve 5/3	ms	15 / 45					
TRA/TRR valve 3/2 high flow	ms	13 / 36					
Fluid		Unlubricated air					
Air quality required		ISO 8573-1 class 4-7-3					
Degree of protection		IP65					
Category ATEX		Ⓔx II 3G Ex ec IIC T5 Gc X -10°C<Ta<50°C Ⓔx II 3D Ex tc IIIC T100°C Dc X					
Certifications		CE - EAC - c UL us - Ⓔx					
Weight (without valves)	g	330 (4-position); 640 (6-position); 780 (8-position); 1060 (12-position)					

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28

** Using high-flow valves or connected valves - see pages **B2**.58

*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

CERTIFICATIONS

The c UL us certification for the part concerning only CSA (Canada) is bound to the following conditions of use:

- environment temperature: max 45°C
- ED max 70%

If non-adjoining valves are used, ED max can reach 100% (environment temperature max 45°C)

THE EB 80 BOXI WORLD

VALVES

Z_ ▲	I_ ▲	W_ ▲	L_ ▲	V_	K_ ▲	O_ ▲	G_	J_	R_ ✚	N0	Y8
											
2 valves 2/2 NC	2 valves 3/2 NC (valid as 5/3 OC)	2 valves 3/2 NO (valid as 5/3 PC)	3/2 NC + 3/2 NO	Monostable 5/2	Bistable 5/2	5/3 CC	3/2 NC high flow	3/2 NO high flow	Shut-off valve	Dummy valve	Bypass
See page **B2**.57	See page **B2**.57	See page **B2**.57	See page **B2**.57	See page **B2**.57	See page **B2**.57	See page **B2**.57	See page **B2**.58	See page **B2**.58	See page **B2**.59	See page **B2**.60	See page **B2**.60

▲ Can only be used with 8 control bases.
✚ Requires inlet port X slave synchronisation.

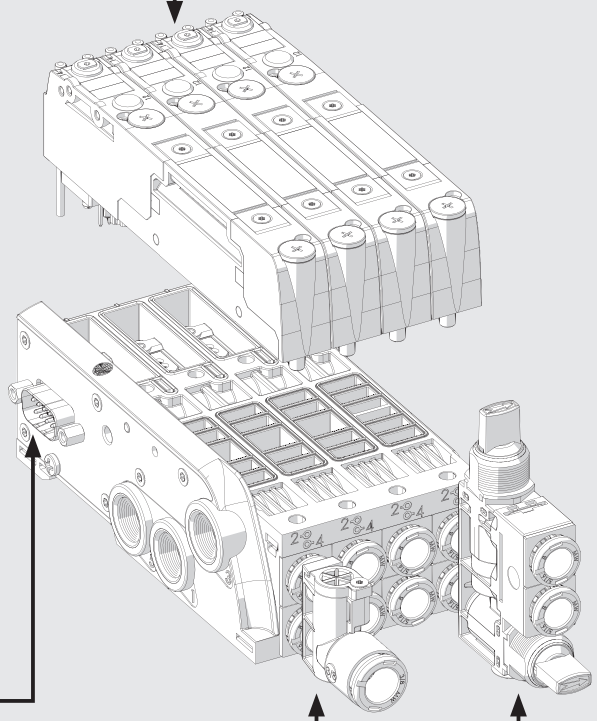

ELECTRICAL CONNECTION

4-position		6-8-12-position	
			
D-Sub 9-pin multipole	IO-Link M12x1 5 pin coding A	D-Sub 26-pin multipole	IO-Link M12x1 5 pin coding A
See page **B2**.82	See page **B2**.82	See page **B2**.92	See page **B2**.92

Y-FITTING

R2

Y-fitting
See page **B2**.61

MULTI-FUNCTION MODULE


Fittings with pneumatic functions
See page **B2**.94

SOME CHARACTERISTICS OF EB 80 BOXI SYSTEMS

THE SAME ISLAND CAN BE SUPPLIED 10.8 - 31.2 VDC

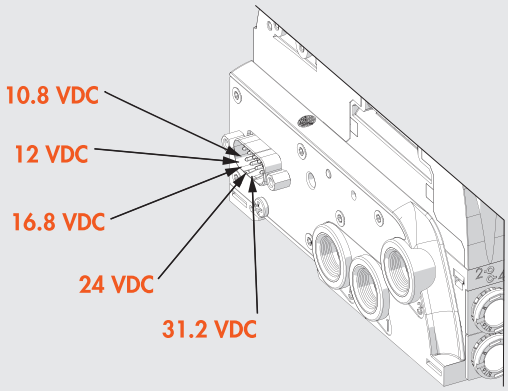

ONLY 0.3 W FOR EACH SOLENOID VALVE

- Speed-up solenoid valve control:
  - high power for a few milliseconds ensures high performance and rapid and safe switching;
  - reduced holding power resulting in reduced temperatures and energy saving.

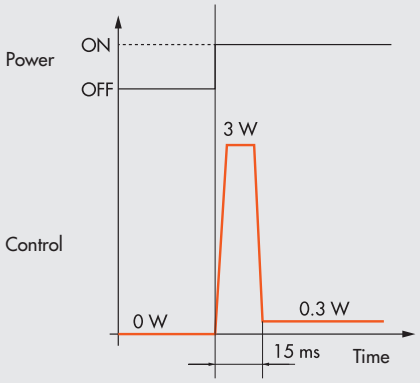

INTERCHANGEABLE CARTRIDGE FITTINGS

- For pipes Ø 4 (5/32"), 6, 8 (5/16"), 1/4"

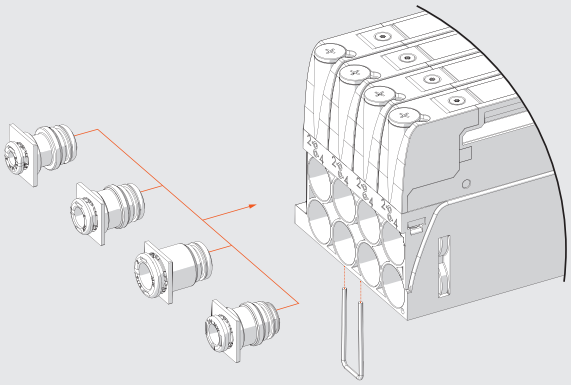

FRONT SUPPLY AND EXHAUSTS

On the BOXI islands, a Bypass module Ⓨ can be mounted in any position instead of a solenoid valve so as to obtain all front pneumatic connections.
In the case of 6-8-12-position islands, the additional power supply can be used (see page **B2**.91), so that no electrical control is lost and the number of useful valves remains unchanged.
The side inlets must be closed with A7 1/4 plugs Ⓣ.

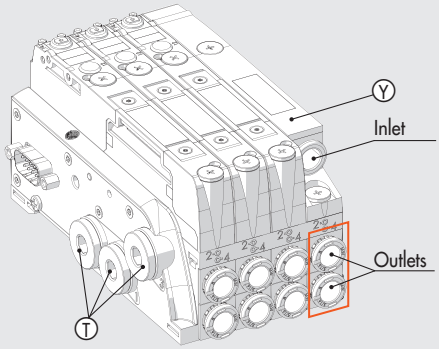

TYPE OF DATA IN THE BASES



● M
○ B = only one electrical control for each position. Can only be used with valves with one solenoid pilot, types V, J, G and R. If you use a N dummy or Y bypass valve, it is occupied an electric position.

○ M
● B = 2 electrical controls for each position. It can be used for all types of valves. If you use a V, G, J or R type valves (with only one solenoid pilot), N dummy or Y bypass valve, both electrical positions get occupied.

EB 80 BOXI - 4-POSITION VALVE ISLAND

FIXING OPTIONS

Fixing on a DIN bar: fixing on a DIN bar in the sequence indicated.

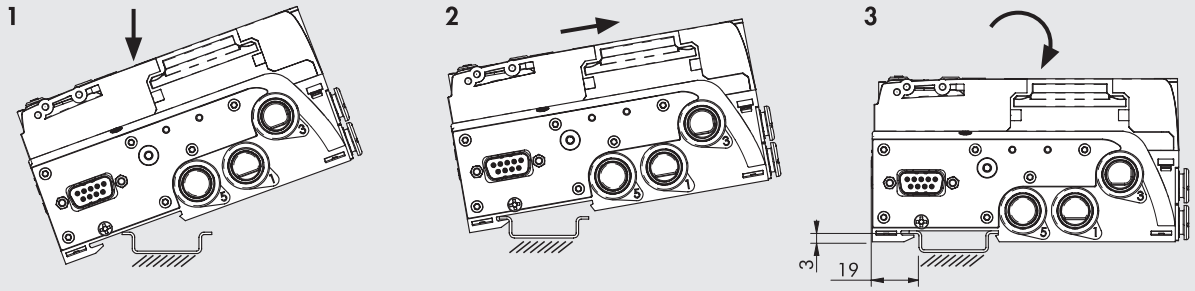

Fixing by means of brackets: 3 brackets are already included in each EB 80 BOXI pack. Push them firmly into the appropriate seats on the base up to the "click".





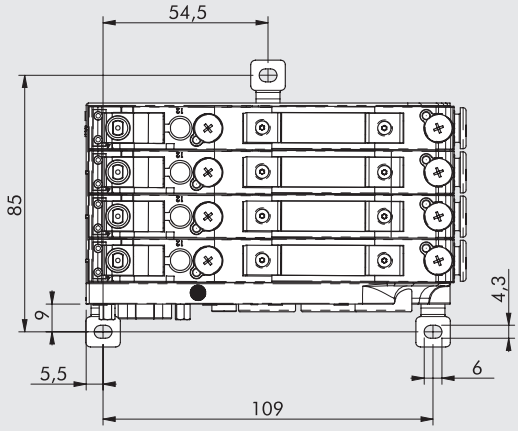

METAL WORK PNEUMATIC

EB 80 BOXI WIRING DIAGRAM

D-Sub 9-PIN CONNECTOR

4-position base for 8 pilots

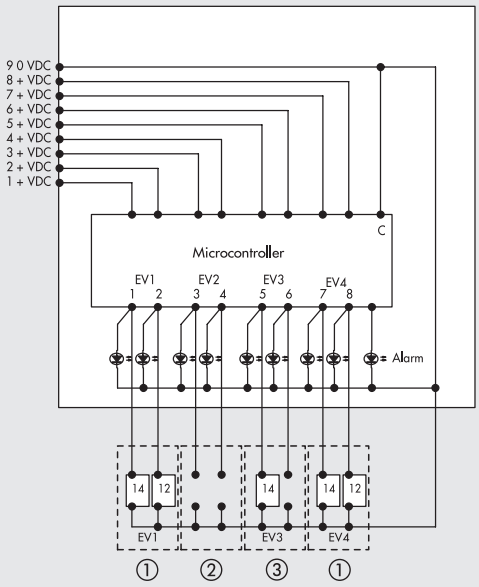

4-position base for 4 pilots

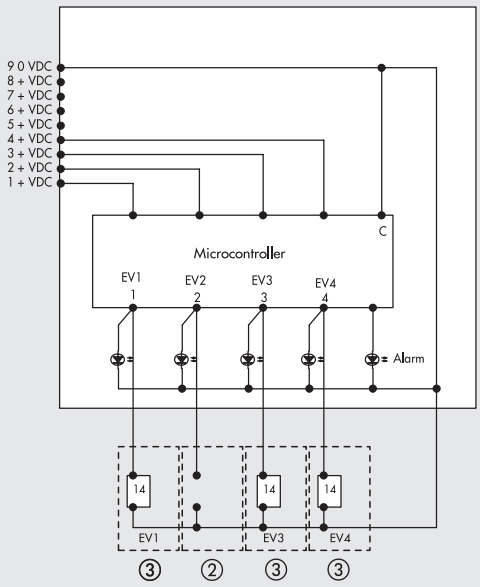

Examples of types of valves:
① Valve with 2 solenoid pilots
② Dummy valve or bypass
③ Valve with 1 solenoid pilot

EB 80 BOXI IO-Link WIRING DIAGRAM

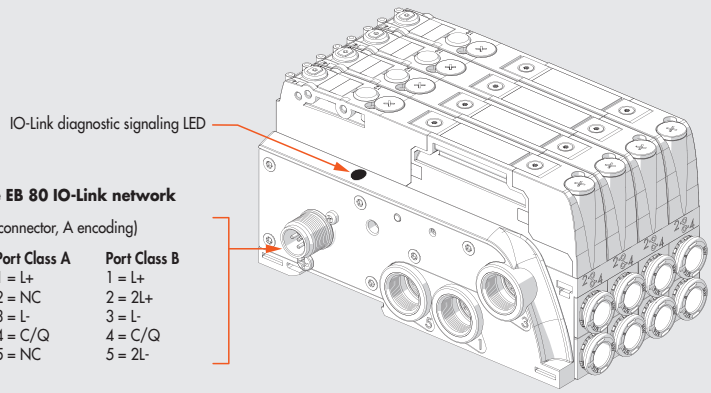

Connection to the EB 80 IO-Link network

BUS IN (M12 male connector, A encoding)



Port Class A	Port Class B
1 = L+	1 = L+
2 = NC	2 = 2L+
3 = L-	3 = L-
4 = C/Q	4 = C/Q
5 = NC	5 = 2L-

TECHNICAL DATA		
Fieldbus		IO-Link version 1.1
Communication speed	Kbps	230.4 (COM3)
Vendor ID / Device ID		1046 (hex 0x0416) / 8 (hex 0x000008)
Minimum cycle time	ms	2.8
Process data length		1 byte of Input / 1 byte of Output
Supply voltage range (M8 connector)	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
IO-Link power supply (L+L - Bus IN connector)	VDC	min 20, max 30
Protection		Module protected from overload and polarity inversion. Outputs protected from overloads.
Connections		M12 male, A-coded - Port Class A - Port Class B.
Diagnostics**		IO-Link: via local LED lights and software messages. Outputs: via local LED
Power supply current absorption		See EB 80 Boxi IO-Link instruction manual
Maximum number of pilots		8
Data bit value		0 = non-active; 1= active
State of outputs in the absence of communication		Configurable for each output: non-active, holding of the state, setting of a preset state

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28
** Refer to the user manual for a detailed description.
*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

DIMENSIONS - ORDERING CODES

EB 80 BASE BOXI WITH D-Sub 9-PIN MULTIPOLE ELECTRICAL CONNECTION



* Pilot (only for servo-assisted version)

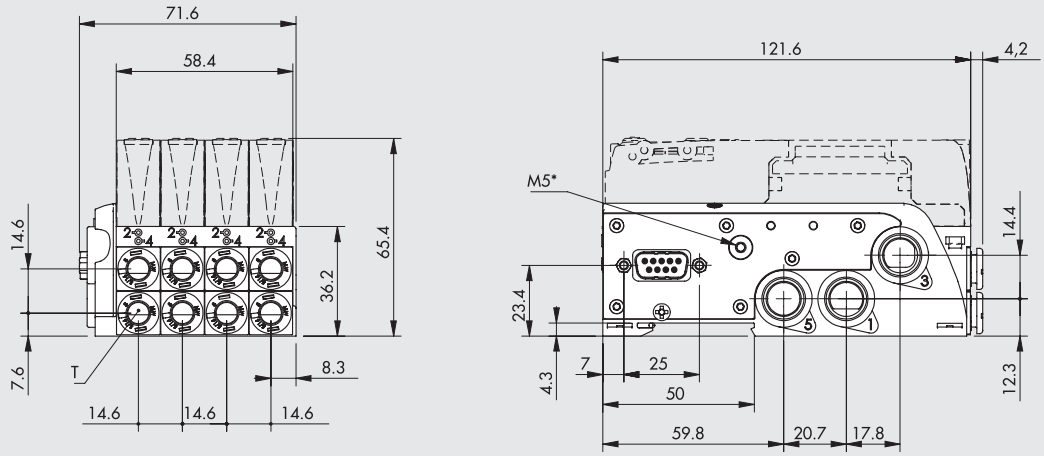

Port threads 1, 3, 5 in G (BSP)

		Code	
	T - Pipe fitting	4 CONTROLS	8 CONTROLS
Servo-assisted	without cartridges	0228**BGX4M1111**	0228**BGX8M1111**
	Ø 4 (5/32")	0228**BGX4M4444**	0228**BGX8M4444**
	Ø 6	0228**BGX4M6666**	0228**BGX8M6666**
	Ø 8 (5/16")	0228**BGX4M8888**	0228**BGX8M8888**
	Ø 1/4"	0228**BGX4M2222**	0228**BGX8M2222**
Non-servo-assisted	without cartridges	0228**BG14M1111**	0228**BG18M1111**
	Ø 4 (5/32")	0228**BG14M4444**	0228**BG18M4444**
	Ø 6	0228**BG14M6666**	0228**BG18M6666**
	Ø 8 (5/16")	0228**BG14M8888**	0228**BG18M8888**
	Ø 1/4"	0228**BG14M2222**	0228**BG18M2222**

Port threads 1, 3, 5 in NPT

		Code	
	T - Pipe fitting	4 CONTROLS	8 CONTROLS
Servo-assisted	without cartridges	0228**BUX4M1111**	0228**BUX8M1111**
	Ø 4 (5/32")	0228**BUX4M4444**	0228**BUX8M4444**
	Ø 6	0228**BUX4M6666**	0228**BUX8M6666**
	Ø 8 (5/16")	0228**BUX4M8888**	0228**BUX8M8888**
	Ø 1/4"	0228**BUX4M2222**	0228**BUX8M2222**
Non-servo-assisted	without cartridges	0228**BU14M1111**	0228**BU18M1111**
	Ø 4 (5/32")	0228**BU14M4444**	0228**BU18M4444**
	Ø 6	0228**BU14M6666**	0228**BU18M6666**
	Ø 8 (5/16")	0228**BU14M8888**	0228**BU18M8888**
	Ø 1/4"	0228**BU14M2222**	0228**BU18M2222**

EB 80 BASE BOXI WITH ELECTRICAL CONNECTION IO-Link (M12x1)



* Pilot (only for servo-assisted version)

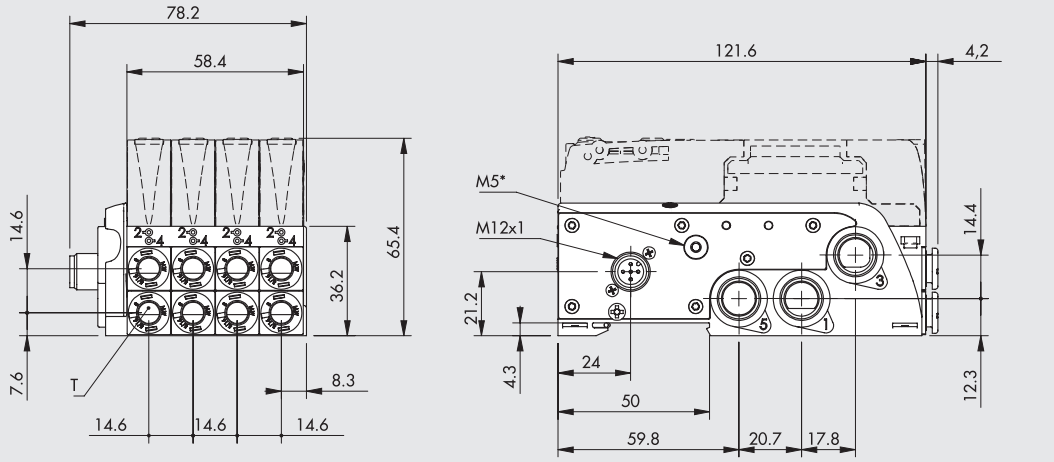

Port threads 1, 3, 5 in G (BSP)

		Code
	T - Pipe fitting	8 CONTROLS
Servo-assisted	without cartridges	0228**BGX8L1111**
	Ø 4 (5/32")	0228**BGX8L4444**
	Ø 6	0228**BGX8L6666**
	Ø 8 (5/16")	0228**BGX8L8888**
	Ø 1/4"	0228**BGX8L2222**
Non-servo-assisted	without cartridges	0228**BG18L1111**
	Ø 4 (5/32")	0228**BG18L4444**
	Ø 6	0228**BG18L6666**
	Ø 8 (5/16")	0228**BG18L8888**
	Ø 1/4"	0228**BG18L2222**

Port threads 1, 3, 5 in NPT

		Code
	T - Pipe fitting	8 CONTROLS
Servo-assisted	without cartridges	0228**BUX8L1111**
	Ø 4 (5/32")	0228**BUX8L4444**
	Ø 6	0228**BUX8L6666**
	Ø 8 (5/16")	0228**BUX8L8888**
	Ø 1/4"	0228**BUX8L2222**
Non-servo-assisted	without cartridges	0228**BU18L1111**
	Ø 4 (5/32")	0228**BU18L4444**
	Ø 6	0228**BU18L6666**
	Ø 8 (5/16")	0228**BU18L8888**
	Ø 1/4"	0228**BU18L2222**

METAL WORK PNEUMATIC

KEY TO CODING OF THE EB 80 BOXI WITHOUT VALVES

0228B	G	1	8	M	4	4	4	4
FAMILY	PORT THREADS 1, 3, 5	PILOTING	NUMBER OF SOLENOID PILOT CONTROLS	ELECTRICAL CONNECTION	FITTINGS 1ª position (from left)	2ª position	3ª position	4ª position
0228B EB 80 BOXI	**G** 1/4" G (BSP) **U** 1/4" NPT	**1** Non-servo-assisted **X** Servo-assisted	**4** 4 controls	**M** D-Sub 9-pin multipole connection	**1** The whole base without cartridges **2** Pipe fitting Ø 1/4" **4** Pipe fitting Ø 4 (5/32") **6** Pipe fitting Ø 6 **8** Pipe fitting Ø 8 (5/16")			
			8 8 controls	**M** D-Sub 9-pin multipole connection **L** IO-Link, M12x1				

KEY TO CODING OF THE EB 80 BOXI COMPLETE WITH VALVES

0228B	G	1	8	M	4	4	4	4	0	V V K I
FAMILY	PORT THREADS 1, 3, 5	PILOTING	NUMBER OF SOLENOID PILOT CONTROLS	ELECTRICAL CONNECTION	FITTINGS 1ª position (from left)	2ª position	3ª position	4ª position	MANUAL CONTROL	VALVES
0228B EB 80 BOXI	**G** 1/4" (BSP) **U** 1/4" NPT	**1** Non-servo-assisted **X** Servo-assisted	**4** 4 controls	**M** D-Sub 9-pin multipole connection	**1** The whole base without cartridges **2** Pipe fitting Ø 1/4" **4** Pipe fitting Ø 4 (5/32") **6** Pipe fitting Ø 6 **8** Pipe fitting Ø 8 (5/16")				**0** Monostable **1** Bistable	**V** 5/2 monostable **G** 3/2 NC high flow **J** 3/2 NO high flow ✚ **R** Shut-off valve **Y** Bypass **N** Dummy valve (plug)
			8 8 controls	**M** D-Sub 9-pin multipole connection **L** IO-Link, M12x1						**Z** 2 valves 2/2 NC **I** 2 valves 3/2 NC **W** 2 valves 3/2 NO **L** 3/2 NC + 3/2 NO **V** 5/2 monostable **K** 5/2 bistable **O** 5/3 CC **G** 3/2 NC high flow **J** 3/2 NO high flow ✚ **R** Shut-off valve **N** Dummy valve (plug)

✚ Requires inlet port X slave synchronisation.

ACCESSORIES

STRAIGHT IP65 9-PIN PLUG CONNECTOR KIT



Code	Description	Weight [g]
02269G0000	Straight D-Sub 9-PIN IP65 connector kit	20

STRAIGHT IP40 9-PIN PLUG CONNECTOR KIT



Code	Description	Weight [g]
0226180102	Straight D-Sub 9-PIN connector kit	20

CABLE



Code	Description	Weight [g/m]
0226107201	10-PIN cable	60

Specify the number of metres desired.

① PRE-WIRED STRAIGHT IP65 9-PIN PLUG CONNECTOR KIT



Code	Description	Weight [g/m]
02269G0100	Straight D-Sub 9-PIN IP65 connector + cable L = 1 m	80
02269G0250	Straight D-Sub 9-PIN IP65 connector + cable L = 2.5 m	170
02269G0500	Straight D-Sub 9-PIN IP65 connector + cable L = 5 m	320
02269G1000	Straight D-Sub 9-PIN IP65 connector + cable L = 10 m	620
02269G2000	Straight D-Sub 9-PIN IP65 connector + cable L = 20 m	1220
02269H0100*	Straight D-Sub 9-PIN IP65 connector, UL H-FLEX CL6, cable L = 1 m	80
02269H0250*	Straight D-Sub 9-PIN IP65 connector, UL H-FLEX CL6, cable L = 2.5 m	170
02269H0500*	Straight D-Sub 9-PIN IP65 connector, UL H-FLEX CL6, cable L = 5 m	320
02269H1000*	Straight D-Sub 9-PIN IP65 connector, UL H-FLEX CL6, cable L = 10 m	620

* Very flexible cables, class 6 according to IEC 60228

② PRE-WIRED STRAIGHT IP40 9-PIN PLUG CONNECTOR KIT



Code	Description	Weight [g/m]
0226900100	Straight D-Sub 9-PIN connector + cable L = 1 m	80
0226900250	Straight D-Sub 9-PIN connector + cable L = 2.5 m	170
0226900500	Straight D-Sub 9-PIN connector + cable L = 5 m	320
0226900750	Straight D-Sub 9-PIN connector + cable L = 7.5 m	470
0226901000	Straight D-Sub 9-PIN connector + cable L = 10 m	620
0226901500	Straight D-Sub 9-PIN connector + cable L = 15 m	920
0226902000	Straight D-Sub 9-PIN connector + cable L = 20 m	1220
0226905000	Straight D-Sub 9-PIN connector + cable L = 50 m	3020

② PRE-WIRED 90° IP40 9-PIN PLUG CONNECTOR



Code	Description	Weight [g/m]
0226910100	90° D-Sub 9-PIN connector + cable L = 1 m	80
0226910250	90° D-Sub 9-PIN connector + cable L = 2.5 m	170
0226910500	90° D-Sub 9-PIN connector + cable L = 5 m	320
0226910750	90° D-Sub 9-PIN connector + cable L = 7.5 m	470
0226911000	90° D-Sub 9-PIN connector + cable L = 10 m	620
0226911500	90° D-Sub 9-PIN connector + cable L = 15 m	920

WIRING DIAGRAM FOR PRE-WIRED 9-PIN PLUG CONNECTORS

Position of electrical contact	Colour of the corresponding wire Metal Work cable IP40 connector ②	Colour of the corresponding wire (DIN 47100) IP65 connector ①	Function	4-position base	8-position base
1	green/black	white	Out 1 + VDC	solenoid pilot 14 valve 1	solenoid pilot 14 valve 1
2	white	brown	Out 2 + VDC	solenoid pilot 14 valve 2	solenoid pilot 12 valve 1
3	blue/black	green	Out 3 + VDC	solenoid pilot 14 valve 3	solenoid pilot 14 valve 2
4	blue	yellow	Out 4 + VDC	solenoid pilot 14 valve 4	solenoid pilot 12 valve 2
5	yellow/black	grey	Out 5 + VDC	/	solenoid pilot 14 valve 3
6	yellow	pink	Out 6 + VDC	/	solenoid pilot 12 valve 3
7	red/black	blue	Out 7 + VDC	/	solenoid pilot 14 valve 4
8	green	red	Out 8 + VDC	/	solenoid pilot 12 valve 4
9	white/black	black	COM 0VDC	common	common

METAL WORK PNEUMATIC

STRAIGHT CONNECTOR FOR M12, A-CODED



Code	Description
W0970513001	5-PIN M12x1 straight connector

Note: Can be used for IO-Link

STRAIGHT CONNECTOR WITH WIRE FOR M12, A-CODED

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray



Code	Description
W0970513002	5-PIN M12x1 straight connector with wire L = 5 m

Note: Can be used for IO-Link

90° CONNECTOR FOR M12, A-CODED



Code	Description
W0970513003	M12x1 5-PIN 90° connector

Note: Can be used for IO-Link

90° CONNECTOR WITH WIRE FOR M12, A-CODED

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray

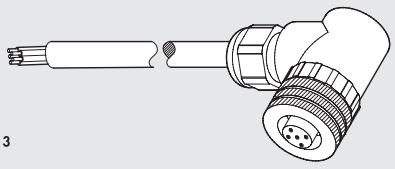

Code	Description
W0970513004	M12x1 5-PIN 90° connector with wire L = 5 m

Note: Can be used for IO-Link

T-CONNECTOR M12 A-CODED / M8 MALE FOR AUXILIARY POWER



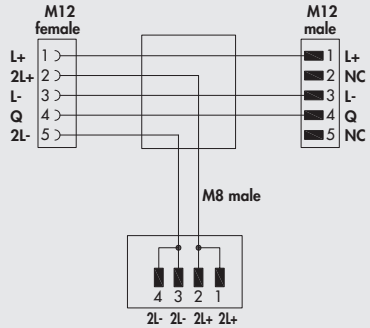

Code	Description
0240009070	T - connector for auxiliary power

Note: Can be used for IO-Link

SPARE PARTS

CARTRIDGE



Code	Description	Ø
02282R2001	EB 80 Ø 4 base square cartridge kit	4 (5/32")
02282R2002	EB 80 Ø 6 base square cartridge kit	6
02282R2003	EB 80 Ø 8 base square cartridge kit	8 (5/16")
02282R2006	EB 80 Ø 1/4 base square cartridge kit	1/4"

Comes in 10-pc. packs

BASE-VALVE GASKET



Code	Description
02282R1002	EB 80 base-valve gasket kit

Comes in 10-pc. packs

GASKETS BETWEEN BASE AND COVER SHEET METAL



Code	Description
02282R1006	EB 80 BOXI kit of gaskets between base and cover sheet metal

Comes in 10-pc. packs

FIXING FOOT

Code	Description
02282R4002	EB 80 BOXI fixing foot

Comes in 3-pc. packs

KIT PNEUMATIC MOTION® EB 80 BOXI

The EB 80 BOXI complete with electrical connector, cable, fittings and silencers can be supplied under one ordering code only.

REQUEST THE KIT CODE BY SPECIFYING:

- The EB 80 BOXI code
- The code of the single connector or pre-wired connector
- The fitting and the quantity desired. We suggest choosing one among those listed below ▲
- The silencer and the quantity desired. We suggest choosing one among those listed below ◆

Example
0228BG18M66660KKKK
02269G0250
n° 1 2L01010
n° 2 W0970530053

▲ 1/4" FITTINGS FOR BOXI PNEUMATIC SUPPLIES *

Ø Pipe	Straight male cylindrical code (R1)	L rotary elbow, male, code (R34)
4	2L01003	2L34003
6	2L01008	2L34008
8	2L01010	2L34010
10	2L01012	2L34013
12	2001019	-

* Normally, one is used for port 1

◆ SILENCERS FOR EB 80 BOXI OUTLET PORTS **

	Code
SFE silencer with stainless steel mesh	W0970530053
SPLF silencer made of resin with felt	W0970530073

** Normally, two are used for ports 3 and 5

EB 80 BOXI - 6-8-12-POSITION VALVE ISLAND

FIXING OPTIONS

Fixing on a DIN bar: tighten the screw on the end plate.

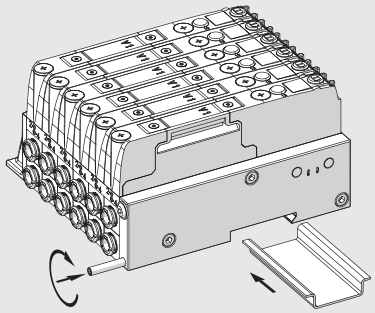

Fixing by means of brackets: the 3 brackets are already included in each EB 80 BOXI island. On the pressure inlet side, push the two brackets ① firmly into the appropriate seats on the base up to the "click". Tighten the screw on the end plate to secure the third bracket ②.

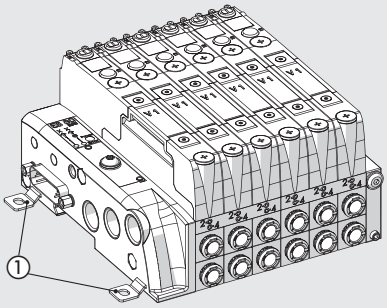



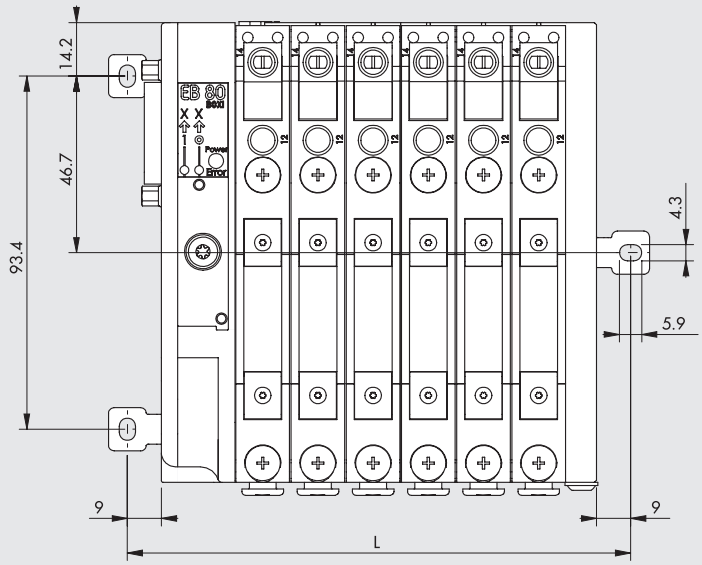

Boxi island	L (mm)
6 position	133
6 position with additional pneumatic supply	153
8 position	162
8 position with additional pneumatic supply	182.5
12 position	221
12 position with additional pneumatic supply	241

WIRING DIAGRAM MULTIPOLE VERSION

D-Sub 26-PIN CONNECTOR



Examples of types of valves:
① Valve with 2 solenoid pilots
② Dummy valve or bypass
③ Valve with 1 solenoid pilot

Base with 2 electric controls at each valve position

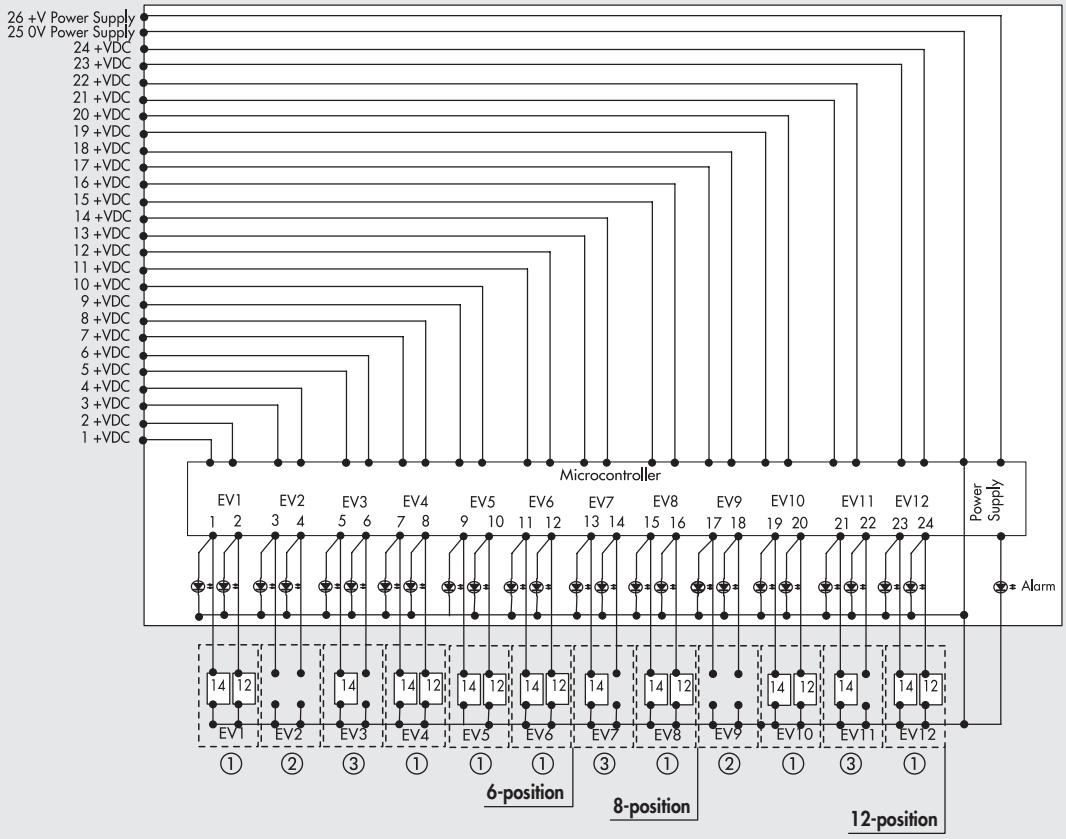

Base with 1 electric control at each valve position

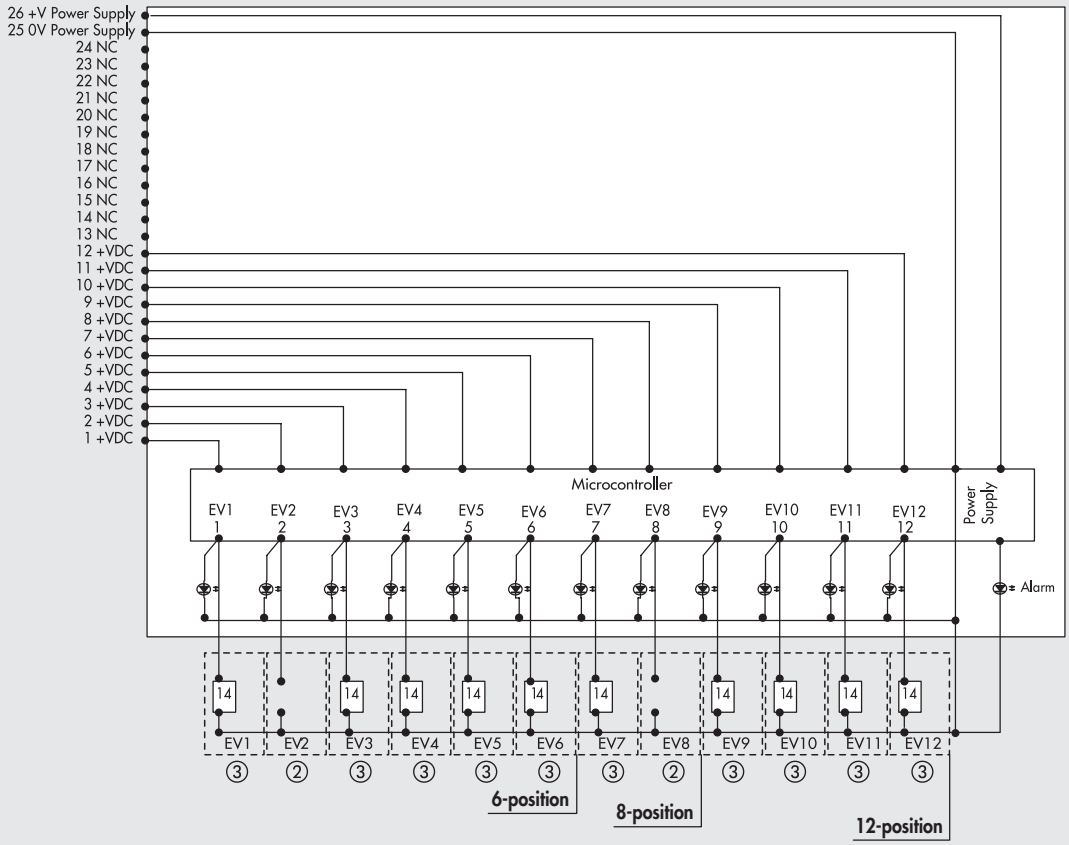

EB 80 BOXI IO-Link WIRING DIAGRAM

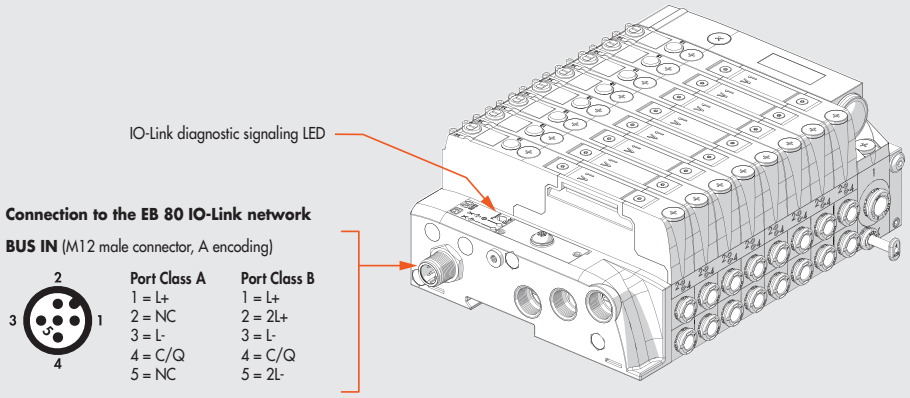

TECHNICAL DATA		
Fieldbus		IO-Link version 1.1
Communication speed	Kbps	230.4 (COM3)
Vendor ID / Device ID		1046 (hex 0x0416) / 8 (hex 0x000008)
Minimum cycle time	ms	2.8
Process data length		1 byte of Input / 2 bytes of Output for 8- and 6-position bases
		1 byte of Input / 3 bytes of output for 12-position bases
Supply voltage range (M8 connector)	VDC	12 -10% 24 +30%
Minimum operating voltage	VDC	10.8 *
Maximum operating voltage	VDC	31.2
Maximum admissible voltage	VDC	32 ***
IO-Link power supply (L+L - Bus IN connector)	VDC	min 20, max 30
Protection		Module protected from overload and polarity inversion. Outputs protected from overloads.
Connections		M12 male, A-coded - Port Class A - Port Class B.
Diagnostics**		IO-Link: via local LED lights and software messages. Outputs: via local LED
Power supply current absorption		See EB 80 Boxi IO-Link instruction manual
Maximum number of pilots		12 - 16 - 24
Data bit value		0 = non-active; 1= active
State of outputs in the absence of communication		Configurable for each output: non-active, holding of the state, setting of a preset state

* **Minimum voltage 10.8VDC required at solenoid pilots. Check the minimum voltage at the power supply output using the calculations shown on page B2**.28
** Refer to the user manual for a detailed description.
*** **IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

NOTES

DIMENSIONS

MULTI-POLE ELECTRICAL CONNECTION

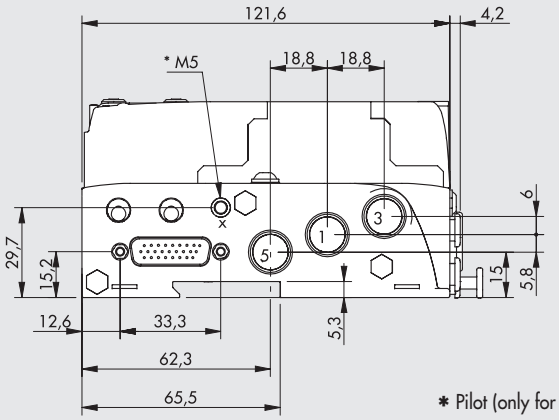

* Pilot (only for servo-assisted version)

ELECTRICAL CONNECTION IO-Link



6-POSITION



With additional pneumatic supply

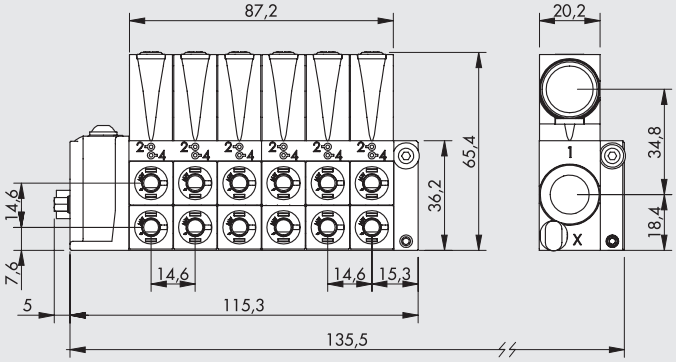



NB: For dimensions not indicated, see multi-pole electrical connection

8-POSITION



With additional pneumatic supply

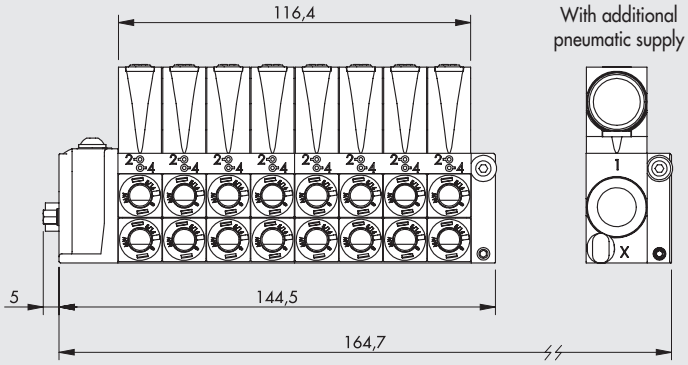

12-POSITION



With additional pneumatic supply

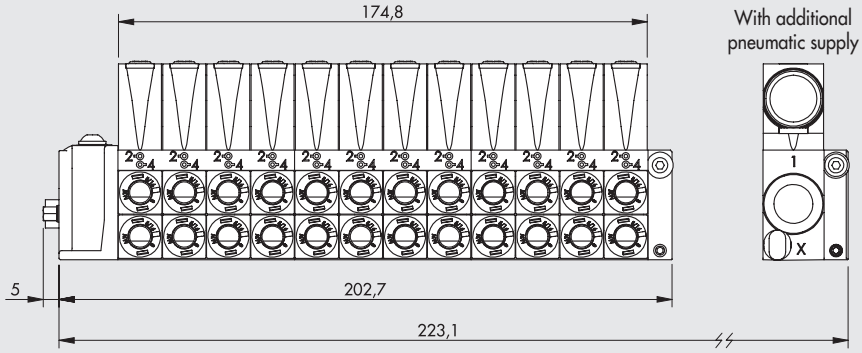

METAL WORK PNEUMATIC

ADDITIONAL PNEUMATIC SUPPLY

During the configuration of the BOXI island, it is possible to insert, in the final position, an additional dedicated pneumatic supply and exhaust module, in order to increase the inlet and exhaust air flow rate of the island. **The module cannot be inserted into already assembled islands.**
It is recommended in cases where there is simultaneous operation of several solenoid valves, with a flow rate request exceeding 3000 Nl/min*, or when it becomes important to have a quick pressure relief from ports 3 and 5.
It can be requested with a silenced exhaust or with a conveyed exhaust with fittings for Ø 8 - Ø 10, Ø 12 or Ø 1/2" pipes.

* Indicative value, depending on the operating pressure, the supply hoses and the specific needs of the application.

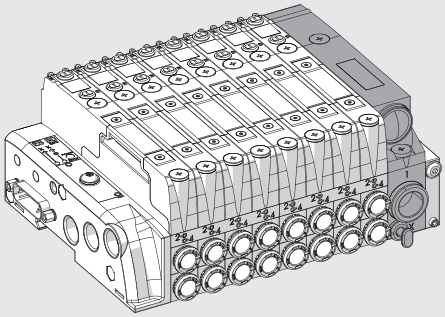

Relief	Symbol	Pipe fitting	Configuration ID
Silenced		Ø 8 (5/16")	**M100B00**
		Ø 10	**M200B00**
		Ø 12	**M300B00**
		Ø 1/2"	**M500B00**
Conveyed		2 x Ø 8 (5/16")	**M100B10**
		2 x Ø 10	**M200B20**
		2 x Ø 12	**M300B30**
		2 x Ø 1/2"	**M500B50**

CONFIGURATION SEQUENCE

EB 80 BOXI	0 8	1 6	E 0 2 6	G	1	8 8 8 4 4 6 6 6	0	V V K I V V K I	M 1 0 0 B 0 0
FAMILY	NUMBER		ELECTRICAL CONNECTION	PORT THREADS 1, 3, 5	PILOTING	FITTINGS FOR PORTS 2-4 (Starting from the left)	MANUAL VALVE CONTROL	VALVES	ADDITIONAL PNEUMATIC SUPPLY (Optional)
	Positions	Electrical controls							
BOXI	**06**	**06**	**E026** Multi-pole Connection, D-Sub 26 pin	**G** 1/4" G (BSP)	**1** Non-servo-assisted	**1** Without cartridges	**0** Monostable	▲ **Z** 2 valves 2/2 NC	**SILENCED EXHAUST**
		12		**U** 1/4" NPT	**X** Servo-assisted	**2** Pipe fitting Ø 1/4"	**1** Bistable	▲ **I** 2 valves 3/2 NC	**M100B00** Pipe fitting Ø 8 (5/16")
	08	**08**				**4** Pipe fitting Ø 4 (5/32")	● **9** Without valves	▲ **W** 2 valves 3/2 NO	**M200B00** Pipe fitting Ø 10
		16				**6** Pipe fitting Ø 6		▲ **L** 3/2 NC + 3/2 NO	**M300B00** Pipe fitting Ø 12
	12	**12**				**8** Pipe fitting Ø 8 (5/16")		**V** 5/2 monostable	**M500B00** Pipe fitting Ø 1/2"
		24						▲ **K** 5/2 bistable	**CONVEYED EXHAUST**
	06	**12**	**E0IO** IO-Link M12x1					▲ **O** 5/3 CC	**M100B10** Pipe fitting Ø 8 (5/16")
	08	**16**						**G** 3/2 NC high flow	**M200B20** Pipe fitting Ø 10
	12	**24**						**J** 3/2 NO high flow	**M300B30** Pipe fitting Ø 12
								✚ **R** Shut-off valve	**M500B50** Pipe fitting Ø 1/2"
								Y Bypass	
								N Dummy valve (plug)	
								● **9** None	

▲ Only for version with 12, 16 or 24 electrical controls.
✚ Requires inlet port X slave synchronisation.
● The entire island without valves.

Example of configuration sequence for an island with valves

BOXI	12	24	E026	G	1	666666888888	1	IIIKKKIIIKKK	M100B00

Example of configuration sequence for an island without valves

BOXI	12	24	E026	G	1	666666888888	9	999999999999	M100B00

As with the EB 80 islands, a full configuration sequence is required when ordering (see examples). The sales code for the desired configuration will be created by our sales departments.

ACCESSORIES

PRE-WIRED STRAIGHT D-Sub 26 PIN HIGH DENSITY PLUG CONNECTOR KIT



Code	Description	Weight [g]
02269K0100	Straight D-Sub HD 26 PIN IP65 connector + cable L = 1 m	160
02269K0250	Straight D-Sub HD 26 PIN IP65 connector + cable L = 2.5 m	350
02269K0500	Straight D-Sub HD 26 PIN IP65 connector + cable L = 5 m	680
02269K1000	Straight D-Sub HD 26 PIN IP65 connector + cable L = 10 m	1300
02269K2000	Straight D-Sub HD 26 PIN IP65 connector + cable L = 20 m	2540

Position of electrical contact	Colour of the corresponding wire (DIN 47100)	Function for EB 80 BOXI
1	White	Out 1
2	Brown	Out 2
3	Green	Out 3
4	Yellow	Out 4
5	Grey	Out 5
6	Pink	Out 6
7	Blue	Out 7
8	Red	Out 8
9	Black	Out 9
10	Violet	Out 10
11	Grey + Pink ring	Out 11
12	Red + Blue ring	Out 12
13	White + Green ring	Out 13

Position of electrical contact	Colour of the corresponding wire (DIN 47100)	Function for EB 80 BOXI
14	Brown + Green ring	Out 14
15	White + Yellow ring	Out 15
16	Yellow + Brown ring	Out 16
17	White + Grey ring	Out 17
18	Grey + Brown ring	Out 18
19	White + Pink ring	Out 19
20	Pink + Brown ring	Out 20
21	White + Blue ring	Out 21
22	Brown + Blue ring	Out 22
23	White + Red ring	Out 23
24	Brown + Red ring	Out 24
25	White + Black ring	0VDC
26	Brown + Black ring	+ VDC

STRAIGHT CONNECTOR FOR M12, A-CODED



Code	Description
W0970513001	5-PIN M12x1 straight connector

STRAIGHT CONNECTOR WITH WIRE FOR M12, A-CODED

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray



Code	Description
W0970513002	5-PIN M12x1 straight connector with wire L = 5 m

90° CONNECTOR FOR M12, A-CODED





Code	Description
W0970513003	M12x1 5-PIN 90° connector

90° CONNECTOR WITH WIRE FOR M12, A-CODED

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray

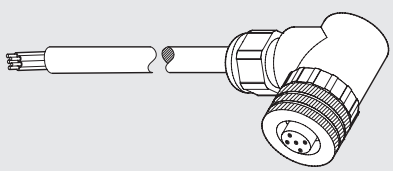

Code	Description
W0970513004	M12x1 5-PIN 90° connector with wire L = 5 m

T-CONNECTOR M12 A-CODED / M8 MALE FOR AUXILIARY POWER

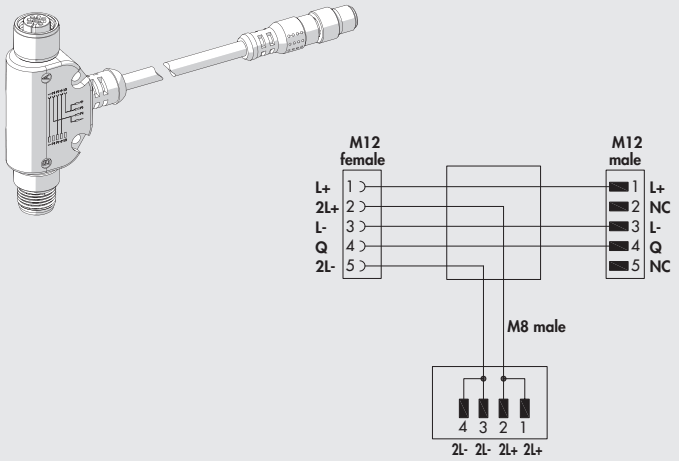

Code	Description
0240009070	T - connector for auxiliary power

SPARE PARTS

CARTRIDGE FOR BASES



Code	Description	Ø
02282R2001	EB 80 Ø 4 base square cartridge kit	4 (5/32")
02282R2002	EB 80 Ø 6 base square cartridge kit	6
02282R2003	EB 80 Ø 8 base square cartridge kit	8 (5/16")
02282R2006	EB 80 Ø 1/4 base square cartridge kit	1/4"

Comes in 10-pc. packs

CARTRIDGE FOR ADDITIONAL PNEUMATIC SUPPLY



Code	Description	Ø
02282R2110	EB 80 silencer cartridge kit	silencer
02282R2113	EB 80 Ø 8 power supply round cartridge kit	8 (5/16")
02282R2114	EB 80 Ø 10 power supply round cartridge kit	10
02282R2115	EB 80 Ø 12 power supply round cartridge kit	12
02282R2118	EB 80 Ø 1/2 power supply round cartridge kit	1/2"

Comes in 10-pc. packs

BASE-VALVE GASKET



Code	Description
02282R1002	EB 80 base-valve gasket kit

Comes in 10-pc. packs

SERVO SELECTOR



Code	Description
02282R9002	Kit servo selector with OR

FIXING FOOT



Code	Description
02282R4003	Kit fixing foots

EB 80 MULTI-FUNCTION MODULE

The multi-function module is an important extension of the possibilities offered by the EB 80 systems to manage the performance of actuators controlled by individual solenoid valves. For each port, it can regulate the pressure and the flow rate, provide manual sectioning, display the presence of pressurized air and much more besides.
In line with the modular EB 80 configuration, the multi-function module is designed to ensure maximum flexibility: it can be installed at any time; the function connected to port 2 may differ from that connected to port 4 (e.g. regulating the pressure at output 2 and the air flow at port 4);
the modules can be mounted in series one after the other; the cartridge fittings for the pipes can be replaced at any time and are the same as those used in the EB 80 valve bases.
Given that the air input pipes have a Ø 8 mm, the multi-function module must be inserted in the EB 80 bases with cartridges suitable for Ø 8 fittings; but if the base to which you want to connect has a cartridge of a different diameter, you only need to buy a multi-function fitting with Ø 8 cartridges and replace those of the base with those of the module.
The code and the pneumatic diagram are laser etched on the technopolymer body.

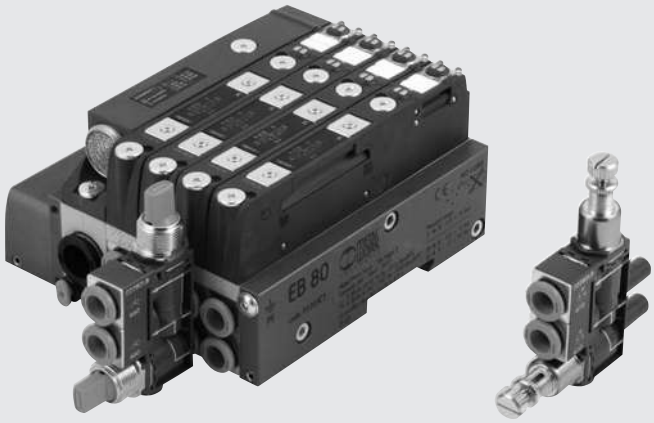

PATENTED

TECHNICAL DATA

Operating pressure	bar	10
	MPa	1
	psi	145
Temperature range	°C	-10 to + 50
	°F	14 to 122
Fluid		Unlubricated air
Air quality required		ISO 8573-1 class 4-7-3
Functions		Unidirectional flow regulator, bidirectional flow regulator, pressure regulator, quick-relief valve, check valve, 2- or 3-way shut-off valve, pneumatic valve, pressure display, calibrated choke.
Air inlet		Tubes for Ø 8 mm fittings
Air delivery		Cartridge fittings for pipes Ø 4 (5/32"), Ø 6, Ø 1/4", Ø 8 (5/16")
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene

N.B.: For more specific technical data, please refer to the chapters for individual function-modules

COMPONENTS

① BODY: technopolymer
② TUBE to be inserted into port 2 of the EB 80 base
③ TUBE to be inserted into port 4 of the EB 80 base
④ PNEUMATIC FUNCTION relating to port 2
⑤ CLIP for the pneumatic function, steel
⑥ PNEUMATIC FUNCTION relating to port 4
⑦ Cartridge FITTING for port 2
⑧ Cartridge FITTING for port 4
⑨ CLIP for the cartridges
⑩ CODE AND DIAGRAM, laser etched

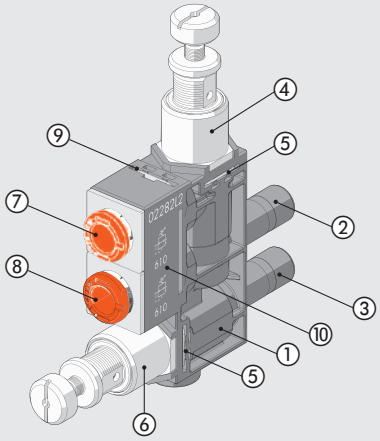

METAL WORK PNEUMATIC

EXPLODED FUNCTION DIAGRAM

PNV	REG	LAM	V2V	V3V
				
3-way pneumatic valve	Pressure regulator	Pressure indicator	Shut-off valve 2-way	Shut-off valve 3-way
				
Code **670**	Code **610**	Code **680 / 682**	Code **650**	Code **660**
See page **B2**.98	See page **B2**.99	See page **B2**.100	See page **B2**.101	See page **B2**.101

RFL		RFF	
			
Flow regulator unidirectional	Flow regulator bidirectional	Calibrated choke unidirectional type V	Calibrated choke bidirectional type B
Code **410**	Code **411**	Code **7_ _**	Code **8_ _**
See page **B2**.102		See page **B2**.104	

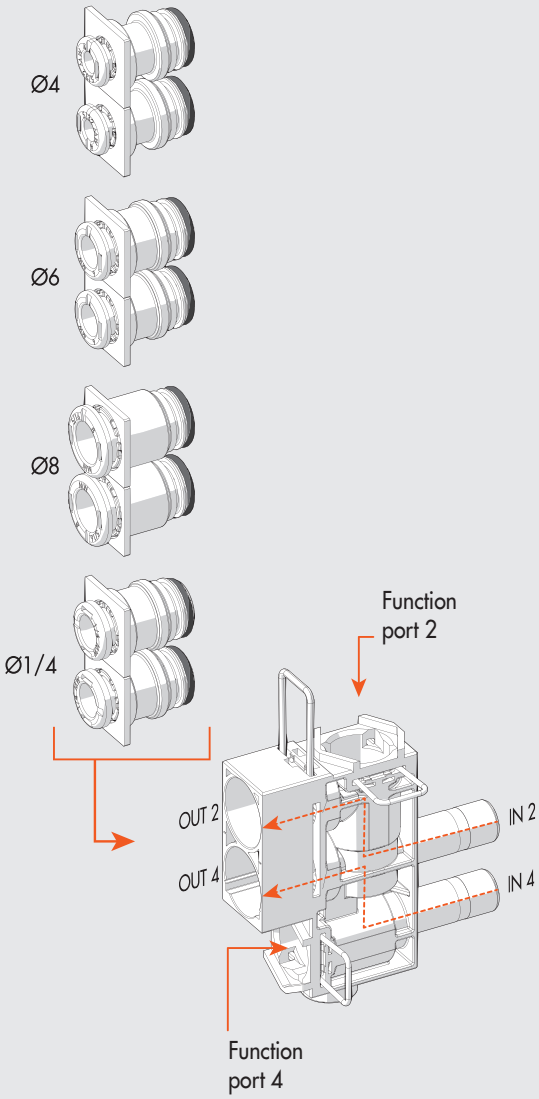

VSRC	VSRS	VSRR	P2V	VNR	NF
					
Quick-exhaust valve conveyed	Quick-exhaust valve silenced	Quick-exhaust valve regulated	Unidirectional 2-way pneumatic valve	Check valve	No function
					
Code **630**	Code **631**	Code **632**	Code **671**	Code **640**	Code **000**
See page **B2**.105	See page **B2**.105	See page **B2**.106	See page **B2**.108	See page **B2**.109	See page **B2**.110

EXAMPLES OF MODULARITY



SAME FUNCTIONS ON PORTS 2 AND 4

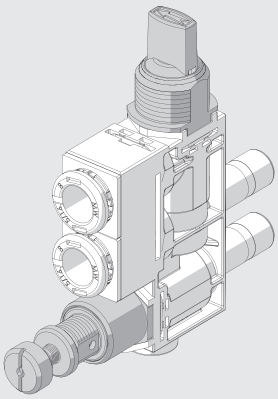

FUNCTION ON PORT 2 DIFFERENT FROM THAT ON PORT 4



FUNCTION ON ONE PORT ONLY

SERIES ASSEMBLING

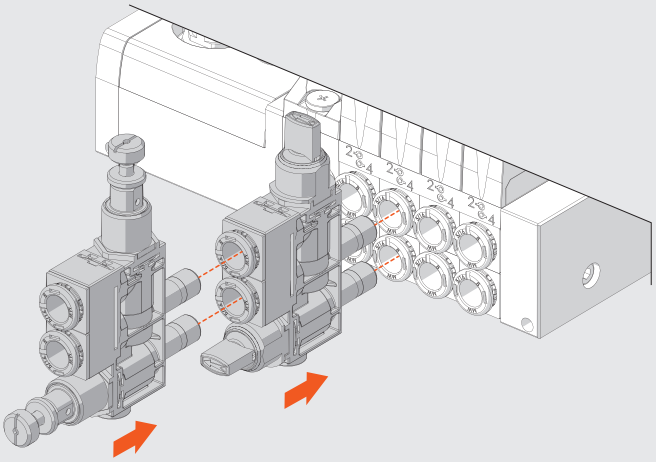

REPLACING THE CARTRIDGES

When fittings for pipes other than Ø 8 pipes are mounted on the base, choose a multi-function module with Ø 8 fittings and invert them with those of the base.

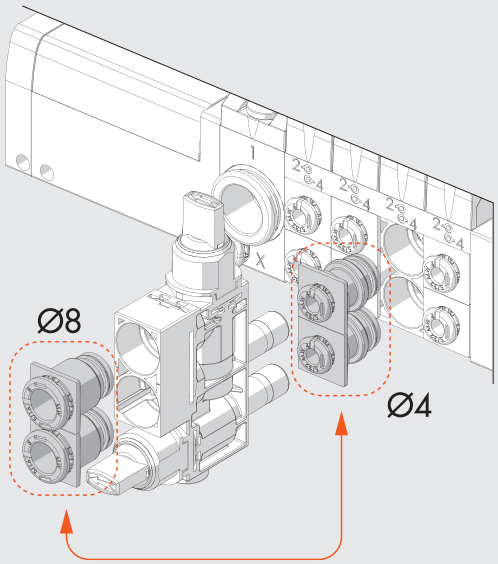

METAL WORK PNEUMATIC

KEY TO CODES

02282	L	6	610	410
FAMILY	**SUBSYSTEM**	**FITTINGS**	**FUNCTION PORT 2 (Top)**	**FUNCTION PORT 4 (Bottom)**
02282 EB 80	**L** Multi-function module	**2** Pipe fitting Ø 1/4" **4** Pipe fitting Ø 4 (5/32") **6** Pipe fitting Ø 6 **8** Pipe fitting Ø 8 (5/16")	**000** NF - No function **410** RFL - Flow regulator unidirectional **411** RFL - Flow regulator bidirectional **610** REG - Pressure regulator **630** VSRC - Quick-exhaust valve, conveyed **631** VSRS - Quick-exhaust valve, silenced **632** VSRR - Quick-exhaust valve, regulated **640** VNR - Check valve **650** V2V - 2-way shut-off valve **660** V3V - 3-way shut-off valve **670** PNV - 3-way pneumatic valve **671** P2V - Unidirectional 2-way pneumatic valve **680** LAM - Orange pressure indicator **682** LAM - Green pressure indicator **7_ _*** RFF - Calibrated choke unidirectional - type V **8_ _*** RFF - Calibrated choke bidirectional - type B	**000** NF - No function **410** RFL - Flow regulator unidirectional **411** RFL - Flow regulator bidirectional **610** REG - Pressure regulator **630** VSRC - Quick-exhaust valve, conveyed **631** VSRS - Quick-exhaust valve, silenced **632** VSRR - Quick-exhaust valve, regulated **640** VNR - Check valve **650** V2V - 2-way shut-off valve **660** V3V - 3-way shut-off valve **670** PNV - 3-way pneumatic valve **671** P2V - Unidirectional 2-way pneumatic valve **680** LAM - Orange pressure indicator **682** LAM - Green pressure indicator **7_ _*** RFF - Calibrated choke unidirectional - type V **8_ _*** RFF - Calibrated choke bidirectional - type B

* The last two digits indicate the narrowing Ø.

02 = Ø 0.2 mm	**05** = Ø 0.5 mm	**10** = Ø 1.0 mm
03 = Ø 0.3 mm	**06** = Ø 0.6 mm	**13** = Ø 1.3 mm
04 = Ø 0.4 mm	**08** = Ø 0.8 mm	**15** = Ø 1.5 mm

SPARE PARTS

CARTRIDGE



Code	Description	Ø
02282R2001	EB 80 Ø 4 base square cartridge kit	4 (5/32")
02282R2002	EB 80 Ø 6 base square cartridge kit	6
02282R2003	EB 80 Ø 8 base square cartridge kit	8 (5/16")
02282R2006	EB 80 Ø 1/4 base square cartridge kit	1/4"

Comes in 10-pc. packs

NOTES

EB 80 3-WAY PNEUMATIC VALVE – PNV

It is a normally closed 3/2 valve driven pneumatically via a Ø 4 pipe.
It intercepts the air flow leaving the EB 80 valve. If the PNV is activated, the flow opens up, when it is de-activated the pressure is discharged downstream.

TECHNICAL DATA

Ø of cartridge fitting		Ø 4 (5/32")	Ø 6	Ø 8 (5/16")	Ø 1/4"
Max. operating pressure	bar	10			
	MPa	1			
	psi	145			
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	110	380	420	380
Flow rate at 6.3 bar free exhaust	Nl/min	80			
Minimum pilot pressure		See graph			

COMPONENTS

① BODY: technopolymer
② INSERT: nickel-plated brass
③ PILOT INSERT: nickel-plated brass
④ PISTON ROD: brass
⑤ CLAMPING SPRING: stainless steel
⑥ SEAL: NBR
⑦ POPPET SPRING: stainless steel



MINIMUM PILOT PRESSURE

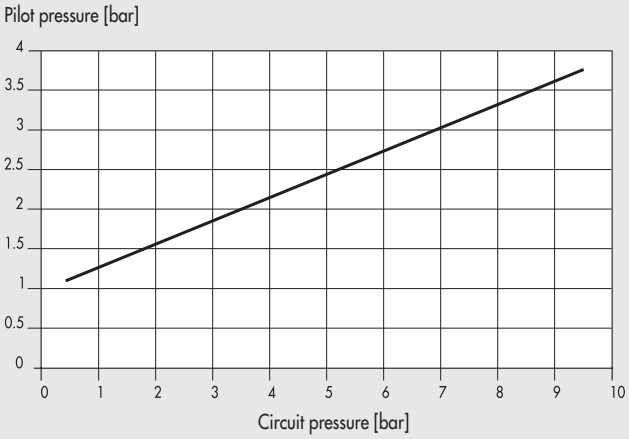

DIMENSIONS

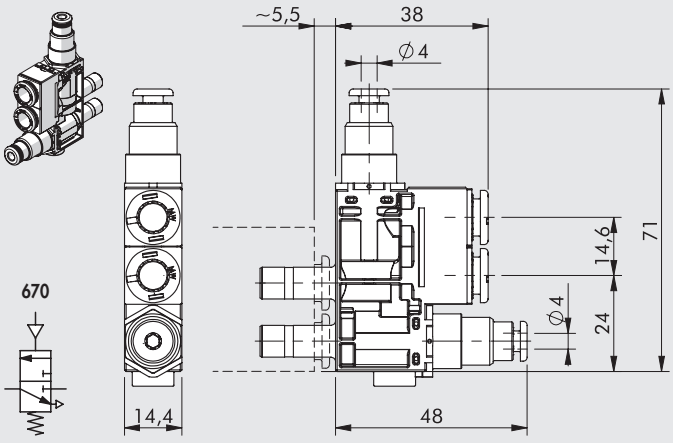

EB 80 PRESSURE REGULATOR - REG

It regulates the pressure coming from the EB 80 base to individual branches.
It comes with an overpressure relief device.
It can be used as an economizer: if the thrust in a cylinder must be exerted in one direction, e.g. at the piston rod output, while a lower thrust is required in the other direction, a lot of energy can be saved by inserting the pressure regulator into the port connected to piston rod retraction.

TECHNICAL DATA

Ø of cartridge fitting		Ø 4 (5/32")	Ø 6	Ø 8 (5/16")	Ø 1/4"
Setting range		1 to 8 bar - 0.1 to 0.8 MPa - 14.5 to 116 psi			
Input pressure	bar	2 to 10			
	MPa	0.2 to 1			
	psi	30 to 145			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar	Nl/min	80	130	150	130
Flow rate on exhaust at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	300	380	400	380
Adjustment		Manual or using a screwdriver			
Notes on use		The pressure must always be set upwards			

COMPONENTS

① BODY: technopolymer
② INSERT: nickel-plated brass
③ ADJUSTING SCREW: nickel-plated brass
④ ADJUSTING SPRING: steel
⑤ PISTON ROD: brass
⑥ SHUTTER: NBR
⑦ POPPET SPRING: stainless steel
⑧ ADJUSTING SCREW RING NUT: nickel-plated brass



DIMENSIONS



610





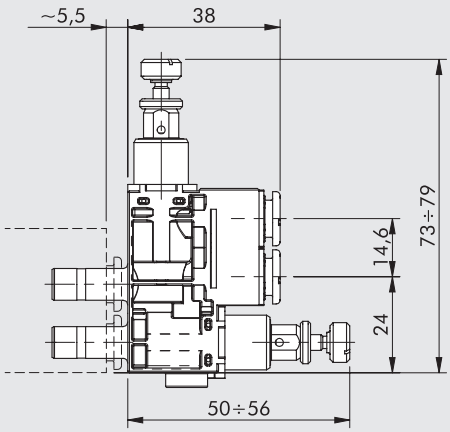

EB 80 PRESSURE INDICATOR - LAM

Also called pneumatic lamp, it optically indicate the presence of compressed air in the circuit.
If there is no pressure, the transparent technopolymer bell is empty; if there is pressure an orange or a green sign is indicated.

TECHNICAL DATA

Ø of cartridge fitting		Ø 4 (5/32")	Ø 6	Ø 8 (5/16")	Ø 1/4"
Operating pressure	bar	2 to 10			
	MPa	0.2 to 1			
	psi	29 to 145			
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	130	500	600	500
Colour with pressure		Orange - Green			

COMPONENTS

① BODY: technopolymer
② INSERT: nickel-plated brass
③ COVER: clear technopolymer
④ RETURN SPRING: stainless steel
⑤ MOBILE INDICATOR: technopolymer



DIMENSIONS



680/682

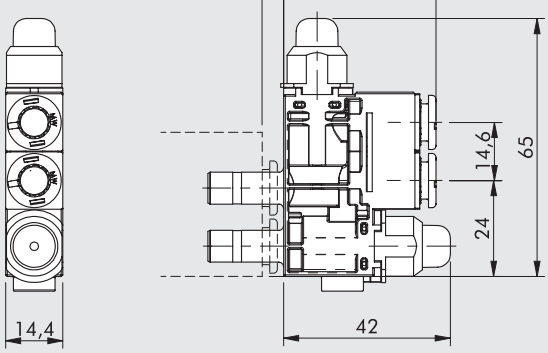

EB 80 SHUT-OFF VALVE - V2V-V3V

It shuts off the flow of air coming from the EB 80 via a manual command. Two versions are available: the two-way unidirectional V2V valve and the V3V 3-way valve. The latter, when deactivated, intercepts the flow from the EB 80 valve and relieves downstream pressure.

TECHNICAL DATA

Ø of cartridge fitting		Ø 4 (5/32")	Ø 6	Ø 8 (5/16")	Ø 1/4"
Max. operating pressure	bar		10		
	MPa		1		
	psi		145		
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	120	370	420	370
Flow rate of the V3V when relieving at 6.3 bar	Nl/min		110		

COMPONENTS

① BODY: technopolymer
② INSERT: nickel-plated brass
③ ROD: brass
④ KNOB: technopolymer
⑤ VALVE: NBR
⑥ VALVE COMPRESSION SPRING: stainless steel

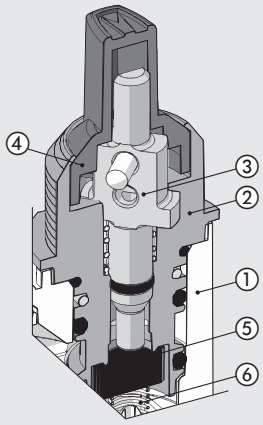

DIMENSIONS



650 660





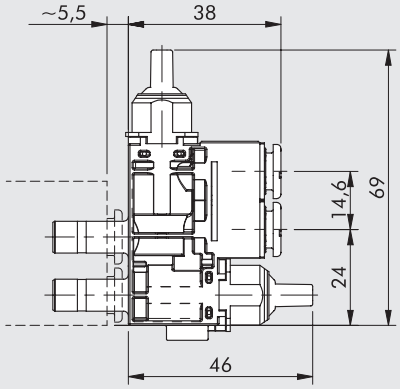

EB 80 FLOW REGULATOR - RFL

It regulates the air flow rate, and hence the speed, in pneumatic actuators. Two versions are available: the bidirectional one regulating the flow in both directions and the unidirectional one regulating the flow when the EB 80 valve is relieving.

TECHNICAL DATA

Ø of cartridge fitting		Ø 4 (5/32")	Ø 6	Ø 8 (5/16")	Ø 1/4"
Max. operating pressure	bar	10			
	MPa	1			
	psi	145			
Maximum flow rate during regulation at 6.3 bar	Nl/min	440	650	710	650
Exhaust flow rate (unidirectional version)	Nl/min	450	720	800	720
Adjustment		Manual or using a screwdriver			
Operating system		Tapered needle			

COMPONENTS

① BODY: technopolymer
② SEAL SUPPORT: nickel-plated brass
③ GASKET: NBR
④ ADJUSTING NEEDLE: brass
⑤ NEEDLE RING NUT: nickel-plated brass

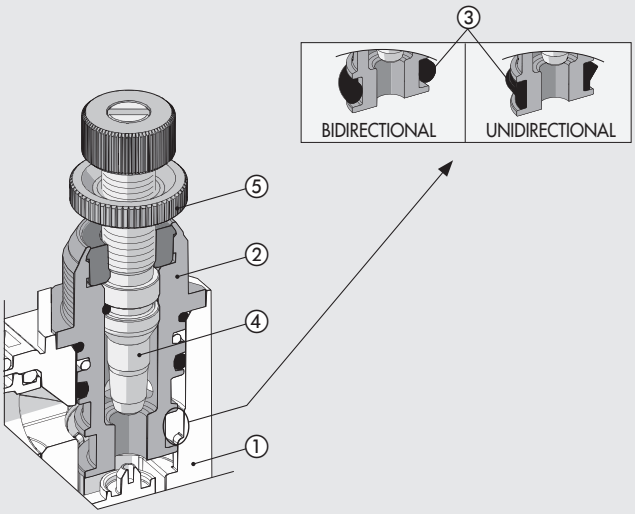

FLOW RATE CHARTS AT 6.3 bar DEPENDING ON THE TURNS EFFECTED BY THE REGULATION OF THE NEDDLE

RFL Ø4

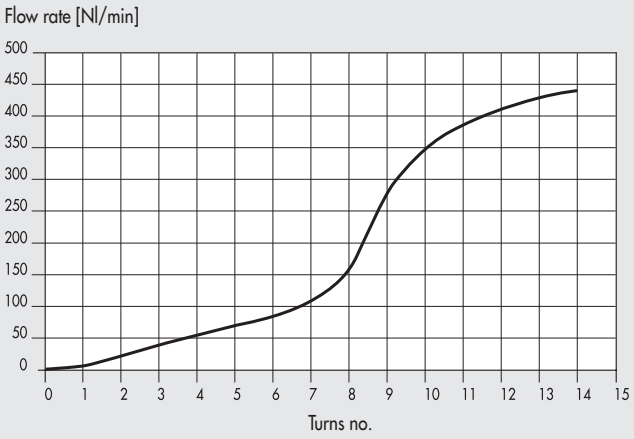

RFL Ø6 - Ø1/4

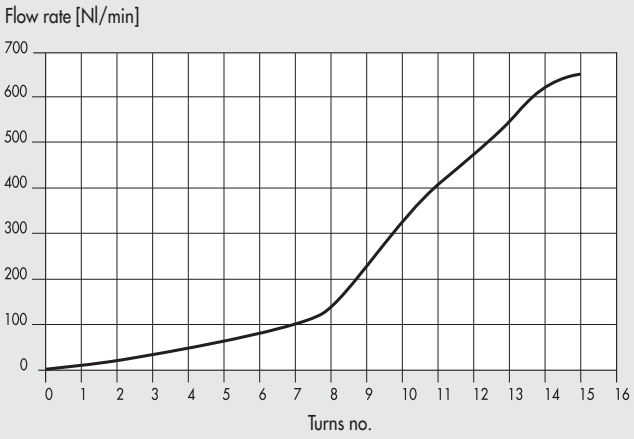

RFL Ø8

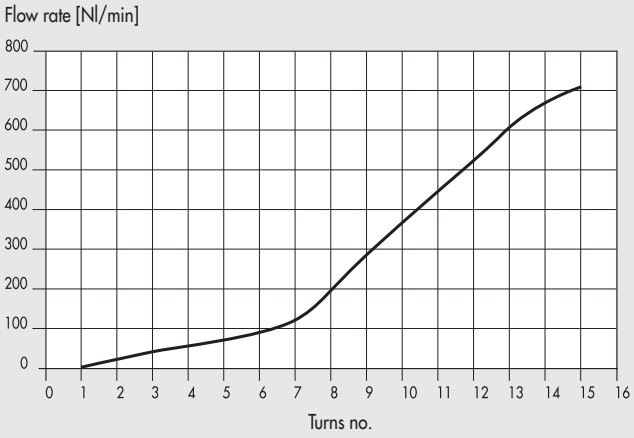

DIMENSIONS





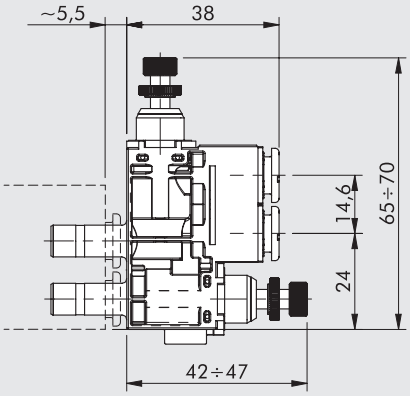

EB 80 CALIBRATED CHOKE - RFF

It regulates the air flow rate, and hence the speed, in pneumatic actuators. This is done by means of a choke of a calibrated diameter. In order to obtain the desired air flow rate, you can choose different choking diameters. Compared to adjustable versions, the main advantage is that it does not require any adjustments during the assembly of the machine and prevents from subsequent tampering.
Two versions are available: the bidirectional one regulating the flow in both directions and the unidirectional one regulating the flow when the EB 80 valve is relieving.

TECHNICAL DATA

Ø of cartridge fitting		Ø 4 (5/32")	Ø 6	Ø 8 (5/16")	Ø 1/4"
Max. operating pressure	bar	10			
	MPa	1			
	psi	145			
Flow rates		See tables			
Adjustment		Fixed			
Operating system		Calibrated hole			

COMPONENTS

① BODY: technopolymer
② SEAL SUPPORT: nickel-plated brass
③ GASKET: NBR
④ THROTTLE CARTRIDGE: brass

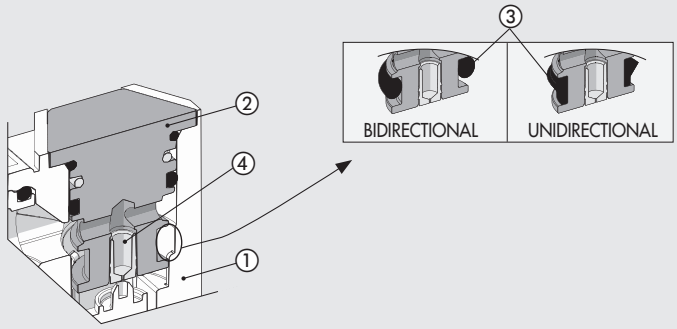

EXHAUST FLOW RATE AT 6.3 bar UNIDIRECTIONAL VERSION [Nl/min]

Choke [mm]	Ø 4	Ø 6 - Ø 1/4	Ø 8
Ø 0.2	240	550	640
Ø 0.3	242	552	642
Ø 0.4	245	555	645
Ø 0.5	250	560	650
Ø 0.6	255	565	660
Ø 0.8	265	570	690
Ø 1.0	275	580	710
Ø 1.3	290	610	750
Ø 1.5	300	620	800

CHOKE FLOW-RATE AT 6 bar WITH FREE EXHAUST

Choke [mm]	Flow rate [Nl/min]
Ø 0.2	2
Ø 0.3	4
Ø 0.4	7
Ø 0.5	13
Ø 0.6	15
Ø 0.8	32
Ø 1.0	50
Ø 1.3	85
Ø 1.5	110

DIMENSIONS







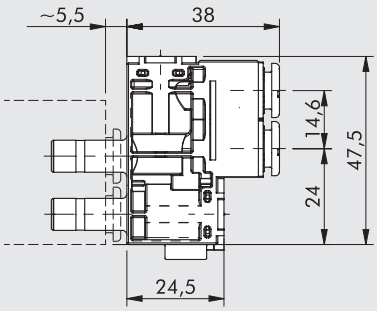

EB 80 QUICK-EXHAUST VALVE - VSR

It speeds up the relieving of air coming from the actuators to the EB 80 and releases it into the atmosphere.
If the air coming from the actuators is polluted, it prevents it from entering into the EB 80 island, where it could risk to damage the valves.
Air relieving can be either silenced with a stainless steel wire or conveyed via an automatic fitting.

TECHNICAL DATA

Ø of cartridge fitting		Ø 4 (5/32")	Ø 6	Ø 8 (5/16")	Ø 1/4"
Operating pressure	bar	1 to 10			
	MPa	0.1 to 1			
	psi	14.5 to 145			
Inlet flow rate at 6.3 bar ΔP 1 bar	Nl/min	90	210	270	210
Exhaust flow rate at 6.3 bar	Nl/min	330	700	750	700

COMPONENTS

① BODY: technopolymer
② INSERT: nickel-plated brass
③ VALVE: brass
④ SILENCER: stainless steel wire
⑤ GASKET: NBR

CONVEYED VERSION



SILENCED VERSION



CONVEYED VERSION DIMENSIONS

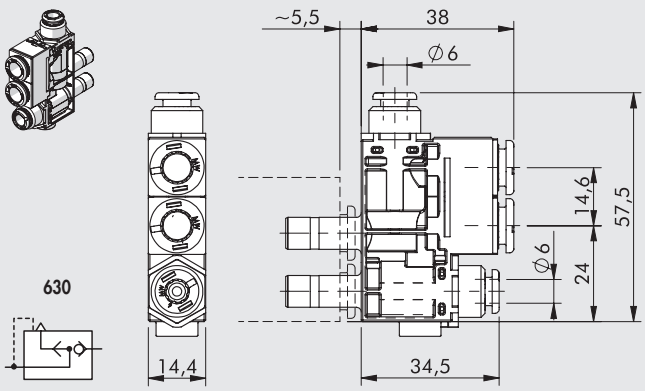

SILENCED VERSION DIMENSIONS

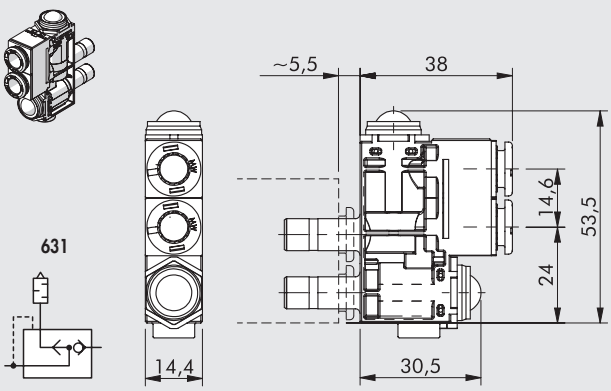

EB 80 QUICK-EXHAUST VALVE WITH FLOW REGULATOR - VSRR

It speeds up the relieving of air coming from the actuators to the EB 80, releases it into the atmosphere and regulates the flow rate. It relieves the air coming from the utilities and regulates the quality of flow precisely by operating the knob provided.

TECHNICAL DATA

Ø of cartridge fitting		Ø 4 (5/32")	Ø 6	Ø 8 (5/16")	Ø 1/4"
Operating pressure	bar	1 to 10			
	MPa	0.1 to 1			
	psi	14.5 to 145			
Inlet flow rate at 6.3 bar ΔP 1 bar	Nl/min	90	210	270	210
Max flow rate on exhaust at 6.3 bar	Nl/min	450	530	560	530
Adjustment		Manual or using a screwdriver			
Internal system		Tapered needle			

COMPONENTS

① BODY: technopolymer
② SEAL SUPPORT: nickel-plated brass
③ GASKET: NBR
④ ADJUSTING NEEDLE: brass
⑤ NEEDLE RING NUT: nickel-plated brass
⑥ SILENCER: sintered bronze

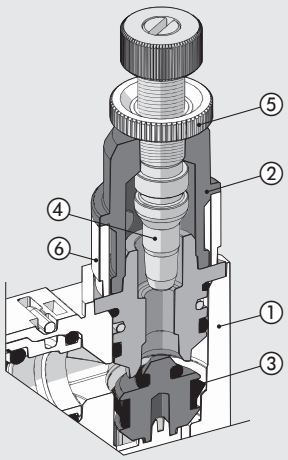

EXHAUST FLOW CHARTS AT 6.3 bar DEPENDING ON THE TURNS EFFECTED BY THE REGULATION OF THE NEDDLE

VSRR Ø4

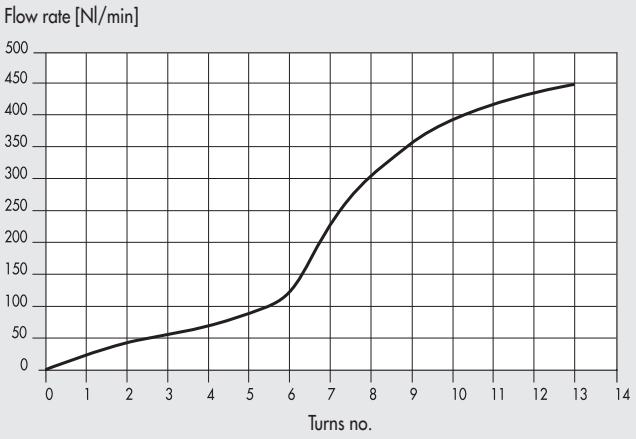

VSRR Ø6 - Ø1/4

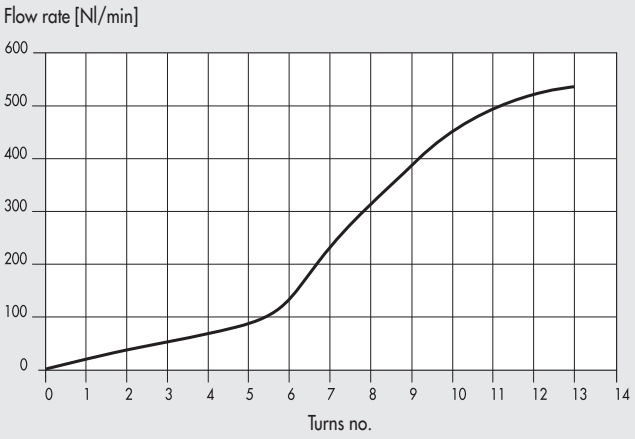

VSRR Ø8

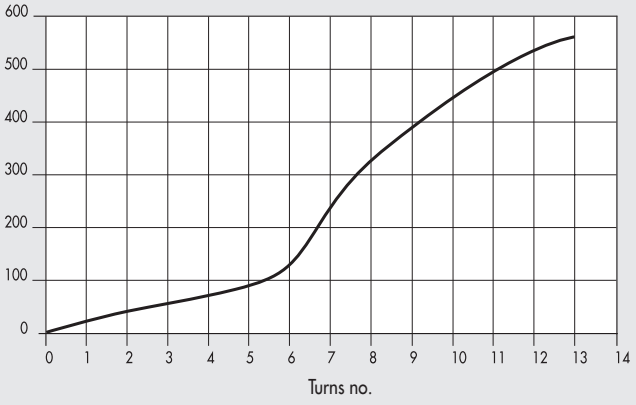

DIMENSIONS



632



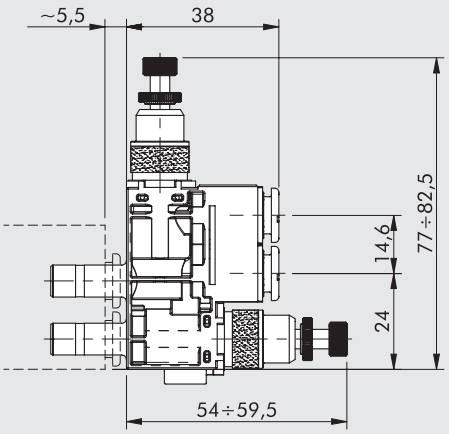

EB 80 UNIDIRECTIONAL 2-WAY PNEUMATIC VALVE – P2V

Unidirectional normally closed 2/2 valve pneumatically driven via a Ø 4 pipe.
Can intercept the flow of air coming from the EB 80 valve.
When enabled, it opens the flow; when disabled it closes the pressurised circuit.
N.B.: Given the direction of the flow, it cannot be used to block the flow of air coming out of a cylinder.

TECHNICAL DATA

Ø of cartridge fitting		Ø 4 (5/32")	Ø 6	Ø 8 (5/16")	Ø 1/4"
Max. operating pressure	bar	10			
	MPa	1			
	psi	145			
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	110	370	420	370
Minimum pilot pressure		See graph			

COMPONENTS

① BODY: technopolymer
② INSERT: nickel-plated brass
③ PILOT INSERT: nickel-plated brass
④ PISTON ROD: brass
⑤ CLAMPING SPRING: stainless steel
⑥ SEAL: NBR
⑦ POPPET SPRING: stainless steel



MINIMUM PILOT PRESSURE

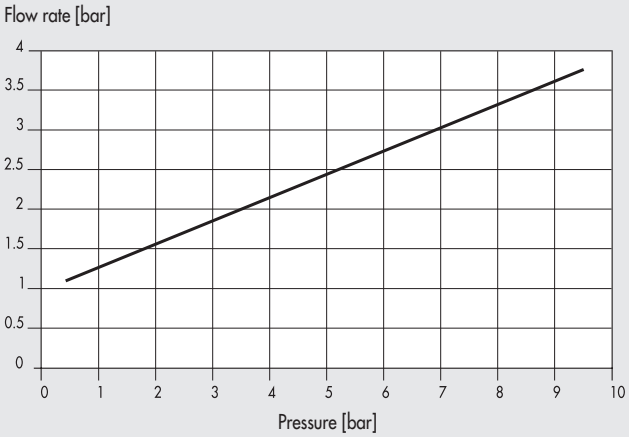

DIMENSIONS

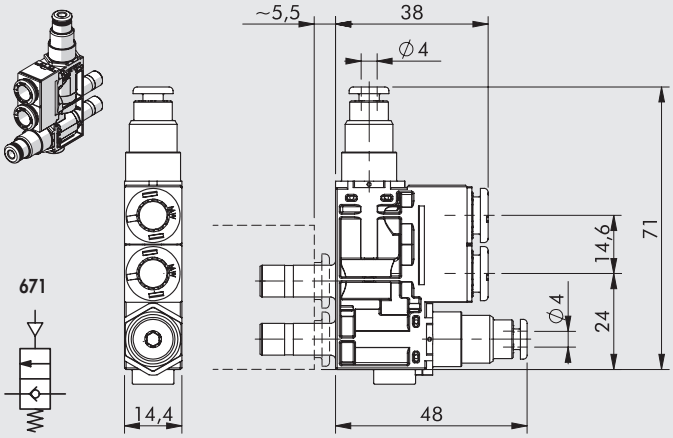

EB 80 CHECK VALVE - VNR

Check valve. Full flow from the EB 80 valve to the utility. It prevents the air flow from reversing downstream the VNR.

TECHNICAL DATA

Ø of cartridge fitting		Ø 4 (5/32")	Ø 6	Ø 8 (5/16")	Ø 1/4"
Operating pressure	bar	0.5 to 10			
	MPa	0.05 to 1			
	psi	7.2 to 145			
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	350	420	450	420

COMPONENTS

① BODY: technopolymer
② INSERT: nickel-plated brass
③ VALVE: NBR
④ VALVE COMPRESSION SPRING: stainless steel



DIMENSIONS



640



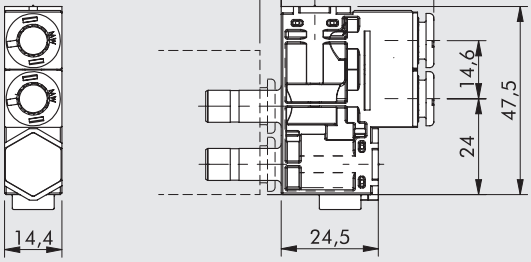

EB 80 NO FUNCTION - NF

To be used when, on one of the two-way network, no pneumatic function is required.
The flow conveys directly from the inlet to the output fitting without any variation.

TECHNICAL DATA

Ø of cartridge fitting		Ø 4 (5/32")	Ø 6	Ø 8 (5/16")	Ø 1/4"
Max. operating pressure	bar		10		
	MPa		1		
	psi		145		
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	130	500	600	500

DIMENSIONS



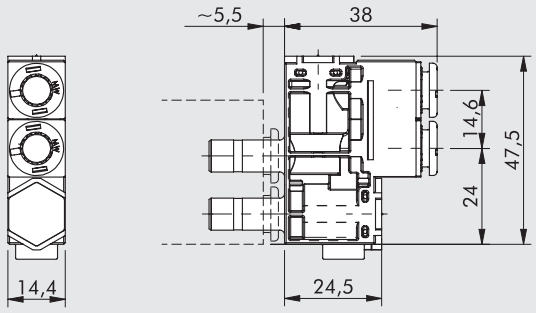

NOTES

EB 80 SPLASH AREA

The splash-area assembly kits have been designed and developed for the Food & Beverage industry and, in general, for use in all the situations in which it is advisable to separate the solenoid valves from areas where there are fluids.
The kit can be used to fix a standard EB 80 island to a sheet metal plate, perforated by the customer, with compressed air fittings and pipes installed downstream.
Two models are available, one designed to accommodate 3-8 valves and one 8-12 valves. Other configurations can be made on specific request.
The plate is available in two optional materials: anticorodal 6082 anodized aluminium and AISI 304 stainless steel.
Threaded holes are provided in the splash-area side of the plate for air supply, relief, control and utilities.
The EB 80 islands of any type can be fixed to the kit, with either multi-pin or fieldbus connection and signal modules, provided that they have one pneumatic supply source to avoid changing the pitch between valves, and the ports 2 and 4 have Ø 8 fittings and the ports 1 and 3 have Ø 12 fittings.
The valve island can be used with silenced relief provided that the threaded port of the plate is closed.

TECHNICAL DATA	
General technical data	See page **B2**.4
Protection rating at the splash-area side	IP67
Versions	3 to 8 positions; 8 to 12 positions
Bases configurable with this number of valves	For maximum 8-position version: 3, 4, 6, 7, 8 valves
	For the maximum 12-position version: 8, 9, 10, 11, 12 valves
Pneumatic fittings	1/4" supply and discharge
	M5 piloting
	1/8" delivery

N.B.: The valve island to be used with the splash-area must be configured with Ø8 mm fittings on ports 2 and 4 and Ø12 mm fittings on ports 1, 3 and 5.

COMPONENTS

① SPLASH-AREA PLATE: 6082 anodized aluminium or AISI 304 stainless steel
② SPLASH-AREA GASKET: NBR
③ EXTENSIONS: nickel-plated brass
④ GASKETS: NBR
⑤ FIXING BRACKET: AISI 304 stainless steel
⑥ SCREWS AND WASHERS: stainless steel
⑦ 1/8" PLUGS: nickel-plated brass (to cover unused outputs)
⑧ SCREWS AND WASHERS: zinc-plated steel

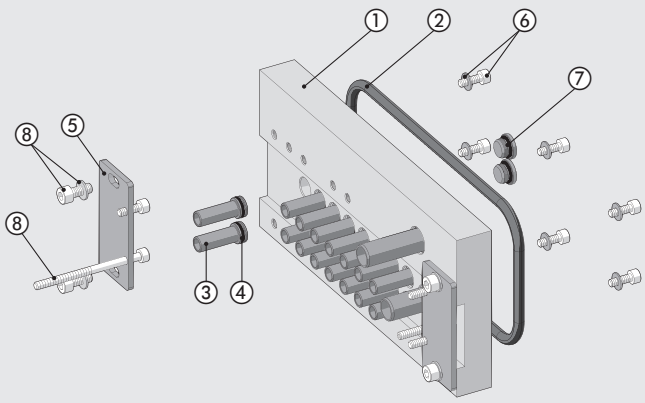

DIMENSIONS AND ORDERING CODES

3 to 8 POSITION



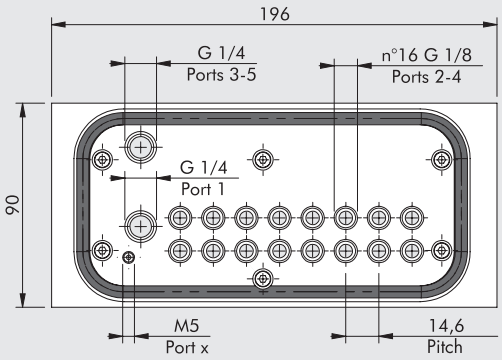



8 to 12 POSITION



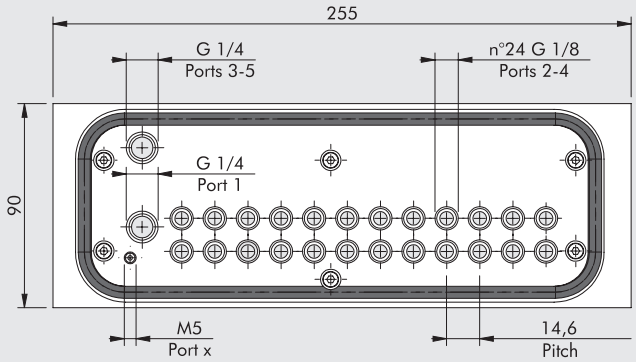

Code	Description	Weight [g]
02282**R7080**	EB 80 splash-area kit 3-8 positions aluminum	919
02282**R7081**	EB 80 splash-area kit 3-8 positions stainless steel	2354
02282**R7120**	EB 80 splash-area kit 8-12 positions aluminum	1189
02282**R7121**	EB 80 splash-area kit 8-12 positions stainless steel	3046

DIMENSIONS FOR THE DRILLING OF THE FIXING INTERFACE

3 to 8 POSITION

A	B	C
140.6	149.9	70.8

8 to 12 POSITION

A	B	C
199	208	100

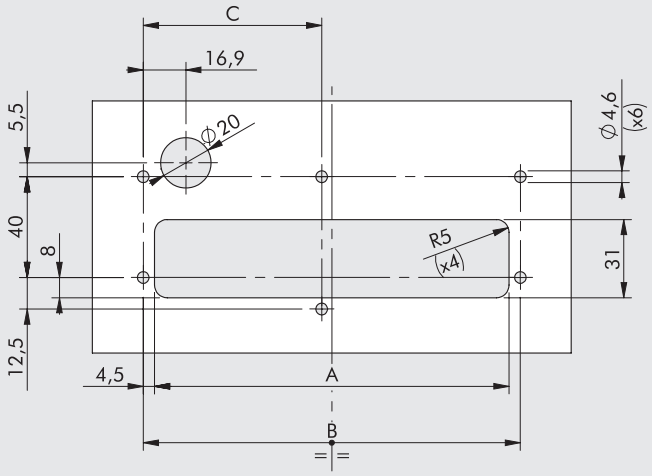

KEY TO CODES

02282	R	7	08	0
FAMILY	**CATEGORY**	**SUBSYSTEM**	**NUMBER OF POSITIONS**	**MATERIAL**
02282 EB 80	**R** Spares and accessories	**7** Splash-area	**08** 8 positions **12** 12 positions	**0** Anodized aluminum plate 6082 **1** Plate AISI 304

METAL WORK PNEUMATIC

NOTES

HDM + MULTI-POLE CONNECTION

HDMs are the ideal solution for those requiring the unbeatable performance, flexibility and modularity of Multimach valves combined with sturdy mechanics and a high degree of protection against external agents. Each valve is enclosed in a reinforced technopolymer protective shell that acts as a shock-absorber and prevents the infiltration of dirt. The class of protection is IP65.
The smooth, rounded design makes HDMs ideal for applications requiring frequent washing without the deposit of residues. All the pneumatic connections are on one side, with built-in push-in fittings. The user interface is on another side so that the fitter and the service engineer have everything at hand.
Flexibility is total: there are 1-16 valves, input and output terminals for pipes of different sizes and intermediate modules for separate inputs and outputs.
One very important new feature is that valves of different capacities can be mounted as required. Three different valve sizes can be combined at will.
This means a valve can be replaced at any time by another one offering a different performance. It only takes a few seconds to replace or add a valve.
To do this, merely loosen the two grub screws fixing the valve to the adjacent ones. Since the electrical signal is relayed from one valve to the next by means of gold-plated contacts connected to an electronic board, the electrical connections are entirely automatic.
The ratio of the HDM's flow rate to its dimensions is unrivalled – miniaturisation and efficiency have reached a peak.

TECHNICAL DATA

Valve port connections		Ø 4,6,8,10 mm automatic fitting for ports 2 and 4 / power supply port for Ø10 or Ø 12 mm automatic fitting / 3/8 thread for exhaust port, M5 thread for exhaust pilot port				
Connection on the end-plate for the supply of pilots		Automatic fitting Ø 4 mm				
Maximum number of pilots		16				
Maximum number of valves		16 (same as the max. no. of pilots)				
Operating temperature range	°C	-10 to +60				
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous				
Pressure range	bar	X (pilot supply)			1-11 (valve supply)	
	Terminal 1-1	3 to 7			vacuum at 10	
	Terminal 1	3 to 7				
Voltage range		24VDC ± 10%				
Power	W	0.9				
Control		PNP o NPN				
Insulation class		F155				
Degree of protection		IP65 (with conveyed exhust)				
Solenoid rating		100% ED				
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	11.5 mm Ø 4	11.5 mm Ø 6	14 mm Ø 8	23 mm Ø 8	23 mm Ø 10
	version 5/2 and 3/2	200	500	650	1000	1200
	version 5/3	200	300	300	500	500
TRA/TRR 2x3/2 monostable at 6 bar	ms	8 / 45			8 / 60	
TRA/TRR 5/2 monostable at 6 bar	ms	8 / 33			9 / 60	
TRA/TRR 5/2 bistable at 6 bar	ms	20 / 20			8 / 8	
TRA/TRR 5/3 cc monostable at 6 bar	ms	20 / 20			15 / 15	
Note on use		Insert the pipes in the fittings, before passing air through the valves, otherwise the basket may be pulled out of its seat by the flow of air.				
Compatibility with oils		See **chapter Z1**				

COMPONENTS

① Exhaust - Solenoid pilot 82/84
② Valve supply - port 1
③ Threaded connection of exhausts 3/5
④ Valve supply - port 11
⑤ Electrical control supply X
⑥ Blind end-plate or right end-plate 1-11
⑦ Screw for valve wall-mounting
⑧ Utility port for pipe Ø 4, 6, 8 or 10 mm
⑪ Manual control
⑫ LED (LED on, solenoid valve energised)
⑬ Pneumatic symbol
⑭ Identification of the monostable or bistable manual control
⑮ Valve ordering code
⑯ Valve identification code
⑰ Blank space for valve number

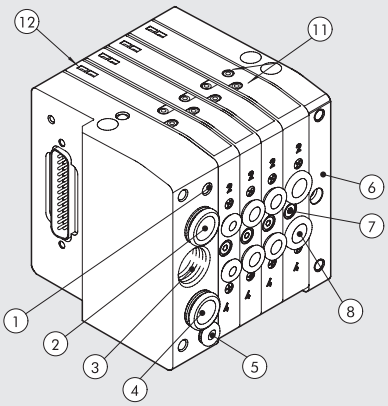



METAL WORK PNEUMATIC

THE MULTIMACH WORLD: FLEXIBILITY

The numbers permit rapid identification of the function and assembly position of the single elements represented as follows.
Refer to page B2.142 **for valves, intermediates elements and common accessories.**

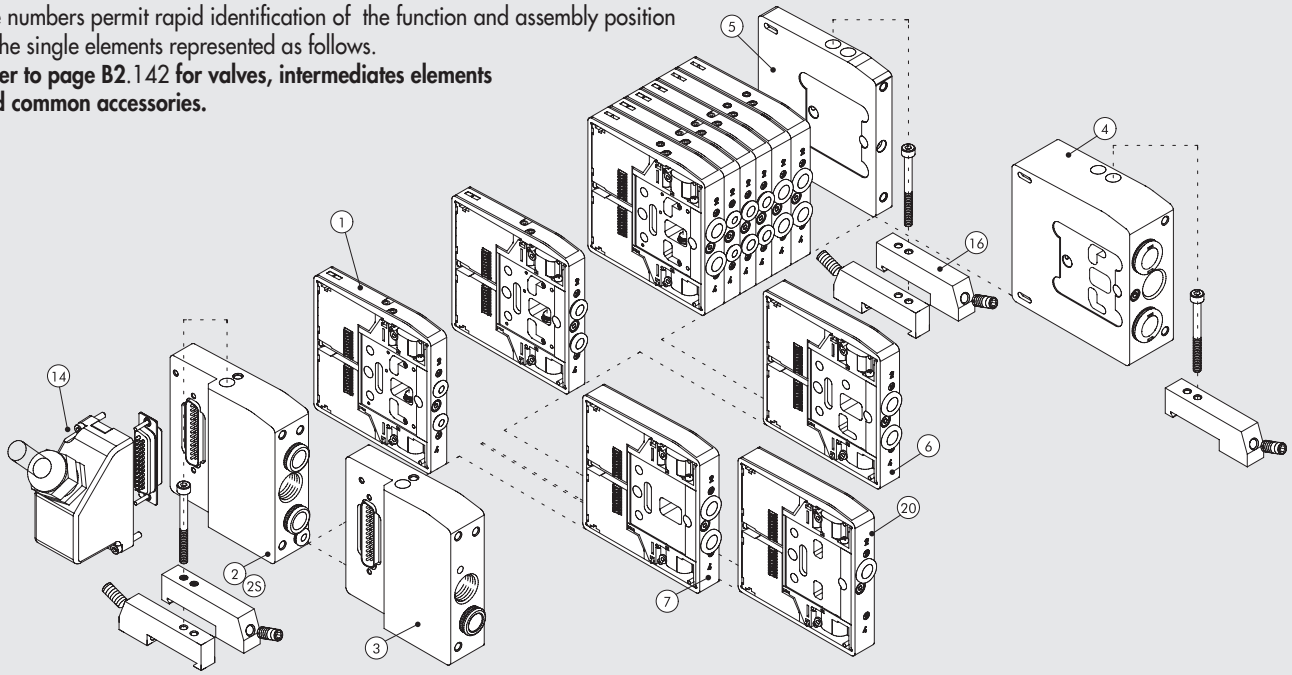

FIXING THE BASE

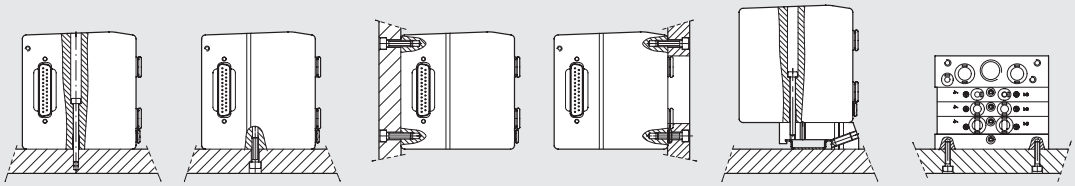

Ⓐ Fixing from above using the 1 or 1-11 input terminal and the blind terminal.
Ⓑ Ⓒ Fixing from above using the 1 or 1-11 input terminal and the blind terminal, using the M5 threads on the bottom and the rear of the terminals.
Ⓓ Fixing from above using the 1 or 1-11 input terminal and the blind terminal, using the M5 threads on the front of the terminals. An opening for the pipes is made in the plate.
Ⓔ Fixing on the DIN bar with end-plate 1 or 1-11 and blind and plate, using the push-in bracket code 0227301600.
Ⓕ Lateral fixing using the blind terminal, and its the M4 threads on the side lateral.
Note: The sole fixing admitted is the one showed.

SYNOPTIC, SIZES AND VERSIONS

H D M VALVE	2 INPUT END-PLATE	8 ELECTRICAL BASE	M MANUAL TYPE	I6 - W 8 - W 6 - O 4 - L 8 - 5 TYPE OF VALVE	1 4 - 1 6 FURTHER DETAILS
Heavy duty Multimach IP65	**2** End-plate 1-11 pipe Ø 10 **3** End-plate 1 pipe Ø 10 **2S** End-plate 1-11 pipe Ø 12	**8** D-Sub 25 wire	**M** Monostable manual control **B** Bistable manual control	**I** n° 2 3/2 NC **W** n° 2 3/2 NO **L** 3/2 NO + 3/2 NC **V** 5/2 monostable **K** 5/2 bistable **O** 5/3 monostable ***F** 5/2 monostable **4** right-end-plate 1-11 pipe Ø12 **5** blind end-plate **6** Passing-intermede **7** Blind intermediate **20** Exhaust section **4** Cartridge 4 **6** Cartridge 6 **8** Cartridge 8 - 14 mm **8S** Cartridge 8 - 23 mm **10** Cartridge 10	**14** IP65 25-wire shell **16** n° 2 brackets for DIN bar

* Uses a single PIN (like the V) and occupies 2 signals.

WIRING DIAGRAM

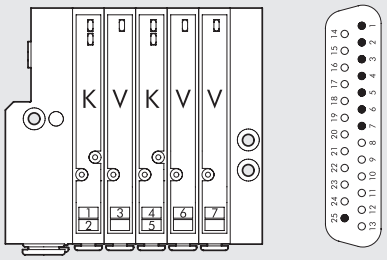

PNP - Com (-)

NPN - Com (+)







NOTE: The type F monostable valve uses one PIN only (like the V) but occupies 2 signals.

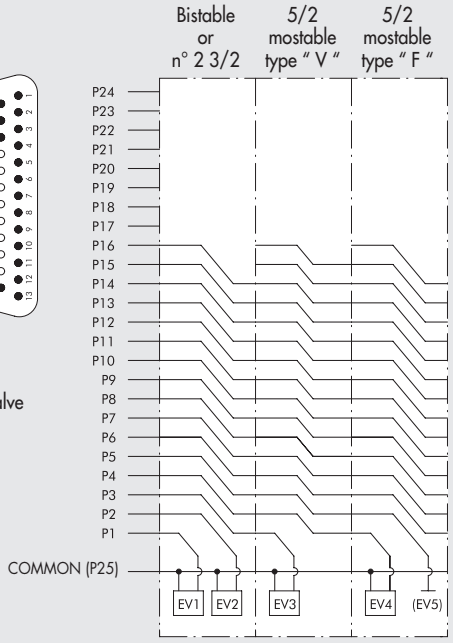

② END-PLATE 1-11-25D - PIPE Ø10

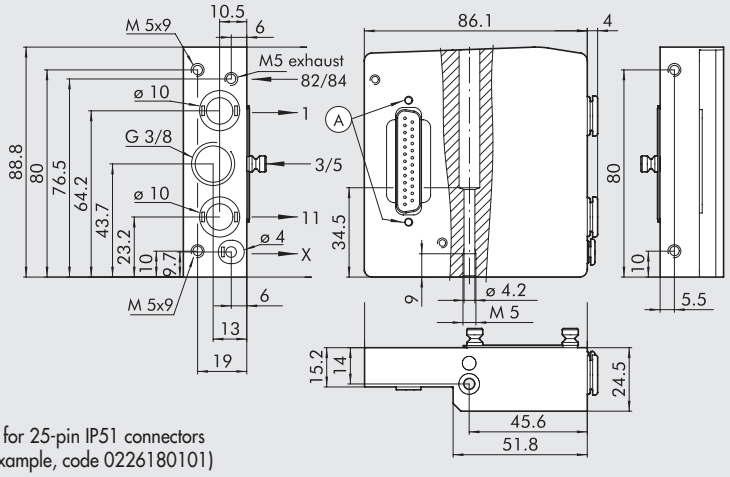

Ⓐ = Holes for 25-pin IP51 connectors (for example, code 0226180101)

Code	Description	Weight [g]
0227301200	End-plate HDM 1-11-25D Ø10	370

This end-plate allows for supplies to be differentiated
- Port 2
- Port 4
- Pilot supply

2S END-PLATE 1-11-25D - PIPE Ø12

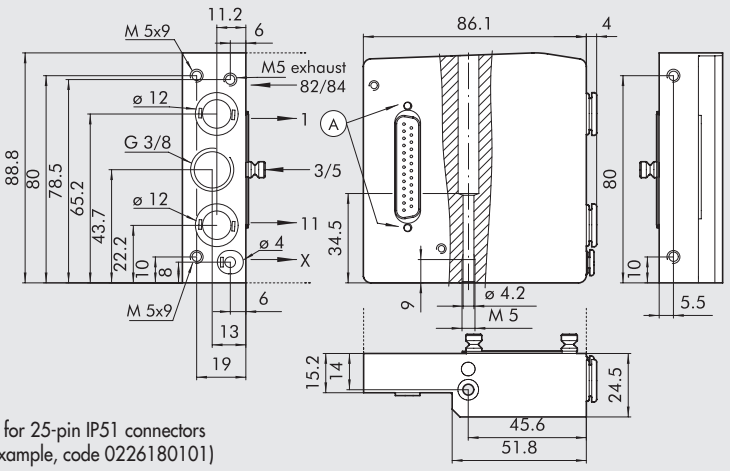

Ⓐ = Holes for 25-pin IP51 connectors (for example, code 0226180101)

Code	Description	Weight [g]
0227301220	End-plate HDM 1-11-25D Ø12	370

This end-plate allows for supplies to be differentiated
- Port 2
- Port 4
- Pilot supply

METAL WORK PNEUMATIC

③ END-PLATE 1-25D - PIPE Ø10

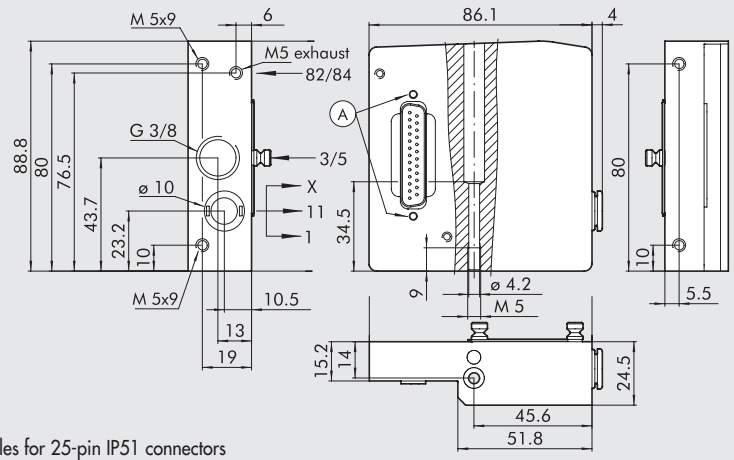

Ⓐ = Holes for 25-pin IP51 connectors (for example, code 0226180101)

Code	Description	Weight [g]
0227301201	End-plate HDM 1-25D Ø10	370

ACCESSORIES

⑭ 45° CONNECTOR KIT, 25 WIRES IP65



Code	Description	Weight [g]
0226180107	45° connector kit, 25 wires IP 65	65

CABLES

Code	Description	Weight [g/m]
0226107201	10-wire cable	60
0226107101	19-wire cable	122
0226107102	25-wire cable	130

Specify the number of metres desired.

PRE-WIRED 45° CONNECTOR KIT, 25 WIRES IP65



Code	Description	Weight [g]
0226960100	Connector IP 65 + 25-wire 45° cable L = 1 m	190
0226960250	Connector IP 65 + 25-wire 45° cable L = 2.5 m	390
0226960500	Connector IP 65 + 25-wire 45° cable L = 5 m	740

IDENTIFICATION PLATE KIT



Code	Description
0226107000	Identification plate kit

Comes in 16-pc. packs

WIRING DIAGRAM FOR PRE-WIRED PLUG CONNECTOR

25 PIN

Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire
1	blue/black	9	red/black	17	orange/white	25	green/black
2	red/brown	10	brown/white	18	green		
3	white/black	11	red/orange	19	yellow/black		
4	red/blue	12	light blue	20	white		
5	black/orange	13	yellow/white	21	blue/white		
6	yellow/red	14	yellow	22	brown		
7	black/brown	15	red/green	23	green/white		
8	white/red	16	orange	24	red		

HDM + AS-Interface

The HDM+AS-Interface system has been designed in such a way that the pneumatic input terminal contains all the electronics, signals and AS-I connectors. It is a very compact and sturdy system where everything is housed in a thick casing aluminium to protect the delicate components against impact. The valves and accessories are HDM standard, which means that you only need to replace the input terminal to convert the valve island with multiple connector into an AS-I island. All the advantages of the HDM system can be exploited: the possibility of mounting valves of different size, with fittings for pipes 4, 6, 8 or 10; the insertion of intermediate modules with separate power supply or outlets; aluminium valves with chemical nickel plating enclosed in a protective casing in reinforced technopolymer, with an index of protection IP65. The arrangement of the functions continues the traditional optimisation of the HDMs: the user interface of the valves and bus all on one side, so that the fitter and service engineer have everything within easy reach: all compressed air connections on the other side; the connectors for AS-I cables on the opposite side longitudinally, so that several valve islands can be arranged in line, fixed on a DIN bar.
There are many AS-I terminal variants to meet all possible requirements:

- with 1 node, for controlling up to 4 valve solenoid pilots;
- with 2 nodes, for controlling up to 8 solenoid pilots;
- with 1 note for output and input for controlling up to 4 solenoid pilots and receiving up to 4 input signals. The input connectors are M8 or M12;
- with 2 nodes for output and input for controlling up to 8 solenoid pilots and receiving up to 8 input signals with M8 connectors;
- power supply with the AS-I yellow cable only;
- power supply with two cables: the yellow AS-I cable and the black power supply cable.
- traditional V.2.1 addressing or extended AB V.3.0 address for an increase in the node numbers which can be connected up to 62 and for a better diagnostics

Note: if you use valves 8S type or 10 exploiting their flow capacity it is necessary that the feeding pressure is at least 6 bar (to avoid the pressure to decrease too much on the pilots).

TECHNICAL DATA

Valve port connections		Ø 4,6,8,10 mm automatic fitting for ports 2 and 4 / power supply port for Ø10 or 12* automatic fitting / 3/8 thread for exhaust port, M5 thread for exhaust pilot port				
Maximum number of pilots		Terminal with 1 node = 4 / terminal with 2 node = 8				
Maximum number of valves		Terminal with 1 node = 4 (same as the max. no. of pilots) / terminal with 2 node = 8 (same as the max. no. of pilots)				
Operating temperature range	°C	-10 to +60				
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous				
Pressure range		X (pilot supply)		1-11 (valve supply)		
	Terminal 1-11	3 to 7 bar		vacuum at 10 bar		
	Terminal 1	3 to 7 bar				
Voltage range		24VDC ±10%				
Power for each pilot	W	0.9				
Solenoid Pilot Insulation class		F155				
Degree of protection		IP 65 (with conveyed exhaust, and unused INPUTS sealed with caps/plugs)				
Solenoid rating		100% ED				
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	11.5 mm Ø 4	11.5 mm Ø 6	14 mm Ø 8	23 mm Ø 8	23 mm Ø 10
	version 5/2 and 3/2	200	500	650	1000	1200
	version 5/3	200	300	300	500	500
TRA/TRR 2x3/2 monostable at 6 bar	ms	8 / 45			8 / 60	
TRA/TRR 5/2 monostable at 6 bar	ms	8 / 33			9 / 60	
TRA/TRR 5/2 bistable at 6 bar	ms	20 / 20			8 / 8	
TRA/TRR 5/3 cc monostable at 6 bar	ms	20 / 20			15 / 15	
Note on use		Insert the pipes in the fittings, before passing air through the valves, otherwise the basket may be pulled out of its seat by the flow of air. *with right-end-plate 1-11				
Compatibility with oils		See **chapter Z1**				

COMPONENTS

① Exhaust - Solenoid pilot 82/84
③ Threaded connection of exhausts 3/5
④ Valve supply - port 1-11-X
⑥ Blind end-plate or right-end-plate 1-11
⑦ Screw for valve wall-mounting
⑧ Utility port for pipe Ø 4, 6, 8, 10 mm
⑪ Manual control
⑫ LED (LED on, solenoid valve energised)
⑬ Pneumatic symbol
⑭ Identification of the monostable or bistable manual control
⑮ Valve ordering code
⑯ Valve identification code
⑰ Blank space for valve number
⑱ Black cable for 24V (if present)
⑲ AS-INTERFACE yellow cable
⑳ AS-INTERFACE led

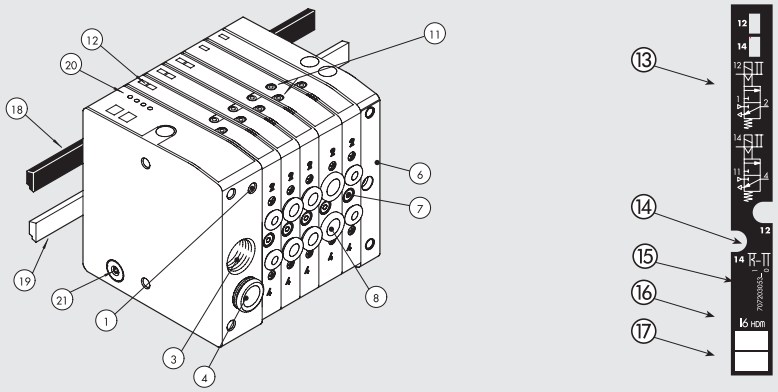

METAL WORK PNEUMATIC

THE MULTIMACH WORLD: FLEXIBILITY

The numbers permit rapid identification of the function and assembly position of the single elements represented as follows.
Refer to page B2.142 **for valves, intermediates elements and common accessories.**

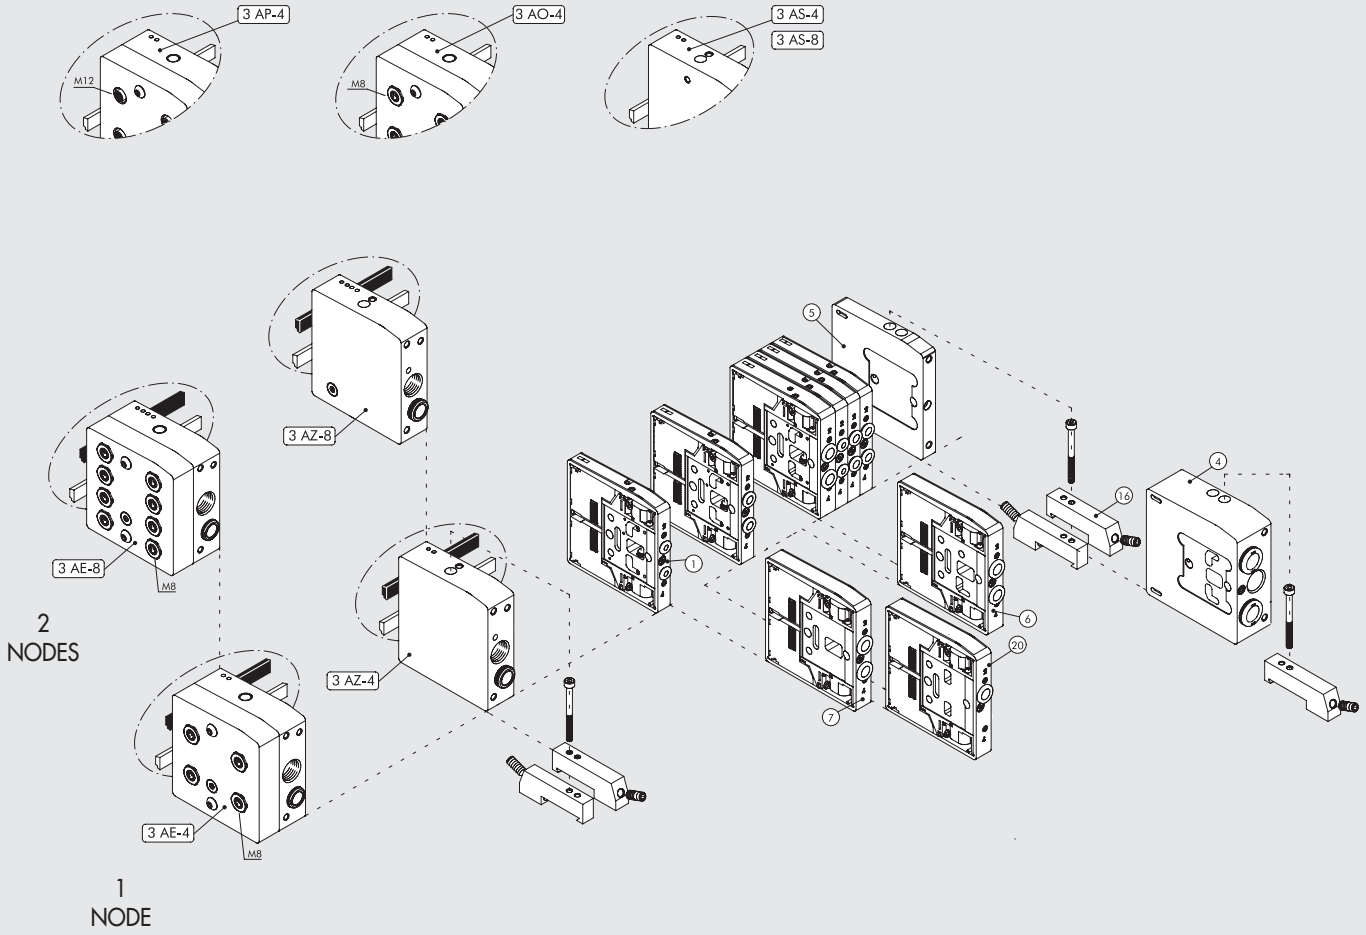

FIXING THE BASE

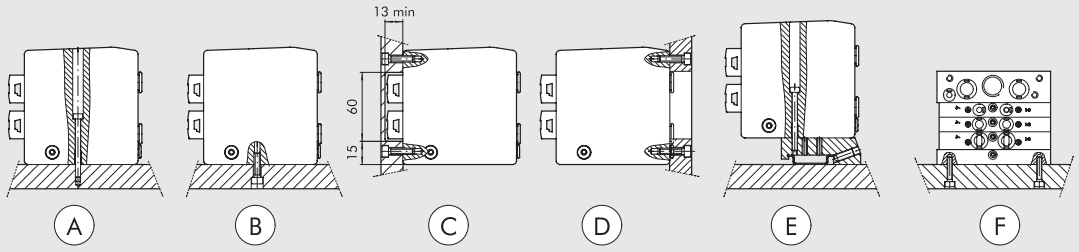

Ⓐ Fixing from above using the 1 or 1-11 input terminal and the blind terminal.
Ⓑ Ⓒ Fixing from above using the 1 or 1-11 input terminal and the blind terminal, using the M5 threads on the bottom and the rear of the terminals.
Ⓓ Fixing from above using the 1 or 1-11 input terminal and the blind terminal, using the M5 threads on the front of the terminals. An opening for the pipes is made in the plate.
Ⓔ Fixing on the DIN bar with end-plate 1 or 1-11 and blind and plate, using the push-in bracket code 0227301600.
Ⓕ Lateral fixing using the blind terminal, and its the M4 threads on the side lateral.
Note: The sole fixing admitted is the one showed.

SYNOPTIC, SIZES AND VERSIONS

H D M	3	A S - 4	M	I6 - W 8 - 5	1 6
VALVE	**INPUT END-PLATE**	**ELECTRICAL BASE**	**MANUAL TYPE**	**TYPE OF VALVE**	**FURTHER DETAILS**
Heavy duty Multimach IP65	**3** End-plate 1	Version with standard address **AS-4** 1 node, 4 out, yellow cable **AS-8** 2 nodes, 8 out, yellow cable **AO-4** 1 node, 4 out e 4 in M8, yellow cable **AP-4** 1 node, 4 out e 4 in M12, yellow cable **AZ-4** 1 node, 4 out, yellow cable and black cable **AZ-8** 2 nodes, 8 out, yellow cable and black cable **AE-4** 1 node, 4 out e 4 in M8, yellow cable and black cable **AE-8** 2 nodes, 8 out e 8 in M8, yellow cable and black cable	**M** Monostable manual control **B** Bistable manual control	**I** n° 2 3/2 NC **W** n° 2 3/2 NO **L** 3/2 NO + 3/2 NC **V** 5/2 monostable **K** 5/2 bistable **O** 5/3 monostable ***F** 5/2 monostable **4** right-end-plate 1-11 pipe Ø12 **5** blind end-plate **6** Passing-intermede **7** Blind intermediate **20** Exhaust section **4** Cartridge 4 **6** Cartridge 6 **8** Cartridge 8 - 14 mm **8S** Cartridge 8 - 23 mm **10** Cartridge 10	**16** n° 2 brackets for DIN bar

* Uses a single PIN (like the V) and occupies 2 signals

WIRING DIAGRAM

NOTE: The type f monostable valve uses one PIN only (like the V) but occupies 2 signals.

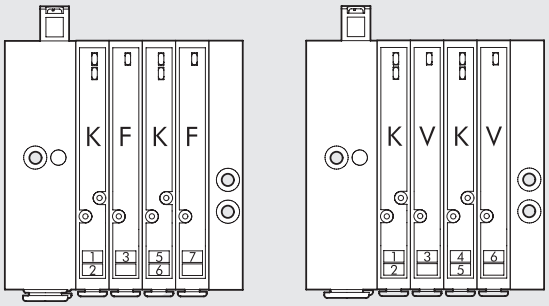

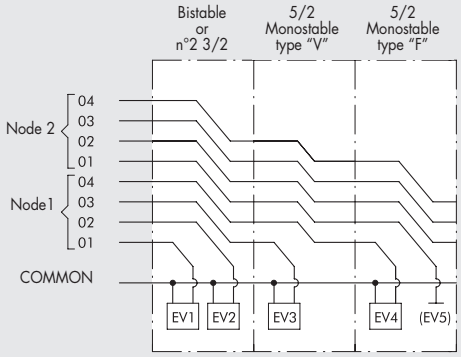

③ END-PLATE 1 AS-4, AS-8

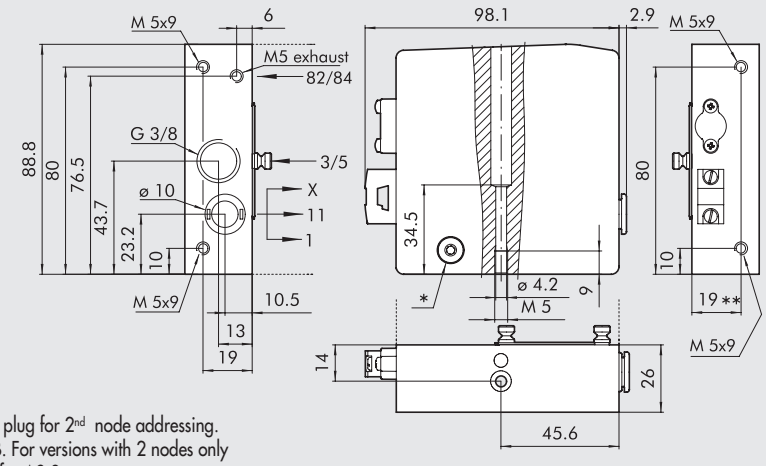

* M7 plug for 2nd node addressing.
N.B. For versions with 2 nodes only
** 21 for AS-8

Code	Description	Weight [g]
0227301202	End-plate HDM 1 AS-4 1 node, 4 Out, yellow cable	465
0227301208	End-plate HDM 1 AS-8 2 nodes, 8 Out, yellow cable	454

③ END-PLATE 1 AO-4, M8

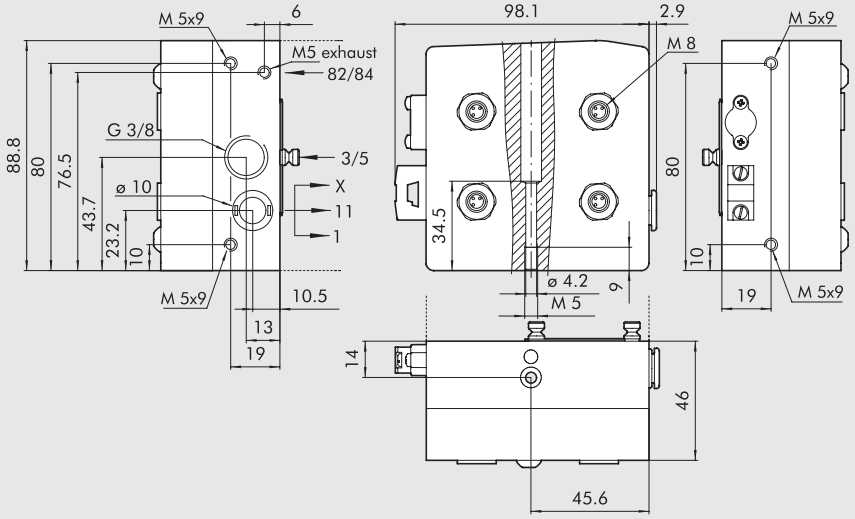

Code	Description	Weight [g]
0227301218	End-plate HDM 1 AO-4 1 node, 4 Out and 4 In M8, yellow cable	759

③ END-PLATE 1 AP-4, M12

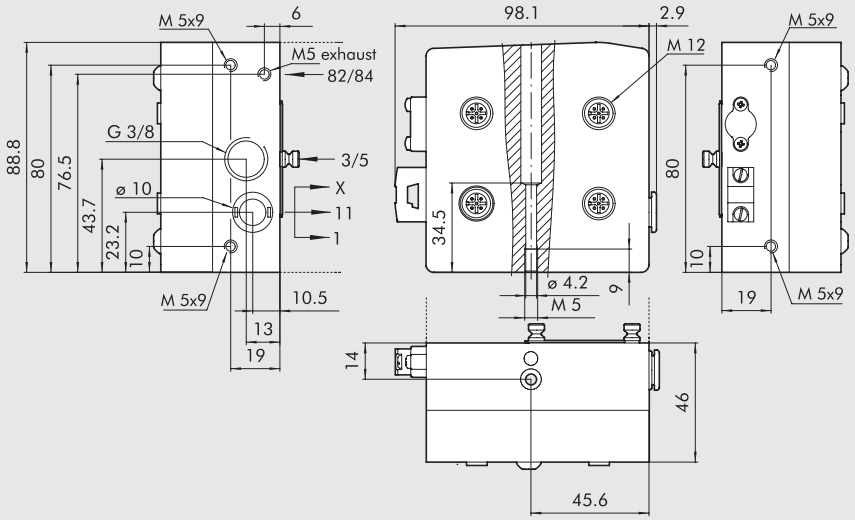

Code	Description	Weight [g]
0227301212	End-plate HDM 1 AP-4 1 node, 4 Out and 4 In M12, yellow cable	756

③ END-PLATE 1 AE-4, M8

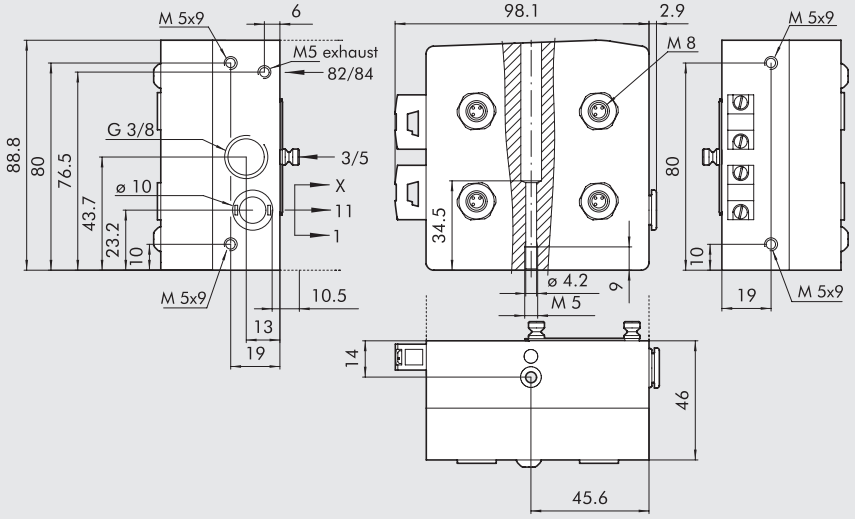

Code	Description	Weight [g]
0227301214	End-plate HDM 1 AE-4 1 node, 4 Out and 4 In M8, yellow cable and black cable	761

③ END-PLATE 1 AE-8, M8

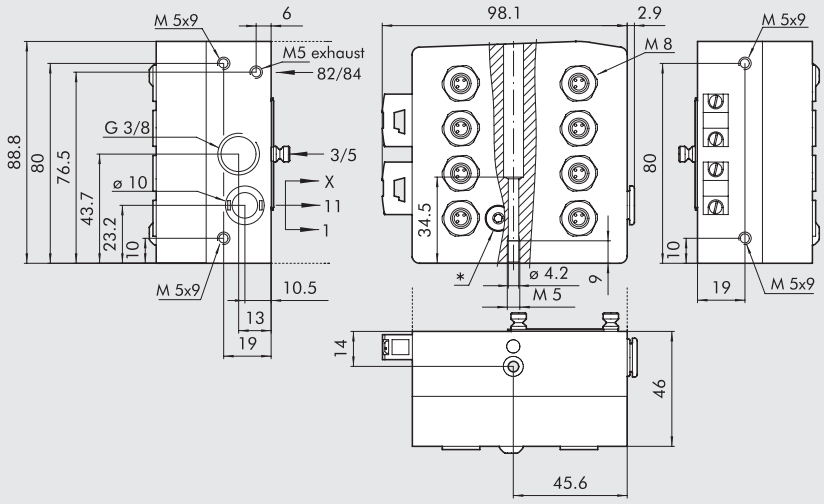

Code	Description	Weight [g]
0227301216	End-plate HDM 1 AE-8 2 nodes, 8 Out and 8 In M8, yellow cable and black cable	773

③ END-PLATE 1 AZ-4, AZ-8

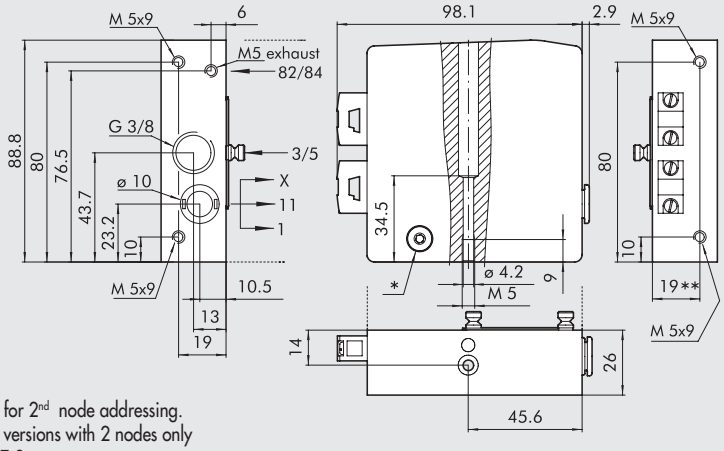

Code	Description	Weight [g]
0227301204	End-plate HDM 1 AZ-4 1 node, 4 Out, yellow cable and black cable	467
0227301210	End-plate HDM 1 AZ-8 2 nodes, 8 Out, yellow cable and black cable	456

* M7 plug for 2nd node addressing.
N.B. For versions with 2 nodes only
** 21 for AZ-8

ACCESSORIES

AS-interface ADDRESS CONNECTOR KIT



Code	Description
0226950150	AS-interface address connector cable L = 1 m

M8 - M12 PLUG

Code	Description
0240009039	PLUG M8
0240009040	PLUG M12

SPARES

AS-interface CONNECTOR KIT



Code	Description
0226950151	AS-interface connector kit

HDM + PROFIBUS-DP

METAL WORK PNEUMATIC

The HDM+PROFIBUS system has been designed in such a way that the pneumatic input terminal contains all the electronics, signals and connectors. It is a very compact and sturdy system where everything is housed in a thick casing aluminium to protect the delicate components against impact.
The valves and accessories are HDM standard, which means that you only need to replace the input terminal to convert the valve island with multiple connector into an PROFIBUS island. All the advantages of the HDM system can be exploited: the possibility of mounting valves of different size, with fittings for pipes 4, 6, 8 or 10; the insertion of intermediate modules with separate power supply or outlets; aluminium valves with chemical nickel plating enclosed in a protective casing in reinforced technopolymer, with an index of protection IP65.
The arrangement of the functions continues the traditional optimisation of the HDM: the user interface of the valves and bus all on one side, so that the fitter and service engineer have everything within easy reach: all compressed air connections are on the other side, and the electrical connectors and selectors are at the end of the island.
It is advisable to grounding the system to prevent electrical or electrostatic discharge from damaging the electronic circuit.

TECHNICAL DATA						
Valve port connections		Ø 4,6,8,10 mm automatic fitting for ports 2 and 4 / power supply port for Ø10 or 12* automatic fitting / 3/8 thread for exhaust port, M5 thread for exhaust pilot port				
Connection on the end-plate 1-11 for the supply of pilots		Automatic fitting Ø 4 mm				
Maximum number of pilots		16				
Maximum number of valves		16 (same as the max. no. of pilots)				
Operating temperature range	°C	-10 to +60				
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous				
Pressure range		X (pilot supply)			1-11 (valve supply)	
	Terminal 1-11	3 to 7 bar			vacuum at 10 bar	
	Terminal 1	3 to 7 bar				
Voltage range		24 VDC ±10%				
		(slave protected against overload and reverse polarity)				
Power for each pilot	W	0.9				
Solenoid Pilot Insulation class		F155				
Degree of protection		IP65 (with conveyed exhust, and that - in case of no use - the BUS OUT connector gets plugged)				
Solenoid rating		100% ED				
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	11.5 mm Ø 4	11.5 mm Ø 6	14 mm Ø 8	23 mm Ø 8	23 mm Ø 10
	version 5/2 and 3/2	200	500	650	1000	1200
	version 5/3	200	300	300	500	500
TRA/TRR 2x3/2 monostable at 6 bar	ms	8 / 45			8 / 60	
TRA/TRR 5/2 monostable at 6 bar	ms	8 / 33			9 / 60	
TRA/TRR 5/2 bistable at 6 bar	ms	20 / 20			8 / 8	
TRA/TRR 5/3 cc monostable at 6 bar	ms	20 / 20			15 / 15	
Note on use		Insert the pipes in the fittings, before passing air through the valves,otherwise the gasket may be pulled out of its seat by the flow of air.				
		*with right-end-plate 1-11				
Compatibility with oils		See **chapter Z1**				
Profibus-DP module for HDM valves						
Protection		Outputs protected against overloads and shortcircuits				
Max input power (all valves ON)		~500 mA				
Addressing		By rotary selectors				
Highest settable address number		99				
Default address		3				
Peripheral defect diagnosis		Local LED indicator and relay to Master				
Defects reported		Output shortcircuit or overload.				
		Auxiliary power supply failure.				
Module status in the event of peripheral defect		Profibus communication active.				
		The "peripheral defect" bit is active and accessible at the master station.				
Data bit value		0 = not enabled				
		1 = enabled				
Output status in the absence of communication		Disabled				

COMPONENTS

① Exhaust - Solenoid pilot 82/84
② Valve supply - port 1
③ Threaded connection of exhausts 3/5
④ Valve supply - port 11
⑤ Electrical control supply X
⑥ Blind end-plate or right-end-plate-1-11
⑦ Screw for valve wall-mounting
⑧ Utility port for pipe Ø 4, 6, 8 or 10 mm
⑪ Manual control
⑫ LED (LED on, solenoid valve energised)
⑬ Pneumatic symbol
⑭ Identification of the monostable or bistable manual control
⑮ Valve ordering code
⑯ Valve identification code
⑰ Blank space for valve number
⑱ Profibus terminal

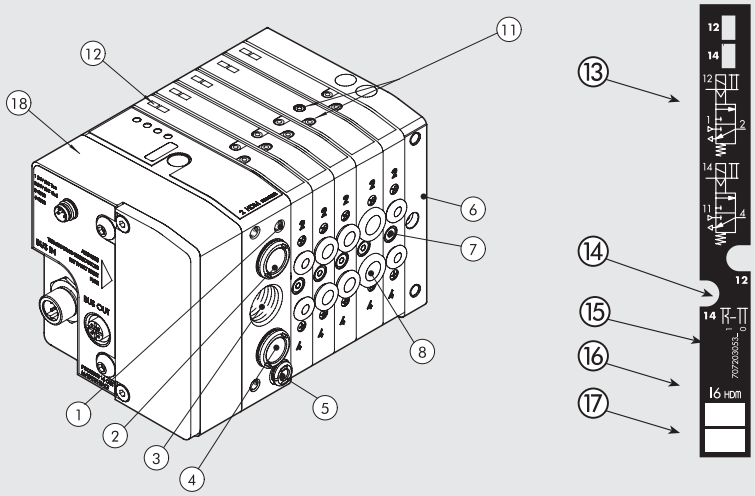

THE MULTIMACH WORLD: FLEXIBILITY

The numbers permit rapid identification of the function and assembly position of the single elements represented as follows.
Refer to page B2.142 **for valves, intermediates elements and common accessories.**

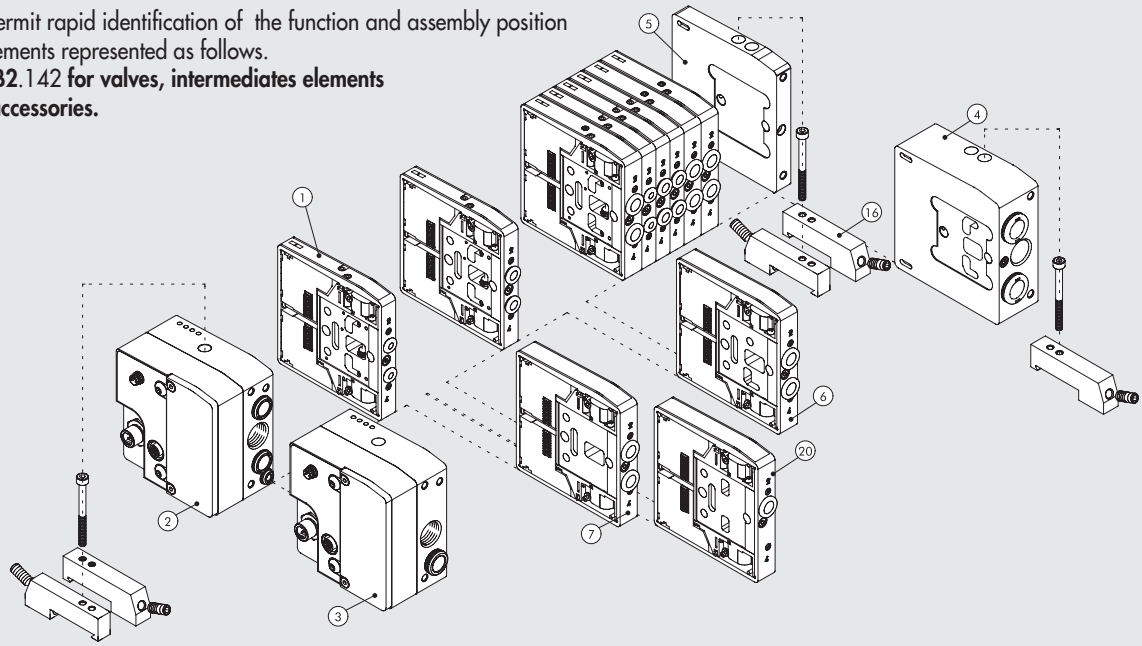

FIXING THE BASE

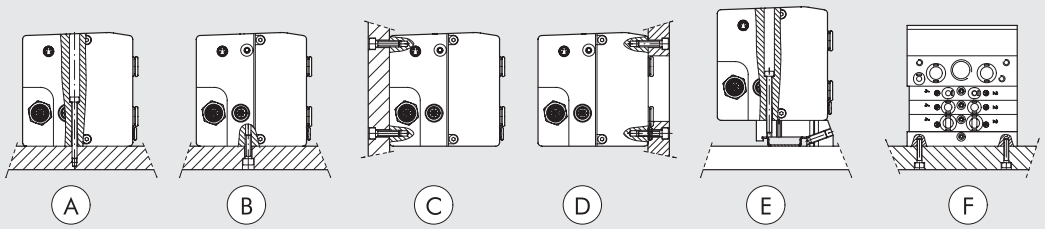

Ⓐ Fixing from above using the 1 or 1-11 input terminal and the blind terminal.
Ⓑ Ⓒ Fixing from above using the 1 or 1-11 input terminal and the blind terminal, using the M5 threads on the bottom and the rear of the terminals.
Ⓓ Fixing from above using the 1 or 1-11 input terminal and the blind terminal, using the M5 threads on the front of the terminals. An opening for the pipes is made in the plate.
Ⓔ Fixing on the DIN bar with end-plate 1 or 1-11 and blind and plate , using the push-in bracket code 0227301600.
Ⓕ Lateral fixing using the blind terminal, and its the M4 threads on the side lateral.
Note: The sole fixing admitted is the one showed.

METAL WORK PNEUMATIC

SYNOPTIC, SIZES AND VERSIONS

H D M	2	P	M	I6 - W8 - W6 - O4 - L8 - 5	1 6
VALVE	**INPUT END-PLATE**	**ELECTRICAL BASE**	**MANUAL TYPE**	**TYPE OF VALVE**	**FURTHER DETAILS**
Heavy duty Multimach IP65	**2** End-plate 1-11 **3** End-plate 1	**P** Profibus-DP	**M** Monostable manual control **B** Bistable manual control	**I** n° 2 3/2 NC **W** n° 2 3/2 NO **L** 3/2 NO + 3/2 NC **V** 5/2 monostable **K** 5/2 bistable **O** 5/3 monostable ***F** 5/2 monostable **4** right-end-plate 1-11 pipe Ø12 **5** blind end-plate **6** Passing-intermede **7** Blind intermediate **20** Exhaust section **4** Cartridge 4 **6** Cartridge 6 **8** Cartridge 8 - 14 mm **8S** Cartridge 8 - 23 mm **10** Cartridge 10	**16** n° 2 brackets for DIN bar

* Uses a single PIN (like the V) and occupies 2 signals.

WIRING DIAGRAM

1 = +24V bus (brown)
2 = +24V valve (white)
3 = GND (blue)
4 = GND (black)

POWER SUPPLY (M8)

BUS OUT (female connector) (M12 COD. B)

BUS IN (male connector) (M12 COD. B)

1 = +5V *
2 = A
3 = OV*
4 = B
5 = Shield

* DO NOT CONNECT PIN 1 and PIN 3: to be used only for feeding of the external terminating resistors.
- For correct communication, use Profibus cables at least 1 metre long.
- The shield should be evenly distributed around the thread. Should this not be possible, the shield can be connected to prin 5. Both of these methods can also be used in combination.

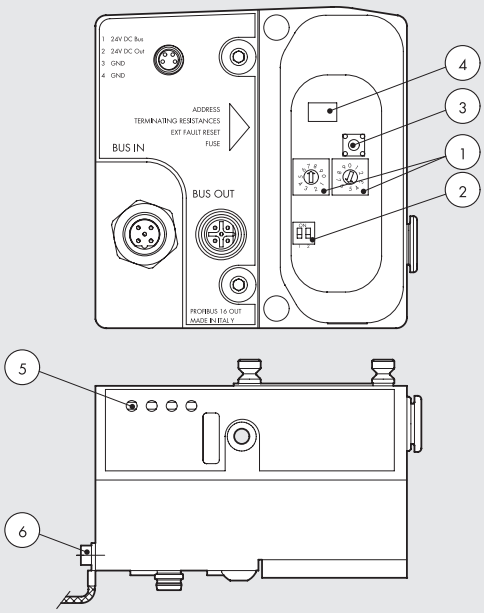

❶ Adressing
❷ Terminal resistances
❸ Reset button faulty
❹ Resettable fuse
❺ Indicator Led
❻ Grounding

NOTE: The type F monostable valve uses one PIN only (like the V) but occupies 2 signals.

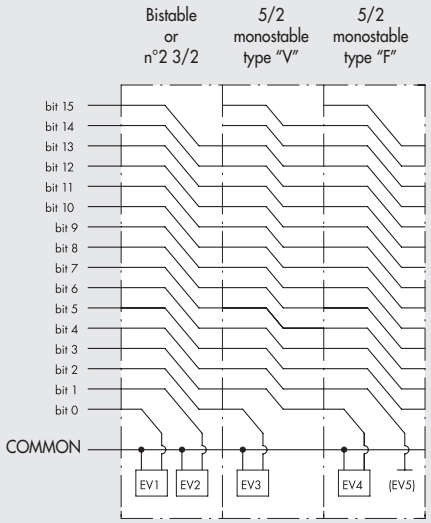

② END-PLATE 1-11 PROFIBUS-DP

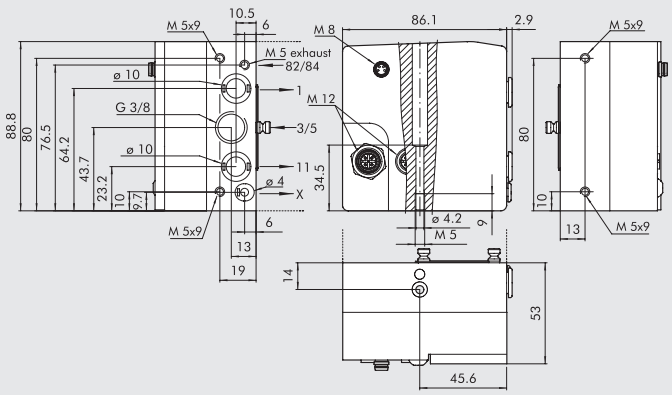

Code	Description	Weight [g]
0227301231	End-plate HDM 1-11 PROFIBUS	730

③ END-PLATE 1 PROFIBUS-DP

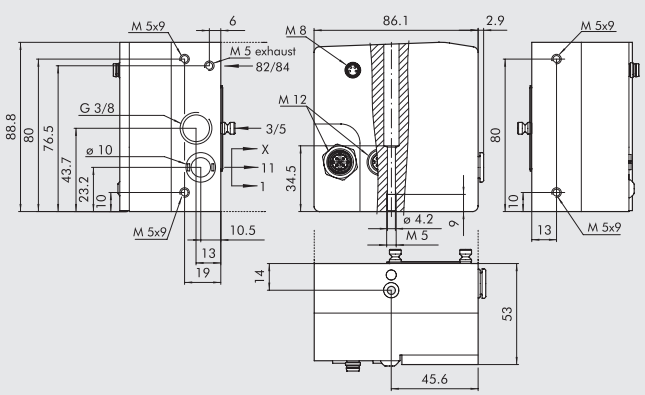

Code	Description	Weight [g]
0227301230	End-plate HDM 1 PROFIBUS	730

ACCESSORIES

M12 MALE CONNECTOR OUT-BUS



Code	Description
0240009035	M12 male connector B coding

M12 FEMALE CONNECTOR IN-BUS



Code	Description
0240009036	M12 female connector B coding

M8 CONNECTOR FOR POWER SUPPLY

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black



Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m
0240009P60 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 3 m
0240009P37 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 5 m
0240009P58 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 10 m
0240009P59 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 15 m

* Very flexible cables, class 6 according to IEC 60228

M8 - M12 PLUG

Code	Description
0240009039	Plug M8
0240009040	Plug M12

HDM + EtherNet/IP

METAL WORK PNEUMATIC

The HDM+EtherNet/IP system has been designed in such a way that the pneumatic input terminal contains all the electronics, signals and connectors. It is a very compact and sturdy system where everything is housed in a thick casing aluminium to protect the delicate components against impact.
The valves and accessories are HDM standard, which means that you only need to replace the input terminal to convert the valve island with multiple connector into an EtherNet/IP island. All the advantages of the HDM system can be exploited: the possibility of mounting valves of different size, with fittings for pipes 4, 6, 8 or 10; the insertion of intermediate modules with separate power supply or outlets; aluminium valves with chemical nickel plating enclosed in a protective casing in reinforced technopolymer, with an index of protection IP65.
The arrangement of the functions continues the traditional optimisation of the HDM: the user interface of the valves and bus all on one side, so that the fitter and service engineer have everything within easy reach: all compressed air connections are on the other side, and the electrical connectors and selectors are at the end of the island.
It is advisable to grounding the system to prevent electrical or electrostatic discharge from damaging the electronic circuit.

TECHNICAL DATA							
Valve port connections		Ø 4,6,8,10 mm automatic fitting for ports 2 and 4 / power supply port for Ø10 or 12* automatic fitting / 3/8 thread for exhaust port, M5 thread for exhaust pilot port					
Connection on the end-plate 1-11 for the supply of pilots		Automatic fitting Ø 4 mm					
Maximum number of pilots		16					
Maximum number of valves		16 (same as the max. no. of pilots)					
Operating temperature range	°C	-10 to +60					
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous					
Pressure range		X (pilot supply)			1-11 (valve supply)		
	Terminal 1-11	3 to 7 bar			vacuum at 10 bar		
	Terminal 1	3 to 7 bar					
Voltage range		24 VDC ±10%					
		(slave protected against overload and reverse polarity)					
Power for each pilot	W	0.9					
Solenoid Pilot Insulation class		F155					
Degree of protection		IP65 (with conveyed exhust, and that - in case of no use - the BUS OUT connector gets plugged)					
Solenoid rating		100% ED					
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	11.5 mm Ø 4	11.5 mm Ø 6	14 mm Ø 8	23 mm Ø 8	23 mm Ø 10	
	version 5/2 and 3/2	200	500	650	1000	1200	
	version 5/3	200	300	300	500	500	
TRA/TRR 2x3/2 monostable at 6 bar	ms	8 / 45			8 / 60		
TRA/TRR 5/2 monostable at 6 bar	ms	8 / 33			9 / 60		
TRA/TRR 5/2 bistable at 6 bar	ms	20 / 20			8 / 8		
TRA/TRR 5/3 cc monostable at 6 bar	ms	20 / 20			15 / 15		
Note on use		Insert the pipes in the fittings, before passing air through the valves,otherwise the gasket may be pulled out of its seat by the flow of air.					
		*with right-end-plate 1-11					
Compatibility with oils		See **chapter Z1**					
EtherNet/IP module for HDM valves							
Field buses		EtherNet/IP - 10/100 Mbit/s - Half-duplex - Full-duplex - Supports Auto-Negotiation					
Factory settings		Module name: Cmseries - Address IP 192.168.192.30					
Addressing		Software DHCP/BOOTP					
Voltage range		24VDC ± 10%					
Maximum number of pilots (Out)		16					
Maximum number of valves		16 (depending on the maximum number of solenoids)					
Icc bus supply current		Nominal Icc 120 mA - Instantaneous Icc (< 2 ms) 450 mA					
Maximum absorption of a valve distribution block with 16 mono-stable valves		Nominal Icc with 120mA OFF valves - Nominal Icc with 580 mA ON valves					
Protections		Module protected against overload and polarity reversal. Outputs protected against overloads and short-circuits					
Connections		Field bus: 2 M12 Female, D-coded, internal switch					
		Supply: M8 4 pin - input: M8 3 pin					
Data bit value		0 = not enabled - 1 = enabled					
Output status in the absence of communication		Disabled					

COMPONENTS

① Exhaust - Solenoid pilot 82/84
② Valve supply - port 1
③ Threaded connection of exhausts 3/5
④ Valve supply - port 11
⑤ Electrical control supply X
⑥ Blind end-plate or right-end-plate-1-11
⑦ Screw for valve wall-mounting
⑧ Utility port for pipe Ø 4, 6, 8 or 10 mm
⑪ Manual control
⑫ LED (LED on, solenoid valve energised)
⑬ Pneumatic symbol
⑭ Identification of the monostable or bistable manual control
⑮ Valve ordering code
⑯ Valve identification code
⑰ Blank space for valve number
⑱ Profibus EtherNet/IP

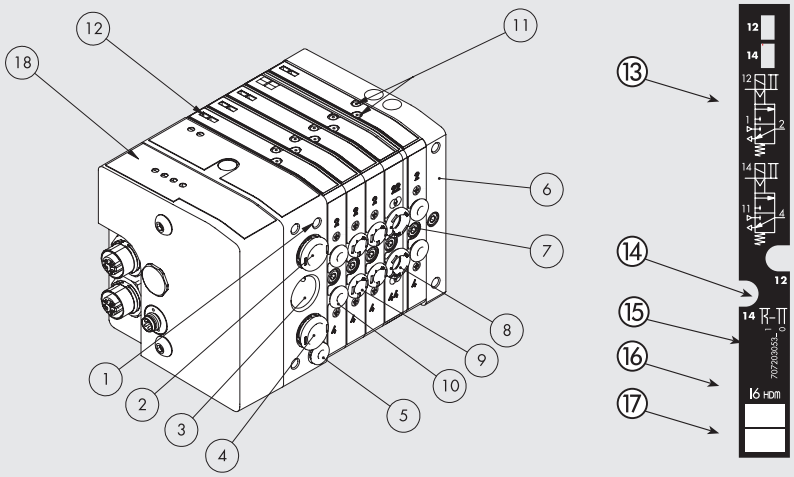

THE MULTIMACH WORLD: FLEXIBILITY

The numbers permit rapid identification of the function and assembly position of the single elements represented as follows.
Refer to page B2.142 **for valves, intermediates elements and common accessories.**

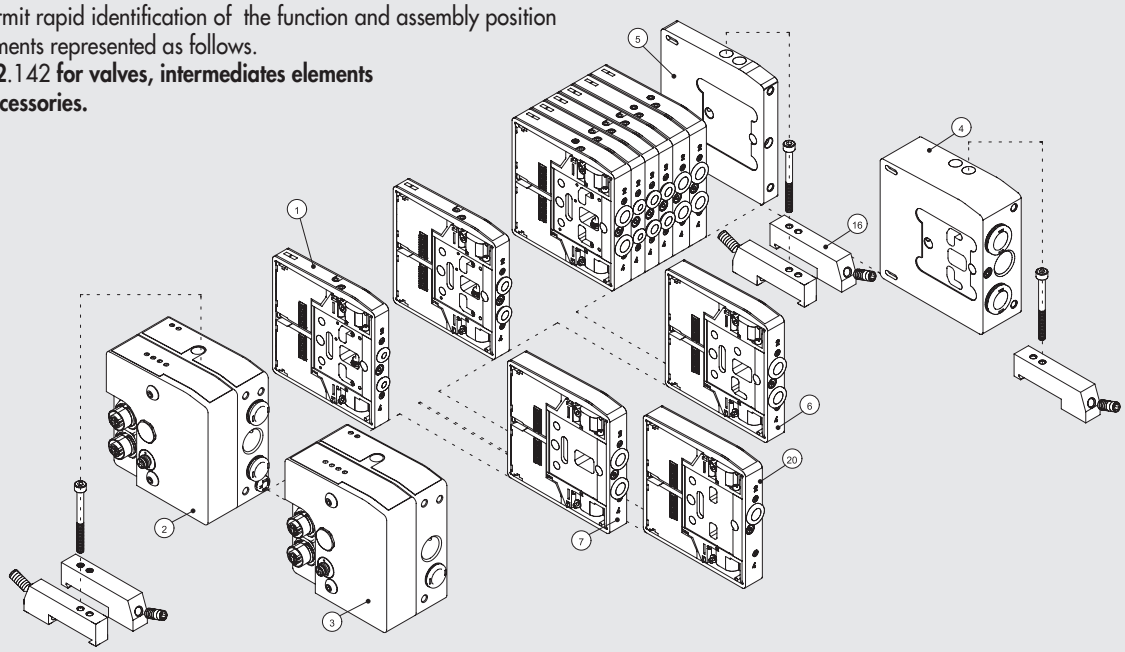

FIXING THE BASE

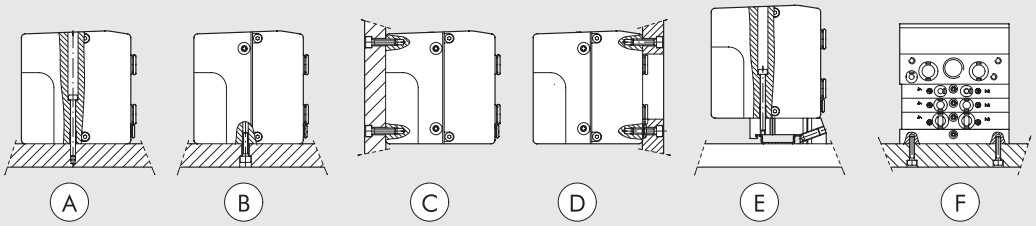

Ⓐ Fixing from above using the 1 or 1-11 input terminal and the blind terminal.
Ⓑ Ⓒ Fixing from above using the 1 or 1-11 input terminal and the blind terminal, using the M5 threads on the bottom and the rear of the terminals.
Ⓓ Fixing from above using the 1 or 1-11 input terminal and the blind terminal, using the M5 threads on the front of the terminals. An opening for the pipes is made in the plate.
Ⓔ Fixing on the DIN bar with end-plate 1 or 1-11 and blind and plate , using the push-in bracket code 0227301600.
Ⓕ Lateral fixing using the blind terminal, and its the M4 threads on the side lateral.
Note: The sole fixing admitted is the one showed.

SYNOPTIC, SIZES AND VERSIONS

H D M	2	EN	M	I6 - W8 - W6 - O4 - L8 - 5	1 6
VALVE	**INPUT END-PLATE**	**ELECTRICAL BASE**	**MANUAL TYPE**	**TYPE OF VALVE**	**FURTHER DETAILS**
Heavy duty Multimach IP65	**2** End-plate 1-11 **3** End-plate 1	**EN** EtherNet/IP	**M** Monostable manual control **B** Bistable manual control	**I** n° 2 3/2 NC **W** n° 2 3/2 NO **L** 3/2 NO + 3/2 NC **V** 5/2 monostable **K** 5/2 bistable **O** 5/3 monostable ***F** 5/2 monostable **4** right-end-plate 1-11 pipe Ø12 **5** blind end-plate **6** Passing-intermede **7** Blind intermediate **20** Exhaust section **4** Cartridge 4 **6** Cartridge 6 **8** Cartridge 8 - 14 mm **8S** Cartridge 8 - 23 mm **10** Cartridge 10	**16** n° 2 brackets for DIN bar

* Uses a single PIN (like the V) and occupies 2 signals.

WIRING DIAGRAM

Ⓐ Connection to the EtherNet/IP network
Ⓑ Connection for node supply and auxiliary valve supply
Ⓒ HDM diagnostics indicator light
Ⓓ EtherNet/IP diagnostics indicator light

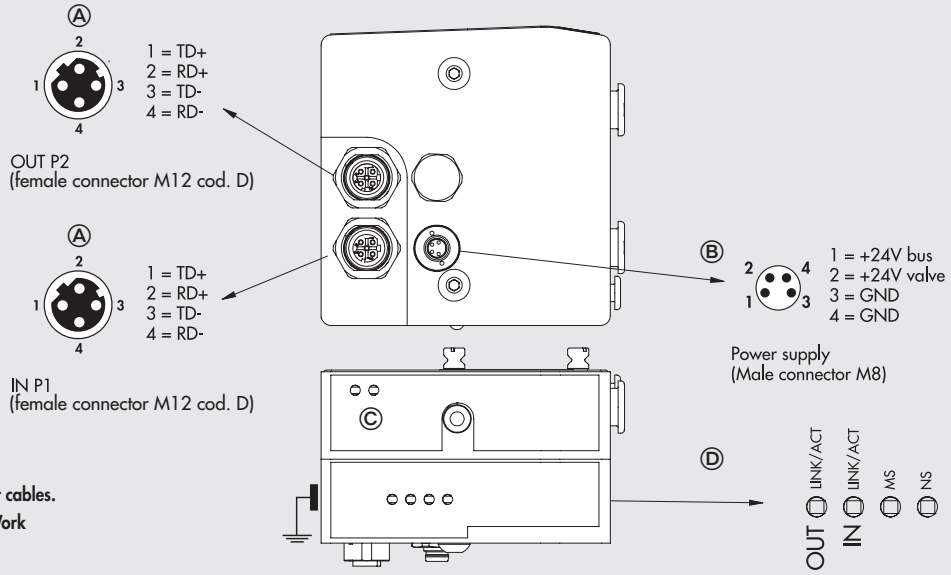

WARNING

For correct communication use only Industrial Ethernet cables. Cat. 5 / Class D 100 MHz, like the one in the Metal Work catalogue.

NOTE: The type F monostable valve uses one PIN only (like the V) but occupies 2 signals.

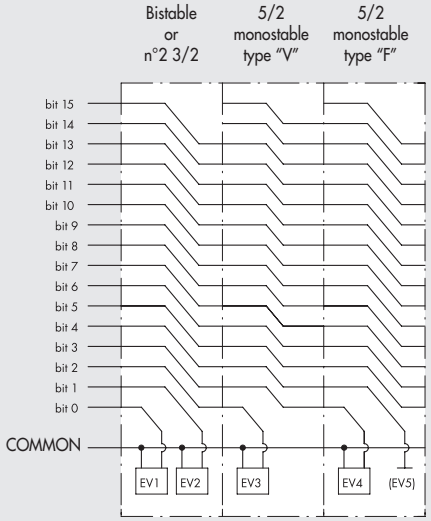

② END-PLATE 1-11 EtherNet/IP

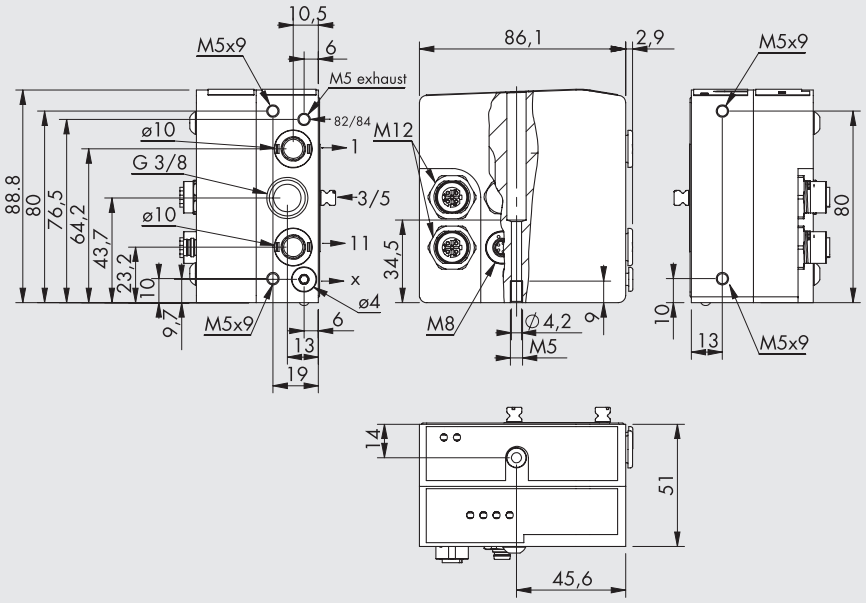

Code	Description	Weight [g]
0227301242	End-plate HDM 1-11 EtherNet/IP	730

③ END-PLATE 1 EtherNet/IP

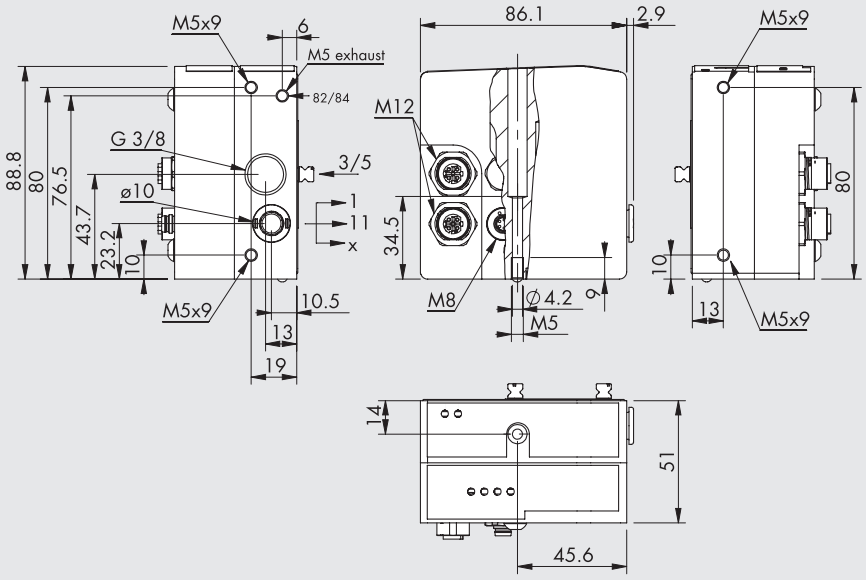

Code	Description	Weight [g]
0227301243	End-plate HDM 1 EtherNet/IP	730

ACCESSORIES

M8 CONNECTOR FOR POWER SUPPLY

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black



Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m
0240009P60 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 3 m
0240009P37 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 5 m
0240009P58 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 10 m
0240009P59 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 15 m

* Very flexible cables, class 6 according to IEC 60228

M12 PLUG



Code	Description
0240009040	Plug M12

M12 BUS CONNECTOR, D-CODED



Code	Description
0240005051	M12 BUS connector, D-coded

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP....)

BUS CABLE

Code	Description
0240005220	BUS cable L = 20 m

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP....)

STRAIGHT CONNECTOR FOR M12-M12 BUS, D-CODED



Code	Description
0240005103	Straight connector for M12-M12 BUS, D-coded, with 3 m cable
0240005105	Straight connector for M12-M12 BUS, D-coded, with 5 m cable
0240005110	Straight connector for M12-M12 BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP....)

STRAIGHT CONNECTOR FOR M12 BUS, D-CODED

Pin	Cable color
1	Yellow
2	White
3	Red
4	Blue



Code	Description
0240005093	Straight connector for M12 BUS, D-coded, with 3 m cable
0240005095	Straight connector for M12 BUS, D-coded, with 5 m cable
0240005100	Straight connector for M12 BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP....)

RJ45 CONNECTOR



Code	Description
0240005050	RJ45 connector with 4 contacts according to IEC 60603-7

NOTES

HDM + CANopen

METAL WORK PNEUMATIC

The HDM+CANopen system has been designed in such a way that the pneumatic input terminal contains all the electronics, signals and connectors. It is a very compact and sturdy system where everything is housed in a thick casing aluminium to protect the delicate components against impact.
Two versions of end-plate are available: one can handle up to 16 controls (16 Out) and one up to 16 controls and 8 inputs (16 Out + 8 In).
The input connectors are M12. Two inputs can be connected to each connector. The functions are arranged to ensure the same optimisation as the HDMs. The user interface is all on one side to facilitate the work of the fitter and service engineer. All pneumatic connections are on one side; the electrical connectors and selectors are on top of the island.

TECHNICAL DATA						
Valve port connections		Ø 4,6,8,10 mm automatic fitting for ports 2 and 4 / power supply port for Ø10 or 12* automatic fitting / 3/8 thread for exhaust port, M5 thread for exhaust pilot port				
Connection on the end-plate 1-11 for the supply of pilots		Automatic fitting Ø 4 mm				
Maximum number of pilots		16				
Maximum number of valves		16 (same as the max. no. of pilots)				
Operating temperature range	°C	-10 to +60				
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous				
Pressure range		X (pilot supply)			1-11 (valve supply)	
	Terminal 1-11	3 to 7 bar			vacuum at 10 bar	
	Terminal 1	3 to 7 bar				
Voltage range		24VDC ±10% (slave protected against overload and reverse polarity)				
Power for each pilot	W	0.9				
Solenoid Pilot Insulation class		F155				
Degree of protection		IP65 (with conveyed exhausts and with not used connectors plugged)				
Solenoid rating		100% ED				
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	11.5 mm Ø 4	11.5 mm Ø 6	14 mm Ø 8	23 mm Ø 8	23 mm Ø 10
	version 5/2 and 3/2	200	500	650	1000	1200
	version 5/3	200	300	300	500	500
TRA/TRR 2x3/2 monostable at 6 bar	ms	8 / 45			8 / 60	
TRA/TRR 5/2 monostable at 6 bar	ms	8 / 33			9 / 60	
TRA/TRR 5/2 bistable at 6 bar	ms	20 / 20			8 / 8	
TRA/TRR 5/3 cc monostable at 6 bar	ms	20 / 20			15 / 15	
Note on use		Insert the pipes in the fittings, before passing air through the valves,otherwise the gasket may be pulled out of its seat by the flow of air. * with right-end-plate 1-11				
Compatibility with oils		See **chapter Z1**				
CANopen module for HDM valves						
Protection		Outputs protected against overloads and shortcircuits				
Max input power (all valves ON)		~800 mA				
Addressing		By DIP SWITCH				
Highest settable address number		127				
Default address		1				
Peripheral defect diagnosis		Local LED indicator and relay to Master				
Defects reported		Output shortcircuit or overload. Auxiliary power supply failure.				
Module status in the event of peripheral defect		CANopen communication active. The "peripheral defect" bit is active and accessible at the master station.				
Data bit value		0 = not enabled 1 = enabled				
Output status in the absence of communication		Disabled				
INPUT module for HDM valves						
Sensor supply voltage		24 VDC ±10% (depending on the supply of the CANopen module)				
Max sensor power (distribuited over eight connectors)	mA	40				
Type of input		PNP for sensor 2-3 wires according to EN 60947-5-2				
Protection		Protected inputs against overload and short-circuit				
Active INPUT signalling		One LED for each INPUT				

COMPONENTS

① Exhaust - Solenoid pilot 82/84
② Valve supply - port 1
③ Threaded connection of exhausts 3/5
④ Valve supply - port 11
⑤ Electrical control supply X
⑥ Blind end-plate or right-end-plate 1-11
⑦ Screw for valve wall-mounting
⑧ Utility port for pipe Ø 4, 6, 8 or 10 mm
⑪ Manual control
⑫ LED (LED on, solenoid valve energised)
⑬ Pneumatic symbol
⑭ Identification of the monostable or bistable manual control
⑮ Valve ordering code
⑯ Valve identification code
⑰ Blank space for valve number
⑱ CANopen terminal

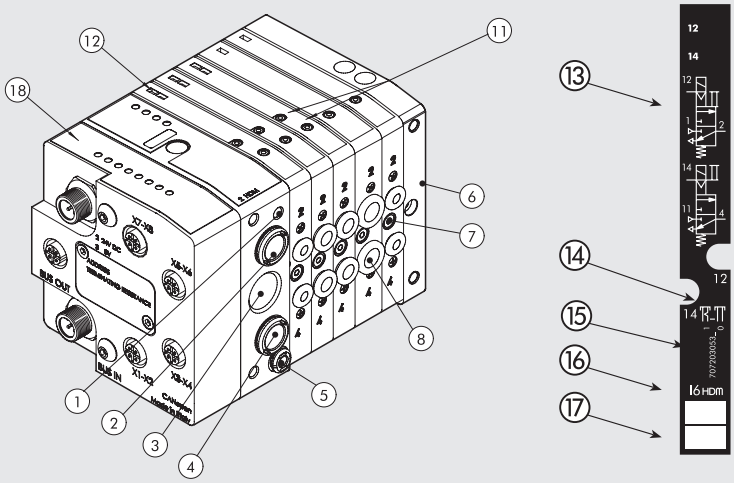

THE MULTIMACH WORLD: FLEXIBILITY

The numbers permit rapid identification of the function and assembly position of the single elements represented as follows.
Refer to page B2.142 **for valves, intermediates elements and common accessories.**

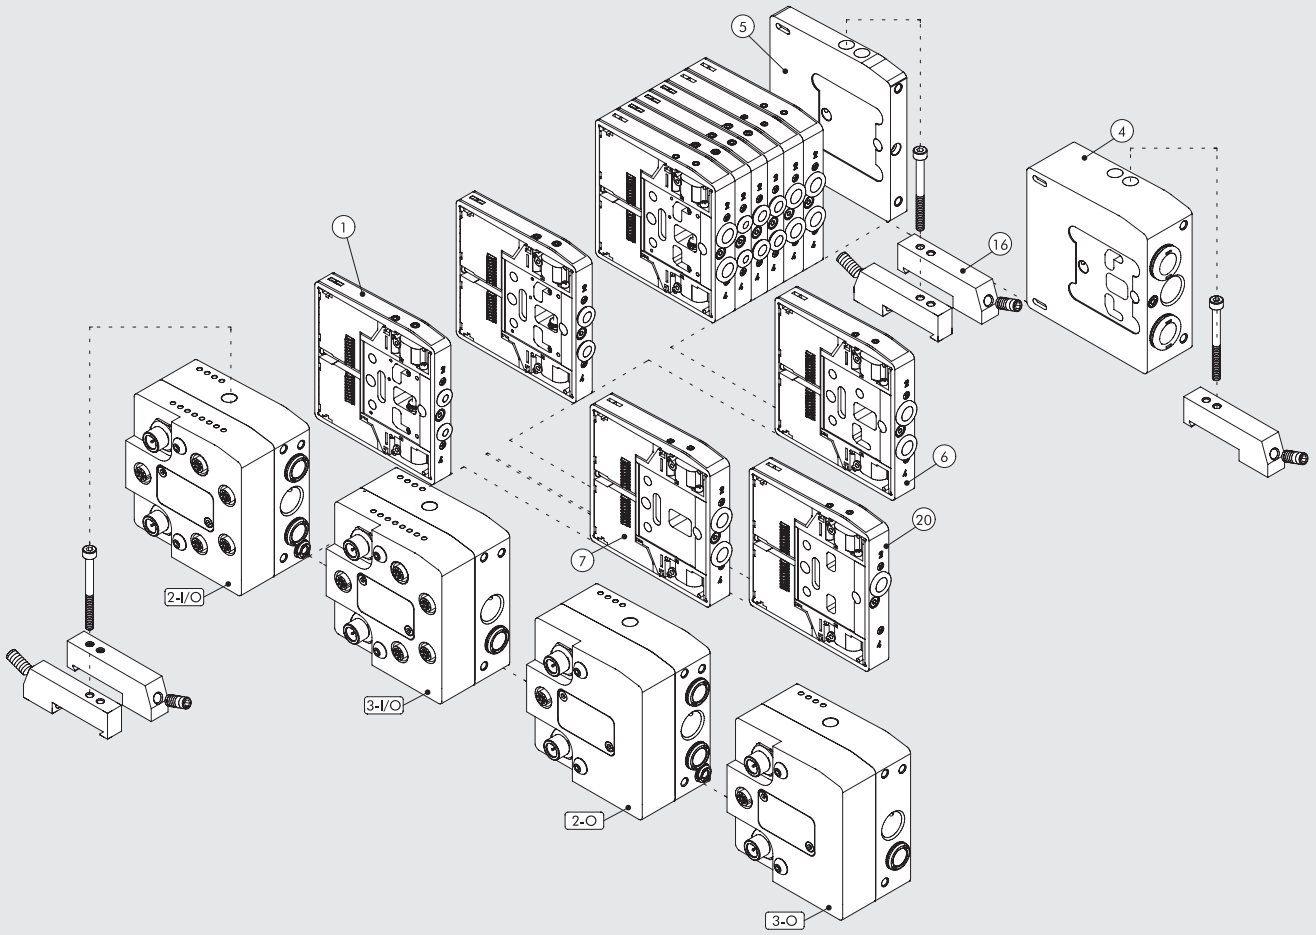

METAL WORK PNEUMATIC

FIXING THE BASE

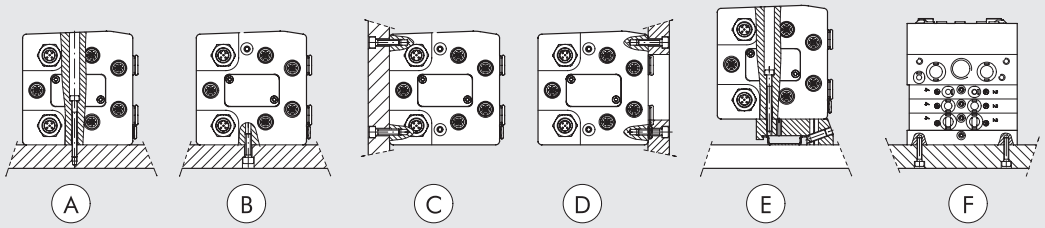

Ⓐ Fixing from above using the 1 or 1-11 input terminal and the blind terminal.
Ⓑ Ⓒ Fixing from above using the 1 or 1-11 input terminal and the blind terminal, using the M5 threads on the bottom and the rear of the terminals.
Ⓓ Fixing from above using the 1 or 1-11 input terminal and the blind terminal, using the M5 threads on the front of the terminals. An opening for the pipes is made in the plate.
Ⓔ Fixing on the DIN bar with end-plate 1 or 1-11 and blind and plate , using the push-in bracket code 0227301600.
Ⓕ Lateral fixing using the blind terminal, and its the M4 threads on the side lateral.
Note: The sole fixing admitted is the one showed.

SYNOPTIC, SIZES AND VERSIONS

H D M	2	CAN O	M	I6 - W 8 - W 6 - O 4 - L 8 - 5	1 6
VALVE	**INPUT END-PLATE**	**ELECTRICAL BASE**	**MANUAL TYPE**	**TYPE OF VALVE**	**FURTHER DETAILS**
Heavy duty Multimach IP65	**2** End-plate 1-11 **3** End-plate 1	**CAN O** CANopen 16 OUTPUT **CAN I/O** CANopen 8 INPUT e 16 OUTPUT	**M** Monostable manual control **B** Bistable manual control	**I** n° 2 3/2 NC **W** n° 2 3/2 NO **L** 3/2 NO + 3/2 NC **V** 5/2 monostable **K** 5/2 bistable **O** 5/3 monostable ***F** 5/2 monostable **4** right-end-plate 1-11 pipe Ø12 **5** blind end-plate **6** Passing-intermede **7** Blind intermediate **20** Exhaust section **4** Cartridge 4 **6** Cartridge 6 **8** Cartridge 8 - 14 mm **8S** Cartridge 8 - 23 mm **10** Cartridge 10	**16** n° 2 brackets for DIN bar

* Uses a single PIN (like the V) and occupies 2 signals.

WIRING DIAGRAM

POWER SUPPLY
(Male connector M12 cod. A)

1 = NC
2 = +24V
3 = 0V
4 = NC
5 = NC

BUS IN
(Male connector M12 cod. A)

1 = CAN-SHLD
2 = CAN V+
3 = CAN-GND
4 = CAN-H
5 = CAN-L



BUS OUT
(Female connector M12 cod. A)

CONN. INPUT
(Female connector M12 cod. A)

1 = +24V
2 = IN 2 - 4 - 6 - 8
3 = 0V
4 = IN 1 - 3 - 5 - 7
5 = NC



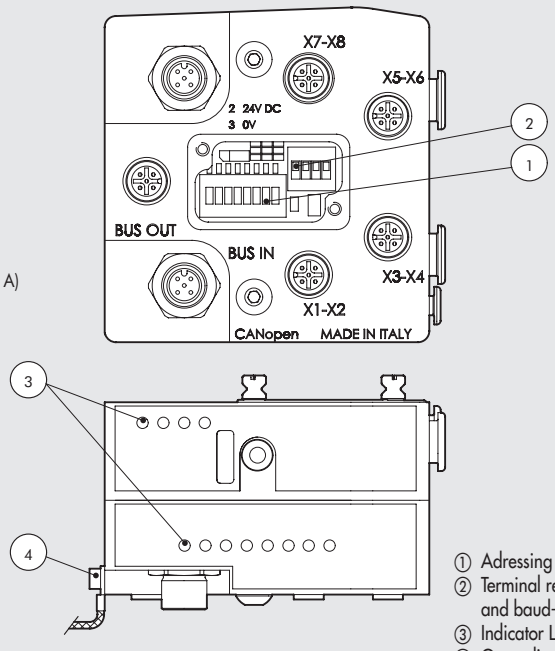

① Adressing
② Terminal resistances and baud-rate setting
③ Indicator LED
④ Grounding

2 - O END-PLATE 1-11 CANopen O

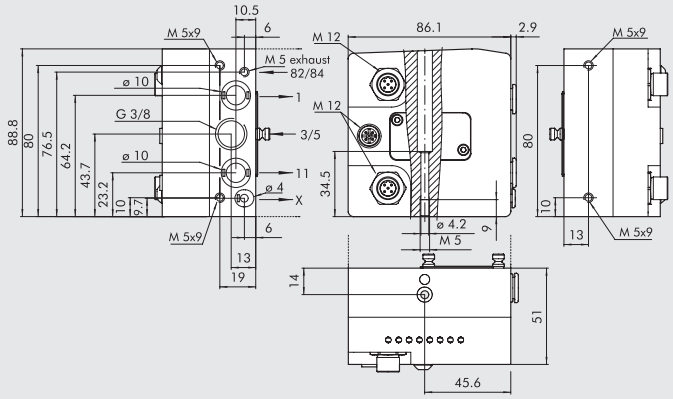

Code	Description	Weight [g]
0227301251	End-plate 1-11 HDM CANopen OUTPUT	745

Handles 16 OUTPUTS (solenoid pilots)

3 - O END-PLATE 1 CANopen O

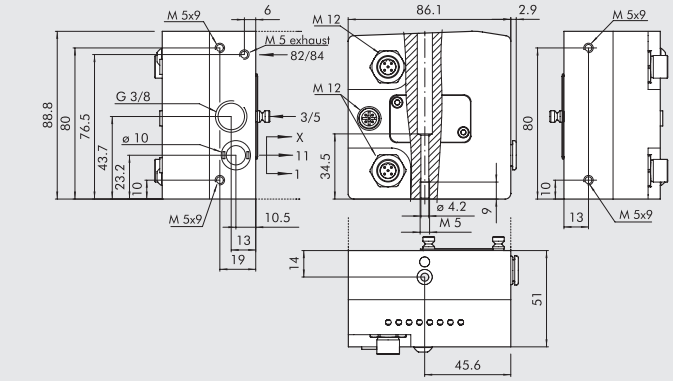

Code	Description	Weight [g]
0227301253	End-plate 1 HDM CANopen OUTPUT	746

Handles 16 OUTPUTS (solenoid pilots)

2 - I/O END-PLATE 1-11 CANopen I/O

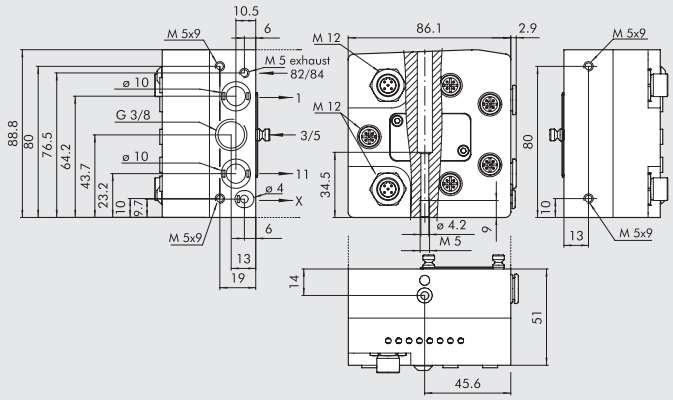

Code	Description	Weight [g]
0227301250	End-plate 1-11 HDM CANopen IN-OUT	734

Handles 16 OUTPUTS and 8 INPUTS

3 - I/O END-PLATE 1 CANopen I/O

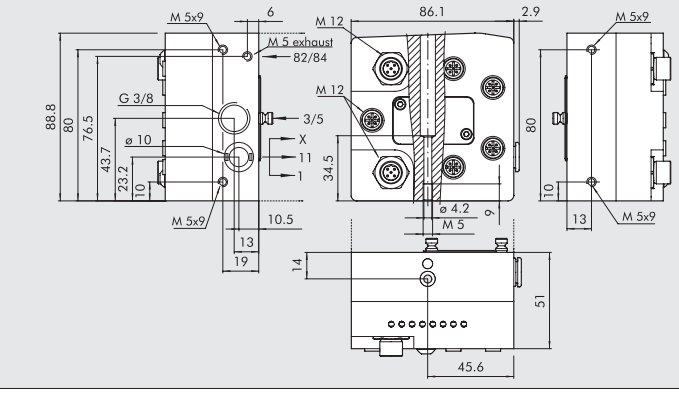

Code	Description	Weight [g]
0227301252	End-plate 1 HDM CANopen IN-OUT	735

Handles 16 OUTPUTS and 8 INPUTS

ACCESSORIES

M12 PLUG FOR BUS OUT E INPUT CANopen

Code	Description
0240009040	Plug M12

STRAIGHT CONNECTOR FOR CANopen POWER SUPPLY



Code	Description
W0970513001	5-pin M12x1 straight connector

STRAIGHT CONNECTOR WITH CANopen POWER CABLE

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Grey

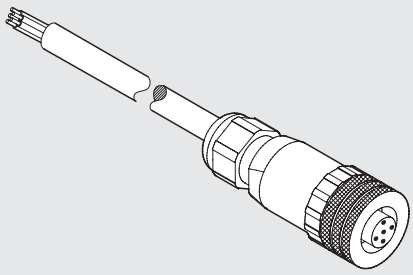

Code	Description
W0970513002	5-pin M12x1 straight connector with wire L = 5 m

FEMALE CONNECTOR FOR CANopen BUS-IN

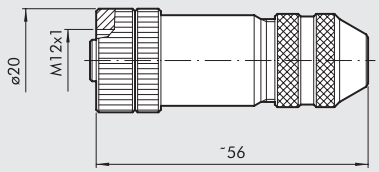

Code	Description
0240009055	M12 female connector, A coding

MALE CONNECTOR FOR CANopen BUS-OUT



Code	Description
0240009038	Male connector Bus A coding

STRAIGHT CONNECTOR WITHOUT CABLE FOR CANopen INPUT

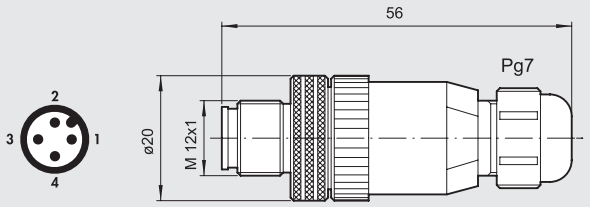

Code	Description
0240009021	Straight fitting without cable

STRAIGHT CONNECTOR WITH CABLE FOR CANopen INPUT

Pin	Cable colour
1	Brown
2	White
3	Blue
4	Black



Code	Description
0240009002	Straight, with 1.5 m cable
0240009003	Straight, with 5 m cable

M12 Y-CONNECTOR WITH CABLE FOR DIGITAL CANopen INPUT

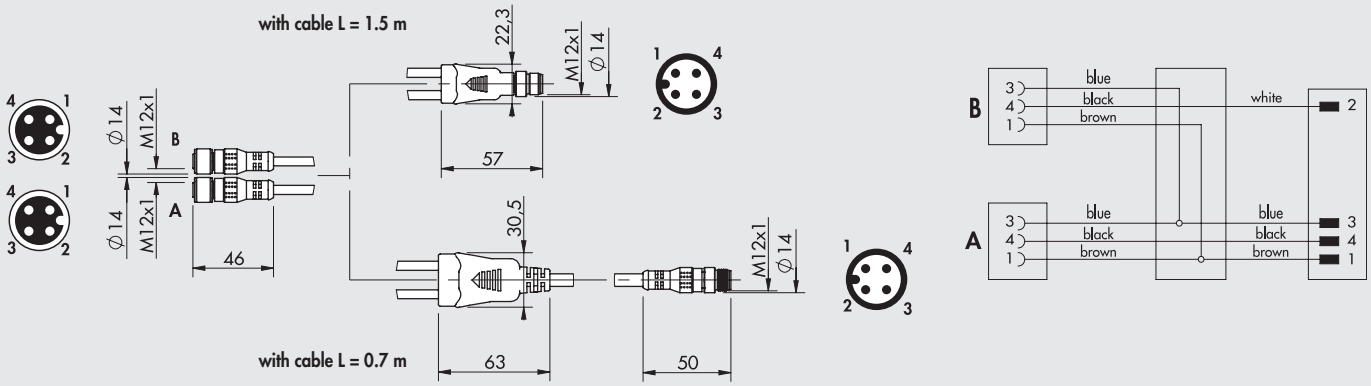

Code	Description
0240009032	Y-connector M12 4-pin M / double M12 4-pin F with cable L = 1.5 m
0240009049	Y-connector M12 4-pin M / double M12 4-pin F with cable L = 0.7 m

HDM + B&R

METAL WORK PNEUMATIC

An advanced field bus system interfacing with the Multimach world.
B&R has developed a new standard for automation, called FORMULA X.
For further details about features, functions and qualities of this system, reference must be made to the B&R documentation, also available on the web site www.br-automation.com
An overview is given below.
The X-system is a system handling analogue and digital inputs and outputs for local or remote use, which B&R defines as decentralised backplane.
Different types of modules are available. We present those designed for connection with Multimach and HDM valve islands. We only indicate the B&R's code root, since each type of module comes in different variants, that differ by number of signals handled, that can be 8, 16 or 24, and by type of signal, that can be input, output or input/output indifferently.
Common to all the modules is the presence of 4 connections: a signal input, a signal output for the following modules, a power input (24V DC), a power output for the following modules.

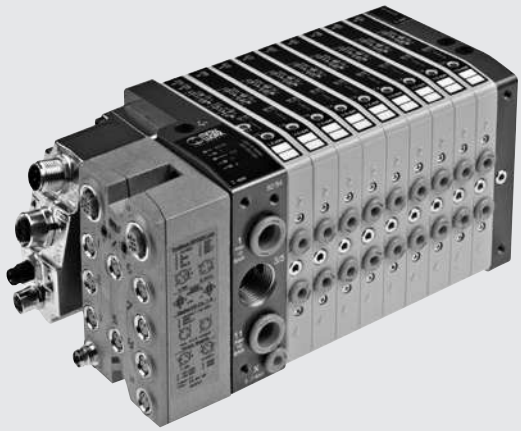

B&R CONNECTORS AND MODULES

IP20 7XV---50-11 SMART CONNECTOR

It is a plug connector with IP20 protection that contains the X system electronics. It can be connected with HDM islands, using the special input end-plate, type 1, code 0227301207 or the special input end-plate type 1-11, code 0227301206.



IP67 7XV---50-51 SMART CONNECTOR

It is a plug connector with IP67 protection, that contains the X system electronics. It can be connected with HDM islands, using the special input end-plate type 1, code 0227301207, or the special input end-plate, type 1-11 code 0227301206.

X67 1/O SYSTEM MODULES

These are modules with IP67 protection, connected to the X system, for handling inputs and outputs. It is interesting to note that their size is such that they can be fixed directly to the HDM input end-plate type 1-11, code 0227301206
(N.B. NOT to be fixed to the HDM end-plate type 1, code 0227301207).

X67 BUS CONTROLLER MODULES

These are modules with protection IP67, receiving a signal according to one of the DP Profibus, CAN open, Device Net, Ethernet Powerlink protocols (the module code differs obviously according to the protocol being controlled). The output signal is according to the X-system.
These are gateways converting the signals of a field bus into an X-system. These modules control the inputs and/or outputs via the M8 connectors provided. They can be fixed directly to the HDM input end-plate type 1-11, code 0227301206
(N.B. NOT to be fixed to the HDM end-plate, type 1, code 0227301207).

X2X →

X2X →

PROFIBUS-DP
DEVICE-NET
CAN-OPEN
ETHERNET →



X2X →

APPLICATIONS OF B&R MODULES TO HDM END-PLATES

Refer to page B2.142 **for valves, intermediates elements and common accessories.**

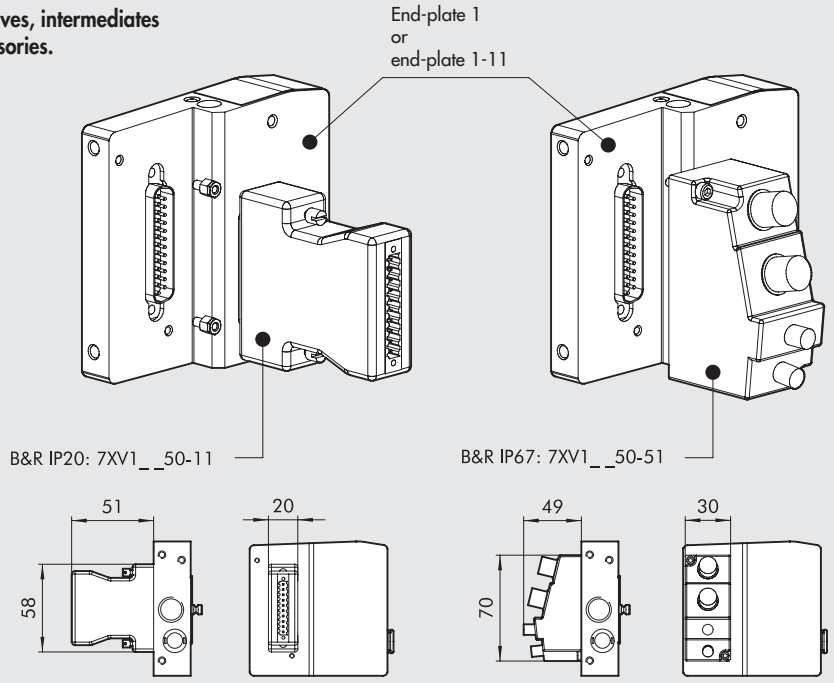

Refer to page B2.142 **for valves, intermediates elements and common accessories.**

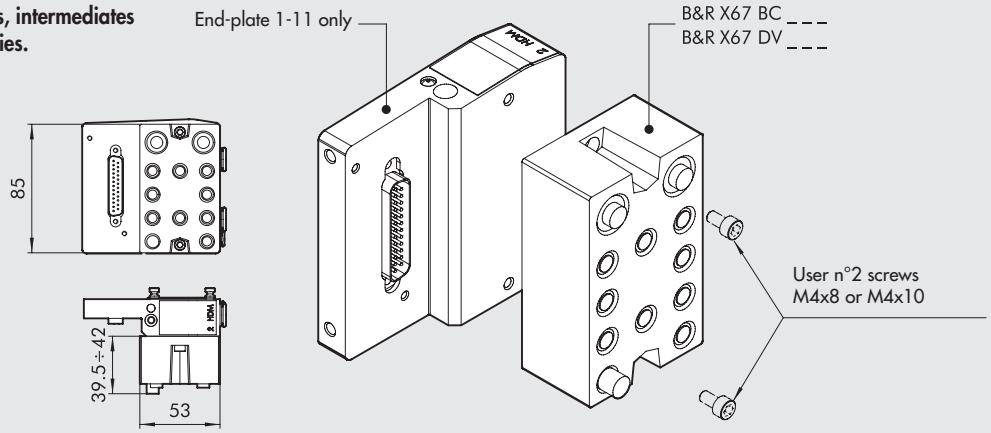

SYNOPTIC, SIZES AND VERSIONS

H D M	2	B & R	M	I6 - W 8 - W 6 - O 4 - L 8 - 5	1 6
VALVE	**INPUT END-PLATE**	**ELECTRICAL BASE**	**MANUAL TYPE**	**TYPE OF VALVE**	**FURTHER DETAILS**
Heavy duty Multimach IP65	**2** End-plate 1-11 **3** End-plate 1	**B&R** Fit for B&R	**M** Monostable manual control **B** Bistable manual control	**I** n° 2 3/2 NC **W** n° 2 3/2 NO **L** 3/2 NO + 3/2 NC **V** 5/2 monostable **K** 5/2 bistable **O** 5/3 monostable ***F** 5/2 monostable **4** Right-end-plate 1-11 pipe Ø12 **5** Blind end-plate **6** Passing-intermede **7** Blind intermediate **20** Exhaust section **4** Cartridge 4 **6** Cartridge 6 **8** Cartridge 8 - 14 mm **8S** Cartridge 8 - 23 mm **10** Cartridge 10	**16** n° 2 brackets for DIN bar

* Uses a single PIN (like the V) and occupies 2 signals.

HDM 1-11 END-PLATE FOR B&R

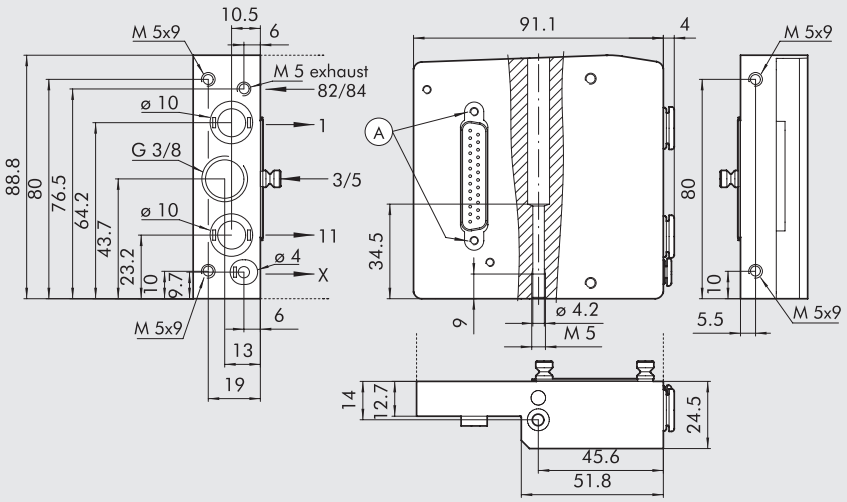

Code	Description	Weight [g]
0227301206	HDM 1-11 end-plate kit for B&R	340

HDM 1 END-PLATE FOR B&R

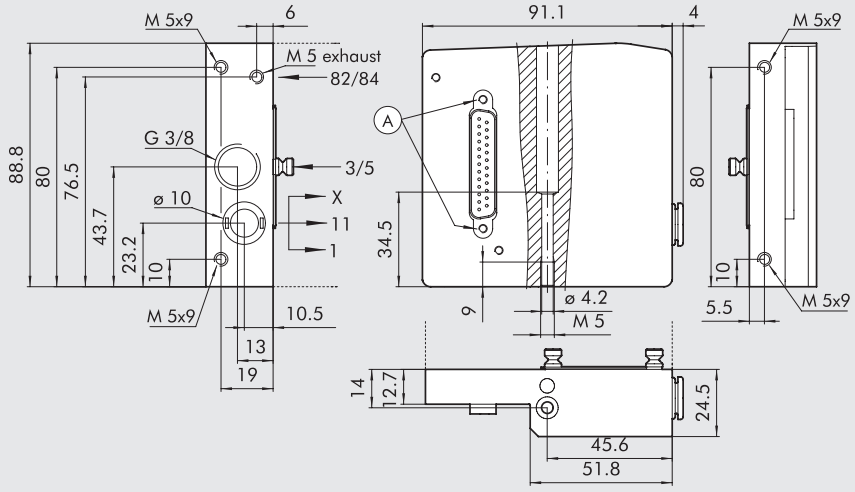

Code	Description	Weight [g]
0227301207	HDM 1 end-plate kit for B&R	380

NOTES

HDM - VALVES, INTERMEDIATES ELEMENTS AND ACCESSORIES

HDM valve can be included in islands with any available input terminal. The same valve can be connected to the multiple connection end-plate and all the field bus end-plates.

Note: if you use valves 8S type or 10 exploiting their flow capacity, it is appropriate to choose the inlet end plate 1-11 type by feeding the pilots separately (to avoid the pressure to decrease too much on the pilots). If you use simultaneously more than one valve 8S or 10 it is necessary to potentiate the pneumatic feeding by inserting end plates having 12 mm pipe and/or through intermediate modules

MANUAL CONTROLS



MONOSTABLE OVERRIDE PORT 2
servo-assisted

- Press and hold the manual control in position (not necessary for bistable type K valve)
- Release the manual control:
  - The manual control returns to the home position.
  - Valves type I, W, L, V, F, and O reposition.
  - The type K valve remains switched

N.B.: The pilot power supply X must be present.



MONOSTABLE OVERRIDE PORT 4
servo-assisted

- Press and hold the manual control in position (not necessary for bistable type K valve)
- Release the manual control:
  - The manual control returns to the home position.
  - Valves type I, W, L, V and F reposition.
  - The type K valve remains switched

With type F and V valves, this manual control is not present.

N.B.: The pilot power supply X must be present.

- The reference code for the monostable control ends in 0 (2 for type F).

Example: 707203053 – 1 / 0



BISTABLE OVERRIDE PORT 2
servo-assisted

- Press the manual control right in then turn it clockwise 90 degrees and Leave it in position.
- Rotate the manual control 90 degrees anticlockwise, and then release it.
  - The manual control returns to the home position.
  - Valves type I, W, L, V, F, and O reposition.
  - The type K valve remains switched

N.B.: The pilot power supply X must be present.



BISTABLE OVERRIDE PORT 4
servo-assisted

- Press the manual control right in then turn it 90 degrees clockwise and Leave it in position.
- Rotate the manual control 90 degrees anticlockwise, and then release it:
  - The manual control returns to the home position.
  - Valves type I, W, L and O reposition.
  - The type K valve remains switched

With type F and V valves, this manual control is not present.

N.B.: The pilot power supply X must be present.

- The reference code for the monostable control ends in 1 (3 for type F).

Example: 707203053 – 1 / 0

① VALVE DIMENSIONS HDM Ø 4

*uses a single PIN (like the V) and occupies 2 signals

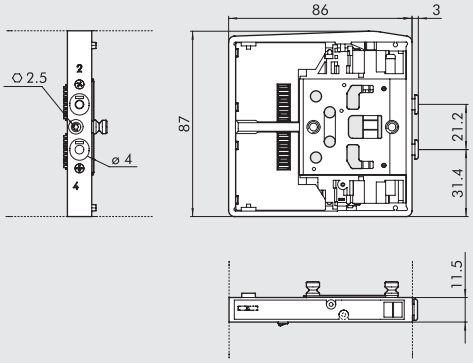

Symbol		Code	Manual control	Weight [g]
HDM I4		7071030530	monostable	130
		7071030531	bistable	
HDM W4		7071030630	monostable	130
		7071030631	bistable	
HDM L4		7071030730	monostable	130
		7071030731	bistable	
HDM V4		7071030130	monostable	115
		7071030131	bistable	
HDM *F4		7071030132	monostable	115
		7071030133	bistable	
HDM K4		7071030110	monostable	130
		7071030111	bistable	
HDM O4		7071030210	monostable	130
		7071030211	bistable	

METAL WORK PNEUMATIC

① VALVE DIMENSIONS HDM Ø 6

*uses a single PIN (like the V) and occupies 2 signals

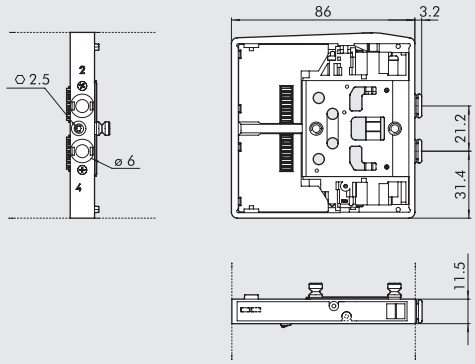

Symbol		Code	Manual control	Weight [g]
HDM I6		7072030530 7072030531	monostable bistable	130
HDM W6		7072030630 7072030631	monostable bistable	130
HDM L6		7072030730 7072030731	monostable bistable	130
HDM V6		7072030130 7072030131	monostable bistable	115
HDM *F6		7072030132 7072030133	monostable bistable	115
HDM K6		7072030110 7072030111	monostable bistable	130
HDM O6		7072030210 7072030211	monostable bistable	130

① VALVE DIMENSIONS HDM Ø 8

*uses a single PIN (like the V) and occupies 2 signals

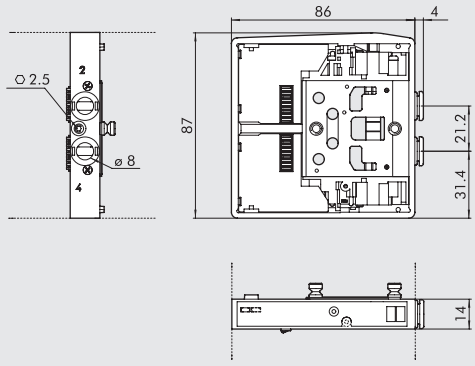

Symbol		Code	Manual control	Weight [g]
HDM I8		7073030530 7073030531	monostable bistable	140
HDM W8		7073030630 7073030631	monostable bistable	140
HDM L8		7073030730 7073030731	monostable bistable	140
HDM V8		7073030130 7073030131	monostable bistable	130
HDM *F8		7073030132 7073030133	monostable bistable	130
HDM K8		7073030110 7073030111	monostable bistable	140
HDM O8		7073030210 7073030211	monostable bistable	140

① VALVE DIMENSIONS HDM Ø 8S

*uses a single PIN (like the V) and occupies 2 signals

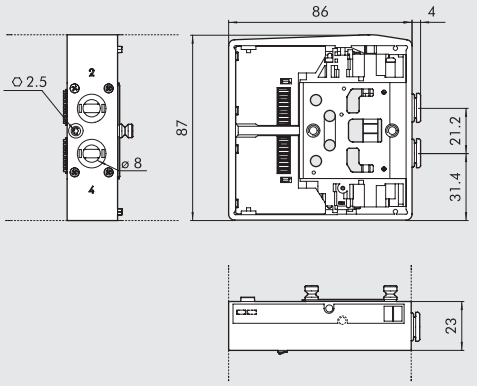

Symbol		Code	Manual control	Weight [g]
HDM I8S		7077030530 7077030531	monostable bistable	260
HDM W8S		7077030630 7077030631	monostable bistable	260
HDM L8S		7077030730 7077030731	monostable bistable	260
HDM V8S		7077030130 7077030131	monostable bistable	241
HDM *F8S		7077030132 7077030133	monostable bistable	241
HDM K8S		7077030110 7077030111	monostable bistable	253
HDM O8S		7077030210 7077030211	monostable bistable	262

① VALVE DIMENSIONS HDM Ø 10

*uses a single PIN (like the V) and occupies 2 signals

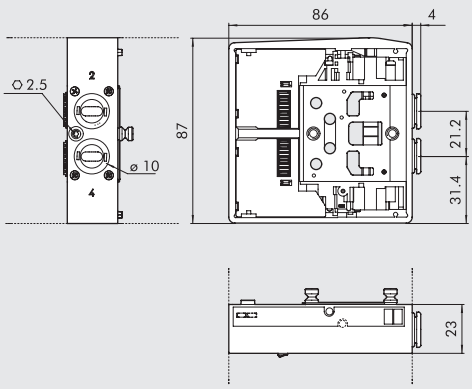

Symbol		Code	Manual control	Weight [g]
HDM I10		7078030530 7078030531	monostable bistable	250
HDM W10		7078030630 7078030631	monostable bistable	250
HDM L10		7078030730 7078030731	monostable bistable	250
HDM V10		7078030130 7078030131	monostable bistable	231
HDM *F10		7078030132 7078030133	monostable bistable	231
HDM K10		7078030110 7078030111	monostable bistable	243
HDM O10		7078030210 7078030211	monostable bistable	252

⑥ INTERMEDIATE THROUGH

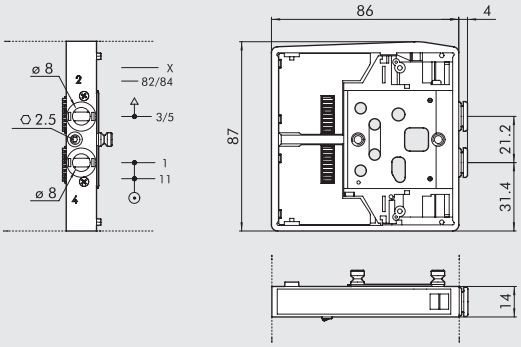

Code	Description	Weight [g]
0227301301	Intermediate through HDM	120

⑦ INTERMEDIATE BLIND

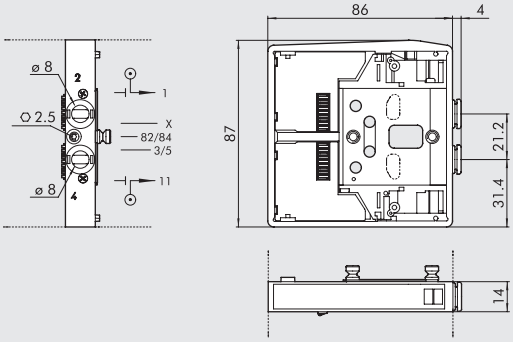

Code	Description	Weight [g]
0227301302	Intermediate blind HDM	117

⑳ INTERMEDIATE EXHAUST SWITCH

Code	Description	Weight [g]
0227301303	Intermediate exhaust switch HDM	125

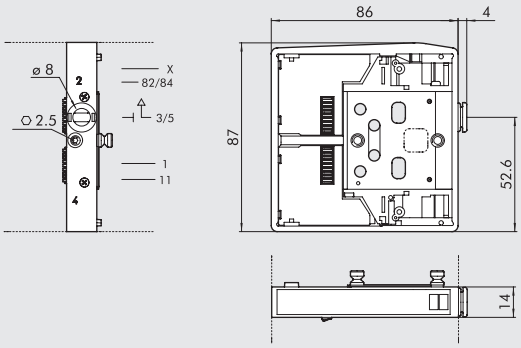

④ RIGHT-END-PLATE 1-11 PIPE Ø 12

Code	Description	Weight [g]
0227301221	Rigth-end-plate HDM 1-11 Ø 12	630

This end-plate allows for supplies to be differentiated:

- Port 2
- Port 4

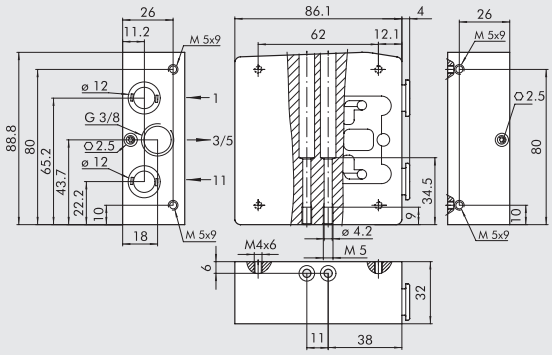

⑤ BLIND END-PLATE

Code	Description	Weight [g]
0227301500	Blind end-plate HDM	230

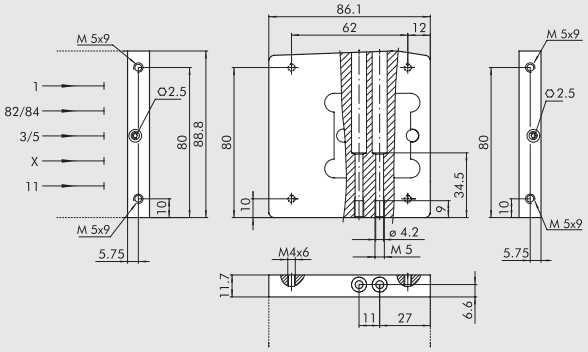

ACCESSORIES

⑯ CONNECTION BRACKETS ON DIN BAR

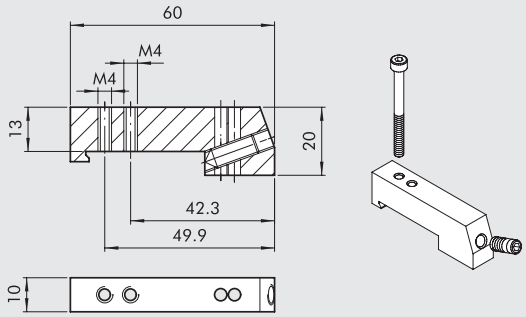

Code	Description	Weight [g]
0227301600	Connection brackets on din bar HDM/CM	30

Supplied complete with one M4x45 screws and one M6 grub screw
Individually packed

SILENCER FOR FITTING, Ø 8



Code	Description	Flow rate at 6.3 bar [Nl/min]	Weight [g]
W0970530084	Silencer for fitting, Ø 8	2400	15

At the 3/5-exhaust port of the intermediate throughreference 6 and of the exhaust switch reference 20

R17 - PIPE RELEASE SPANNER

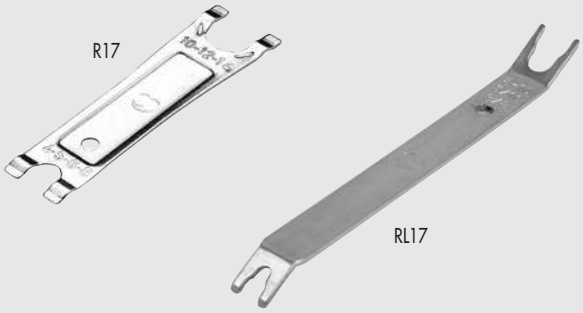

Code	Rif.	Length [mm]	Ø Tube
2L17001	RL17	140	from 3 to 10
2017001	R17	95	from 4 to 14

SPARES

GRUB SCREW KIT



Code	Description
0227301800	Grub screw for Multimach HDM/CM

Comes in 1 + 1 pc. packs

CM CLEVER MULTIMACH

METAL WORK PNEUMATIC

THE VALVE IN DETAIL

Clever Multimach valves can be used to form autonomous and intelligent valve island subsystems. Each valve has a microchip that performs a series of functions connected with operation and dialogue with the valves before and after it. Valves communicate via serial transmission. CM refers to the communication protocol patented by Metal Work. It is a field-bus in its own right, designed specifically for very easy control of islands of pneumatic solenoid valves. CM valves have a diagnosis system that detects electrical faults. It can also be used to verify during installation that all connections are correct. Multi-pole connections and field buses with different communication protocols are available for controlling the valve distribution island. Addressing of single outputs is not required as the connection number of each solenoid pilot is assigned automatically based on the position occupied by the valve.

SMART VALVE

Each valve comes with a microchip that controls operation and dialogue with the other valves.

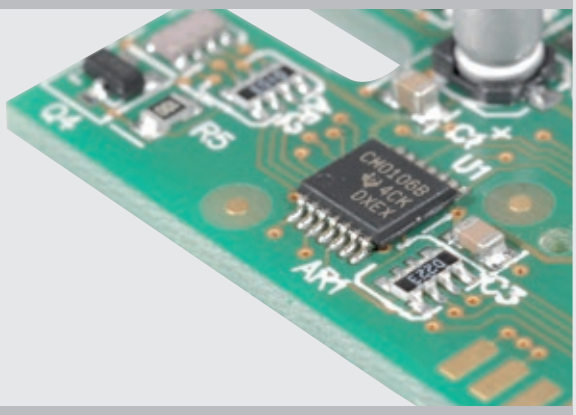

LOCAL DIAGNOSTICS

Each Clever Multimach valve has a LED diagnostic system that identifies immediately whether a pilot is energized, the contact is interrupted or there is a short-circuit.

LED 14	LED 12	DESCRIPTION OF THE FAUL
OFF ○	**OFF** ○	No fault, EV1-EV2=OFF
ON (green) ●	**OFF** ○	No fault, EV1=ON - EV2=OFF
ON (green) ●	**ON** (green) ●	No fault, EV1-EV2=ON
OFF ○	**ON** (green) ●	No fault, EV1=OFF - EV2=ON
RED (flashing) ✳	**OFF** ○	Solenoid pilot EV1 interrupted or disconnected
OFF ○	**RED** (flashing) ✳	Solenoid pilot EV2 interrupted or disconnected
ON (red) ●	**OFF** ○	Solenoid pilot EV1 short circuit
OFF ○	**ON** (red) ●	Solenoid pilot EV2 short circuit
GREEN (flashing) ✳	**OFF** ○	Data update time out, communication faulty

INPUT MODULES

With a suitably arranged Clever Center, you can insert add-on modules.
When connecting buses, the add-on modules can only be used for e PNP INPUTs.
With a multi-pole connection, the following INPUTs and OUTPUTs can be used:
- DIGITAL INPUTS, as cylinder sensors for example
- DIGITAL OUTPUTS
- ANALOGUE INPUTS (but the LEDs do not light up)
- ANALOGUE OUTPUTS (but the LEDs do not light up)

They can be combined, even on the same module. You can choose between PNP or NPN connections via a dip switch-type selector.
All the INPUTS/OUTPUTS must be the same type, i.e. all PNP or NPN.

MAXIMUM EXTENSION OF ADD-ON MODULES

Up to 4 modules can be connected, giving a total of 32 input signals.

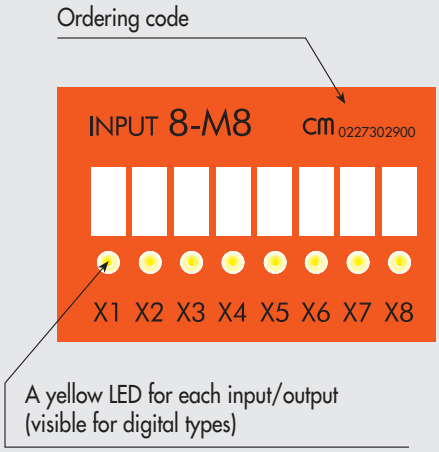

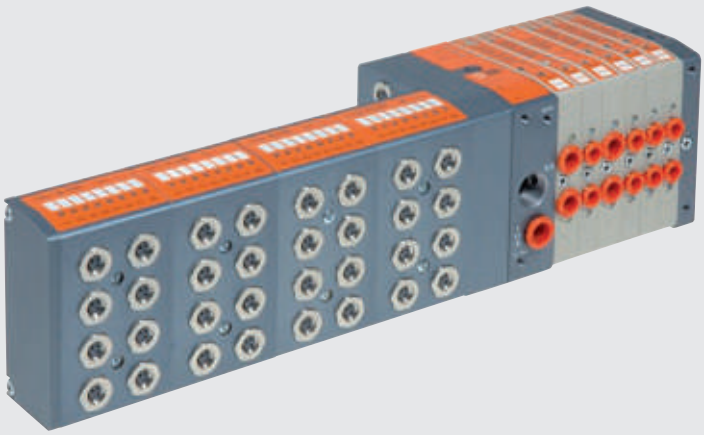

EXAMPLE OF A CM LAYOUT

The Clever Center can relay command signals to other islands of "slaves". Transmission, in serial mode, is via a cable with M8 connectors. Commands can be sent from the first slave island to other slave islands in cascade, again via cables with M8 connectors. Addresses are assigned automatically, based on intuitive sequential logic. This means that other slaves can be added downstream at any time, until all available outputs are in use.

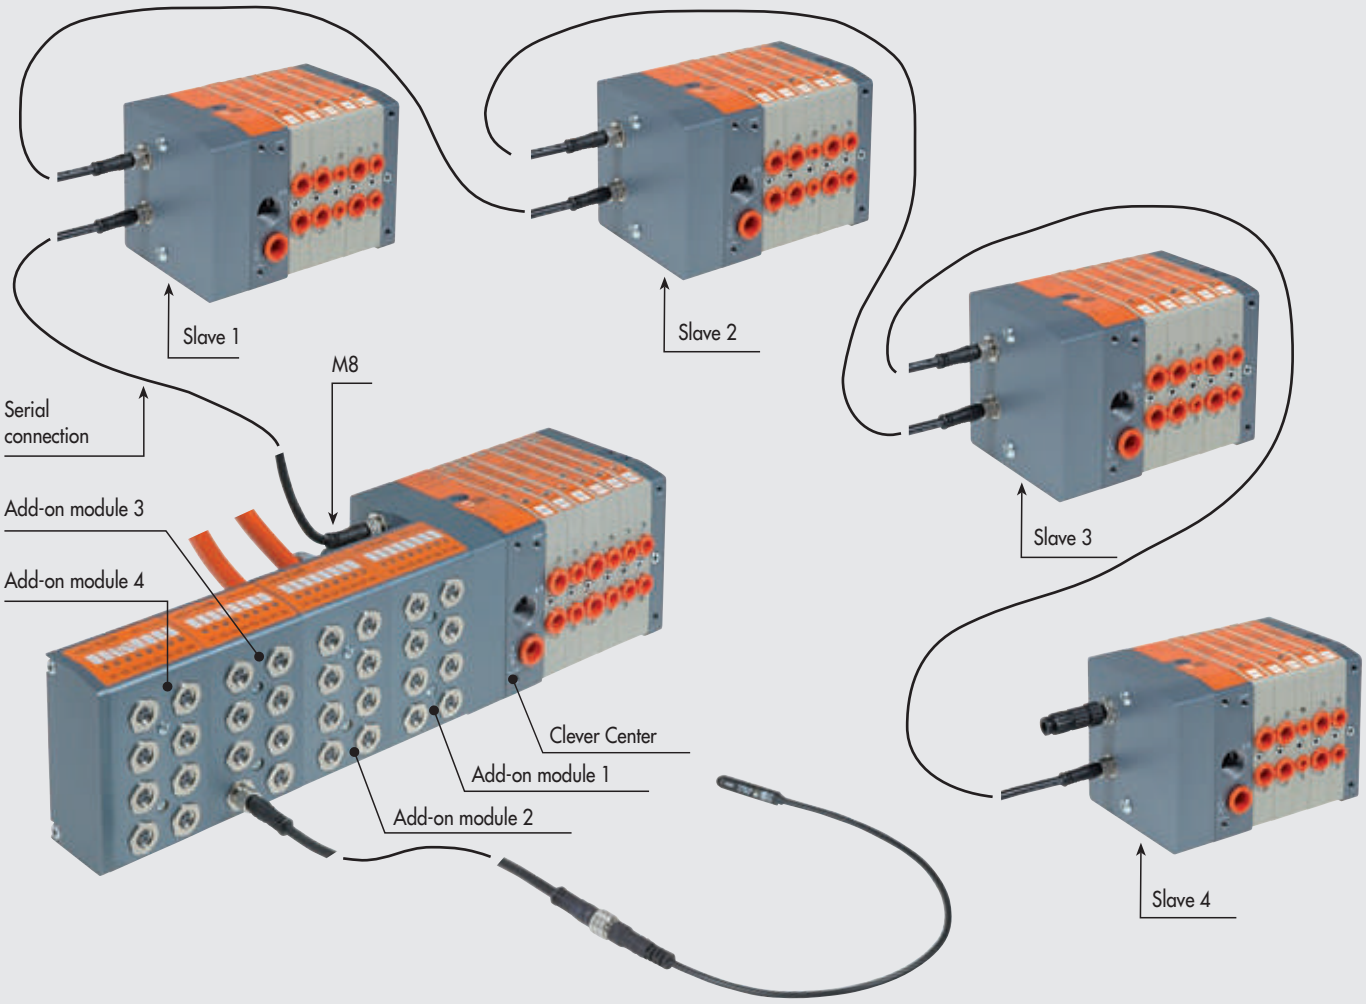

NOTES

TECHNICAL DATA

Valve port connections		Ø 4,6,8 mm automatic fitting for ports 2 and 4 / power supply port for Ø10 automatic fitting / 3/8 thread for exhaust port, M5 thread for exhaust pilot port		
Connection on the end-plate 1-11 for the supply of pilots		Automatic fitting Ø 4 mm		
Maximum number of pilots		See input end-plate technical data		
Maximum number of valves		See input end-plate technical data		
Operating temperature range	°C	-10 to +60		
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous		
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	11.5 mm Ø 4	11.5 mm Ø 6	14 mm Ø 8
	version 5/2 and 3/2	200	500	650
	version 5/3	200	300	300
Pressure range		X (pilot supply)		1-11 (valve supply)
	end-plate 1-11	3 to 7 bar		vacuum at 10 bar
	end-plate 1	3 to 7 bar		
Voltage range		24 VDC ±10%		
		(slave protected against overload and reverse polarity)		
Power for each pilot	W	0.9		
Solenoid Pilot Insulation class		F155		
Degree of protection		IP65 (with conveyed exhust, and that - in case of no use)		
Diagnostics and protections		Local via PC/PLC fault led. For defects signalled look at the manual.		
		Outlets protected against overload and short-circuit		
Solenoid rating		100% ED		
Maximum latency time of the serial transmission	ms	<10		
TRA/TRR 2x3/2 monostable at 6 bar	ms	8 / 45		
TRA/TRR 5/2 monostable at 6 bar	ms	8 / 33		
TRA/TRR 5/2 bistable at 6 bar	ms	20 / 20		
TRA/TRR 5/3 cc monostable at 6 bar	ms	20 / 20		
Note on use		Insert the pipes in the fittings, before passing air through the valves, otherwise the gasket may be pulled out of its seat by the flow of air.		
Compatibility with oils		See **chapter Z1**		
Add-on module				
Sensor supply voltage		24 VDC ±10%		
Maximum current for each single connector	mA	200		
Maximum current for each module	mA	400		
Maximum total current of all the modules	mA	1000		
Input impedance	KΩ	3.9		
Max input voltage	Vcc	-5 to +30		
Type of input		With field bus: PNP		
		With multi-pole connection: PNP/NPN configurable via DIP SWITCH		
Protection		Protected inputs against overload and short-circuit		
Active input signalling		One LED for each INPUT		

FIXING THE BASE

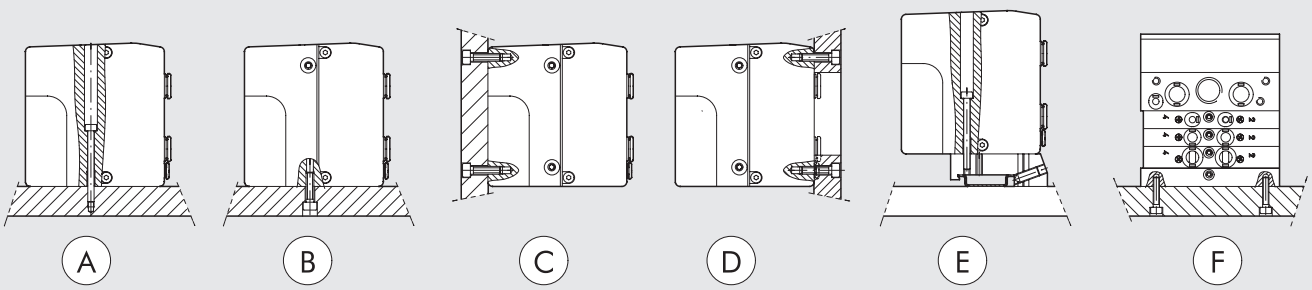

Ⓐ Fixing from above using the 1 or 1-1 input end-plate and the blind end-plate.
Ⓑ Ⓒ Fixing from above using the 1 or 1-1 input end-plate and the blind end-plate, using the M5 threads on the bottom and the rear of the end-plates.
Ⓓ Fixing from above using the 1 or 1-1 input end-plate and the blind end-plate, using the M5 threads on the front of the end-plates. An opening for the pipes is made in the plate.
Ⓔ Fixing on the DIN bar with end-plate 1 or 1-11 and blind end-plate, using the push-in bracket code 0227301600.
Ⓕ Lateral fixing using the blind end-plate, and its the M4 threads on the side lateral.
Note: The sole fixing admitted is the one showed.

KEY TO CODES – CLEVER MULTIMACH CM

C M	2	I / O	M	I6 - W8 - W6 - O4 - L8 - 5	M8 - M8 - 15 - 16
VALVE	**INPUT END-PLATE**	**FUNCTION**	**MANUAL TYPE**	**TYPE OF VALVE**	**FURTHER DETAILS**
Clever Multimach	**2** End-plate 1-11 **3** End-plate 1	**O** Multi-pole connection, valves only **I/O** Multi-pole connection, valves and inputs **ADD** Additional (slave) valves only **PN O** Profinet IO, valves only **PN I/O** Profinet IO, valves and inputs **EC O** EtherCAT, valves only **EC I/O** EtherCAT, valves and inputs **EN O** EtherNet/IP, valves only **EN I/O** EtherNet/IP, valves and inputs **CAN O** CANopen, valves only **CAN I/O** CANopen, valves and inputs	**M** Monostable manual control **B** Bistable manual control	**I** n° 2 3/2 NC **W** n° 2 3/2 NO **L** 3/2 NO + 3/2 NC **V** 5/2 monostable **K** 5/2 bistable **O** 5/3 monostable **5** Blind end-plate **6** Passing-intermede **7** Blind intermediate **20** Exhaust section **4** Cartridge 4 **6** Cartridge 6 **8** Cartridge 8	● **M8** Module 8 input M8 ✱ **14** Shell 44 pin ✱ **15** Shell 44 + 44 pin **16** n° 2 brackets for DIN bar

● Not applicable with (add-on) ADD end-plate
✱ For multi-pole connection only

NOTES

CM + MULTI-POLE CONNECTION

CM end-plates + multi-pole connection can be used for connection to the PC/PLC using a 44-pin cable and connector.
The end-plates with provisions for INPUT/OUTPUT add-on modules are connected using an extra 44-pin cable.
Both valves and INPUTs/OUTPUTs can be PNP or NPN configured.

TECHNICAL DATA

Maximum number of pilots		32
Maximum number of valves		32 (same as the max. no. of pilotos)
Voltage range		24VDC ±10%
DC input current without valve modules		Nominal Icc 30 mA - Instantaneous Icc (≤25 ms) 650 mA
Max input current with all valves ON	A	1.5

Refer to page B2.150 **for general technical data**

COMPONENTS

① Exhaust - Solenoid pilot 82/84
② Valve supply - port 1
③ Threaded connection of exhausts 3/5
④ Valve supply - port 11
⑤ Electrical control supply X
⑥ Blind end-plate
⑦ Screw for valve wall-mounting
⑧ ⑨ ⑩ Utility port for pipe Ø 4, 6 or 8 mm
⑪ Manual control
⑫ LED (LED on, solenoid valve energised)
⑬ Pneumatic symbol
⑭ Identification of the monostable or bistable manual control
⑮ Valve ordering code
⑯ Valve identification code
⑰ Blank space for valve number
⑱ Clever Center end-plate multi-pole connection

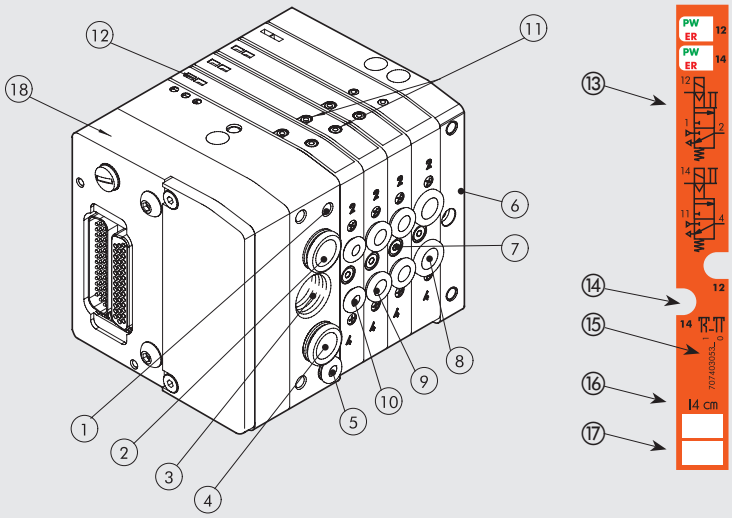

VALVE ISLAND CONFIGURATION

The numbers permit rapid identification of the function and assembly position of the single elements represented as follows.
Refer to page B2.172 **for valves, intermediates elements and common accessories.**

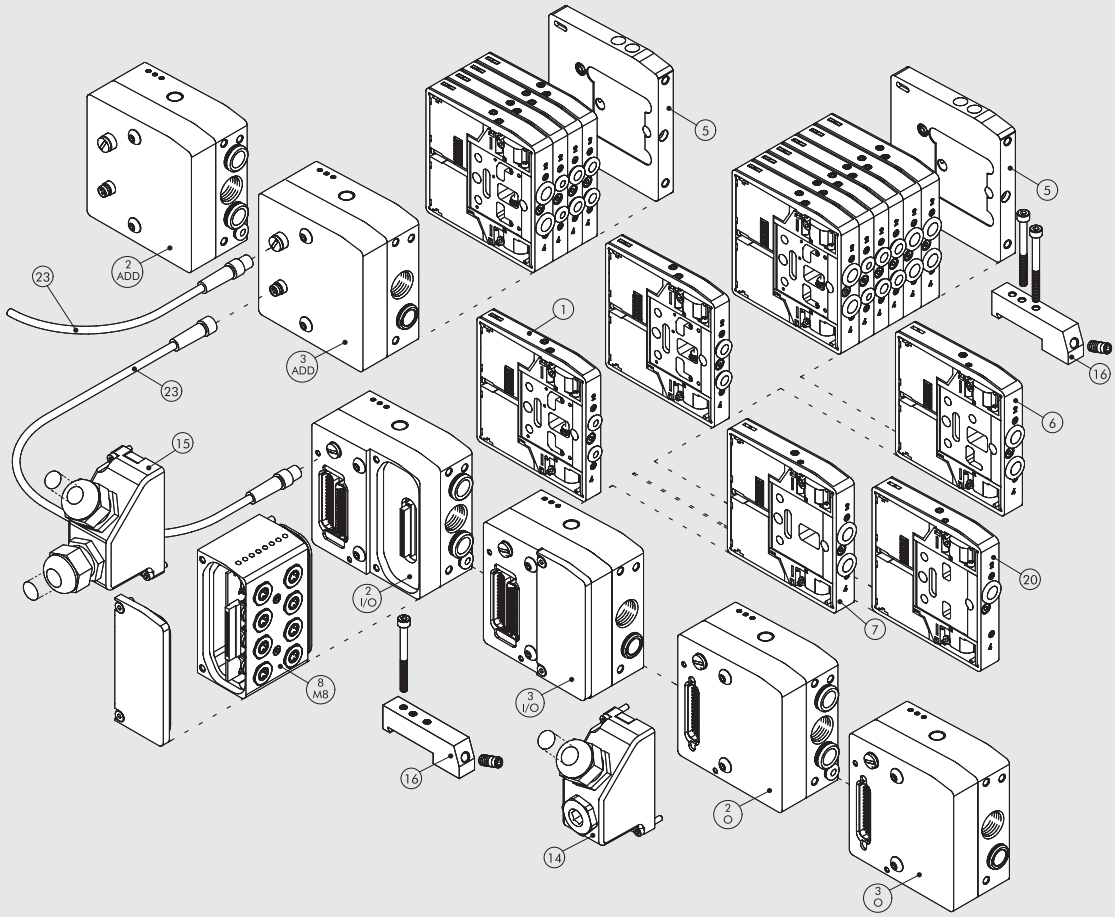

WIRING DIAGRAM FOR THE CLEVER CENTER TERMINAL - VALVES ONLY

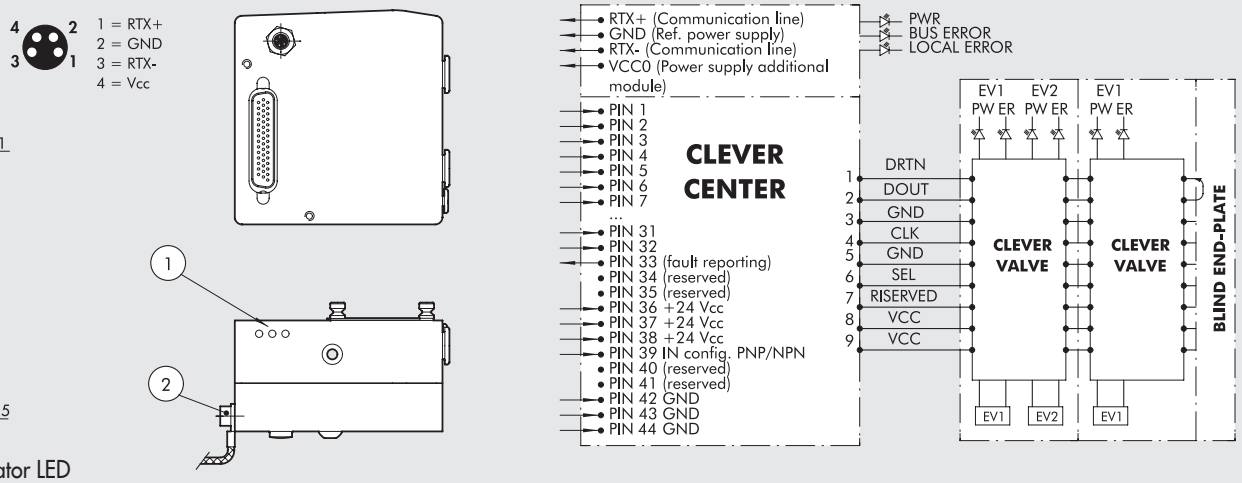

① Indicator LED
② Grounding

WIRING DIAGRAM FOR THE CLEVER CENTER TERMINAL FOR VALVES AND INPUTS/OUTPUTS



1 = RTX +
2 = GND
3 = RTX -
4 = Vcc

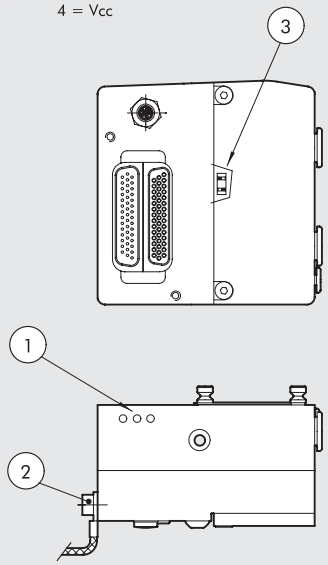

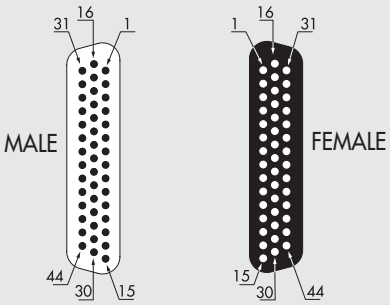

INPUT CONNECTION DIAGRAM

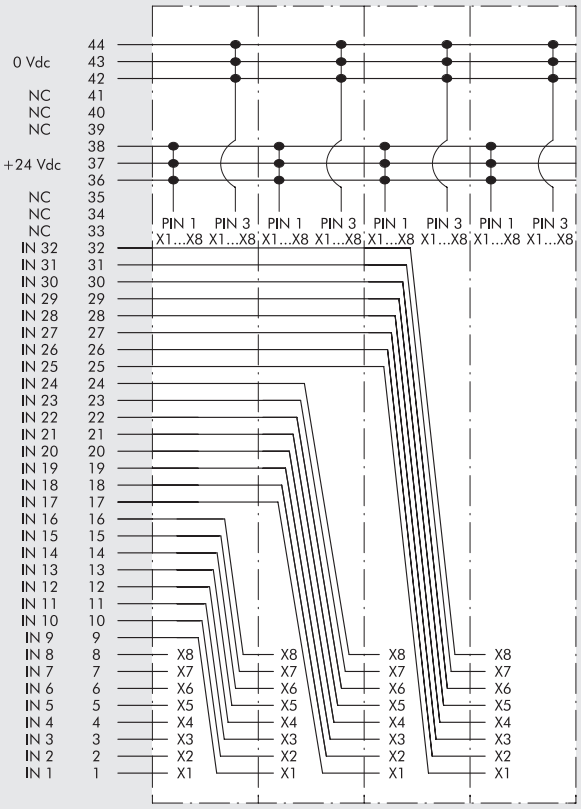

① Indicator LED
② Grounding
③ Input selector type PNP/NPN

2 - O OUTPUT END-PLATE 1-11

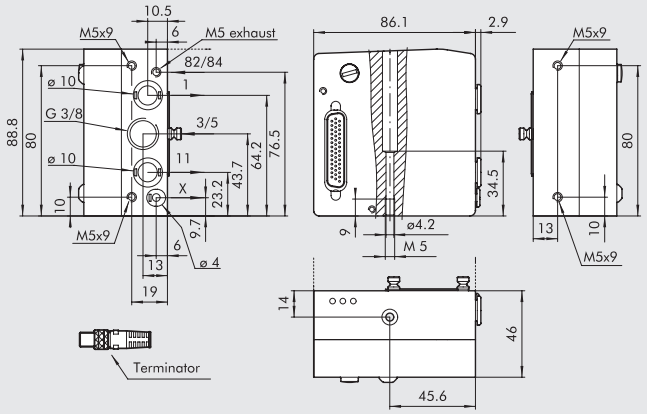

Code	Description	Weight [g]
0227302200	End-plate CM kit 1-11 OUT	722

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply
Note: terminator included

3 - O OUTPUT END-PLATE 1

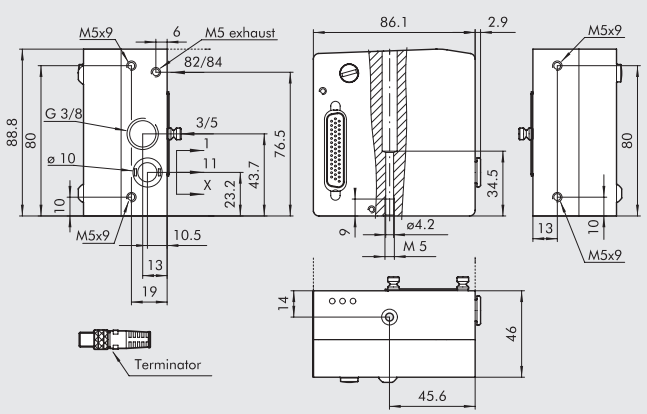

Code	Description	Weight [g]
0227302201	End-plate CM kit 1 OUT	722

Note: terminator included

2 - I/O INPUT/OUTPUT END-PLATE 1-11

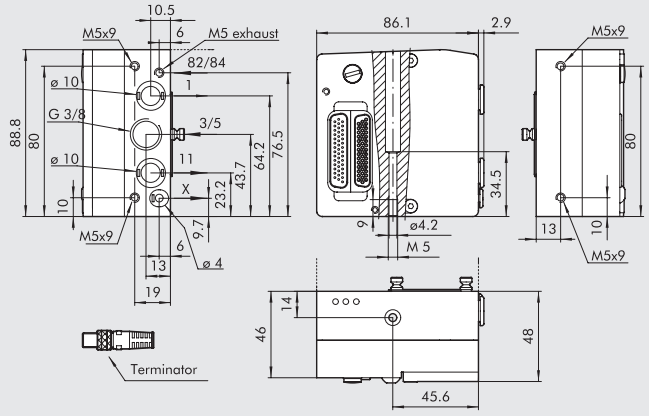

Code	Description	Weight [g]
0227302223	End-plate CM kit 1-11 IN/OUT	722

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply
Note: terminator included

3 - I/O INPUT/OUTPUT END-PLATE 1

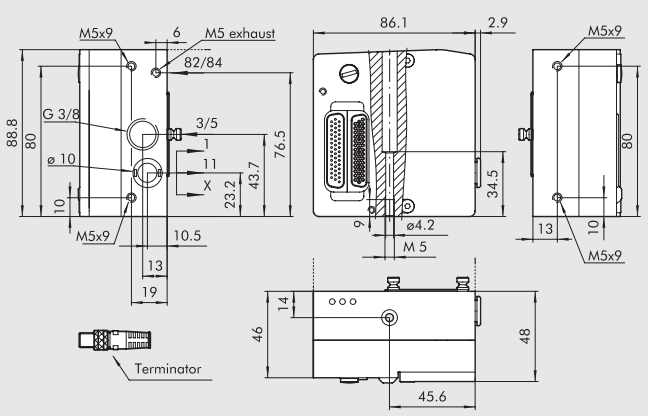

Code	Description	Weight [g]
0227302225	End-plate CM kit 1 IN/OUT	722

Note: terminator included

14 44-PIN CUP CONNECTOR KIT IP 65



Code	Description	Weight [g]
0226180108	44-pin cup connector kit IP 65	60

15 44+44 PIN CUP CONNECTOR KIT IP 65 FOR I/O



Code	Description	Weight [g]
0226180109	44+44 pin cup connector kit IP 65 for I/O	80

CABLES



Code	Description	Weight [g/m]
0226107201	10-wire cable	60
0226107101	19-wire cable	122
0226107102	25-wire cable	130
0226107103	44-wire cable	160

Specify the number of metres desired

IDENTIFICATION PLATE KIT FOR 44-PIN CONNECTOR



Code	Description
0226107000	Identification plate kit

Comes in 16-pc. packs

44-PIN PRE-WIRED CUP CONNECTOR



Code	Description	Weight [g]
0226950500	Connet. IP 65 + cable 44-wire L = 5 m	740

44+44-PIN PRE-WIRED CUP CONNECTOR



Code	Description	Weight [g]
0226980500	Connet. IP 65 + cable 44 + 44-wire L = 5 m	1550

WIRING DIAGRAM FOR THE 44-PIN CUP CONNECTOR KIT

44 PIN FEMALE PRE-WIRED FOR VALVE

Position of electrical contact	Corresponding wire colour	Function
1	white	Out 1
2	brown	Out 2
3	green	Out 3
4	yellow	Out 4
5	gray	Out 5
6	pink	Out 6
7	blue	Out 7
8	violet	Out 8
9	gray + pink ring	Out 9
10	red + blue ring	Out 10
11	white + green ring	Out 11
12	brown + green ring	Out 12
13	white + yellow ring	Out 13
14	yellow + brown ring	Out 14
15	white + gray ring	Out 15
16	gray + brown ring	Out 16
17	white + pink ring	Out 17
18	pink + brown ring	Out 18
19	white + blue ring	Out 19
20	brown + blue ring	Out 20
21	white + red ring	Out 21
22	brown + red ring	Out 22
23	white + black ring	Out 23
24	brown + black ring	Out 24
25	gray + green ring	Out 25
26	yellow + gray ring	Out 26
27	pink + green ring	Out 27
28	yellow + pink ring	Out 28
29	green + blue ring	Out 29
30	yellow + blue ring	Out 30
31	green + red ring	Out 31
32	yellow + red ring	Out 32
33	green + black ring	Fault reporting
34	gray + blue ring	NC
35	gray + red ring	NC
36	red + green ring	+24VDC
37	red + brown ring	+24VDC
38	red + black ring	+24VDC
39	yellow + black ring	Config. PNP/NPN
40	pink + red ring	NC
41	pink + blue ring	NC
42	black + green ring	0 VDC
43	black + pink ring	0 VDC
44	black + red ring	0 VDC

44 PIN MALE PRE-WIRED FOR INPUT/OUTPUT

Position of electrical contact	Corresponding wire colour	Function
1	white	In 1
2	brown	In 2
3	green	In 3
4	yellow	In 4
5	gray	In 5
6	pink	In 6
7	blue	In 7
8	violet	In 8
9	gray + pink ring	In 9
10	red + blue ring	In 10
11	white + green ring	In 11
12	brown + green ring	In 12
13	white + yellow ring	In 13
14	yellow + brown ring	In 14
15	white + gray ring	In 15
16	gray + brown ring	In 16
17	white + pink ring	In 17
18	pink + brown ring	In 18
19	white + blue ring	In 19
20	brown + blue ring	In 20
21	white + red ring	In 21
22	brown + red ring	In 22
23	white + black ring	In 23
24	brown + black ring	In 24
25	gray + green ring	In 25
26	yellow + gray ring	In 26
27	pink + green ring	In 27
28	yellow + pink ring	In 28
29	green + blue ring	In 29
30	yellow + blue ring	In 30
31	green + red ring	In 31
32	yellow + red ring	In 32
33	green + black ring	NC
34	gray + blue ring	NC
35	gray + red ring	NC
36	red + green ring	+24VDC
37	red + brown ring	+24VDC
38	red + black ring	+24VDC
39	yellow + black ring	NC
40	pink + red ring	NC
41	pink + blue ring	NC
42	black + green ring	0 VDC
43	black + pink ring	0 VDC
44	black + red ring	0 VDC

CM + Profinet IO

METAL WORK PNEUMATIC

The CM + Profinet IO system has been designed with a pneumatic input end-plate that can contain all the electronic equipment, indicators and connectors. This system is very compact and sturdy and is housed in a thick aluminium body that protects sensitive components from impact and falls.
The end-plate is available in two electric versions: one handling up to 64 solenoids (64 OUTs) and one handling up to 64 solenoids (64 OUTs) and 32 inputs (32 INs).
Grounding is recommended to protect the electronic circuit against electric or electrostatic charges.
N.B. For the system to handle more than 32 pilots (33 to 64), it must be made up of valves bearing a label marked 64. If one or more valves are not marked 64, each island cannot handle more than 32 pilots.

TECHNICAL DATA

Field buses	Profinet IO - 100 Mbit/s - Full-duplex
	Supports RT communication, Shared Device, Identification & Maintenance 1-4
Factory settings	Module name: Cmseries
	Address IP 0.0.0.0
Addressing	Software DCP
Voltage range	24VDC ± 10%
Maximum number of pilots (Out)	64
Maximum number of valves	64 (same as the max. no. of pilotos)
Maximum number of inputs (INs)	32
Icc bus supply current	Nominal Icc 120 mA - Instantaneous Icc (< 2 ms) 450 mA
Icc valve supply current	Instantaneous Icc (< 2 ms) 900 mA
Maximum absorption of a valve island with 64 monostable valves	Nominal Icc with 900 mA OFF valves – nominal Icc with 2700 mA ON valves
Protections	Module protected against overload and polarity reversal. Outputs protected against overloads and short-circuits
Connections	Field bus: 2 M12 Female, D-coded, internal switch
	supply: M8 4 pin
	input: M8 3 pin
BUS diagnostics	Using local LEDs and software messages
	Outputs: using local LEDs and status bytes
	Inputs: using local LEDs and status bytes
	N.B.: Refer to the user manual for a detailed description
Data bit value	0 = not enabled
	1 = enabled
Output status in the absence of communication	Disabled

See page B2.150 **for general technical data**

COMPONENTS

① Exhaust - Solenoid pilot 82/84
② Valve supply - port 1
③ Threaded connection of exhausts 3/5
④ Valve supply - port 11
⑤ Electrical control supply X
⑥ Blind end-plate
⑦ Screw for valve wall-mounting
⑧ ⑨ ⑩ Utility port for pipe Ø 4, 6 or 8 mm
⑪ Manual control
⑫ LED (LED on, solenoid valve energised)
⑬ Pneumatic symbol
⑭ Identification of the monostable or bistable manual control
⑮ Valve ordering code
⑯ Valve identification code
⑰ Blank space for valve number
⑱ CM Profinet IO end-plate
⑲ 64 = when present, it means that the valve is suitable for installation on islands with a field bus with up to 64 pilots, otherwise the limit is 32 pilots.

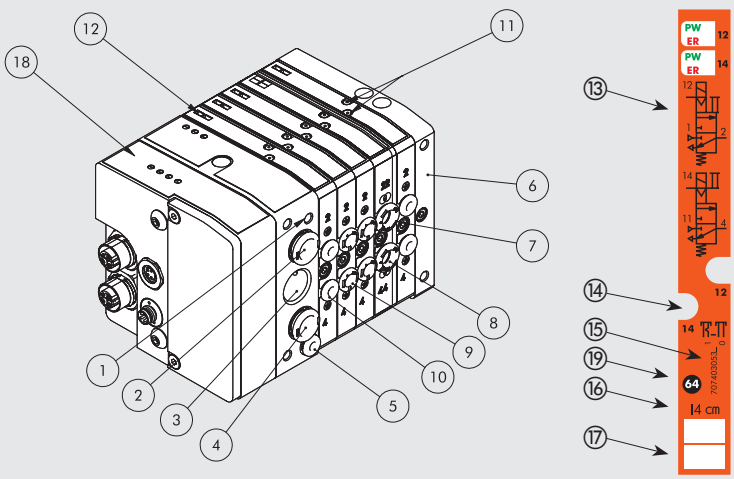

VALVE ISLAND CONFIGURATION

The numbers permit rapid identification of the function and assembly position of the single elements represented as follows.
Refer to page B2.172 **for valves, intermediates elements and common accessories.**

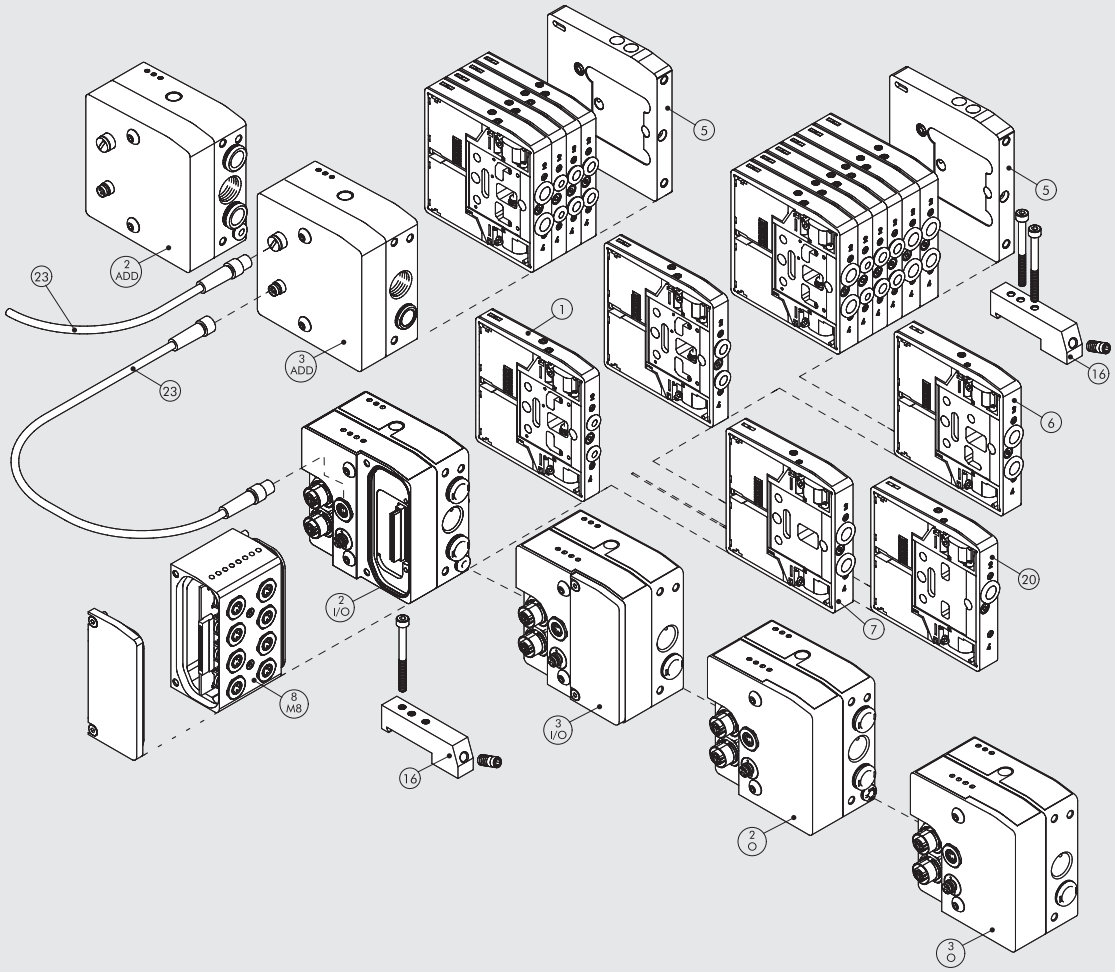

WIRING DIAGRAM

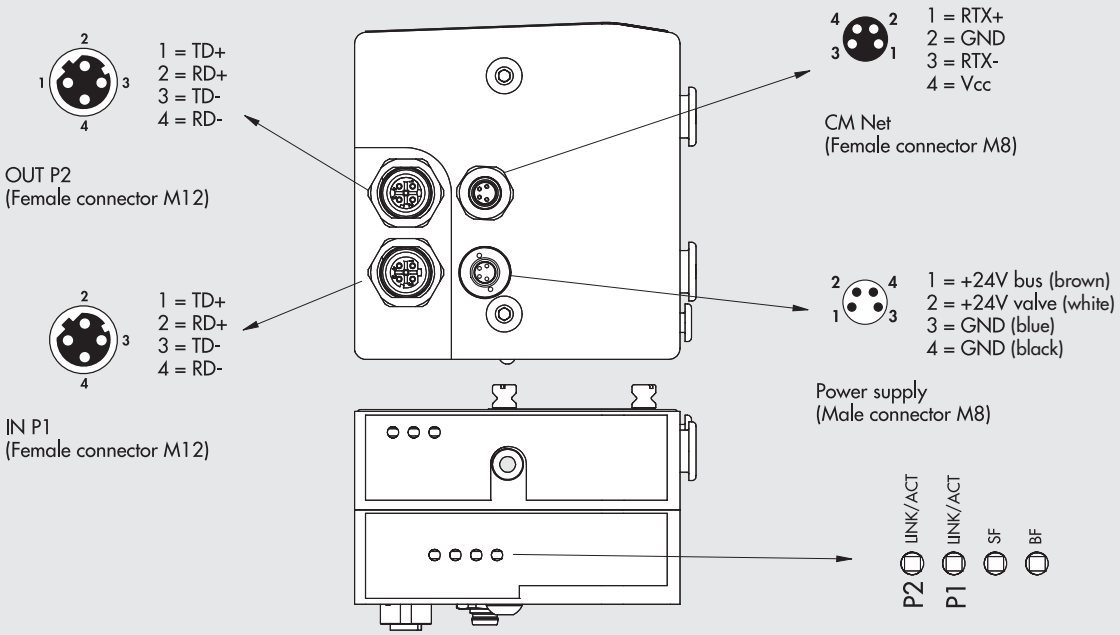

METAL WORK PNEUMATIC

2 - O END-PLATE 1-11 Profinet IO OUTPUT

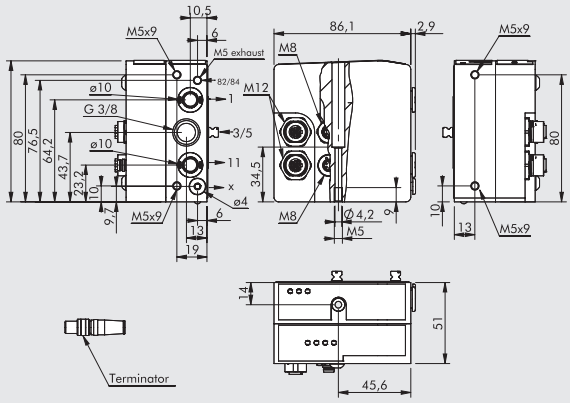

Code	Description	Weight [g]
0227302230	End-plate CM 1-11 Profinet IO OUTPUT	683

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply
Note: terminator included

3 - O END-PLATE 1 Profinet IO OUTPUT

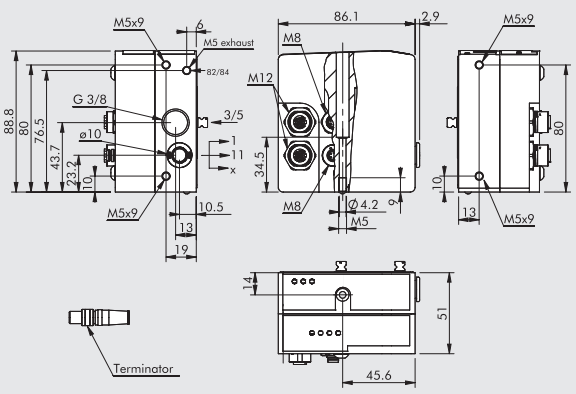

Code	Description	Weight [g]
0227302231	End-plate CM 1 Profinet IO OUTPUT	686

Note: terminator included

2 - I/O END-PLATE 1-11 Profinet IO INPUT/OUTPUT

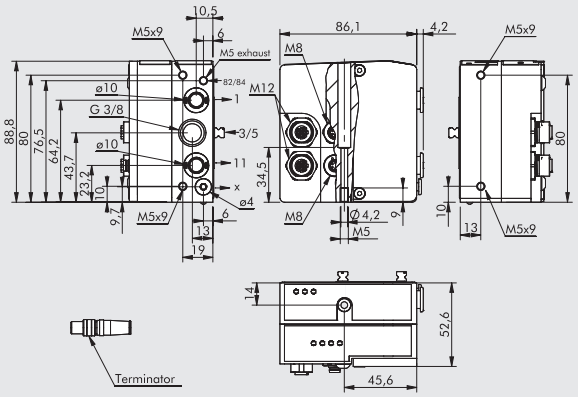

Code	Description	Weight [g]
0227302232	End-plate CM 1-11 Profinet IO IN/OUT	643

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply
Note: terminator included

3 - I/O END-PLATE 1 Profinet IO INPUT/OUTPUT

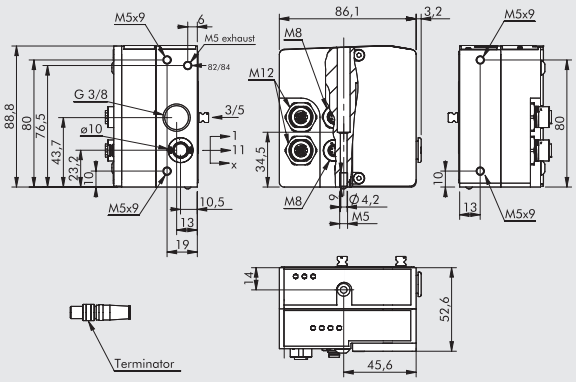

Code	Description	Weight [g]
0227302233	End-plate CM 1 Profinet IO IN/OUT	645

Note: terminator included

M8 CONNECTOR FOR POWER SUPPLY

Pin	Cable colour
1	brown
2	white
3	blue
4	black



Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m
0240009P60 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 3 m
0240009P37 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 5 m
0240009P58 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 10 m
0240009P59 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 15 m

* Very flexible cables, class 6 according to IEC 60228

M12 PLUG

Code	Description
0240009040	Plug M12

M12 BUS CONNECTOR, D-CODED



Code	Description
0240005051	M12 BUS connector, D-coded

BUS CABLE



Code	Description
0240005220	BUS cable L = 20 m

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP….)

STRAIGHT CONNECTOR FOR M12-M12 BUS, D-CODED



Code	Description
0240005103	Straight connector for M12-M12 BUS, D-coded, with 3 m cable
0240005105	Straight connector for M12-M12 BUS, D-coded, with 5 m cable
0240005110	Straight connector for M12-M12 BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP….)

STRAIGHT CONNECTOR FOR M12 BUS, D-CODED

Pin	Cable color
1	Yellow
2	White
3	Red
4	Blue



Code	Description
0240005093	Straight connector for M12 BUS, D-coded, with 3 m cable
0240005095	Straight connector for M12 BUS, D-coded, with 5 m cable
0240005100	Straight connector for M12 BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP….)

RJ45 CONNECTOR



Code	Description
0240005050	RJ45 connector with 4 contacts according to IEC 60603-7

NOTES

CM + EtherCAT

The CM + EtherCAT system has been designed with a pneumatic input end-plate that can contain all the electronic equipment, indicators and connectors.
This system is very compact and sturdy and is housed in a thick aluminium body that protects sensitive components from impact and falls.
The end-plate is available in two electric versions: one handling up to 64 solenoids (64 OUTs) and one handling up to 64 solenoids (64 OUTs) and 32 inputs (32 INs). Grounding is recommended to protect the electronic circuit against electric or electrostatic charges.
N.B. For the system to handle more than 32 pilots (33 to 64), it must be made up of valves bearing a label marked 64. If one or more valves are not marked 64, each island cannot handle more than 32 pilots.

TECHNICAL DATA

Field buses	EtherCAT - 100 Mbit/s - Full-duplex - Supports auto-negotiation
Factory settings	Module name: Cmseries
Minimum cycle time	100 µS
Addressing	Autoincrement Address - Second Slave Address
Voltage range	24VDC ± 10%
Maximum number of pilots (Out)	64 (8 byte)
Maximum number of valves	64 (same as the max. no. of pilotos)
Maximum number of inputs (INs)	32 (4 byte + 1 status byte)
Icc bus supply current	Nominal Icc 120 mA - Instantaneous Icc (< 2 ms) 450 mA
Icc valve supply current	Instantaneous Icc (< 2 ms) 900 mA
Maximum absorption of a valve island with 64 monostable valves	Nominal Icc with 900 mA OFF valves – nominal Icc with 2700 mA ON valves
Protections	Module protected against overload and polarity reversal. Outputs protected against overloads and short-circuits
Connections	Field bus: 2 M12 Female, D-coded, internal switch
	supply: M8 4 pin
	input: M8 3 pin
BUS diagnostics	Using local LEDs and software messages
	Outputs: using local LEDs and status bytes
	Inputs: using local LEDs and status bytes
	N.B.: Refer to the user manual for a detailed description
Data bit value	0 = not enabled
	1 = enabled
Output status in the absence of communication	Disabled

See page B2.150 **for general technical data**

COMPONENTS

① Exhaust - Solenoid pilot 82/84
② Valve supply - port 1
③ Threaded connection of exhausts 3/5
④ Valve supply - port 11
⑤ Electrical control supply X
⑥ Blind end-plate
⑦ Screw for valve wall-mounting
⑧ ⑨ ⑩ Utility port for pipe Ø 4, 6 or 8 mm
⑪ Manual control
⑫ LED (LED on, solenoid valve energised)
⑬ Pneumatic symbol
⑭ Identification of the monostable or bistable manual control
⑮ Valve ordering code
⑯ Valve identification code
⑰ Blank space for valve number
⑱ CM EtherCAT end-plate
⑲ 64 = when present, it means that the valve is suitable for installation on islands with a field bus with up to 64 pilots, otherwise the limit is 32 pilots.

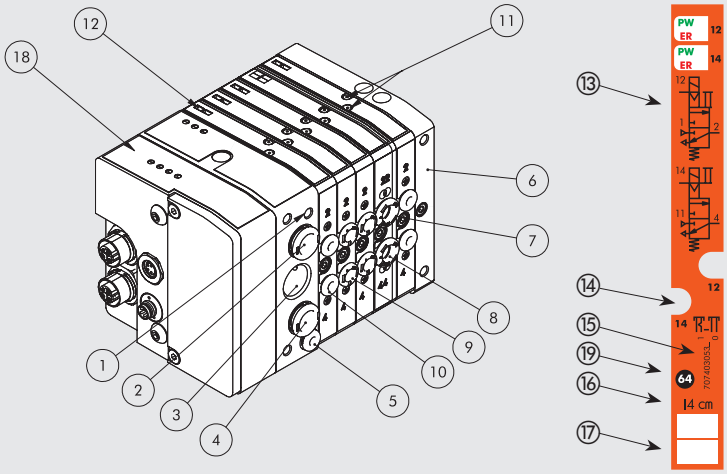

VALVE ISLAND CONFIGURATION

The numbers permit rapid identification of the function and assembly position of the single elements represented as follows.
Refer to page B2.172 **for valves, intermediates elements and common accessories.**

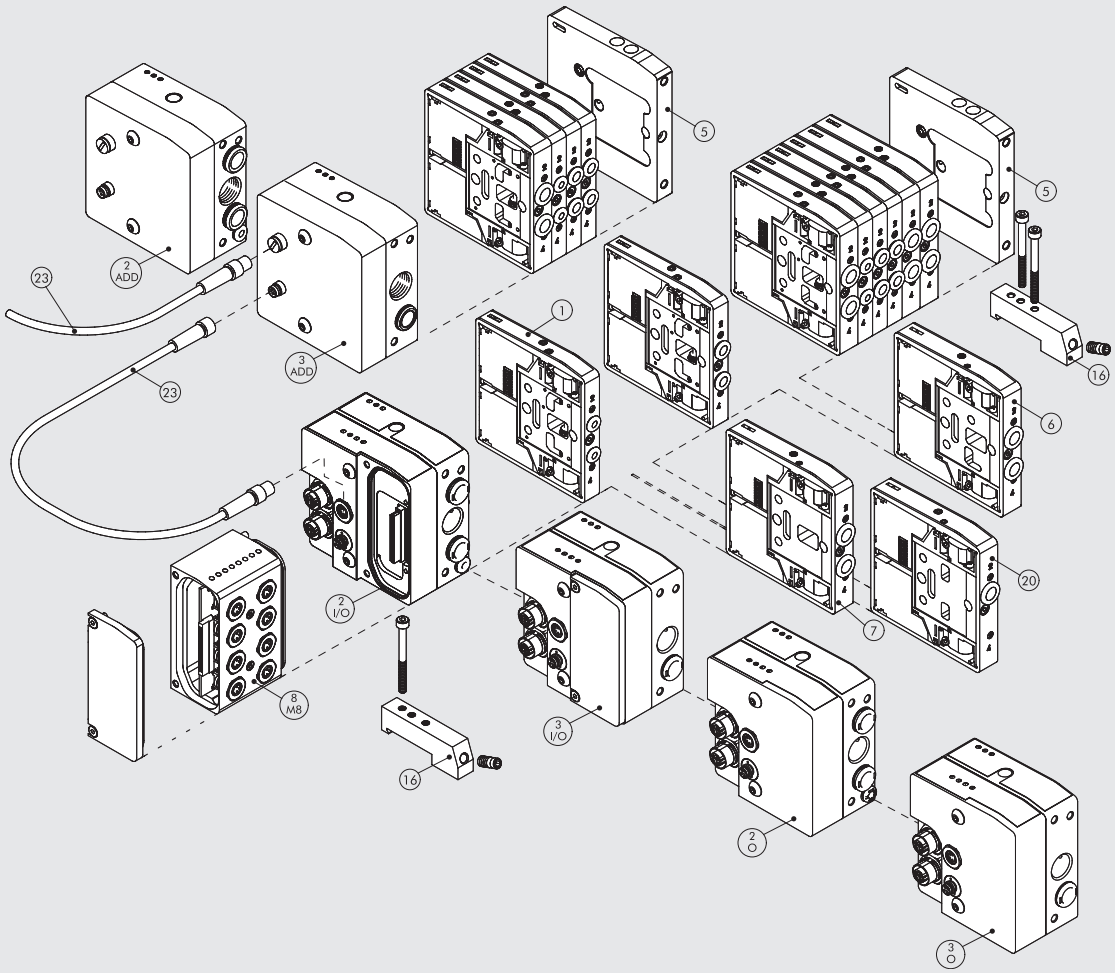

WIRING DIAGRAM

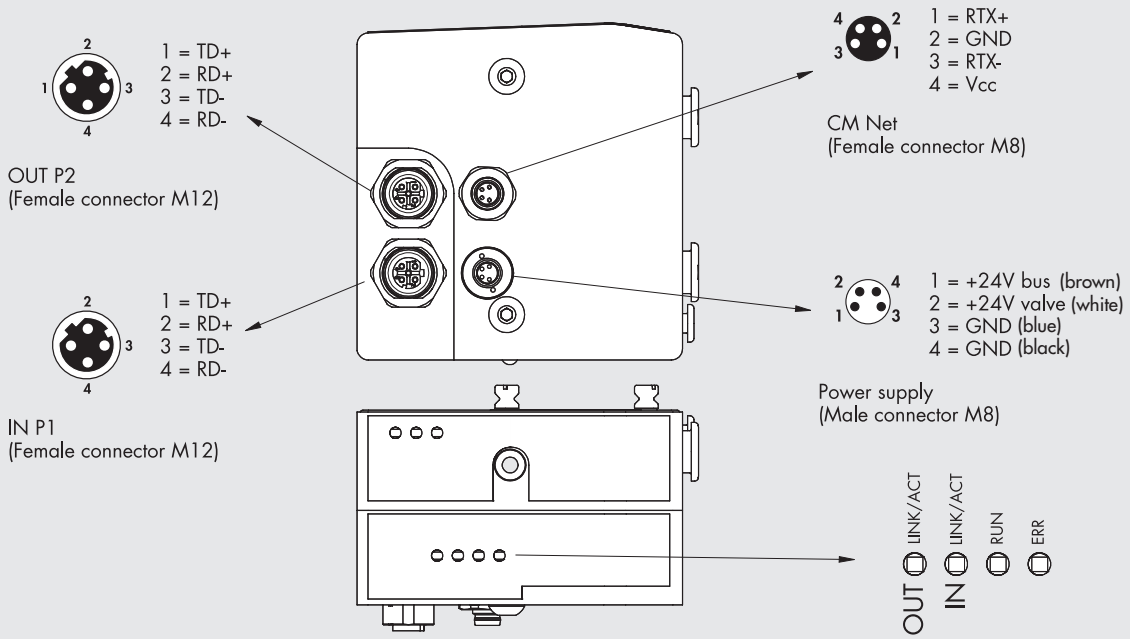

METAL WORK PNEUMATIC

2 - O END-PLATE 1-11 EtherCAT OUTPUT

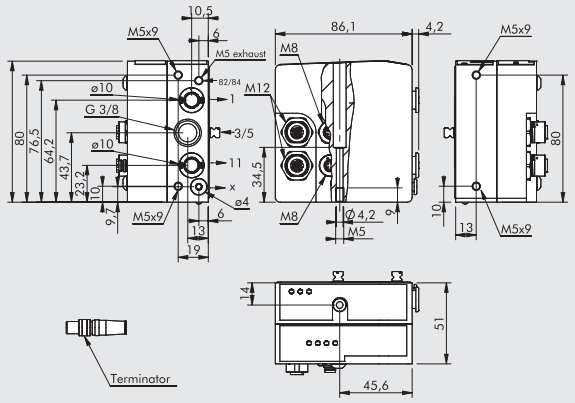

Code	Description	Weight [g]
0227302234	End-plate CM 1-11 EtherCAT OUTPUT	683

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply
Note: terminator included

3 - O END-PLATE 1 EtherCAT OUTPUT

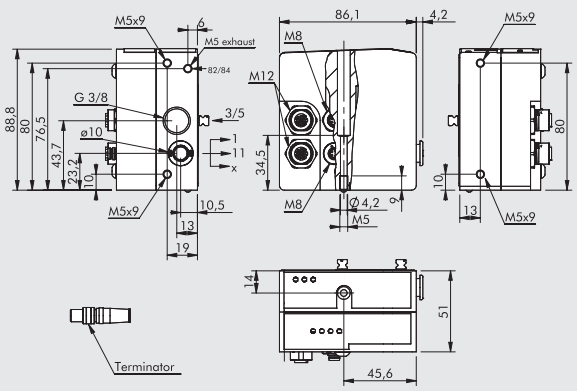

Code	Description	Weight [g]
0227302235	End-plate CM 1 EtherCAT OUTPUT	686

Note: terminator included

2 - I/O END-PLATE 1-11 EtherCAT INPUT/OUTPUT

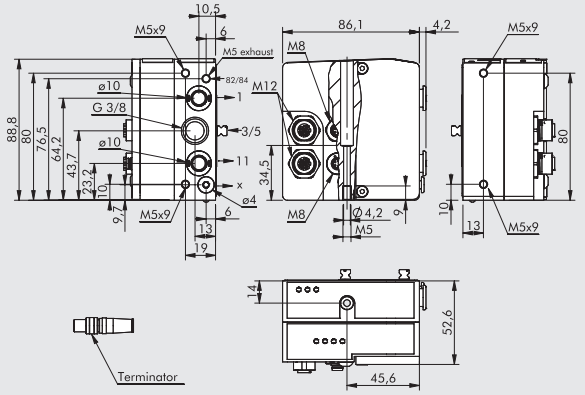

Code	Description	Weight [g]
0227302236	End-plate CM 1-11 EtherCAT IN/OUT	643

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply
Note: terminator included

3 - I/O END-PLATE 1 EtherCAT INPUT/OUTPUT

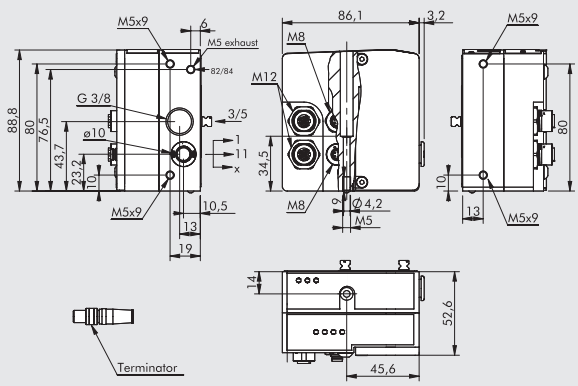

Code	Description	Weight [g]
0227302237	End-plate CM 1 EtherCAT IN/OUT	645

Note: terminator included

M8 CONNECTOR FOR POWER SUPPLY

Pin	Cable colour
1	brown
2	white
3	blue
4	black



Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m
0240009P60 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 3 m
0240009P37 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 5 m
0240009P58 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 10 m
0240009P59 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 15 m

* Very flexible cables, class 6 according to IEC 60228

M12 PLUG



Code	Description
0240009040	Plug M12

M12 BUS CONNECTOR, D-CODED



Code	Description
0240005051	M12 BUS connector, D-coded

BUS CABLE



Code	Description
0240005220	BUS cable L = 20 m

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP….)

STRAIGHT CONNECTOR FOR M12-M12 BUS, D-CODED



Code	Description
0240005103	Straight connector for M12-M12 BUS, D-coded, with 3 m cable
0240005105	Straight connector for M12-M12 BUS, D-coded, with 5 m cable
0240005110	Straight connector for M12-M12 BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP….)

STRAIGHT CONNECTOR FOR M12 BUS, D-CODED

Pin	Cable color
1	Yellow
2	White
3	Red
4	Blue



Code	Description
0240005093	Straight connector for M12 BUS, D-coded, with 3 m cable
0240005095	Straight connector for M12 BUS, D-coded, with 5 m cable
0240005100	Straight connector for M12 BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP….)

RJ45 CONNECTOR



Code	Description
0240005050	RJ45 connector with 4 contacts according to IEC 60603-7

NOTES

CM + EtherNet/IP

METAL WORK PNEUMATIC

The CM + Ether/IP system has been designed with a pneumatic input end-plate that can contain all the electronic equipment, indicators and connectors. This system is very compact and sturdy and is housed in a thick aluminium body that protects sensitive components from impact and falls.
The end-plate is available in two electric versions: one handling up to 64 solenoids (64 OUTs) and one handling up to 64 solenoids (64 OUTs) and 32 inputs (32 INs).
Grounding is recommended to protect the electronic circuit against electric or electrostatic charges.
N.B. For the system to handle more than 32 pilots (33 to 64), it must be made up of valves bearing a label marked 64. If one or more valves are not marked 64, each island cannot handle more than 32 pilots.

TECHNICAL DATA

Field buses	EtherNet/IP - 10/100 Mbit/s - Half-duplex - Full-duplex - Supports auto-negotiation
Factory settings	Module name: Cmseries
	Address IP 0.0.0.0
Addressing	Software DCP
Voltage range	24VDC ± 10%
Maximum number of pilots (Out)	64
Maximum number of valves	64 (same as the max. no. of pilotos)
Maximum number of inputs (INs)	32
Icc bus supply current	Nominal Icc 120 mA - Instantaneous Icc (< 2 ms) 450 mA
Icc valve supply current	Instantaneous Icc (< 2 ms) 900 mA
Maximum absorption of a valve island with 64 monostable valves	Nominal Icc with 900 mA OFF valves – nominal Icc with 2700 mA ON valves
Protections	Module protected against overload and polarity reversal. Outputs protected against overloads and short-circuits
Connections	Field bus: 2 M12, D-coded, internal switch
	supply: M8 4 pin
	input: M8 3 pin
BUS diagnostics	Using local LEDs and software messages
	Outputs: using local LEDs and status bytes
	Inputs: using local LEDs and status bytes
	N.B.: Refer to the user manual for a detailed description
Data bit value	0 = not enabled
	1 = enabled
Output status in the absence of communication	Disabled

See page B2.150 **for general technical data**

COMPONENTS

① Exhaust - Solenoid pilot 82/84
② Valve supply - port 1
③ Threaded connection of exhausts 3/5
④ Valve supply - port 11
⑤ Electrical control supply X
⑥ Blind end-plate
⑦ Screw for valve wall-mounting
⑧ ⑨ ⑩ Utility port for pipe Ø 4, 6 or 8 mm
⑪ Manual control
⑫ LED (LED on, solenoid valve energised)
⑬ Pneumatic symbol
⑭ Identification of the monostable or bistable manual control
⑮ Valve ordering code
⑯ Valve identification code
⑰ Blank space for valve number
⑱ CM EtherNet/IP end-plate
⑲ 64 = when present, it means that the valve is suitable for installation on islands with a field bus with up to 64 pilots, otherwise the limit is 32 pilots.

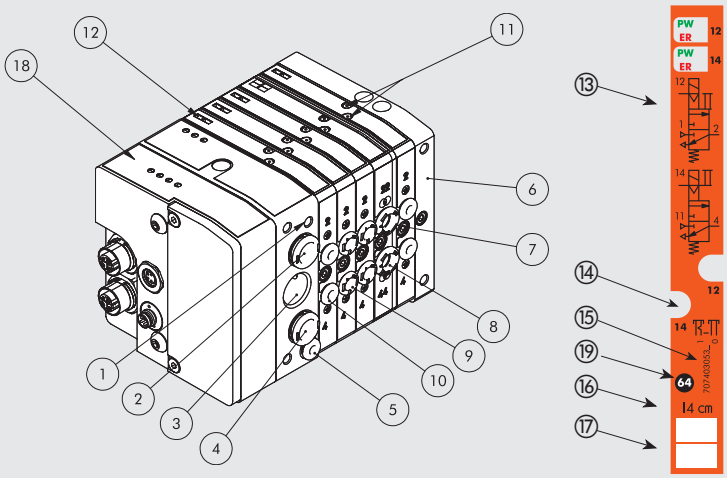

VALVE ISLAND CONFIGURATION

The numbers permit rapid identification of the function and assembly position of the single elements represented as follows.
Refer to page B2.172 **for valves, intermediates elements and common accessories.**

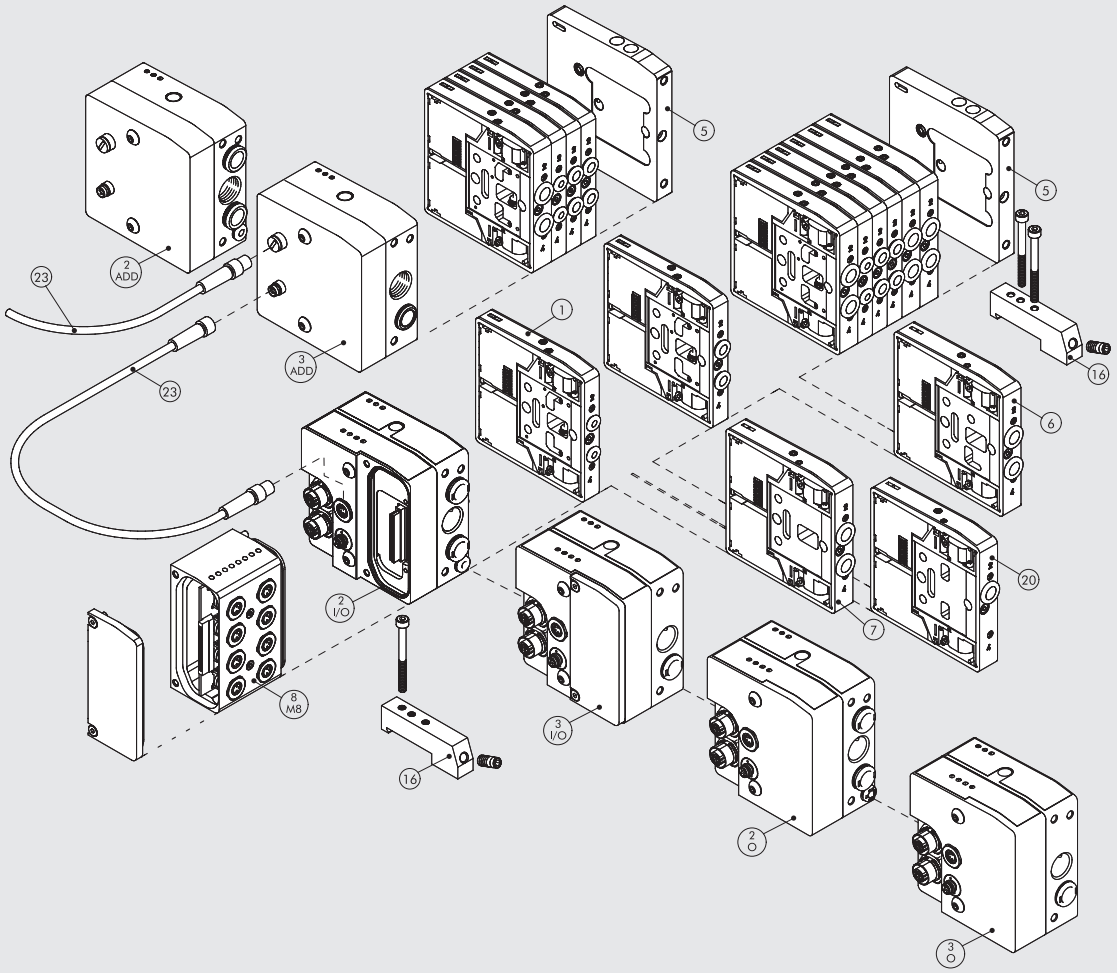

WIRING DIAGRAM

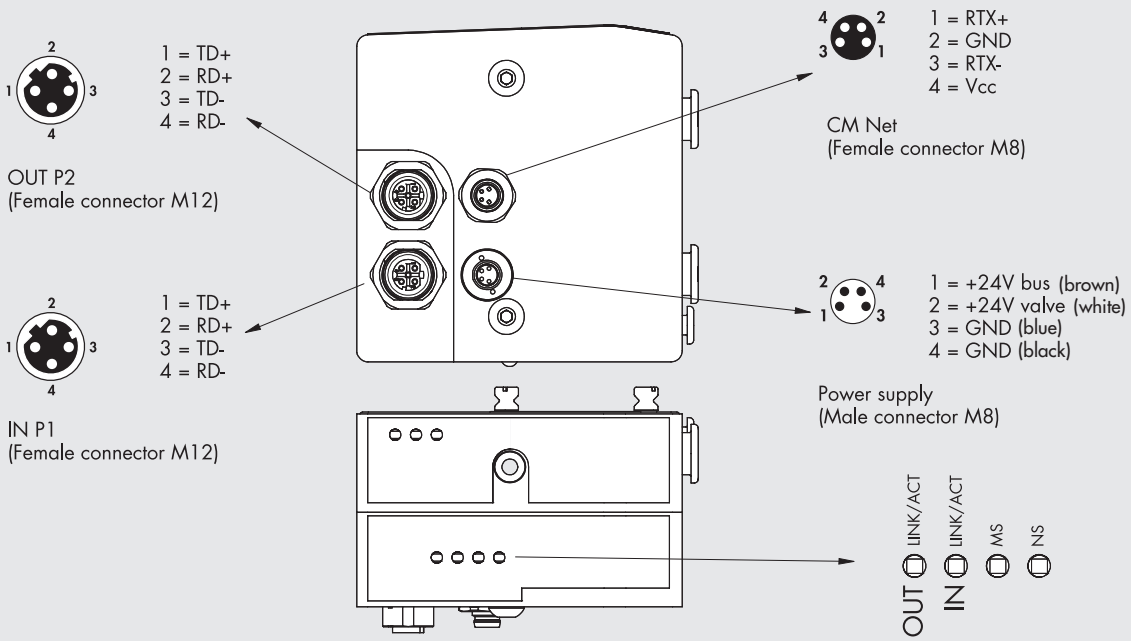

METAL WORK PNEUMATIC

2 - O END-PLATE 1-11 EtherNet/IP OUTPUT

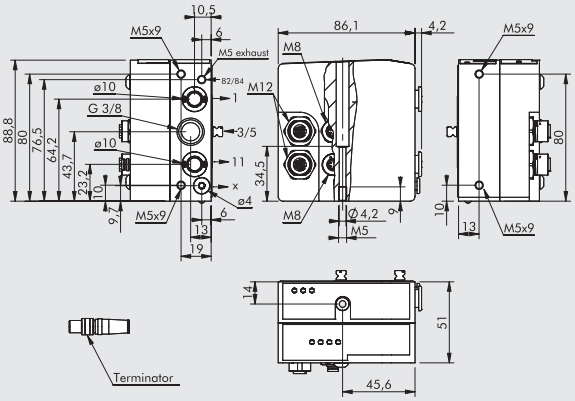

Code	Description	Weight [g]
0227302242	End-plate CM 1-11 EtherNet/IP OUTPUT	683

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply
Note: terminator included

3 - O END-PLATE 1 EtherNet/IP OUTPUT

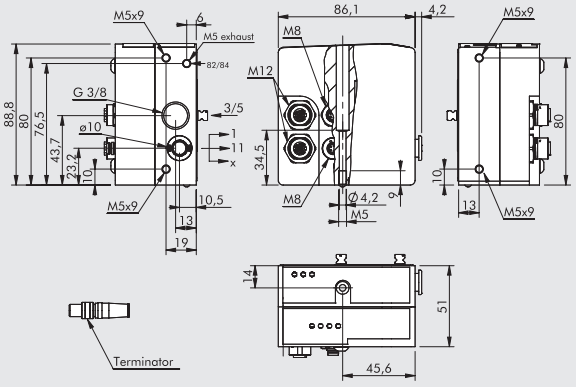

Code	Description	Weight [g]
0227302243	End-plate CM 1 EtherNet/IP OUTPUT	686

Note: terminator included

2 - I/O END-PLATE 1-11 EtherNet/IP INPUT/OUTPUT

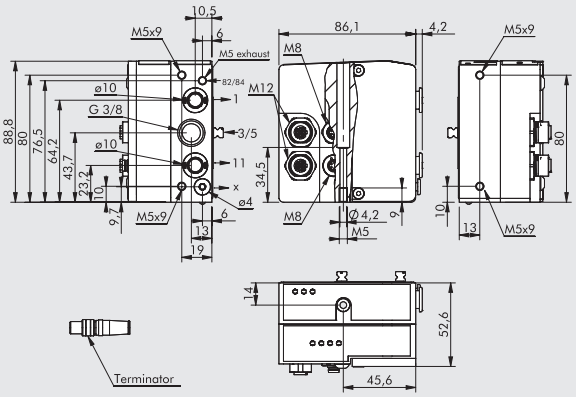

Code	Description	Weight [g]
0227302244	End-plate CM 1-11 EtherNet/IP IN/OUT	643

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply
Note: terminator included

3 - I/O END-PLATE 1 EtherNet/IP INPUT/OUTPUT

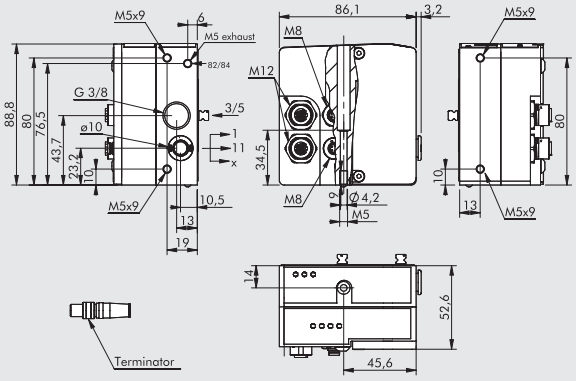

Code	Description	Weight [g]
0227302245	End-plate CM 1 EtherNet/IP IN/OUT	645

Note: terminator included

M8 CONNECTOR FOR POWER SUPPLY

Pin	Cable colour
1	brown
2	white
3	blue
4	black



Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m
0240009P60 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 3 m
0240009P37 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 5 m
0240009P58 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 10 m
0240009P59 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 15 m

* Very flexible cables, class 6 according to IEC 60228

M12 PLUG

Code	Description
0240009040	Plug M12

M12 BUS CONNECTOR, D-CODED



Code	Description
0240005051	M12 BUS connector, D-coded

BUS CABLE



Code	Description
0240005220	BUS cable L = 20 m

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP….)

STRAIGHT CONNECTOR FOR M12-M12 BUS, D-CODED



Code	Description
0240005103	Straight connector for M12-M12 BUS, D-coded, with 3 m cable
0240005105	Straight connector for M12-M12 BUS, D-coded, with 5 m cable
0240005110	Straight connector for M12-M12 BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP….)

STRAIGHT CONNECTOR FOR M12 BUS, D-CODED

Pin	Cable color
1	Yellow
2	White
3	Red
4	Blue



Code	Description
0240005093	Straight connector for M12 BUS, D-coded, with 3 m cable
0240005095	Straight connector for M12 BUS, D-coded, with 5 m cable
0240005100	Straight connector for M12 BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP….)

RJ45 CONNECTOR



Code	Description
0240005050	RJ45 connector with 4 contacts according to IEC 60603-7

NOTES

CM + CANopen

METAL WORK PNEUMATIC

The CM+CANopen system has been designed with a pneumatic input end-plate that can contain all the electronic equipment, indicators and connectors. This system is very compact and sturdy and is housed in a thick aluminium body that protects sensitive components impact and falls.
The end-plate is available in two electric versions: one handling up to 64 solenoids (64 OUTs) and one handling up to 64 solenoids (64 OUTs) and 32 inputs (32 INs).
Grounding is recommended to protect the electronic circuit against electric or electrostatic charges.
N.B. For the system to handle more than 32 pilots (33 to 64), it must be made up of valves bearing a label marked 64. If one or more valves are not marked 64, each island cannot handle more than 32 pilots.

TECHNICAL DATA

Field buses	CANopen - Complies with CiA DS401 specifications
Factory settings	Module name: Cmseries
	Address 4
Addressing	Hardware via dip Switch
Voltage range	24VDC ± 10%
Maximum number of pilots (Out)	64
Maximum number of valves	* 64 (same as the max. no. of pilotos)
Maximum number of inputs (INs)	32
Icc bus supply current	Nominal Icc 30 mA - Instantaneous Icc (< 5 ms) 640 mA
Icc valve supply current	Instantaneous Icc (< 5 ms) 1100 mA
Maximum absorption of a valve island with 64 monostable valves	Nominal Icc with 900 mA OFF valves – nominal Icc with 2700 mA ON valves
Protections	Module protected against overload and polarity reversal. Outputs protected against overloads and short-circuits
Connections	Field bus: M12 Male inputs, 5 pins, A-coded; M12 Female outputs, 5 poles, A-coded
	supply: M8 4 pin
	input: M8 3 pin
BUS diagnostics	Using local LEDs and software messages
	Outputs: using local LEDs and status bytes
	Inputs: using local LEDs and status bytes
	N.B.: Refer to the user manual for a detailed description
Data bit value	0 = not enabled
	1 = enabled
Output status in the absence of communication	Disabled

*** N.B.: In case of "slaves" islands, the CANopen "clever center" can contain up to 34 valves (pilots can be even up to 64).**
See page B2.150 **for general technical data**

COMPONENTS

① Exhaust - Solenoid pilot 82/84
② Valve supply - port 1
③ Threaded connection of exhausts 3/5
④ Valve supply - port 11
⑤ Electrical control supply X
⑥ Blind end-plate
⑦ Screw for valve wall-mounting
⑧ ⑨ ⑩ Utility port for pipe Ø 4, 6 or 8 mm
⑪ Manual control
⑫ LED (LED on, solenoid valve energised)
⑬ Pneumatic symbol
⑭ Identification of the monostable or bistable manual control
⑮ Valve ordering code
⑯ Valve identification code
⑰ Blank space for valve number
⑱ CM CANopen end-plate
⑲ 64 = when present, it means that the valve is suitable for installation on islands with a field bus with up to 64 pilots, otherwise the limit is 32 pilots.

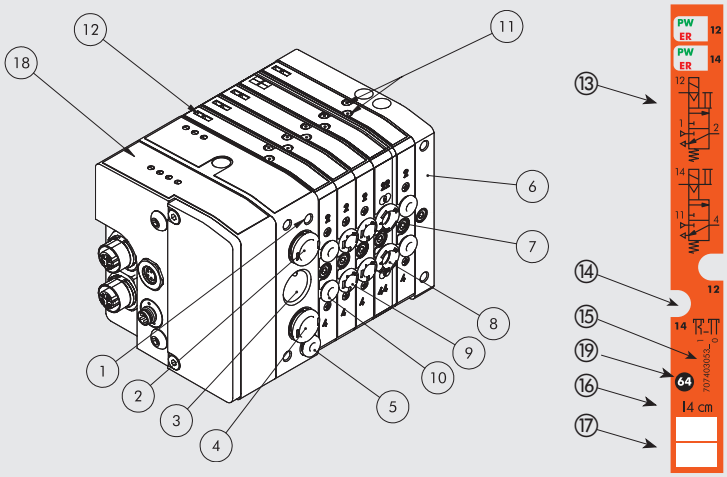

VALVE ISLAND CONFIGURATION

The numbers permit rapid identification of the function and assembly position of the single elements represented as follows.
Refer to page B2.172 **for valves, intermediates elements and common accessories.**

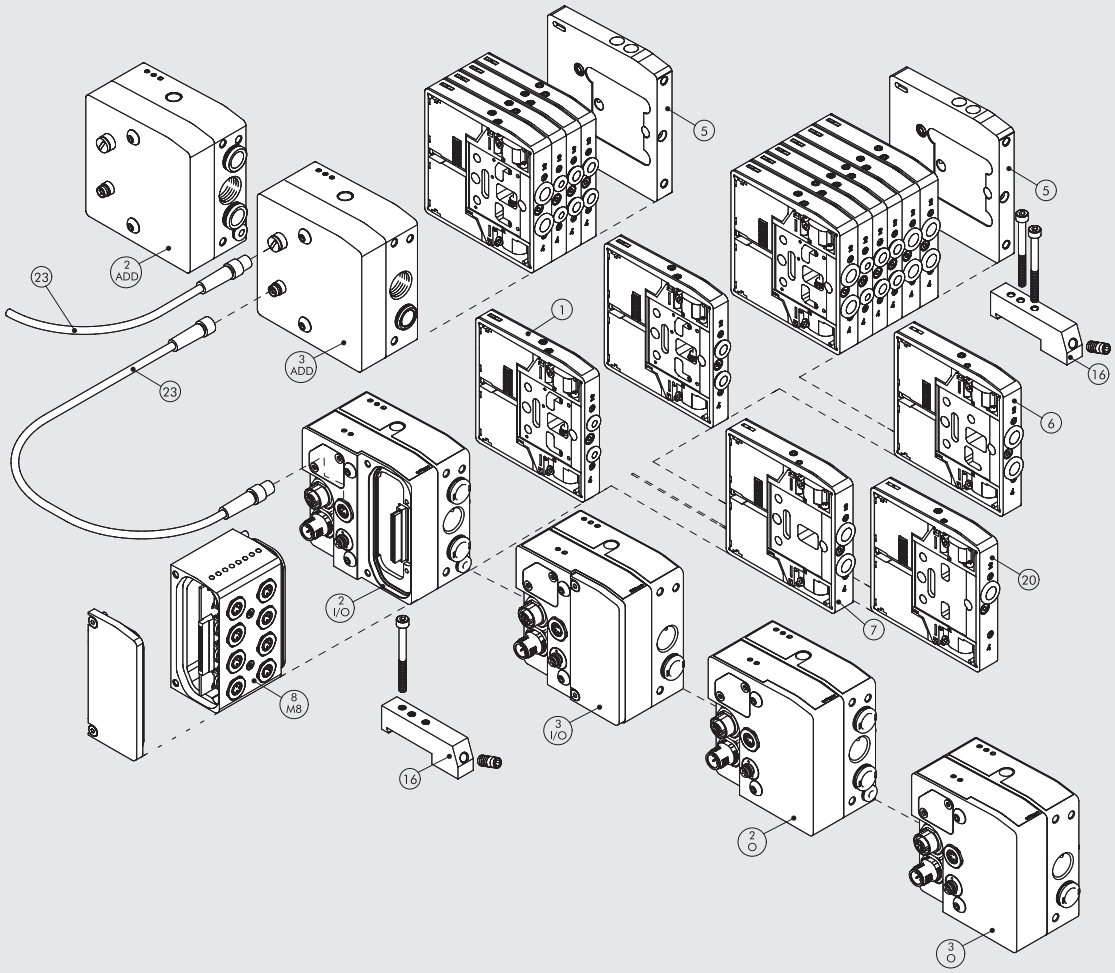

WIRING DIAGRAM

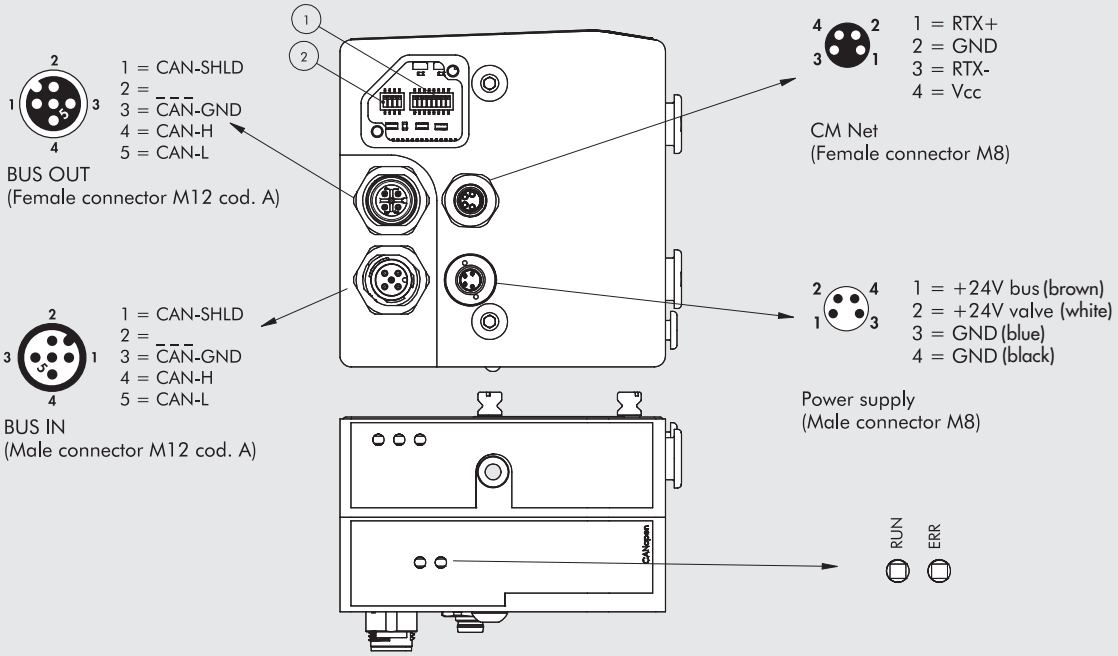

2 - O END-PLATE 1-11 CANopen OUTPUT

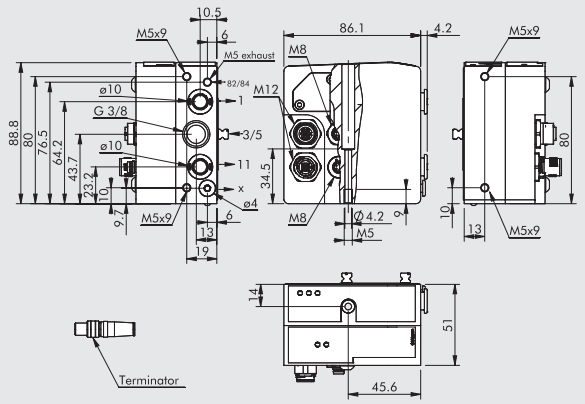

Code	Description	Weight [g]
0227302238	End-plate CM 1-11 CANopen OUTPUT	678

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply
Note: terminator included

3 - O END-PLATE 1 CANopen OUTPUT

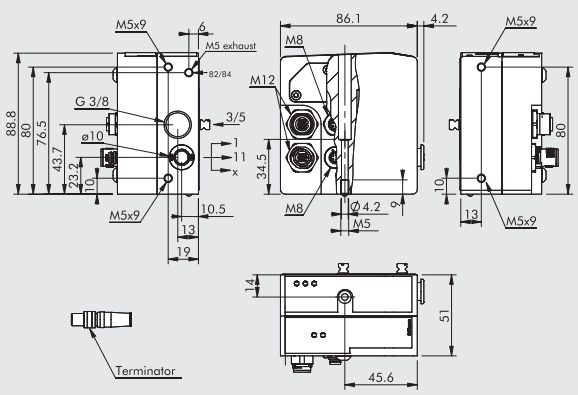

Code	Description	Weight [g]
0227302239	End-plate CM 1 CANopen OUTPUT	680

Note: terminator included

2 - I/O END-PLATE 1-11 CANopen INPUT/OUTPUT

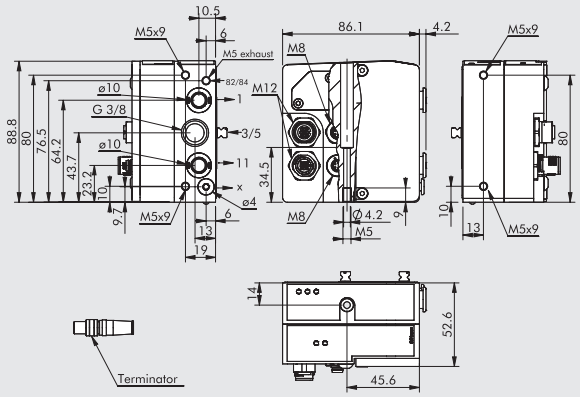

Code	Description	Weight [g]
0227302240	End-plate CM 1-11 CANopen IN/OUT	632

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply
Note: terminator included

3 - I/O END-PLATE 1 CANopen INPUT/OUTPUT

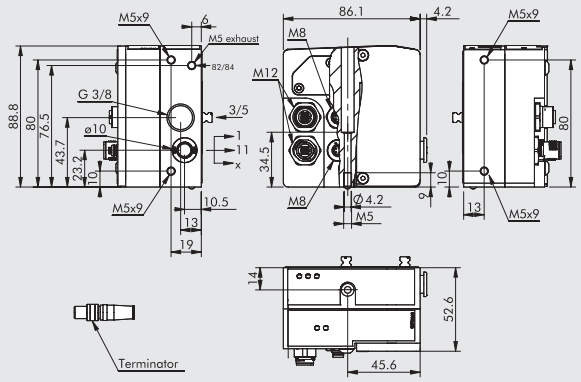

Code	Description	Weight [g]
0227302241	End-plate CM 1 CANopen IN/OUT	635

Note: terminator included

FEMALE CONNECTOR FOR CANopen BUS-IN



Code	Description
0240009055	M12 female connector, A-coded

MALE CONNECTOR FOR CANopen BUS-OUT



Code	Description
0240009038	M12 male connector, A-coded

CABLE FOR CANopen BUS

Code	Description
0240005250	Cable for CANopen bus 20 m

NOTES

CM - VALVES, INTERMEDIATES ELEMENTS AND ACCESSORIES

CM valve can be included in islands with any available input terminal.
The same valve can be connected to the multiple connection end-plate and all the field bus end-plates.

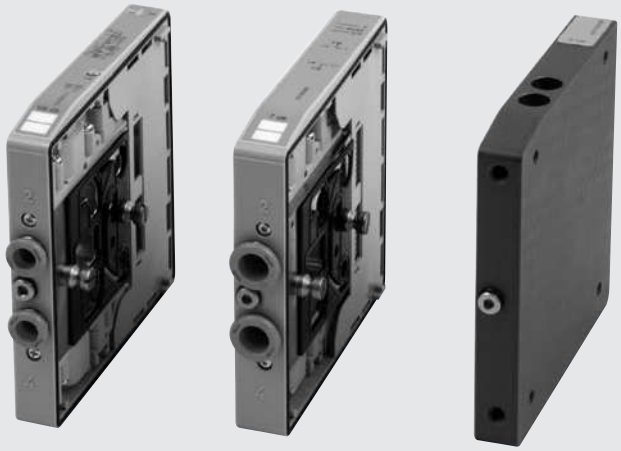

MANUAL CONTROLS



MONOSTABLE OVERRIDE PORT 2
servo-assisted

- Press and hold the manual control in position (not necessary for bistable type K valve)
- Release the manual control:
  - The manual control returns to the home position.
  - Valves type I, W, L, V and O reposition.
  - The type K valve remains switched

N.B.: The pilot power supply X must be present.

- The reference code for the monostable control ends in "0".

Example: 707403053 – 1 / 0



MONOSTABLE OVERRIDE PORT 4
servo-assisted

- Press and hold the manual control in position (not necessary for bistable type K valve)
- Release the manual control:
  - The manual control returns to the home position.
  - Valves type I, W, L, V and O reposition.
  - The type K valve remains switched

N.B.: The pilot power supply X must be present.



BISTABLE OVERRIDE PORT 2
servo-assisted

- Press the manual control right in then turn it clockwise 90 degrees and Leave it in position.
- Rotate the manual control 90 degrees anticlockwise, and then release it.
  - The manual control returns to the home position.
  - Valves type I, W, L, V and O reposition.
  - The type K valve remains switched

N.B.: The pilot power supply X must be present.

- The reference code for the bistable control ends in "1".

Example: 707403053 – 1 / 0



BISTABLE OVERRIDE PORT 4
servo-assisted

- Press the manual control right in then turn it 90 degrees clockwise and Leave it in position.
- Rotate the manual control 90 degrees anticlockwise, and then release it:
  - The manual control returns to the home position.
  - Valves type I, W, L and O reposition.
  - The type K valve remains switched

N.B.: The pilot power supply X must be present.

① VALVE DIMENSIONS CM Ø 4

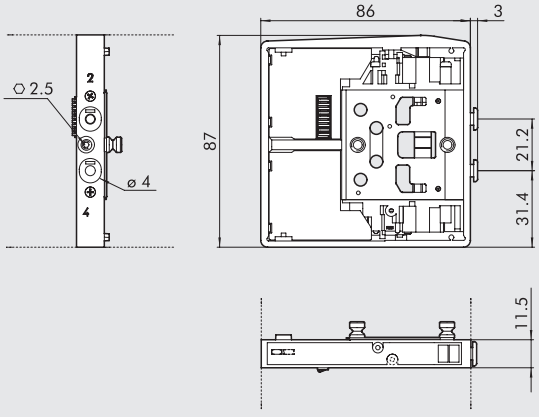

Symbol		Code	Manual control	Weight [g]
CM I4		7074030530 7074030531	monostable bistable	130
CM W4		7074030630 7074030631	monostable bistable	130
CM L4		7074030730 7074030731	monostable bistable	130
CM V4		7074030130 7074030131	monostable bistable	115
CM K4		7074030110 7074030111	monostable bistable	130
CM O4		7074030210 7074030211	monostable bistable	130

METAL WORK PNEUMATIC

① VALVE DIMENSIONS CM Ø 6

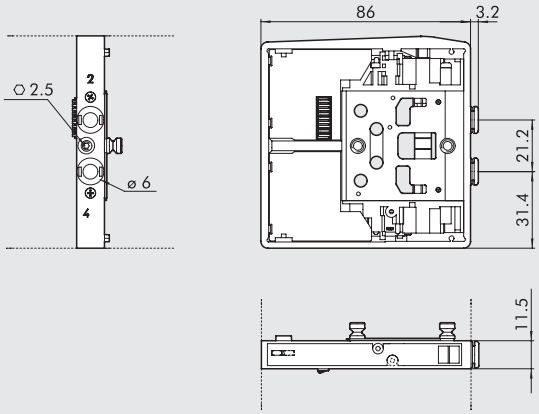

Symbol		Code	Manual control	Weight [g]
CM I6		7075030530 7075030531	monostable bistable	130
CM W6		7075030630 7075030631	monostable bistable	130
CM L6		7075030730 7075030731	monostable bistable	130
CM V6		7075030130 7075030131	monostable bistable	115
CM K6		7075030110 7075030111	monostable bistable	130
CM O6		7075030210 7075030211	monostable bistable	130

① VALVE DIMENSIONS CM Ø 8

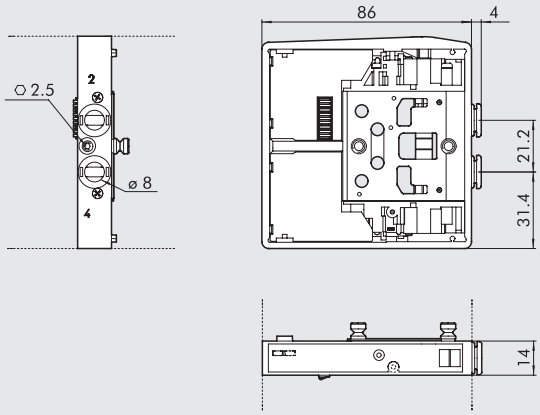

Symbol		Code	Manual control	Weight [g]
CM I8		7076030530 7076030531	monostable bistable	140
CM W8		7076030630 7076030631	monostable bistable	140
CM L8		7076030730 7076030731	monostable bistable	140
CM V8		7076030130 7076030131	monostable bistable	130
CM K8		7076030110 7076030111	monostable bistable	140
CM O8		7076030210 7076030211	monostable bistable	140

2 - ADD ADDITIONAL END-PLATE 1-11

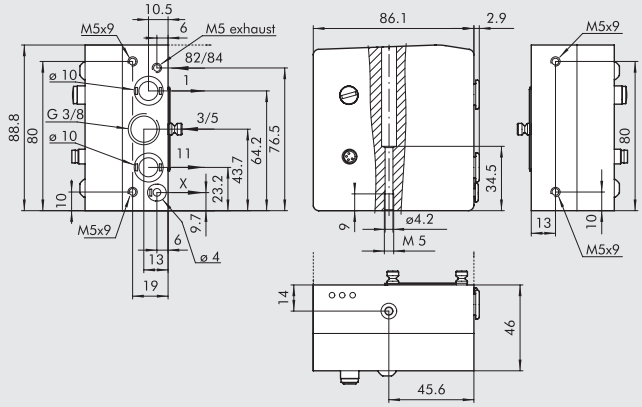

Code	Description	Weight [g]
0227302224	End-plate CM kit 1-11 ADD	770

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply

3 - ADD ADDITIONAL END-PLATE 1

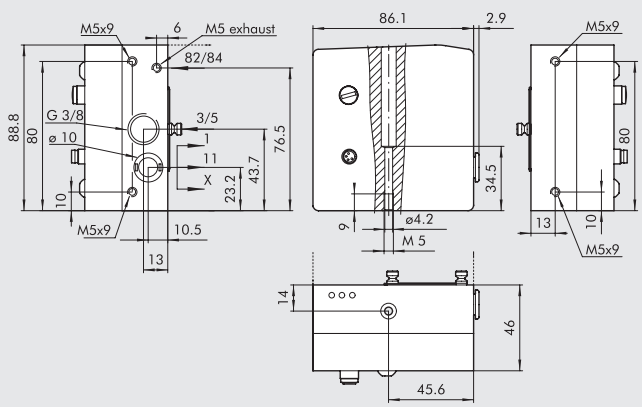

Code	Description	Weight [g]
0227302226	End-plate CM kit 1 ADD	770

WIRING DIAGRAM FOR THE ADDITIONAL TERMINAL

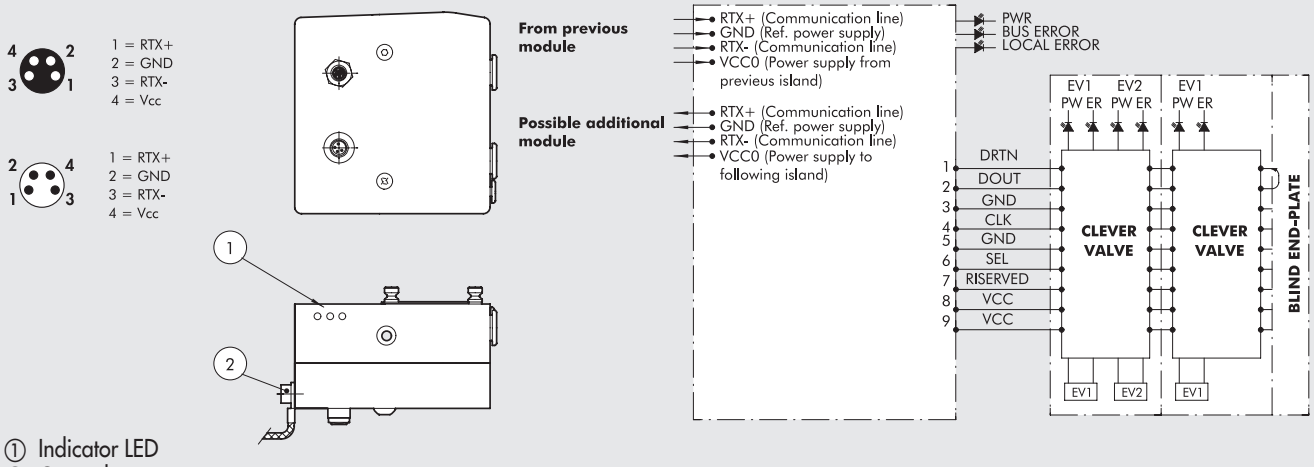

① Indicator LED
② Grounding

⑤ BLIND END-PLATE

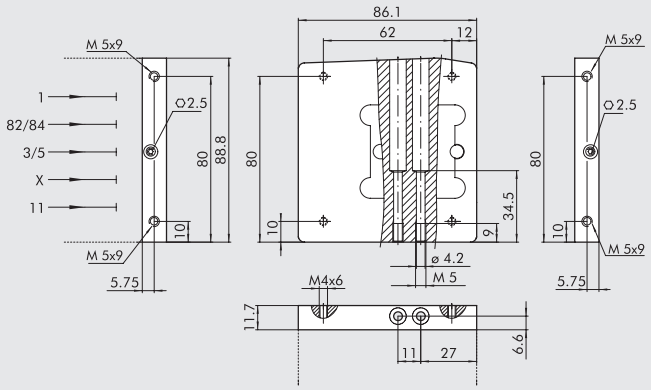

Code	Description	Weight [g]
0227302500	Blind end-plate CM	230

⑥ INTERMEDIATE THROUGHT

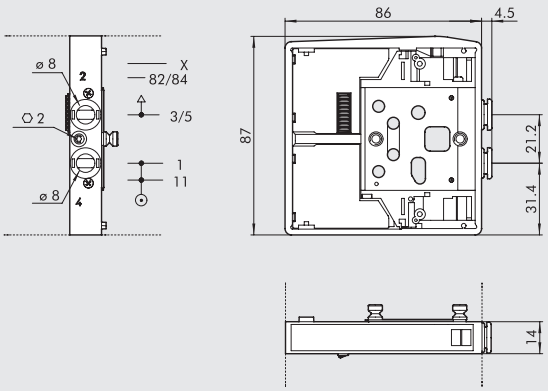

Code	Description	Weight [g]
0227302301	Intermediate throught CM	120

⑦ INTERMEDIATE BLIND

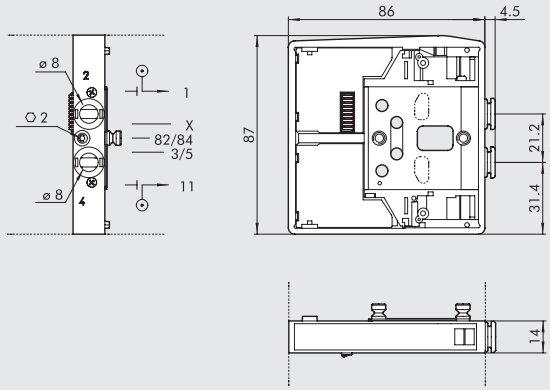

Code	Description	Weight [g]
0227302302	Intermediate blind CM	117

⑳ INTERMEDIATE EXHAUST SWITCH

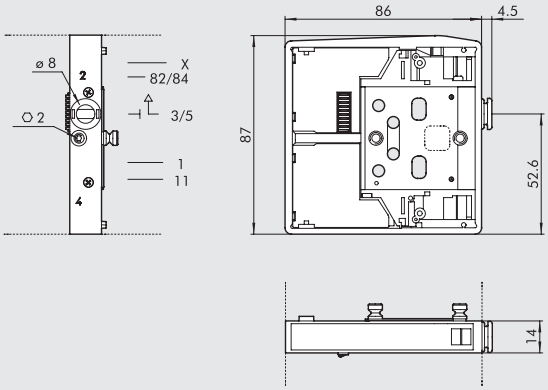

Code	Description	Weight [g]
0227302303	Intermediate exhaust switch CM	125

⑯ CONNECTION BRACKETS ON DIN BAR

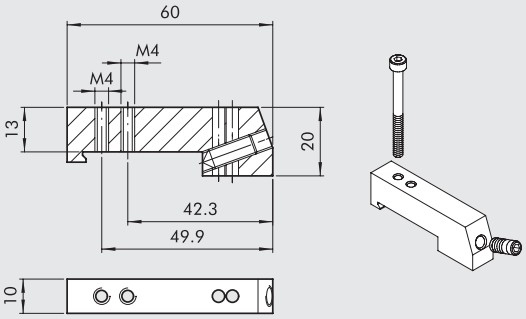

Code	Description	Weight [g]
0227301600	Connection brackets on din bar HDM/CM	30

Supplied complete with one M4x45 screws and one grub screw
Individually packed

SILENCER FOR FITTING, Ø 8



Code	Description	Flow rate at 6.3 bar [Nl/min]	Weight [g]
W0970530084	Silencer for fitting, Ø 8	2400	15

At the 3/5-exhaust port of the intermediate through reference 6
and the exhaust switch reference 20

8 - M8 8-INPUT M8 ADD-ON MODULE (for BUS) – INPUTs / OUTPUTs (for multi-pole connection)

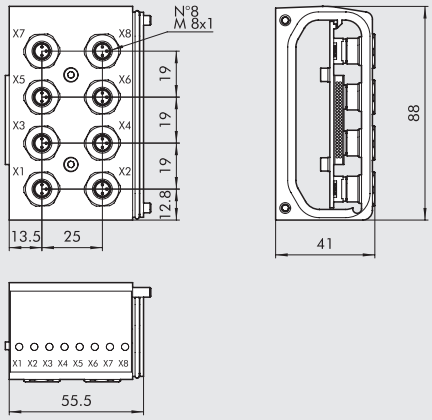

Code	Description	Weight [g]
0227302900	M8 8-input module CM	273

FIELD BUS CONNECTION	MULTI-POLE CONNECTION	
INPUT PNP 1 = + 24 VDC 3 = 0VDC 4 = INPUT	INPUT PNP 1 = + 24 VDC 3 = 0VDC 4 = INPUT	INPUT NPN 1 = + 24 VDC 3 = 0VDC 4 = INPUT
	OUTPUT PNP 1 = + 24 VDC 3 = 0VDC 4 = INPUT	OUTPUT NPN 1 = + 24 VDC 3 = 0VDC 4 = INPUT
	DIP SWITCH ON OFF	DIP SWITCH ON OFF
	OUTPUT ANALOGIC PLC 4 OUT 3 0 V 1 24 V	INPUT ANALOGIC INPUT 4 TRSD 0 V 3 24 V 1

M8 PLUG

Code	Description
0240009039	Plug M8

M8 INPUT CONNECTOR

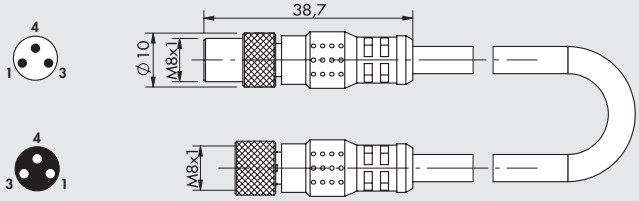

Code	Description
0240009009	M8-M8 straight connector with 3 m cable

M8 ADAPTER CABLE FOR CONNECTION OF THE PRESSURE SWITCH

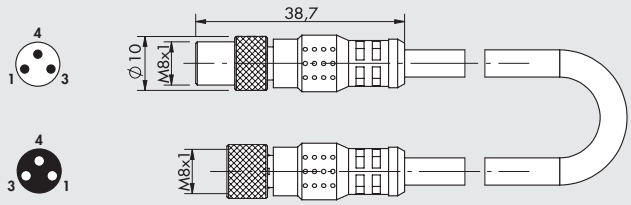

Code	Description
0240010501	M8-M, M8-F 3-pole adapter with cable L = 0.3 m

Note: Can be used for connecting **1/8-1/4**, **Syntesi**®, **Skillair**®, **PRS L** pressure switches to the M8 additional module. Contact type NO (Normally open)

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 3	pin 4	Signal NO
pin 4	pin 3	Disconnect

(23) M8 PREWIRED CONNECTOR FOR VALVE ISLANDS CONNECTIONS

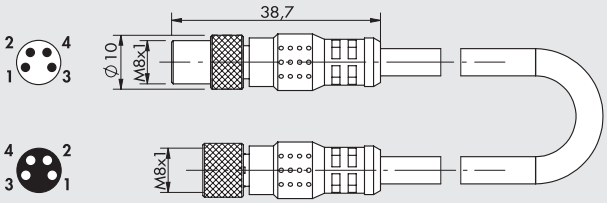

Code	Description
0240005003	M8 prewired connector for valve islands conn. CM L = 5 m
0240005005	M8 prewired connector for valve islands conn. CM L = 1 m
0240005006	M8 prewired connector for valve islands conn. CM L = 3 m
0240005008	M8 prewired connector for valve islands conn. CM L = 10 m

DISTRIBUTORS M8 INPUT CONNECTOR



Code	Description
0240009010	M8 3-pin straight connector

GRUB SCREW KIT



Code	Description
0227301800	Grub screw for Multimach HDM/CM

Comes 1 + 1 packs

R17 - DISASSEMBLY KEY



Lenght = 140 mm

Code	Description	Ø Tube	Tube
2L17001	RL17	from Ø 3 to Ø 10	For R fitting and Fox fitting

NOTES

MULTIMACH

Multimach is not a mere valve, it is an electropneumatic distribution "island" - a single block ready for connection to power and air delivery pipes and a multi-pin cable.
All the pneumatic connections are situated on one side with built-in push-in fittings. The user interface is on the other side so that the fitter or serviceman has everything within an easy reach: manual controls, active valve signalling lights, compressed air system diagram, valve identification plates.
The user can count on four different orientations for the electric connector.
Multimach provides full flexibility in the application of valves: 1 to 24 valves, power plates and drain for pipes of various sizes, electric 9- or 25-pin plug connector. But the real novelty, is the possibility of mounting valves of different flow rates: three different valves can be mounted at a time and a valve can be replaced with another of a different flow rate. This revolutionary concept enables the user to optimise space and costs and adapt the unit to different performance requirements.
The ratio between the flow rate of the Multimach system and sizes is incomparable: the top in terms of miniaturisation and efficiency.

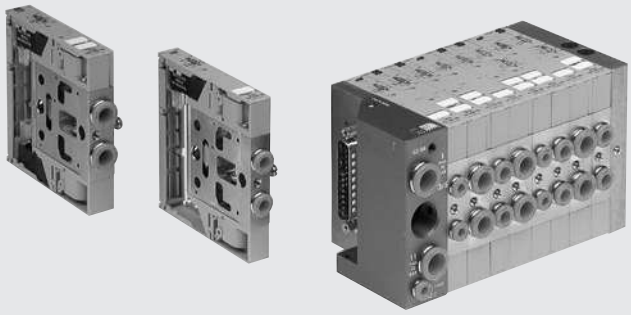

TECHNICAL DATA

Valve port connections			Ø 4,6,8 mm automatic fitting for ports 2 and 4 / power supply port for Ø8 or Ø10 automatic fitting / 3/8 thread for exhaust port, M5 thread for exhaust pilot port		
Connection on the end-plate for the supply of pilots			Automatic fitting Ø 4		
Operating temperature range		°C	-10 to +60		
Fluid			Filtered air without lubrication; lubrication, if used, must be continuous		
Screw for valve - wall-mounting			According to the end-plate used: see page **B2**.178		
Flow rate at 6 bar ΔP 1bar		Nl/min	11 mm Ø 4: 200	11 mm Ø 6: 500	14 mm Ø 8: 700
Voltage range			24 VDC ±10%		
Power		W	1.2		
Insulation class			F155		
Degree of protection			IP51		
Solenoid rating			100% ED		
Pressure range			X (pilot supply)		1-11 (valve supply)
	Terminal 1-11	bar	3 to 7 max		vacuum at 10 bar
	Terminal 1	bar	3 to 7		
	Terminal 1 reduced	bar	3 to 7		
TRA/TRR 2x3/2 monostable at 6 bar		ms	8 / 45		
TRA/TRR 5/2 monostable at 6 bar		ms	8 / 33		
TRA/TRR 5/2 bistable at 6 bar		ms	20 / 20		
TRA/TRR 5/3 cc monostable at 6 bar		ms	20 / 20		
Note on use			Insert the pipes in the fittings, before passing air through the valves, otherwise the basket may be pulled out of its seat by the flow of air.		
Compatibility with oils			See **chapter Z1**		

COMPONENTS

① Exhaust – Solenoid pilot
② Valve supply - port 1
③ Electrical multiple connection with 9 or 25 pins
④ Threaded connection of exhausts 3/5
⑤ Valve supply
⑥ Electrical control supply
⑦ LED (LED on, solenoid valve energised)
⑧ Removable identification labels
⑨ Blind end-plate
⑩ Screw for valve wall-mounting
⑪ Utility port for pipe Ø 8 mm
⑫ Utility port for pipe Ø 6 mm
⑬ Utility port for pipe Ø 4 mm
⑭ Manual control

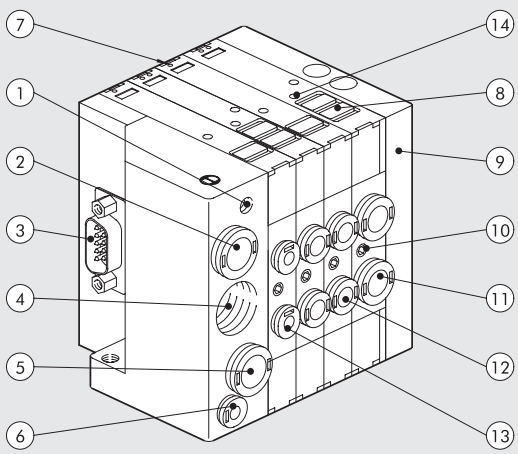

THE MULTIMACH WORLD: FLEXIBILITY

The numbers permit rapid identification of the function and assembly position of the single elements represented as follows

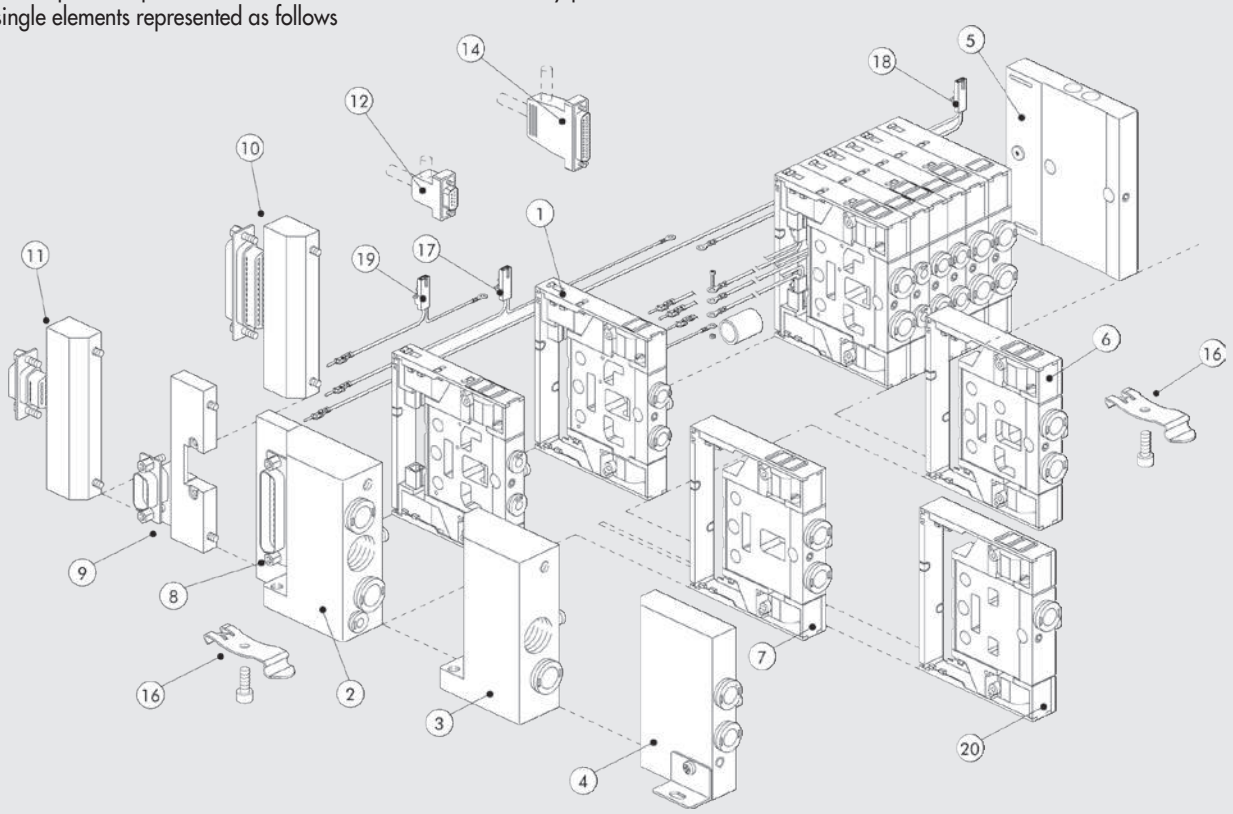

FIXING THE BASE

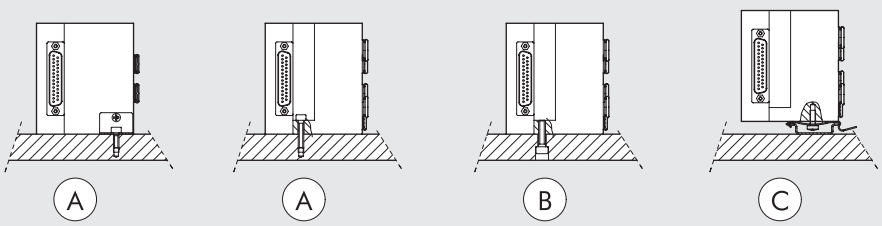

Ⓐ Fixing with reduced end-plate 1, CODE 0227300300, supplied complete with bracket
Ⓑ Fixing with end-plate 1-11 CODE 0227300200 or with end-plate CODE 0227300201
Ⓒ Fixing with end-plate 1-11 CODE 0227300200 or with end-plate 1 CODE 0227300201 using the M4-thread found on the M5 end-plate
Ⓓ Fixing on the DIN bar with end-plate 1-11 CODE 0227300 using the reduced end-plate 1 CODE 0227300300 or end-plate CODE 0227300201 using the push-in bracket CODE 0227300600.
If you have to remove the base from the bar, this is rapid and can be performed without using any tools.

SYNOPTIC, SIZES AND VERSIONS

M 5 1	2	8	I6 - W 8 - W 6 - O 4 - L 8 - 5	1 4
VALVE	**INPUT END-PLATE**	**ELECTRICAL BASE**	**TYPE OF VALVE**	**FURTHER DETAILS**
Multimach IP51	**2** End-plate 1-11 **3** End-plate 1 **4** Reduced End-plate 1	**8** Axial 25-wire connector base **9** Axial 9-wire connector base **10** 25-wire rear connector base **11** 9-wire rear connector base	**I** n° 2 3/2 NC **W** n° 2 3/2 NO **L** 3/2 NO + 3/2 NC **V** 5/2 monostable **K** 5/2 bistable **O** 5/3 monostable **5** Blind end-plate **6** Passing-intermede **7** Blind intermediate **20** Exhaust section **4** Cartridge 4 **6** Cartridge 6 **8** Cartridge 8	**12** 9-wire connector **14** 25-wire connector **16** Brackets for DIN bar

METAL WORK PNEUMATIC

① VALVE DIMENSIONS Ø 4

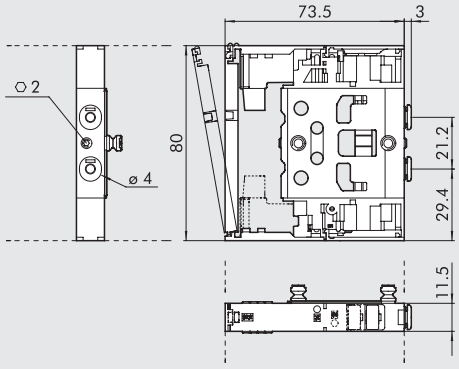

Symbol		Code	Manual control	Weight [g]
I4		7068030532	monostable	118
W4		7068030632	monostable	118
L4		7068030732	monostable	118
V4		7068030132	monostable	100
K4		7068030112	monostable	114
O4		7068030212	monostable	115

① VALVE DIMENSIONS Ø 6

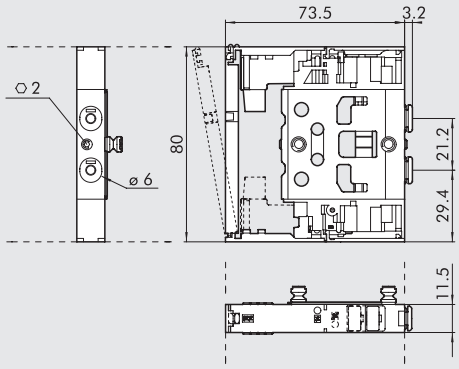

Symbol		Code	Manual control	Weight [g]
I6		7069030532	monostable	110
W6		7069030632	monostable	110
L6		7069030732	monostable	110
V6		7069030132	monostable	90
K6		7069030112	monostable	107
O6		7069030212	monostable	108

① VALVE DIMENSIONS Ø 8

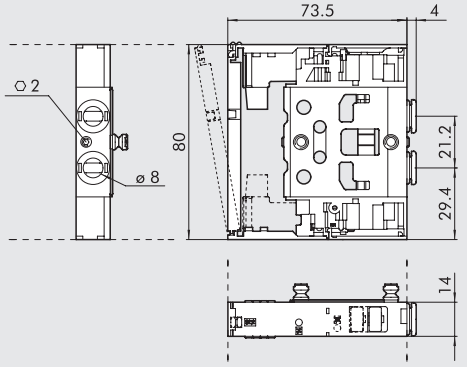

Symbol		Code	Manual control	Weight [g]
I8		7070030532	monostable	124
W8		7070030632	monostable	124
L8		7070030732	monostable	124
V8		7070030132	monostable	105
K8		7070030112	monostable	120
O8		7070030212	monostable	121

② END-PLATE 1-11

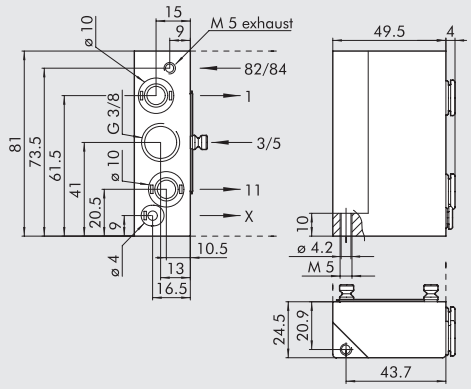

Code	Description	Weight [g]
0227300200	End-plate kit 1-11	223

This end-plate allows for supplies to be differentiated:
port 2, port 4 and pilot supply

③ END-PLATE 1

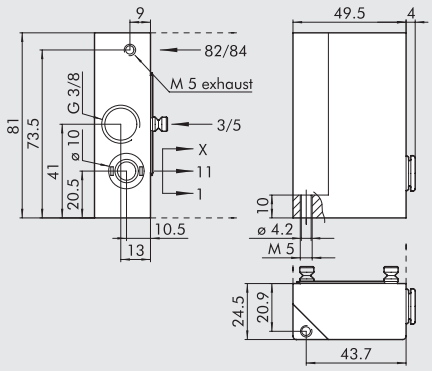

Code	Description	Weight [g]
0227300201	End-plate kit 1	224

④ REDUCED END-PLATE 1

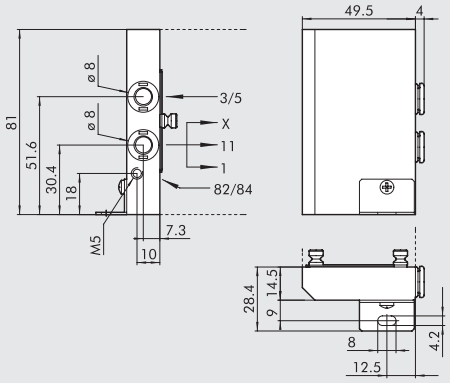

Code	Description	Weight [g]
0227300300	Reduced end-plate kit 1	148

⑤ BLIND END-PLATE

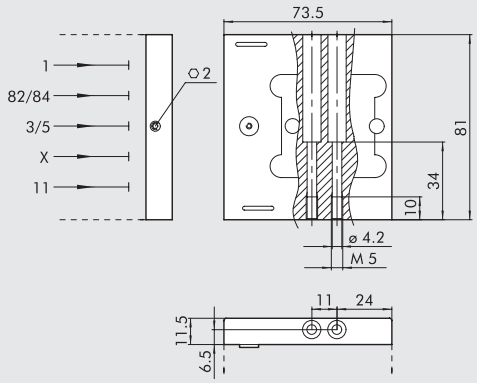

Code	Description	Weight [g]
0227300500	Blind end-plate	168

⑥ INTERMEDIATE THROUGH

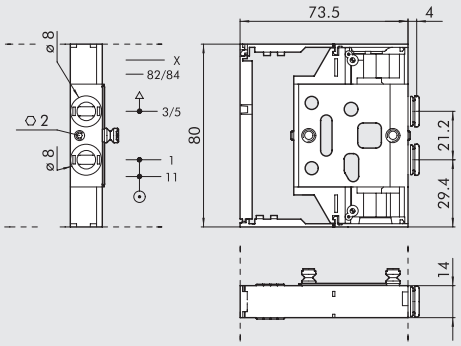

Code	Description	Weight [g]
0227300301	Intermediate through	92

⑦ INTERMEDIATE BLIND

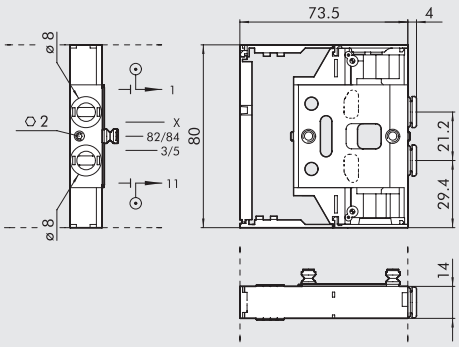

Code	Description	Weight [g]
0227300302	Intermediate blind	89

METAL WORK PNEUMATIC

⑳ INTERMEDIATE EXHAUST SWITCH

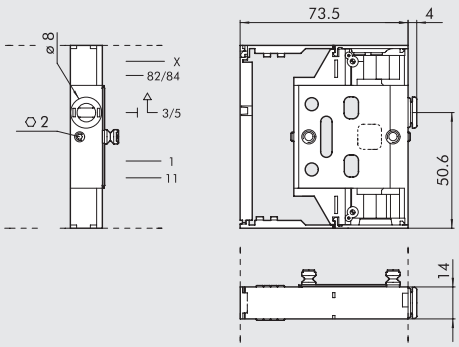

Code	Description	Weight [g]
0227300303	Intermediate exhaust switch	95

⑧ AXIAL CONNECTOR BASE, 25 WIRES

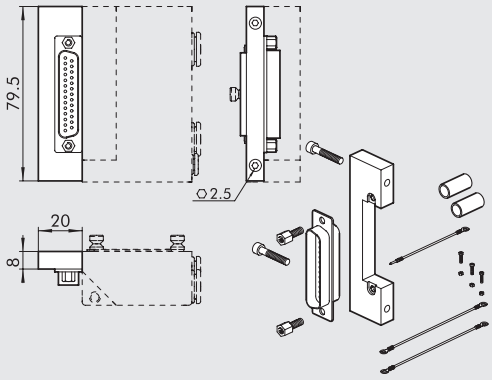

Code	Description	Weight [g]
0226180001	Axial connector base kit, 25 wires	54

⑨ AXIAL CONNECTOR BASE, 9 WIRES

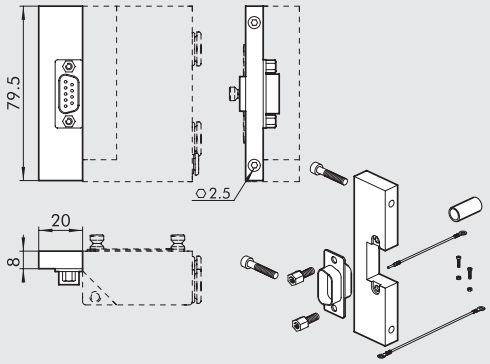

Code	Description	Weight [g]
0226180002	Axial connector base kit, 9 wires	51

⑩ REAR CONNECTOR BASE, 25 WIRES

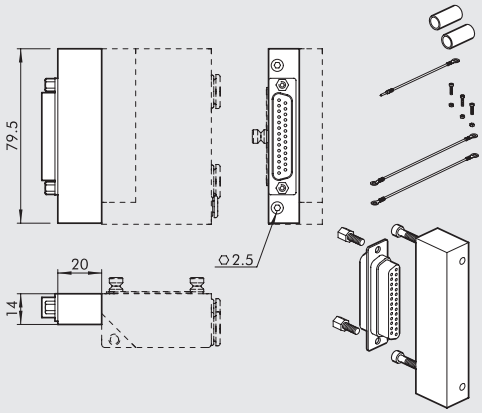

Code	Description	Weight [g]
0226180003	Rear connector base kit, 25 wires	73

⑪ REAR CONNECTOR BASE, 9 WIRES

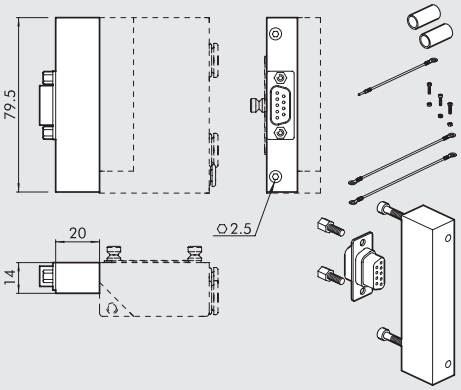

Code	Description	Weight [g]
0226180004	Rear connector base kit, 9 wires	77

⑫ STRAIGHT CONNECTOR KIT, 9 WIRES



Code	Description	Weight [g]
0226180102	Straight connector kit, 9 wires	20

⑭ STRAIGHT AND 90° CONNECTOR KIT, 25 WIRES

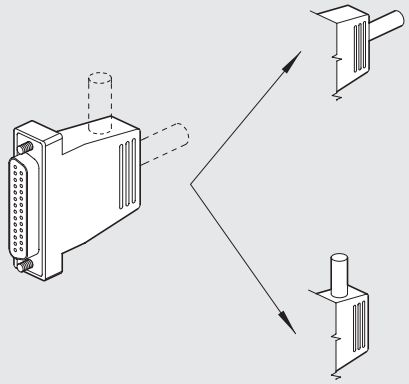

Code	Description	Weight [g]
0226180101	Straight and 90° connector kit, 25 wires	48

⑯ CONNECTION BRACKETS ON THE BAR OMEGA (DIN EN 50022)



Code	Description	Weight [g]
0227300600	Connection brackets on din bar	8

Individually packed

⑰ ⑱ ⑲ CONNECTOR KIT + WIRE

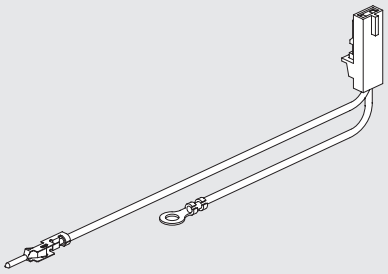

Code	Description	Weight [g]
0226180399	Connector kit + wire 1-6*	3
0226180400	Connector kit + wire 7-12**	4
0226180401	Connector kit + wire13-30***	5

* For valve connection from 1st to 6th position counting from the connector
** For valve connection from 7th to 12th position, counting from the connector
*** For valve connection from 13th to 30th position, counting from the connector

SILENCER FOR FITTING, Ø 8



Code	Description	Flow rate at 6.3 bar [Nl/min]	Weight [g]
W0970530084	Silencer for fitting, Ø 8	2400	15

At the 3/5-exhaust port of the reduced end-plate 1 ref. 4
and of the intermediate through of the exhaust switch ref. 20

CABLES



Code	Description	Weight [g/m]
0226107201	10-wire cable	60
0226107101	19-wire cable	122
0226107102	25-wire cable	130

Specify the number of metres desired

NOTES

METAL WORK PNEUMATIC

STRAIGHT PRE-WIRED CONNECTOR KIT

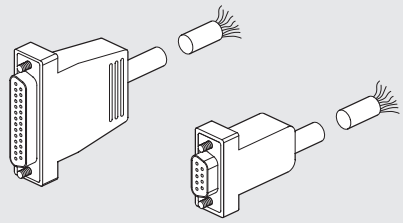

Code	Description	Weight [g]
0226900100	Straight D-Sub 9-PIN connector + cable L = 1 m	80
0226900250	Straight D-Sub 9-PIN connector + cable L = 2.5 m	170
0226900500	Straight D-Sub 9-PIN connector + cable L = 5 m	320
0226900750	Straight D-Sub 9-PIN connector + cable L = 7.5 m	470
0226901000	Straight D-Sub 9-PIN connector + cable L = 10 m	620
0226901500	Straight D-Sub 9-PIN connector + cable L = 15 m	920
0226902000	Straight D-Sub 9-PIN connector + cable L = 20 m	1220
0226905000	Straight D-Sub 9-PIN connector + cable L = 50 m	3020
0226920100	Straight D-Sub 25-PIN connector + cable L = 1 m	132
0226920250	Straight D-Sub 25-PIN connector + cable L = 2.5 m	320
0226920500	Straight D-Sub 25-PIN connector + cable L = 5 m	636

PRE-WIRED 90° CONNECTOR

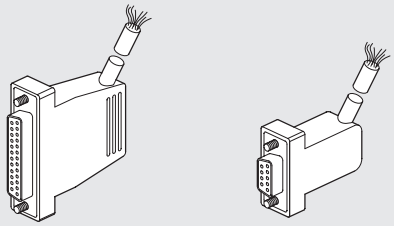

Code	Description	Weight [g]
0226910100	90° D-Sub 9-PIN connector + cable L = 1 m	80
0226910250	90° D-Sub 9-PIN connector + cable L = 2.5 m	170
0226910500	90° D-Sub 9-PIN connector + cable L = 5 m	320
0226910750	90° D-Sub 9-PIN connector + cable L = 7.5 m	470
0226911000	90° D-Sub 9-PIN connector + cable L = 10 m	620
0226911500	90° D-Sub 9-PIN connector + cable L = 15 m	920
0226930100	90° D-Sub 25-PIN connector + cable L = 1 m	132
0226930250	90° D-Sub 25-PIN connector + cable L = 2.5 m	320
0226930500	90° D-Sub 25-PIN connector + cable L = 5 m	636

WIRING DIAGRAM FOR PRE-WIRED PLUG CONNECTORS

25 PIN						9 PIN	
Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire
1	blue/black	10	brown/white	19	yellow/black	1	green/black
2	red/brown	11	red/orange	20	white	2	white
3	white/black	12	light blue	21	blue/white	3	blue/black
4	red/blue	13	yellow/white	22	brown	4	blue
5	black/orange	14	yellow	23	green/white	5	yellow/black
6	yellow/red	15	red/green	24	red	6	yellow
7	black/brown	16	orange	25	green/black	7	red/black
8	white/red	17	orange/white			8	green
9	red/black	18	green			9	white/black

MALE CONNECTOR KIT + CONTACTS + COMMON TERMINAL

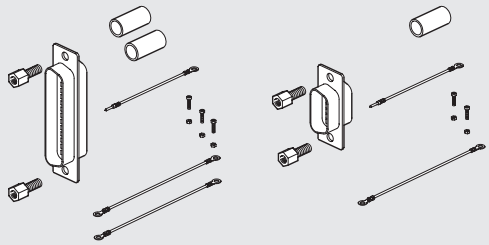

Code	Description
0226180201	Male connector kit - 25 pins
0226180202	Male connector kit - 9 pins

IDENTIFICATION PLATE KIT



Code	Description
0226107000	Identification plate kit

Comes in 16-pc. packs

GRUB SCREW



Code	Description
0227300800	Grub screw for Multimach

Comes in 10-pc. pack

R17 - PIPE RELEASE SPANNER



Lenght = 140 mm

Code	Description	Ø Tube
2L17001	RL17	from Ø 3 to Ø 10

WIRING DIAGRAM OF THE 9-PIN CONNECTOR

Note: available with positive common wire on request.

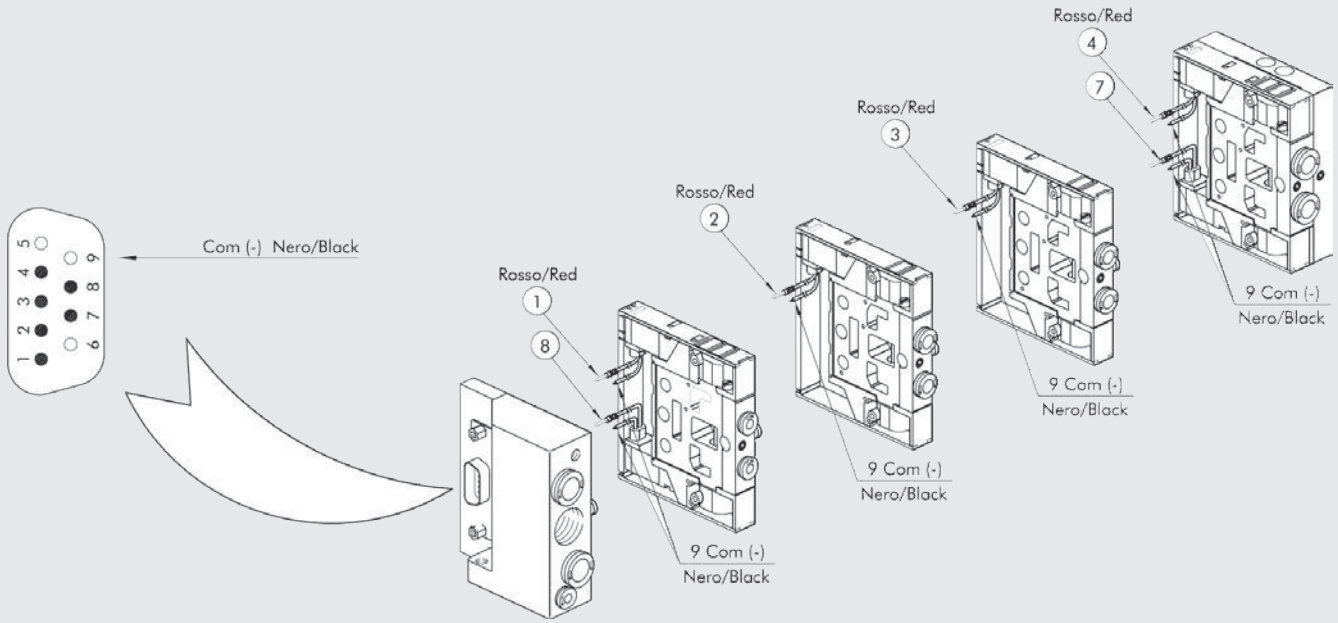

WIRING DIAGRAM OF THE 25-PIN CONNECTOR

Note: available with positive common wire on request.

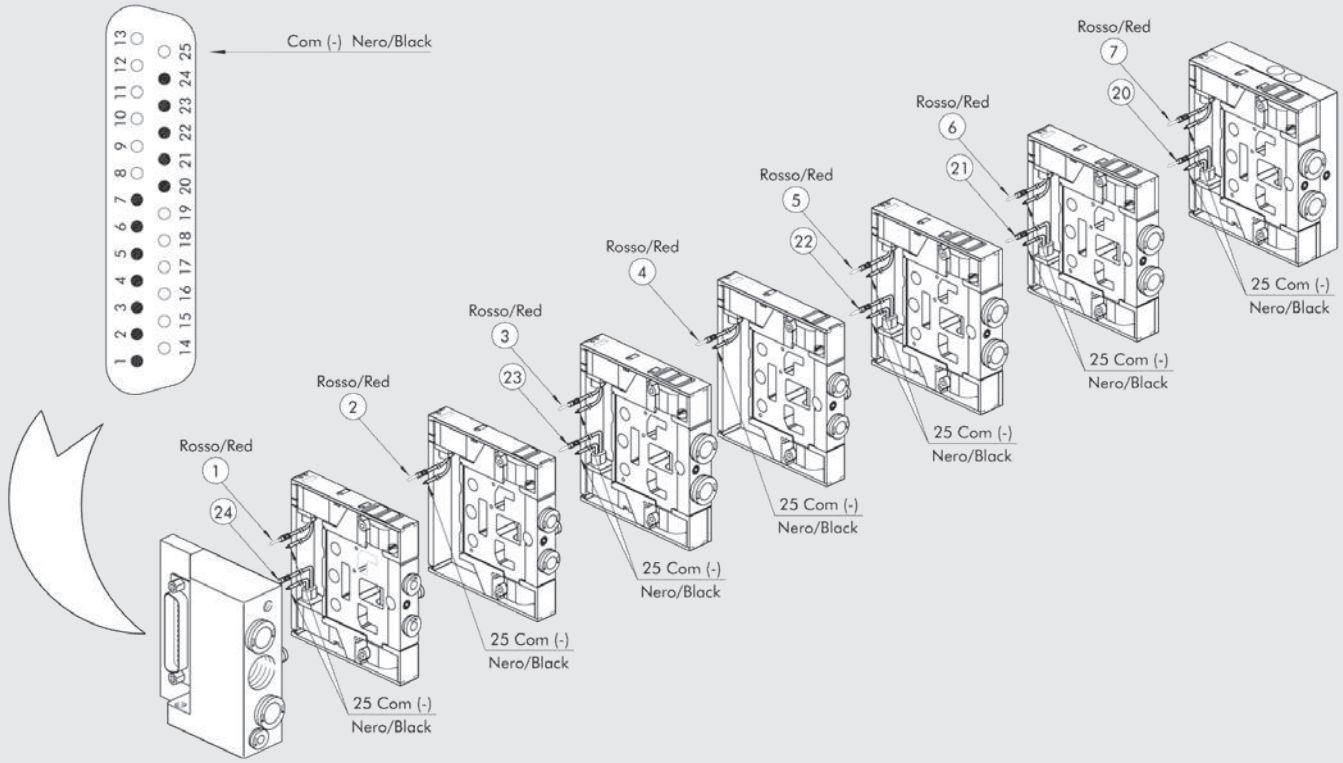

PROFIBUS-DP FOR MULTIMACH AND BASES FOR PLT-10 MULTIPLE CONNECTION

The expandable modular slaves for Multimach and bases for PLT-10 multiple connection follow the same application philosophy of total modularity common to the Multimach system. With full freedom, the slave can be configured by fitting the various modules offered:

- The slave is mounted on a 35 mm DIN bar, next to the Multimach unit.
- The slave is connected to the island via the multiple spring connector of the digital 8-output modules with the 9-pin or 25-pin valve island plug connector, using multi-pin cables.
- Using 1, 2 or 3 digital 8-output modules, it is possible to manage 8, 16 or 24 controls of either one or different valve islands
- Up to 32 additional modules can be fitted alongside the digital 8-output modules to manage other inputs and outputs.
  These modules are electrically connected together, using a small plate-connector (housed under the modules, inside the DIN bar).
- There are 4 other types of modules available: for 8 digital inputs; for 8 digital outputs; for 4 analogue inputs and for 4 analogue outputs.
- With this system, a maximum of total 256 Inputs/Outputs can be managed with just one slave!

TECHNICAL DATA		
Supply voltage		24 VDC + 20% - 15%
EMC and ESD test		in compliance with IEC 801-2/IEC 801/4 (up to level 3: 8kV/2kV)
Resistance to vibration and impacts test		according to IEC68-2-6/IEC 68-2-27 (1g/12g)
Operating temperature range	°C	0 to 60
Storage temperature	°C	-40 to + 85
Admitted relative humidity		95%
Assembly		On Omega bar (DIN EN 50022) size 35 x 7 or 35 x 15

THE MULTIMACH WORLD: SLAVES, INPUTS AND OUTPUTS

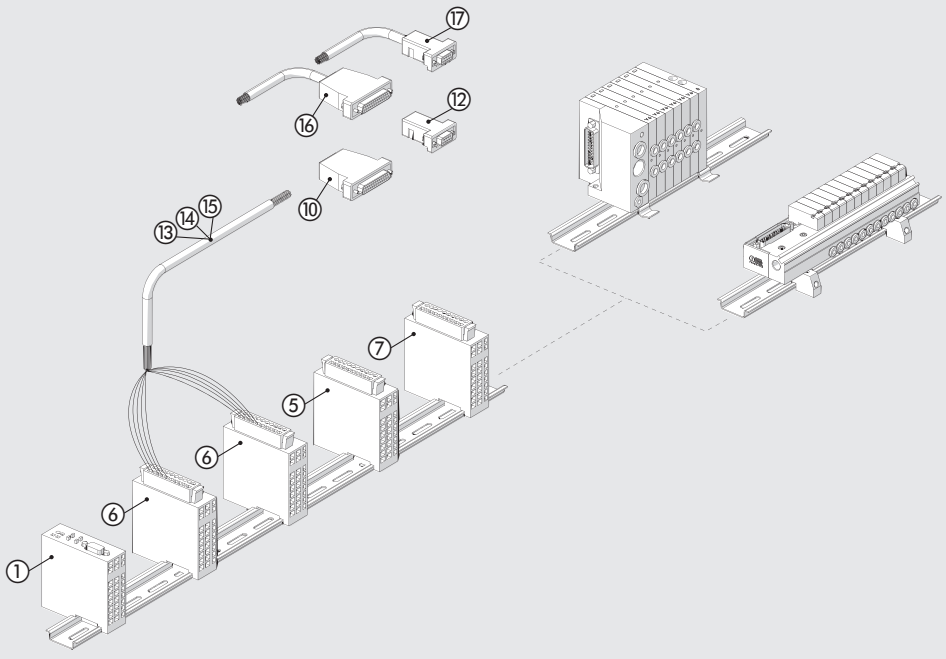

For the connection of the solenoid valve island to the Profibus ① system, the cables ⑬, ⑭, ⑮ must be electrically connected to the digital 8-output modules ⑥. If the number of valve controls is less than or equal to 8, use the 10-pin cable and one module ⑥. If it is less than or equal to 16, use the 19-pin cable and two modules ⑥. With up to 24 valve controls, use 25-pin plug connectors ⑪, the 9-pin plug connector ⑫ or pre-wired connectors ⑯ or ⑰.
You can connect each DIGITAL 8-OUTPUT module ⑥ to a solenoid valve island.

① SLAVE PROFIBUS-DP 24 OUTPUT

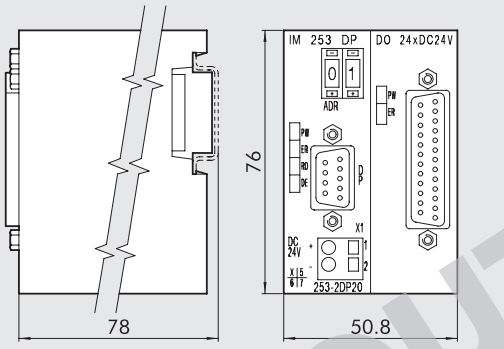

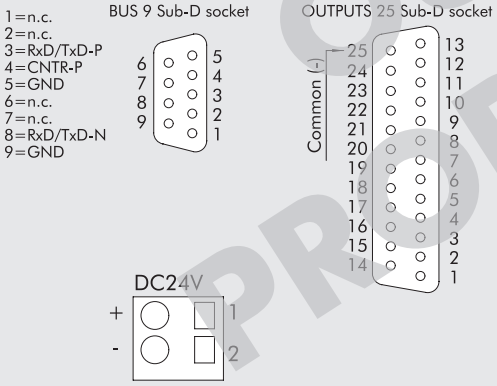

Code	Slave kit
0240004002	Slave PROFIBUS+DO24xDC24V

Technical data	
PROFIBUS-Interface	RS485: 9 pins D-Sub
Transmission speed	9.6 kBaud up to 12 Mbaud
Max number of modules which can be connected	31 (depending on the maximun corrent)
Output interface	25 pins D-Sub
Number of outputs	24
Output data	4 Byte (3used +1)
Nominal supply voltage	24 VDC
Maximum current for each output	1A, max total 4A
Absorption 24V (out excluded)	800 mA

OUT OF PRODUCTION

① SLAVE PROFIBUS-DP

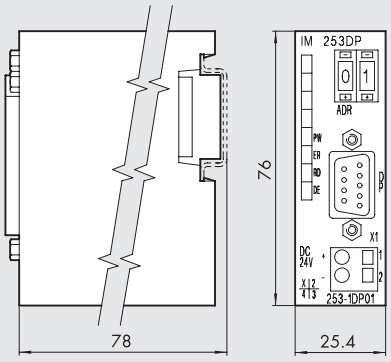

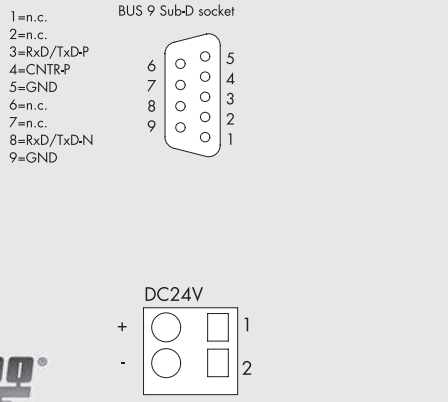

Code	Description
0240004003	Slave PROFIBUS-DP

Technical data	
PROFIBUS-DP Interface	RS485: 9 pins D-Sub
Transmission speed	9.6 kBaud up to 12 Mbaud
Max number of modules which can be connected	32 (depending on the maximun corrent)
Nominal supply voltage	24 VDC
Absorption 24V	70 mA

⑤ 8-DIGITAL INPUT MODULE

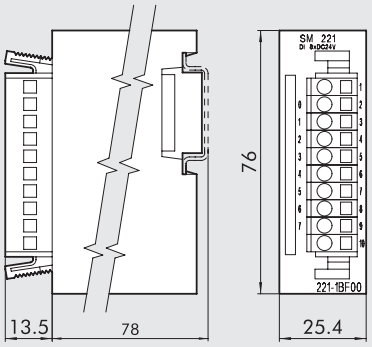

Code	Description
0240004053	DI 8XDC24V unit

Technical data	
Nominal input voltage	24 VDC
Number of inputs	8
Input data	1 Byte
Input voltage at "1"	15…28.8V
Output voltage at "0"	0…5V
Response time	3 ms
Internal Bus voltage	5V
Absorption 5V BUS	20 mA

⑥ 8-DIGITAL OUTPUT MODULE

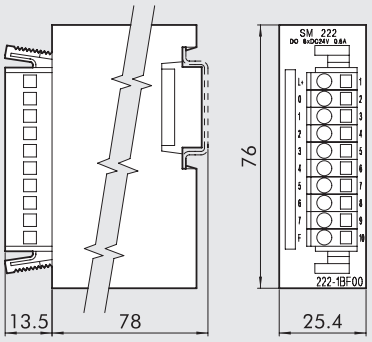

Code	Description
0240004051	DO 8XDC24V 0.5A unit

Technical data	
Nominal voltage	24 VDC
Number of outputs	8
Output data	1 Byte
Absorption for each channel	1A (max 8A)
Internal Bus voltage	5V
Absorption 5V BUS	70 mA

⑦ 4-ANALOG INPUT MODULE



Code	Description
0240004054	AL 4X16 BIT unit

Technical data	
Number of Inputs	4
Input data	8 Byte
Input range	Voltage 0 to 50 mV, 0...10V, ± 4 mV, ± 4V, ± 10V, Current 0/4…20 mA, +/-20 mA Temperature Pt100, Pt1000, Ni100, Ni1000 Resistance 60 Ω, 600 Ω, 3000 Ω, 16000 Ω Thermoelements J, K, N, R, T, S
Resolution	12/16 Bit
Input resistance	20M Ω voltage, 85 Ω current
Time	5…70 ms
Internal Bus voltage	5 V
Absorption 5V BUS	280 mA

⑧ 4-ANALOG OUTPUT MODULE



Code	Description
0240004055	AO 4X12 BIT unit

Technical data	
Number of outputs	4
Output data	8 Byte
Output range	Voltage 0…10V, ±10V, 1…5V
	Current 0…20 mA, 4…20 mA, ±20 mA
Resolution	12 BIT
Output resistance	Minimum voltage 1 kΩ, Maximum current 500 Ω
Conversion time	0.45 ms
Internal Bus voltage	5 V
Absorption 5V BUS	75 mA

⑪ 25-PIN PLUG CONNECTOR KIT

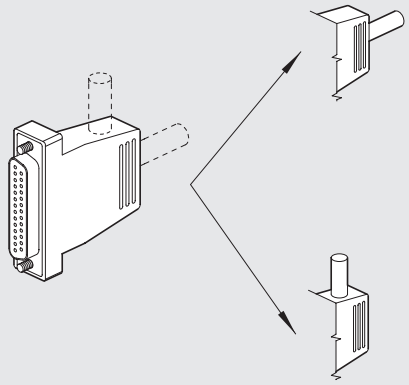

Code	Description	Weight [g]
0226180101	25-pin plug connector	48

⑫ 9-PIN PLUG CONNECTOR, STRAIGHT



Code	Description	Weight [g]
0226180102	9-pin plug connector	20

⑬ ⑭ ⑮ CABLES



Code	Description	Weight [g/m]
0226107201	10-wire cable	60
0226107101	19-wire cable	122
0226107102	25-wire cable	130

Indicate the desired length in metres

NOTES

METAL WORK PNEUMATIC

⑯ ⑰ STRAIGHT PRE-WIRED CONNECTOR KIT

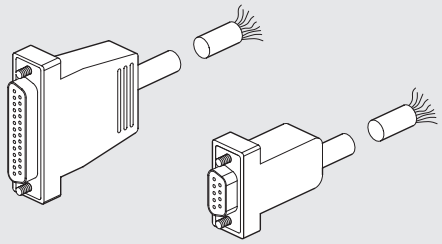

Code	Description	Weight [g]
0226900100	Straight D-Sub 9-PIN connector + cable L = 1 m	80
0226900250	Straight D-Sub 9-PIN connector + cable L = 2.5 m	170
0226900500	Straight D-Sub 9-PIN connector + cable L = 5 m	320
0226900750	Straight D-Sub 9-PIN connector + cable L = 7.5 m	470
0226901000	Straight D-Sub 9-PIN connector + cable L = 10 m	620
0226901500	Straight D-Sub 9-PIN connector + cable L = 15 m	920
0226902000	Straight D-Sub 9-PIN connector + cable L = 20 m	1220
0226905000	Straight D-Sub 9-PIN connector + cable L = 50 m	3020
0226920100	Straight D-Sub 25-PIN connector + cable L = 1 m	132
0226920250	Straight D-Sub 25-PIN connector + cable L = 2.5 m	320
0226920500	Straight D-Sub 25-PIN connector + cable L = 5 m	636

⑯ ⑰ PRE-WIRED 90° CONNECTOR

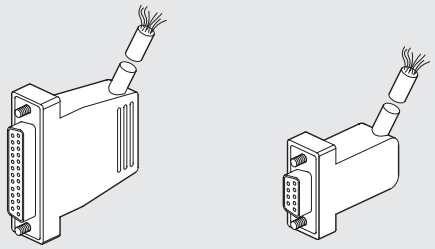

Code	Description	Weight [g]
0226910100	90° D-Sub 9-PIN connector + cable L = 1 m	80
0226910250	90° D-Sub 9-PIN connector + cable L = 2.5 m	170
0226910500	90° D-Sub 9-PIN connector + cable L = 5 m	320
0226910750	90° D-Sub 9-PIN connector + cable L = 7.5 m	470
0226911000	90° D-Sub 9-PIN connector + cable L = 10 m	620
0226911500	90° D-Sub 9-PIN connector + cable L = 15 m	920
0226930100	90° D-Sub 25-PIN connector + cable L = 1 m	132
0226930250	90° D-Sub 25-PIN connector + cable L = 2.5 m	320
0226930500	90° D-Sub 25-PIN connector + cable L = 5 m	636

WIRING DIAGRAM FOR PRE-WIRED PLUG CONNECTORS

25 PIN						9 PIN	
Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire	Position of electrical contact	Colour of the corresponding wire
1	blue/black	10	brown/white	19	yellow/black	1	green/black
2	red/brown	11	red/orange	20	white	2	white
3	white/black	12	light blue	21	blue/white	3	blue/black
4	red/blue	13	yellow/white	22	brown	4	blue
5	black/orange	14	yellow	23	green/white	5	yellow/black
6	yellow/red	15	red/green	24	red	6	yellow
7	black/brown	16	orange	25	green/black	7	red/black
8	white/red	17	orange/white			8	green
9	red/black	18	green			9	white/black

NOTES

MULTIMACH + B&R

An advanced field bus system interfacing with the Multimach world.
B&R has developed a new standard for automation, called FORMULA X.
For further details about features, functions and qualities of this system, referance must be made to the B&R documentation, also available on the web site www.br-automation.com
Refer to page **B2**.139 for details of IP20 and IP67 intelligent connectors and X67 modules.
B&R smart connectors can be connected to Multimach islands using the Multimach connector support for B&R presented below.

APPLICATIONS OF B&R MODULES TO THE MULTIMACH CONNECTOR SUPPORT

Refer to page **B2**.179 for valves, intermediates elements and common accessories.

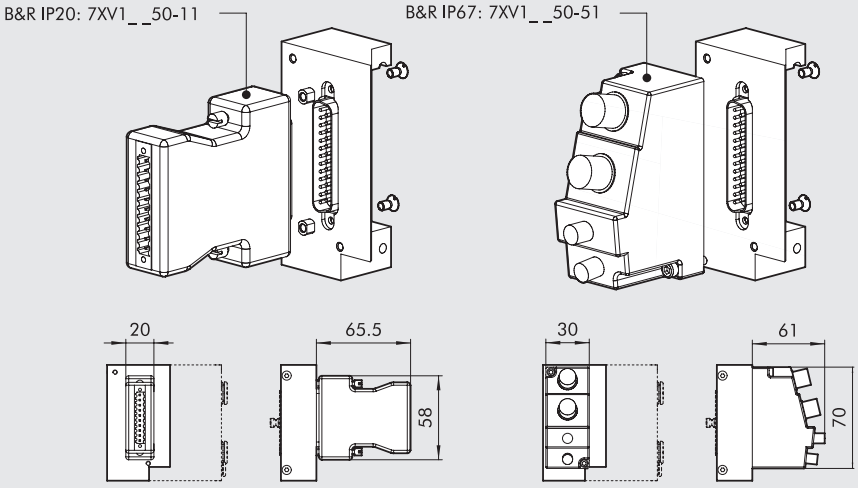

MULTIMACH CONNECTOR SUPPORT FOR B&R

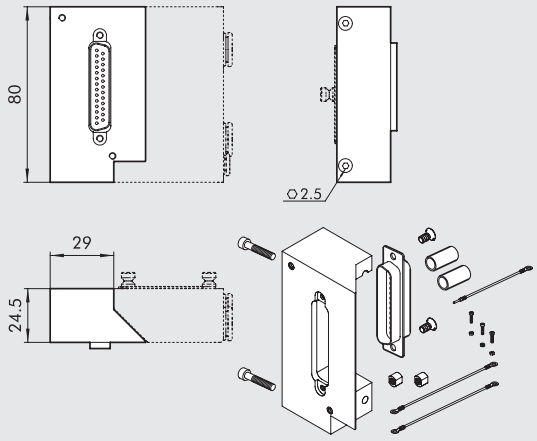

Code	Description	Weight [g]
0226180005	25-pin connector support kit for B&R	140

INPUT/OUTPUT PROFIBUS-DP IP 67 M12

METAL WORK PNEUMATIC

The Profibus-DP IP 67 is a robust metallic slave that can be connected flexibly sing M12 connectors to outputs and solenoid valves and/or inputs.
Each connector can be used freely for:
- 1 Output + 1 diagnostic Input
- 2 Outputs
- 1 Output + 1 Input
- 2 Inputs
- 1 Input + 1 diagnostic Input

Each slave can handle a total of 16 signals, each according to one of the above combinations.
Diagnostics provides information on the type and location of the error of each channel with:
- de-activation of the coupling point "involved" and not the complete module;
- signal to the controller;
- display with local LEDs.

One single slave or an island of solenoid valves complete with slave and connectors can be ordered. The catalogue shows the 1/8" and 1/4" valve islands in the 70 series and the ISO5599 valve islands, size 1 and size 2.

TECHNICAL DATA

Application		8 inputs or outputs + 8 inputs or outputs or diagnostic
Supply voltage		24 VDC (18V.....30,2V), according to EN 61131-2
Degree of protection		IP67
Temperature		0 to 55°C (32 to 131° F)
Field Bus Data	Transmission protocol	Profibus-DP EN 50170
	Transmission mode	synchronous or Freeze-Mode
	Transmission speed	12MBit/s
	Addresses	rotating switches BCD, 0.....99
Inputs Output Technical Data	Type	pnp proximnity sensors or EN 61131-2 compatable mechanical limit switch
	Supply	24 VDC (18-30.2V) to EN 61131-2; ≥ 200 mA for M12 coupling point.
	Indicator	One LED for each
Output Technical Data	Voltage	24 VDC (18-30.2V) output, to EN 61131-2; cumulative I ≥ 9A
	Maximum current for each actuator	1.6 A, system protected by fuse in case of short-circuit
	Maximum current contemporary	10W
	Maximum signal exchange frequency	20 Hz Ohm, 20 Hz induction
	Indicator LED	One LED for each output
Autotest	Field bus	RUN-LED
	Insufficient voltage signal	LED + alarm signal to master
	Short-circuit sensor INPUT or OUTPUTS	Red LED for channel on M12 coupling point
Autotest	Desina® (pin 2)	PIN 2 diagnostic with red LED for M12 coupling point and signal to master
		N.B.: for the disposition of the contact, please look at the connectors at the following pages

COMPONENTS

① ② IN-OUT diagnostic connectors
③ Led Power, Error, Run
④ IN feeding connector
⑤ OUT feeding connector
⑥ IN BUS connector
⑦ OUT BUS connector
⑧ Rotaring switches for addressing
⑨ Diagnostic LED for single channel

BUS IN/OUT
1 = VP
2 = A (green)
3 = DGN
4 = B (red)
5 = Sch
Thread, Sch

POWER-SUPPLY IN/OUT
1 = GND
2 = GND
3 = PE
4 = Sensor feeding
5 = Actuator feeding

IN/OUT CONNECTORS
1 = +24 VDC
2 = Diagnostic input
Digital input → Closure contact
Opening contact
Digital output
3 = O VDC
4 = Digital input → Closure contact
Opening contact
Digital output
5 = PE

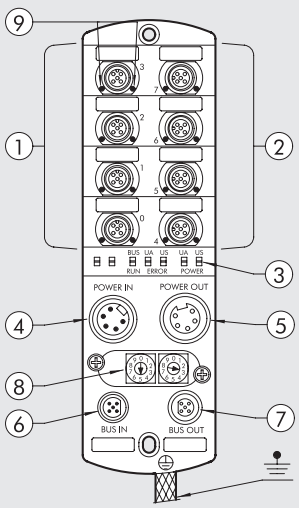

SLAVE IP67

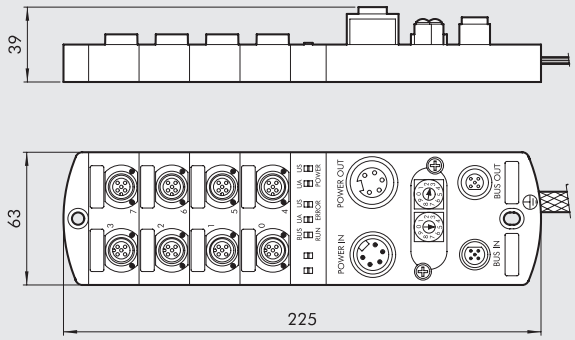

Code	Description
0240008001	8 I/O + 8 I/O/autotest Profibus

IP67 SLAVE, COMPLETE WITH SERIES 70 VALVES

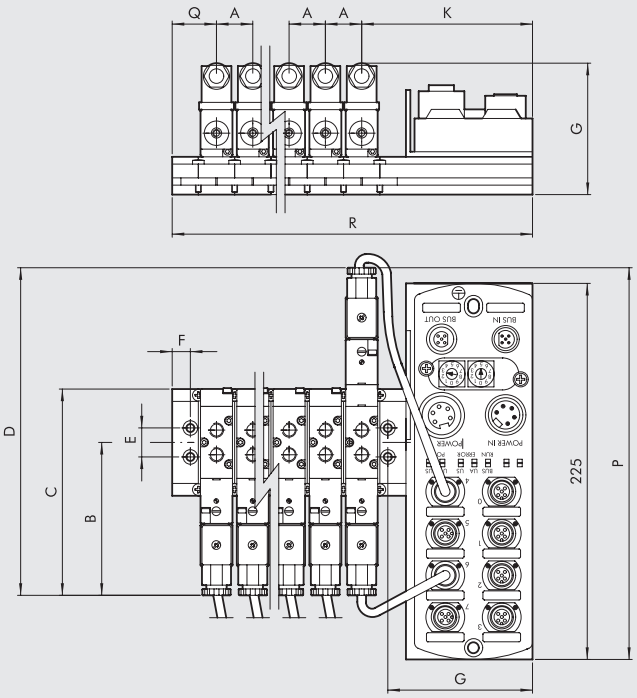

A	B	C	D	E	F	G	K	P	Q	R
1/8" Manifold										
25	105	142	225	20	12.5	85.8	103.5	230	305	Q + K + (A x *n°-1)
1/8" Multiple										
25	105	142	225	20	7	98	115	230	24	Q + K + (A x *n°-1)
1/4" Manifold										
27	112	156	239	25	10	85.5	104.5	237	31.5	Q + K + (A x *n°-1)
1/4" Multiple										
27	112	156	239	25	7	98	118	237	27	Q + K + (A x *n°-1)

***n** = number of mounted valves

N.B.: the unit is supplied complete with cables for valves

SYNOPTIC, SIZES AND VERSIONS

B U S	P	V	B	O	0 2	D D
	P Profibus	**V** IP67	**B** 70 1/8" **C** 70 1/4"	**O** Multiple base	**02** 2 positions **04** 4 positions **06** 6 positions **08** 8 positions **10** 10 positions **12** 12 positions **14** 14 positions **16** 16 positions	**D** SOV 23 SOS NO - SOV 33 SOS NO **H** SOV 23 SOS NC - SOV 33 SOS NC **Z** SOV 23 SOB 00 - SOV 33 SOB 00 **M** SOV 25 SOS 0 - SOV 35 SOS 00 **J** SOV 25 SOB 00 - SOV 35 SOB 00 **G** SOV 26 SOS CC - SOV 36 SOS CC **E** SOV 26 SOS OC - SOV 36 SOS OC **B** SOV 26 SOS PC - SOV 36 SOS PC **A** Blanking plate

METAL WORK PNEUMATIC

IP67 SLAVE, COMPLETE WITH ISO VALVES

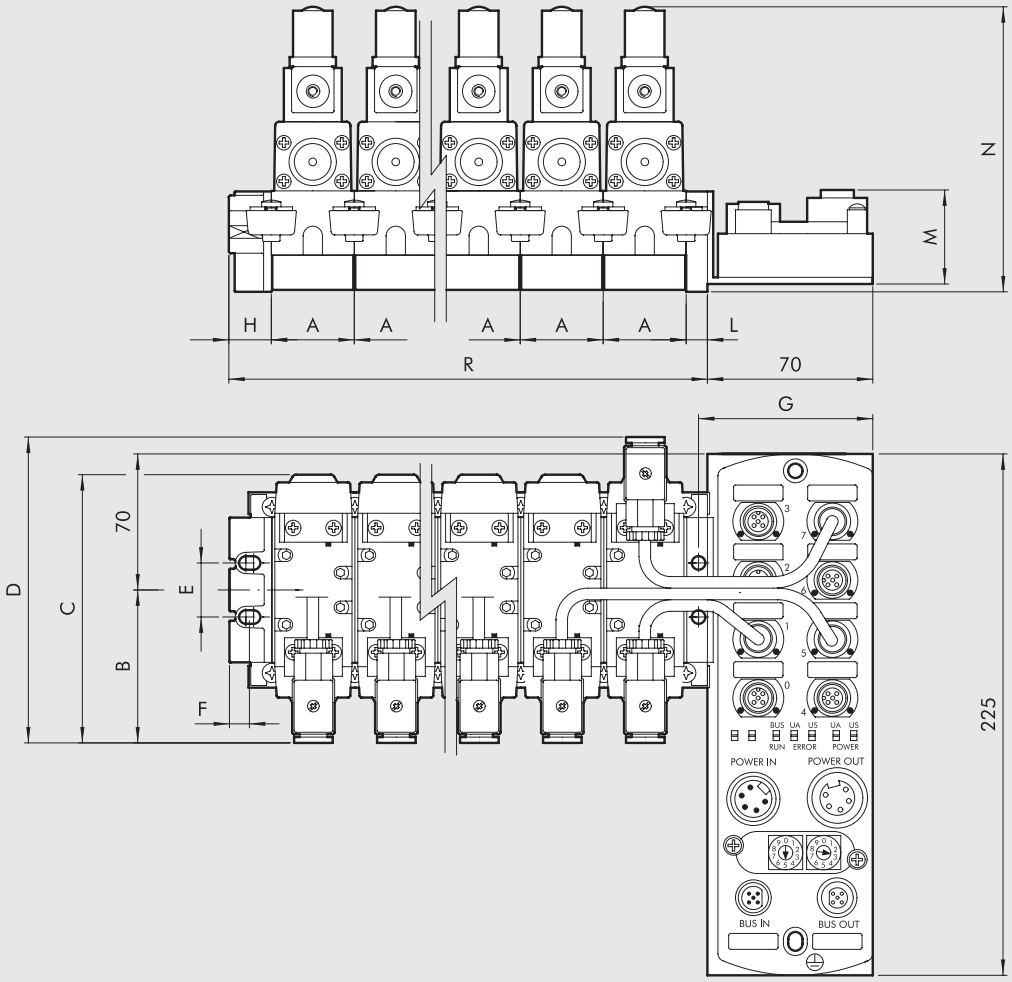

	A	B	C	D	E	F	G	H	L	M	N	P	R
ISO1	43	80	140	158	28	10.5	76.4	22	11	47	150	230	H + L + (A x *n°)
ISO2	56	90	165	180	35	12.5	77.5	26	14	61	178	240	H + L + (A x *n°)

***n** = number of mounted valves

N.B.: the unit is supplied complete with cables for valves

SYNOPTIC, SIZES AND VERSIONS

B U S	P	V	D	1	0 2	M M
	P Profibus	**V** IP67	**D** ISO1 **E** ISO2	**1** Manifold base side	**02** 2 positions **04** 4 positions **06** 6 positions **08** 8 positions **10** 10 positions **12** 12 positions **14** 14 positions **16** 16 positions	**M** ISV 55 SOS 00 - ISV 65 SOS 00 **J** ISV 55 SOB 00 - ISV 65 SOB 00 **G** ISV 56 SOS CC - ISV 66 SOS CC **E** ISV 56 SOS OC - ISV 66 SOS OC **B** ISV 56 SOS PC - ISV 66 SOS PC **A** Blanking plate

ACCESSORIES

90° ELBOW WITHOUT CABLE



Code	Description
0240009001	90° Elbow without cable

STRAIGHT FITTING WITHOUT CABLE





Code	Description
0240009021	Straight fitting without cable

90° ELBOW WITH CABLE



Pin	Cable color
1	Brown
2	White
3	Blue
4	Black

Code	Description
0240009022	90° curve with cable 1.5 m
0240009023	90° curve with cable 5 m

STRAIGHT FITTING WITH CABLE





Pin	Cable color
1	Brown
2	White
3	Blue
4	Black

Code	Description
0240009002	Straight, with 1.5 m cable
0240009003	Straight, with 5 m cable

M12 Y-CONNECTOR WITH CABLE

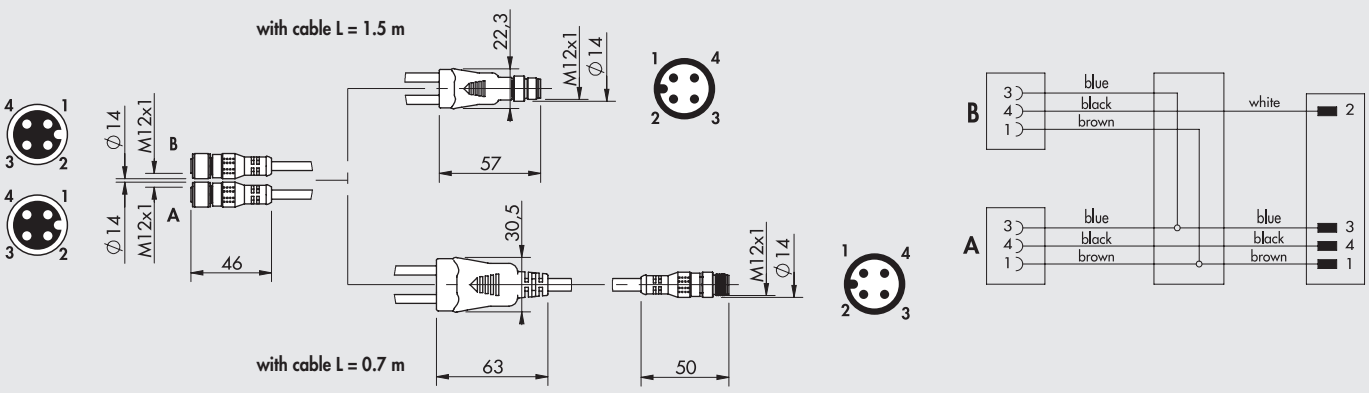

Code	Description
0240009032	Y-connector M12 4-pin M / double M12 4-pin F with cable L = 1.5 m
0240009049	Y-connector M12 4-pin M / double M12 4-pin F with cable L = 0.7 m

METAL WORK PNEUMATIC

MALE CONNECTOR FOR FEEDING "IN"

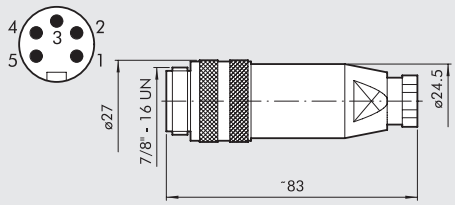

Code	Description
0240009033	Male connector "IN" feeding

FEMALE CONNECTOR FOR FEEDING "OUT"

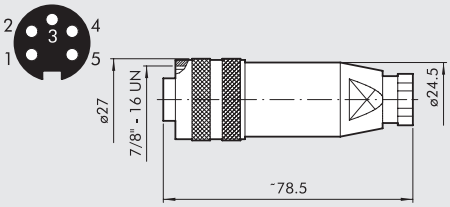

Code	Description
0240009034	Female connector "OUT" feeding

M12 MALE CONNECTOR OUT-BUS

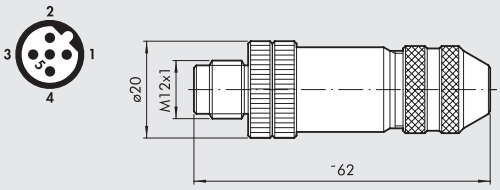

Code	Description
0240009035	M12 male connector B coding

M12 FEMALE CONNECTOR IN-BUS

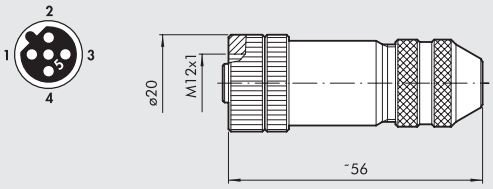

Code	Description
0240009036	M12 female connector B coding

PLUG M12



Code	Description
0240009040	M12 plug

INPUT PROFIBUS-DP IP67 M8

The Profibus-DP "COMPACT" input module is a sturdy
and compact IP67 slave that can be used for connecting up to 8 inputs.
A series of diagnostic functions provides information
on the state of operation through lights and signals to the controller.

TECHNICAL DATA		
Application		8 PNP inputs
Power supply		24 VDC (13-28 V)
Index of protection		IP67
Temperature range		-20 to +70°C RH 5-95% - no condensate
Field Bus technical data	Transmission protocol	DP-VO Profibus to EN 50170
	Transmission mode	Synchronous or Freeze-Mode
	Transfer rate	Up to 12 MBit/s
	Addresses	Rotary switches, 1...99
Input technical data	Type	PNP proximity sensors or IEE 1131-2 compact mechanical stop
	Power supply	24 VDC (18 to 28 V)
	Signal	One green LED for each input
	Input 0 signal voltage	2...5 V
	Input 1 signal voltage	10...30 V
Diagnosis	Field bus	"NET" LED+alarm signal to master
	INPUT short-circuit sensor	Red LED for each channel at M8 connection point M8 (600 mA)

SLAVE IP67

Code	Description
0240008002	IP67 M8 PROFIBUS INPUT

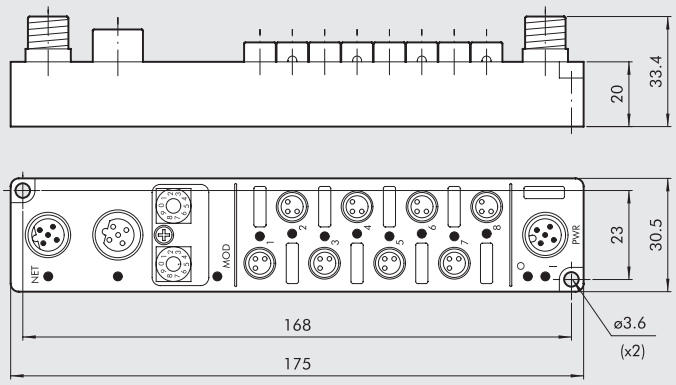

PIN ASSIGNMENT

PROFIBUS CONNECTORS

BUS OUT
M12 female connector
B coding for profibus

1 - 5 VDC power
2 - Bus A
3 - GND
4 - Bus B
5 - Shield





BUS IN
M12 male connector
B coding for profibus

1 - 5 VDC power
2 - Bus A
3 - GND
4 - Bus B
5 - Shield

POWER CONNECTOR

M12 male connector
A coding

1 - Power supply module and input
2 - NC
3 - GND
4 - GND
5 - Grounding





INPUT CONNECTORS

M8 three-pole female connector
A coding

1 - 24VDC
3 - GND
4 - INPUT

LED ASSIGNMENT

NETWORK
- (red): slave not configured or not communicating with master
- (green): slave configured and communicating with master

MODULE FAILURE
- (red): check signal LEDs

Channel LEDs (inputs)
- (green): input enabled
- (red): sensor faulty, +24V power supply short-circuit

NOT USED

INPUT MODULE POWER SUPPLY
- (green): on



M12 BUS-OUT MALE CONNECTOR



Code	Description
0240009035	M12 male connector, B coding

M8-M12 PLUG

Code	Description
0240009039	M8 plug
0240009040	M12 plug

M8 ADAPTER CABLE FOR CONNECTION OF THE PRESSURE SWITCH

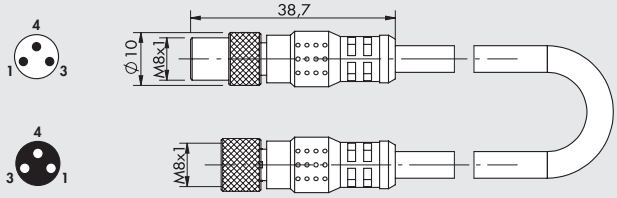

Code	Description
0240010501	M8-M, M8-F 3-pole adapter with cable L = 0.3 m

Note: Can be used for connecting **1/8-1/4**, **Syntesi®**, **Skillair®**, **PRS L** pressure switches.
Contact type NO (Normally open).

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 3	pin 4	Signal NO
pin 4	pin 3	Disconnect

M8 INPUT CONNECTOR



Code	Description
0240009010	M8 3-pin straight connector

M12 STRAIGHT SUPPLY CONNECTOR WITH CABLE

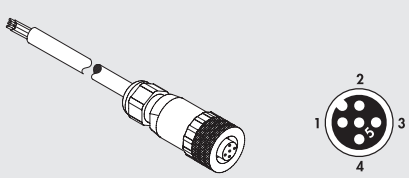

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Grey

Code	Description
W0970513002	5-pin M12x1 straight connector with 5 m cable

M12 90° SUPPLY CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Grey

Code	Description
W0970513004	M12x1 5-pin 90° connector with 5 m cable

M12 BUS-IN FEMALE CONNECTOR



Code	Description
0240009036	M12 female connector, B coding

M8 INPUT CONNECTOR WITH CABLE

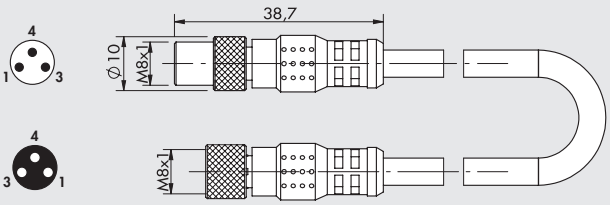

Code	Description
0240009009	M8-M8 straight connector with 3 m cable

M12 STRAIGHT SUPPLY CONNECTOR



Code	Description
W0970513001	5-pin M12x1 straight connector

M12 90° SUPPLY CONNECTOR



Code	Description
W0970513003	M12x1 5-pin 90°connector

SUMMARY PROCESS VALVES MULTIPLE FLUIDS

METAL WORK PNEUMATIC

- **MULTIPLE-FLUID PROCESS VALVES** B3.2

- **SOLENOID VALVES, SERIES EV-FLUID** B3.4

- SOLENOID VALVES, SERIES EV-FLUID, DIRECT ACTING B3.5

- SOLENOID VALVES, SERIES EV-FLUID, SERVO-ASSISTED ACTION B3.11

- SOLENOID VALVES, SERIES EV-FLUID, MIXED ACTION B3.15

- COILS AND CONNECTORS FOR EV-FLUID SERIES SOLENOID VALVES B3.17

- **ACTUATED VALVES SERIES RV-FLUID** B3.19

- ACTUATED BALL VALVES SERIES RV-FLUID B3.20

- ACTUATED BUTTERFLY VALVES SERIES RV-FLUID B3.30

- ROTARY ACTUATOR SERIES R4 B3.33

- ACCESSORIES PARTS FOR ACTUATED VALVES SERIES RV-FLUID B3.40
- SPARES PARTS FOR ACTUATED VALVES SERIES RV-FLUID B3.41

MULTIPLE-FLUID PROCESS VALVES

There are products designed for normal operation with compressed air that are not suited for application in certain industrial sectors. Let's take, for example, fluid metering plants, steam-conveying plants or chemicals treatment plants. These applications, which are identified by the generic term of "process industry", require the use of component parts that are designed and manufactured with specific materials, undergo special treatments and engineered solutions, featuring particular requirements.
This section of the catalogue illustrates a vast range of products best suited to intercept and control the flow of fluids, such as water, steam, mineral oi and numerous chemicals.
More specifically, the range includes solenoid valves (series EV-FLUID) and ball or butterfly valves with a rotary actuator (series RV-FLUID).
Solenoid valves can be classified according to their function (2/2 NC, 2/2 NO, 3/2 NC and NO), type of operation (direct-acting, servo-assisted action or mixed action), the threading of ports, the size of the orifice, the material of the body (brass or stainless steel) and the gasket materials.
Ball-acting valves can be classified according to their function (2- or 3-way), the threading of ports, the orifice, the actuator interface (to ISO 5211), the material of the body (brass or stainless steel) and the gasket materials.
Butterfly valves, which can be the "Wafer" type for installation between pipes or the Lug type for installation at the end of the system, are generally made of painted cast iron and come with orifices in various diameters and gaskets in different materials.

The main materials used for gaskets are NBR, FKM-FPM, EPDM and PTFE.
NBR is used at medium temperatures with water, air, mineral oils and hydrocarbon media; FKM.FPM is used at medium-high temperatures, with the exception of steam; EPDM is best suited for steam and detergents; PTFE is suite for general use at high temperatures. The precise temperature range is specified for each family. The compatibility table can be consulted by logging on to www.metalwork.it .

CALCULATING THE FLOW RATE

Each valve has a flow coefficient Kv.
Given the acceptable pressure drop, the media type and the working pressure, with this data it is possible to calculate the flow rate and the sizing.
This coefficient is determined by way of experimentation, according to the standard VDE 2173 and it represents the quantity of water passing through the valve in 1 minute with a differential pressure of 1 bar and a temperature between 5°C and 40°C.

Kv coefficient measuring circuit

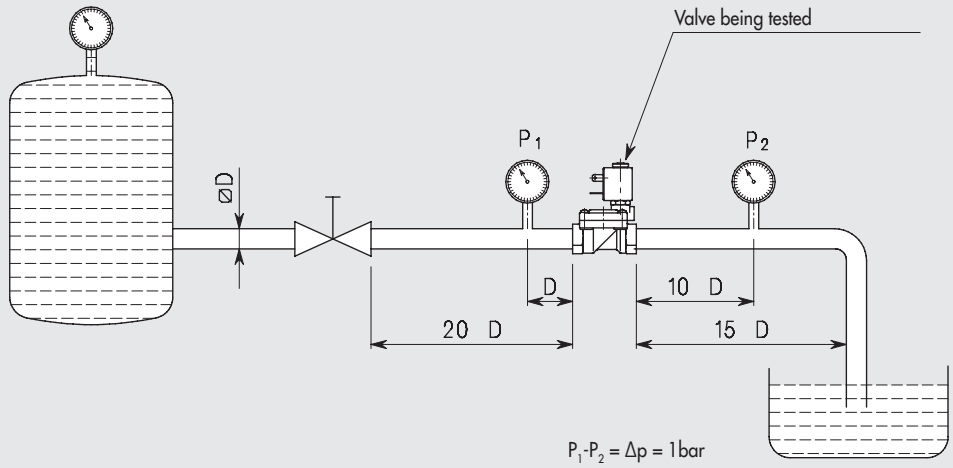

METAL WORK PNEUMATIC

Kv	= m^3/h	Hydraulic coefficient
Q	= m^3/h	Flow rate
Q_n	= m^3n/h	Portata normale (20°C 760 mmhg)
P_1	= bar	Absolute upstream pressure (Gauge pressure +1)
P_2	= bar	Absolute outlet pressure (gauge pressure +1)
Δp	= bar	Pressure drop (differential pressure between inlet and outlet)
ρ	= kg/dm^3	Relative density referred to water (water 4°C = 1)
ρ_n	= kg/dm^3	Normal density referred to air
G	= kg/h	Mass
t	= °C	Inlet fluid temperature
V_1	= m^3/kg	Inlet specific volume
V_2	= m^3/kg	Outlet specific volume referred to pressure "P_2" and temperature "t"

Liquids: $Q = Kv \sqrt{\frac{\Delta p}{\rho}}$

Gas: $\Delta p = \Delta p < P_1/2$ $\quad Q_n = 514 \times Kv \sqrt{\frac{\Delta p \times P_2}{\rho_n \times (273 + t)}}$

$\Delta p = \Delta p > P_1/2$ $\quad Q_n = 257 \times Kv \frac{P_1}{\sqrt{\rho_n (273 + t)}}$

Air: $\Delta p = \Delta p < P_1/2$ $\quad Q_n = 26 \times Kv \sqrt{\Delta p \times P_2}$

$\Delta p = \Delta p > P_1/2$ $\quad Q_n = Kv \times P_1 \times 13$

Vapour: $\Delta p = \Delta p < P_1/2$ $\quad G = 31.6 \times Kv \sqrt{\frac{\Delta p}{V_2}}$

$\Delta p = \Delta p > P_1/2$ $\quad G = 31.6 \times Kv \sqrt{\frac{P_1}{V_1}}$

Below are some examples of specific gravities of liquid substances, gases or vapours

Liquid substances

Liquid	Temperature °C	Specific weight kg/dm^3
Water, sea	77°F	1.025
Water, pure	4	1
Ethylene glycol	25	1.1
Milk	15	1.035

Gases and vapours at 20°C and 1atm*

Gases or vapours	Relative density to air	Specific weight gr/dm^3
Air *	1.00	1.205
nitrogen (atomospheric)	0.97	1.172
Water vapor	0.62	0.749

* NTP - Normal Temperature and Pressure - is defined as air at 20°C and 1 atm. Specific gravity is the ratio between the density (mass per unit volume) of the actual gas and the density of air, specific density has no dimension. The density of air at NTP is 1.205 kg/m^3.

SOLENOID VALVES, SERIES EV-FLUID

The EV-FLUID series consists of a vast range of solenoid valves, with a brass or stainless steel body, suited to intercept the different types of fluid. Available in 2/2 or 3/2, normally closed or normally open, and with different types of action: direct, servo-assisted or mixed (also called assisted-lift).
The size of the inlet and outlet threads, as well as that of the nominal orifice, can be chosen from among a vast range.
Versions with NBR, FKM/FPM, EPDM or PTFE gaskets are available, depending on the models.
The coils, which are designed and optimized specifically for this type of solenoid valves, are available for operation with different voltage ratings. They are divided by power and dimension into four types (type 2, type 3, type 4 and type 5). The coupling between each solenoid valve and the type of matching coil is illustrated in the dedicated section of the catalogue.

RESPONSE TIME

The Response time of a solenoid valve series EV-FLUID, is the period passing betweenthe energisation (or de-energisation) of the coil and the moment when the outlet pressure reaches the 50% of its peak.
The response time depends from the type of valve, the nature of the medium, the pressure and the current (AC or DC), if these value are measured at the moment of electrical connection or disconnection.

Tipologia	Response time at 6 bar [ms]		Notes
	Opening (TRA)	Closing (TRR)	
2 and 3 ways direct acting NC	8	25	with liquids +50% to +150% depending on the viscosity
2 and 3 ways direct acting NO	25	8	
Servo-assisted NC			
3/8″ - 1/2″	30	50	
3/4″ - 1″	50	70	
Servo-assisted NO			
3/8″ - 1/2″	50	30	
3/4″ - 1″	70	50	
For Servo-assisted 1 ¼″ - 1 ½″ - 2″ the response times vary about the model and operating conditions (viscosity, fluid, temperature, etc.)			

NOTES

SOLENOID VALVES, SERIES EV-FLUID, DIRECT ACTING

In direct-acting EV-FLUID series solenoid valves the orifice is closed (or opened) by the movement of a rubber poppet placed on a moving core made of ferromagnetic steel.
The moving core, which is normally kept in the resting position by a spring, is moved thanks to the action of the magnetic field generated by the coil that is mounted on the valve. The sleeve supporting the coil can be retracted or incorporated into the valve body (depending on the model).
Available functions are 2/2 NC, 2/2 NO and 3/2 NC (3/2 NO available on request for some models)
These solenoid valves can operate at a minimum pressure of 0 bar.

TECHNICAL DATA		NBR	FPM/FKM	EPDM	PTFE
Max operating frequency (with air)	Hz	2			
Power consumption		DC: 5 - 6.5 -10 - 27 W / AC: 8 - 11 - 15 - 30 VA			
Voltage available		12 - 24VDC / 24 - 110 - 220 VAC 50/60 Hz			
Voltage tolerance	%	DC: ±10 / AC: –10 to +15			
Type of protection		IP 65 with connector			
Fluid temperature	°C	-10 to +90	-10 to +140	-10 to +140	-10 to +180
Ambient temperature	°C	with coil C.I F: -10 to +55; con with coil C.I H: -10 to +80			
Maximum fluid viscosity		25 cSt (mm^2/s)			
Pressure range, flow rate, weight		See dimensions and ordering codes			
Maximum coil nut torque	Nm	1.5			
Threaded connections standard		ISO 228-1			
Usable fluids / Materials compatibility		Valves that can be used with neutral or slightly aggressive liquid and gas fluids. (Refer to the tables of chemical compatibility of materials in contact with the fluid on www.metalwork.it or contact Metal Work technical service)			

COMPONENTS

① BODY: brass or stainless steel
② SPRING: stainless steel
③ SLEEVE
④ GASKET
⑤ SPRING: stainless steel
⑥ MOBILE CORE
⑦ GASKET
⑧ RING NUT FOR COIL FIXING

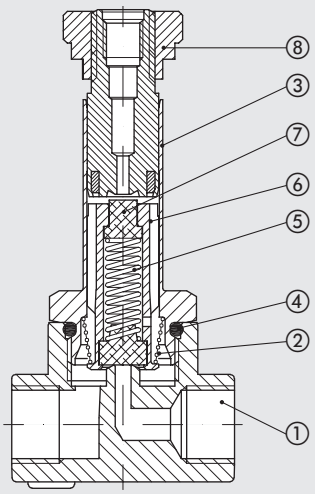

OPERATING CHART

2-WAY DIRECT ACTING

Two-way solenoid valves have an inlet and an outlet connection in the valve body; the orifice is opened or closed by the poppet incorporated in the moving core.
Normally-closed version (2/2 NC): in the resting position, the fluid is intercepted by the poppet; when connected to an electrical supply, the orifice opens allowing the inlet to feed the user port.
Normally-open version (2/2 NO): in the resting position, the orifice is opened and the air is supplied through the user port. When connected to an electrical supply, the orifice closes. In both cases, operation only depends on the magnetic field produced by the passage of current through the coil. Solenoid valves can work at zero pressure.

NORMALLY CLOSED (NC)



NORMALLY OPEN (NO)



3-WAY DIRECT ACTING

Three-way solenoid valves have an inlet connection and a user port in the valve body, plus an exhaust connection in the fixed core; the inlet and outlet orifices are opened or closed directly by the poppets in the moving core.
Normally-closed version (3/2 NC): in the resting position, the incoming fluid is intercepted by the poppet and the user port communicates with the exhaust port. When connected to an electric supply, the inlet orifice opens, and the inlet port communicates with the user port.
The exhaust port is closed.
Normally-open version (3/2 NO): in the resting position, the orifice is opened and the air is supplied through the user port. The exhaust port is closed. When connected to an electric supply, the inlet orifice closes and the exhaust port communicates with the user port.
In both cases, operation only depends on the magnetic field produced by the coil.
Solenoid valves can work at zero pressure.

NORMALLY CLOSED (NC)



NORMALLY OPEN (NO)



NOTES

DIMENSIONS AND ORDERING CODES

VERSION 2/2 NC, BRASS VALVE BODY

G1/8" - G1/4"

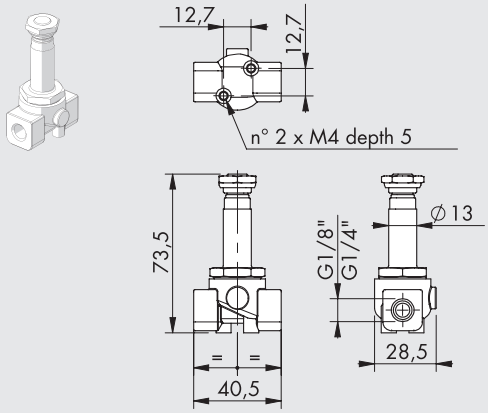

G3/8" - G1/2"

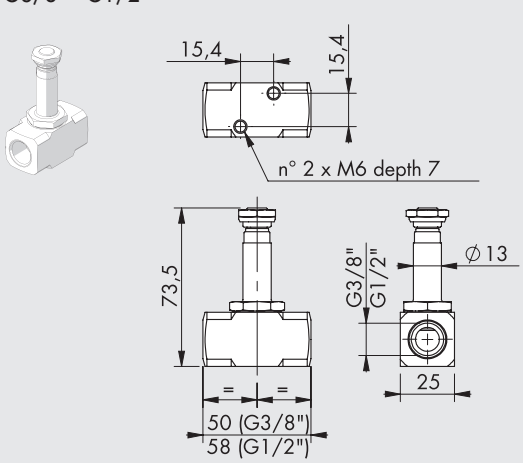



Code	Threaded port	Air hole Ø [mm]	Kv factor [m³/h]	Type of coil	Differential pressure [bar] AC	Differential pressure [bar] DC	Max pressure * [bar]	Weight [g]
W_910100001	1/8"	1.5	0.07	2	0 to 30	0 to 26	80	180
W_910100002	1/8"	2	0.1	2	0 to 22	0 to 20	80	180
W_910100010	1/4"	2.5	0.15	2	0 to 16	0 to 14	80	180
W_910100011	1/4"	3.5	0.32	2	0 to 10	0 to 8	80	180
W_910100012	1/4"	4.5	0.41	2	0 to 6.5	0 to 3.5	80	180
W_910100013	1/4"	5.2	0.47	5	0 to 10	0 to 9	80	180
W_910100017	1/4"	6.4	0.64	5	0 to 5	0 to 4.5	80	180
W_910100020	3/8"	4	0.36	2	0 to 8	0 to 5	80	240
W_910100021	3/8"	3.5	0.32	2	0 to 10	0 to 8	80	240
W_910100022	3/8"	4.5	0.41	2	0 to 6.5	0 to 3.5	80	240
W_910100030	1/2"	5.2	0.47	5	0 to 10	0 to 9	80	240
W_910100031	1/2"	6.4	0.64	5	0 to 5	0 to 4.5	80	240
W_910100032	1/2"	3.5	0.32	2	0 to 10	0 to 8	80	240

To complete the code enter:

0 for NBR gaskets
E for EPDM gaskets
V for FKM/FPM gaskets
T for PTFE gaskets

* The maximum operating pressure is limited to use within the indicated differential pressure range.
The maximum allowable pressure for steam is 6 bar with PTFE gaskets and 2.5 bar with EPDM gaskets.

VERSION 2/2 NC, BRASS VALVE BODY AND DIAPHRAGM POPPET



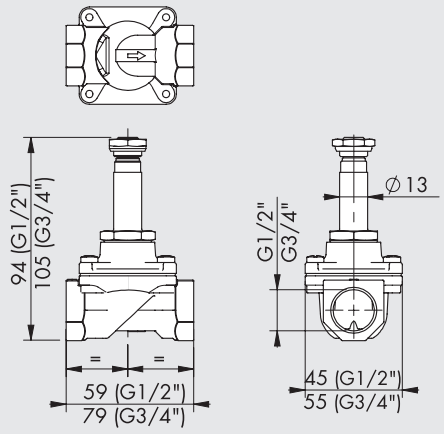



Code	Threaded port	Air hole Ø [mm]	Kv factor [m³/h]	Type of coil	Differential pressure [bar] AC	Differential pressure [bar] DC	Max pressure * [bar]	Weight [g]
W_910700001	1/2"	12	2.2	5	0 to 0.8	0 to 0.4	5	330
W_910700002	3/4"	18	4.5	5	0 to 0.2	0 to 0.12	5	630

To complete the code enter:

0 for NBR gaskets
E for EPDM gaskets
V for FKM/FPM gaskets

* The maximum operating pressure is limited to use within the indicated differential pressure range.

VERSION 2/2 NC, STAINLESS STEEL VALVE BODY

G1/8"

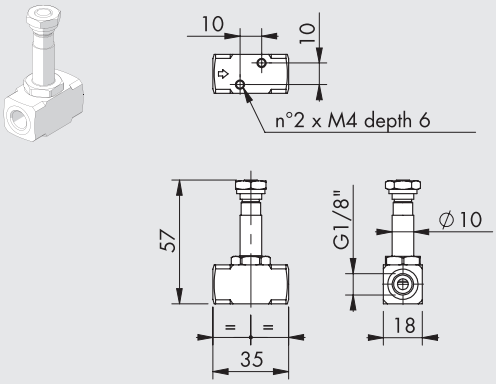

G1/4" - G3/8" - G1/2"

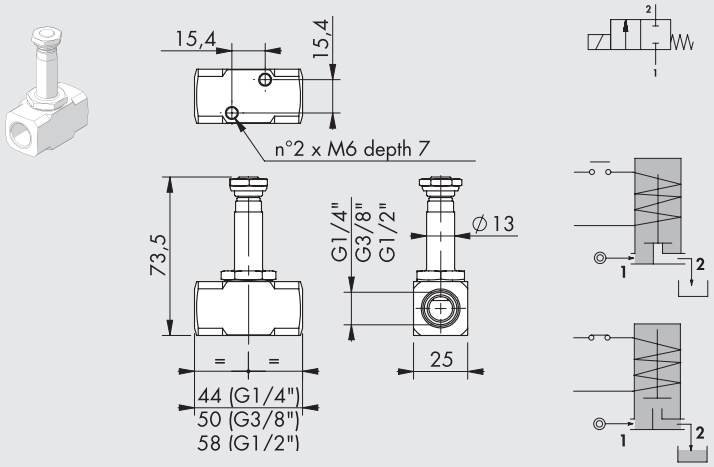

Code	Threaded port	Air hole Ø [mm]	Kv factor [m³/h]	Type of coil	Differential pressure [bar] AC	Differential pressure [bar] DC	Max pressure * [bar]	Weight [g]
W_910300001 ▲	1/8"	1.5	0.06	3	0 to 16	0 to 16	50	100
W_910300002 ▲	1/8"	2.5	0.14	3	0 to 8	0 to 5.5	50	100
W_910300003 ▲	1/8"	3.1	0.19	3	0 to 5.5	0 to 2	50	100
W_910300010	1/4"	2	0.1	2	0 to 22	0 to 20	100	240
W_910300011	1/4"	3.5	0.32	2	0 to 10	0 to 8	100	240
W_910300020	3/8"	3.5	0.32	2	0 to 10	0 to 8	100	240
W_910300021	3/8"	5.2	0.47	5	0 to 10	0 to 9	100	240
W_910300022	3/8"	6.4	0.64	5	0 to 5	0 to 4.5	100	240
W_910300030	1/2"	5.2	0.47	5	0 to 10	0 to 9	100	240
W_910300031	1/2"	6.4	0.64	5	0 to 5	0 to 4.5	100	240
W_910300032	1/2"	3.5	0.32	5	0 to 20	0 to 19	100	240

To complete the code enter:

0 for NBR gaskets
E for EPDM gaskets
V for FKM/FPM gaskets
T for PTFE gaskets

* The maximum operating pressure is limited to use within the indicated differential pressure range.
The maximum allowable pressure for steam is 6 bar with PTFE gaskets and 2.5 bar with EPDM gaskets.

▲ Not available in the T version (PTFE gasket)

NOTES

METAL WORK PNEUMATIC

VERSION 2/2 NO, BRASS VALVE BODY

G1/8"

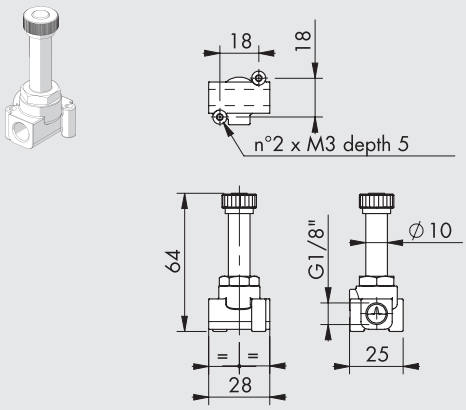

G1/4"

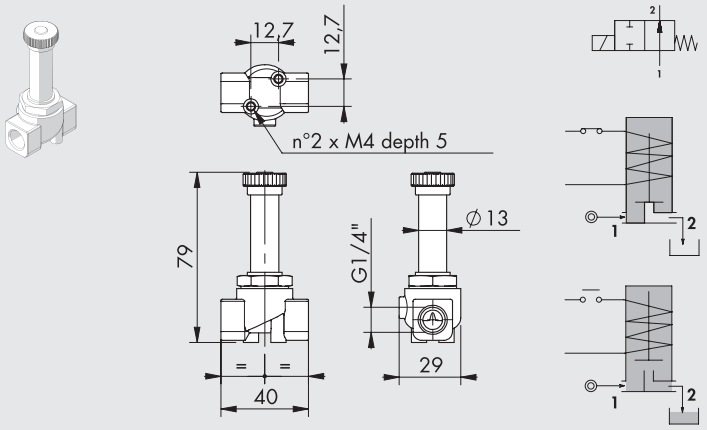

Code	Threaded port	Air hole Ø [mm]	Kv factor [m³/h]	Type of coil	Differential pressure [bar] AC	Differential pressure [bar] DC	Max pressure * [bar]	Weight [g]
W_910800003	1/8"	2	0.09	3	0 to 8	0 to 8	50	80
W_910800004	1/8"	2.5	0.14	3	0 to 4.5	0 to 4.5	50	80
W_910800008	1/4"	2.5	0.15	2	0 to 12	-	50	180
W_910800009	1/4"	3.5	0.32	2	0 to 7	-	50	180
W_910800010	1/4"	4.5	0.41	2	0 to 4.5	-	50	180
W_910800011	1/4"	5.2	0.47	2	0 to 3	-	50	180
W_910810009	1/4"	3.5	0.32	2	-	0 to 4	50	180
W_910810010	1/4"	4.5	0.41	2	-	0 to 3	50	180
W_910810011	1/4"	5.2	0.47	2	-	0 to 2.2	50	180

To complete the code enter:

0 for NBR gaskets
E for EPDM gaskets

V for FKM/FPM gaskets

* The maximum operating pressure is limited to use within the indicated differential pressure range.
The maximum allowable pressure for steam is 2.5 bar.

VERSION 3/2 NC, BRASS VALVE BODY

G1/8"

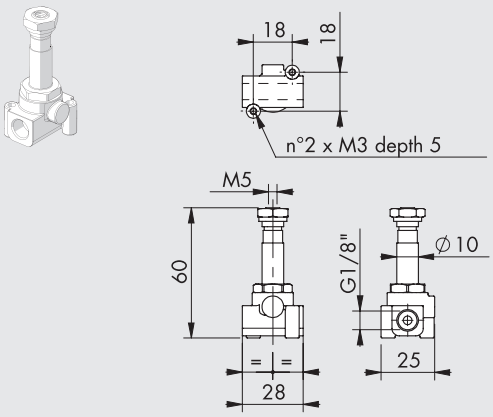

G1/4"

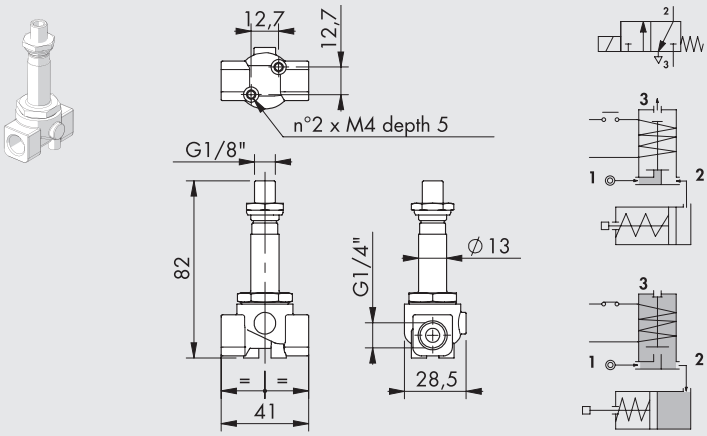

Code	Threaded port	Air hole Ø [mm]	Kv factor [m³/h]	Type of coil	Differential pressure [bar] AC	Differential pressure [bar] DC	Max pressure * [bar]	Weight [g]
W_911000002	1/8"	1.5	0.06	3	0 to 10	0 to 10	11	60
W_911000003	1/8"	2	0.09	3	0 to 6	0 to 6	6.5	60
W_911000004	1/4"	1.5	0.07	2	0 to 20	0 to 20	22	200
W_911000005	1/4"	2	0.11	2	0 to 13	0 to 13	14	200
W_911000006	1/4"	2.5	0.16	2	0 to 10	0 to 10	11	200

To complete the code enter:

0 for NBR gaskets
E for EPDM gaskets

V for FKM/FPM gaskets

* The maximum operating pressure is limited to use within the indicated differential pressure range.

VERSION 3/2 NC, STAINLESS STEEL VALVE BODY

G1/8"

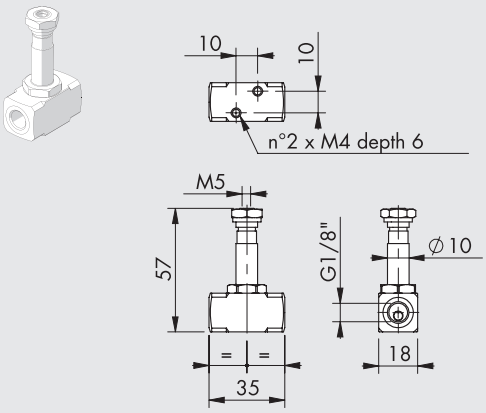

G1/4"

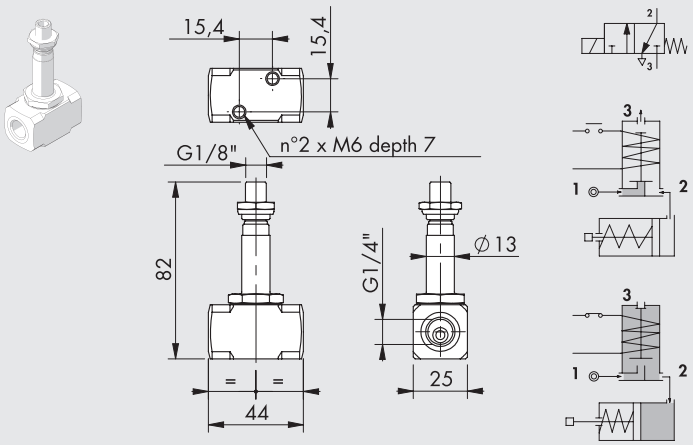

Code	Threaded port	Air hole Ø [mm]	Kv factor [m³/h]	Type of coil	Differential pressure [bar]		Max pressure * [bar]	Weight [g]
					AC	DC		
W_911200002	1/8"	1.5	0.06	3	0 to 10	0 to 10	11	100
W_911200003	1/8"	2	0.09	3	0 to 6	0 to 6	6.5	100
W_911200005	1/4"	2	0.11	2	0 to 13	0 to 13	14	240
W_911200006	1/4"	2.5	0.16	2	0 to 10	0 to 10	11	240

To complete the code enter:

0 for NBR gaskets
E for EPDM gaskets

V for FKM/FPM gaskets

* The maximum operating pressure is limited to use within the indicated differential pressure range.

NOTES

SOLENOID VALVES, SERIES EV-FLUID, SERVO-ASSISTED ACTION

Servo-assisted valves in the EV-FLUID series are used with larger orifices, without giving up the pressure. Indeed, in this type of valves, the fluid pressure helps keep the main valve seal closed. In the 2/2 NC version, when the coil is not energized, the seal connected to the diaphragm keeps the flow blocked between the inlet and outlet ports. The closure of the diaphragm is assisted by the pressure of the media that, flowing through a small hole, fills the chamber above the diaphragm.
When the coil is energized, the solenoid pilot allows the fluid in the upper chamber to exhaust and the diaphragm to open, thus allowing the fluid to flow through the upper orifice.
In the 2/2 NO version, when the coil is not energized, the fluid between the inlet and outlet ports is open and the chamber above the diaphragm is empty. When the coil is energized, the pilot allows the media in the upper chamber to flow down to the diaphragm, thus allowing the orifice to close through the seal connected to the diaphragm.
Available functions are 2/2 NC and 2/2 NO, brass valve body with NBR ,FKM/FPM or EPDM seals, or stainless steel valve body with FKM/FPM seals. In general, these solenoid valves operate at a minimum working pressure over 0 bar.

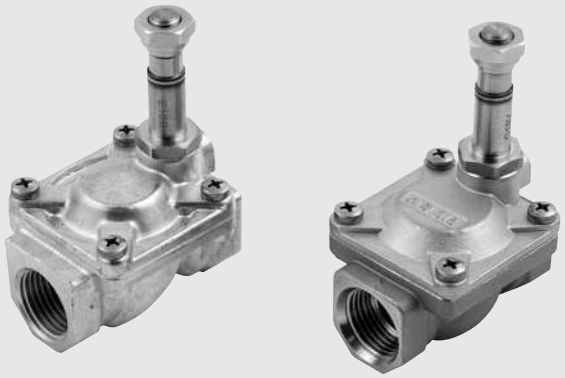

TECHNICAL DATA		NBR	FPM/FKM	EPDM
Max operating frequency (with air)	Hz	2		
Power consumption		DC: 6.5 -10 W / AC: 8 - 15 VA		
Voltage available		12 - 24VDC / 24 - 110 - 220 VAC 50/60 Hz		
Voltage tolerance	%	DC: ±10 / AC: –10 to +15		
Type of protection		IP 65 with connector		
Fluid temperature	°C	-10 to +90	-10 to +140	-10 to +140
Ambient temperature	°C	with coil C.I F: -10 to +55; con with coil C.I H: -10 to +80		
Maximum fluid viscosity		25 cSt (mm^2/s)		
Pressure range, flow rate, weight		See dimensions and ordering codes		
Maximum coil nut torque	Nm	1.5		
Threaded connections standard		ISO 228-1		
Usable fluids / Materials compatibility		Valves that can be used with neutral or slightly aggressive liquid and gas fluids. (Refer to the tables of chemical compatibility of materials in contact with the fluid on www.metalwork.it or contact Metal Work technical service)		

COMPONENTS

① BODY: brass or stainless steel
② SPRING: stainless steel
③ SLEEVE
④ DIAPHRAGM
⑤ SPRING: stainless steel
⑥ MOBILE CORE
⑦ GASKET
⑧ RING NUT FOR COIL FIXING

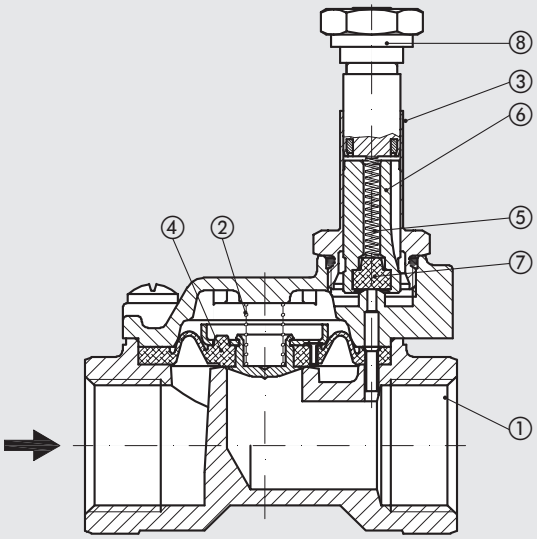

SERVO-ASSISTED ACTION DESIGN

With larger orifices, the static pressure to be controlled with the magnetic field produced by the coil increases: for this reason these models, in which the fluid helps the main poppet to open or close, are used.

Normally closed (2/2 NC) version: with an inlet and outlet port in the valve body; when the coil is not energized, the fluid is intercepted by the main poppet that can be either a diaphragm or a piston.
In this mode, the fluid flows through a small hole in the diaphragm and acts on the two sides of the main poppet and helps to close it.
When connected to an electrical supply, the secondary, or piloting, orifice opens, thus allowing the fluid to exhaust, which closes the main poppet.
This generates increased force in the lower part of the main actuator, which acts on the opening, the poppet is raised from the orifice and the air supply is entirely connected to the user port.
Operation in these versions does not depend only on the magnetic field produced by the coil, it only needs a minimum input pressure that moves the diaphragm or piston, controlling its rigidity and keeping it raised from the main orifice (minimum working Δp).

Normally open version (2/2 NO): with an inlet port and a user port in the valve body; when the secondary poppet is not energized, it communicates with the user port; a minimum pressure difference between the air supply and the user port allows the main poppet to open. When connected to an electric supply, the secondary orifice closes and the balance between the pressures on the two sides of the main poppet closing on the main orifice is restored.
A minimum operating pressure is required in this version as well.

NORMALLY CLOSED (NC)

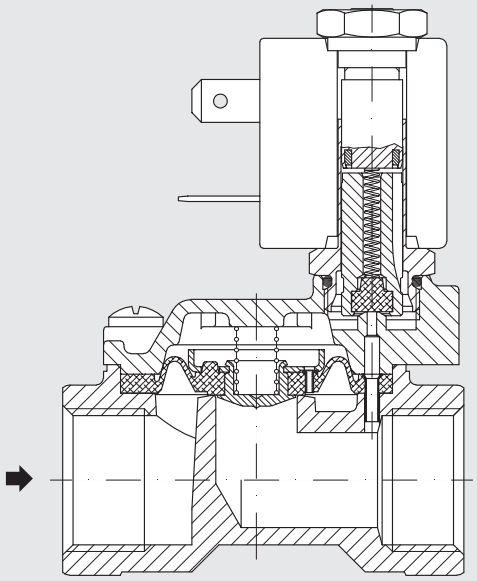

NORMALLY OPEN (NO)

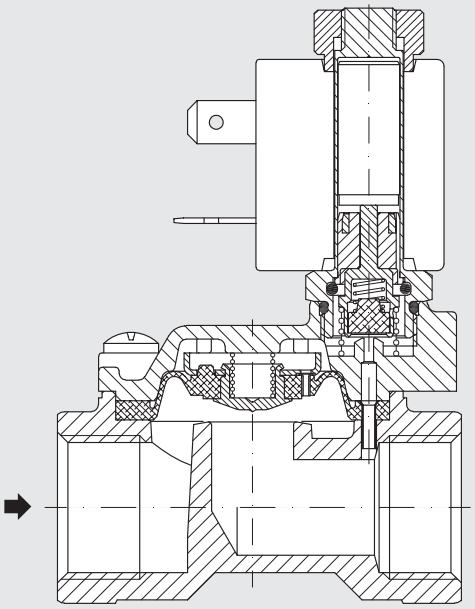

DIMENSIONS AND ORDERING CODES

VERSION 2/2 NC, BRASS VALVE BODY



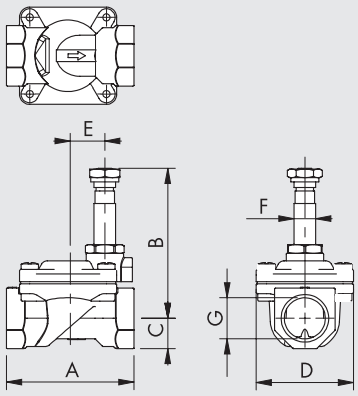



Code	G	A	B	C	D	E	F	Air hole Ø [mm]	Kv factor [m³/h]	Type of coil	Differential pressure [bar] AC	Differential pressure [bar] DC	Max pressure * [bar]	Weight [g]
W_910200001	1/4"	49	65	11	32	16	10	10	1.5	3	0.15 to 15	0.15 to 15	25	180
W_910200002	3/8"	49	65	11	32	16	10	10	1.7	3	0.15 to 15	0.15 to 15	25	190
W_910200003	3/8"	59	70	14	45	17	10	12	2.2	3	0.15 to 15	0.15 to 15	25	370
W_910200004	1/2"	59	70	14	45	17	10	12	2.5	3	0.15 to 15	0.15 to 15	25	340
W_910200005	3/4"	79	76	18	55	22	10	18	5.5	3	0.15 to 13	0.15 to 13	25	600
W_910200006	1"	96	84	20	72	30	10	25	10.2	3	0.15 to 10	0.15 to 10	25	1000
W_910200007	1 ¼"	142	105	28	102	43	13	37	18	2	0.15 to 10	0.15 to 10	20	2880
W_910200008	1 ½"	142	105	28	102	43	13	37	21	2	0.15 to 10	0.15 to 10	20	2730
W_910200009	2"	158	115	35	119	48	13	50	36	2	0.15 to 10	0.15 to 10	20	4180

To complete the code enter: **0** for NBR gaskets **E** for EPDM gaskets **V** for FKM/FPM gaskets

* The maximum operating pressure is limited to use within the indicated differential pressure range.
The maximum allowable pressure for steam is 2.5 bar.

VERSION 2/2 NC, STAINLESS STEEL VALVE BODY, FKM/FPM GASKETS



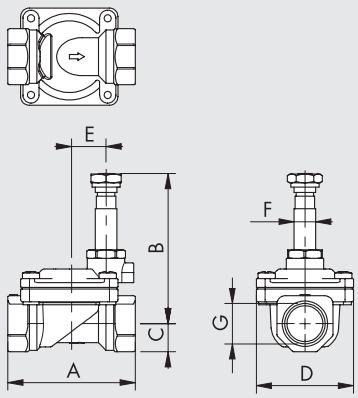



Code	G	A	B	C	D	E	F	Air hole Ø [mm]	Kv factor [m³/h]	Type of coil	Differential pressure [bar] AC	Differential pressure [bar] DC	Max pressure * [bar]	Weight [g]
WV910400001	3/8"	59	70	11	45	17	10	12	2.2	3	0.15 to 15	0.15 to 15	25	250
WV910400002	1/2"	59	70	13	45	17	10	12	2.5	3	0.15 to 15	0.15 to 15	25	270
WV910400003	3/4"	80	75	16	54	22	10	18	5.5	3	0.15 to 13	0.15 to 13	25	500
WV910400004	1"	100	84	20	72	30	10	25	10.2	3	0.15 to 10	0.15 to 10	25	900

* The maximum operating pressure is limited to use within the indicated differential pressure range.
The maximum allowable pressure for steam is 2.5 bar.

VERSION 2/2 NO, BRASS VALVE BODY



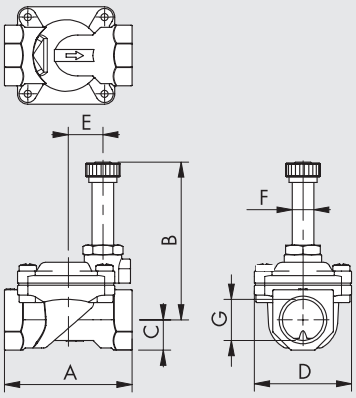



Code	G	A	B	C	D	E	F	Air hole Ø [mm]	Kv factor [m³/h]	Type of coil	Differential pressure [bar] AC	Differential pressure [bar] DC	Max pressure * [bar]	Weight [g]
W_910900001	1/4"	49	68	11	32	16	10	10	1.5	3	0.15 to 15	0.15 to 15	25	180
W_910900003	3/8"	59	73	14	45	17	10	12	1.7	3	0.15 to 15	0.15 to 15	25	370
W_910900004	1/2"	59	73	14	45	17	10	12	2.5	3	0.15 to 15	0.15 to 15	25	340
W_910900005	3/4"	79	79	18	54	22	10	18	5.5	3	0.15 to 13	0.15 to 13	25	600
W_910900006	1"	96	88	20	72	30	10	25	10.2	3	0.15 to 10	0.15 to 10	25	1000

To complete the code enter:

0 for NBR gaskets
E for EPDM gaskets
V for FKM/FPM gaskets

* The maximum operating pressure is limited to use within the indicated differential pressure range.
The maximum allowable pressure for steam is 2.5 bar.

NOTES

SOLENOID VALVES, SERIES EV-FLUID, MIXED ACTION

In this type of solenoid valve, the moving core is connected to the diaphragm and it directly intercepts the secondary orifice.
The same coil-actuated moving core drags the diaphragm that opens or closes the main orifice.
These two combined actions allow these two models to operate at a zero pressure.
These valves are available with 2/2 NC function, brass body and FKM/FPM gaskets.

TECHNICAL DATA		FPM/FKM
Max operating frequency (with air)	Hz	2
Power consumption		DC: 27 W / AC: 30 VA
Voltage available		12 - 24VDC / 24 - 110 - 220 VAC 50/60 Hz
Voltage tolerance	%	DC: ±10 / AC: –10 to +15
Type of protection		IP 65 with connector
Fluid temperature	°C	-10 to +90
Ambient temperature	°C	with coil C.I H: -10 to +80
Maximum fluid viscosity		25 cSt (mm^2/s)
Pressure range, flow rate, weight		See dimensions and ordering codes
Maximum coil nut torque	Nm	1.5
Threaded connections standard		ISO 228-1
Usable fluids / Materials compatibility		Valves that can be used with neutral or slightly aggressive liquid and gas fluids. (Refer to the tables of chemical compatibility of materials in contact with the fluid on www.metalwork.it or contact Metal Work technical service)

COMPONENTS

① BODY: brass
② SPRING: stainless steel
③ SLEEVE: stainless steel
④ GASKET
⑤ SPRING: stainless steel
⑥ MOBILE CORE: stainless steel
⑦ GASKET
⑧ RING NUT FOR COIL FIXING

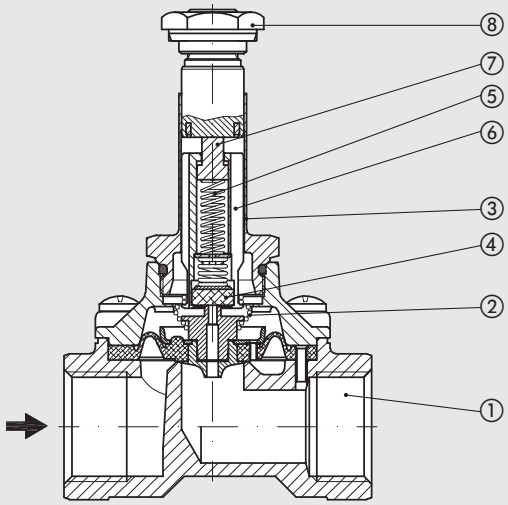

VERSION 2/2 NC, BRASS VALVE BODY, FKM/FPM GASKETS







Code	G	A	B	C	D	F	Air hole Ø [mm]	Kv factor [m³/h]	Type of coil	Differential pressure [bar]		Max pressure * [bar]	Weight [g]
										AC	DC		
WV910600003	3/8"	59	80	14	45	13	12	2	5	0 to 12	0 to 10	25	400
WV910600004	1/2"	59	80	14	45	13	12	2.2	5	0 to 12	0 to 10	25	370
WV910600005	3/4"	79	88	18	54	13	18	4.5	5	0 to 9	-	25	610
WV910600006	1"	96	94	20	72	13	25	8.5	5	0 to 7	-	25	1020
WV910610005	3/4"	79	88	18	54	13	18	4.5	5	-	0 to 9	25	610
WV910610006	1"	96	94	20	72	13	25	8.5	5	-	0 to 8	25	1020

* The maximum operating pressure is limited to use within the indicated differential pressure range.

NOTES

COILS AND CONNECTORS FOR EV-FLUIDSERIES SOLENOID VALVES

These coils have been optimized specifically for use with EV-Fluid series solenoid valves. They come in different voltage ratings and powers, depending on power supply needs and level of performance requested of the valve on which they are installed. They come into 4 types (type 2, type 3, type 4 and type 5). The types differ one from the other in terms of size, type of electrical connection, orifice and output power. ATEX and UL versions are available on request

COILS SIDE 22 mm TYPE 3

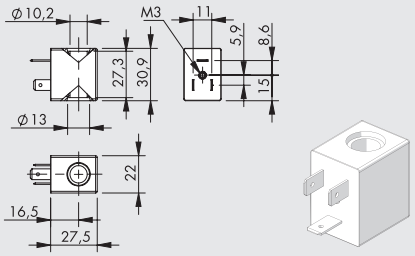

- Voltage tolerance: –10% to + 15% AC version / ± 10% DC version
- Degree of protection: IP65 EN60529 with connector
- Ambient temperature: –10°C to +55°C
- Duty Cycle: 100%
- Connector: **DIN 43650 B**

Code	Abbrev.	Nominal voltage	Absorption	Index of protection
W0911100001	Coil 22 Ø10 Type 3, 6.5W 12VDC	12VDC	6.5W	H
W0911100002	Coil 22 Ø10 Type 3, 6.5W 24VDC	24VDC	6.5W	H
W0911100003	Coil 22 Ø10 Type 3, 8VA 24V 50/60Hz	24V 50/60Hz	8VA	H
W0911100004	Coil 22 Ø10 Type 3, 8VA 110V 50/60Hz	110V 50/60Hz	8VA	H
W0911100005	Coil 22 Ø10 Type 3, 8VA 220V 50/60Hz	220V 50/60Hz	8VA	H

COILS SIDE 30 mm TYPE 4

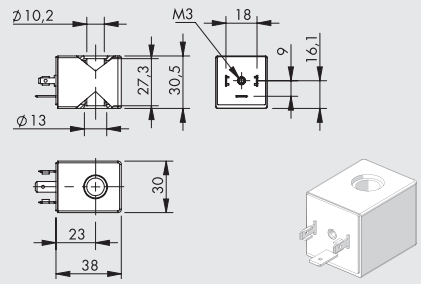

- Voltage tolerance: –10% to + 15% AC version / ± 10% DC version
- Degree of protection: IP65 EN60529 with connector
- Ambient temperature: –10°C to +55°C
- Duty Cycle: 100%
- Connector: **DIN 43650 A**

Code	Abbrev.	Nominal voltage	Absorption	Index of protection
W0911100006	Coil 30 Ø10 Type 4, 5W 12VDC	12VDC	5W	F
W0911100007	Coil 30 Ø10 Type 4, 5W 24VDC	24VDC	5W	F
W0911100008	Coil 30 Ø10 Type 4, 11VA 24V 50/60Hz	24V 50/60Hz	11VA	F
W0911100009	Coil 30 Ø10 Type 4, 11VA 110V 50/60Hz	110V 50/60Hz	11VA	F
W0911100010	Coil 30 Ø10 Type 4, 11VA 220V 50/60Hz	220V 50/60Hz	11VA	F

COILS SIDE 30 mm TYPE 2

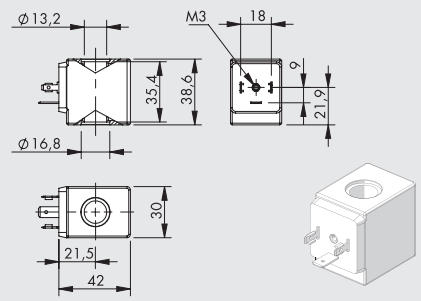

- Voltage tolerance: –10% to + 15% AC version / ± 10% DC version
- Degree of protection: IP65 EN60529 with connector
- Ambient temperature: –10°C to +55°C
- Duty Cycle: 100%
- Connector: **DIN 43650 A**

Code	Abbrev.	Nominal voltage	Absorption	Classe isolamento
W0911100011	Coil 30 Ø13 Type 2, 10W 12VDC	12VDC	10W	F
W0911100012	Coil 30 Ø13 Type 2, 10W 24VDC	24VDC	10W	F
W0911100013	Coil 30 Ø13 Type 2, 15VA 24V 50/60Hz	24V 50/60Hz	15VA	F
W0911100014	Coil 30 Ø13 Type 2, 15VA 110V 50/60Hz	110V 50/60Hz	15VA	F
W0911100015	Coil 30 Ø13 Type 2, 15VA 220V 50/60Hz	220V 50/60Hz	15VA	F

COILS SIDE 36 mm TYPE 5

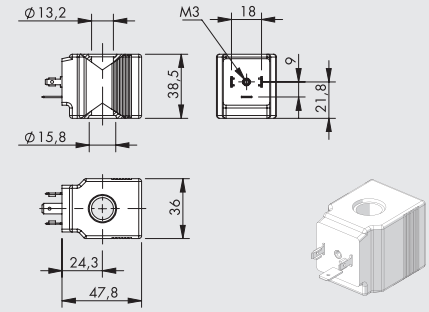

- Voltage tolerance: –10% to + 15% AC version / ± 10% DC version
- Degree of protection: IP65 EN60529 with connector
- Ambient temperature: –10°C to +80°C
- Duty Cycle: 100%
- Connector: **DIN 43650 A**

Code	Abbrev.	Nominal voltage	Absorption	Index of protection
W0911100016	Coil 36 Ø13 Type 5, 27W 12VDC	12VDC	27W	H
W0911100017	Coil 36 Ø13 Type 5, 27W 24VDC	24VDC	27W	H
W0911100018	Coil 36 Ø13 Type 5, 30VA 24V 50/60Hz	24V 50/60Hz	30VA	H
W0911100019	Coil 36 Ø13 Type 5, 30VA 110V 50/60Hz	110V 50/60Hz	30VA	H
W0911100020	Coil 36 Ø13 Type 5, 30VA 220V 50/60Hz	220V 50/60Hz	30VA	H

CONNECTOR SIDE 22 mm DIN 43650 B-IND FOR COIL TYPE 3



Code	Type	Colour	Ø Cable
W0970510011	Standard	Black	PG9
W0970510012	LED 24V	Transparent	PG9
W0970510013	LED 110V	Transparent	PG9
W0970510014	LED 220V	Transparent	PG9
W0970510015	LED + VDR 24V	Transparent	PG9
W0970510016	LED + VDR 110V	Transparent	PG9
W0970510017	LED + VDR 220V	Transparent	PG9

CONNECTOR SIDE 30 mm DIN 43650 - A FOR COILS TYPE 2, 4, 5



Code	Type	Colour	Ø Cable
W0970520033	Standard	Black	PG11
W0970520034	LED 24V	Transparent	PG11
W0970520035	LED 110V	Transparent	PG11
W0970520036	LED 220V	Transparent	PG11
W0970520037	LED + VDR 24V	Transparent	PG11
W0970520038	LED + VDR 110V	Transparent	PG11
W0970520039	LED + VDR 220V	Transparent	PG11

NOTES

ACTUATED VALVES SERIES RV-FLUID

METAL WORK PNEUMATIC

Actuated valves in the RV-FLUID series consist of a pneumatic rotary actuator series R4 that controls a ball or a butterfly valve.
Ball valves come in the 2- and the 3-way version, with nickel-plated brass or stainless steel body.
Butterfly valves are available with a painted cast iron body and nickel-plated cast iron lens. The actuator is the rack-and-pinion type, with an aluminium body processed with thick hard anodization and powder-coated heads.
It is available in the single-acting version or double-acting version, and allows the valve to rotate by 90 degrees with limit switch adjustment on both ends.
Operation is the pinion-and-rack type, a technology characterised by the constant supply of torque during the entire rotation.
The control valve can be applied either directly to the actuator thanks to the NAMUR VDI\VDE-3845 interface or remotely using the threaded connections on the body.
A specific accessory (switch box) can be installed on the actuator to detect the limit switch positions.

COMPONENTS OF THE PNEUMATIC ROTARY ACTUATOR SERIES R4 (COMMON TO ALL TYPES OF RV-FLUID VALVES)

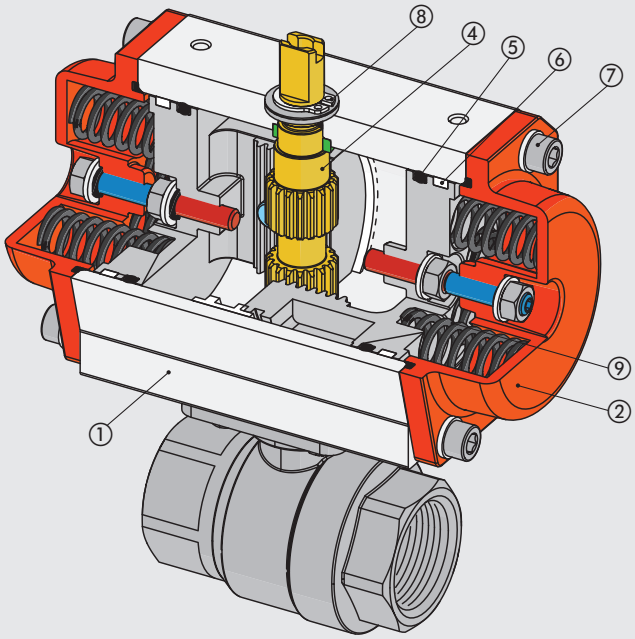

① BODY: hard anodized extruded aluminium
② END CAP: pressure die-cast aluminium with polyester powdercoating
③ PISTON: anodized pressure die-cast aluminium
④ SHAFT WITH PINION: nickel-plated carbon steel
⑤ GASKETS: NBR
⑥ SLIDING GUIDES: acetal resin
⑦ SCREWS AND WASHERS: stainless steel
⑧ SEEGER: zinc-plated carbon steel
⑨ SPRINGS (for single-acting versions only): carbon steel with polyester powder coating

ACTUATED BALL VALVES SERIES RV-FLUID

Actuated ball valves are the floating type, available in the 2- and 3-way versions (the latter with an L- or T-shaped ball holes). The body is made of nickel-plated moulded brass or micro-cast stainless steel with PTFE seats.
All valves are available with GAS female threading, while the ones made of stainless steel can also be supplied with a wafer-type flanged connection.

TECHNICAL DATA		BRASS	STAINLESS STEEL
VALVES			
Max operating pressure *	bar	40	63
	MPa	4	6.3
	psi	580	913.5
Fluid temperature	°C	-20 to +130	-25 to +180
Ambient temperature	°C	-20 to +80	
Usable fluids / Materials compatibility		Valves that can be used with neutral or slightly aggressive liquid and gas fluids. (Refer to the tables of chemical compatibility of materials in contact with the fluid on www.metalwork.it or contact Metal Work technical service)	
Nominal diameter (DN)	mm	8 to 80	8 to 80
Mounting position		Any, except that with actuator downwards, which is not recommended	
Threaded connections standard		ISO 7-1	
Note		High- and low-temperature versions on request	
ROTARY ACTUATOR			
Operating pressure	bar	6 to 10	
	MPa	0.6 to 1	
	psi	87 to 145	
Ambient temperature	°C	-20 to +80	
Fluid		20 µm filtered, unlubricated air	

* The maximum working pressure varies with temperature. See the "Max. pressure/temperature chart".

2-WAY AND 3-WAY BRASS ACTUATED BALL VALVES COMPONENTS

① BODY: nickel-plated brass
② SLEEVE: nickel-plated brass
③ BALL: nickel-plated brass
④ PIN: brass
⑤ BALL SEATS: teflon®
⑥ PIN GASKETS (O-rings): FKM/FPM
⑦ ANTI-FRICTION RING: teflon®
⑧ SEAL: teflon®

Close-up of 2-way 1/4", 3/8" and 3-way versions



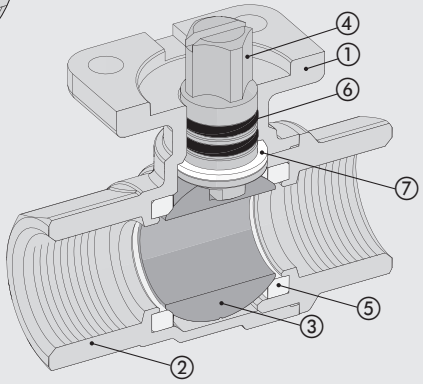

2-WAY



3-WAY



2-WAY AND 3-WAY STAINLESS STEEL ACTUATED BALL VALVES COMPONENTS

① BODY: AISI 316 stainless steel
② SLEEVE: AISI 316 stainless steel
③ BALL: AISI 316 stainless steel
④ PIN: AISI 316 stainless steel
⑤ BALL SEATS: loaded teflon®
⑥ PIN GASKET (O-ring): FKM/FPM
⑦ NUT AND NUT HOLDER: AISI 304 stainless steel
⑧ ANTI-FRICTION RING: teflon®
⑨ SEAL: teflon®

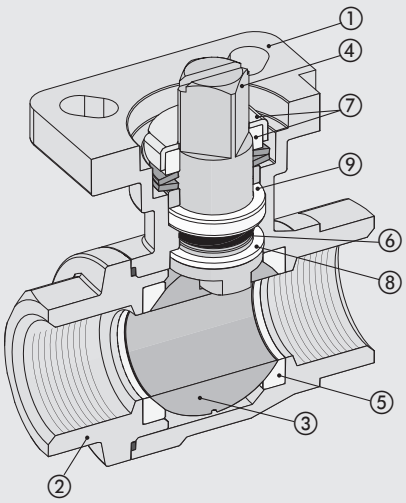

2-WAY



3-WAY



3-PIECE STAINLESS STEEL ACTUATED BALL VALVES COMPONENTS

① BODY: AISI 316 stainless steel
② FLANGED SLEEVE: AISI 316 stainless steel
③ BALL: AISI 316 stainless steel
④ PIN: AISI 316 stainless steel
⑤ BALL SEATS: loaded teflon®
⑥ PIN GASKET (O-ring): FKM/FPM
⑦ NUT AND NUT HOLDER: AISI 304 stainless steel
⑧ TIE ROD: AISI 316 stainless steel
⑨ ANTI-FRICTION RING: teflon®
⑩ SEAL: teflon®



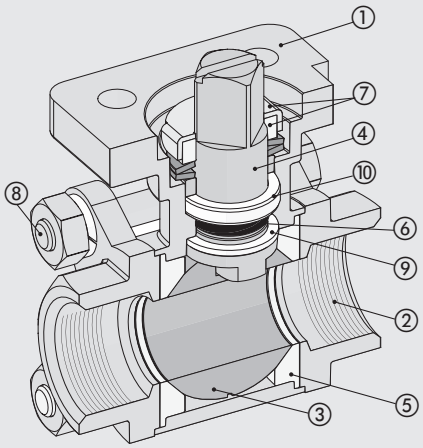

WAFER STAINLESS STEEL ACTUATED BALL VALVES COMPONENTS

① BODY: AISI 316 stainless steel
② RING: AISI 316 stainless steel
③ BALL: AISI 316 stainless steel
④ PIN: AISI 316 stainless steel
⑤ BALL SEATS: loaded teflon®
⑥ PIN GASKET (O-ring): FKM/FPM
⑦ NUT AND NUT HOLDER: AISI 304 stainless steel
⑧ ANTI-FRICTION RING: teflon®
⑨ SEAL: teflon®



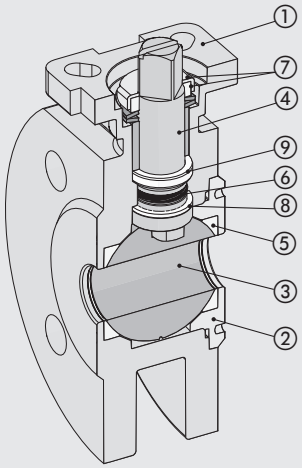

MAX. PRESSURE/TEMPERATURE CHART

2-way and 3-way brass actuated ball valves

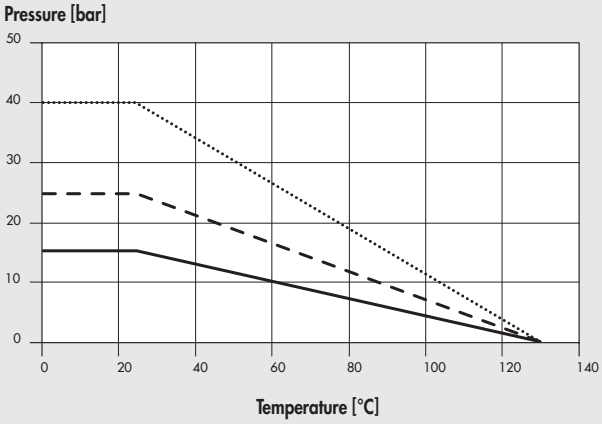

..... 1/4" - 3/8" - 1/2" - 3/4" - 1" - 1 ¼" ——— 3"

– – – – 1 ½" - 2" - 2 ½"

2-way and 3-piece stainless steel actuated ball valves

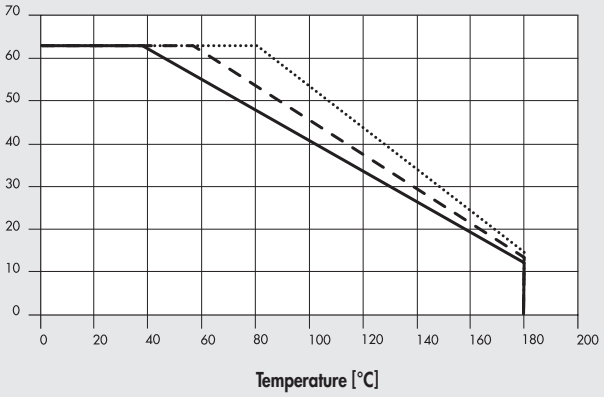

..... 1/4" - 3/8" - 1/2" - 3/4" - 1" ——— 2" - 3"

– – – – 1 ¼" - 1 ½"

3-way stainless steel actuated ball valves

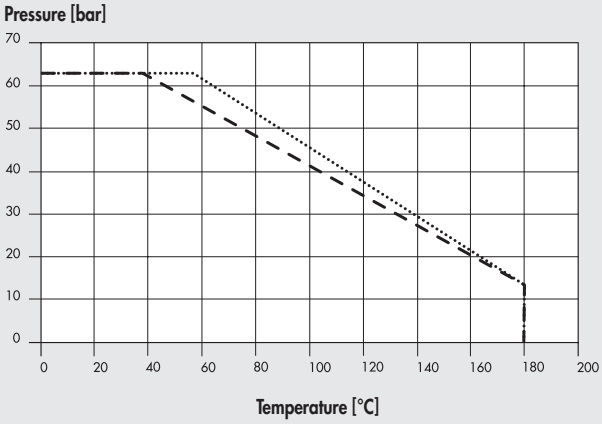

..... 1/4" - 3/8" - 1/2" - 3/4" - 1" - 1 ¼"

– – – – 1 ½" - 2"

WAFER stainless steel actuated ball valves

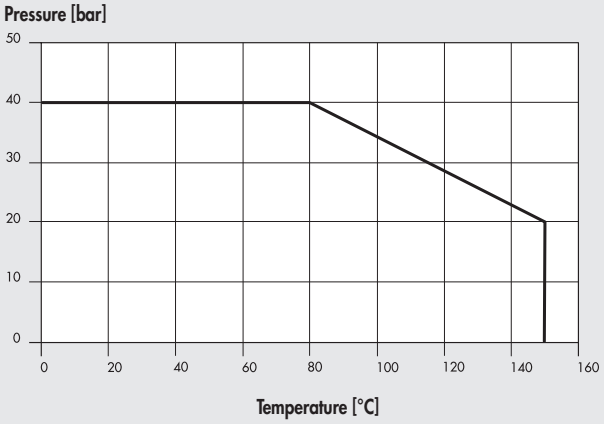

——— 1/2" - 2"

NOTES

METAL WORK PNEUMATIC

LOAD LOSS CHART (reference fluid water at 20°C)

2-way brass actuated ball valves

Load loss [ΔP = mbar]

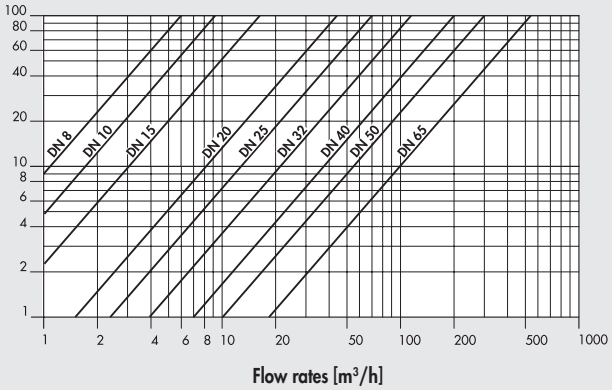

Flow rates [m³/h]

3-way brass actuated ball valves

Load loss [ΔP = mbar]

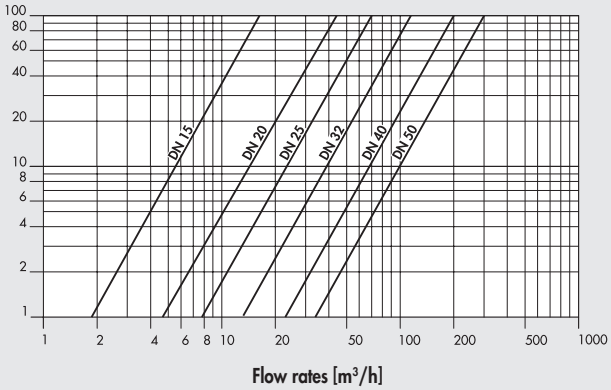

Flow rates [m³/h]

2-way and 3-piece stainless steel actuated ball valves

Load loss [ΔP = mbar]

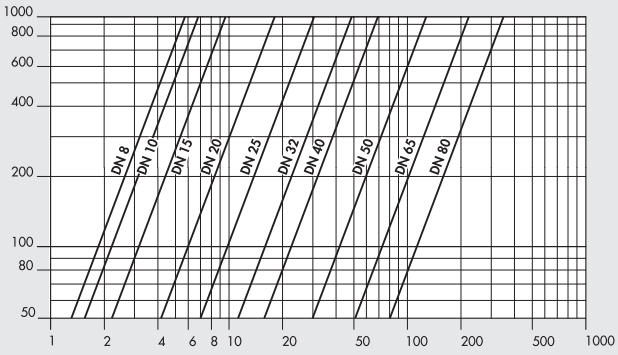

Flow rates [m³/h]

3-way stainless steel actuated ball valves

Load loss [ΔP = mbar]

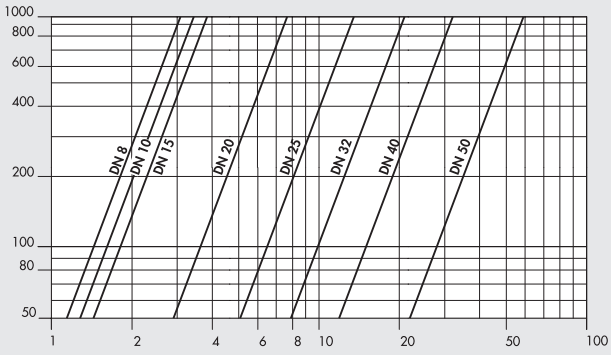

Flow rates [m³/h]

WAFER stainless steel actuated ball valves

Load loss [ΔP = mbar]

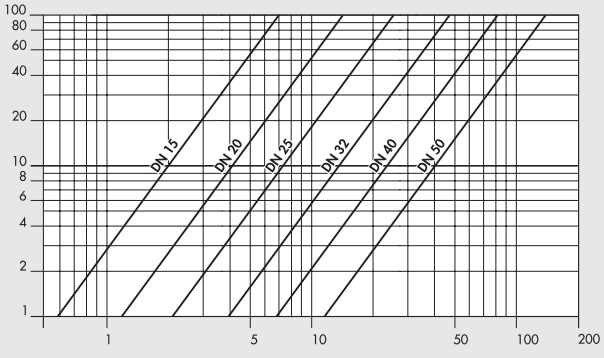

Flow rates [m³/h]

2-WAYS BRASS ACTUATED BALL VALVES



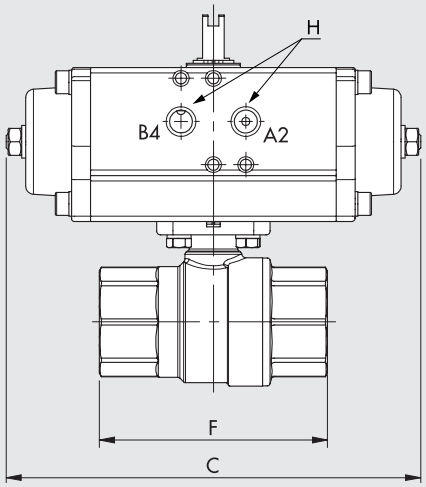

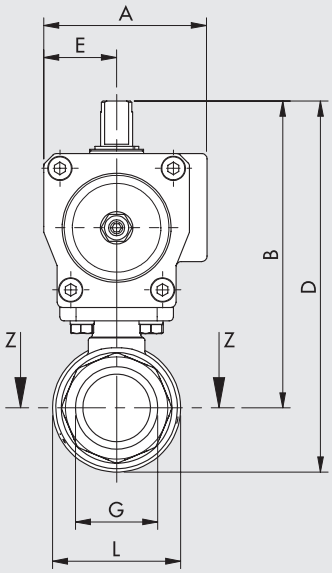



- Position of the ball with "B4" port powered actuator for double-acting versions.
- Position of the ball with actuator at rest for single-acting versions.

Single-acting

Double-acting

SINGLE-ACTING

Code	DN (nominal diameter)	G	A	B	C	D	E	F	H	L	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300090	8	1/4"	60.5	115	160	130.5	27	75	1/8"	33	5.9	40	42	1342
W0900300091	10	3/8"	60.5	115	160	130.5	27	75	1/8"	33	9.4	40	42	1320
W0900300092	15	1/2"	60.5	106	160	122	27	61	1/8"	32	17	40	42	1147
W0900300093	20	3/4"	75	121	139	140	33.5	69.5	1/8"	39	41	40	50	1515
W0900300094	25	1"	86	141	152	164.5	38	84.5	1/4"	48	70	40	63	2338
W0900300095	32	1 ¼"	86	151	152	181	38	98.5	1/4"	60	121	40	63	2670
W0900300096	40	1 ½"	94	173	205	208	42.5	110	1/4"	70	200	25	75	2959
W0900300097	50	2"	94	184	205	227	42.5	130	1/4"	86	292	25	75	5360
W0900300098	65	2 ½"	104	213	230	266.5	49	161	1/4"	106.5	535	25	85	8436
W0900300099	80	3"	104	225	230	292	49	183	1/4"	134	850	25	85	10750

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

DOUBLE-ACTING

Code	DN (nominal diameter)	G	A	B	C	D	E	F	H	L	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300101	8	1/4"	49	103	117	120	23.5	75	1/8"	33	5.9	40	32	832
W0900300102	10	3/8"	49	103	117	120	23.5	75	1/8"	33	9.4	40	32	810
W0900300103	15	1/2"	49	94.5	117	110.5	23.5	61	1/8"	32	17	40	32	637
W0900300104	20	3/4"	49	98	117	117.5	23.5	69.5	1/8"	39	41	40	32	735
W0900300105	25	1"	60.5	113.5	160	137.5	27	84.5	1/8"	48	70	40	42	1408
W0900300106	32	1 ¼"	75	135.5	139	165	33.5	98.5	1/8"	60	121	40	50	1940
W0900300107	40	1 ½"	86	156.5	152	191.5	38	110	1/4"	70	200	25	63	2759
W0900300108	50	2"	86	167.5	152	210.5	38	130	1/4"	86	292	25	63	3590
W0900300109	65	2 ½"	86	186.5	152	239.5	38	161	1/4"	106.5	535	25	63	5206
W0900300110	80	3"	94	214.5	205	281.5	42.5	183	1/4"	134	850	25	75	8820

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

METAL WORK PNEUMATIC

3-WAYS BRASS ACTUATED BALL VALVES



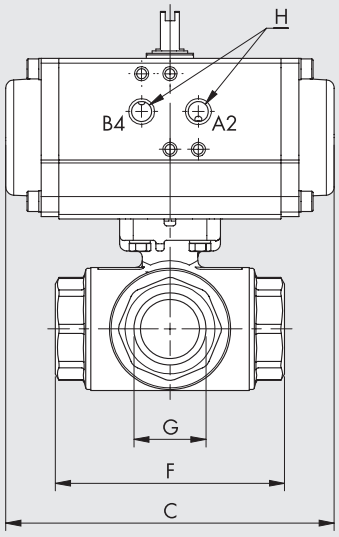

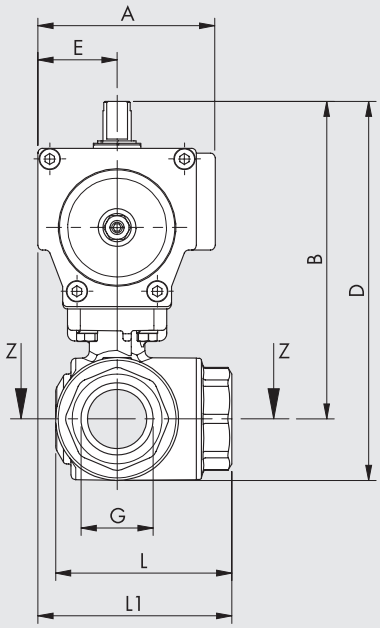

SEZ. Z-Z



- Position of the ball with "B4" port powered actuator for double-acting versions.
- Position of the ball with actuator at rest for single-acting versions.

SINGLE-ACTING

Code for L-shaped ball hole	Code for T-shaped ball hole	DN (nominal diameter)	G	A	B	C	D	E	F	H	L	L1	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300141	W0900300151	8	1/4"	60.5	114.5	160	131.5	27	64.5	1/8"	49.5	59	5.9	40	42	1625
W0900300142	W0900300152	10	3/8"	60.5	114.5	160	131.5	27	64.5	1/8"	49.5	59.5	9.4	40	42	1597
W0900300143	W0900300153	15	1/2"	75	126	139	143	33.5	64.5	1/8"	49.5	66	17	40	50	1741
W0900300144	W0900300154	20	3/4"	86	146	152	167	38	76	1/4"	59.5	76	41	40	63	2614
W0900300145	W0900300155	25	1"	86	150	152	176	38	97	1/4"	74.5	86.5	70	40	63	3117
W0900300146	W0900300156	32	1 ¼"	94	181	205	217	42.5	118	1/4"	95.5	101.5	121	40	75	6465
W0900300147	W0900300157	40	1 ½"	94	183.5	205	221.5	42.5	135	1/4"	105	110	200	25	75	6737
W0900300148	W0900300158	50	2"	104	204.5	230	247.5	49	157	1/4"	121.5	127.5	292	25	85	9586

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

DOUBLE-ACTING

Code for L-shaped ball hole	Code for T-shaped ball hole	DN (nominal diameter)	G	A	B	C	D	E	F	H	L	L1	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300121	W0900300131	8	1/4"	49	103	117	120	23.5	64.5	1/8"	49.5	56	5.9	40	32	1115
W0900300122	W0900300132	10	3/8"	49	103	117	120	23.5	64.5	1/8"	49.5	56	9.4	40	32	1087
W0900300123	W0900300133	15	1/2"	49	103	117	120	23.5	64.5	1/8"	49.5	56	17	40	32	961
W0900300124	W0900300134	20	3/4"	75	130	139	151	33.5	76	1/8"	59.5	71.5	41	40	50	1884
W0900300125	W0900300135	25	1"	75	134.5	139	160	33.5	97	1/8"	74.5	82	70	40	50	2387
W0900300126	W0900300136	32	1 ¼"	75	149	139	185	33.5	118	1/8"	95.5	92.5	121	40	50	4165
W0900300127	W0900300137	40	1 ½"	86	167	152	205	38	135	1/4"	105.5	105.5	200	25	63	4967
W0900300128	W0900300138	50	2"	86	178	152	221	38	157	1/4"	121.5	116.5	292	25	63	6356

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

2-WAYS STAINLESS STEEL ACTUATED BALL VALVES



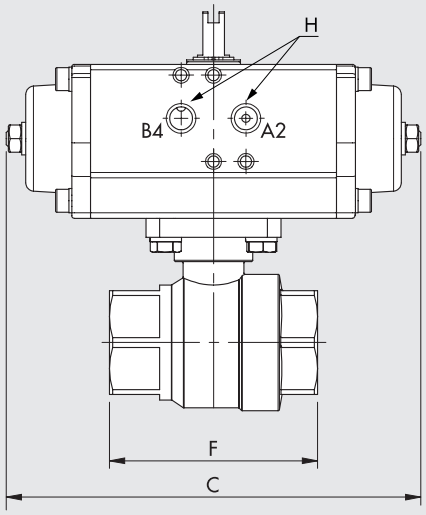

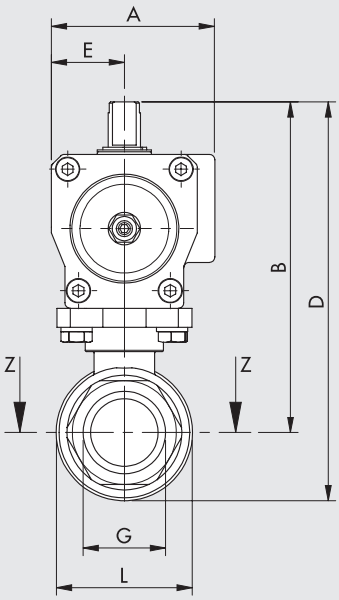



- Position of the ball with "B4" port powered actuator for double-acting versions.
- Position of the ball with actuator at rest for single-acting versions.

Single-acting

Double-acting

SINGLE-ACTING

Code	DN (nominal diameter)	G	A	B	C	D	E	F	H	L	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300009	10	1/4"	60.5	113.5	160	131	27	56	1/8"	35	5.6	63	42	1300
W0900300010	10	3/8"	60.5	113.5	160	131	27	56	1/8"	35	6.8	63	42	1280
W0900300011	15	1/2"	60.5	113.5	160	131	27	57	1/8"	35	9.6	63	42	1300
W0900300012	20	3/4"	75	131	139	152	33.5	64	1/8"	42	17.9	63	50	1690
W0900300013	25	1"	86	149.5	152	175	38	77	1/4"	51	30	63	63	2540
W0900300014	32	1 ¼"	86	157.5	152	189.5	38	90	1/4"	64	49	63	63	2980
W0900300015	40	1 ½"	94	180	205	218	42.5	105	1/4"	76	68	63	75	5310
W0900300016	50	2"	94	190	205	233.5	42.5	125	1/4"	91	126	63	75	6270

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

DOUBLE-ACTING

Code	DN (nominal diameter)	G	A	B	C	D	E	F	H	L	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300001	10	1/4"	49	102	117	119.5	23.5	56	1/8"	35	5.6	63	32	790
W0900300002	10	3/8"	49	102	117	119.5	23.5	56	1/8"	35	6.8	63	32	770
W0900300003	15	1/2"	49	102	117	119.5	23.5	57	1/8"	35	9.6	63	32	790
W0900300004	20	3/4"	49	108	117	129	23.5	64	1/8"	42	17.9	63	32	910
W0900300005	25	1"	60.5	122.5	160	147.5	27	77	1/8"	51	30	63	42	1610
W0900300006	32	1 ¼"	75	142	139	173.5	33.5	90	1/8"	64	49	63	50	2250
W0900300007	40	1 ½"	86	163.5	152	201.5	38	105	1/4"	76	68	63	63	3540
W0900300008	50	2"	94	188	205	233.5	42.5	125	1/4"	91	126	63	75	5800

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

METAL WORK PNEUMATIC

3-WAYS STAINLESS STEEL ACTUATED BALL VALVES



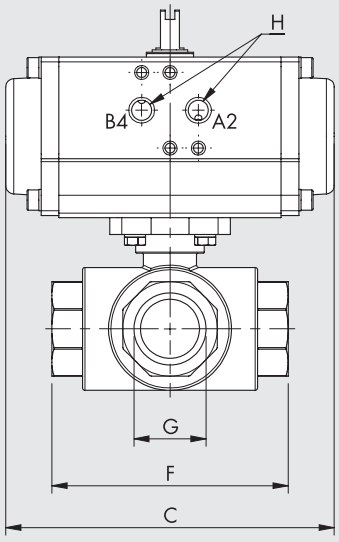

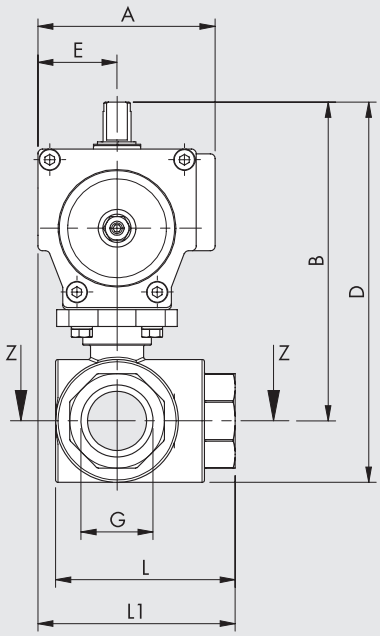

SEZ. Z-Z



L-shaped ball hole



T-shaped ball hole

- Position of the ball with "B4" port powered actuator for double-acting versions.
- Position of the ball with actuator at rest for single-acting versions.



Single-acting



Double-acting

SINGLE-ACTING

Code for L-shaped ball hole	Code for T-shaped ball hole	DN (nominal diameter)	G	A	B	C	D	E	F	H	L	L1	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300161	W0900300171	8	1/4"	86	140.5	152	158.5	38	75	1/4"	55.5	75.5	3.2	63	63	2500
W0900300162	W0900300172	10	3/8"	86	140.5	152	158.5	38	75	1/4"	55.5	75.5	3.4	63	63	2470
W0900300163	W0900300173	15	1/2"	86	140.5	152	158.5	38	75	1/4"	55.5	75.5	3.8	63	63	2430
W0900300164	W0900300174	20	3/4"	86	144.5	152	165.5	38	85	1/4"	63.5	80.5	7.7	63	63	2740
W0900300165	W0900300175	25	1"	94	167	205	193	42.5	100	1/4"	76	92.5	13.7	63	75	4760
W0900300166	W0900300176	32	1 ¼"	94	176	205	210	42.5	122	1/4"	95	103.5	20.5	63	75	6280
W0900300167	W0900300177	40	1 ½"	120	204.5	275	243.5	55	131	1/4"	104.5	120.5	31.5	63	100	10480
W0900300168	W0900300178	50	2"	134	243.5	309	293	63.5	158	1/4"	129	142.5	58	63	115	16610

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

DOUBLE-ACTING

Code for L-shaped ball hole	Code for T-shaped ball hole	DN (nominal diameter)	G	A	B	C	D	E	F	H	L	L1	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300080	W0900300112	8	1/4"	60.5	113.5	160	131.5	27	75	1/8"	55.5	64.5	3.2	63	42	1570
W0900300081	W0900300113	10	3/8"	60.5	113.5	160	131.5	27	75	1/8"	55.5	64.5	3.4	63	42	1540
W0900300082	W0900300114	15	1/2"	60.5	113.5	160	131.5	27	75	1/8"	55.5	64.5	3.8	63	42	1500
W0900300083	W0900300115	20	3/4"	60.5	117.5	160	138.5	27	85	1/8"	63.5	69.5	7.7	63	42	1810
W0900300084	W0900300116	25	1"	75	135	139	161	33.5	100	1/8"	76	83.5	13.7	63	50	2460
W0900300085	W0900300117	32	1 ¼"	86	159.5	152	193.5	38	122	1/4"	95	99	20.5	63	63	4510
W0900300086	W0900300118	40	1 ½"	94	180	205	219	42.5	131	1/4"	104.5	108	31.5	63	75	6560
W0900300087	W0900300119	50	2"	94	191	205	240.5	42.5	158	1/4"	129	121.5	58	63	75	9210

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

3-PIECE STAINLESS STEEL ACTUATED BALL VALVES



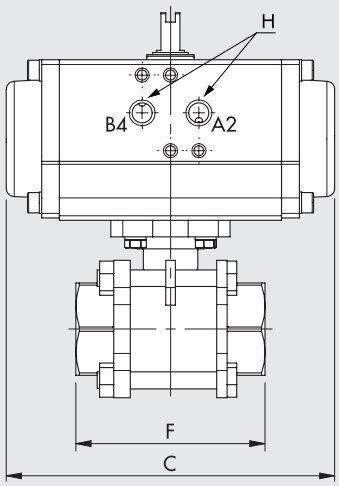

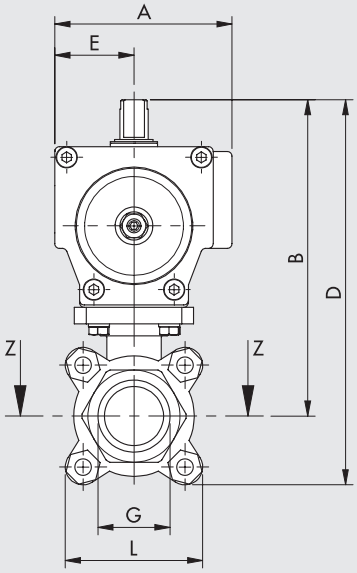



SEZ. Z-Z

- Position of the ball with "B4" port powered actuator for double-acting versions.
- Position of the ball with actuator at rest for single-acting versions.

Single-acting

Double-acting

SINGLE-ACTING

Code	DN (nominal diameter)	G	A	B	C	D	E	F	H	L	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300201	10	1/4"	75	121	139	141	33.5	48	1/8"	40	5.6	63	50	1610
W0900300202	10	3/8"	75	121	139	141	33.5	48	1/8"	40	6.8	63	50	1600
W0900300203	15	1/2"	75	125	139	146	33.5	54	1/8"	42	9.6	63	50	1650
W0900300204	20	3/4"	86	145.5	152	171.5	38	73	1/4"	52	17.9	63	63	2660
W0900300205	25	1"	94	166	205	195	42.5	80	1/4"	58	30	63	75	4590
W0900300206	32	1 ¼"	94	174	205	210	42.5	90	1/4"	72	49	63	75	5250
W0900300207	40	1 ½"	94	180	205	220.5	42.5	102	1/4"	81	68	63	75	6150
W0900300208	50	2"	104	198.5	230	244.5	49	118	1/4"	92	126	63	85	8390
W0900300209	65	2 ½"	120	244.5	275	312.5	55	151	1/4"	154	226	63	100	14020
W0900300210	80	3"	163	318	392	398.5	80	182	1/4"	182	355	63	145	22400

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

DOUBLE-ACTING

Code	DN (nominal diameter)	G	A	B	C	D	E	F	H	L	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300181	10	1/4"	49	98	117	118	23.5	48	1/8"	40	5.6	63	32	830
W0900300182	10	3/8"	49	98	117	118	23.5	48	1/8"	40	6.8	63	32	820
W0900300183	15	1/2"	49	102	117	123	23.5	54	1/8"	42	9.6	63	32	870
W0900300184	20	3/4"	60.5	118.5	160	144.5	27	73	1/8"	52	17.9	63	42	1730
W0900300185	25	1"	75	134	139	163	33.5	80	1/8"	58	30	63	50	2290
W0900300186	32	1 ¼"	86	157.5	152	193.5	38	90	1/4"	72	49	63	63	3480
W0900300187	40	1 ½"	86	163.5	152	204	38	102	1/4"	81	68	63	63	4380
W0900300188	50	2"	94	188	205	234	42.5	118	1/4"	92	126	63	75	6460
W0900300189	65	2 ½"	94	220	205	288	42.5	151	1/4"	154	226	63	75	10100
W0900300190	80	3"	120	257.5	275	338	55	182	1/4"	182	355	63	100	17900

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

METAL WORK PNEUMATIC

WAFER STAINLESS STEEL ACTUATED BALL VALVES



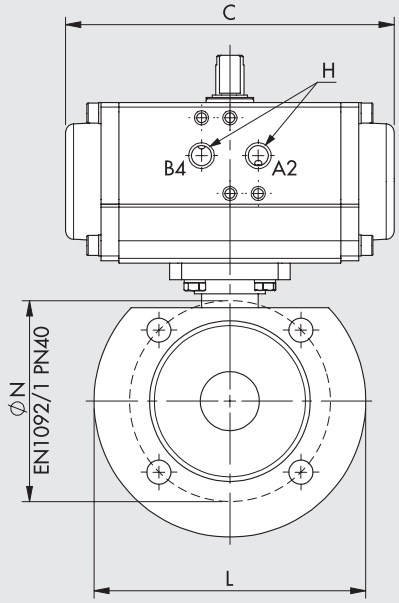

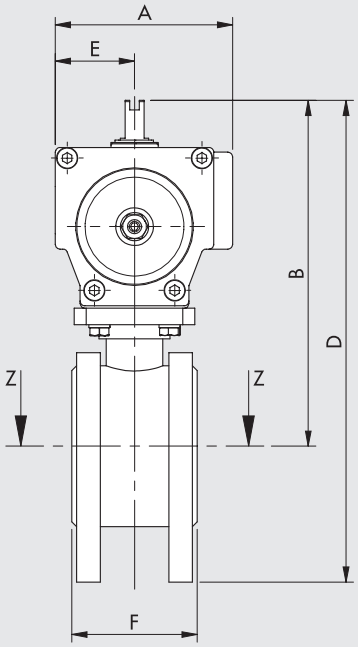



- Position of the ball with "B4" port powered actuator for double-acting versions.
- Position of the ball with actuator at rest for single-acting versions.

Single-acting

Double-acting

SINGLE-ACTING

Code	DN (nominal diameter)	A	B	C	D	E	F	H	L	ØN	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300031	15	86	159	152	206.5	38	36	1/4"	95	65	22.3	40	63	2910
W0900300032	20	86	164	152	216.5	38	38	1/4"	105	75	47.7	40	63	3280
W0900300033	25	94	178.5	205	236	42.5	53	1/4"	115	85	83.5	40	75	5300
W0900300034	32	94	190.5	205	260.5	42.5	53	1/4"	140	100	150.4	40	75	6470
W0900300035	40	94	196.5	205	271.5	42.5	65	1/4"	150	110	255	40	75	7570
W0900300036	50	104	215	230	297.5	49	78	1/4"	165	125	435	40	85	10200

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

DOUBLE-ACTING

Code	DN (nominal diameter)	A	B	C	D	E	F	H	L	ØN	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300021	15	60.5	132	160	179	27	36	1/8"	95	65	22.3	40	42	1980
W0900300022	20	60.5	137	160	189	27	38	1/8"	105	75	47.7	40	42	2350
W0900300023	25	75	146.5	139	204	33.5	53	1/8"	115	85	83.5	40	50	3000
W0900300024	32	86	174	152	244	38	53	1/4"	140	100	150.4	40	63	4700
W0900300025	40	86	180	152	255	38	65	1/4"	150	110	255	40	63	5800
W0900300026	50	86	188	152	270.5	38	78	1/4"	165	125	435	40	63	6970

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

ACTUATED BUTTERFLY VALVES SERIES RV-FLUID

Actuated throttle valves with a Wafer-type connection and centred disc are mainly used to choke and regulate large flow rates. The body is made of painted cast iron, nickel-plated cast iron lens with EPDM seals. A position indicator can be applied to the actuator using special position-sensing switch-boxes.

TECHNICAL DATA

VALVES		
Max operating pressure *	bar	16
	MPa	1.6
	psi	232
Fluid temperature	°C	-10 to +120
Ambient temperature	°C	-20 to +80
Usable fluids / Materials compatibility		Valves that can be used with neutral or slightly aggressive liquid and gas fluids. (Refer to the tables of chemical compatibility of materials in contact with the fluid on www.metalwork.it or contact Metal Work technical service)
Nominal diameter (DN)	mm	50 to 200
Mounting position		Any, except that with actuator downwards, which is not recommended
Note		High- and low-temperature versions on request
ROTARY ACTUATOR		
Operating pressure	bar	6 to 10
	MPa	0.6 to 1
	psi	87 to 145
Ambient temperature	°C	-20 to +80
Fluid		20 µm filtered, unlubricated air

* The maximum working pressure varies with temperature. See the "Max. pressure/temperature chart".

COMPONENTS

① BODY: lamellar cast iron coated with epoxy-resin enamel
② DISK: nickel-plated spheroidal cast iron
③ ROD: AISI 420 stainless steel
④ SLEEVE: EPDM
⑤ ROD GUIDE BUSHING: teflon®
⑥ ROD SEALS: FKM/FPM
⑦ SEEGER: zinc-plated carbon steel

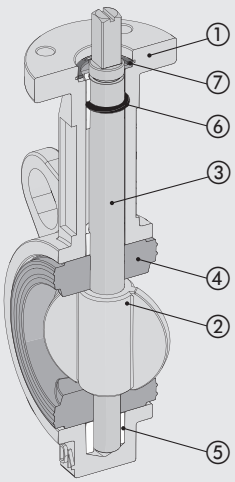



METAL WORK PNEUMATIC

MAX. PRESSURE/TEMPERATURE CHART

Actuated Butterfly valves

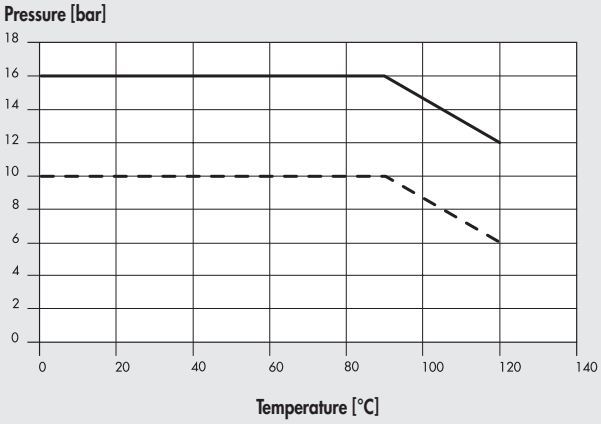

Installation between flanges

Installation at end of lines

LOAD LOSS CHART (reference fluid water at 20°C)

Actuated Butterfly valves

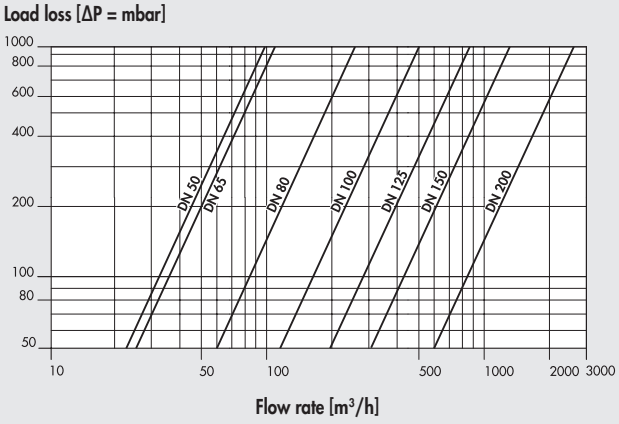

FLOW RATE TO THE DISC-OPENING ANGLE CHART

Actuated Butterfly valves

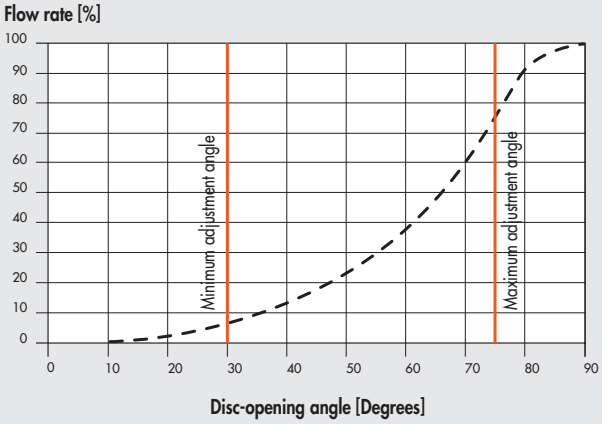

CONFIGURATION FLANGE FIXING SCREWS

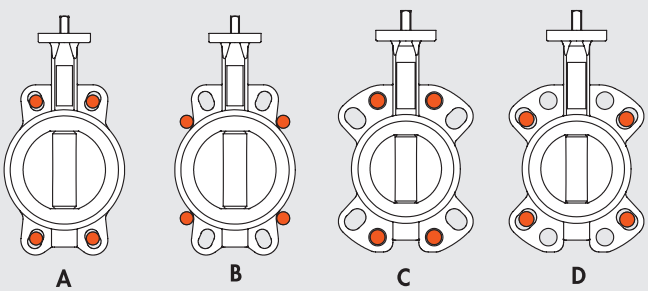

Type flange	Valve size						
	50	65	80*	100	125	150	200
PN6 EN1092	A	A	D	B	A	A	A
PN10 EN1092	A	A	C	A	A	A	A
PN16 EN1092	A	A	C	A	A	A	A
#150 ANSI B16.5	A	A	D	A	A	A	A

* For DN80 PN10-16 with 4 holes see configuration D.

ACTUATED BUTTERFLY VALVES



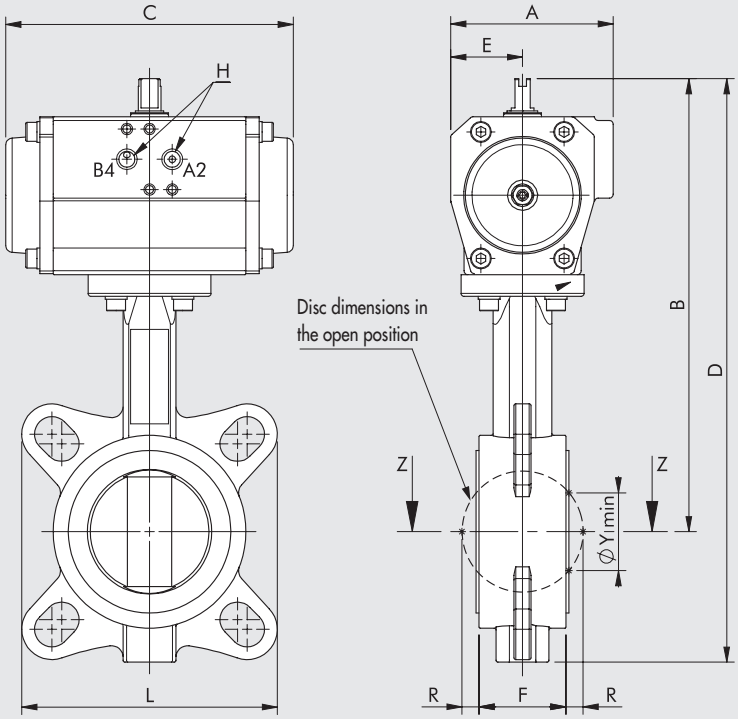



- Position of the disc with "B4" port powered actuator for double-acting versions.
- Position of the disc with actuator at rest for single-acting versions.

Single-acting

Double-acting

SINGLE-ACTING

Code	DN (nominal diameter)	A	B	C	D	E	F	H	L	R	ØY min	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300051	50	94	246	205	308	42.5	43	1/4"	121	5	31	99	16	75	5470
W0900300052	65	94	256	205	325	42.5	46	1/4"	135	9	45	108	16	75	5770
W0900300053	80	104	280	230	370	49	46	1/4"	146	17	65	261	16	85	8030
W0900300054	100	120	314.5	275	422.5	55	52	1/4"	108	26	90	518	16	100	11120
W0900300055	125	134	352.5	309	471.5	63.5	56	1/4"	119	34	110	883	16	115	16600
W0900300056	150	134	372.5	309	504	63.5	56	1/4"	131	50	146	1364	16	115	18100
W0900300057	200	163	435	392	601	80	60	1/4"	156	71	194	2716	16	145	34000

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

DOUBLE-ACTING

Code	DN (nominal diameter)	A	B	C	D	E	F	H	L	R	ØY min	Kv factor [m³/h]	Max pressure * [bar]	R4 rotary actuator bore	Weight [g]
W0900300041	50	86	229.5	152	291.5	38	43	1/4"	121	5	31	99	16	63	3700
W0900300042	65	86	239.5	152	308.5	38	46	1/4"	135	9	45	108	16	63	4000
W0900300043	80	86	253.5	152	343.5	38	46	1/4"	146	17	65	261	16	63	4800
W0900300044	100	94	290	205	397.5	42.5	52	1/4"	108	26	90	518	16	75	7200
W0900300045	125	94	300	205	419	42.5	56	1/4"	119	34	110	883	16	75	9200
W0900300046	150	104	330	230	461.5	49	56	1/4"	131	50	146	1364	16	85	12000
W0900300047	200	134	402.5	309	568.5	80	60	1/4"	156	71	194	2716	16	115	24200

* The maximum operating pressure varies with the temperature. See the "Max. pressure/temperature chart".

ROTARY ACTUATOR SERIES R4

Sturdy, compact rotary actuators, suitable for operating industrial valves with ISO 5211 mounting flange and 0-90° swivel angle.
The R4 actuator is the double-rack type, a technology that ensures constant twisting torque during rotation.
The control valve can be fitted directly to the actuator using the NAMUR VDI\VDE-3845 interface or can be controlled remotely using the existing G (BSP) threaded connections.
On the actuator, you can install specific accessories for the detection of limit switch positions (switch box).
Given its specific application, the R4 actuator features high torque and reduced bending moment supported by the shaft.

TECHNICAL DATA			Ø 32	Ø 42	Ø 50	Ø 63	Ø 75	Ø 85	Ø 100	Ø 115	Ø 125	Ø 145
Operating pressure		bar	3 to 8									
		MPa	0.3 to 0.8									
		psi	43 to 116									
Temperature range		°C	-20 to +80									
Fluid			20 µm filtered, unlubricated air									
Rotation angle			90° ±5° (90°±3° for Ø 32)									
Valve fixing interface			According to ISO 5211 and DIN 3337									
Female bottom key			Double square type (star)									
Power interface			According to NAMUR VDI\VDE-3845									
Interface for fixing accessories at the top			According to NAMUR VDI\VDE-3845									
Category ATEX			Ⓔx II 2G Ex h IIC T5 Gb									
			Ⓔx II 2D Ex h IIIC T95°C Db									
Assembly position			Any. Upward power takeoff not recommended									
Versions			Single-acting / Double-acting									
Nominal torque at 6 bar		Nm	7.6	13.0	18.5	33.0	70.2	106.9	166.4	274.5	361.1	520.2
Maximum idle rotation	double acting	s	0.5	0.5	0.6	0.7	0.7	0.9	0.9	1.1	1.1	1.1
	single acting	s	-	0.5	0.6	0.9	1	1.3	1.3	1.6	2.1	2.1
Internal volume	double acting	liters	0.07	0.18	0.23	0.45	0.61	0.98	1.8	2.8	3.7	4.9
	single acting	liters	-	0.072	0.092	0.18	0.244	0.392	0.72	1.12	1.48	1.96

COMPONENTS

① BODY: extruded aluminium with hard anodisation
② END CAP: pressure die-cast aluminium with polyester powdercoating
③ PISTON: anodized pressure die-cast aluminium
④ SHAFT WITH PINION: nickel-plated carbon steel
⑤ GASKETS: NBR
⑥ SLIDING GUIDES: acetal resin
⑦ SCREWS AND WASHERS: stainless steel
⑧ SEEGER: zinc-plated carbon steel
⑨ SPRINGS (for single-acting versions only): carbon steel with polyester powder coating

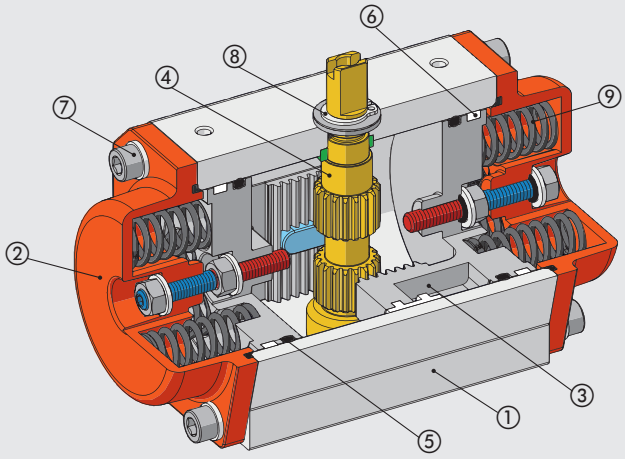

DIMENSIONING

CHOOSING THE ACTUATOR

Actuators are chosen by ensuring that the available torque is greater than the torque required by the application, taking into account a safety margin. When used for actuating valves, which is a typical case for this series of actuators, the interface flange and the power takeoff dimension (seat for connection with the valve shaft) must also be verified.
When using ball valves, you need to know the operating torque according to which a minimum safety factor must be considered to ensure correct operation over time, even in the worst operating conditions. As a general rule, the safety factor must be at least 25% but in some applications and, for some valve manufacturers, it is recommended to be up until 50%.

- **DOUBLE-ACTING VERSION**
  During rotation, the double-acting actuator provides constant torque at each position and in both directions with the same supply pressure.

Powered B4: closing (0°)





Example	
Valve operating torque	50 Nm
Safety factor required	25% (12.5 Nm)
Minimum actuator torque required	50 Nm + 12.5 Nm = 62.5 Nm
Actuator supply pressure	6 bar
Chosen bore	75
Based on the supplied torque at 6 bar (see table "pair of double-acting actuator")	70.2 Nm (> 62.5 Nm)
Actual safety factor	(70.2 Nm - 50 Nm) / 50 Nm = 40%

Powered A2: opening (90°)





- **SINGLE-ACTING VERSION**
  During rotation, the single-acting actuator provides variable torque depending on the angle.
  On opening, the maximum torque value is at 0° and then decreases as the compressed springs counteract the movement of the pistons and accumulate energy that is made available when rotation is reversed.
  On closing, the maximum torque value is at 90° and then decreases due to the release of the springs.

NOT powered: closing (0°)





Example	
Valve operating torque	50 Nm
Safety factor required	30% (15 Nm)
Minimum actuator torque required	50 Nm + 15 Nm = 65 Nm
Actuator supply pressure	6 bar
Chosen bore	115
Based on the supplied torque at 6 bar (see table "pair of double-acting actuator")	106 Nm a 0° (> 65 Nm)
Actual safety factor	(106 Nm - 50 Nm) / 50 Nm = 112%

Powered A2: opening (90°)





METAL WORK PNEUMATIC

TORQUE OF DOUBLE-ACTING ACTUATORS [Nm]

Ø	Supply pressure [bar]							
	1	2	3	4	5	6	7	8
32	-	-	-	5	6.3	7.6	8.8	10
42	-	-	6.5	8.7	10.9	13	15.2	17.3
50	3	6.1	9.2	12.3	15.4	18.5	21.5	24.6
63	5.5	11	16.5	22	27.5	33	38.5	44
75	11.7	23.4	35.1	46.8	58.5	70.2	81.9	93.6
85	17.8	35.6	53.4	71.2	89	106.9	124.7	142.4
100	27.7	55.4	83.2	110.9	138.6	166.4	194.1	221.8
115	45.7	91.5	137.2	183	228.7	274.5	320.2	366
125	60.1	120.3	180.5	240.7	300.9	361.1	421.2	481.4
145	86.7	173.4	260.1	346.8	433.5	520.2	606.9	693.6

TORQUE OF SINGLE-ACTING ACTUATORS [Nm]

Ø	Springs per side	Supply pressure [bar]												Non-powered spring torque	
		3		4		5		6		7		8			
		0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	90°	0°
42	3	-	-	-	-	7.1	4.1	9.3	6.3	11.5	8.5	13.7	10.7	6.8	3.8
	4	**-**	**-**	**-**	**-**	**-**	**-**	**8.1**	**4.1**	**10.2**	**6.2**	**12.4**	**8.4**	**9**	**5**
50	3	5.7	3.5	8.9	6.6	12	9.6	15.1	12.7	18.1	15.7	21.2	18.8	5.7	3.5
	4	-	-	7.7	4.7	10.8	7.7	13.9	10.8	16.9	13.8	20.2	16.9	7.7	4.7
	5	-	-	-	-	9.6	5.8	12.7	8.9	15.7	11.9	18.8	15	9.6	5.8
	6	**-**	**-**	**-**	**-**	**8.4**	**3.9**	**11.5**	**7**	**14.5**	**10**	**17.6**	**13.1**	**11.5**	**7**
63	3	9.4	6.3	14.9	11.7	20.4	17.2	25.9	22.7	31.4	28.2	36.9	33.7	10.2	7.2
	4	-	-	12.3	8.3	17.8	13.8	23.3	19.3	28.8	24.8	34.3	30.3	13.7	9.7
	5	-	-	-	-	15.4	10.4	20.9	15.9	26.4	21.4	31.9	26.9	17.1	12.1
	6	**-**	**-**	**-**	**-**	**13**	**7**	**18.5**	**12.5**	**24**	**18**	**29.5**	**23.5**	**20.5**	**14.5**
75	3	22.5	12.6	34.2	24.4	46	36.1	57.7	47.8	69.4	59.5	81.1	71.2	22.5	12.6
	4	-	-	30	16.9	41.8	28.6	53.5	40.3	65.2	52	76.9	63.7	30	16.9
	5	-	-	-	-	37.6	21.1	49.3	32.8	61	44.5	72.7	56.2	37.6	21.1
	6	**-**	**-**	**-**	**-**	**33.4**	**13.6**	**45.1**	**25.3**	**56.8**	**37**	**68.5**	**48.7**	**45.1**	**25.3**
85	3	34.5	18.9	52.4	36.7	70.2	54.5	88	72.3	105.8	90.1	123.6	107.9	34.5	18.9
	4	-	-	46.1	25.2	63.9	43	81.7	60.8	99.5	78.6	117.3	96.4	46.1	25.2
	5	-	-	-	-	57.6	31.5	75.4	49.3	93.2	67.1	111	84.9	57.6	31.5
	6	**-**	**-**	**-**	**-**	**51.5**	**20**	**69.1**	**37.8**	**86.9**	**55.6**	**104.7**	**73.4**	**69.1**	**37.8**
100	3	53.2	30	80.9	57.7	108.7	85.4	136.4	113.1	164.1	140.8	191.8	168.5	53.2	30
	4	-	-	70.9	40	98.7	67.7	126.4	95.4	154.1	123.1	181.8	150.8	70.9	40
	5	-	-	-	-	88.7	50	116.4	77.7	144.1	105.4	171.8	133.1	88.7	50
	6	**-**	**-**	**-**	**-**	**78.7**	**32.2**	**106.4**	**60**	**134.1**	**87.7**	**161.8**	**115.4**	**106.4**	**60**
115	3	84.3	53	130	98.8	175.8	144.5	221.6	190.3	267.3	236	313	281.7	84.3	53
	4	-	-	112.3	70.7	158.1	116.4	203.9	162.2	249.6	207.9	295.3	253.6	112.3	70.7
	5	-	-	-	-	140.4	88.3	186.2	134.1	231.9	179.8	277.6	225.5	140.4	88.3
	6	**-**	**-**	**-**	**-**	**122.7**	**60.2**	**168.5**	**106**	**214.2**	**151.7**	**259.9**	**197.4**	**168.5**	**106**
125	3	116.8	63.7	177	123.9	237.3	184.1	297.5	244.2	357.6	304.3	417.7	364.4	116.8	63.7
	4	-	-	155.7	85	216	145.2	276.2	205.3	336.3	265.4	396.4	325.5	155.7	85
	5	-	-	-	-	194.7	106.3	254.9	166.4	315	226.5	375.1	286.6	194.7	106.3
	6	**-**	**-**	**-**	**-**	**173.4**	**67.4**	**233.6**	**127.5**	**293.7**	**187.6**	**353.8**	**247.7**	**233.6**	**127.5**
145	3	158	92	245	179	332	265	418	352	505	439	592	526	168	102
	4	-	-	211	123	298	210	384	269	471	383	558	470	224	136
	5	-	-	-	-	264	154	350	240	437	327	524	414	280	170
	6	**-**	**-**	**-**	**-**	**230**	**98**	**316**	**184**	**403**	**271**	**490**	**358**	**336**	**204**

N.B.: All single-acting actuators come with the maximum quantity of springs that can be fitted to each side, which means that the user can dispense lower torques as required by simply removing unnecessary springs. If the quantity of springs is reduced, carefully check that the residual springs are positioned correctly.


2 springs


3 springs


4 springs


5 springs


6 springs

EXAMPLES OF APPLICATION



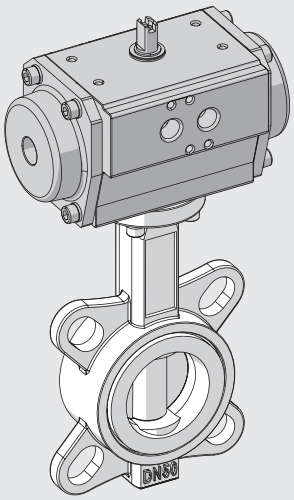



NOTES

DIMENSIONS AND ORDERING CODES

DIMENSIONS Ø 32 - 42 - 50 - 63

Ø 32

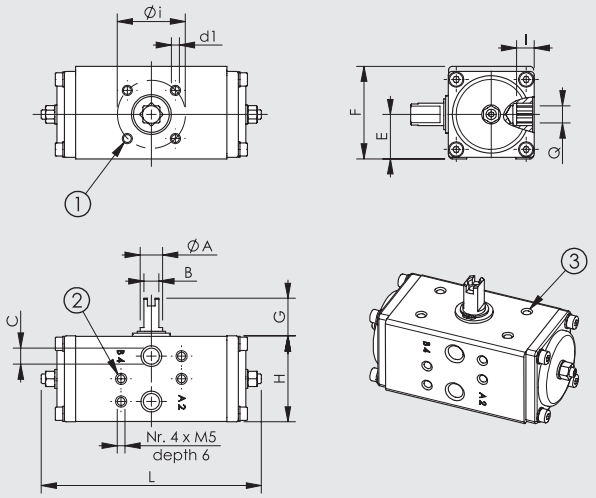

Ø 42 - 50 - 63

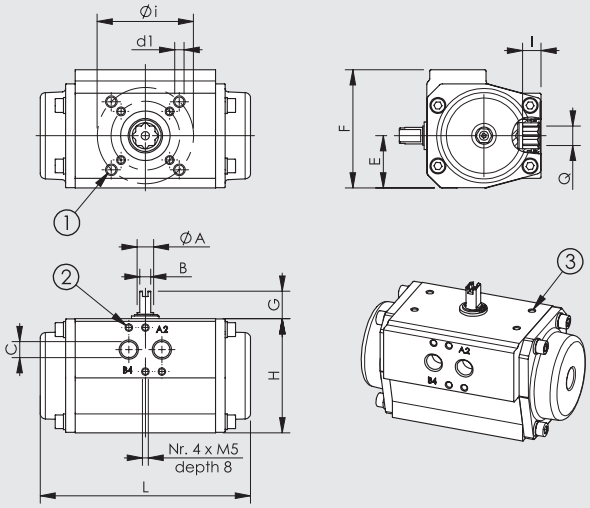

① Flange connection according to UNI 5211 and DIN 3337
② Supply interface according to NAMUR VDI/VDE-3845
③ Holes for fixing accessories according to NAMUR VDI/VDE-3845

Single-acting

Double-acting

FLANGE ISO 5211	Ø i	d1
F03	36	M5 depth 8
F04	42	M5 depth 8
F05	50	M6 depth 9
F07	70	M8 depth 12
F10	102	M10 depth 15
F12	125	M12 depth 18

Ø	Type	Code	Flange ISO 5211	Q	I	ØA	B	C	G	E	F	H	L	Weight [g]
32	Double-acting	W790A032GQ009DA	F03	9	10	12	8	1/8"	20	23.5	49	45	117	420
		W790B032GQ009DA	F04	9	10	12	8	1/8"	20	23.5	49	45	117	420
42	Double-acting	W79AC042GQ009DA	F03 / F05	9	10	12	8	1/8"	20	27	60.5	57	160	870
		W79AC042GQ011DA	F03 / F05	11	13	12	8	1/8"	20	27	60.5	57	160	870
		W790B042GQ009DA	F04	9	10	12	8	1/8"	20	27	60.5	57	160	870
		W790B042GQ011DA	F04	11	13	12	8	1/8"	20	27	60.5	57	160	870
	Single-acting	W79AC042GQ009SR	F03 / F05	9	10	12	8	1/8"	20	27	60.5	57	160	930
		W79AC042GQ011SR	F03 / F05	11	13	12	8	1/8"	20	27	60.5	57	160	930
		W790B042GQ009SR	F04	9	10	12	8	1/8"	20	27	60.5	57	160	930
		W790B042GQ011SR	F04	11	13	12	8	1/8"	20	27	60.5	57	160	930
50	Double-acting	W79AC050GQ009DA	F03 / F05	9	10	12	8	1/8"	20	33.5	75	67	139	1070
		W79AC050GQ011DA	F03 / F05	11	13	12	8	1/8"	20	33.5	75	67	139	1070
		W790B050GQ009DA	F04	9	10	12	8	1/8"	20	33.5	75	67	139	1070
		W790B050GQ011DA	F04	11	13	12	8	1/8"	20	33.5	75	67	139	1070
	Single-acting	W79AC050GQ009SR	F03 / F05	9	10	12	8	1/8"	20	33.5	75	67	139	1200
		W79AC050GQ011SR	F03 / F05	11	13	12	8	1/8"	20	33.5	75	67	139	1200
		W790B050GQ009SR	F04	9	10	12	8	1/8"	20	33.5	75	67	139	1200
		W790B050GQ011SR	F04	11	13	12	8	1/8"	20	33.5	75	67	139	1200
63	Double-acting	W79AD063GQ009DA	F03 / F05 / F07	9	10	12	8	1/4"	20	38	86	83	152	1600
		W79AD063GQ011DA	F03 / F05 / F07	11	13	12	8	1/4"	20	38	86	83	152	1600
		W79AD063GQ014DA	F03 / F05 / F07	14	16	12	8	1/4"	20	38	86	83	152	1600
		W790B063GQ009DA	F04	9	10	12	8	1/4"	20	38	86	83	152	1600
		W790B063GQ011DA	F04	11	13	12	8	1/4"	20	38	86	83	152	1600
		W790B063GQ014DA	F04	14	16	12	8	1/4"	20	38	86	83	152	1600
	Single-acting	W79AD063GQ009SR	F03 / F05 / F07	9	10	12	8	1/4"	20	38	86	83	152	1800
		W79AD063GQ011SR	F03 / F05 / F07	11	13	12	8	1/4"	20	38	86	83	152	1800
		W79AD063GQ014SR	F03 / F05 / F07	14	16	12	8	1/4"	20	38	86	83	152	1800
		W790B063GQ009SR	F04	9	10	12	8	1/4"	20	38	86	83	152	1800
		W790B063GQ011SR	F04	11	13	12	8	1/4"	20	38	86	83	152	1800
		W790B063GQ014SR	F04	14	16	12	8	1/4"	20	38	86	83	152	1800

DIMENSIONS Ø 75 - 85 - 100 - 115 - 125 - 145

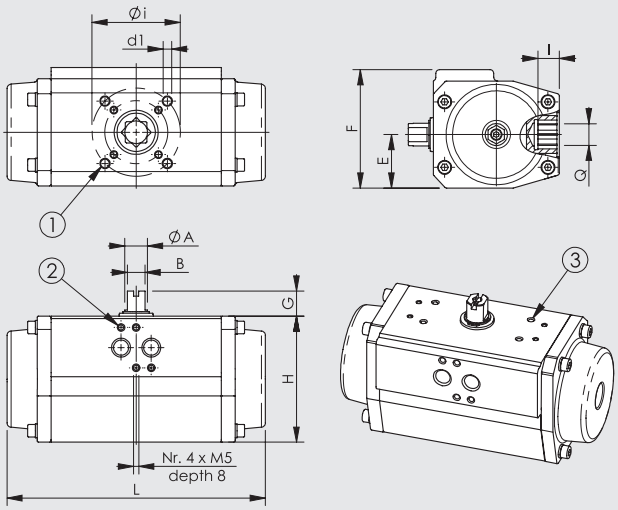

① Flange connection according to UNI 5211 and DIN 3337
② Supply interface according to NAMUR VDI/VDE-3845
③ Holes for fixing accessories according to NAMUR VDI/VDE-3845

Single-acting

Double-acting

FLANGE ISO 5211	Ø i	d1
F04	42	M5 depth 8
F05	50	M6 depth 9
F07	70	M8 depth 12
F10	102	M10 depth 15
F12	125	M12 depth 18

Ø	Type	Code	Flange ISO 5211	Q	I	ØA	B	C	G	E	F	H	L	Weight [g]
75	Double-acting	**W790D075GQ011DA**	F05 / F07	11	13	18	14	1/4"	20	42.5	94	100	205	2800
		W790D075GQ014DA	F05 / F07	14	16	18	14	1/4"	20	42.5	94	100	205	2800
		W790D075GQ017DA	F05 / F07	17	20	18	14	1/4"	20	42.5	94	100	205	2800
		W790B075GQ011DA	F04	11	13	18	14	1/4"	20	42.5	94	100	205	2800
		W790B075GQ014DA	F04	14	16	18	14	1/4"	20	42.5	94	100	205	2800
		W790B075GQ017DA	F04	17	20	18	14	1/4"	20	42.5	94	100	205	2800
	Single-acting	**W790D075GQ011SR**	F05 / F07	11	13	18	14	1/4"	20	42.5	94	100	205	3370
		W790D075GQ014SR	F05 / F07	14	16	18	14	1/4"	20	42.5	94	100	205	3370
		W790D075GQ017SR	F05 / F07	17	20	18	14	1/4"	20	42.5	94	100	205	3370
		W790B075GQ011SR	F04	11	13	18	14	1/4"	20	42.5	94	100	205	3370
		W790B075GQ014SR	F04	14	16	18	14	1/4"	20	42.5	94	100	205	3370
		W790B075GQ017SR	F04	17	20	18	14	1/4"	20	42.5	94	100	205	3370
85	Double-acting	**W790D085GQ014DA**	F05 / F07	14	16	18	14	1/4"	20	49	104	110	230	4200
		W790D085GQ017DA	F05 / F07	17	20	18	14	1/4"	20	49	104	110	230	4200
	Single-acting	**W790D085GQ014SR**	F05 / F07	14	16	18	14	1/4"	20	49	104	110	230	4830
		W790D085GQ017SR	F05 / F07	17	20	18	14	1/4"	20	49	104	110	230	4830
100	Double-acting	**W79DE100GQ014DA**	F05 / F07 / F10	14	16	18	14	1/4"	20	55	120	125	275	5800
		W79DE100GQ017DA	F05 / F07 / F10	17	20	18	14	1/4"	20	55	120	125	275	5800
		W79DE100GQ022DA	F05 / F07 / F10	22	25	18	14	1/4"	20	55	120	125	275	5800
	Single-acting	**W79DE100GQ014SR**	F05 / F07 / F10	14	16	18	14	1/4"	20	55	120	125	275	6820
		W79DE100GQ017SR	F05 / F07 / F10	17	20	18	14	1/4"	20	55	120	125	275	6820
		W79DE100GQ022SR	F05 / F07 / F10	22	25	18	14	1/4"	20	55	120	125	275	6820
115	Double-acting	**W790E115GQ017DA**	F07 / F10	17	20	36	27	1/4"	30	63.5	134	142	309	9200
		W790E115GQ022DA	F07 / F10	22	25	36	27	1/4"	30	63.5	134	142	309	9200
	Single-acting	**W790E115GQ017SR**	F07 / F10	17	20	36	27	1/4"	30	63.5	134	142	309	10300
		W790E115GQ022SR	F07 / F10	22	25	36	27	1/4"	30	63.5	134	142	309	10300
125	Double-acting	**W790E125GQ017DA**	F07 / F10	17	20	36	27	1/4"	30	69.5	141	155	362	11900
		W790E125GQ022DA	F07 / F10	22	25	36	27	1/4"	30	69.5	141	155	362	11900
	Single-acting	**W790E125GQ017SR**	F07 / F10	17	20	36	27	1/4"	30	69.5	141	155	362	14200
		W790E125GQ022SR	F07 / F10	22	25	36	27	1/4"	30	69.5	141	155	362	14200
145	Double-acting	**W790F145GQ022DA**	F10 / F12	22	25	36	27	1/4"	30	80	163	175	392	15500
	Single-acting	**W790F145GQ022SR**	F10 / F12	22	25	36	27	1/4"	30	80	163	175	392	19000

KEY TO CODES

W79	0A	032	G	Q0	09	DA
	FLANGE	DIAMETER	CONNECTIONS	TYPE OF POWER TAKEOFF	POWER TAKEOFF DIMENSIONS	TYPE
Rotary actuator series R4	**0A** F03 **0B** F04 **0D** F05 - F07 **0E** F07 - F10 **0F** F10 - F12 **AC** F03 - F05 **AD** F03 - F05 - F07 **DE** F05 - F07 - F10	**032** Ø 32 **042** Ø 42 **050** Ø 50 **063** Ø 63 **075** Ø 75 **085** Ø 85 **100** Ø 100 **115** Ø 115 **125** Ø 125 **145** Ø 145	**G** Supply port threading G (BSP)	**Q0** Star type (double square 45° offset)	**09** 9 mm **11** 11 mm **14** 14 mm **17** 17 mm **22** 22 mm	**DA** Double-acting **SR** Single-acting

N.B.: The orderable configurations are shown on the previous pages.

NOTES

ACCESSORIES PARTS FOR ACTUATED VALVES SERIES RV-FLUID

SWITCH BOX WITH ELECTROMECHANICAL MICROSWITCHES FOR ACTUATOR



Voltage: max 125/250 VAC
Current: min 30 mA
max 2.5 A
Temperature: -25°C to +125°C
Charge: IP67

	Code	Description	Weight [g]
	W0900300915	Switch box with electromechanical microswitches for actuator bore 32	196
	W0900300916	Switch box with electromechanical microswitches for actuator bore 42 - 63	152
	W0900300917	Switch box with electromechanical microswitches for actuator bore 115 - 145	384
	W0900300919	Switch box with electromechanical microswitches for actuator bore 75 - 100	384

POSITION INDICATOR FOR ACTUATOR

	Code	Description	Weight [g]
	W0900300930	Position indicator for actuator bore 32 - 63	16
	W0900300931	Position indicator for actuator bore 75 - 100	22
	W0900300933	Position indicator for actuator bore 32 - 100 (only without switch box)	52
	W0900300932	Position indicator for actuator bore 115 - 145	26

CONTROL VALVES WITH NAMUR INTERFACE

Refer to page **B1**.53



KIT SQUARED ADAPTOR



Code	Description	A	B	L	Weight [g]
W0900301001	Kit squared adaptor RV-FLUID 08/11	8	11	12	7
W0900301002	Kit squared adaptor RV-FLUID 09/11	9	11	12	6
W0900301006	Kit squared adaptor RV-FLUID 09/13	9	13	12	11
W0900301007	Kit squared adaptor RV-FLUID 11/13	11	13	12	7
W0900301008	Kit squared adaptor RV-FLUID 11/14	11	14	16	13
W0900301003	Kit squared adaptor RV-FLUID 14/17	14	17	17	19
W0900301005	Kit squared adaptor RV-FLUID 14/22	14	22	22	65
W0900301009	Kit squared adaptor RV-FLUID 16/22	16	22	22	52
W0900301004	Kit squared adaptor RV-FLUID 17/22	17	22	22	48

Note: adapters according to ISO 5211 - DIN 3337 in AISI 316 stainless steel

SPRINGS KIT FOR SINGLE-ACTING VERSION



Code	Ø	Quantity per kit
W0900303002	42	8
W0900303003	50	12
W0900303004	63	12
W0900303005	75	12
W0900303006	85	12
W0900303007	100	12
W0900303008	115	12
W0900303009	125	12
W0900303010	145	12

Note: the springs are supplied pre-compressed with a special support to facilitate installation. **Do not remove the spring from its support for any reason whatsoever**.

SPARES PARTS FOR ACTUATED VALVES SERIES RV-FLUID

GASKETS KIT AND SLIDING ELEMENTS

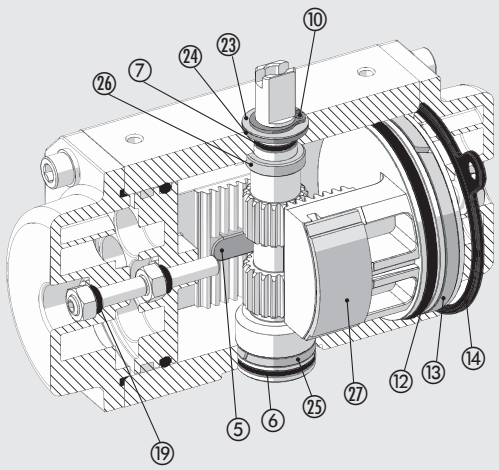

Code	Ø	Parts
W0900302001	32	6-7-10-12-13-14-19-23-24-25-26-27
W0900302002	42	5-6-7-10-12-13-14-19-23-24-25-26-27
W0900302003	50	5-6-7-10-12-13-14-19-23-24-25-26-27
W0900302004	63	5-6-7-10-12-13-14-19-23-24-25-26-27
W0900302005	75	5-6-7-10-12-13-14-19-23-24-25-26-27
W0900302006	85	5-6-7-10-12-13-14-19-23-24-25-26-27
W0900302007	100	5-6-7-10-12-13-14-19-23-24-25-26-27
W0900302008	115	5-6-7-10-12-13-14-19-23-24-25-26-27
W0900302009	125	5-6-7-10-12-13-14-19-23-24-25-26-27
W0900302010	145	5-6-7-10-12-13-14-19-23-24-25-26-27

METAL WORK PNEUMATIC

UNITS

- SYNTESI C1
- BIT C2
- SKILLAIR C3
- NEW DEAL C4
- ONE C5
- PRECISION REGULATORS AND PRESSURE CONTROL C6
- FLOW AND PRESSURE SENSORS C7

SUMMARY SYNTESI®

	● GENERAL TECHNICAL DATA Syntesi®	C1.4
	● Syntesi® KEY TO CODES	C1.8
	● Syntesi® FILTER	C1.9
	● Syntesi® DEPURATOR	C1.12
	● Syntesi® ACTIVE CARBON FILTER	C1.15
	● Syntesi® REGULATOR	C1.18
	● Syntesi® IN-SERIES REGULATOR	C1.21
	● Syntesi® PILOT OPERATED REGULATOR	C1.24
	● PROPORTIONAL PRECISION PRESSURE REGULATOR SYNTRONIC SERIES	C6.19
	● Syntesi® FILTER-REGULATOR	C1.28
	● Syntesi® LUBRICATOR	C1.33
	● Syntesi® SHUT-OFF-VALVE	C1.36
	● Syntesi® SHUT-OFF-VALVE SAFE AIR® SERIES	C1.39

METAL WORK PNEUMATIC

● **Syntesi® PROGRESSIVE STARTER** — C1.49

● **Syntesi® PRESSURE SWITCHES** — C1.51

● **Syntesi® AIR TAKE-OFF** — 2 WAYS 4 WAYS — C1.53

● **FR + LUB Syntesi®** — C1.55

● **V3V + FR + LUB Syntesi®** — C1.58

● **FIL + DEP Syntesi®** — C1.61

● **FIL + LUB Syntesi®** — C1.63

● **Syntesi® ACCESSORIES** — C1.65

● **Syntesi® SPARE PARTS** — C1.68

GENERAL TECHNICAL DATA SYNTESI®

Syntesi® is an important milestone achieved by Metal Work, the result of thirty years' experience producing air-treatment units. It has been studied in minute detail to obtain the best possible performance in a reduced space and with limited weight. The capacity is much higher than that of other units of the same size.
This modular unit features a very simple yet effective system that requires no brackets, stay bolts or yoke for assembling the elements.
The basic version of Syntesi® incorporates numerous functions that are not provided or are only optional with traditional units. Examples are padlockable knobs, additional pneumatic ports on the front and back, flow options from left to right or vice versa, regulators with compensation system - which are accurate even when the upstream pressure changes, with rapid downstream pressure relief - full indelible marking, automatic condensate drain even in size 1, and 360° visual inspection of oil and condensate levels. The basic materials, technopolymer and nickel-plated brass have excellent corrosion resistance. An anti-corrosion version is available with stainless steel components (screws, plates) or Geomet®-treated ones (regulator springs).

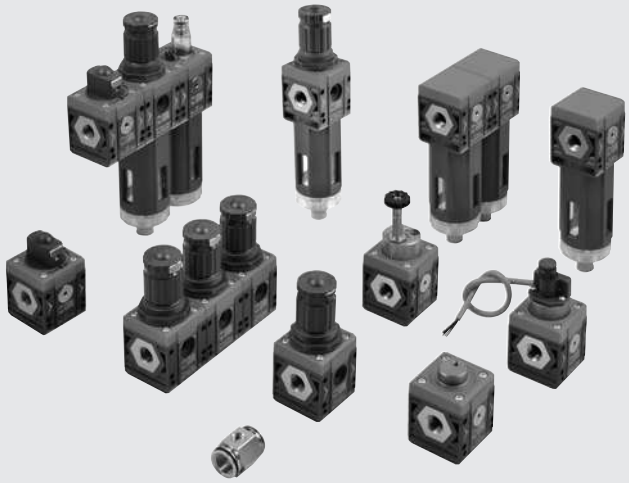

TECHNICAL DATA		SIZE 1			SIZE 2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Max. input pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Flow rate		See catalogue of the various elements						
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	from -10 to +50			from -10 to +50			
Padlockable knob		The knobs of the regulators, filter regulators and standard sectioning valves can all be padlocked						
Fluid		Compressed air or other inert gases						
Mounting position		See catalogue of the various elements						
Direction of flow		Flow options right to left or vice versa						
Additional air take-off, for pressure gauges or fittings		1/8", front and rear, on all modules			1/4", front and rear, on all modules			
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			
Certification for potentially explosive atmosphere according to Atex 2014/34/EU rule		II 3G Ex h IIC T5 Gc -10°C < Ta < 50°C II 3D Ex h IIIC T100 °C Dc						

ANTI-CORROSION VERSION

Differences compared to the standard version:
- stainless steel screws
- stainless steel plate for R, FR, V3V knobs
- Geomet®-treated regulator spring and filter-regulator

FIXING TO FRONT PORTS



Do not use a spanner for fixing taper threaded elements to the front ports. Mount by hand and apply a liquid sealant (not teflon®).

ROTARY BUSHINGS



3/4" and 1" bushings in Size 2 rotate freely to facilitate assembly operations.

LASER MARKING

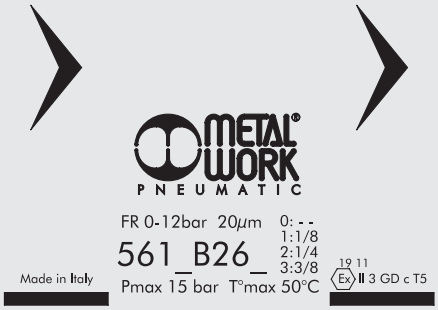

The following is marked indelibly on the body:
- Metal Work trademark
- Code
- Maximum pressure and temperature
- Degree of filtration or pressure range, where relevant
- Week and year of manufacture
- Atex category
- Made in Italy

MOUNTING OPTIONS

On the wall, using two screws



On a panel



Using knob bracket



Using a bracket

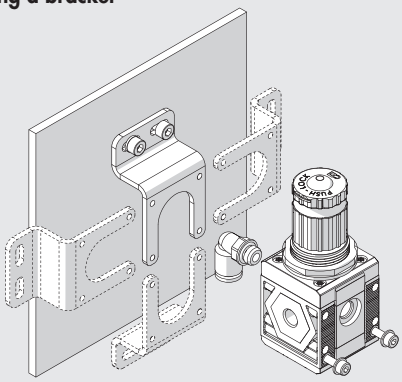



The bracket can be secured in any position, and the fittings can be mounted on the pressure gauge air intake at the back of the unit.

On a DIN EN50022 bar with the apposite adaptator



MODULARITY AND FLEXIBILITY

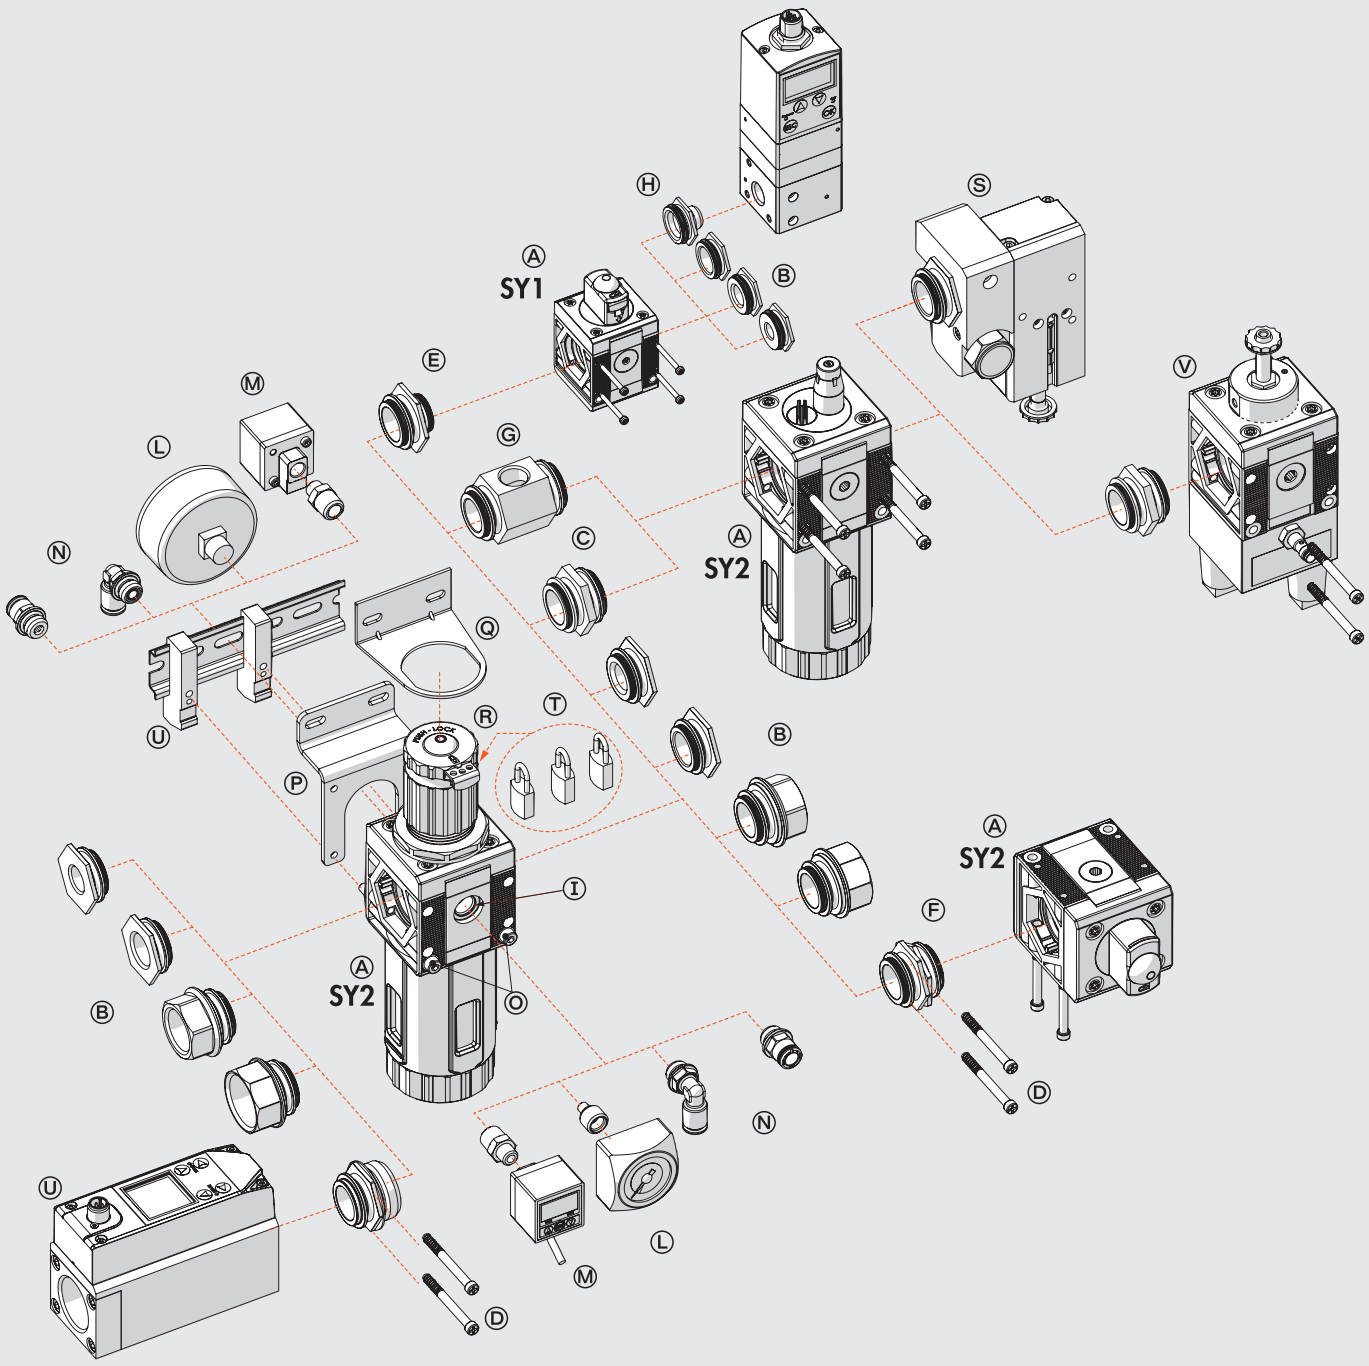

The various elements of Syntesi® Ⓐ can be connected to the air feed and delivery circuit using pneumatic nickel brass or passivated aluminium ports Ⓑ and can be fixed together using nipples Ⓒ.
The nipples and ports are easy to remove by unscrewing the two front screws Ⓓ. This solution has numerous advantages:
- Reduced overall dimensions.
- Free composition of multiple elements, without the need for brackets, stay bolts or yoke.
- The threads for the fittings are metallic, allowing high tightening torques, also for tapered threads.
- Maximum flexibility: a unit can be transformed at any time by adding an element or replacing a port with another one, e.g. 1/4" instead of 1/8".
- The air intake port can be the same or different from the outlet port, as desired.

Standard Syntesi® ports are: 1/8", 1/4", 3/8" for size 1; 3/8", 1/2", 3/4", 1" for size 2.
It may be necessary to use a vice to insert the bushes into size 2.
The nipples have different functions:
- Nipple Ⓒ joins two elements of the same size together.
- Size adaptor Ⓔ can be used to connect an element in the Syntesi® 2 series with one in the Syntesi® 1 series.
- The 90° adaptor Ⓕ can be used to connect two 90° angled elements. For example, it can help directing the regulator knob or the control knob of a sectioning valve towards the user.
- The two-way air intake Ⓖ is a simple and cost-effective system which, besides connecting two elements together, has 2 opposing threaded air intakes.
- The adaptor for Regtronic Ⓗ can be used to fix the Regtronic 1/4" proportional valve to a Syntesi® size 1 element.

Additional ports Ⓘ. On the front and back of ALL Syntesi® elements there is a port (1/8" for size 1, 1/4" for size 2) that can be used for pressure gauges Ⓛ, pressure switches Ⓜ or, given the high flow rate, as additional air take-off Ⓝ. These ports are downstream of the element, so, for example, a regulator port can supply air at a set pressure or a filter port can supply filtered air (not valid for activated carbon filter and depurator).
Wall fixing. Only two through screws Ⓞ are needed. No bulky brackets or additional flanges are required. The bracket Ⓟ can be used to separate the unit from the fixing wall, e.g. to mount a fitting to the rear port.
Fixing on a DIN EN50022 bar. Can be done using the bracket kit Ⓤ.
Regulator fixing bracket Ⓠ. Regulators and filter-regulators can also be fixed using a steel bracket Ⓠ that embraces the bell.
Padlockable knob Ⓡ. The knobs of regulators, filter-regulator and sectioning valves can all be padlocked. The steel plate is included in the supply. You can insert up to two 3 mm diameter padlocks Ⓣ on size 1 and three padlocks on size 2. As an alternative, the sectioning valve can have a steel plate suitable for a single 6 mm diameter padlock.
Safety valve. The unit can be equipped with a safety valve. For both sizes, valves from the 70 SAFE AIR® Ⓢ, series can be used, while the V3V valve from the SAFE AIR® Ⓥ, series, specifically designed for the Syntesi® series, is available only for size 2.
Flowmeter series FLUX 1-2 Ⓤ. The unit can incorporate a series FLUX 1 or FLUX 2 flow meter.

SYNTESI® KEY TO CODES

KEY TO CODES SINGLE ELEMENT

56	1	1	F	10	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**TYPE**	**THREADED OUTPUT CONNECTION**
56 Syntesi **5X** Syntesi anti-corrosion	**1** Size 1 **2** Size 2	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port	**F** Filter **D** Depurator **C** Active carbon filter **R** Pressure regulator **B** Filter-regulator **L** Lubricator ● **V** Shut off valve ▲✚ **W** Shut off valve Safe Air® ▲ **A** Progressive starter ▲ **S** Pressure switches **P** Air take-off ▲■ **G** Syntronic	Varies from element to element	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port

● The anti-corrosion version of this element is only available in manual or pneumatic type.
▲ Not available in the anti-corrosion version.
✚ Not available in size 1.
■ Not available in size 2.

KEY TO CODES UNIT COMPOSED OF TWO OR THREE ELEMENTS

56	1	1	V	10	B	24	L	10	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT 1**	**TYPE**	**ELEMENT 2**	**TYPE**	**ELEMENT 3**	**TYPE**	**THREADED OUTPUT CONNECTION**
56 Syntesi **5X** Syntesi anti-corrosion	**1** Size 1 **2** Size 2	**1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port	**F** Filter **D** Depurator **C** Active carbon filter **R** Pressure regulator **B** Filter-regulator **L** Lubricator ● **V** Shut off valve ▲✚ **W** Shut off valve Safe Air® ▲ **A** Progressive starter ▲ **S** Pressure switches **P** Air take-off ▲■ **G** Syntronic	Varies from element to element	**F** Filter **D** Depurator **C** Active carbon filter **R** Pressure regulator **B** Filter-regulator **L** Lubricator ● **V** Shut off valve ▲✚ **W** Shut off valve Safe Air® ▲ **A** Progressive starter ▲ **S** Pressure switches **P** Air take-off ▲■ **G** Syntronic	Varies from element to element	**F** Filter **D** Depurator **C** Active carbon filter **R** Pressure regulator **B** Filter-regulator **L** Lubricator ● **V** Shut off valve ▲✚ **W** Shut off valve Safe Air® ▲ **A** Progressive starter ▲ **S** Pressure switches **P** Air take-off ▲■ **G** Syntronic	Varies from element to element	**1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port

● The anti-corrosion version of this element is only available in manual or pneumatic type.
▲ Not available in the anti-corrosion version.
✚ Not available in size 1.
■ Not available in size 2.

SYNTESI® FILTER

METAL WORK PNEUMATIC

The job of the filter is to retain liquid or solid impurities present in the compressed air. The incoming air is moved by the centrifuge unit, so that liquid particles, which are heavier, are projected against the walls of the container and force to adhere to it. As they accumulate, the create drops that deposit on the bottom by gravity.
The remaining solid particles are held back by the porous filtering element.
The condensate is maintained in a quiet state to prevent the deposited impurities from re-entering the circulation. The condensate drains out through the drain cock provided.
The RMSA drain discharges when the pressure in the filter drops to zero. Alternatively the condensate can be drained by hand by pressing the button.
The RA drain discharges condensate from the container automatically whenever necessary, regardless of the pressure level.
The SAC tap drains the condensate only as the result **of sudden changes in compressed air requests**.
On the front and back there is a port (1/8" for size 1 and 1/4" forsize 2) that can be used with pressure gauges, pressure switches or as an additional filtered air intake.

TECHNICAL DATA		FIL SY1			FIL SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Degree of filtration	µm	5 (yellow) - output air purity class ISO8573-1: 3.7.4						
		20 (white) - output air purity class ISO8573-1: 4.7.4						
		50 (blue) - output air purity class ISO8573-1: 5.7.4						
Max. input pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	900	1200	1300	3400	3800	3800	
	scfm	32	42	46	120	135	135	
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1300	1650	1750	4500	5200	5200	
	scfm	46	58	62	159	184	184	
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Weight	g	178	173	164	488	461	457	445
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure						
		RA: automatic drain with condensate discharge, independent of pressure and flow rate.						
		Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.						
		SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs.**						
		Note: **the maximum input pressure for the RA version must not exceed 10 bar**						
Fluid		Compressed air or other inert gases						
Condensate bowl capacity	cm^3	30			70			
Mounting position		Vertical			Vertical			
Port for additional air take-off		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500			1500			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18			53			

COMPONENTS

① Technopolymer filter body
② IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
③ Technopolymer centrifuge
④ Sintered HDPE filter cartridge
⑤ Technopolymer screen
⑥ Drain (RMSA)
⑦ Technopolymer plate
⑧ NBR o-ring gaskets
⑨ Clear technopolymer bowl

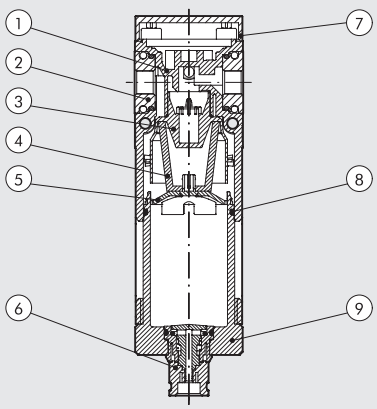

FLOW CHARTS

FIL Syntesi® **SY1** 1/8"

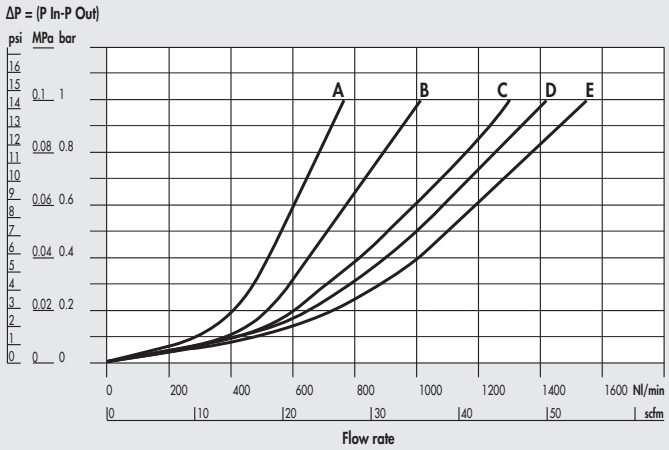

FIL Syntesi® **SY1** 1/4"

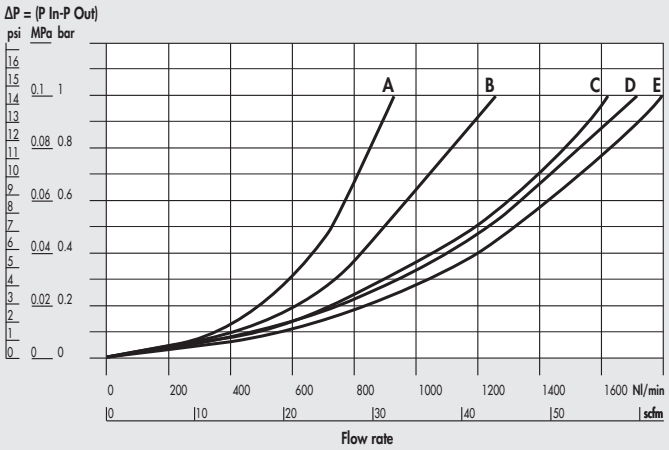

FIL Syntesi® **SY1** 3/8"

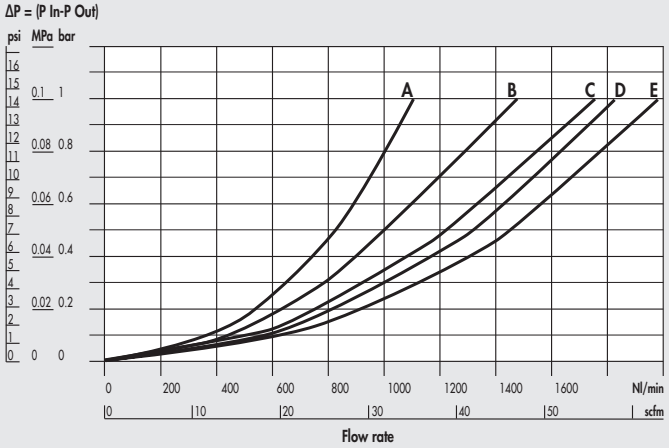

FIL Syntesi® **SY2** 3/8"

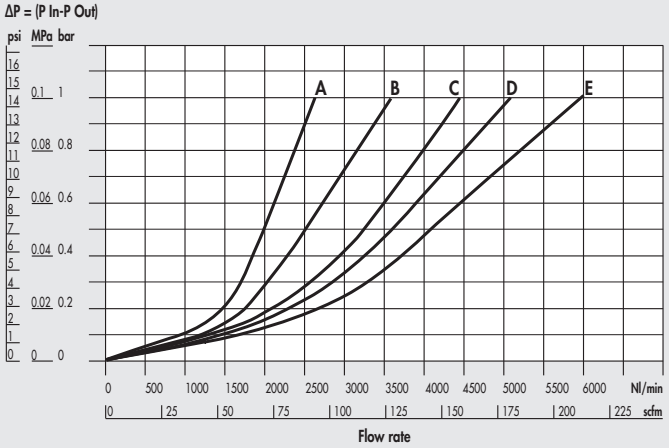

FIL Syntesi® **SY2** 1/2"

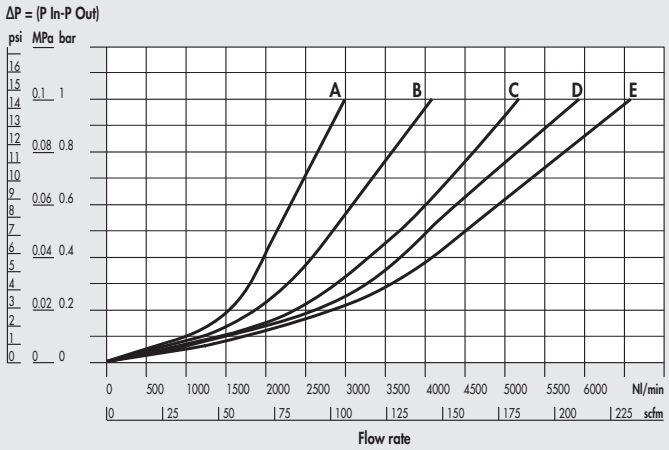

FIL Syntesi® **SY2** 3/4"-1"

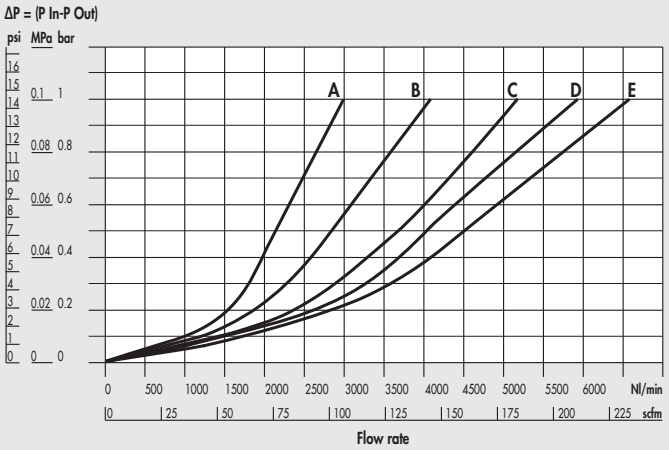

A = 2.5 bar - 0.25 MPa - 36 psi
B = 4 bar - 0.4 MPa - 58 psi
C = 6.3 bar - 0.63 MPa - 91 psi
D = 8 bar - 0.8 MPa - 116 psi
E = 10 bar - 1 MPa - 145 psi

METAL WORK PNEUMATIC

DIMENSIONS

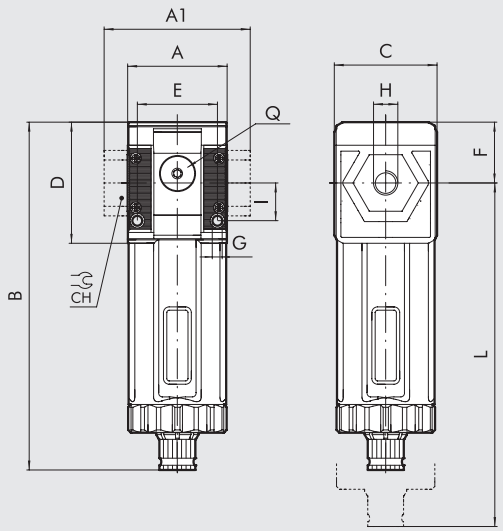

		SIZE 1			SIZE 2			
H (threaded port)		1/8″	1/4″	3/8″	3/8″	1/2″	3/4″	1″
A		42			60.5			
A1		-	-	44	-	-	95	95
B	RMSA	148			178			
	RA/SAC	152			182			
C		44			61			
CH		-			-	-	32	36
D		51.5			70.5			
E		33.5			47.5			
F		25.8			38.2			
G		Hole for M4 screws			Hole for M5 screws			
I		16			22.5			
L	RMSA	202			245			
	RA/SAC	206			249			
Q (no. 2 additional air takes-off)		1/8″			1/4″			

KEY TO CODES

56	1	1	F	10	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**DEGREE OF FILTRATION AND TYPE OF CONDENSATE DRAIN**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**1** Size 1	**0** Without bushing	**F** Filter	**10** 5 µm, RMSA	**0** Without bushing
5X Syntesi anti-corrosion		**1** 1/8″ port		**20** 20 µm, RMSA	**1** 1/8″ port
		2 1/4″ port		**30** 50 µm, RMSA	**2** 1/4″ port
		3 3/8″ port		**40** 5 µm, RA	**3** 3/8″ port
	2 Size 2	**0** Without bushing		**50** 20 µm, RA	**0** Without bushing
		3 3/8″ port		**60** 50 µm, RA	**3** 3/8″ port
		4 1/2″ port		**11** 5 µm, SAC	**4** 1/2″ port
		5 3/4″ port		**21** 20 µm, SAC	**5** 3/4″ port
		6 1″ port		**31** 50 µm, SAC	**6** 1″ port

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.

RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs.**

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description	Code	Description	Code	Description
Syntesi® SY1 FILTER		**Syntesi® SY2 FILTER**		**Syntesi® SY2 FILTER**	
5610F100	FIL SY1 5 RMSA without bushings	**5620F100**	FIL SY2 5 RMSA without bushings	**5626F106**	FIL SY2 1 5 RMSA
5610F200	FIL SY1 20 RMSA without bushings	**5620F200**	FIL SY2 20 RMSA without bushings	**5626F206**	FIL SY2 1 20 RMSA
5610F400	FIL SY1 5 RA without bushings	**5620F400**	FIL SY2 5 RA without bushings	**5626F406**	FIL SY2 1 5 RA
5610F500	FIL SY1 20 RA without bushings	**5620F500**	FIL SY2 20 RA without bushings	**5626F506**	FIL SY2 1 20 RA
5611F101	FIL SY1 1/8 5 RMSA	**5623F103**	FIL SY2 3/8 5 RMSA		
5611F201	FIL SY1 1/8 20 RMSA	**5623F203**	FIL SY2 3/8 20 RMSA		
5611F401	FIL SY1 1/8 5 RA	**5623F403**	FIL SY2 3/8 5 RA		
5611F501	FIL SY1 1/8 20 RA	**5623F503**	FIL SY2 3/8 20 RA		
5612F102	FIL SY1 1/4 5 RMSA	**5624F104**	FIL SY2 1/2 5 RMSA		
5612F202	FIL SY1 1/4 20 RMSA	**5624F204**	FIL SY2 1/2 20 RMSA		
5612F402	FIL SY1 1/4 5 RA	**5624F404**	FIL SY2 1/2 5 RA		
5612F502	FIL SY1 1/4 20 RA	**5624F504**	FIL SY2 1/2 20 RA		
5613F103	FIL SY1 3/8 5 RMSA	**5625F105**	FIL SY2 3/4 5 RMSA	**NOTE**	
5613F203	FIL SY1 3/8 20 RMSA	**5625F205**	FIL SY2 3/4 20 RMSA	**Anti-corrosion version**	
5613F403	FIL SY1 3/8 5 RA	**5625F405**	FIL SY2 3/4 5 RA	**5X**_ _ _ _ _	
5613F503	FIL SY1 3/8 20 RA	**5625F505**	FIL SY2 3/4 20 RA	**Example**	
				5X11F101	FIL SY1 1/8 5 RMSA anti-corrosion

SYNTESI® DEPURATOR

The job of the filter purifier is to separate liquid and solid particles dispersed in the compressed air with a high degree of efficiency.
This separation is achieved by means of a special filtering element called a "coalescence cartridge".
It is particularly indicated for eliminating traces of oil present in the compressed air. The air flow rate must remain below the maximum values to achieve the desired degree of purification. Beyond this value, there may be a decline in the quality of air from the purifier.
On the front and back there is a port (1/8" for size 1 and 1/4" for size 2) that can be used with pressure gauges, pressure switches or as an additional air intake. **The air taken from here is not purified**.

TECHNICAL DATA		DEP SY1			DEP SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Degree of filtration	µm	0.01 - output air purity class ISO8573-1: 1.7.2						
		1 - output air purity class ISO8573-1: 3.7.3						
Max. input pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Suggested flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	460			620			
	scfm	9			37			
Maximun suggested flow rate		See graph on the next page						
		N.B.: flow rates higher than the recommended value reduces purification efficiency						
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Weight	g	194	189	180	483	456	452	440
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure						
		SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs**.						
Fluid		Compressed air or other inert gases						
Bowl capacity	cm^3	15			40			
Mounting position		Vertical			Vertical			
Port for additional air take-off (not purified air)		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500			1500			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18			53			
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			
Notes on use		It is advisable to mount a 5 µm filter upstream of the purifier to retain solid particles						

COMPONENTS

① Technopolymer depurator body
② IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
③ Coalescence cartridge
④ Technopolymer cartridge support
⑤ Drain (RMSA)
⑥ Technopolymer plate
⑦ NBR o-ring gaskets
⑧ Clear technopolymer bowl

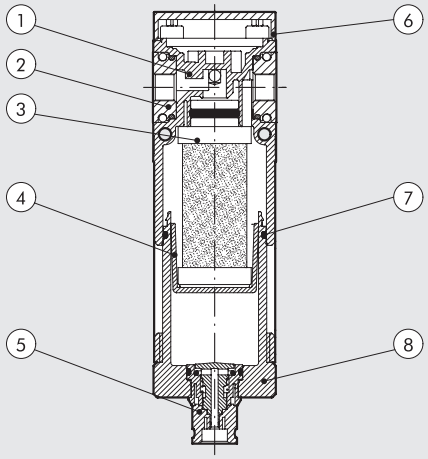

METAL WORK PNEUMATIC

HOW THE COALESCENCE CARTRIDGE WORKS

Air from the mains – full of impurities – flows into the coalescence cartridge and then passes through the crossed micro-fibres that make up the cartridge. During this movement the liquid particles come into contact with the crossed micro-fibres and adhere to them. Due to the air pressure and gravity they join up with other micro-drops at each cross-over point and gradually increase in volume, leading to the physical phenomenon called coalescence. When they stop moving, the drops deposit on the outside of the cartridge, from which they detach and drop to the bottom. Since the volume of liquid leaving the cartridge is exactly the same as the drops arriving, the coalescence cartridge ought to work indefinitely. Solid particles are caught with the same efficiency but, unlike drops, they are not drained out and clog the cartridge. To get round this problem, it is necessary to mount a 5µm prefilter before the fine oil filter to separate the solid particles first.

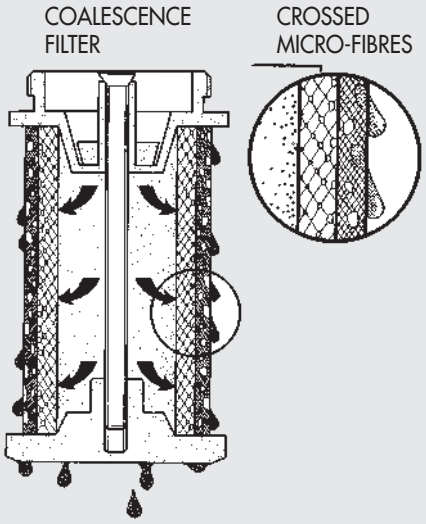

FLOW CHARTS

DEP Syntesi® **SY1** 1/8"

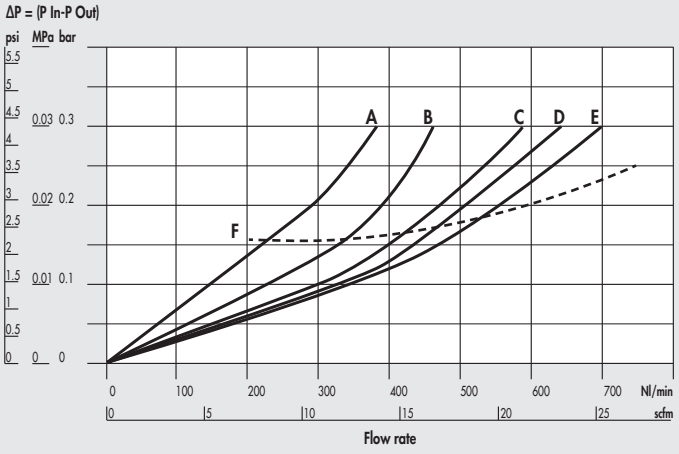

DEP Syntesi® **SY1** 1/4"

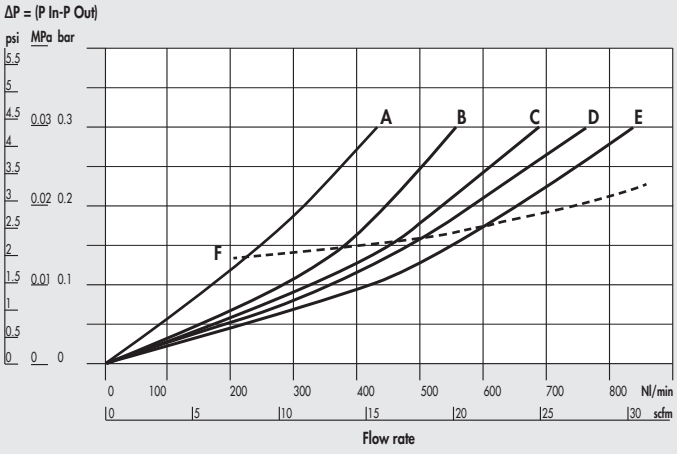

DEP Syntesi® **SY1** 3/8"

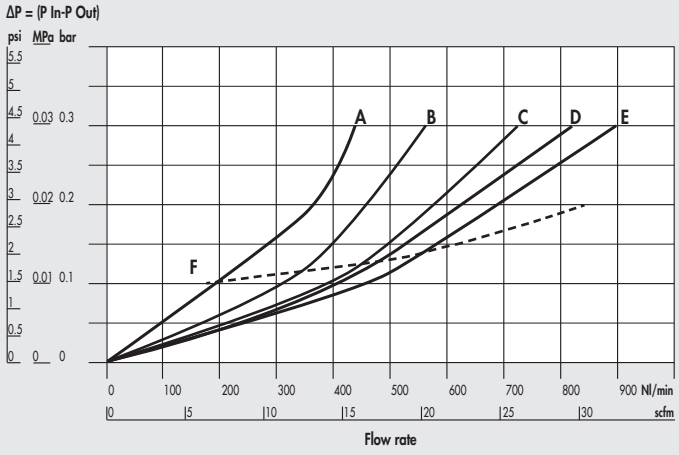

DEP Syntesi® **SY2** 3/8"

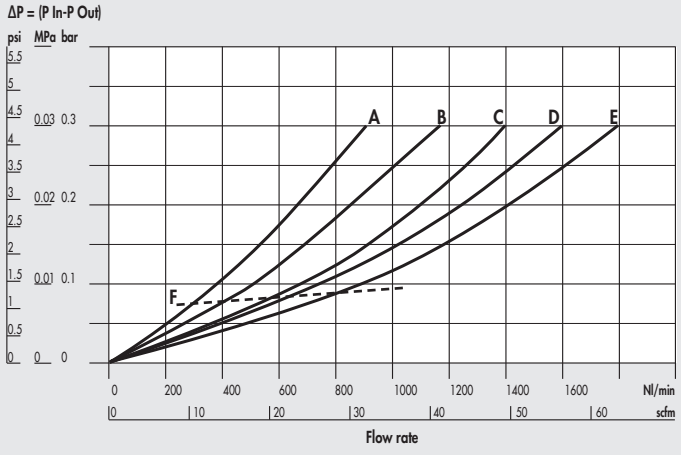

A = 2.5 bar - 0.25 MPa - 36 psi
B = 4 bar - 0.4 MPa - 58 psi
C = 6.3 bar - 0.63 MPa - 91 psi
D = 8 bar - 0.8 MPa - 116 psi
E = 10 bar - 1 MPa - 145 psi
F = max suggested flow

DEP Syntesi® **SY2** 1/2"

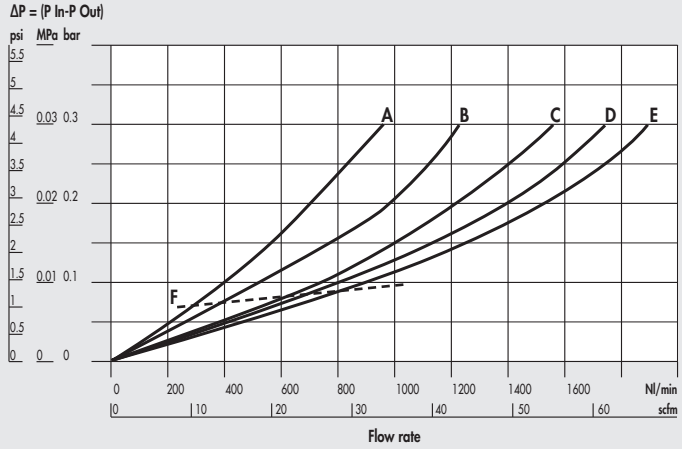

DEP Syntesi® **SY2** 3/4" - 1"

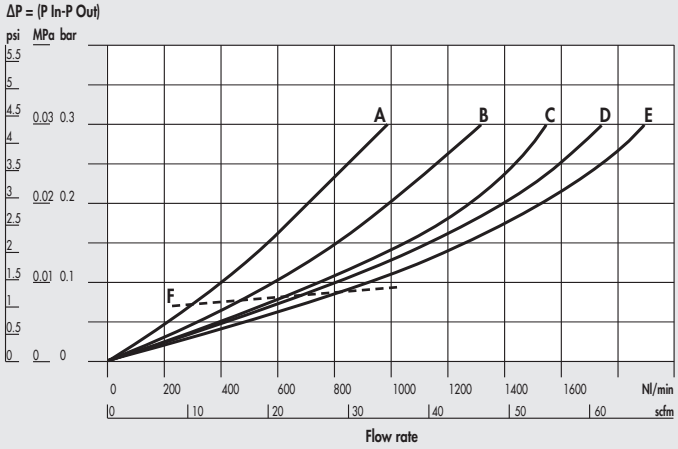

A = 2.5 bar - 0.25 MPa - 36 psi
B = 4 bar - 0.4 MPa - 58 psi
C = 6.3 bar - 0.63 MPa - 91 psi
D = 8 bar - 0.8 MPa - 116 psi
E = 10 bar - 1 MPa - 145 psi
F = max suggested flow

DIMENSIONS

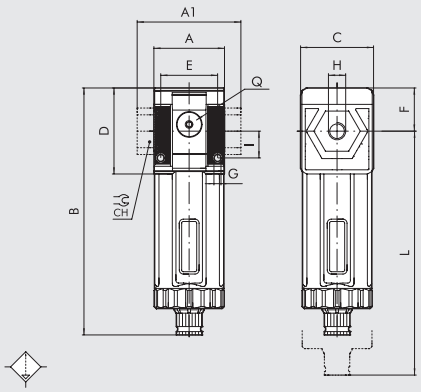

		SIZE 1			SIZE 2			
H (threaded port)		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
A		42			60.5			
A1		-	-	44	-	-	95	95
B	**RMSA**	148			178			
	SAC	152			182			
C		44			61			
CH		-			-	-	32	36
D		51.5			70.5			
E		33.5			47.5			
F		25.8			38.2			
G		Hole for M4 screws			Hole for M5 screws			
I		16			22.5			
L	**RMSA**	202			245			
	SAC	206			249			
Q (no. 2 additional air takes-off)		1/8"			1/4"			

KEY TO CODES

56	1	1	D	10	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**TYPE**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**1** Size 1	**0** Without bushing	**D** Depurator	**10** 0.01 µm RMSA	**0** Without bushing
5X Syntesi anti-corrosion		**1** 1/8" port		**11** 0.01 µm SAC	**1** 1/8" port
		2 1/4" port		**30** 1 µm RMSA	**2** 1/4" port
		3 3/8" port		**31** 1 µm SAC	**3** 3/8" port
	2 Size 2	**0** Without bushing			**0** Without bushing
		3 3/8" port			**3** 3/8" port
		4 1/2" port			**4** 1/2" port
		5 3/4" port			**5** 3/4" port
		6 1" port			**6** 1" port

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.
SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
Syntesi® SY1 DEPURATOR	
5610D100	DEP SY1 RMSA without bushings
5611D101	DEP SY1 1/8 RMSA
5612D102	DEP SY1 1/4 RMSA
5613D103	DEP SY1 3/8 RMSA

Code	Description
Syntesi® SY2 DEPURATOR	
5620D100	DEP SY2 RMSA without bushings
5623D103	DEP SY2 3/8 RMSA
5624D104	DEP SY2 1/2 RMSA
5625D105	DEP SY2 3/4 RMSA
5626D106	DEP SY2 1 RMSA

NOTE	
Anti-corrosion version	
5X_ _ _ _ _	
Example	
5X11D101	DEP SY1 1/8 RMSA anti-corrosion

SYNTESI® ACTIVE CARBON FILTER

METAL WORK PNEUMATIC

Activated-carbon filtering systems achieve the highest standard of purification possible in industrial applications. They eliminate all traces of oils, solvents and hydrocarbons, and remove unpleasant odours.
The operating principle uses activated carbon, which absorbs most of the polluting particles in the air thanks to minute holes in the granules of carbon.
On the front and back there is a port (1/8" for size 1 and 1/4" for size 2) that can be used with pressure gauges, pressure switches or as an additional air intake. **The air taken from here is not filtered by the activated-carbon cartridge**.
Cartridge life and efficiency can be increased by using pre-filtered (5µm) and purified (0.01µm) air.
The cartridge must be replaced at set intervals as there is no difference in load loss between an efficient cartridge and a saturated one.
N.B.: to ensure the performance and duration stated on the data sheet, the load loss (ΔP) must not exceed 75 mbar.

TECHNICAL DATA		FIL CA SY1			FIL CA SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Residual oil at 20°C *	mg/m³	0.003 - output air purity class ISO8573-1: 1.7.1						
Duration of cartridge *	hours	4000			4000			
Max. inlet pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Suggested flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	350			800			
	scfm	12			28			
		N.B.: flow rates higher than the recommended value reduces purification efficiency						
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Weight	g	195	190	181	483	456	452	440
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure						
Fluid		0.01 µm filtred and depurated air						
Mounting position		In any position			In any position			
Additional air take-off port (unfiltered air from cartridge CA)		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500			1500			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18			53			
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			
Notes on use		Upstream it's necessary to mount a coalescence filter depurator of 0.01µm.						

* if the load loss of 75 mbar is not exceeded

COMPONENTS

① Technopolymer depurator body
② IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
③ Active carbon cartridge
④ Technopolymer cartridge support
⑤ Drain (RMSA)
⑥ Technopolymer plate
⑦ NBR o-ring gasket
⑧ Clear technopolymer bowl

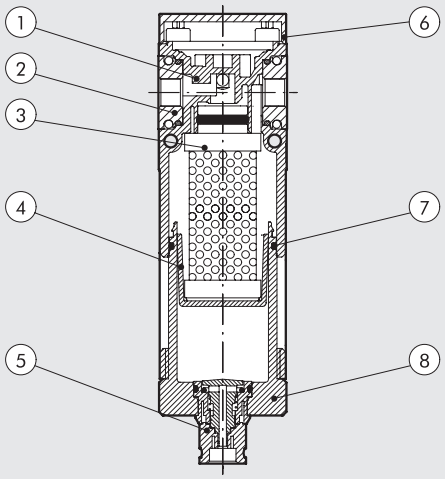

FLOW CHARTS

FIL CA Syntesi® **SY1** 1/8"

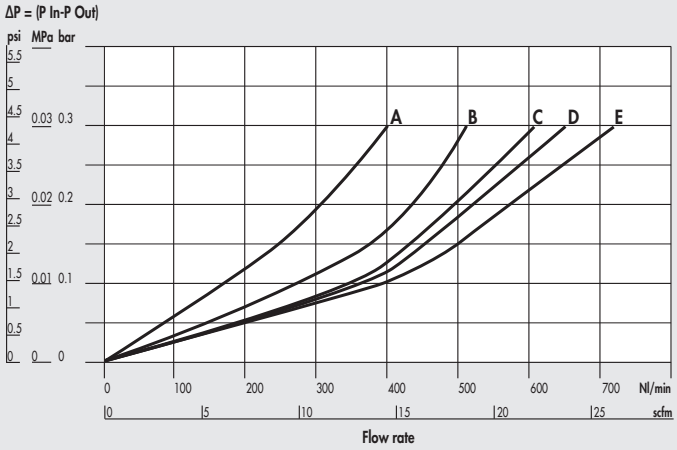

FIL CA Syntesi® **SY1** 1/4"

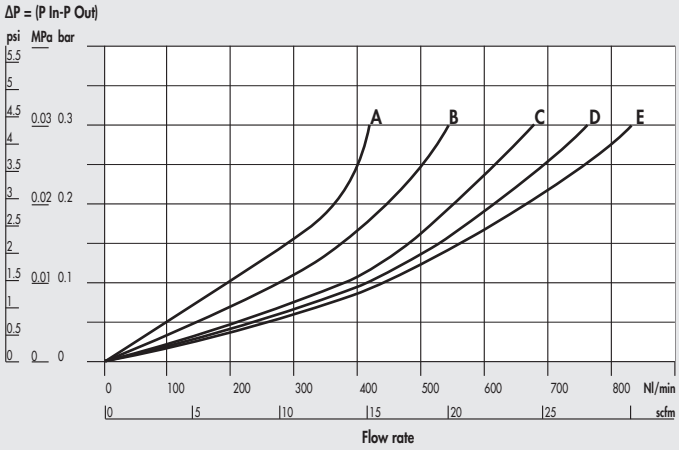

FIL CA Syntesi® **SY1** 3/8"

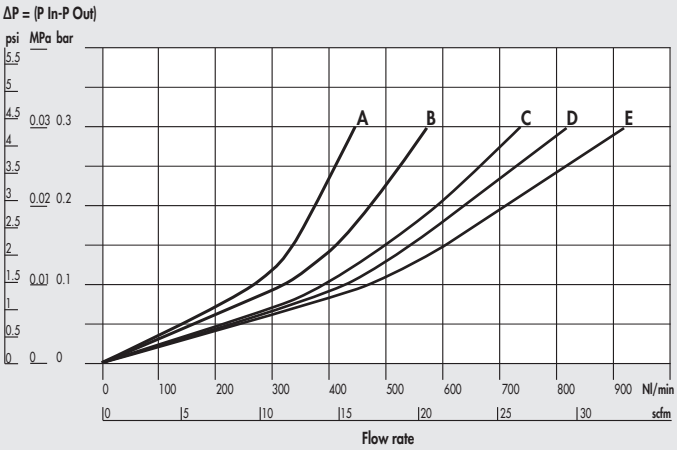

FIL CA Syntesi® **SY2** 3/8"

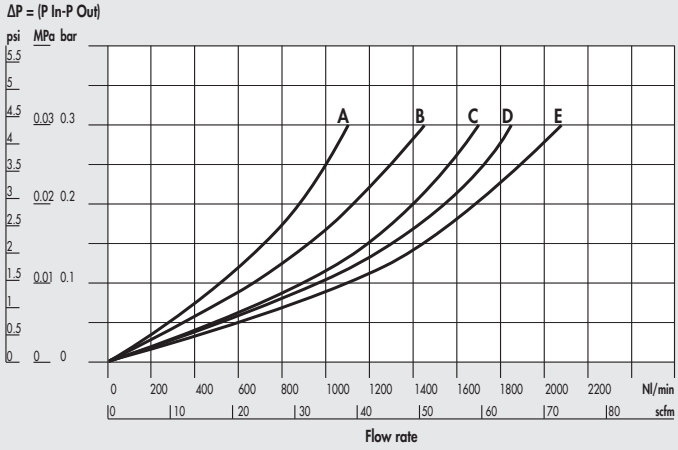

FIL CA Syntesi® **SY2** 1/2"

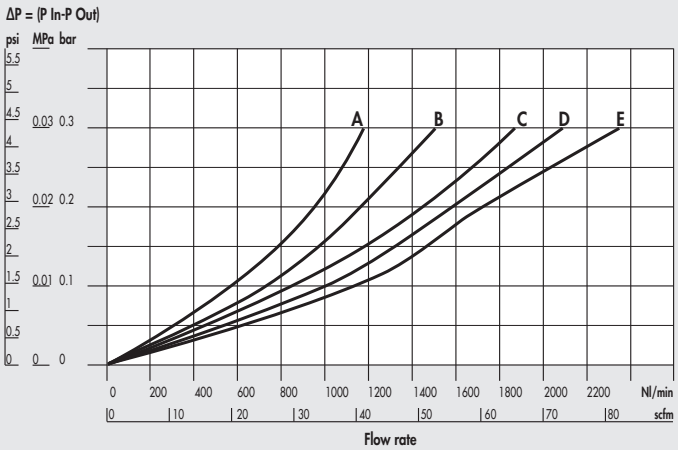

FIL CA Syntesi® **SY2** 3/4" - 1"

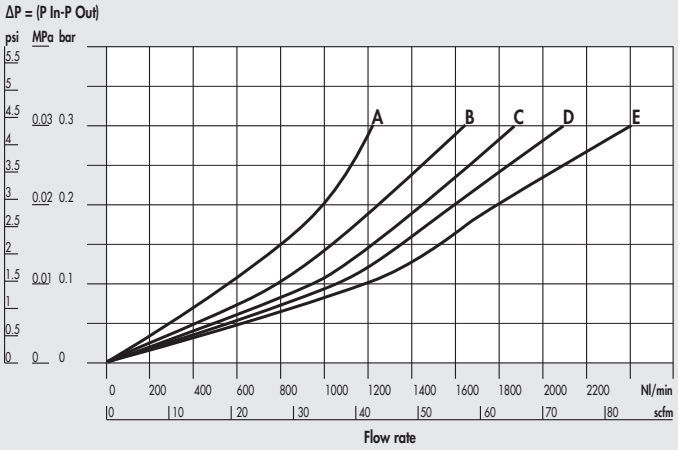

A = 2.5 bar - 0.25 MPa - 36 psi
B = 4 bar - 0.4 MPa - 58 psi
C = 6.3 bar - 0.63 MPa - 91 psi
D = 8 bar - 0.8 MPa - 116 psi
E = 10 bar - 1 MPa - 145 psi

METAL WORK PNEUMATIC

DIMENSIONS

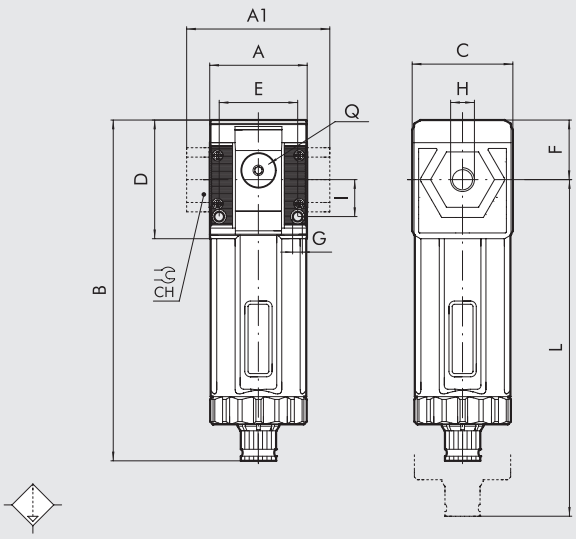

		SIZE 1			SIZE 2			
H (threaded port)		1/8″	1/4″	3/8″	3/8″	1/2″	3/4″	1″
A		42			60.5			
A1		-	-	44	-	-	95	95
B	RMSA	148			178			
C		44			61			
CH		-			-	-	32	36
D		51.5			70.5			
E		33.5			47.5			
F		25.8			38.2			
G		Hole for M4 screws			Hole for M5 screws			
I		16			22.5			
L	RMSA	202			245			
Q (no. 2 additional air takes-off)		1/8″			1/4″			

KEY TO CODES

56	1	1	C	10	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**TYPE**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**1** Size 1	**0** Without bushing	**C** Active carbon filter	**10** RMSA	**0** Without bushing
5X Syntesi anti-corrosion		**1** 1/8″ port			**1** 1/8″ port
		2 1/4″ port			**2** 1/4″ port
		3 3/8″ port			**3** 3/8″ port
	2 Size 2	**0** Without bushing			**0** Without bushing
		3 3/8″ port			**3** 3/8″ port
		4 1/2″ port			**4** 1/2″ port
		5 3/4″ port			**5** 3/4″ port
		6 1″ port			**6** 1″ port

RMSA: Drain with manual condensate discharge and automatic discharge at zero pressure.

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
FILTRO CARBONI ATTIVI Syntesi® SY1	
5610C100	AC SY1 RMSA without bushings
5611C101	AC SY1 1/8 RMSA
5612C102	AC SY1 1/4 RMSA
5613C103	AC SY1 3/8 RMSA

Code	Description
FILTRO CARBONI ATTIVI Syntesi® SY2	
5620C100	AC SY2 RMSA without bushings
5623C103	AC SY2 3/8 RMSA
5624C104	AC SY2 1/2 RMSA
5625C105	AC SY2 3/4 RMSA
5626C106	AC SY2 1 RMSA

NOTE	
Anti-corrosion version	
5X_ _ _ _ _	
Example	
5X11C101	AC SY1 1/8 RMSA anti-corrosion

SYNTESI® REGULATOR

Syntesi® pressure regulator is based on the rolling diaphragm principle, which offers numerous advantages compared to systems using a flat diaphragm:

- Increased stroke, allowing wider valve aperture and hence greater flow rate.
- Decreased dynamic and pick-up friction, and hence quicker response and enhanced sensitivity.
- Greater accuracy in maintaining the pressure setting, both with both variable flow rates and different supply pressures.

The regulator includes a compensation system that keeps the pressure setting virtually constant, even when the upstream pressure changes. This is achieved mainly by the design of the valve, which is pneumatically balanced.
If the downstream pressure rises above the threshold value, the air is discharged (relief valve) until it drops below the maximum value.
A special device relieves downstream pressure rapidly when the upstream pressure drops to zero. This means the regulator can be positioned between a valve and a cylinder because the air can flow in both directions, towards the cylinder with regulated pressure, or return towards the valve during relief.
The knob is the push-lock type – once the pressure has been set, press it and it locks in position. In this position you can pull out the plate and attach two padlocks on size 1 or three padlocks on size 2 in order to avoid possible tampering. On the front and back there is a port (1/8" for size 1 and 1/4" size 2) that can be used with pressure gauges, pressure switches or as an additional regulated air intake.

TECHNICAL DATA		REG SY1			REG SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Max. inlet pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	570	1600	2900	3000	4300	4700	
(inlet pressure 10 bar)	scfm	20	57	103	106	152	166	
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1200	2800	3350	5300	7400	7600	
(inlet pressure 10 bar)	scfm	42	99	119	188	261	267	
Relief valve flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	70			100			
	scfm	2.5			3.5			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Full outflow with zero inlet pressure		Included						
Padlockable knob		Included						
Upstream pressure compensation		Included, via balanced valve						
Weight	g	193	188	179	546	519	515	503
Fluid		Compressed air or other inert gases						
Mounting position		In any position						
Additional air take-off, for pressure gauges or fittings		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500			1400			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18			50			
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			
Notes on use		The pressure must always be set upwards. For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value. On request version without overpressure exaust						

METAL WORK PNEUMATIC

COMPONENTS

① Technopolymer adjusting knob
② Technopolymer bell
③ Steel adjusting spring (with Geomet® treatment for anti-corrosion version)
④ Technopolymer flange
⑤ Rolling diaphragm
⑥ IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
⑦ Technopolymer regulator body
⑧ OT58 brass valve, with NBR vulcanized gasket
⑨ Stainless steel valve spring
⑩ Zinc-plated steel plate for knob locking (stainless steel for anti-corrosion version)
⑪ OT58 brass adjusting screw
⑫ Technopolymer ring nut
⑬ Technopolymer plate
⑭ Technopolymer rod
⑮ NBR o-ring gasket
⑯ Technopolymer plug

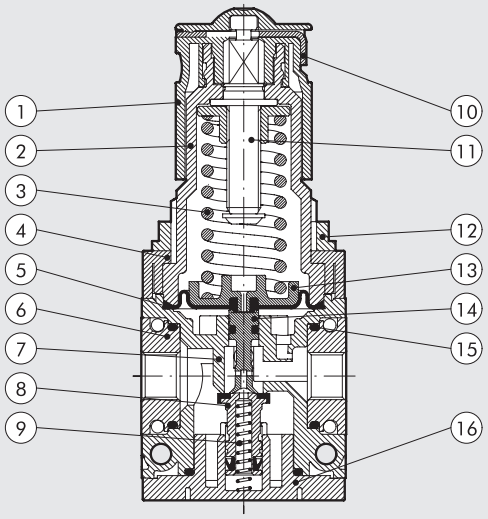

FLOW CHARTS

REG Syntesi® **SY1** 1/8"

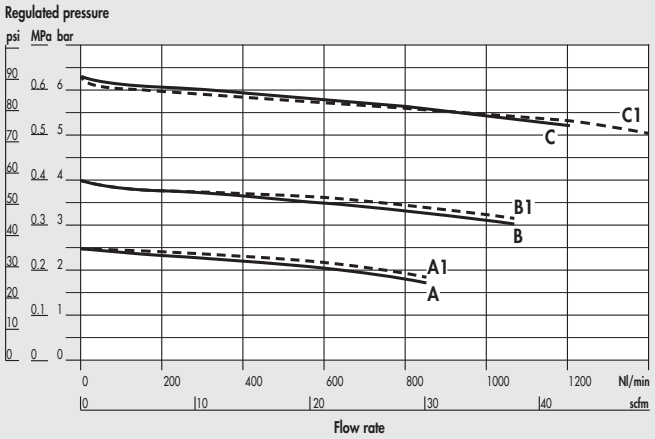

REG Syntesi® **SY1** 1/4"

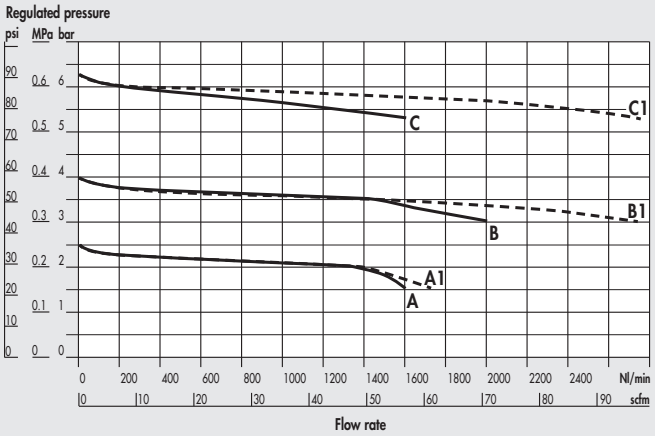

REG Syntesi® **SY1** 3/8"

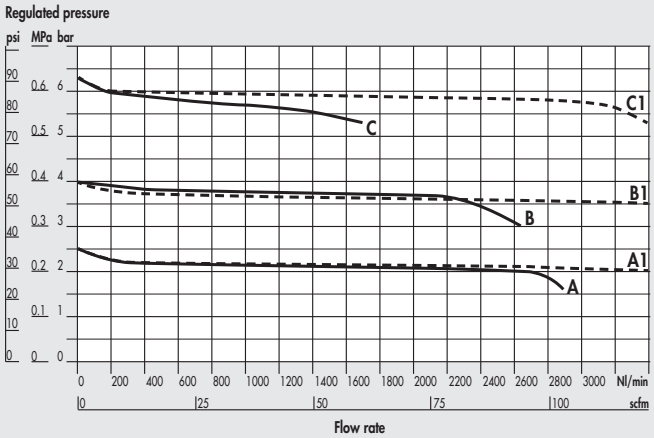

REG Syntesi® **SY2** 3/8"

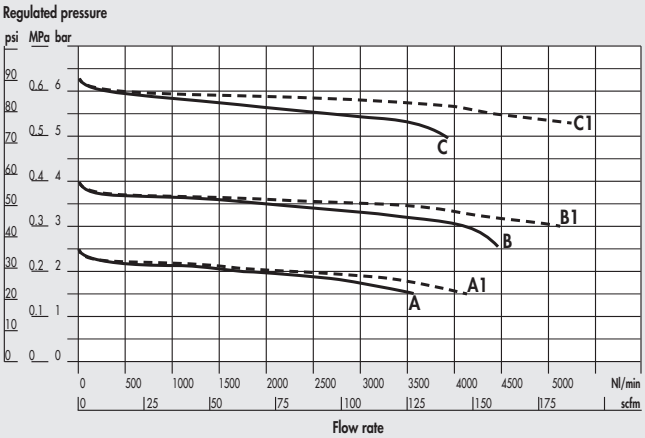

A = P In 7 bar - P Out 2.5 bar
B = P In 7 bar - P Out 4 bar
C = P In 7 bar - P Out 6.3 bar
A1 = P In 10 bar - P Out 2.5 bar
B1 = P In 10 bar - P Out 4 bar
C1 = P In 10 bar - P Out 6.3 bar

REG Syntesi® **SY2** 1/2"

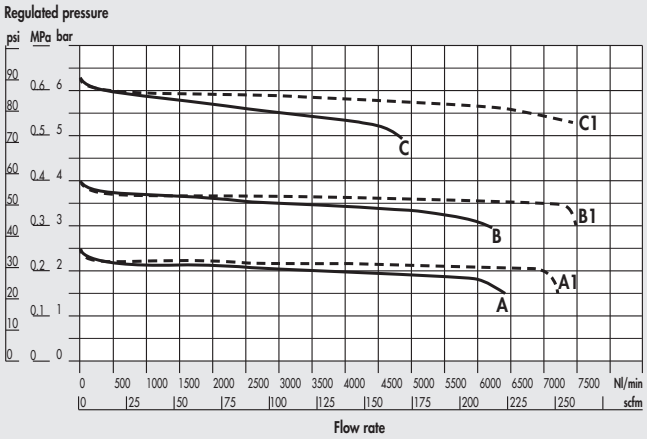

REG Syntesi® **SY2** 3/4" - 1"

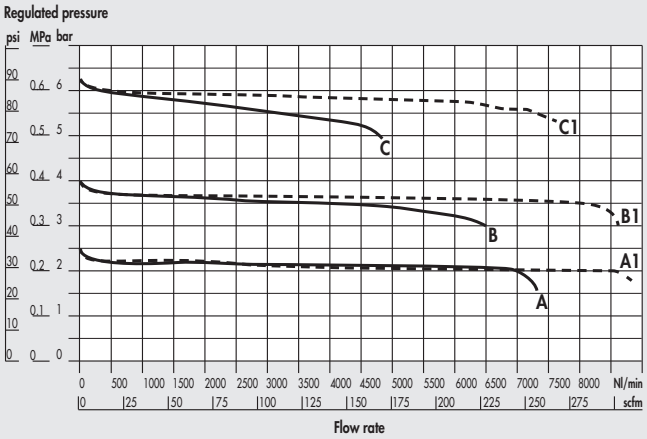

A = P In 7 bar - P Out 2.5 bar
B = P In 7 bar - P Out 4 bar
C = P In 7 bar - P Out 6.3 bar
A1 = P In 10 bar - P Out 2.5 bar
B1 = P In 10 bar - P Out 4 bar
C1 = P In 10 bar - P Out 6.3 bar

DIMENSIONS

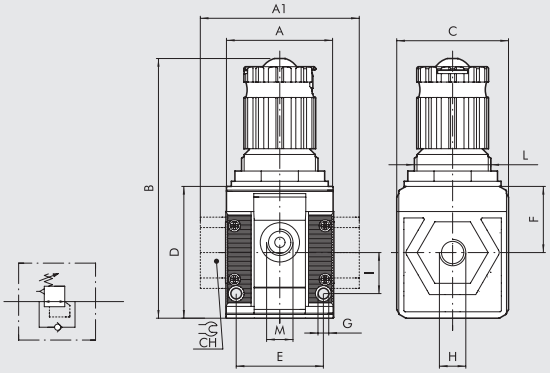

	SIZE 1			SIZE 2			
H (threaded port)	1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
A	42			60.5			
A1	-	-	44	-	-	95	95
B	102			139			
C	44			61			
CH	-			-	-	32	36
D	51.5			70.5			
E	33.5			47.5			
F	25.8			38.2			
G	Hole for M4 screws			Hole for M5 screws			
I	16			22.5			
L	M30x1.5			M38x2			
M (pressure gauge port or air takes-off)	1/8"			1/4"			

KEY TO CODES

56	1	1	R	14	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**SETTING RANGE**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**1** Size 1	**0** Without bushing	**R** Pressure regulator	● **10** 0 to 2 bar	**0** Without bushing
5X Syntesi anti-corrosion		**1** 1/8" port		✚ **12** 0 to 4 bar	**1** 1/8" port
		2 1/4" port		**14** 0 to 8 bar	**2** 1/4" port
		3 3/8" port		**16** 0 to 12 bar	**3** 3/8" port
	2 Size 2	**0** Without bushing			**0** Without bushing
		3 3/8" port			**3** 3/8" port
		4 1/2" port			**4** 1/2" port
		5 3/4" port			**5** 3/4" port
		6 1" port			**6** 1" port

● Not available in the anti-corrosion version. ✚ Anti-corrosion version available only in size 1.

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
Syntesi® SY1 REGULATOR	
5610R140	REG SY1 08 without bushings
5610R160	REG SY1 012 without bushings
5611R141	REG SY1 1/8 08
5611R161	REG SY1 1/8 012
5612R142	REG SY1 1/4 08
5612R162	REG SY1 1/4 012
5613R143	REG SY1 3/8 08
5613R163	REG SY1 3/8 012

Code	Description
Syntesi® SY2 REGULATOR	
5620R140	REG SY2 08 without bushings
5620R160	REG SY2 012 without bushings
5623R143	REG SY2 3/8 08
5623R163	REG SY2 3/8 012
5624R144	REG SY2 1/2 08
5624R164	REG SY2 1/2 012
5625R145	REG SY2 3/4 08
5625R165	REG SY2 3/4 012

Code	Description
Syntesi® SY2 REGULATOR	
5626R146	REG SY2 1 08
5626R166	REG SY2 1 012

NOTE
Anti-corrosion version
5X_ _ _ _ _
Example
5X11R141 REG SY1 1/8 08 anti-corrosion

SYNTESI® IN-SERIES REGULATOR

METAL WORK PNEUMATIC

The in-series regulator is used to take air at a set pressure from the ports on the front and back of the body, while the pneumatic inlet and outlet ports are connected directly.
It is possible for instance to assemble several regulators side by side, all supplied at the same pressure, and obtain different regulated pressures, regardless of the pressure of the previous module.
The in-series regulator uses the same construction principles as the standard regulator, so the advantages are the same, such as compensation for upstream pressure changes, relief valve, rapid relief of the downstream pressure and a padlockable push-lock knob.

TECHNICAL DATA		IN-SERIES REGULATOR SY1			IN-SERIES REGULATOR SY2			
Threaded inlet port, through		1/8″	1/4″	3/8″	3/8″	1/2″	3/4″	1″
Utility threaded port		1/8″			1/4″			
Max. input pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	330			540			
	scfm	12			19			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	500			1000			
	scfm	18			35			
Relief valve flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	70			100			
	scfm	2.5			3.5			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Full outflow with zero inlet pressure		Included						
Padlockable knob		Included						
Upstream pressure compensation		Included, via balanced valve						
Weight	g	193	188	179	546	519	515	503
Fluid		Compressed air or other inert gases						
Mounting position		In any position						
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			
Notes on use		The pressure must always be set upwards. For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value. On request version without overpressure exhaust						

COMPONENTS

① Technopolymer adjusting knob
② Technopolymer bell
③ Steel adjusting spring (with Geomet® treatment for anti-corrosion version)
④ Technopolymer flange
⑤ Rolling diaphragm
⑥ IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4″ - 1″
⑦ Technopolymer body
⑧ OT58 brass valve, with NBR vulcanized gasket
⑨ Stainless steel valve spring
⑩ Zinc-plated steel plate for knob locking (stainless steel for anti-corrosion version)
⑪ OT58 brass adjusting screw
⑫ Technopolymer ring nut
⑬ Technopolymer plate
⑭ Technopolymer rod
⑮ NBR o-ring gaskets
⑯ Technopolymer plug

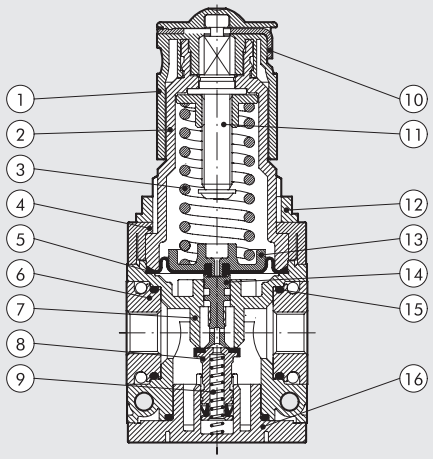

FLOW CHARTS

IN-SERIES REGULATOR Syntesi® **SY1** 1/4"-1/8"-3/8"

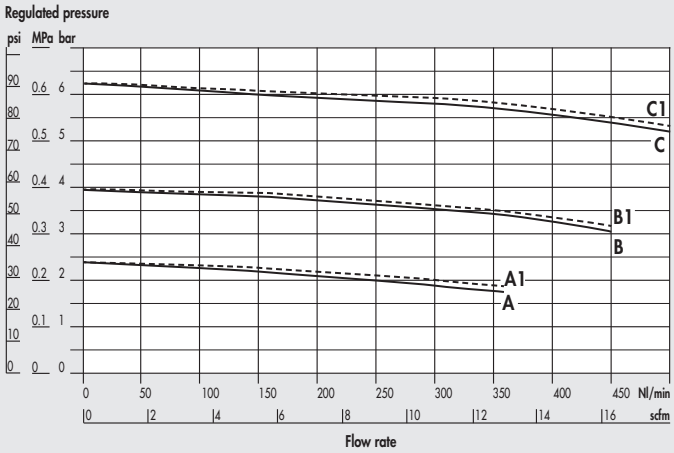

IN-SERIES REGULATOR Syntesi® **SY2** 3/8" - 1/2" - 3/4" - 1"

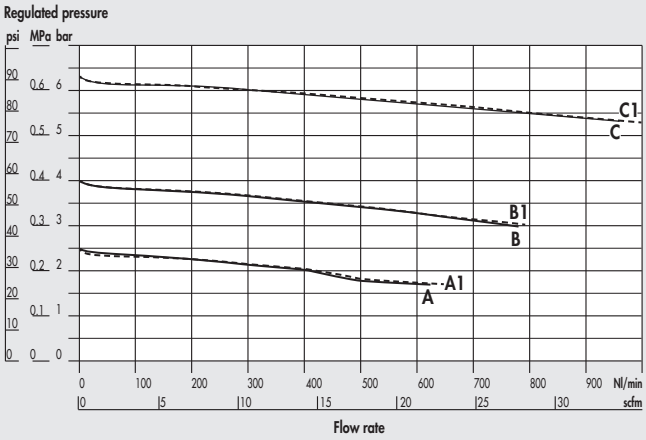

A = P In 7 bar - P Out 2.5 bar
B = P In 7 bar - P Out 4 bar
C = P In 7 bar - P Out 6.3 bar

A1 = P In 10 bar - P Out 2.5 bar
B1 = P In 10 bar - P Out 4 bar
C1 = P In 10 bar - P Out 6.3 bar

DIMENSIONS

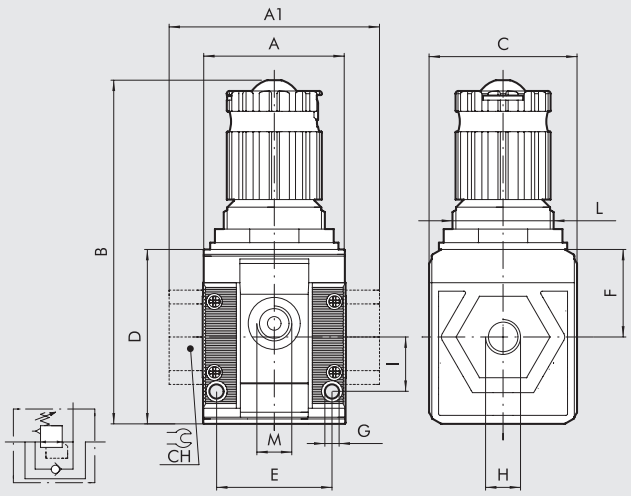

	SIZE 1			SIZE 2			
H (threaded port)	1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
A	42			60.5			
A1	-	-	44	-	-	95	95
B	102			139			
C	44			61			
CH	-			-	-	32	36
D	51.5			70.5			
E	33.5			47.5			
F	25.8			38.2			
G	Hole for M4 screws			Hole for M5 screws			
I	16			22.5			
L	M30x1.5			M38x2			
M (use)	1/8"			1/4"			

FUNCTION DIAGRAM



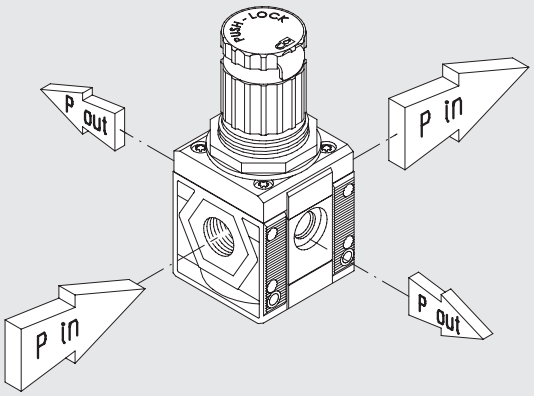

KEY TO CODES

56	1	1	R	24	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**IN-SERIES REGULATOR SETTING RANGE**	**THREADED OUTPUT CONNECTION**
56 Syntesi **5X** Syntesi anti-corrosion	**1** Size 1 **2** Size 2	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port	**R** Pressure regulator	● **20** 0 to 2 bar ✚ **22** 0 to 4 bar **24** 0 to 8 bar **26** 0 to 12 bar	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port

● Not available in the anti-corrosion version. ✚ Anti-corrosion version available only in size 1.

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description	Code	Description	NOTE	
Syntesi® SY1 IN-SERIES REGULATOR		**Syntesi® SY2 IN-SERIES REGULATOR**		**Anti-corrosion version**	
5610R240	In-series REG SY1 08 without bushings	**5620R240**	In-series REG SY2 08 without bushings	**5X**_ _ _ _ _ _	
5610R260	In-series REG SY1 012 without bushings	**5620R260**	In-series REG SY2 012 without bushings	**Example**	
5611R241	In-series REG SY1 1/8 08	**5623R243**	In-series REG SY2 3/8 08	**5X11R241**	In-series REG SY1 1/8 08 anti-corrosion
5611R261	In-series REG SY1 1/8 012	**5623R263**	In-series REG SY2 3/8 012		
5612R242	In-series REG SY1 1/4 08	**5624R244**	In-series REG SY2 1/2 08		
5612R262	In-series REG SY1 1/4 012	**5624R264**	In-series REG SY2 1/2 012		
5613R243	In-series REG SY1 3/8 08	**5625R245**	In-series REG SY2 3/4 08		
5613R263	In-series REG SY1 3/8 012	**5625R265**	In-series REG SY2 3/4 012		
		5626R246	In-series REG SY2 1 08		
		5626R266	In-series REG SY2 1 012		

NOTES

SYNTESi® PILOT OPERATED REGULATOR

The pilot operated regulator can adjust pressure remotely via a pneumatic command.
The two rolling diaphragms offer several advantages:
- increased stroke, which allows greater opening of the valve and hence increased flow rate;
- reduced dynamic and pickup friction, which results in increased response speed and high sensitivity;
- high precision in maintaining the set pressure, both with variable flow rates and different inlet pressures.

The design features the same construction characteristics as those used for a standard regulator, so the advantages are the same, namely: compensation of the regulated pressure varies with the upstream pressure; presence of a relieving valve and downstream pressure quick relieving.

TECHNICAL DATA		REG SY1			REG SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Max. inlet pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	900	1700	3300	5500	5500	7300	
(inlet pressure 10 bar)	scfm	32	60	116	194	194	258	
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1000	2800	3550	6800	6800	7700	
(inlet pressure 10 bar)	scfm	53	99	120	240	240	272	
Relief valve flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	70			100			
	scfm	2.5			3.5			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Full outflow with zero inlet pressure		Included						
Upstream pressure compensation		Included, via balanced valve						
Weight	g	149	144	135	456	429	425	413
Fluid		Compressed air or other inert gases						
Mounting position		In any position						
Additional air take-off, for pressure gauges or fittings		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar		500			1400			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)		18			50			
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			
Notes on use		The pressure must always be set upwards.						

COMPONENTS

① Anodized aluminium plate
② Anodized aluminium diaphragm washer
③ Anodized aluminium upper cap
④ Technopolymer flange
⑤ Rolling diaphragm
⑥ IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
⑦ Technopolymer regulator body
⑧ OT58 brass valve, with NBR vulcanized gasket
⑨ Stainless steel valve spring
⑩ Technopolymer rod
⑪ NBR o-ring gasket
⑫ Technopolymer plug

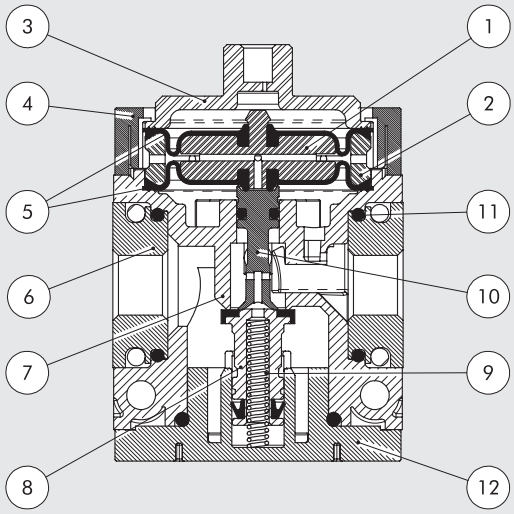

METAL WORK PNEUMATIC

FLOW CHARTS

REG PIL Syntesi® **SY1** 1/8"

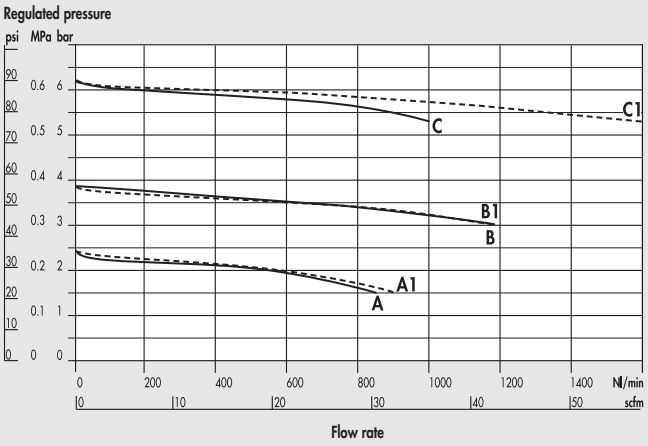

REG PIL Syntesi® **SY1** 1/4"

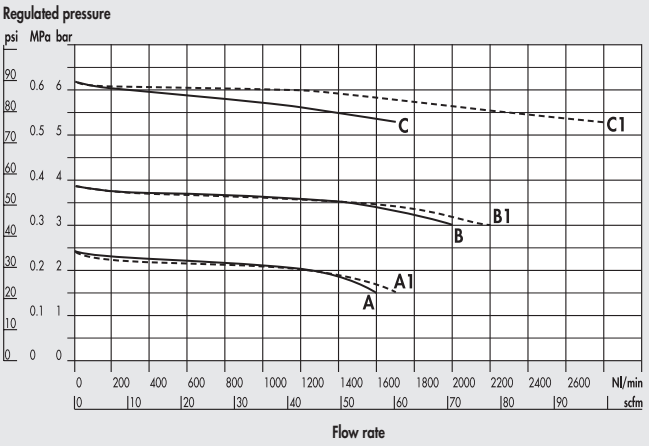

REG PIL Syntesi® **SY1** 3/8"

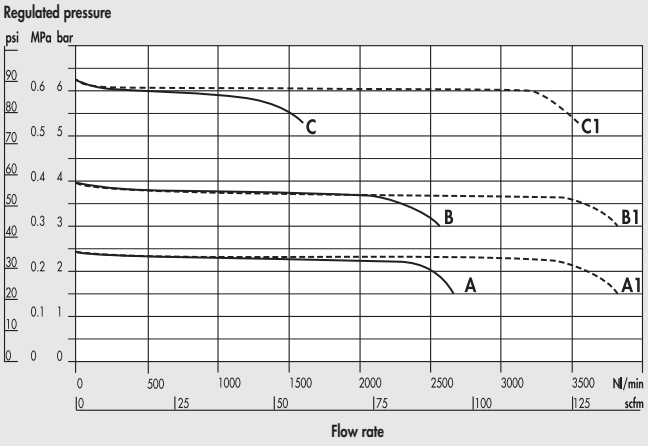

REG PIL Syntesi® **SY2** 3/8"

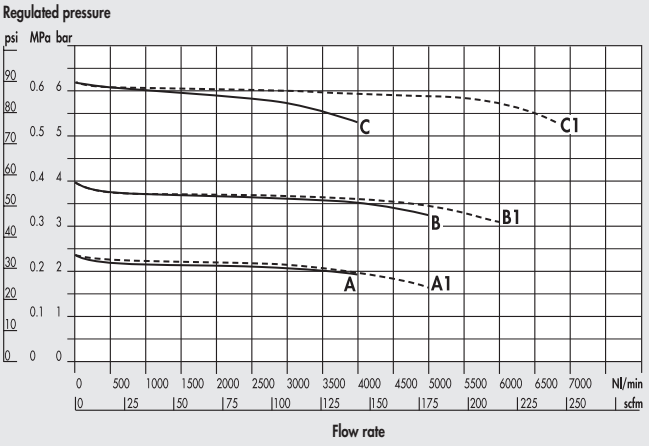

REG PIL Syntesi® **SY2** 1/2"

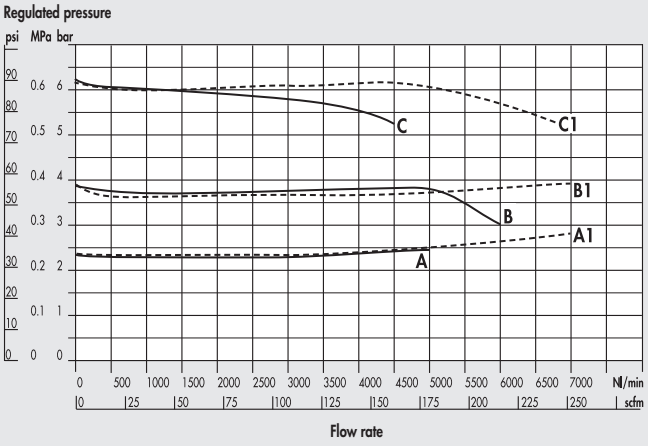

REG PIL Syntesi® **SY2** 3/4" - 1"

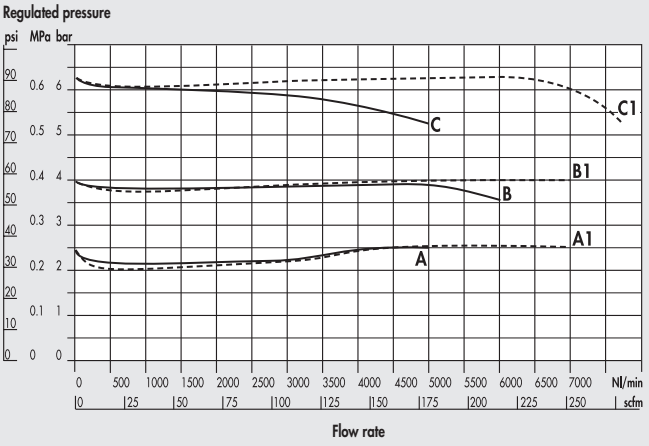

A = P In 7 bar - P Out 2.5 bar
B = P In 7 bar - P Out 4 bar
C = P In 7 bar - P Out 6.3 bar

A1 = P In 10 bar - P Out 2.5 bar
B1 = P In 10 bar - P Out 4 bar
C1 = P In 10 bar - P Out 6.3 bar

PILOTING CURVES

REG PIL Syntesi® **SY1**

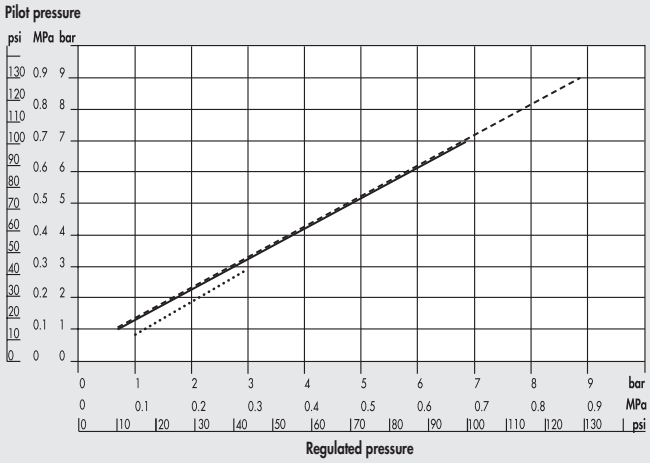

REG PIL Syntesi® **SY2**

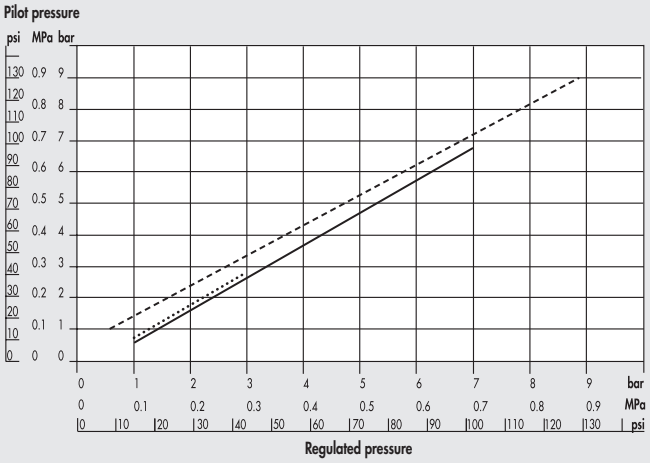

..... P In 4 bar ——— P In 7 bar - - - - - - - - - - - P In 10 bar

DIMENSIONS

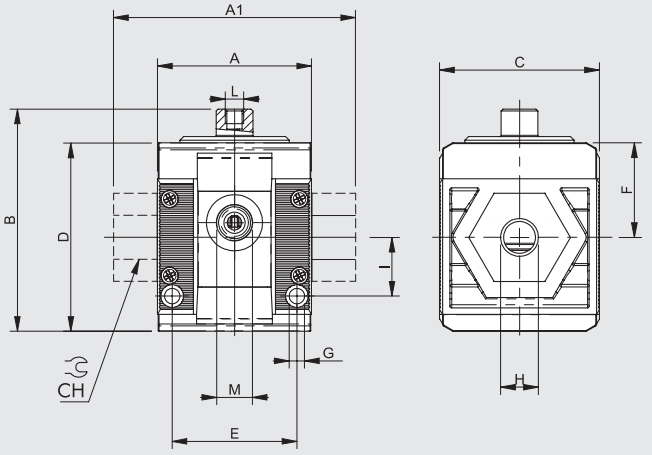

	SIZE 1			SIZE 2			
H (threaded port)	1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
A	42			60.5			
A1	-	-	44	-	-	95	95
B	63			81			
C	44			61			
CH	-			-	-	32	36
D	51.5			70.5			
E	33.5			47.5			
F	25.8			38.2			
G	Hole for M4 screws			Hole for M5 screws			
I	16			22.5			
L (pilot)	M5			M5			
M (pressure gauge port or air takes-off)	1/8"			1/4"			

KEY TO CODES

56	1	1	R	00	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**SETTING RANGE**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**1** Size 1	**0** Without bushing	**R** Pressure regulator	**00** Pilot operated	**0** Without bushing
5X Syntesi anti-corrosion		**1** 1/8" port			**1** 1/8" port
		2 1/4" port			**2** 1/4" port
		3 3/8" port			**3** 3/8" port
	2 Size 2	**0** Without bushing			**0** Without bushing
		3 3/8" port			**3** 3/8" port
		4 1/2" port			**4** 1/2" port
		5 3/4" port			**5** 3/4" port
		6 1" port			**6** 1" port

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
Syntesi® SY1 PILOT OPERATED REGULATOR	
5610R000	REG PIL SY1 without bushings
5611R001	REG PIL SY1 1/8
5612R002	REG PIL SY1 1/4
5613R003	REG PIL SY1 3/8

Code	Description
Syntesi® SY2 PILOT OPERATED REGULATOR	
5620R000	REG PIL SY2 without bushings
5623R003	REG PIL SY2 3/8
5624R004	REG PIL SY2 1/2
5625R005	REG PIL SY2 3/4
5626R006	REG PIL SY2 1

NOTE	
Anti-corrosion version	
5X_ _ _ _ _ _	
Example	
5X11R001	REG PIL SY1 1/8 anti-corrosion

NOTES

SYNTESI® FILTER-REGULATOR

This device combines in a single unit the functions of filtration, condensate separation and pressure regulation.
It is made up of the same elements forming the filter and the regulator, so the performance and advantages are the same:

- Separation of condensate and larger liquid and solid particles by centrifugation.
- Three condensate drain options (RMSA, RA and SAC).
- 360° visually inspection of the condensate level, via transport spy-holes.
- Rolling diaphragm regulator, allowing maximum precision and flow rate, and minimal friction.
- Compensation for upstream pressure changes.
- Pressure relief valve.
- Quick downstream pressure relief.
- Padlockable push-lock knob.
- Front and rear ports for pressure gauges, pressure switches or, considering the high flow rate, for use as additional filtered and regulated air take-off.

TECHNICAL DATA		FR SY1			FR SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Degree of filtration	µm	5 (yellow) - output air purity class ISO8573-1: 3.7.4						
		20 (white) - output air purity class ISO8573-1: 4.7.4						
		50 (blue) - output air purity class ISO8573-1: 5.7.4						
Max. inlet pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	500	800	2200	3200	4300	5200	
(inlet pressure 10 bar)	scfm	18	28	78	113	152	184	
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1300	2000	3000	5800	7200	7400	
(inlet pressure 10 bar)	scfm	46	71	106	205	255	262	
Relief valve flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	70			100			
	scfm	2.5			3.5			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Full outflow with zero inlet pressure		Included						
Padlockable knob		Included						
Upstream pressure compensation		Included, via balanced valve						
Weight	g	244	239	230	623	596	592	580
Fluid		Compressed air or other inert gases						
Mounting position		Vertical						
Additional air take-off, for pressure gauges or fittings		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500			1400			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18			50			
Bowl capacity	cm^3	30			70			
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure						
		RA: automatic drain with condensate discharge, independent of pressure and flow rate.						
		Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.						
		SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs**.						
		Note: **the maximum input pressure for the RA version must not exceed 10 bar**						
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			
Notes on use		The pressure must always be set upwards. For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value.						
		On request version without overpressure exaust.						

COMPONENTS

① Technopolymer adjusting knob
② Technopolymer bell
③ Steel adjusting spring (with Geomet® treatment for anti-corrosion version)
④ Technopolymer flange
⑤ Rolling diaphragm
⑥ IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
⑦ Technopolymer body
⑧ OT58 brass valve, with NBR vulcanized gasket
⑨ Clear technopolymer bowl
⑩ Zinc-plated steel plate for knob locking (stainless steel for anti-corrosion version)
⑪ OT58 brass adjusting screw
⑫ Technopolymer ring nut
⑬ Technopolymer plate
⑭ Technopolymer rod
⑮ Stainless steel valve spring
⑯ O-ring NBR gaskets
⑰ Drain (RMSA)
⑱ Sintered HDPE filter cartridge
⑲ Technopolymer screen

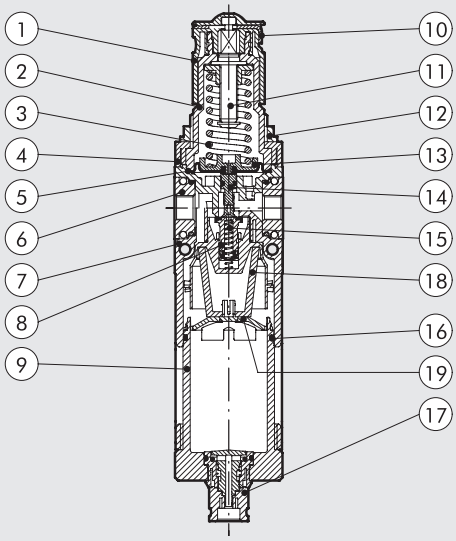

FLOW CHARTS

FR Syntesi® **SY1** 1/8"

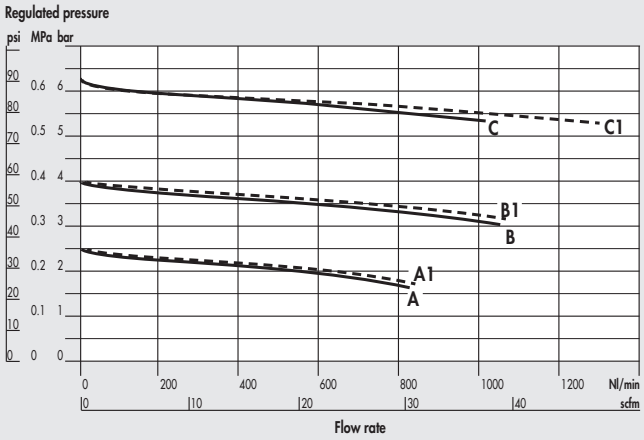

FR Syntesi® **SY1** 1/4"

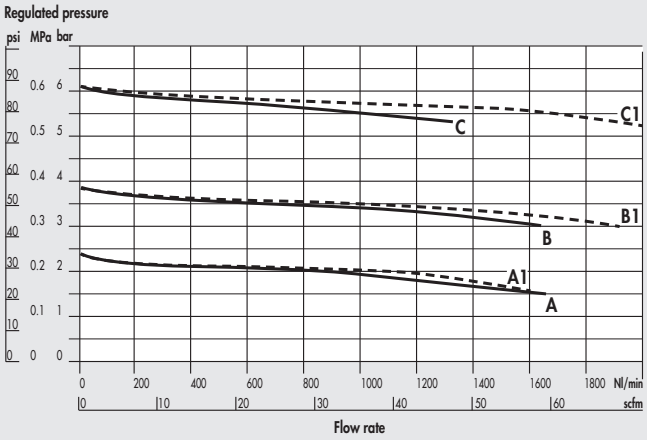

FR Syntesi® **SY1** 3/8"

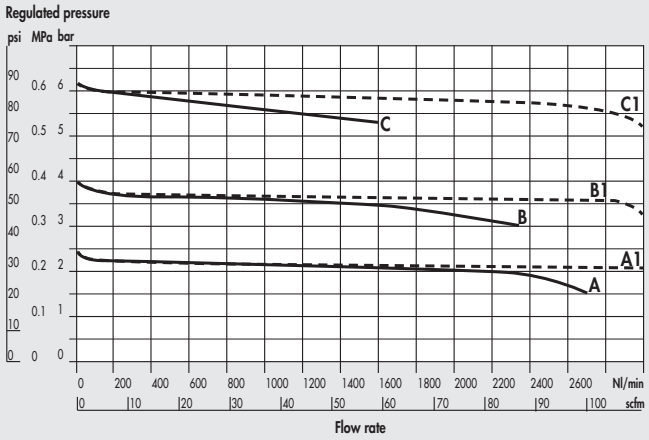

FR Syntesi® **SY2** 3/8"

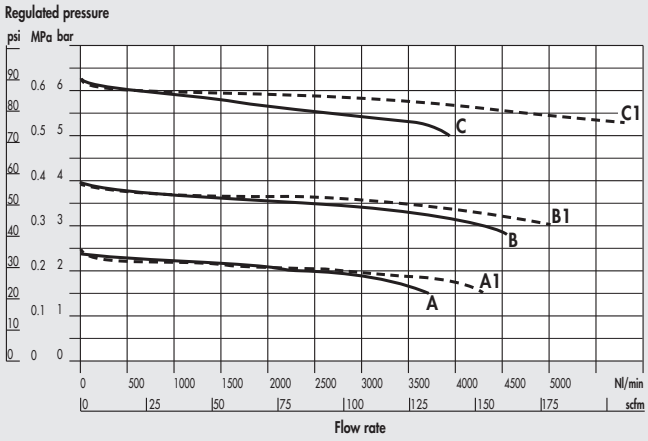

A = P In 7 bar - P Out 2.5 bar
B = P In 7 bar - P Out 4 bar
C = P In 7 bar - P Out 6.3 bar
A1 = P In 10 bar - P Out 2.5 bar
B1 = P In 10 bar - P Out 4 bar
C1 = P In 10 bar - P Out 6.3 bar

FR Syntesi® **SY2** 1/2"

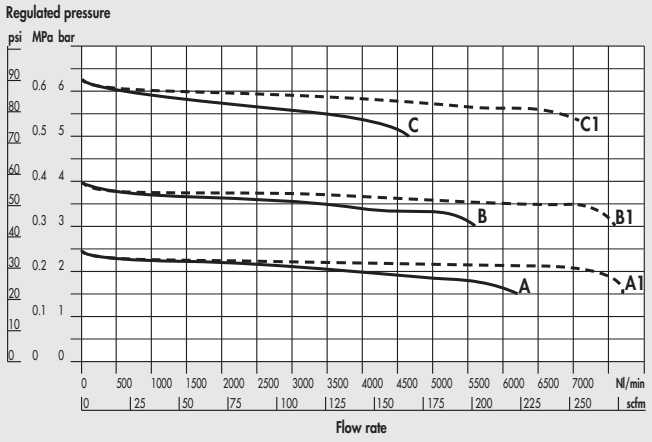

FR Syntesi® **SY2** 3/4" - 1"

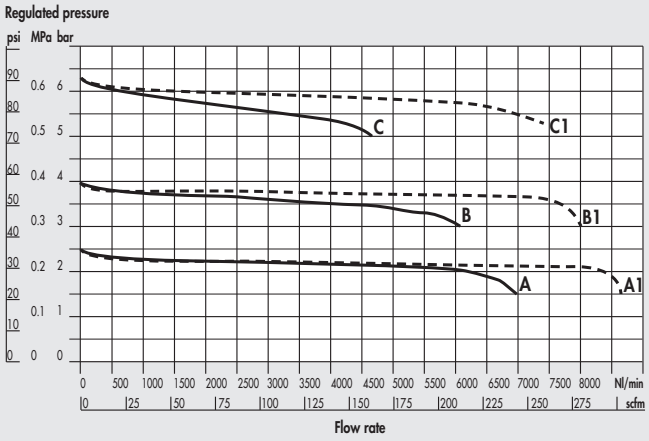

A = P In 7 bar - P Out 2.5 bar
B = P In 7 bar - P Out 4 bar
C = P In 7 bar - P Out 6.3 bar
A1 = P In 10 bar - P Out 2.5 bar
B1 = P In 10 bar - P Out 4 bar
C1 = P In 10 bar - P Out 6.3 bar

DIMENSIONS

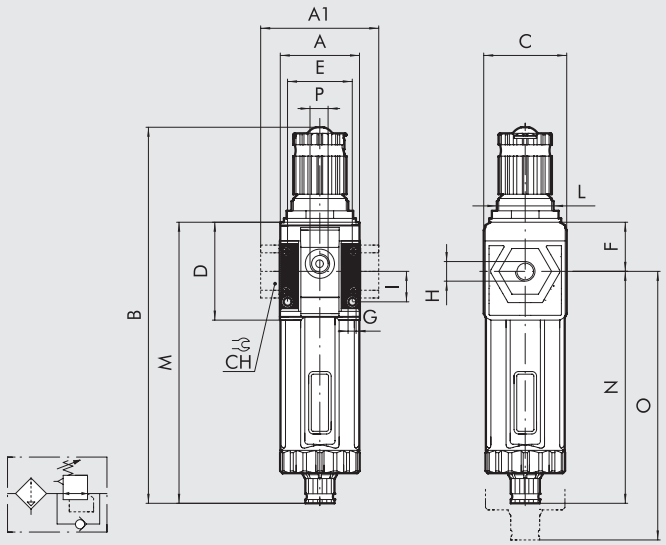

		SIZE 1			SIZE 2			
H (threaded port)		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
A		42			60.5			
A1		-	-	44	-	-	95	95
B	**RMSA**	198			246			
	RA/SAC	202			250			
C		44			61			
CH		-			-	-	32	36
D		51.5			70.5			
E		33.5			47.5			
F		25.8			38.2			
G		Hole for M4 screws			Hole for M5 screws			
I		16			22.5			
L		M30x1.5			M38x2			
M	**RMSA**	148			178			
	RA/SAC	152			182			
N	**RMSA**	122.2			139.8			
	RA/SAC	126.2			143.8			
O	**RMSA**	202			245			
	RA/SAC	206			249			
P (pressure gauge port or additional air takes-off)		1/8"			1/4"			

NOTES

KEY TO CODES

56	1	1	B	24	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**DEGREE OF FILTRATION, TYPE OF CONDENSATE DRAIN AND SETTING RANGE**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**1** Size 1	**0** Without bushing	**B** Filter-regulator	● **10** 5 µm, RMSA, 0 to 2 bar	**0** Without bushing
5X Syntesi anti-corrosion		**1** 1/8" port		● **20** 20 µm, RMSA, 0 to 2 bar	**1** 1/8" port
		2 1/4" port		● **30** 50 µm, RMSA, 0 to 2 bar	**2** 1/4" port
		3 3/8" port		● **40** 5 µm, RA, 0 to 2 bar	**3** 3/8" port
	2 Size 2	**0** Without bushing		● **50** 20 µm, RA, 0 to 2 bar	**0** Without bushing
		3 3/8" port		● **60** 50 µm, RA, 0 to 2 bar	**3** 3/8" port
		4 1/2" port		● **11** 5 µm, SAC, 0 to 2 bar	**4** 1/2" port
		5 3/4" port		● **21** 20 µm, SAC, 0 to 2 bar	**5** 3/4" port
		6 1" port		● **31** 50 µm, SAC, 0 to 2 bar	**6** 1" port
				✚ **12** 5 µm, RMSA, 0 to 4 bar	
				✚ **22** 20 µm, RMSA, 0 to 4 bar	
				✚ **32** 50 µm, RMSA, 0 to 4 bar	
				✚ **42** 5 µm, RA, 0 to 4 bar	
				✚ **52** 20 µm, RA, 0 to 4 bar	
				✚ **62** 50 µm, RA, 0 to 4 bar	
				✚ **13** 5 µm, SAC, 0 to 4 bar	
				✚ **23** 20 µm, SAC, 0 to 4 bar	
				✚ **33** 50 µm, SAC, 0 to 4 bar	
				14 5 µm, RMSA, 0 to 8 bar	
				24 20 µm, RMSA, 0 to 8 bar	
				34 50 µm, RMSA, 0 to 8 bar	
				44 5 µm, RA, 0 to 8 bar	
				54 20 µm, RA, 0 to 8 bar	
				64 50 µm, RA, 0 to 8 bar	
				15 5 µm, SAC, 0 to 8 bar	
				25 20 µm, SAC, 0 to 8 bar	
				35 50 µm, SAC, 0 to 8 bar	
				16 5 µm, RMSA, 0 to 12 bar	
				26 20 µm, RMSA, 0 to 12 bar	
				36 50 µm, RMSA, 0 to 12 bar	
				46 5 µm, RA, 0 to 12 bar	
				56 20 µm, RA, 0 to 12 bar	
				66 50 µm, RA, 0 to 12 bar	
				17 5 µm, SAC, 0 to 12 bar	
				27 20 µm, SAC, 0 to 12 bar	
				37 50 µm, SAC, 0 to 12 bar	

● Not available in the anti-corrosion version.
✚ Anti-corrosion version available only in size 1.
RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.
RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.
SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs**.

NOTES

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description	Code	Description
FILTER-REGULATOR Syntesi® SY1		**FILTER-REGULATOR Syntesi® SY2**	
5610B140	FR SY1 5 08 RMSA without bushings	**5620B140**	FR SY2 5 08 RMSA without bushings
5610B240	FR SY1 20 08 RMSA without bushings	**5620B240**	FR SY2 20 08 RMSA without bushings
5610B440	FR SY1 5 08 RA without bushings	**5620B440**	FR SY2 5 08 RA without bushings
5610B540	FR SY1 20 08 RA without bushings	**5620B540**	FR SY2 20 08 RA without bushings
5610B160	FR SY1 5 012 RMSA without bushings	**5620B160**	FR SY2 5 012 RMSA without bushings
5610B260	FR SY1 20 012 RMSA without bushings	**5620B260**	FR SY2 20 012 RMSA without bushings
5610B460	FR SY1 5 012 RA without bushings	**5620B460**	FR SY2 5 012 RA without bushings
5610B560	FR SY1 20 012 RA without bushings	**5620B560**	FR SY2 20 012 RA without bushings
5611B141	FR SY1 1/8 5 08 RMSA	**5623B143**	FR SY2 3/8 5 08 RMSA
5611B241	FR SY1 1/8 20 08 RMSA	**5623B243**	FR SY2 3/8 20 08 RMSA
5611B441	FR SY1 1/8 5 08 RA	**5623B443**	FR SY2 3/8 5 08 RA
5611B541	FR SY1 1/8 20 08 RA	**5623B543**	FR SY2 3/8 20 08 RA
5611B161	FR SY1 1/8 5 012 RMSA	**5623B163**	FR SY2 3/8 5 012 RMSA
5611B261	FR SY1 1/8 20 012 RMSA	**5623B263**	FR SY2 3/8 20 012 RMSA
5611B461	FR SY1 1/8 5 012 RA	**5623B463**	FR SY2 3/8 5 012 RA
5611B561	FR SY1 1/8 20 012 RA	**5623B563**	FR SY2 3/8 20 012 RA
5612B142	FR SY1 1/4 5 08 RMSA	**5624B144**	FR SY2 1/2 5 08 RMSA
5612B242	FR SY1 1/4 20 08 RMSA	**5624B244**	FR SY2 1/2 20 08 RMSA
5612B442	FR SY1 1/4 5 08 RA	**5624B444**	FR SY2 1/2 5 08 RA
5612B542	FR SY1 1/4 20 08 RA	**5624B544**	FR SY2 1/2 20 08 RA
5612B162	FR SY1 1/4 5 012 RMSA	**5624B164**	FR SY2 1/2 5 012 RMSA
5612B262	FR SY1 1/4 20 012 RMSA	**5624B264**	FR SY2 1/2 20 012 RMSA
5612B462	FR SY1 1/4 5 012 RA	**5624B464**	FR SY2 1/2 5 012 RA
5612B562	FR SY1 1/4 20 012 RA	**5624B564**	FR SY2 1/2 20 012 RA
5613B143	FR SY1 3/8 5 08 RMSA	**5625B145**	FR SY2 3/4 5 08 RMSA
5613B243	FR SY1 3/8 20 08 RMSA	**5625B245**	FR SY2 3/4 20 08 RMSA
5613B443	FR SY1 3/8 5 08 RA	**5625B445**	FR SY2 3/4 5 08 RA
5613B543	FR SY1 3/8 20 08 RA	**5625B545**	FR SY2 3/4 20 08 RA
5613B163	FR SY1 3/8 5 012 RMSA	**5625B165**	FR SY2 3/4 5 012 RMSA
5613B263	FR SY1 3/8 20 012 RMSA	**5625B265**	FR SY2 3/4 20 012 RMSA
5613B463	FR SY1 3/8 5 012 RA	**5625B465**	FR SY2 3/4 5 012 RA
5613B563	FR SY1 3/8 20 012 RA	**5625B565**	FR SY2 3/4 20 012 RA
		5626B146	FR SY2 1 5 08 RMSA
		5626B246	FR SY2 1 20 08 RMSA
		5626B446	FR SY2 1 5 08 RA
		5626B546	FR SY2 1 20 08 RA
		5626B166	FR SY2 1 5 012 RMSA
		5626B266	FR SY2 1 20 012 RMSA
		5626B466	FR SY2 1 5 012 RA
		5626B566	FR SY2 1 20 012 RA

NOTE	
Anti-corrosion version	
5X_ _ _ _ _ _	
Example	
5X11B141	FR SY1 1/8 5 08 RMSA anti-corrosion

NOTES

SYNTESI® LUBRICATOR

METAL WORK PNEUMATIC

The pneumatic lubricator is the simplest way of efficiently lubricating the actuators linked to a circuit. As compressed air flows towards the lubricator, it encounters a flexible diaphragm which partially blocks the way, creating a small pressure difference between the inlet and outlet air. Being at the higher pressure, the oil in the bowl is pumped through a tube with a filter towards the regulation pin.
The quantity of oil can be metered accurately since the drops can be viewed through the transparent dome.
Filling with oil must take place in the absence of pressure, unscrewing the plug next to the dome. On the front and back there is a port (1/8" for size 1 and 1/4" for size 2) that can be used with pressure gauges, pressure switches or as an additional air intake.



TECHNICAL DATA		LUB SY1			LUB SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Type of lubrication		Oil mist						
Version		Manual filling from the top						
Max. input pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	1300	1700	2200	2300	3900	3900	
	scfm	46	60	78	81	138	138	
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1600	3000	3650	3650	6100	6100	
	scfm	57	106	129	129	216	216	
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Weight	g	185	180	171	480	453	449	437
Fluid		Compressed air or other inert gases						
Quantity of filled oil	cm^3	60			130			
Mounting position		Vertical			Vertical			
Port for additional air take-off		1/8", front and rear, lubricated air			1/4", front and rear, lubricated air			
Additional air take-off flow rate at 6.3 bar	Nl/min	450			800			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	16			53			
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			
Recommended oils		ISO and UNI FD22 (Energol HPL; Spinesso; Mobil DTE; Tellus oil)						
Notes on use		Install the lubricator as close as possible to the point of use. Fill the lubricator bowl with oil before pressurizing the system. Do not use cleaning oils, brake fluid oils or solvents in general. For the best lubrication results, set the drip rate to one drop for 300-600 Nl.						

COMPONENTS

① Technopolymer oil filling plug
② Technopolymer flange
③ IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
④ Venturi NBR diaphragm
⑤ Technopolymer body
⑥ Clear technopolymer bowl
⑦ OT 58 brass oil flow regulation needle
⑧ Clear technopolymer cover
⑨ NBR o-ring gasket
⑩ Rilsan® oil suction pipe
⑪ Oil filter

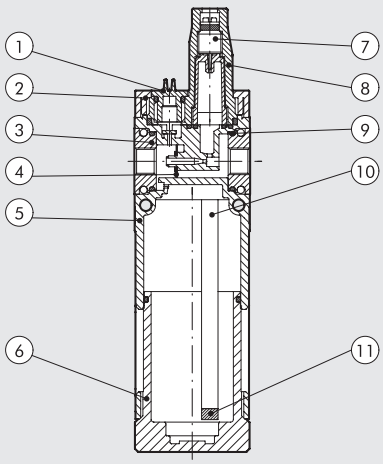

FLOW CHARTS

LUB Syntesi® **SY1** 1/8"

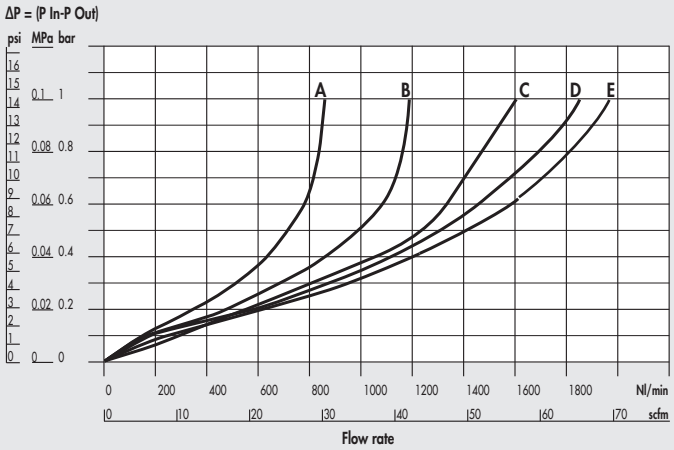

LUB Syntesi® **SY1** 1/4"

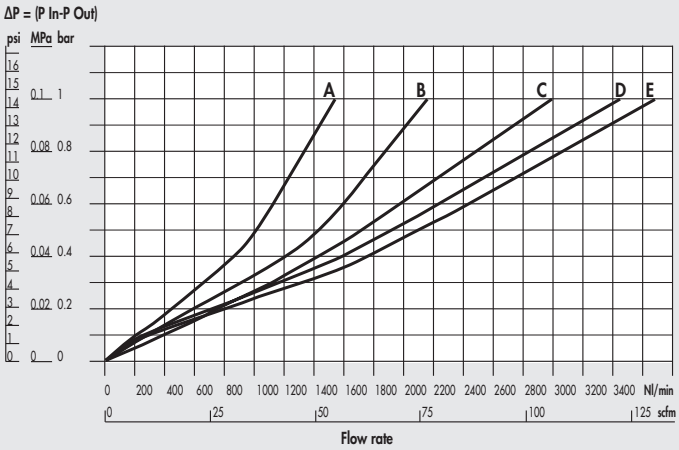

LUB Syntesi® **SY1** 3/8"

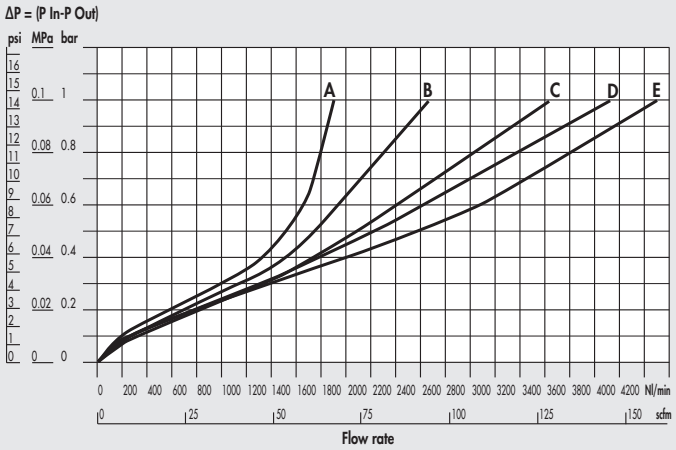

Minimum operating flow chart **SY1**



LUB Syntesi® **SY2** 3/8"

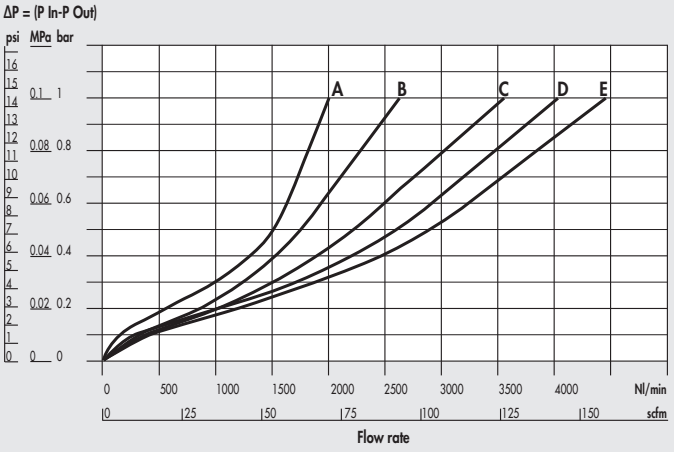

LUB Syntesi® **SY2** 1/2"

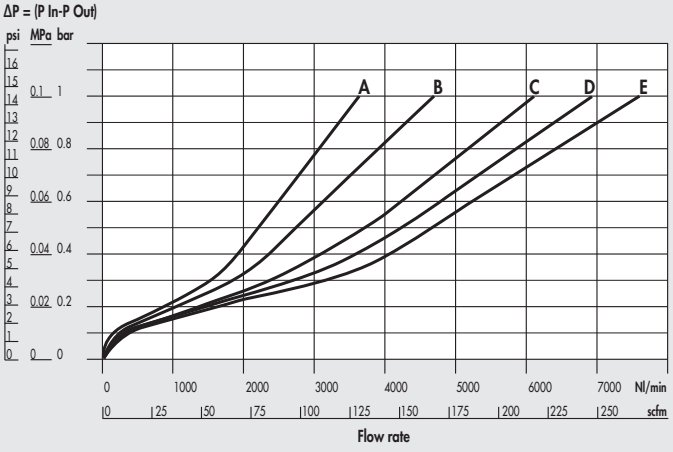

A = 2.5 bar - 0.25 MPa - 36 psi
B = 4 bar - 0.4 MPa - 58 psi
C = 6.3 bar - 0.63 MPa - 91 psi
D = 8 bar - 0.8 MPa - 116 psi
E = 10 bar - 1 MPa - 145 psi

METAL WORK PNEUMATIC

LUB Syntesi® **SY2** 3/4" - 1"

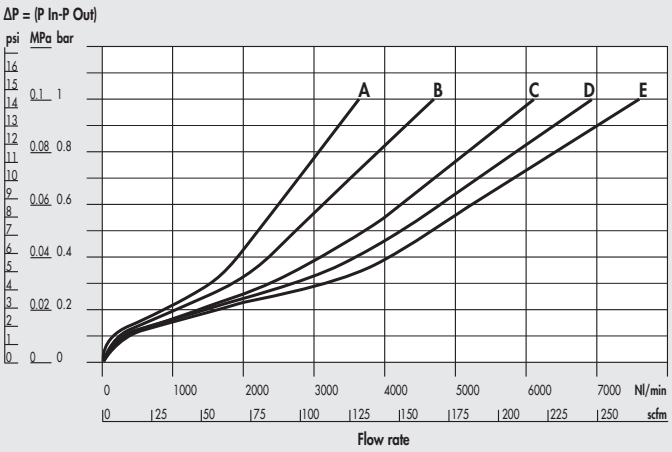

Minimum operating flow chart **SY2**



A = 2.5 bar - 0.25 MPa - 36 psi
B = 4 bar - 0.4 MPa - 58 psi
C = 6.3 bar - 0.63 MPa - 91 psi
D = 8 bar - 0.8 MPa - 116 psi
E = 10 bar - 1 MPa - 145 psi

DIMENSIONS

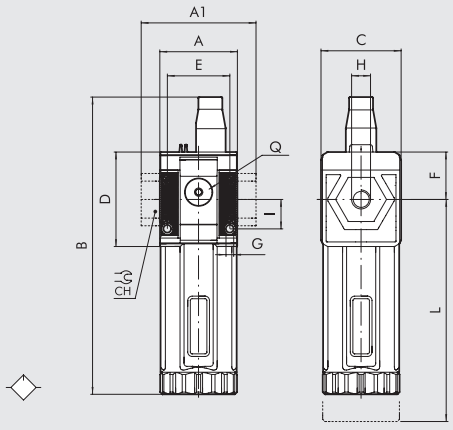

	SIZE 1			SIZE 2			
H (threaded port)	1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
A	42			60.5			
A1	-	-	44	-	-	95	95
B	162			200.5			
C	44			61			
CH	-			-	-	32	36
D	51.5			70.5			
E	33.5			47.5			
F	25.8			38.2			
G	Hole for M4 screws			Hole for M5 screws			
I	16			22.5			
L	158			193			
Q (no. 2 additional air takes-off)	1/8"			1/4"			

KEY TO CODES

56	1	1	L	10	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**OIL FILLING**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**1** Size 1	**0** Without bushing	**L** Lubricator	**10** Manual filling from the top	**0** Without bushing
5X Syntesi anti-corrosion		**1** 1/8" port			**1** 1/8" port
		2 1/4" port			**2** 1/4" port
		3 3/8" port			**3** 3/8" port
	2 Size 2	**0** Without bushing			**0** Without bushing
		3 3/8" port			**3** 3/8" port
		4 1/2" port			**4** 1/2" port
		5 3/4" port			**5** 3/4" port
		6 1" port			**6** 1" port

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
LUBRIFICATORE Syntesi® SY1	
5610L100	LUB SY1 without bushings
5611L101	LUB SY1 1/8
5612L102	LUB SY1 1/4
5613L103	LUB SY1 3/8

Code	Description
LUBRIFICATORE Syntesi® SY2	
5620L100	LUB SY2 without bushings
5623L103	LUB SY2 3/8
5624L104	LUB SY2 1/2
5625L105	LUB SY2 3/4
5626L106	LUB SY2 1

NOTE
Anti-corrosion version
5X_ _ _ _ _
Example
5X11L101 LUB SY1 1/8 anti-corrosion

SYNTESI® SHUT-OFF VALVE

This device separates the compressed air circuit from the main air supply. It is a three-way valve that relieves the downstream system in the closed position. This makes it useful for maintenance operations or when the air supply to a machine or piece of equipment needs to be shut off.
Manual, pneumatic, electro-pneumatic and assisted electro-pneumatic control versions are available. The last version must be used if the inlet pressure is outside the electro-pneumatic valve operating range, so for particularly low or high pressures.
The version with manual control can be locked and you can enter up to two padlocks on size 1 and up to three on size 2 when the valve is in the closed position. As an alternative, a version with a single Ø7 hole is available for a single padlock. On the front and back there is a port (1/8" for size 1 and 1/4" size 2) that can be used with pressure gauges, pressure switches or as an additional air intake.

TECHNICAL DATA		V3V SY1			V3V SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Threaded discharge port		1/8"			1/4"			
Type of control		Manual - pneumatic - Elpn - Elpn pilot-assisted			Manual - Pneumatic - Cnomo elpn - Cnomo elpn pilot-assisted			
Max inlet pressure for pneumatic and solenoid pilot-assisted versions	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Inlet pressure for solenoid version	bar	3 - 10			3 - 10			
	MPa	0.3 - 1			0.3 - 1			
	psi	43 - 145			43 - 145			
Pilot pressure for pneumatic and solenoid pilot-assisted versions	bar	3 - 10			3 - 10			
	MPa	0.3 - 1			0.3 - 1			
	psi	43 - 145			43 - 145			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	800	1000	1100	2800	3000	3000	
	scfm	28	35	39	99	106	106	
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1100	1500	1600	3600	4000	4000	
	scfm	39	53	57	127	141.5	141.5	
Exhaust flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	500			2000			
	scfm	18			71			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Padlockable knob					Included			
Weight	g	197	192	183	476	449	445	433
Fluid		Compressed air or other inert gases						
Mounting position		In any position						
Additional air take-off, for pressure gauges or fittings		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500			1500			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18			53			
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			
Coil capacity for electro-pneumatic version		12 VDC and 24 VDC = 2W; 24 VAC, 110 VAC and 220 VAC = 3.5 VA						
Hand operator of electro-pneumatic versions		Bistable: horizontal = OFF, vertical = ON (see drawing page **C1**.40)						

COMPONENTS

① Technopolymer knob
② Technopolymer hinge
③ Technopolymer body
④ NBR o-ring gasket
⑤ IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
⑥ OT58 brass valve with NBR vulcanized gasket
⑦ Stainless steel valve spring
⑧ Technopolymer plug
⑨ OT58 brass threaded insert
⑩ Zinc-plated steel plate for knob locking (stainless steel for anti-corrosion version)
⑪ Stainless steel spring stem recovery
⑫ OT58 brass stem

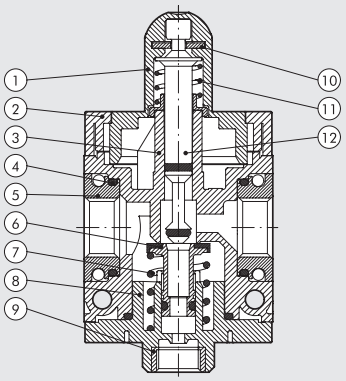

V10 - Steel plate with Ø3.5 holes for locking with 2 padlocks (SY1) or 3 padlocks (SY2).


SY1


SY2

V11 - Steel plate with a single Ø7 hole for docking with a single padlock (compatible with most of the padlocks available from the trade with a Ø5mm arch).

METAL WORK PNEUMATIC

DIMENSIONS

MANUAL **SY1-SY2**

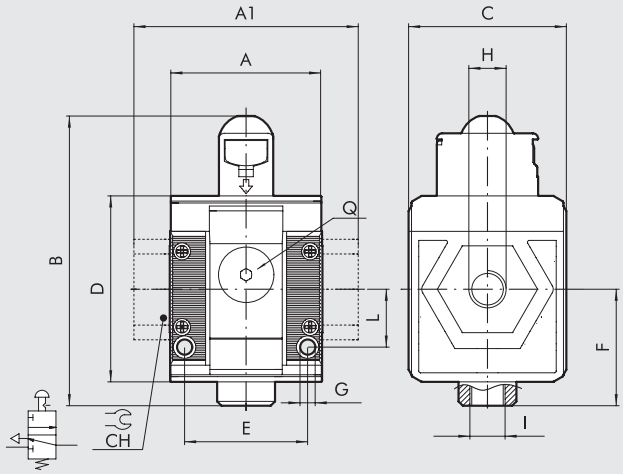

PNEUMATIC **SY1-SY2**

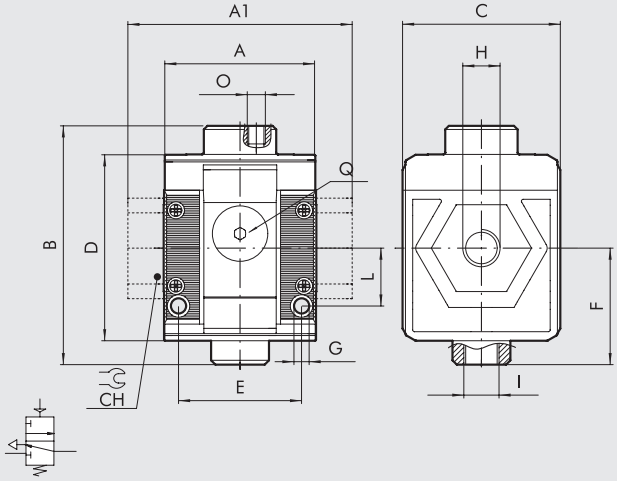

SOLENOID/SOLENOID PILOT-ASSISTED* **SY1**

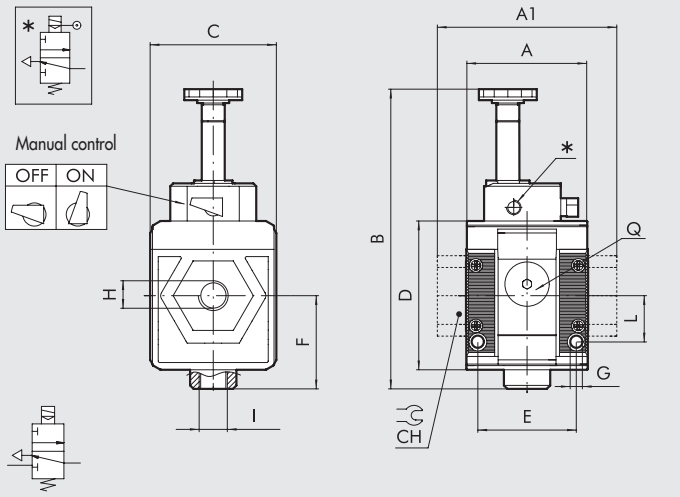

CNOMO SOLENOID / CNOMO SOLENOID PILOT-ASSISTED* **SY2**

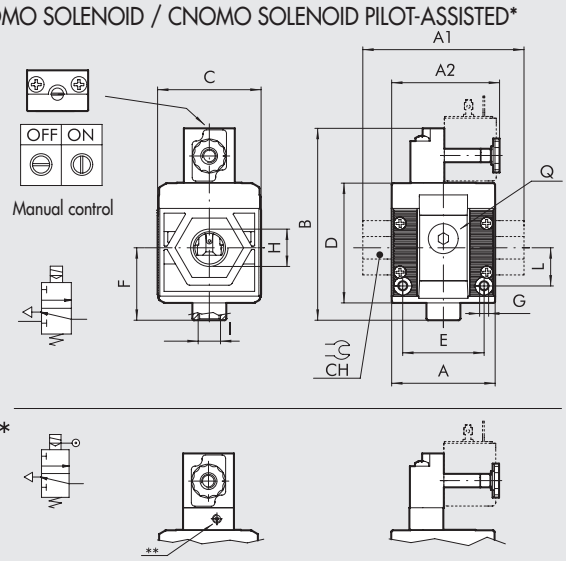

N.B.: Before assembling other Syntesi elements after the V3V, remember to mount the coil on the V3V itself.

	MANUAL							PNEUMATIC							SOLENOID/SOLENOID PILOT-ASSISTED			CNOMO SOLENOID/CNOMO SOLENOID PILOT-ASSISTED			
	SIZE 1			SIZE 2				SIZE 1			SIZE 2				SIZE 1			SIZE 2			
H (threaded port)	1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"	1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"	1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
A	42			60.5				42			60.5				42			60.5			
A1	-	-	44	-	-	95	95	-	-	44	-	-	95	95	-	-	44	-	-	95	95
A2	-			-				-			-				-			65			
B	80			109				66			94				104			-			
Cnomo	-			-				-			-				-			113			
Cnomo pilot ass.	-			-				-			-				-			126			
C	44			61				44			61				44			61			
CH	-			-	-	32	36	-			-	-	32	36	-			-	-	32	36
D	51.5			70.5				51.5			70.5				51.5			70.5			
E	33.5			47.5				33.5			47.5				33.5			47.5			
F	32.2			42.7				32.2			42.7				32.2			42.7			
G	Hole for M4 screws			Hole for M5 screws				Hole for M4 screws			Hole for M5 screws				Hole for M4 screws			Hole for M5 screws			
I (exhaust)	1/8"			1/4"				1/8"			1/4"				1/8"			1/4"			
L	16			22.5				16			22.5				16			22.5			
O (pilot)	-			-				M5			1/8"				-			-			
Q (no. 2 additional air takes-off)	1/8"			1/4"				1/8"			1/4"				1/8"			1/4"			
**** Pilot**	-							-			-				M5			M5			

KEY TO CODES

56	1	1	V	10	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**TYPE**	**THREADED OUTPUT CONNECTION**
56 Syntesi **5X** Syntesi anti-corrosion	**1** Size 1 **2** Size 2	**0** Without bushing **1** 1/8" port **2** 1/4" port **3** 3/8" port **0** Without bushing **3** 3/8" port **4** 1/2" port **5** 3/4" port **6** 1"port	**V** Shut-off valve	**10** Manual with Ø3.5 hole for padlocks *** 11** Manual with Ø7 hole for padlock **20** Pneumatic **● 30** Solenoid pilot-assisted **● 70** Solenoid	**0** Without bushing **1** 1/8" port **2** 1/4" port **3** 3/8" port **0** Without bushing **3** 3/8" port **4** 1/2" port **5** 3/4" port **6** 1" port

* Compatible with most of the padlocks available from the trade with a Ø5mm arch.
● Not available in the anti-corrosion version.

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
Syntesi® SY1 SHUT-OFF VALVE	
5610V100	V3V SY1 manual without bushings
5611V101	V3V SY1 1/8 manual
5612V102	V3V SY1 1/4 manual
5613V103	V3V SY1 3/8 manual
5610V200	V3V SY1 pneumatic without bushings
5611V201	V3V SY1 1/8 pneumatic
5612V202	V3V SY1 1/4 pneumatic
5613V203	V3V SY1 3/8 pneumatic
5610V300	V3V SY1 elpn pilot-assisted without bushings
5611V301	V3V SY1 1/8 elpn pilot-assisted
5612V302	V3V SY1 1/4 elpn pilot-assisted
5613V303	V3V SY1 3/8 elpn pilot-assisted
5610V700	V3V SY1 elpn without bushings
5611V701	V3V SY1 1/8 elpn
5612V702	V3V SY1 1/4 elpn
5613V703	V3V SY1 3/8 elpn

Code	Description
Syntesi® SY2 SHUT-OFF VALVE	
5620V100	V3V SY2 manual without bushings
5623V103	V3V SY2 3/8 manual
5624V104	V3V SY2 1/2 manual
5625V105	V3V SY2 3/4 manual
5626V106	V3V SY2 1 manual
5620V200	V3V SY2 pneumatic without bushings
5623V203	V3V SY2 3/8 pneumatic
5624V204	V3V SY2 1/2 pneumatic
5625V205	V3V SY2 3/4 pneumatic
5626V206	V3V SY2 1 pneumatic
5620V300	V3V SY2 elpn pilot-assisted Cnomo without bushings
5623V303	V3V SY2 3/8 elpn pilot-assisted Cnomo
5624V304	V3V SY2 1/2 elpn pilot-assisted Cnomo
5625V305	V3V SY2 3/4 elpn pilot-assisted Cnomo
5626V306	V3V SY2 1 elpn pilot-assisted Cnomo
5620V700	V3V SY2 elpn Cnomo without bushings
5623V703	V3V SY2 3/8 elpn Cnomo
5624V704	V3V SY2 1/2 elpn Cnomo
5625V705	V3V SY2 3/4 elpn Cnomo
5626V706	V3V SY2 1 elpn Cnomo

NOTE	
Anti-corrosion version	
5X_ _ _ _ _	
Example	
5X11V101	V3V SY1 1/8 anti-corrosion

NOTES

SAFE AIR®

SYNTESI® SHUT-OFF-VALVE SAFE AIR® SERIES

METAL WORK PNEUMATIC

The V3V Syntesi® SAFE AIR® is a three-way valve that, when closed, vents the downstream system. It is used during maintenance operations or when it is necessary to remove air from machinery or equipment.
It is equipped with a diagnostic system, that uses an inductive sensor, to monitor the position of the spool.
This means that when the valve is deactivated, the sensor is in the ON state, when the valve is activated, the sensor is in the OFF state.
A status in which the sensor is OFF state and the coil de-energized indicates that there is a problem.
To reduce the probability of risk during plant maintenance, the manual actuator mounted on the electric control is the monostable type.
This valve is a category 2 component, according to EN ISO 13849, and is suitable for use in safety circuits up to PL = d.
For applications requiring higher performance levels, we have also develop a double-channel version (redundant) that requires the use of two valves with a monitored spool arranged so that port 2 of the first valve is connected to port 1 of the second valve. It is sufficient for just one of the two valves to be de-energized to discharge the downstream system; so, even if one of the two spools remains blocked, the other guarantees relief of the compressed-air circuit. In this case, too, the presence of spool position sensors can be used to monitor the status. The double valve is a category 4 component according to EN ISO 13849 and is suitable for use in safety circuits up to PL = e.
Both the single and double channel valves come with: a voluntary examination certificate No. BVI-25-MAC-CV-0004 issued by Bureau Veritas in accordance with EN ISO 13849.

SINGLE V3V Syntesi® SERIES SAFE AIR®

TECHNICAL DATA		SINGLE V3V SY2 SAFE AIR®			
Threaded port		3/8"	1/2"	3/4"	1"
Threaded discharge port		No. 2 from 1/2"			
Fluid		Filtered unlubricated air (50µm)			
Operation		3/2 monostable			
Operating pressure:					
non-assisted		from 3 to 10 bar - from 0.3 to 1 MPa - from 43 to 145 psi			
pilot-assisted		from 0 to 10 bar - from 0 to 1 MPa - from 0 to 145 psi			
Minimum pilot pressure		from 3 to 10 bar - from 0.3 to 1 MPa - from 43 to 145 psi			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	from -10 to +50 ✱			
Weight	g	920	890	890	875
Conductance C	Nl/min · bar	764	821	828	
Critical ratio b	bar/bar	0.25	0.27	0.36	
Flow rate at 6.3 bar Δp 0.5 bar	Nl/min	2300	2550	2700	
Flow rate at 6.3 bar Δp 1 bar	Nl/min	3200	3500	3700	
Conductance C on relief	Nl/min · bar	742			
Critical ratio b on relief	bar/bar	0.09			
Flow rate on free exhaust at 6.3 bar	Nl/min	5400			
TRA/TRR at 6.3 bar	ms/ms	33/100			
Mounting position		In any position			
Wall fixing screws		No. 2 M5 screws			
Hand operator		Monostable			
Coils		22 and 30 mm side, Ø 8 hole – EN175301-803 connection, type B			
		Certified EN 60204.1 and VDE 0580 ■			
Class of protection		IP65 with coil and connector mounted			
Noise level		Max 95 dBA with silenced relief			
Max coil ring nut torque	Nm	1			
CE marking		In accordance with Machinery Directive, Annexe V ●			
Safety function		Cuts off the power supply and relieves the air circuit connected to port 2			
Type of sensor used		Inductive proximity sensors (refer to page **C1**.47 for sensor details)			
B10d		10 x 10^6 cycles			
Category - EN ISO 13849		2			
PL - EN ISO 13849		Suitable for use in safety circuits up to PL = d			

✱ The dew point must be at least 10°C lower than the fluid temperature, to avoid ice formation
■ To avoid malfunctions, we recommend using Metal Work accessories
● The declaration can be downloaded from www.metalwork.it

COMPONENTS - SINGLE VALVE

① Technopolymer flange
② Technopolymer body
③ IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
④ Chemically nickel-plated aluminum spool
⑤ Technopolymer distance
⑥ NBR gaskets
⑦ Anodized aluminium end cap
⑧ Aluminum spring guide
⑨ Special steel spring
⑩ Silencers
⑪ Inductive sensor
⑫ Operator: Brass pipe - Stainless steel core
⑬ Technopolymer piston
⑭ NBR piston gasket

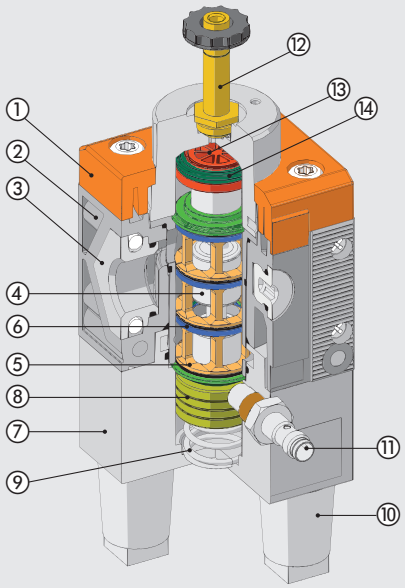

FLOW CHARTS ON DELIVERY - SINGLE VALVE

V3V Syntesi® **SY2** 3/8"

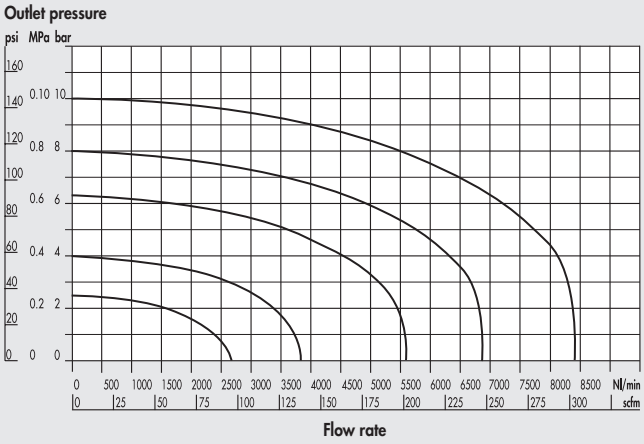

V3V Syntesi® **SY2** 1/2"

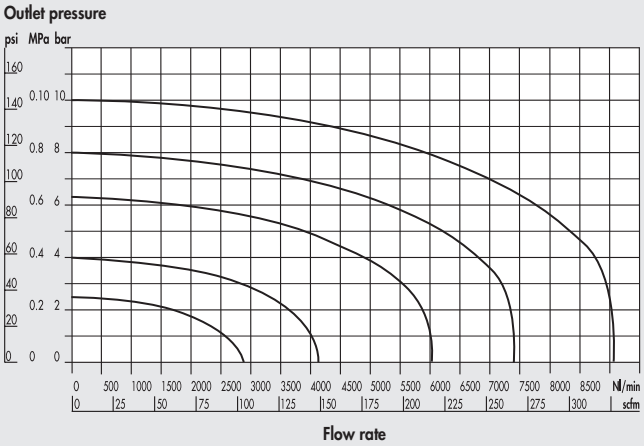

V3V Syntesi® **SY2** 3/4" - 1"

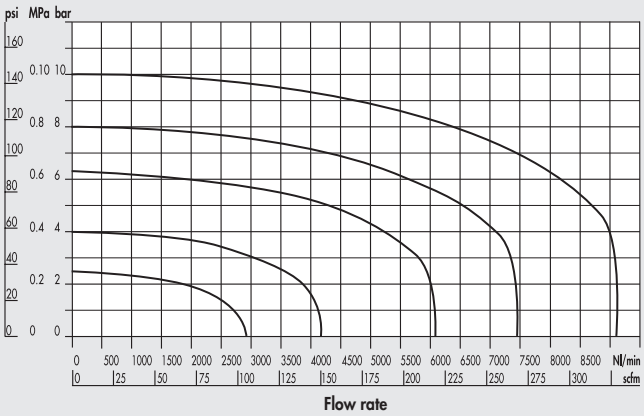

FLOW CHARTS ON RELIEF - SINGLE VALVE

V3V Syntesi® **SY2** 3/8" - 1/2" - 3/4" - 1"

Outlet pressure

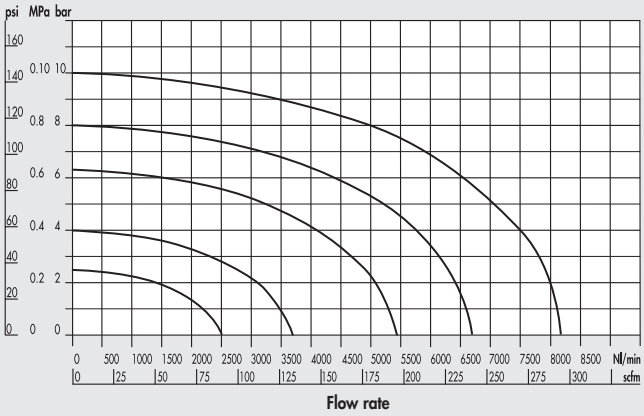

DIMENSIONS - SINGLE VALVE

PILOT-ASSISTED VERSION

NOT PILOT-ASSISTED VERSION

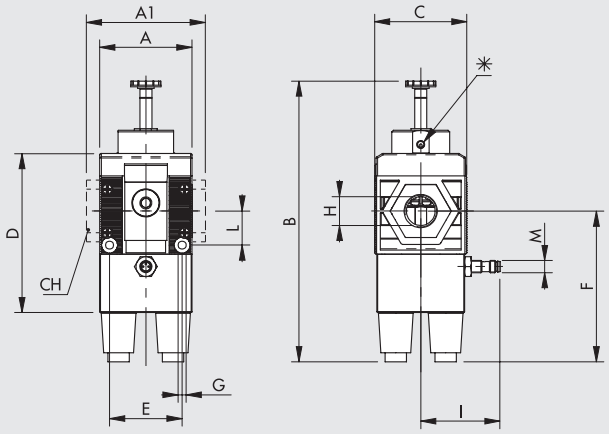

	SIZE 2			
H (threaded port)	3/8"	1/2"	3/4"	1"
A	60.5			
A1	-	-	95	95
B	186			
C	61			
CH	-	-	32	36
D	105			
E	47.5			
F	97			
G	Hole for M5 screws			
I	53			
L	22.5			
M	M8x1			
*** Pilot**	M5			

KEY TO CODES - SINGLE VALVE

56	2	3	W	70	3
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**TYPE**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**2** Size 2	**0** Without bushing **3** 3/8" port **4** 1/2" port **5** 3/4" port **6** 1" port	**W** Shut-off-valve Safe Air®	**30** Solenoid pilot-assisted **70** Solenoid	**0** Without bushing **3** 3/8" port **4** 1/2" port **5** 3/4" port **6** 1" port

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE - SINGLE VALVE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
Syntesi® SY2 SHUT-OFF-VALVES SAFE AIR®	
5620W300	V3V SY2 elpn Safe Air® pilot-assisted without bushings
5623W303	V3V SY2 3/8 elpn pilot-assisted Safe Air®
5624W304	V3V SY2 1/2 elpn pilot-assisted Safe Air®
5625W305	V3V SY2 3/4 elpn pilot-assisted Safe Air®
5626W306	V3V SY2 1 elpn pilot-assisted Safe Air®
5620W700	V3V SY2 elpn Safe Air® without bushings
5623W703	V3V SY2 3/8 elpn Safe Air®
5624W704	V3V SY2 1/2 elpn Safe Air®
5625W705	V3V SY2 3/4 elpn Safe Air®
5626W706	V3V SY2 1 elpn Safe Air®

EXAMPLE OF A SAFETY CIRCUIT WITH A SINGLE VALVE

Below is an example of a wiring diagram for controlling Metal Work SAFE AIR® single valves using Pilz® components.
Circuit components:
- a Pilz® safety module PNOZ® s3 for controlling the emergency stop button; terminal Y32 indicates the status of the module, which can be relayed to the machine control logic
- an emergency stop button S1 (Pilz® - PIT® es Set) linked to terminals S11-S12-S22-S23 of the PNOZ® s3
- a Metal Work SAFE AIR® solenoid valve, the 24 VDC coil of which is fed by terminal 14 of the PNOZ® s3 (the other terminal of the coil is 0 V); the valve's Hall-effect sensor is 24 VDC
- a start/reset button S2
- a relay K1, controlled by the valve sensor; an NO contact of the relay is in series with button S2 of the PNOZ® s3.

Expected behaviour with the system operating correctly:
- system deactivated:
  - contact 14 is OFF
  - the coil is de-energized
  - the sensor is ON
  - relay K1 is energized
  - contact K1 is closed
  - contact Y32 is OFF
- with the system activated via the start/reset button S2:
  - contact 14 is ON
  - the coil is energized
  - the sensor is OFF
  - relay K1 is de-energized
  - contact K1 is open
  - contact Y32 is ON

In the event of a malfunction (e.g. spool jam), the coil is de-energized but the sensor remains OFF, relay K1 remains de-energized, contact K1 remains open (preventing subsequent restarts) and contact Y32 is OFF.
In the event of a valve fault, the circuit in the diagram below does not allow relief of the compressed air system. Sensor status must be monitored to assess valve operation. Contact Y32 indicates the status of the PNOZ® s3, not the status of the sensor.
All the electrical connections between the various components must comply with the applicable safety regulations.
If the emergency button is operated at a frequency of 1 actuation per hour, the circuit activates a safety function with PL = c (calculations made with the PAScal programme by Pilz®). Responsibility for final checking that PL lies with the person assembling the circuit.

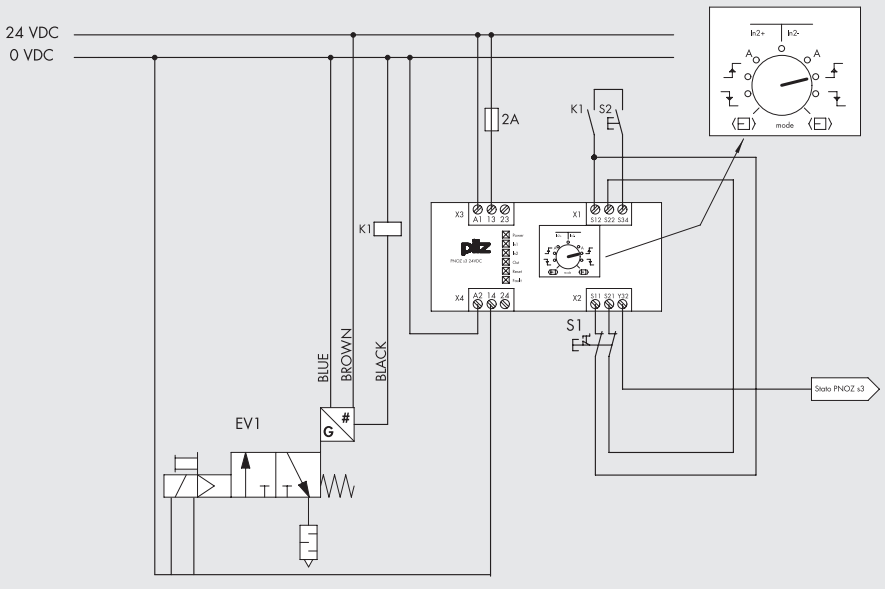

DOUBLE V3V Syntesi® SERIE SAFE AIR®

TECHNICAL DATA		DOUBLE V3V SY2 SAFE AIR®			
Threaded port		3/8"	1/2"	3/4"	1"
Threaded discharge port		No. 4 from 1/2"			
Fluid		Filtered unlubricated air (50µm)			
Operation		3/2 monostable			
Operating pressure:					
non-assisted		from 3 to 10 bar - from 0.3 to 1 MPa - from 43 to 145 psi			
pilot-assisted		from 0 to 10 bar - from 0 to 1 MPa - from 0 to 145 psi			
Minimum pilot pressure		from 3 to 10 bar - from 0.3 to 1 MPa - from 43 to 145 psi			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	from -10 to +50 ✱			
Weight	g	1840	1780	1780	1750
Conductance C	Nl/min · bar	557	600		
Critical ratio b	bar/bar	0.23	0.24		
Flow rate at 6.3 bar Δp 0.5 bar	Nl/min	1700	1800		
Flow rate at 6.3 bar Δp 1 bar	Nl/min	2300	2500		
Conductance C on relief	Nl/min · bar	742			
Critical ratio b on relief	bar/bar	0.09			
Flow rate on free exhaust at 6.3 bar	Nl/min	5400			
TRA/TRR at 6.3 bar	ms/ms	70/100			
Mounting position		In any position			
Wall fixing screws		No. 2 M5 screws			
Hand operator		Monostable			
Coils		22 and 30 mm side, Ø 8 hole – EN175301-803 connection, type B			
		Certified EN 60204.1 and VDE 0580 ■			
Class of protection		IP65 with coil and connector mounted			
Noise level		Max 95 dBA with silenced relief			
Max coil ring nut torque	Nm	1			
CE marking		In accordance with Machinery Directive, Annexeo V ●			
Safety function		Cuts off the power supply and relieves the air circuit connected to port 2			
Type of sensor used		Inductive proximity sensors (refer to page **C1**.47 for sensor details)			
B10d		10 x 10^6 cycles			
Category - EN ISO 13849		4			
PL - EN ISO 13849		Suitable for use in safety circuits up to PL = e			

✱ The dew point must be at least 10°C lower than the fluid temperature, to avoid ice formation
■ To avoid malfunctions, we recommend using Metal Work accessories
● The declaration can be downloaded from www.metalwork.it

COMPONENTS - DOUBLE VALVE

① Technopolymer flange
② Technopolymer body
③ IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
④ Chemically nickel-plated aluminum spool
⑤ Technopolymer distance
⑥ NBR gaskets
⑦ Anodized aluminium end cap
⑧ Aluminum spring guide
⑨ Special steel spring
⑩ Silencers
⑪ Inductive sensor
⑫ Operator: Brass pipe - Stainless steel core
⑬ Technopolymer piston
⑭ NBR piston gasket

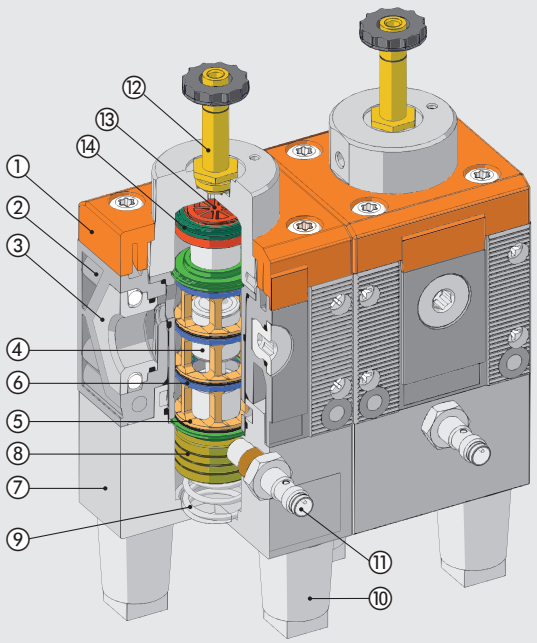

FLOW CHARTS ON DELIVERY - DOUBLE VALVE

V3V Syntesi® **SY2** 3/8″

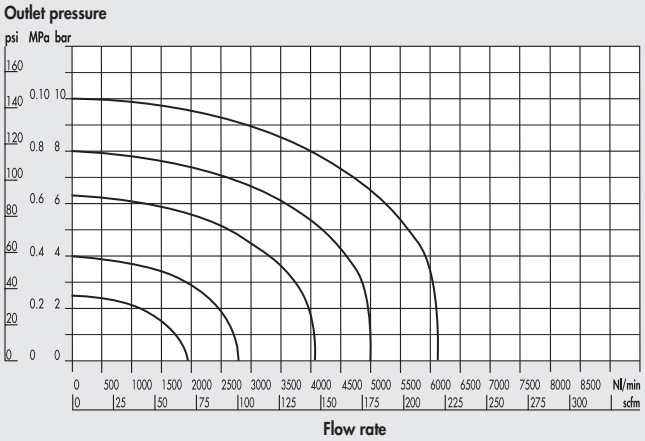

V3V Syntesi® **SY2** 1/2″- 3/4″ - 1″

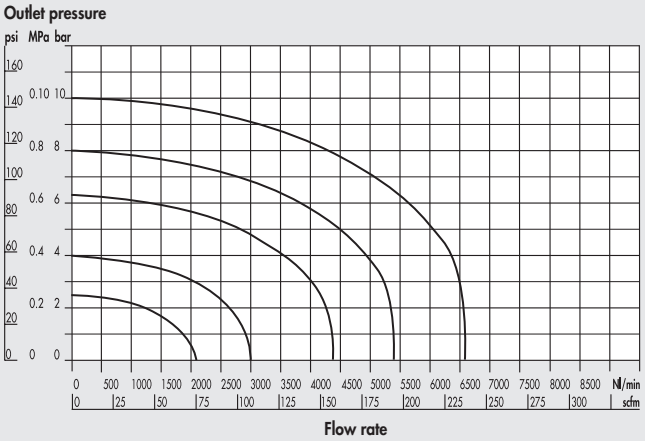

FLOW CHARTS ON RELIEF - DOUBLE VALVE

V3V Syntesi® **SY2** 3/8″ - 1/2″- 3/4″ - 1″

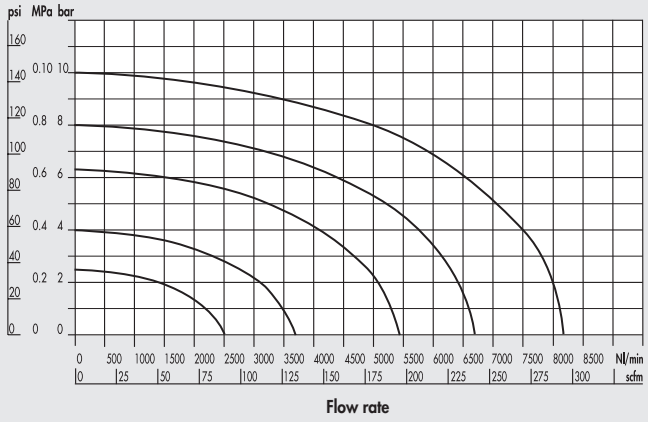

DIMENSIONS - DOUBLE VALVE

PILOT-ASSISTED VERSION



NOT PILOT-ASSISTED VERSION



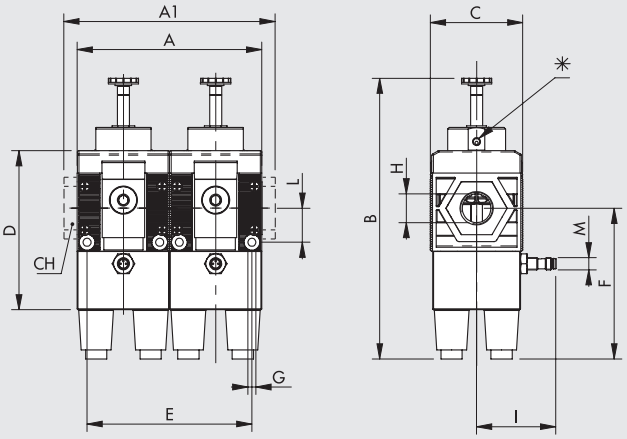

	SIZE 2			
H (threaded port)	3/8"	1/2"	3/4"	1"
A	121			
A1	-	-	217	217
B	186			
C	61			
CH	-	-	32	36
D	105			
E	108			
F	97			
G	Hole for M5 screws			
I	53			
L	22.5			
M	M8x1			
* Pilot	M5			

KEY TO CODES - DOUBLE VALVE

56	2	3	W	72	3
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**TYPE**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**2** Size 2	**0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port	**W** Shut-off-valve Safe Air®	**32** Double solenoid pilot-assisted **72** Double solenoid	**0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE - DOUBLE VALVE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
Syntesi® SY2 SHUT-OFF-VALVES SAFE AIR®	
5620W320	V3V SY2 elpn Safe Air® double pilot-assisted without bushing
5623W323	V3V SY2 3/8 elpn double pilot-assisted Safe Air®
5624W324	V3V SY2 1/2 elpn double pilot-assisted Safe Air®
5625W325	V3V SY2 3/4 elpn double pilot-assisted Safe Air®
5626W326	V3V SY2 1 elpn double pilot-assisted Safe Air®
5620W720	V3V SY2 elpn Safe Air® double without bushing
5623W723	V3V SY2 3/8 elpn double Safe Air®
5624W724	V3V SY2 1/2 elpn double Safe Air®
5625W725	V3V SY2 3/4 elpn double Safe Air®
5626W726	V3V SY2 1 elpn double Safe Air®

NOTES

EXAMPLE OF A SAFETY CIRCUIT WITH A DOUBLE VALVE

Below is an example of a wiring diagram for controlling double valves SAFE AIR® a Metal Work using Pilz® components.
Circuit components:
- a Pilz® PNOZ® mm 0.1p modular safety system
- an emergency stop button S1 (Pilz® - PIT® es Set) linked to terminals T0-T1-I8-I9 of the PNOZ® mm 0.1p
- a Metal Work double solenoid valve SAFE AIR®, the 24 VDC coils of which are fed by terminals O0 (SV1) and O1 (SV2) of the PNOZ® mm 0.1p (the other terminals of the coils are OV); the valves' Hall-effect sensors are 24 VDC
- the sensor signals are relayed to terminals 16 (SV1) and 17 (SV2) of the PNOZ® mm 0.1p
- a start/reset button S2

Expected behaviour with the system operating correctly:
- system deactivated:
  - contacts O0 and O1 are OFF
  - the coils are de-energized
  - the sensors are ON (and hence signals to terminals 16 and 17)
  - if one of the sensors is OFF, the Pilz® module does not allow subsequent start/reset
- with the system activated via the start/reset button:
  - contacts O0 and O1 are ON
  - the coils are energized
  - the sensors are OFF (and hence signals to terminals 16 and 17)

The PNOZ® mm 0.1p module is programmed so that:
- when either sensor is OFF, and the coils are de-energized, the module does not allow subsequent restarts.
- when the valves are energized, the 2 sensors must go off within the valve actuation time, otherwise the 2 valves are switched off again.
  The programme can be downloaded from www.metalwork.it (the licence for programming Pilz® modules is not included).

All the electrical connections between the various components must comply with the applicable safety regulations.
If the emergency button is operated at a frequency of 1 actuation per hour, the circuit activates a safety function with PL = e (calculations made with the PAScal programme by Pilz®).
Responsibility for final checking that PL lies with the person assembling the circuit.

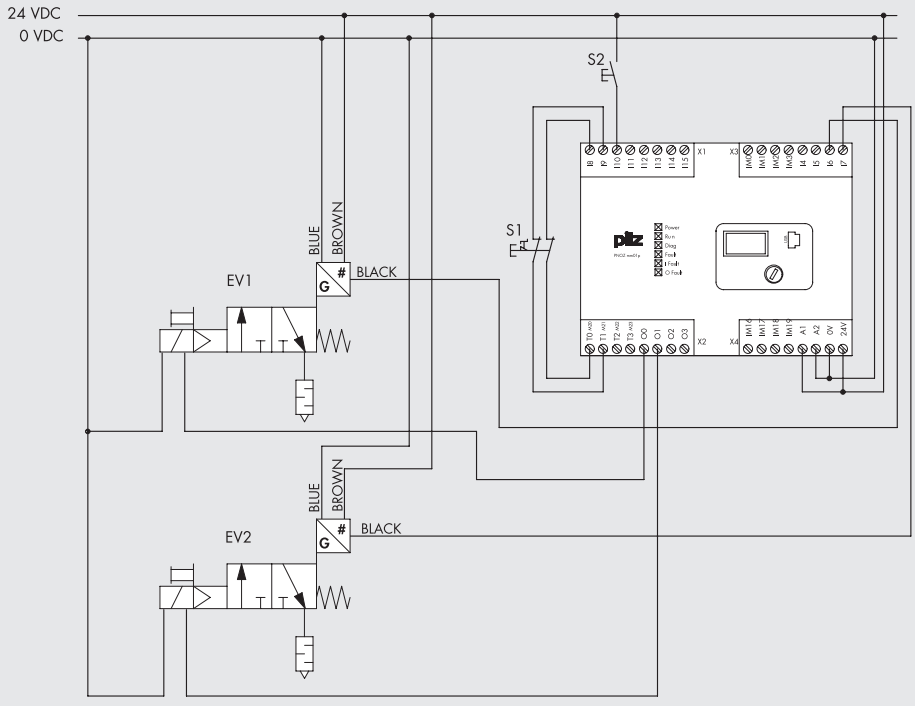

ASSEMBLY DIAGRAM V3V Syntesi® SERIES SAFE AIR®

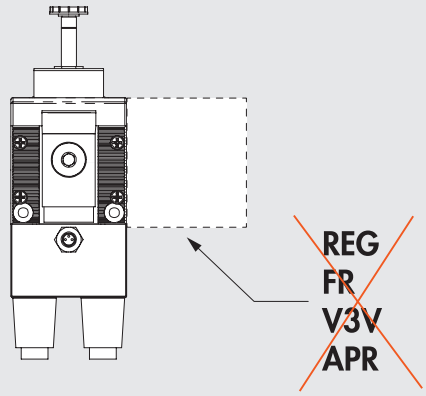

N.B. The **REG**, **FR**, **V3V**, **APR** elements **cannot be mounted** downstream the safety valves because if the elements are blocked, safety relief is not guaranteed.

SENSOR FOR V3V Syntesi® SERIES SAFE AIR®

TECHNICAL DATA SENSOR		
Type of sensor		INDUCTIVE PROXIMITY
Type of contact		N.O.
Switch		PNP
Supply voltage (Ub)	V	from 10 to 30
Voltage dro (for Ia max)	V	≤ 2
Hysteresis	%	from 3 to 20
EMC		EN 60 947-5-2
Continuous current Ia	mA	≤ 200
No load current	mA	≤ 10
Switching frequency	Hz	4000
Over-voltage suppression		Yes
Vibration and shock resistance		100 g /11 ms / 1000 cycles;; 150 g / 1 Mio cycles; from 10 to 55 Hz / 1 mm / from 55 to 500 Hz / 15 g
LED display		Yellow
Degree of protection (EN 60529)		IP68
Temperature range	°C	from -40 to +100
Sensor capsule material		Stainless steel V2A, DIN 1.4305 / AISI 303
Sensing face material		Plastic, LCP
Protection class		III
Communication interface detail		Connector male M8, 3-pin
MTTFd	years	1971
UL-File-Nr		E.181493
Certifications		CE cULus UKCA

WIRING DIAGRAM SENSOR

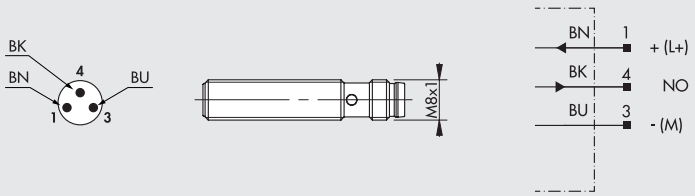

NOTES

SYNTESI® PROGRESSIVE STARTER

METAL WORK PNEUMATIC

The progressive starter is a pneumatic component that allows air enter the circuit gradually, thereby avoiding excessive pressure bursts.
A sophisticated system of internal valves allows two separate stages of operation. During the first stage, a quantity of air that can be regulated via a pin flows from the APR. The second stage starts when the downstream pressure reached 40 to 60% of the upstream pressure, during which full-port flow is achieved. When the mechanism is deactivated, the air flow is cut off and the downstream circuit is relieved.
The progressive starter is particularly useful on machinery where it is important to prevent actuators from moving rapidly and out of control, or where, for safety reasons, the air in-feed needs to be gentle and gradual. It, however, there is a major leak in the downstream system, it may never be possible to achieve the pressure required to open the valve completely.

TECHNICAL DATA		APR SY1			APR SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Threaded discharge port		1/8"			1/4"			
Type of control		Solenoid			Solenoid - Cnomo solenoid			
Inlet pressure	bar	3 - 10			3 - 10			
	MPa	0.3 - 1			0.3 - 1			
	psi	43 - 145			43 - 145			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	900	1000	1100	2800	3600	3600	
	scfm	32	39	39	99	127	127	
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1250	1500	1600	4400	4800	4800	
	scfm	44	53	57	156	170	170	
Drain flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	500			2700			
	scfm	18			96			
Maximum flow rate start-up, at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	170			700			
with regulation pin completely unscrewed	scfm	6			25			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Weight	g	203	198	189	503	476	472	460
Fluid		Compressed air or other inert gases						
Mounting position		In any position						
Additional air take-off, for pressure gauges or fittings		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500			1500			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18			53			
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			
Coil capacity for electro-pneumatic version		12 VDC and 24 VDC = 2W; 24 VAC, 110 VAC and 220 VAC = 3.5 VA						
Hand operator		Bistable: horizontal = OFF, vertical = ON (see drawing page **C1**.40)						

COMPONENTS

① Sleeve ø8
② Anodized aluminium upper block
③ Technopolymer flange
④ Technopolymer body
⑤ IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
⑥ O-ring NBR gasket
⑦ Stainless steel valve spring
⑧ Technopolymer bottom plug
⑨ OT58 brass progressive start regulation pin
⑩ OT58 brass internal valve
⑪ Stainless steel spring stem recoveryng
⑫ OT58 brass stem
⑬ OT58 brass main valve with vulcanized gasket
⑭ OT58 brass threaded insert

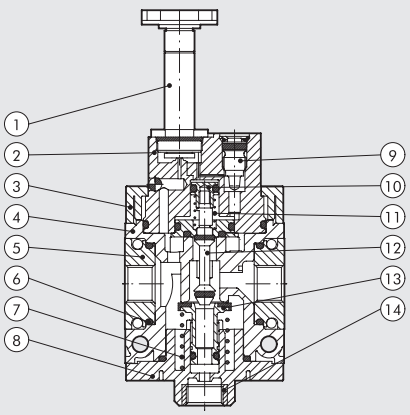

DIMENSIONS

SOLENOID **SY1-SY2**

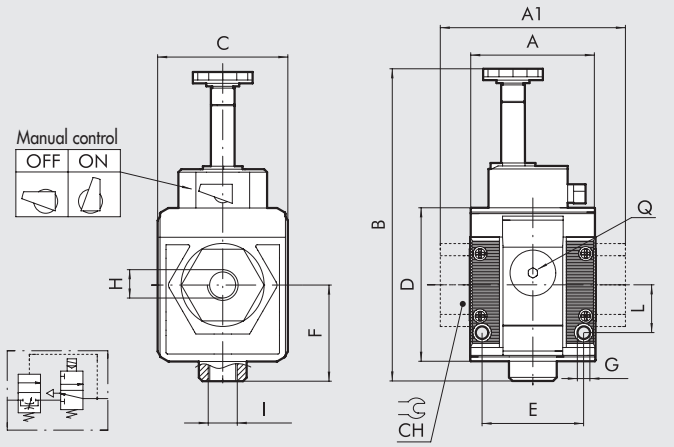

CNOMO SOLENOID **SY2**

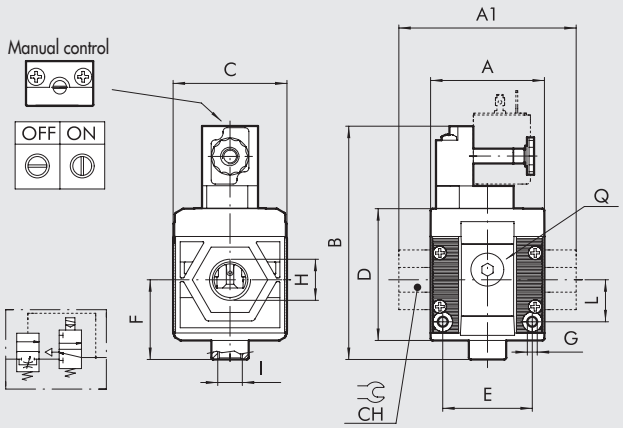

N.B.: Before assembling other Syntesi elements after the APR, remember to mount the coil on the APR itself.

	SOLENOID SIZE 1			SOLENOID / CNOMO SOLENOID SIZE 2			
H (threaded port)	1/8″	1/4″	3/8″	3/8″	1/2″	3/4″	1″
A	42			60.5			
A1	-	-	44	-	-	95	95
B	105			131			
Cnomo	-			125			
C	44			61			
CH	-			-	-	32	36
D	51.5			70.5			
E	33.5			47.5			
F	32.2			42.7			
G	Hole for M4 screws			Hole for M5 screws			
I (exhaust)	1/8″			1/4″			
L	16			22.5			
Q (no. 2 additional air takes-off)	1/8″			1/4″			

KEY TO CODES

56	1	1	A	70	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**TYPE**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**1** Size 1	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port	**A** Progressive starter APR	**70** Solenoid * **71** Cnomo solenoid	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port
	2 Size 2	**0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port			**0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port

* Only for size 2

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
Syntesi® SY1 PROGRESSIVE STARTER	
5610A700	APR SY1 elpn without bushings
5611A701	APR SY1 1/8 elpn
5612A702	APR SY1 1/4 elpn
5613A703	APR SY1 3/8 elpn

Code	Description
Syntesi® SY2 PROGRESSIVE STARTER	
5620A700	APR SY2 elpn without bushings
5623A703	APR SY2 3/8 elpn
5624A704	APR SY2 1/2 elpn
5625A705	APR SY2 3/4 elpn
5626A706	APR SY2 1 elpn

Code	Description
Syntesi® SY2 PROGRESSIVE STARTER	
5620A710	APR SY2 elpn Cnomo without bushings
5623A713	APR SY2 3/8 elpn Cnomo
5624A714	APR SY2 1/2 elpn Cnomo
5625A715	APR SY2 3/4 elpn Cnomo
5626A716	APR SY2 1 elpn Cnomo

SYNTESI® PRESSURE SWITCHES

METAL WORK PNEUMATIC

Syntesi® pressure switches feature a high degree of miniaturisation and a modern attractive design.
As they are extremely modular, the Syntesi® series can be installed facing up or down.
They come ready assembled with a 2-metre cable or an M8 connector with a 300-mm cable.
The contact is the switching type, which means it can be normally open or normally closed.
It can be regulated via a knurled push-lock handle.
On the front and back there is a port (1/8" for size 1 and 1/4" size 2) that can be used with pressure gauges or as an additional air intake.

TECHNICAL DATA		SY1 PRESSURE SWITCHES			SY2 PRESSURE SWITCHES			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Adjustable pressure interval	bar	0.5 to 10			0.5 to 10			
Hysteresis (not adjustable)	bar	From 0.4 to 0.8 (See diagram)						
Maximum pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Min/Max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to 50			From -10 to 50			
Maximum current	A	2			2			
Maximum voltage	V	250			250			
Outside diameter of cable	mm	4.9			4.9			
Number of wires and cross section		3 x 0.5 mm^2			3 x 0.5 mm^2			
Contacts		Normally-Open (NO) and Normally-Closed (NC)						
Protection		IP65			IP65			
Number of switchings		5 x 10^6			5 x 10^6			
Fluid		Filtered lubricated or unlubricated compressed air. Lubrication, if used, must be continuous						
Mounting position		In any position						
Additional air take-off, for pressure gauges or fittings		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500			1500			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18			53			
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			
Weight	g	255	250	241	443	416	412	400

COMPONENTS

① Technopolymer adjusting "push lock" handle
② OT58 brass adjusting screw
③ Steel piston spring
④ OT58 brass piston
⑤ Aluminium top plug
⑥ Technopolymer body
⑦ IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
⑧ Technopolymer bottom plug
⑨ Technopolymer pressure switch body
⑩ Resin finish for IP65
⑪ Electrical contact
⑫ O-ring NBR gasket
⑬ Technopolymer flange

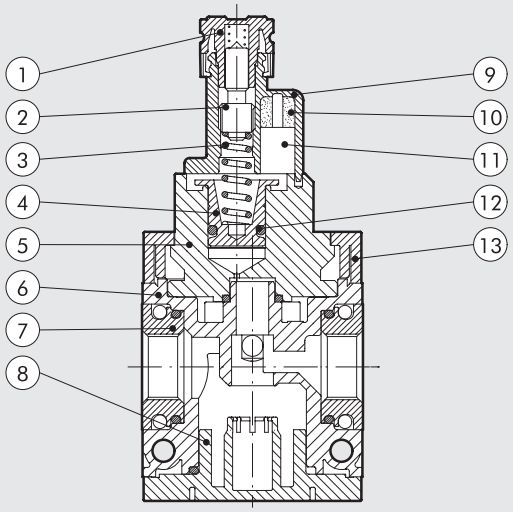

DIMENSIONS

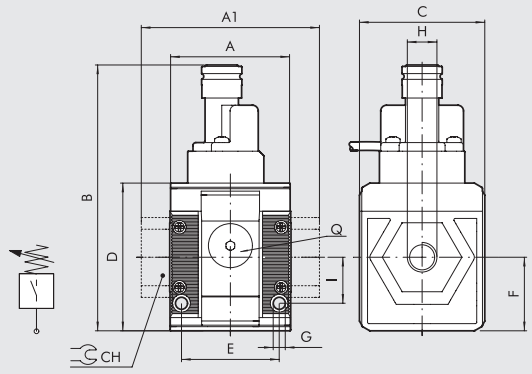

	SIZE 1			SIZE 2			
H (threaded port)	1/8″	1/4″	3/8″	3/8″	1/2″	3/4″	1″
A	42			60.5			
A1	-	-	44	-	-	95	95
B	93			101			
C	44			61			
CH	-			-	-	32	36
D	51.5			70.5			
E	33.5			47.5			
F	25.6			32.5			
G	Hole for M4 screws			Hole for M5 screws			
I	16			22.5			
Q (no. 2 additional air takes-off)	1/8″			1/4″			

HYSTERESIS GRAPH

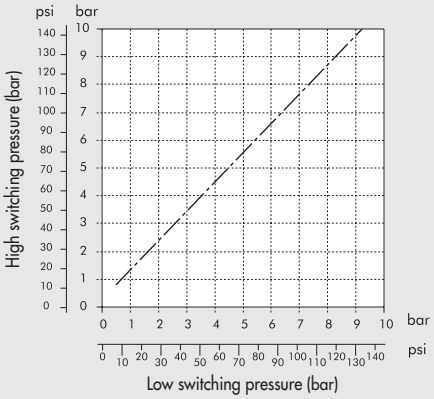

WIRING DIAGRAM

VERSION WITH CABLE



VERSION WITH M8 CONNECTOR



1 - 3 NO
1 - 4 NC

KEY TO CODES

56	1	1	S	10	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**TYPE**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**1** Size 1	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port	**S** Pressure switches	**10** 2 m cable **20** 300 mm cable with M8 connector	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port
	2 Size 2	**0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port			**0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
Syntesi® SY1 PRESSURE SWITCHES	
5610S100	Pressure switch 2 m cable SY1 without bushings
5611S101	Pressure switch 2 m cable SY1 1/8
5612S102	Pressure switch 2 m cable SY1 1/4
5613S103	Pressure switch 2 m cable SY1 3/8
5610S200	Pressure switch M8 SY1 connector without bushings
5611S201	Pressure switch M8 connector SY1 1/8
5612S202	Pressure switch M8 connector SY1 1/4
5613S203	Pressure switch M8 connector SY1 3/8

Code	Description
Syntesi® SY2 PRESSURE SWITCHES	
5620S100	Pressure switch 2 m cable SY2 without bushings
5623S103	Pressure switch 2 m cable SY2 3/8
5624S104	Pressure switch 2 m cable SY2 1/2
5625S105	Pressure switch 2 m cable SY2 3/4
5626S106	Pressure switch 2 m cable SY2 1
5620S200	Pressure switch M8 SY2 connector without bushings
5623S203	Pressure switch M8 connector SY2 3/8
5624S204	Pressure switch M8 connector SY2 1/2
5625S205	Pressure switch M8 connector SY2 3/4
5626S206	Pressure switch M8 connector SY2 1

ACCESSOIRES: SECURITY KNOB



Code	Description
9200703	Security knob APR / pressure switch

NOTE: Pull outwards to remove the knob from the pressure switch on the unit. Insert the security knob and regulate the pressure switch. Then press the handle firmly to lock it in position. If the pressure switch needs to be reset, remove the security knob by forcing it laterally with a screwdriver.

SYNTESI® AIR TAKE-OFF

The air take-off is a connecting element that is mounted between two Syntesi® modules. The 2-way version, made of metal and having restrained dimensions, has a threaded port upwards and one downwards. The 4-way version, in technopolymer, has a threaded port on each side. This gives or four additional air outlets for use as required. All Syntesi® modules come with two threaded ports, one on the front and one on the back, for use as air take-off.

TECHNICAL DATA		AIR TAKE-OFF, SY1		AIR TAKE-OFF, SY2	
Version		PA 2-way	PA 4-way	PA 2-way	PA 4-way
Flow rate of the air take-off at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1550	500 - 2000	7000	1500 - 4500
	scfm	55	18 - 71	248	53 - 160
Maximum pressure	bar	15		13	
	MPa	1.5		1.3	
	psi	217		188	
Min/Max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to 50		From -10 to 50	
Weight	g	62	100	75	306
Fluid		Compressed air or other inert gases			

DIMENSIONS

2-WAY VERSION



	SIZE 1	SIZE 2
A	15.5	27
B	1/8"	3/8"
C	3/8"	1/2"

4-WAY VERSION

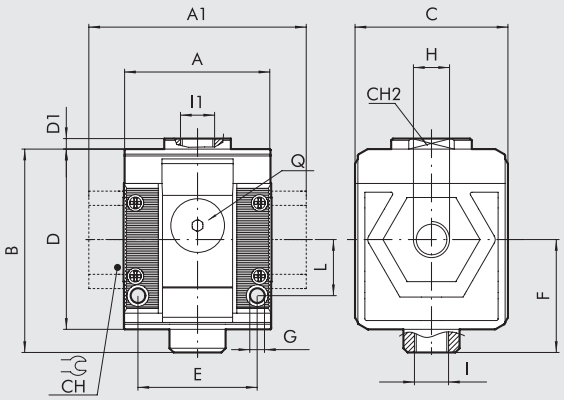

	SIZE 1			SIZE 2			
H (threaded port)	1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
A	42			60.5			
A1	-	-	44	-	-	95	95
B	58			81			
C	44			61			
CH	-			-	-	32	36
CH2	19			-			
D	51.5			70.5			
D1	3			-			
E	33.5			47.5			
F	32.2			42.7			
G	Hole for M4 screws			Hole for M5 screws			
I	1/8"			1/4"			
I1	1/4"			3/8"			
L	16			22.5			
Q (no. 2 add. air take-offs)	1/8"			1/4"			

KEY TO CODE FOR 4-WAY VERSION

56	1	1	P	20	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**TYPE**	**THREADED OUTPUT CONNECTION**
56 Syntesi **5X** Syntesi anti-corrosion	**1** Size 1 **2** Size 2	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port	**P** Air take-off	**20** 4-way	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **0** Without bushing **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE CODES

Code	Description
AIR INTAKE, 2-way version	
5610P100	PA SY1
5X10P100	PA SY1 anti-corrosion
5620P100	PA SY2
5X20P100	PA SY2 anti-corrosion

Code	Description
AIR INTAKE, 4-way version	
5610P200	PA 4-way SY1 without bushing
5611P201	PA 4-way SY1 1/8
5612P202	PA 4-way SY1 1/4
5613P203	PA 4-way SY1 3/8
5620P200	PA 4-way SY2 without bushing
5623P203	PA 4-way SY2 3/8
5624P204	PA 4-way SY2 1/2
5625P205	PA 4-way SY2 3/4
5626P206	PA 4-way SY2 1

NOTE

Anti-corrosion version

5X_ _ _ _ _

Example

5X11P201 PA 4-way SY1 1/8 anti-corrosion

NOTES

FR + LUB SYNTESi®

METAL WORK PNEUMATIC

For full details and list of components refer to the sections about filter-regulator and the lubricator.

TECHNICAL DATA		FR + LUB SY1			FR + LUB SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Degree of filtration	µm	5 (yellow) - output air purity class ISO8573-1: 3.7.-						
		20 (white) - output air purity class ISO8573-1: 4.7.-						
		50 (blue) - output air purity class ISO8573-1: 5.7.-						
Max. inlet pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	350			1200			
(P In=10 bar)	scfm	12			42.5			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1400			4000			
(P In=10 bar)	scfm	50			141.5			
Relief valve flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	70			100			
	scfm	2.5			3.5			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Padlockable knob		Included						
Upstream pressure compensation		Included, via balanced valve						
Weight	g	414	409	400	1074	1047	1043	1031
Fluid		Compressed air or other inert gases						
Mounting position		Vertical			Vertical			
Additional air take-off, for pressure gauges or fittings		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500 (FR) - 450 (LUB)			1400 (FR) - 800 (LUB)			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18 (FR) - 16 (LUB)			49.5 (FR) - 28 (LUB)			
Filter bowl capacity (condensate)	cm^3	30			70			
Quantity of filled oil	cm^3	60			130			
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure						
		RA: automatic drain with condensate discharge, independent of pressure and flow rate.						
		Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.						
		SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs.**						
		Note: **the maximum input pressure for the RA version must not exceed 10 bar**						
Recommended oils		ISO and UNI FD22						
		(Energol HPL; Spinesso; Mobil DTE; Tellus oil)						
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			

DIMENSIONS

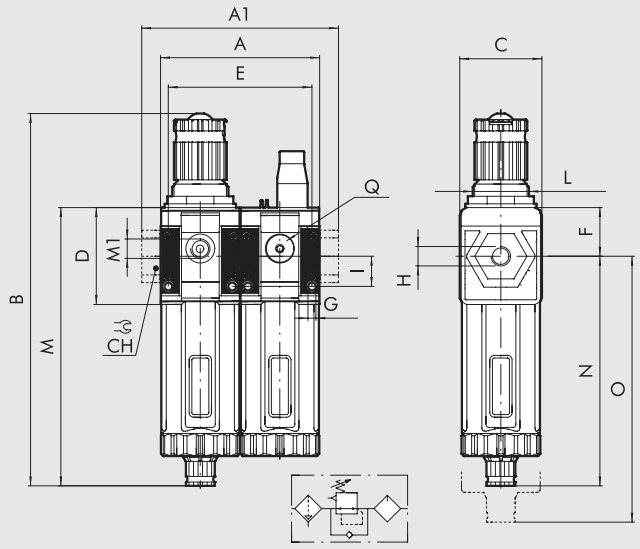

		SIZE 1			SIZE 2			
H (threaded port)		1/8″	1/4″	3/8″	3/8″	1/2″	3/4″	1″
A		84			121			
A1		-	-	86	-	-	156	156
B	**RMSA**	198			246			
	RA/SAC	202			250			
C		44			61			
CH		-			-	-	32	36
D		51.5			70.5			
E		75.3			108			
F		25.8			38.2			
G		Hole for M4 screws			Hole for M5 screws			
I		16			22.5			
L		M30x1.5			M38x2			
M	**RMSA**	148			178			
	RA/SAC	152			182			
M1 (pressure gauge port)		1/8″			1/4″			
N	**RMSA**	122.2			139.8			
	RA/SAC	126.2			143.8			
O	**RMSA**	202			245			
	RA/SAC	206			249			
Q (no. 2 additional air takes-off)		1/8″			1/4″			

KEY TO CODES

56	1	1	B	24	L	10	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**DEGREE OF FILTRATION, TYPE OF CONDENSATE DRAIN AND SETTING RANGE**	**ELEMENT**	**OIL FILLING**	**THREADED OUTPUT CONNECTION**
56 Syntesi **5X** Syntesi anti-corrosion	**1** Size 1 **2** Size 2	**1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port	**B** Filter-regulator	● **10** 5 µm, RMSA, 0 to 2 bar ● **20** 20 µm, RMSA, 0 to 2 bar ● **30** 50 µm, RMSA, 0 to 2 bar ● **40** 5 µm, RA, 0 to 2 bar ● **50** 20 µm, RA, 0 to 2 bar ● **60** 50 µm, RA, 0 to 2 bar ● **11** 5 µm, SAC, 0 to 2 bar ● **21** 20 µm, SAC, 0 to 2 bar ● **31** 50 µm, SAC, 0 to 2 bar ✚ **12** 5 µm, RMSA, 0 to 4 bar ✚ **22** 20 µm, RMSA, 0 to 4 bar ✚ **32** 50 µm, RMSA, 0 to 4 bar ✚ **42** 5 µm, RA, 0 to 4 bar ✚ **52** 20 µm, RA, 0 to 4 bar ✚ **62** 50 µm, RA, 0 to 4 bar ✚ **13** 5 µm, SAC, 0 to 4 bar ✚ **23** 20 µm, SAC, 0 to 4 bar ✚ **33** 50 µm, SAC, 0 to 4 bar **14** 5 µm, RMSA, 0 to 8 bar **24** 20 µm, RMSA, 0 to 8 bar **34** 50 µm, RMSA, 0 to 8 bar **44** 5 µm, RA, 0 to 8 bar **54** 20 µm, RA, 0 to 8 bar **64** 50 µm, RA, 0 to 8 bar **15** 5 µm, SAC, 0 to 8 bar **25** 20 µm, SAC, 0 to 8 bar **35** 50 µm, SAC, 0 to 8 bar **16** 5 µm, RMSA, 0 to 12 bar **26** 20 µm, RMSA, 0 to 12 bar **36** 50 µm, RMSA, 0 to 12 bar **46** 5 µm, RA, 0 to 12 bar **56** 20 µm, RA, 0 to 12 bar **66** 50 µm, RA, 0 to 12 bar **17** 5 µm, SAC, 0 to 12 bar **27** 20 µm, SAC, 0 to 12 bar **37** 50 µm, SAC, 0 to 12 bar	**L** Lubricator	**10** Manual filling from the top	**1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port

● Not available in the anti-corrosion version.
✚ Anti-corrosion version available only in size 1.

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure
RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.
SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
FR + LUB Syntesi® SY1	
5611B24L101	FR+LUB SY1 1/8 20 08 RMSA
5611B54L101	FR+LUB SY1 1/8 20 08 RA
5612B24L102	FR+LUB SY1 1/4 20 08 RMSA
5612B54L102	FR+LUB SY1 1/4 20 08 RA
5613B24L103	FR+LUB SY1 3/8 20 08 RMSA
5613B54L103	FR+LUB SY1 3/8 20 08 RA

Code	Description
FR + LUB Syntesi® SY2	
5623B24L103	FR+LUB SY2 3/8 20 08 RMSA
5623B54L103	FR+LUB SY2 3/8 20 08 RA
5624B24L104	FR+LUB SY2 1/2 20 08 RMSA
5624B54L104	FR+LUB SY2 1/2 20 08 RA
5625B24L105	FR+LUB SY2 3/4 20 08 RMSA
5625B54L105	FR+LUB SY2 3/4 20 08 RA
5626B24L106	FR+LUB SY2 1 20 08 RMSA
5626B54L106	FR+LUB SY2 1 20 08 RA

NOTE
Anti-corrosion version
5X_ _ _ _ _ _
Example
5X11B54L101 FR+LUB SY1 1/8 20 08 RA anti-corrosion

NOTES

V3V + FR + LUB SYNTESI®

For full details and list of components refer to the sections about shut-off valve, filter-regulator and lubricator.

TECHNICAL DATA		V3V + FR + LUB SY1			V3V + FR + LUB SY2			
Threaded port		1/8′	1/4″	3/8″	3/8″	1/2″	3/4″	1″
Degree of filtration	µm	5 (yellow) - output air purity class ISO8573-1: 3.7.-						
		20 (white) - output air purity class ISO8573-1: 4.7.-						
		50 (blue) - output air purity class ISO8573-1: 5.7.-						
Max. inlet pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	250			1200			
(P In=10 bar)	scfm	9			42.5			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1050			4000			
(P In=10 bar)	scfm	37			141.5			
Relief valve flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	70			100			
	scfm	2.5			3.5			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Full outflow with zero inlet pressure		Included			Included			
Drain flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	500			2000			
	scfm	18			71			
Padlockable knob		Included with both V3V and regulator						
Upstream pressure compensation		Included, via balanced valve						
Weight	g	598	593	584	1479	1452	1448	1436
Fluid		Compressed air or other inert gases						
Mounting position		Vertical			Vertical			
Additional air take-off, for pressure gauges or fittings		1/8″, front and rear			1/4″, front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500 (V3V) - 500 (FR) - 450 (LUB)			1500 (V3V) - 1400 (FR) - 800 (LUB)			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18 (V3V) - 18 (FR) - 16 (LUB)			53 (V3V) - 49.5 (FR) - 28 (LUB)			
Filter bowl capacity	cm^3	30			70			
Quantity of filled oil	cm^3	60			130			
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure						
		RA: automatic drain with condensate discharge, independent of pressure and flow rate.						
		Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.						
		SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs.**						
		Note: **the maximum input pressure for the RA version must not exceed 10 bar**						
Recommended oils		ISO and UNI FD22						
		(Energol HPL; Spinesso; Mobil DTE; Tellus oil)						
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			

OVERALL DIMENSIONS

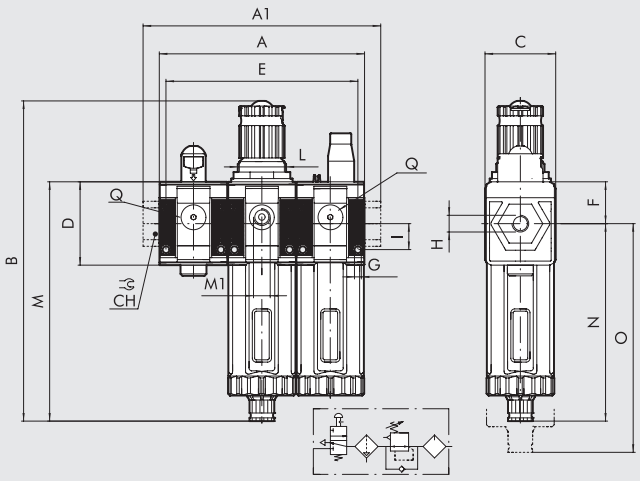

		SIZE 1			SIZE 2			
H (threaded port)		1/8″	1/4″	3/8″	3/8″	1/2″	3/4″	1″
A		126			181.5			
A1		-	-	128	-	-	217	217
B	**RMSA**	198			246			
	RA/SAC	202			250			
C		44			61			
CH		-			-	-	32	36
D		51.5			70.5			
E		117.1			168.5			
F		25.8			38.2			
G		Hole for M4 screws			Hole for M5 screws			
I		16			22.5			
L		M30x1.5			M38x2			
M	**RMSA**	148			178			
	RA/SAC	152			182			
M1 (pressure gauge port)		1/8″			1/4″			
N	**RMSA**	122.2			139.8			
	RA/SAC	126.2			143.8			
O	**RMSA**	202			245			
	RA/SAC	206			249			
Q (no. 2 additional air takes-off)		1/8″			1/4″			

KEY TO CODES

56	1	1	V	10	B	24	L	10	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**TYPE**	**ELEMENT**	**DEGREE OF FILTRATION, TYPE OF CONDENSATE DRAIN AND SETTING RANGE**	**ELEMENT**	**OIL FILLING**	**THREADED OUTPUT CONNECTION**
56 Syntesi **5X** Syntesi anti-corrosion	**1** Size 1 **2** Size 2	**1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port	**V** V3V	**10** Manual with Ø3.5 hole for padlocks **11** Manual with Ø7 hole for padlock	**B** Filter-regulator	● **10** 5 µm, RMSA, 0 to 2 bar ● **20** 20 µm, RMSA, 0 to 2 bar ● **30** 50 µm, RMSA, 0 to 2 bar ● **40** 5 µm, RA, 0 to 2 bar ● **50** 20 µm, RA, 0 to 2 bar ● **60** 50 µm, RA, 0 to 2 bar ● **11** 5 µm, SAC, 0 to 2 bar ● **21** 20 µm, SAC, 0 to 2 bar ● **31** 50 µm, SAC, 0 to 2 bar ✚ **12** 5 µm, RMSA, 0 to 4 bar ✚ **22** 20 µm, RMSA, 0 to 4 bar ✚ **32** 50 µm, RMSA, 0 to 4 bar ✚ **42** 5 µm, RA, 0 to 4 bar ✚ **52** 20 µm, RA, 0 to 4 bar ✚ **62** 50 µm, RA, 0 to 4 bar ✚ **13** 5 µm, SAC, 0 to 4 bar ✚ **23** 20 µm, SAC, 0 to 4 bar ✚ **33** 50 µm, SAC, 0 to 4 bar **14** 5 µm, RMSA, 0 to 8 bar **24** 20 µm, RMSA, 0 to 8 bar **34** 50 µm, RMSA, 0 to 8 bar **44** 5 µm, RA, 0 to 8 bar **54** 20 µm, RA, 0 to 8 bar **64** 50 µm, RA, 0 to 8 bar **15** 5 µm, SAC, 0 to 8 bar **25** 20 µm, SAC, 0 to 8 bar **35** 50 µm, SAC, 0 to 8 bar **16** 5 µm, RMSA, 0 to 12 bar **26** 20 µm, RMSA, 0 to 12 bar **36** 50 µm, RMSA, 0 to 12 bar **46** 5 µm, RA, 0 to 12 bar **56** 20 µm, RA, 0 to 12 bar **66** 50 µm, RA, 0 to 12 bar **17** 5 µm, SAC, 0 to 12 bar **27** 20 µm, SAC, 0 to 12 bar **37** 50 µm, SAC, 0 to 12 bar	**L** Lubricator	**10** Manual filling from the top	**1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port

● Not available in the anti-corrosion version.
✚ Anti-corrosion version available only in size 1.
RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.
RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.
SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs**.

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description
V3V + FR + LUB Syntesi® SY1	
5611V10B24L101	V3V+FR+LUB SY1 1/8 20 08 RMSA
5611V10B54L101	V3V+FR+LUB SY1 1/8 20 08 RA
5612V10B24L102	V3V+FR+LUB SY1 1/4 20 08 RMSA
5612V10B54L102	V3V+FR+LUB SY1 1/4 20 08 RA
5613V10B24L103	V3V+FR+LUB SY1 3/8 20 08 RMSA
5613V10B54L103	V3V+FR+LUB SY1 3/8 20 08 RA

Code	Description
V3V + FR + LUB Syntesi® SY2	
5623V10B24L103	V3V+FR+LUB SY2 3/8 20 08 RMSA
5623V10B54L103	V3V+FR+LUB SY2 3/8 20 08 RA
5624V10B24L104	V3V+FR+LUB SY2 1/2 20 08 RMSA
5624V10B54L104	V3V+FR+LUB SY2 1/2 20 08 RA
5625V10B24L105	V3V+FR+LUB SY2 3/4 20 08 RMSA
5625V10B54L105	V3V+FR+LUB SY2 3/4 20 08 RA
5626V10B24L106	V3V+FR+LUB SY2 1 20 08 RMSA
5626V10B54L106	V3V+FR+LUB SY2 1 20 08 RA

NOTE
Anti-corrosion version
5X_ _ _ _ _ _
Example
5X11V10B54L101 V3V+FR+LUB SY1 1/8 20 08 RA anti-corrosion

NOTES

FIL + DEP SYNTESI®

METAL WORK PNEUMATIC

For full details and list of components refer to the sections about filter and depurator.

TECHNICAL DATA		FIL + DEP SY1			FIL + DEP SY2			
Threaded port		1/8″	1/4″	3/8″	3/8″	1/2″	3/4″	1″
Purifier degree of filtration	µm	0.01 - output air purity class ISO8573-1: 1.7.2						
		1 - output air purity class ISO8573-1: 3.7.3						
Filter degree of filtration	µm	5 (yellow)						
Max. inlet pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Suggested flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	550			1050			
	scfm	9			37			
Maximun suggested flow rate		Look a the chart on the depurator page **C1**.12			Look a the chart on the depurator page **C1**.12 / **C1**.13			
		N.B.: flow rates higher than the recommended value reduces purification efficiency						
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Weight	g	358	353	344	942	915	911	899
Purifier condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure						
Filter condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure						
		RA: automatic drain with condensate discharge, independent of pressure and flow rate.						
		Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.						
		SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs.**						
		Note: **the maximum input pressure for the RA version must not exceed 10 bar**						
Fluid		Compressed air or other inert gases						
Bowl capacity filter/depurator	cm^3	30/15			70/40			
Mounting position		Vertical			Vertical			
Port for additional air take-off		1/8″, front and rear			1/4″, front and rear			
Additional air take-off flow rate (not purified air)	Nl/min	500			1500			
at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18			53			
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			

DIMENSIONS

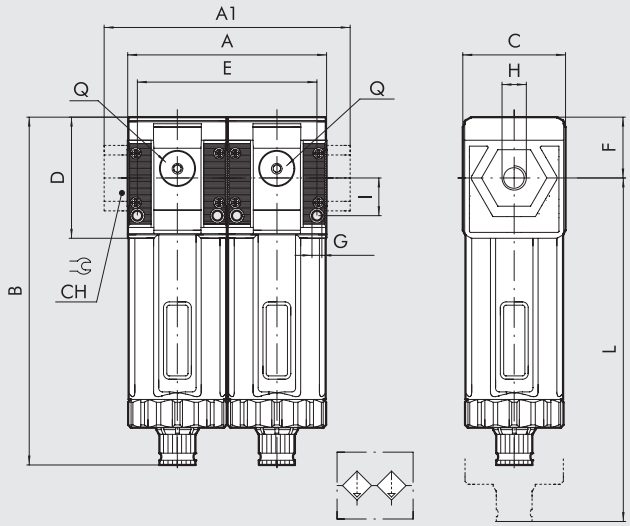

		SIZE 1			SIZE 2			
H (threaded port)		1/8″	1/4″	3/8″	3/8″	1/2″	3/4″	1″
A		84			121			
A1		-	-	86	-	-	217	217
B	RMSA	148			178			
	RA/SAC	152			182			
C		44			61			
CH		-			-	-	32	36
D		51.5			70.5			
E		75.3			108			
F		25.8			38.2			
G		Hole for M4 screws			Hole for M5 screws			
I		16			22.5			
L	RMSA	202			245			
	RA/SAC	206			249			
Q (no. 2 additional air takes-off)		1/8″			1/4″			

KEY TO CODES

56	1	1	F	10	D	10	1
SYNTESI	SIZE	THREADED INPUT CONNECTION	ELEMENT	DEGREE OF FILTRATION AND TYPE OF CONDENSATE DRAIN	ELEMENT	TYPE	THREADED OUTPUT CONNECTION
56 Syntesi **5X** Syntesi anti-corrosion	**1** Size 1 **2** Size 2	**1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port	**F** Filter	**10** 5 µm, RMSA **40** 5 µm, RA **11** 5 µm, SAC	**D** Depurator	**10** 0.01 µm RMSA **11** 0.01 µm SAC **30** 1 µm RMSA **31** 1 µm SAC	**1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.
RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.
SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs**.

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description	Code	Description	NOTE
FIL + DEP Syntesi® SY1		**FIL + DEP Syntesi® SY2**		**Anti-corrosion version**
5611F10D101	FIL+DEP SY1 1/8 05 RMSA	**5623F10D103**	FIL+DEP SY2 3/8 05 RMSA	**5X**_ _ _ _ _
5611F40D101	FIL+DEP SY1 1/8 05 RA	**5623F40D103**	FIL+DEP SY2 3/8 05 RA	**Example**
				5X11F40D101 FIL+DEP SY1 1/8 05 RA anti-corrosion
5612F10D102	FIL+DEP SY1 1/4 05 RMSA	**5624F10D104**	FIL+DEP SY2 1/2 05 RMSA	
5612F40D102	FIL+DEP SY1 1/4 05 RA	**5624F40D104**	FIL+DEP SY2 1/2 05 RA	
5613F10D103	FIL+DEP SY1 3/8 05 RMSA	**5625F10D105**	FIL+DEP SY2 3/4 05 RMSA	
5613F40D103	FIL+DEP SY1 3/8 05 RA	**5625F40D105**	FIL+DEP SY2 3/4 05 RA	
		5626F10D106	FIL+DEP SY2 1 05 RMSA	
		5626F40D106	FIL+DEP SY2 1 05 RA	

FIL + LUB SYNTESI®

METAL WORK PNEUMATIC

For full details and list of components refer to the sections about filter and lubricator.

TECHNICAL DATA		FIL + LUB SY1			FIL + LUB SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Degree of filtration	µm	5 (yellow) - output air purity class ISO8573-1: 3.7.-						
		20 (white) - output air purity class ISO8573-1: 4.7.-						
		50 (blue) - output air purity class ISO8573-1: 5.7.-						
Max. inlet pressure	bar	15			13			
	MPa	1.5			1.3			
	psi	217			188			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	860			2900			
	scfm	30			102.5			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1450			4400			
	scfm	51			156			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Weight	g	349	344	355	840	813	809	797
Fluid		Compressed air or other inert gases						
Mounting position		Vertical			Vertical			
Additional air take-off, for pressure gauges or fittings		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500 - 450			1500 - 800			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18 - 16			53 - 28			
Filter bowl capacity (condensate)	cm^3	30			70			
Quantity of filled oil	cm^3	60			130			
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure						
		RA: automatic drain with condensate discharge, independent of pressure and flow rate.						
		Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.						
		SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs.**						
		Note: **the maximum input pressure for the RA version must not exceed 10 bar**						
Recommended oils		ISO and UNI FD22						
		(Energol HPL; Spinesso; Mobil DTE; Tellus oil)						
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			

DIMENSIONS

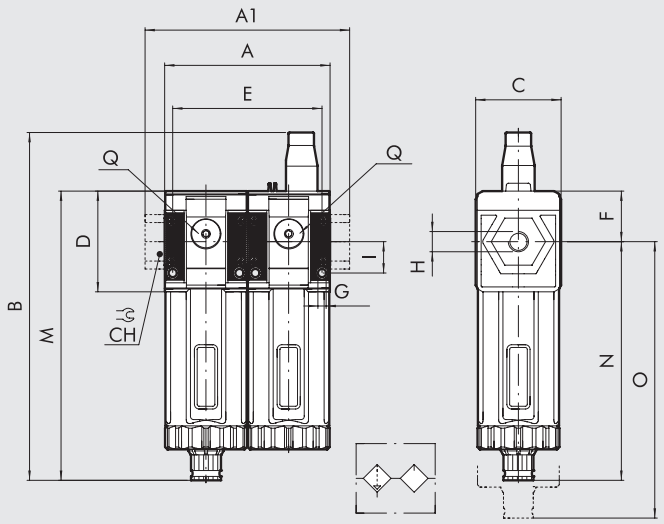

		SIZE 1			SIZE 2			
H (threaded port)		1/8″	1/4″	3/8″	3/8″	1/2″	3/4″	1″
A		84			121			
A1		-	-	86	-	-	156	156
B	**RMSA**	117.5			208			
	RA/SAC	121.5			212			
C		44			61			
CH		-			-	-	32	36
D		51.5			70.5			
E		75.3			108			
F		25.8			38.2			
G		Hole for M4 screws			Hole for M5 screws			
I		16			22.5			
M	**RMSA**	148			178			
	RA/SAC	152			182			
N	**RMSA**	122.2			139.8			
	RA/SAC	126.2			143.8			
O	**RMSA**	202			245			
	RA/SAC	206			249			
Q (no. 2 additional air takes-off)		1/8″			1/4″			

KEY TO CODES

56	1	1	F	10	L	10	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**DEGREE OF FILTRATION AND TYPE OF CONDENSATE DRAIN**	**ELEMENT**	**OIL FILLING**	**THREADED OUTPUT CONNECTION**
56 Syntesi **5X** Syntesi anti-corrosion	**1** Size 1 **2** Size 2	**1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port	**F** Filter	**10** 5 µm, RMSA **20** 20 µm, RMSA **30** 50 µm, RMSA **40** 5 µm, RA **50** 20 µm, RA **60** 50 µm, RA **11** 5 µm, SAC **21** 20 µm, SAC **31** 50 µm, SAC	**L** Lubricator	**10** Manual filling from the top	**1** 1/8″ port **2** 1/4″ port **3** 3/8″ port **3** 3/8″ port **4** 1/2″ port **5** 3/4″ port **6** 1″ port

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.
RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.
SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs**.

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description	Code	Description	NOTE
FIL + LUB Syntesi® SY1		**FIL + LUB Syntesi® SY2**		**Anti-corrosion version**
5611F20L101	FIL+LUB SY1 1/8 20 RMSA	**5623F20L103**	FIL+LUB SY2 3/8 20 RMSA	**5X**_ _ _ _ _
5611F50L101	FIL+LUB SY1 1/8 20 RA	**5623F50L103**	FIL+LUB SY2 3/8 20 RA	**Example**
				5X11F50L101 FIL+LUB SY1 1/8 20 RA anti-corrosion
5612F20L102	FIL+LUB SY1 1/4 20 RMSA	**5624F20L104**	FIL+LUB SY2 1/2 20 RMSA	
5612F50L102	FIL+LUB SY1 1/4 20 RA	**5624F50L104**	FIL+LUB SY2 1/2 20 RA	
5613F20L103	FIL+LUB SY1 3/8 20 RMSA	**5625F20L105**	FIL+LUB SY2 3/4 20 RMSA	
5613F50L103	FIL+LUB SY1 3/8 20 RA	**5625F50L105**	FIL+LUB SY2 3/4 20 RA	
		5626F20L106	FIL+LUB SY2 1 20 RMSA	
		5626F50L106	FIL+LUB SY2 1 20 RA	

SYNTESI® ACCESSORIES

METAL WORK PNEUMATIC

MOUNTING BRACKET FOR REG. AND FR KNOB



Code	Description
9200701	SF100 - BIT-ND 1/4 - SY1
9400701	SF200 - ND-3/8 1/2 - SY2

Code	A	B	C	D	E
9200701	32	20	12	5.5	14.2
9400701	42	40	12	5.5	15

MOUNTING BRACKET

Vertical mounting

Horizontal mounting

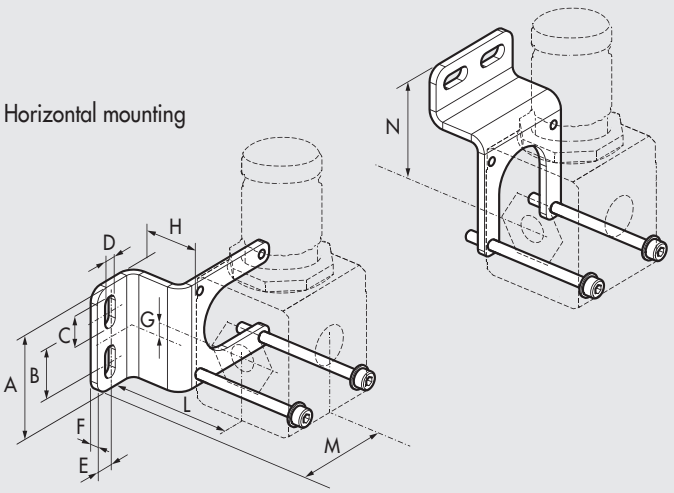

Code	Description
9200716X	Mounting bracket SY1
9200717X	Mounting bracket SY2

Note: Supplie complete with screws and washers.
Max torque 0.8 Nm for SY1 - Max torque 2.0 Nm for SY2
Codes to be used for units in the standard and the anti-corrosion version

Code	A	B	C	D	E	F	G	H	L	M	N
9200716X	41.5	20	12.7	5.5	7	3	0.8	25	43.8	46.5	47
9200717X	60	40	12.7	5.5	8	3	1.3	30	57.5	58.3	59.5

CONNECTION BRACKETS ON THE BAR (DIN EN50022)

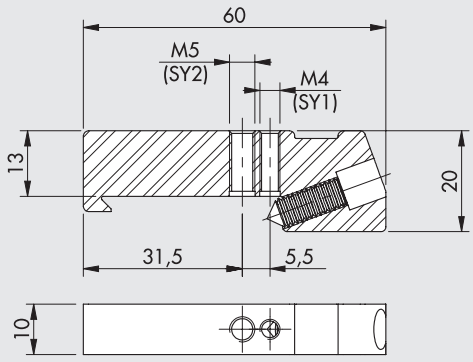

Code	Description
9200718X	Connection brackets on DIN bar, SY1 - SY2

Note: 2 pieces per pack complete with screws and washers.
Max torque 0.8 Nm for SY1 - Max torque 2.0 Nm for SY2
Codes to be used for units in the standard and the anti-corrosion version

PRESSURE GAUGES



Code	Description
9700101	M 40 1/8 012
9700102	M 40 1/8 04
9800101	M 50 1/8 012
9800102	M 50 1/8 04
9900101	M 63 1/4 012
9700109	M 40x40 1/8 04
9700110	M 40x40 1/8 012

ADAPTERS FOR PRESSURE GAUGES (SY2)



Code	Description
9210005	1/4 adapter for 1/8 pressure gauge

COIL 22 mm FOR APR AND V3V ELPN



Code	Description
W0215000151	Coil 22 Ø 8 BA 2W-12VDC
W0215000101	Coil 22 Ø 8 BA 2W-24VDC
W0215000111	Coil 22 Ø 8 BA 3.5VA-24VAC
W0215000121	Coil 22 Ø 8 BA 3.5VA-110VAC
W0215000131	Coil 22 Ø 8 BA 3.5VA-220VAC

Electrical connection DIN 43650 B-IND

"UL" AND "CSA" COILS 22 mm

c UL us



Code	Description
W0215000251	Coil 22 Ø 8 BA 2W-12VDC UR
W0215000201	Coil 22 Ø 8 BA 2W-24VDC UR
W0215000211	Coil 22 Ø 8 BA 3.5VA-24VAC UR
W0215000221	Coil 22 Ø 8 BA 3.5VA-110VAC UR
W0215000231	Coil 22 Ø 8 BA 3.5VA-220VAC UR

Electrical connection DIN 43650 B-IND

COIL 30 mm FOR APR AND V3V ELPN



Code	Description
W0210010100	Coil 30 Ø 8 2W-24VDC
W0210011100	Coil 30 Ø 8 3.5VA-24VAC 50/60 HZ
W0210012100	Coil 30 Ø 8 3.5VA-110VAC 50/60 HZ
W0210013100	Coil 30 Ø 8 3.5VA-220VAC 50/60 HZ

Electrical connection DIN 43650 - A

KIT FOR COIL EEXM



Code	Description
0227606913	Kit for coil 30 24 VDC EEXMT5 cable 3 m
0227606915	Kit for coil 30 24 VDC EEXMT5 cable 5 m
0227608013	Kit for coil 30 24 VAC EEXMT5 cable 3 m
0227608015	Kit for coil 30 24 VAC EEXMT5 cable 5 m
0227608023	Kit for coil 30 110 VAC EEXMT5 cable 3 m
0227608025	Kit for coil 30 110 VAC EEXMT5 cable 5 m
0227608033	Kit for coil 30 230 VAC EEXMT5 cable 3 m
0227608035	Kit for coil 30 230 VAC EEXMT5 cable 5 m

Atex (2014/34/EU), IECEx and CCC certified coils:
Ex II 2G Ex mb IIC T4/T5 Gb
Ex II 2D Ex tb IIIC T130/T95 °C Db
N.B.: Supplied complete with adapter for Ø8 mm sleeve

ELECTRIC CONNECTOR 22 mm FOR COILS DIN 43650 B-IND



Code	Description
W0970510011	Connector standard
W0970510012	Connector 22 LED 24V
W0970510013	Connector 22 LED 110V
W0970510014	Connector 22 LED 220V
W0970510015	Connector 22 LED VDR 24V
W0970510016	Connector 22 LED VDR 110V
W0970510017	Connector 22 LED VDR 220V
W0970510070	Connector 22 ATEX II 2 GD

Code	Description
W0970510051	Connector 22 LED 24VDC Energy Saving

For technical data see page **B1**.61

ELECTRIC CONNECTOR 30 mm FOR COILS DIN 43650-A



Code	Description
W0970520033	Connector 30 STD
W0970520034	Connector 30 LED 24V
W0970520035	Connector 30 LED 110V
W0970520036	Connector 30 LED 220V
W0970520037	Connector 30 LED VDR 24V
W0970520038	Connector 30 LED VDR 110V
W0970520039	Connector 30 LED VDR 220V
W0970520070	Connector 30 ATEX II 2GD

M8 STRAIGHT CONNECTOR WITH CABLE FOR PRESSURE SWITCHES AND V3V SAFE AIR®



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

M8 90° CONNECTOR WITH CABLE FOR V3V SAFE AIR®



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

M8 ADAPTER CABLE FOR CONNECTING THE PRESSURE SWITCH TO THE EB 80 E CM DIGITAL INPUTS MODULE

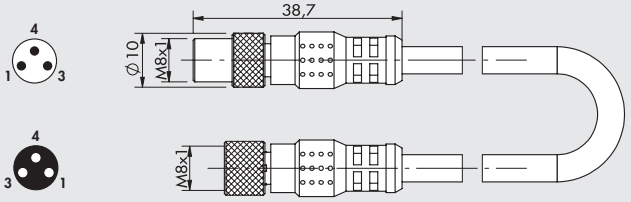

Code	Description
0240010501	M8-M, M8-F 3-pole adapter with cable L = 0.3 m

Note: Can be used to connect the pressure switch to the module of digital INPUT **S01** of the EB 80 valves, to the additional M8 INPUT module of the CM valves and to the Profibus-DP IP67 M8 input. Contact type NO (Normally open).

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 3	pin 4	Signal NO
pin 4	pin 3	Disconnect

KIT COIL SIDE 22 IP65

Code	Description
0222100100	Kit for coils 22 - IP65

Improved IP65 protection, even after prolonged exposure to atmospheric agents.

THREADED PORT



Code	Description
9210001	Kit IN OUT 1/8 SY1
9210002	Kit IN OUT 1/4 SY1
9210003	Kit IN OUT 3/8 SY1
9210011	Kit IN OUT 3/8 SY2
9210012	Kit IN OUT 1/2 SY2
9210013	Kit IN OUT 3/4 SY2
9210014	Kit IN OUT 1 SY2
9210001X	Kit IN OUT 1/8 SY1 anti-corrosion
9210002X	Kit IN OUT 1/4 SY1 anti-corrosion
9210003X	Kit IN OUT 3/8 SY1 anti-corrosion
9210011X	Kit IN OUT 3/8 SY2 anti-corrosion
9210012X	Kit IN OUT 1/2 SY2 anti-corrosion
9210013X	Kit IN OUT 3/4 SY2 anti-corrosion
9210014X	Kit IN OUT 1 SY2 anti-corrosion

Max torque 0.4 Nm for SY1
Max torque 2.5 Nm for SY2

CONNECTING NIPPLE KIT



Code	Description
9210000	Connecting nipple kit SY1
9210010	Connecting nipple kit SY2
9210000X	Connecting nipple kit SY1 anti-corrosion
9210010X	Connecting nipple kit SY2 anti-corrosion

Max torque 0.4 Nm for SY1
Max torque 2.5 Nm for SY2

90° CONNECTING ELEMENT KIT



Code	Description
9210009	90° SY1 connection element kit
9210019	90° SY2 connection element kit
9210009X	90° anti-corrosion SY1 connection element kit
9210019X	90° anti-corrosion SY2 connection element kit

Max torque 0.4 Nm for SY1 Max torque 2.5 Nm for SY2

KIT CONNECTING REGTRONIC 1/4 (PAGE C6.12) AND GS REGULATOR (PAGE C6.2)

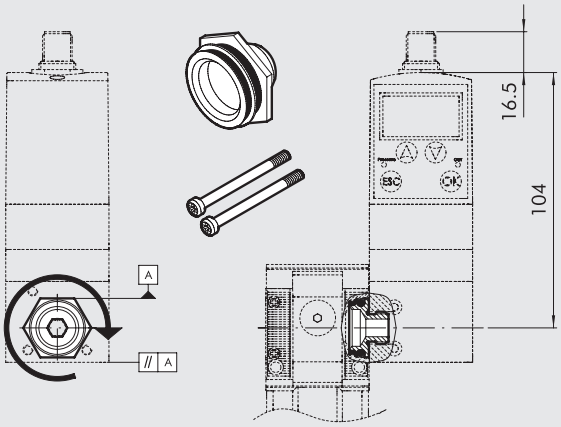

Code	Description
9210004	Adapter for regtronic 1/4 SY1

Max torque for screw, 0.4 Nm

Instructions:
1) Screw the connecting bushing onto the REGTRONIC 1/4 as far as it will go. Use sealant on the G1/4 thread to provide a further seal.
2) Unscrew the bushing slightly until two surfaces of the hexagon are parallel to the body of REGTRONIC 1/4 (see diagram).
3) Insert the bushing into the Syntesi® unit.
4) Tighten the two self-tapping screws in the Syntesi® unit to a torque of 0.4 Nm max.

SY1 - SY2 SIZE ADAPTER



Code	Description
9210006	SY1 - SY2 size adapter
9210006X	SY1 - SY2 size adapter anti-corrosion

Max torque for screw, 0.4 Nm for SY1
Max torque for screw, 2.5 Nm for SY2

SY1 - SY2 KIT FOR CONNECTION TO FLUX 1 - 2



Code	Description
900099A002	Adapter FLUX 1 - SY1
900099A003	Adapter FLUX 2 - SY2

Max torque for screw, 0.4 Nm for SY1
Max torque for screw, 2.5 Nm for SY2
See page **C7**.18 for the assembly diagram.

SY1 - SY2 KIT FOR CONNECTION TO SERIE 70 SAFE AIR® VALVES

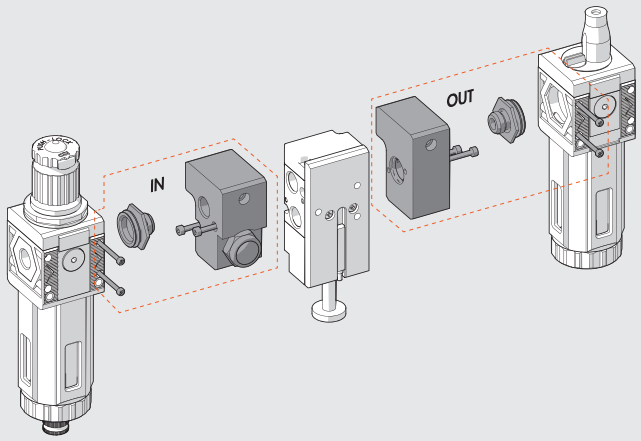

Code	Description
9210015	IN 1/4 SY1 block accessory
9210016	OUT 1/4 SY1 block accessory
9210022	IN 3/8 SY1 block accessory
9210023	OUT 3/8 SY1 block accessory
9210017	IN 3/8 SY2 block accessory
9210018	OUT 3/8 SY2 block accessory
9210020	IN 1/2 SY2 block accessory
9210021	OUT 1/2 SY2 block accessory

Max torque for screw, 0.4 Nm for SY1
Max torque for screw, 2.5 Nm for SY2

See page **B1**.155 for the assembly diagram.

BOWL DISASSEMBLY SPANNER



Code	Description
9170601	CS TF - TL BIT/SY1
9210050	CS TF - TL SY2

WALL-FIXING SCREW

Code	Description
9210030	M4 x 55 fixing screw SY1
9210031	M5 x 75 fixing screw SY2

Max torque 0.8 Nm for SY1
Max torque 2.0 Nm for SY2

PADLOCK



Code	Description
9062401	Padlock

SYNTESI® SPARE PARTS

AUTOMATIC DRAIN (RA)



Code	Description
9000802	RA automatic drain spare part

AUTOMATIC DRAIN (SAC)



Code	Description
9000803	Spares SAC automatic drain

BOWL RMSA/RA/SAC



Code	Description
9210100	Bowl FIL FR DEP RMSA SY1
9210101	Bowl FIL FR RA SY1
9210102	Bowl FIL FR DEP SAC SY1
9210105	Bowl FIL FR DEP RMSA SY2
9210106	Bowl FIL FR RA SY2
9210107	Bowl FIL FR DEP SAC SY2

LUBRICATOR BOWL



Code	Description
9210110	Bowl LUB SY1
9210115	Bowl LUB SY2

FILTERING ELEMENT



Code	Description
9210150	Filtering element 5µm (yellow) SY1
9210151	Filtering element 20µm (white) SY1
9210152	Filtering element 50µm (blue) SY1
9210155	Filtering element 5µm (yellow) SY2
9210156	Filtering element 20µm (white) SY2
9210157	Filtering element 50µm (blue) SY2

PURIFIER FILTERING ELEMENT



Code	Description
9210160	Cartridge 0.01µm DEP SY1
9210165	Cartridge 0.01µm DEP SY2
9210162	Cartridge 1µm DEP SY1
9210167	Cartridge 1µm DEP SY2

AC FILTERING ELEMENT (ACTIVE CARBON)



Code	Description
9210161	Cartridge AC SY1
9210166	Cartridge AC SY2

TRANSPARENT LUBRICATOR COVER



Code	Description
9210180	Transparent cover LUB SY1
9210185	Transparent cover LUB SY2

LUBRICATOR OIL-FILLING CAP



Code	Description
9210181	Oil-filling cap LUB SY1
9210186	Oil-filling cap LUB SY2

SPRINGS FOR REGULATORS AND FR



Code	Description
9210190	Spares MO 02 SY1
9210191	Spares MO 04 SY1/SY1 anti-corrosion
9210192	Spares MO 08 SY1
9210193	Spares MO 012 SY1
9210195	Spares MO 02 SY2
9210196	Spares MO 04 SY2
9210197	Spares MO 08 SY2
9210198	Spares MO 012 SY2
9210192X	Spares 08 SY1 anti-corrosion
9210193X	Spares 012 SY1 anti-corrosion
9210197X	Spares 08 SY2 anti-corrosion
9210198X	Spares 012 SY2 anti-corrosion

BELL FOR REG AND FR



Code	Description
9210200	Bell 02 SY1
9210201	Bell 04 SY1
9210202	Bell 08 SY1
9210203	Bell 012 SY1
9210220	Bell 02 SY2
9210221	Bell 04 SY2
9210222	Bell 08 SY2
9210223	Bell 012 SY2
9210202X	Bell 08 SY1 anti-corrosion
9210203X	Bell 012 SY1 anti-corrosion
9210222X	Bell 08 SY2 anti-corrosion
9210223X	Bell 012 SY2 anti-corrosion

POPPET FOR REG



Code	Description
9210210	Poppet REG SY1
9210230	Poppet REG SY2
9210210X	Poppet REG SY1 anti-corrosion
9210230X	Poppet REG SY2 anti-corrosion

POPPET FOR FR



Code	Description
9210211	Poppet FR 5µm SY1
9210212	Poppet FR 20µm SY1
9210213	Poppet FR 50µm SY1
9210231	Poppet FR 5µm SY2
9210232	Poppet FR 20µm SY2
9210233	Poppet FR 50µm SY2

CNOMO CONTROL FOR V3V AND APR SY2



Code	Description
9453922	Elpn Cnomo control kit, manual bistable

NOTES

NOTES

NOTES

NOTES

NOTES

NOTES

NOTES

SUMMARY bit

METAL WORK PNEUMATIC

bit STANDARD

- GENERAL TECHNICAL DATA bit — C2.2
- bit FILTER — C2.4
- bit DEPURATOR — C2.6
- bit MICRO-REGULATOR — C2.8
- bit PADLOCKABLE MICROREGULATOR — C2.10
- bit FILTER-REGULATOR — C2.11
- bit LUBRICATOR — C2.13
- bit TAKE-OFF — C2.16
- FIL + REG + LUB bit — C2.17
- FR + LUB bit — C2.19
- FIL + DEP bit — C2.21
- FIL + LUB bit — C2.22

bit SERIES F FOR WATER

- GENERAL TECHNICAL DATA bit SERIES F FOR WATER — C2.23
- bit SERIES F FILTER FOR WATER — C2.24
- bit SERIES F REGULATOR FOR WATER — C2.26
- bit SERIES F FILTER-REGULATOR FOR WATER — C2.29

ACCESSORIES AND SPARE PARTS

- bit ACCESSORIES — C2.32
- bit SPARE PARTS — C2.33

GENERAL TECHNICAL DATA **bit**

The units in the **bit** range feature:
- reduced dimensions
- negligible load loss
- long life
- excellent quality-to-price ratio

Thanks to its technical features the **bit** air treatment range is particularly suitable for de-centralized use near the final actuators.

TECHNICAL DATA		BIT 1/8"	BIT 1/4"
Threaded port		1/8"	1/4"
Degree of filtration	µm	5 (yellow) 20 (white) 50 (blue)	
Degree of purification		99.97% a 0.01 µm	
Setting range	bar	0 to 2 - 0 to 4 - 0 to 8 - 0 to 12	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	350	
	scfm	12	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	– 10° to + 50°	
	°F	14° to 122°	
Elements		Filter – Regulator – Lubricator – Filter-regulator – Depurator	
		Units: FRL, FR + L, F + L, F + D	
Mounting		By means of the bracket provided	
Fluid		Compressed air	
Compatibility with oils		See **chapter Z1**	

ASSEMBLY

Use ASSEMBLY PLATES (code 9170201) to assemble the **bit** elements correctly.
Assembly procedure:
- Fit the plates right into the slots under the body of the **bit** element
- Check that there O-rings round the threaded outlet
- Assemble the elements, making sure that the flow run in the direction of the arrows marked on the body.

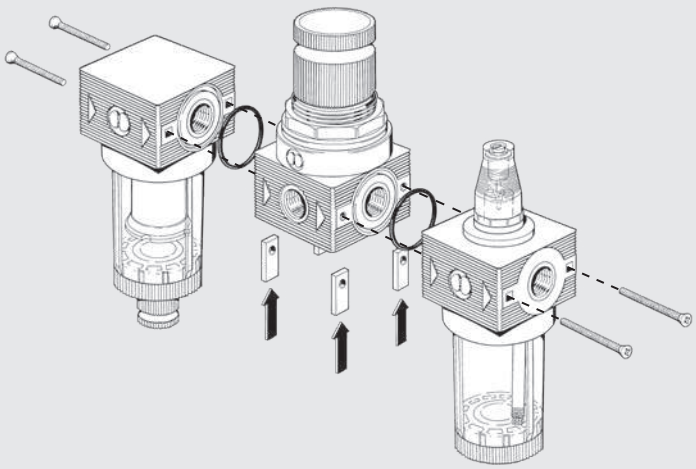

WALL MOUNTING

The wall fixing of a **bit** unit can be made through:
- Fixing bracket R/FR code 9200701 (A)
- Wall fixing plates code 9170301 (B)

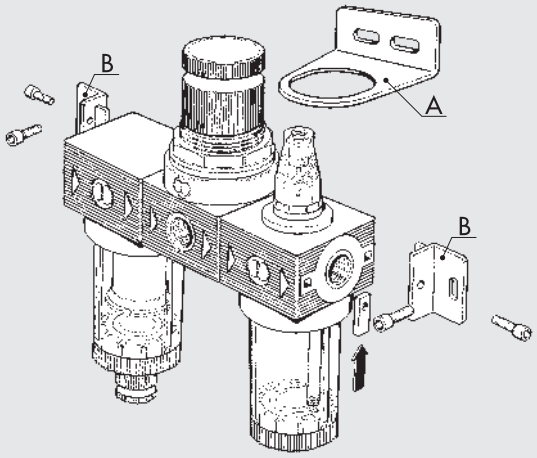

GENERAL RULES - USE AND MAINTENANCE

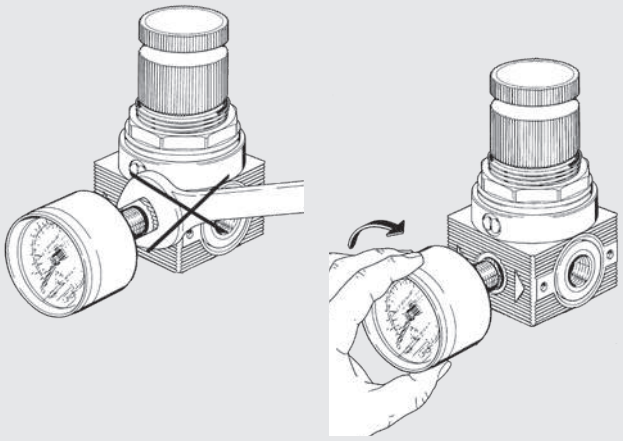

MOUNTING THE GAUGE

The gauge must be mounted by hand without using a spanner.
Use fluid sealants to provide a good seal.
N.B. Do not use Teflon.

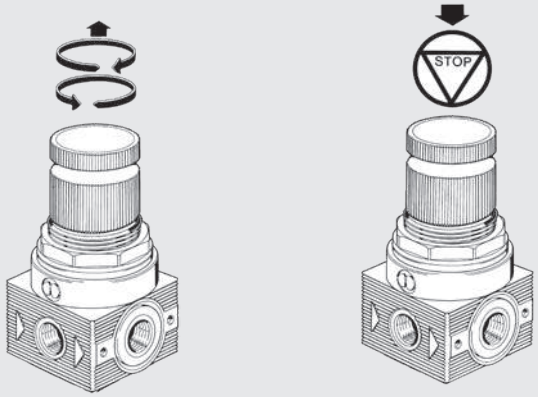

SETTING THE PRESSURE

The air pressure must always be set upwards. The knob can be locked so that the set pressure cannot be altered.



With the knob in the centre position, the drain is semi-automatic.
The drain operates when the bowl is not pressurized and closes when it is.



Press the button to drain condensate when the bowl is pressurized.



Turn the knob anticlockwise to close the valve with bowl pressurized or not pressurized.

To clean or replace the filter element unscrew the screen of the centrifuge assembly.
Use a no. 3 compass spanner to unscrew the bowl.

bit FILTER

The units in the **bit** range feature:
- reduced dimensions
- negligible load loss
- long life
- excellent quality-to-price ratio

Thanks to its technical features the **bit** air treatment range is particularly suitable for de-centralized use near the final actuators.

TECHNICAL DATA		BIT 1/8"	BIT 1/4"
Threaded port		1/8"	1/4"
Degree of filtration	µm	5 (yellow) 20 (white) 50 (blue)	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.6 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	860	
	scfm	30.5	
Flow rate at 6.3 bar (0.6 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	1200	
	scfm	42.5	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	g	40	
Wall fixing screws		M4 by means of the bracket provided	
Bowl capacity	cm^3	16	
Mounting position		Vertical	
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure	
		SAC: automatic drain with condensate discharge .	
		Operates by pressure drop – requires variable air take-offs.	
Fluid		Compressed air	

COMPONENTS

① Technopolymer body with OT58 threaded element
② Clear technopolymer bowl
③ Technopolymer baffle plug
④ Technopolymer centrifuge
⑤ Condensate drain (RMSA)
⑥ HDPE sintered filter cartridge
⑦ NBR gaskets

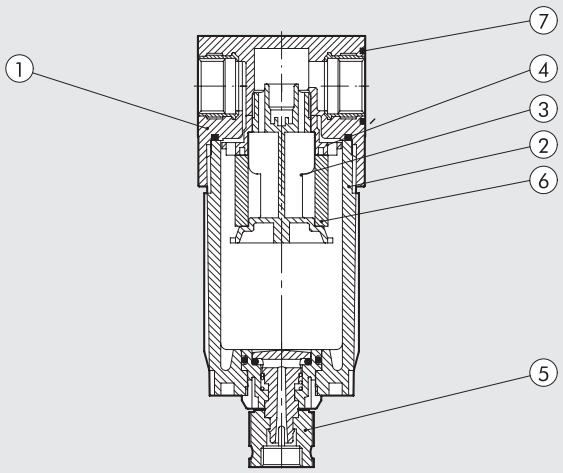

FLOW CHARTS

FIL

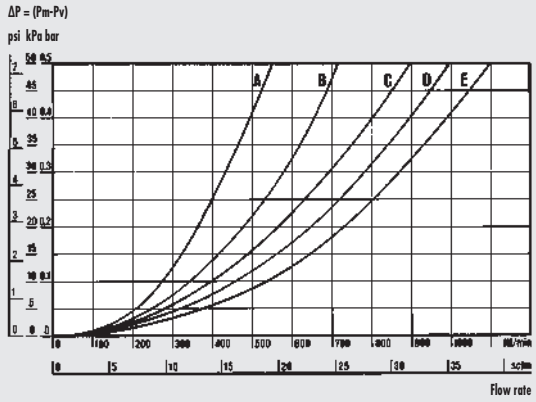

Chart referring to a filter with 1/4 ports

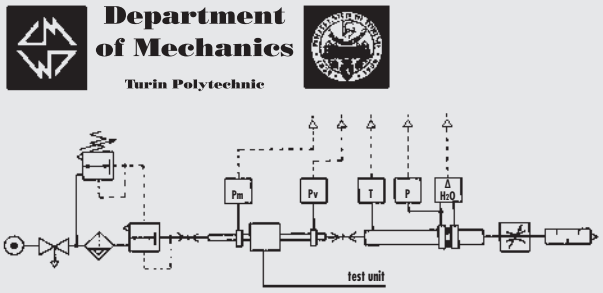

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi

DIMENSIONS

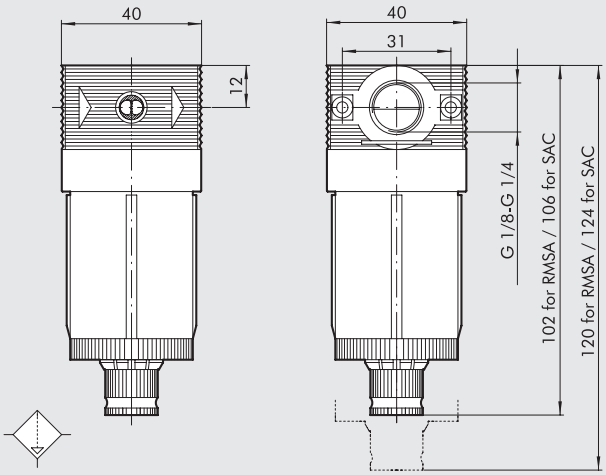

ORDERING CODES

Code	Description
5101001	FIL BIT 1/8 5 RMSA
5101004	FIL BIT 1/8 5 SAC
5101002	FIL BIT 1/8 20 RMSA
5101005	FIL BIT 1/8 20 SAC
5101003	FIL BIT 1/8 50 RMSA
5101006	FIL BIT 1/8 50 SAC
5201001	FIL BIT 1/4 5 RMSA
5201004	FIL BIT 1/4 5 SAC
5201002	FIL BIT 1/4 20 RMSA
5201005	FIL BIT 1/4 20 SAC
5201003	FIL BIT 1/4 50 RMSA
5201006	FIL BIT 1/4 50 SAC

SYNOPTIC, SIZES AND VERSIONS

FIL	BIT	1/8	5	RMSA
ELEMENT	SIZE	THREADED PORT	DEGREE OF FILTRATION	CONDENSATE DRAIN
FIL	BIT	1/8 1/4	5 = 5 µm 20 = 20 µm 50 = 50 µm	RMSA SAC

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.
SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

bit DEPURATOR

Coalescing mini-depurator
- Space saving
- Minimum load loss as the flow rate varies
- All-round condensate level viewing

TECHNICAL DATA		DEP BIT 1/8"	DEP BIT 1/4"
Threaded port		1/8"	1/4"
Degree of purification		99.97% 0.01 µm	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Suggested flow at 6 bar	Nl/min	200	
	scfm	7	
Maximum suggested flow rate		See next page	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	g	65	
Wall fixing screws		M4 by means of the bracket provided	
Bowl capacity	cm^3	16	
Mounting position		Vertical	
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.	
Fluid		Filtered 5 µm compressed air	
Notes		A It is advisable to mount a 5 m filter upstream the depurator acting as a rough filter.	

USE AND MAINTENANCE

When replacing the coalescing cartridge, unscrew the bowl and then unscrew the screen of the cartridge assembly.
Then replace the cartridge. Use a no. 3 compass spanner to unscrew the bowl.

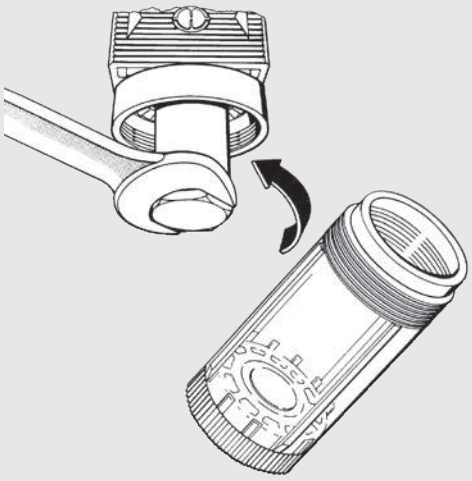

FLOW CHARTS

DEP

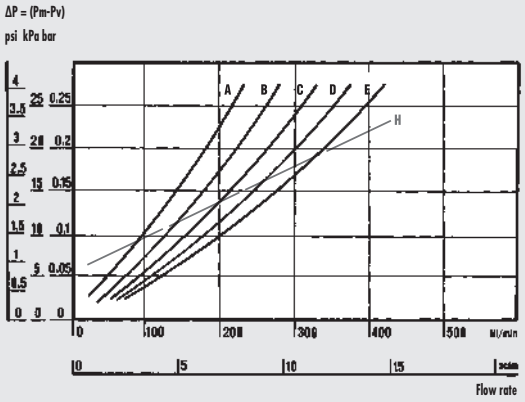

Department of Mechanics
Turin Polytechnic



• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi
(H) = maximum flow rate recommended for optimal operation

DIMENSIONS

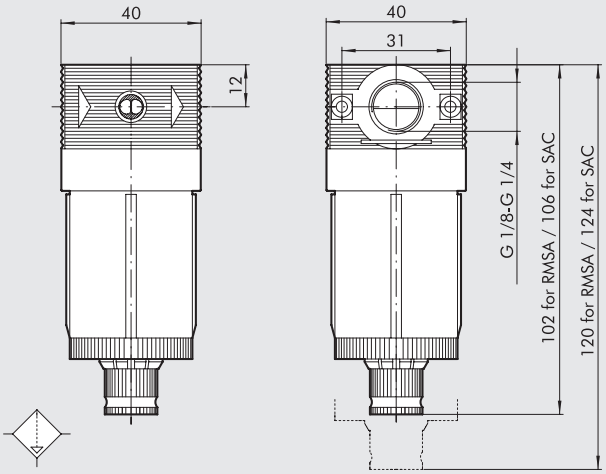

ORDERING CODES

Code	Description
5112001	DEP BIT 1/8 RMSA
5212001	DEP BIT 1/4 RMSA

SYNOPTIC, SIZES AND VERSIONS

DEP	BIT	1/8	RMSA
ELEMENT	SIZE	THREADED PORT	CONDENSATE DRAIN
DEP	BIT	1/8 1/4	RMSA

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.

bit MICRO-REGULATOR

Micro-regulator with rolling diaphragm.
- Preset pressure stability as the upstream pressure varies.
- High flow rates with reduced pressure drops
- Quick overpressure exhaust

Versions available
bit FC: controlled relief to allow greater accuracy in regulation by means of slight continuous air relief.
bit for water: used to regulate the pressure in water circuits; without blowoff valve
bit SR: for use when the downstream circuit needs to be relieved quickly as the upstream pressure drops. Mount the SR regulator between the power supply valve and the point of use.

TECHNICAL DATA		MR BIT 1/8"	MR BIT 1/4"
Threaded port		1/8"	1/4"
Setting range		0 to 2 - 0 to 4 - 0 to 8 - 0 to 12	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	340	
	scfm	12	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	600	
	scfm	21	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	g	80	
Wall fixing screws		M4 by means of the bracket provided	
Gauge port		G 1/8"	
Mounting position		In any position	
Fluid		Filtered, lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.	
Notes		The regulator pressure must always be set upwards.	
		For increased sensitivity, use a pressure regulator with a rated pressure	
		as close as possible to the required value.	

COMPONENTS

① Technopolymer body with OT58 threaded element
② Technopolymer bell
③ Technopolymer fixing ring nut
④ Technopolymer knob
⑤ Rolling diaphragm
⑥ Technopolymer plug
⑦ Technopolymer anti-vibration screen
⑧ NBR relieving gasket
⑨ OT58 brass adjusting screws
⑩ OT58 valve with NBR vulcanized gasket
⑪ OT58 brass nut
⑫ Steel adjusting spring
⑬ Stainless steel valve compression spring
⑭ NBR gaskets

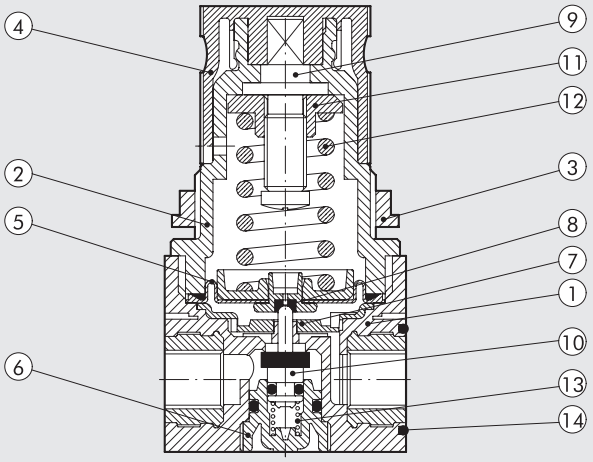

FLOW CHARTS

MR

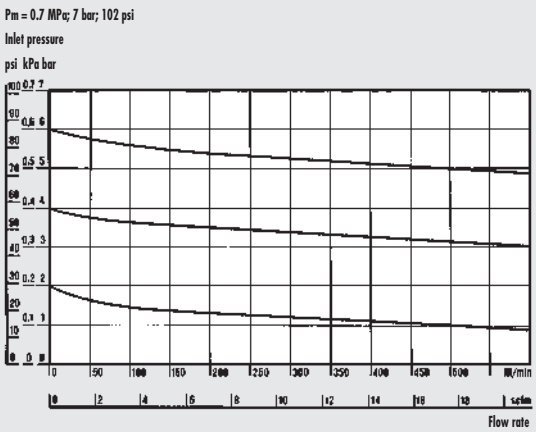

Department of Mechanics
Turin Polytechnic



• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

DIMENSIONS

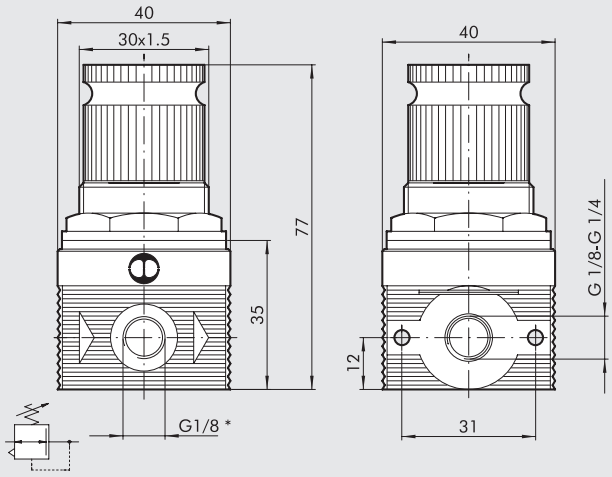

* Pressure gauge port

SYNOPTIC, SIZES AND VERSIONS

MR	BIT	FC	1/8	02
ELEMENT	SIZE	VERSION	THREADED PORT	CONDENSATE DRAIN
MR	BIT	FC = Controlled relief	1/8"	02 = 0 to 2 bar
		SR = Quickly relieved	1/4"	04 = 0 to 4 bar
		= Standard		08 = 0 to 8 bar
MRA		Without relief (for WATER)		012 = 0 to 12 bar

ORDERING CODES

Code	Description
MICROREGULATOR (MR)	
5107004	MR BIT 1/8 012
5107001	MR BIT 1/8 02
5107002	MR BIT 1/8 04
5107003	MR BIT 1/8 08
5207004	MR BIT 1/4 012
5207001	MR BIT 1/4 02
5207002	MR BIT 1/4 04
5207003	MR BIT 1/4 08
MICROREGULATOR WITH CONTROLLED RELIEF	
5111001	MR BIT FC 1/8 02
5111002	MR BIT FC 1/8 04
5211001	MR BIT FC 1/4 02
5211002	MR BIT FC 1/4 04
MICROREGULATOR WITH QUICK RELIEF	
5102001	MR BIT SR 1/8 02
5102002	MR BIT SR 1/8 04
5102003	MR BIT SR 1/8 08
5102004	MR BIT SR 1/8 012
5202001	MR BIT SR 1/4 02
5202002	MR BIT SR 1/4 04
5202003	MR BIT SR 1/4 08
5202004	MR BIT SR 1/4 012
WATER MICROREGULATOR	
5108001	MRA BIT 1/8 02
5108002	MRA BIT 1/8 04
5108003	MRA BIT 1/8 08
5108004	MRA BIT 1/8 012
5208001	MRA BIT 1/4 02
5208002	MRA BIT 1/4 04
5208003	MRA BIT 1/4 08
5208004	MRA BIT 1/4 012

bit PADLOCKABLE MICROREGULATOR

The padlockable microregulator has a pin with a hole in it that projects from the top of the knob. When the knob is in the push-lock position, the padlock can be inserted in the hole, preventing the knob from being operated. A padlock and two keys are supplied with the regulator.

Refer to the bit microregulator for technical data and flow curves.

COMPONENTS

① Technopolymer body with OT58 threaded element
② Technopolymer bell
③ Technopolymer fixing ring nut
④ Technopolymer knob
⑤ Rolling diaphragm
⑥ Technopolymer plug
⑦ Technopolymer anti-vibration screen
⑧ NBR relieving gasket
⑨ Nickel-plated brass OT58 adjusting screws
⑩ OT58 valve with NBR vulcanized gasket
⑪ OT58 brass nut
⑫ Steel adjusting spring
⑬ Stainless steel valve compression spring
⑭ NBR gaskets
⑮ Padlock

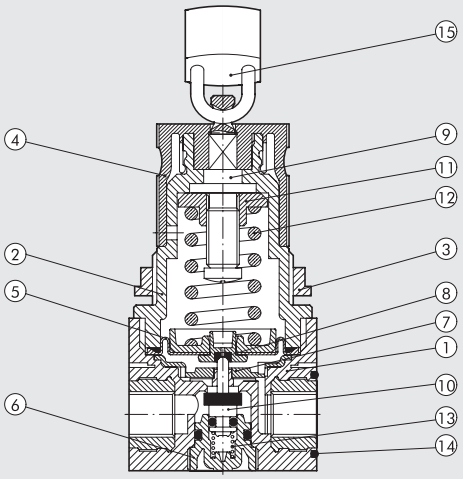

DIMENSIONS

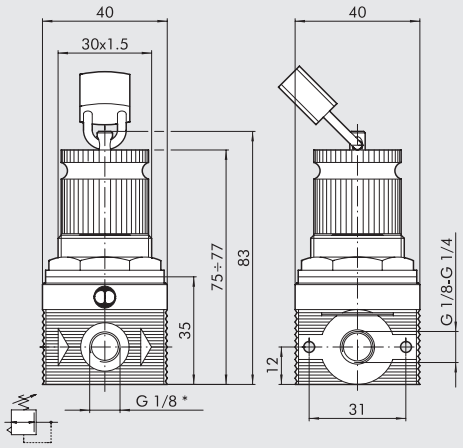



* Pressure gauge port

ORDERING CODES

Code	Description
5110001	MR BIT KEY 1/8 02
5110002	MR BIT KEY 1/8 04
5110003	MR BIT KEY 1/8 08
5110004	MR BIT KEY 1/8 012
5210001	MR BIT KEY 1/4 02
5210002	MR BIT KEY 1/4 04
5210003	MR BIT KEY 1/4 08
5210004	MR BIT KEY 1/4 012

SYNOPTIC, SIZES AND VERSIONS

MR	BIT	KEY	1/8	02
ELEMENT	SIZE	TYPE	THREADED PORT	SETTING RANGE
MR	BIT	Padlockable	1/8 1/4	02 = 0 to 2 bar 04 = 0 to 4 bar 08 = 0 to 8 bar 012 = 0 to 12 bar

bit FILTER-REGULATOR

Filter regulator with rolling diaphragm.
- High flow rate with reduced pressure drop
- Excellent degree of condensate separation
- Semi-automatic or automatic drain
- All-round condensate level viewing

The degree of filtration is shown by the colour of the cartridge:
yellow = 5 µm, white = 20 µm, blue = 50 µm.

TECHNICAL DATA		FR BIT 1/8"	FR BIT 1/4"
Threaded port		1/8"	1/4"
Setting range		0 to 2 - 0 to 4 - 0 to 8 - 0 to 12	
Degree of filtration	µm	5 (yellow) - 20 (white) - 50 (blue)	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	290	
	scfm	10	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	600	
	scfm	21	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	g	110	
Wall fixing screws		M4 by means of the bracket provided	
Bowl capacity	cm^3	16	
Mounting position		Vertical	
Gauge port		G 1/8"	
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure	
		SAC: automatic drain with condensate discharge .	
		Operates by pressure drop – requires variable air take-offs.	
Fluid		Compressed air	
Notes		The regulator pressure must always be set upwards.	
		For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value.	

COMPONENTS

① Technopolymer body with OT58 threaded element
② Clear technopolymer bowl
③ Technopolymer knob
④ Technopolymer bell
⑤ Technopolymer fixing ring nut
⑥ OT58 brass nut
⑦ OT58 brass adjusting screw
⑧ Steel adjusting spring
⑨ NBR relieving gasket
⑩ Rolling diaphragm
⑪ OT58 valve with NBR vulcanized gasket
⑫ Stainless steel valve compression spring
⑬ Technopolymer centrifuge
⑭ Technopolymer baffle plug
⑮ HDPE sintered filter cartridge
⑯ Condensate drain (RMSA)
⑰ NBR gaskets

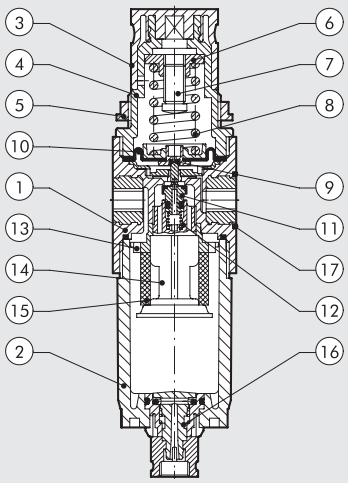

FLOW CHARTS

FR

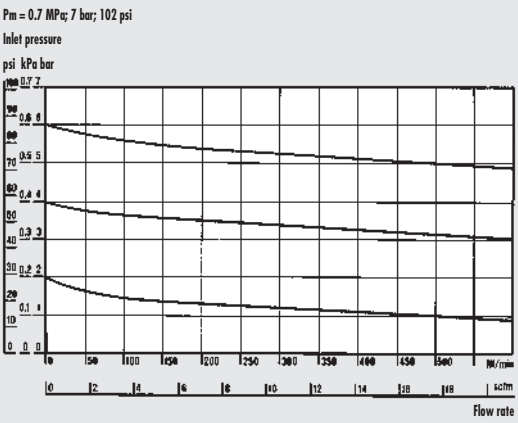

Department of Mechanics
Turin Polytechnic



• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

DIMENSIONS

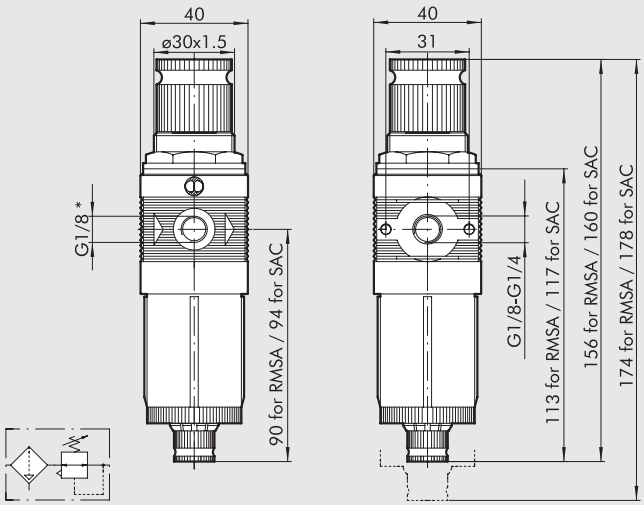

* Pressure gauge port

SYNOPTIC, SIZES AND VERSIONS

FR	BIT	1/8	5	02	RMSA
ELEMENT	SIZE	THREADED PORT	DEGREE OF FILTRATION	SETTING RANGE	CONDENSATE DRAIN
FR	BIT	1/8 1/4	5 = 5 µm 20 = 20 µm 50 = 50 µm	02 = 0 to 2 bar 04 = 0 to 4 bar 08 = 0 to 8 bar 012 = 0 to 12 bar	RMSA SAC

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure
SAC: automatic drain with condensate discharge .
Operates by pressure drop – requires variable air take-offs.

ORDERING CODES

Code	Description
5105001	FR BIT 1/8 5 02 RMSA
5105013	FR BIT 1/8 5 02 SAC
5105002	FR BIT 1/8 20 02 RMSA
5105014	FR BIT 1/8 20 02 SAC
5105003	FR BIT 1/8 50 02 RMSA
5105015	FR BIT 1/8 50 02 SAC
5105004	FR BIT 1/8 5 04 RMSA
5105016	FR BIT 1/8 5 04 SAC
5105005	FR BIT 1/8 20 04 RMSA
5105017	FR BIT 1/8 20 04 SAC
5105006	FR BIT 1/8 50 04 RMSA
5105018	FR BIT 1/8 50 04 SAC
5105007	FR BIT 1/8 5 08 RMSA
5105019	FR BIT 1/8 5 08 SAC
5105008	FR BIT 1/8 20 08 RMSA
5105020	FR BIT 1/8 20 08 SAC
5105009	FR BIT 1/8 50 08 RMSA
5105021	FR BIT 1/8 50 08 SAC
5105010	FR BIT 1/8 5 012 RMSA
5105022	FR BIT 1/8 5 012 SAC
5105011	FR BIT 1/8 20 012 RMSA
5105023	FR BIT 1/8 20 012 SAC
5105012	FR BIT 1/8 50 012 RMSA
5105024	FR BIT 1/8 50 012 SAC
5205001	FR BIT 1/4 5 02 RMSA
5205013	FR BIT 1/4 5 02 SAC
5205002	FR BIT 1/4 20 02 RMSA
5205014	FR BIT 1/4 20 02 SAC
5205003	FR BIT 1/4 50 02 RMSA
5205015	FR BIT 1/4 50 02 SAC
5205004	FR BIT 1/4 5 04 RMSA
5205016	FR BIT 1/4 5 04 SAC
5205005	FR BIT 1/4 20 04 RMSA
5205017	FR BIT 1/4 20 04 SAC
5205006	FR BIT 1/4 50 04 RMSA
5205018	FR BIT 1/4 50 04 SAC
5205007	FR BIT 1/4 5 08 RMSA
5205019	FR BIT 1/4 5 08 SAC
5205008	FR BIT 1/4 20 08 RMSA
5205020	FR BIT 1/4 20 08 SAC
5205009	FR BIT 1/4 50 08 RMSA
5205021	FR BIT 1/4 50 08 SAC
5205010	FR BIT 1/4 5 012 RMSA
5205022	FR BIT 1/4 5 012 SAC
5205011	FR BIT 1/4 20 012 RMSA
5205023	FR BIT 1/4 20 012 SAC
5205012	FR BIT 1/4 50 012 RMSA
5205024	FR BIT 1/4 50 012 SAC

bit LUBRICATOR

Mini-lubricator with high lubrication stability.
- Quantity of lubricant proportioned to air flow
- Activates at low flow rates
- Micrometric regulation of lubricant flow
- All-round oil level viewing

TECHNICAL DATA		LUB BIT 1/8"	LUB BIT 1/4"
Threaded port		1/8"	1/4"
Type of lubrication		Oil mist	
Bowl capacity	cm^3	26.5	
Lubricator version		Manual filling with the bowl disassembled	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	400	
	scfm	14	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	710	
	scfm	25	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	g	40	
Wall fixing screws		M4 by means of the bracket provided	
Mounting position		Vertical	
Fluid		Filtered compressed air	

COMPONENTS

① Technopolymer body with OT58 threaded elements
② Clear technopolymer bowl
③ Rilsan oil suction pipe
④ Filter
⑤ Technopolymer plug
⑥ Oil flow adjustment regulation needle made of OT58 brass
⑦ Clear technopolymer cover
⑧ NBR Venturi diaphragm
⑨ NBR gaskets

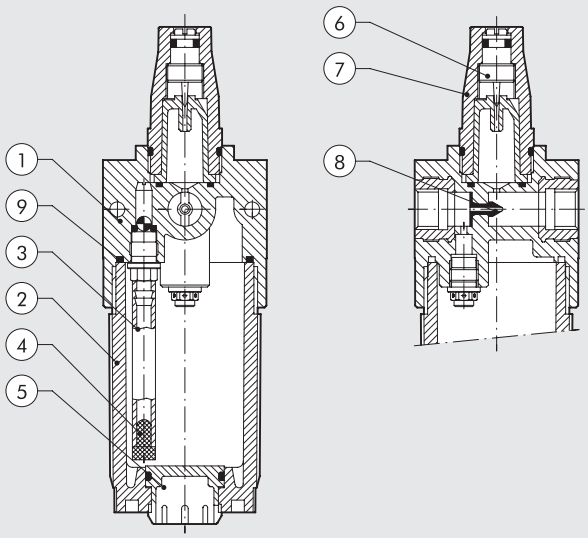

GENERAL RULES - USE AND MAINTENANCE

Use a no. 3 compass spanner to unscrew the bowl.

- Fit the lubricator as close as possible to the point of use
- Fill the bowl with oil before pressurizing the system
- Do not use cleaning oil, brake fluid or solvents in general
- For correct lubrication, set the drip rate to approximately 1 drop every 300-600 Nl via the adjusting screw.
- Recommended lubricants:
  ISO and UNI FD22
  E.g. Energol HLP 22 (BP) – Spinesso 22 (Esso) - Mobil DTE 22 (Mobil) – Tellus Oil 22 (Shell).

REGULATING LUBRICATION



FILLING THE BOWL WITH OIL

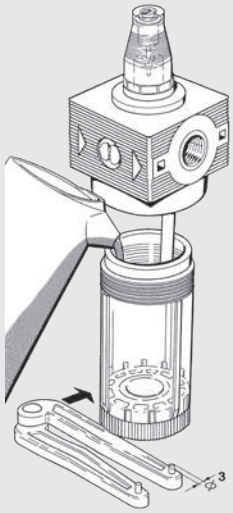

FLOW CHARTS

LUB

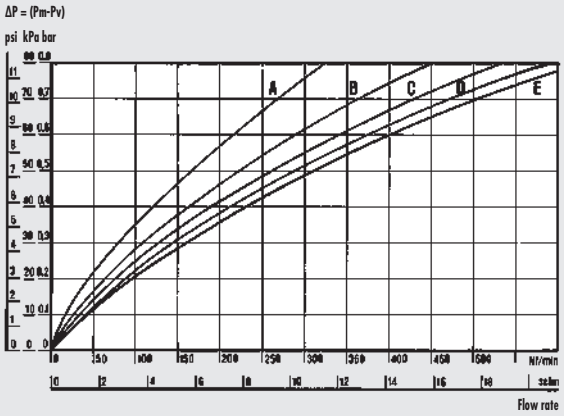

LUB 1/8-1/4

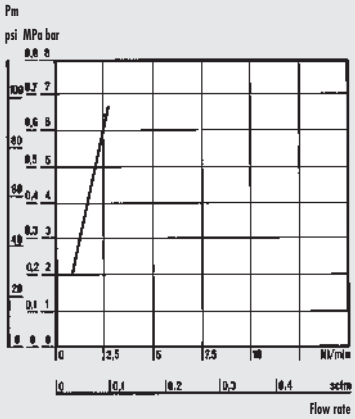

MINIMUM OPERATION FLOW CHARTS
Minimum flow tests were performed in compliance with ISO/DP 6301/2.

Department of Mechanics
Turin Polytechnic

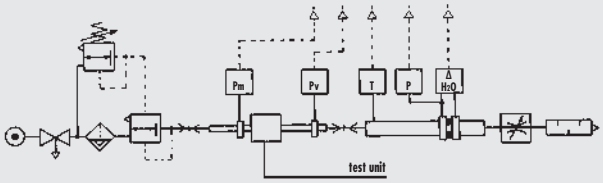

- Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi

DIMENSIONS

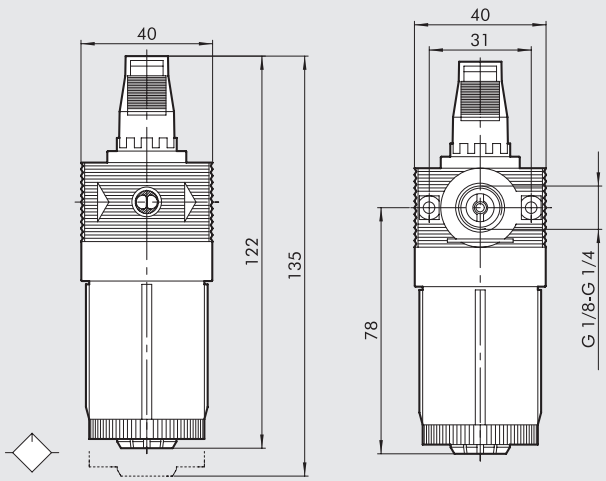

ORDERING CODES

Code	Description
5103001	LUB BIT 1/8
5203001	LUB BIT 1/4

NOTES

bit TAKE-OFF

- The air take-off takes air from the FRL unit irrespective of the assembly position.
- It is necessary when air needs to be taken from the FRL unit at any stage of the treatment (normal, filtered, regulated, lubricated, etc.).

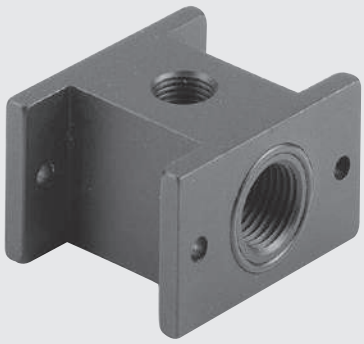

TECHNICAL DATA		PA
Maximum operating pressure	MPa	1.3
	bar	13
	psi	188
Maximum working temperature at 1 MPa; 10 bar; 145 psi	°C	50
	°F	

CONNECTION DIAGRAMS AND APPLICATION

Mounting the air take-off at the inlet: only use two screws and the O-rings supplied in the PA kit.

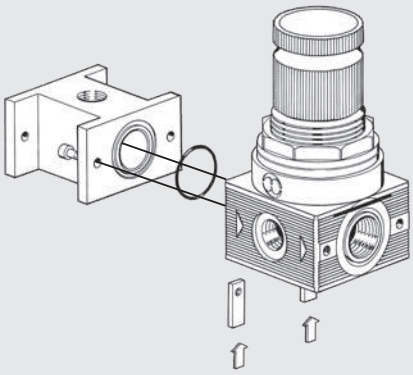

Mounting the air take-off at the outlet: only use two screws and the O-rings supplied in the PA kit. Seal is provided by the contact between O-rings.

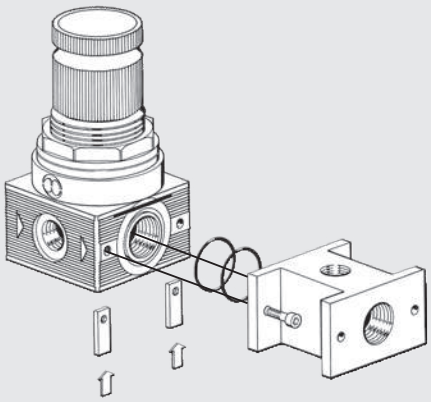

DIMENSIONS

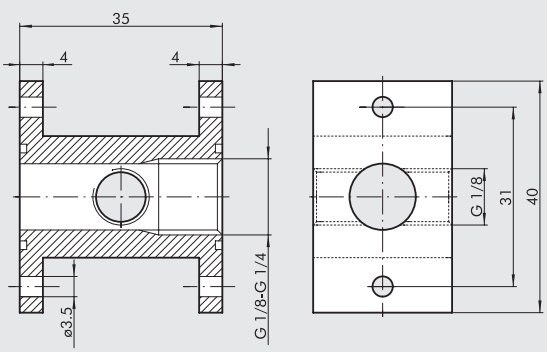

ORDERING CODES

Code	Description
9100401	PA 1/8 - 1/4 BIT

FIL + REG + LUB bit

METAL WORK PNEUMATIC

Complete mini-FRL unit with rolling diaphragm.
- High flow rates with reduced pressure drop
- Excellent degree of condensate separation
- Quantity of lubricant proportioned to air flow
- Activates at low flow rates

TECHNICAL DATA		F + R + L BIT 1/8"	F + R + L BIT 1/4"
Threaded port		1/8"	1/4"
Setting range		0 to 2 - 0 to 4 - 0 to 8 - 0 to 12	
Degree of filtration	µm	5 (yellow) 20 (white) 50 (blue)	
Type of lubrication		Oil mist	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	150	
	scfm	5.3	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	280	
	scfm	10	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	g	160	
Wall fixing screws		M4 by means of the bracket provided	
Gauge port		G1/8"	
Mounting position		Vertical	
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure	
		SAC: automatic drain with condensate discharge.	
		Operates by pressure drop – requires variable air take-offs.	
Fluid		Compressed air	
Notes		See chapters regarding individual elements.	

DIMENSIONS

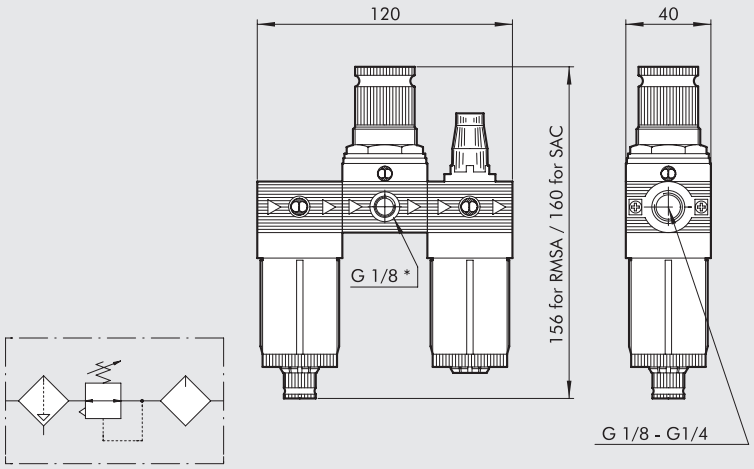

* Pressure gauge port

SYNOPTIC, SIZES AND VERSIONS

FRL	BIT	1/8	5	02	RMSA
ELEMENT	SIZE	THREADED PORT	DEGREE OF FILTRATION	SETTING RANGE	CONDENSATE DRAIN
FRL	BIT	1/8 1/4	5 = 5 µm 20 = 20 µm 50 = 50 µm	02 = 0 to 2 bar 04 = 0 to 4 bar 08 = 0 to 8 bar 012 = 0 to 12 bar	RMSA SAC

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure
SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

ORDERING CODES

Code	Description
5104008	FRL BIT 1/8 20 08 RMSA
5104011	FRL BIT 1/8 20 012 RMSA
5204008	FRL BIT 1/4 20 08 RMSA
5204011	FRL BIT 1/4 20 012 RMSA

The following versions are available on request:
- with 5 µm or 50 µm degree of filtration
- with 0-2 bar or 0-4 bar setting range
- with SAC condensate discharge

NOTES

FR + LUB bit

METAL WORK PNEUMATIC

Compact FR + L unit with rolling diaphragm.
- High flow rates with reduced pressure drop
- Excellent degree of condensate separation
- Quantity of lubricant proportioned to air flow
- Activates at low flow rates

TECHNICAL DATA		FR + L BIT 1/8"	FR + L BIT 1/4"
Threaded port		1/8"	1/4"
Setting range		0 to 2 - 0 to 4 - 0 to 8 - 0 to 12	
Degree of filtration	µm	5 (yellow) 20 (white) 50 (blue)	
Type of lubrication		Oil mist	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	140	
	scfm	5	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	260	
	scfm	9.2	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	g	170	
Wall fixing screws		M4 by means of the bracket provided	
Gauge port		G1/8"	
Mounting position		Vertical	
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure	
		SAC: automatic drain with condensate discharge.	
		Operates by pressure drop – requires variable air take-offs.	
Fluid		Compressed air	
Notes		See chapters regarding individual elements.	

DIMENSIONS

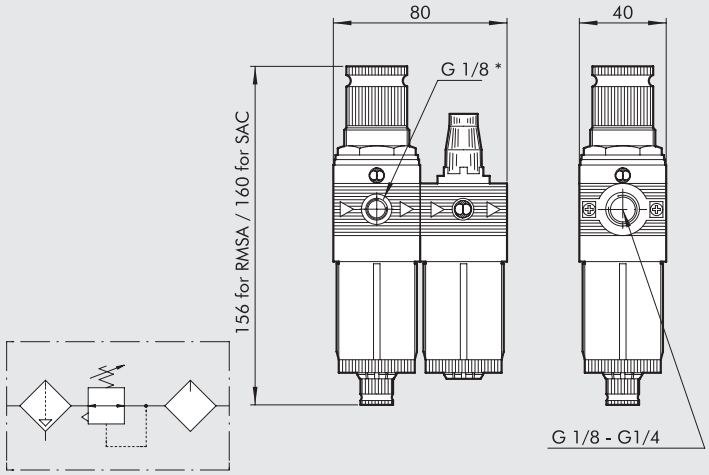

* Pressure gauge port

SYNOPTIC, SIZES AND VERSIONS

FR+L	BIT	1/8	5	02	RMSA
ELEMENT	SIZE	THREADED PORT	DEGREE OF FILTRATION	SETTING RANGE	CONDENSATE DRAIN
FR+L	BIT	1/8 1/4	5 = 5 µm 20 = 20 µm 50 = 50 µm	02 = 0 to 2 bar 04 = 0 to 4 bar 08 = 0 to 8 bar 012 = 0 to 12 bar	RMSA SAC

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure
SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

ORDERING CODES

Code	Description
5106008	FR+L BIT 1/8 20 08 RMSA
5106011	FR+L BIT 1/8 20 012 RMSA
5206008	FR+L BIT 1/4 20 08 RMSA
5206011	FR+L BIT 1/4 20 012 RMSA

The following versions are available on request:
- with 5 µm or 50 µm degree of filtration
- with 0-2 bar or 0-4 bar setting range
- with SAC condensate discharge

NOTES

FIL + DEP bit

Compact filter + depurator unit for fine filtering followed by purification by coalescence.

- All-round condensate level viewing
- Condensate drainage - manual/semi-auto (RMSA) or automatic (SAC) on the filter
- 5 µm filter element.

TECHNICAL DATA		F + D BIT 1/8"	F + D BIT 1/4"
Threaded port		1/8"	1/4"
Degree of purification		5 µm filter – 99.97% depurator at 0.01 µm	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Maximum suggested flow rate		Please look at the flow rate curves at page **C2**.7	
Fluid		Compressed air	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	g	110	
Wall fixing screws		M4 by means of the bracket provided	
Mounting position		Vertical	
Condensate drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure	
		SAC: automatic drain with condensate discharge.	
		Operates by pressure drop – requires variable air take-offs.	
Notes		See chapters regarding individual elements	

DIMENSIONS

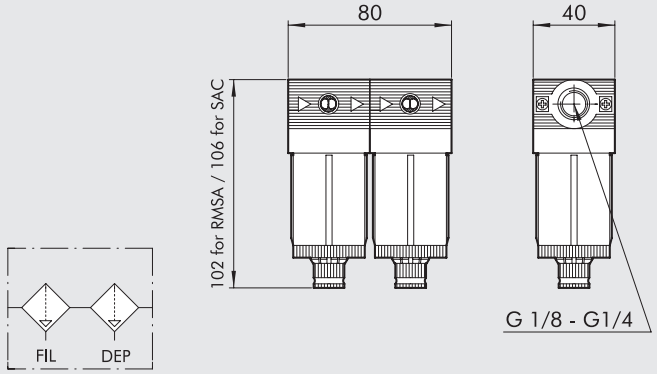

SYNOPTIC, SIZES AND VERSIONS

F+D	BIT	1/4	5	RMSA
ELEMENT	SIZE	THREADED PORT	DEGREE OF FILTRATION	CONDENSATE DRAIN
F+D	BIT	1/8 1/4	5 µm	RMSA SAC

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

ORDERING CODES

Code	Description
5114001	F+D BIT 1/8 5 RMSA - RMSA
5114002	F+D BIT 1/8 5 SAC - RMSA
5214001	F+D BIT 1/4 5 RMSA - RMSA
5214002	F+D BIT 1/4 5 SAC - RMSA

FIL + LUB bit

Compact filter + lubricator unit with different degrees of filtration and high lubrication stability.

- Excellent degree of condensate separation
- Semi-automatic and automatic condensate drainage
- Lubrication activates at low flow rates
- All-round oil and condensate level viewing

TECHNICAL DATA		F + L BIT 1/8"	F + L BIT 1/4"
Threaded port		1/8"	1/4"
Degree of filtration	µm	5 (yellow) - 20 (white) - 50 (blue)	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6 bar (0.6 MPa to 87 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	300	
	scfm	10.6	
Flow rate at 6 bar (0.6 MPa to 87 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	600	
	scfm	21.2	
Fluid		Compressed air	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	g	90	
Wall fixing screws		M4 by means of the bracket provided	
Mounting position		Vertical	
Condensed drain		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure	
		SAC: automatic drain with condensate discharge.	
		Operates by pressure drop – requires variable air take-offs.	
Notes		See chapters regarding individual elements	

DIMENSIONS



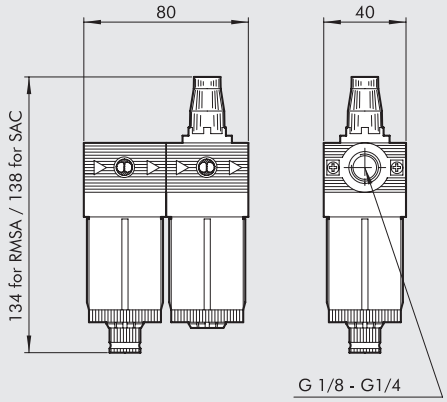

SYNOPTIC, SIZES AND VERSIONS

F+L	BIT	1/4	5	RMSA
ELEMENT	SIZE	THREADED PORT	DEGREE OF FILTRATION	CONDENSATE DRAIN
F+L	BIT	1/8 1/4	5 = 5 µm 20 = 20 µm 50 = 50 µm	RMSA SAC

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

ORDERING CODES

Code	Description
5113002	F+L BIT 1/8 20 RMSA
5213002	F+L BIT 1/4 20 RMSA

The following versions are available on request:
- with 5 µm or 50 µm degree of filtration
- with SAC condensate discharge

GENERAL TECHNICAL DATA
bit SERIES F FOR WATER

Filtering and/or water pressure regulation units, characterized by the use of materials certified to specific standards on products for use in contact with foodstuff or drinking water.
Declarations of conformity and release test reports are available on request for those who need them to certify our product incorporated in their own systems.
The white colour surface finish of the body was chosen to enhance the highly hygienic properties of the product.
If the pressure regulator works with incompressible fluids (water) and there is a valve leak, the downstream pressure could rise up to reach the inlet pressure and then it re-stabilizes with water consumption.
If necessary, consider the possibility of installing a safety valve that relieves any excess pressure.

TECHNICAL DATA		BIT F 1/8"	BIT F 1/4"
Threaded port		1/8"	1/4"
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Max temperature at 10 bar (1 MPa; 145 psi)	°C	50	
	°F	122	
Elements		Filter - Regulator - Filter regulator	
Mounting		Fixed to a wall, using fixing plate code 9170301 and M4 screws, or fixing bracket code 9200701 for the threaded regulator and filter-regulator bell.	
		Panel-mounted using the threaded bell of the regulator or filter-regulator (Ø hole 30-32 mm).	
Fluid		Water, air and fluids compatible with the materials used	

WALL MOUNTING

The wall fixing of a bit unit can be made through:
- Fixing bracket R/FR code 9200701 (A)
- Wall fixing plates code 9170301 (B)



MATERIALS

COMPONENTS IN CONTACT WITH THE FLUID

Designation	Material	Certifications
Body	Hostaform® C13031	European Regulation (EU) 10/2011, KTW, W270, WRAS, ACS, NSF61
Threaded body inserts	CW510L low-lead brass	Approved for compliance with the UBA List, NSF/ANSI 372
Transparent bowl	TR90 Grilamid®	European Regulation (EU) 10/2011, KTW, W270, WRAS, NSF61
Rolling diaphragm	0477 NBR 70 telato	DM174/04, WRAS, ACS, NSF61
Valve	AISI 303 stainless steel	Approved for compliance with the UBA List
	with vulcanized gasket 0477 NBR 70	DM174/04, WRAS, ACS, NSF61
Valve spring	AISI 302 stainless steel	Approved for compliance with the UBA List
Gaskets	0477 NBR 70	DM174/04, WRAS, ACS, NSF61
Filter cartridge	GUR X192	European Regulation (EU) 10/2011,
Centrifuge	Hostaform® C13031	European Regulation (EU) 10/2011, KTW, W270, WRAS, ACS, NSF61
Baffle plug	Hostaform® C13031	European Regulation (EU) 10/2011, KTW, W270, WRAS, ACS, NSF61

COMPONENTS NOT IN CONTACT WITH THE FLUID

Designation	Material
Bell	Technopolymer
Fixing ring nut	Technopolymer
Nut	OT58 brass
Adjusting screw	OT58 brass
Adjusting spring	Steel

bit SERIES F FILTER FOR WATER

Water filter characterized by the use of materials certified to specific standards on products for use in contact with foodstuff or drinking water.
Declarations of conformity and release test reports are available on request for those who need them to certify our product incorporated in their own systems.
The white colour surface finish of the body was chosen to enhance the highly hygienic properties of the product.
The transparent bowl was designed to make it possible to check the state of the filter cartridge.
Unlike compressed air filters, the bowl has no drain holes.
The cartridge filtration degree is 20 µm.

TECHNICAL DATA		FIL BIT F 1/8"	FIL BIT F 1/4"
Threaded port		1/8"	1/4"
Degree of filtration	µm	20 (white)	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa ÷ 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	l/min	13	14.5
	cfm	0.46	0.51
Max temperature at 10 bar (1 MPa; 145 psi)	°C	50	
	°F	122	
Weight	g	40	
Internal volume	cm^3	40	
Mounting position		In any position	
Fluid		Water, air and fluids compatible with the materials used	

COMPONENTS

① Body with threaded inserts
② Transparent bowl
③ Baffle plug
④ Centrifuge
⑤ Gaskets
⑥ Filter cartridge

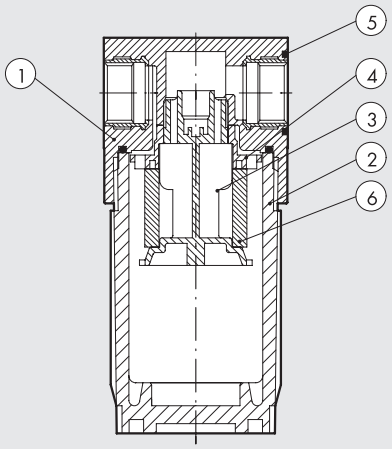

N.B.: For details on the materials used, please refer to the section "general technical data".

FLOW CHARTS

FIL BIT F 1/8"

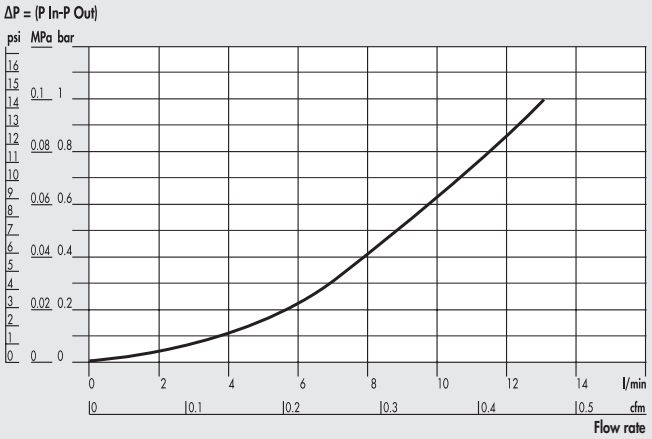

FIL BIT F 1/4"

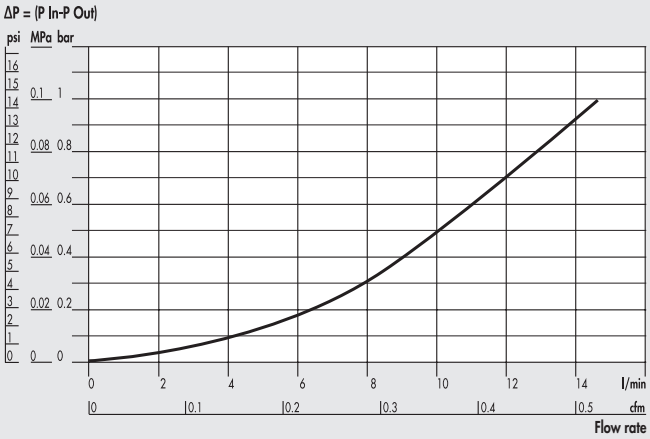

DIMENSIONS

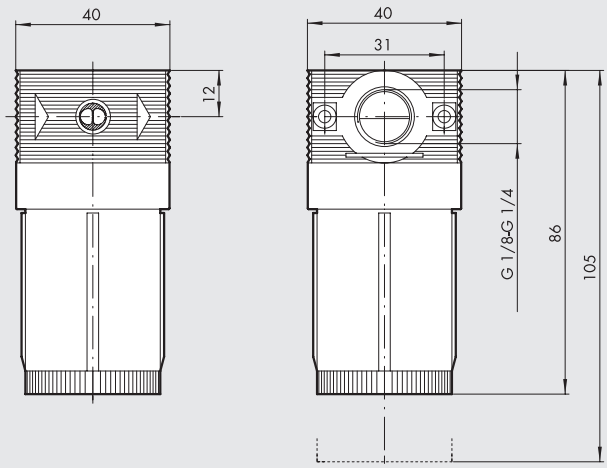

ORDERING CODES

Code	Description
5101002F	FIL BIT F 1/8 20
5201002F	FIL BIT F 1/4 20

NOTES

bit SERIES F REGULATOR FOR WATER

Water regulator characterized by the use of materials certified to specific standards on products for use in contact with foodstuff or drinking water. Declarations of conformity and release test reports are available on request for those who need them to certify our product incorporated in their own systems.
The white colour surface finish of the body was chosen to enhance the highly hygienic properties of the product.
Versions with brass threaded inlet and outlet ports and side sockets for pressure gauges and other uses with engineering plastic thread are available. There is also a version with inlet and outlet ports incorporated directly in the engineering plastic body, without requiring further threaded ports for pressure gauges.
If the pressure regulator works with incompressible fluids (water) and there is a valve leak, the downstream pressure could rise up to reach the inlet pressure and then it re-stabilizes with water consumption.
If necessary, consider the possibility of installing a safety valve that relieves any excess pressure.

TECHNICAL DATA		REG BIT F 1/8"	REG BIT F 1/4"
Threaded port		1/8"	1/4"
Setting range	bar	0 to 2; 0 to 4; 0 to 8; 0 to 12	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa ÷ 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	l/min	6.5	7
	scfm	0.23	0.25
Max temperature at 10 bar (1 MPa; 145 psi)	°C	50°	
	°F	122°	
Weight	g	80	
Versions		With 1/8" or 1/4" brass threaded ports and 1/8" pressure gauge port.	
		With 1/4" engineering plastic threaded ports, without pressure gauge ports	
Mounting position		In any position	
Fluid		Water, air and fluids compatible with the materials used	
Notes		The pressure must always be set upwards.	
		For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value.	

COMPONENTS

① Body with incorporated threads or threaded inserts
② Bell
③ Fixing ring nut
④ Knob
⑤ Rolling diaphragm
⑥ Plug
⑦ Anti-vibration screen
⑧ Plate with gasket
⑨ Adjusting screws
⑩ Valve gasket
⑪ Nut
⑫ Adjusting spring
⑬ Valve spring
⑭ Gaskets

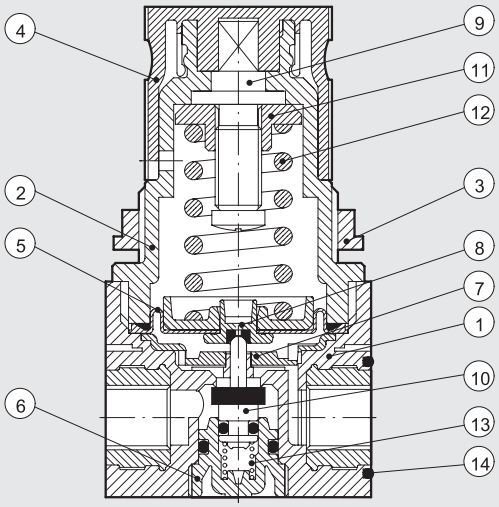

N.B.: For details on the materials used, please refer to the section "general technical data".

METAL WORK PNEUMATIC

FLOW CHARTS

REG BIT F 1/8" 0-2

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

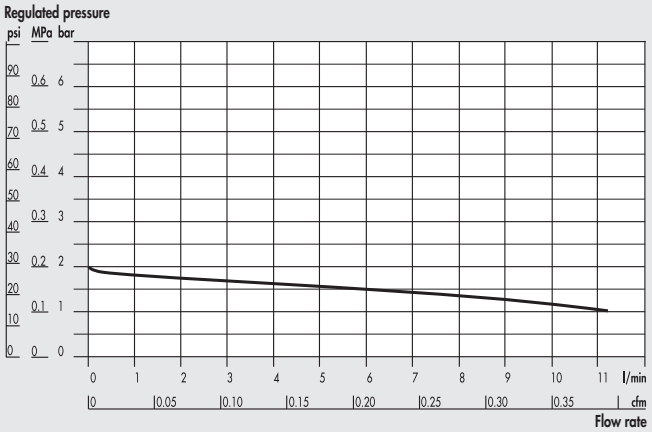

REG BIT F 1/4" 0-2

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

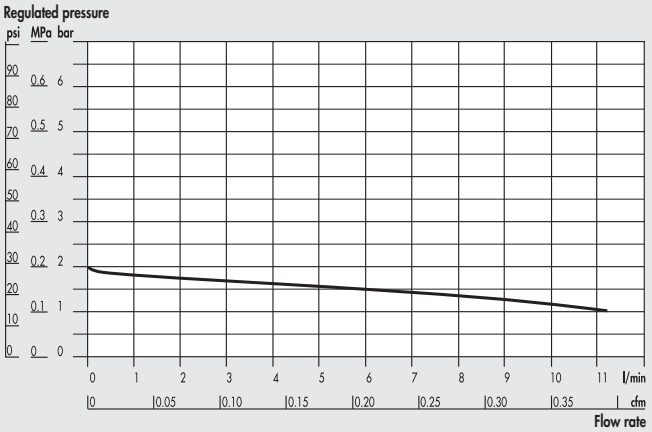

REG BIT F 1/8" 0-4

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

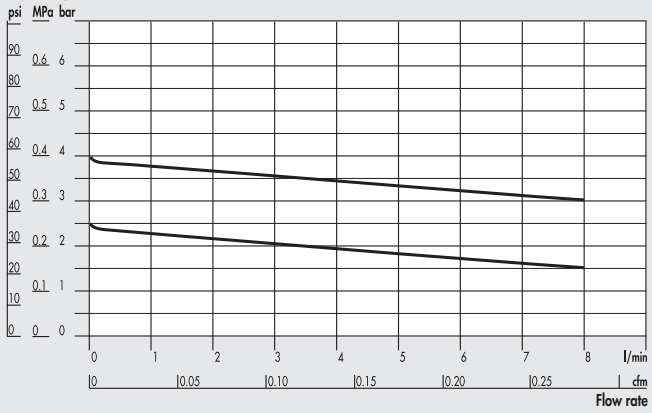

REG BIT F 1/4" 0-4

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

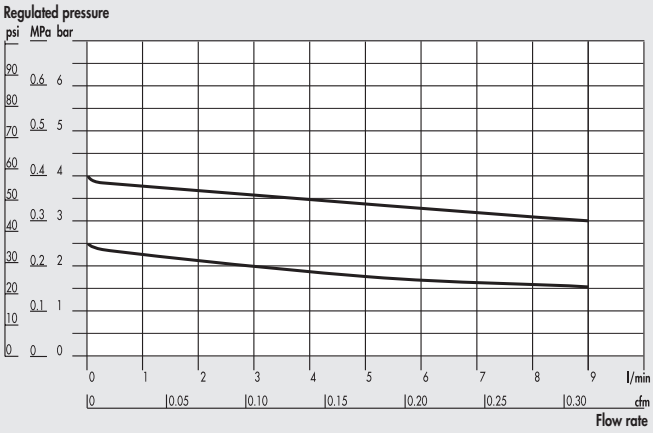

REG BIT F 1/8" 0-8; 0-12

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

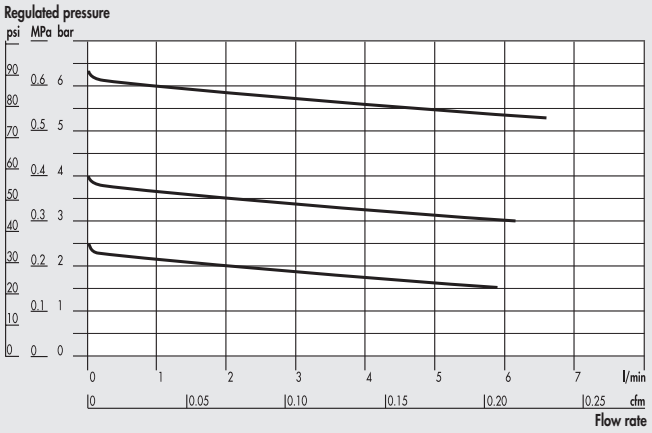

REG BIT F 1/4" 0-8; 0-12

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

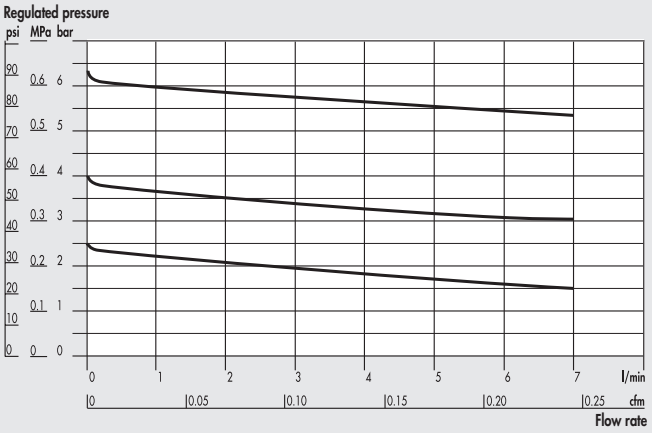

DIMENSIONS

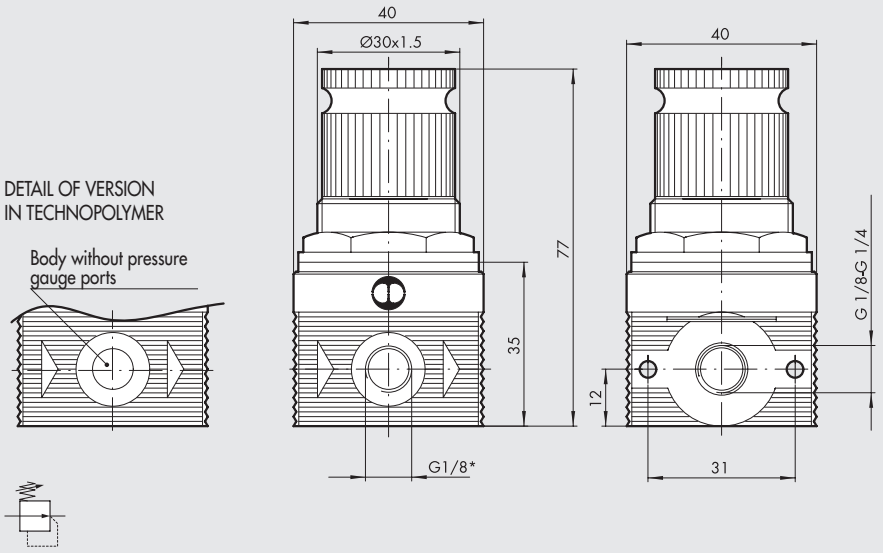

* Pressure gauge port (not supplied in the technopolymer version)

ORDERING CODES

Code	Description
REGULATOR WITH BRASS PORTS	
5108001F	REG BIT F 1/8 02
5108002F	REG BIT F 1/8 04
5108003F	REG BIT F 1/8 08
5108004F	REG BIT F 1/8 012
5208001F	REG BIT F 1/4 02
5208002F	REG BIT F 1/4 04
5208003F	REG BIT F 1/4 08
5208004F	REG BIT F 1/4 012
REGULATOR WITH TECHNOPOLYMER PORTS **	
5228001F	REG BIT F 1/4 TP 02
5228002F	REG BIT F 1/4 TP 04
5228003F	REG BIT F 1/4 TP 08
5228004F	REG BIT F 1/4 TP 012

** Without pressure gauge ports

NOTES

bit SERIES F FILTER-REGULATOR FOR WATER

Filter-regulator characterized by the use of materials certified to specific standards on products for use in contact with foodstuff or drinking water. Declarations of conformity and release test reports are available on request for those who need them to certify our product incorporated in their own systems. The white colour surface finish of the body was chosen to enhance the highly hygienic properties of the product.
The transparent bowl was designed to make it possible to check the state of the filter cartridge. The transparent bowl was designed to make it possible to check the state of the filter cartridge.
Unlike compressed air filters, the bowl has no drain holes.
The cartridge filtration degree is 20 µm.
If the pressure regulator works with incompressible fluids (water) and there is a valve leak, the downstream pressure could rise up to reach the inlet pressure and then it re-stabilizes with water consumption. If necessary, consider the possibility of installing a safety valve that relieves any excess pressure.

TECHNICAL DATA		FR BIT F 1/8"	FR BIT F 1/4"
Threaded port		1/8"	1/4"
Setting range	bar	0 to 2; 0 to 4; 0 to 8; 0 to 12	
Degree of filtration	µm	20 (white)	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa ÷ 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	l/min	6	6
	cfm	0.21	0.21
Max temperature at 10 bar (1 MPa; 145 psi)	°C	50	
	°F	122	
Weight	g	110	
Mounting position		In any position	
Fluid		Water, air and fluids compatible with the materials used	
Notes		The pressure must always be set upwards. For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value.	

COMPONENTS

① Body with threaded inserts
② Bowl
③ Knob
④ Bell
⑤ Fixing ring nut
⑥ Nut
⑦ Adjusting screws
⑧ Adjusting spring
⑨ Plate with gasket
⑩ Rolling diaphragm
⑪ Valve
⑫ Valve spring
⑬ Centrifuge
⑭ Baffle plug
⑮ Filter cartridge
⑯ Gaskets
⑰ Anti-vibration screen

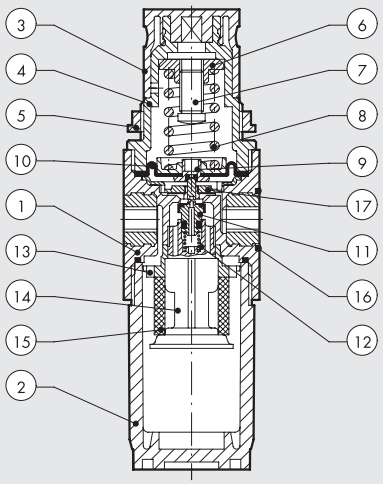

N.B.: For details on the materials used, please refer to the section "general technical data".

FLOW CHARTS

FR BIT F 1/8" 0-2

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

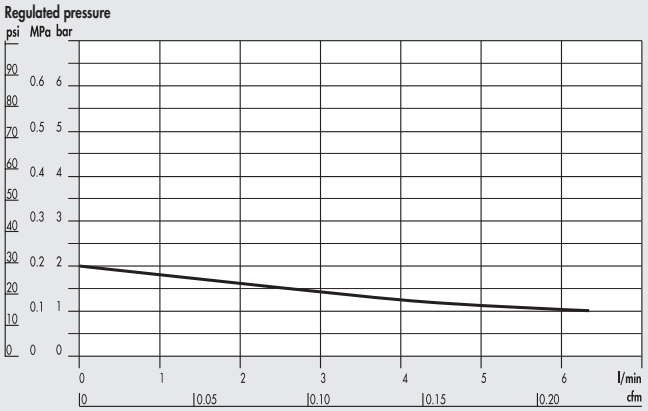

FR BIT F 1/4" 0-2

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

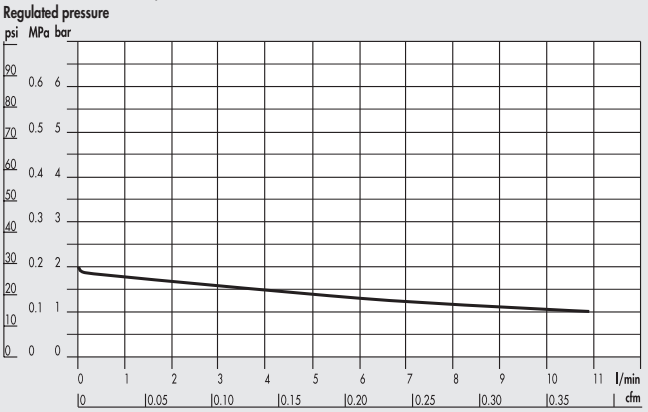

FR BIT F 1/8" 0-4

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

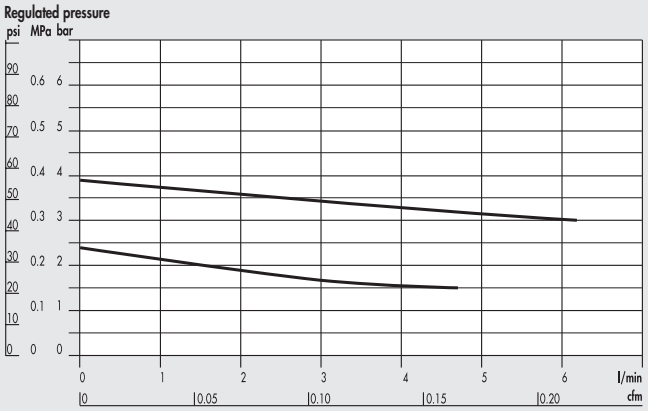

FR BIT F 1/4" 0-4

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

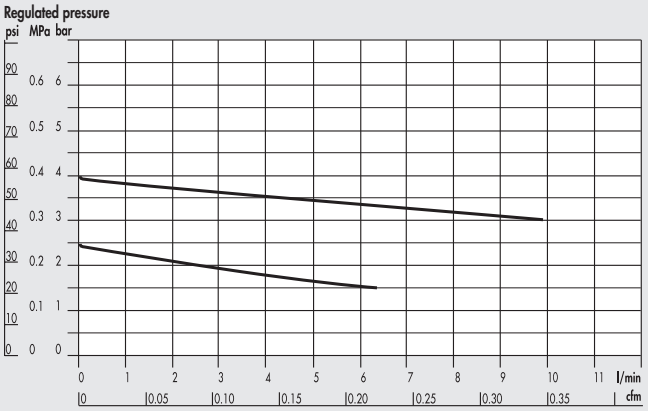

FR BIT F 1/8" 0-8; 0-12

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

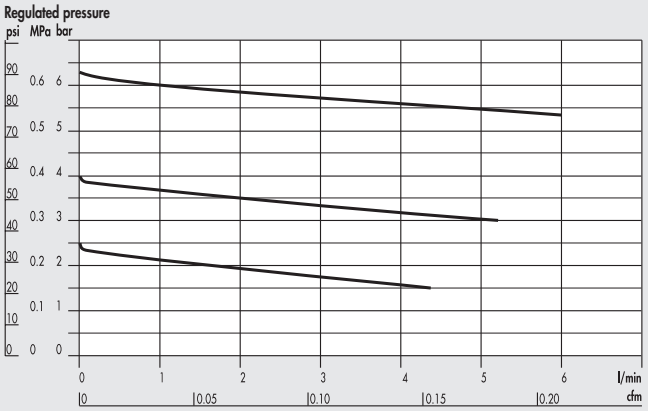

FR BIT F 1/4" 0-8; 0-12

Pm = 0.9 MPa; 9 bar; 130 psi
Regulated pressure

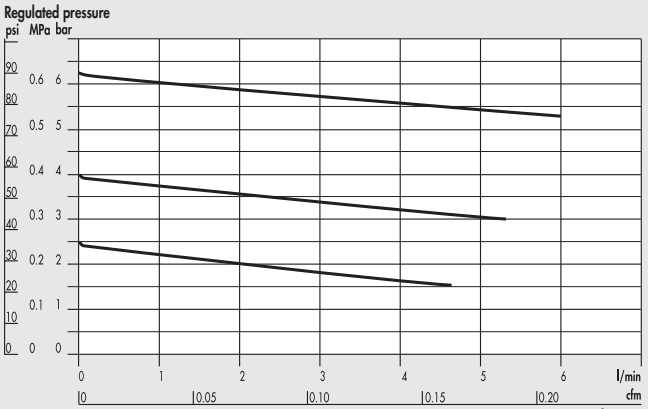

DIMENSIONS

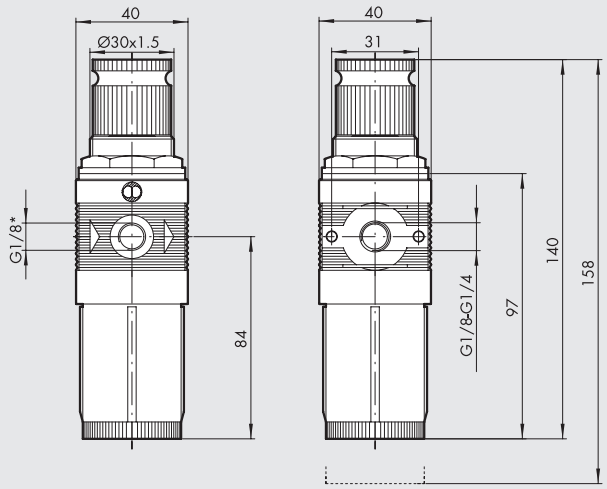



* Pressure gauge port

ORDERING CODES

Code	Description
5105102F	FR BIT F 1/8 20 02
5105105F	FR BIT F 1/8 20 04
5105108F	FR BIT F 1/8 20 08
5105111F	FR BIT F 1/8 20 012
5205102F	FR BIT F 1/4 20 02
5205105F	FR BIT F 1/4 20 04
5205108F	FR BIT F 1/4 20 08
5205111F	FR BIT F 1/4 20 012

NOTES

bit ACCESSORIES

ACCESSORIES FOR STANDARD bit AND SERIES F bit FOR WATER

PRESSURE GAUGE





Code	Description
9700102 *	M 40 1/8 04
9700101 *	M 40 1/8 012
9700109 *	M 40x40 1/8 04
9700110 *	M 40x40 1/8 012

* Cannot be used with water

DOME DISASSEMBLY SPANNER



Code	Description
9220701	Cover LUB spanner

R/FR FIXING BRACKET



Code	Description
9200701	SF100 - BIT - ND 1/4 - SY1

COVER DISASSEMBLY SPANNER



Code	Description
9170401	CS CS BIT

ASSEMBLY PLATE (PAIR)



Code	Description
9170201	PAB 1/8 - 1/4 BIT

REDUCER PLUG DISASSEMBLY SPANNER



Code	Description
9170501	CS OTR BIT

WALL MOUNTING BRACKET (PAIR)



Code	Description
9170301	SFB 1/8 - 1/4 BIT

BOWL DISASSEMBLY SPANNER



Code	Description
9170601	CS TF - TL BIT - SY1

bit SPARE PARTS

SPARE PARTS FOR STANDARD bit

UPPER COVER FOR MR



Code	Description
9250805	Spares CS 1/8 1/4 BIT 02
9250806	Spares CS 1/8 1/4 BIT 04
9250807	Spares CS 1/8 1/4 BIT 08
9250808	Spares CS 1/8 1/4 BIT 012

FILTER AND FILTER-REGULATOR BOWL



Code	Description
9255001	Spares TF 1/8 1/4 BIT RMSA
9255101	Spares TF 1/8 1/4 BIT SAC

UPPER COVER FOR MR FC



Code	Description
9250817	Spares CS FC 1/8 1/4 BIT 02
9250818	Spares CS FC 1/8 1/4 BIT 04

AUTOMATIC DRAIN (SAC)



Code	Description
9000803	Spares SAC automatic drain

UPPER COVER FOR MRA



Code	Description
9250809	Spares CSA 1/8 - 1/4 BIT 02
9250814	Spares CSA 1/8 - 1/4 BIT 04
9250815	Spares CSA 1/8 - 1/4 BIT 08
9250816	Spares CSA 1/8 - 1/4 BIT 012

LUBRICATOR BOWL



Code	Description
9251402	Spares TL 1/8 1/4 BIT

COMPLETE POPPET FOR MR AND MRA



Code	Description
9250705	Spares poppet for MR
9250706	Spares poppet for MR-SR (rapid drain)
9250708	Spares poppet for MRA

FILTER ELEMENT



Code	Description
9251708	Spares FP 1/8-1/4 BIT 5 (yellow)
9251709	Spares FP 1/8-1/4 BIT 20 (white)
9251710	Spares FP 1/8-1/4 BIT 50 (blue)

FILTER CARTRIDGE



Code	Description
9251808	Spares filter cartridge BIT 5 (yellow)
9251809	Spares filter cartridge BIT 20 (white)
9251810	Spares filter cartridge BIT 50 (blue)

TRANSPARENT LUBRICATOR COVER



Code	Description
9251302	Spares CVL 100-200-300-400 BIT

DEPURATOR FILTER ELEMENT



Code	Description
9251712	Spares FP DEP. 1/8 1/4 BIT

SPRING FOR MR, FR



Code	Description
9250610	Spares MO 02 BIT
9250611	Spares MO 04 BIT
9250612	Spares MO 08 BIT
9250613	Spares MO 012 BIT

COMPLETE POPPET FOR FR

Code	Description
9250905	Spares OTFR 1/8 1/4 BIT 5 (yellow)
9250906	Spares OTFR 1/8 1/4 BIT 20 (white)
9250907	Spares OTFR 1/8 1/4 BIT 50 (blue)

NOTES

SPARE PARTS FOR SERIES F bit FOR WATER

FILTER ELEMENT

Code	Description
9251709	Spares FP 1/8-1/4 BIT 20 (white)

SPRING FOR REG F, FR F



Code	Description
9250610	Spares MO 02 BIT
9250611	Spares MO 04 BIT
9250612	Spares MO 08 BIT
9250613	Spares MO 012 BIT

FILTER CARTRIDGE



Code	Description
9251809	Spares filter cartridge BIT 20 (white)

NOTES

NOTES

SUMMARY Skillair®

- GENERAL TECHNICAL DATA Skillair® — C3.4

- Skillair® FILTER — C3.7

- Skillair® DEPURATOR — C3.11

- Skillair® ACTIVE CARBON FILTER — C3.14

- DIAPHRAGM DRIER SERIES DRY 100 Skillair® — C3.17

- Skillair® REGULATOR — C3.20

- Skillair® 100 IN-SERIES REGULATOR — C3.24

- Skillair® PADLOCKABLE REGULATOR — C3.25

- Skillair® PILOT REGULATOR — C3.27

- Skillair® PILOT PADLOCKABLE REGULATOR — C3.29

- Skillair® 300 PILOT OPERATED REGULATOR — C3.30

- Skillair® FILTER REGULATOR — C3.31

- Skillair® LUBRICATOR — C3.34

METAL WORK PNEUMATIC

- **Skillair® SHUT-OFF VALVE** — C3.38

- **Skillair® PROGRESSIVE START VALVE** — C3.43

- **Skillair® PROGRESSIVE STARTER** — C3.45

- **Skillair® AIR TAKE-OFF** — C3.49

- **Skillair® PRESSURE SWITCHES** — C3.50

- **Skillair® SUB-BASE AND ADAPTER BASE** — C3.52

- **FIL + REG + LUB Skillair®** — C3.54

- **FR + LUB Skillair®** — C3.56

- **V3V + FR + LUB Skillair®** — C3.58

- **FIL + LUB Skillair®** — C3.60

- **FIL + DEP Skillair®** — C3.62

- **Skillair® ACCESSORIES** — C3.64
- **Skillair® SPARES PARTS** — C3.65

GENERAL TECHNICAL DATA Skillair®

The superior technology of Skillair® FRL units is the expression of Metal Work innovation. The FRL system is the brainchild of a joint study by Metal Work engineers and researchers from the Department of Mechanics in Turin. The integration of metal alloys and super-resistant techno-polymers is the result of co-operation between CESAP (European Centre for the Development of Plastic Applications) and leading international companies such as Du Pont, EMS Chemie and Hoechst. The installation of advanced processing and quality control systems guarantees the reliability of Skillair® FRLs.

Technical features

The Skillair® units incorporate very interesting technological features:

- Compactness: with the same flow capacity our unit is one of the smallest on the market.
- Modularity: various elements such as filters, reducers, lubricators, 3-way valves, progressive actuators and air take-offs can be combined at will. With the modular system the FRL units can be removed without disturbing the pipes.
- Easy maintenance: Any of the elements or the entire unit can be removed without disturbing the remaining part or pipes.

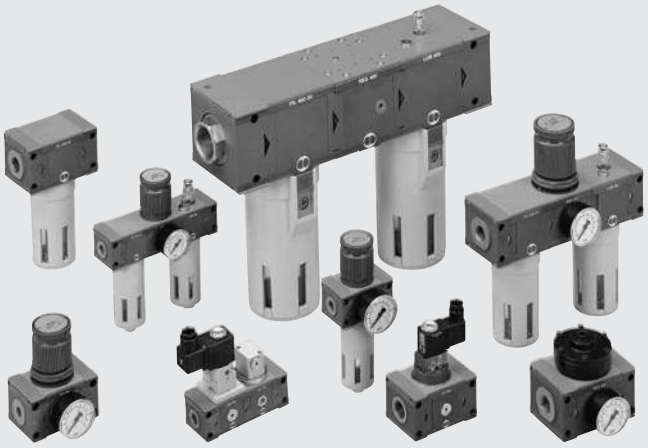

TECHNICAL DATA		SK 100		SK 200			SK 300			SK 400			
Threaded port		1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
Degree of filtration	µm	5 - 20 - 50											
Degree of purification	µm	99.97% a 0.01											
Setting range	bar	0 to 2 0 to 4 0 to 8 0 to 12											
Max. input pressure	MPa	1.5		1.3			1.3			1.3			
	bar	15		13			13			13			
	psi	217		188			188			188			
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	From 1100 to 20000											
ΔP 0.5 bar (0.05 MPa to 7 psi)													
Fluid		Lubricated or unlubricated compressed air											
Temperature range at 1 MPa; 10 bar; 145 psi	°C	−10 to +50											
	°F	14 to 122											
Elements comprising the range		Filter, Depurator, Regulator, Pilot operated regulator, In-series Regulator, Filter-regulator, Lubricator with various lubricant filling systems, Circuit Shut-off Valve, Progressive Actuator.											
Compatibility with oils		See **chapter Z1**											

Skillair® MODULARITY

The FRL units can be removed from the system without disturbing the pipes. This can be done with a single element or with the entire system. Assemble the unit so that the air flows in the direction marked by the arrows.

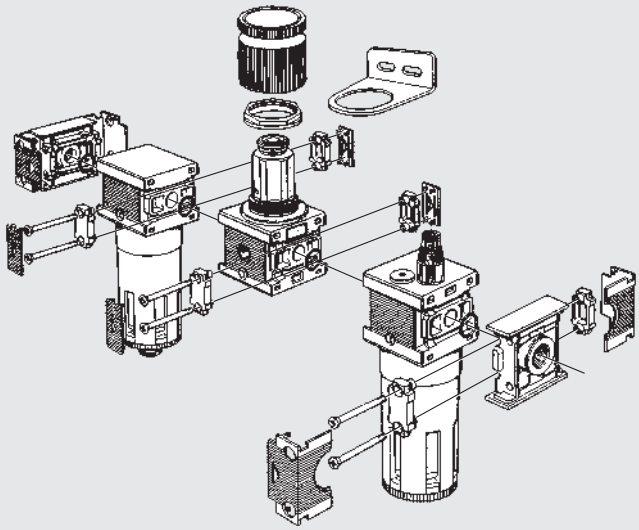

DISASSEMBLING THE UNIT – WALL FIXING

How to disassemble Skillair® end plates:
- Remove the plate Ⓐ.
- Unscrew the screws and remove the cams Ⓑ to disassemble the unit.
- Screws to fix the end plates to the wall Ⓒ:
  Series 100: M4x50
  Series 200: M5x60
  Series 300: M5x70
  Series 400: M6x110

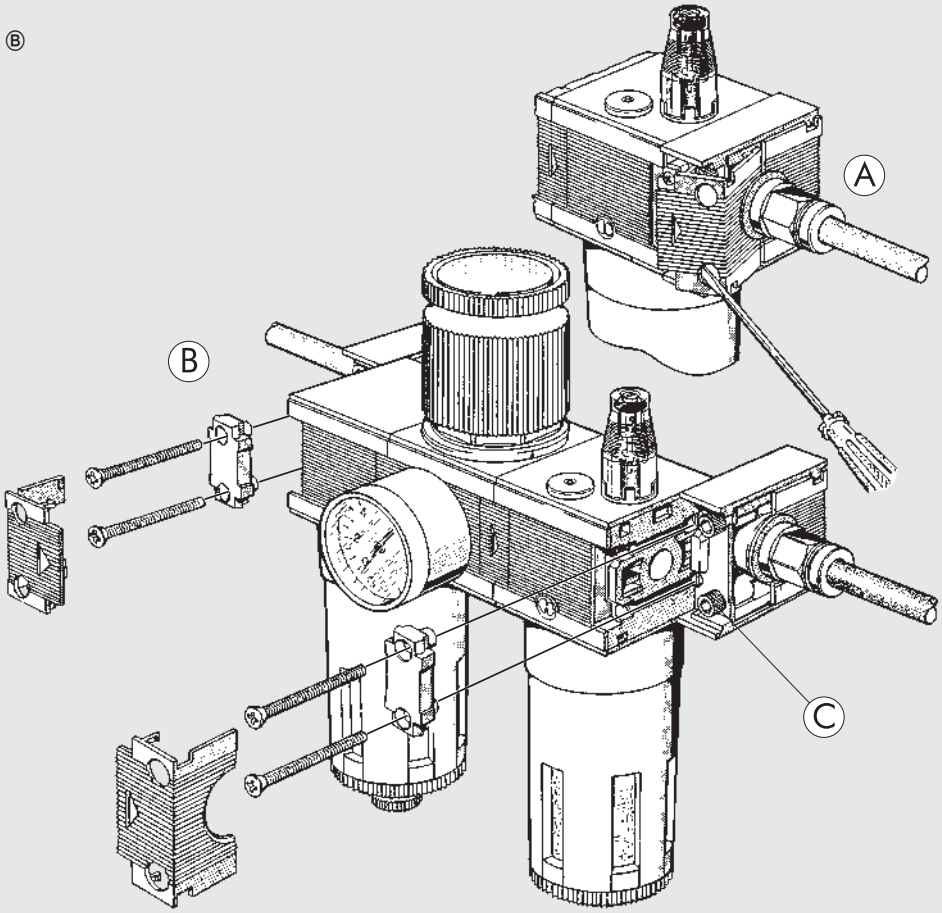

Skillair® 400 - ROTARY SLIDING JOINT

The series 400 comes with a patented system with a rotary sliding end joint to allow the unit to be adapted to the pipe cutting distance. For correct assembly and disassembly, loosen the screw in the end plate before screwing in or unscrewing the bush.

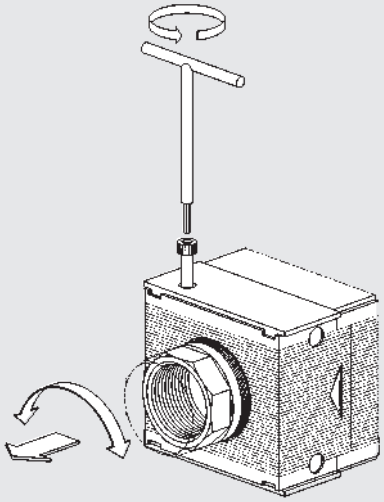

CLEANING AND/OR REPLACING THE FILTER ELEMENTS

Before unscrewing the bowl to replace the filter elements, check that the line is no longer pressurized.
Replace as shown in the diagram.

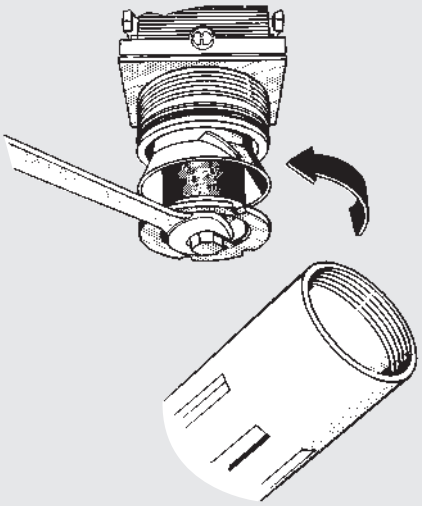

GENERAL RULES FOR USE AND MAINTENANCE

MOUNTING THE PRESSURE GAUGE

① Do not use a spanner.
② The gauge must be mounted by hand.
Use liquid sealants only.
Do not use Teflon.

①



②



SETTING THE PRESSURE

③ **N.B.: the pressure in standard regulators must always be set upwards.**
Before setting the pressure, check that the knob is raised.
④ When the required pressure has been reached, press the knob downwards.

③



④



MOUNTING THE REGULATOR AND FILTER-REGULATOR

⑤ Panel mounting: remove the knob and lock the regulator with the ring nut.
⑥ Wall mounting: use a suitable bracket (see Skillair® accessories).

⑤

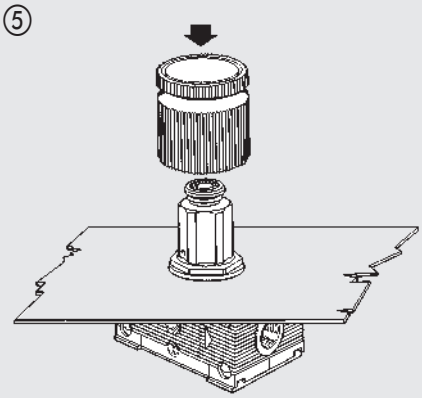

⑥

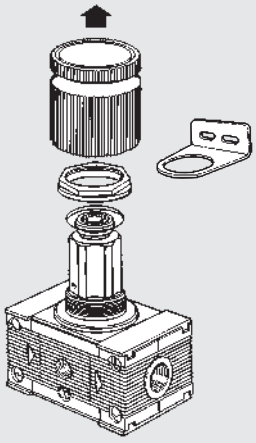

SEMI-AUTO CONDENSATE DRAIN FOR FILTER, FILTER-REGULATOR AND DEPURATOR

The semi-auto condensate drain is the normally open type. When there is pressure in the bowl, the drain closes. When there is no pressure in the bowl, it opens and the condensate drains out.

If necessary, it is possible to drain the condensate whilst the bowl is pressurised. The simple manual operation of "pushing up the valve" will allow the condensate to drain.



When rotating the button clockwise, the valve becomes in locked position, and can only work when the button is returned to the central position.

Skillair® FILTER

The Job of the filter is to remove any solid or liquid impurities from the air generated by the compressor.
Incoming air is rotated by the centrifuge unit. The heaviest liquid and solid particles are projected against the walls of the container and forced to adhere to it. As they accumulate they form drops that deposit on the bottom by gravity.
The remaining solid particles are held back by the porous element depending on the filtering threshold.
The accumulated condensate is drained out through the drain - automatically when there is no pressure in the filter, or by hand pressing the button.
An automatic drain is available. It automatically eliminates condensate from the container whenever necessary, whatever the pressure.
The transparent windows allow to view the level of condensation at 360°.

TECHNICAL DATA		FIL 100	FIL 200	FIL 300	FIL 400
Threaded port		1/4" | 3/8"	1/4" | 3/8" | 1/2"	1/2" | 3/4" | 1"	1" | 1 1/4" | 1 1/2" | 2"
Degree of filtration	µm	5 - 20 - 50	5 - 20 - 50	5 - 20 - 50	5 - 20 - 50
Max. input pressure	MPa	1.5	1.3	1.3	1.3 | 1.3
	bar	15	13	13	13 | 13
	psi	217	188	188	188 | 188
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	1400	2400	3800	16500 | 20000
ΔP 0.5 bar (0.05 MPa to 7 psi)	scfm	50	85	135	590 | 710
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	2000	3100	5300	- | -
ΔP 1 bar (0.1 MPa to 14 psi)	scfm	71	110	188	- | -
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	50	50	50 | 50
	°F	122	122	122	122 | 122
Weight	kg	0.4	0.7	1.4	5.2 | 6
Wall fixing screws		M4 x 50	M5 x 60	M5 x 70	M6 x 110 | M6 x 110
Bowl capacity	cm^3	22	45	75	270 | 270
Mounting position		Vertical	Vertical	Vertical	Vertical | Vertical
Drain		RMSA - SAC	RMSA - SAC - RA	RMSA - RA	RMSA - RA | RMSA - RA
		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port. SAC: automatic drain with condensate discharge .**Operates by pressure drop – requires variable air take-offs.**			
Fluid		Compressed air.			
Notes on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.**			

COMPONENTS FIL 100 - 200 - 300

① Technopolymer body
② Zamak end plate
③ Technopolymer centrifuge
④ Bowl: technopolymer for FIL 100 and FIL 200, metal for FIL 300
⑤ Technopolymer baffle
⑥ Sintered HDPE filter cartridge
⑦ Technopolymer screen
⑧ Clear technopolymer glass
⑨ NBR gaskets
⑩ Drain (RMSA)

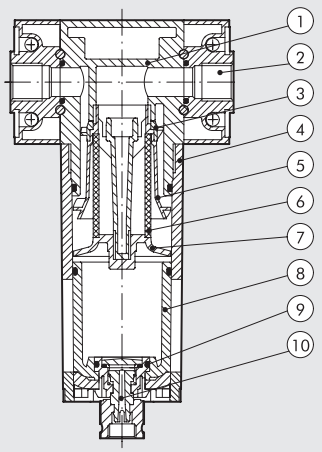

COMPONENTS FIL 400

① Aluminium body
② Aluminium end plate
③ OT58 brass retaining ring
④ Anodized aluminium threaded bush, axial adjustment
⑤ Technopolymer centrifuge
⑥ Aluminium bowl
⑦ Sintered bronze filter cartridge
⑧ Aluminium screen
⑨ Clear technopolymer glass
⑩ Technopolymer plug
⑪ Drain (RMSA)
⑫ NBR gaskets

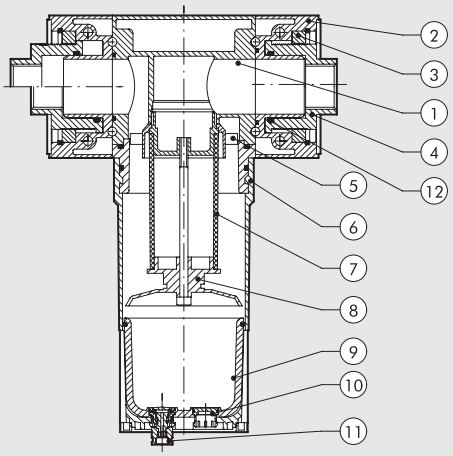

FLOW CHARTS

FIL 100 1/4 - 3/8

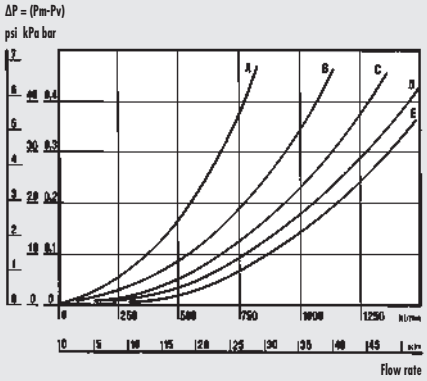

FIL 200 1/4 - 3/8 - 1/2

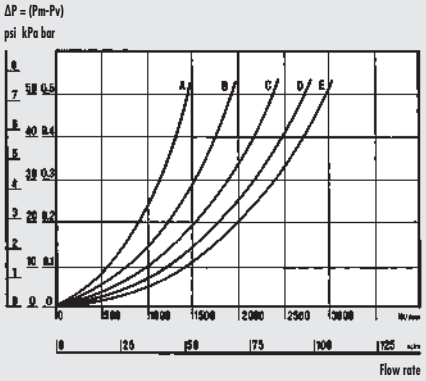

FIL 300 1/2 - 3/4 - 1

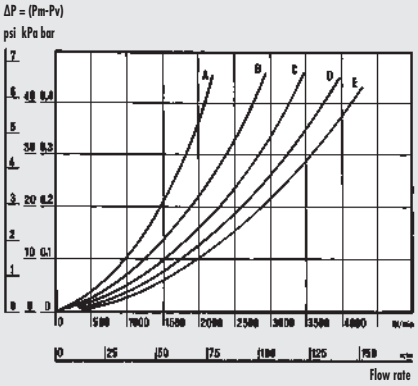

FIL 400 1″

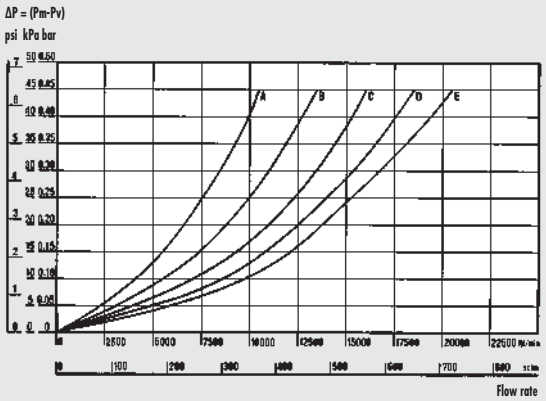

FIL 400 2″

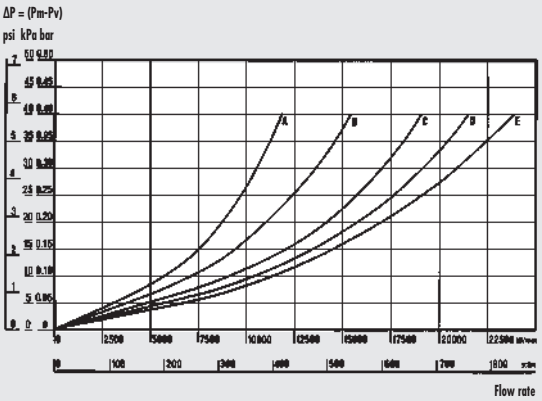

Department of Mechanics
Turin Polytechnic

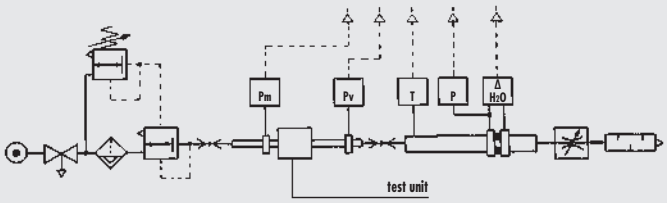

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi

DIMENSIONS

100 - 200 - 300

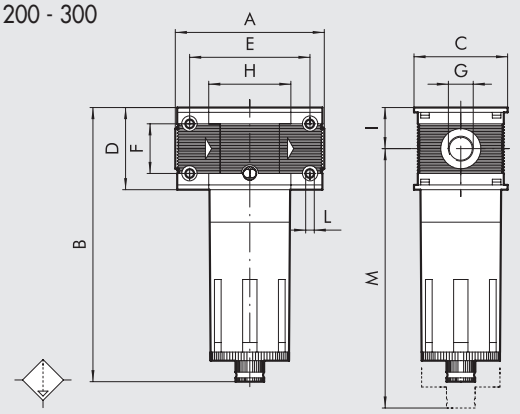

400

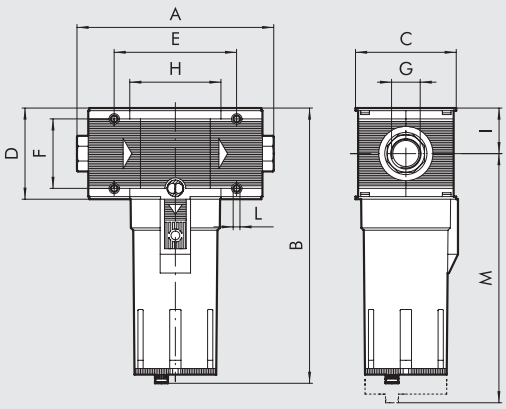

		FIL 100		FIL 200			FIL 300			FIL 400			
Threaded port G		1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
A		78		93.5			110		112	225 to 255			283 to 313
B	**RMSA**	144		175			195			320			
	RA	-		179			199			324			
	SAC	148		179			-			-			
C		50		63			72			118			
D		43		55			65			105			
E		63		78.5			92			141.4			
F		26		36			42			80			
H		43		55.5			65			105.4			
I		21.5		27.5			32.5			52.5			
L		Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
M	**RMSA**	137		196			215			378			
	RA	-		200			219			382			
	SAC	141		200			-			-			

NOTES

SYNOPTIC, SIZES AND VERSIONS

FIL ELEMENT	100 SIZE	1/4 THREADED PORT	20 DEGREE OF FILTRATION	RMSA TYPE OF DRAIN
FIL.	100	1/4 3/8	5 = 5 µm 20 = 20 µm 50 = 50 µm	RMSA SAC
	200	1/4 3/8 1/2		RMSA SAC RA*
	300	1/2 3/4 1		RMSA RA
	400	1 1 1/4 1 1/2 2		

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure

RA: automatic drain with condensate discharge, independent of pressure and flow rate. (for size 300 and 400). Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.
(for size 100 and 200)

* For Skillair® 200 with RA, please contact our sales assistance department.

ORDERING CODES

Code	Description
Skillair® 100 FILTER	
3280001A	FIL 100 5 RMSA without end plates
3280007A	FIL 100 5 SAC without end plates
3280002A	FIL 100 20 RMSA without end plates
3280008A	FIL 100 20 SAC without end plates
3280003A	FIL 100 50 RMSA without end plates
3280009A	FIL 100 50 SAC without end plates
3280001	FIL 100 1/4 5 RMSA
3280007	FIL 100 1/4 5 SAC
3280002	FIL 100 1/4 20 RMSA
3280008	FIL 100 1/4 20 SAC
3280003	FIL 100 1/4 50 RMSA
3280009	FIL 100 1/4 50 SAC
3380001	FIL 100 3/8 5 RMSA
3380007	FIL 100 3/8 5 SAC
3380002	FIL 100 3/8 20 RMSA
3380008	FIL 100 3/8 20 SAC
3380003	FIL 100 3/8 50 RMSA
3380009	FIL 100 3/8 50 SAC
Skillair® 200 FILTER	
3480001A	FIL 200 5 RMSA without end plates
3480007A	FIL 200 5 SAC without end plates
3480002A	FIL 200 20 RMSA without end plates
3480008A	FIL 200 20 SAC without end plates
3480003A	FIL 200 50 RMSA without end plates
3480009A	FIL 200 50 SAC without end plates
3480001	FIL 200 1/4 5 RMSA
3480007	FIL 200 1/4 5 SAC
3480002	FIL 200 1/4 20 RMSA
3480008	FIL 200 1/4 20 SAC
3480003	FIL 200 1/4 50 RMSA
3480009	FIL 200 1/4 50 SAC
3580001	FIL 200 3/8 5 RMSA
3580007	FIL 200 3/8 5 SAC
3580002	FIL 200 3/8 20 RMSA
3580008	FIL 200 3/8 20 SAC
3580003	FIL 200 3/8 50 RMSA
3580009	FIL 200 3/8 50 SAC
3680001	FIL 200 1/2 5 RMSA
3680007	FIL 200 1/2 5 SAC
3680002	FIL 200 1/2 20 RMSA
3680008	FIL 200 1/2 20 SAC
3680003	FIL 200 1/2 50 RMSA
3680009	FIL 200 1/2 50 SAC

Code	Description
Skillair® 300 FILTER	
4480001A	FIL 300 5 RMSA without end plates
4480002A	FIL 300 20 RMSA without end plates
4480003A	FIL 300 50 RMSA without end plates
4480004A	FIL 300 5 RA without end plates
4480005A	FIL 300 20 RA without end plates
4480006A	FIL 300 50 RA without end plates
4480001	FIL 300 1/2 5 RMSA
4480002	FIL 300 1/2 20 RMSA
4480003	FIL 300 1/2 50 RMSA
4480004	FIL 300 1/2 5 RA
4480005	FIL 300 1/2 20 RA
4480006	FIL 300 1/2 50 RA
4580001	FIL 300 3/4 5 RMSA
4580002	FIL 300 3/4 20 RMSA
4580003	FIL 300 3/4 50 RMSA
4580004	FIL 300 3/4 5 RA
4580005	FIL 300 3/4 20 RA
4580006	FIL 300 3/4 50 RA
4680001	FIL 300 1 5 RMSA
4680002	FIL 300 1 20 RMSA
4680003	FIL 300 1 50 RMSA
4680004	FIL 300 1 5 RA
4680005	FIL 300 1 20 RA
4680006	FIL 300 1 50 RA

Code	Description
Skillair® 400 FILTER	
6180001A	FIL 400 5 RMSA without end plates
6180002A	FIL 400 20 RMSA without end plates
6180003A	FIL 400 50 RMSA without end plates
6180004A	FIL 400 5 RA without end plates
6180005A	FIL 400 20 RA without end plates
6180006A	FIL 400 50 RA without end plates
6180001	FIL 400 1 5 RMSA
6180002	FIL 400 1 20 RMSA
6180003	FIL 400 1 50 RMSA
6180004	FIL 400 1 5 RA
6180005	FIL 400 1 20 RA
6180006	FIL 400 1 50 RA
6280001	FIL 400 1 1/4 5 RMSA
6280002	FIL 400 1 1/4 20 RMSA
6280003	FIL 400 1 1/4 50 RMSA
6280004	FIL 400 1 1/4 5 RA
6280005	FIL 400 1 1/4 20 RA
6280006	FIL 400 1 1/4 50 RA
6380001	FIL 400 1 1/2 5 RMSA
6380002	FIL 400 1 1/2 20 RMSA
6380003	FIL 400 1 1/2 50 RMSA
6380004	FIL 400 1 1/2 5 RA
6380005	FIL 400 1 1/2 20 RA
6380006	FIL 400 1 1/2 50 RA
6480001	FIL 400 2 5 RMSA
6480002	FIL 400 2 20 RMSA
6480003	FIL 400 2 50 RMSA
6480004	FIL 400 2 5 RA
6480005	FIL 400 2 20 RA
6480006	FIL 400 2 50 RA

Skillair® DEPURATOR

METAL WORK PNEUMATIC

The role of the depurator is to separate the liquid and solid particles contained in the compressed air with a high degree of efficiency. This separation is carried out using a special filtering element called a "coalescence cartridge".

TECHNICAL DATA		DEP 100		DEP 200			DEP 300			DEP 400		
Threaded port		1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	2"
Degree of purification		99.97% at 0.01 µm		99.97% at 0.01 µm			99.97% at 0.01 µm			99.97% at 0.01 µm		
Max. inlet pressure	MPa	1.5		1.3			1.3			1.3		1.3
	bar	15		13			13			13		13
	psi	217		188			188			188		188
Suggested flow at 6 bar	Nl/min	230		360			500			2300		2250
Maximun suggested flow rate		See next page										
Max temperature at: 1 MPa; 10 bar; 145 psi	°C	50		50			50			50		50
	°F	122		122			122			122		122
Weight	kg	0.4		0.9			1.4			4.2		5
Wall fixing screws		M4 x 50		M5 x 60			M5 x 70			M6 x 110		M6 x 110
Bowl capacity	cm^3	22		45			75			270		270
Mounting position		Vertical		Vertical			Vertical			Vertical		Vertical
Drain		RMSA		RMSA			RMSA - RA			RMSA - RA		RMSA - RA
		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.										
Fluid		5 µm filtered air										
Notes on use		It is advisable to mount a 5 µm pre-filter in order to separate the solid particles first. **The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.**										

HOW THE COALESCENCE CARTRIDGE WORKS

Air from the mains – full of impurities – flows into the coalescence cartridge and then passes through the crossed micro-fibres that make up the cartridge. During this movement the liquid particles come into contact with the crossed micro-fibres and adhere to them. Due to the air pressure and gravity they join up with other micro-drops at each cross-over point and gradually increase in volume, leading to the physical phenomenon called coalescence. When they stop moving, the drops deposit on the outside of the cartridge, from which they detach and drop to the bottom.
Since the volume of liquid leaving the cartridge is exactly the same as the drops arriving, the coalescence cartridge ought to work indefinitely.
Solid particles are caught with the same efficiency but, unlike drops, they are not drained out and clog the cartridge.
To get round this problem, it is necessary to mount a 5 µm pre-filter before the fine oil filter to separate the solid particles first.

COALESCENCE FILTER

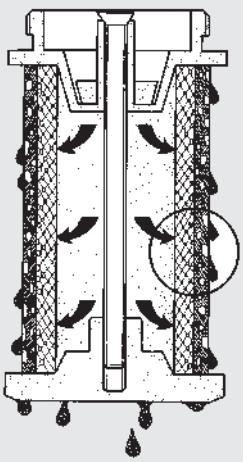

CROSSED MICRO-FIBRES

FLOW CHARTS

DEP 100 1/4 - 3/8

ΔP = (Pm-Pv)
psi kPa bar

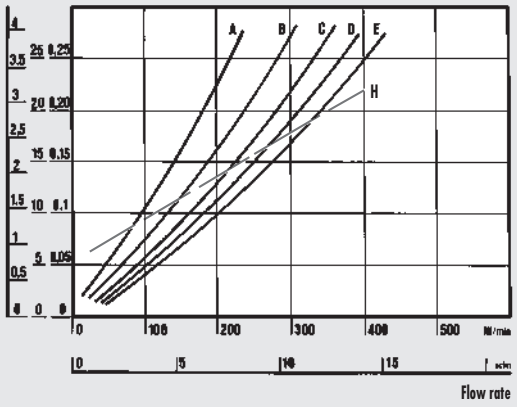

DEP 400 1″

ΔP = (Pm-Pv)
psi kPa bar

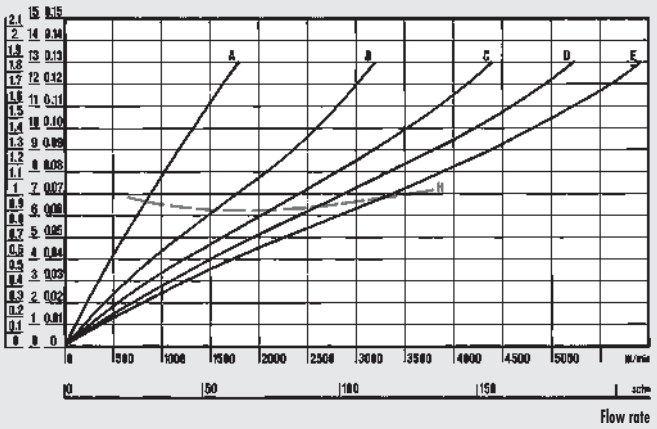

DEP 200 1/4 - 3/8 - 1/2

ΔP = (Pm-Pv)
psi kPa bar

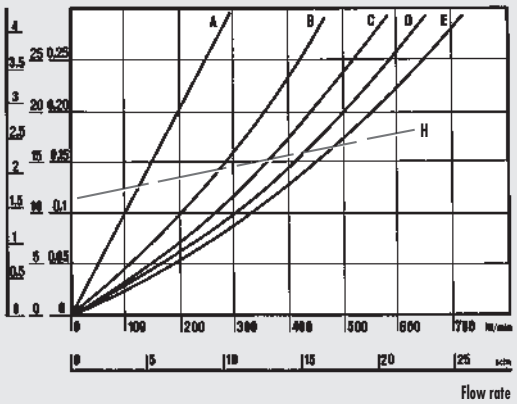

DEP 400 2″

ΔP = (Pm-Pv)
psi kPa bar

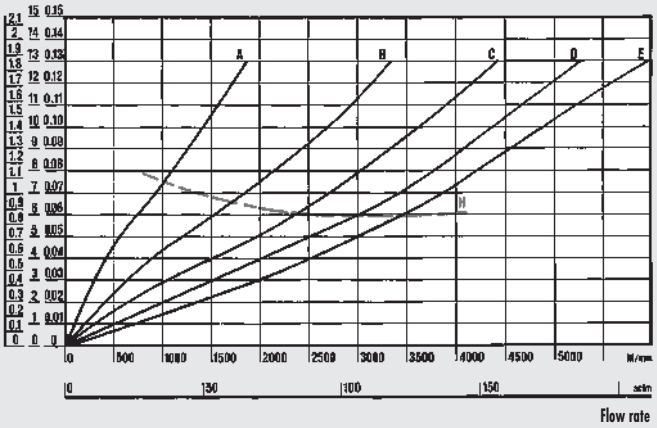

DEP 300 1/2 - 3/4 - 1

ΔP = (Pm-Pv)
psi kPa bar

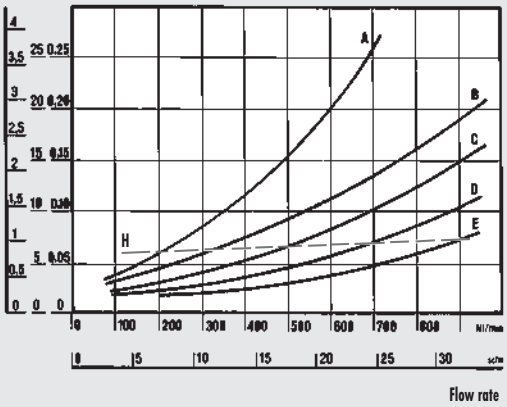

Department of Mechanics
Turin Polytechnic

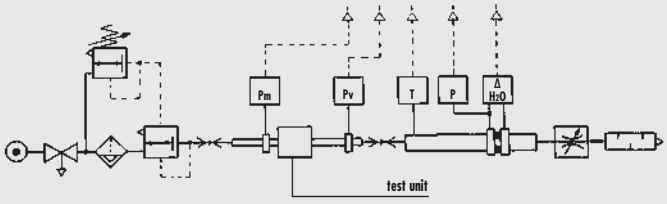

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi
(H) = maximum flow rate recommended for optimal operation

DIMENSIONS

100 - 200 - 300

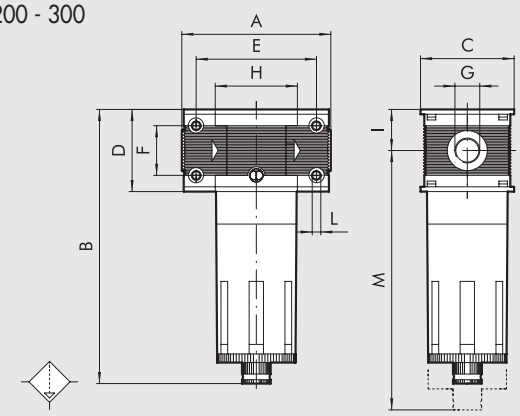

400

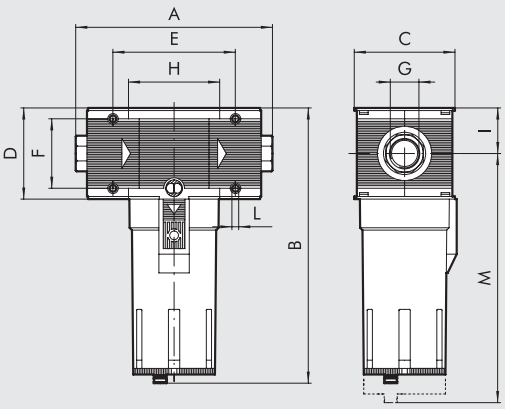

		DEP 100		DEP 200			DEP 300			DEP 400			
Threaded port G		1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
A		78		93.5			110		112	225 to 255			283 to 313
B	**RMSA**	144		175			195			320			
	RA	-		-			199			324			
C		50		63			72			118			
D		43		55			65			105			
E		63		78.5			92			141.4			
F		26		36			42			80			
H		43		55.5			65			105.4			
I		21.5		27.5			32.5			52.5			
L		Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
M	**RMSA**	137		196			215			378			
	RA	-		-			219			382			

SYNOPTIC, SIZES AND VERSIONS

DEP	**100**	**1/4**	**RMSA**
ELEMENT	**SIZE**	**THREADED PORT**	**TYPE OF DRAIN**
DEP	100	1/4	RMSA
		3/8	
	200	1/4	
		3/8	
		1/2	
	300	1/2	RMSA
		3/4	RA
		1	
	400	1	
		1 1/4	
		1 1/2	
		2	

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure

RA: automatic drain with condensate discharge, independent of pressure and flow rate. (for size 300 and 400). Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

ORDERING CODES

Code	Description
Skillair® 100 DEPURATOR	
3288001A	D 100 RMSA without end plates
3288001	D 100 1/4 RMSA
3388001	D 100 3/8 RMSA
Skillair® 200 DEPURATOR	
3488001A	D 200 RMSA without end plates
3488001	D 200 1/4 RMSA
3588001	D 200 3/8 RMSA
3688001	D 200 1/2 RMSA

Code	Description
Skillair® 300 DEPURATOR	
4488001A	D 300 RMSA without end plates
4488002A	D 300 RA without end plates
4488001	D 300 1/2 RMSA
4488002	D 300 1/2 RA
4588001	D 300 3/4 RMSA
4588002	D 300 3/4 RA
4688001	D 300 1 RMSA
4688002	D 300 1 RA

Code	Description
Skillair® 400 DEPURATOR	
6188001A	D 400 RMSA without end plates
6188002A	D 400 RA without end plates
6188001	D 400 1 RMSA
6188002	D 400 1 RA
6288001	D 400 1 1/4 RMSA
6288002	D 400 1 1/4 RA
6388001	D 400 1 1/2 RMSA
6388002	D 400 1 1/2 RA
6488001	D 400 2 RMSA
6488002	D 400 2 RA

Skillair® ACTIVE CARBON FILTER

Active carbon filtering systems are the most efficient in the industry as they eliminate all traces of oils, solvents and hydrocarbons, and remove unpleasant odours from the air.
The operating principle is based on active carbon's ability to absorb the majority of the polluting particles in the air thanks to the presence of tiny passages inside the carbon granules.
The incoming air must be filtered (5 µm) and purified (0.01 µm) to increase the duration and efficiency of the cartridge.
The cartridge must be replaced at set intervals since there is no difference in load loss between an efficient cartridge and a saturated one.
N.B. To maintain the same performance and duration specified on the data sheet, the load loss (ΔP) must not exceed 75 mbar.

TECHNICAL DATA		AC 100		AC 200			AC 300			AC 400			
Threaded port		1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
Residual oil at 20°C *	mg/m³	0.003		0.003			0.003			0.003			
Duration of cartridge *	hours	4000		4000			4000			1000			
Max. inlet pressure	MPa	1.5		1.3			1.3			1.3			
	bar	15		13			13			13			
	psi	217		188			188			188			
Max temperature at: 1 MPa; 10 bar; 145 psi	°C	50		50			50			50			
	°F	122		122			122			122			
Weight	kg	0.4		0.9			1.4			4.2			5
Wall fixing screws		M4 x 50		M5 x 60			M5 x 70			M6 x 110			
Mounting position		In any position.											
Fluid		0.01µm filtred and depurated air.											
Notes on use		Upstream it's necessary to mount a coalescence filter depurator of 0.01 µm.											

* if the load loss of 75 mbar is not exceeded

FLOW CHARTS

AC 100 1/4 - 3/8

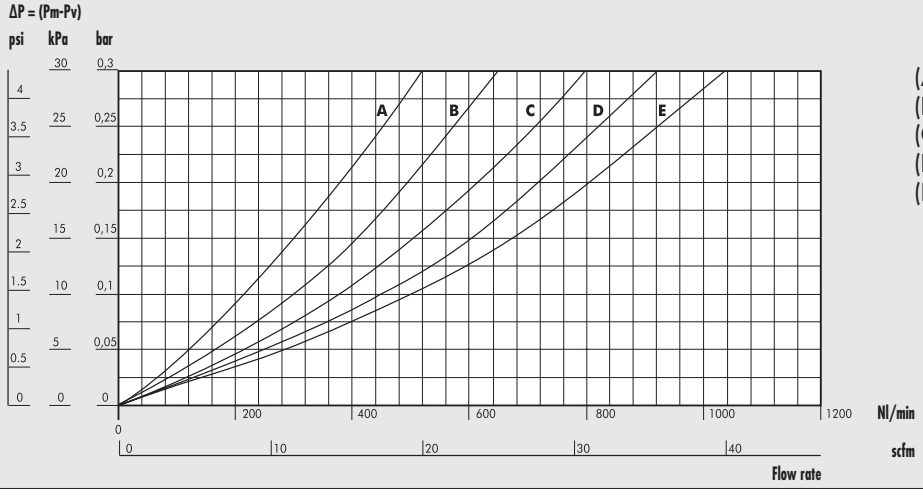

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi

METAL WORK PNEUMATIC

FLOW CHARTS

AC 200 1/4 - 3/8 - 1/2

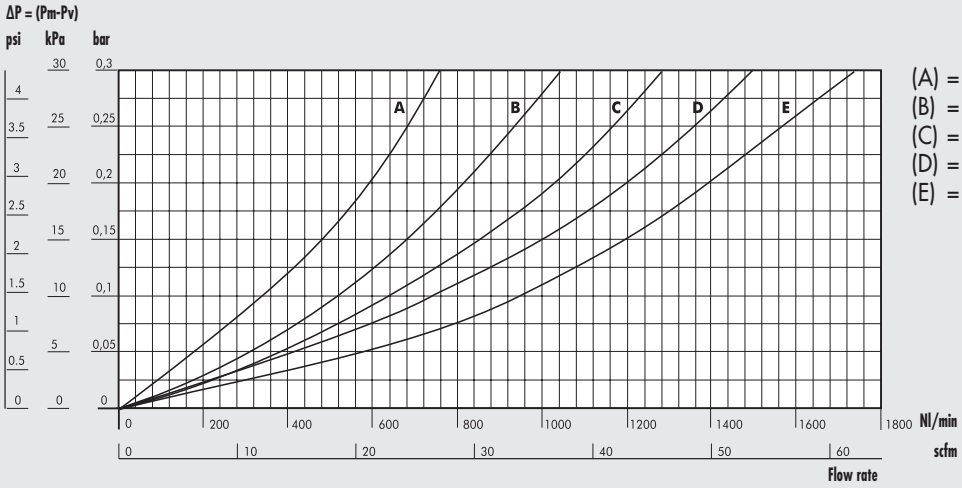

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi

AC 300 1/2 - 3/4 - 1

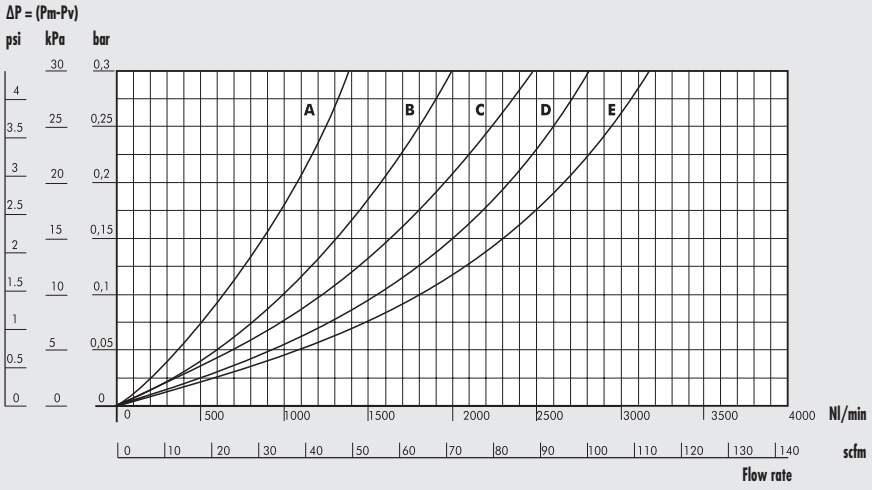

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi

AC 400 1

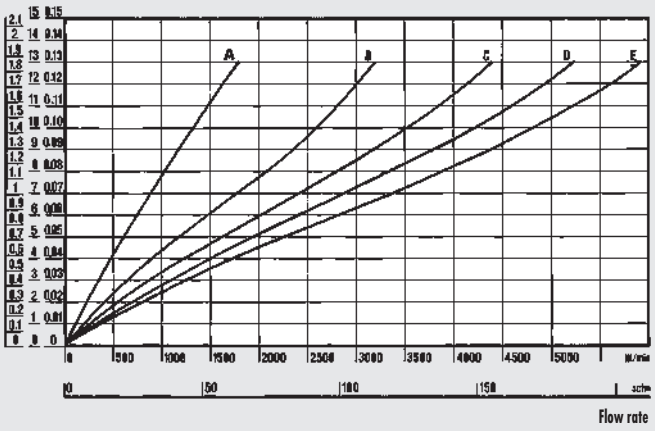

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi

AC 400 2

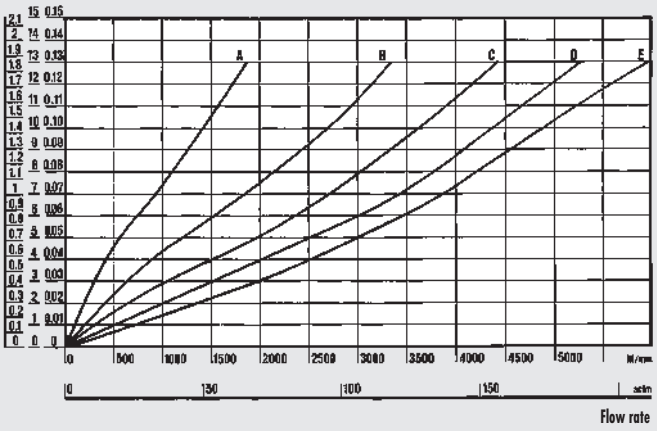

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi

DIMENSIONS

100 - 200 - 300

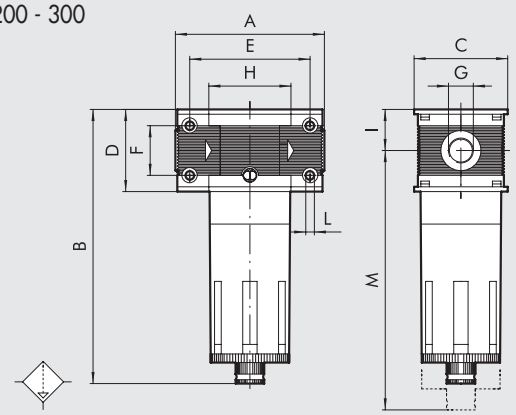

400

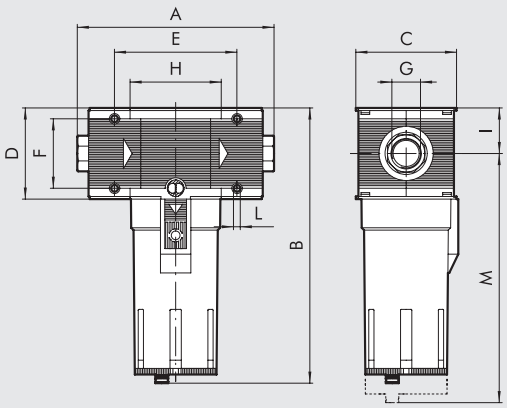

	AC 100		AC 200			AC 300			AC 400			
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
A	78		93.5			110		112	225 to 255			283 to 313
B	144		175			195			320			
C	50		63			72			118			
D	43		55			65			105			
E	63		78.5			92			141.4			
F	26		36			42			80			
H	43		55.5			65			105.4			
I	21.5		27.5			32.5			52.5			
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
M	137		196			215			378			

SYNOPTIC, SIZES AND VERSIONS

AC	**100**	**1/4**	**RMSA**
ELEMENT	**SIZE**	**THREADED PORT**	**TYPE**
AC = Active carbon	100	1/4 3/8	RMSA
	200	1/4 3/8 1/2	
	300	1/2 3/4 1	
	400	1 1 1/4 1 1/2 2	

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.

ORDERING CODES

Code	Description
Skillair® 100 ACTIVE CARBON FILTER	
3288003A	FIL AC 100 RMSA without end plates
3288003	FIL AC 100 1/4 RMSA
3388003	FIL AC 100 3/8 RMSA
Skillair® 200 ACTIVE CARBON FILTER	
3488003A	FIL AC 200 RMSA without end plates
3488003	FIL AC 200 1/4 RMSA
3588003	FIL AC 200 3/8 RMSA
3688003	FIL AC 200 1/2 RMSA

Code	Description
Skillair® 300 ACTIVE CARBON FILTER	
4488003A	FIL AC 300 RMSA without end plates
4488003	FIL AC 300 1/2 RMSA
4588003	FIL AC 300 3/4 RMSA
4688003	FIL AC 300 1 RMSA

Code	Description
Skillair® 400 ACTIVE CARBON FILTER	
6188003A	FIL AC 400 RMSA without end plates
6188003	FIL AC 400 1 RMSA
6288003	FIL AC 400 1 1/4 RMSA
6388003	FIL AC 400 1 1/2 RMSA
6488003	FIL AC 400 2 RMSA

DIAPHRAGM DRIER SERIES DRY 100 Skillair®

METAL WORK PNEUMATIC

Skillair® diaphragm driers are used to reduce the air's moisture content by lowering the dew point, i.e. the temperature at which condensate starts to form. They use diaphragms with a new cross-fibre system that guarantees a lower consumption of regenerated air and hence power.
This is an all-in-one unit complete with a filter, purifier, air intake and drier. The air intake uses air that has been filtered and purified, but not dried, and sends it to utilities not requiring dry air. This is a much more efficient system as only the required quantity of compressed air is dried.
An alternative proposal is the drier by itself. As the Skillair® system is modular, it can be inserted in any type of assembly. It is important, however, to remember that only properly filtered and purified air must be supplied to the drier. It's advisable that the drier should be used at the highestpressure as possible.

TECHNICAL DATA		DRY 100	FIL + DEP + PA + DRY 100
Threaded port		1/4" - 3/8"	
Max. inlet pressure		1.3 MPa / 13 bar /188 psi	
Suggested flow rate at 6.3 bar (0.63 MPa, 91 psi)	Nl/min	230	
	scfm	8	
Consumption of compressed air for regeneration at 6.3 bar	Nl/min	20	
	scfm	0.7	
Minimum temperature		2°C / 35°F	
Maximum temperature at 1MPa; 10 bar; 145 psi		50°C / 122°F	
Noise level	dB(A)	< 45	
Weight	kg	0.84	1.24
Wall fixing screws		M4 x 50	
Mounting position		In any position	Vertical
Drain		-	RMSA: drain with manual condensate discharge and automatic discharge at zero pressure
		-	SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs.**
Filter bowl and purification bowl capacity	cm^3	-	22
Fluid		Compressed air without condensate max solid particle size:1 µm max oil residue: 0.01mg/m^3	Compressed air
Important note		The drier must always be preceded by a 5 µm filter and a purifier	

COMPONENTS

① Body: painted anodized aluminium
② Diaphragm: poliester sulfone resin
③ Inner tube: salt-water resistant aluminium
④ O-Ring seals: NBR
⑤ Adapter: anodized aluminium
⑥ Flanges: brass
⑦ Skillair® body: technopolymer

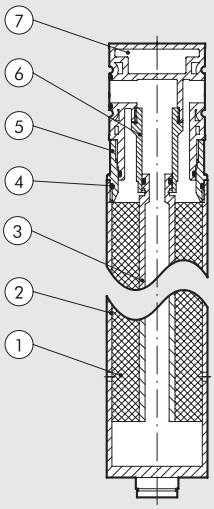

OPERATING PRINCIPLE

The drying element is comprised of cross-fibre diaphragms arranged around an inner tube. The compressed air passes through the tube (A) and flows back through the hollow diaphragms (B). At the same time, the regeneration air required for drying is tapped from the outlet port, expands as it passes through a nozzle (C), which reduces the relative humidity, and flows back along the outer side of the fibres. This allows moist compressed air to flow through the diaphragms and the dry regeneration air outside.
The difference in moisture content causes the water to pass from the compressed air to the regeneration air, which is drained through holes (D) at the bottom of the drier.

ADVANTAGES

- Drying is guaranteed as all the moisture is removed
- Minimum consumption of regeneration air
- Reduce drier maintenance as none of the components are subject to wear
- Environmentally friendly drying process.

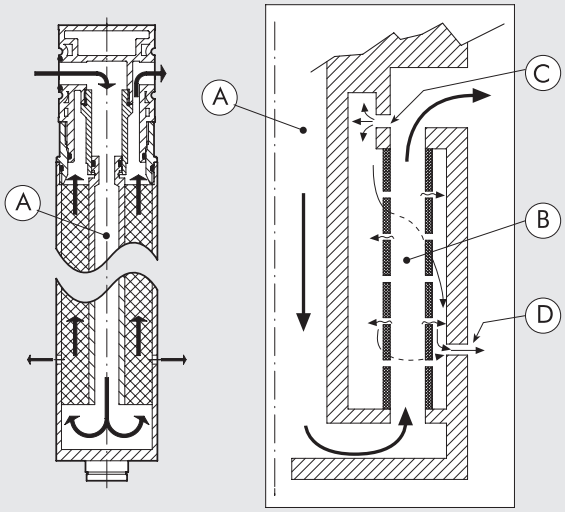

FLOW CHARTS

DRY 100

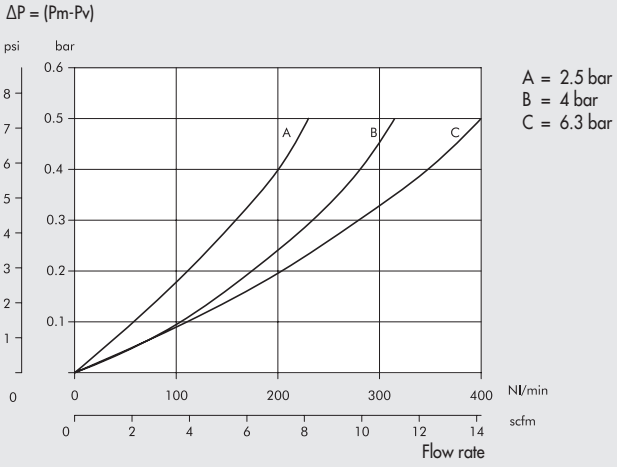

FIL (5 µm) + DEP + PA + DRY 100

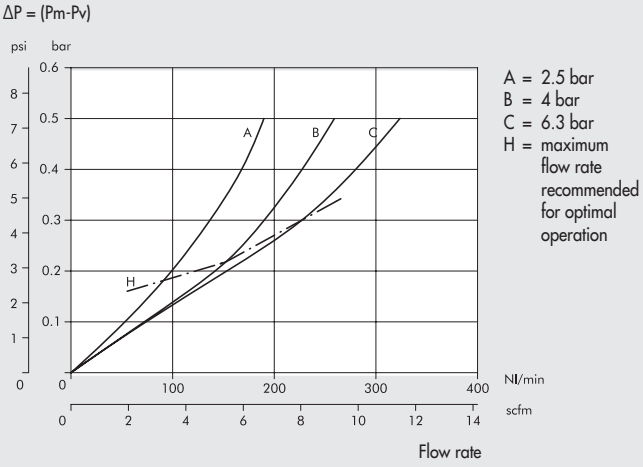

REGENERATION AIR

Thanks to the cross-fiber system, the flow rate loss is much lesser than in traditional linear-fibre systems.
In the diagram on the right is indicated the drop-in air flow according to the operating pressure.

N.B.: for the best drying efficiency the higest pressure possible is required, though this implies an increase of the regeneration air.

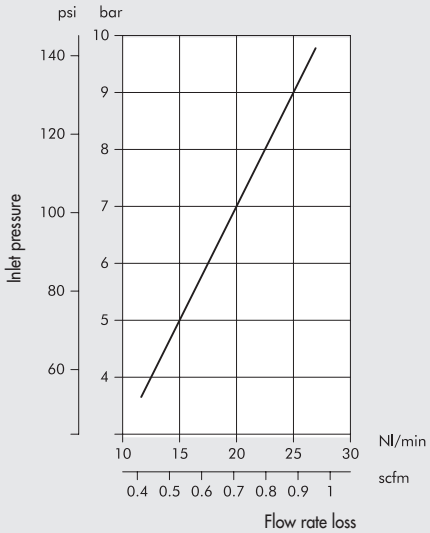

METAL WORK PNEUMATIC

DRYING

Dew point of the outgoing air in nominal reference conditions:
- Dew point referred to atmospheric pressure
- Incoming air with dew point at 25°C (i.e. saturated at 25°C)

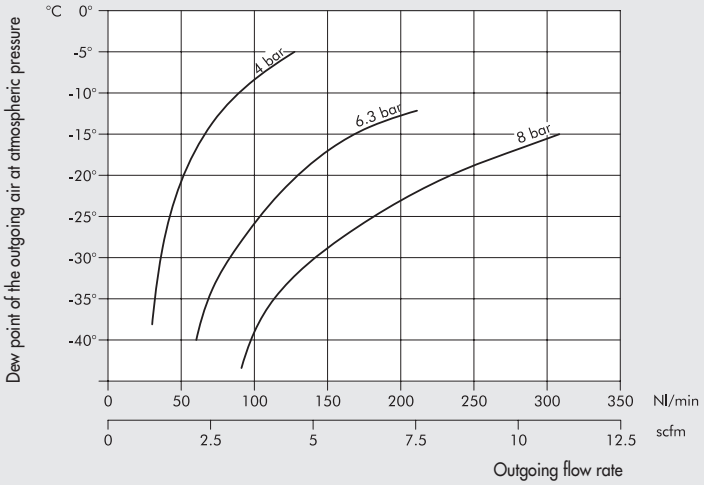

In the diagram below is indicated the dew point of the outgoing compressed air for various input air dew points, depending on the rate of flow of compressed air.

INLET PRESSURE: 4 bar

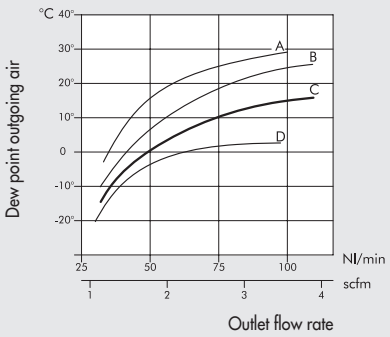

INLET PRESSURE: 6.3 bar

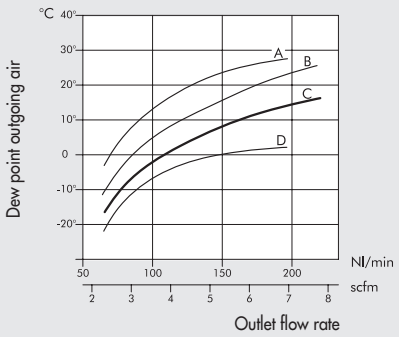

INLET PRESSURE: 8 bar

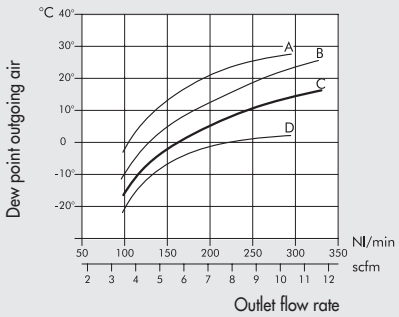

A: Incoming air with dew point at 45°C
B: Incoming air with dew point at 35°C
C: Incoming air with dew point at 25°C
D: Incoming air with dew point at 15°C

DRY 100 DIMENSIONS

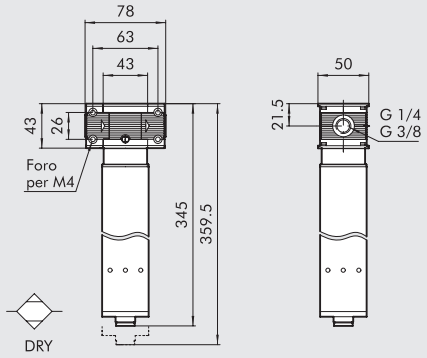

Code	Description
3290001A	DRY 100 without end plates
3290001	DRY 100 1/4"
3390001	DRY 100 3/8"

FIL + DEP + PA + DRY 100 DIMENSIONS

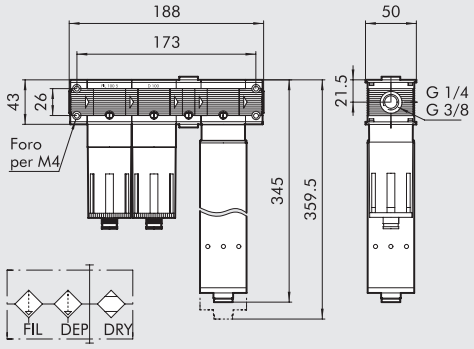

Code	Description
3291001	F+D+PA+DRY 100 1/4" RMSA-RMSA
3291005	F+D+PA+DRY 100 1/4" SAC-RMSA
3291006	F+D+PA+DRY 100 1/4" SAC-SAC
3391001	F+D+PA+DRY 100 3/8" RMSA-RMSA
3391005	F+D+PA+DRY 100 3/8" SAC-RMSA
3391006	F+D+PA+DRY 100 3/8" SAC-SAC

Skillair® REGULATOR

Each system served by the air supply mains (e.g. actuators and general appliances) requires its own constant operating pressure. It is necessary to use a regulator to regulate the pressure within a set range by means of regulating springs, with the pressure never exceeding the mains pressure.
The new Skillair® regulator uses a rolling diaphragm which gives a much better performance than the flat version.
Advantages of this system:

- Increased stroke, increased valve opening and hence higher flow rate.
- Decreased dynamic and inrush friction; prompter, more sensitive operation.
- Reduced working stress and hence longer life allowing the use of thinner diaphragms (0.45 mm versus 1.5 mm for a flat one) which increases regulator sensitivity and prompt action.
- Increased accuracy in maintaining the set pressure with both variable flow rates and different feed pressures.
- Downstream overpressures relieved quickly.

TECHNICAL DATA		REG 100		REG 200			REG 300			REG 400 PILOT OPERATED*			
Threaded port		1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
Setting range	bar	0 to 2 - 0 to 4 - 0 to 8 - 0 to 12								Depending on the pilot operated regulator			
Max. input pressure	MPa	1.5		1.5			1.3			1.3			1.3
	bar	15		15			13			13			13
	psi	217		217			188			188			188
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	1100		2500			3500			18000			20000
ΔP 0.5 bar (0.05 MPa to 7 psi)	scfm	39		88			124			363			707
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	1600		3500			7000			-			-
ΔP 1 bar (0.1 MPa to 14 psi)	scfm	57		124			247			-			-
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50		50			50			50			50
	°F	122		122			122			122			122
Weight	kg	0.4		0.7			1.4			4.8			5.6
Wall fixing screws		M4 x 50		M5 x 60			M5 x 70			M6 x 110			M6 x 110
Pressure gauge port		1/8″		1/8″			1/8″			1/4″			1/4″
Mounting position		In any position											
Fluid		Filtered lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.											
Notes on use		The regulator pressure must always be set upwards.											
		For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value.											
		Do not take air from pressure gauge ports.											
		***Supplied without a pilot regulator.**											

COMPONENTS REG 100 - 200 - 300

① Technopolymer body
② Zamak end plate
③ Technopolymer knob
④ Technopolymer bell
⑤ OT58 brass adjusting screw
⑥ OT58 brass scroll
⑦ Steel adjusting spring
⑧ Technopolymer ring nut
⑨ Rolling diaphragm
⑩ NBR relieving gaskets
⑪ OT58 brass stem
⑫ Valve with NBR vulcanized gasket
⑬ Stainless steel valve spring
⑭ Technopolymer plug
⑮ NBR gaskets

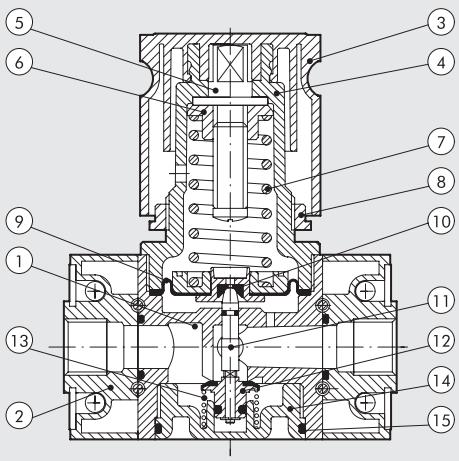

METAL WORK PNEUMATIC

COMPONENTS REG 400 PILOT OPERATED

① Aluminium body
② Aluminium end plate
③ Anodized aluminium threaded bush, axial adjustment
④ OT58 brass retaining ring
⑤ Rolling diaphragm
⑥ Anodized aluminium plug
⑦ Stainless steel valve spring
⑧ OT58 brass stem with air relief hole
⑨ Valve with NBR vulcanized gasket
⑩ NBR gaskets

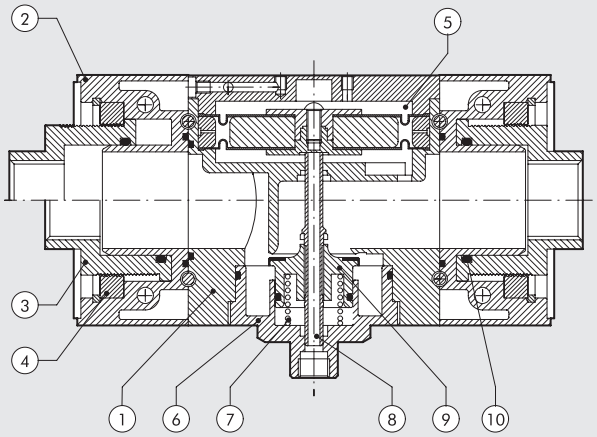

FLOW CHARTS

REG 100 1/4 - 3/8

Preset pressure
Pm = 7 bar - 0.7 MPa - 100 psi

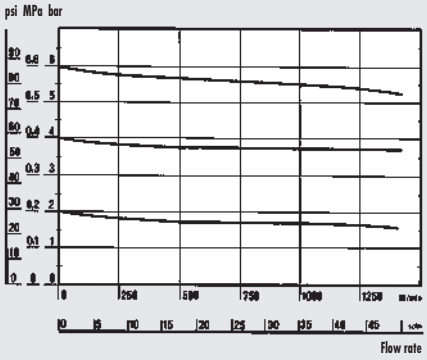

REG 200 1/4 - 3/8 - 1/2

Preset pressure
Pm = 7 bar - 0.7 MPa - 100 psi

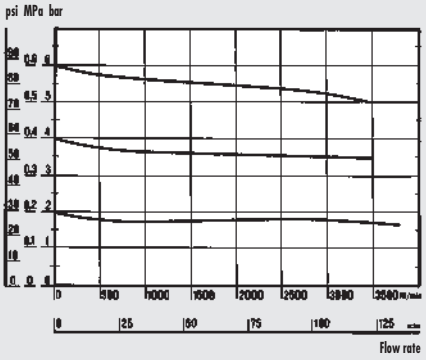

REG 300 1/2 - 3/4 - 1

Preset pressure
Pm = 7 bar - 0.7 MPa - 100 psi

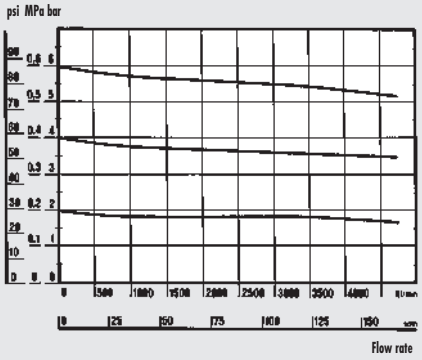

REG 400 1″

Preset pressure
Pm = 7 bar - 0.7 MPa - 100 psi

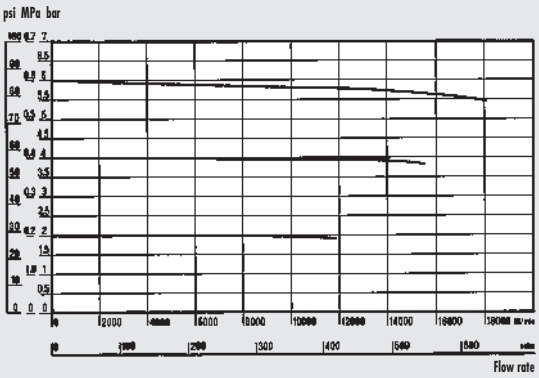

REG 400 2″

Preset pressure
Pm = 7 bar - 0.7 MPa - 100 psi

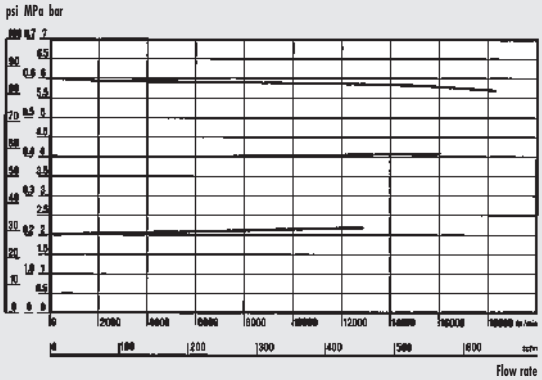

Department of Mechanics
Turin Polytechnic

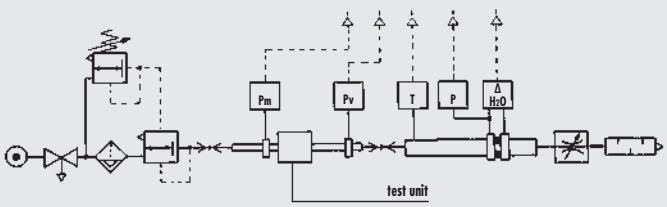

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

DIMENSIONS

100 - 200 - 300

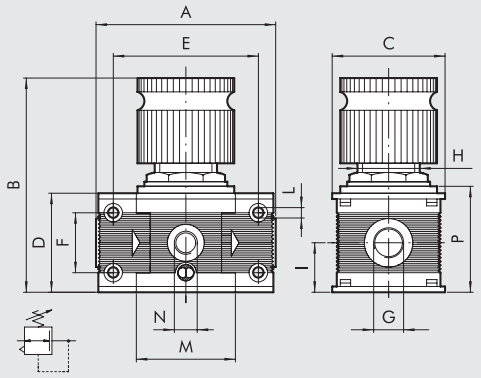

400

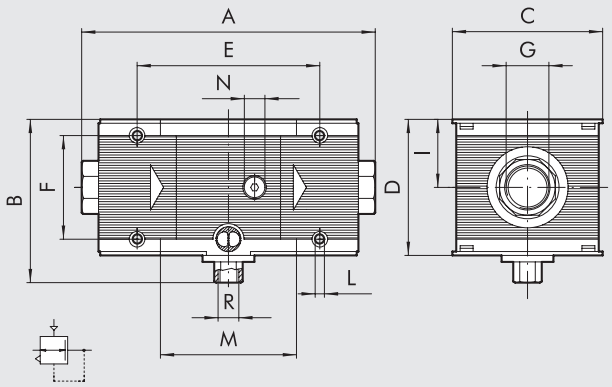

	REG 100		REG 200			REG 300			REG 400			
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
A	78		93.5			110		112	225 to 255			283 to 313
B	98		125			148			127			
C	50		63			72			118			
D	43		55			65			105			
E	63		78.5			92			141.4			
F	26		36			42			80			
H	30 x 1.5		40 x 1.5			48 x 1.5			-			
I	21.5		27.5			32.5			52.5			
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
M	43		55.5			65			105.4			
N (pressure gauge port)	1/8″		1/8″			1/8″			1/4″			
P	46		58			69			-			
R (relief)	-		-			-			1/4″			

INSTRUCTIONS FOR USE REG 400

①

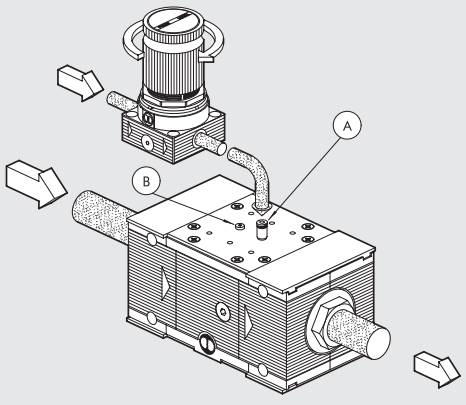

REMOTE PILOT

- Fit the A7 M5 plug into the threaded hole Ⓑ (close to the entrance).
- Fit the M5 fitting into the threaded hole Ⓐ as close to the entrance as possible.
- Connect the downstream circuit of the selected pilot operated regulator to the input Ⓐ (R1 fitting).
- Set the required pressure on the pilot operated regulator.

②

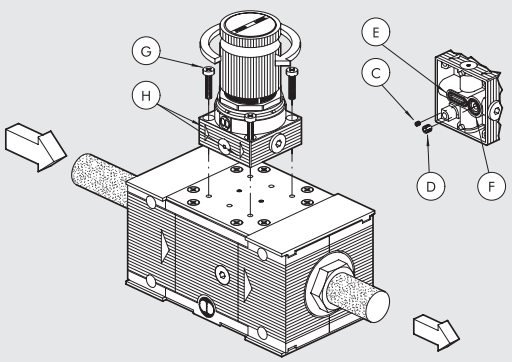

DIRECT PILOT WITH Skillair® PILOT OPERATED REGULATOR

- Remove the pins Ⓒ and Ⓓ under the pilot operated regulator.
- Check that the two gaskets Ⓔ and Ⓕ under the pilot are in place.
- Fix the pilot operated regulator to the base of the regulator using the self-threading screws Ⓖ. Make sure the arrows Ⓗ point in the same direction as the arrows in relief under the base of the regulator.

INSTRUCTIONS FOR USE REG 400

③

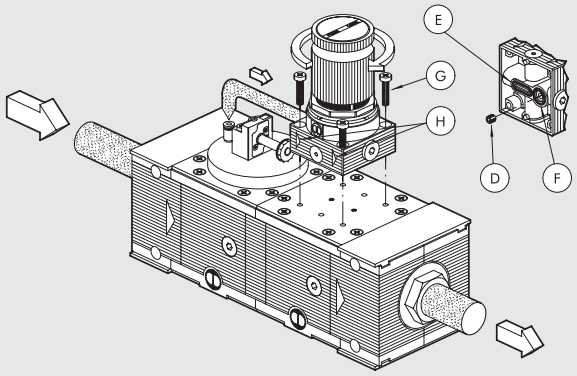

PILOT REGULATOR FOLLOW-UP LINK

This is used when the regulator is mounted downstream of a V3V valve or an APR.
The air can be bled from the V3V or APR valves instead of from the regulator relieving system.

- Remove only the stud pin marked with a letter Ⓓ under the pilot regulator.
- Check the two gaskets under the pilot marked Ⓔ and Ⓕ.
- Secure the pilot regulator to the regulator base with the self-tapping screws marked with a letter Ⓖ. Making sure the arrows marked Ⓗ point in the same direction as the arrows in relief under the regulator base.
- Remove the A7 M5 plug from the V3V or APR plate and remount the fitting.
- Connect the pilot regulator supply to the fitting.

SYNOPTIC, SIZES AND VERSIONS

REG	100	1/4	02
ELEMENT	SIZE	THREADED PORT	SETTING RANGE
REG	100	1/4	02 = 0 to 2 bar
		3/8	04 = 0 to 4 bar
	200	1/4	08 = 0 to 8 bar
		3/8	012 = 0 to 12 bar
		1/2	
	300	1/2	
		3/4	
		1	
	400	1	Depending on the pilot used
		1 1/4	
		1 1/2	
		2	

The pilot operated regulator is necessary for size 400. See page **C3**.27

ORDERING CODES

Code	Description
Skillair® 100 REGULATOR	
3202001A	REG 100 02 without end plates
3202002A	REG 100 04 without end plates
3202003A	REG 100 08 without end plates
3202004A	REG 100 012 without end plates
3202001	REG 100 1/4 02
3202002	REG 100 1/4 04
3202003	REG 100 1/4 08
3202004	REG 100 1/4 012
3302001	REG 100 3/8 02
3302002	REG 100 3/8 04
3302003	REG 100 3/8 08
3302004	REG 100 3/8 012

Code	Description
Skillair® 200 REGULATOR	
3402001A	REG 200 02 without end plates
3402002A	REG 200 04 without end plates
3402003A	REG 200 08 without end plates
3402004A	REG 200 012 without end plates
3402001	REG 200 1/4 02
3402002	REG 200 1/4 04
3402003	REG 200 1/4 08
3402004	REG 200 1/4 012
3502001	REG 200 3/8 02
3502002	REG 200 3/8 04
3502003	REG 200 3/8 08
3502004	REG 200 3/8 012
3602001	REG 200 1/2 02
3602002	REG 200 1/2 04
3602003	REG 200 1/2 08
3602004	REG 200 1/2 012

Code	Description
Skillair® 300 REGULATOR	
4402000A	REG 300 02 without end plates
4402001A	REG 300 04 without end plates
4402002A	REG 300 08 without end plates
4402003A	REG 300 012 without end plates
4402000	REG 300 1/2 02
4402001	REG 300 1/2 04
4402002	REG 300 1/2 08
4402003	REG 300 1/2 012
4502000	REG 300 3/4 02
4502001	REG 300 3/4 04
4502002	REG 300 3/4 08
4502003	REG 300 3/4 012
4602000	REG 300 1 02
4602001	REG 300 1 04
4602002	REG 300 1 08
4602003	REG 300 1 012
Skillair® 400 REGULATOR	
6102001A	REG 400 without end plates
6102001	REG 400 1
6202001	REG 400 1 1/4
6302001	REG 400 1 1/2
6402001	REG 400 2

Skillair® 100 IN-SERIES REGULATOR

TECHNICAL DATA

Threaded inlet port		1/4″ - 3/8″
Threaded user port		G 1/8″
Degree of purification	bar	0 to 2 - 0 to 4 - 0 to 8 - 0 to 12
Max. input pressure		1.5 MPa - 15 bar - 217 psi
Flow rate at 6.3 bar (0.63 MPa to 91 psi)		500 Nl/min
ΔP 0.5 bar (0.05 MPa to 7 psi)		18 scfm
Flow rate at 6.3 bar (0.63 MPa to 91 psi)		950 Nl/min
ΔP 1 bar (0.1 MPa to 14 psi)		34 scfm
Fluid		Filtered, lubricated or unlubricated compressed air. Lubrication, if used, must be continuous
Max temperature	°C	50
at 1 MPa; 10 bar; 145 psi	°F	122
Weight	kg	0.4
Wall fixing screws		M4x50
Mounting position		In any position
Pressure gauge port		G 1/8″
Notes on use		The regulator pressure must always be set upwards. For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value.

DIMENSIONS

	REG 100	REG 100
Threaded port	1/4″	3/8″
A	78	
B	98	
C	50	
D	43	
E	63	
F	26	
G	1/4″	3/8″
H	30 x 1.5	
I	21.5	
L	Hole for M4 screws	
M	43	
N (use)	1/8″	
P	46	

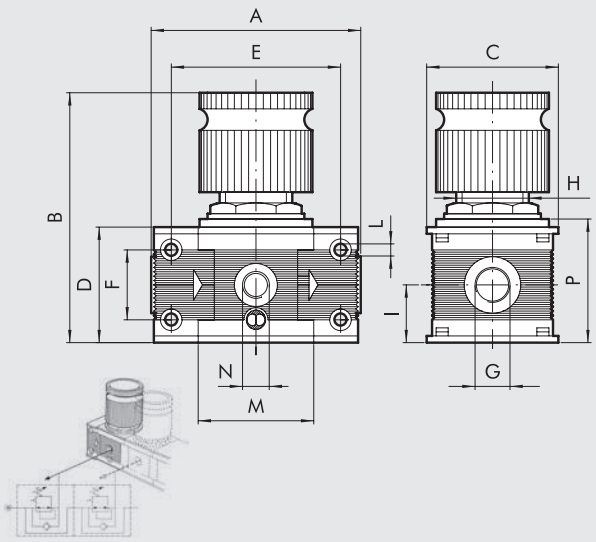

ORDERING CODES

Code	Description
100 IN-SERIES REGULATOR	
3202101A	100 IN-SERIES REG. 0-2 without end plates
3202102A	100 IN-SERIES REG. 0-4 without end plates
3202103A	100 IN-SERIES REG. 0-8 without end plates
3202104A	100 IN-SERIES REG. 0-12 without end plates
3202101	100 IN-SERIES REG. 1/4 0-2
3202102	100 IN-SERIES REG. 1/4 0-4
3202103	100 IN-SERIES REG. 1/4 0-8
3202104	100 IN-SERIES REG. 1/4 0-12
3302101	100 IN-SERIES REG. 3/8 0-2
3302102	100 IN-SERIES REG. 3/8 0-4
3302103	100 IN-SERIES REG. 3/8 0-8
3302104	100 IN-SERIES REG. 3/8 0-12

Several of these Skillair® regulators can be mounted in series, all fed by the same pressure. They can give different set pressures, each independent of the previous regulator.
Operating compressed air can be taken from the pressure gauge ports (G 1/8″).

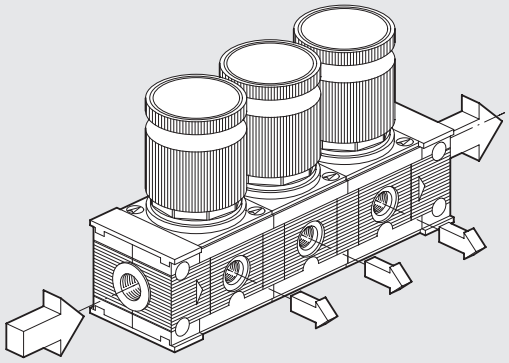

Skillair® PADLOCKABLE REGULATOR

The padlockable regulator has a pin with a hole in it that projects from the top of the knob. When the knob is in the push-lock position, the padlock can be inserted in the hole, preventing the knob from being operated. A padlock and two keys are supplied with the regulator.
The new Skillair® regulator uses a rolling diaphragm which gives a much better performance than the flat version.
Advantages of this system:

- Increased stroke, increased valve opening and hence higher flow rate.
- Decreased dynamic and inrush friction; prompter, more sensitive operation.
- Reduced working stress and hence longer life allowing the use of thinner diaphragms (0.45 mm versus 1.5 mm for a flat one) which increases regulator sensitivity and prompt action.
- Increased accuracy in maintaining the set pressure with both variable flow rates and different feed pressures.
- Downstream overpressures relieved quickly.

Refer to the regulator for technical data and flow curves.

COMPONENTS

① Technopolymer body
② Zamak end plate
③ Technopolymer knob
④ Technopolymer bell
⑤ Nickel-plated OT58 brass adjusting screw
⑥ OT58 brass scroll
⑦ Steel adjusting spring
⑧ Technopolymer ring nut
⑨ Rolling diaphragm
⑩ NBR relieving gaskets
⑪ OT58 brass stem
⑫ Valve with NBR vulcanized gasket
⑬ Stainless steel valve spring
⑭ Technopolymer plug
⑮ NBR gaskets
⑯ Padlock

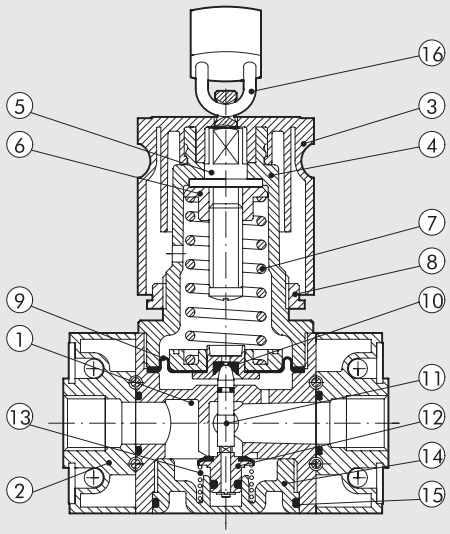

DIMENSIONS

	REG 100 KEY		REG 200 KEY			REG 300 KEY		
Threaded port G	1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"
A	78		93.5			110		112
B	95 to 98		123 to 125			145 to 148		
C	50		63			72		
D	43		55			65		
E	63		78.5			92		
F	26		36			42		
H	30 x 1.5		40 x 1.5			48 x 1.5		
I	21.5		27.5			32.5		
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws		
M	43		55.5			65		
N	101		127			151		
O (pressure gauge port)	1/8"		1/8"			1/8"		
P	46		58			69		

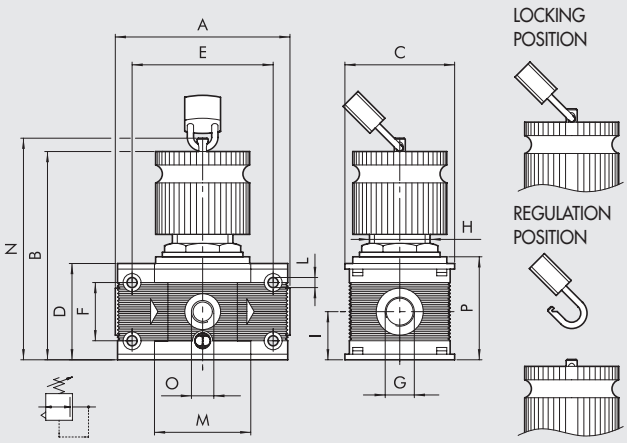

SYNOPTIC, SIZES AND VERSIONS

REG	100	KEY	1/4	02
ELEMENT	SIZE	TYPE	THREADED PORT	SETTING RANGE
REG = Regulator	100	KEY = Padlockable	1/4	02 = 0 to 2 bar
	200		3/8	04 = 0 to 4 bar
			1/4	08 = 0 to 8 bar
	300		3/8	012 = 0 to 12 bar
			1/2	
			1/2	
			3/4	
			1	

ORDERING CODES

Code	Description
Skillair® 100 PADLOCKABLE REGULATOR	
3210001A	REG 100 KEY 02 without end plates
3210002A	REG 100 KEY 04 without end plates
3210003A	REG 100 KEY 08 without end plates
3210004A	REG 100 KEY 012 without end plates
3210001	REG 100 KEY 1/4 02
3210002	REG 100 KEY 1/4 04
3210003	REG 100 KEY 1/4 08
3210004	REG 100 KEY 1/4 012
3310001	REG 100 KEY 3/8 02
3310002	REG 100 KEY 3/8 04
3310003	REG 100 KEY 3/8 08
3310004	REG 100 KEY 3/8 012

Code	Description
Skillair® 200 PADLOCKABLE REGULATOR	
3410001A	REG 200 KEY 02 without end plates
3410002A	REG 200 KEY 04 without end plates
3410003A	REG 200 KEY 08 without end plates
3410004A	REG 200 KEY 012 without end plates
3410001	REG 200 KEY 1/4 02
3410002	REG 200 KEY 1/4 04
3410003	REG 200 KEY 1/4 08
3410004	REG 200 KEY 1/4 012
3510001	REG 200 KEY 3/8 02
3510002	REG 200 KEY 3/8 04
3510003	REG 200 KEY 3/8 08
3510004	REG 200 KEY 3/8 012
3610001	REG 200 KEY 1/2 02
3610002	REG 200 KEY 1/2 04
3610003	REG 200 KEY 1/2 08
3610004	REG 200 KEY 1/2 012

Code	Description
Skillair® 300 PADLOCKABLE REGULATOR	
4410000A	REG 300 KEY 02 without end plates
4410001A	REG 300 KEY 04 without end plates
4410002A	REG 300 KEY 08 without end plates
4410003A	REG 300 KEY 012 without end plates
4410000	REG 300 KEY 1/2 02
4410001	REG 300 KEY 1/2 04
4410002	REG 300 KEY 1/2 08
4410003	REG 300 KEY 1/2 012
4510000	REG 300 KEY 3/4 02
4510001	REG 300 KEY 3/4 04
4510002	REG 300 KEY 3/4 08
4510003	REG 300 KEY 3/4 012
4610000	REG 300 KEY 1 02
4610001	REG 300 KEY 1 04
4610002	REG 300 KEY 1 08
4610003	REG 300 KEY 1 012

Skillair® PILOT REGULATOR

The pilot regulator is used when great accuracy is required in maintaining the set pressure under changing operating conditions.
It is ideal for use as:
• a precision regulator for flow rates < 100 Nl/min.
• a pilot in general - typically for large size regulators (see REG 400).
The system's high operating accuracy and low hysteresis are determined by the virtually total lack of friction.
The presence of a slight air leak is necessary for the regulator to operate properly - it is not a malfunction. It is advisable to use filtered air.

TECHNICAL DATA		PILOT REGULATOR
Threaded port		1/4"
Setting range	bar	0 to 2 - 0 to 4 - 0 to 8 - 0 to 12
Max. input pressure	MPa	1.3
	bar	13
	psi	188
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)		120 Nl/min - 4.3 scfm
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)		140 Nl/min - 5 scfm
Fluid		Filtered, lubricated or unlubricated compressed air.
		Lubrication, if used, must be continuous.
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50
	°F	122
Weight	kg	0.6
Mounting position		In any position
Pressure gauge port		G 1/8"
Notes on use		The regulator pressure must always be set upwards.
		For increased sensitivity, use a pressure regulator with a rated pressure
		as close as possible to the required value.
		Do not take air from the pressure gauge ports. Mount directly on REG 400.

COMPONENTS

① Aluminium body
② Technopolymer knob
③ OT58 brass adjusting screw
④ OT58 brass scroll
⑤ Technopolymer bell
⑥ Technopolymer ring nut
⑦ Steel adjusting spring
⑧ Rolling diaphragm
⑨ NBR relieving gaskets
⑩ OT58 brass stem
⑪ Stainless steel ball valve
⑫ Stainless steel valve spring
⑬ NBR gaskets

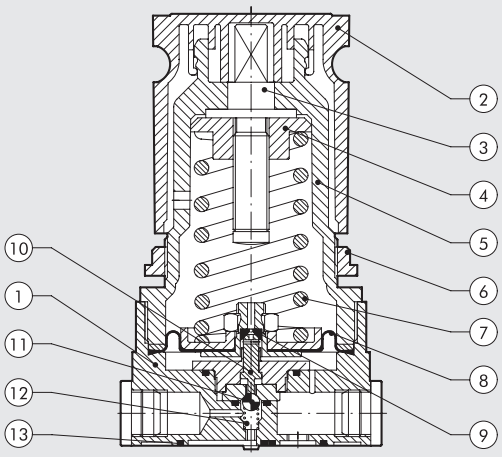

FLOW CHARTS

FLOW FEATURES REG. P 1/4"

Preset pressure
Pm = 7 bar - 0.7 MPa - 100 psi

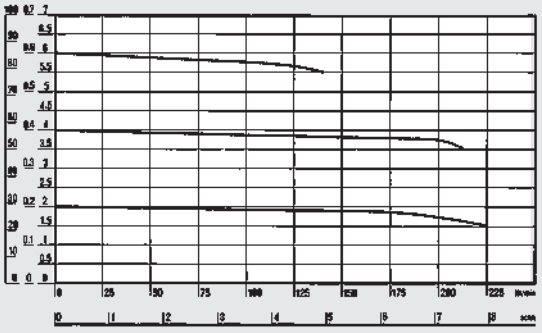

REGULATION FEATURES REG. P 1/4" *

Flow rate: A = 0 Nl/min = 0 scfm -
B = 25 Nl/min = 0.88 scfm - C = 50 Nl/min = 1.76 scfm

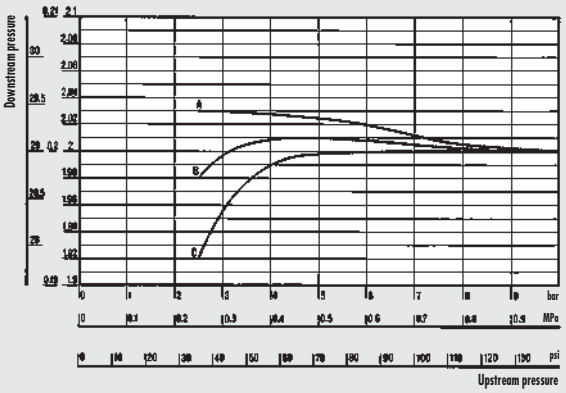

REGULATION FEATURES REG. P 1/4" *

Flow rate: A = 0 Nl/min = 0 scfm
B = 25 Nl/min = 0.88 scfm - C = 50 Nl/min = 1.76 scfm

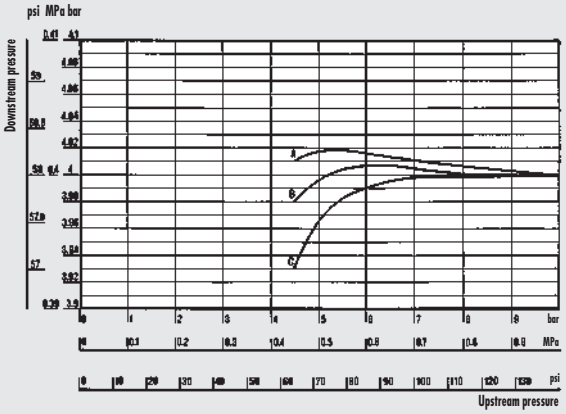

REGULATION FEATURES REG. P 1/4" *

Flow rate: A = 0 Nl/min = 0 scfm
B = 25 Nl/min = 0.88 scfm - C = 50 Nl/min = 1.76 scfm

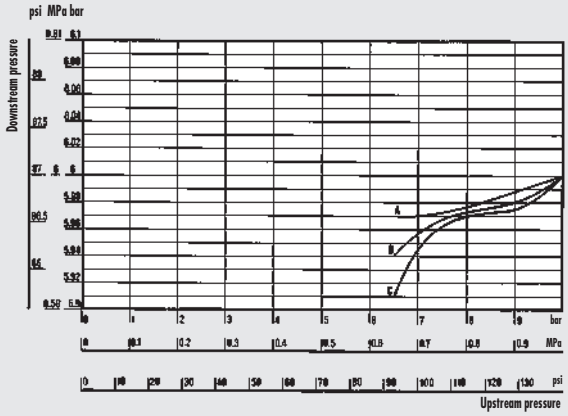

Department of Mechanics
Turin Polytechnic

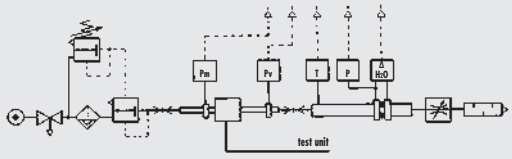

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

* Pressure stability adjusted according to changes in upstream pressure.

DIMENSIONS

Code	Description
3206001	REG. P 1/4" 02
3206002	REG. P 1/4" 04
3206003	REG. P 1/4" 08
3206004	REG. P 1/4" 012

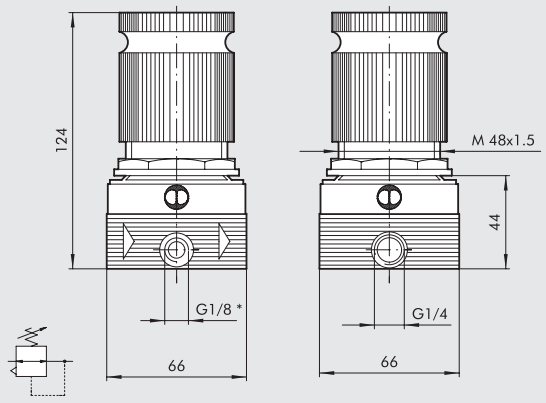

*Pressure gauge port

Skillair®
PILOT PADLOCKABLE REGULATOR

METAL WORK PNEUMATIC

The pilot regulator is used when great accuracy is required in maintaining the set pressure under changing operating conditions.
It is ideal for use as:
• a precision regulator for flow rates < 100 Nl/min.
• a pilot in general - typically for large size regulators (see REG 400).
The system's high operating accuracy and low hysteresis are determined by the virtually total lack of friction. The presence of a slight air leak is necessary for the regulator to operate properly - it is not a malfunction.
It is advisable to use filtered air.
The pilot padlockable regulator has a pin with a hole in it that projects from the top of the knob. When the knob is in the push-lock position, the padlock can be inserted in the hole, preventing the knob from being operated.
A padlock and two keys are supplied with the regulator.

Refer to the pilot regulator for technical data and flow curves.

COMPONENTS

① Aluminium body
② Technopolymer knob
③ Nickel-plated brass OT58 adjusting screw
④ OT58 brass scroll
⑤ Technopolymer bell
⑥ Technopolymer ring nut
⑦ Steel adjusting spring
⑧ Rolling diaphragm
⑨ NBR relieving gaskets
⑩ OT58 brass stem
⑪ Stainless steel ball valve
⑫ Stainless steel valve spring
⑬ NBR gaskets
⑭ Padlock

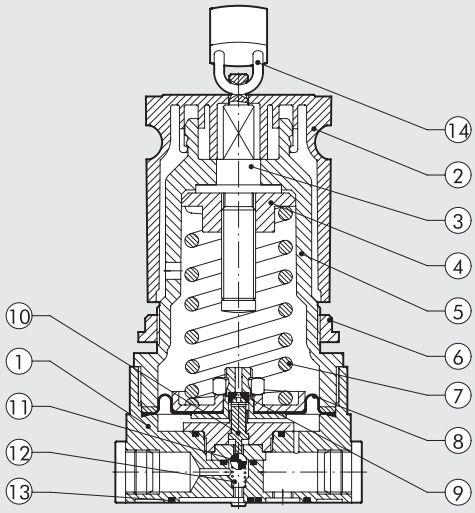

DIMENSIONS

Code	Description
3208001	REG. P KEY 1/4" 02
3208002	REG. P KEY 1/4" 04
3208003	REG. P KEY 1/4" 08
3208004	REG. P KEY 1/4" 012

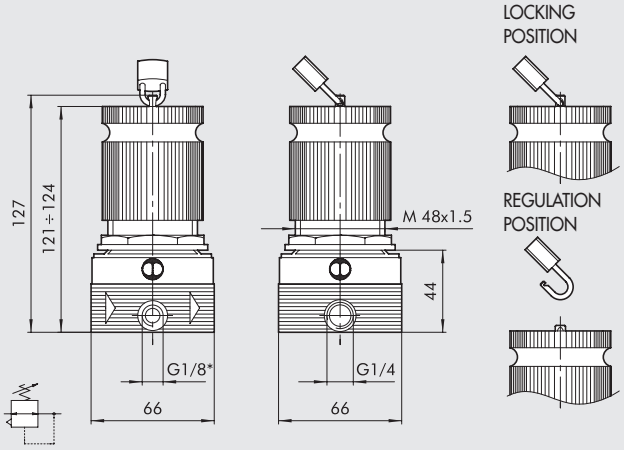

*Pressure gauge port

Skillair® 300 PILOT OPERATED REGULATOR

- Pilot-operated or servo-piloted regulator.
- Twin rolling diaphragm to ensure improved opening and hence greater flow rate.
- Low load losses
- Excellent precision in pressure setting.
- Excellent sensitivity during relieving.

TECHNICAL DATA		300 PILOT OPERATED REG		
Threaded port		1/2″	3/4″	1″
Setting range		Depending on the pilot regulator		
Max. input pressure	MPa	1.3		
	bar	13		
	psi	188		
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	4500		
	scfm	160		
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	7000		
	scfm	247		
Fluid		Filtered, lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.		
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50		
	°F	122		
Weight	kg	1.3		
Wall fixing screws		M5 x 70		
Mounting position		In any position		
Pressure gauge port		1/8″		
Notes on use		The regulator pressure must always be set upwards. **Do not take air from the pressure gauge ports.**		

DIMENSIONS

	REG 300		
Threaded port G	1/2″	3/4″	1″
A	110	110	112

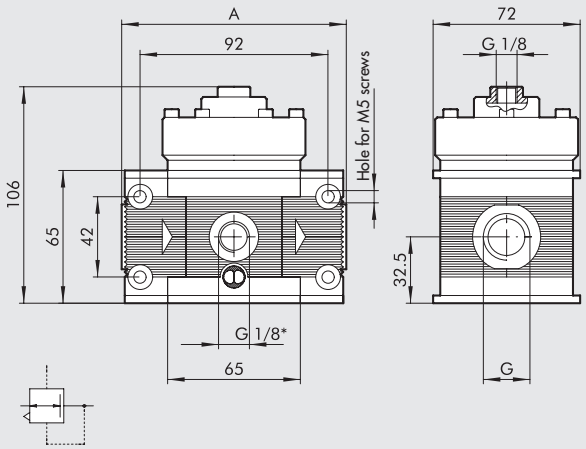

*Pressure gauge port

ORDERING CODES

Code	Description
4403003A	300 pilot operated reg without end plates
4403003	300 1/2" pilot operated reg
4503003	300 3/4" pilot operated reg
4603003	300 1" pilot operated reg

Skillair® FILTER REGULATOR

METAL WORK PNEUMATIC

This device combines a filter and a pressure regulator in a single unit.
It has the dual function of filtering and regulating air from the compressor.
As the filter regulator is made up of the same elements as the regulator and the filter, the performance is the same.

- High flow rates with low load loss.
- Special rolling diaphragm - higher flow rate, greater stability, improved sensitivity.
- Rapid relief of downstream overpressures.
- Stability of the regulated pressure as the mains pressure fluctuates.
- Maximum degree of condensate separation.
- 360° condensate level display.
- Condensate drain with manual/semi-automatic or automatic function.

TECHNICAL DATA		FR 100	FR 200	FR 300
Threaded port		1/4" | 3/8"	1/4" | 3/8" | 1/2"	1/2" | 3/4" | 1"
Setting range	bar	0 to 2 - 0 to 4 - 0 to 8 - 0 to 12	0 to 2 - 0 to 4 - 0 to 8 - 0 to 12	0 to 2 - 0 to 4 - 0 to 8 - 0 to 12
Degree of filtration	µm	5 - 20 - 50	5 - 20 - 50	5 - 20 - 50
Max. input pressure		1.5 MPa - 15 bar - 217 psi	1.3 MPa - 13 bar - 188 psi	1.3 MPa - 13 bar - 188 psi
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	1100	1600	3500
ΔP 0.5 bar (0.05 MPa to 7psi)	scfm	39	57	125
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	1600	3000	5600
ΔP 1 bar (0.1 MPa to 14 psi)	scfm	57	71	200
Max temperature	°C	50	50	50
at: 1 MPa; 10 bar; 145 psi	°F	122	122	122
Weight	kg	0.5	1	1.8
Wall fixing screws		M4 x 50	M5 x 60	M5 x 70
Mounting position		Vertical	Vertical	Vertical
Pressure gauge port		1/8"	1/8"	1/8"
Bowl capacity	cm^3	22	45	75
Drain		RMSA - SAC	RMSA - SAC - RA	RMSA - RA
		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure		
		RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.		
		SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs.**		
Fluid		Filtered, lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.		
Notes on use		The regulator pressure must always be set upwards. For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value. **Do not take air from pressure gauge ports.**		
		The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.		

COMPONENTS

① Technopolymer body
② Technopolymer knob
③ OT58 brass adjusting screw
④ OT58 brass scroll
⑤ Technopolymer bell
⑥ Steel adjusting spring
⑦ Technopolymer ring nut
⑧ Rolling diaphragm
⑨ NBR relieving gaskets
⑩ OT58 brass stem
⑪ Valve with NBR vulcanized gasket
⑫ Stainless steel valve spring
⑬ Technopolymer centrifuge
⑭ Technopolymer baffle plug
⑮ Technopolymer screen
⑯ Sintered HDPE filter cartridge
⑰ Clear technopolymer glass
⑱ Bowl: technopolymer for FR100 and FR200, metal for FR 300
⑲ Drain (RMSA)
⑳ Zamak end plate
㉑ NBR gaskets

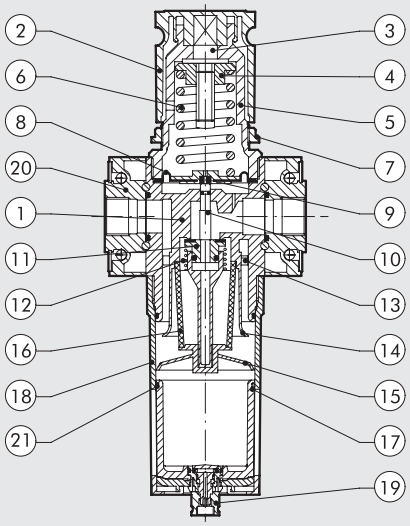

FLOW CHARTS

FR 100 1/4 - 3/8

Preset pressure
Pm = 7 bar - 0.7 MPa - 100 psi

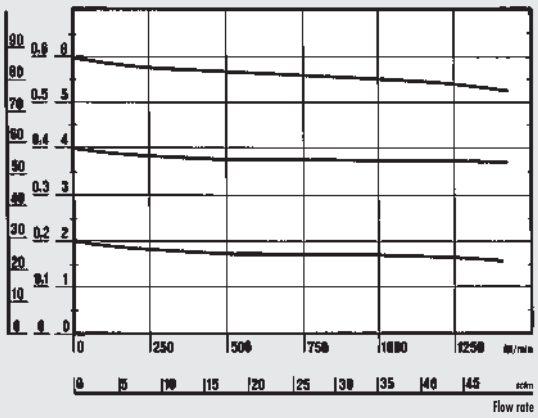

Department of Mechanics
Turin Polytechnic

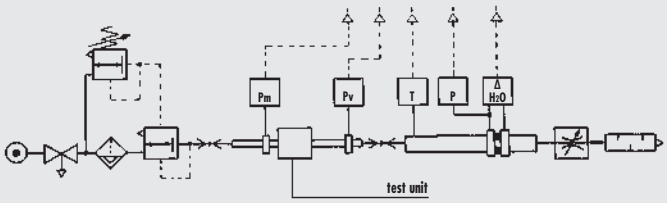

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

FR 200 1/4 - 3/8 - 1/2

Preset pressure
Pm = 7 bar - 0.7 MPa - 100 psi

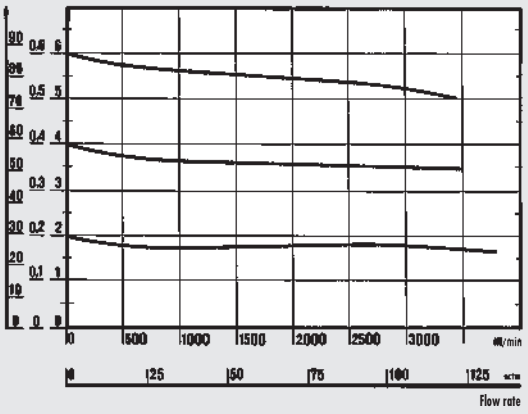

FR 300 1/2 - 3/4 - 1

Preset pressure
Pm = 7 bar - 0.7 MPa - 100 psi

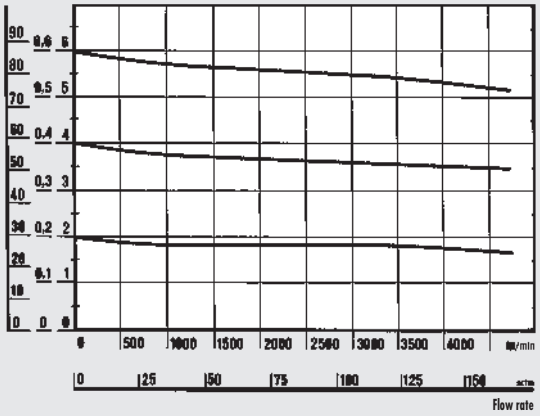

DIMENSIONS

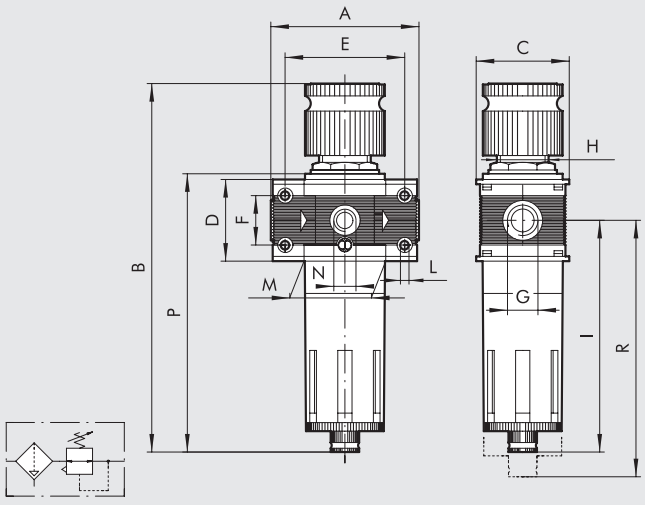

		FR 100		FR 200			FR 300		
Threaded port G		1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"
A		78		93.5			110		112
B	RMSA	199		245			278		
	RA	-		249			282		
	SAC	203		249			282		
C		50		63			72		
D		43		55			65		
E		63		78.5			92		
F		26		36			42		
H		30 x 1.5		40x1.5			48 x 1.5		
I		122.5		147.5			162.5		
L		Hole for M4 screws		Hole for M5 screws			Hole for M5 screws		
M		43		55.5			65		
N (pressure gauge port)		1/8"		1/8"			1/8"		
P	RMSA	147		178			200		
	RA	-		182			204		
	SAC	151		182			204		
R	RMSA	137		196			215		
	RA	-		200			219		
	SAC	141		200			219		

METAL WORK PNEUMATIC

SYNOPTIC, SIZES AND VERSIONS

FR	100	1/4	5	02	RMSA
ELEMENT	SIZE	THREADED PORT	DEGREE OF FILTRATION	SETTING RANGE	TYPE OF DRAIN
FR	100	1/4	5 = 5 µm	02 = 0 to 2 bar	RMSA
		3/8	20 = 20 µm	04 = 0 to 4 bar	SAC
	200	1/4	50 = 50 µm	08 = 0 to 8 bar	RMSA
		3/8		012 = 0 to 12 bar	SAC
		1/2			RA*
	300	1/2			RMSA
		3/4			RA
		1			

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.
RA: automatic drain with condensate discharge, independent of pressure and flow rate. (for size 300 and 400).
Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.
SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.
(for size 100 and 200)
* For Skillair® 200 with RA, please contact our sales assistance department.

ORDERING CODES

Code	Description
Skillair® 100 FILTER REGULATOR	
3283007A	FR 100 5 08 RMSA without end plates
3283008A	FR 100 20 08 RMSA without end plates
3283009A	FR 100 50 08 RMSA without end plates
3283010A	FR 100 5 012 RMSA without end plates
3283011A	FR 100 20 012 RMSA without end plates
3283012A	FR 100 50 012 RMSA without end plates
3283031A	FR 100 5 08 SAC without end plates
3283032A	FR 100 20 08 SAC without end plates
3283033A	FR 100 50 08 SAC without end plates
3283034A	FR 100 5 012 SAC without end plates
3283035A	FR 100 20 012 SAC without end plates
3283036A	FR 100 50 012 SAC without end plates
3283007	FR 100 1/4 5 08 RMSA
3283008	FR 100 1/4 20 08 RMSA
3283009	FR 100 1/4 50 08 RMSA
3283010	FR 100 1/4 5 012 RMSA
3283011	FR 100 1/4 20 012 RMSA
3283012	FR 100 1/4 50 012 RMSA
3283031	FR 100 1/4 5 08 SAC
3283032	FR 100 1/4 20 08 SAC
3283033	FR 100 1/4 50 08 SAC
3283034	FR 100 1/4 5 012 SAC
3283035	FR 100 1/4 20 012 SAC
3283036	FR 100 1/4 50 012 SAC
3383007	FR 100 3/8 5 08 RMSA
3383008	FR 100 3/8 20 08 RMSA
3383009	FR 100 3/8 50 08 RMSA
3383010	FR 100 3/8 5 012 RMSA
3383011	FR 100 3/8 20 012 RMSA
3383012	FR 100 3/8 50 012 RMSA
3383031	FR 100 3/8 5 08 SAC
3383032	FR 100 3/8 20 08 SAC
3383033	FR 100 3/8 50 08 SAC
3383034	FR 100 3/8 5 012 SAC
3383035	FR 100 3/8 20 012 SAC
3383036	FR 100 3/8 50 012 SAC

Code	Description
Skillair® 200 FILTER REGULATOR	
3483007A	FR 200 5 08 RMSA without end plates
3483008A	FR 200 20 08 RMSA without end plates
3483009A	FR 200 50 08 RMSA without end plates
3483010A	FR 200 5 012 RMSA without end plates
3483011A	FR 200 20 012 RMSA without end plates
3483012A	FR 200 50 012 RMSA without end plates
3483031A	FR 200 5 08 SAC without end plates
3483032A	FR 200 20 08 SAC without end plates
3483033A	FR 200 50 08 SAC without end plates
3483034A	FR 200 5 012 SAC without end plates
3483035A	FR 200 20 012 SAC without end plates
3483036A	FR 200 50 012 SAC without end plates
3483007	FR 200 1/4 5 08 RMSA
3483008	FR 200 1/4 20 08 RMSA
3483009	FR 200 1/4 50 08 RMSA
3483010	FR 200 1/4 5 012 RMSA
3483011	FR 200 1/4 20 012 RMSA
3483012	FR 200 1/4 50 012 RMSA
3483031	FR 200 1/4 5 08 SAC
3483032	FR 200 1/4 20 08 SAC
3483033	FR 200 1/4 50 08 SAC
3483034	FR 200 1/4 5 012 SAC
3483035	FR 200 1/4 20 012 SAC
3483036	FR 200 1/4 50 012 SAC
3583007	FR 200 3/8 5 08 RMSA
3583008	FR 200 3/8 20 08 RMSA
3583009	FR 200 3/8 50 08 RMSA
3583010	FR 200 3/8 5 012 RMSA
3583011	FR 200 3/8 20 012 RMSA
3583012	FR 200 3/8 50 012 RMSA
3583031	FR 200 3/8 5 08 SAC
3583032	FR 200 3/8 20 08 SAC
3583033	FR 200 3/8 50 08 SAC
3583034	FR 200 3/8 5 012 SAC
3583035	FR 200 3/8 20 012 SAC
3583036	FR 200 3/8 50 012 SAC
3683007	FR 200 1/2 5 08 RMSA
3683008	FR 200 1/2 20 08 RMSA
3683009	FR 200 1/2 50 08 RMSA
3683010	FR 200 1/2 5 012 RMSA
3683011	FR 200 1/2 20 012 RMSA
3683012	FR 200 1/2 50 012 RMSA
3683031	FR 200 1/2 5 08 SAC
3683032	FR 200 1/2 20 08 SAC
3683033	FR 200 1/2 50 08 SAC
3683034	FR 200 1/2 5 012 SAC
3683035	FR 200 1/2 20 012 SAC
3683036	FR 200 1/2 50 012 SAC

Code	Description
Skillair® 300 FILTER REGULATOR	
4483004A	FR 300 5 08 RMSA without end plates
4483005A	FR 300 20 08 RMSA without end plates
4483006A	FR 300 50 08 RMSA without end plates
4483007A	FR 300 5 012 RMSA without end plates
4483008A	FR 300 20 012 RMSA without end plates
4483009A	FR 300 50 012 RMSA without end plates
4483013A	FR 300 5 08 RA without end plates
4483014A	FR 300 20 08 RA without end plates
4483015A	FR 300 50 08 RA without end plates
4483016A	FR 300 5 012 RA without end plates
4483017A	FR 300 20 012 RA without end plates
4483018A	FR 300 50 012 RA without end plates
4483004	FR 300 1/2 5 08 RMSA
4483005	FR 300 1/2 20 08 RMSA
4483006	FR 300 1/2 50 08 RMSA
4483007	FR 300 1/2 5 012 RMSA
4483008	FR 300 1/2 20 012 RMSA
4483009	FR 300 1/2 50 012 RMSA
4483013	FR 300 1/2 5 08 RA
4483014	FR 300 1/2 20 08 RA
4483015	FR 300 1/2 50 08 RA
4483016	FR 300 1/2 5 012 RA
4483017	FR 300 1/2 20 012 RA
4483018	FR 300 1/2 50 012 RA
4583004	FR 300 3/4 5 08 RMSA
4583005	FR 300 3/4 20 08 RMSA
4583006	FR 300 3/4 50 08 RMSA
4583007	FR 300 3/4 5 012 RMSA
4583008	FR 300 3/4 20 012 RMSA
4583009	FR 300 3/4 50 012 RMSA
4583013	FR 300 3/4 5 08 RA
4583014	FR 300 3/4 20 08 RA
4583015	FR 300 3/4 50 08 RA
4583016	FR 300 3/4 5 012 RA
4583017	FR 300 3/4 20 012 RA
4583018	FR 300 3/4 50 012 RA
4683004	FR 300 1 5 08 RMSA
4683005	FR 300 1 20 08 RMSA
4683006	FR 300 1 50 08 RMSA
4683007	FR 300 1 5 012 RMSA
4683008	FR 300 1 20 012 RMSA
4683009	FR 300 1 50 012 RMSA
4683013	FR 300 1 5 08 RA
4683014	FR 300 1 20 08 RA
4683015	FR 300 1 50 08 RA
4683016	FR 300 1 5 012 RA
4683017	FR 300 1 20 012 RA
4683018	FR 300 1 50 012 RA

Skillair® LUBRICATOR

The pneumatic lubricator is the simplest way of properly lubricating actuators connected to a circuit.
As air flows from the mains through the lubricator, it encounters the diaphragm which obstruct the flow and the air is forced through the Venturi tube.
The inside of the Venturi tube is connected to the inspection dome, which connects with the bowl via a tube with a regulating needle in between.
The drop in pressure caused by the Venturi tube sucks up air through the dome, the tube and lastly into the bowl containing oil.
The quantity of oil controlled by the regulating needle then flows back from the bowl to the circuit.

TECHNICAL DATA		LUB 100		LUB 200			LUB 300			LUB 400			
Threaded port		1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
Type of lubrication		Mist		Mist			Mist			Mist			
Bowl capacity	cm^3	50		95			160			800			
Versions		Standard - CD		Standard - CD			Standard - CD - ML CD			Standard - CD - ML CD			
Max. inlet pressure	Mpa	1.5		1.3			1.3			1.3			1.3
	bar	15		13			13			13			13
	psi	217		188			188			188			188
Flow rate at 6.3 bar (0.63 MPa to 91psi)	Nl/min	1100		2200			3500			18000			21000
ΔP 0.5 bar (0.05 MPa to 7 psi)	scfm	39		71			125			640			750
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	1500		3700			5500			-			-
ΔP 1 bar (0.1 MPa to 14 psi)	scfm	53		131			196			-			-
Max temperature at: 1 MPa; 10 bar; 145 psi	°C	50		50			50			50			50
	°F	122		122			122			122			122
Weight	Kg	0.4		0.7			1.4			4.9			5.7
Wall fixing screws		M4 x 50		M5 x 60			M5 x 70			M6 x 110			M6 x 110
Mounting position		Vertical											
Fluid		Filtered compressed air											
Recommended oils		ISO and UNI FD22 (Energol HPL to Spinesso to Mobil DTE to Tellus Oil).											
Notes on use		Install the lubricator as close as possible to the point of use. Fill the lubricator bowl with oil before pressurizing the system.											
		Do not use cleaning oils, brake fluid oils or solvents in general.											
		For the best lubrication results, set the drip rate to one drop per 300-600 Nl.											

COMPONENTS LUB 100 - LUB 200 - LUB 300

① Technopolymer body
② Bowl: technopolymer for LUB 100 and 200, metal for LUB 300
③ Technopolymer plug
④ Clear technopolymer glass
⑤ NBR Venturi tube diaphragm
⑥ Rilsan® oil suction tube
⑦ Filter
⑧ Clear technopolymer inspection dome
⑨ OT58 brass oil flow regulating needle
⑩ OT58 brass oil filling plug
⑪ Zamak end plate
⑫ NBR gaskets

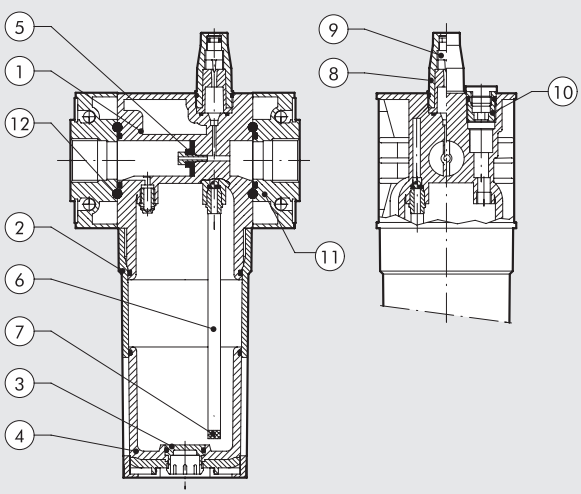

COMPONENTS LUB 400

① Aluminium body
② Aluminium bowl
③ Clear technopolymer glass
④ NBR Venturi tube diaphragm
⑤ Aluminium end plate
⑥ OT58 brass retaining ring
⑦ Anodized aluminium threaded bush, axial adjustment
⑧ Rilsan® oil suction pipe
⑨ Filter
⑩ Technopolymer plug
⑪ Clear technopolymer inspection dome
⑫ OT58 brass oil flow regulating needle
⑬ OT58 brass oil filling plug
⑭ NBR gaskets

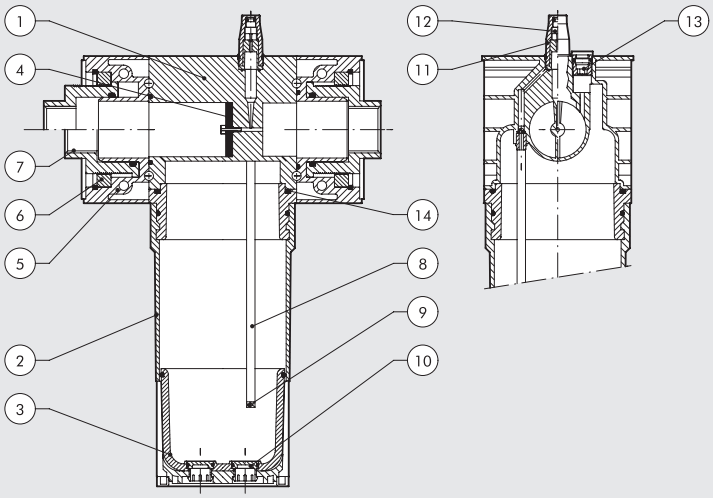



PRESSURE DROP FILLING WITH MINIMUM LEVEL (ML CD AUTOMATIC)
Available in sizes 300 and 400, this lubricator is controlled by a solenoid valve (2/2 NC minimum bore 3) situated on the lubricator body.
It reduces pressure inside the bowl allow it to be filled with oil taken from a tank at ambient pressure, which can be located in a lower position than the lubricator (max. difference in height 2 m).
The electric indicator inside the bowl sends an electric signal used to activate the valve. When the oil reaches the maximum level, another signal disactivates the valve. In this case, the lubricator system operates with the oil level between minimum and maximum. If it is necessary to keep the oil level in the bowl constant, only one of the two signals can be used. Pressure range 3-10 bar. Connect the oil tank to the G1/4 fitting on the bowl.
N.B.: for coils and connectors see Skillair accessories.

Constant minimum level

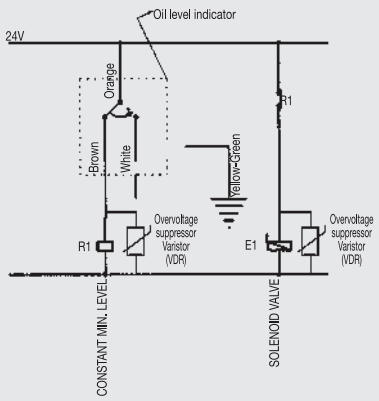

Constant maximum level

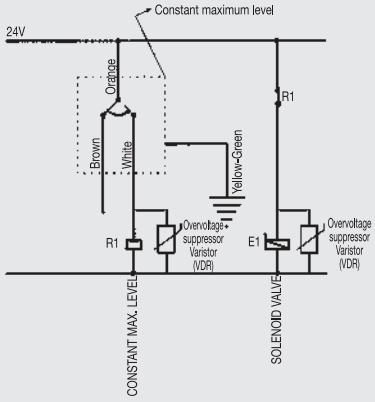

Oil level between maximum and minimum

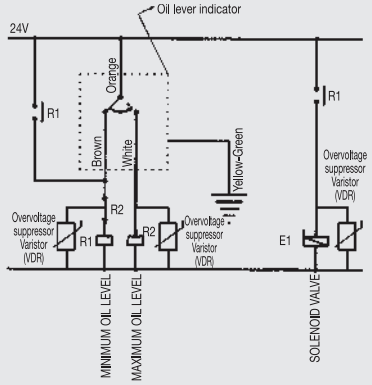



FILLING BY PRESSURE DROP (CD MANUAL)
Available in all sizes. It is operated by means of a button on the lubricator body. The pressure inside the bowl drops to allow it to be filled with oil taken from a tank at ambient pressure, which can be located in a lower position than the lubricator (max. difference in height 2 m). Oil filling stops when the level of oil raises the float and shuts off a specific valve.
Important – The SK4 lubricator is filled with oil by hand. Filling must stop when the oil level is visible through the spy-hole in the bowl release lever. Pressure range 3-10 bar. Lubrication is discontinued during filling.
Connect the oil tank to the G1/4 fitting below the bowl.

FLOW CHARTS

Department of Mechanics
Turin Polytechnic

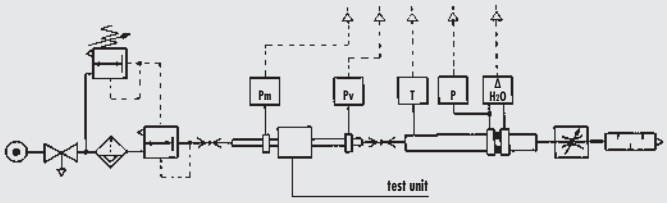

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi

LUB 100 1/4 - 3/8

ΔP = (Pm-Pv)
psi kPa bar

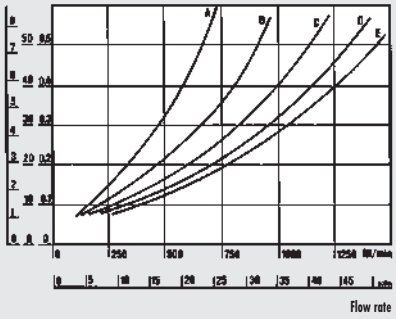

MINIMUM OPERATING FLOW CHART

Pm
psi kPa bar



LUB 400 1"

ΔP = (Pm-Pv)
psi kPa bar

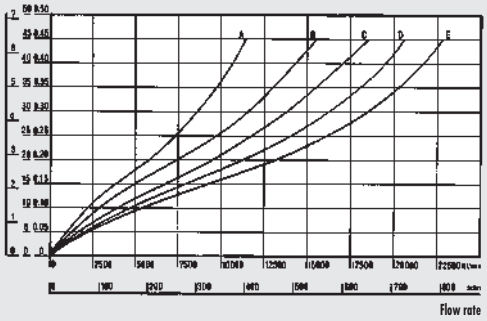

LUB 200 1/4 - 3/8 - 1/2

ΔP = (Pm-Pv)
psi kPa bar

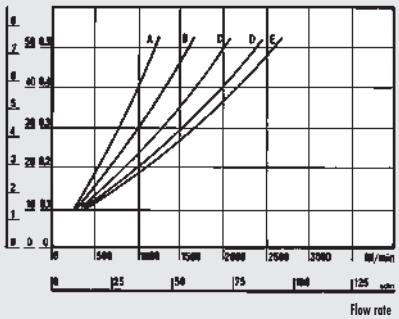

MINIMUM OPERATING FLOW CHART

Pm
psi kPa bar



LUB 400 2"

ΔP = (Pm-Pv)
psi kPa bar

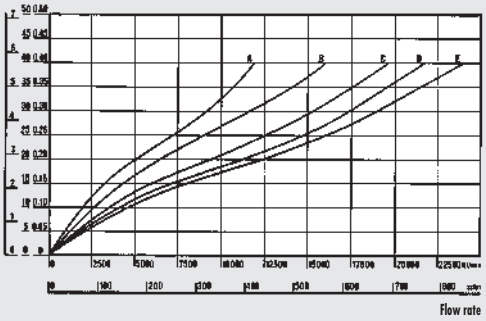

LUB 300 1/2 - 3/4 - 1

ΔP = (Pm-Pv)
psi kPa bar

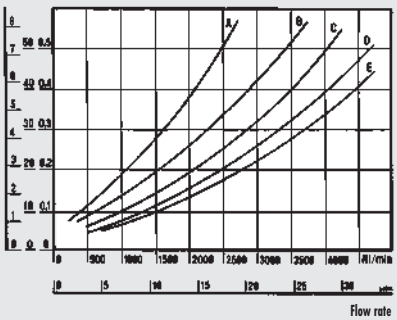

MINIMUM OPERATING FLOW CHART

Pm
psi kPa bar



MINIMUM OPERATING FLOW CHART LUB 400 1" AND 2"

PRESSURE
psi kPa bar

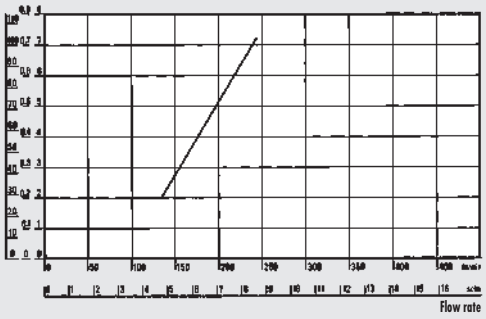

DIMENSIONS

100 - 200 - 300

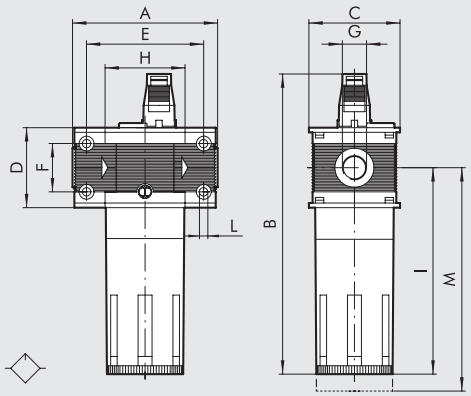

400

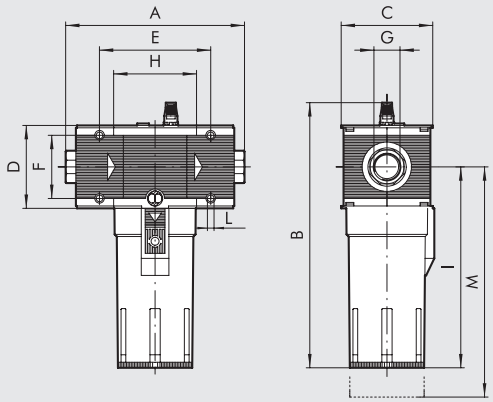

	LUB 100		LUB 200			LUB 300			LUB 400			
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
A	78		93.5			110		112	225 to 255			283 to 313
B	162		193			214			338			
C	50		63			72			118			
D	43		55			65			105			
E	63		78.5			92			141.4			
F	26		36			42			80			
H	43		55.5			65			105.4			
I	112		137.5			153			256			
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
M	130		150			160			285			

SYNOPTIC, SIZES AND VERSIONS

LUB ELEMENT	100 SIZE	1/4 THREADED PORT	- TYPE OF OIL FILLING
LUB	100	1/4 3/8	- = STD ML-CD = AUTOMATIC CD = MANUAL
	200	1/4 3/8 1/2	
	300	1/2 3/4 1	
	400	1 1 1/4 1 1/2 2	

STD: Standard version filled with oil by removing the bowl or through the top cap. Requires circuit relieving.
ML CD: Pressure drop filling with minimum level and valve
CD MANUAL: Filling by pressure drop.

ORDERING CODES

Code	Description
Skillair® 100 LUBRICATOR	
3281001A	LUB 100 without end plates
3281005A	LUB 100 CD manual without end plates
3281001	LUB 100 1/4
3281005	LUB 100 1/4 CD manual
3381001	LUB 100 3/8
3381005	LUB 100 3/8 CD manual
Skillair® 200 LUBRICATOR	
3481001A	LUB 200 without end plates
3481005A	LUB 200 CD manual without end plates
3481001	LUB 200 1/4
3481005	LUB 200 1/4 CD manual
3581001	LUB 200 3/8
3581005	LUB 200 3/8 CD manual
3681001	LUB 200 1/2
3681005	LUB 200 1/2 CD manual

Code	Description
Skillair® 300 LUBRICATOR	
4481001A	LUB 300 without end plates
4481005A	LUB 300 CD manual without end plates
4481006A	LUB 300 ML-CD automatic without end plates
4481001	LUB 300 1/2
4481005	LUB 300 1/2 CD manual
4481006	LUB 300 1/2 ML-CD automatic
4581001	LUB 300 3/4
4581005	LUB 300 3/4 CD manual
4581006	LUB 300 3/4 ML-CD automatic
4681001	LUB 300 1
4681005	LUB 300 1 CD manual
4681006	LUB 300 1 ML-CD automatic

Code	Description
Skillair® 400 LUBRICATOR	
6181001A	LUB 400 without end plates
6181004A	LUB 400 CD manual without end plates
6181006A	LUB 400 ML-CD automatic without end plates
6181001	LUB 400 1
6181004	LUB 400 1 CD manual
6181006	LUB 400 1 ML-CD automatic
6281001	LUB 400 1 1/4
6281004	LUB 400 1 1/4 CD manual
6281006	LUB 400 1 1/4 ML-CD automatic
6381001	LUB 400 1 1/2
6381004	LUB 400 1 1/2 CD manual
6381006	LUB 400 1 1/2 ML-CD automatic
6481001	LUB 400 2
6481004	LUB 400 2 CD manual
6481006	LUB 400 2 ML-CD automatic

Skillair® SHUT-OFF VALVE

The job of this valve is to make the circuit independent from the air supply. It is basically a three-way valve. In the closed position, it cuts off the air supply and discharges the downstream circuit at the same time, which is means it is particularly useful during servicing operations. The hand-operated version can be padlocked to lock the knob in a closed position so that it can only be opened by someone with the right key. An interlocked version is available for low pressure operation.

N.B.: With size 400, when the V3V is mounted upstream of the regulator, the pilot regulator must be piloted at a pressure taken upstream of the V3V, otherwise when the system is relieved, most of the air downstream will be relieved by the regulator and not the V3V relief port.
For connecting instruction see page **C3**.23

TECHNICAL DATA		V3V 100		V3V 200			V3V 300			V3V 400			
Threaded port		1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1″1/4	1″1/2	2″
Min. inlet pressure for solenoid version **	MPa	0.3		0.3			0.2			0.3			0.3
	bar	3		3			2			3			3
	psi	43.5		43.5			29			43.5			43.5
Max. input pressure*	MPa	1.5		1.3			1.3			1.3			1.3
	bar	15		13			13			13			13
	psi	217		188			188			188			188
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	1300		2400			3200			13000			14000
ΔP 0.5 bar (0.05 MPa to 7 psi)	scfm	46		85			113			460			494
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	1650		3000			4700			-			-
ΔP 1 bar (0.1 MPa to 14 psi)	scfm	58		106			166			-			-
Max temperature	°C	50		50			50			50			50
	°F	122		122			122			122			122
Weight	kg	~ 0.5		~ 0.8			~ 1.2			4.8			5.6
Wall fixing screws		M4 x 50		M5 x 60			M5 x 70			M6 x 110			M6 x 110
Type of control		Manual - Pneumatic - Solenoid								Manual - Pneumatic - Solenoid			
		Solenoid pilot-assisted								Solenoid pilot-assisted - Key-operated			
Mounting position		In any position.											
Fluid		Filtered, lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.											
Note		* 1 MPa - 10 bar - 145 psi for solenoid version											
		** 0.01 MPa – 0.1 bar – 1.45 psi for manual, pneumatic and pilot-assisted versions with controls min. 0.3 MPa 3 bar 43.5 psi.											

COMPONENTS

① Technopolymer body
② Operating button
③ Technopolymer knob
④ Stainless steel safety lamination
⑤ Locking unit
⑥ OT58 brass piston rod
⑦ Anodized aluminium top plug
⑧ Zamak end plate
⑨ Valve with vulcanized NBR gasket
⑩ Anodized aluminium bottom plug
⑪ Stainless steel valve spring
⑫ NBR gaskets

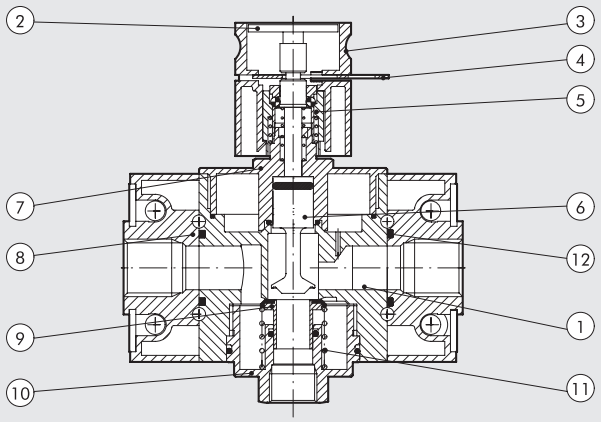

DIMENSIONS OF V3V MANUAL VERSION

100 - 200 - 300 LOCKABLE

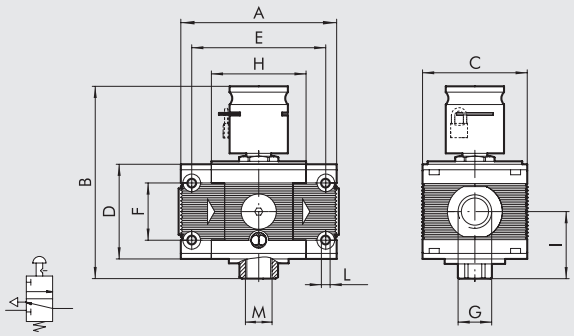

400 LOCKABLE

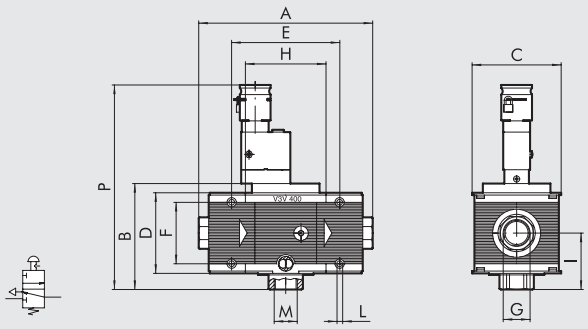

400 KEY-OPERATED

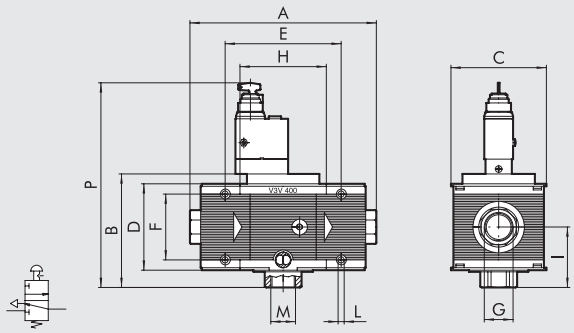

	V3V 100		V3V 200			V3V 300			V3V 400			
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
A	78		93.5			110		112	225 to 255			283 to 313
B	106		119			132			137			
C	50		63			72			118			
D	43		55			65			105			
E	63		78.5			92			141.4			
F	26		36			42			80			
H	43		55.5			65			105.4			
I	33.5		40			46.5			72.5			
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
M (relief)	1/8″		1/4″			3/8″			1″			
P manual	-		-			-			266			
key-operated	-		-			-			249			

DIMENSIONS OF V3V PNEUMATIC VERSION

100

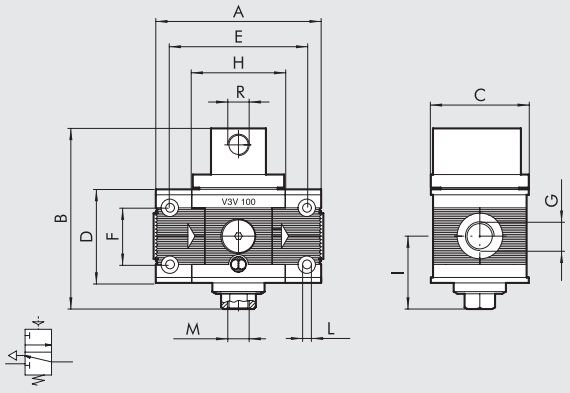

200

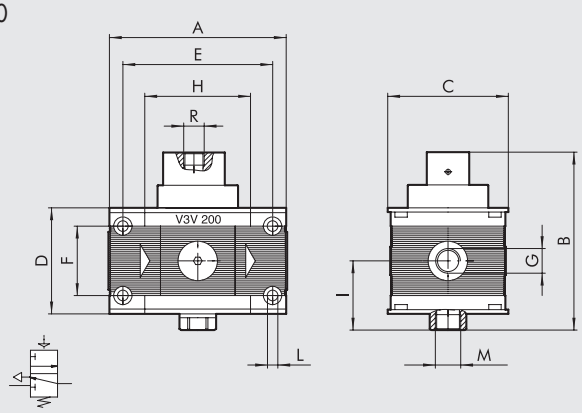

300

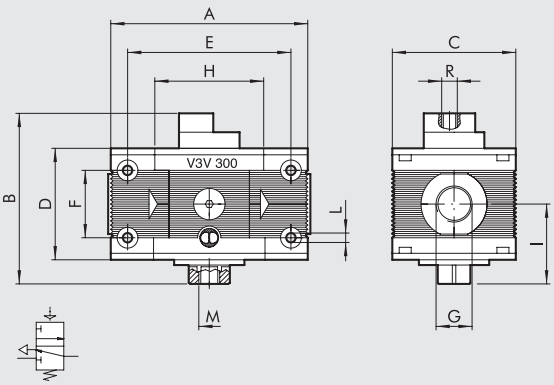

400

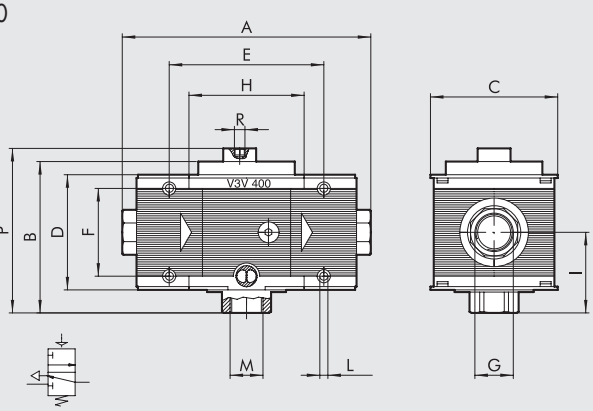

	V3V 100		V3V 200			V3V 300			V3V 400			
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
A	78		93.5			110		112	225 to 255			283 to 313
B	83		96			106			137			
C	50		63			72			118			
D	43		55			65			105			
E	63		78.5			92			141.4			
F	26		36			42			80			
H	43		55.5			65			105.4			
I	33.5		40			46.5			72.5			
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
M (relief)	1/8″		1/4″			3/8″			1″			
R (pilot)	1/8″		1/8″			1/8″			1/8″			
P	-		-			-			150			

DIMENSIONS OF V3V SOLENOID/SOLENOID PILOT-ASSISTED VALVE

100 SOLENOID/SOLENOID PILOT-ASSISTED VALVE

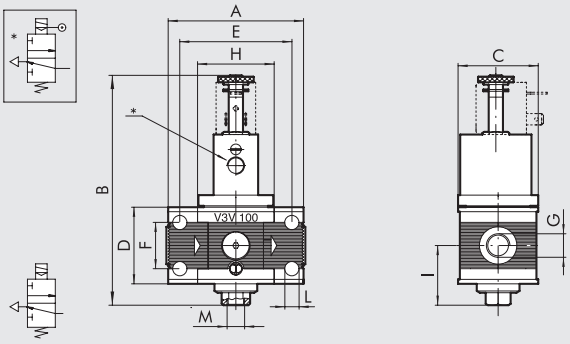

200 SOLENOID/SOLENOID PILOT-ASSISTED VALVE

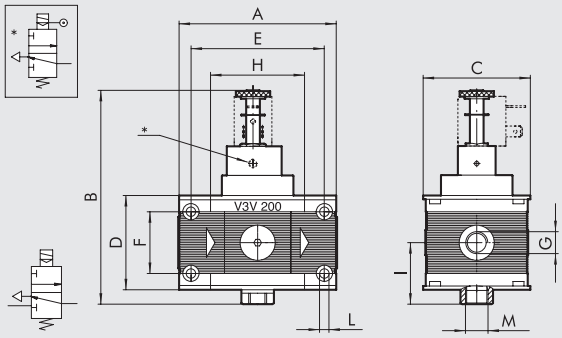

200 CNOMO

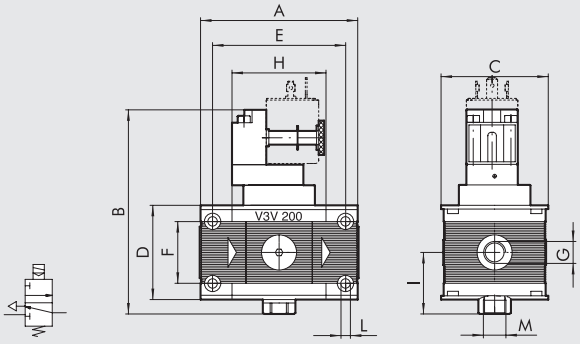

300 CNOMO SOLENOID/CNOMO SOLENOID PILOT-ASSISTED VALVE

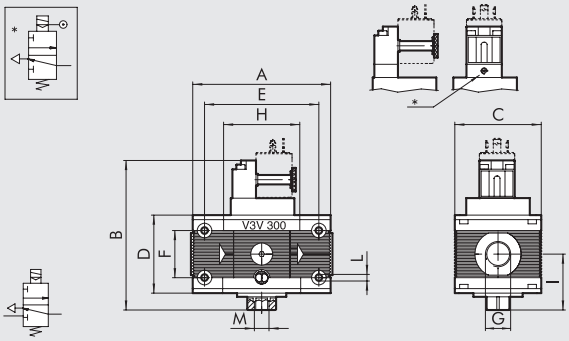

400 CNOMO SOLENOID/CNOMO SOLENOID PILOT-ASSISTED VALVE

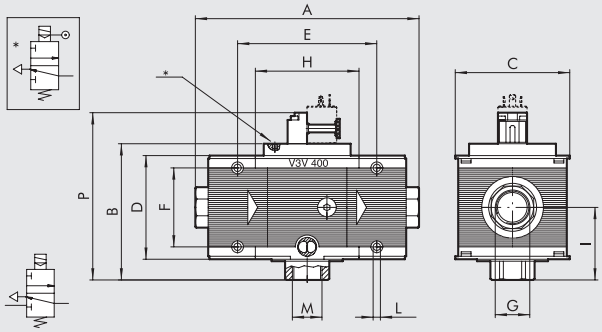

	V3V 100		V3V 200			V3V 300			V3V 400			
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
A	78		93.5			110		112	225 to 255			283 to 313
B Solenoid	128		129			152			-			
Solenoid pilot-ass.	129		129			-			-			
CNOMO control	-		123			125			137			
CNOMO pilot-ass.	-		-			138			137			
C	50		63			72			118			
D	43		55			65			105			
E	63		78.5			92			141.4			
F	26		36			42			80			
H	43		55.5			65			105.4			
I	33.5		40			46.5			72.5			
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
M (relief)	1/8″		1/4″			3/8″			1″			
*** (pilot)**	1/8″		M5			M5			M5			
P	-		-			-			169			

SYNOPTIC, SIZES AND VERSIONS

V3V ELEMENT	100 SIZE	1/4 THREADED PORT	MANUAL TYPE OF COMMAND
V3V	100	1/4 3/8	Manual (lockable)
	200	1/4 3/8 1/2	Pneumatic
	300	1/2 3/4 1	Solenoid pilot assisted
	400	1 1 1/4 1 1/2 2	Solenoid Key-operated (400)

ORDERING CODES

Code	Description
Skillair® 100 3-WAY VALVE	
3270001A	V3V 100 lockable without end plates
3269000A	V3V 100 pneumatic without end plates
3269001A	V3V 100 solenoid without end plates
3269002A	V3V 100 solenoid pilot assisted without end plates
3270001	V3V 100 1/4 lockable
3269000	V3V 100 1/4 pneumatic
3269001	V3V 100 1/4 solenoid
3269002	V3V 100 1/4 solenoid pilot assisted
3370001	V3V 100 3/8 lockable
3369000	V3V 100 3/8 pneumatic
3369001	V3V 100 3/8 solenoid
3369002	V3V 100 3/8 solenoid pilot assisted
Skillair® 200 3-WAY VALVE	
3470001A	V3V 200 lockable without end plates
3469000A	V3V 200 pneumatic without end plates
3469001A	V3V 200 solenoid without end plates
3469002A	V3V 200 solenoid pilot assisted without end plates
3469004A	V3V 200 solenoid cnomo comm. w/end plate
3469005A	V3V 200 solenoid cnomo ass. comm. w/end plate
3470001	V3V 200 1/4 lockable
3469000	V3V 200 1/4 pneumatic
3469001	V3V 200 1/4 solenoid
3469002	V3V 200 1/4 solenoid pilot assisted
3469004	V3V 200 1/4 solenoid cnomo comm.
3469005	V3V 200 1/4 solenoid cnomo pilot-assisted
3570001	V3V 200 3/8 lockable
3569000	V3V 200 3/8 pneumatic
3569001	V3V 200 3/8 solenoid
3569002	V3V 200 3/8 solenoid pilot assisted
3569004	V3V 200 3/8 solenoid cnomo comm.
3569005	V3V 200 3/8 solenoid cnomo pilot-assisted
3670001	V3V 200 1/2 lockable
3669000	V3V 200 1/2 pneumatic
3669001	V3V 200 1/2 solenoid
3669002	V3V 200 1/2 solenoid pilot assisted
3669004	V3V 200 1/2 solenoid cnomo comm.
3669005	V3V 200 1/2 solenoid cnomo pilot-assisted

Code	Description
Skillair® 300 3-WAY VALVE	
4470001A	V3V 300 lockable without end plates
4469000A	V3V 300 pneumatic without end plates
4469004A	V3V 300 solenoid cnomo without end plates
4469005A	V3V 300 solenoid cnomo pilot-assisted w/end plates
4470001	V3V 300 1/2 lockable
4469000	V3V 300 1/2 pneumatic
4469004	V3V 300 1/2 solenoid cnomo
4469005	V3V 300 1/2 solenoid cnomo assisted
4570001	V3V 300 3/4 lockable
4569000	V3V 300 3/4 pneumatic
4569004	V3V 300 3/4 solenoid cnomo
4569005	V3V 300 3/4 solenoid cnomo assisted
4669000	V3V 300 1 pneumatic
4669004	V3V 300 1 solenoid cnomo
4669005	V3V 300 1 solenoid cnomo assisted
4670001	V3V 300 1 lockable

Code	Description
Skillair® 400 3-WAY VALVE	
6169010A	V3V 400 key-operated without end plates
6169000A	V3V 400 pneumatic without end plates
6169004A	V3V 400 solenoid cnomo without end plates
6169005A	V3V 400 solenoid cnomo pilot-assisted w/end plates
6170002A	V3V 400 lockable without end plates
6169010	V3V 400 1 key-operated
6169000	V3V 400 1 pneumatic
6169004	V3V 400 1 solenoid cnomo
6169005	V3V 400 1 solenoid cnomo assisted
6269010	V3V 400 1 1/4 key-operated
6269000	V3V 400 1 1/4 pneumatic
6269004	V3V 400 1 1/4 solenoid cnomo
6269005	V3V 400 1 1/4 solenoid cnomo assisted
6369010	V3V 400 1 1/2 key-operated
6369000	V3V 400 1 1/2 pneumatic
6369004	V3V 400 1 1/2 solenoid cnomo
6369005	V3V 400 1 1/2 solenoid cnomo assisted
6469010	V3V 400 2 key-operated
6469000	V3V 400 2 pneumatic
6469004	V3V 400 2 solenoid cnomo
6469005	V3V 400 2 solenoid cnomo assisted
6170002	V3V 400 1 lockable
6270002	V3V 400 1 1/4 lockable
6370002	V3V 400 1 1/2 lockable
6470002	V3V 400 2 lockable

Skillair® PROGRESSIVE START VALVE

The 2/2 progressive valve comes in two versions, with solenoid or pneumatic actuation.
STD progressive start valve: a differential balanced valve automatically opens the air port fully when the downstream pressure is about 50% of the upstream pressure.
Progressive start valve with pneumatic or solenoid actuation: without a pilot, the upstream air flows downstream through the regulation needle.
When an external or pneumatic solenoid signal is generated, the valve opens the main port to create full flow. It does not relieve the downstream circuit.

TECHNICAL DATA		VAP 100	
Threaded port		1/4"	3/8"
Min. inlet pressure **	MPa	0.3	
	bar	3	
	psi	43.5	
Max. inlet pressure*	MPa	1.5	
	bar	15	
	psi	217	
Flow rate at 6 bar (0.6 MPa to 87 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	1300	
	scfm	46	
Flow rate at 6 bar (0.6 MPa to 87 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	2000	
	scfm	71	
Max temperature	°C	50	
	°F	122	
Weight	kg	0.5 ~	
Wall fixing screws		M4 x 50	
Mounting position		In any position	
Type of control		Automatic - Pneumatic – Solenoid – Solenoid pilot-assisted	
Fluid		Filtered, lubricated or unlubricated compressed air. Lubrication, if used, must be continuous	

** 0.01 MPa – 0.1 bar – 1.45 psi for pneumatic and pilot-assisted versions with controls at min. 0.3 MPa 3 bar 43.5 psi.
* 1 MPa – 10 bar – 1.45 psi

DIMENSIONS OF VAP 100 STD/PNEUMATIC VALVE

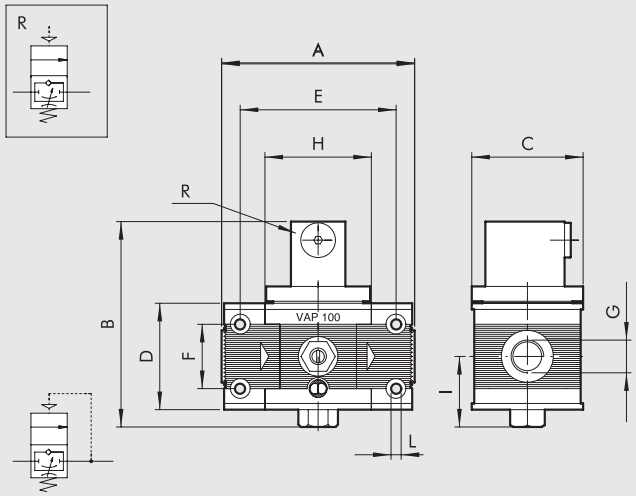

	VAP 100	
Threaded port G	1/4″	3/8″
A	78	
B	83.5	
C	50	
D	43	
E	63	
F	26	
H	43	
I	29	
L	Hole for M4 screws	
R (pilot - pneumatic version)	1/8″	

DIMENSIONS OF VAP 100 SOLENOID/SOLENOID PILOT-ASSISTED VALVE

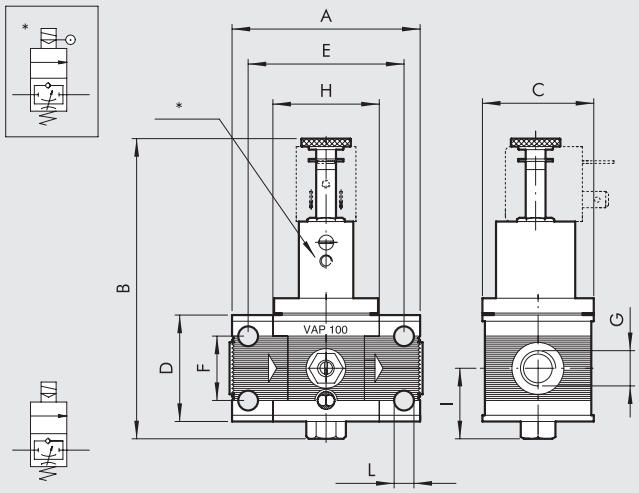

	VAP 100	
Threaded port G	1/4″	3/8″
A	78	
B	122.5	
C	50	
D	43	
E	63	
F	26	
H	43	
I	29	
L	Hole for M4 screws	
O	89	
*** (pilot assisted)**	M5	

ORDERING CODES

Code	Description
3271000A	VAP 100 without end plates
3271500A	VAP 100 pneumatic without end plates
3271600A	VAP 100 solenoid without end plates
3271700A	VAP 100 solenoid pilot-assisted without end plates
3271000	VAP 100 1/4
3271500	VAP 100 1/4 pneumatic
3271600	VAP 100 1/4 solenoid
3271700	VAP 100 1/4 solenoid pilot-assisted
3371000	VAP 100 3/8
3371500	VAP 100 3/8 pneumatic
3371600	VAP 100 3/8 solenoid
3371700	VAP 100 3/8 solenoid pilot-assisted

NOTES

Skillair® PROGRESSIVE STARTER

The job of the progressive starter is to feed air into the circuit gradually with controlled flow. It comes in two versions with solenoid or pneumatic actuation. Both control signals cause the valve to open, which allows the air controlled by the flow regulator to flow slowly towards the downstream circuit.
In the APR, when the pressure in the downstream circuit reaches 50%-60% of the upstream pressure, the valve opens the main inlet duct connecting.
The time elapsing between starting and opening the valve can be adjusted via the built-in flow regulator. If it is necessary to relieve the downstream circuit quickly, merely operate the control valve which cuts off air flow in the pipe. This closes the valve and starts relieving the downstream circuit.
The progressive starter acts both as an actuator positioner, which eliminates the risk of sudden kickback, and as a valve.

N.B. With size 400, when the APR is mounted upstream of the regulator, the pilot regulator must be piloted at a pressure taken upstream of the APR, otherwise when the system is relieved, most of the air downstream will be relieved by the regulator and not the APR relief port.
For connecting instruction see page **C3**.23

TECHNICAL DATA		APR 100		APR 200			APR 300			APR 400			
Threaded port		1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	2"
Min. inlet pressure	MPa	0.3		0.3			0.4			0.3			0.3
	bar	3		3			4			3			3
	psi	43.5		43.5			58			43.5			43.5
Max. inlet pressure*	MPa	1.5		1.3			1.3			1			1
	bar	15		13			13			10			10
	psi	217		188.5			188.5			145			145
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	1300		2000			2400			13000			14000
ΔP 0.5 bar (0.05 MPa to 7 psi)	scfm	46		71			85			460			494
Flow rate at 6.3 bar (0.63 MPa to 91 psi)	Nl/min	2000		3200			3600			-			-
ΔP 1 bar (0.1 MPa to 14 psi)	scfm	71		113			127			-			-
Max temperature	°C	50		50			50			50			50
	°F	122		122			122			122			122
Weight	kg	~ 0.8		~ 0.9			~ 1.5			5.6			6.4
Wall fixing screws		M4 x 50		M5 x 60			M5 x 70			M6 x 110			M6 x 110
Type of control		Pneumatic		Pneumatic			Pneumatic			Pneumatic - Solenoid			
		Solenoid		Solenoid			CNOMO Solenoid						
				CNOMO Solenoid									
Mounting position		In any position											
Fluid		Filtered, lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.											
Notes on use		For the pneumatic version 200 the pilot pressure must range between the inlet P and the inlet P + 2 bar.											
		For pneumatic version 300, the pilot pressure must be greater or equal to the input pressure.											
		* 1 MPa - 10 bar - 145 psi for solenoid version											

DIMENSIONS APR SOLENOID

APR 100 SOLENOID

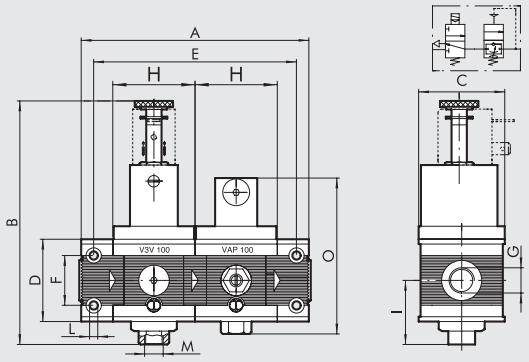

APR 200 SOLENOID

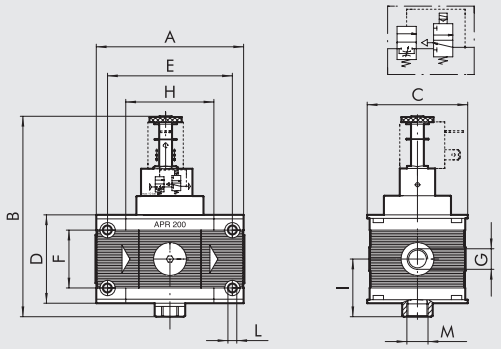

APR 200 CNOMO SOLENOID

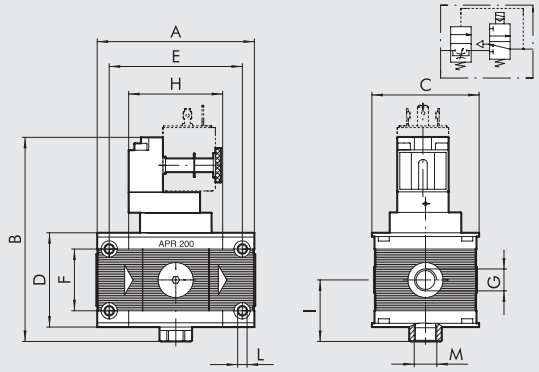

APR 300 CNOMO SOLENOID

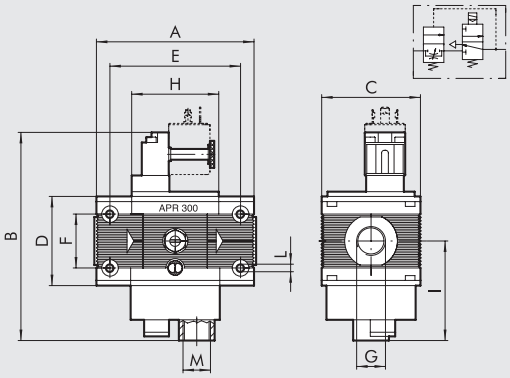

APR 400 SOLENOID

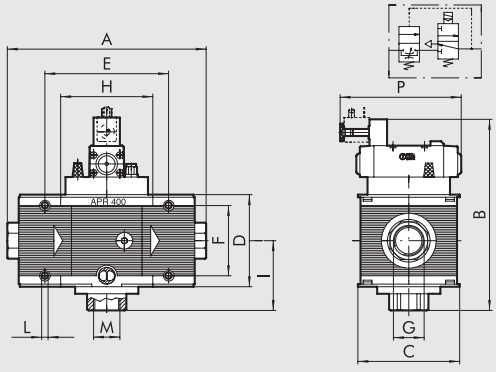

	APR 100 ELPN		APR 200 ELPN			APR 200 ELPN CNOMO			APR 300 ELPN CNOMO			APR 400 ELPN			
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
A	121		93.5			93.5			110		112	225 to 255			283 to 313
B	128		125			120			152			218			
C	50		63			63			72			118			
D	43		55			55			65			105			
E	106		78.5			78.5			92			141.4			
F	26		36			36			42			80			
H	43		55.5			55.5			65			105.4			
I	34.5		36			36			74			80			
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
M (relief)	1/8″		1/4″			1/4″			1/2″			1″			
O	83.5		-			-			-			-			
P	-		-			-			-			138			

DIMENSIONS APR PNEUMATIC

APR 100 PNEUMATIC

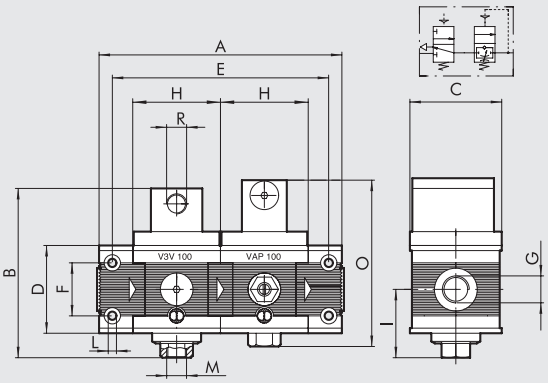

APR 200 PNEUMATIC

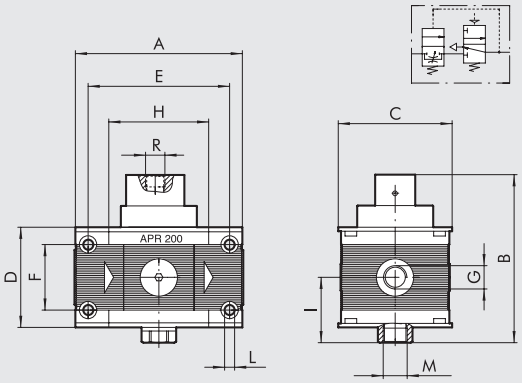

APR 300 PNEUMATIC

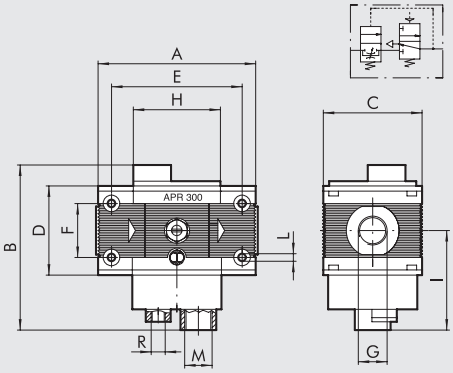

APR 400 PNEUMATIC

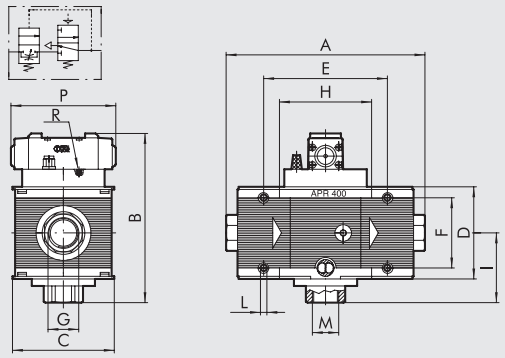

	APR 100 PN		APR 200 PN			APR 300 PN			APR 400 PN			
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
A	121		93.5			110		112	225 to 255			283 to 313
B	83		92			122			193			
C	50		63			72			118			
D	43		55			65			105			
E	106		78.5			92			141.4			
F	26		36			42			80			
H	43		55.5			65			105.4			
I	34.5		36			74			80			
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
M (relief)	1/8″		1/4″			1/2″			1″			
R (pilot)	1/8″		1/8″			1/4″			M5			
P	-		-			-			119			

SYNOPTIC, SIZES AND VERSIONS

APR ELEMENT	100 SIZE	1/4 THREADED PORT	PNEUMATIC TYPE OF CONTROL
APR	100	1/4 3/8	Pneumatic Solenoid
	200	1/4 3/8 1/2	
	300	1/2 3/4 1	
	400	1 1 1/4 1 1/2 2	

ORDERING CODES

Code	Description
Skillair® 100 PROGRESSIVE STARTER	
3267001A	APR 100 pneumatic without end plates
3267051A	APR 100 solenoid without end plates
3267001	APR 100 1/4 pneumatic
3267051	APR 100 1/4 solenoid
3367001	APR 100 3/8 pneumatic
3367051	APR 100 3/8 solenoid
Skillair® 200 PROGRESSIVE STARTER	
3471000A	APR 200 pneumatic without end plates
3471001A	APR 200 solenoid without end plates
3471004A	APR 200 solenoid cnomo without end plates
3471000	APR 200 1/4 pneumatic
3471001	APR 200 1/4 solenoid
3471004	APR 200 1/4 solenoid cnomo control
3571000	APR 200 3/8 pneumatic
3571001	APR 200 3/8 solenoid
3571004	APR 200 3/8 solenoid cnomo control
3671000	APR 200 1/2 pneumatic
3671001	APR 200 1/2 solenoid
3671004	APR 200 1/2 solenoid cnomo control

Code	Description
Skillair® 300 PROGRESSIVE STARTER	
4471900A	APR 300 pneumatic without end plates
4471901A	APR 300 solenoid cnomo without end plates
4471900	APR 300 1/2 pneumatic
4471901	APR 300 1/2 solenoid cnomo control
4571900	APR 300 3/4 pneumatic
4571901	APR 300 3/4 solenoid cnomo control
4671900	APR 300 1 pneumatic
4671901	APR 300 1 solenoid cnomo control
Skillair® 400 PROGRESSIVE STARTER	
6171002A	APR 400 pneumatic without end plates
6171003A	APR 400 solenoid without end plates
6171002	APR 400 1 pneumatic
6171003	APR 400 1 solenoid
6271002	APR 400 1 1/4 pneumatic
6271003	APR 400 1 1/4 solenoid
6371002	APR 400 1 1/2 pneumatic
6371003	APR 400 1 1/2 solenoid
6471002	APR 400 2 pneumatic
6471003	APR 400 2 solenoid

Skillair® AIR TAKE-OFF

The air take-off takes air from the Skillair® FRL unit irrespective of the assembly position. It is necessary when air needs to be taken from the FRL unit at any stage of the treatment (normal, filtered and regulated, lubricated, etc.). If used separately from the FRL unit, which is infinitely modular, it acts as a distributor allowing air take-off through the threaded ports.

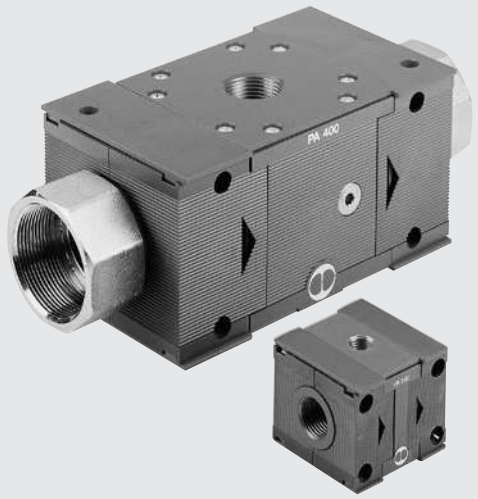

TECHNICAL DATA		PA 100		PA 200			PA 300			PA 400			
Threaded port		1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	2"
Max. working temperature	°C	50		50			50			50			
at: 1 MPa; 10 bar; 145 psi	°F	122		122			122			122			
Max. operating pressure	MPa	1.5		1.3			1.3			1.3			
	bar	15		13			13			13			
	psi	217		188			188			188			
Wall fixing screws		M4 x 50		M5 x 60			M5 x 70			M6 x 110			
Threaded port		G 1/4		G 1/4			G 3/8			G 1			
Weight	kg	0.3		0.5			0.8			4.3			5.1

DIMENSIONS AND ORDERING CODES

100 - 200 - 300

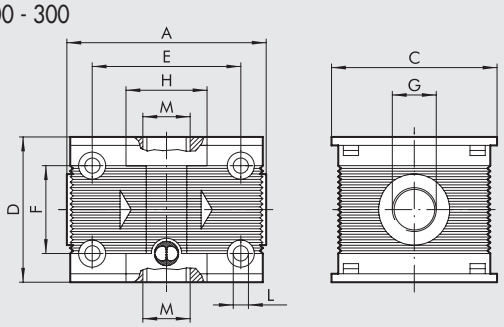

400

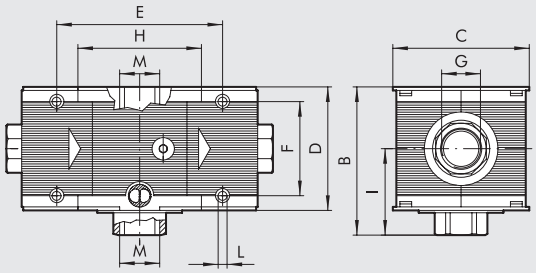

	PA 100		PA 200			PA 300			PA 400			
Threaded port G	1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	2"
A	59		63			117		119	225 to 255			283 to 313
B	-		-			-			120			
C	50		63			72			118			
D	43		55			65			105			
E	44		48			59			141.4			
F	26		36			42			80			
H	24		25			32			105.4			
I	-		-			-			67.5			
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
M	1/4"		1/4"			3/8"			1"			

Code	Description
9200402A	PA 100 without end plates
9200402	PA 100 1/4
9300401	PA 100 3/8
9300402A	PA 200 without end plates
9300404	PA 200 1/2
9300402	PA 200 1/4
9300403	PA 200 3/8
9400402A	PA 300 without end plates
9500402	PA 300 1
9400402	PA 300 1/2
9500401	PA 300 3/4
9700401A	PA 400 without end plates
9700401	PA 400 1
9700403	PA 400 1 1/2
9700402	PA 400 1 1/4
9700404	PA 400 2

Skillair® PRESSURE SWITCHES

Skillair® pressure switches feature a high degree of miniaturisation and a modern attractive design. As they are extremely modular, the Skillair® series can be installed facing up or down.
They come ready assembled with a 2-metre cable or an M8 connector with a 300-mm cable.
The contact is the switching type, which means it can be normally open or normally closed. It can be regulated via a knurled push-lock handle.
On the side opposite the regulation handle is a threaded air inlet port that can be used by removing the threaded plug.

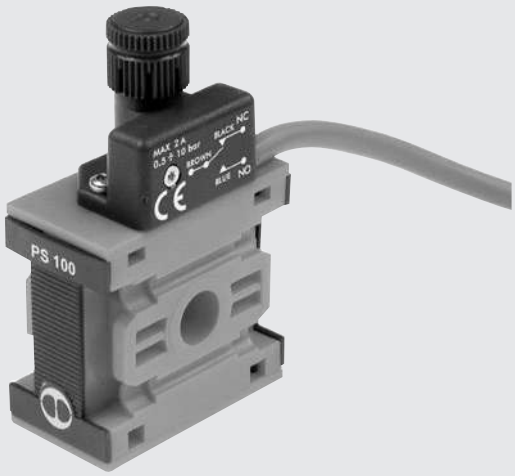

TECHNICAL DATA		PS 100	PS 200	PS 300
Adjustable pressure interval	bar	0.5 to 10		
Hysteresis (not adjustable)	bar	from 0.4 to 0.8 (See diagram)		
Maximum pressure	bar	15	13	13
	MPa	1.5	1.3	1.3
	psi	217	188	188
Operating temperature range at: 1 MPa; 10 bar; 145 psi	°C	-10 to 50		
	°F	14 to 122		
Lower threaded port		1/4"	1/4"	3/8"
Maximum current	A	2		
Maximum voltage	V	250		
Outside diameter of cable	mm	4.9		
Number of wires and cross section		3 x 0.5 mm^2		
Contacts		Normally-Open (NO) and Normally-Closed (NC)		
Protection		IP65		
Number of switchings		5 x 10^6		
Fluid		Filtered lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.		
Mounting position		In any position.		
Weight	kg	0.160	0.185	0.250

COMPONENTS

① Technopolymer adjusting push-lock handle
② Brass adjusting screw
③ Steel piston spring
④ Brass piston
⑤ NBR gasket
⑥ Choke to reduce peaks in pressure
⑦ Technopolymer pressure switch body
⑧ Resin finish for IP65
⑨ Electrical contact
⑩ Technopolymer body
⑪ Supplementary air inlet port
⑫ A7 plug

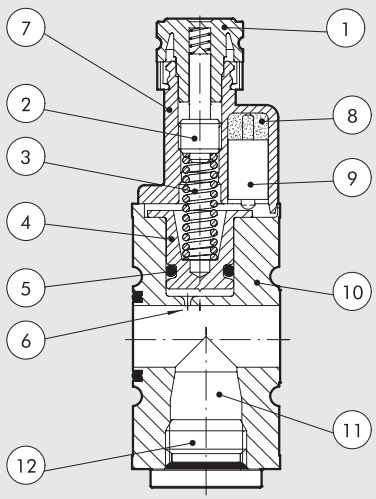

DIMENSIONS

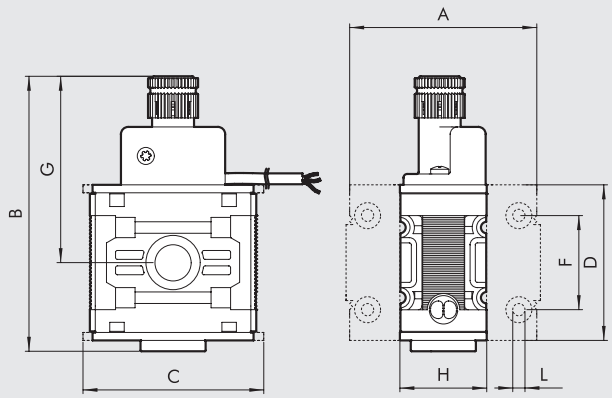

	PS 100	PS 200	PS 300
A	59	63	177
B	76	85	99
C	50	63	72
D	43	55	65
F	26	36	42
G	52	58	63
H	24	25	32
L	Hole for M4 screws	Hole for M5 screws	Hole for M5 screws

WIRING DIAGRAM

VERSION WITH CABLE



VERSION WITH M8 CONNECTOR



1 - 3 NO
1 - 4 NC

HYSTERESIS GRAPH

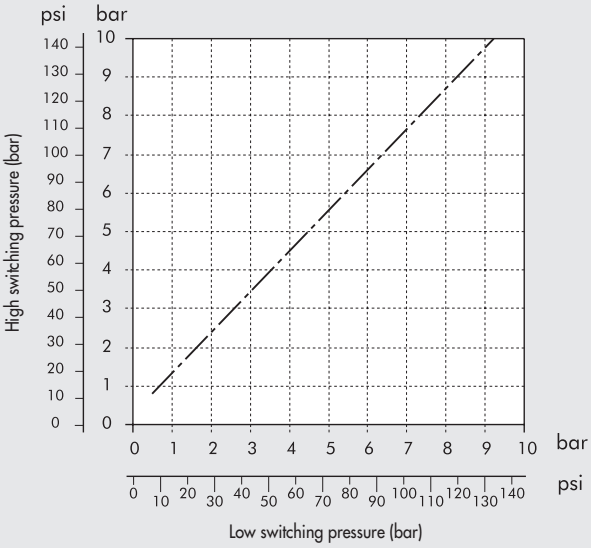

ORDERING CODES

Code	Description
Skillair® 100 PRESSURE SWITCHES	
3240000A	PS 100 2A NO/NC 2 m cable without end plates
3240001A	PS 100 2A NO/NC M8 connector without end plates
Skillair® 200 PRESSURE SWITCHES	
3440000A	PS 200 2A NO/NC 2 m cable without end plates
3440001A	PS 200 2A NO/NC M8 connector without end plates
Skillair® 300 PRESSURE SWITCHES	
4440000A	PS 300 2A NO/NC 2 m cable without end plates
4440001A	PS 300 2A NO/NC M8 connector without end plates

ACCESSORIES

SECURITY KNOB



Code	Description
9200703	Security knob APR / pressure switch

NOTE: Pull outwards to remove the knob from the pressure switch on the unit. Insert the security knob and regulate the pressure switch. Then press the handle firmly to lock it in position. If the pressure switch needs to be reset, remove the security knob by forcing it laterally with a screwdriver.

Skillair® SUB-BASE AND ADAPTER BASE

The adapter base is used to adapt the Skillair® FRL system to various assemblies without affecting modularity or servicing.
If you use the universal adopter base plus the intermediate plate, you can assemble several elements of different sizes.

DIMENSIONS

2-POSITION SUB-BASE

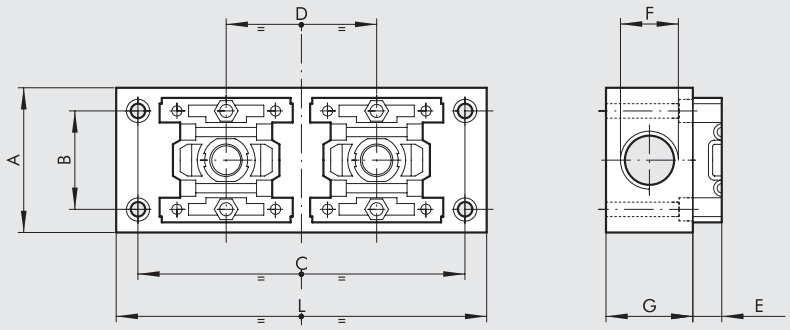

3-POSITION SUB-BASE

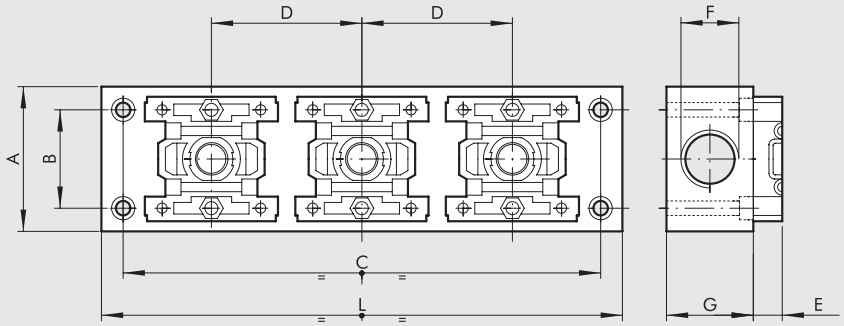

	100 - 2 POS.	100 - 3 POS.	200 - 2 POS.	200 - 3 POS.	300 - 2 POS.	300 - 3 POS.
A	50	50	55	55	60	60
B	34	34	44	44	49	49
C	113	165	135	200	155	230
D	52	52	65	65	75	75
E	10	10	8.5	8.5	10.5	10.5
F	1/2"	1/2"	3/4"	3/4"	3/4"	3/4"
G	30	30	40	40	40	40
L	128	180	150	215	170	245

DIMENSIONS OF ADAPTER BASE

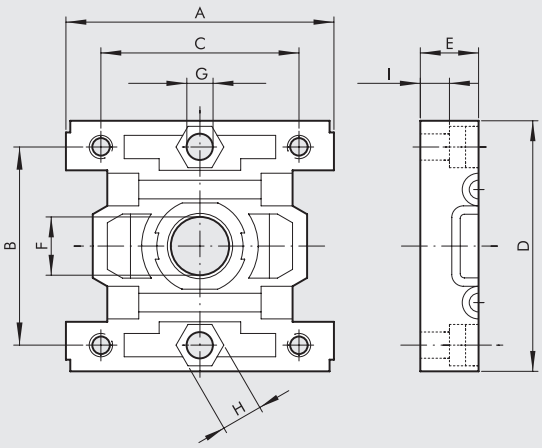

	BA 100	BA 200	BA 300
A	46	59	69
B	34	44	49
C	34	44	49
D	43	55	65
E	10	8.5	10.5
F	10	15	18
G	Hole for M4 screws	Hole for M4 screws	Hole for M5 screws
H	Es. 7	Es. 7	Es. 7
I	5	2	5

DIMENSIONS OF SIZE ADAPTERS

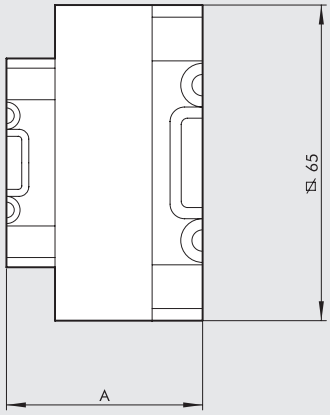

	BA 100 - 200	BA 100 - 300	BA 200 - 300
A	38.5	40.5	39

ORDERING CODES

Code	Description
MULTIPLE SUB-BASES FOR REGULATORS	
9200202	SB 2 100
9300202	SB 2 200
9400202	SB 2 300
9200302	SB 3 100
9300302	SB 3 200
9400302	SB 3 300
ADAPTER BASE	
9201801	BA 100
9321801	BA 200
9401801	BA 300
SIZE ADAPTER	
9301801	BA 100 - 200
9301802	BA 100 - 300
9301803	BA 200 - 300

NOTES

FIL + REG + LUB Skillair®

Refer to the sections on the single modules for a further description, components and other technical data.

TECHNICAL DATA		FRL 100		FRL 200			FRL 300			FRL 400			
Threaded port		1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1"	1"1/4	1"1/2	2"
Setting range		0 to 8 - 0 to 12		0 to 8 - 0 to 12			0 to 8 - 0 to 12			Depending on pilot regulator			
Degree of filtration	µm	5 - 20		5 - 20			5 - 20			5 - 20 - 50			5 - 20 - 50
Max. inlet pressure	MPa	1.5		1.3			1.3			1.3			1.3
	bar	15		13			13			13			13
	psi	217		188			188			188			188
Flow rate at 6.3 bar ΔP 0.5 bar	Nl/min	300		1300			2500			9000			14000
	scfm	11		46			89			320			500
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	800		3000			4500			-			-
	scfm	28		106			160			-			-
Max temperature at 10 bar	°C	50		50			50			50			50
	°F	122		122			122			122			122
Weight	kg	0.75		1.5			2.9			~ 10			~ 10
Wall fixing screws		M4 x 50		M5 x 60			M5 x 70			M6 x 110			M6 x 110
Fluid		Compressed air											
Notes on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.**											
		Do not take air from pressure gauge ports.											

SYNOPTIC, SIZES AND VERSIONS

FRL	100	1/4	20	08	RMSA
ELEMENT	SIZE	THREADED PORT	DEGREE OF FILTRATION	SETTING RANGE	TYPE OF CONDEN-SATION DRAIN
FRL	100	1/4	5 = 5 µm	08 = 0 to 8 bar	RMSA
		3/8	20 = 20 µm	012 = 0 to 12 bar	SAC
	200	1/4	50 = 50 µm		RMSA
		3/8			SAC
		1/2			RA
	300	1/2			RMSA
		3/4			RA
		1			
	400	1			
		1 1/4			
		1 1/2			
		2			

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure

RA: automatic drain with condensate discharge, independent of pressure and flow rate.
(for size 200, 300 and 400).
Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.
(for size 100 and 200)

DIMENSIONS FIL + REG + LUB

100 - 200 - 300

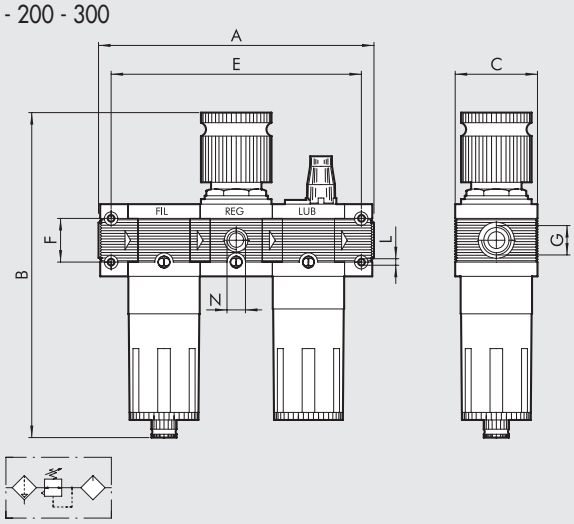

400

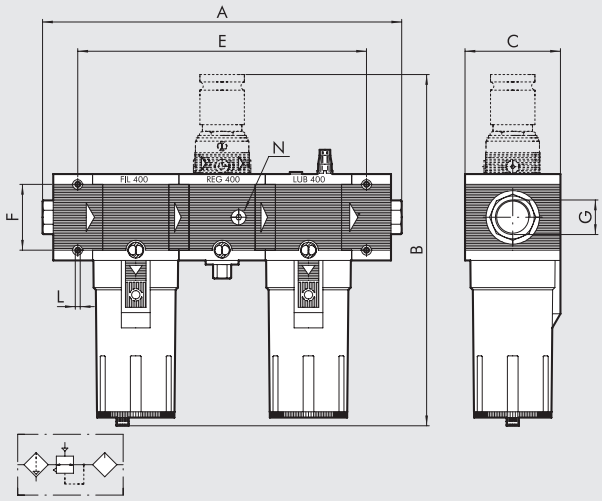

	FIL + REG + LUB 100		FIL + REG + LUB 200			FIL + REG + LUB 300			FIL + REG + LUB 400			
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″	1″	1 1/4″	1 1/2″	2″
A	164		204.5			240	240	242	436 to 466			494 to 524
B **RMSA**	199		245			278			444			
RA	-		249			282			448			
SAC	203		249			282			448			
C	50		63			72			118			
E	149		189.5			222			352			
F	26		36			42			80			
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			
N (pressure gauge port)	1/8″		1/8″			1/8″			1/4″			

ORDERING CODES

Code	Description
FIL+REG+LUB Skillair® 100	
3282008	FRL 100 1/4 20 08 RMSA
3282011	FRL 100 1/4 20 012 RMSA
3382008	FRL 100 3/8 20 08 RMSA
3382011	FRL 100 3/8 20 012 RMSA
FIL+REG+LUB Skillair® 200	
3482008	FRL 200 1/4 20 08 RMSA
3482011	FRL 200 1/4 20 012 RMSA
3582008	FRL 200 3/8 20 08 RMSA
3582011	FRL 200 3/8 20 012 RMSA
3682008	FRL 200 1/2 20 08 RMSA
3682011	FRL 200 1/2 20 012 RMSA
FIL+REG+LUB Skillair® 300	
4482005	FRL 300 1/2 20 08 RMSA
4482008	FRL 300 1/2 20 012 RMSA
4582005	FRL 300 3/4 20 08 RMSA
4582008	FRL 300 3/4 20 012 RMSA
4682005	FRL 300 1 20 08 RMSA
4682008	FRL 300 1 20 012 RMSA
FIL+REG+LUB Skillair® 400	
6182002	FRL 400 1 20 RMSA
6182005	FRL 400 1 20 RA
6282002	FRL 400 1 1/4 20 RMSA
6382002	FRL 400 1 1/2 20 RMSA
6482002	FRL 400 2 20 RMSA

The following versions are available on request:
- with 5 µm or 50 µm degree of filtration
- with SAC or RA condensate discharge

FR + LUB Skillair®

Refer to the sections on the single modules for a further description, components and other technical data.

TECHNICAL DATA		FR + LUB 100		FR + LUB 200			FR + LUB 300		
Threaded port		1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″
Setting range		0 to 8 - 0 to 12		0 to 8 - 0 to 12			0 to 8 - 0 to 12		
Degree of filtration	µm	5 - 20 - 50		5 - 20 - 50			5 - 20 - 50		
Max. inlet pressure	MPa	1.5		1.3			1.3		
	bar	15		13			13		
	psi	217		188			188		
Flow rate at 6.3 bar ΔP 0.5 bar	Nl/min	300		1200			2300		
	scfm	11		43			82		
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	800		2400			4000		
	scfm	28		85			142		
Max temperature at 10 bar	°C	50		50			50		
	°F	122		122			122		
Weight	kg	0.7		1.35			2.7		
Wall fixing screws		M4 x 50		M4 x 60			M5 x 70		
Fluid		Compressed air							
Notes on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.**							
		Do not take air from pressure gauge ports.							

SYNOPTIC, SIZES AND VERSIONS

FR+L	100	1/4	20	08	RMSA
ELEMENT	SIZE	THREADED PORT	DEGREE OF FILTRATION	SETTING RANGE	TYPE OF CONDEN-SATION RANGE
FR+L	100	1/4	5 = 5 µm	08 = 0 to 8 bar	RMSA
		3/8	20 = 20 µm	012 = 0 to 12 bar	SAC
	200	1/4	50 = 50 µm		RMSA
		3/8			SAC
		1/2			RA
	300	1/2			RMSA
		3/4			RA
		1			

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure

RA: automatic drain with condensate discharge, independent of pressure and flow rate.
(for size 200, 300).
Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.
(for size 100 and 200)

METAL WORK PNEUMATIC

DIMENSIONS FR + L

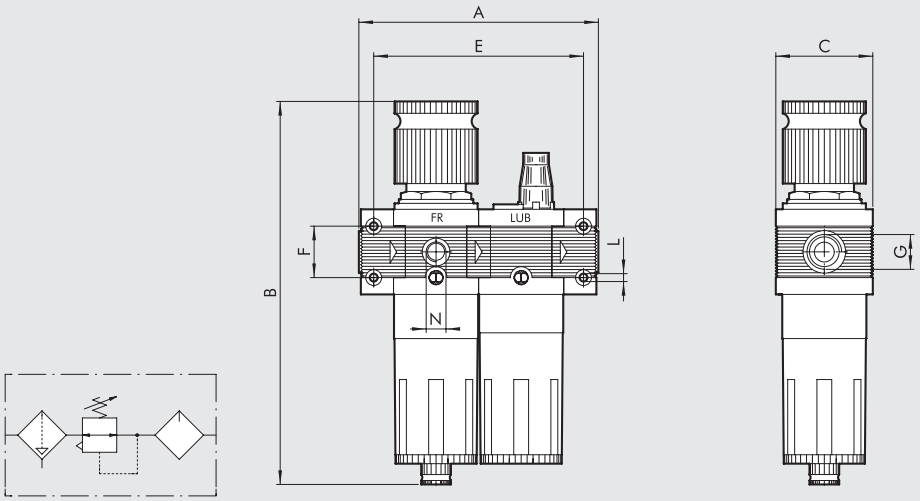

		FR + LUB 100		FR + LUB 200			FR + LUB 300		
Threaded port G		1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"
A		121		149			175		177
B	RMSA	199		245			278		
	RA	-		249			282		
	SAC	203		249			282		
C		50		63			72		
E		106		134			157		
F		26		36			42		
L		Hole for M4 screws		Hole for M5 screws			Hole for M5 screws		
N (pressure gauge port)		1/8"		1/8"			1/8"		

ORDERING CODES

Codie	Description
FR+L Skillair® 100	
3284008	FR+L 100 1/4 20 08 RMSA
3284011	FR+L 100 1/4 20 012 RMSA
3384008	FR+L 100 3/8 20 08 RMSA
3384011	FR+L 100 3/8 20 012 RMSA
FR+L Skillair® 200	
3484008	FR+L 200 1/4 20 08 RMSA
3484011	FR+L 200 1/4 20 012 RMSA
3584008	FR+L 200 3/8 20 08 RMSA
3584011	FR+L 200 3/8 20 012 RMSA
3684008	FR+L 200 1/2 20 08 RMSA
3684011	FR+L 200 1/2 20 012 RMSA
FR+L Skillair® 300	
4484005	FR+L 300 1/2 20 08 RMSA
4484008	FR+L 300 1/2 20 012 RMSA
4584005	FR+L 300 3/4 20 08 RMSA
4584008	FR+L 300 3/4 20 012 RMSA
4684005	FR+L 300 1 20 08 RMSA
4684008	FR+L 300 1 20 012 RMSA

The following versions are available on request:
- with 5 µm or 50 µm degree of filtration
- with SAC or RA condensate discharge

V3V + FR + LUB Skillair®

Refer to the sections on the single modules for a further description, components and other technical data.

TECHNICAL DATA		V + FR + L 100		V + FR + L 200			V + FR + L 300		
Threaded port		1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"
Setting range		0 to 8 - 0 to 12		0 to 8 - 0 to 12			0 to 8 - 0 to 12		
Degree of filtration	µm	5 - 20 - 50		5 - 20 - 50			5 - 20 - 50		
Max. inlet pressure	MPa	1.5		1.3			1.3		
	bar	15		13			13		
	psi	217		188			188		
Flow rate at 6.3 bar ΔP 0.5 bar	Nl/min	300		1200			2300		
	scfm	11		43			82		
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	800		2400			4000		
	scfm	28		85			142		
Max temperature at 10 bar	°C	50		50			50		
	°F	122		122			122		
Weight	kg	1		1.8			3.2		
Wall fixing screws		M4 x 50		M5 x 60			M5 x 70		
Fluid		Compressed air.							
Notes on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.**							
		Do not take air from pressure gauge ports.							

SYNOPTIC, SIZES AND VERSIONS

VFR+L	100	1/4	20	08	RMSA
ELEMENT	SIZE	THREADED PORT	DEGREE OF FILTRATION	SETTING RANGE	TYPE OF CONDEN-SATE DRAIN
VFRL+L	100	1/4	5 = 5 µm	08 = 0 to 8 bar	RMSA
		3/8	20 = 20 µm	012 = 0 to 12 bar	SAC
	200	1/4	50 = 50 µm		RMSA
		3/8			SAC
		1/2			RA
	300	1/2			RMSA
		3/4			RA
		1			

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure

RA: automatic drain with condensate discharge, independent of pressure and flow rate.
(for size 200, 300).
Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.
(for size 100 and 200)

DIMENSIONS V3V + FR + L



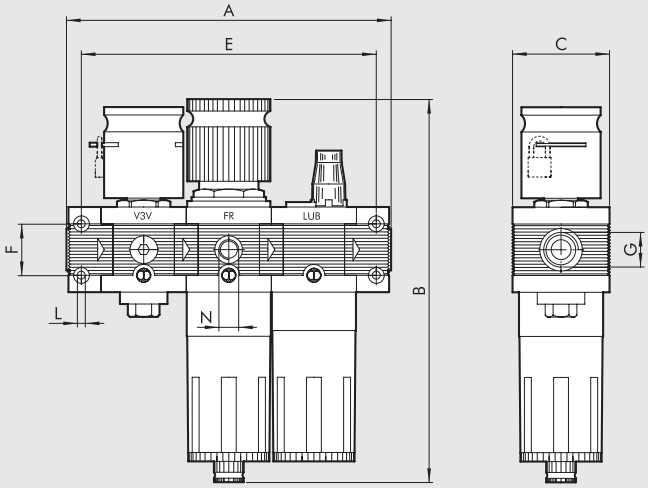

	V3V + FR + LUB 100		V3V + FR + LUB 200			V3V + FR + LUB 300		
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″
A	164		204.5			240		242
B **RMSA**	199		245			278		
RA	-		249			282		
SAC	203		249			282		
C	50		63			72		
E	149		189.5			222		
F	26		36			42		
L	Hole for M4 screws		Hole for M5 screws			Hole for M5 screws		
N (pressure gauge port)	1/8″		1/8″			1/8″		

ORDERING CODES

Code	Description
VFR+L Skillair® 100	
3272008	VFR+L 100 1/4 20 08 RMSA
3272011	VFR+L 100 1/4 20 012 RMSA
3372008	VFR+L 100 3/8 20 08 RMSA
3372011	VFR+L 100 3/8 20 012 RMSA
VFR+L Skillair® 200	
3472008	VFR+L 200 1/4 20 08 RMSA
3472011	VFR+L 200 1/4 20 012 RMSA
3572008	VFR+L 200 3/8 20 08 RMSA
3572011	VFR+L 200 3/8 20 012 RMSA
3672008	VFR+L 200 1/2 20 08 RMSA
3672011	VFR+L 200 1/2 20 012 RMSA
VFR+L Skillair® 300	
4472005	VFR+L 300 1/2 20 08 RMSA
4472008	VFR+L 300 1/2 20 012 RMSA
4572005	VFR+L 300 3/4 20 08 RMSA
4572008	VFR+L 300 3/4 20 012 RMSA
4672005	VFR+L 300 1 20 08 RMSA
4672008	VFR+L 300 1 20 012 RMSA

The following versions are available on request:
- with 5 µm or 50 µm degree of filtration
- with SAC or RA condensate discharge

FIL + LUB Skillair®

Refer to the sections on the single modules for a further description, components and other technical data.

TECHNICAL DATA		F + L 100		F + L 200			F + L 300			F + L 400		
Threaded port		1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	2"
Degree of filtration	µm	5 - 20 - 50		5 - 20 - 50			5 - 20 - 50			5 - 20 - 50		
Max. inlet pressure	MPa	1.5		1.3			1.3			1.3		
	bar	15		13			13			13		
	psi	217		188			188			188		
Flow rate at 6.3 bar ΔP 0.5 bar	Nl/min	600		1800			3200			9000		14000
	scfm	21		64			113			320		500
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	1200		3200			4500			-		-
	scfm	42		113			160			-		-
Max temperature at 10 bar	°C	50		50			50			50		
	°F	122		122			122			122		
Weight	kg	0.5		1.1			2.2			~ 8		
Wall fixing screws		M4 x 50		M5 x 60			M5 x 70			M6 x 110		
Fluid		Compressed air.										
Notes on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.**										

SYNOPTIC, SIZES AND VERSIONS

F+L	100	1/4	20	RMSA
ELEMENT	SIZE	THAREADED PORT	DEGREE OF FILTRATION	TYPE OF CONDENSATE DRAIN
F+L	100	1/4	5 = 5 µm	RMSA
		3/8	20 = 20 µm	SAC
	200	1/4	50 = 50 µm	RMSA
		3/8		RA
		1/2		
	300	1/2		
		3/4		
		1		
	400	1		
		1 1/4		
		1 1/2		
		2		

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure

RA: automatic drain with condensate discharge, independent of pressure and flow rate.
(for size 200, 300 and 400).
Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.
(for size 100 and 200)

DIMENSIONS FIL + LUB

100 - 200 - 300

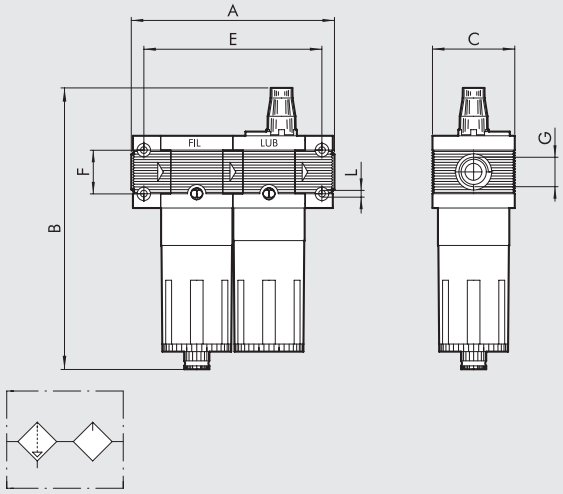

400

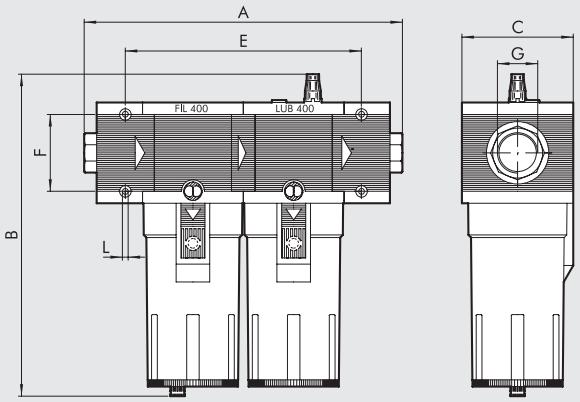

		FIL + LUB 100		FIL + LUB 200			FIL + LUB 300			FIL + LUB 400			
Threaded port G		1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	2"
A		121		149			175		177	330 to 360			388 to 418
B	**RMSA**	172.5		203.5			223.5			349.5			
	RA	-		207.5			227.5			353.5			
	SAC	176.5		207.5			227.5			353.5			
C		50		63			72			118			
E		106		134			157			247			
F		26		36			42			80			
L		Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			

ORDERING CODES

Code	Description
F+L Skillair® 100	
3285002	F+L 100 1/4 20 RMSA
3385002	F+L 100 3/8 20 RMSA
F+L Skillair® 200	
3485002	F+L 200 1/4 20 RMSA
3585002	F+L 200 3/8 20 RMSA
3685002	F+L 200 1/2 20 RMSA
F+L Skillair® 300	
4485002	F+L 300 1/2 20 RMSA
4585002	F+L 300 3/4 20 RMSA
4585005	F+L 300 3/4 20 RA
4685002	F+L 300 1 20 RMSA
F+L Skillair® 400	
6185002	F+L 400 1 20 RMSA
6185005	F+L 400 1 20 RA
6285002	F+L 400 1 1/4 20 RMSA
6385002	F+L 400 1 1/2 20 RMSA
6485002	F+L 400 2 20 RMSA

The following versions are available on request:
- with 5 µm or 50 µm degree of filtration
- with SAC or RA condensate discharge

FIL + DEP Skillair®

Refer to the sections on the single modules for a further description, components and other technical data.

TECHNICAL DATA			F + D 100		F + D 200			F + D 300			F + D 400			
Threaded port			1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	2"
Degree of filtration	Filter	µm	5		5			5			5			
	Depurator	µm	0.01		0.01			0.01			0.01			
Max. inlet pressure		MPa	1.5		1.3			1.3			1.3			
		bar	15		13			13			13			
		psi	217		188			188			188			
Max temperature at 10 bar		°C	50		50			50			50			
		°F	122		122			122			122			
Weight		kg	0.6		1.3			2.2			~ 7			
Wall fixing screws			M4 x 50		M5 x 60			M5 x 70			M6 x 110			
Maximun suggested flow rate			Please look at the flow rate curves at page **C3**.12											
Fluid			Compressed air.											
Notes on use			**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.**											

SYNOPTIC, SIZES AND VERSIONS

F+D	100	1/4	5	RMSA
ELEMENT	SIZE	THREADED PORT	DEGREE OF FILTRATION	TYPE OF CONDENSATE DRAIN
F+D	100	1/4	5 = 5 µm	RMSA
		3/8		SAC
	200	1/4		RMSA
		3/8		RA
		1/2		
	300	1/2		
		3/4		
		1		
	400	1		
		1 1/4		
		1 1/2		
		2		

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure

RA: automatic drain with condensate discharge, independent of pressure and flow rate. (for size 300 and 400). Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs**. (for size 100 and 200)

METAL WORK PNEUMATIC

DIMENSIONS FIL + DEP

100 - 200 - 300

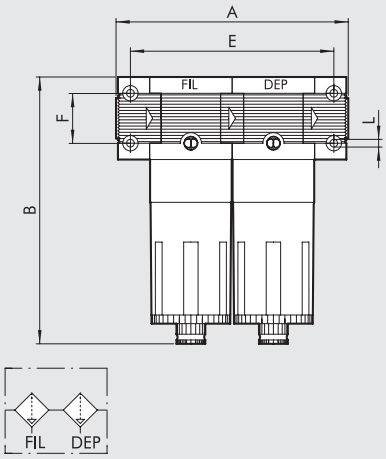

400

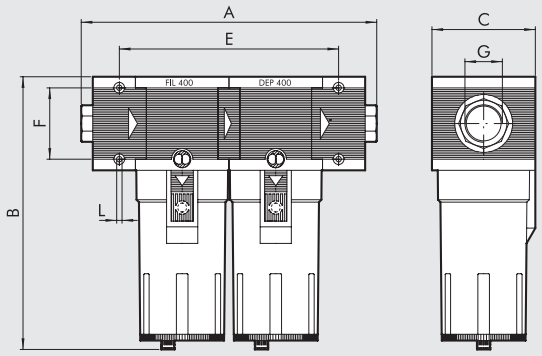

		FIL + DEP 100		FIL + DEP 200			FIL + DEP 300			FIL + DEP 400			
Threaded port G		1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1"	1" 1/4"	1" 1/2"	2"
A		121		149			175		177	330 to 360			388 to 418
B	**RMSA**	144		175			195			320			
	RA	-		179			199			324			
	SAC	148		179			199			324			
C		50		63			72			118			
E		106		134			157			247			
F		26		36			42			80			
L		Hole for M4 screws		Hole for M5 screws			Hole for M5 screws			Hole for M6 screws			

ORDERING CODES

Code	Description
F+D Skillair® 100	
3289001	F+D 100 1/4 5 RMSA-RMSA
3289005	F+D 100 1/4 5 SAC-RMSA
3289006	F+D 100 1/4 5 SAC-SAC
3389001	F+D 100 3/8 5 RMSA-RMSA
3389005	F+D 100 3/8 5 SAC-RMSA
3389006	F+D 100 3/8 5 SAC-SAC
F+D Skillair® 200	
3489001	F+D 200 1/4 5 RMSA-RMSA
3489005	F+D 200 1/4 5 SAC-RMSA
3489006	F+D 200 1/4 5 SAC-SAC
3589001	F+D 200 3/8 5 RMSA-RMSA
3589005	F+D 200 3/8 5 SAC-RMSA
3589006	F+D 200 3/8 5 SAC-SAC
3689001	F+D 200 1/2 5 RMSA-RMSA
3689005	F+D 200 1/2 5 SAC-RMSA
3689006	F+D 200 1/2 5 SAC-SAC

Code	Description
F+D Skillair® 300	
4489001	F+D 300 1/2 5 RMSA-RMSA
4489002	F+D 300 1/2 5 RA-RA
4589001	F+D 300 3/4 5 RMSA-RMSA
4589002	F+D 300 3/4 5 RA-RA
4689001	F+D 300 1 5 RMSA-RMSA
4689002	F+D 300 1 5 RA-RA
F+D Skillair® 400	
6189001	F+D 400 1 5 RMSA-RMSA
6189002	F+D 400 1 5 RA-RA
6289001	F+D 400 1 1/4 5 RMSA-RMSA
6289002	F+D 400 1 1/4 5 RA-RA
6389001	F+D 400 1 1/2 5 RMSA-RMSA
6389002	F+D 400 1 1/2 5 RA-RA
6489001	F+D 400 2 5 RMSA-RMSA
6489002	F+D 400 2 5 RA-RA

Skillair® ACCESSORIES

MOUNTING BRACKET FOR REG.



Code	Description
9200701	SF100- BIT-ND1/4
9400701	SF200-ND-3/8 1/2
9400702	SF300

Code	A	B	C	D	E
9200701	32	20	12	5.5	14.2
9400701	42	40	12	5.5	15
9400702	48	49	12	5.5	17

PRESSURE GAUGES





Code	Description
9700101	M 40 1/8 012
9700102	M 40 1/8 04
9800101	M 50 1/8 012
9800102	M 50 1/8 04
9900101	M 63 1/4 012
9700109	M 40x40 1/8 04
9700110	M 40x40 1/8 012

COIL 22 mm FOR APR AND V3V ELPN



Code	Description
W0215000151	Coil 22 Ø 8 BA 2W-12VDC
W0215000101	Coil 22 Ø 8 BA 2W-24VDC
W0215000111	Coil 22 Ø 8 BA 3.5VA-24VAC
W0215000121	Coil 22 Ø 8 BA 3.5VA-110VAC
W0215000131	Coil 22 Ø 8 BA 3.5VA-220VAC

Electrical connection DIN 43650 B-IND

"UL" AND "CSA" COIL 22 mm FOR APR AND V3V ELPN



Code	Description
W0215000251	Coil 22 Ø 8 BA 2W-12VDC UR
W0215000201	Coil 22 Ø 8 BA 2W-24VDC UR
W0215000211	Coil 22 Ø 8 BA 3.5VA-24VAC UR
W0215000221	Coil 22 Ø 8 BA 3.5VA-110VAC UR
W0215000231	Coil 22 Ø 8 BA 3.5VA-220VAC UR

Electrical connection DIN 43650 B-IND

c UL us

COIL 30 mm FOR APR AND V3V ELPN



Code	Description
W0210010100	Coil 30 Ø 8 2W-24VDC
W0210011100	Coil 30 Ø 8 3.5VA-24VAC 50/60 HZ
W0210012100	Coil 30 Ø 8 3.5VA-110VAC 50/60 HZ
W0210013100	Coil 30 Ø 8 3.5VA-220VAC 50/60 HZ

Electrical connection DIN 43650 - A

COIL 30 mm FOR CDV CDML LUBRICATOR



Code	Description
W0216001001	Coil 30 Ø13 10W-24VDC
W0216001011	Coil 30 Ø13 13VA-24VAC 50/60HZ
W0216001021	Coil 30 Ø13 13VA-110VAC 50/60HZ
W0216001031	Coil 30 Ø13 13VA-220VAC 50/60HZ

Electrical connection DIN 43650 - A

KIT FOR COIL EEXM (FOR V3V-APR-LUB)



Code	Description
0227606913	Kit for coil 30 24 VDC EEXMT5 cable 3 m
0227606915	Kit for coil 30 24 VDC EEXMT5 cable 5 m
0227608013	Kit for coil 30 24 VAC EEXMT5 cable 3 m
0227608015	Kit for coil 30 24 VAC EEXMT5 cable 5 m
0227608023	Kit for coil 30 110 VAC EEXMT5 cable 3 m
0227608025	Kit for coil 30 110 VAC EEXMT5 cable 5 m
0227608033	Kit for coil 30 230 VAC EEXMT5 cable 3 m
0227608035	Kit for coil 30 230 VAC EEXMT5 cable 5 m

Atex (2014/34/EU), IECEx and CCC certified coils:
Ex II 2G Ex mb IIC T4/T5 Gb
Ex II 2D Ex tb IIIC T130/T95 °C Db
N.B.: Supplied complete with adapter for Ø8 mm sleeve

ELECTRIC CONNECTOR 22 mm FOR COILS DIN 43650 B-IND



Code	Description
W0970510011	Connector standard
W0970510012	Connector 22 LED 24V
W0970510013	Connector 22 LED 110V
W0970510014	Connector 22 LED 220V
W0970510015	Connector 22 LED VDR 24V
W0970510016	Connector 22 LED VDR 110V
W0970510017	Connector 22 LED VDR 220V
W0970510070	Connector 22 ATEX II 2 GD

Code	Description
W0970510051	Connector 22 LED 24VDC Energy Saving

For technical data see page **B1**.61

ELECTRIC CONNECTOR 30 mm FOR COILS DIN 43650-A



Code	Description
W0970520033	Connector 30 STD
W0970520034	Connector 30 LED 24V
W0970520035	Connector 30 LED 110V
W0970520036	Connector 30 LED 220V
W0970520037	Connector 30 LED VDR 24V
W0970520038	Connector 30 LED VDR 110V
W0970520039	Connector 30 LED VDR 220V
W0970520070	Connector 30 ATEX II 2GD

M8 STRAIGHT CONNECTOR WITH CABLE FOR PRESSURE SWITCHES



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

Skillair® SPARE PARTS

METAL WORK PNEUMATIC

M8 ADAPTER CABLE FOR CONNECTING THE PRESSURE SWITCH TO THE EB 80 E CM DIGITAL INPUTS MODULE

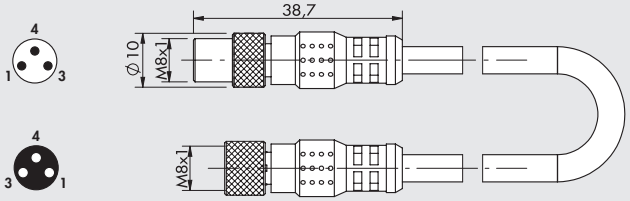

Code	Description
0240010501	M8-M, M8-F 3-pole adapter with cable L = 0.3 m

Note: Can be used to connect the pressure switch to the module of digital INPUT **S01** of the EB 80 valves, to the additional M8 INPUT module of the CM valves and to the Profibus-DP IP67 M8 input. Contact type NO (Normally open)

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 3	pin 4	Signal NO
pin 4	pin 3	Disconnect

KIT COIL SIDE 22 IP65 (FOR V3V-APR-LUB)

Code	Description
0222100100	Kit for coils 22 - IP65

Improved IP65 protection, even after prolonged exposure to atmospheric agents. Applicable to valves with a technopolymer control.

CONNECTOR KIT FOR SKILLAIR CODE A



Code	Description
9230301	Connector kit 100
9330301	Connector kit 200
9430301	Connector kit 300
9630301	Connector kit 400

INPUT/OUTPUT END PLATE KIT



Code	Description
9230401	IN/OUT end plate kit 100 1/4
9330501	IN/OUT end plate kit 100 3/8
9330601	IN/OUT end plate kit 200 1/4
9330701	IN/OUT end plate kit 200 3/8
9330801	IN/OUT end plate kit 200 1/2
9430701	IN/OUT end plate kit 300 1/2
9530901	IN/OUT end plate kit 300 3/4
9531001	IN/OUT end plate kit 300 1
9631001	IN/OUT end plate kit 400 1
9631101	IN/OUT end plate kit 400 1 1/4
9631201	IN/OUT end plate kit 400 1 1/2
9631301	IN/OUT end plate kit 400 2

FILTER BOWL



Code	Description
9253301	Spares TF 100 RMSA
9255301	Spares TF 100 SAC
9353301	Spares TF 200 RMSA
9355301	Spares TF 200 SAC
9453401	Spares TF 300 RA
9453301	Spares TF 300 RMSA
9653401	Spares TF 400 RA
9653301	Spares TF 400 RMSA

LUBRICATOR BOWL



Code	Description
9253501	Spares TL 100
9202503	Spares TL 100 CA
9202502	Spares TL 100 CD
9202501	Spares TL 100 ML
9353501	Spares TL 200
9302501	Spares TL 200 CA
9302503	Spares TL 200 CD
9302502	Spares TL 200 ML
9453501	Spares TL 300
9202401	Spares TL 300 CA
9202403	Spares TL 300 CD
9202402	Spares TL 300 ML
9653501	Spares TL 400
9653502	Spares TL 400 CA
9653504	Spares TL 400 CD
9653503	Spares TL 400 ML

FILTERING ELEMENTS



Code	Description
9251705	Spares FP 100 5
9251706	Spares FP 100 20
9251707	Spares FP 100 50
9351705	Spares FP 200 5
9351706	Spares FP 200 20
9351707	Spares FP 200 50
9451705	Spares FP 300 5
9451706	Spares FP 300 20
9451707	Spares FP 300 50
9651705	Spares FP 400 5
9651706	Spares FP 400 20
9651707	Spares FP 400 50

FILTERING/PURIFICATION ELEMENTS



Code	Description
9251711	Spares FP DEP. 100
9351711	Spares FP DEP. 200
9451711	Spares FP DEP. 300
9651711	Spares FP DEP. 400

CARTRIDGE AC



Code	Description
9251713	Spares cartridge 100 AC
9351713	Spares cartridge 200 AC
9451713	Spares cartridge 300 AC
9651712	Spares cartridge 400 AC

UPPER COVER FOR REGULATOR AND FR



Code	Description
9250800	Spares CS 100 02
9250810	Spares CS 100 04
9250811	Spares CS 100 08
9250812	Spares CS 100 012
9350800	Spares CS 200 02
9350810	Spares CS 200 04
9350811	Spares CS 200 08
9350812	Spares CS 200 012
9450805	Spares CS 300 04
9450806	Spares CS 300 08
9450807	Spares CS 300 012
9450808	Spares CS 300 02

VENTURI LUBRICATOR DIAPHRAGM



Code	Description
9252001	Spares MB 100 ND 1/4
9352001	Spares MB 200 ND 3/8-1/2
9452001	Spares MB 300
9652601	Spares MB 400

COMPLETE POPPET FOR REGULATORS



Code	Description
9250704	Spares OTR 100
9350704	Spares OTR 200
9450704	Spares OTR 300
9650704	Spares OTR 400

TRANSPARENT LUBRICATOR COVER



Code	Description
9251302	Spares CVL 100-200-300-400 BIT

COMPLETE POPPET FOR FR



Code	Description
9250902	Spares OTFR 100 5
9250903	Spares OTFR 100 20
9250904	Spares OTFR 100 50
9350902	Spares OTFR 200 5
9350903	Spares OTFR 200 20
9350904	Spares OTFR 200 50
9450902	Spares OTFR 300 5
9450903	Spares OTFR 300 20
9450904	Spares OTFR 300 50

SPRINGS FOR REDUCERS AND FRS



Code	Description
9250605	Spares MO 100 02
9250606	Spares MO 100 04
9250607	Spares MO 100 08
9250608	Spares MO 100 012
9350605	Spares MO 200 02
9350606	Spares MO 200 04
9350607	Spares MO 200 08
9350608	Spares MO 200 012
9450605	Spares MO 300 04
9450606	Spares MO 300 08
9450607	Spares MO 300 012
9450608	Spares MO 300 02

UPPER COVER DISASSEMBLY SPANNER



Code	Description
9220701	Spares cover spanner

METAL WORK PNEUMATIC

REG AND FR VISUAL DOME DISASSEMBLY SPANNER



Code	Description
9220401	Spares dome dis. spanner 100
9323401	Spares dome dis. spanner 200
9420401	Spares dome dis. spanner 300

POPPET DISASSEMBLY SPANNER (FOR REG.)



Code	Description
9220501	Spares R cap disass. WR. 100
9323501	Spares R cap disass. WR. 200
9420501	Spares R cap disass. WR. 300

POPPET DISASSEMBLY SPANNER (FOR FR)



Code	Description
9220801	Spares FR cap disass. WR. 100
9320801	Spares FR cap disass. WR. 200
9420801	Spares FR cap disass. WR. 300

CAP DISASSEMBLY SPANNER



Code	Description
9220601	Spares cap disass. 100
9323601	Spares cap disass. 200
9420601	Spares cap disass. 300

PROVISION FOR SOLENOID CONTROL TO CNOMO FOR APR-300



Code	Description
9454001	Spares PCE to Cnomo

PROVISION FOR MICRO SOLENOID CONTROL FOR APR-300



Code	Description
9453601	Spares PCE micro

PROVISION FOR PNEUMATIC CONTROL FOR APR-300



Code	Description
9453701	Spares PCP pneumatic

CNOMO SOLENOID CONTROL FOR APR and V3V 300-400



Code	Description
9453901	Spares CEC Cnomo 24CC
9453902	Spares CEC Cnomo 24V
9453903	Spares CEC Cnomo 110V
9453904	Spares CEC Cnomo 220V

MICRO SOLENOID CONTROL FOR APR-300 and V3V 300 (NO MORE IN THE CATALOGUE)



Code	Description
9453801	Spares CEM micro 24CC
9453802	Spares CEM micro 24V
9453803	Spares CEM micro 110V
9453804	Spares CEM micro 220V

KEY-OPERATED V3V 400



Code	Description
9455401	Spares kit C.C. 400

MANUAL LOCKABLE V3V 400



Code	Description
9455601	Spares kit lockable 400

INPUT/OUTPUT COVER PLATE



Code	Description
9152103	Spares OUTPUT cover plate 100
9152105	Spares INPUT cover plate 100
9152115	Spares OUTPUT cover plate 200
9152116	Spares INPUT cover plate 200
9152104	Spares OUTPUT cover plate 300
9152106	Spares INPUT cover plate 300
9152118	Spares OUTPUT cover plate 400
9152119	Spares INPUT cover plate 400

INTERMEDIATE COVER PLATE



Code	Description
9152107	Spares intermediate cover plate 100
9152114	Spares intermediate cover plate 200
9152108	Spares intermediate cover plate 300
9152117	Spares intermediate cover plate 400

AUTOMATIC DRAIN (RA)



Code	Description
9000802	Spares RA automatic drain

AUTOMATIC DRAIN (SAC)

Code	Description
9000803	Spares SAC automatic drain

NOTES

METAL WORK PNEUMATIC

NOTES

NOTES

METAL WORK PNEUMATIC

NOTES

SUMMARY New deal

	GENERAL TECHNICAL DATA New deal	C4.4
	New deal FILTER	C4.6
	New deal DEPURATOR	C4.9
	New deal REGULATOR	C4.11
	New deal PADLOCKABLE REGULATOR	C4.14
	New deal PILOT-OPERATED REGULATOR	C4.16
	New deal REGULATOR AND REGULATOR WITH V3V 3/4"-1"	C4.17
	New deal FILTER REGULATOR	C4.20
	New deal LUBRICATOR	C4.23
	New deal SHUT-OFF VALVE	C4.26
	New deal 3/4"-1" SHUT-OFF VALVE	C4.28

METAL WORK PNEUMATIC

- **New deal AIR TAKE-OFF** — C4.30

- **New deal SUB-BASE** — C4.31

- **New deal AUTOMATIC CONDENSATE DRAIN** — C4.32

- **FIL + REG + LUB New deal** — C4.33

- **FRPL 3/4"-1" New deal** — C4.35

- **FR + LUB New deal** — C4.37

- **V3V + FR + LUB New deal** — C4.39

- **FIL + DEP New deal** — C4.41

- **FIL + LUB New deal** — C4.43

- **New deal ACCESSORIES** — C4.45

- **New deal SPARE PARTS** — C4.47

GENERAL TECHNICAL DATA Newdeal

Newdeal is the forerunner of all air treatment units by Metal Work.
The entire range is top quality, heavy-duty and reliable.
These units are designed for use at high pressures* and in applications where the temperature and quality of the ambient area are critical.

*For further details, refer to the Specification for the item in question.

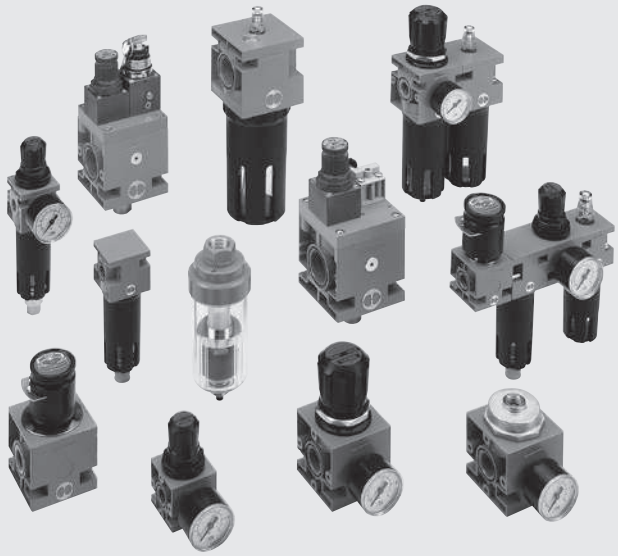

TECHNICAL DATA		ND 1/4"	ND 3/8"	ND 1/2"	ND 3/4"	ND 1"
Threaded port		1/4"	3/8"	1/2"	3/4"	1"
Degree of filtration	µm	4 - 20 - 50				
Degree of purification	µm	99.97% at 0.01				
Setting range	bar	0 to 2 - 0 to 4 - 0 to 8 - 0 to 12				
Max. input pressure	MPa	1.8				
	bar	18				
	psi	261				
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	from 200 at 12000				
Fluid		Lubricated or unlubricated compressed air				
Temperature range at 1 MPa; 10 bar; 145 psi	°C	–10 to +50				
	°F	14 to 122				
Elements comprising the range		Filter, Depurator, Regulator, Pilot operated Regulator, In-series Regulator, Filter-regulator, Lubricator, Circuit Shut-off Valve				
Compatibility with oils		See **chapter Z1**				

WALL MOUNTING

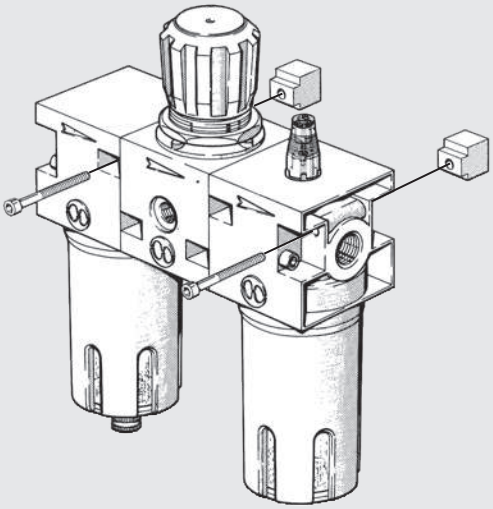

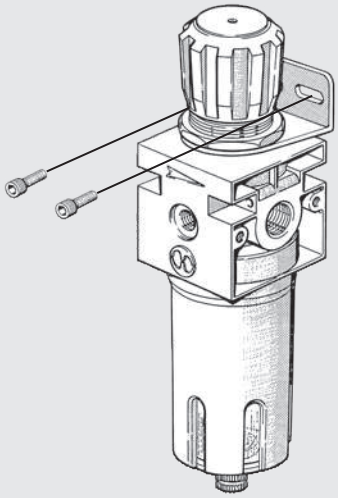

METAL WORK PNEUMATIC

ASSEMBLY DIAGRAM

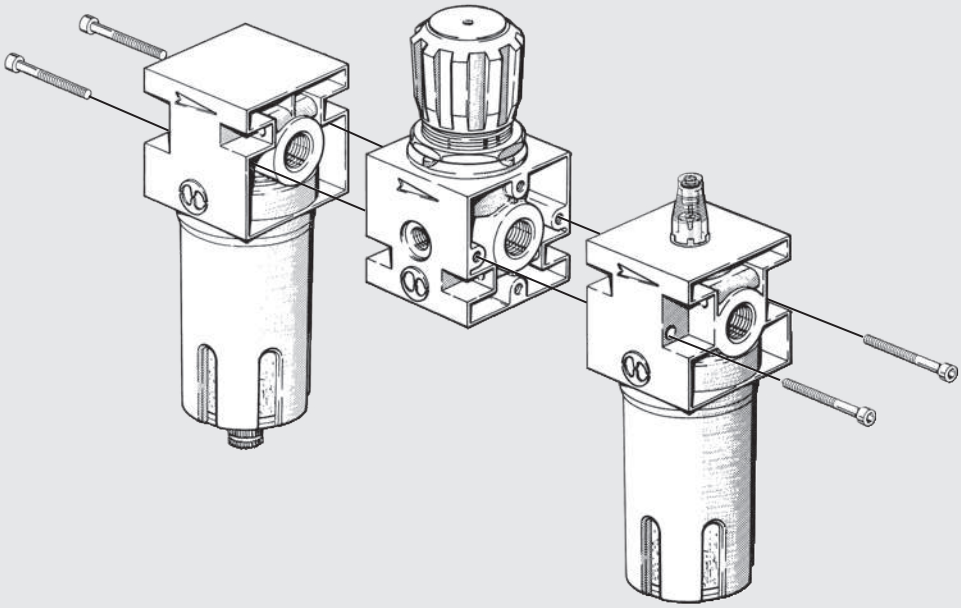

ASSEMBLY TIE RODS



Elements that can be assembled	1/4			3/8 - 1/2			3/4 - 1		
	Type	Code	Ref.	Type	Code	Ref.	Type	Code	Ref.
F/L + R/FR	A	**9250001**	CVA 1/4 4x40	A	**9450001**	CVA 1/2 5x55	A	**9650001**	CVA 1 6x70
V3V + R/FR	A	**9250001**	CVA 1/4 4x40	A	**9450002**	CVA 1/2 5x60	-	-	-
V3V + F/L + R/FR	A	**9250002**	CVA 1/4 4x82	A	**9450003**	CVA 1/2 5x120	C	**9604402**	V3V + F + R T 3/4-1
F/L/D + F/L/D	B	**9200901**	F + L T 1/4	B	**9400901**	F + L T 3/8-1/2	B	**9600901**	F + L T 3/4-1

GENERAL RULES - USE AND MAINTENANCE

The knob can be locked so that the set pressure cannot be altered.



The air pressure must always be set upwards.





With the knob in the centre position, the drain is semi-automatic.
The drain operates when the bowl is not pressurized and closes when it is.



Press the button to drain condensate when the bowl is pressurized.



Turn the knob anticlockwise to close the valve with bowl pressurized or not pressurized.



To clean or replace the filter element unscrew the screen of the centrifuge assembly. Use a no. 3 compass spanner to unscrew the bowl.

New deal FILTER

Filter with different impurity filtration degrees.
- Metal bowl with external viewing
- Semi-automatic and condensate drainage

TECHNICAL DATA		FIL ND 1/4"	FIL ND 3/8"	FIL ND 1/2"	FIL ND 3/4"	FIL ND 1"
Threaded port		1/4"	3/8"	1/2"	3/4"	1"
Degree of filtration	µm	4 - 20 - 50	4 - 20 - 50		4 - 20 - 50	
Max. inlet pressure	MPa	1.8	1.8		1.8	
	bar	18	18		18	
	psi	261	261		261	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	1300	3100		9100	
	scfm	46	110		324	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	1720	4100		11000	
	scfm	61	146		391	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50°	50°		50°	
	°F	122°	122°		122°	
Weight	kg	0.4	0.9		1.2	
Wall fixing screws		M4 x 40	M4 x 55		M6 x 75	
Bowl capacity	cm^3	10	45		170	
Mounting position		Vertical	Vertical		Vertical	
Drain		RMSA - SAC	RMSA - SAC - RA		RMSA - RA	
		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure. RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port. SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs.**				
Fluid		Compressed air				
Note on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.**				

COMPONENTS

① Zamak body
② Aluminium bowl
③ Technopolymer centrifuge
④ Technopolymer baffle plug
⑤ Technopolymer screen
⑥ Clear technopolymer bowl
⑦ Drain (RMSA)
⑧ HDPE bronze filter cartridge (1/4 - 3/8 - 1/2), sintered bronze (1")
⑨ NBR gaskets

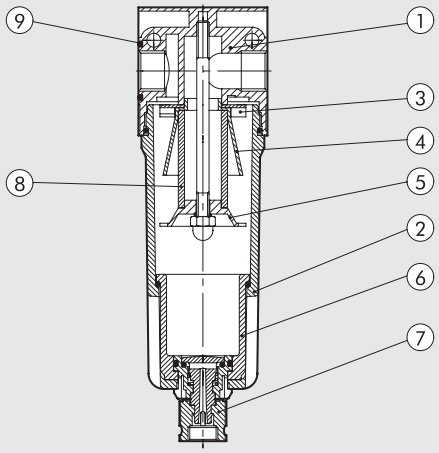

FLOW CHARTS

FIL 1/4

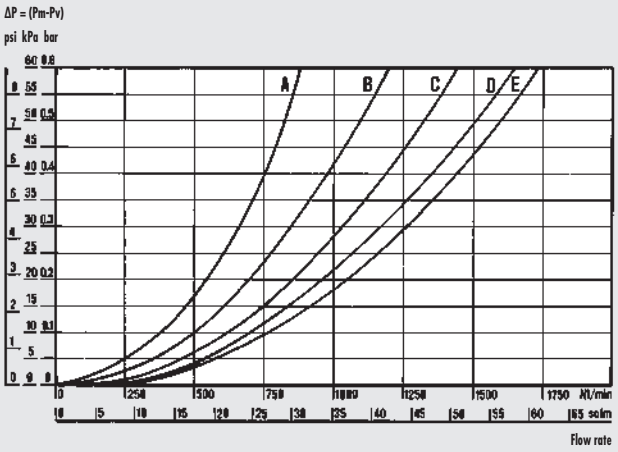

Department of Mechanics
Turin Polytechnic

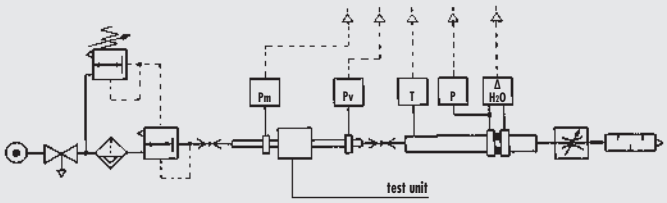

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi

FIL 3/8 - 1/2

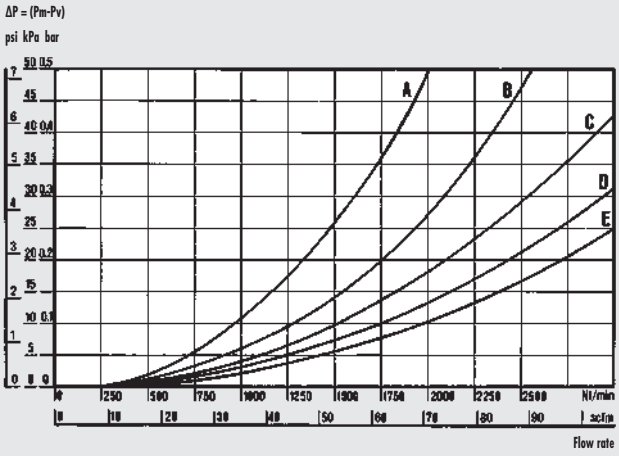

FIL 3/4 - 1"

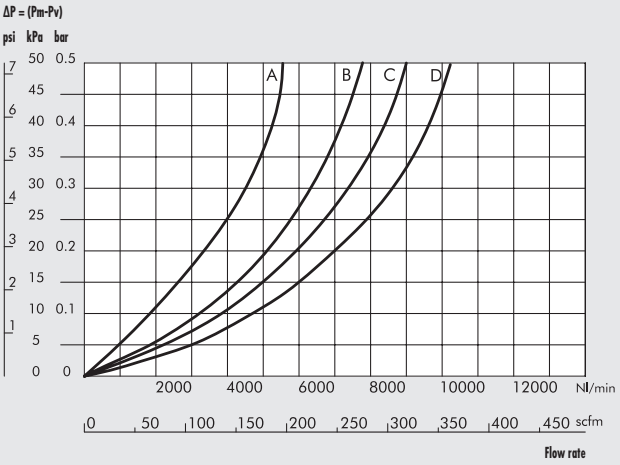

DIMENSIONS

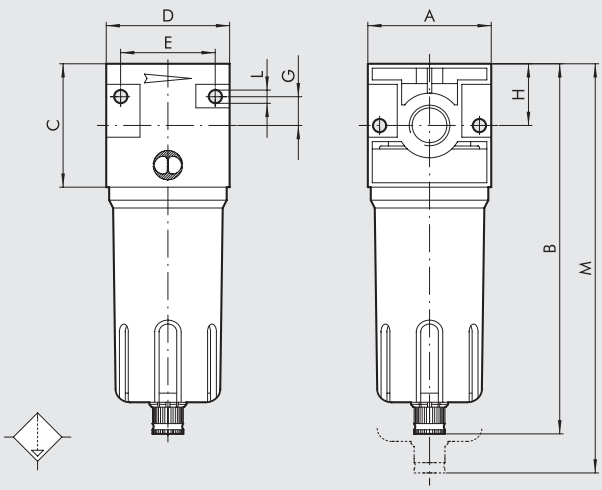

		FIL ND 1/4"	FIL ND 3/8"	FIL ND 1/2"	FIL ND 3/4"	FIL ND 1"
Threaded port		1/4"	3/8"	1/2"	3/4"	1"
A		42	60		80	
B	RMSA	142	180		235	
	RA	-	184		239	
	SAC	146	184		239	
C		42	60		80	
D		42	60		80	
E		32	46		66	
G		10	14		22	
H		21	30		40	
L		Hole for M4 screws	Hole for M4 screws		Hole for M6 screws	
M	RMSA	185	230		325	
	RA	-	234		329	
	SAC	189	234		329	

SYNOPTIC, SIZES AND VERSIONS

FIL ELEMENT	1/4 THREADED PORT	4 DEGREE OF FILTRATION	RMSA TYPE OF CONDENSATE DRAIN
FIL.	1/4	4 µm	RMSA
		20 µm	SAC
	3/8	50 µm	RMSA
	1/2		SAC
			RA
	3/4		RMSA
	1		RA

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.
RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.
SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

ORDERING CODES

Code	Description
New deal FILTER 1/4"	
1221005	FIL 1/4 4 RMSA
1221013	FIL 1/4 4 SAC
1221006	FIL 1/4 20 RMSA
1221014	FIL 1/4 20 SAC
1221008	FIL 1/4 50 RMSA
1221016	FIL 1/4 50 SAC
New deal FILTER 3/8"	
1321005	FIL 3/8 4 RMSA
1321009	FIL 3/8 4 RA
1321013	FIL 3/8 4 SAC
1321006	FIL 3/8 20 RMSA
1321010	FIL 3/8 20 RA
1321014	FIL 3/8 20 SAC
1321008	FIL 3/8 50 RMSA
1321012	FIL 3/8 50 RA
1321016	FIL 3/8 50 SAC
New deal FILTER 1/2"	
1421005	FIL 1/2 4 RMSA
1421009	FIL 1/2 4 RA
1421013	FIL 1/2 4 SAC
1421006	FIL 1/2 20 RMSA
1421010	FIL 1/2 20 RA
1421014	FIL 1/2 20 SAC
1421008	FIL 1/2 50 RMSA
1421012	FIL 1/2 50 RA
1421016	FIL 1/2 50 SAC
New deal FILTER 3/4"	
1521005	FIL 3/4 4 RMSA
1521009	FIL 3/4 4 RA
1521006	FIL 3/4 20 RMSA
1521010	FIL 3/4 20 RA
1521008	FIL 3/4 50 RMSA
1521012	FIL 3/4 50 RA
New deal FILTER 1"	
1621005	FIL 1 4 RMSA
1621009	FIL 1 4 RA
1621006	FIL 1 20 RMSA
1621010	FIL 1 20 RA
1621008	FIL 1 50 RMSA
1621012	FIL 1 50 RA

NOTES

New deal DEPURATOR

METAL WORK PNEUMATIC

Oil-proof depurator with coalescing cartridge
- Metal bowl with external viewing
- Manual/semi-auto or automatic condensate drain

TECHNICAL DATA		DEP ND 3/8"	DEP ND 1/2"
Threaded port		3/8"	1/2"
Degree of depuration	µm	99.97% a 0.01	
Max. inlet pressure	MPa	1.8	
	bar	18	
	psi	261	
Maximum suggested flow rate		please look at the flow rate curves	
Suggested flow rate at 6 bar	Nl/min	230	
	scfm	8	
Fluid		Filtered air 4 µm	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	kg	0.9	
Wall fixing screws		M4 x 55	
Bowl capacity	cm^3	45	
Mounting position		Vertical	
Drain		RMSA - SAC - RA	
		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.	
		RA: automatic drain with condensate discharge, independent of pressure and flow rate.	
		Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.	
		SAC: automatic drain with condensate discharge.	
		Operates by pressure drop – requires variable air take-offs.	
Note on use		It is advisable to mount a 4 µm filter upstream the depurator acting as a rough filter.	
		The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.	

FLOW CHARTS

D 3/8 - 1/2

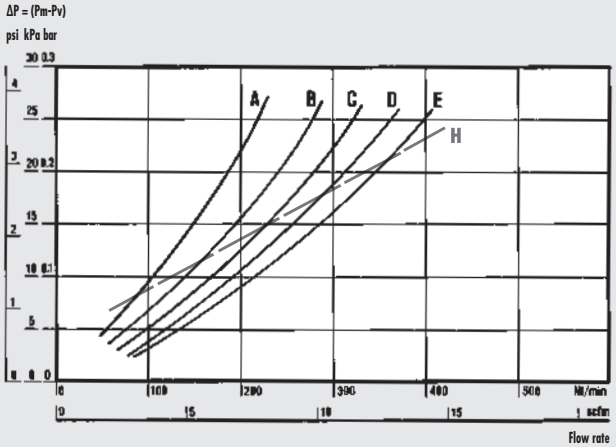

Department of Mechanics
Turin Polytechnic

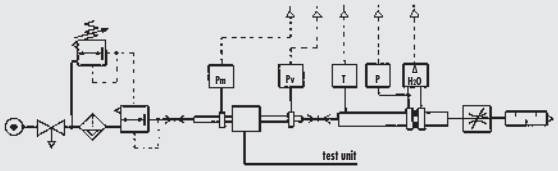

- Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi
(H) = maximum flow rate recommended for optimal operation

DIMENSIONS

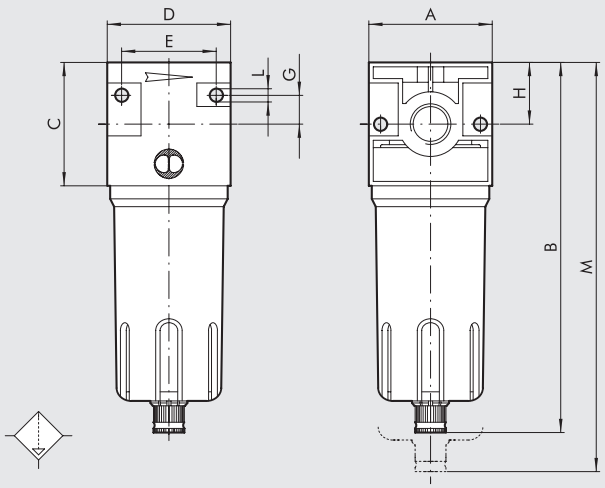

		DEP ND 3/8″	DEP ND 1/2″
Threaded port		3/8″	1/2″
A		60	
B	**RMSA**	180	
	RA	184	
	SAC	184	
C		60	
D		60	
E		46	
G		14	
H		30	
L		Hole for M4 screws	
M	**RMSA**	230	
	RA	234	
	SAC	234	

SYNOPTIC, SIZES AND VERSIONS

DEP	3/8	RMSA
ELEMENT	**THREADED PORT**	**CONDENSATE DRAIN**
DEP	3/8 1/2	RMSA RA SAC

RMSA: Manual/semi-auto drain

RA: Automatic drain. Float-type operation irrespective of the pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: Automatic drain. **Operates by pressure drop - requires variable air take-offs**.

ORDERING CODES

Code	Description
DEPURATOR 3/8″	
1322002	DEP 3/8 RMSA
1322003	DEP 3/8 RA
1322004	DEP 3/8 SAC
DEPURATOR 1/2″	
1422002	DEP 1/2 RMSA
1422003	DEP 1/2 RA
1422004	DEP 1/2 SAC

NOTES

New deal REGULATOR

Highly reliable, heavy-duty piston-operated regulator.
- Stability of the set pressure as the upstream pressure varies
- Standard overpressure blowoff valve
- Can be fixed to the wall using the holes is the sides of the body.

TECHNICAL DATA		REG ND 1/4"	REG ND 3/8"	REG ND 1/2"	REG ND 3/4"	REG ND 1"
Threaded port		1/4"	3/8"	1/2"	3/4"	1"
Setting range	bar	0 to 4 - 0 to 8 - 0 to 12	0 to 4 - 0 to 8 - 0 to 12		0 to 4 - 0 to 8 - 0 to 12	
Max. inlet pressure	MPa	1.8	1.8		1.8	
	bar	18	18		18	
	psi	261	261		261	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	200	1100		2500	
	scfm	7	39		89	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	650	2500		4500	
	scfm	23	89		160	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	50		50	
	°F	122	122		122	
Weight	kg	0.3	0.8		1.5	
Wall fixing screws		M4 x 40	M4 x 55		M6 x 75	
Gauge port		1/8"	1/8"		1/4"	
Mounting position		In any position				
Fluid		Filtered, lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.				
Note on use		The regulator pressure must always be set upwards.				
		For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value.				
		Do not take off air from gauge ports.				

COMPONENTS

① Zamak body
② Technopolymer bell
③ Technopolymer knob
④ Technopolymer piston rod
⑤ Technopolymer plug
⑥ OT58 brass adjusting screw
⑦ OT58 brass nut
⑧ Ring nut : technopolymer (ND 1/4-3/8-1/2) brass (ND 3/4-1)
⑨ OT brass rod
⑩ Valve with NBR vulcanized gasket
⑪ NBR lip seal
⑫ NBR relieving seal
⑬ Steel adjusting spring
⑭ Steel valve compression spring
⑮ NBR gaskets

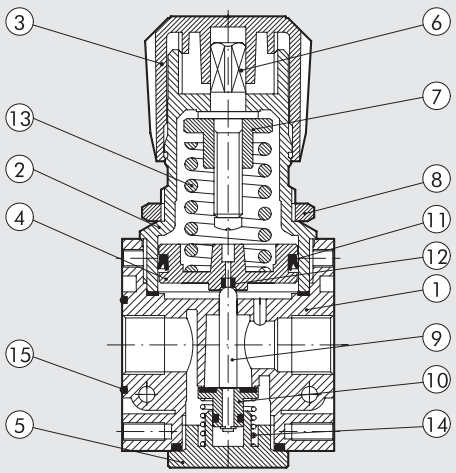

FLOW CHARTS

REG 1/4

Pm = 0.7 MPa - 7 bar - 100 psi
Inlet pressure
psi MPa bar

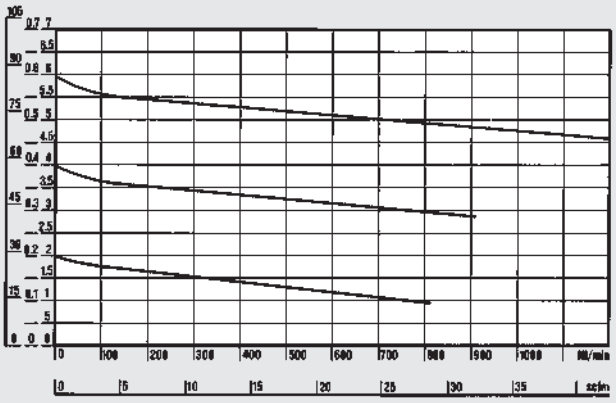

Department of Mechanics
Turin Polytechnic

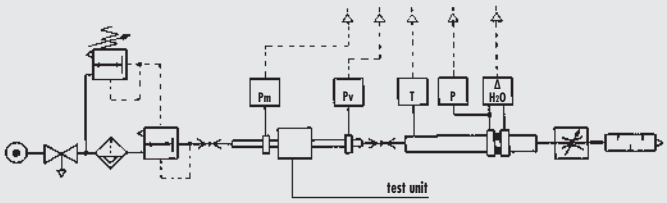

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

REG 3/8 - 1/2

Pm = 0.7 MPa - 7 bar - 100 psi
Inlet pressure
psi MPa bar

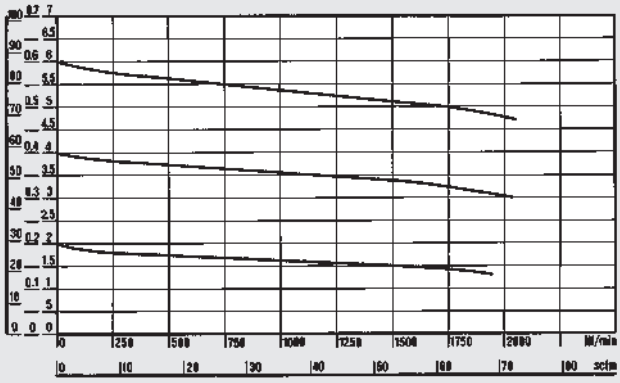

REG 3/4 - 1"

Pm = 0.7 MPa - 7 bar - 100 psi
Inlet pressure
psi MPa bar

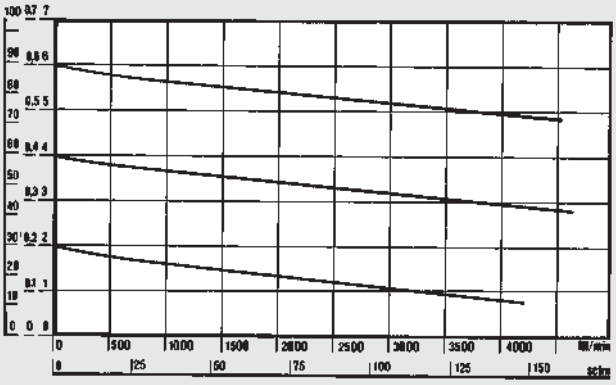

Flow rate

DIMENSIONS

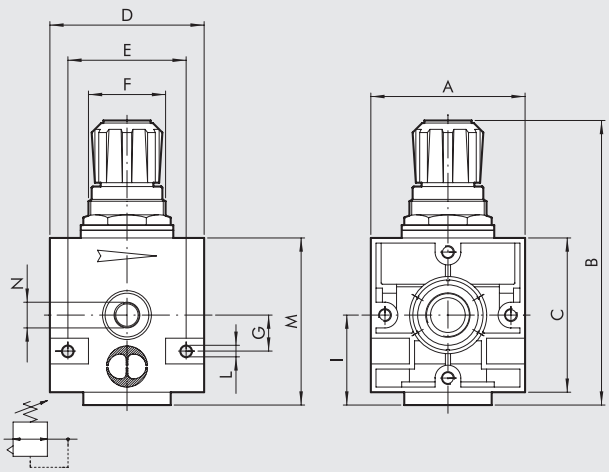

	REG ND 1/4"	REG ND 3/8"	REG ND 1/2"	REG ND 3/4"	REG ND 1"
Threaded port	1/4"	3/8"	1/2"	3/4"	1"
A	42	60		80	
B	94	130		184	
C	42	60		80	
D	42	60		80	
E	32	46		66	
F	30 x 1.5	38 x 2		55 x 2	
G	10	14		22	
I	25	35		47	
L	Hole for M4 screws	Hole for M4 screws		Hole for M6 screws	
M	49	70		94	
N (pressure gauge port)	1/8"	1/8"		1/4"	

SYNOPTIC, SIZES AND VERSIONS

REG	1/4	04
ELEMENT	THREADED PORT	SETTING RANGE
REG	1/4 3/8 1/2 3/4 1	04 = 0 to 4 bar 08 = 0 to 8 bar 012 = 0 to 12 bar

ORDERING CODES

Code	Description
New deal REGULATOR 1/4"	
1202001	REG 1/4 04
1202002	REG 1/4 08
1202003	REG 1/4 012
1202004	REG 1/4 02
New deal REGULATOR 3/8"	
1302001	REG 3/8 04
1302002	REG 3/8 08
1302003	REG 3/8 012
New deal REGULATOR 1/2"	
1402001	REG 1/2 04
1402002	REG 1/2 08
1402003	REG 1/2 012
New deal REGULATOR 3/4"	
1502001	REG 3/4 04
1502002	REG 3/4 08
1502003	REG 3/4 012
New deal REGULATOR 1"	
1602001	REG 1 04
1602002	REG 1 08
1602003	REG 1 012

NOTES

New deal PADLOCKABLE REGULATOR

The New deal padlockable regulator has a pin with a hole in it that projects from the top of the knob. When the knob is in the push-lock position, the padlock can be inserted in the hole, preventing the knob from being operated. A padlock and two keys are supplied with the regulator.

Refer to the regulator for technical data and flow curves.

COMPONENTS

① Zamak body
② Technopolymer bell
③ Technopolymer knob
④ Technopolymer piston rod
⑤ Technopolymer plug
⑥ Nickel-plated brass OT58 adjusting screw
⑦ OT58 brass nut
⑧ Technopolymer ring nut
⑨ OT brass rod
⑩ Valve with NBR vulcanized gasket
⑪ NBR lip seal
⑫ NBR relieving seal
⑬ Steel adjusting spring
⑭ Steel valve compression spring
⑮ NBR gaskets
⑯ Padlock

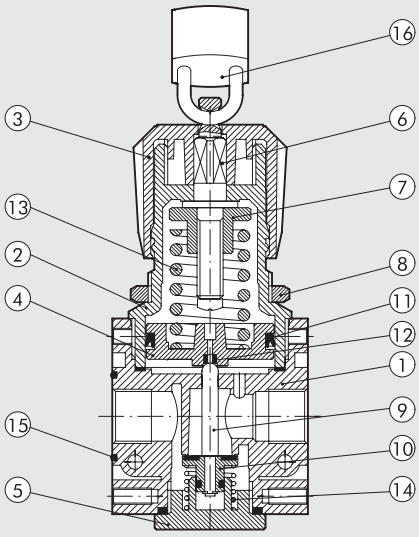

DIMENSIONS

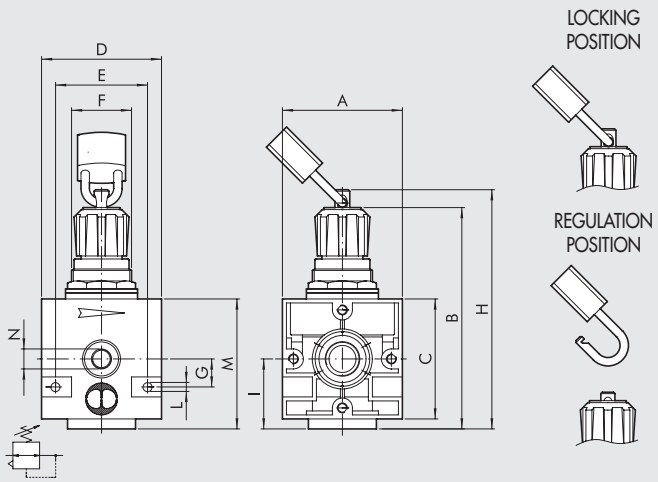

	REG KEY ND 1/4"	REG KEY ND 3/8"	REG KEY ND 1/2"
Threaded port	1/4"	3/8"	1/2"
A	42	60	
B	90 to 94	126 to 130	
C	42	60	
D	42	60	
E	32	46	
F	30 x 1.5	38 x 2	
G	10	14	
H	96	131	
I	25	35	
L	Hole for M4 screws	Hole for M4 screws	
M	49	70	
N (pressure gauge port)	1/8"	1/8"	

SYNOPTIC, SIZES AND VERSIONS

REG KEY	1/4	02
ELEMENT	THREADED PORT	SETTING RANGE
REG KEY = padlockable regulator	1/4	02 = 0 to 2 bar 04 = 0 to 4 bar 08 = 0 to 8 bar 012 = 0 to 12 bar
	3/8 1/2	04 = 0 to 4 bar 08 = 0 to 8 bar 012 = 0 to 12 bar

ORDERING CODES

Code	Description
New deal PADLOCKABLE REGULATOR 1/4"	
1210011	REG KEY 1/4 02
1210012	REG KEY 1/4 04
1210013	REG KEY 1/4 08
1210014	REG KEY 1/4 012
New deal PADLOCKABLE REGULATOR 3/8"	
1310012	REG KEY 3/8 04
1310013	REG KEY 3/8 08
1310014	REG KEY 3/8 012
New deal PADLOCKABLE REGULATOR 1/2"	
1410012	REG KEY 1/2 04
1410013	REG KEY 1/2 08
1410014	REG KEY 1/2 012

NOTES

New deal PILOT-OPERATED REGULATOR

Remote pilot-operated regulator for heavy-duty use.
- Stability of the set pressure as the upstream pressure varies;
- Can be fixed to the wall using the holes is the sides of the body.

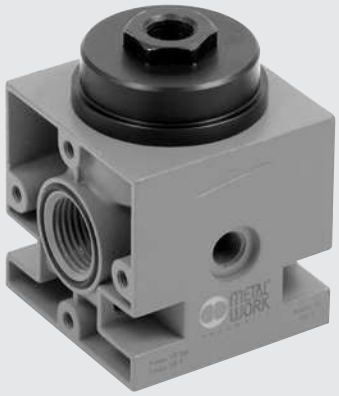

TECHNICAL DATA		REG PIL 3/8″	REG PIL 1/2″
Threaded port		3/8″	1/2″
Setting range	bar	Depending on pilot	
Max. inlet pressure	MPa	1.8	
	bar	18	
	psi	261	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	3500	
	scfm	124	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	4500	
	scfm	160	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	kg	0.8	
Wall fixing screws		M4 x 55	
Gauge port		1/8″	
Mounting position		In any position	
Fluid		Filtered, lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.	
Note on use		The regulator pressure must always be set upwards. Overpressure relieving from the pilot.	

DIMENSIONS

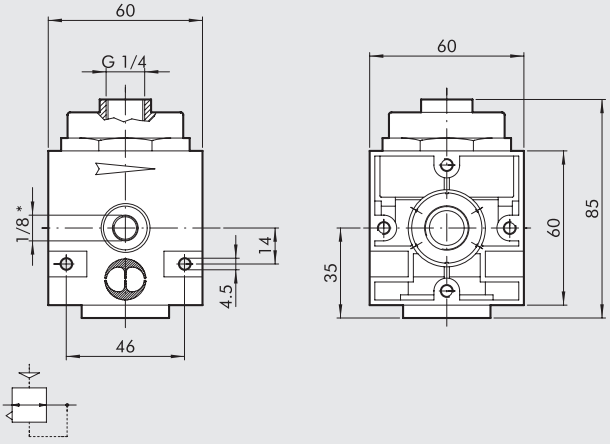

*Pressure gauge port

ORDERING CODES

Code	Description
1302004	RP 3/8 pilot-operated regulator
1402004	RP 1/2 pilot-operated regulator

Newdeal REGULATOR AND REGULATOR WITH V3V 3/4"-1"

Piloted regulator with integrated function, manual, electropneumatic or pneumatic stop valve as required.
It performs two functions in the space usually occupied by a single module, which ensures a high flow rate at all ΔP values including low ones.
Extremely quick responses in both discharge and feed.
The integrated pilot regulator is available with controlled leak.

TECHNICAL DATA

Threaded port		3/4"	1"
Setting range	bar	0 to 2 - 0 to 4 - 0 to 8 - 0 to 12	
*Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	12000	
	scfm	423	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	13000	
	scfm	460	
Fluid		Lubricated or unlubricated filtered air. If lubrication is used, it must be continous.	
Drain flow rate at 6 bar (0.6 MPa to 87 psi)	Nl/min	1800	
	scfm	64	
Max temperature at 10 bar (1 Mpa to 145 psi)	°C	50	
	°F	122	
Weight	kg	1.7	
Wall fixing screws		M6 x 75	
Mounting position		In any position	
Note on use		**Do not take air from pressure gauge ports.**	

* Version Reg + V3V Cnomo (1 Mpa - 10 bar -145 psi)

COMPONENTS

① Pilot Reg. sub-assembly
② Manual V3V control sub-assembly
③ Aluminium regulator body
④ Aluminium upper plate
⑤ Aluminium spacer
⑥ NBR lip seal
⑦ Aluminium Ø 63 piston rod
⑧ Cap for OT 58 brass plain gasket
⑨ NBR plain gasket
⑩ OT 58 brass rod
⑪ OT 58 brass valve
⑫ Aluminium lower cap
⑬ Steel valve compression spring
⑭ NBR gaskets

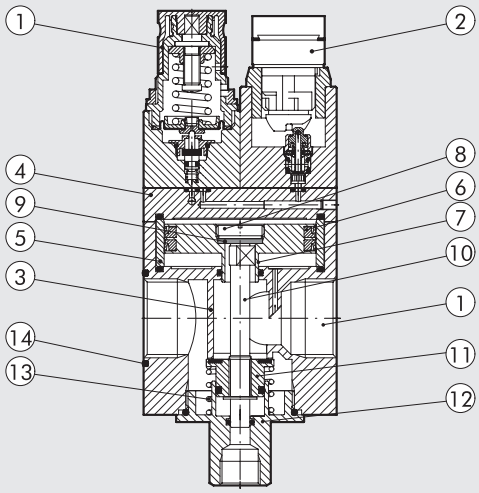

DIMENSIONS

REG P + V3V MANUAL

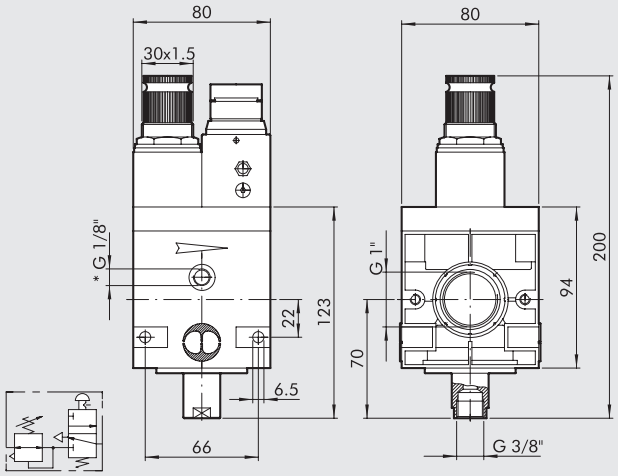

*Pressure gauge port

REG P + V3V KEY

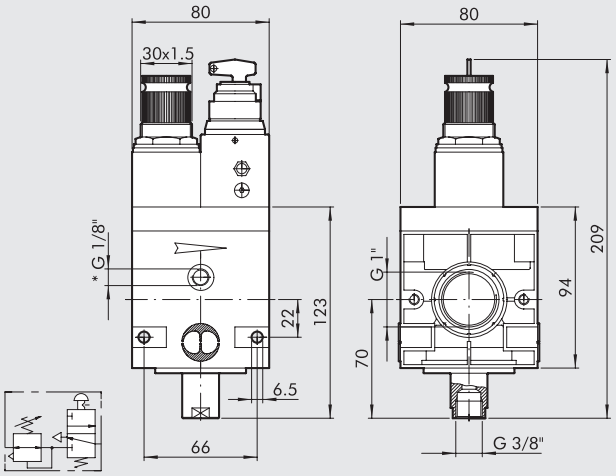

*Pressure gauge port

REG P + V3V ELPN CNOMO

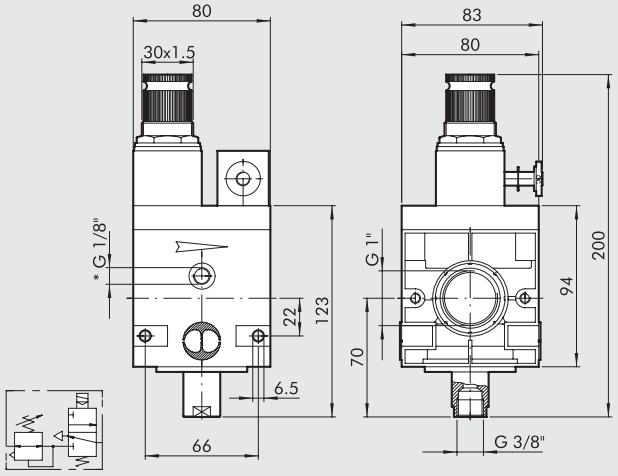

*Pressure gauge port

REG P

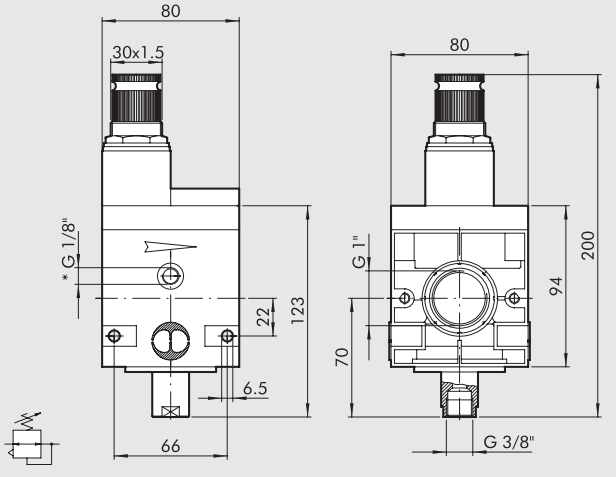

*Pressure gauge port

REG P 00

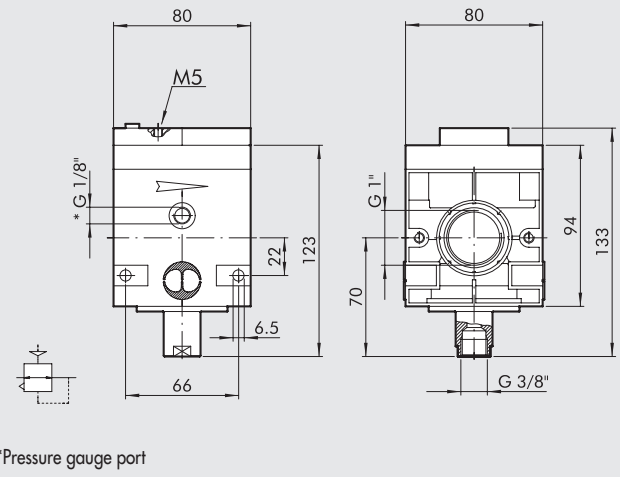

*Pressure gauge port

FLOW CHARTS

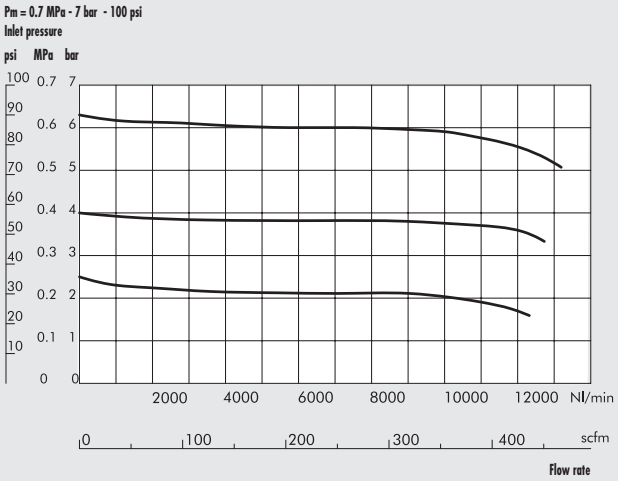

SYNOPTIC, SIZES AND VERSIONS

RV3V	1	02	ELPN
ELEMENT	THREADED PORT	SETTING RANGE	ELPN V3V CONTROL
RV3V REGP	1″ 3/4″	00 = without pilot 02 = 0 to 2 bar 04 = 0 to 4 bar 08 = 0 to 8 bar 012 = 0 to 12 bar	ELPN KEY MANUAL

RV3V: Regulator with built-in shut-off valve.
ELPN: CNOMO solenoid
REGP: Pilot-operated regulator

ASSEMBLY OPTIONS

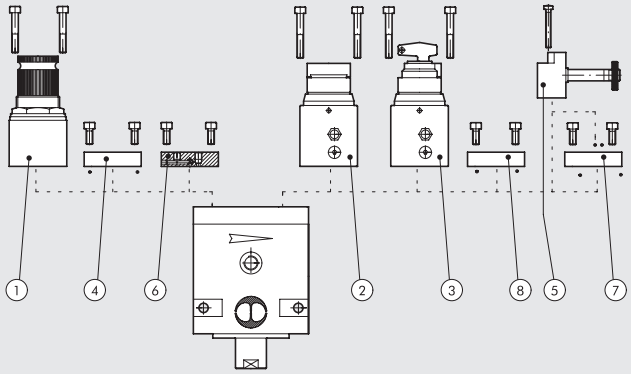

This modular system makes it possible to make the following combinations:

A) Regulator with pilot regulator ① or remote control ⑥, the end plate is mounted on the right-hand side ⑧.

B) V3V with manual lever-operated control ② or key control ③ or solenoid CNOMO ⑤. the end plate is mounted on the left-hand side ④.

C) Regulator + V3V is the result of the free combination of the versions specified above.

	Code	Description
①	**9640501-02-03-04**	Pilot regulator kit
②	**9640401**	V3V manual lever-operated control kit
③	**9640301**	V3V manual key-operated control kit
④	**9640101**	End plate kit for V3V
⑤	**9453922**	V3V ELPN CNOMO bistable control kit
⑤	**9453920**	V3V ELPN CNOMO monostable control kit
⑥	**9640001**	Remote control plate kit
⑦	**9640201**	Plate kit to mount Cnomo rotated by 180°
⑧	**9640101**	End plate kit for piloted regulator

ORDERING CODES

Code	Description
New deal PILOT-OPERATED REGULATOR 3/4″	
1519001	REGP 3/4 00
1518001	REGP 3/4 02
1518002	REGP 3/4 04
1518003	REGP 3/4 08
1518004	REGP 3/4 012
New deal REGULATOR WITH BUILT-IN SHUT-OFF VALVE 3/4″	
1517001	RV3V 3/4 02 ELPN
1517002	RV3V 3/4 04 ELPN
1517003	RV3V 3/4 08 ELPN
1516101	RV3V 3/4 02 key
1516102	RV3V 3/4 04 key
1516103	RV3V 3/4 08 key
1516104	RV3V 3/4 012 key
1516001	RV3V 3/4 02 manual
1516002	RV3V 3/4 04 manual
1516003	RV3V 3/4 08 manual
1516004	RV3V 3/4 012 manual
New deal PILOT-OPERATED REGULATOR 1″	
1619001	REGP 1 00
1618001	REGP 1 02
1618002	REGP 1 04
1618003	REGP 1 08
1618004	REGP 1 012
New deal REGULATOR WITH BUILT-IN SHUT-OFF VALVE 1″	
1617001	RV3V 1 02 ELPN
1617002	RV3V 1 04 ELPN
1617003	RV3V 1 08 ELPN
1616101	RV3V 1 02 key
1616102	RV3V 1 04 key
1616103	RV3V 1 08 key
1616104	RV3V 1 012 key
1616001	RV3V 1 02 manual
1616002	RV3V 1 04 manual
1616003	RV3V 1 08 manual
1616004	RV3V 1 012 manual

New deal FILTER REGULATOR

Highly reliable piston-operated filter regulator.
- Stability of the set pressure as the upstream pressure varies
- Standard overpressure blow-off valve
- Can be fixed to the wall using the holes is the sides of the body
- Metal bowl with external viewing
- Manual/semi-auto or automatic condensate drainage

TECHNICAL DATA		FR ND 1/4″	FR ND 3/8″	FR ND 1/2″
Threaded port		1/4″	3/8″	1/2″
Setting range	bar	0 to 8 - 0 to 12	0 to 8 - 0 to 12	
Degree of filtration	µm	4 - 20 - 50	4 - 20 - 50	
Max. inlet pressure	MPa	1.8	1.8	
	bar	18	18	
	psi	261	261	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	260	1000	
	scfm	9.2	35.5	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	700	2500	
	scfm	25	88.5	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	50	
	°F	122	122	
Weight	kg	0.5	1	
Wall fixing screws		M4 x 40	M4 x 55	
Gauge port		1/8″	1/8″	
Bowl capacity	cm^3	10	45	
Mounting position		Vertical	Vertical	
Drain		RMSA - SAC	RMSA - SAC - RA	
		RMSA: drain with manual condensate discharge and automatic discharge at zero pressure RA: automatic drain with condensate discharge, independent of pressure and flow rate. Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port. SAC: automatic drain with condensate discharge. **Operates by pressure drop – requires variable air take-offs.**		
Fluid		Compressed air		
Note on use		The regulator pressure must always be set upwards. **The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar. Do not take air from pressure gauge ports.**		

COMPONENTS

① Zamak body
② Aluminium bowl
③ Technopolymer bell
④ Technopolymer knob
⑤ Technopolymer piston rod
⑥ Technopolymer plug
⑦ Technopolymer centrifuge
⑧ Technopolymer baffle plug
⑨ Technopolymer screen
⑩ Technopolymer bowl
⑪ Drain (RMSA)
⑫ OT58 brass adjusting screw
⑬ OT58 brass nut
⑭ Technopolymer ring nut
⑮ OT58 brass rod
⑯ Valve with NBR vulcanized gasket
⑰ Steel adjusting spring
⑱ NBR lip seal
⑲ NBR relieving seal
⑳ Steel valve compression spring
㉑ Sintered HDPE filter cartridge
㉒ NBR gaskets

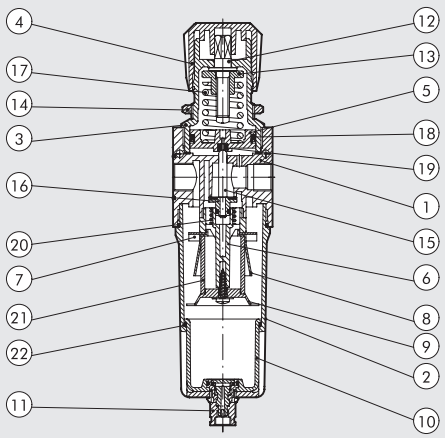

METAL WORK PNEUMATIC

FLOW CHARTS

FR 1/4

Pm = 0.7 MPa - 7 bar - 100 psi
Inlet pressure

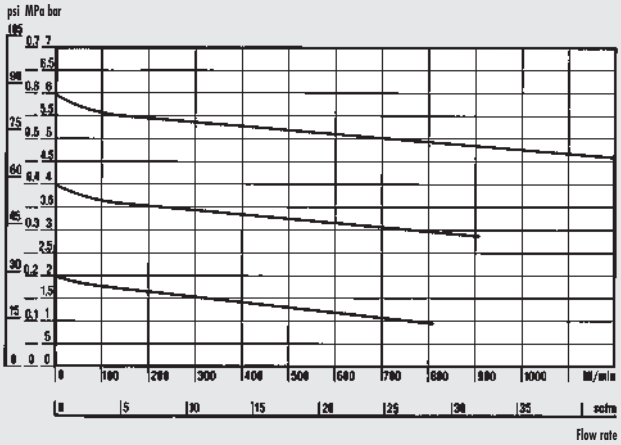

Department of Mechanics
Turin Polytechnic

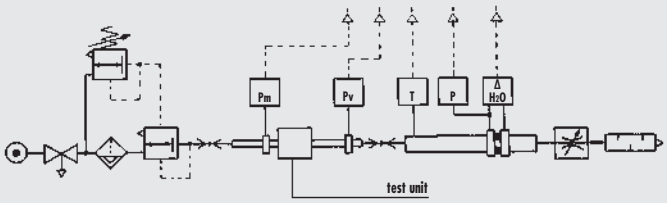

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

FR 3/8 - 1/2

Pm = 0.7 MPa - 7 bar - 100 psi
Inlet pressure

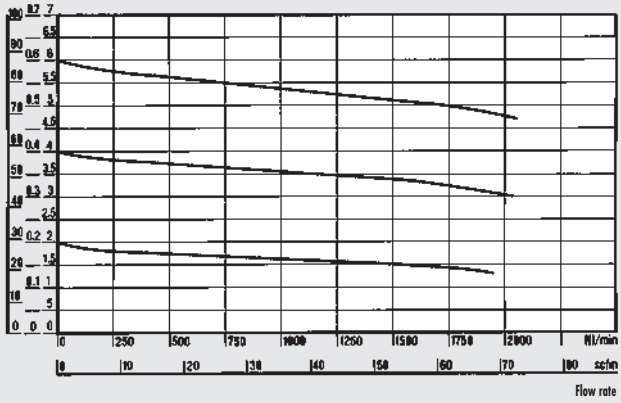

DIMENSIONS

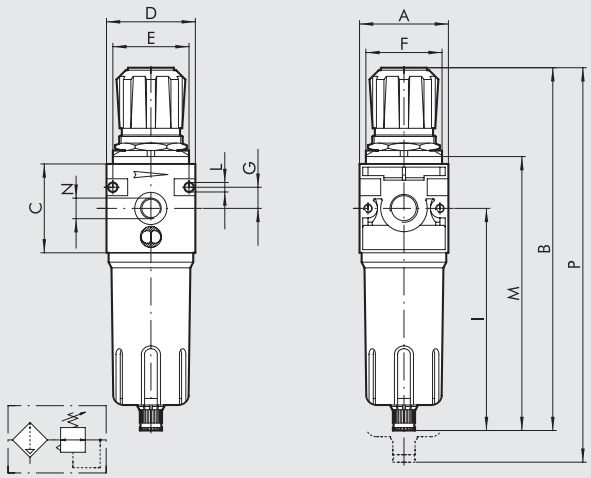

		FR ND 1/4"	FR ND 3/8"	FR ND 1/2"
Threaded port		1/4"	3/8"	1/2"
A		42	60	
B	RMSA	190	245	
	RA	-	249	
	SAC	194	249	
C		42	60	
D		42	60	
E		36	52	
F		30 x 1.5	38 x 2	
G		10	14	
I		121	150	
L		Hole for M4 screws	Hole for M4 screws	
M	RMSA	145	185	
	RA	-	189	
	SAC	149	189	
N (Pressure gauge port)		1/8"	1/8"	
P	RMSA	233	295	
	RA	-	299	
	SAC	237	299	

SYNOPTIC, SIZES AND VERSIONS

FR	1/4	4	08	RMSA
ELEMENT	THREADED PORT	DEGREE OF FILTRATION	SETTING RANGE	CONDENSATE DRAIN
FR	1/4 3/8 1/2	4 = 4 µm 20 = 20 µm 50 = 50 µm	08 = 0 to 8 bar 012 = 0 to 12 bar	RMSA SAC RA*

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.

RA: automatic drain with condensate discharge, independent of pressure and flow rate.
Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

* For ND 3/8 and 1/2 with RA, please contact our sales assistance department

ORDERING CODES

Code	Description
New deal FILTER REGULATOR 1/4"	
1225029	FR 1/4 4 08 RMSA
1225053	FR 1/4 4 012 RMSA
1225509	FR 1/4 4 08 SAC
1225513	FR 1/4 4 012 SAC
1225030	FR 1/4 20 08 RMSA
1225510	FR 1/4 20 08 SAC
1225054	FR 1/4 20 012 RMSA
1225514	FR 1/4 20 012 SAC
1225032	FR 1/4 50 08 RMSA
1225511	FR 1/4 50 08 SAC
1225056	FR 1/4 50 012 RMSA
1225516	FR 1/4 50 012 SAC
New deal FILTER REGULATOR 3/8"	
1325029	FR 3/8 4 08 RMSA
1325509	FR 3/8 4 08 SAC
1325053	FR 3/8 4 012 RMSA
1325513	FR 3/8 4 012 SAC
1325030	FR 3/8 20 08 RMSA
1325510	FR 3/8 20 08 SAC
1325054	FR 3/8 20 012 RMSA
1325514	FR 3/8 20 012 SAC
1325032	FR 3/8 50 08 RMSA
1325512	FR 3/8 50 08 SAC
1325056	FR 3/8 50 012 RMSA
1325516	FR 3/8 50 012 SAC
New deal FILTER REGULATOR 1/2"	
1425029	FR 1/2 4 08 RMSA
1425509	FR 1/2 4 08 SAC
1425053	FR 1/2 4 012 RMSA
1425513	FR 1/2 4 012 SAC
1425030	FR 1/2 20 08 RMSA
1425510	FR 1/2 20 08 SAC
1425054	FR 1/2 20 012 RMSA
1425514	FR 1/2 20 012 SAC
1425032	FR 1/2 50 08 RMSA
1425512	FR 1/2 50 08 SAC
1425056	FR 1/2 50 012 RMSA
1425516	FR 1/2 50 012 SAC

NOTES

New deal LUBRICATOR

Lubricator with high lubrication stability.
- Quantity of lubricant proportioned to air flow
- Micrometric regulation of lubricant flow
- Activates at low flow rates
- All-round oil level viewing

TECHNICAL DATA		LUB ND 1/4"	LUB ND 3/8"	LUB ND 1/2"	LUB ND 3/4"	LUB ND 1"
Threaded port		1/4"	3/8"	1/2"	3/4"	1"
Type of lubrication		Mist	Mist		Mist	
Bowl capacity	cm^3	50	150		380	
Max. inlet pressure	MPa	1.8	1.8		1.8	
	bar	18	18		18	
	psi	261	261		261	
Flow rate at 6 bar (0.6 MPa to 87 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	700	3000		12800	
	scfm	25	107		452	
Flow rate at 6 bar (0.6 MPa to 87 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	1100	4300		16000	
	scfm	39	153		565	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	50		50	
	°F	122	122		122	
Weight	kg	0.4	0.9		1.3	
Wall fixing screws		M4 x 40	M4 x 55		M6 x 75	
Mounting position		Vertical				
Fluid		Filtered compressed air				
Note on use:		• Use the screw provided to set the drip rate to drop every 300-600 Nl.				
		• Fit the lubricator as close as possible to the point of use				
		• Fill the bowl with oil before pressurizing the system				
		• Do not use cleaning oil, brake fluid or solvents in general				
		• Recommended lubricants: ISO and UNI FD22 - E.g. Energol HLP 22 (BP) - Spinesso 22 (Esso) - Mobil DTE 22 (Mobil) - Tellus Oil 22 (Shell)				

COMPONENTS

① Zamak body
② Rilsan® oil suction pipe
③ Aluminium bowl
④ Clear technopolymer bowl
⑤ Filter
⑥ Technopolymer plug
⑦ Venturi NBR diaphragm
⑧ OT 58 brass oil flow regulation needle
⑨ Clear technopolymer cover
⑩ NBR gaskets

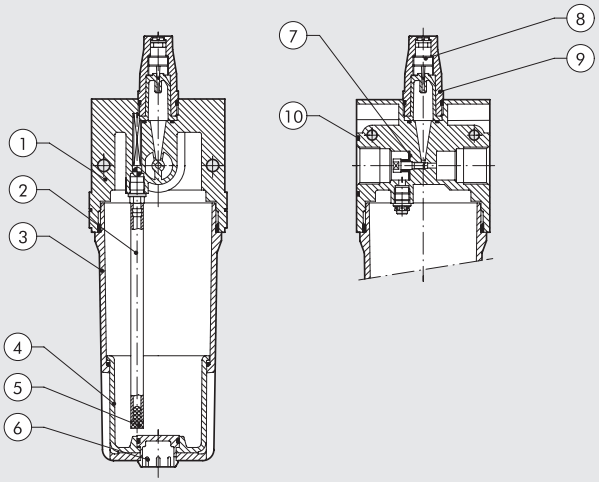

FLOW CHARTS

Department of Mechanics
Turin Polytechnic

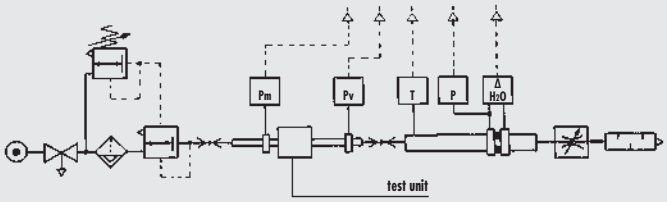

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

(A) = 2 bar - 0.2 MPa - 29 psi
(B) = 4 bar - 0.4 MPa - 58 psi
(C) = 6 bar - 0.6 MPa - 87 psi
(D) = 8 bar - 0.8 MPa - 116 psi
(E) = 10 bar - 1 MPa - 145 psi

LUB 1/4

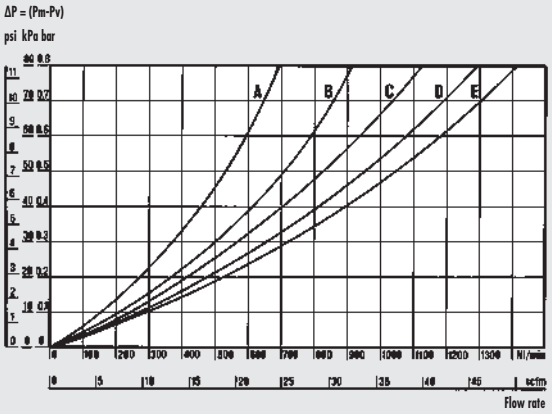



MINIMUM ACTIVATION FLOW CHARTS
The minimum activation flow charts were carried out in compliance with ISO/DP 6301/2

LUB 3/8 - 1/2

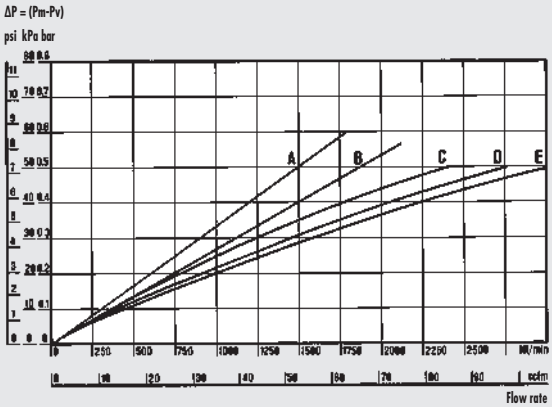



MINIMUM ACTIVATION FLOW CHARTS
The minimum activation flow charts were carried out in compliance with ISO/DP 6301/2

LUB 3/4 - 1"

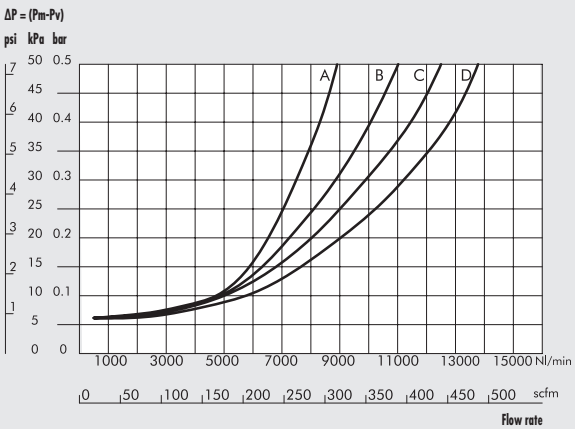



MINIMUM ACTIVATION FLOW CHARTS
The minimum activation flow charts were carried out in compliance with ISO/DP 6301/2

DIMENSIONS

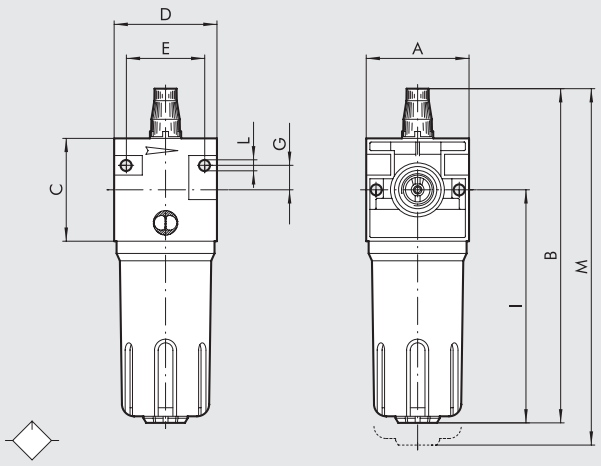

	LUB ND 1/4"	LUB ND 3/8"	LUB ND 1/2"	LUB ND 3/4"	LUB ND 1"
Threaded port	1/4"	3/8"	1/2"	3/4"	1"
A	42	60		80	
B	156	195		260	
C	42	60		80	
D	42	60		80	
E	32	46		66	
G	10	14		22	
I	107	136		182	
L	Hole for M4 screws	Hole for M4 screws		Hole for M6 screws	
M	176	220		290	

ORDERING CODES

Code	Description
1223001	LUB 1/4
1323001	LUB 3/8
1423001	LUB 1/2
1523001	LUB 3/4
1623001	LUB 1

NOTES

New deal SHUT-OFF VALVE

Manually-operated circuit shut-off valve.
- Poppet seat system to ensure high flow rate
- Quick-actuation knob
- Possible triple locking
- The valve is actuated by pressing the actuation disk until it clicks. Press the knob downwards to relieve pressure. In this position you can extract the shim and fit a lock to avoid accidental operation.

TECHNICAL DATA		V3V ND 1/4"	V3V ND 3/8"	V3V ND 1/2"
Threaded port		1/4"	3/8"	1/2"
Max. inlet pressure	MPa	1.8	1.8	
	bar	18	18	
	psi	261	261	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	1100	2200	
	scfm	38.8	78	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	1500	2900	
	scfm	53	103	
Flow rate on relieving at 6 bar (0.6 Mpa to 87 psi)	Nl/min	1600	2900	
with direct rilieving into the atmosphere	scfm	56.5	103	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	50	
	°F	122	122	
Weight	kg	0.35	0.8	
Wall fixing screws		M4 x 40	M4 x 55	
Mounting position		In any position		
Fluid		Filtered, lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.		
Type of control		Manual		

COMPONENTS

① Zamak body
② Actuation disk
③ Technopolymer knob
④ Stainless steel safety shim
⑤ Clutching unit
⑥ OT 58 brass rod
⑦ Upper anodized aluminium plug
⑧ V3V valve with NBR vulcanized gasket
⑨ Stainless steel valve compression spring
⑩ Lower anodized aluminium plug
⑪ NBR gaskets

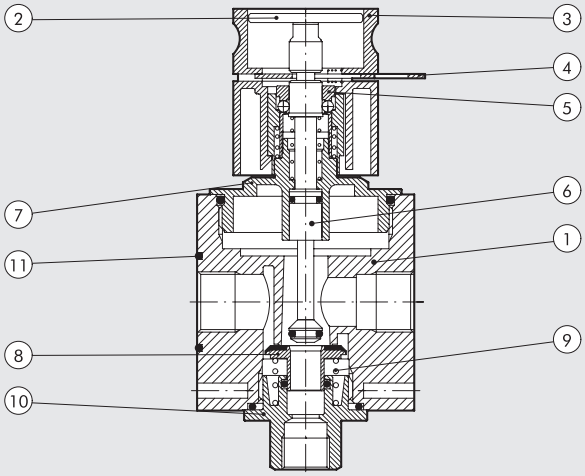

ASSEMBLY DIAGRAM

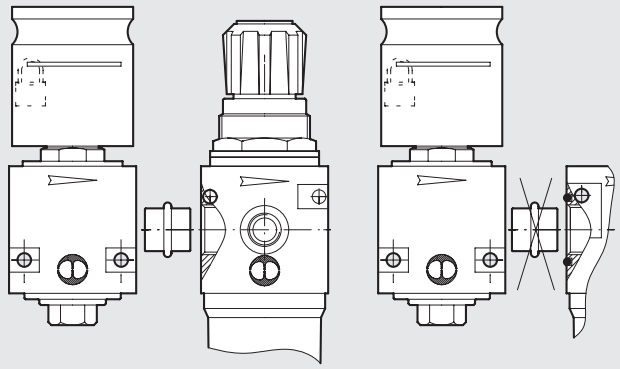

To assemble the V3V to the regulator filter 1/4", or depurator 3/8-1/2, use the adopter provided (see the assembly diagram at the left).

Adaptor V3V + FR 1/4" - code 9201001
Adaptor V3V + D 3/8" - code 9401001
Adaptor V3V + D 1/2" - code 9401002

DIMENSIONS

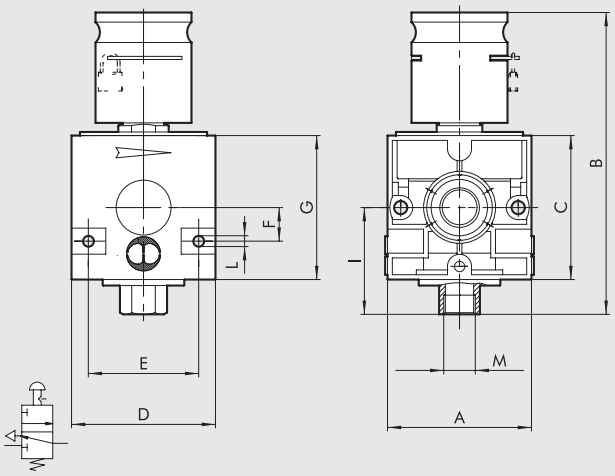

	V3V ND 1/4"	V3V ND 3/8"	V3V ND 1/2"
Threaded port	1/4"	3/8"	1/2"
A	42	60	
B	105	126	
C	42	60	
D	42	60	
E	32	46	
F	10	14	
G	42	60	
I	32	43	
L	Hole for M4 screws	Hole for M4 screws	
M	1/8"	1/4"	

ORDERING CODES

Code	Description
1270001	V3V ND 1/4
1370001	V3V ND 3/8
1470001	V3V ND 1/2

NOTES

Newdeal 3/4"-1" SHUT-OFF VALVE

Circuit cut-off valve with three different controls:
- CNOMO electropneumatic
- Manual key-operated
- Manual lever-operated

TECHNICAL DATA		V3V ND 3/4"	V3V ND 1"
Threaded port		3/4"	1"
Max. inlet pressure*	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	7600	
	scfm	268	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	10200	
	scfm	360	
Flow rate on relief at 6 bar (0.6 MPa; 87 psi)	Nl/min	1800	
	scfm	64	
Weight	kg	2.2	
Wall fixing screws		M6 x 75	
Mounting position		In any position	
Fluid		Filtered, lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.	

*V3V CNOMO -10 bar - 1 MPa - 145 Psi

COMPONENTS

① V3V plate
② V3V manual sub-assembly control
③ V3V aluminium body
④ Aluminium top plate
⑤ Aluminium spacer
⑥ NBR lip seal
⑦ Aluminium piston rod
⑧ Cap for OT 58 brass plain gasket
⑨ NBR plain gasket
⑩ OT 58 brass rod
⑪ OT 58 brass valve
⑫ Aluminium bottom cap
⑬ Steel valve spring
⑭ NBR gaskets

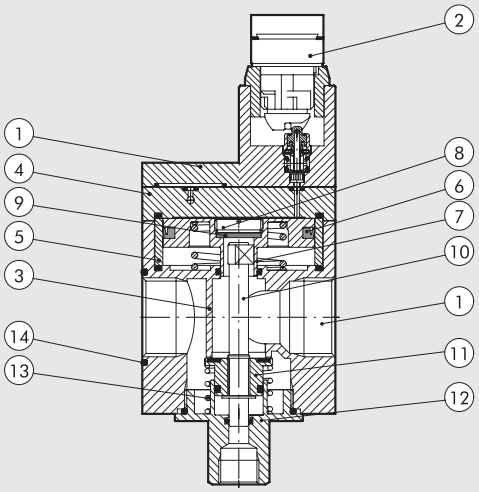

ASSEMBLY DIAGRAM V3V + F

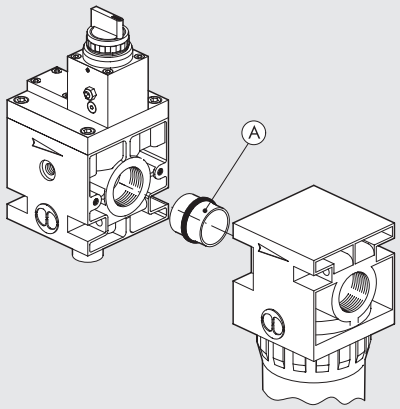

A= V3V ADAPTER + FIL 1" – code 9601001
to be used with filters not having o-ring seat

DIMENSIONS

V3V 3/4"-1" KEY-OPERATED CONTROL

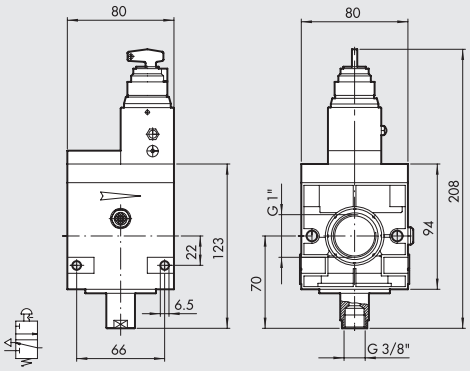

V3V 3/4"-1" ELPN CNOMO

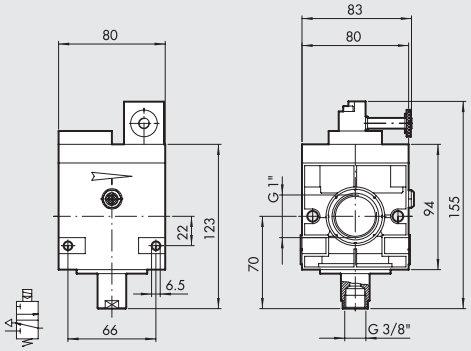

V3V 3/4"-1" PNEUMATIC

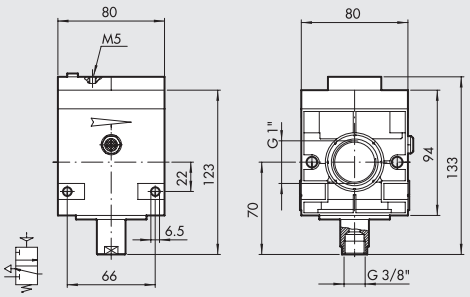

V3V 3/4"-1" MANUAL CONTROL

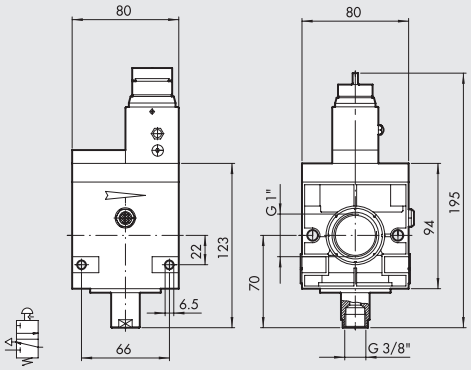

SYNOPTIC, SIZES AND VERSIONS

RV3V	3/4	ELPN
ELEMENT	THREADED PORT	CONTROL V3V
V3V	3/4" 1"	ELPN Key Manual Pneumatic

ORDERING CODES

Code	Description
SHUT-OFF VALVE New deal 3/4"	
1575001	V3V 3/4 ELPN Cnomo
1574101	V3V 3/4 key
1574001	V3V 3/4 manual
1576001	V3V 3/4 pneumatic
SHUT-OFF VALVE New deal 1"	
1675001	V3V 1 ELPN Cnomo
1674101	V3V 1 key
1674001	V3V 1 manual
1676001	V3V 1 pneumatic

Newdeal AIR TAKE-OFF

The air take-off has the job to take off the air from the Newdeal FRL unit irrespective of the position where it is assembled.
It is required whenever you need to take off air from the FRL unit at different stages of the treatment (normal, filtered, filtered regulated, lubricated, etc.)

TECHNICAL DATA		PA ND 1/4"	PA ND 3/8"	PA ND 1/2"	PA ND 3/4"	PA ND 1"
Threaded port		1/8"	1/4"		1/2"	
Maximum working temperature at: 1 MPa; 10 bar; 145 psi	°C	50	50		50	
	°F	122	122		122	
Maximum admissible pressure	MPa	1.8	1.8		1.8	
	bar	18	18		18	
	psi	261	261		261	
Weight	kg	0.06	0.18		0.41	

DIMENSIONS

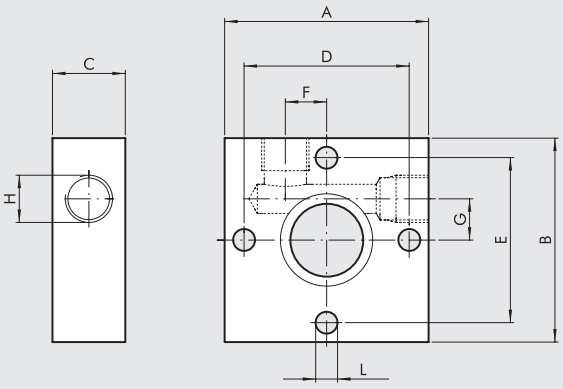

	PA ND 1/4"	PA ND 3/8"	PA ND 1/2"	PA ND 3/4"	PA ND 1"
Threaded port	1/8"	1/4"		1/2"	
A	42	60		80	
B	42	60		80	
C	15	20		30	
D	34	49		64	
E	34	49		64	
F	8.5	14		16	
G	8.5	14		16	
H (n° 2 pos.)	1/8"	1/4"		1/2"	
L	Hole for M4 screws	Hole for M5 screws		Hole for M6 screws	

ORDERING CODES

Code	Description
9200401	PA 1/4 take-off
9400401	PA 1/2 take-off
9600401	PA 3/4 take-off

Comes with 2 screws for F/L and R/FR fixing.

New deal SUB-BASE

With the New deal sub-base, more than one regulators can be mounted in parallel using a single pressure supply source.

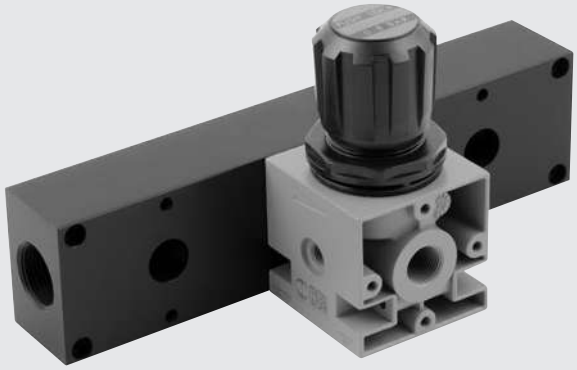

DIMENSIONS

3 POSITION

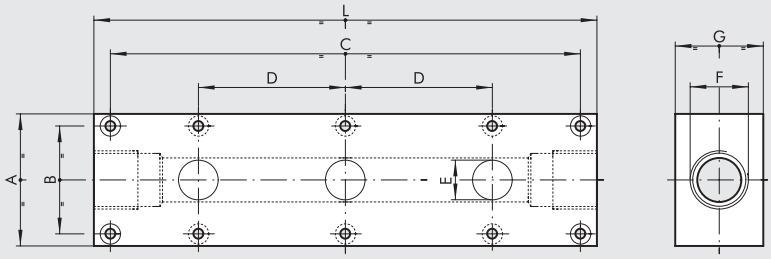

2 POSITION

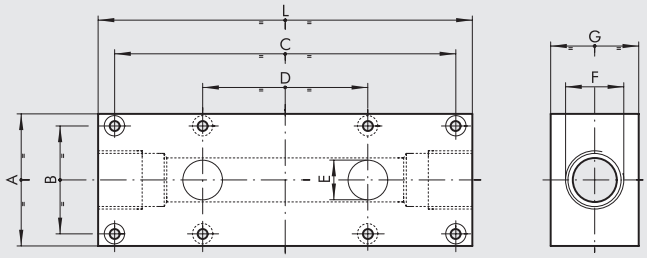

	ND 1/4"		ND 3/8" - 1/2"		ND 3/4" - 1"	
	2 positions	3 positions	2 positions	3 positions	2 positions	3 positions
A	50	50	60	60	80	80
B	34	34	49	49	64	64
C	113	165	155	230	190	280
D	52	52	75	75	90	90
E	1/4"	1/4"	18	18	31	31
F	1/2"	1/2"	3/4"	3/4"	1 1/4"	1 1/4"
G	30	30	40	40	50	50
L	128	180	170	245	210	300
Weight [kg]	0.45	0.62	0.94	1.4	1.5	1.7

ORDERING CODES

Code	Description
9200201	SB 1/4 sub-base 2 pos.
9400201	SB 1/2 sub-base 2 pos.
9600201	SB 3/4 sub-base 2 pos.
9200301	SB 1/4 sub-base 3 pos.
9400301	SB 1/2 sub-base 3 pos.
9600301	SB 3/4 sub-base 3 pos.

New deal AUTOMATIC CONDENSATE DRAIN

System supply condensate drain:
- All-round condensate level viewing
- Automatic drain from inside the bowl
- Axial coupling

TECHNICAL DATA		SCAL ND 1/2"
Threaded port		1/2"
Maximum working temperature at: 1 MPa; 10 bar; 145 psi	°C	50
	°F	122
Maximum admissible pressure	MPa	1
	bar	10
	psi	145
Weight	kg	0.5

DIMENSIONS

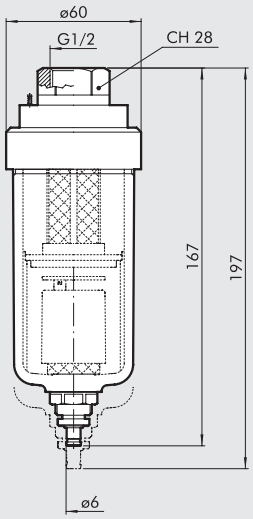

ORDERING CODES

Code	Description
4589003	Autom. cond. drain 1/2 in line

FIL + REG + LUB Newdeal

Highly reliable heavy-duty piston-operated FRL unit.
- Stability of the set pressure as the upstream pressure varies
- Metal bowl with external sight glass
- Semi-automatic and automatic condensate drain
- Lubrication proportional to flow rate
- Micrometric lubrication regulation
- Activation guaranteed with low flow rates

Refer to the sections on the single modules for a further description, components and other technical data.

TECHNICAL DATA

		FRL ND 1/4"	FRL ND 3/8"	FRL ND 1/2"	FRL ND 3/4"	FRL ND 1"
Threaded port		1/4"	3/8"	1/2"	3/4"	1"
Setting range	bar	0 to 8 - 0 to 12	0 to 8 - 0 to 12		0 to 8 - 0 to 12	
Degree of filtration	µm	4 - 20 - 50	4 - 20 - 50		4 - 20 - 50	
Max. inlet pressure	MPa	1.8	1.8		1.8	
	bar	18	18		18	
	psi	261	261		261	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	140	1300		1900	2000
	scfm	5	46		68	71
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	400	2000		3600	3700
	scfm	14.2	71		128	132
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	50		50	
	°F	122	122		122	
Weight	kg	1	2.5		4	
Wall fixing screws		M4 x 40	M4 x 55		M6 x 75	
Fluid		Compressed air				
Note on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar. Do not take air from pressure gauge ports.**				

DIMENSIONS

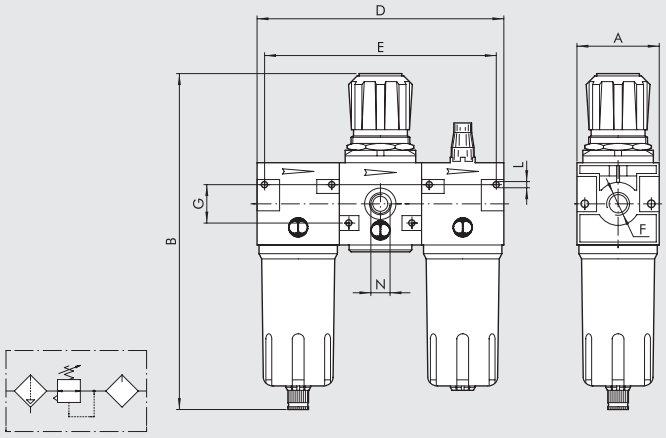

		FRL ND 1/4"	FRL ND 3/8"	FRL ND 1/2"	FRL ND 3/4"	FRL ND 1"
Threaded port F		1/4"	3/8"	1/2"	3/4"	1"
A		42	60		80	
B	RMSA	190	245		332	
	RA	-	249		336	
	SAC	194	249		336	
D		126	180		240	
E		116	166		226	
G		20	28		44	
L		Hole for M4 screws	Hole for M4 screws		Hole for M6 screws	
N (pressure gauge port)		1/8"	1/8"		1/4"	

SYNOPTIC, SIZES AND VERSIONS

FRL	1/4	4	08	RMSA
ELEMENT	THREADED PORT	DEGREE OF FILTRATION	SETTING RANGE	CONDENSATE DRAIN
FRL	1/4	4 = 4 µm	08 = 0 to 8 bar	RMSA
		20 = 20 µm	012 = 0 to 12 bar	SAC
	3/8	50 = 50 µm		RMSA
	1/2			SAC
				RA
	3/4			RMSA
	1			RA

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.

RA: automatic drain with condensate discharge, independent of pressure and flow rate.
Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

ORDERING CODES

Code	Description
FRL 1/4"	
1224029	FRL 1/4 4 08 RMSA
1224409	FRL 1/4 4 08 SAC
1224030	FRL 1/4 20 08 RMSA
1224410	FRL 1/4 20 08 SAC
1224032	FRL 1/4 50 08 RMSA
1224412	FRL 1/4 50 08 SAC
1224053	FRL 1/4 4 012 RMSA
1224413	FRL 1/4 4 012 SAC
1224054	FRL 1/4 20 012 RMSA
1224414	FRL 1/4 20 012 SAC
1224056	FRL 1/4 50 012 RMSA
1224416	FRL 1/4 50 012 SAC

Code	Description
FRL 3/8"	
1324029	FRL 3/8 4 08 RMSA
1324033	FRL 3/8 4 08 RA
1324409	FRL 3/8 4 08 SAC
1324030	FRL 3/8 20 08 RMSA
1324034	FRL 3/8 20 08 RA
1324410	FRL 3/8 20 08 SAC
1324032	FRL 3/8 50 08 RMSA
1324036	FRL 3/8 50 08 RA
1324412	FRL 3/8 50 08 SAC
1324053	FRL 3/8 4 012 RMSA
1324057	FRL 3/8 4 012 RA
1324413	FRL 3/8 4 012 SAC
1324054	FRL 3/8 20 012 RMSA
1324058	FRL 3/8 20 012 RA
1324414	FRL 3/8 20 012 SAC
1324056	FRL 3/8 50 012 RMSA
1324060	FRL 3/8 50 012 RA
1324416	FRL 3/8 50 012 SAC
FRL 1/2"	
1424029	FRL 1/2 4 08 RMSA
1424033	FRL 1/2 4 08 RA
1424409	FRL 1/2 4 08 SAC
1424030	FRL 1/2 20 08 RMSA
1424034	FRL 1/2 20 08 RA
1424410	FRL 1/2 20 08 SAC
1424032	FRL 1/2 50 08 RMSA
1424036	FRL 1/2 50 08 RA
1424412	FRL 1/2 50 08 SAC
1424053	FRL 1/2 4 012 RMSA
1424057	FRL 1/2 4 012 RA
1424413	FRL 1/2 4 012 SAC
1424054	FRL 1/2 20 012 RMSA
1424058	FRL 1/2 20 012 RA
1424414	FRL 1/2 20 012 SAC
1424056	FRL 1/2 50 012 RMSA
1424060	FRL 1/2 50 012 RA
1424416	FRL 1/2 50 012 SAC

Code	Description
FRL 3/4"	
1524017	FRL 3/4 4 08 RMSA
1524021	FRL 3/4 4 08 RA
1524018	FRL 3/4 20 08 RMSA
1524022	FRL 3/4 20 08 RA
1524020	FRL 3/4 50 08 RMSA
1524024	FRL 3/4 50 08 RA
1524029	FRL 3/4 4 012 RMSA
1524033	FRL 3/4 4 012 RA
1524030	FRL 3/4 20 012 RMSA
1524034	FRL 3/4 20 012 RA
1524032	FRL 3/4 50 012 RMSA
1524036	FRL 3/4 50 012 RA
FRL 1"	
1624017	FRL 1 4 08 RMSA
1624021	FRL 1 4 08 RA
1624018	FRL 1 20 08 RMSA
1624022	FRL 1 20 08 RA
1624020	FRL 1 50 08 RMSA
1624024	FRL 1 50 08 RA
1624029	FRL 1 4 012 RMSA
1624033	FRL 1 4 012 RA
1624030	FRL 1 20 012 RMSA
1624034	FRL 1 20 012 RA
1624032	FRL 1 50 012 RMSA
1624036	FRL 1 50 012 RA

FRPL 3/4"-1" New deal

Refer to the sections on the single modules for a further description, components and other technical data.

TECHNICAL DATA		FRPL ND 3/4"	FRPL ND 1"
Threaded port		3/4"	1"
Setting range		0 to 8 - 0 to 12	
Max. temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Degree of filtration	µm	4 - 20 - 50	
Max. inlet pressure	MPa	1.3	
	bar	13	
	psi	188	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	7500	
	scfm	235	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	8500	
	scfm	266	
Weight	kg	3.6	
Wall fixing screws		M6 x 75	
Drain		RMSA - RA	
		RMSA: manual - semi-auto; RA: automatic.	
Fluid		Compressed air	
Bowl capacity	cm^3	170	
Note on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.**	
		Do not take air from pressure gauge ports.	

DIMENSIONS

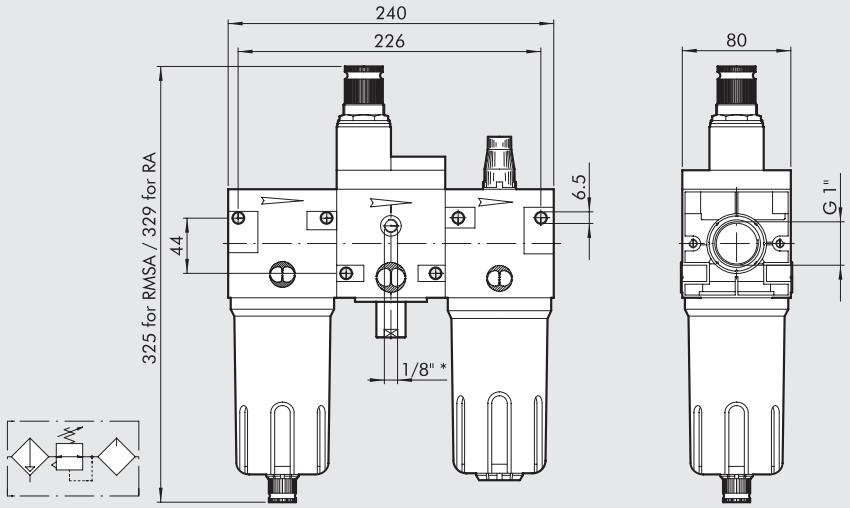

*Pressure gauge port

SYNOPTIC, SIZES AND VERSIONS

FRPL	1/4	4	08	RMSA
ELEMENT	THREADED PORT	DEGREE OF FILTRATION	SETTING RANGE	TYPE OF DRAIN
FRPL	1″ 3/4″	4 = 4 µm 20 = 20 µm 50 = 50 µm	08 = 0 to 8 bar 012 = 0 to 12 bar	RMSA RA

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.
RA: automatic drain with condensate discharge, independent of pressure and flow rate. (for size 300 and 400). Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.
FRPL: Filter + pilotable regulator + lubricator.

ORDERING CODES

Code	Description
FRPL 3/4″	
1528007	FRPL 3/4 4 08 RMSA
1528019	FRPL 3/4 4 08 RA
1528010	FRPL 3/4 4 012 RMSA
1528022	FRPL 3/4 4 012 RA
1528008	FRPL 3/4 20 08 RMSA
1528020	FRPL 3/4 20 08 RA
1528011	FRPL 3/4 20 012 RMSA
1528023	FRPL 3/4 20 012 RA
1528009	FRPL 3/4 50 08 RMSA
1528021	FRPL 3/4 50 08 RA
1528012	FRPL 3/4 50 012 RMSA
1528024	FRPL 3/4 50 012 RA
FRPL 1″	
1628007	FRPL 1 4 08 RMSA
1628019	FRPL 1 4 08 RA
1628010	FRPL 1 4 012 RMSA
1628022	FRPL 1 4 012 RA
1628008	FRPL 1 20 08 RMSA
1628020	FRPL 1 20 08 RA
1628011	FRPL 1 20 012 RMSA
1628023	FRPL 1 20 012 RA
1628009	FRPL 1 50 08 RMSA
1628021	FRPL 1 50 08 RA
1628012	FRPL 1 50 012 RMSA
1628024	FRPL 1 50 012 RA

FR + LUB Newdeal

Heavy duty and reliable piston-operated FR + L unit.
- Stability of the set pressure as the upstream pressure varies
- Metal bowl with external sight glass
- Semi-automatic and automatic condensate drain
- Quantity of lubricant proportioned to air flow
- Micrometric lubrication regulation
- Activation guaranteed with low flow rates

Refer to the sections on the single modules for a further description, components and other technical data.

TECHNICAL DATA

		FR + L ND 1/4"	FR + L ND 3/8"	FR + L ND 1/2"
Threaded port		1/4"	3/8"	1/2"
Setting range	bar	0 to 8 - 0 to 12	0 to 8 - 0 to 12	
Degree of filtration	µm	4 - 20 - 50	4 - 20 - 50	
Max. inlet pressure	MPa	1.8	1.8	
	bar	18	18	
	psi	261	261	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	150	1300	
	scfm	5.3	46	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	500	2200	
	scfm	18	78	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	50	
	°F	122	122	
Weight	kg	0.9	2	
Wall fixing screws		M4 x 40	M4 x 55	
Fluid		Compressed air		
Note on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar. Do not take air from pressure gauge ports.**		

DIMENSIONS

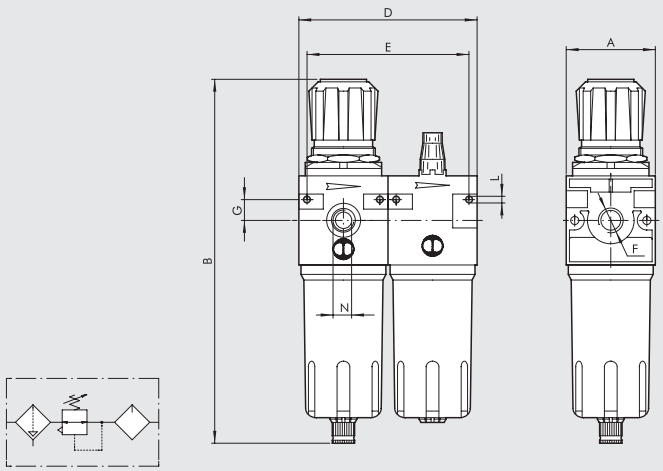

		FR + L ND 1/4"	FR + L ND 3/8"	FR + L ND 1/2"
Threaded port F		1/4"	3/8"	1/2"
A		42	60	
B	RMSA	190	245	
	RA	-	249	
	SAC	194	249	
D		84	120	
E		76	109	
G		10	14	
L		Hole for M4 screws	Hole for M4 screws	
N (pressure gauge port)		1/8"	1/8"	

SYNOPTIC, SIZES AND VERSIONS

FR + L	1/4	4	08	RMSA
ELEMENT	THREADED PORT	DEGREE OF FILTERING	SETTING RANGE	CONDENSATE DRAIN
FR + L	1/4	4 = 4 µm	08 = 0 to 8 bar	RMSA
	3/8	20 = 20 µm	012 = 0 to 12 bar	SAC
	1/2	50 = 50 µm		RMSA
				SAC
				RA*

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.

RA: automatic drain with condensate discharge, independent of pressure and flow rate.
Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

* For ND 3/8 and 1/2 with RA, please contact our sales assistance department.

ORDERING CODES

Code	Description
FR + L 1/4"	
1226029	FR+L 1/4 4 08 RMSA
1226409	FR+L 1/4 4 08 SAC
1226053	FR+L 1/4 4 012 RMSA
1226413	FR+L 1/4 4 012 SAC
1226030	FR+L 1/4 20 08 RMSA
1226410	FR+L 1/4 20 08 SAC
1226054	FR+L 1/4 20 012 RMSA
1226414	FR+L 1/4 20 012 SAC
1226032	FR+L 1/4 50 08 RMSA
1226412	FR+L 1/4 50 08 SAC
1226056	FR+L 1/4 50 012 RMSA
1226416	FR+L 1/4 50 012 SAC

Code	Description
FR + L 3/8"	
1326029	FR+L 3/8 4 08 RMSA
1326409	FR+L 3/8 4 08 SAC
1326053	FR+L 3/8 4 012 RMSA
1326413	FR+L 3/8 4 012 SAC
1326030	FR+L 3/8 20 08 RMSA
1326034	FR+L 3/8 20 08 RA
1326410	FR+L 3/8 20 08 SAC
1326054	FR+L 3/8 20 012 RMSA
1326058	FR+L 3/8 20 012 RA
1326414	FR+L 3/8 20 012 SAC
1326032	FR+L 3/8 50 08 RMSA
1326412	FR+L 3/8 50 08 SAC
1326056	FR+L 3/8 50 012 RMSA
1326416	FR+L 3/8 50 012 SAC
FR + L 1/2"	
1426029	FR+L 1/2 4 08 RMSA
1426409	FR+L 1/2 4 08 SAC
1426053	FR+L 1/2 4 012 RMSA
1426413	FR+L 1/2 4 012 SAC
1426030	FR+L 1/2 20 08 RMSA
1426034	FR+L 1/2 20 08 RA
1426410	FR+L 1/2 20 08 SAC
1426054	FR+L 1/2 20 012 RMSA
1426058	FR+L 1/2 20 012 RA
1426414	FR+L 1/2 20 012 SAC
1426032	FR+L 1/2 50 08 RMSA
1426412	FR+L 1/2 50 08 SAC
1426056	FR+L 1/2 50 012 RMSA
1426416	FR+L 1/2 50 012 SAC

V3V + FR + LUB Newdeal

Highly reliable heavy-duty piston-operated FRFL unit.
- Stability of the set pressure as the upstream pressure varies
- Metal bowl with external sight glass
- Semi-automatic and automatic condensate drain
- Quantity of lubricant proportionate to the air flow
- Micrometric lubrication regulation
- Activation guaranteed at low air flows
- Quick filling and drainage of the downstream circuit with the V3V element

Refer to the sections on the single modules for a further description, components and other technical data.

TECHNICAL DATA		VFR + L ND 1/4"	VFR + L ND 3/8"	VFR + L ND 1/2"
Threaded port		1/4"	3/8"	1/2"
Setting range	bar	0 to 8 - 0 to 12	0 to 8 - 0 to 12	
Degree of filtration	µm	4 - 20 - 50	4 - 20 - 50	
Max. inlet pressure	MPa	1.8	1.8	
	bar	18	18	
	psi	261	261	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	140	1000	
	scfm	5	35.5	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	480	1900	
	scfm	17	67.5	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	50	
	°F	122	122	
Weight	kg	1.1	1.8	
Wall fixing screws		M4 x 40	M4 x 55	
Fluid		Compressed air		
Note on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar. Do not take air from pressure gauge ports.**		

DIMENSIONS

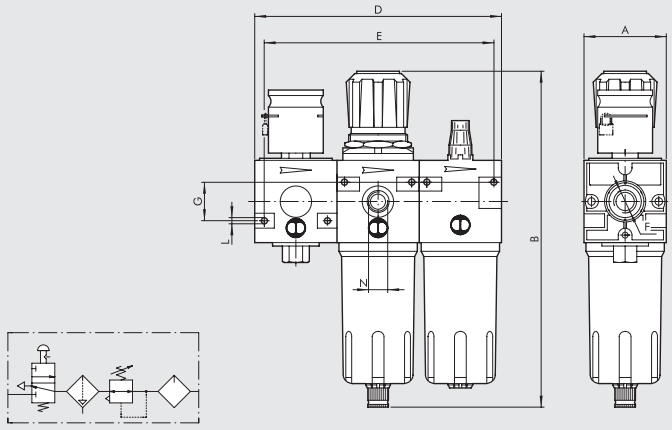

		VFR + L ND 1/4"	VFR + L ND 3/8"	VFR + L ND 1/2"
Threaded port F		1/4"	3/8"	1/2"
A		42	60	
B	RMSA	190	245	
	RA	-	249	
	SAC	194	249	
D		126	180	
E		116	166	
G		20	28	
L		Hole for M4 screws	Hole for M4 screws	
N (pressure gauge port)		1/8"	1/8"	

SYNOPTIC, SIZES AND VERSIONS

VFR + L	1/4	20	08	RMSA
ELEMENT	THREADED PORT	DEGREE OF FILTERING	SETTING RANGE	CONDENSATE DRAIN
VFR + L	1/4	4 = 4 µm	08 = 0 to 8 bar	RMSA
		20 = 20 µm	012 = 0 to 12 bar	SAC
	3/8	50 = 50 µm		RMSA
	1/2			SAC
				RA

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.

RA: automatic drain with condensate discharge, independent of pressure and flow rate.
Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

ORDERING CODES

Code	Description
1272030	VFR+L 1/4 20 RMSA 08
1272054	VFR+L 1/4 20 RMSA 012
1372030	VFR+L 3/8 20 RMSA 08
1372054	VFR+L 3/8 20 RMSA 012
1472030	VFR+L 1/2 20 RMSA 08
1472054	VFR+L 1/2 20 RMSA 012
1472032	VFR+L 1/2 50 RMSA 08
1472056	VFR+L 1/2 50 RMSA 012

The following versions are available on request:
- with 4 µm or 50 µm degree of filtration
- with SAC or RA condensate discharge

FIL + DEP New deal

Filter + depurator unit for fine filtering followed by purification by coalescence
- Metal bowl with external sight glass
- Semi-automatic condensate drain

Refer to the sections on the single modules for a further description, components and other technical data.

TECHNICAL DATA		F + D ND 3/8"	F + D ND -1/2"
Threaded port		3/8"	1/2"
Degree of filtration	µm	4	
Degree of depuration	µm	99.97% 0.01	
Max. inlet pressure	MPa	1.8	
	bar	18	
	psi	261	
Maximum suggested flow rate		Please look at the flow rate curves at page **C4**.9	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	
	°F	122	
Weight	kg	1.8	
Wall fixing screws		M4 x 55	
Fluid		Compressed air	
Note on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.**	

DIMENSIONS



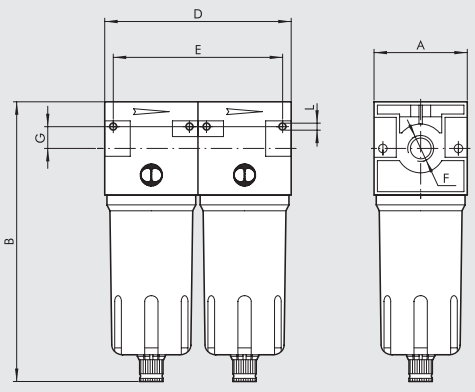

		F + D ND 3/8"	F + D ND -1/2"
Threaded port F		3/8"	1/2"
A		60	
B	**RMSA**	180	
	RA	184	
	SAC	184	
D		120	
E		106	
G		14	
L		Hole for M4 screws	

SYNOPTIC, SIZES AND VERSIONS

F + D ELEMENT	3/8 THREADED PORT	4 DEGREE OF FILTERING	RMSA CONDENSATE DRAIN	RMSA CONDENSATE DRAIN
F + D	3/8 1/2	4 = 4 µm	RMSA SAC RA	RMSA RA

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.

RA: automatic drain with condensate discharge, independent of pressure and flow rate.
Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

ORDERING CODES

Code	Description
1327004	F+D 3/8 4 RMSA-RMSA
1327007	F+D 3/8 4 RA-RA
1327104	F+D 3/8 4 SAC-RMSA
1427004	F+D 1/2 4 RMSA-RMSA
1427007	F+D 1/2 4 RA-RA
1427104	F+D 1/2 4 SAC-RMSA

FIL + LUB Newdeal

Filter + lubricator unit offering various degrees of filtration and high lubrication stability.
- Metal bowl with external sight glass
- Semi-automatic and automatic condensate drain
- Micrometric lubrication regulation
- Activation guaranteed at low air flows

Refer to the sections on the single modules for a further description, components and other technical data.

TECHNICAL DATA		F + L ND 1/4"	F + L ND 3/8"	F + L ND 1/2"	F + L ND 3/4"	F + L ND 1"
Threaded port		1/4"	3/8"	1/2"	3/4"	1"
Lubrication		mist	mist		mist	
Degree of filtration	µm	4 - 20 - 50	4 - 20 - 50		4 - 20 - 50	
Max. inlet pressure	MPa	1.8	1.8		1.8	
	bar	18	18		18	
	psi	261	261		261	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	600	2500		8000	
	scfm	21	89		282	
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	1000	3500		9500	
	scfm	35.5	124		335	
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50	50		50	
	°F	122	122		122	
Weight	kg	0.8	1.8		2.5	
Wall fixing screws		M4 x 40	M4 x 55		M6 x 75	
Fluid		Compressed air				
Note on use		**The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar.**				

DIMENSIONS



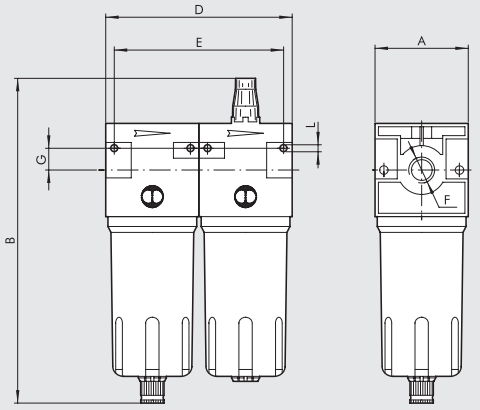

		F + L ND 1/4"	F + L ND 3/8"	F + L ND 1/2"	F + L ND 3/4"	F + L ND 1"
Threaded port F		1/4"	3/8"	1/2"	3/4"	1"
A		42	60		80	
B	RMSA	170	209		273	
	RA	-	213		277	
	SAC	174	213		277	
D		84	120		160	
E		74	106		146	
G		10	14		22	
L		Hole for M4 screws	Hole for M4 screws		Hole for M6 screws	

SYNOPTIC, SIZES AND VERSIONS

F + L	1/4	4	RMSA
ELEMENT	THREADED PORT	DEGREE OF FILTERING	CONDENSATE DRAIN
F + L	1/4	4 = 4 µm	RMSA
		20 = 20 µm	SAC
	3/8	50 = 50 µm	RMSA
	1/2		SAC
			RA
	3/4		RMSA
	1		RA

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.

RA: automatic drain with condensate discharge, independent of pressure and flow rate.
Version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SAC: automatic drain with condensate discharge.
Operates by pressure drop – requires variable air take-offs.

ORDERING CODES

Code	Description
1233006	F+L 1/4 20 RMSA
1333006	F+L 3/8 20 RMSA
1433006	F+L 1/2 20 RMSA
1533006	F+L 3/4 20 RMSA
1633006	F+L 1 20 RMSA

The following versions are available on request:
- with 4 µm or 50 µm degree of filtration
- with SAC or RA condensate discharge

Newdeal ACCESSORIES

METAL WORK PNEUMATIC

MOUNTING BRACKET FOR REG.



Code	Description
9200701	SF 1/4
9400701	SF 1/2



Code	A	B	C	D	E
9200701	32	20	12	5.5	14.2
9400701	42	40	12	5.5	15

PRESSURE GAUGE



Code	Description
9700102	M 40 1/8 04
9700101	M 40 1/8 012
9800102	M 50 1/8 04
9800101	M 50 1/8 012
9900101	M 63 1/4 012



Code	Description
9700109	M 40x40 1/8 04
9700110	M 40x40 1/8 012

TIE RODS



Code	Description
9200901	T 1/4 F+L tie rods
9400901	T 1/2 F+L tie rods
9600901	T 3/4 F+L tie rods



Code	Description
9604402	V3V+F+R 3/4-1 tie rods

ADAPTER FOR V3V



Code	Description
9201001	Adapt. X V3V+FR/D 1/4
9401001	Adapt. X V3V+D 3/8
9401002	Adapt. X V3V+D 1/2
9601001	Adapt. X V3V+F 1

REGULATOR CONNECTION BLOCK



Code	Description	Weight [g]
9200501	BC 1/4 block	90
9400501	BC 1/2 block	244
9600501	BC 3/4 block	428

SPACERS FOR FRL WALL MOUNTING



Code	Description
9200601	DF 1/4 spacer
9400601	DF 1/2 spacer
9600601	DF 3/4 spacer

DISASSEMBLY TOOL FOR BOWL

Code	Description
9601501	Disassembloy key

ASSEMBLY SCREWS (2 PIECES)

Code	Description
9250001	CVA 1/4 screw M4x40
9250002	CVA 1/4 screw M4x82 V3V+F+R
9450001	CVA 1/2 screw M5x55
9450002	CVA 3/8 1/2 screw M5x60 V3V+R
9450003	CVA 3/8 1/2 screw M5x120 V3V+F+R
9650001	CVA 3/4 screw M6X70

REVERSE PLATE CNOMO CONTROL FOR V3V 3/4"-1"



Code	Description	Weight [g]
9640201	Reverse plate kit V3V cnomo control	86

PLATE FOR REMOTE CONTROL FOR V3V 3/4"-1"



Code	Description	Weight [g]
9640001	Remote control plate kit	84

REG OR V3V END PLATE



Code	Description	Weight [g]
9640101	End plate kit for regulator or V3V	82

KEY CONTROL FOR V3V 3/4"-1"



Code	Description	Weight [g]
9640301	Key control kit for V3V	364

MANUAL CONTROL FOR V3V 3/4"-1"



Code	Description	Weight [g]
9640401	Manual control kit for V3V	340

CNOMO CONTROL FOR V3V 3/4"-1"



Code	Description
9453920	Elpn cnomo control kit, manual monostable
9453922	Elpn cnomo control kit, manual bistable

PILOT REGULATOR FOR ND 3/4-1"



Code	Description	Weight [g]
9640501	02 pilot regulator kit	220
9640502	04 pilot regulator kit	220
9640503	08 pilot regulator kit	220
9640504	012 pilot regulator kit	220

COIL 22 mm FOR V3V ELPN



Code	Description
W0215000151	Coil 22 Ø 8 BA 2W-12VDC
W0215000101	Coil 22 Ø 8 BA 2W-24VDC
W0215000111	Coil 22 Ø 8 BA 3.5VA-24VAC
W0215000121	Coil 22 Ø 8 BA 3.5VA-110VAC
W0215000131	Coil 22 Ø 8 BA 3.5VA-220VAC

Electrical connection DIN 43650 B-IND

"UL" AND "CSA" COIL 22 mm FOR V3V ELPN



Code	Description
W0215000251	Coil 22 Ø 8 BA 2W-12VDC UR
W0215000201	Coil 22 Ø 8 BA 2W-24VDC UR
W0215000211	Coil 22 Ø 8 BA 3.5VA-24VAC UR
W0215000221	Coil 22 Ø 8 BA 3.5VA-110VAC UR
W0215000231	Coil 22 Ø 8 BA 3.5VA-220VAC UR

Electrical connection DIN 43650 B-IND

c UL us

COIL 30 mm FOR V3V ELPN



Code	Description
W0210010100	Coil 30 Ø 8 2W 24VDC
W0210011100	Coil 30 Ø 8 3.5VA 24VAC 50/60HZ
W0210012100	Coil 30 Ø 8 3.5VA 110VAC 50/60HZ
W0210013100	Coil 30 Ø 8 3.5VA 220VAC 50/60HZ

Electrical connection DIN 43650 - A

ELECTRIC CONNECTOR 22 mm FOR COILS DIN 43650 B-IND



Code	Description
W0970510011	Connector standard
W0970510012	Connector 22 LED 24V
W0970510013	Connector 22 LED 110V
W0970510014	Connector 22 LED 220V
W0970510015	Connector 22 LED VDR 24V
W0970510016	Connector 22 LED VDR 110V
W0970510017	Connector 22 LED VDR 220V
W0970510070	Connector 22 ATEX II 2 GD

Code	Description
W0970510051	Connector 22 LED 24VDC Energy Saving

For technical data see page **B1**.61

ELECTRIC CONNECTOR 30 mm FOR COILS DIN 43650-A



Code	Description
W0970520033	Connector standard
W0970520034	Connector 30 LED 24V
W0970520035	Connector 30 LED 110V
W0970520036	Connector 30 LED 220V
W0970520037	Connector 30 VDR 24V
W0970520038	Connector 30 VDR 110V
W0970520039	Connector 30 VDR 220V
W0970520070	Connector 30 ATEX II 2GD

KIT COIL EEXM



Code	Description
0227606913	Kit for coil 30 24 VDC EEXMT5 cable 3 m
0227606915	Kit for coil 30 24 VDC EEXMT5 cable 5 m
0227608013	Kit for coil 30 24 VAC EEXMT5 cable 3 m
0227608015	Kit for coil 30 24 VAC EEXMT5 cable 5 m
0227608023	Kit for coil 30 110 VAC EEXMT5 cable 3 m
0227608025	Kit for coil 30 110 VAC EEXMT5 cable 5 m
0227608033	Kit for coil 30 230 VAC EEXMT5 cable 3 m
0227608035	Kit for coil 30 230 VAC EEXMT5 cable 5 m

Atex (2014/34/EU), IECEx and CCC certified coils:
Ex II 2G Ex mb IIC T4/T5 Gb
Ex II 2D Ex tb IIIC T130/T95 °C Db
N.B.: Supplied complete with adapter for Ø8 mm sleeve

KIT FOR COIL SIDE 22 IP65

Code	Description
0222100100	Kit for coil 22 - IP65

Improved IP65 protection, even after prolonged exposure to atmospheric agents.
Applicable to valves with a technopolymer control.

Newdeal SPARE PARTS

METAL WORK PNEUMATIC

FILTER AND FILTER REGULATOR FILTERING ELEMENT



Code	Description
9450102	Spares FP 1/2 20
9450103	Spares FP 1/2 4
9450101	Spares FP 1/2 50
9250102	Spares FP 1/4 20
9250103	Spares FP 1/4 4
9250101	Spares FP 1/4 50
9650103	Spares FP 3/4 4
9650102	Spares FP 3/4 20
9650101	Spares FP 3/4 50

AUTOMATIC DRAIN (RA)



Code	Description
9000802	Spares RA automatic drain

FILTERING ELEMENT FOR DEPURATOR



Code	Description
9450105	Spares kit FP DEP. 3/8 1/2

AUTOMATIC DRAIN (SAC)



Code	Description
9000803	Spares SAC automatic drain

METAL FILTER BOWL



Code	Description
9450301	Spares TMVF 1/2 RMSA
9455201	Spares TMVF 1/2 SAC
9250301	Spares TMVF 1/4 RMSA
9255201	Spares TMVF 1/4 SAC
9650301	Spares TMVF 3/4 1 RMSA

SPRINGS FOR REGULATORS AND FILTER REGULATOR



Code	Description
9250601	Spares MO 02 1/4
9250602	Spares MO 04 1/4
9250603	Spares MO 08 1/4
9250604	Spares MO 12 1/4
9450601	Spares MO 04 1/2
9450602	Spares MO 08 1/2
9450603	Spares MO 12 1/2
9650601	Spares MO 04 3/4
9650602	Spares MO 08 3/4
9650603	Spares MO 12 3/4

VENTURI LUBRICATOR DIAPHRAGM



Code	Description
9252001	Spares MB 100 1/4
9352001	Spares MB 200 1/4 3/8 1/2
9652002	Spares MB 3/4-1

METAL LUBRICATOR BOWL



Code	Description
9251201	Spares TMVL 1/4
9451201	Spares TMVL 1/2
9651201	Spares TMVL 3/4

TRANSPARENT LUBRICATOR COVER



Code	Description
9251302	Spares CVL 100-200-300-400 BIT

DOME DISASSEMBLY SPANNER



Code	Description
9220701	Acc cover LUB spanner

COMPLETE POPPET FOR FILTER REGULATOR



Code	Description
9250901	Spares OTFR 1/4
9450901	Spares OTFR 1/2

POPPET DISASSEMBLY SPANNER (FOR REG)



Code	Description
9220501	R cap disass. wr. 100

COMPLETE POPPER FOR REGULATOR



Code	Description
9250701	Spares OTR 1/4
9450701	Spares OTR 1/2
9650701	Spares OTR 3/4

NOTES

UPPER COVER FOR REGULATOR AND FILTER REGULATOR



Code	Description
9250801	Spares CS 1/4 02
9250802	Spares CS 1/4 04
9250803	Spares CS 1/4 08
9250804	Spares CS 1/4 012
9450801	Spares CS 1/2 04
9450802	Spares CS 1/2 08
9450803	Spares CS 1/2 12
9650801	Spares CS 3/4 04
9650802	Spares CS 3/4 08
9650803	Spares CS 3/4 12

SUMMARY ONE

METAL WORK PNEUMATIC

- **LEARNING ABOUT** C5.2
- **SPECIFICATIONS** C5.6
- **HOW TO ORDER** C5.10
- **ACCESSORIES** C5.12
- **SPARE PARTS** C5.13

LEARNING ABOUT

In the world of pneumatics, which is considered mature, it is rare to encounter completely new and different products.
ONE a compressed air treatment unit with a high degree of integration, that encompassed numerous pneumatic functions. In fact, it contains so many innovations that a single patent is not enough to safeguard it against imitation – three separate patent applications have been registered with a total of 39 claims. This unit is so innovative that it won the international novelty award at Fluidtrans Compomac.
ONE has a single high-performance valve on the main flow that handles all the functions from regulation to relief. It is controlled by a high-precision pilot regulator with controlled relief, in series with the manual on-off valve, the electric valve and the progressive actuator. Unification of the valve has led to a significant reduction in overall dimensions, enhanced capacity, precision and response speed.

INTEGRATION

One single unit houses the threaded ports, filter, condensate drain, pressure regulator, shut-off valve, soft start valve, pressure switch and three supplementary air intakes.

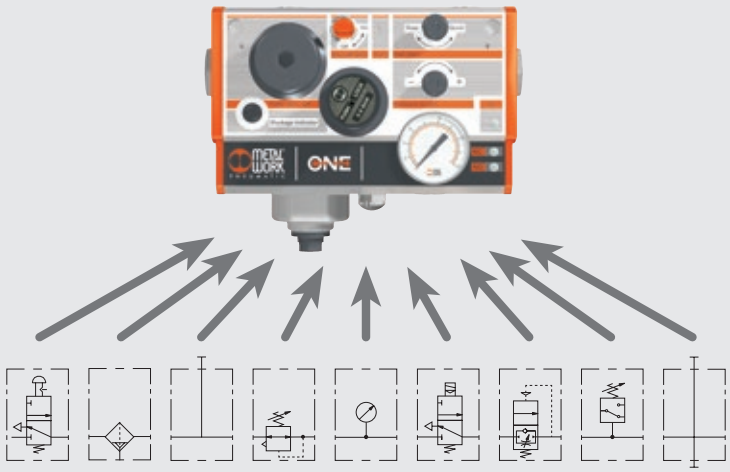

MINIATURISATION



Extremely reduced dimensions, considering the extra-high performance and flow rate reachable.

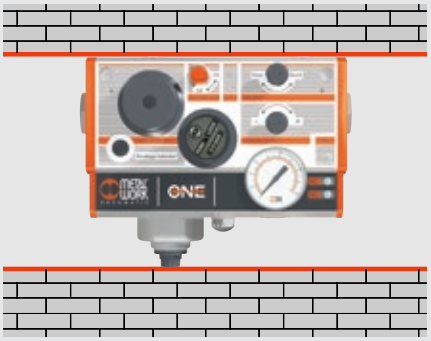

No clearance is required above and below it to make adjustments or change the filter or other components. The actual space occupied is thus further reduced.

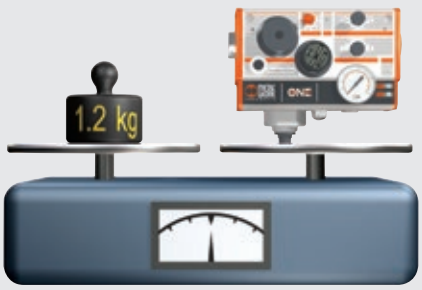

It weighs slightly more than one kilo instead of the 4 to 8 kilos of conventional units.

EASY ADJUSTMENTS AND LITTLE MAINTENANCE

The entire user interface is at the front, which means that everything is visible and easy to reach. All the adjustments are made using the push-lock knobs (no need for wrenches or screwdrivers), thus preventing accidental operations or manoeuvres.

CONFIGURABILITY

Considering that ONE is reduced in size but highly performing, and it can integrate tenths of functions, a single unit can cover the entire range of applications, with cut-clear advantages in terms of standardisation and reduction of the number of codes handled and goods in stock.
With a single size there are thousands of different configurations.
For example, there is choice between 1/4", 3/8", 1/2", 3/4" or 1" threaded ports, manual and/or electric on-off or progressive valves, etc.
The customer decides the configuration he wants and creates the code, using the key-to-coding table shown below in this catalogue.
He will receive the unit he wants marked with its code and the correct pneumatic diagram.

WHAT YOU CAN SEE FROM THE OUTSIDE

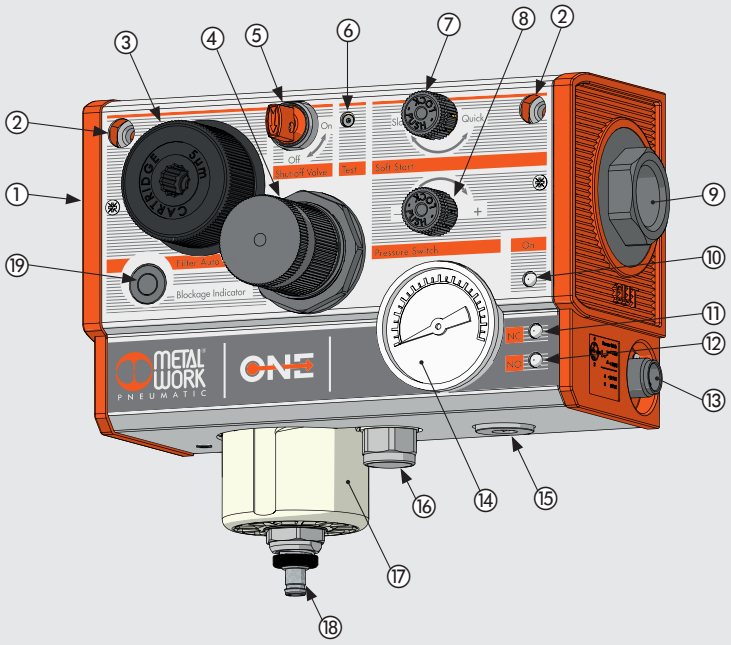



① Air intake, with swivel threaded port
② Fixing hole
③ Access to filter cartridge
④ Pressure regulation
⑤ Shut-off valve (manual)
⑥ Manual override (shut-off valve electrical)
⑦ Soft start valve regulation
⑧ Switching pressure regulation of the analog pressure switch
⑨ Air outlet, with swivel threaded port
⑩ LED signalling unit ON
⑪ LED signalling pressure below the value set on analog pressure switch
⑫ LED signalling pressure over the value set on analog pressure switch
⑬ 5-pin M12x1 electrical connector
⑭ Pressure gauge
⑮ 1/4" air intake. Another regulated air intake and a filtered non-regulated air intake are situated on the top
⑯ Air exhaust with a 1/4" silencer
⑰ Condensate tank
⑱ Condensate drain
⑲ Clogged filter signal
⑳ Digital pressure switch

THREADED PORTS

- The threaded ports at the air intake and outlet are the swivel type to facilitate coupling with the supply and delivery pipes. In this way, the unit can be mounted or removed without dismounting the pipes.
- A range of 5 different threads, 1/4", 3/8", 1/2", 3/4" and 1" is also available.
- The thread for the supply pipe may differ from that of the delivery one.

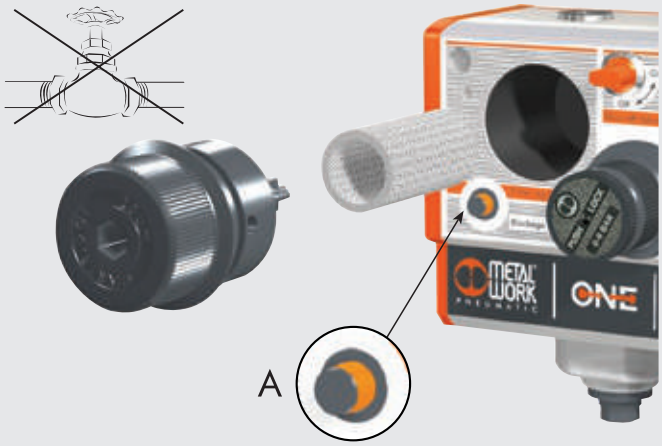

- If the filter gets so clogged up that it causes an excessive drop in pressure as the air passes through, the optical filter blockage indicator will project (see detail A) to indicate that the filter cartridge must be replaced.
- The cartridge can be replaced by unscrewing a plug at the front. This system is functional and, unlike conventional filters, does not require manoeuvring space below the unit.
- An automatic stop on-off valve is incorporated in the unit: when the filter plug is unscrewed, the valve closes automatically. This means there is not need to a tap upstream and there is no risk of the plug being ejected violently.

CONDENSATE DRAIN

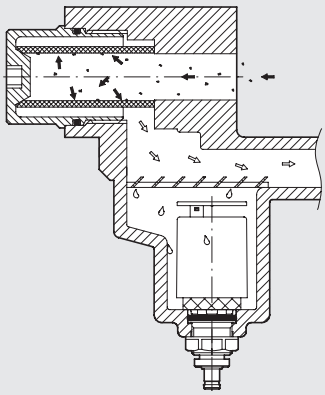

- The condensate drain is located downstream of the filter and thus uses cleaner air. This prevents the known problem of air leaks due to the deposit of dirt on the condensate discharge valve.
- You can request ONE with two types of condensate drain:
  - semi-automatic, type RMSA
  - automatic, of the floating type RA

SINGLE AIR EXHAUST

The air in the circuit is relieved via one outlet situated below the unit and fitted with silencer. If you want to convey air relief to prevent the emission of polluted air into the atmosphere, you can replace the silencer and install a fitting. (a pipe with a diameter of at least 6 mm is recommended)
Next to the air outlet there is the condensate drain, which in the RA version conveys the draining by inserting the pipe having internal diameter 6 mm in the lower port.

SUPPLEMENTARY PORTS

In addition to the main outlet, there are three supplementary air ports with a 1/4" thread.

- one for filtered non-regulated air (A) for use, for example, with a compressed air gun.
- two for filtered regulated air (B).

The unit comes complete with supplementary plugged ports for use with A7 fittings.

PANEL MOUNTING

ONE can be mounted inside the guard of the machine leaving only the front visible. This is a considerable advantage in terms of functionality and aesthetics as the user interface is entirely at the front.
Among the accessories to be ordered separately, there is the kit of brackets for panel mounting.

ELECTRICAL CONNECTION

A standard five-pin M12x1 connector, with IP65 protection is used for the opening solenoid valve and the pressure switch.
One cable only is required, thus improving reliability and reducing wiring times.

SOFT START VALVE

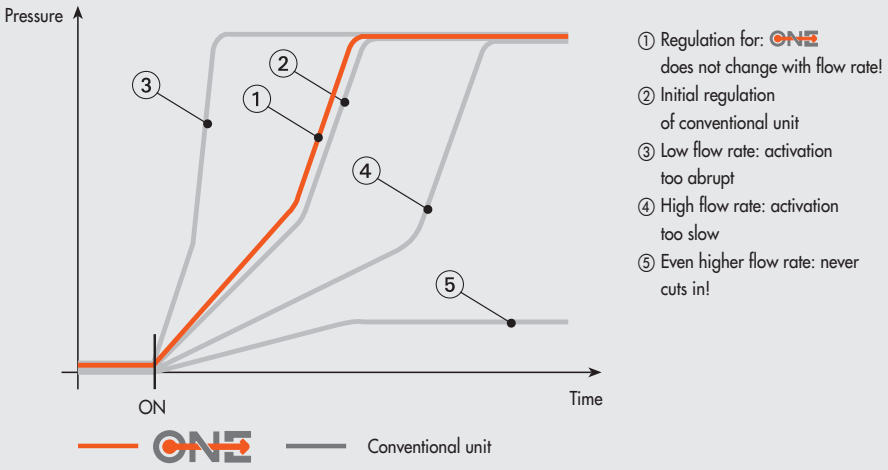

The soft start valve is an absolutely innovative feature among the functions provided by ONE.
Soft start valve available from the trade are generally based on the principle of leaving the passage of a small amount of air until the downstream pressure reaches a set value, and then opening the passage fully. In this way, the rate at which the pressure increases depends on the flow rate of the utilities, which often feature a continuous flow rate, for example a blow, and thus the starter can hardly activate. The solution offered by One is such that the pressure increases gradually and it is independent of the flow rate of the utilities. Pressure increase can be regulated precisely via the knob at the front.
Another piece of news, among the several possible configurations you can have the soft start valve operated by the manual V3V

SPECIFICATIONS

TECHNICAL DATA		1/4"	3/8"	1/2"	3/4"	1"
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	2200	2900		3600	
	scfm	78	102		127	
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	2400	3300		4000	
	scfm	85	116		141	
Flow rate on discharge at 6 bar (0.6 MPa; 87 psi)	Nl/min	1600				
	scfm	56				
1/4" port flow rate of non-regulated filtered air	Nl/min	1800				
at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar	scfm	64				
Flow rate of each supplementary 1/4" filtered	Nl/min	2400				
and regulated air port at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar *	scfm	85				
Fluid		Compressed air				
Setting range	bar	0.5 to 2; 0.5 to 4; 0.5 to 8				
Degree of filtration	µm	5 (yellow) or 20 (white)				
Operating pressure range	bar	10				
	MPa	1				
	psi	145				
Operating temperature range	°C	-10 to 50				
	°F	-14 to 122				
Class of protection		IP 65 with connector				
Weight	kg	From 1.15 to 1.25 according to configurations				
Wall fixing (max. panel thickness 10 mm)		Front, with M5x75 screws or back, with M6x70 screws				
		The screws are included in the supply				
Mounting position		Vertical				
Direction of flow		From left to right				
Compatibility with oils		See **chapter Z1**				
Solenoid valve						
Insulation class		F155				
Switching time		100% ED				
Electrical connector		M12x1, 5-PIN 90°, according to CEI IEC 60947-5-2				
Power	W	3/0.3				
Voltage	V	24 VDC± 10%				
Analog pressure switch						
Pressure interval settable on the pressure switch	bar	0.5 to 10				
Pressure switch hysteresis (not adjustable)	bar	bar 0.4 to 0.8 (see diagram)				
Maximum pressure switch current	A	0.5				
Maximum pressure switch voltage	V	3 to 30 AC/DC				
Pressure switch contacts		Normally open (NO) and normally closed (NC)				
Number of switching		$5x10^6$				
Digital pressure switch series 600		See page **C7**.4				

***** Total flow rate from two supplementary outlets and the main one cannot exceed 4000 Nl/min at 6.3 bar with ΔP=1

WIRING DIAGRAM M12 CONNECTOR

Version with solenoid valve and analog pressure switch



4 +24V DC
5 0V DC

Version with analog pressure switch



Version with solenoid valve



4 +24V DC
5 0V DC

DIGITAL PRESSURE SWITCH WIRING DIAGRAM

PNP output with cable 2 m

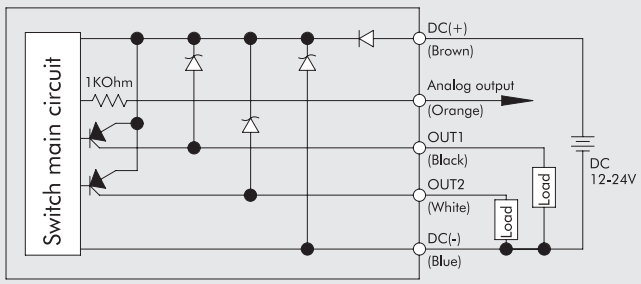

PNP output with cable 300 mm and M12 connector



1 DC (+)
2 OUT 1
3 DC (-)
4 OUT 2
5 Analog Output

ANALOG PRESSURE SWITCH WIRING DIAGRAM

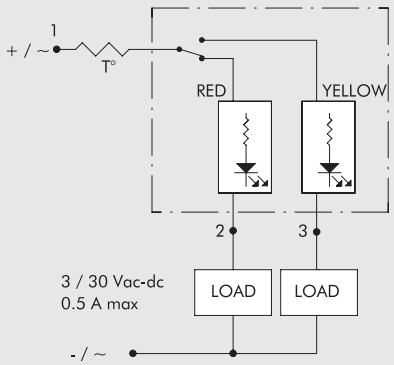

ANALOG PRESSURE SWITCH HYSTERISIS GRAPH

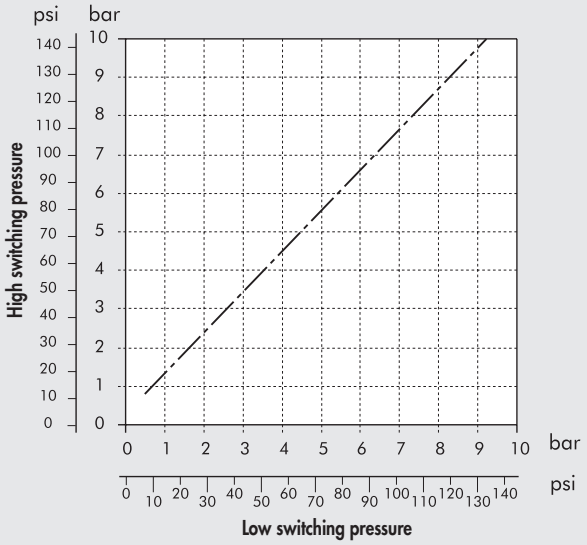

FLOW CHARTS

1/4"

Pm = 8 bar - 0.8 MPa - 116 psi
Preset pressure

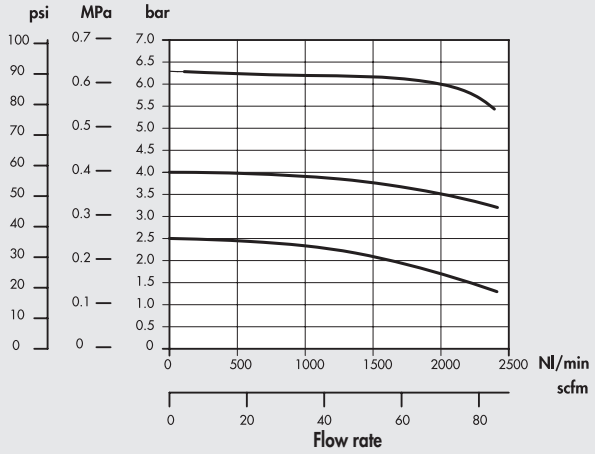

3/8"

Pm = 8 bar - 0.8 MPa - 116 psi
Preset pressure

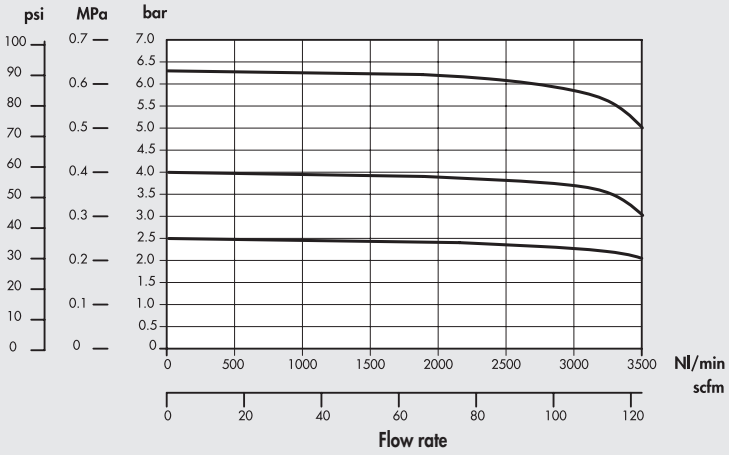

1/2" - 3/4" - 1"

Pm = 8 bar - 0.8 MPa - 116 psi
Preset pressure

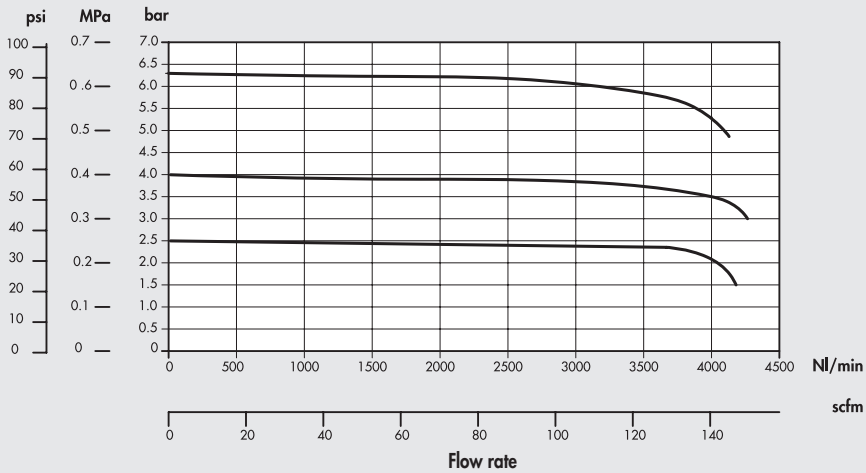

DIMENSIONS

STANDARD VERSION

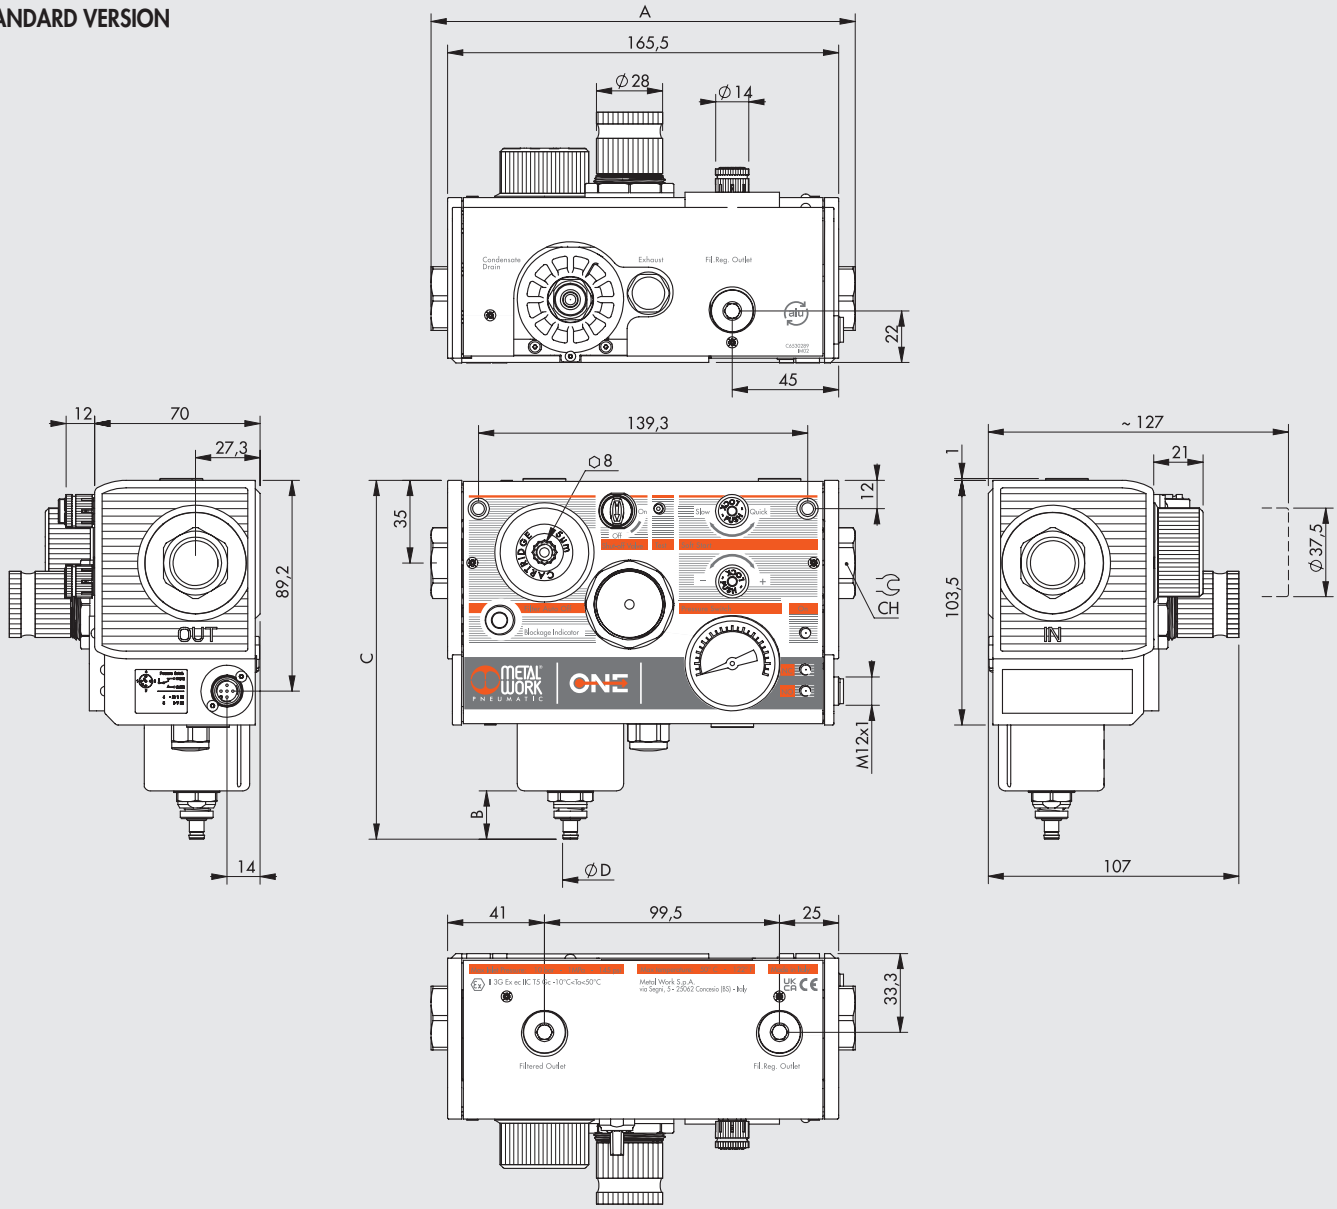

WITH DIGITAL PRESSURE SWITCH VERSION

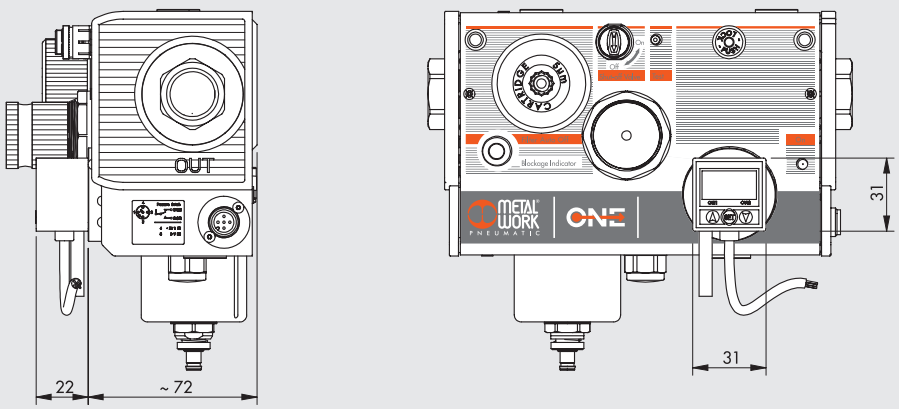

	1/4"	3/8"	1/2"	3/4"	1"
A	180			195	
CH	19	22	27	32	36

	RA	RMSA
B	20.4	16.4
C	152	148
Ø D	For pipe internal diameter 6 mm	15

METAL WORK PNEUMATIC

EXTERNAL DESIGN

You can get thousands of different configurations. The external design differs according on the versions chosen.

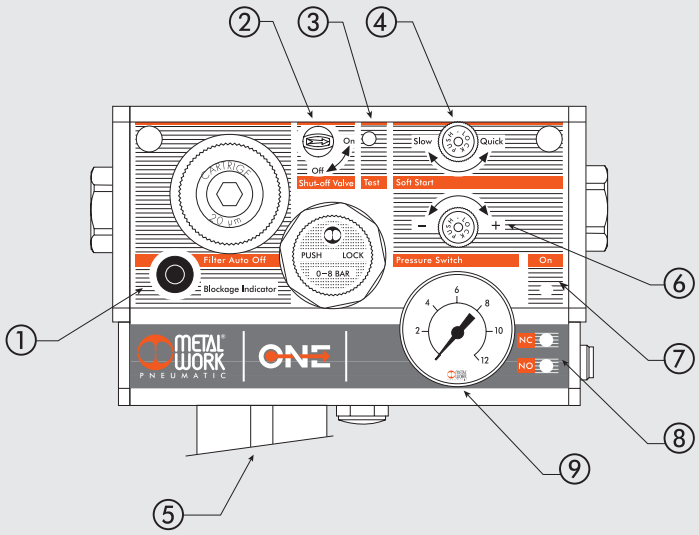

ONE NON-ELECTRICAL

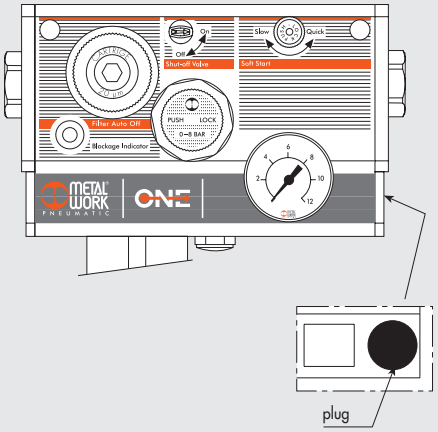

CLOGGED FILTER SIGNAL ①

PRESENT



NOT PRESENT



V3V MANUAL ②

STANDARD



LOCKABLE



NOT PRESENT

V3V ELECTRICAL

PRESENT



NOT PRESENT
in some versions holes are present

in other configurations the cover has no holes



SOFT START VALVE ④

PRESENT

NOT PRESENT

CONDENSATE DRAIN ⑤

AUTOMATIC (RA)



RMSA



ANALOG PRESSURE SWITCH

PRESENT



NOT PRESENT
in some versions holes are present

in other configurations the cover has no holes

READING OF PRESSURE GAUGE ⑨

DIGITAL PRESSURE SWITCH



HOW TO ORDER

ORDERING CODES

You can choose among numerous variants and options. The product code so personalised is made up by compiling the diagram below.
The code so compiled must be specified on the order. A label showing the code and its pneumatic diagram is affixed onto the product.

	A	B	C	D	E	F	G	H	I	L	
	ONE electric or ONE non-electric	Air intake	Degree of filtration	Clogged filter signal	Condensate drain	Pressure regulation	Valves	Pressure switch	Air outlet	Miscellaneous, special version	
EXAMPLE	54	3	2	1	1	2	7	1	3	0	0
	53 ONE non-electric	1 1/4″	2 20 µm	0 NO	0 RMSA	2 0.5-2 bar	0 None	0 NO	1 1/4″	00 Standard	
	54 ONE electric *	2 3/8″	5 5 µm	1 YES	1 Automatic (RA)	4 0.5-4 bar	1 V3V manual	1 YES Analog ●	2 3/8″		
		3 1/2″				8 0.5-8 bar	2 V3V manual with padlock	2 YES Digital with cable 2 m	3 1/2″		
		4 3/4″					3 V3V manual and soft start valve	3 YES With cablle 300 mm and M12 connector	4 3/4″		
		5 1″					4 V3V manual with padlock and soft start valve		5 1″		
							5 V3V manual and V3V electric ●				
							6 V3V manual with padlock and V3V electric ●				
							7 V3V manual and APR electric ●				
							8 V3V manual with padlock and APR electric ●				
							9 only V3V electric ●				
							A only APR electric ●				

* a pressure switch version and/or electric V3V and/or electric progressive actuator.

● **NB: versions valid only for the electric ONE (code 54...)**

A **ONE electric or non-electric**
ONE non-electric: there is no component actuated electrically: select code 53. In this case, the unit comes without any M12x1 connector, LED, pressure switch,or electric V3V.
ONE electric: there is at least one component actuated electrically, and thus the pressure switch and/or electric V3V (and/or the electrical soft sta valve) select code 54. In this case, the unit comes with the M12x1 connector and 3 LEDs. Only the LEDs associated with the functions installed will be active.

B **Air intake**
There are 5 different gas cylindrical threads: 1/4", 3/8", 1/2", 3/4" and 1".

C **Degree of filtration**
A cartridge with a degree of filtering of 5 µm (yellow) or 20 µm (white) is available. This value is marked on the plug.

D **Clogged filter signal**
If the filter gets so clogged up that it causes an excessive drop in pressure as the air passes through, the orange indicator will project from the body by a few millimetres.

E **Condensate drain**
RMSA: the condensate is drained out automatically only by relieving the air pull the knurled knob for having the same result.
Automatic (RA): a floating system that automatically drains the condensate out whenever the level of water in the bowl reaches the set value.

F **Pressure regulation**
There are three possible regulation fields.
The value is marked on the regulation knob.

G **Valves**
There are 11 different combinations. The electric valves are clearly selectable only if the initial code is 54, i.e. ONE electric.

- **0** - No valves present
- **1** - V3V manual: is a 3/2 valve that in a set position allows the air to flow and in the other it closes the passage and discharges the pressure downstream.
- **2** - V3V manual with padlock: like the previous one, with the possibility of inserting a padlock (included in the supply with 2 keys) in the valve closed position.
- **3** - V3V manual and soft start valve: when the manual V3V valve is operated, the pressure starts to increase slowly, with a fine adjustable ramp, and when it reaches about 30-40% of the set value, the valve opens completely and the pressure rises to the set value.
- **4** - V3V manual with padlock and soft start valve: like the previous, with the padlock device on the manual V3V in "OFF" position.
- **5** - V3V manual and V3V electric: two V3V in series are present, one is manual the other electrical. By operating both the valve the air flow is allowed. If one or two are switched OFF, the air downstream is relieved. The electrical one can also be operated manually by reefing pushed the "TEST" button
- **6** - V3V manual with padlock and V3V electric: like the previous, with the padlock device in "OFF" position.
- **7** - V3V manual and APR electric: One manual V3V and one soft start valve are present. When both are operated, the pressure starts to increase slowly, with a fine adjustable ramp, and when it reaches about 30-40% of the set value, the valve opens completely and the pressure rises to the set value.
- **8** - V3V manual with padlock and APR electric: like the previous, with the padlock device on the manual V3V in "OFF" position.
- **9** - V3V elettric: It's present only the electrical V3V. The valve will open if it is powered on. When the power supply is switched off, the valve closes and air downstream is relieved. The valve can also be operated manually by keeping pushed the test button.
- **A** - APR elettric: It's present only the electric soft start valve. Whent it is powered ON, the pressure starts to increase slowly,with a fine adjustable ramp, and when it reaches about 30-40% of the set value, the valve opens completely and the pressure rises to the set value.

H **Analog pressure switch**
The pressure switch has a switching contact, which means you can have a normally-open signal or a normally-close signal. It is also connected to the NC and NO LEDs which come on if the actual pressure is less or greater than the set pressure, respectively. The LEDs only come on if an electric charge is connected to them.

Digital pressure switch
The digital pressure switch allows both the transmission of electrical pressure signals and the instant display of pressure. Two digital outputs, which can be set according to the two pressure values reached, are available. An analogue output of a voltage proportional to the pressure reading is also available. The values are clearly displayed on a LED video and different parameters can be entered from the keypad. Hysteresis can be adjusted and the unit of measurement for pressure can be modified.

I **Air outlet**
Five different gas cylindrical threads are available: 1/4", 3/8", 1/2", 3/4" and 1". It is possible to choose a thread other than the one on the inlet port.

L Free positions for special executions.

ACCESSORIES ONE

PANEL MOUNTING BRACKETS

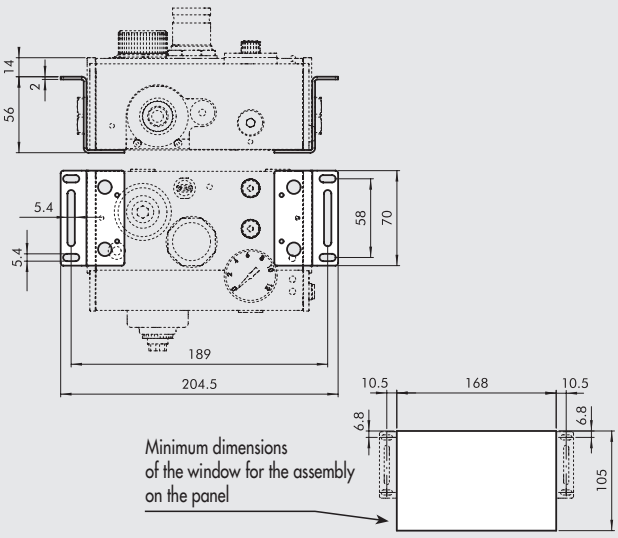

Code	Description
9200702	Kit – panel mounting brackets **N.B.:** fixing screws included

COVER DISASSEMBLY WRENCH



Code	Description
9170401	Cover disassembly wrench

SECURITY KNOB



Code	Description
9200703	Security knob apr/pressure switch

NOTE: Pull outwards to remove the knob from the APR/pressure switch on the unit. Insert the security knob and regulate the APR/ pressure switch. Then press the handle firmly to lock it in position. If the APR/pressure switch needs to be reset, remove the security knob by forcing it laterally with a screwdriver.

STRAIGHT CONNECTOR



Code	Description
W0970513001	5-PIN M12X1 straight connector

STRAIGHT CONNECTOR WITH WIRE



Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Grey

Code	Description
W0970513002	5-PIN M12X1 straight connector with wire L = 5 m

90° CONNECTOR



Code	Description
W0970513003	M12X1 5-PIN 90° connector

90° CONNECTOR WITH WIRE



Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Grey

Code	Description
W0970513004	M12X1 5-PIN 90° connector with wire L = 5 m

PRESSURE GAUGE



Code	Description
9700106	M 39 1/8 0-4
9700107	M 39 1/8 0-12

THREADED PORT



Code	Description
9232001	1/4" spare thr. port for ONE
9232002	3/8" spare thr. port for ONE
9232003	1/2" spare thr. port for ONE
9232004	3/4" spare thr. port for ONE
9232005	1" spare thr. port for ONE

FILTER ELEMENT



Code	Description
9251720	Spare filter element 5 µm for ONE
9251721	Spare filter element 20 µm for ONE

FILTER PLUG WITH FILTER ELEMENT



Code	Description
9251723	Spare plug + filter element 5 µm ONE
9251724	Spare plug + filter element 20 µm ONE

PILOT REGULATOR



Code	Description
9250820	Spare pilot reg. 0.5 to 2 bar for ONE
9250821	Spare pilot reg. 0.5 to 4 bar for ONE
9250822	Spare pilot reg. 0.5 to 8 bar for ONE

POPPET



Code	Description
9250707	Spare poppet for ONE

SOLENOID VALVE

NEW

Code	Description
722123840101	PLT-10 722123840101

OLD

Note: Spare part no longer available. If the solenoid valve to be replaced is the same as the one shown here on the left, please contact our sales department.

ELECTRIC BOARD



Code	Description
9232010	Spare electric board for ONE

Note: with this kit we suggest you should order also the gauge, as it could get damaged during the disassembly.

PRESSURE SWITCH



Code	Description
9000500	Spare press. switch for ONE

Note: with this kit we suggest you should order also the gauge, as it could get damaged during the disassembly.

NOTES

SUMMARY PRECISION REGULATORS AND PRESSURE CONTROL

- **PRECISION PRESSURE REGULATOR WITH HIGH EXAUST FLOW, SERIE GS** — C6.2

- **PROPORTIONAL PRECISION PRESSURE REGULATOR REGTRONIC SERIES** — C6.6

- **REGTRONIC M5** — Analog — Io-Link — C6.10

- **REGTRONIC 1/8"- 1/4"** — Analog — Io-Link — C6.12

- **REGTRONIC Newdeal** — Analog — Io-Link — C6.14

- **REGTRONIC 300** — Analog — Io-Link — C6.15

- **REGTRONIC 400** — Analog — Io-Link — C6.16

- **ACCESSORIES REGTRONIC** — Analog — Io-Link — C6.18

- **PROPORTIONAL PRECISION PRESSURE REGULATOR SYNTRONIC SERIES** — C6.19

PRECISION PRESSURE REGULATOR WITH HIGH EXAUST FLOW, SERIE GS

GS is a series of precision regulators, designed for rapid relief of overpressure and a high flow rate.
They feature identical and opposing regulation valves on the inlet and outlet sides. This enables the regulator to behave symmetrically – precise regulation with a high rate of flow both in and out.
The pressure setting is virtually insensitive to changes in the upstream pressure (see diagram below), which guarantees accuracy even when the mains pressure fluctuates considerably.
A slight escape of air is required for correct operation of the regulator – it must not be considered a defect.
The regulator can be fixed using the through holes in the body or a bracket accessory.
The body has a 1/8" pressure gauge fitting.
GS regulators are suitable for applications requiring good accuracy in maintaining the pressure and a certain sensitivity in relieving pressure peaks, e.g. to supply low-friction cylinders, reel tensioners and coil winders.
Two sizes of compressed air fitting are available: 1/8" and 1/4".
Three different setting ranges are available: 0 to 2 bar, 0 to 4 bar and 0 to 8 bar.

TECHNICAL DATA		1/8"	1/4"
Threaded port		1/8"	1/4"
Setting range	bar	0 to 2 - 0 to 4 - 0 to 8	
Max. input pressure	bar	10	
Flow rate at 6.3 bar ΔP 0.5 bar	Nl/min	900	1170
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	1200	1380
Fluid		Unlubricated filtered air	
		The air must be at least 10 µm pre-filtered	
Temperature range	°C	From -10 to +50	
Mounting position		In any position	
Pressure gauge port		G 1/8"	
Weight	g	600	
Exaust flow rate at 4 bar (regulated pressure)			
ΔP 0.1 bar	Nl/min	450	810
ΔP 0.5 bar	Nl/min	900	1190
Variation in regulated pressure (2 bar) with changes in upstream pressure (4-10 bar)	mbar	± 20	
Relieving sensitivity	mbar	30	
Air consumption – continuous escape (PIN 4 bar)	Nl/min	< 1	
Notes		The regulator pressure must always be set upwards.	
		For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value.	
		Do not take air from pressure gauge ports.	

COMPONENTS

① Spring: stainless steel
② Cartridges: nickel-plated brass
③ Poppet: nickel-plated brass
④ Ring: vulcanized NBR
⑤ Control lever: brass
⑥ Bodies: painted aluminium
⑦ Control diaphragm: oil-proof rubber
⑧ Filter: sintered bronze
⑨ Throttle cartridge: brass
⑩ Ball: stainless steel
⑪ Ball valve: brass
⑫ Regulation diaphragm: NBR
⑬ Ring nut: technopolymer
⑭ Adjusting spring: steel
⑮ Scroll: brass
⑯ Bell: technopolymer
⑰ Adjusting screw: brass
⑱ Knob: technopolymer

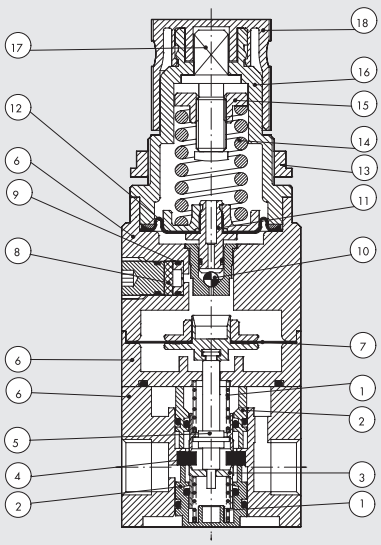

FLOW RATE

Upstream pressure = 10 bar

P reg = 2 bar

P reg = 6.3 bar

P reg = 4 bar

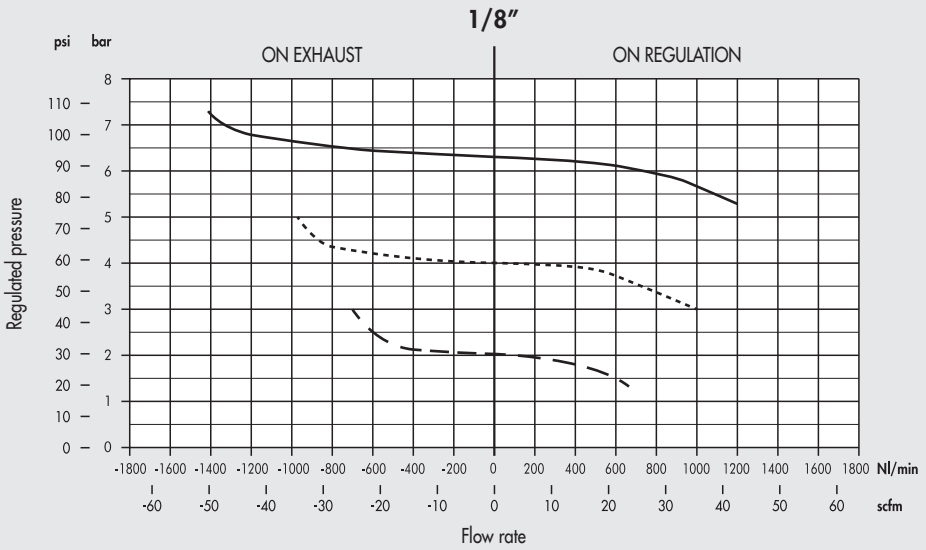

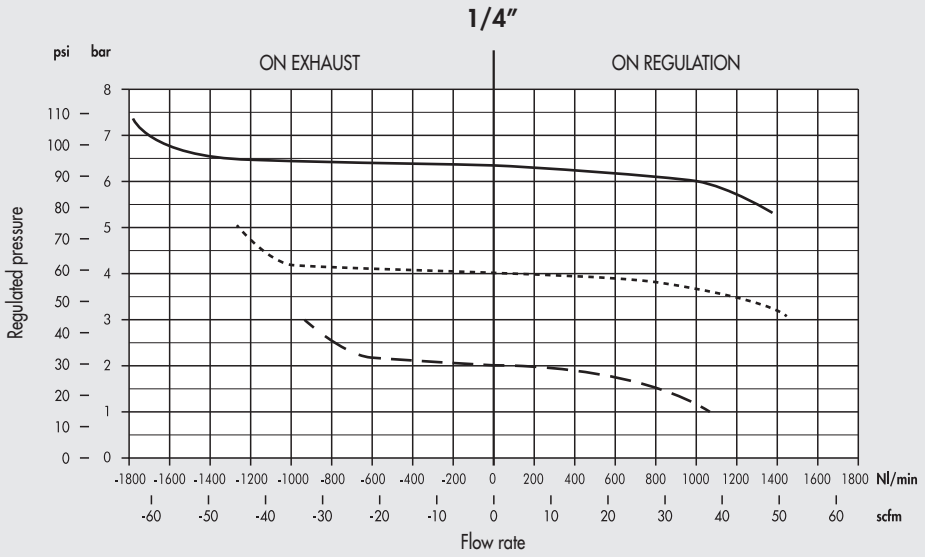

UPSTREAM PRESSURE SENSITIVITY

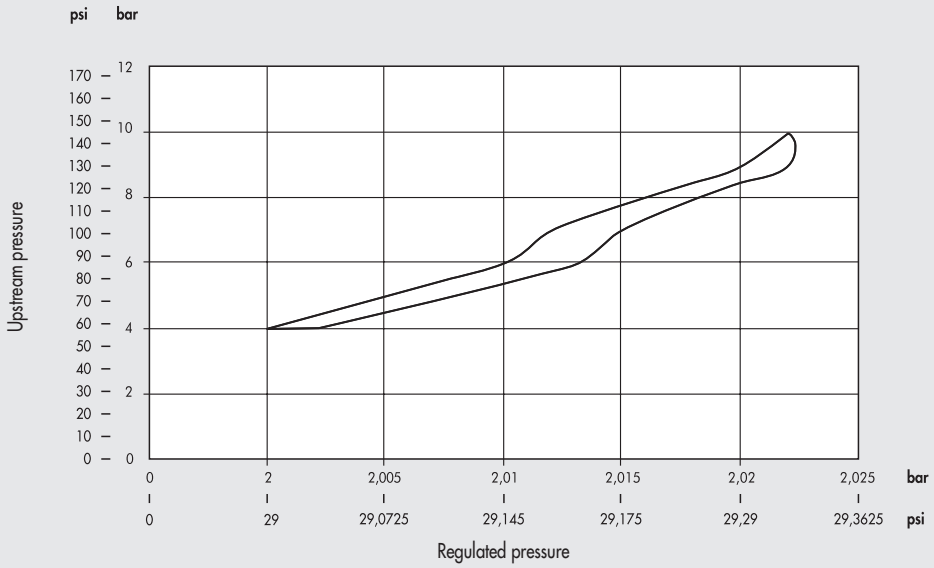

INSTALLATION

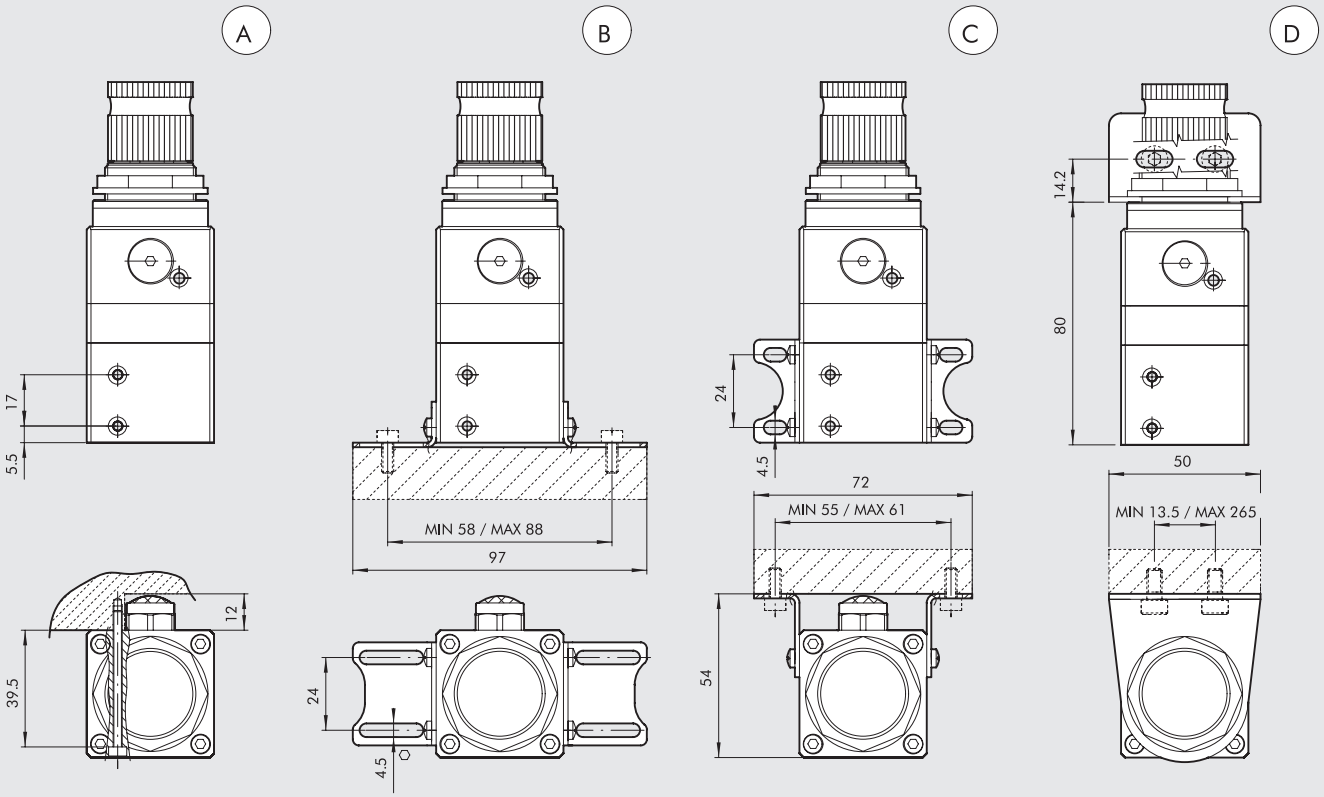

Ⓐ On the wall with 2 M3 hex screws
Ⓑ On the base with legs code 9200710
Ⓒ On the wall with legs code 9200710
Ⓓ On the wall with bracket code 9200701

DIMENSIONS

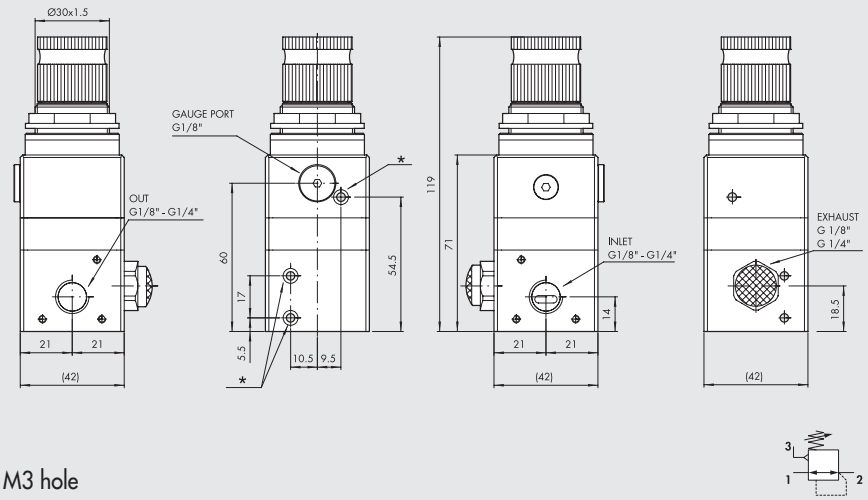

* M3 hole

Code	Description
5511200	REG. GS 1/8 02
5511300	REG. GS 1/8 04
5511400	REG. GS 1/8 08
5512200	REG. GS 1/4 02
5512300	REG. GS 1/4 04
5512400	REG. GS 1/4 08

ACCESSORIES

SPARES PARTS

R/FR FIXING BRACKET



Code	Description
9200701	SF100 - BIT - ND 1/4 - SY1

FIXING BRACKET KIT



Code	Description
9200710	Fixing bracket kit

N.B. supplied complete with four M4X6 screws

PRESSURE GAUGE



Code	Description
9700102	M 40 1/8 04
9700101	M 40 1/8 012



Code	Description
9700109	M 40x40 1/8 04
9700110	M 40x40 1/8 012

UPPER COVER FOR REG GS



Code	Description
9250835	SPARES CS REG GS 02
9250836	SPARES CS REG GS 04
9250837	SPARES CS REG GS 08

NOTES

PROPORTIONAL PRECISION PRESSURE REGULATOR REGTRONIC SERIES

Proportional pressure regulators series REGTRONIC have the job of precisely regulating the pressure in a system, the variables depending on the input command. Remote control regulators are controlled by means of an M12x1 cable and connector and can have Volt, mA, RS232 control or via IO-Link. Regulators with a display can be controlled via a cable or directly using the keys below the display. The pressure value and a series of information and diagnostics are visible at all times on the graphic display. The user-display interface, LEDs and buttons are all on one side. The programming and reading software is comprehensive, simple and intuitive. Pressure control takes place in a "closed-loop" with an electronic precision pressure sensor that measures the downstream pressure, a control system that compares it with the desired pressure, and two mini solenoid valves that adjust the pressure to reach the target value. Through the dedicated "Metal Work RegUp" App, the wireless versions can communicate with Ethernet networks (via MQTT protocol) and mobile devices (smartphones and tablets) via Bluetooth®.
Through this App it is possible to view and modify the regulated pressure in real time , set all the operating parameters and view the pressure trend graphs.

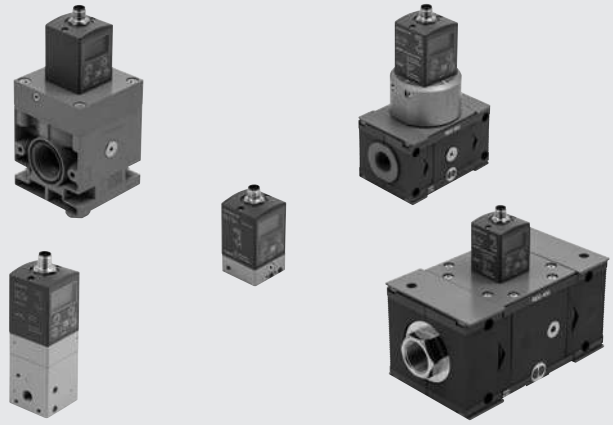

TECHNICAL DATA		REGTRONIC			REGTRONIC NEW DEAL		REGTRONIC 300			REGTRONIC 400			
Threaded port		M5	1/8"	1/4"	3/4"	1"	1/2"	3/4"	1"	1"	1 ¼"	1 ½"	2"
Fluid		Filtered, unlubricated air.											
		The air must be filtered at least 10 µm and without condensation.											
MIN inlet pressure	bar	Regulation pressure + 1 bar											
MAX inlet pressure	bar	11											
Temperature range	°C	from 0 to 50											
Pressure regulation range	bar	from 0.05 to 10 (settable full scale and minimum pressure)											
Flow rate at 6.3 bar ΔP 0.5	Nl/min	10	1300	1500	10000		4500			18000			20000
Flow rate at 6.3 bar ΔP 1	Nl/min	10	1450	1700	13000		7000			-			-
Exhaust flow rate at 6.3 bar with 0.1 bar overpressure	Nl/min	2	600	1300	1800		250			400			400
Exhaust flow rate at 6.3 bar with 0.5 bar overpressure	Nl/min	9	1000	1500	2000		500			850			850
Response time with ΔP =1 bar	Volume [cc]	100	100	1000	100	1000	1000			1000			1000
from 6 to 7 bar	s	0.5	0.1	0.15	0.1	0.15	0.27			0.25			0.2
from 7 to 6 bar	s	0.55	0.1	0.15	0.1	0.15	0.27			0.33			0.35
Weight	kg	0.2	0.38		0.38		1.3			1.5			5
Class of protection		IP 65											5.8
Supply voltage range IO-Link version	VDC	from 18 to 30											
Current absorption		Max 150 mA at 18VDC											
Supply voltage range analog version	VDC	12 -10% 24 +30%											
Minimum operating voltage	VDC	10.8											
Maximum operating voltage	VDC	31.2											
Maximum admissible voltage	VDC	32 *											
Current absorption		max 220 mA at 12VDC											
Input signal (input impedence)	Voltage	0 to 5 VDC, 0 to 10 VDC (approx. 6.3 KΩ)											
	Current	4 to 20 mA (approx. 100 Ω)											
	Serial ports	RS 232											
	Manual	Keypad											
Output signal	Analog version voltage	0 to 10 VDC (1 VDC = 1 bar) - 1 mA max											
	Analog version current	4 to 20 mA (4 mA = 0 bar, 20 mA = 10 bar)											
	Digital	PNP open collector output: max 24VDC 60 mA											
		NPN open collector output: max 24VDC 60 mA											
Hysteresis		± 0.2% (Full scale)											
Repeatability		± 0.2% (Full scale)											
Sensitivity/Dead-band		setting range 10 to 300 mbar											
Output pressure (display and keyboard version)	Accuracy	± 0.3% (Full scale)											
	Unit of measurement	bar, MPa, psi											
	Minimum resolution	0.01 bar - 0.001 MPa - 0.01 psi											
Analog output accuracy		± 0.1% of the reading											
Temperature characteristics		max 2 mbar / °C											
Installation position		In any position											
Notes		The features shown refer to the static condition only. With air consumption on the output side, the pressure may vary. **On all anolog versions you can set the parameters using the software "MWRegtronic" downloadable from the website www.metalwork.eu; to connect the PC to Regtronic you can use the cable code W0970513019.**											

*** IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.**

REMOTE-CONTROL VERSION

The remote-control version of the Regtronic has two diagnostic LEDs.

DISPLAY AND KEYBOARD VERSION

The display version also has buttons for entering the various parameters.

PROGRAMMABLE AND FLEXIBLE

Setting options:

- LANGUAGE
- UNIT OF MEASUREMENT
- TYPE OF INPUT
- TYPE OF DIGITAL OUTPUT
- DEAD-BAND
- FULL SCALE
- MINIMUM PRESSURE

PRECISION

Linearity
± 0.5 % (full scale)

Hysteresis
± 0.2 % (full scale)

Repeatability
± 0.2 % (full scale)

Sensitivity
range 10 to 300 mbar

IO-Link CONNECTOR 5-PIN M12x1

IO-Link



Pin	Signal	Description of Class A Port	Lead colour
1	L+	+24 VDC power supply	Brown
2	NC	/	White
3	L -	0 VDC power supply	Blue
4	C/Q	IO-Link communication	Black
5	NC	/	Gray

ANALOG CONNECTOR 8-PIN M12x1

Pin	Signal	Description	Lead colour
1	TX	RS232	White
2	RX	RS232	Brown
3	Pressure set	0 to 10 VDC / 0 to 5 VDC / 4 to 20 mA	Green
4	Digital out	NPN	Yellow
5	Analog out	Voltage version 0 to10 VDC	Gray
		Current version 4 to 20 mA	
6	Digital out	PNP	Pink
7	0 VDC	Power supply	Blue
8	+ VDC	Power supply	Red

FUNCTION DIAGRAM

REGTRONIC M5

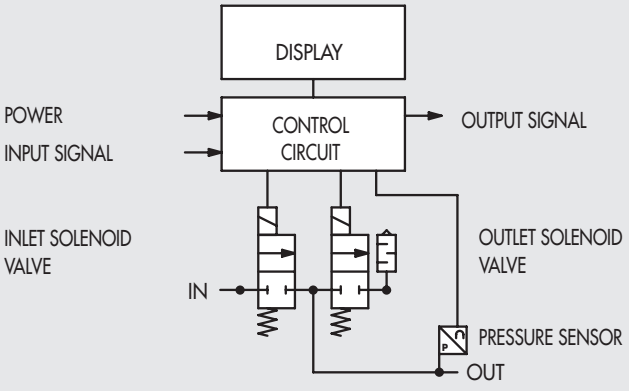

REGTRONIC 1/8" - 1/4" - SK300 - SK400 - NEW DEAL

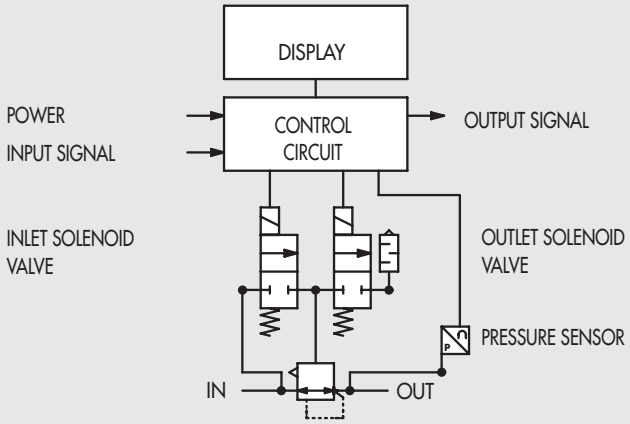

WIRELESS CONNECTION

With the Wireless version of Regtronic, you can establish a connection to a Wi-Fi network via an access point or gateway to monitor and collect all the measured gas values.

Connection to a MQTT Broker via an Access point

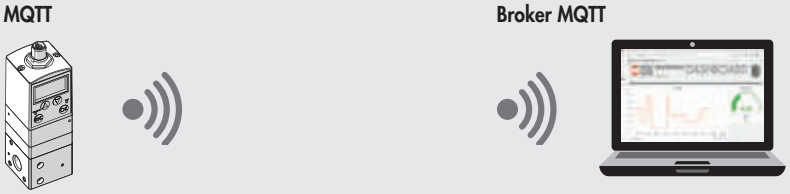

Gathering data from the field makes it possible to:
- carry out a predictive diagnosis of the system;
- monitor the operating parameters at all times and optimize the operation of the machines and the pneumatic system.

The software can be implemented with analysis functions that provide:
- machine efficiency monitoring;
- to check the pressure trends and long-term forecasting (plant improvement evaluation).

The "Metal Work RegUp" App allows you to connect, via Bluetooth, from Android® and iOS® smartphones, to the Metal Work proportional pressure regulators of the REGTRONIC series with a wireless interface.

Through "Metal Work RegUp" it is possible:

- view and modify the regulated pressure in real time
- set all operating parameters
- view the pressure trend graphs

RegUP

Download on the App Store

GET IT ON Google Play

METAL WORK PNEUMATIC

NOTES

REGTRONIC M5

COMPONENTS

① BODY: painted aluminium
② PRESSURE SENSOR
③ SOLENOID VALVE: 10 mm series PLT-10
④ SHELL: technopolymer
⑤ CONNECTOR M12
⑥ ELECTRONIC BOARDS



FLOW CHARTS

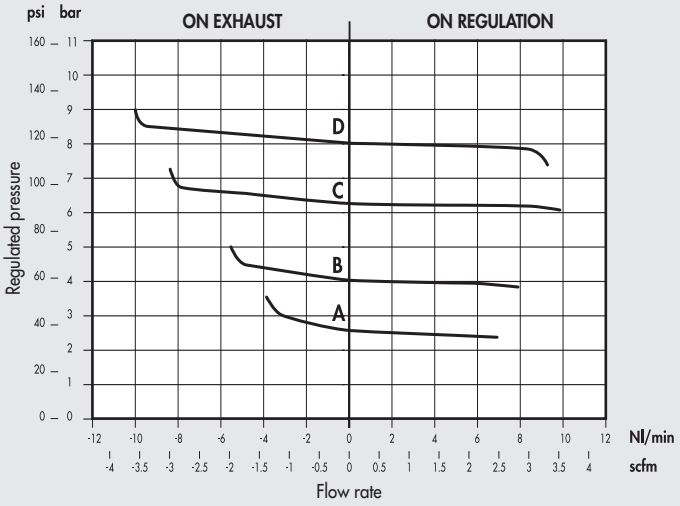

A = 2.5 bar
B = 4 bar
C = 6.3 bar
D = 8 bar
Pm = 10 bar

FIXING OPTIONS

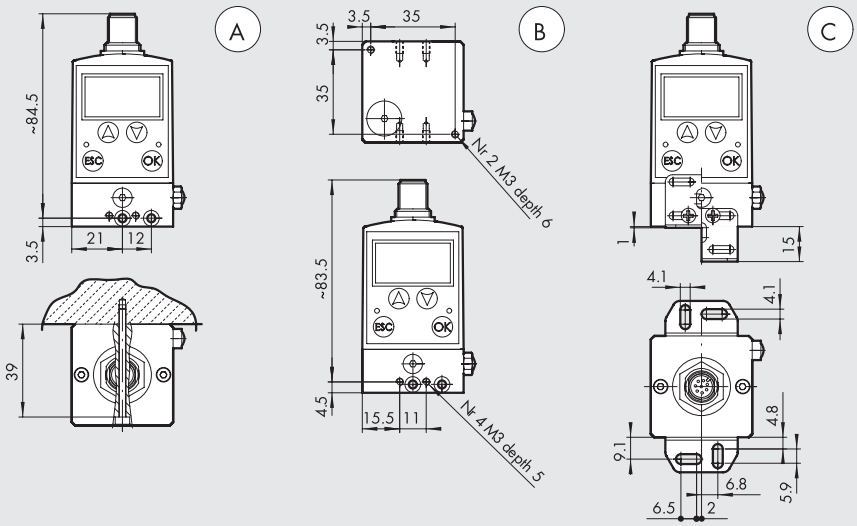

Ⓐ On the wall with 2 M3 screws, with through holes
Ⓑ On the wall using the M3 threaded holes on the front, rear and underside
Ⓒ On the wall with legs code 9200711

DIMENSIONS AND ORDERING CODES

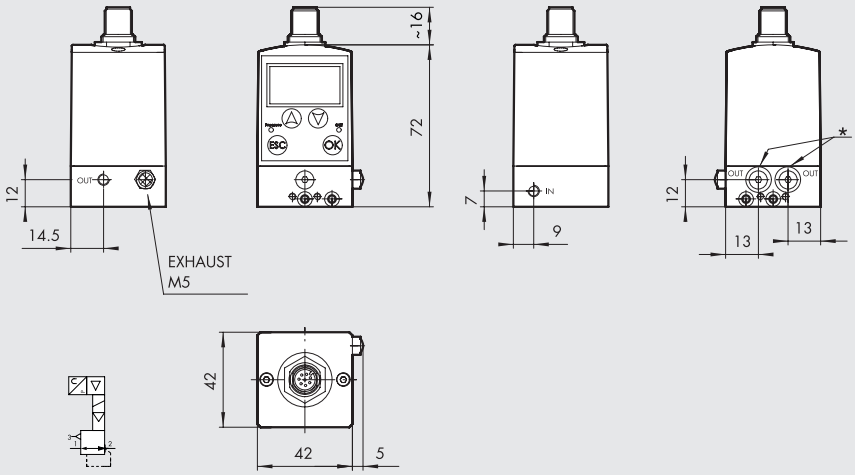

Code	Description
5520500	REGTRONIC M5 with display and keyboard OUT 0-10 V
5520502	REGTRONIC M5 remote control OUT 0-10 V
5540500	REGTRONIC M5 with display and keyboard OUT 4-20 mA
5540502	REGTRONIC M5 remote control OUT 4-20 mA
5530500	REGTRONIC IO-Link M5 with display and keyboard
5530502	REGTRONIC IO-Link M5 remote control

* alternative outputs, removing the M5 cap

ACCESSORIES

FIXING BRACKET KIT



Code	Description
9200711	Regtronic M5 Fixing bracket kit

A	B	C	F	I	I1	I2	I3	I4	I5	S
30	22	14.5	4.2	6.8	4.8	5.9	9.1	2	6.5	1.2

Note: supplied complete with four M3x6 screws

NOTES

REGTRONIC 1/8”; 1/4”

COMPONENTS

① CARTRIDGES: nickel-plated brass
② RING: vulcanized NBR
③ ROD: steel
④ BODIES: painted aluminium
⑤ PRESSURE SENSOR
⑥ SOLENOID VALVE: 10 mm series PLT-10
⑦ SHELL: technopolymer
⑧ CONNECTOR M12
⑨ ELECTRONIC BOARDS
⑩ CONTROL DIAPHRAGM: anti-oil rubber
⑪ SPRING: stainless steel
⑫ POPPET: nickel-plated brass

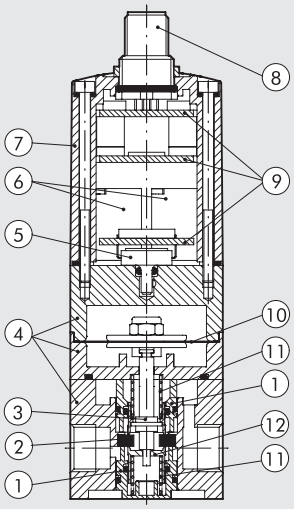

FLOW CHARTS

REGTRONIC 1/8”

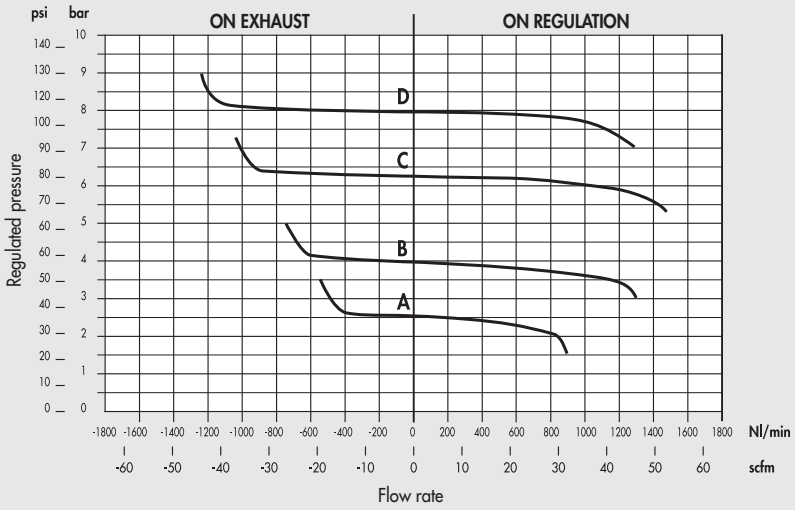

A = 2.5 bar
B = 4 bar
C = 6.3 bar
D = 8 bar
Pm = 10 bar

REGTRONIC 1/4”

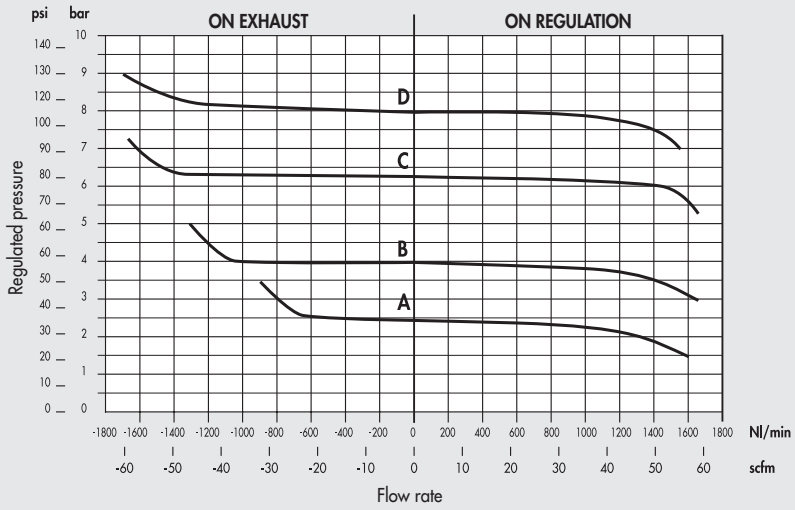

A = 2.5 bar
B = 4 bar
C = 6.3 bar
D = 8 bar
Pm = 10 bar

FIXING OPTIONS

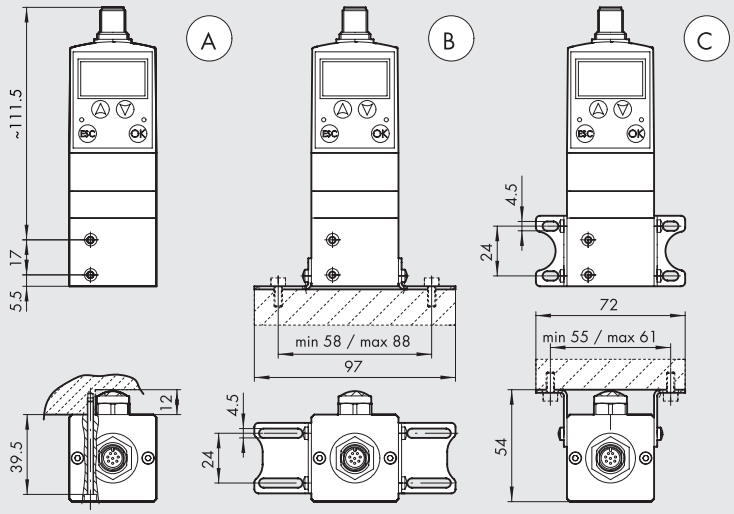

Ⓐ On the wall with 2 M3 screws
Ⓑ On the base with legs code 9200710
Ⓒ On the wall with legs code 9200710

DIMENSIONS AND ORDERING CODES

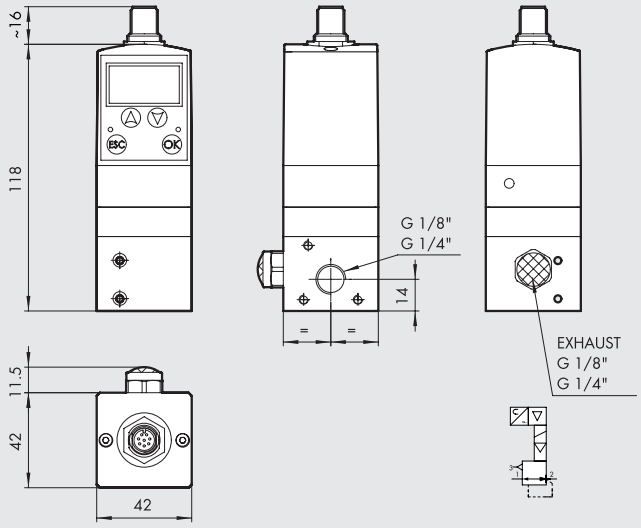

Code	Description
5521500	REGTRONIC 1/8 with display and keyboard OUT 0-10 V
5521502	REGTRONIC 1/8 remote control OUT 0-10 V
5522500	REGTRONIC 1/4 with display and keyboard OUT 0-10 V
5522502	REGTRONIC 1/4 remote control OUT 0-10 V
5541500	REGTRONIC 1/8 with display and keyboard OUT 4-20 mA
5541502	REGTRONIC 1/8 remote control OUT 4-20 mA
5542500	REGTRONIC 1/4 with display and keyboard OUT 4-20 mA
5542502	REGTRONIC 1/4 remote control OUT 4-20 mA
5531500	REGTRONIC IO-Link 1/8 with display and keyboard
5531502	REGTRONIC IO-Link 1/8 remote control
5531510	REGTRONIC IO-Link 1/8 with display, keyboard and Wi-Fi
5532500	REGTRONIC IO-Link 1/4 with display and keyboard
5532502	REGTRONIC IO-Link 1/4 remote control
5532510	REGTRONIC IO-Link 1/4 with display, keyboard and Wi-Fi

ACCESSORIES

FIXING BRACKET KIT



Code	Description
9200710	Fixing bracket kit

Note: supplied complete with four M4x6 screws

NOTES

REGTRONIC Newdeal

COMPONENTS

① REGULATOR BODY: aluminium
② LOWER CAP: aluminium
③ UPPER PLATE: aluminium
④ SPACER: aluminium
⑤ GASKET: NBR
⑥ PISTON ROD: aluminium
⑦ CAP FOR PLAIN GASKET: OT58 brass
⑧ PLAIN GASKET: NBR
⑨ ROD: OT58 brass
⑩ VALVE: OT58 brass
⑪ VALVE SPRING: steel
⑫ GASKETS: NBR
⑬ ELECTRONIC BOARDS
⑭ CONNECTOR M12
⑮ PRESSURE SENSOR
⑯ SOLENOID VALVE: 10 mm series PLT-10
⑰ SHELL: tecnopolymer

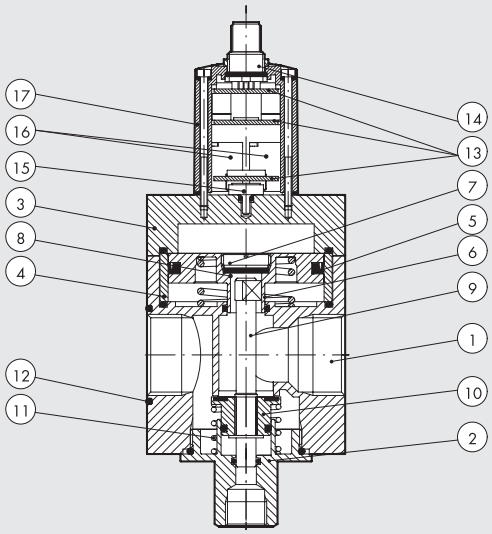

FLOW CHARTS

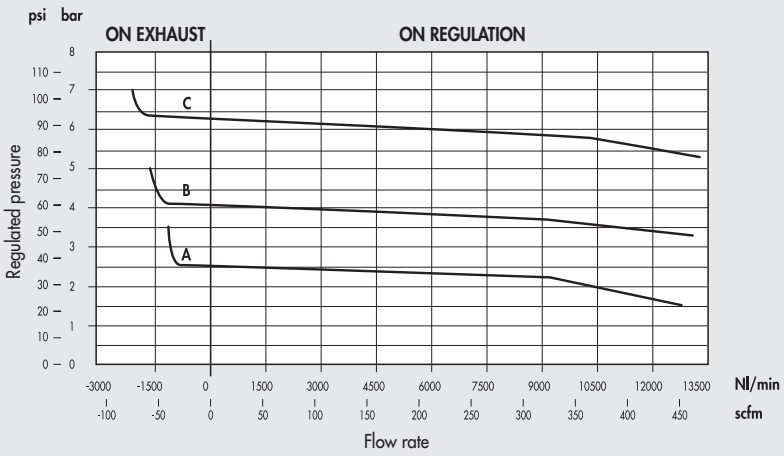

A = 2.5 bar
B = 4 bar
C = 6.3 bar
Pm = 10 bar

DIMENSIONS AND ORDERING CODES

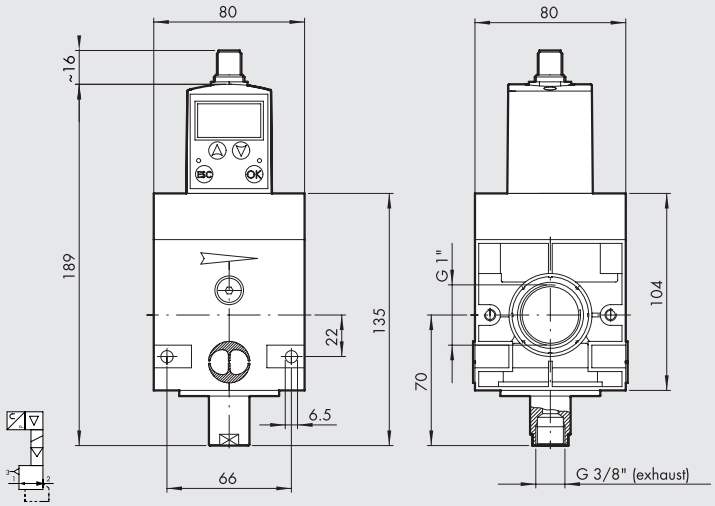

Code	Description
1520003	REGTRONIC New Deal 3/4 with display and keyboard OUT 0-10 V
1520004	REGTRONIC New Deal 3/4 remote control OUT 0-10 V
1620003	REGTRONIC New Deal 1 with display and keyboard OUT 0-10 V
1620004	REGTRONIC New Deal 1 remote control OUT 0-10 V
1520043	REGTRONIC New Deal 3/4 with display and keyboard OUT 4-20 mA
1520044	REGTRONIC New Deal 3/4 remote control OUT 4-20 mA
1620043	REGTRONIC New Deal 1 with display and keyboard OUT 4-20 mA
1620044	REGTRONIC New Deal 1 remote control OUT 4-20 mA
1520033	REGTRONIC IO-Link New Deal 3/4 display and keyboard display
1520034	REGTRONIC IO-Link New Deal 3/4 remote control
1620033	REGTRONIC IO-Link New Deal 1 display and keyboard display
1620034	REGTRONIC IO-Link New Deal 1 remote control

REGTRONIC 300

COMPONENTS

① BODY: tecnopolymer
② END PLATE: zamak
③ STEM: OT58 brass
④ UPPER CUP: aluminium
⑤ PISTON: OT58 brass
⑥ CUP: aluminium
⑦ PRESSURE SENSOR
⑧ SOLENOID VALVE: 10 mm series PLT-10
⑨ SHELL: tecnopolymer
⑩ CONNECTOR M12
⑪ ELECTRONIC BOARDS
⑫ GASKET: NBR
⑬ VALVE WITH NBR VULCANIZED GASKET
⑭ VALVE SPRING: stainless steel
⑮ LOWER CUP: tecnopolymer

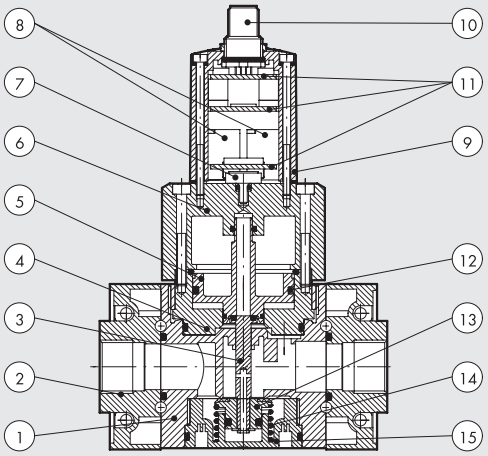

FLOW CHARTS

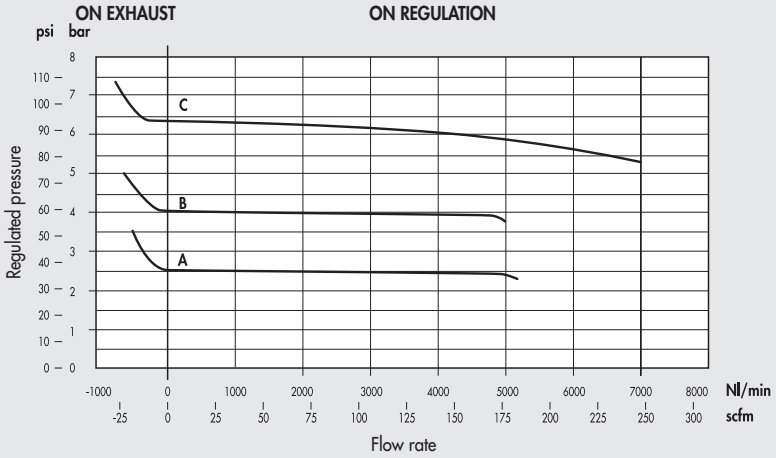

A = 2.5 bar B = 4 bar C = 6.3 bar Pm = 10 bar

DIMENSIONS

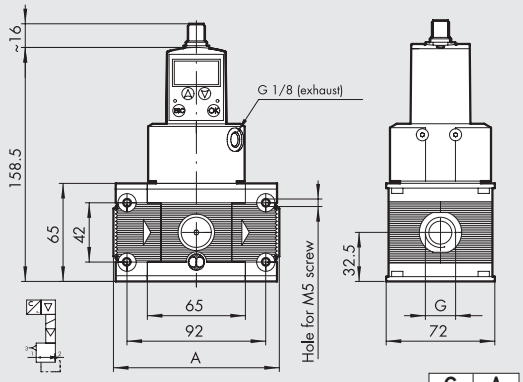

G	A
1/2"	110
3/4"	110
1"	112

ORDERING CODES

Code	Description
4402012A	REGTRONIC 300 with display and keyboard without end plates OUT 0-10 V
4402013A	REGTRONIC 300 remote control without end plates OUT 0-10 V
4402012	REGTRONIC 300 1/2 with display and keyboard OUT 0-10 V
4402013	REGTRONIC 300 1/2 remote control OUT 0-10 V
4502012	REGTRONIC 300 3/4 with display and keyboard OUT 0-10 V
4502013	REGTRONIC 300 3/4 remote control OUT 0-10 V
4602012	REGTRONIC 300 1 with display and keyboard OUT 0-10 V
4602013	REGTRONIC 300 1 remote control OUT 0-10 V
4402412A	REGTRONIC 300 with display and keyboard without end plates OUT 4-20 mA
4402413A	REGTRONIC 300 remote control without end plates OUT 4-20 mA
4402412	REGTRONIC 300 1/2 with display and keyboard OUT 4-20 mA
4402413	REGTRONIC 300 1/2 remote control OUT 4-20 mA
4502412	REGTRONIC 300 3/4 with display and keyboard OUT 4-20 mA
4502413	REGTRONIC 300 3/4 remote control OUT 4-20 mA
4602412	REGTRONIC 300 1 with display and keyboard OUT 4-20 mA
4602413	REGTRONIC 300 1 remote control OUT 4-20 mA
4402312A	REGTRONIC IO-Link 300 with display and keyboard without end plates
4402313A	REGTRONIC IO-Link 300 remote control without end plates
4402312	REGTRONIC IO-Link 300 1/2 with display and keyboard
4402313	REGTRONIC IO-Link 300 1/2 remote control
4502312	REGTRONIC IO-Link 300 3/4 with display and keyboard
4502313	REGTRONIC IO-Link 300 3/4 remote control
4602312	REGTRONIC IO-Link 300 1 with display and keyboard
4602313	REGTRONIC IO-Link 300 1 remote control

ACCESSORIES

INPUT/OUTPUT END PLATE KIT FOR SKILLAIR



Code	Description
9430701	IN/OUT end plates kit 300 1/2
9530901	IN/OUT end plates kit 300 3/4
9531001	IN/OUT end plates kit 300 1

CONNECTOR KIT FOR SKILLAIR CODE A



Code	Description
9430301	Connector kit 300

REGTRONIC 400

COMPONENTS

① BODY: Aluminium
② END PLATE: Aluminium
③ THREADED BUSH, AXIAL ADJUSTMENT: anodized aluminium
④ RETAINING RING: OT58 brass
⑤ ROLLING DIAPHRAGM
⑥ BRASS PLUG: anodized aluminium
⑦ VALVE SPRING: Stainless steel
⑧ STEM: OT58 brass with air relief hole
⑨ VALVE WITH NBR VULCANIZED GASKET
⑩ GASKETS: NBR
⑪ CONNECTOR M12
⑫ SHELL: technopolymer
⑬ SOLENOID VALVE: 10 mm series PLT-10
⑭ PRESSURE SENSOR
⑮ ELECTRONIC BOARDS

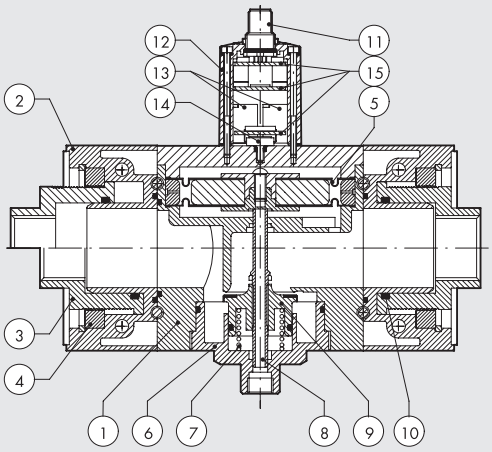

FLOW CHARTS

REGTRONIC 400 1" to 1 ½"

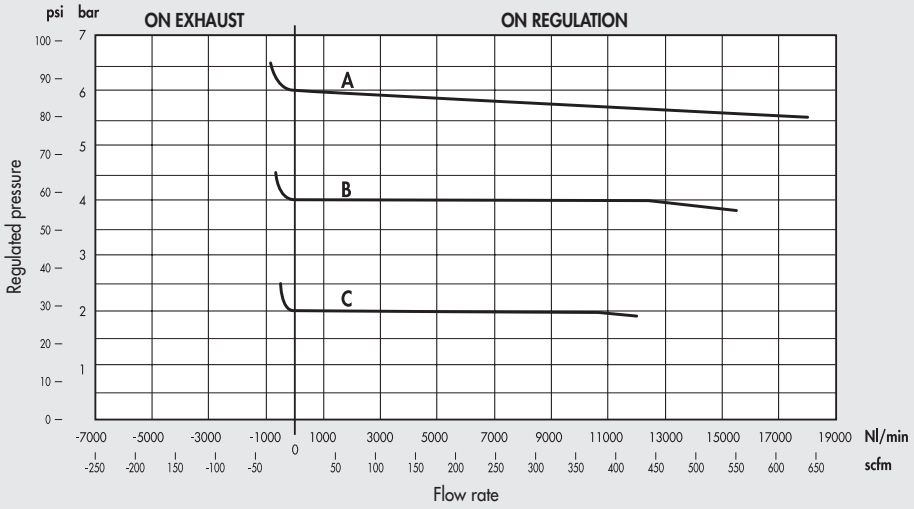

A = 6 bar
B = 4 bar
C = 2 bar
Pm = 7 bar

REGTRONIC 400 2"

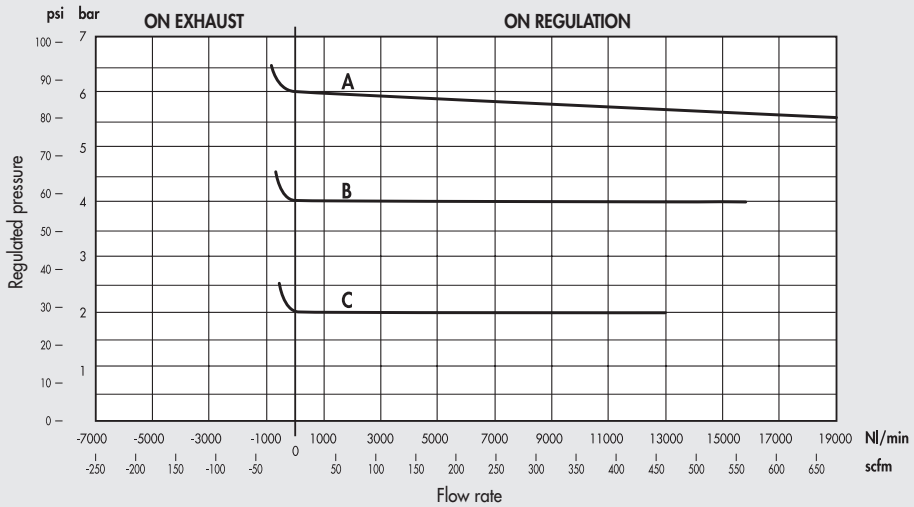

A = 6 bar
B = 4 bar
C = 2 bar
Pm = 7 bar

DIMENSIONS

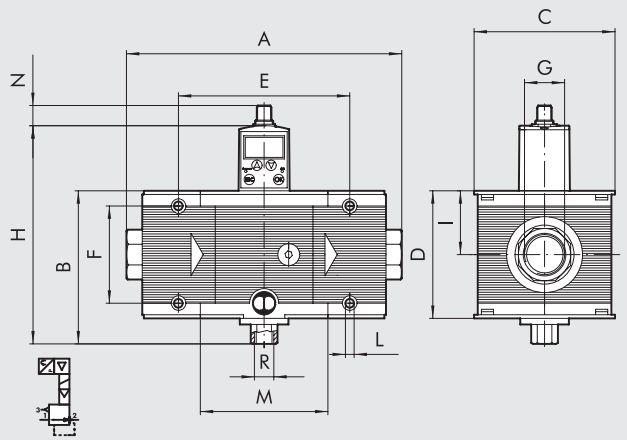

	REGTRONIC 400			
Threaded port G	1″	1 1/4″	1 1/2″	2″
A	225 to 255			283 to 313
B	127			
C	116			
D	105			
E	141.4			
F	80			
G	1″	1 1/4″	1 1/2″	2″
H	182			
I	52.5			
L	Hole for M6 screws			
M	105.4			
N	~16			
R (exhaust)	1/4″			

ORDERING CODES

Code	Description
6102012A	REGTRONIC 400 with display and keyboard without end plates OUT 0-10 V
6102013A	REGTRONIC 400 control remote without end plates OUT 0-10 V
6102012	REGTRONIC 400 1 with display and keyboard OUT 0-10 V
6102013	REGTRONIC 400 1 control remote OUT 0-10 V
6202012	REGTRONIC 400 1 1/4 with display and keyboard OUT 0-10 V
6202013	REGTRONIC 400 1 1/4 control remote OUT 0-10 V
6302012	REGTRONIC 400 1 1/2 with display and keyboard OUT 0-10 V
6302013	REGTRONIC 400 1 1/2 control remote OUT 0-10 V
6402012	REGTRONIC 400 2 with display and keyboard OUT 0-10 V
6402013	REGTRONIC 400 2 control remote OUT 0-10 V
6102412A	REGTRONIC 400 with display and keyboard without end plates OUT 4-20 mA
6102413A	REGTRONIC 400 control remote without end plates OUT 4-20 mA
6102412	REGTRONIC 400 1 with display and keyboard OUT 4-20 mA
6102413	REGTRONIC 400 1 control remote OUT 4-20 mA
6202412	REGTRONIC 400 1 1/4 with display and keyboard OUT 4-20 mA
6202413	REGTRONIC 400 1 1/4 control remote OUT 4-20 mA
6302412	REGTRONIC 400 1 1/2 with display and keyboard OUT 4-20 mA
6302413	REGTRONIC 400 1 1/2 control remote OUT 4-20 mA
6402412	REGTRONIC 400 2 with display and keyboard OUT 4-20 mA
6402413	REGTRONIC 400 2 control remote OUT 4-20 mA

Code	Description
6102312A	REGTRONIC IO-Link 400 with display and keyboard without end plates
6102313A	REGTRONIC IO-Link 400 remote control without end plates
6102312	REGTRONIC IO-Link 400 1 with display and keyboard
6102313	REGTRONIC IO-Link 400 1 remote control
6202312	REGTRONIC IO-Link 400 1 1/4 with display and keyboard
6202313	REGTRONIC IO-Link 400 1 1/4 remote control
6302312	REGTRONIC IO-Link 400 1 1/2 with display and keyboard
6302313	REGTRONIC IO-Link 400 1 1/2 remote control
6402312	REGTRONIC IO-Link 400 2 with display and keyboard
6402313	REGTRONIC IO-Link 400 2 remote control

ACCESSORIES

INPUT/OUTPUT END PLATE KIT FOR SKILLAIR



Code	Description
9631001	IN/OUT end plates kit 400 1
9631101	IN/OUT end plates kit 400 1 1/4
9631201	IN/OUT end plates kit 400 1 1/2
9631301	IN/OUT end plates kit 400 2

CONNECTOR KIT FOR SKILLAIR CODE A



Code	Description
9630301	Connector kit 400

ACCESSORIES REGTRONIC

ANALOG VERSION

CONNECTOR M12x1, 8-PIN, A-CODED, FEMALE, STRAIGHT



Code	Description
W0970513010	Connector M12x1, 8-pin, A-coded, female, straight, with cable L = 5 m

Note: can only be used for analog version

Pin	Cable color
1	White
2	Brown
3	Green
4	Yellow
5	Grey
6	Pink
7	Blue
8	Red

CONNECTOR M12x1, 8-PIN, A-CODED, FEMALE, 90°, WITH CABLE



Code	Description
W0970513011	Connector M12x1, 8-pin, A-coded, female, 90°, with cable L = 5 m

Note: can only be used for analog version

Pin	Cable color
1	White
2	Brown
3	Green
4	Yellow
5	Grey
6	Pink
7	Blue
8	Red

CONFIGURATION CABLE



Code	Description
W0970513019	Configuration cable Regtronic

The cable consists of:
- M12 8-PIN female connector to be connected to Regtronic
- RS232 serial connector to be connected to PC
- 2 wires to supply 24VDC power

The package also includes a RS232-USB adapter

Note: can only be used for analog version

NOTES

IO-Link VERSION

CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, STRAIGHT



Code	Description
W0970513001	Connector M12x1, 5-pin, A-coded, female, straight

Note: can only be used for version IO-Link

CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, STRAIGHT



Code	Description
W0970513002	Connector M12x1, 5-pin, A-coded, female, straight, with cable L = 5 m

Note: can only be used for version IO-Link

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray

CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, 90°



Code	Description
W0970513003	Connector M12x1, 5-pin, A-coded, female, 90°

Note: can only be used for version IO-Link

CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, 90°, WITH CABLE



Code	Description
W0970513004	Connector M12x1, 5-pin, A-coded, female, 90°, with cable L = 5 m

Note: can only be used for version IO-Link

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray

PROPORTIONAL PRECISION PRESSURE REGULATOR SYNTRONIC SERIES

The proportional regulators in the SYNTRONIC series are used to precisely control the pressure in a system, with varying values depending on the input command. The regulators can be controlled remotely via a cable connection and an M12x1 connector accepting commands in Volts or mA. The main casing is made of techno-polymer, the display (when present) is the 3-digit type and the pneumatic connections are obtained with inset and easily replaceable metal bushings, as with other products in the Syntesi series.
The presence of two rolling diaphragms offers several advantages, including increased stroke, which provides greater valve opening and consequently increased flow rate, thereby reducing dynamic and inrush friction.
Syntronic is designed in such a way as to cause the downstream pressure to be relieved when the upstream pressure is set to zero. This makes it possible, for example, to arrange the regulator between a valve and a cylinder because air can flow in both directions, towards the cylinder with regulated pressure and back to the relieving valve.
The pressure value and a range of information and diagnostics are displayed at all times on the 7 segments display.
The user interface with the display and LEDs is entirely on one side.
Pressure is controlled in a 'closed loop' via a precision electronic sensor that detects the downstream pressure value, a control system that matches it to the desired pressure and two miniature solenoid valves that adjust the pressure to the target value.

TECHNICAL DATA				
Threaded port		1/8"	1/4"	3/8"
Fluid		Filtered, unlubricated air.		
		The air must be filtered at least 10 µm and without condensation.		
MIN inlet pressure	bar	Regulation pressure + 1 bar		
MAX inlet pressure	bar	11		
Temperature range	°C	0 ÷ 50		
Pressure regulation range	bar	0.2 ÷ 10		
Flow rate at 6.3 bar ΔP 0.5 inlet pressure 10 bar	Nl/min	1100	1800	2200
	scfm	39	64	78
Flow rate at 6.3 bar ΔP 1 inlet pressure 10 bar	Nl/min	1500	2200	2800
	scfm	53	78	99
Weight	g	378	373	364
Class of protection		IP65		
Full outlow with zero inlet pressure		Included		
Supply voltage range	VDC	12 -10% 24 +30%		
Minimum operating voltage	VDC	10.8		
Maximum operating voltage	VDC	31.2		
Maximum admissible voltage	VDC	32*		
Current absorption		max 220 mA a 12VDC		
Hysteresis		< ± 0.4% (Full scale)		
Repeatability		< ± 0.2% (Full scale)		
Sensitivity/Dead-band	bar	0.1		
Output pressure (display version)	Accuracy	< ± 0.1% (Full scale)		
	Unit of measurement	bar		
	Minimum resolution	0.01 bar		
Analog output accuracy		< ± 0.1% (Full scale)		
Temperature characteristics		max 2 mbar/°C		
Installation position		In any position		
Wall fixing screws		No. 2 M4 screws		
Notes		The features shown refer to the static condition only. With air consumption on the output side, the pressure may vary.		

COMPONENTS

① Anodized aluminium plate
② Anodized aluminium diaphragm washer
③ Technopolymer flange
④ NBR rolling diaphragm
⑤ IN/OUT bushing made of OT58 nickel-plated brass
⑥ Technopolymer regulator body
⑦ OT58 brass valve, with NBR vulcanized gasket
⑧ Passivated aluminium upper cap
⑨ Stainless steel valve spring
⑩ OT58 brass rod
⑪ O-rings in NBR
⑫ Technopolymer cap
⑬ Painted aluminum bodies
⑭ Pressure sensor
⑮ 10 mm solenoid valves PLT-10 series
⑯ Technopolymer cover
⑰ Electronic board
⑱ Exhaust gasket in NBR

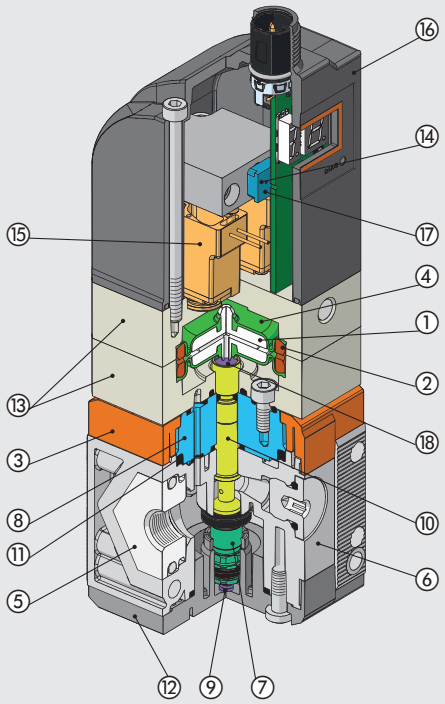

WIRING DIAGRAM

Analogue version 0-10 V



Pin	Function description	Lead colour
1	+12÷24 VDC power supply	Brown
2	IN + analogue input 0-10V	White
3	0VDC (GND) power supply	Blue
4	IN - analogue input 0-10V	Black
5	Analogue output 0-10V	Gray

Analogue version 4-20 mA



Pin	Function description	Lead colour
1	+12÷24 VDC power supply	Brown
2	IN + analogue input 4-20 mA	White
3	0VDC (GND) power supply	Blue
4	IN - analogue input 4-20 mA	Black
5	Analogue output 4-20 mA	Gray

FUNCTION DIAGRAM

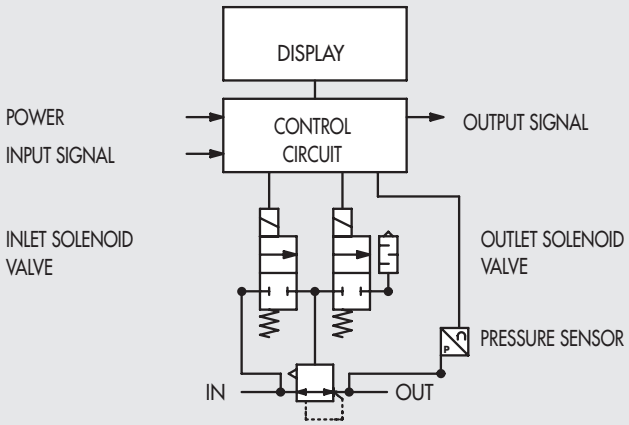

FLOW CHARTS

Syntronic **SY1** 1/8"

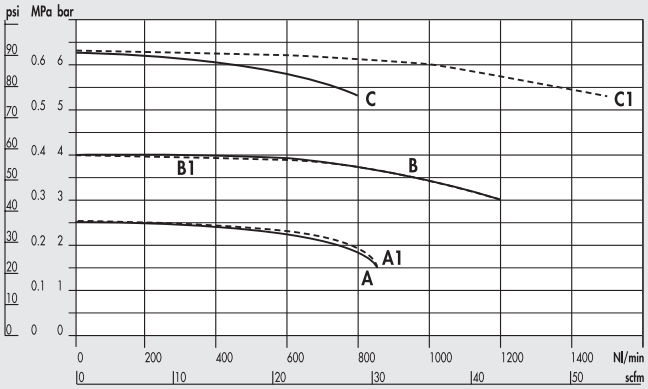

Syntronic **SY1** 1/4"

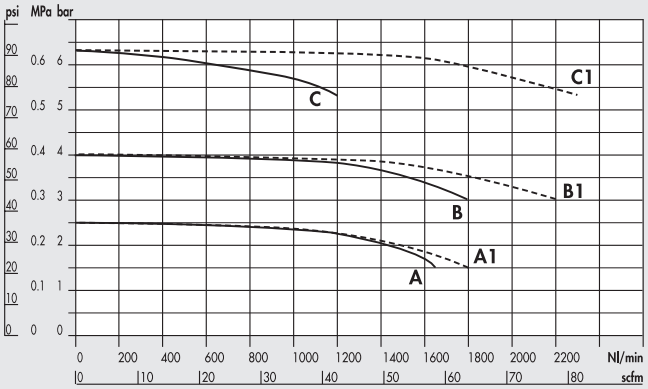

Syntronic **SY1** 3/8"

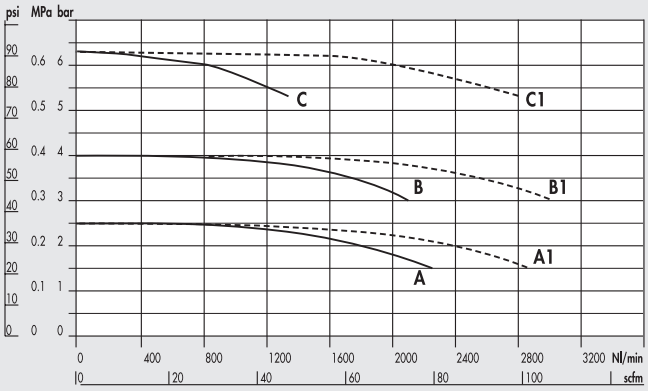

A = P In 7 bar - P Out 2.5 bar
B = P In 7 bar - P Out 4 bar
C = P In 7 bar - P Out 6.3 bar
A1 = P In 10 bar - P Out 2.5 bar
B1 = P In 10 bar - P Out 4 bar
C1 = P In 10 bar - P Out 6.3 bar

MOUNTING OPTIONS

On the wall, using two screws

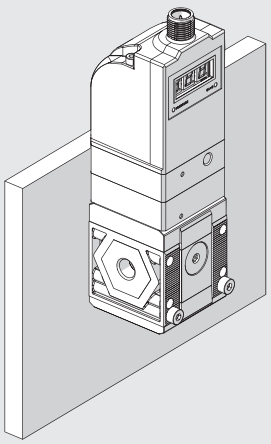

Using a bracket

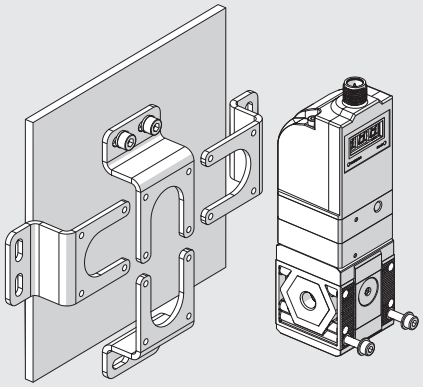

The bracket can be secured in any position

On a DIN EN50022 bar with the apposite adaptator



DIMENSIONS

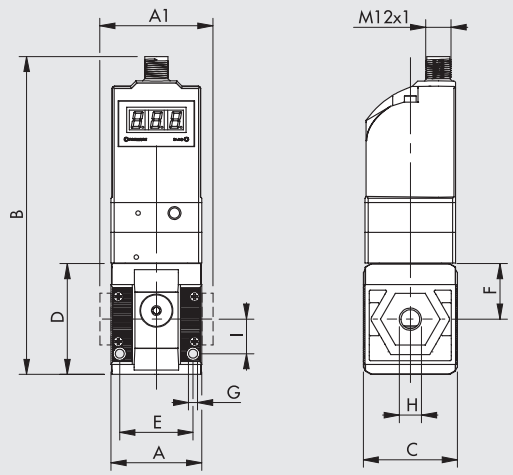

	SIZE 1		
H (threaded port)	1/8″	1/4″	3/8″
A		42	
A1	-	-	44
B		147.5	
C		44	
D		51.5	
E		33.5	
F		25.8	
G		Hole for M4 screws	
I		16	

KEY TO CODES

56	1	1	G	00	1
SYNTESI	**SIZE**	**THREADED INPUT CONNECTION**	**ELEMENT**	**TYPE**	**THREADED OUTPUT CONNECTION**
56 Syntesi	**1** Size 1	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port	**G** Syntronic	**00** Remote control 0-10V **01** Remote control 4-20 mA **10** With display 0-10V **11** With display 4-20 mA	**0** Without bushing **1** 1/8″ port **2** 1/4″ port **3** 3/8″ port

PURCHASE ORDER CODES HAVING A MORE FREQUENT USE

N.B. Besides the below mentioned codes, you can order elements composed at your will according to the key to codes.

Code	Description	Code	Description
5610G000	SYNTRONIC SY1 remote control 0-10V without bushings	**5612G002**	SYNTRONIC SY1 1/4 remote control 0-10V
5610G010	SYNTRONIC SY1 remote control 4-20 mA without bushings	**5612G012**	SYNTRONIC SY1 1/4 remote control 4-20 mA
5610G100	SYNTRONIC SY1 with display 0-10V without bushings	**5612G102**	SYNTRONIC SY1 1/4 with display 0-10V
5610G110	SYNTRONIC SY1 with display 4-20 mA without bushings	**5612G112**	SYNTRONIC SY1 1/4 with display 4-20 mA
5611G001	SYNTRONIC SY1 1/8 remote control 0-10V	**5613G003**	SYNTRONIC SY1 3/8 remote control 0-10V
5611G011	SYNTRONIC SY1 1/8 remote control 4-20 mA	**5613G013**	SYNTRONIC SY1 3/8 remote control 4-20 mA
5611G101	SYNTRONIC SY1 1/8 with display 0-10V	**5613G103**	SYNTRONIC SY1 3/8 with display 0-10V
5611G111	SYNTRONIC SY1 1/8 with display 4-20 mA	**5613G113**	SYNTRONIC SY1 3/8 with display 4-20 mA

NOTES

ACCESSORIES

MOUNTING BRACKET

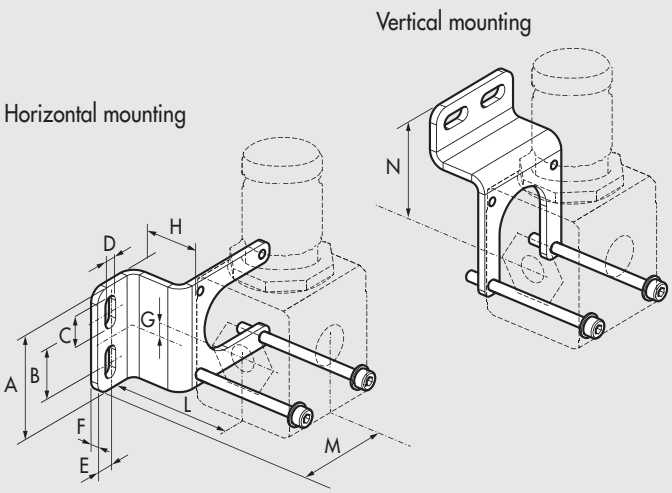

Code	Description
9200716X	Mounting bracket SY1

Note: Supplie complete with screws and washers.
Max torque 0.8 Nm for SY1

Code	A	B	C	D	E	F	G	H	L	M	N
9200716X	41.5	20	12.7	5.5	7	3	0.8	25	43.8	46.5	47

CONNECTION BRACKETS ON THE BAR (DIN EN50022)

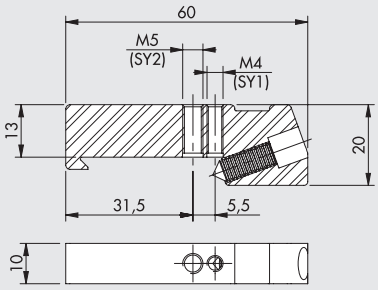

Code	Description
9200718X	Connection brackets on DIN bar, SY1 - SY2

Note: 2 pieces per pack complete with screws and washers.
Max torque 0.8 Nm for SY1

WALL-FIXING SCREW



Code	Description
9210030	M4 x 55 fixing screw SY1

Max torque 0.8 Nm for SY1

THREADED PORT



Code	Description
9210001	Kit IN OUT 1/8 SY1
9210002	Kit IN OUT 1/4 SY1
9210003	Kit IN OUT 3/8 SY1

Max torque 0.4 Nm for SY1

CONNECTING NIPPLE KIT



Code	Description
9210000	Connecting nipple kit SY1

Max torque 0.4 Nm for SY1

90° CONNECTING ELEMENT KIT



Code	Description
9210009	90° SY1 connection element kit

Max torque 0.4 Nm for SY1

SY1 - SY2 SIZE ADAPTER



Code	Description
9210006	SY1 - SY2 size adapter

Max torque 0.4 Nm for SY1

STRAIGHT CONNECTOR



Code	Description
W0970513001	5-PIN M12x1 straight connector

STRAIGHT CONNECTOR WITH WIRE



Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Grey

Code	Description
W0970513002	5-PIN M12x1 straight connector with wire L = 5 m

90° CONNECTOR



Code	Description
W0970513003	M12x1 5-PIN 90° connector

90° CONNECTOR WITH WIRE



Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Grey

Code	Description
W0970513004	M12x1 5-PIN 90° connector with wire L = 5 m

NOTES

SUMMARY
FLOW AND PRESSURE SENSOR

- **PRESSURE SWITCHES** — C7.2

- **DIGITAL PRESSURE SWITCH** — C7.4

- **FLOWMETER SERIES FLUX 0** — C7.8

- **FLOWMETER SERIES FLUX** — FLUX 1 | FLUX 2 | FLUX 3 | FLUX 4 — C7.14

- **SQUARE DIAL PRESSURE GAUGE** — C7.22

PRESSURE SWITCHES

This type of pressure switch features a high degree of miniaturisation and a modern attractive design.
It can be installed in any position and also mounted onto a wall by means of two transversal holes.
In order to reduce wiring times, it is supplied ready assembled with a 2-metre electric cable or an M8 connector with a 300-mm cable.
The contact is the switching type, which means it can be normally open or normally closed.
A knurled push-lock handle is provided for regulation

TECHNICAL DATA

Adjustable pressure interval	bar	0.5 to 10
Hysteresis (not adjustable)	bar	from 0.4 to 0.8 (See diagram)
Maximum pressure	bar	15
	MPa	1.5
	psi	217
Operating temperature range at: 1 MPa; 10 bar; 145 psi	°C	50
	°F	122
Lower threaded port		G 1/8" - G 1/4"
Maximum current	A	2
Maximum voltage	V	250
Outside diameter of cable	mm	4.9
Number of wires and cross section		3 x 0.5 mm^2
Contacts		Normally-Open (NO) and Normally-Closed (NC)
Protection		IP65
Number of switchings		5 x 10^6
Fluid		Filtered lubricated or unlubricated compressed air. Lubrication, if used, must be continuous
Mounting position		In any position.
Weight	g	With cable 2 m: 12
		With M8 connector: 35

COMPONENTS

① Technopolymer adjusting push-lock handle
② Brass adjusting screw
③ Steel piston spring
④ Brass piston
⑤ NBR gaskets
⑥ Technopolymer bodies
⑦ Rotary connection in nickel-plated brass
⑧ Resin finish for IP65
⑨ Electrical contact
⑩ Choke to reduce peaks in pressure

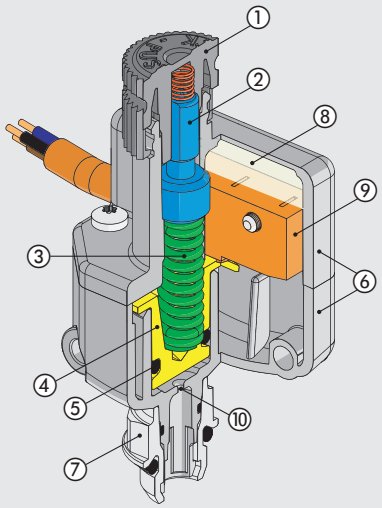

DIMENSIONS AND ORDERING CODES

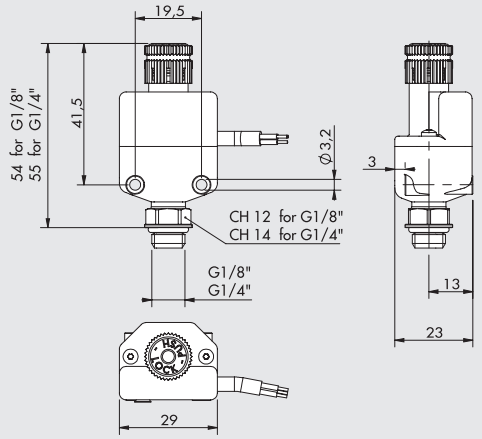

Code	Description
9000401	1/8 2A NO/NC pressure switch, 2-metre cable
9000402	1/8 2A NO/NC pressure switch, M8 connector
9000405	1/4 2A NO/NC pressure switch, 2-metre cable
9000406	1/4 2A NO/NC pressure switch, M8 connector

WIRING DIAGRAM

VERSION WITH CABLE



VERSION WITH M8 CONNECTOR



HYSTERESIS GRAPH

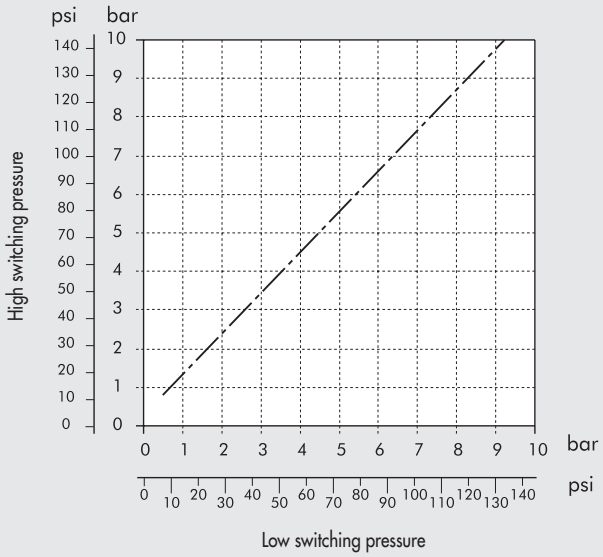

SECURITY KNOB



Code	Description
9200703	Security knob APR / pressure switch

Note: Pull outwards to remove the knob from the pressure switch on the unit.
Insert the security knob and regulate the pressure switch.
Then press the handle firmly to lock it in position. If the pressure switch needs to be reset, remove the security knob by forcing it laterally with a screwdriver.

M8 STRAIGHT CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

M8 ADAPTER CABLE FOR CONNECTION TO THE EB 80 E CM DIGITAL INPUTS MODULE

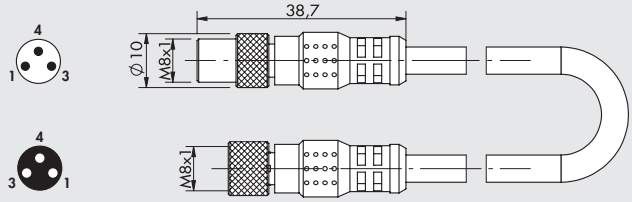

Code	Description
0240010501	M8-M, M8-F 3-pole adapter with cable L = 0.3 m

Note: Can be used to connect the pressure switch to the module of digital INPUT **S01** of the EB 80 valves, to the additional M8 INPUT module of the CM valves and to the Profibus-DP IP67 M8 input. Contact type NO (Normally open)

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 3	pin 4	Signal NO
pin 4	pin 3	Disconnect

DIGITAL PRESSURE SWITCH

The digital pressure switch allows both the transmission of electrical pressure signals and the instant display of pressure. Two digital outputs, which can be set according to the two pressure values reached, are available. An analogue output of a voltage proportional to the pressure reading is also available. The values are clearly displayed on a LED video and different parameters can be entered from the keypad. Hysteresis can be adjusted and the unit of measurement for pressure can be modified. Two models are available:
Series **600**, characterised by G1/8" female pneumatic ports, one at the bottom and one at the back (pressure switch supplied with bottom port covered with a removable plug); one-colour LED; pre-wired cable.
Series **640**, characterised by R1/8" male pneumatic ports (taper thread) and M5 female thread inside on the rear side; two-colour LED displays that can be programmed depending on the pressure signal; cable with connector. It is available in analog and IO-Link versions.
A kit of accessories is provided for fixing to the top or wall, or to a panel.

TECHNICAL DATA		SERIES 600	SERIES 640	SERIES 640 IO-Link
Fieldbus		-		IO-Link version 1.1
Working pressure range		-1 to 10 bar / -0.1 to 1 MPa		
Maximum admissible pressure		15 bar / 1.5 MPa		
Readable resolution		0.01 bar / 0.001 MPa / 0.01 kg/cm² / 0.1 psi		
Power supply	VDC	12 to 24 ± 10%, max ripple 10%		24, Ripple (P-P) ≤10%
Current consumption	mA	≤ 55	≤ 40	≤35 (no load)
Outputs		-	-	**OUT 1**: IO-Link (C/Q Line) or PNP or NPN configurable
				OUT 2: Analogue or PNP or NPN configurable
Digital outputs		**PNP**: Number of outputs: 2 Max current: 80 mA Max voltage: 24 VDC Residual voltage: ≤ 1V (at 80 mA)	**PNP**: Number of outputs: 2 Max current: 125 mA Max voltage: 24 VDC Residual voltage: ≤ 1.5V (at 125 mA)	**PNP**: Open collector output Max current: 150 mA Max voltage: 24 VDC Residual voltage: ≤ 1V
				NPN: Open collector output Max current: 150 mA Max voltage: 30 VDC Residual voltage: ≤ 1V
Analogue output		1/5V ± 2.5% (0 bar - 1V; 10 bar - 5V; it doesn't read the vacum) Linearity ≤ 1% full scale Output impedance: about 1 kΩ		1/5V, 0/10V, 4/20 mA configurable Linearity ± 1.5% full scale 1/5V - 0/10V (impedance 1 kΩ), 4/20 mA (impedance 500 Ω) it doesn't read the vacum
Digital output repeatability		≤ ± 0.2% full scale ± 1 digits		
Hysteresis		Adjustable or fixed at 3 digits for operation within a pressure range		
Actuation response time	ms	≤ 2.5		
Interference suppression selectable at	ms	24, 192, 768	25, 100, 250, 500, 1000, 1500	
Short-circuit protection at the outputs		Yes		
LED 7 segment display		3 ½ digit display		
Display colours		red	red/green	
Display accuracy		±2% full scale ±1 digit, ambient temperature 25° ±3°C		
Indicators		green LED (output 1), red LED (output 2)	orange LED (output 1 and output 2)	Green or Red LED configurable
Thermal characteristic		≤ ±2% full scale of the calibration pressure (at 25°C), in the temperature range 0 - 50°C		
Compressed air ports		2 G1/8" female thread	1 R1/8" male taper thread (M5 female inside)	
Power cable		2 m, with five 0.15 mm² wires, oil-resistant		
		pre-wired cable, not removable	removable connector	
Communication speed	Kbps	-		38.4 (COM2)
Vendor ID / Device ID		-		1046 (hex 0x0416) / 72 (hex 0x000048)
Minimum cycle time	ms	-		3
Process data length		-		2 byte di Input (2 bit BCD;14 bit PDV)
Weight	g	105, including 2 m cable	86, including 2 m cable	
AMBIENT CONDITIONS				
Fluid		Filtered and unlubricated air, inert non-corrosive and non-explosive gas		
Degree of protection		IP 40 - IP65 (with accessory protection assembled)		IP 40
Temperature range	°C	0 to 50		
Storage temperature	°C	-20 to +60, but without condensate or ice	-10 to +60, but without condensate or ice	
Ambient humidity		35 to 85% relative humidity; no condensate		
Insulation voltage		1000 VAC for one minute between casing and cable		
Resistance of Insulation		Min. 50 MΩ minimo (at 500 VDC between casing and cable)		
Vibration admitted		1.5 mm amplitude or 10G with scanning every minute from 10 to 55 Hz at 10 Hz, for 2 hours in each direction x, y and z		
Impact		980 m/s² (100 g), 3 times in each direction x, y and z	100 m/s² (10 g), 3 times in each direction x, y and z	

METAL WORK PNEUMATIC

SERIES 600

DIMENSIONS AND ORDERING CODES

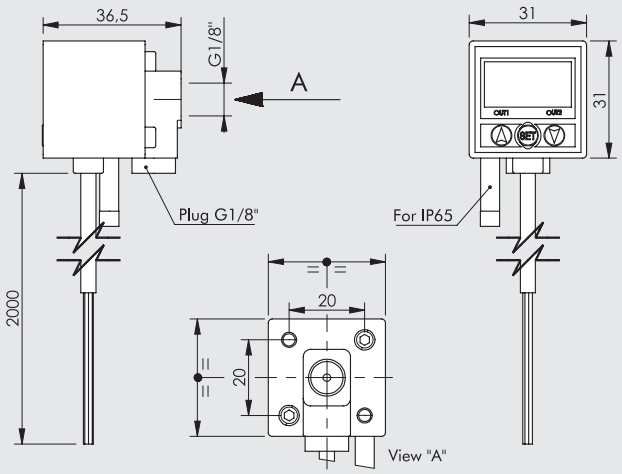

Code	Description
9000600	Digital pressure switch series 600

USER INTERFACE



① 3 ½ digit display, red: showing the pressure reading, all setting information, and the error code
② Digital output 1: green LED
③ Digital output 2: red LED
④ Button: modifies the value of the selected parameter
⑤ Button: modifies the value of the selected parameter
⑥ Setting button: selects the parameter to modify

WIRING DIAGRAM

PNP output

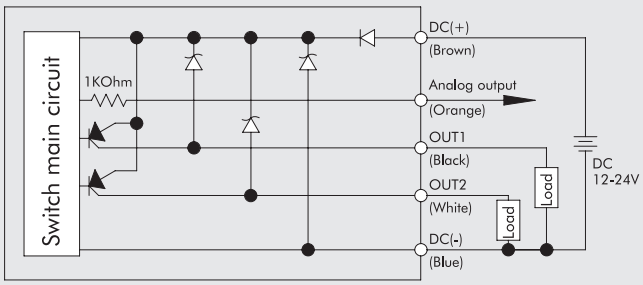

FIXING BRACKET KIT



BT-1





BT-2



Code	Description
9000601	Kit of fixing brackets for digital pressure switches series 600

N.B.: Each kit contains a bracket for fixing on the back and one for fixing at the bottom.

PANEL FIXING KIT

PA-1



PA-2



Code	Description
9000602	Kit for panel fixing for the digital pressure switch series 600

PANEL FIXING KIT WITH PROTECTION



FPC-1

PA-1



PA-2



Code	Description
9000603	Kit for panel fixing with protection for the digital pressure switch series 600

SERIES 640

DIMENSIONS AND ORDERING CODES

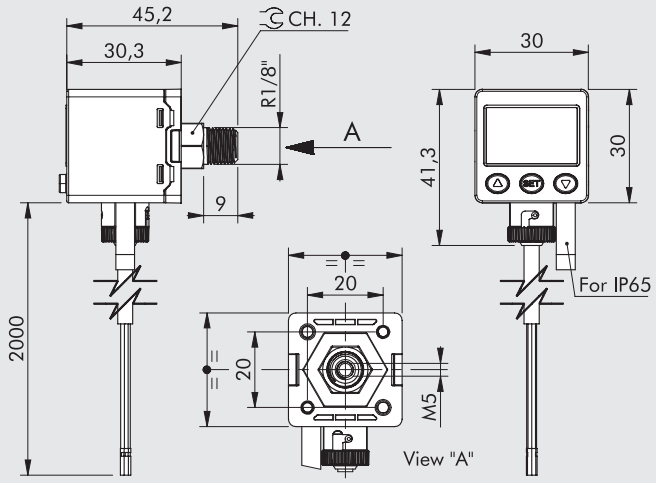

Code	Description
9000640	Digital pressure switch series 640

USER INTERFACE

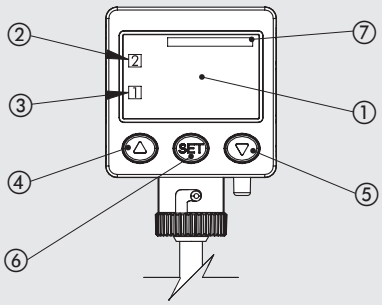

① 3 ½ digit display, green and red: it displays the unit of measurement, the pressure value read, all setting information, the error code.
② Digital output 1: orange LED
③ Digital output 2: orange LED
④ Button: modifies the value of the selected parameter
⑤ Button: modifies the value of the selected parameter
⑥ Setting button: selects the parameter to modify
⑦ Unit of measurement selected

WIRING DIAGRAM

PNP output

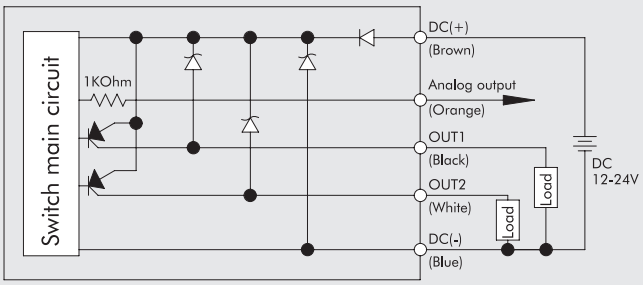

PARALLEL FIXING BRACKET KIT





Code	Description
9000641	Parallel fixing bracket kit for digital pressure switch series 640

90° FIXING BRACKET KIT





Code	Description
9000644	90° fixing bracket kit for digital pressure switch series 640

PANEL FIXING KIT





Code	Description
9000642	Kit for panel fixing for the digital pressure switch series 640

PANEL FIXING KIT WITH PROTECTION



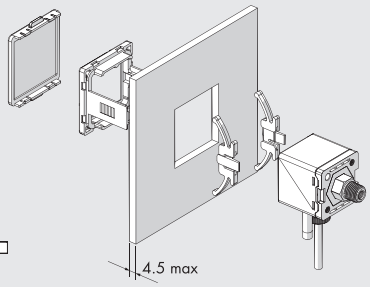

Code	Description
9000643	Kit for panel fixing with protection for the digital pressure switch series 640

SERIES 640 IO-Link

DIMENSIONS AND ORDERING CODES

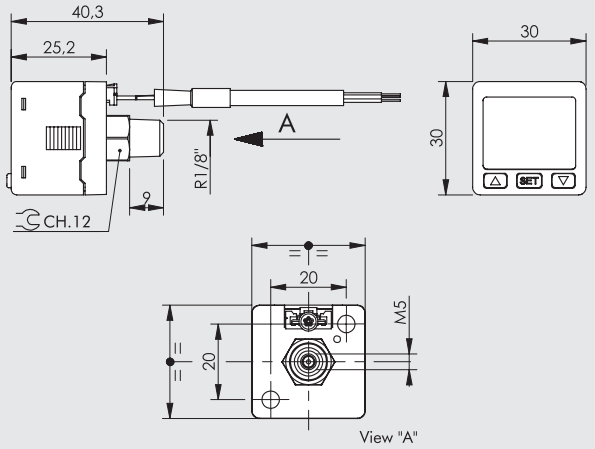

Code	Description
9000640L	Digital pressure switch series 640 IO-Link

USER INTERFACE



① 3 ½ digit display, green and red: it displays the unit of measurement, the pressure value read, all setting information, the error code.
② Digital output 1: orange LED
③ Digital output 2: orange LED
④ Button: modifies the value of the selected parameter
⑤ Button: modifies the value of the selected parameter
⑥ Setting button: selects the parameter to modify
⑦ Unit of measurement selected

WIRING DIAGRAM

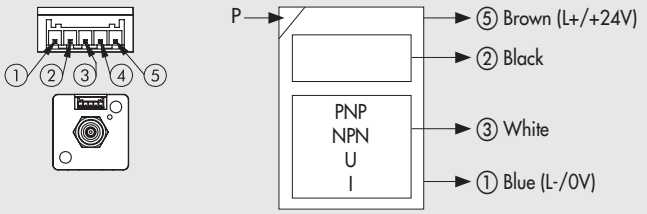

PIN	Color	Function
1	Blue	0V power supply
2	Black	Digital output OUT 1 or IO-Link (C/Q Line)
3	White	Digital output OUT 2 or analog output (1 to 5V, 0 to 10V, 4 to 20 mA)
4	Orange	Disconnect
5	Brown	+24VDC power supply

PARALLEL FIXING BRACKET KIT

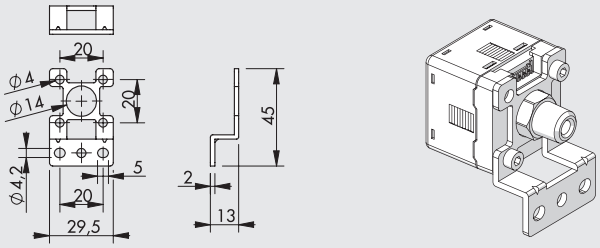

Code	Description
9000641L	Parallel fixing bracket kit for digital pressure switch series 640 IO-Link

90° FIXING BRACKET KIT

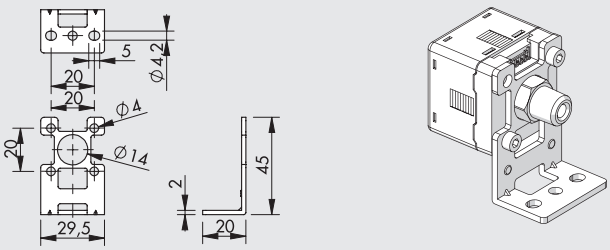

Code	Description
9000644L	90° fixing bracket kit for digital pressure switch series 640 IO-Link

PANEL FIXING KIT

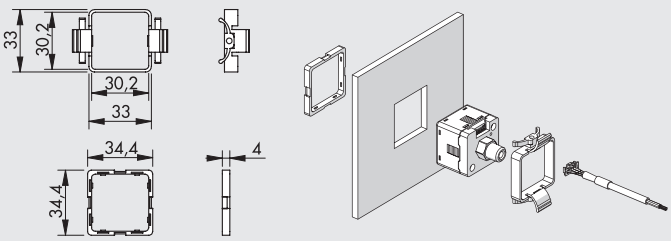

Code	Description
9000642L	Kit for panel fixing for the digital pressure switch series 640 IO-Link

PANEL FIXING KIT WITH PROTECTION

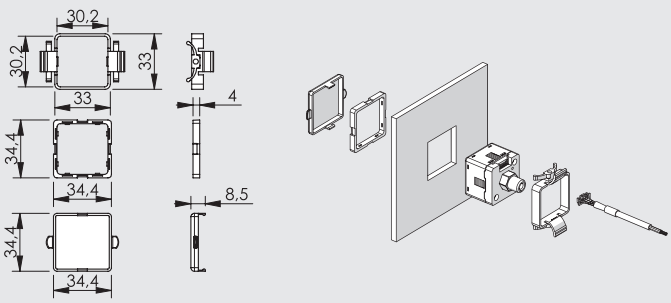

Code	Description
9000643L	Kit for panel fixing with protection for the digital pressure switch series 640 IO-Link

FLOWMETER SERIES FLUX 0

The flowmeters FLUX 0 series are miniaturized devices used to measure air flow rate. They come complete with push-in pipe fittings.
Numerous functions can be viewed and set on a three-colour display.
They have 2 digital and one analogue outputs, each of which can be freely set to measure the instantaneous flow rate, the accumulated flow rate or the pressure, therefore they can perform the function of flowmeter, flow switch, pressure gauge or pressure switch.
They feature reduced dimensions, with a width of only 17 mm.
The FLUX 0 flowmeters comes in two models: one for flow rates up to 50 Nl/min, the other up to 200 Nl/min, and are can be powered at 12 and 24 VDC.

TECHNICAL DATA		FLUX 0 50 L	FLUX 0 200 L
Measured flow range	Nl/min	0 - 50	0 - 200
Direction of flow		Unidirectional	
Working pressure range	bar	-0.9 to 8	
	MPa	-0.09 to 0.8	
	psi	-13 to 116	
Maximum admissible pressure	bar	10	
Pipe diameter for push-in fitting	mm	8	
Connecting cable	VDC	12 to 24 ± 10%, ripple max 10%	
Current consumption	mA	≤ 50	
Power cable		Cable Ø 4 length 2 m, oil resistant, 26 AGW (6 x 0.15 mm^2)	
Weight	g	100 (including cable)	
DISPLAY			
Instant flow rate			
Display range	Nl/min	0 - 50	0 - 200
Minimum setting scale	Nl/min	0.1	1
	ft^3/min	1	1
Cumulative flow rate			
Display range		9999999.9	99999999
Minimum setting scale	Nl	0.1	1
	ft^3	1	1
Pressure			
Display range	kPa	-100 to 1000	
Minimum setting scale	kPa	1	
	bar	0.01	
	psi	0.1	
PRECISION			
Flow rate			
Guaranteed measuring range		2 to 100 % FS	
Display accuracy		± 3 % FS ± 1 digit ▲	
Analogue output accuracy		± 5 % FS ▲	
Repeatability		± 1 % FS ± 1 digit ■	
Linearity		± 3 % FS ■	
Temperature characteristic		± 2 % FS for a temperature range of 15-35°C; ± 5 % FS for a temperature range of 0-15°C or 35-50°C ■	
Pressure characteristic		± 5 % FS ± 1 digit ✱	
Pressure			
Guaranteed measuring range		0 to 100 % FS	
Display accuracy		± 2 % FS ± 1 digit ●	
Analogue output accuracy		± 2.5 % FS ●	
Repeatability		± 0.2 % FS ± 1 digit ●	
Linearity		± 1 % FS ●	
Temperature characteristic		± 2 % FS ●	

▲ Data valid under these conditions: input pressure 3 bar, output pressure 1 bar, temperature 25°C
■ Data valid under these conditions: output pressure 1 bar, temperature 25°C
✱ Data valid under these conditions: -90 to 800 kPa, output pressure 1 bar, temperature 25°C
● Data valid under these conditions: flow rate 0 Nl/min, temperature 25°C

METAL WORK PNEUMATIC

TECHNICAL DATA		FLUX 0 50 L	FLUX 0 200 L
DIGITAL OUTPUTS			
N ° outputs		2 PNP	
Max current	mA	125	
Max voltage	VDC	24	
Residual voltage	V	≤ 1.5 V	
Response time, with flow rate setting	ms	50, 80, 120, 200, 400, 800, 1500 (default 800)	
Response time, with pressure setting	ms	2.5, 25, 100, 250, 500, 1000, 1500 (default 2.5)	
Response mode, with flow rate setting		Hysteresis mode, window comparison mode, cumulative mode, cumulative pulse mode ◆	
		Normally open or normally closed	
Response mode, with pressure mode setting		One-point setting mode, hysteresis mode, window comparison mode. Normally open or normally closed ◆	
Hysteresis		Adjustable	
Short-circuit protection at output		Yes	
Cumulative pulse output	Nl/impulse	0.5	2
	ft^3/impulse	2	7
ANALOGUE OUTPUT			
Version with voltage	V	1 to 5, 1 kΩ impedance	
Version with current	mA	4 to 20, with ≤ 300 Ω impedance	
Response time, with flow rate setting	ms	≤ 100	
Response time, with pressure setting	ms	≤ 50	
AMBIENT CONDITIONS			
Fluid		Filtered, dried and unlubricated air, inert non-corrosive and non-explosive gas.	
		A 5 µm filter and a 0.01 µm oil purifier are recommended	
Degree of protection		IP 40	
Temperature range	°C	0 to 50	
Storage temperature	°C	0 to 60 , but without condensate or ice	
Ambient humidity		35 to 85% relative humidity; no condensate	
Insulation voltage		1000 VAC for one minute between casing and cable	
Resistance of Insulation		Min. 50 MΩ (at 500VDC between casing and cable)	
Vibration admitted		1.5 mm amplitude or 10 g with scanning every minute from 10 to 55 Hz at 10 Hz, for 2 hours in each direction x, y and z	
Impact		100 m/s^2 (10 g), 3 times in each direction x, y and z	
Electromagnetic compatibility (EMC)		IEC 61000-6-2, IEC 61000-6-4	

◆ Refer to the user manual for further details

COMPONENTS

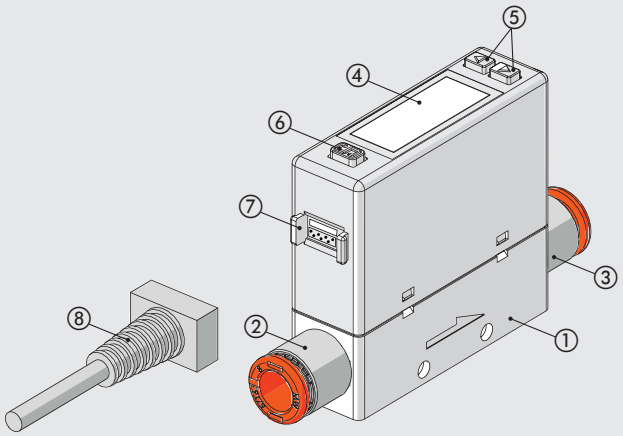

① BODY: technopolymer
② INPUT AUTOMATIC FITTING: nickel-plated brass and technopolymer
③ OUTPUT AUTOMATIC FITTING: nickel-plated brass and technopolymer
④ DISPLAY LCD
⑤ BUTTON: silicone.
Used to select the operating mode, ON/FF switching and value setting
⑥ BUTTON: silicone.
Used to select the operating mode and confirm the set values
⑦ CONNECTOR
⑧ CONNECTOR WITH CABLE: length 2 meters

WIRING DIAGRAMS

Analog voltage output /external input

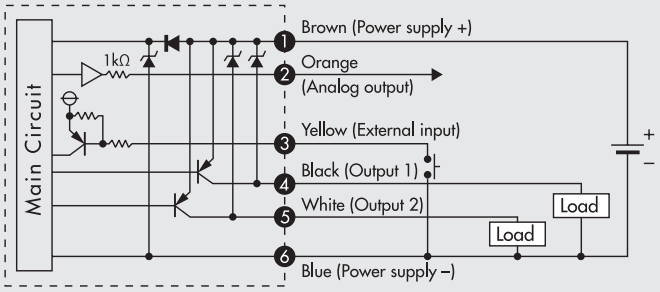

Analog current output /external input

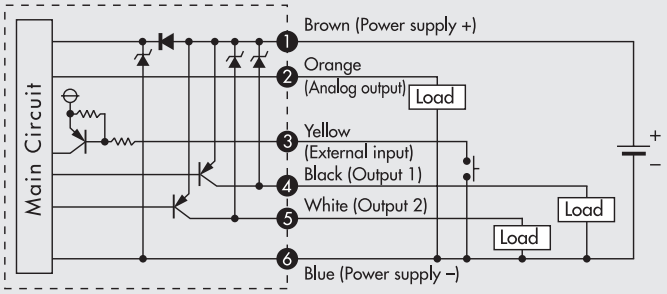



PIN	Cable color	Function
1	Brown	Power supply (12 to 24 VDC)
2	Orange	Analog voltage output: 1 to 5 V Analog current output: 4 to 20 mA
3	Yellow	External input
4	Black	Output 1 (Max. load current: 125 mA)
5	White	Output 2 (Max. load current: 125 mA)
6	Blue	0V (GND)

PNEUMATIC CONNECTION

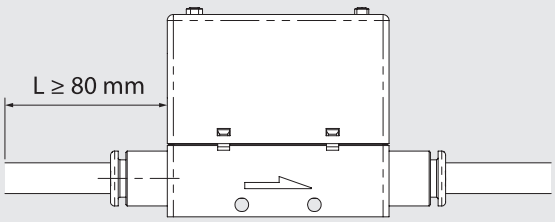

The input pipe must have a straight section of at least 80 mm in length or more, otherwise the measurement will be inaccurate.

NOTES

FIXING OPTIONS

Ⓐ

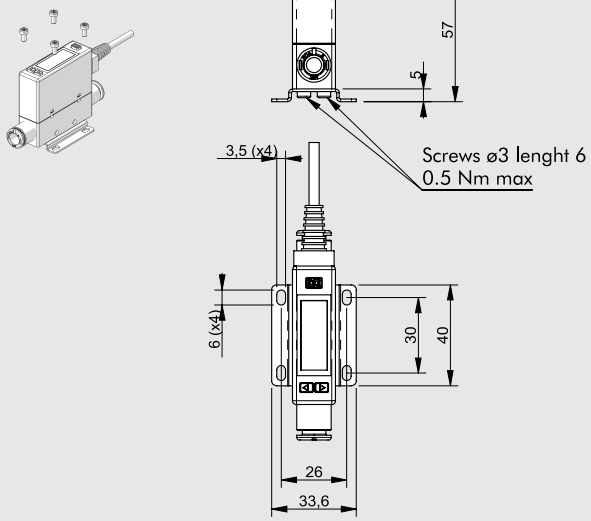

Fixing with bracket code 90009A001 using the included Ø3 self-tapping screws and M3 screws

Ⓑ

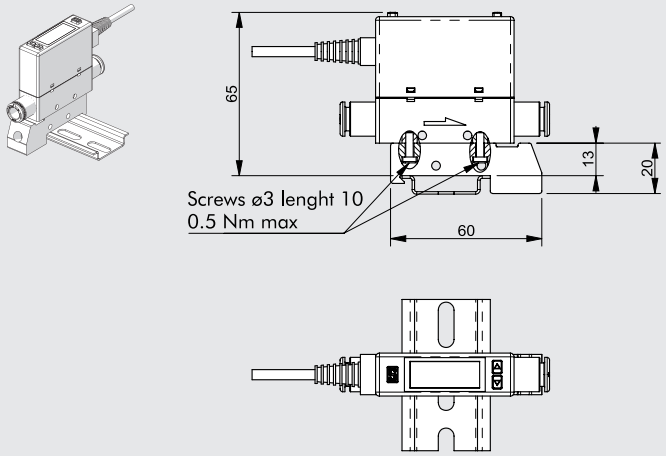

Single fixing on DIN bar with code bracket 90009A002 using the included Ø3 self-tapping screws

Ⓒ

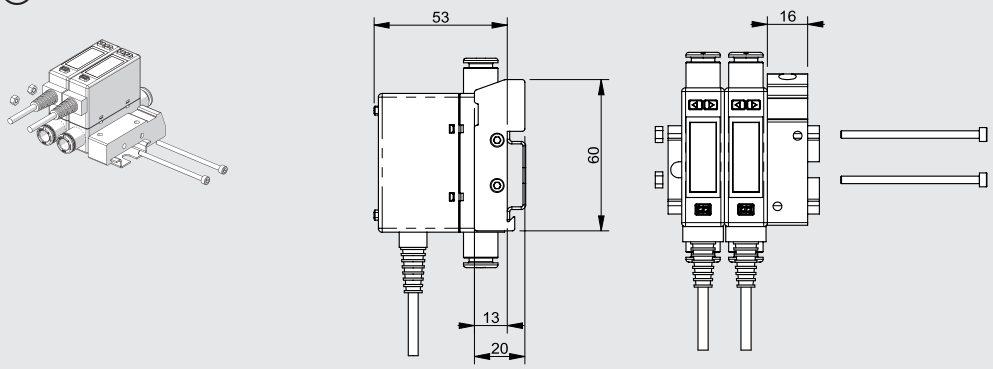

Multiple fixing on DIN bar with code bracket 90009A002 using the lateral holes Ø3.4 with M3 screws and nuts

Ⓓ

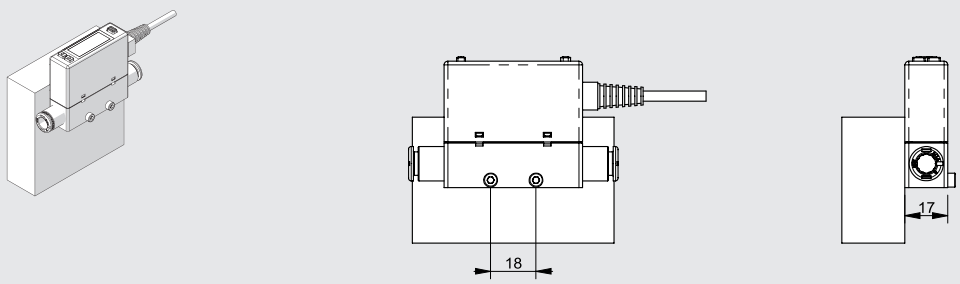

Side fixing using M3 screws, minimum length 23 mm

DIMENSIONS AND ORDERING CODES





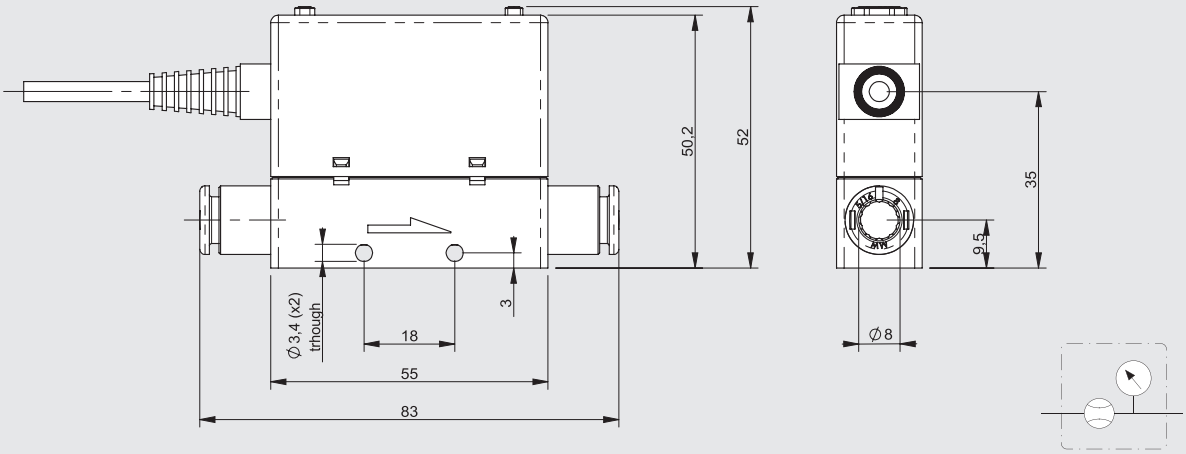

Code	Description
9000958A2	Flowmeter FLUX 0 50L Ø8 PNP 4-20 mA 2 m
9000958V2	Flowmeter FLUX 0 50L Ø8 PNP 1-5V 2 m
9000978A2	Flowmeter FLUX 0 200L Ø8 PNP 4-20 mA 2 m
9000978V2	Flowmeter FLUX 0 200L Ø8 PNP 1-5V 2 m

ACCESSORIES

FIXING BRACKET



Code	Description
90009A001	Fixing bracket FLUX 0

Note: Comes complete with two 3x6 screws for plastic (max. torque 0.5 Nm)

CONNECTION BRACKETS ON BAR OMEGA (DIN EN 50022)



Code	Description
90009A002	Connection brackets on DIN bar FLUX 0

Note: Comes complete with two 3x10 screws for plastic (max. torque 0.5 Nm)

METAL WORK PNEUMATIC

NOTES

FLOWMETER SERIES FLUX

The flowmeters in the FLUX series are the ideal solution for measuring the flow rate of compressed air in pneumatic systems.
Made of an anodised aluminium body from 1/2" to 2" threaded ports, they can measure flow rates of up to 15,000 Nl/min.
Available in two main versions: with or without built-in display.
The version with display provides an intuitive user interface for real-time several information, including:
- flow rate, pressure and temperature;
- graphs showing instant and cumulative quantities;
- power consumption to generate the measured flow.

This version also integrates a pressure/temperature transducer that uses an advanced software algorithm to minimise measurement error within the operating range.
All flowmeters come have an M12 connector for power supply and signal management plus an analogue output that can be set to either voltage or current; the models with display also feature a configurable digital output (on the flow rate, pressure or total consumption).
They can be powered with variable voltage ranging from 12VDC to 24VDC and act as either a flowmeter and flow switch; additionally, the display versions can be used as either a pressure gauge or pressure switch. Internal air channels are designed to ensure an accurate flow rate reading at all times without creating any pressure drop between the instrument inlet and outlet.
The wireless versions can communicate with Ethernet networks (via MQTT protocol) and mobile devices (smartphones and tablets) via Bluetooth®, through the dedicated App "Metal Work FluxUP". In addition to displaying measured values in real time, through this App, you can change all flowmeter settings and view the relevant data.

TECHNICAL DATA		FLUX 1	FLUX 2	FLUX 3	FLUX 4
Measured flow range	Nl/min	0 to 2000	0 to 4000	0 to 8000	0 to 15000
Fluid		Compressed air free of any lubricants and inert gases			
Fluid temperature	°C	0 to 50			
Direction of flow		Unidirectional			
Measuring method		Thermal			
Working pressure range	bar	0 to 10			
	MPa	0 to 1			
	psi	0 to 145			
Pressure drop		None			
Temperature range	°C	0 to 50			
Threaded ports		1/2"	1"	1 1/2"	2"
Degree of protection		IP65			
Weight	g	585	705	1975	4000
IO-Link supply voltage range	VDC	15 - 27 (with IO-Link Master)			
Current consumption	mA	80 mA (at 24VDC)			
Power supply voltage range in the analogue version	VDC	12 -10% 24 +30%			
Maximum admissible voltage	VDC	32 ▲			
Current absorption	mA	min 50 - max 120			
DISPLAY					
Instant flow rate	Nl/min	0 to 2300	0 to 4600	0 to 8800	0 to 16500
Cumulative flow rate	Nl	999.999.999			
	Nm^3	999.999			
	Nft^3	35.320.000			
Pressure ■	bar	0 to 10			
Resolution	bar	0.01			

▲ IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.
■ In versions with pressure transducer.

METAL WORK PNEUMATIC

TECHNICAL DATA		FLUX 1	FLUX 2	FLUX 3	FLUX 4
PRECISION ●					
Flow rate					
Measuring range		0 to 100% of the full scale			
Single unit display accuracy		from 0 to 20% of the FS - better than ±1% of the FS			
		from 20% to 100% of the FS - better than ±3% of the FS			
Display accuracy of unit installed in an SY unit ✱		from 0 to 20% of the FS - better than ±2% of the FS		-	
		from 20% to 100% of the FS - better than ±6% of the FS		-	
Repeatability		±1% of the FS			
Temperature characteristic					
Version with pressure transducer		Automatic compensation of fluid temperature from 0 to 50°			
		Between 0 and 15°C and between 35 and 50°C ±0.6% of the FS every °C			
Version without pressure transducer		Without compensation, between 0 and 15°C and between 35 and 50°C ±1.2 % of the FS every °C			
Pressure					
Measuring range	bar	0 to 10			
Display accuracy		±2% of the FS			
ANALOGUE OUTPUT					
Output signal					
Analogue output powered		0 to 10 VDC or 0 to 5 VDC (I max 20 mA)			
		Output impedance about 1 kΩ			
Analogue output current		4 to 20 mA			
		Max. load impedance 500 Ω			
Analogue output accuracy		±0.1% of the value read			
DIGITAL OUTPUT ✚		n° 1 open collector output NC / NO - PNP / NPN			
Maximum current	mA	100 mA			
Residual voltage	VDC	20 mV (with load)			
Operating mode, if set on flow rate		Level switch, Band switch, Value switch, Cyclic pulse			
Min. accumulated volume by pulse (pulse width 100 msec)	Nl	10	20	30	60
	Nm^3	1	1	1	1
	Nft^3	1	1	1	2
Response mode, with pressure mode setting		Level switch, Band switch			
Hysteresis		Adjustable			
Short-circuit protection at output		Yes			
DIGITAL INPUT ◆		n° 1 input for the reset of the consumption counters NO – PNP/NPN			
Type of input		Voltage 12 -10% 24 +30%			
Activation time		min 1 sec			

● Accuracy referred to compressed air gas, at a pressure of 5 bar and a fluid temperature of 25°C ±10°C.

✱ In order to guarantee the stated measurement accuracy and to prevent lubricant residues from damaging the measurement sensor, **a filter has to be mounted at the FLUX inlet. If the device is fitted with a Syntesi® filter, the SYN filter parameter must be enabled in the system menu to guarantee the stated accuracy (function available only for the version with display).**

◆ Version without display: the digital input selects the type of analogue output from 0 to 10 V and 4 to 20 mA.

✚ Available only for version with display.

COMPONENTS

① BODY: anodized aluminium
② INLET BUSHING: anodized aluminium
③ FLOW RECTIFIER DISC: passivated aluminium
④ CONNECTOR M12: technopolymer
⑤ ELECTRONIC BOARD
⑥ FLOW SENSOR
⑦ COVER: technopolymer
⑧ GASKETS: NBR

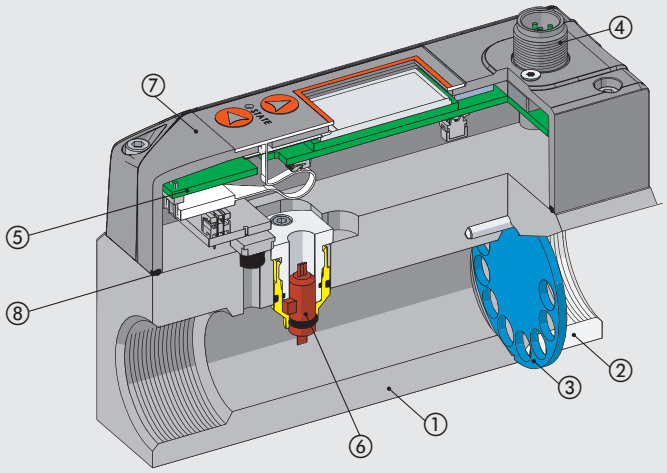

WIRING DIAGRAMS

Wiring diagram, analogue version

M12 male connector, A encoding

Pin	Function description	Lead colour
1	+24VDC power supply	Brown
2	Digital output	White
3	0VDC power supply	Blue
4	Digital input	Black
5	Analogue output	Gray

Wiring diagram, IO-Link version

M12 male connector, A encoding

Port Class A
1 = L+
2 = NC
3 = L-
4 = C/Q
5 = NC

Pin	Signal	Description of Port Class A	Lead colour
1	L+	+24VDC power supply	Brown
2	NC	/	White
3	L -	0VDC power supply	Blue
4	C/Q	IO-Link communication	Black
5	NC	/	Gray

WIRELESS CONNECTION

With the Wireless versions, you can establish a connection to at Wi-Fi® network via an access point or gateway to monitor and collect all the measured gas values.

Connection to a MQTT broker via an access point

MQTT



Broker MQTT

The "Metal Work FluxUp" App allows you to connect, via Bluetooth, from Android® and iOS® smartphones, to the Metal Work flowmeters of the FLUX series, equipped with a wireless interface.

Through "Metal Work FluxUp" it is possible to view in real time all the data recorded by FLUX and set all the operating parameters.

Download on the App Store

GET IT ON Google Play

PNEUMATIC CONNECTION

To connect the inlet side, use a straight pipe* with a minimum length as per the table.
If straight piping is not installed, the accuracy may vary from what is stated.

* **Straight pipe**: the pipe must be straight with a constant cross-section.

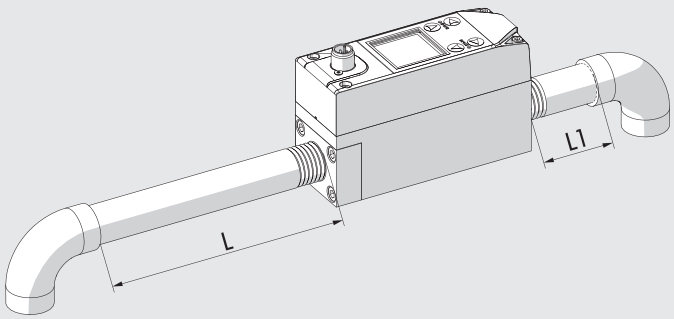

Pipe length

	L Inlet	L1 Outlet
FLUX 1	≥150 mm	≥50 mm
FLUX 2	≥200 mm	≥50 mm
FLUX 3	≥300 mm	≥100 mm
FLUX 4	≥300 mm	≥100 mm

FIXING OPTIONS

FLUX 1 - 2 - 3



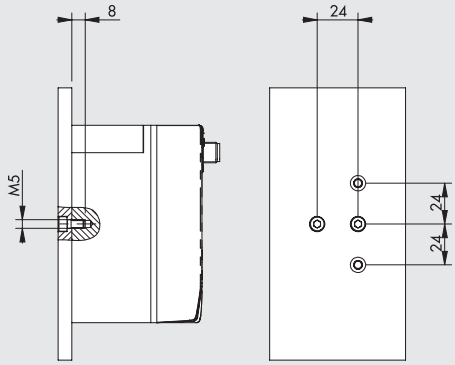

Wall mounting by means M5 screws.



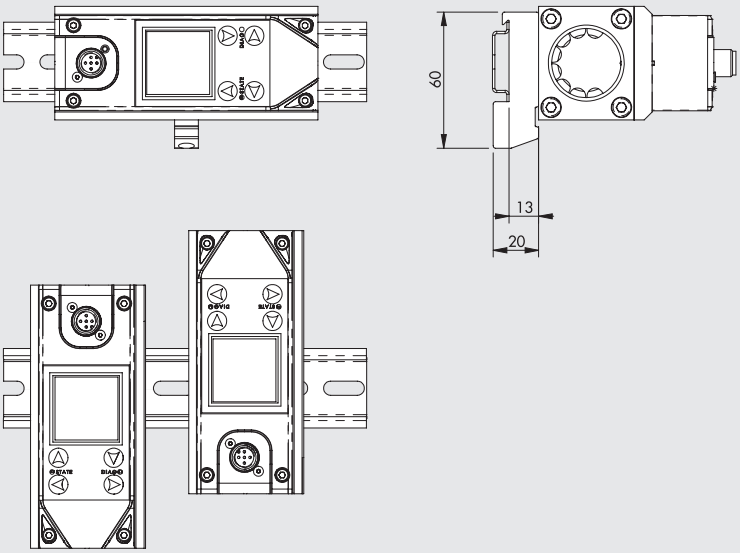

DIN rail mounting with bracket code 900099A001, using the M5x14 screws provided.

FLUX 4



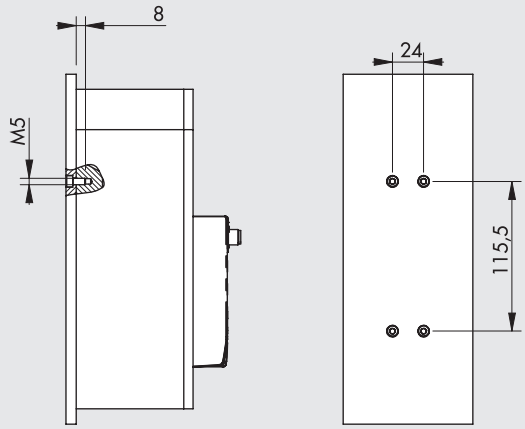

Wall mounting by means M5 screws.

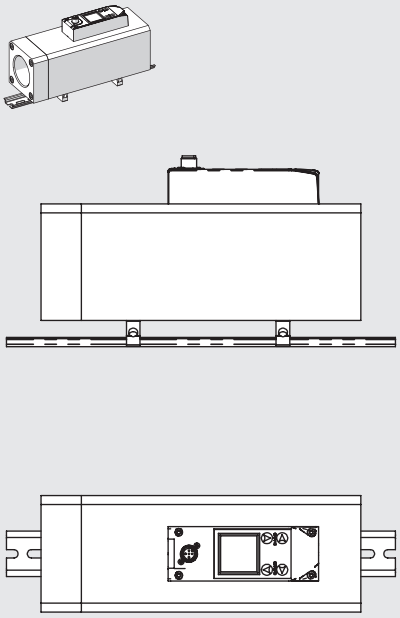



DIN rail mounting with bracket code 900099A001, using the M5x14 screws provided.

N.B.: For this type of fixing use n. 2 connection brackets.

ASSEMBLY DIAGRAM OF FLUX 1 - 2 WITH SYNTESI®

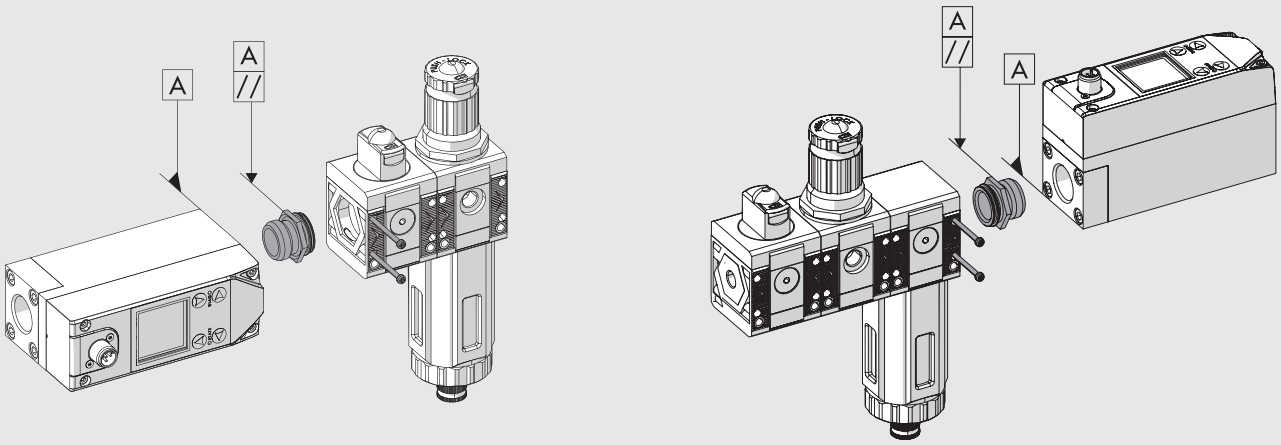

1) Tighten the connection bushing on the flowmeter until it is flush (it is advisable to use sealant on the male thread of the bushing to ensure a perfect seal).
2) Unscrew the bushing slightly until two surfaces of the hexagon are parallel to the body of FLUX.
3) Insert the bushing into the Syntesi® unit.
4) Tighten the two self-tapping screws in the Syntesi® unit to a torque of 0.4 Nm for size 1 and torque 2.5 Nm for size 2.

FLUX 1 + SYNTESI® 1

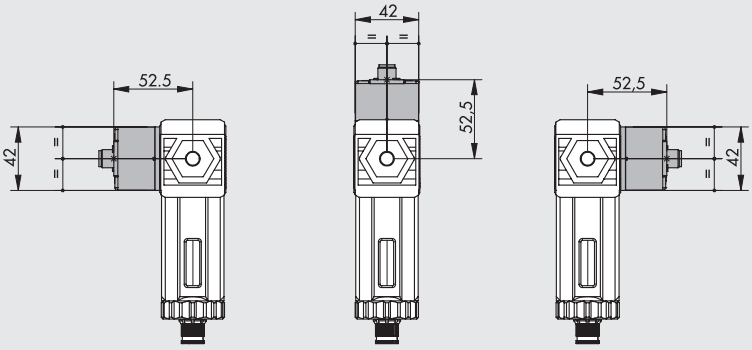

FLUX 2 + SYNTESI® 2

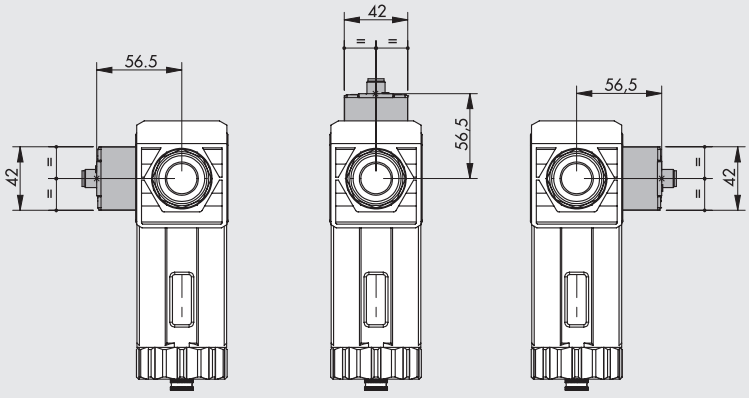

N.B.: If the FLUX is used downstream a Syntesi® filter, fit it in one of the three positions shown in the figure.

DIMENSIONS AND ORDERING CODES FLUX 1 - 2

FLUX 1



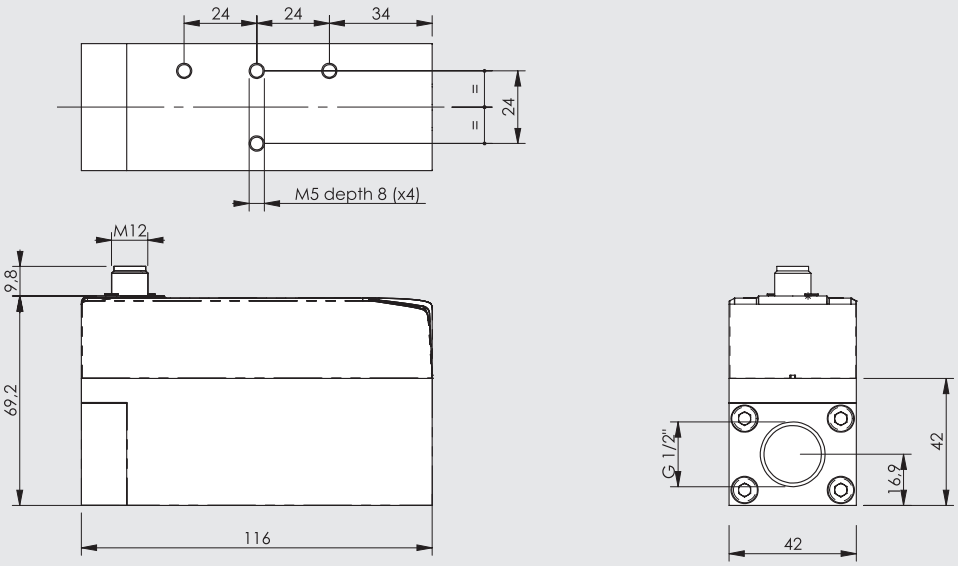

FLUX 2



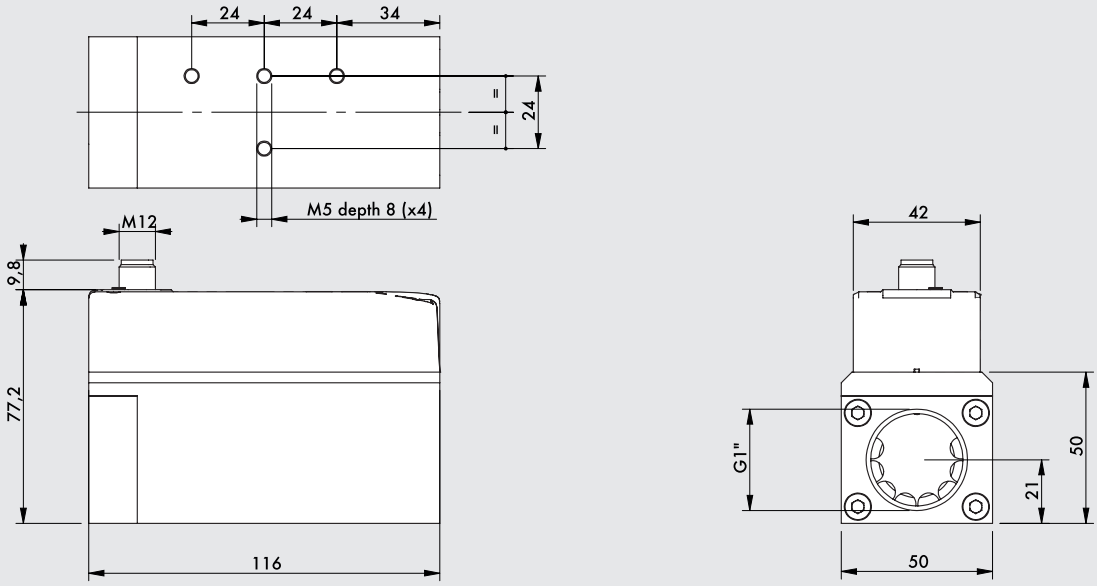

Symbol	Code	Description
	9000991000	Flowmeter FLUX 1, coupling 1/2", analog output 0-10V 4-20 mA
	9000991200	Flowmeter FLUX 1, coupling 1/2", IO-Link
	9000992000	Flowmeter FLUX 2, coupling 1", analog output 0-10V 4-20 mA
	9000992200	Flowmeter FLUX 2, coupling 1", IO-Link
	9000991510	Flowmeter FLUX 1, coupling 1/2", digital output PNP 0-10V 4-20 mA, with display and pressure sensor
	9000991511	Flowmeter FLUX 1, coupling 1/2", digital output PNP 0-10V 4-20 mA, with display, pressure sensor and Wi-Fi®
	9000991610	Flowmeter FLUX 1, coupling 1/2", IO-Link with display and pressure sensor
	9000991611	Flowmeter FLUX 1, coupling 1/2", IO-Link with display, pressure sensor and Wi-Fi®
	9000992510	Flowmeter FLUX 2, coupling 1", digital output PNP 0-10V 4-20 mA, with display and pressure sensor
	9000992511	Flowmeter FLUX 2, coupling 1", digital output PNP 0-10V 4-20 mA, with display, pressure sensor and Wi-Fi®
	9000992610	Flowmeter FLUX 2, coupling 1", IO-Link with display and pressure sensor
	9000992611	Flowmeter FLUX 2, coupling 1", IO-Link with display, pressure sensor and Wi-Fi®

DIMENSIONS AND ORDERING CODES FLUX 3 - 4

FLUX 3



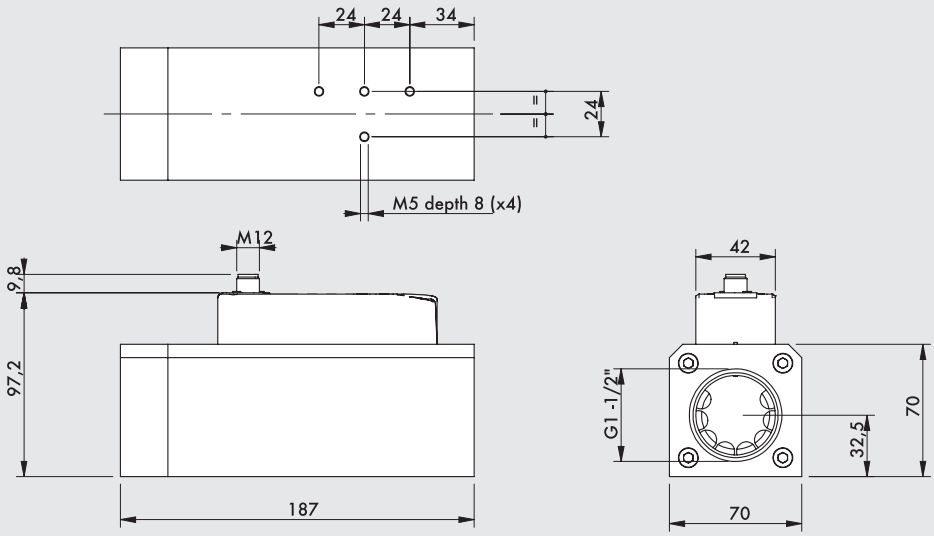

FLUX 4



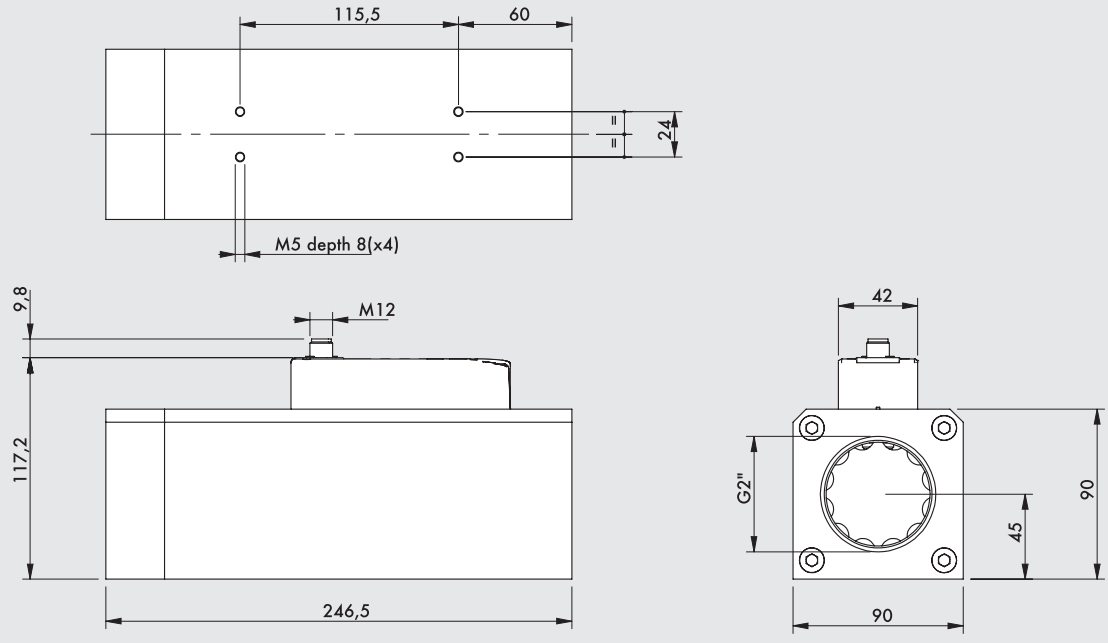

Symbol	Code	Description
	9000993000	Flowmeter FLUX 3, coupling 1 1/2", analog output 0-10V 4-20 mA
	9000993200	Flowmeter FLUX 3, coupling 1 1/2", IO-Link
	9000994000	Flowmeter FLUX 4, coupling 2", analog output 0-10V 4-20 mA
	9000994200	Flowmeter FLUX 4, coupling 2", IO-Link
	9000993510	Flowmeter FLUX 3, coupling 1 1/2", digital output PNP 0-10V 4-20 mA, with display and pressure sensor
	9000993511	Flowmeter FLUX 3, coupling 1 1/2", digital output PNP 0-10V 4-20 mA, with display, pressure sensor and Wi-Fi®
	9000993610	Flowmeter FLUX 3, coupling 1 1/2", IO-Link with display and pressure sensor
	9000993611	Flowmeter FLUX 3, coupling 1 1/2", IO-Link with display, pressure sensor and Wi-Fi®
	9000994510	Flowmeter FLUX 4, coupling 2", digital output PNP 0-10V 4-20 mA, with display and pressure sensor
	9000994511	Flowmeter FLUX 4, coupling 2", digital output PNP 0-10V 4-20 mA, with display, pressure sensor and Wi-Fi®
	9000994610	Flowmeter FLUX 4, coupling 2", IO-Link with display and pressure sensor
	9000994611	Flowmeter FLUX 4, coupling 2", IO-Link with display, pressure sensor and Wi-Fi®

ACCESSORIES

STRAIGHT CONNECTOR



Code	Description
W0970513001	5-PIN M12x1 straight connector

STRAIGHT CONNECTOR WITH WIRE



Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Grey

Code	Description
W0970513002	5-PIN M12x1 straight connector with wire L = 5 m

90° CONNECTOR



Code	Description
W0970513003	M12x1 5-PIN 90° connector

90° CONNECTOR WITH WIRE



Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Grey

Code	Description
W0970513004	M12x1 5-PIN 90° connector with wire L = 5 m

CONNECTION BRACKETS ON THE BAR (DIN EN50022)

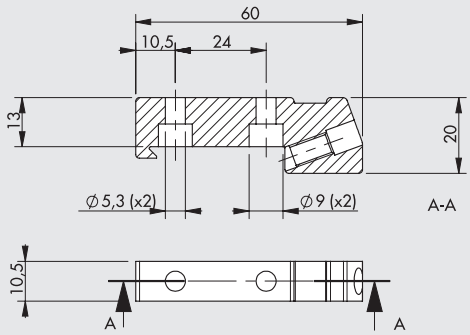

Code	Description
900099A001	Connection brackets on DIN bar, FLUX 1 - 4

Note: complete with 2 M5x14 screws and 1 M6 grub screw

SY1 - SY2 KIT FOR CONNECTION



Code	Description
900099A002	Adapter FLUX 1 - SY1
900099A003	Adapter FLUX 2 - SY2

Max torque for screw, 0.4 Nm for SY1
Max torque for screw, 2.5 Nm for SY2

NOTES

SQUARE DIAL PRESSURE GAUGE

A compact pressure gauge with a square dial to go with air treatment units.
A PTFE ring seal mounted on the 1/8" thread of the fitting ensures a perfect pneumatic seal. To mount it, screw the gauge in as far as it will go, then loosen enough to align the dial. A sealant is not required. The pressure gauge has a neck to dampen pressure vibration and absorb water hammer. This improves overall reliability and guarantees longer life.

TECHNICAL DATA

Fitting thread		G 1/8"
Pressure range	bar	0-4 / 0-12
	psi	0-60 / 0-175
Precision class	EN 837	2.5
Pneumatic seal		PTFE ring seal
Vibration damping		Yes

DIMENSIONS

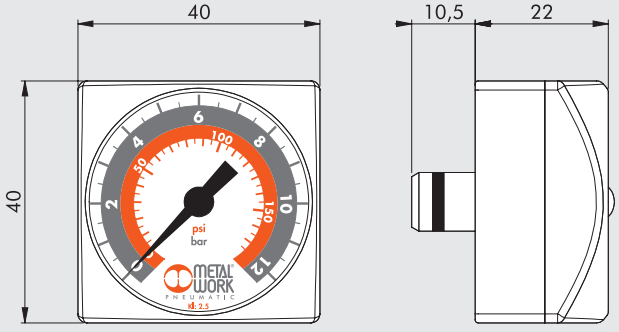

ORDERING CODES

Code	Description
9700109	M 40x40 1/8 04
9700110	M 40x40 1/8 012

METAL WORK PNEUMATIC

NOTES

METAL WORK®
PNEUMATIC

FITTINGS

- PUSH-IN FITTINGS D1
- FITTING SERIES A, B, C, D D2
- STAINLESS STEEL FITTINGS D3
- PUSH-IN FITTINGS UNF or NPT THREAD AND INCH PIPES D4

SUMMARY PUSH-IN FITTINGS

METAL WORK PNEUMATIC

PUSH-IN FITTINGS

- GENERAL INTRODUCTION — D1.4

- BRASS PUSH-IN FITTINGS FOR mm TUBES AND G (BSP) or METRIC THREAD (G BSP) — D1.9

- BRASS PUSH-IN FITTINGS FOR INCH TUBES AND UNF or NPT THREAD (UNF NPT) — D1.19

- ADAPTORS AND PLUGS FOR G (BSPP) AND NPT THREAD (G BSP) (UNF NPT) — D1.24

- TECHNOPOLYMER PUSH-IN FITTINGS FOR mm TUBES AND G (BSP) or METRIC THREAD (G BSP) — D1.27

- CARTRIDGES AND ACCESSORIES — D1.33

PUSH-IN FITTINGS FOR USE IN THE FOOD INDUSTRY

- SERIES F-E PLUS FITTINGS — D1.36

- SERIES F-NSF PLUS FITTINGS — D1.41

- SERIES XTR FITTINGS — D1.44

- SERIES F-E / SERIE F-NSF FITTINGS — F-E — F-NSF — D1.48

- PUSH-IN FITTINGS, STAINLESS STEEL — D3.2

PUSH-IN FITTINGS FOR THE PRODUCTION OF BATTERIES

- SERIES BTY FITTINGS — D1.53

PUSH-IN FITTINGS

GENERAL INTRODUCTION

Push-in fittings by Metal Work are the best elements for connecting pipes and actuators.
Quick and easy to use, the Metal Work push-in fitting can be re-used thousands of times without affecting the pneumatic and mechanical seal in any way. It comes in various configurations and guarantees a virtually unlimited, highly flexible use. The clamping spring with its special shape grips the pipe without scratching or deforming it.
These fittings are designed to facilitate pipe release. You only need to press the release bushing to open up the clamping spring and free the pipe. When you press your finger onto the release bushing, you can clearly hear the characteristic "click-clock" sound.
In the fittings, the release bushing has patented screwdriver slots to facilitate release in applications not accessible to the fingers.
Configurations RL19, RL21, RL22, RL23, RL23M, RL24, RL44, and RL49 (except for Ø5), have a ring for fixing to the wall asymmetrically in order to contain the head of a screw within the overall dimensions of the fitting.
There are push-in fittings for metric pipes in the diameter range of 3 to 14, and push-in fittings for inch pipes in the diameter range of 1/8 to 1/2.
Threaded connections have ISO 228-1G cylindrical thread in the 1/8-1/2 range, ISO 7-1 conical thread in the1/8-1/2 range, metric thread in the M3 to M12x1.5 range, and conical thread compatible with NPT female threading.

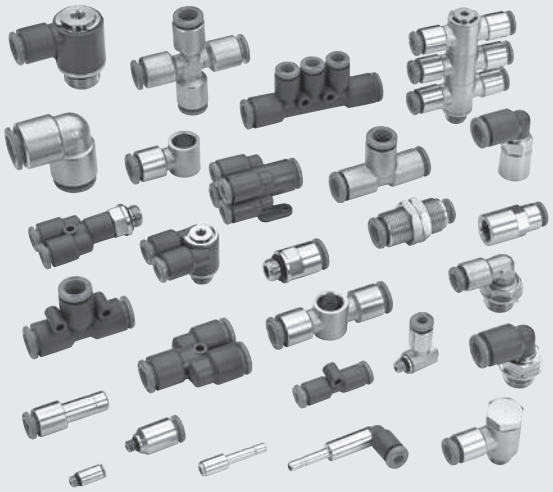

TECHNICAL DATA		METRIC or G (BSP) *	UNF or NPT **
Threaded coupling		Metric: M3 - M5 - M7 - M12x1.5	UNF: 10-32
		G (BSP): 1/8 - 1/4 - 3/8 - 1/2	NPT: 1/8 - 1/4 - 3/8 - 1/2
Diameter of the pipe		3 - 3.17 - 4 - 5 - 6 - 8 - 10 - 12 - 14	1/8 - 5/32 - 1/4 - 5/16 - 3/8 - 1/2
Temperature range for brass fittings	°C	– 20 to + 80	
	°F	– 4 to 176	
Temperature range for technopolymer fittings	°C	– 20 to + 60	
	°F	–4 to 140	
Pressure range for brass fittings		– 0.99 bar to 16 bar / – 0.099 MPa to 1.6 MPa	
Pressure range for technopolymer fittings		– 0.99 bar to 12 bar / – 0.099 MPa to 1.2 MPa	
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene	
Fluid		Vacuum - Compressed air	

* **Metric cylindrical threads according to ISO 262**
Cylindrical threads according to ISO 228-1, identified with a letter G. They also correspond to BSP or more precisely to BSPP designation (P stands for Parallel).
Conical threads according to ISO 7-1, identified by a letter R. They also correspond to BSP or more precisely to BSPT designation (T stands for Tapered).

** **UNF cylindrical threads, according to ANSI B 1.1**
NPT conical threads. Female threads are in accordance with ANSI B 1-20, male threads are a Metal Work specifically designed solution that is compatible with ANSI B 1-20 threads (see page **D1**.8)

COMPONENTS

① Ring or release bushing: technopolymer
② Locking bushing: brass or technopolymer
③ Body: brass or technopolymer
④ Clamping spring: stainless steel (for pipes Ø 3 and Ø 3.17: brass gripper)
⑤ Spring supporting ring: technopolymer
⑥ Seal: NBR

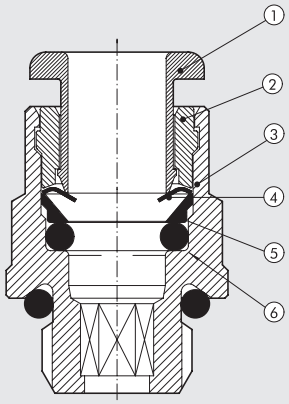

O-RING BELOW R FITTINGS

Thread	Initials	Dimensions of O-ring
M3	-	2.6 x 1
M5 (for Ø 3 - Ø 3.17)	-	3 x 1.2
M5 - 10-32 UNF	-	3.5 x 1.2
M7	-	5 x 1.5
M12x1.5	-	9.75 x 1.78
G 1/8 - 1/8 NPT	2031	7.66 x 1.78
G 1/4 - 1/4 NPT	2043	10.82 x 1.78
G 3/8 - 3/8 NPT	2056	14 x 1.78
G 1/2 - 1/2 NPT	3068	17.13 x 2.62

SCREWING TORQUE

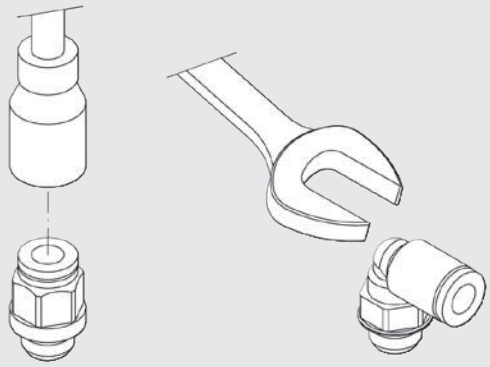

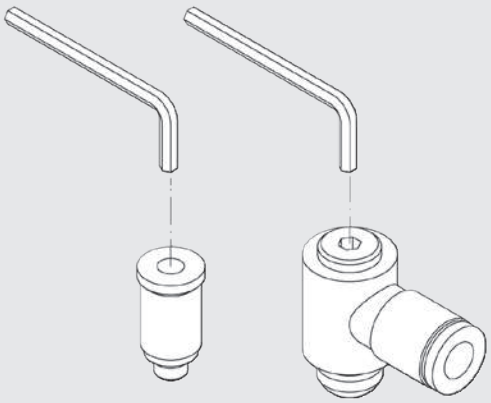

Thread	Max. Torque [Nm]
M3	0.4
M5 - 10-32 UNF	1.8
M7	2.5
M12x1.5	8
G 1/8 - 1/8 NPT	6
G 1/4 - 1/4 NPT	8
G 3/8 - 3/8 NPT	10
G 1/2 - 1/2 NPT	15

CH [mm]	CH [inc]	Max. Torque [Nm]
1.5	-	0.4
2	5/64	0.7
2.5	-	1.2
3	0.118	2.5
4	0.157	5
5	0.197	8
Over 5	Over 0.197	See the values concerning threads

N.B.: When using a socket spanner, the torque must not exceed that of the thread (e.g. fitting RL1 6 M7, with a 4 mm thread, has a maximum torque of 2.5 Nm, highest value of the thread)

GENERAL FEATURES

All fittings have cylindrical threading and incorporate a O-ring. The use of an O-ring considerably improves the seal of angled, rough, and slightly convex surfaces. (PTFE) is no longer used.

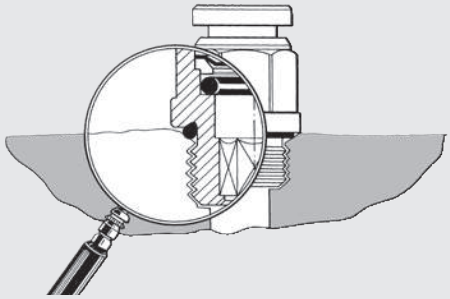

IDENTIFICATION OF FITTINGS FOR INCH PIPES AND UNF or NPT THREAD

The push-in fittings for inch pipes or with NPT thread have an identification mark (see below).
N.B.: threadless fittings for 1/8, 5/32 and 5/16 pipes do not bear an identification mark as they are used in Europe.

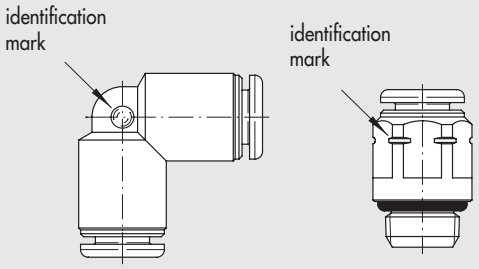

FITTINGS WITH ALLEN WRENCH - ADVANTEGES

An Allen wrench is used to assemble rotary fittings even with very close centre distances.



The special configuration with two O-rings allows maximum orientation so as to follow pipe movement in the specific application.

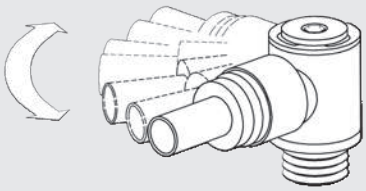

Fittings with a built-in gasket and reduced height (H) with the same threaded coupling and pipe diameter.

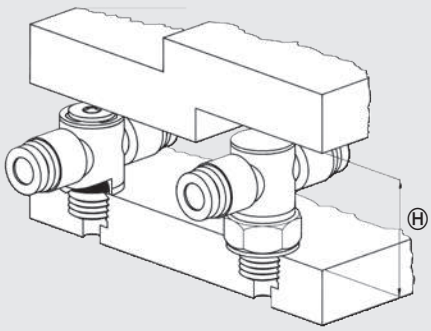

IDEA: TO USE 4 PUSH-IN FITTINGS ONLY

- With four type of push-in fittings that are R1, R4, R5, R6 it is possible to do every type of connection for a pneumatic circuit.
- Sharp drop in the number of fittings to be stocked and hence reduced operating costs.

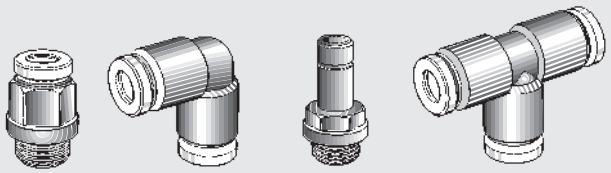

Mounting fittings with an Allen wrench or pneumatic tool. All the elbows and tees are rotary. Drastic reduction in assembly times.

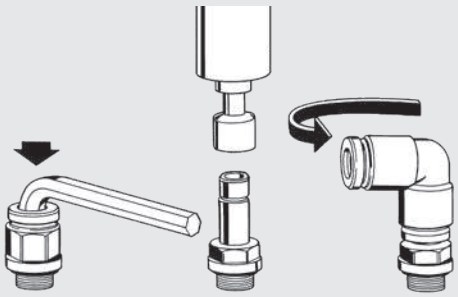

A single tee can give central tees and lateral tees.

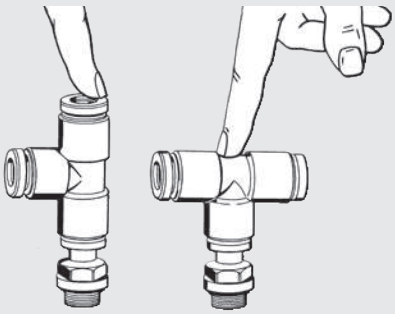

The pipe is easy to assemble by pressing lightly on the pusher ring. To remove the fitting, merely push radially on the key.

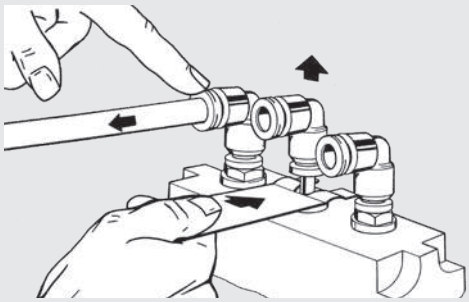

Pre-assembling fittings on the workbench with pneumatic tool even with very close centre distances.

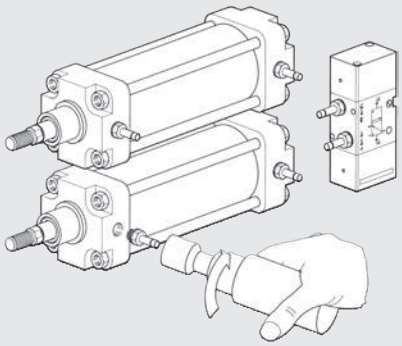

Pre-assembling fittings and pipe sections on the workbench. Pre-assembled configurations can be stocked for assembly in series.

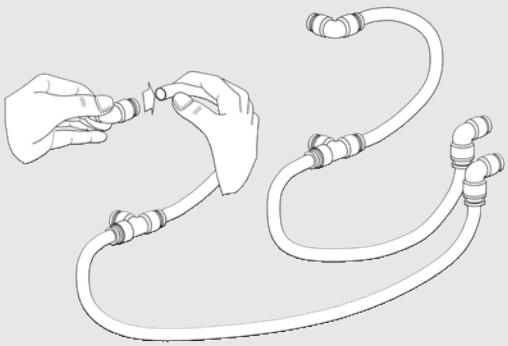

Quick connection and completion of the pneumatic circuit.

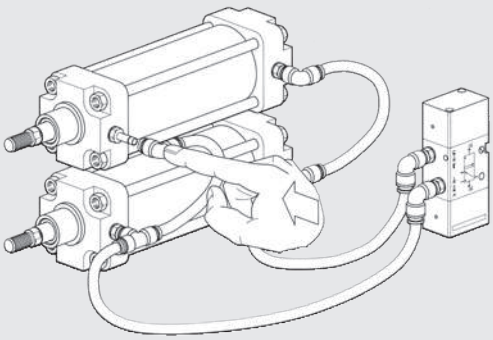

THE METAL WORK SOLUTION WITH CAPTIVATED O-RINGFOR THREAD NPT

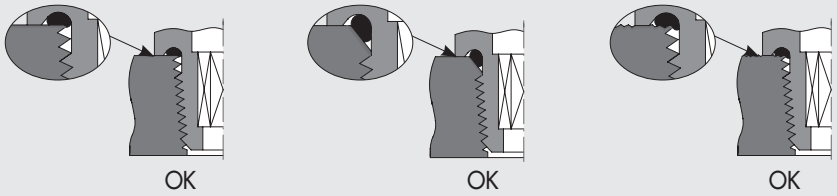

- Perfect seal even on flat, conical and raw surfaces.

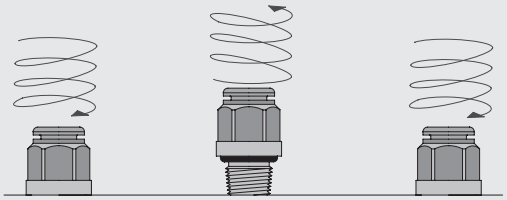

- Can be re-used thousands of times.



- The pneumatic seal is obtained by simply screwing the fitting in by hand. Tighten firmly without forcing to prevent unscrewing.

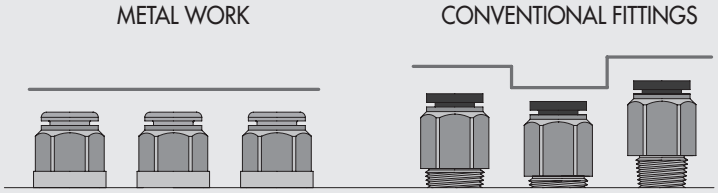

- Constant height of the mounted fitting irregardless of the tolerance of the thread, or to the torque.

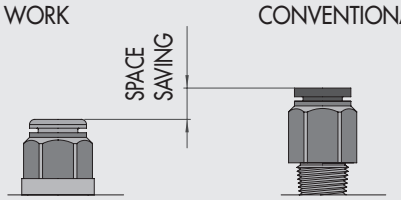

- Reduced fitting height.

THE SOLUTION OFFERS NUMEROUS ADVANTAGES OVER CONVENTIONAL SOLUTIONS

Solution with **NPTF Dry seal thread**

- It operates correctly if the male and female thread are made exactly to standard, otherwise there will be air leaks.



Solution with **thread coated with teflon® or other sealant**

- A limited number of assemblies is possible after which there will be no seal.
- Particles of sealant detach from the fitting or enter the compressed air system, which affects cleanness of the compressed air.



Solution with **teflon® or rubber ring on the thread**

- Guaranteed seal with just a few turns.



BRASS PUSH-IN FITTINGS FOR mm TUBES AND G (BSP) or METRIC THREAD

STRAIGHT, CYLINDRICAL, MALE (R1)



Code	Ref.	Ø	F	Ch	Ch1	P	L	D	E
2001B01	R1	3	M3	Ø 5.8	1.5	3	12.6	1.5	5.8
2001B02	R1	3	M5	Ø 5.8	2	3.5	13	2	5.8
2001A01	R1	3.17	M3	Ø 5.8	1.5	3	12.6	1.5	5.8
2001A02	R1	3.17	M5	Ø 5.8	2	3.5	13	2	5.8
2L01001	RL1	4	M5	Ø 9	2.5	4	20.3	2.6	9
2L01020	RL1	4	M7	Ø 9	3	5	18.9	3.1	9.8
2L01002	RL1	4	1/8	10	3	6	18	3.1	14
2L01003	RL1	4	1/4	10	3	8	19.8	3.1	18
2001004	R1	5	M5	Ø 12	2.5	4	22.5	2.6	12
2001005	R1	5	1/8	13	3	6	22	3.1	15
2001006	R1	5	1/4	12	3	8	24	3.1	18
2L01000	RL1	6	M5	Ø 11	2.5	4	21.9	2.6	11
2L01021	RL1	6	M7	Ø 11	4	5	23	4.1	11
2L01101	RL1	6	M12x1.5	12	4	8	23.2	4.1	17
2L01007	RL1	6	1/8	12	4	6	21.6	4.1	14
2L01008	RL1	6	1/4	12	4	8	20.3	4.1	18
2L01102	RL1	8	M12x1.5	14	6	8	24.5	6.2	17
2L01009	RL1	8	1/8	13	5	6	25.4	5.2	14
2L01010	RL1	8	1/4	14	6	8	24.4	6.2	18
2L01011	RL1	8	3/8	14	6	9	22.8	6.2	22
2L01012	RL1	10	1/4	16	7	8	29.2	7.2	18
2L01013	RL1	10	3/8	16	8	9	26.5	8.2	22
2L01018	RL1	10	1/2	16	8	11	29.8	8.2	26
2001019	RL1	12	1/4	19	7	8	30.5	7.2	21
2001014	RL1	12	3/8	19	10	9	28.1	10.2	22
2001015	RL1	12	1/2	19	10	11	29.3	10.2	26
2001016	RL1	14	3/8	22	10	9	33.8	10.2	24.6
2001017	RL1	14	1/2	22	12	11	31.5	12.2	26

STRAIGHT, CONICAL, MALE (R1C)



Code	Ref.	Ø	F	Ch	Ch1	D	E	L	P
2L01C02	RL1C	4	1/8	10	3	3.1	11.3	18.5	6.2
2L01C07	RL1C	6	1/8	12	4	4.1	13.5	22.5	6.2
2L01C08	RL1C	6	1/4	12	4	4.1	13.2	22.3	8.5
2001Z07	RL1Z	6	12x1 conical	12	4	4.1	13.2	23.5	9
2001Z08	RL1Z	6	12x1.25 conical	12	4	4.1	13.2	23.5	9
2L01C09	RL1C	8	1/8	13	6	6.2	14.3	26	6.2
2L01C10	RL1C	8	1/4	14	6	6.2	15.8	25.5	8.5
2L01C11	RL1C	8	3/8	14	6	6.2	16.6	24.9	9
2L01C13	RL1C	10	1/4	16	7	7.2	17.7	28.9	8.5
2L01C14	RL1C	10	3/8	16	8	8.2	17.7	26	9
2001C15	RL1C	12	3/8	19	10	10.2	21	28.5	9
2001C16	RL1C	12	1/2	19	10	10.2	21.3	26.6	11

STRAIGHT, FEMALE (R2)



Code	Ref.	Ø	F	Ch	P	L	D	E
2002B02	R2	3	M5	7	4.5	15.7	2.5	7.8
2002A02	R2	3.17	M5	7	4.5	15.7	2.5	7.8
2L02001	RL2	4	1/8	10	7	26.2	3	14
2L02002	RL2	4	1/4	10	8	28.6	3	17
2002003	R2	5	1/8	12	7	27	4	14
2002004	R2	5	1/4	12	8	29.5	4	17
2L02005	RL2	6	1/8	12	7	27.1	5	14
2L02006	RL2	6	1/4	12	8	29.3	5	17
2L02007	RL2	8	1/8	13	7	28.1	7	14
2L02008	RL2	8	1/4	14	8	30	7	17
2L02009	RL2	10	1/4	16	8	31.8	8	17.7
2L02010	RL2	10	3/8	16	10	36.8	8	20.8
2L02011	RL2	12	3/8	19	10	37	10	20.8
2L02012	RL2	12	1/2	19	11	40.5	10	23.8

G BSP

STRAIGHT, INTERMEDIATE (R3)



Code	Ref.	Ø 1	Ø 2	F	L	D
2003A02	R3	3	3	M8x0.75	18.4	2
2003A01	R3	3.17	3.17	M8x0.75	18.4	2
2L03001	RL3	4	4	M11x1	30.6	2.5
2003002	R3	5	5	M14x1	33.5	4
2L03003	RL3	6	6	M13x1	33	4.5
2L03004	RL3	8	8	M15x1	35.7	6.5
2L03005	RL3	10	10	M17x1	39.2	8
2003006	RL3	12	12	M20x1	40.7	10
2003007	RL3	14	14	M24x1	45.9	12
2L03301	RL3	4	6	M13x1	32.7	2.5
2L03302	RL3	4	8	M15x1	34.4	2.5
2L03303	RL3	6	8	M15x1	35	4.5
2L03304	RL3	6	10	M17x1	37.5	4.5
2L03306	RL3	6	12	M20x1	39	4.5
2L03305	RL3	8	10	M17x1	37.8	6.5
2L03307	RL3	8	12	M20x1	40.1	6
2L03308	RL3	10	12	M20x1	40.8	8

ELBOW, INTERMEDIATE (R4)



Code	Ref.	Ø	L	D	E
2004A02	R4	3	10.4	2	6.3
2004A01	R4	3.17	10.4	2	6.3
2L04001	RL4	4	16.7	2.5	9.5
2004002	R4	5	19.2	3	13.5
2L04003	RL4	6	19	4.5	11.5
2L04004	RL4	8	21.3	6.5	13.5
2L04005	RL4	10	23.3	8	16
2004006	RL4	12	26	10	20.5
2004007	RL4	14	29.3	12	22

TEE, INTERMEDIATE (R5)



Code	Ref.	Ø	L	L1	D	E
2005A02	R5	3	10.4	20.8	2	6.3
2005A01	R5	3.17	10.4	20.8	2	6.3
2L05001	RL5	4	16.7	33.4	2.5	9.5
2005002	R5	5	19.2	38.4	3	13.5
2L05003	RL5	6	19	38	4.5	11.5
2L05004	RL5	8	21.3	42.6	6.5	13.5
2L05005	RL5	10	23.3	46.6	8	16
2005006	RL5	12	26	52	10	20.5
2005007	RL5	14	29.3	58.6	12	22

G BSP

METAL WORK PNEUMATIC

THREADED ADAPTER (R6)



Code	Ref.	Ø	F	Ch	P	L	D	E
2006A02	R6	3	M5	5	3.5	17.1	2	5.8
2006A01	R6	3.17	M5	5	3.5	17.1	2	5.8
2006001	R6	4	M5	8	4	25.2	2.5	9
2006020	R6	4	M7	8	5	26.5	2.5	9.8
2006002	R6	4	1/8	13	6	28.9	2.5	15
2006003	R6	4	1/4	14	8	32.4	2.2	18
2006004	R6	5	M5	8	4	25.2	2.7	9
2006005	R6	5	1/8	13	6	28.9	3	15
2006006	R6	5	1/4	14	8	32.4	3	18
2006000	R6	6	M5	9	4	25.7	2.7	10
2006021	R6	6	M7	8	5	27	4	9.8
2006007	R6	6	1/8	13	6	29.4	4	15
2006008	R6	6	1/4	14	8	32.9	4	18
2006009	R6	8	1/8	13	6	30.6	5.5	15
2006010	R6	8	1/4	14	8	34	6	18
2006011	R6	8	3/8	17	9	35.4	6	22
2006012	R6	10	1/4	14	8	38.2	7.8	18
2006013	R6	10	3/8	17	9	38.7	8	22
2006022	R6	10	1/2	19	11	41	8	26
2006019	R6	12	1/4	14	8	40.7	7.8	18
2006014	R6	12	3/8	17	9	42.2	10	22
2006015	R6	12	1/2	22	11	44.2	10	26
2006016	R6	14	3/8	17	9	46.2	10	22
2006017	R6	14	1/2	22	11	48.2	12	26
2006101	R6	6	M12x1.5	13	8	33	4	17
2006102	R6	8	M12x1.5	13	8	33.7	6	17

EXTENDED THREADED ADAPTER (R18)



Code	Ref.	Ø	F	Ch	P	L	L1	L2	E	E1
2018002	R18	4	1/8	13	6	40.4	18.2	6.7	15	7
2018007	R18	6	1/8	13	6	43.4	20.7	6.7	15	9
2018008	R18	6	1/4	14	8	46.9	22.2	8.2	18	9
2018009	R18	8	1/8	13	6	46.5	22.7	6.7	15	11
2018010	R18	8	1/4	14	8	50	24.2	8.2	18	11
2018011	R18	8	3/8	17	9	51.4	24.7	8.7	22	13
2018012	R18	10	1/4	14	8	57.2	27.2	8.2	18	12
2018013	R18	10	3/8	17	9	58.7	27.7	8.7	22	12

EXTENSION (R7)



Code	Ref.	Ø	L	D
2007001	R7	4	34	2
2007002	R7	5	34	3
2007003	R7	6	37.5	4
2L07004	RL7	8	37.5	6
2007005	R7	10	45	8
2007006	R7	12	48	10
2007007	R7	14	58	12

G BSP

REDUCER (R8)



Code	Ref.	Ø 1	Ø 2	L	D	E
2008A01	R8	4	3	26	2	6.3
2008A02	R8	4	3.17	26	2	6.3
2008001	RL8	5	4	32.2	3	9.5
2L08002	RL8	6	4	29.9	2.8	9.5
2008003	R8	6	5	36	4	12
2L08004	RL8	8	4	28.7	2.8	9.5
2008005	R8	8	5	34.5	4	12
2L08006	RL8	8	6	31.9	4.5	11.5
2L08007	RL8	10	6	36.2	5	11.5
2L08008	RL8	10	8	40.8	7	14
2008009	RL8	12	4	36.7	3	13
2008010	RL8	12	6	38.5	5	13
2008011	RL8	12	8	40.1	7	14
2008015	RL8	12	10	44.3	8.2	16
2008014	RL8	14	8	44.1	7	15.5
2008017	RL8	14	10	44.3	8.2	16
2008018	RL8	14	12	50	10	19.5
ADDITION						
2009001	RL8/M	4	6	34.5	2.5	11.5

PLUG (R9)



Code	Ref.	Ø	L	MATERIAL
2010A02	R9	3	20	Brass
2L10A01	RL9T	3.17	19.6	Technopolymer
2L10001	RL9T	4	27	Technopolymer
2010002	R9	5	27	Brass
2L10003	RL9T	6	29.8	Technopolymer
2L10004	RL9T	8	33.6	Technopolymer
2L10005	RL9T	10	36.8	Technopolymer
2L10006	RL9T	12	39	Technopolymer
2010007	R9	14	39.5	Brass

STRAIGHT, INTERMEDIATE, BULKMTAD (R10)



Code	Ref.	Ø 1	Ø 2	F	Ch	L	D	l max
2011A02	R10	3	3	M8x0.75	10	18.4	2	5
2011A01	R10	3.17	3.17	M8x0.75	10	18.4	2	5
2L11001	RL10	4	4	M11x1	13	30.6	2.5	11
2011002	R10	5	5	M14x1	17	33.5	4	8
2L11003	RL10	6	6	M13x1	16	33	4.5	12
2L11004	RL10	8	8	M15x1	17	35.7	6.5	13.5
2L11005	RL10	10	10	M17x1	20	39.2	8	17
2011006	RL10	12	12	M20X1	24	40.7	10	20.3
2011007	RL10	14	14	M24x1	27	45.9	12	21.9
2L11301	RL10	4	6	M13x1	16	32.7	2.5	11
2L11302	RL10	4	8	M15x1	17	34.4	2.5	12
2L11303	RL10	6	8	M15x1	17	35	4.5	13
2L11304	RL10	6	10	M17x1	20	37.5	4.5	14.5
2L11306	RL10	6	12	M20x1	24	39	4.5	16
2L11305	RL10	8	10	M17x1	20	37.8	6.5	15
2L11307	RL10	8	12	M20x1	24	40.1	6	17.5
2L11308	RL10	10	12	M20x1	24	40.8	8	19

G BSP

METAL WORK PNEUMATIC

SINGLE RING (R13)



Code	Ref.	Ø	Ø 1	L	L1	E	E1
2012A02	R13	3	M5	12.9	9	9	7
2012A01	R13	3.17	M5	12.9	9	9	7
2012001	RL13	4	M5	20.2	9	9.5	9.5
2012002	RL13	4	1/8	21.3	15	14	9.5
2012003	R13	5	M5	23.8	9	9.5	12
2012004	R13	5	1/8	24.8	15	14	12
2012005	RL13	6	1/8	23	15	14	11.5
2012006	RL13	6	1/4	24.5	17	18	11.5
2012007	RL13	8	1/8	24.8	15	14	13.8
2012008	RL13	8	1/4	26.5	17	18	13.8
2012009	RL13	8	3/8	28.5	20	21	13.8
2012010	RL13	10	1/4	31.4	17	18	16.5
2012011	RL13	10	3/8	32.8	20	21	16
2012013	RL13	12	1/4	33	17	18	19.5
2012012	RL13	12	3/8	35.3	20	21	19.5
2012014	RL13	12	1/2	37	24	26	19.5
2012017	RL13	14	1/2	35	24	26	22

For the rods series D, see page **D2**.15

DUAL RING (R14)



Code	Ref.	Ø	Ø 1	L	L1	E	E1
2013001	RL14	4	M5	40.4	9	9.5	9.5
2013002	RL14	4	1/8	42.6	15	14	9.5
2013003	R14	5	M5	48	9	9.5	12
2013004	R14	5	1/8	49.5	15	14	13.5
2013005	RL14	6	1/8	46	15	14	11.5
2013006	RL14	6	1/4	49	17	18	11.5
2013007	RL14	8	1/8	49.6	15	14	13.8
2013008	RL14	8	1/4	53	17	18	13.8
2013009	RL14	8	3/8	57	20	21	13.8
2013010	RL14	10	1/4	62.8	17	18	16.5
2013011	RL14	10	3/8	65.6	20	21	16

For the rods series D, see page **D2**.15

ROD, MALE SINGLE ROTARY RING (R15)



Code	Ref.	Ø	F	CH	P	L	L1	E	E1
2014101	R15	3	M3	1.5	3	12.2	13.2	5.8	5.8
2014102	R15	3.17	M3	1.5	3	12.2	13.2	5.8	5.8
2014103	R15	3	M5	2	3.5	12.7	13.7	5.8	7
2014104	R15	3.17	M5	2	3.5	12.7	13.7	5.8	7
2L14001	RL15	4	M5	2	4	20.2	18.4	9.5	9.5
2L14020	RL15	4	M7	3	5	20.2	18.5	9.8	9.5
2L14002	RL15	4	1/8	3	6	21.3	24.9	14	9.5
2014003	R15	5	M5	2	4	24	19	9.9	12
2014004	R15	5	1/8	3	6	25	27	14	12
2L14106	RL15	6	M5	2	4	23.5	18.4	9.5	11.3
2L14021	RL15	6	M7	3	5	23.5	18.5	9.8	11.3
2L14005	RL15	6	1/8	3	6	23	24.9	14	11.5
2L14007	RL15	6	1/4	4	8	24.5	29.4	18	11.5
2L14006	RL15	8	1/8	3	6	24.8	24.9	14	13.8
2L14008	RL15	8	1/4	4	8	26.5	29.4	18	13.8
2L14013	RL15	8	3/8	5	9	28.5	35.6	22	13.8
2L14009	RL15	10	1/4	4	8	31.4	29.4	18	16.5
2L14014	RL15	10	3/8	5	9	32.8	35.6	22	16
2014010	RL15	12	1/4	4	8	33	29.4	18	19.5
2014011	RL15	12	3/8	5	9	35.3	35.6	22	19.5
2014012	RL15	12	1/2	8	11	37	40.8	26	19.5
2014015	RL15	14	1/2	8	11	35	40.8	26	22

G BSP

ROD, MALE DUAL ROTARY RING (R16)



Code	Ref.	Ø	F	CH	P	L	L1	E	E1
2L15001	RL16	4	M5	2	4	40.4	18.4	9.5	9.5
2L15020	RL16	4	M7	3	5	40.4	18.5	9.8	9.5
2L15002	RL16	4	1/8	3	6	42.6	24.9	14	9.5
2015003	R16	5	M5	2	4	47.6	18.8	9.9	12
2015004	R16	5	1/8	3	6	49.5	27	14	13.5
2L15106	RL16	6	M5	2	4	47	18.4	9.5	11.3
2L15021	RL16	6	M7	3	5	47	18.5	9.8	11.3
2L15005	RL16	6	1/8	3	6	46	24.9	14	11.5
2L15007	RL16	6	1/4	4	8	49	29.4	18	11.5
2L15006	RL16	8	1/8	3	6	49.6	24.9	14	13.8
2L15008	RL16	8	1/4	4	8	53	29.4	18	13.8
2L15013	RL16	8	3/8	5	9	57	35.6	18	13.8
2L15009	RL16	10	1/4	4	8	62.8	29.4	22	16.5
2L15014	RL16	10	3/8	5	9	65.6	35.6	22	16
2015010	RL16	12	1/4	4	8	66	29.4	18	19.5
2015011	RL16	12	3/8	5	9	70.6	35.6	22	19.5
2015012	RL16	12	1/2	8	11	74	40.8	26	19.5

ROTARY ELBOW, MALE, CYLINDRICAL (R31)



Code	Ref.	Ø	F	CH	E	E1	L	L1	P
2L31001	RL31	4	M5	9	9.9	9.5	18.6	15.3	4
2L31002	RL31	4	1/8	12	14	9.5	18.6	19.1	6
2L31003	RL31	4	1/4	14	18	9.5	18.6	21.1	8
2031004	R31	5	M5	9	9.9	13.5	22.8	17.5	4
2031005	R31	5	1/8	12	14	13.5	22.8	21	6
2031006	R31	5	1/4	14	18	13.5	22.8	24.5	8
2L31007	RL31	6	M5	9	9.9	11.8	21.9	15.3	4
2L31008	RL31	6	1/8	12	14	11.8	21.9	19.1	6
2L31009	RL31	6	1/4	14	18	11.8	21.9	21.1	8
2L31010	RL31	8	1/8	12	14	13.5	25.4	19.1	6
2L31011	RL31	8	1/4	14	18	13.5	25.4	21.1	8
2L31012	RL31	8	3/8	17	22	13.8	23.6	27.1	9
2L31013	RL31	10	1/4	14	18	16	27.2	24.8	8
2L31014	RL31	10	3/8	17	22	16	27.2	27.1	9
2031015	RL31	10	1/2	22	26	16	27.2	30.7	11
2031016	RL31	12	1/4	14	18	20	30	25.6	8
2031017	RL31	12	3/8	17	22	20	30	27.1	9
2031018	RL31	12	1/2	22	26	20	30	30.7	11
2031019	RL31	14	1/2	22	26	21.3	33	32.3	11

ROTARY ELBOW, MALE, CONICAL (R31C)



Code	Ref.	Ø	F	CH	E	E1	L	L1	P
2L31C02	RL31/C	4	1/8	12	13.3	9.5	18.6	19.8	6.2
2L31C03	RL31/C	4	1/4	14	15.4	9.5	18.6	22.6	8.5
2L31C08	RL31/C	6	1/8	12	13.3	11.8	21.9	19.8	6.2
2L31C09	RL31/C	6	1/4	14	15.4	11.8	21.9	22.6	8.5
2L31C10	RL31/C	8	1/8	12	13.3	13.5	25.4	19.8	6.2
2L31C11	RL31/C	8	1/4	14	15.4	13.5	25.4	23.6	8.5
2L31C12	RL31/C	8	3/8	17	19.2	13.8	23.6	27.1	9
2L31C13	RL31/C	10	1/4	14	15.4	16	27.2	26.3	8.5
2L31C14	RL31/C	10	3/8	17	19.2	16	27.2	27.1	9
2031C15	RL31/C	12	3/8	17	19.2	20	30	27.1	9
2031C16	RL31/C	12	1/2	22	24.6	20	30	31.9	11

G BSP

METAL WORK PNEUMATIC

CENTRAL TEE, MALE, CYLINDRICAL, ROTARY (R32)



Code	Ref.	Ø	F	CH	E	E1	L	L1	P
2L32001	RL32	4	M5	9	9.9	9.5	37.2	15.3	4
2L32002	RL32	4	1/8	12	14	9.5	37.2	19.1	6
2L32003	RL32	4	1/4	14	18	9.5	37.2	21.1	8
2032005	R32	5	1/8	12	14	13.5	45.6	19.1	6
2L32004	RL32	6	M5	9	9.9	11.8	43.8	15.3	4
2L32008	RL32	6	1/8	12	14	11.8	43.8	19.1	6
2L32009	RL32	6	1/4	14	18	11.8	43.8	21.1	8
2L32010	RL32	8	1/8	12	14	13.5	50.8	19.1	6
2L32011	RL32	8	1/4	14	18	13.5	50.8	21.1	8
2L32012	RL32	8	3/8	17	22	13.8	47.2	27.1	9
2L32013	RL32	10	1/4	14	18	16	44.4	21.8	8
2L32014	RL32	10	3/8	17	22	16	44.4	27.1	9
2032017	RL32	12	3/8	17	22	20	60	27.1	9
2032018	RL32	12	1/2	22	26	20	60	30.7	11
2032019	RL32	14	1/2	22	26	21.3	66	32.3	11

CENTRAL TEE, MALE, CONICAL, ROTARY (R32C)



Code	Ref.	Ø	F	CH	E	E1	L	L1	P
2L32C02	RL32/C	4	1/8	12	13.3	9.5	37.2	19.8	6.2
2L32C03	RL32/C	4	1/4	14	15.4	9.5	37.2	22.6	8.5
2L32C08	RL32/C	6	1/8	12	13.3	11.8	43.8	19.8	6.2
2L32C09	RL32/C	6	1/4	14	15.4	11.8	43.8	22.6	8.5
2L32C10	RL32/C	8	1/8	12	13.3	13.5	50.8	19.8	6.2
2L32C11	RL32/C	8	1/4	14	15.4	13.5	50.8	23.6	8.5
2L32C12	RL32/C	8	3/8	17	19.2	13.8	47.2	27.1	9
2L32C13	RL32/C	10	1/4	14	15.4	16	44.4	26.3	8.5
2L32C14	RL32/C	10	3/8	17	19.2	16	44.4	27.1	9

LATERAL TEE, MALE, CYLINDRICAL, ROTARY (R38)



Code	Ref.	Ø	F	CH	E	E1	L	L1	P
2L38002	RL38	4	1/8	12	14	9.5	18.6	19.1	6
2038005	R38	5	1/8	12	14	13.5	22.8	19.1	6
2L38008	RL38	6	1/8	12	14	11.5	21.9	19.1	6
2L38009	RL38	6	1/4	14	18	11.5	21.9	21.1	8
2L38010	RL38	8	1/8	12	14	13.5	25.4	19.1	6
2L38011	RL38	8	1/4	14	18	13.5	25.4	22.1	8
2L38013	RL38	10	1/4	14	18	16	27.2	21.8	8
2L38014	RL38	10	3/8	17	22	16	27.2	27.1	9
2038015	RL38	12	3/8	17	22	20	30	27.1	9
2038016	RL38	12	1/2	22	26	20	30	30.7	11

ELBOW, MALE, CONICAL (R39C)



Code	Ref.	Ø	F	CH	E1	L	L1	P
2L39C02	RL39/C	4	1/8	10	9.5	18.6	16	6.2
2L39C08	RL39/C	6	1/8	10	11.8	21.9	16	6.2
2L39C09	RL39/C	6	1/4	10	11.8	21.9	18.5	8.5
2039Z07	RL39/Z	6	12x1 conical	10	11.8	21.9	17.5	7
2039Z08	RL39/Z	6	12x1.25 conical	10	11.8	21.9	17.5	7
2L39C10	RL39/C	8	1/8	10	13.5	25.4	16	6.2
2L39C11	RL39/C	8	1/4	10	13.5	25.4	18.5	8.5
2L39C13	RL39/C	10	1/4	14	16	27.2	22	8.5

G BSP

CROSS FITTING (R40)



Code	Ref.	Ø	D	E	L	L1
2L40001	RL40	4	3	9.5	37.2	18.6
2L40003	RL40	6	4.5	11.3	43.8	21.9
2L40004	RL40	8	6.5	14	50.8	25.4

DUAL ROD SINGLE ROTARY RINGS (R50)



Code	Ref.	Ø	F	CH	E	E1	L	L1	L2	L3	P
2L50001	RL50	4	M5	2	9.5	9.5	20.2	30.3	11.5	6.8	4
2L50002	RL50	4	1/8	3	14	9.5	20.2	40.9	15.5	9.1	6
2033002	R33	5	1/8	5	14	12	25	42	15	10.5	6
2L50007	RL50	6	M5	2	9.5	11.3	23.5	30.3	11.5	6.8	4
2L50008	RL50	6	1/8	3	14	11.3	23.5	40.9	15.5	9.1	6
2L50009	RL50	6	1/4	4	18	11.5	23	47	17.2	10.2	8
2L50010	RL50	8	1/8	3	14	13.8	24.8	40.9	15.5	9.1	6
2L50011	RL50	8	1/4	4	18	13.8	26.5	47	17.2	10.2	8
2L50013	RL50	10	1/4	4	18	16.5	31.4	47	17.2	10.2	8

DUAL ROD DUAL ROTARY RINGS (R51)



Code	Ref.	Ø	F	CH	E	E1	L	L1	L2	L3	P
2L51001	RL51	4	M5	2	9.5	9.5	40.4	30.3	11.5	6.8	4
2L51002	RL51	4	1/8	3	14	9.5	40.4	40.9	15.5	9.1	6
2L51007	RL51	6	M5	2	9.5	11.3	47	30.3	11.5	6.8	4
2L51008	RL51	6	1/8	3	14	11.3	47	40.9	15.5	9.1	6
2L51009	RL51	6	1/4	4	18	11.5	46	47	17.2	10.2	8
2L51010	RL51	8	1/8	3	14	13.8	49.6	40.9	15.5	9.1	6
2L51011	RL51	8	1/4	4	18	13.8	53	47	17.2	10.2	8
2L51013	RL51	10	1/4	4	18	16.5	62.8	47	17.2	10.2	8

TRIPLE ROD SINGLE ROTARY RINGS (R52)



Code	Ref.	Ø	F	CH	E	E1	L	L1	L2	L3	P
2L52002	RL52	4	1/8	3	14	9.5	20.2	56.7	15.5	9.1	6
2L52008	RL52	6	1/8	3	14	11.3	23.5	56.7	15.5	9.1	6
2L52009	RL52	6	1/4	4	18	11.5	23	64.3	17.2	10.2	8
2L52010	RL52	8	1/8	3	14	13.8	24.8	56.7	15.5	9.1	6
2L52011	RL52	8	1/4	4	18	13.8	26.5	64.3	17.2	10.2	8
2L52013	RL52	10	1/4	4	18	16.5	31.4	64.3	17.2	10.2	8

G BSP

TRIPLE ROD DUAL ROTARY RINGS (R53)



Code	Ref.	Ø	F	CH	E	E1	L	L1	L2	L3	P
2L53002	RL53	4	1/8	3	14	9.5	40.2	56.7	15.5	9.1	6
2L53008	RL53	6	1/8	3	14	11.3	47	56.7	15.5	9.1	6
2L53009	RL53	6	1/4	4	18	11.5	46	64.3	17.2	10.2	8
2L53010	RL53	8	1/8	3	14	13.8	49.6	56.7	15.5	9.1	6
2L53011	RL53	8	1/4	4	18	13.8	53	64.3	17.2	10.2	8
2L53013	RL53	10	1/4	4	18	16.5	62.8	64.3	17.2	10.2	8

MALE ROD, SINGLE SWIVEL RING (R54)



Code	Ref.	Ø	F	CH	E	E1	L	L1	P
2L54001	RL54	4	M5	9	9.5	9.5	20.2	18.7	4.5
2L54002	RL54	4	1/8	13	14	9.5	21.3	25.3	6.2
2L54007	RL54	6	M5	9	9.5	11.3	23.5	18.7	4.5
2L54008	RL54	6	1/8	13	14	11.5	23	25.3	6.2
2L54009	RL54	6	1/4	16	18	11.5	24.5	29.2	8
2L54010	RL54	8	1/8	13	14	13.8	24.8	25.3	6.2
2L54011	RL54	8	1/4	16	18	13.8	26.5	29.2	8
2L54012	RL54	8	3/8	20	21	13.8	28.5	35.4	9
2L54013	RL54	10	1/4	16	18	16.5	31.4	29.2	8
2L54014	RL54	10	3/8	20	21	16	32.8	35.4	9
2L54018	RL54	12	1/4	16	18	19.5	33	29.2	8
2L54016	RL54	12	3/8	20	21	19.5	35.3	35.4	9
2L54017	RL54	12	1/2	25	26	19.5	37	40	11
2L54020	RL54	14	1/2	25	26	22	35	40	11

MALE ROD, DUAL SWIVEL RING (R55)



Code	Ref.	Ø	F	CH	E	E1	L	L1	P
2L55001	RL55	4	M5	9	9.5	9.5	40.4	18.7	4.5
2L55002	RL55	4	1/8	13	14	9.5	42.6	25.3	6
2L55007	RL55	6	M5	9	9.5	11.3	47	18.7	4.5
2L55008	RL55	6	1/8	13	14	11.5	46	25.3	6
2L55009	RL55	6	1/4	16	18	11.5	49	29.2	8
2L55010	RL55	8	1/8	13	14	13.8	49.6	25.3	6
2L55011	RL55	8	1/4	16	18	13.8	53	29.2	8
2L55012	RL55	8	3/8	20	21	13.8	57	35.4	9
2L55013	RL55	10	1/4	16	18	16.5	62.8	29.2	8
2L55014	RL55	10	3/8	20	21	16	65.6	35.4	9
2L55018	RL55	12	1/4	16	18	19.5	66	29.2	8
2L55016	RL55	12	3/8	20	21	19.5	70.6	35.4	9
2L55017	RL55	12	1/2	25	26	19.5	74	40	11

G BSP

DUAL ROD, MALE SINGLE SWIVEL RINGS (R56)



Code	Ref.	Ø	F	CH	E	E1	L	L1	L2	L3	P
2L56001	RL56	4	M5	9	9.5	9.5	20.2	30.2	11.5	5.8	4.5
2L56002	RL56	4	1/8	13	14	9.5	21.3	41	15.5	7.8	6
2L56007	RL56	6	M5	9	9.5	11.3	23.5	30.2	11.5	5.8	4.5
2L56008	RL56	6	1/8	13	14	11.5	23	41	15.5	7.8	6
2L56009	RL56	6	1/4	16	18	11.5	24.5	46.4	17.2	8.6	8
2L56010	RL56	8	1/8	13	14	13.8	24.8	41	15.5	7.8	6
2L56011	RL56	8	1/4	16	18	13.8	26.5	46.4	17.2	8.6	8
2L56012	RL56	8	3/8	20	21	13.8	28.5	56.8	21.4	10.7	9
2L56013	RL56	10	1/4	16	18	16.5	31.4	46.4	17.2	8.6	8
2L56014	RL56	10	3/8	20	21	16	32.8	56.8	21.4	10.7	9
2L56016	RL56	12	3/8	20	21	19.5	35.3	56.8	21.4	10.7	9
2L56017	RL56	12	1/2	25	26	19.5	37	64	24	12	11
2L56020	RL56	14	1/2	25	26	22	35	64	24	12	11

DUAL ROD, MALE DUAL SWIVEL RINGS (R57)



Code	Ref.	Ø	F	CH	E	E1	L	L1	L2	L3	P
2L57001	RL57	4	M5	9	9.5	9.5	40.4	30.2	11.5	5.8	4.5
2L57002	RL57	4	1/8	13	14	9.5	42.6	41	15.5	7.8	6
2L57007	RL57	6	M5	9	9.5	11.3	47	30.2	11.5	5.8	4.5
2L57008	RL57	6	1/8	13	14	11.5	46	41	15.5	7.8	6
2L57009	RL57	6	1/4	16	18	11.5	49	46.4	17.2	8.6	8
2L57010	RL57	8	1/8	13	14	13.8	49.6	41	15.5	7.8	6
2L57011	RL57	8	1/4	16	18	13.8	53	46.4	17.2	8.6	8
2L57012	RL57	8	3/8	20	21	13.8	57	56.8	21.4	10.7	9
2L57013	RL57	10	1/4	16	18	16.5	62.8	46.4	17.2	8.6	8
2L57014	RL57	10	3/8	20	21	16	65.6	56.8	21.4	10.7	9
2L57016	RL57	12	3/8	20	21	19.5	70.6	56.8	21.4	10.7	9
2L57017	RL57	12	1/2	25	26	19.5	74	64	24	12	11

TAPERED THREAD BRASS FITTINGS WITH PTFE

Metal Work can supply fittings with a tapered thread coated in polytetrafluorethylene. This system provides the pneumatic seal between the fitting and the female thread. It is therefore not necessary to add other sealing systems during assembly, such as adhesives or Teflon tape. This significantly reduces assembly times. The physical and technical features of the material used ensure that the properties are maintained through time and in a wide range of operating temperatures.
This coating can be used with push-in fittings type R1C, R31C, R32C and R39C that have a G1/8 to G1/2 taper thread.

KEY TO CODES
Fittings with a PTFE thread have the same code as the standard fitting, with the addition of the suffix **T**.
For example RL1C 8 3/8 fitting has code **2L01C11**, so the PTFE version has code **2L01C11T**.

UNF NPT

BRASS PUSH-IN FITTINGS FOR INCH TUBES AND UNF or NPT THREAD

METAL WORK PNEUMATIC

STRAIGHT, MALE (RU1)



Code	Ref.	Ø	F	Ch Inc	Ch mm	Ch1 Inc	Ch1 mm	P	L	D	E
2U01A02	RU1	1/8	10-32 UNF	–	–	5/64	2	3.5	13	2	5.9
2U01A03	RU1	1/8	1/8 NPT	5/16	8	5/64	2	6	13.7	2	13
2U01001	RU1	5/32	10-32 UNF	–	–	5/64	2	3.5	20.3	2	9
2U01002	RU1	5/32	1/8 NPT	0.394	10	0.118	3	6	18	3	13
2U01003	RU1	5/32	1/4 NPT	0.394	10	0.118	3	8	19.8	3	16.4
2U01000	RU1	1/4	10-32 UNF	–	–	5/64	2	3.5	21.9	2	11
2U01007	RU1	1/4	1/8 NPT	0.472	12	0.157	4	6	21.6	4	13
2U01008	RU1	1/4	1/4 NPT	0.472	12	0.157	4	8	20.3	4	16.4
2U01020	RU1	1/4	3/8 NPT	0.472	12	0.157	4	9	21.3	4	20
2U01009	RU1	5/16	1/8 NPT	0.512	13	0.197	5	6	25.4	5	14
2U01010	RU1	5/16	1/4 NPT	0.551	14	0.236	6	8	24.4	6	16.4
2U01011	RU1	5/16	3/8 NPT	0.551	14	0.236	6	9	22.8	6	20
2U01012	RU1	3/8	1/4 NPT	5/8	16	0.276	7	8	29.2	7	17.7
2U01013	RU1	3/8	3/8 NPT	5/8	16	5/16	8	9	26.5	8	20
2U01021	RU1	3/8	1/2 NPT	5/8	16	5/16	8	11	30	8	24.5
2U01014	RU1	1/2	3/8 NPT	0.866	22	0.394	10	9	32.5	10	20
2U01015	RU1	1/2	1/2 NPT	0.866	22	0.394	10	11	30	10	24.5

STRAIGHT, FEMALE (RU2)



Code	Ref.	Ø	F	Ch Inc	Ch mm	P	L	D	E
2U02A03	RU2	1/8	1/8 NPT	5/16	8	7	20.8	2.3	14
2U02001	RU2	5/32	1/8 NPT	0.394	10	7	26.2	3	14
2U02002	RU2	5/32	1/4 NPT	0.394	10	7	28.6	3	17
2U02005	RU2	1/4	1/8 NPT	0.472	12	7	27.1	5	14
2U02006	RU2	1/4	1/4 NPT	0.472	12	7	29.3	5	17
2U02007	RU2	5/16	1/8 NPT	0.512	13	7	28.1	7	14
2U02008	RU2	5/16	1/4 NPT	0.551	14	7	30	7	17

STRAIGHT, INTERMEDIATE (RU3)



Code	Ref.	Ø	F	L	D
2003A01	R3	1/8	M8x0.75	18.4	2
2L03001	RL3	5/32	M11x1	30.6	2.5
2U03003	RU3	1/4	M13x1	33	4.5
2L03004	RL3	5/16	M15x1	35.7	6.5
2U03005	RU3	3/8	M17x1	39.8	8
2U03006	RU3	1/2	M22x1	43.2	10

ELBOW, INTERMEDIATE (RU4)



Code	Ref.	Ø	L	D	E
2004A01	R4	1/8	10.4	2	6.3
2L04001	RL4	5/32	16.7	2.5	9.5
2U04003	RU4	1/4	19	4.5	11.5
2L04004	RL4	5/16	21.3	6.5	13.5
2U04005	RU4	3/8	23.6	8	15.5
2U04006	RU4	1/2	27.2	11	20.5

UNF NPT

TEE, INTERMEDIATE (RU5)



Code	Ref.	Ø	L	L1	D	E
2005A01	R5	1/8	10.4	20.8	2	6.3
2L05001	RL5	5/32	16.7	33.4	2.5	9.5
2U05003	RU5	1/4	19	38	4.5	11.5
2L05004	RL5	5/16	21.3	42.6	6.5	13.5
2U05005	RU5	3/8	23.6	47.2	8	15.5
2U05006	RU5	1/2	27.2	54.4	11	20.5

THREADED ADAPTER (RU6)



				Ch					
Code	Ref.	Ø	F	Inc	mm	P	L	D	E
2U06A01	RU6	1/8	10-32 UNF	0.197	5	3.5	18.6	2	5.8
2U06A02	RU6	1/8	1/8 NPT	0.472	12	6	22.6	2	13
2U06001	RU6	5/32	10-32 UNF	5/16	8	4	25.2	2	9
2U06002	RU6	5/32	1/8 NPT	0.472	12	6	27.7	2.5	13
2U06003	RU6	5/32	1/4 NPT	0.551	14	8	30.2	2.5	16.4
2U06000	RU6	1/4	10-32 UNF	5/16	8	4	25.7	2	9
2U06007	RU6	1/4	1/8 NPT	0.472	12	6	28.2	4	13
2U06008	RU6	1/4	1/4 NPT	0.551	14	8	30.5	4	16.4
2U06020	RU6	1/4	3/8 NPT	0.669	17	9	33.3	4	20
2U06009	RU6	5/16	1/8 NPT	0.472	12	6	29.2	5.5	13
2U06010	RU6	5/16	1/4 NPT	0.551	14	8	31.5	6	16.4
2U06011	RU6	5/16	3/8 NPT	0.669	17	9	34.3	6	20
2U06012	RU6	3/8	1/4 NPT	0.551	14	8	34.8	7.3	16.4
2U06013	RU6	3/8	3/8 NPT	0.669	17	9	37.6	7.3	20
2U06022	RU6	3/8	1/2 NPT	0.748	19	11	41.2	7.3	24.5
2U06014	RU6	1/2	3/8 NPT	0.669	17	9	39.4	10.5	20
2U06015	RU6	1/2	1/2 NPT	0.748	19	11	43.7	10.5	24.5

EXTENSION (RU7)



Code	Ref.	Ø	L	D
2007001	R7	5/32	34	2
2U07003	RU7	1/4	35.5	4
2L07004	RL7	5/16	37.5	6
2U07005	RU7	3/8	44	7.3
2U07006	RU7	1/2	50.8	10.5

REDUCER (RU8)



Code	Ref.	Ø 1	Ø 2	L	D	E
2008A02	R8	5/32	1/8	18.4	2	5
2U08002	RU8	1/4	5/32	30.6	2.5	11
2L08004	RL8	5/16	5/32	33	4.5	12
2U08006	RU8	5/16	1/4	35.7	6.5	13.5
2U08007	RU8	3/8	1/4	39.8	8	17
2U08010	RU8	1/2	1/4	43.2	10	19
2U08011	RU8	1/2	5/16	35.9	7	14.5
2U08015	RU8	1/2	3/8	41.3	8	16

UNF NPT

METAL WORK PNEUMATIC

PLUG (RU9)



Code	Ref.	Ø	L
2L10A01	RL9T	1/8	19.6
2L10001	RL9T	5/32	27
2U10003	RU9	1/4	29.8
2L10004	RL9T	5/16	33.6
2U10005	RU9	3/8	36.8
2U10006	RU9	1/2	39.1

STRAIGHT, INTERMEDIATE, BULKMTAD (RU10)



Code	Ref.	Ø	F	Ch Inc	Ch mm	L	D	lmax
2011A01	R10	1/8	M8x0.75	0.394	10	18.4	2	5
2L11001	RL10	5/32	M11x1	0.512	13	30.6	2.5	11
2U11003	RU10	1/4	M13x1	5/8	16	33	4.5	12
2L11004	RL10	5/16	M15x1	0.669	17	35.7	6.5	13.5
2U11005	RU10	3/8	M17x1	0.787	20	39.8	8	17
2U11006	RU10	1/2	M22x1	0.984	25	43.2	10	19

ROD, MALE SINGLE ROTARY RING (RU15)



Code	Ref.	Ø	F	Ch Inc	Ch mm	P	L	L1	E	E1
2U14104	RU15	1/8	10-32 UNF	5/64	2	3.5	12.7	13.7	5.8	7
2U14001	RU15	5/32	10-32 UNF	5/64	2	3.5	20.2	18.8	9.5	9.5
2U14002	RU15	5/32	1/8 NPT	0.118	3	6	21.3	25.6	14	9.5
2U14106	RU15	1/4	10-32 UNF	5/64	2	3.5	23.5	18.8	9.5	12
2U14005	RU15	1/4	1/8 NPT	0.118	3	6	23	25.6	14	12
2U14007	RU15	1/4	1/4 NPT	5/32	4	8	24.5	29.8	18	12
2U14006	RU15	5/16	1/8 NPT	0.118	3	6	24.8	25.6	14	13.8
2U14008	RU15	5/16	1/4 NPT	5/32	4	8	26.5	29.8	18	13.8
2U14013	RU15	5/16	3/8 NPT	0.197	5	9	28.5	35.6	22	13.8
2U14009	RU15	3/8	1/4 NPT	5/32	4	8	31.7	29.8	18	16.5
2U14014	RU15	3/8	3/8 NPT	0.197	5	9	33.1	35.6	22	16
2U14011	RU15	1/2	3/8 NPT	0.197	5	9	36.6	35.6	22	20
2U14012	RU15	1/2	1/2 NPT	0.315	8	11	38.1	40.8	26	20

ROD, MALE DUAL ROTARY RING (RU16)



Code	Ref.	Ø	F	Ch Inc	Ch mm	P	L	L1	E	E1
2U15001	RU16	5/32	10-32 UNF	5/64	2	3.5	40.4	18.8	9.5	9.5
2U15002	RU16	5/32	1/8 NPT	5/64	2	6	42.6	25.6	14	9.5
2U15106	RU16	1/4	10-32 UNF	0.118	3	3.5	47	18.8	9.5	12
2U15005	RU16	1/4	1/8 NPT	5/64	2	6	46	25.6	14	12
2U15007	RU16	1/4	1/4 NPT	0.118	3	8	49	29.8	18	12
2U15006	RU16	5/16	1/8 NPT	5/32	4	6	49.6	25.6	14	13.8
2U15008	RU16	5/16	1/4 NPT	0.118	3	8	53	29.8	18	13.8
2U15013	RU16	5/16	3/8 NPT	5/32	4	9	57	35.6	22	13.8
2U15009	RU16	3/8	1/4 NPT	0.197	5	8	63.4	29.8	18	16.5
2U15014	RU16	3/8	3/8 NPT	5/32	4	9	66.2	35.6	22	16
2U15011	RU16	1/2	3/8 NPT	0.197	5	9	73.2	35.6	22	20
2U15012	RU16	1/2	1/2 NPT	0.315	8	11	78.2	40.8	26	20

UNF NPT

ROTARY ELBOW, MALE (RU31)



Code	Ref.	Ø	F	Ch Inc	Ch mm	P	L	L1	E	E1
2U31001	RU31	5/32	10-32 UNF	0.354	9	4	18.6	15.3	9.9	9.5
2U31002	RU31	5/32	1/8 NPT	0.472	12	6	18.6	19.1	13	9.5
2U31003	RU31	5/32	1/4 NPT	0.551	14	8	18.6	21.1	16.4	9.5
2U31007	RU31	1/4	10-32 UNF	0.354	9	4	21.9	15.3	9.9	11.8
2U31008	RU31	1/4	1/8 NPT	0.472	12	6	21.9	19.1	13	11.8
2U31009	RU31	1/4	1/4 NPT	0.551	14	8	21.9	21.1	16.4	11.8
2U31010	RU31	5/16	1/8 NPT	0.472	12	6	25.4	19.1	13	13.5
2U31011	RU31	5/16	1/4 NPT	0.551	14	8	25.4	21.1	16.4	13.5
2U31012	RU31	5/16	3/8 NPT	0.669	17	9	23.6	27.1	20	13.5
2U31013	RU31	3/8	1/4 NPT	0.551	14	8	27.5	24.5	16.4	16
2U31014	RU31	3/8	3/8 NPT	0.669	17	9	27.5	27.1	20	16
2U31015	RU31	3/8	1/2 NPT	0.866	22	11	27.5	30	24.5	16
2U31017	RU31	1/2	3/8 NPT	0.67	17	9	30.2	28.2	20	20
2U31018	RU31	1/2	1/2 NPT	0.866	22	11	30.2	30.5	24.5	20

CENTRAL TEE, MALE, ROTARY (RU32)



Code	Ref.	Ø	F	Ch Inc	Ch mm	P	L	L1	E	E1
2U32002	RU32	5/32	1/8 NPT	0.472	12	6	37.2	19.1	13	9.5
2U32003	RU32	5/32	1/4 NPT	0.551	14	8	37.2	21.1	16.4	9.5
2U32007	RU32	1/4	10-32 UNF	0.354	9	4	45	15.3	9.9	11.8
2U32008	RU32	1/4	1/8 NPT	0.472	12	6	45	19.1	13	11.8
2U32009	RU32	1/4	1/4 NPT	0.551	14	8	45	21.1	16.4	11.8
2U32010	RU32	5/16	1/8 NPT	0.472	12	6	50.8	19.1	13	13.5
2U32011	RU32	5/16	1/4 NPT	0.551	14	8	50.8	21.1	16.4	13.5
2U32012	RU32	5/16	3/8 NPT	0.669	17	9	47.2	27.1	20	13.5
2U32013	RU32	3/8	1/4 NPT	0.551	14	8	55	24.5	16.4	16
2U32014	RU32	3/8	3/8 NPT	0.669	17	9	55	27.1	20	16
2U32015	RU32	3/8	1/2 NPT	0.866	22	11	55	30	24.5	16
2U32017	RU32	1/2	3/8 NPT	0.67	17	9	60.4	28.2	20	20
2U32018	RU32	1/2	1/2 NPT	0.866	22	11	60.4	30.5	24.5	20

MALE ROD, SINGLE SWIVEL RING (RU54)



Code	Ref.	Ø	F	Ch Inc	Ch mm	P	L	L1	E	E1
2U54001	RU54	5/32	10-32 UNF	0.354	9	4.5	20.2	18.7	9.5	9.5
2U54002	RU54	5/32	1/8 NPT	0.512	13	6.2	21.3	25.3	14	9.5
2U54007	RU54	1/4	10-32 UNF	0.354	9	4.5	23.5	18.7	9.5	11.8
2U54008	RU54	1/4	1/8 NPT	0.512	13	6.2	23	25.3	14	11.8
2U54009	RU54	1/4	1/4 NPT	5/8	16	8	24.5	29.2	18	11.8
2U54010	RU54	5/16	1/8 NPT	0.512	13	6.2	24.8	25.3	14	13.8
2U54011	RU54	5/16	1/4 NPT	5/8	16	8	26.5	29.2	18	13.8
2U54012	RU54	5/16	3/8 NPT	0.787	20	9	28.5	35.4	21	13.8
2U54013	RU54	3/8	1/4 NPT	5/8	16	8	31.7	29.2	18	16
2U54014	RU54	3/8	3/8 NPT	0.787	20	9	33.1	35.4	21	16
2U54016	RU54	1/2	3/8 NPT	0.787	20	10	36.6	35.4	21	20.2
2U54017	RU54	1/2	1/2 NPT	0.984	25	12.5	38.1	40	26	20.2

UNF NPT

METAL WORK PNEUMATIC

MALE ROD, DUAL SWIVEL RING (RU55)



Code	Ref.	Ø	F	Ch Inc	Ch mm	P	L	L1	E	E1
2U55001	RU55	5/32	10-32 UNF	0.354	9	4.5	40.4	18.7	9.5	9.5
2U55002	RU55	5/32	1/8 NPT	0.512	13	6.2	42.6	25.3	14	9.5
2U55007	RU55	1/4	10-32 UNF	0.354	9	4.5	47	18.7	9.5	11.8
2U55008	RU55	1/4	1/8 NPT	0.512	13	6.2	46	25.3	14	11.8
2U55009	RU55	1/4	1/4 NPT	5/64	16	8	49	29.2	18	11.8
2U55010	RU55	5/16	1/8 NPT	0.512	13	6.2	49.6	25.3	14	13.8
2U55011	RU55	5/16	1/4 NPT	5/64	16	8	53	29.2	18	13.8
2U55012	RU55	5/16	3/8 NPT	0.787	20	9	57	35.4	21	13.8
2U55013	RU55	3/8	1/4 NPT	5/64	16	8	63.4	29.2	18	16
2U55014	RU55	3/8	3/8 NPT	0.787	20	9	66.2	35.4	21	16
2U55016	RU55	1/2	3/8 NPT	0.787	20	10	73.2	35.4	21	20.2
2U55017	RU55	1/2	1/2 NPT	0.984	25	12.5	76.2	40	26	20.2

DUAL ROD, MALE SINGLE SWIVEL RINGS (RU56)



Code	Ref.	Ø	F	Ch Inc	Ch mm	P	L	L1	L2	L3	E	E1
2U56001	RU56	5/32	10-32 UNF	0.354	9	4.5	20.2	30.2	11.5	5.8	9.5	9.5
2U56002	RU56	5/32	1/8 NPT	0.512	13	6.2	21.3	40.6	15.5	7.75	14	9.5
2U56007	RU56	1/4	10-32 UNF	0.354	9	4.5	23.5	30.2	11.5	5.8	9.5	11.8
2U56008	RU56	1/4	1/8 NPT	0.512	13	6.2	23	40.6	15.5	7.75	14	11.8
2U56009	RU56	1/4	1/4 NP	5/8	16	8	24.5	46.4	17.2	8.6	18	11.8
2U56010	RU56	5/16	1/8 NPT	0.512	13	6.2	24.8	40.6	15.5	7.75	14	13.8
2U56011	RU56	5/16	1/4 NPT	5/8	16	8	26.5	46.4	17.2	8.6	18	13.8
2U56012	RU56	5/16	3/8 NPT	0.787	20	9	28.5	56.8	21.4	10.7	21	13.8
2U56013	RU56	3/8	1/4 NPT	5/8	16	8	31.7	46.4	17.2	8.6	18	16
2U56014	RU56	3/8	3/8 NPT	0.787	20	9	33.1	56.8	21.4	10.7	21	16
2U56016	RU56	1/2	3/8 NPT	0.787	20	10	36.6	56.8	21.4	10.7	21	20.2
2U56017	RU56	1/2	1/2 NPT	0.984	25	12.5	38.1	64	24	12	26	20.2

DUAL ROD, MALE DUAL SWIVEL RINGS (RU57)



Code	Ref.	Ø	F	Ch Inc	Ch mm	P	L	L1	L2	L3	E	E1
2U57001	RU57	5/32	10-32 UNF	0.354	9	4.5	40.4	30.2	11.5	5.8	9.5	9.5
2U57002	RU57	5/32	1/8 NPT	0.512	13	6.2	42.6	40.6	15.5	7.75	14	9.5
2U57007	RU57	1/4	10-32 UNF	0.354	9	4.5	47	30.2	11.5	5.8	9.5	11.8
2U57008	RU57	1/4	1/8 NPT	0.512	13	6.2	46	40.6	15.5	7.75	14	11.8
2U57009	RU57	1/4	1/4 NPT	5/8	16	8	49	46.4	17.2	8.6	18	11.8
2U57010	RU57	5/16	1/8 NPT	0.512	13	6.2	49.6	40.6	15.5	7.75	14	13.8
2U57011	RU57	5/16	1/4 NPT	5/8	16	8	53	46.4	17.2	8.6	18	13.8
2U57012	RU57	5/16	3/8 NPT	0.787	20	9	57	56.8	21.4	10.7	21	13.8
2U57013	RU57	3/8	1/4 NPT	5/8	16	8	63.4	46.4	17.2	8.6	18	16
2U57014	RU57	3/8	3/8 NPT	0.787	20	9	66.2	56.8	21.4	10.7	21	16
2U57016	RU57	1/2	3/8 NPT	0.787	20	10	73.2	56.8	21.4	10.7	21	20.2
2U57017	RU57	1/2	1/2 NPT	0.984	25	12.5	76.2	64	24	12	26	20.2

ADAPTORS AND PLUGS FOR G (BSPP) AND NPT THREAD

AU5/G - NPT FEMALE G (BSPP) MALE ADAPTORS



Code	Ref.	F	F1	Ch Inc	Ch mm	P	P1	L
2105100U	AU5/G	M5	10-32 UNF	5/16	8	4	4.5	11.8
2105101U	AU5/G	G 1/8	1/8 NPT	0.551	14	6	7	18.5
2105103U	AU5/G	G 1/4	1/4 NPT	0.669	17	8	7	22
2105105U	AU5/G	G 3/8	3/8 NPT	0.866	22	9	9.5	26.2
2105107U	AU5/G	G 1/2	1/2 NPT	0.984	25	11	9.5	29.2

AU5/N - NPT MALE G (BSPP) FEMALE ADAPTORS



Code	Ref.	F	F1	Ch Inc	Ch mm	P	P1	L
2105200U	AU5/N	10-32 UNF	M5	5/16	8	4	4.5	11.8
2105201U	AU5/N	1/8 NPT	G 1/8	0.551	14	6	6.7	18.5
2105203U	AU5/N	1/4 NPT	G 1/4	0.669	17	8	8	23
2105205U	AU5/N	3/8 NPT	G 3/8	0.866	22	9	10	26.7
2105207U	AU5/N	1/2 NPT	G 1/2	0.984	25	11	11	31.2

AU7 - PLUG MALE NPT



Code	Ref.	F	Ch Inc	Ch mm	P	L	E
2107000U	AU7	10-32 UNF	0.079	2	4	6.5	8
2107001U	AU7	1/8 NPT	0.118	3	6	8.5	13
2107002U	AU7	1/4 NPT	0.236	6	8	11	16.4
2107003U	AU7	3/8 NPT	5/16	8	9	12.5	20
2107004U	AU7	1/2 NPT	0.394	10	11	14.5	24.5

IDENTIFICATION MARK FOR AU5

An identification mark near the NPT thread is used to distinguish it from the G (BSPP) thread.

AU5/G



AU5/N



EXAMPLE

TRANSFORMATION FROM M5 TO 10-32 UNF

①
REGTRONIC M5 with display code **5520500**
REGTRONIC M5 remote control code **5520502**
②
AU5/G M5 10/32 UNF code **2105100U**



TRANSFORMATION FROM 1/4 G (BSPP) TO 1/4 NPT

①
REGTRONIC G1/4 with display code **5522500**
REGTRONIC G1/4 remote control code **5522502**
②
REG. GS G1/4 02 code **5512200**
REG. GS G1/4 04 code **5512300**
REG. GS G1/4 08 code **5512400**
③
AU5/G G1/4 - 1/4 NPT code **2105103U**

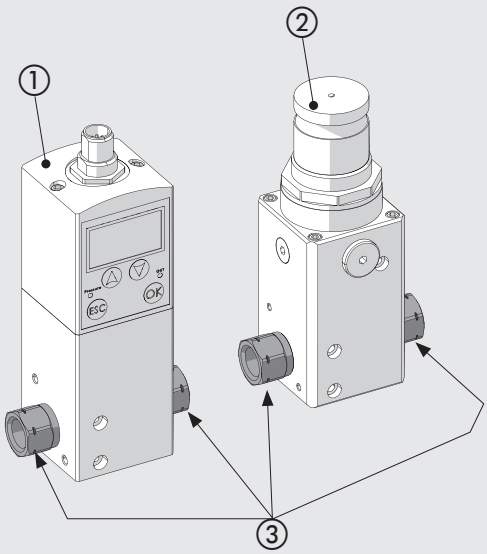

TRANSFORMATION FROM 1/8 G (BSPP) TO 1/8 NPT

①
REGTRONIC G1/8 with display code **5521500**
REGTRONIC G1/8 remote control code **5521502**
②
REG. GS G1/8 02 code **5511200**
REG. GS G1/8 04 code **5511300**
REG. GS G1/8 08 code **5511400**
③
AU5/G G1/8 - 1/8 NPT code **2105101U**

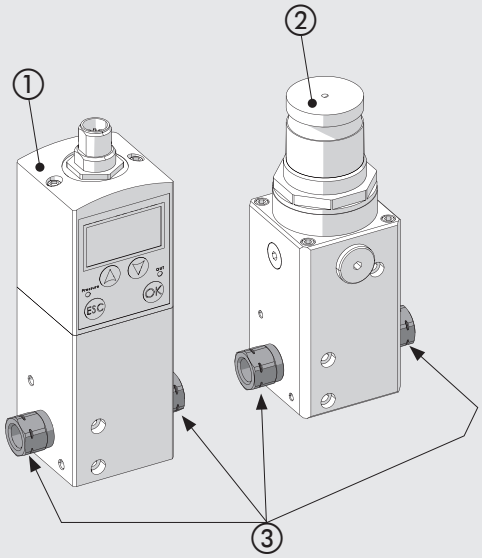

①
Digital pressure switch series 600 code **9000600**
②
AU5/G G1/8 - 1/8 NPT code **2105101U**



①
Digital pressure switch series 640 code **9000640**
②
AU5/N 1/8 NPT - G1/8 code **2105201U**



NOTES

TECHNOPOLYMER PUSH-IN FITTINGS FOR mm TUBES AND G (BSP) or METRIC THREAD

STRAIGHT, INTERMEDIATE, TECHNOPOLYMER (R19)



Code	Ref.	Ø1	Ø2	E	L	D	F
2019001	RL19	4	4	9.2	30.4	3	3.3
2019002	R19	5	5	14	33.5	4	–
2019003	RL19	6	6	11.3	33	5	3.3
2019004	RL19	8	8	13.8	36.2	6.5	3.3
2019005	RL19	10	10	16	38	8.5	3.3
2019006	RL19	12	12	19.5	40	10.5	3.3
2019303	RL19	6	4	11.3	32.7	3	3.3
2019304	RL19	8	6	13.8	36.1	5	3.3
2019305	RL19	10	8	16	37.8	6.5	3.3
2019306	RL19	12	10	19.5	40	8.5	3.3

MALE ROD, SINGLE ROTARY RING, TECHNOPOLYMER (R20)



Code	Ref.	Ø	F	Ch	P	L	L1	L2	E	E1
2020001	RL20	4	M5	2	4	18.7	18.4	9.1	8	9.2
2020002	RL20	4	1/8	3	6	21	24.9	12.3	14	9.2
2020003	R20	5	M5	2	4	21.5	18.8	8.5	9.9	13.5
2020004	R20	5	1/8	3	6	23	27	10.5	14	13.5
2020016	RL20	6	M5	2	4	20.8	18.4	9.1	8	11.3
2020005	RL20	6	1/8	3	6	22.3	24.9	12.3	14	11.3
2020007	RL20	6	1/4	4	8	24.3	29.4	14.3	18	11.3
2020006	RL20	8	1/8	3	6	25.6	24.9	12.3	14	13.8
2020008	RL20	8	1/4	4	8	27.2	29.4	14.3	18	13.8
2020009	RL20	10	1/4	4	8	28.6	29.4	14.3	18	16
2L20017	RL20	10	3/8	5	9	30.5	35.6	15.3	22	16
2020010	RL20	12	1/4	4	8	31	29.4	14.3	18	19.5
2020011	RL20	12	3/8	5	9	32.4	35.6	17.5	22	19.5
2020012	RL20	12	1/2	8	11	34	40.8	19.2	26	19.5

MALE ROD, DUAL ROTARY RING, TECHNOPOLYMER (R20/A)



Code	Ref.	Ø	F	Ch	P	L	L1	L2	E	E1
2020A01	R20/A	4	M5	2	4	40	16.8	6.5	9.9	10.9
2020A02	R20/A	4	1/8	3	6	45	27	10.5	14	12.5
2020A03	R20/A	5	M5	2	4	43	18.8	8.5	9.9	13.5
2020A04	R20/A	5	1/8	3	6	46	27	10.5	14	13.5
2020A05	R20/A	6	1/8	3	6	45	27	10.5	14	15
2020A07	R20/A	6	1/4	4	8	48	31.5	11.5	18	15
2020A06	R20/A	8	1/8	3	6	51	27	10.5	14	16.3
2020A08	R20/A	8	1/4	4	8	54	31.5	11.5	18	16.3
2020A09	R20/A	10	1/4	4	8	64	31.5	11.5	18	18.5
2020A10	R20/A	12	1/4	4	8	64	31.5	11.5	18	21
2020A11	R20/A	12	3/8	5	9	68	36	13.5	22	21
2020A12	R20/A	12	1/2	8	11	72	42	16.2	26	21

ELBOW, INTERMEDIATE, TECHNOPOLYMER (R21)



Code	Ref.	Ø	L	D	E	I	F
2L21001	RL21	4	16.7	2.5	9.2	7.2	3.3
2021002	R21	5	20	3.5	13.5	–	–
2L21003	RL21	6	19	4.2	11.3	8.2	3.3
2L21004	RL21	8	21.4	6.2	13.8	9.6	3.3
2021005	RL21	10	24	8.5	16	10.9	3.3
2021006	RL21	12	25.8	10.5	19.5	12.5	3.3

G BSP

INTERMEDIATE TEE, TECHNOPOLYMER (R22)



Code	Ref.	Ø	L	L1	D	E	I	I1	F
2L22001	RL22	4	16.7	33.4	2.5	9.2	7.2	14.4	3.3
2022002	R22	5	20	40	3.5	13.5	–	–	–
2L22003	RL22	6	19	38	4.2	11.3	8.2	16.4	3.3
2L22004	RL22	8	21.4	42.8	6.2	13.8	9.6	19.2	3.3
2022005	RL22	10	24	48	8.5	16	10.9	21.8	3.3
2022006	RL22	12	25.8	51.6	10.5	19.5	12.5	25	3.3

Y TECHNOPOLYMER (R23)



Code	Ref.	Ø1	Ø2	L	L1	E1	ØE2	I	F	L2
2023001	RL23	4	4	32.9	5	9.2	9.2	14.8	3.3	19.2
2023002	R23	5	5	35.5	6.5	13.5	13.5	–	–	26.5
2023003	RL23	6	6	35.5	5.8	11.3	11.3	15	3.3	22.8
2023004	RL23	8	8	39.5	7.2	13.8	13.8	15.8	3.3	28.2
2L23005	RL23	10	10	43.1	8.3	16	16	17.4	3.3	32.6
2L23006	RL23	12	12	48	10	19.5	19.5	18	3.3	39.5
2L23301	RL23	6	4	34.2	5	11.3	9.2	14.8	3.3	19.2
2L23303	RL23	8	6	37.8	5.8	13.8	11.3	15	3.3	22.8
2L23306	RL23	10	8	40.4	7.2	16	13.8	15.8	3.3	28.2
2L23309	RL23	12	10	44.2	8.3	19.5	16	17.4	3.3	32.6

Y TECHNOPOLYMER, THREADED INPUT (R23/M)



Code	Ref.	Ø	F	L	L1	L2	I	Ch	P	E	F1
2L23401	RL23/M	4	M5	38.7	5	19.2	14.8	9	4	9.9	3.3
2L23402	RL23/M	4	1/8	42.6	5	19.2	14.8	12	6	14	3.3
2L23403	RL23/M	4	1/4	46.6	5	19.2	14.8	14	8	18	3.3
2L23406	RL23/M	6	1/8	44.9	5.75	22.8	15	12	6	14	3.3
2L23407	RL23/M	6	1/4	47.9	5.75	22.8	15	14	8	18	3.3
2L23409	RL23/M	8	1/8	48.4	7.2	28.2	15.8	14	6	15	3.3
2L23410	RL23/M	8	1/4	52.8	7.2	28.2	15.8	14	8	18	3.3
2L23412	RL23/M	8	3/8	54.4	7.2	28.2	15.8	17	9	22	3.3
2L23413	RL23/M	10	1/4	53.8	8.3	32.6	17.4	16	8	18	3.3
2L23415	RL23/M	10	3/8	56	8.3	32.6	17.4	17	9	20	3.3
2L23419	RL23/M	12	3/8	62	10	39.5	18	19	9	22	3.3
2L23420	RL23/M	12	1/2	62.3	10	39.5	18	22	11	26	3.3

Y BRANCH WITH ADAPTER, TECHNOPOLYMER (R24)



Code	Ref.	Ø1	Ø2	L	L1	L2	E1	E2	I	F
2024001	RL24	4	4	46.9	5	29.7	9.2	9.2	14.8	3.3
2024003	RL24	6	6	49.7	5.75	32	11.3	11.3	15	3.3
2L24004	RL24	8	8	55.1	7.2	35.9	13.8	13.8	15.8	3.3
2L24005	RL24	10	10	63.1	8.3	39.2	16	16	17.4	3.3
2L24006	RL24	12	12	70.5	10	44	19.5	19.5	18	3.3
2L24301	RL24	6	4	48.4	5	30.7	9.2	11.3	14.8	3.3
2L24303	RL24	8	6	53.4	5.75	34.2	11.3	13.8	15	3.3
2L24306	RL24	10	8	60.4	7.2	36.6	13.8	16	15.8	3.3
2L24309	RL24	12	10	66.7	8.3	40.2	16	19.5	17.4	3.3

G BSP

METAL WORK PNEUMATIC

TECHNOPOLYMER PARALLEL Y, THREADED INPUT (R25)

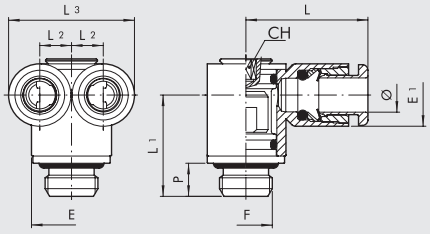

Code	Ref.	Ø	F	L	L1	L2	L3	E	E1	CH	P
2L25001	RL25	4	M5	17.7	13.1	5	19.2	8	9.2	2	4
2L25002	RL25	4	M7	17.7	14.6	5	19.2	9.8	9.2	3	5
2L25003	RL25	4	1/8	17.7	16.5	5	19.2	13	9.2	3	6
2L25004	RL25	6	1/8	23	18.3	5.75	22.8	14	11.3	3	6
2L25005	RL25	6	1/4	23	21.2	5.75	22.8	16.4	11.3	4	8
2L25008	RL25	8	1/4	25.8	22.2	7.2	28.2	18	13.8	4	8
2L25009	RL25	8	3/8	25.8	23.8	7.2	28.2	20	13.8	5	9

SINGLE RING, TECHNOPOLYMER (R28)



Code	Ref.	Ø	Ø 1	L	L1	E	E1
2012102	R28	4	1/8	22.5	17	15	12.5
2012104	R28	5	1/8	23	17	15	13.5
2012106	R28	6	1/8	22.5	17	15	15
2012107	R28	6	1/4	24	19	18	15
2012108	R28	8	1/8	25.5	17	15	16.5
2012109	R28	8	1/4	27	19	18	16.5
2012110	R28	8	3/8	29	22	21.5	16.5
2012111	R28	10	1/4	32	19	18	18.5
2012112	R28	10	3/8	32	22	21.5	18.5
2012113	R28	12	1/4	32	19	18	21
2012114	R28	12	3/8	34	22	21.5	21
2012115	R28	12	1/2	36	24	26	21

For the rods series D, see page **D2**.15

DUAL RING, TECHNOPOLYMER (R29)



Code	Ref.	Ø	Ø 1	L	L1	E	E1
2013102	R29	4	1/8	45	17	15	12.5
2013104	R29	5	1/8	46	17	15	13.5
2013106	R29	6	1/8	45	17	15	15
2013107	R29	6	1/4	48	19	18	15
2013108	R29	8	1/8	51	17	15	16.5
2013109	R29	8	1/4	54	19	18	16.5
2013110	R29	8	3/8	58	22	21.5	16.5
2013111	R29	10	1/4	64	19	18	18.5
2013112	R29	10	3/8	64	22	21.5	18.5
2013113	R29	12	1/4	64	19	18	21
2013114	R29	12	3/8	68	22	21.5	21
2013115	R29	12	1/2	72	24	26	21

For the rods series D, see page **D2**.15

ROTARY ELBOW, MALE, TECHNOPOLYMER (R34)



Code	Ref.	Ø	F	Ch	P	L	L1	E	E1
2L34001	RL34	4	M5	8	4	16.4	15.2	9	9.2
2L34020	RL34	4	M7	8	5	16.4	16.2	9.8	9.2
2L34002	RL34	4	1/8	12	6	16.4	17.2	14	9.2
2L34003	RL34	4	1/4	14	8	16.4	20.1	18	9.2
2L34006	RL34	6	M5	8	4	18	16.3	9	11.3
2L34021	RL34	6	M7	9	5	19	17.5	9.9	11.3
2L34007	RL34	6	1/8	12	6	19	18.3	14	11.3
2L34008	RL34	6	1/4	14	8	19	21.2	18	11.3
2L34009	RL34	8	1/8	12	6	20.2	19.5	14	13.8
2L34010	RL34	8	1/4	14	8	20.2	22.4	18	13.8
2L34011	RL34	8	3/8	17	9	20.2	24.4	22	13.8
2L34013	RL34	10	1/4	14	8	23.3	23.5	18	16
2L34014	RL34	10	3/8	17	9	23.3	25.6	22	16
2L34016	RL34	12	3/8	17	9	25.2	27.3	22	19.5
2L34017	RL34	12	1/2	19	11	25.2	30.3	26	19.5

G BSP

ROTARY ELBOW, FEMALE, TECHNOPOLYMER (R34/F)



Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2L34F01	RL34/F	4	M5	8	9	9.2	16.4	15.3	4
2L34F05	RL34/F	4	1/8	12	14	9.2	16.4	20.9	7
2L34F06	RL34/F	6	M5	8	9	11.3	18	16.4	4
2L34F07	RL34/F	6	1/8	12	14	11.3	19	26.5	7
2L34F08	RL34/F	6	1/4	14	17	11.3	19	28.2	8
2L34F09	RL34/F	8	1/8	12	14	13.8	20.2	27.7	7
2L34F10	RL34/F	8	1/4	14	17	13.8	20.2	29.4	8
2L34F13	RL34/F	10	1/4	14	17	16	23.3	33	8
2L34F14	RL34/F	10	3/8	17	21	16	23.3	38	10
2L34F16	RL34/F	12	3/8	17	21	19.5	25.2	40.3	10
2L34F17	RL34/F	12	1/2	19	23.8	19.5	25.2	42.8	11

CENTRAL TEE, MALE, ROTARY, TECHNOPOLYMER (R35)



Code	Ref.	Ø	F	Ch	P	L	L1	E	E1
2L35001	RL35	4	M5	8	4	32.8	15.2	9	9.2
2L35020	RL35	4	M7	8	5	32.8	16.2	9.8	9.2
2L35002	RL35	4	1/8	12	6	32.8	17.2	14	9.2
2L35003	RL35	4	1/4	14	8	32.8	20.1	18	9.2
2L35006	RL35	6	M5	8	4	36	16.3	9	11.3
2L35007	RL35	6	1/8	12	6	38	18.3	14	11.3
2L35008	RL35	6	1/4	14	8	38	21.2	18	11.3
2L35009	RL35	8	1/8	12	6	40.4	19.5	14	13.8
2L35010	RL35	8	1/4	14	8	40.4	22.4	18	13.8
2L35011	RL35	8	3/8	17	9	40.4	24.4	22	13.8
2L35013	RL35	10	1/4	14	8	46.6	23.5	18	16
2L35014	RL35	10	3/8	17	9	46.6	25.6	22	16
2L35016	RL35	12	3/8	17	9	50.4	27.3	22	19.5
2L35017	RL35	12	1/2	19	11	50.4	30.3	26	19.5

CENTRAL TEE, FEMALE, ROTARY, TECHNOPOLYMER (R35/F)



Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2L35F01	RL35/F	4	M5	8	9	9.2	32.8	15.3	4
2L35F06	RL35/F	6	M5	8	9	11.3	36	16.4	4
2L35F07	RL35/F	6	1/8	12	14	11.3	38	26.5	7
2L35F08	RL35/F	6	1/4	14	17	11.3	38	28.2	8
2L35F09	RL35/F	8	1/8	12	14	13.8	40.4	27.7	7
2L35F10	RL35/F	8	1/4	14	17	13.8	40.4	29.4	8
2L35F13	RL35/F	10	1/4	14	17	16	46.6	33	8
2L35F14	RL35/F	10	3/8	17	21	16	46.6	38	10
2L35F16	RL35/F	12	3/8	17	21	19.5	50.4	40.3	10
2L35F17	RL35/F	12	1/2	19	23.8	19.5	50.4	42.8	11

ROTARY ELBOW, MALE, EXTENDED, TECHNOPOLYMER (R36)



Code	Ref.	Ø	F	Ch	P	L	L1	E	E1
2L36001	RL36	4	M5	8	4	16.4	26.7	9	9.2
2L36020	RL36	4	M7	8	5	16.4	27.7	9.8	9.2
2L36002	RL36	4	1/8	12	6	16.4	25.3	14	9.2
2L36006	RL36	6	M5	8	4	18	27.8	9	11.3
2L36021	RL36	6	M7	9	5	18	29.3	9.9	11.3
2L36007	RL36	6	1/8	12	6	19	30.9	14	11.3
2L36008	RL36	6	1/4	14	8	19	33.2	18	11.3
2L36009	RL36	8	1/8	12	6	20.2	32.1	14	13.8
2L36010	RL36	8	1/4	14	8	20.2	34.4	18	13.8
2L36012	RL36	10	1/4	14	8	23.3	38	18	16

G BSP

METAL WORK PNEUMATIC

CENTRAL TEE, MALE, ROTARY, EXTENDED, TECHNOPOLYMER (R37)



Code	Ref.	Ø	F	Ch	P	L	L1	E	E1
2L37001	RL37	4	M5	8	4	32.8	26.7	9	9.2
2L37020	RL37	4	M7	8	5	32.8	27.5	9.8	9.2
2L37002	RL37	4	1/8	12	6	32.8	25.3	14	9.2
2L37006	RL37	6	M5	8	4	36	27.8	9	11.3
2L37007	RL37	6	1/8	12	6	38	30.9	14	11.3
2L37008	RL37	6	1/4	14	8	38	33.2	18	11.3
2L37009	RL37	8	1/8	12	6	40.4	32.1	14	13.8
2L37010	RL37	8	1/4	14	8	40.4	34.4	18	13.8
2L37012	RL37	10	1/4	14	8	46.6	38	18	16

DUAL Y BRANCH TECHNOPOLYMER (R42)



Code	Ref.	Ø1	Ø2	E1	E2	L	L1	L2	I	I1	F
2L42001	RL42	4	4	9.2	9.2	28.8	17.9	8.7	8	21.3	3.3
2L42002	RL42	4	6	9.2	11.3	31.3	17.9	8.7	8	21.3	3.3
2L42004	RL42	6	6	11.3	11.3	33.4	22.6	11.3	9.5	25.6	3.3
2L42005	RL42	6	8	11.3	14	34.8	22.6	11.3	9.5	25.6	3.3

DUAL Y BRANCH TECHNOPOLYMER, THREADED INPUT (R43)



Code	Ref.	Ø1	F	E1	E	Ch	P	L	L1	L2	I	I1	F1
2L43001	RL43	4	M5	9.2	8	9	4	35.5	17.9	8.7	8	21.3	3.3
2L43002	RL43	4	1/8	9.2	14	12	6	41.6	17.9	8.7	8	21.3	3.3
2L43003	RL43	4	1/4	9.2	18	14	8	44.6	17.9	8.7	8	21.3	3.3
2L43008	RL43	6	1/8	11.3	14	12	6	43.7	22.6	11.3	9.5	25.6	3.3
2L43009	RL43	6	1/4	11.3	18	14	8	46.7	22.6	11.3	9.5	25.6	3.3

MULTIPLE MANIFOLD, TECHNOPOLYMER (R44)

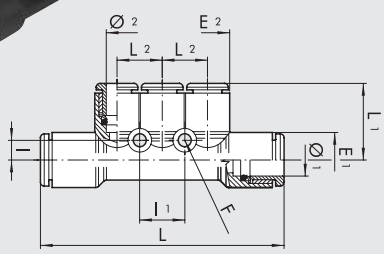

Code	Ref.	Ø1	Ø2	E1	E2	L	L1	L2	I	I1	F
2L44001	RL44	6	4	11.3	9.2	53.2	17.2	9.4	4.3	9.4	3.3
2L44003	RL44	8	6	14	11.3	61.4	19.6	11.5	5	11.5	3.3

G BSP

MULTIPLE MANIFOLD, INPUT, THREADED, TECHNOPOLYMER (R45)

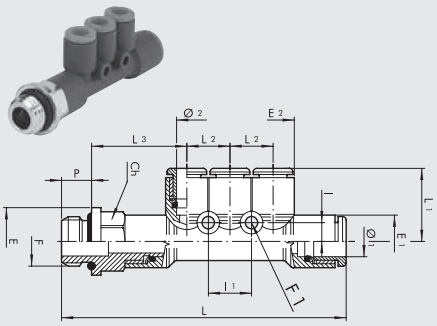

Code	Ref.	F	Ø1	Ø2	E1	E2	E	Ch	P	L	L1	L2	L3	I	I1	F1
2L45001	RL45	1/8	6	4	11.3	9.2	14	12	6	63.5	17.2	9.4	21.5	4.3	9.4	3.3
2L45002	RL45	1/4	6	4	11.3	9.2	18	14	8	66.5	17.2	9.4	22.5	4.3	9.4	3.3
2L45007	RL45	1/8	8	6	14	11.3	15	14	6	71.2	19.6	11.5	23	5	11.5	3.3
2L45008	RL45	1/4	8	6	14	11.3	18	14	8	75.6	19.6	11.5	25.4	5	11.5	3.3
2L45009	RL45	3/8	8	6	14	11.3	22	17	9	77.2	19.6	11.5	26	5	11.5	3.3

PLUG-IN ELBOWS (R46)



Code	Ref.	Ø1	Ø2	L	L1	L2	E	E1
2L46001	RL46	4	4	16	22.5	8.1	6.8	9.2
2L46002	RL46	6	6	18.5	24	8.4	8	11.3
2L46003	RL46	8	8	21.2	28.5	11.3	10	13.8
2L46004	RL46	10	10	23.3	32	13.3	12.5	16

EXTENDED PLUG-IN ELBOWS (R47)



Code	Ref.	Ø1	Ø2	L	L1	L2	E	E1
2L47001	RL47	4	4	15.5	36.9	23.4	7.7	9.2
2L47002	RL47	6	6	18.1	40.6	25.9	9.3	11.3
2L47003	RL47	8	8	19.3	44.9	28.8	9.7	13.8

DOUBLE ELBOW (R48)



Code	Ref.	Ø1	Ø2	L	L1	L2	E	E1
2L48001	RL48	4	4	32	22.5	8.1	6.8	9.2
2L48002	RL48	6	6	37	37.5	16.4	9.7	11.3
2L48003	RL48	8	8	42.4	28.5	11.3	10	13.8
2L48004	RL48	10	10	46.6	46	27.7	14	16

DOUBLE LATERAL ELBOW (R49)



Code	Ref.	Ø	L	L1	I	I1	E	D	D1	F
2L49001	RL49	4	16.7	47.4	7.2	14.4	9.2	2.5	4	3.3
2L49003	RL49	6	19	52.5	8.2	16.4	11.3	4.2	6	3.3
2L49004	RL49	8	21.4	58.4	9.6	19.2	13.8	6.2	8	3.3
2L49005	RL49	10	24.1	68.2	10.9	21.8	16	8.5	10	3.3
2L49006	RL49	12	25.8	74.1	12.5	25	19.5	10.5	12	3.3

CARTRIDGES AND ACCESSORIES

BRASS CARTRIDGE WITH THREAD (R26)



Code	Ref.	Ø	Brace of serration on centers in plastic material [Nm]	Brace of serration on metallic centers [Nm]
SERIES R				
2026A02	R26	3	0.6	0.8
2026A01	R26	3.17 ▲	0.6	0.8
2026001	R26	4 ▲	0.8	1
2026002	R26	5	0.8	1.5
2026003	R26	6	0.8	1.2
2026004	R26	8 ▲	1	1.8
2026005	R26	10	0.8	2
2026006	R26	12	0.8	2

▲ **Ø3.17** = Ø1/8"; **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

CARTRIDGE SLOT R26

Ø 3-3.17-4-6-8



Ø	A	Ø B	Ø C	Ø C1	D	E	F
3-3.17	M7x0.75	6.5 ±01	4.5 +0.12 -0	4 max	10.5 +0.3 -0	9.5 +0.1 -0.3	7 ±0.20
4	M9.5x0.75	9 +0.10 -0	4.1 +0.10 -0	3 max	12 +0 -0.20	9.5 +0.15 -0.05	7.5 ±0.20
6	M11.5x0.75	11 +0.10 -0	6.1 +0.10 -0	5 max	12 ±01	9.5 ±01	7.5 ±0.20
8	M13.5x0.75	13 +0.10 -0	8.1 +0.10 -0	7 max	15 +0 -0.20	10.5 +0.15 -0.05	8.5 ±0.20

Ø	G	H
3-3.17	0.5	-
4	0.4	0.6
6	0.4	0.6
8	0.4	0.6

Ø 5-10-12



Ø	A	Ø B	Ø C	Ø C1	D	E	F
5	M10.5x0.75	10 +0.1 0	5 +0.15 0	4 max	11.8 ±01	8.9 +0.1 0	5.8 +0.3 -0
10	M15.5x0.75	15 +0.1 0	10 +0.15 0	9 max	15.6 ±01	11 ±0.05	7.5 +0.3 -0
12	M18x1	17.5 +0.05 0.1	12 +0.05 +0.15	11 max	18 ±01	12 ±0.05	6.8 +0.3 -0

Ø	G	H	Ø L	M	N	Ø P
5	0.3	0.9 +0 -0.3	11.2 +0.12 +0.02	0.1	7.8 ±0.05	9.7 ±0.05
10	0.3	1.3 +0 -0.3	16.2 +0.1 -0.05	0.2	9 ±0.05	14.9 +0.10 -0
12	0.6	1.3 +0 -0.3	18.8 +0.1 -0	0.2	9.75 +0.1 -0.15	17 +0.1 -0

TOOL FOR SLOT R26



Code	Ref.	A	Ø B	Ø C
2025010	UT.SE. R26 3-3.17	4.5	10	10
2025011	UT.SE. R26 4	4.1	12	18
2025012	UT.SE. R26 5	5.1	15	20
2025013	UT.SE. R26 6	6.1	16	19
2025014	UT.SE. R26 8	8.1	16	21
2025015	UT.SE. R26 10	10.1	16	25
2025016	UT.SE. R26 12	12.1	15	28

MALE FOR CARTRIDGE SLOT R26



Code	Ref.	Ø	A
2025020	MA R26 3-3.17	3-3.17	M7x0.75
2025021	MA R26 4	4	M9.5x0.75
2025022	MA R26 5	5	M10.5x0.75
2025023	MA R26 6	6	M11.5x0.75
2025024	MA R26 8	8	M13.5x0.75
2025025	MA R26 10	10	M15.5x0.75
2025026	MA R26 12	12	M18x1

BRASS COMPRESSION CARTRIDGE (R27)



Code	Ref.	Ø
SERIES R		
2027001	R27	4 ▲
2027002	R27	5
2027003	R27	6
2027004	R27	8 ▲
2027005	R27	10
2027006	R27	12

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

CARTRIDGE SLOT R27

Ø 4-6-8



Ø	Ø A	Ø B	Ø C	Ø C1	D	E	F	G
FOR ALUMINIUM								
4	9.2 $^{+0}_{-0.10}$	9 $^{+0.10}_{-0}$	4.1 $^{+0.10}_{-0}$	3 MAX	12 $^{+0}_{-0.20}$	9.3 $^{+0}_{-0.10}$	6.7 $^{+0.10}_{-0}$	0.5
6	11.3 $^{+0}_{-0.08}$	11 $^{+0.10}_{-0}$	6.1 $^{+0.10}_{-0}$	5 MAX	12 $^{+0}_{-0.20}$	9.3 $^{+0}_{-0.10}$	6.7 $^{+0.10}_{-0}$	0.5
8	13.3 $^{+0}_{-0.08}$	13 $^{+0.10}_{-0}$	8.1 $^{+0.10}_{-0}$	7 MAX	15 $^{+0}_{-0.20}$	10.3 $^{+0}_{-0.10}$	7.7 $^{+0.10}_{-0}$	0.5
FOR TECHNOPOLYMER								
4	*9.2 $^{+0}_{-0.10}$	9 $^{+0.10}_{-0}$	4.1 $^{+0.10}_{-0}$	3 MAX	12 $^{+0}_{-0.20}$	9.3 $^{+0}_{-0.10}$	6.7 $^{+0.10}_{-0}$	0.5
6	*11.2 $^{+0}_{-0.10}$	11 $^{+0.10}_{-0}$	6.1 $^{+0.10}_{-0}$	5 MAX	12 $^{+0}_{-0.20}$	9.3 $^{+0}_{-0.10}$	6.7 $^{+0.10}_{-0}$	0.5
8	*13.2 $^{+0}_{-0.10}$	13 $^{+0.10}_{-0}$	8.1 $^{+0.10}_{-0}$	7 MAX	15 $^{+0}_{-0.20}$	10.3 $^{+0}_{-0.10}$	7.7 $^{+0.10}_{-0}$	0.5

*** N:B.: the diameter in interference is purely an indication and depends on the type of plastic material used and on its thickness. We suggest you should effect practical assembling tests.**

Ø 5-10-12



Ø	Ø A	Ø B	Ø C	Ø D	Ø E	F	H	L	M
FOR TECHNOPOLYMER									
5	12.1 $^{+0.15}_{-0}$	*10.2 $^{+0}_{-0.10}$	4 MAX	5.1 $^{+0.15}_{-0}$	9.7 ±0.05	6 $^{+0.2}_{-0}$	1.2 $^{-0}_{-0.2}$	8.75 $^{-0}_{-0.1}$	11.8 ±0.10
10	17.1 $^{+0.15}_{-0}$	*15.15 $^{+0}_{-0.08}$	9 MAX	10.15 $^{+0.1}_{-0}$	14.9 ±0.05	8 $^{+0.2}_{-0}$	1.5 $^{-0}_{-0.2}$	10.9 $^{-0}_{-0.1}$	15.6 ±0.10
12	19.7 $^{+0.15}_{-0}$	*17.55 $^{+0}_{-0.08}$	11 MAX	12.15 $^{+0.1}_{-0}$	17.1 ±0.05	9 $^{+0.2}_{-0}$	1.5 $^{-0}_{-0.2}$	11.85 $^{-0}_{-0.1}$	18 ±0.10
FOR ALUMINIUM									
5	12.1 $^{+0.15}_{-0}$	10.3 $^{+0}_{-0.08}$	4 MAX	5.1 $^{+0.15}_{-0}$	9.7 ±0.05	6 $^{+0.2}_{-0}$	1.2 $^{-0}_{-0.2}$	8.75 $^{-0}_{-0.1}$	11.8 ±0.10
10	17.1 $^{+0.15}_{-0}$	15.4 $^{+0}_{-0.08}$	9 MAX	10.15 $^{+0.1}_{-0}$	14.9 ±0.05	8 $^{+0.2}_{-0}$	1.5 $^{-0}_{-0.2}$	10.9 $^{-0}_{-0.1}$	15.6 ±0.10
12	19.7 $^{+0.15}_{-0}$	17.8 $^{+0}_{-0.08}$	11 MAX	12.15 $^{+0.1}_{-0}$	17.1 ±0.05	9 $^{+0.2}_{-0}$	1.5 $^{-0}_{-0.2}$	11.85 $^{-0}_{-0.1}$	18 ±0.10

*** N:B.: the diameter in interference is purely an indication and depends on the type of plastic material used and on its thickness. We suggest you should effect practical assembling tests.**

TOOL FOR SLOT R27



Code	Ref.	A	Ø B	Ø C
FOR ALUMINIUM				
2027021	UT.SE. R27 AL. 4	4.1	10	11.5
2027022	UT.SE. R27 AL. 5	5.1	12	16
2027023	UT.SE. R27 AL. 6	6.1	12	13.5
2027024	UT.SE. R27 AL. 8	8.1	12	15.5
2027025	UT.SE. R27 AL. 10	10.1	16	20
2027026	UT.SE. R27 AL. 12	12.1	16	22
FOR TECHNOPOLYMER				
2027011	UT.SE. R27 P. 4	4.1	10	11.5
2027012	UT.SE. R27 P. 5	5.1	12	16
2027013	UT.SE. R27 P. 6	6.1	12	13.5
2027014	UT.SE. R27 P. 8	8.1	12	15.5
2027015	UT.SE. R27 P. 10	10.1	16	20
2027016	UT.SE. R27 P. 12	12.1	16	22

R17 – DISASSEMBLY KEY



Code	Ref.	Lenght [mm]	Ø Tube
2L17001	RL17	140	from 3 to 10
2017001	R17	95.0	from 4 to 14

R41 – CARTRIDGE KEY R26



Code	Ref.	Ø
2041001	R41	4
2041002	R41	5
2041003	R41	6
2041004	R41	8
2041005	R41	10
2041006	R41	12

NOTES

PUSH-IN FITTINGS FOR USE IN THE FOOD INDUSTRY

SERIES F-E PLUS FITTINGS

With the fittings in the F-E Plus series, you can extend all the advantages of the Metal Work push-in fittings to the food industry as well.
As is known, a Metal Work push-in fitting can be reused thousands of times without affecting the pneumatic and mechanical tightness. The refined profile of the clamping spring retains the pipe without cutting or deforming it. The characteristic element of the F-E Plus fittings is the use of materials and lubricants that are chosen for the specific field of application.
All brass component parts undergo a clean-lead process, which consists of removing lead from the surface layer of the fitting; the gaskets are made of special FDA-approved Viton®.
Engineering plastic materials are suitable for use at high temperatures and in contact with water.
The fitting can be used up to 150°C depending on the choice of materials, which makes it ideal for use in applications at high temperatures.
The threads are cylindrical and under-head O-rings provide a pneumatic seal. This avoids the need for sealants (e.g. Teflon®), which could release solid fragments during screwing and unscrewing that would contaminate the environment or the fluid. Our fittings can be screwed and unscrewed any number of times and still remain clean and pneumatically sealed.
In addition to the standard range available, many other configurations can be created on specific request.

TECHNICAL DATA		
Threaded port		Metric: M5
		G (BSP)*: 1/8 - 1/4 - 3/8 - 1/2
Diameter		Ø 4 - Ø 6 - Ø 8 - Ø 10
Temperature range	°C	– 20 to + 150
	°F	– 4 to 302
Pressure range	bar	– 0.99 to +16
	MPa	– 0.099 to +1.6
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene
		PTFE for temperatures over 60°C
Fluid		Vacuum - Compressed air

* **Metric cylindrical threads according to ISO 262**
Cylindrical threads according to ISO 228-1, identified with a letter G. They also correspond to BSP or more precisely to BSPP designation (P stands for Parallel).
Conical threads according to ISO 7-1, identified by a letter R. They also correspond to BSP or more precisely to BSPT designation (T stands for Tapered).

COMPONENTS

① Release bushing: PPSU
② Locking bushing: PPSU
③ Body: unleaded brass treated with environmentally-friendly intermetallic alloy
④ Clamping spring: stainless steel
⑤ Spring supporting ring: PPSU
⑥ Seal: FDA-approved Viton®

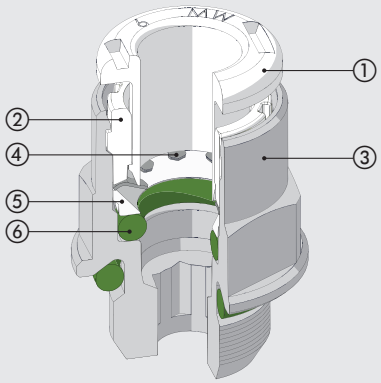

ADVANTAGES / CERTIFICATIONS

ADVANTAGES

Under-head O-ring

Can be screwed and unscrewed any number of times; no fragments of Teflon® or sealant will contaminate the fluid.

Corrosion resistance

The intermetallic alloy deposited on the surface and Viton® are compatible with numerous substances.

CONFORMITY DECLARATIONS

- Regulation 1935/04 EU.*
- Regulation 2023/06 EU.

* Release tests performed at 50°C for 30 minutes.

INSTALLING THE PIPE

Compressed air pipes must be used in compliance with some basic criteria in order to ensure long life and proper operation of the fitting:

- check that the conditions for the installation and use (e.g. temperature and fluid used) comply with the characteristics stated by the pipe manufacturer;
- check the pipe size; oversized pipes could not fit properly, undersized ones could not ensure pipe retention and air tightness.

The cut should be as accurate as possible at a right angle with the pipe axis.

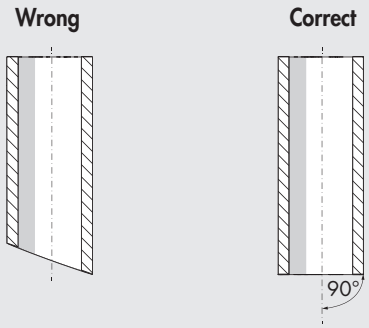

- the bending radius of the pipe installed must be as wide as possible. The fittings have been designed to ensure axial seal of the pipe; excessive curvature could considerably shorten the life of the pipe.
- the pipe must not be subjected to excessive axial stress and it must be of the right length for snugly fitting (not too long or too short).
- correct insertion of the pipe into the fitting is essential for air tightness and pipe retention. Make sure that the pipe is pushed right into the seat.
- check that the pipe does not encounter any obstacles or blockages along its way, which could cause tensile stress of the pipe in the fitting.

STRAIGHT, CYLINDRICAL, MALE R1 F-E PLUS



Code	Ref.	Ø	F	Ch	Ch1	P	L	D	E
2FP0101	R1 F-E P	4	M5	Ø9	2.5	4	20.3	2.6	9
2FP0102	R1 F-E P	4	1/8	10	3	6	18	3.1	14
2FP0103	R1 F-E P	4	1/4	10	3	8	19.8	3.1	18
2FP0100	R1 F-E P	6	M5	Ø11	2.5	4	21.9	2.6	11
2FP0107	R1 F-E P	6	1/8	12	4	6	21.6	4.1	14
2FP0108	R1 F-E P	6	1/4	12	4	8	20.3	4.1	18
2FP0109	R1 F-E P	8	1/8	13	5	6	25.4	5.2	14
2FP0110	R1 F-E P	8	1/4	14	6	8	24.4	6.2	18
2FP0111	R1 F-E P	8	3/8	14	6	9	22.8	6.2	22
2FP0112	R1 F-E P	10	1/4	16	7	8	29.2	7.2	18
2FP0113	R1 F-E P	10	3/8	16	8	9	26.5	8.2	22
2FP0122	R1 F-E P	10	1/2	16	8	11	29.8	8.2	26

STRAIGHT, CONICAL, MALE R1C F-E PLUS



Code	Ref.	Ø	F	Ch	Ch1	P	L	D	E
2FP1C02	R1/C F-E P	4	1/8	10	3	6.2	18.5	3.1	11.3
2FP1C07	R1/C F-E P	6	1/8	12	4	6.2	22.5	4.1	13.5
2FP1C08	R1/C F-E P	6	1/4	12	4	8.5	22.3	4.1	13.2
2FP1C09	R1/C F-E P	8	1/8	13	6	6.2	26	6.2	14.3
2FP1C10	R1/C F-E P	8	1/4	14	6	8.5	25.5	6.2	15.8
2FP1C11	R1/C F-E P	8	3/8	14	6	9	24.9	6.2	16.6
2FP1C13	R1/C F-E P	10	1/4	16	7	8.5	28.9	7.2	17.7
2FP1C14	R1/C F-E P	10	3/8	16	8	9	26	8.2	17.7

STRAIGHT, FEMALE R2 F-E PLUS



Code	Ref.	Ø	F	Ch	P	L	D	E
2FP0201	R2 F-E P	4	1/8	10	7	26.2	3	14
2FP0205	R2 F-E P	6	1/8	12	7	27.1	5	14
2FP0206	R2 F-E P	6	1/4	12	8	29.3	5	17
2FP0207	R2 F-E P	8	1/8	13	7	28.1	7	14
2FP0208	R2 F-E P	8	1/4	14	8	30	7	17
2FP0211	R2 F-E P	10	1/4	16	8	31.8	8	17.7

STRAIGHT, INTERMEDIATE R3 F-E PLUS



Code	Ref.	Ø1	Ø2	F	L	D
2FP0301	R3 F-E P	4	4	M11x1	30.6	2.5
2FP0303	R3 F-E P	6	6	M13x1	33	4.5
2FP0304	R3 F-E P	8	8	M15x1	35.7	6.5
2FP0305	R3 F-E P	10	10	M17x1	39.2	8

ELBOW, INTERMEDIATE R4 F-E PLUS



Code	Ref.	Ø	L	D	E
2FP0401	R4 F-E P	4	16.7	2.5	9.5
2FP0403	R4 F-E P	6	19	4.5	11.5
2FP0404	R4 F-E P	8	21.3	6.5	13.5
2FP0405	R4 F-E P	10	23.3	8	16

TEE, INTERMEDIATE R5 F-E PLUS



Code	Ref.	Ø	L	L1	D	E
2FP0501	R5 F-E P	4	16.7	33.4	2.5	9.5
2FP0503	R5 F-E P	6	19	38	4.5	11.5
2FP0504	R5 F-E P	8	21.3	42.6	6.5	13.5
2FP0505	R5 F-E P	10	23.3	46.6	8	16

THREADED ADAPTER R6 F-E



Code	Ref.	Ø	F	Ch	P	L	D	E
2F06001	R6 F-E	4	M5	8	4	25.2	2.5	9
2F06002	R6 F-E	4	1/8	13	6	28.9	2.5	15
2F06003	R6 F-E	4	1/4	14	8	32.4	2.2	18
2F06000	R6 F-E	6	M5	9	4	25.7	2.7	10
2F06007	R6 F-E	6	1/8	13	6	29.4	4	15
2F06008	R6 F-E	6	1/4	14	8	32.9	4	18
2F06009	R6 F-E	8	1/8	13	6	30.6	5.5	15
2F06010	R6 F-E	8	1/4	14	8	34	6	18
2F06011	R6 F-E	8	3/8	17	9	35.4	6	22
2F06012	R6 F-E	10	1/4	14	8	38.2	7.8	18
2F06013	R6 F-E	10	3/8	17	9	38.7	8	22

STRAIGHT, INTERMEDIATE, BULKHEAD UNIONS R10 F-E PLUS



Code	Ref.	Ø1	Ø2	F	Ch	L	D	l MAX
2FP1101	R10 F-E P	4	4	M11x1	13	30.6	2.5	11
2FP1103	R10 F-E P	6	6	M13x1	16	33	4.5	12
2FP1104	R10 F-E P	8	8	M15x1	17	35.7	6.5	13.5
2FP1105	R10 F-E P	10	10	M17x1	20	39.2	8	17

ROTARY ELBOW, MALE, CYLINDRICAL R31 F-E PLUS



Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2FP3101	R31 F-E P	4	M5	9	9.9	9.5	18.6	15.3	4
2FP3102	R31 F-E P	4	1/8	12	14	9.5	18.6	19.1	6
2FP3103	R31 F-E P	4	1/4	14	18	9.5	18.6	21.1	8
2FP3107	R31 F-E P	6	M5	9	9.9	11.8	21.9	15.3	4
2FP3108	R31 F-E P	6	1/8	12	14	11.8	21.9	19.1	6
2FP3109	R31 F-E P	6	1/4	14	18	11.8	21.9	21.1	8
2FP3110	R31 F-E P	8	1/8	12	14	13.5	25.4	19.1	6
2FP3111	R31 F-E P	8	1/4	14	18	13.5	25.4	21.1	8
2FP3112	R31 F-E P	8	3/8	17	22	13.8	25.4	27.1	9
2FP3113	R31 F-E P	10	1/4	14	18	16	27.2	24.8	8
2FP3114	R31 F-E P	10	3/8	17	22	16	27.2	27.1	9
2FP3115	R31 F-E P	10	1/2	22	26	16	27.2	30.7	11

ROTARY ELBOW, MALE, CONICAL R31C F-E PLUS



Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2FP2C02	R31/C F-E P	4	1/8	12	13.3	9.5	18.6	19.8	6.2
2FP2C03	R31/C F-E P	4	1/4	14	15.4	9.5	18.6	22.6	8.5
2FP2C08	R31/C F-E P	6	1/8	12	13.3	11.8	21.9	19.8	6.2
2FP2C09	R31/C F-E P	6	1/4	14	15.4	11.8	21.9	22.6	8.5
2FP2C10	R31/C F-E P	8	1/8	12	13.3	13.5	25.4	19.8	6.2
2FP2C11	R31/C F-E P	8	1/4	14	15.4	13.5	25.4	23.6	8.5
2FP2C12	R31/C F-E P	8	3/8	17	19.2	13.8	23.6	27.1	9
2FP2C13	R31/C F-E P	10	1/4	14	15.4	16	27.2	26.3	8.5
2FP2C14	R31/C F-E P	10	3/8	17	19.2	16	27.2	27.1	9

CENTRAL TEE, MALE, CYLINDRICAL, ROTARY R32 F-E PLUS



Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2FP3202	R32 F-E P	4	1/8	12	14	9.5	37.2	19.1	6
2FP3208	R32 F-E P	6	1/8	12	14	11.8	43.8	19.1	6
2FP3209	R32 F-E P	6	1/4	14	18	11.8	43.8	21.1	8
2FP3210	R32 F-E P	8	1/8	12	14	13.5	50.8	19.1	6
2FP3211	R32 F-E P	8	1/4	14	18	13.5	50.8	21.1	8
2FP3212	R32 F-E P	8	3/8	17	22	13.8	47.2	27.1	9
2FP3213	R32 F-E P	10	1/4	14	18	16	44.4	21.8	8
2FP3214	R32 F-E P	10	3/8	17	22	16	44.4	27.1	9

LATERAL TEE, MALE, CYLINDRICAL, ROTARY R38 F-E PLUS



Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2FP3802	R38 F-E P	4	1/8	12	14	9.5	18.6	19.1	6
2FP3808	R38 F-E P	6	1/8	12	14	11.5	21.9	19.1	6
2FP3809	R38 F-E P	6	1/4	14	18	11.5	21.9	21.1	8
2FP3810	R38 F-E P	8	1/8	12	14	13.5	25.4	19.1	6
2FP3811	R38 F-E P	8	1/4	14	18	13.5	25.4	22.4	8
2FP3813	R38 F-E P	10	1/4	14	18	16	27.2	21.8	8
2FP3814	R38 F-E P	10	3/8	17	22	16	27.2	27.1	9

ELBOW, MALE, CONICAL R39C F-E PLUS



Code	Ref.	Ø	F	Ch	E1	L	L1	P
2FP4C02	R39/C F-E P	4	1/8	10	9.5	18.6	16	6.2
2FP4C08	R39/C F-E P	6	1/8	10	11.8	21.9	16	6.2
2FP4C09	R39/C F-E P	6	1/4	10	11.8	21.9	18.5	8.5
2FP4C10	R39/C F-E P	8	1/8	10	13.5	24.5	16	6.2
2FP4C11	R39/C F-E P	8	1/4	10	13.5	25.4	18.5	8.5
2FP4C12	R39/C F-E P	8	3/8	14	13.8	25.4	22.5	9
2FP4C13	R39/C F-E P	10	1/4	14	16	27.2	22	8.5

SERIES F-NSF PLUS FITTINGS

The fittings in the F-NSF Plus series encompass all the advantages of Metal Work push-in fittings in one NSF-certified product.
As is known, a Metal Work push-in fitting can be reused thousands of times without affecting the perfect pneumatic and mechanical tightness.
The refined profile of the clamping spring retains the pipe without cutting or deforming it.
The fittings in this series also feature a double internal O-ring seal for enhanced safe tightness, especially when using water or other fluids.
The materials and lubricants used in these fittings are suitable for use in the food industry and for operation in contact with cold and hot drinking water.
The fittings in the F-NSF Plus series are made of brass with a low lead content (≤0.1%) that is subject to a further process that extracts the lead from the surface layer of the product; the gaskets are made of special FDA-approved Viton®.
Engineering plastics are ideal for use at a high temperature and in contact with water.
The fitting can be used up to 150°C depending on the choice of materials, which makes it ideal for use in applications at high temperatures.

The threads are cylindrical and under-head O-rings provide a pneumatic seal. This avoids the need for sealants (e.g. Teflon®), which could release solid fragments during screwing and unscrewing that would contaminate the environment or the fluid. Our fittings can be screwed and unscrewed any number of times and still remain clean and pneumatically sealed.
In addition to the standard range available, many other configurations can be created on specific request.

TECHNICAL DATA		
Threaded port		G (BSP)*: 1/8 - 1/4
Diameter		Ø 4 - Ø 6
Temperature range	°C	– 20 to + 150
	°F	– 4 to 302
Pressure range	bar	– 0.99 to +16
	MPa	– 0.099 to +1.6
Recommended pipe		PTFE
Fluid		Vacuum - Compressed air

* Cylindrical threads according to ISO 228-1, identified with a letter G. They also correspond to BSP or more precisely to BSPP designation (P stands for Parallel).

COMPONENTS

① Release bushing: PPSU
② Locking bushing: PPSU
③ Body: low-lead brass (≤0.1%)
④ Clamping spring: stainless steel
⑤ Spring supporting ring: PPSU
⑥ Seal: FDA-approved Viton®

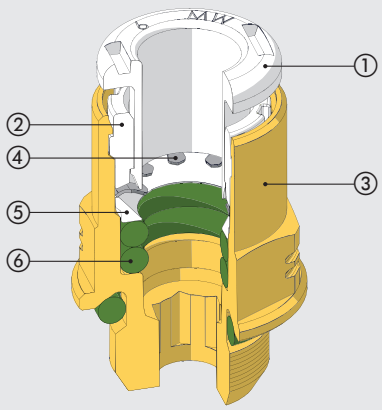

ADVANTAGES / CERTIFICATIONS

ADVANTAGES

Under-head O-ring

Can be screwed and unscrewed any number of times; no fragments of Teflon® or sealant will contaminate the fluid.

CONFORMITY DECLARATIONS

- NSF/ANSI 372 standard: drinking water system components - Lead Content.
- DM 174
- Regulation 1935/04 EU.*
- Regulation 2023/06 EU.

* Release tests performed at 50°C for 30 minutes.

CERTIFIED

- NSF/ANSI 169 standard: products in contact with food.

NSF COMPONENT

INSTALLING THE PIPE

Compressed air pipes must be used in compliance with some basic criteria in order to ensure long life and proper operation of the fitting:

- check that the conditions for the installation and use (e.g. temperature and fluid used) comply with the characteristics stated by the pipe manufacturer;
- check the pipe size; oversized pipes could not fit properly, undersized ones could not ensure pipe retention and air tightness.

The cut should be as accurate as possible at a right angle with the pipe axis.

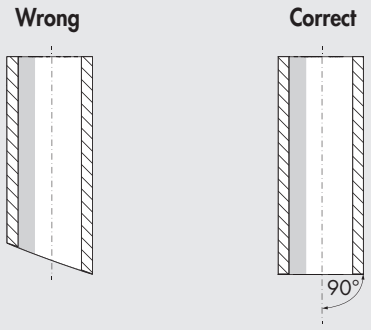

- the bending radius of the pipe installed must be as wide as possible. The fittings have been designed to ensure axial seal of the pipe; excessive curvature could considerably shorten the life of the pipe.
- the pipe must not be subjected to excessive axial stress and it must be of the right length for snugly fitting (not too long or too short).
- correct insertion of the pipe into the fitting is essential for air tightness and pipe retention. Make sure that the pipe is pushed right into the seat.
- check that the pipe does not encounter any obstacles or blockages along its way, which could cause tensile stress of the pipe in the fitting.

STRAIGHT, CYLINDRICAL, MALE R1 F-NSF PLUS



Code	Ref.	Ø	F	Ch	Ch1	P	L	D	E
2FP0152	R1 F-NSF P	4	1/8	10	3	6	20	3.1	14
2FP0153	R1 F-NSF P	4	1/4	10	3	8	21.8	3.1	18
2FP0157	R1 F-NSF P	6	1/8	12	4	6	23.6	4.1	14
2FP0158	R1 F-NSF P	6	1/4	12	4	8	22.6	4.1	18

ROTARY ELBOW, MALE, CYLINDRICAL R31 F-NSF PLUS



Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2FP3152	R31 F-NSF P	4	1/8	12	14	9.5	20.6	19.1	6
2FP3153	R31 F-NSF P	4	1/4	14	18	9.5	20.6	21.1	8
2FP3158	R31 F-NSF P	6	1/8	12	14	11.8	23.9	19.1	6
2FP3159	R31 F-NSF P	6	1/4	14	18	11.8	23.9	21.1	8

CENTRAL TEE, MALE, CYLINDRICAL, ROTARY R32 F-NSF PLUS



Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2FP3252	R32 F-NSF P	4	1/8	12	14	9.5	41.2	19.1	6
2FP3253	R32 F-NSF P	4	1/4	14	18	9.5	41.2	21.1	8
2FP3260	R32 F-NSF P	6	1/8	12	14	11.5	47.8	19.1	6
2FP3261	R32 F-NSF P	6	1/4	14	18	11.5	47.8	21.1	8

LATERAL TEE, MALE, CYLINDRICAL, ROTARY R38 F-NSF PLUS



Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2FP3852	R38 F-NSF P	4	1/8	12	14	9.5	20.6	19.1	6
2FP3853	R38 F-NSF P	4	1/4	14	18	9.5	20.6	21.1	8
2FP3858	R38 F-NSF P	6	1/8	12	14	11.5	23.9	19.1	6
2FP3859	R38 F-NSF P	6	1/4	14	18	11.5	23.9	21.1	8

SERIES XTR FITTINGS

The XTR fittings feature the use of high resistant materials in terms of both chemical compatibility and temperature range.
As automatic fittings, they can be reused countless times without affecting their perfect pneumatic and mechanical tightness.
The specially designed clamping spring holds the tube in place without marking or deforming it.
What's more, the choice of suitable materials and the performance of specific release tests make the XTR range of fittings ideal for use in the food industry and in contact with water.
The threads are round in shape in order to ensure pneumatic sealing, which is guaranteed by an O-ring underside. This solution eliminates the need for sealants (such as Teflon® or similar) which, during screwing and unscrewing, could release solid fragments, thus polluting the environment and the fluid. XTR fittings, on the other hand, can be screwed and unscrewed repeatedly as desired, thereby guaranteeing pneumatic sealing and cleanliness at all times.

TECHNICAL DATA		STEEL	TECHNOPOLYMER
Threaded port		G (BSP)*: 1/8 - 1/4	
Diameter	mm	Ø 6 - Ø 8	
Temperature range	°C	– 20 to 150	See temperature/pressure diagram
	°F	– 4 to 302	
Pressure range	bar	– 0.99 to 16	See temperature/pressure diagram
	MPa	– 0.099 to 1.6	
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene	
		PTFE for temperatures over 60°C	
Fluid		Vacuum - Compressed air	

* Cylindrical threads according to ISO 228-1, identified with a letter G. They also correspond to BSP or more precisely to BSPP designation (P stands for Parallel).

TEMPERATURE/PRESSURE DIAGRAM FOR TECHNOPOLYMER FITTINGS

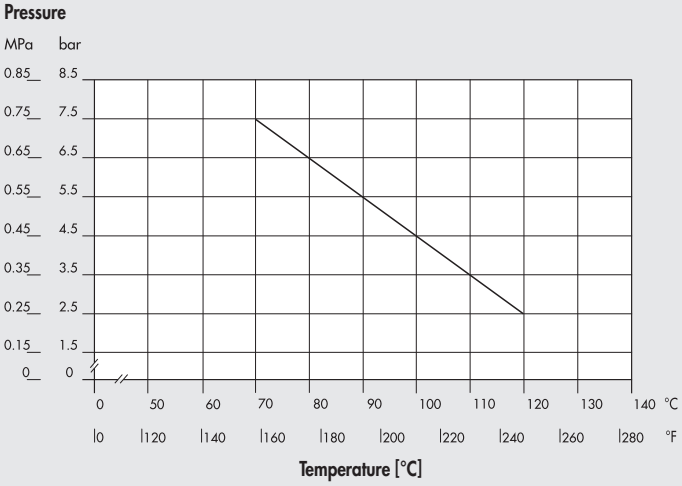

COMPONENTS

① Release bushing: PPSU
② Locking bushing: PPSU
③ Body: AISI 316L steel
④ Clamping spring: stainless steel
⑤ Spring supporting ring: PPSU
⑥ Seal: FDA-approved Viton®

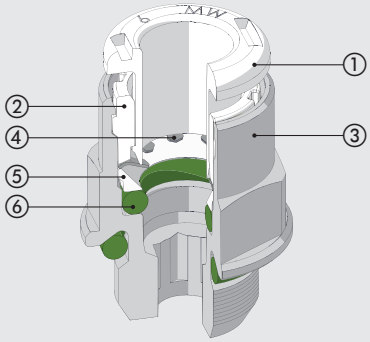

ADVANTAGES / CERTIFICATIONS

ADVANTAGES

Under-head O-ring
Can be screwed and unscrewed any number of times; no fragments of Teflon® or sealant will contaminate the fluid.

Corrosion resistance
The intermetallic alloy deposited on the surface and Viton® are compatible with numerous substances.

CONFORMITY DECLARATIONS

- NSF/ANSI 372: standard: drinking water system components - Lead Content.
- DM 174
- Regulation 1935/04 EU.*
- Regulation 2023/06 EU.

CERTIFIED

- NSF/ANSI 169 standard: products in contact with food.

NSF COMPONENT

* For the product's conditions of use, please refer to the MOCA_XTR declaration of conformity available in the certifications section of the Metal Work website.

INSTALLING THE PIPE

Compressed air pipes must be used in compliance with some basic criteria in order to ensure long life and proper operation of the fitting:
- check that the conditions for the installation and use (e.g. temperature and fluid used) comply with the characteristics stated by the pipe manufacturer;
- check the pipe size; oversized pipes could not fit properly, undersized ones could not ensure pipe retention and air tightness.

The cut should be as accurate as possible at a right angle with the pipe axis.



- the bending radius of the pipe installed must be as wide as possible. The fittings have been designed to ensure axial seal of the pipe; excessive curvature could considerably shorten the life of the pipe.
- the pipe must not be subjected to excessive axial stress and it must be of the right length for snugly fitting (not too long or too short).
- correct insertion of the pipe into the fitting is essential for air tightness and pipe retention. Make sure that the pipe is pushed right into the seat.
- check that the pipe does not encounter any obstacles or blockages along its way, which could cause tensile stress of the pipe in the fitting.

STRAIGHT, CYLINDRICAL, MALE R1 XTR



Code	Ref.	Ø	F	Ch	Ch1	P	L	E
2XT0107	R1 XTR	6	1/8	12	4	6	21.6	14
2XT0108	R1 XTR	6	1/4	12	4	8	20.3	18
2XT0109	R1 XTR	8	1/8	13	5	6	25.4	14
2XT0110	R1 XTR	8	1/4	14	6	8	24.4	18

STRAIGHT, FEMALE R2 XTR



Code	Ref.	Ø	F	Ch	P	L	D	E
2XT0205	R2 XTR	6	1/8	12	7	27.1	5	14
2XT0206	R2 XTR	6	1/4	12	8	29.3	5	17
2XT0207	R2 XTR	8	1/8	13	7	28.1	7	14
2XT0208	R2 XTR	8	1/4	14	8	30	7	17

REDUCER R8 XTR



Code	Ref.	Ø1	Ø2	L	D	E
2XT0806	R8 XTR	8	6	31.9	4.5	11.5

ROTARY ELBOW, MALE, TECHNOPOLYMER R34 XTR



Code	Ref.	Ø	F	Ch	P	L	L1	E	E1
2XT3407	R34 XTR	6	1/8	12	6	19	18.3	14	11.3
2XT3408	R34 XTR	6	1/4	14	8	19	21.2	18	11.3
2XT3409	R34 XTR	8	1/8	12	6	20.2	19.5	14	13.8
2XT3410	R34 XTR	8	1/4	14	8	20.2	22.4	18	13.8

NOTES

SERIES F-E / SERIE F-NSF FITTINGS

These fittings are made of materials suitable for use in the food industry. They can also be used with hot and cold tap water.
All brass component parts undergo a clean-lead process, which consists of removing lead from the surface layer of the fitting; the gaskets are made of special FDA-approved Viton®. These fittings do not contain technopolymers, thereby avoiding problems of compatibility with detergents and other chemical agents. This choice of materials allows the fittings to be used up to 150°C, which makes them suitable for other high-temperature applications, in addition to the food industry.
The threads are cylindrical and under-head O-rings provide a pneumatic seal. This avoids the need for sealants (e.g. Teflon®), which could release solid fragments during screwing and unscrewing that would contaminate the environment or the fluid. Our fittings can be screwed and unscrewed any number of times and still remain clean and pneumatically sealed.
This choice of materials and treatments make these fittings suitable for use in the chemical, pharmaceutical, medical and electronics industry.
The fittings are available in two series:

- Series **F-E** fittings are made of brass that undergoes a surface clean-lead process, followed by a surface coating with inter-metal alloy compound; they comply with regulatory standards applicable in Europe and other world countries for use in contact with foodstuffs or drinking water.
- Series **F-NSF** fittings are made of brass with a low-lead content (≤ 0.1%) that undergoes a further surface clean-lead process in compliance with US standards, and are certified to NSF169 standards.

A standard range of fittings is available, but other designs can be developed on specific request.

SERIES F-NSF

SERIES F-E

TECHNICAL DATA		SERIES F-E	SERIES F-NSF
Threaded port		Metric: M5	
		G (BSP)*: 1/8 - 1/4 - 3/8 - 1/2	
Pipe diameter	mm	Ø 4 - Ø 6 - Ø 8 - Ø 10	
Temperature range	°C	– 20 to + 150	
	°F	– 4 to 302	
Pressure range	bar	– 0.99 to 16	
	MPa	– 0.099 to 1.6	
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene - PTFE	PTFE

* **Metric cylindrical threads according to ISO 262**
Cylindrical threads according to ISO 228-1, identified with a letter G. They also correspond to BSP or more precisely to BSPP designation (P stands for Parallel).
Conical threads according to ISO 7-1, identified by a letter R. They also correspond to BSP or more precisely to BSPT designation (T stands for Tapered).

COMPONENTS



SERIES F-E
① Body: unleaded brass treated with environmentally-friendly intermetallic alloy
② Gripper: unleaded brass treated with environmentally-friendly intermetallic alloy
③ Seal: FDA-approved Viton®
④ Port seal: FDA-approved Viton®

SERIES F-NSF
① Body: low-lead brass (≤0.1%)
② Gripper: brass (not in contact with the fluid)
③ Seal: FDA-approved Viton®
④ Port seal: FDA-approved Viton®

ADVANTAGES / CERTIFICATIONS

SERIES F-E

ADVANTAGES

Under-head O-ring

Can be screwed and unscrewed any number of times; no fragments of Teflon® or sealant will contaminate the fluid.

Corrosion resistance

The intermetallic alloy deposited on the surface and Viton® are compatible with numerous substances.

No plastic parts

CONFORMITY DECLARATIONS

- Regulation 1935/04 EU.*
- Regulation 2023/06 EU.

* Release tests performed at 50°C for 30 minutes.

SERIES F-NSF

ADVANTAGES

Under-head O-ring

Can be screwed and unscrewed any number of times; no fragments of Teflon® or sealant will contaminate the fluid.

No plastic parts

CONFORMITY DECLARATIONS

- NSF/ANSI 372 standard: drinking water system components - Lead Content.
- DM 174
- Regulation 1935/04 EU.*
- Regulation 2023/06 EU.

* Release tests performed at 50°C for 30 minutes.

CERTIFIED

- NSF/ANSI 169 standard: products in contact with food.

NSF COMPONENT

INSTALLING THE PIPE

Compressed air pipes must be used in compliance with some basic criteria in order to ensure long life and proper operation of the fitting:

- check that the conditions for the installation and use (e.g. temperature and fluid used) comply with the characteristics stated by the pipe manufacturer;
- check the pipe size; oversized pipes could not fit properly, undersized ones could not ensure pipe retention and air tightness.

The cut should be as accurate as possible at a right angle with the pipe axis.

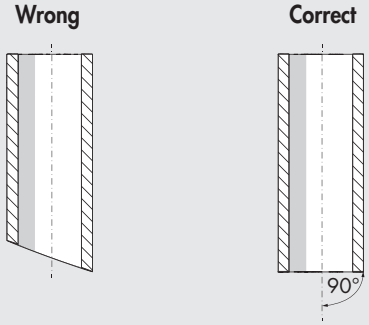

- the bending radius of the pipe installed must be as wide as possible. The fittings have been designed to ensure axial seal of the pipe; excessive curvature could considerably shorten the life of the pipe.
- the pipe must not be subjected to excessive axial stress and it must be of the right length for snugly fitting (not too long or too short).
- correct insertion of the pipe into the fitting is essential for air tightness and pipe retention. Make sure that the pipe is pushed right into the seat.
- check that the pipe does not encounter any obstacles or blockages along its way, which could cause tensile stress of the pipe in the fitting.

STRAIGHT, CYLINDRICAL, MALE R1 F



Series F-E		Series F-NSF									
Code	Ref.	Code	Ref.	Ø	F	Ch	Ch1	P	L	D	E
2F01001	R1 F-E	2F01051	R1 F-NSF	4	M5	Ø 9.9	2.5	4	21.5	2.6	9.9
2F01002	R1 F-E	2F01052	R1 F-NSF	4	1/8	11	3	6	20.5	3.1	15
2F01003	R1 F-E	2F01053	R1 F-NSF	4	1/4	12	3	8	22.5	3.1	18
2F01000	R1 F-E	2F01050	R1 F-NSF	6	M5	Ø 12.9	2.5	4	25	2.6	12.9
2F01007	R1 F-E	2F01057	R1 F-NSF	6	1/8	13	4	6	27.5	4.2	15
2F01008	R1 F-E	2F01058	R1 F-NSF	6	1/4	13	4	8	26.5	4.2	18
2F01009	R1 F-E	2F01059	R1 F-NSF	8	1/8	14	5	6	28.5	5.2	15.6
2F01010	R1 F-E	2F01060	R1 F-NSF	8	1/4	15	6	8	27	6.2	18
2F01011	R1 F-E	2F01061	R1 F-NSF	8	3/8	15	6	9	28	6.2	21
2F01012	R1 F-E	2F01062	R1 F-NSF	10	1/4	17	7	8	33.5	7.2	20
2F01013	R1 F-E	2F01063	R1 F-NSF	10	3/8	17	8	9	30.5	8.2	21
2F01022	R1 F-E	2F01072	R1 F-NSF	10	1/2	17	8	11	31.5	8.2	26

STRAIGHT, CONICAL, MALE R1C F



Series F-E		Series F-NSF									
Code	Ref.	Code	Ref.	Ø	F	Ch	Ch1	P	L	D	E
2F01C02	R1/C F-E	2F01C52	R1/C F-NSF	4	1/8	10	2.5	6.2	20.5	3.1	11.5
2F01C07	R1/C F-E	2F01C57	R1/C F-NSF	6	1/8	12	4	6.2	24	4.2	13.8
2F01C08	R1/C F-E	2F01C58	R1/C F-NSF	6	1/4	14	4	8.5	25.5	4.2	16
2F01C09	R1/C F-E	2F01C59	R1/C F-NSF	8	1/8	14	5	6.2	27.5	5.2	16
2F01C10	R1/C F-E	2F01C60	R1/C F-NSF	8	1/4	14	6	8.5	27.5	6.2	16
2F01C11	R1/C F-E	2F01C61	R1/C F-NSF	8	3/8	17	6	9	27	6.2	19.6
2F01C13	R1/C F-E	2F01C63	R1/C F-NSF	10	1/4	17	7	8.5	34.5	7.2	19.6
2F01C14	R1/C F-E	2F01C64	R1/C F-NSF	10	3/8	17	7	9	30.5	7.2	19.6

STRAIGHT, FEMALE R2 F



Series F-E		Series F-NSF								
Code	Ref.	Code	Ref.	Ø	F	Ch	P	L	D	E
2F02001	R2 F-E	2F02051	R2 F-NSF	4	1/8	10	7	27	3	14
2F02005	R2 F-E	2F02055	R2 F-NSF	6	1/8	13	7	30	5	15
2F02006	R2 F-E	2F02056	R2 F-NSF	6	1/4	13	8	32	5	17
2F02007	R2 F-E	2F02057	R2 F-NSF	8	1/8	14	7	30	7	17
2F02008	R2 F-E	2F02058	R2 F-NSF	8	1/4	14	8	32	7	17
2F02011	R2 F-E	2F02061	R2 F-NSF	10	1/4	17	8	35	9	20

STRAIGHT, INTERMEDIATE R3 F



Series F-E		Series F-NSF				
Code	Ref.	Code	Ref.	Ø	F	L
2F03001	R3 F-E	2F03051	R3 F-NSF	4	M13X1	33
2F03003	R3 F-E	2F03053	R3 F-NSF	6	M15X1	40
2F03004	R3 F-E	2F03054	R3 F-NSF	8	M17X1	41
2F03005	R3 F-E	2F03055	R3 F-NSF	10	M20X1	47

ELBOW, INTERMEDIATE R4 F



Series F-E		Series F-NSF					
Code	Ref.	Code	Ref.	Ø	D	E	L
2F04001	R4 F-E	2F04051	R4 F-NSF	4	2.5	9.5	18
2F04003	R4 F-E	2F04053	R4 F-NSF	6	4.5	13.5	22
2F04004	R4 F-E	2F04054	R4 F-NSF	8	7	14	26
2F04005	R4 F-E	2F04055	R4 F-NSF	10	9	17	30

METAL WORK PNEUMATIC

TEE, INTERMEDIATE R5 F



Series F-E		Series F-NSF						
Code	Ref.	Code	Ref.	Ø	L	L1	D	E
2F05001	R5 F-E	2F05051	R5 F-NSF	4	21	42	3.5	9.5
2F05003	R5 F-E	2F05053	R5 F-NSF	6	24	48	5	12.5
2F05004	R5 F-E	2F05054	R5 F-NSF	8	26	52	7	14
2F05005	R5 F-E	2F05055	R5 F-NSF	10	30	60	9	17

THREADED ADAPTER R6 F



Series F-E		Series F-NSF								
Code	Ref.	Code	Ref.	Ø	F	Ch	P	L	D	E
2F06001	R6 F-E	2F06051	R6 F-NSF	4	M5	8	4	25.2	2.5	9
2F06002	R6 F-E	2F06052	R6 F-NSF	4	1/8	13	6	28.9	2.5	15
2F06003	R6 F-E	2F06053	R6 F-NSF	4	1/4	14	8	32.4	2.2	18
2F06000	R6 F-E	2F06050	R6 F-NSF	6	M5	9	4	25.7	2.7	10
2F06007	R6 F-E	2F06057	R6 F-NSF	6	1/8	13	6	29.4	4	15
2F06008	R6 F-E	2F06058	R6 F-NSF	6	1/4	14	8	32.9	4	18
2F06009	R6 F-E	2F06059	R6 F-NSF	8	1/8	13	6	30.6	5.5	15
2F06010	R6 F-E	2F06060	R6 F-NSF	8	1/4	14	8	34	6	18
2F06011	R6 F-E	2F06061	R6 F-NSF	8	3/8	17	9	35.4	6	22
2F06012	R6 F-E	2F06062	R6 F-NSF	10	1/4	14	8	35.6	7.8	18
2F06013	R6 F-E	2F06063	R6 F-NSF	10	3/8	17	9	37.1	8	22

STRAIGHT, INTERMEDIATE, BULKHEAD UNIONS R10 F



Series F-E		Series F-NSF						
Code	Ref.	Code	Ref.	Ø	F	Ch	L	I MAX
2F11001	R10 F-E	2F11051	R10 F-NSF	4	M13x1	16	33	11
2F11003	R10 F-E	2F11053	R10 F-NSF	6	M15x1	17	40	16
2F11004	R10 F-E	2F11054	R10 F-NSF	8	M17x1	20	41	19
2F11005	R10 F-E	2F11055	R10 F-NSF	10	M20x1	24	47	21

ROTARY ELBOW, MALE, CYLINDRICAL R31 F



Series F-E		Series F-NSF									
Code	Ref.	Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2F31001	R31 F-E	2F31051	R31 F-NSF	4	M5	9	9	10	21	16	4
2F31002	R31 F-E	2F31052	R31 F-NSF	4	1/8	13	15	10	21	21	6
2F31003	R31 F-E	2F31053	R31 F-NSF	4	1/4	16	18	10	21	25	8
2F31007	R31 F-E	2F31057	R31 F-NSF	6	M5	9	8	11.8	24	17.5	4
2F31008	R31 F-E	2F31058	R31 F-NSF	6	1/8	13	15	12.5	24	21	6
2F31009	R31 F-E	2F31059	R31 F-NSF	6	1/4	16	18	12.5	25.5	25	8
2F31010	R31 F-E	2F31060	R31 F-NSF	8	1/8	13	15	14	26	22.5	6
2F31011	R31 F-E	2F31061	R31 F-NSF	8	1/4	16	18	14	26	25	8
2F31012	R31 F-E	2F31062	R31 F-NSF	8	3/8	19	22	14	27.5	30.5	9
2F31013	R31 F-E	2F31063	R31 F-NSF	10	1/4	16	18	16.5	30	27	8
2F31014	R31 F-E	2F31064	R31 F-NSF	10	3/8	19	22	16.5	30	30.5	9
2F31015	R31 F-E	2F31065	R31 F-NSF	10	1/2	22	26	16.5	31	32	11

ROTARY ELBOW, MALE, CONICAL R31C F



Series F-E		Series F-NSF									
Code	Ref.	Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2F31C02	R31/C F-E	2F31C52	R31/C F-NSF	4	1/8	12	13.3	10	21	22	6.2
2F31C03	R31/C F-E	2F31C53	R31/C F-NSF	4	1/4	16	17.7	10	21	27	8.5
2F31C08	R31/C F-E	2F31C58	R31/C F-NSF	6	1/8	12	13.3	11.8	24	22	6.2
2F31C09	R31/C F-E	2F31C59	R31/C F-NSF	6	1/4	16	17.7	12.5	25.5	27	8.5
2F31C10	R31/C F-E	2F31C60	R31/C F-NSF	8	1/8	12	13.3	14	26	23.5	6.2
2F31C11	R31/C F-E	2F31C61	R31/C F-NSF	8	1/4	16	17.7	14	26	27	8.5
2F31C12	R31/C F-E	2F31C62	R31/C F-NSF	8	3/8	19	22	14	27.5	31	9
2F31C13	R31/C F-E	2F31C63	R31/C F-NSF	10	1/4	16	17.7	16.5	30	29	8.5
2F31C14	R31/C F-E	2F31C64	R31/C F-NSF	10	3/8	19	22	16.5	30	31	9

CENTRAL TEE, MALE, CYLINDRICAL, ROTARY R32 F



Series F-E		Series F-NSF									
Code	Ref.	Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2F32002	R32 F-E	2F32052	R32 F-NSF	4	1/8	13	15	10	41.5	21	6
2F32008	R32 F-E	2F32058	R32 F-NSF	6	1/8	13	15	12.5	47.5	21	6
2F32009	R32 F-E	2F32059	R32 F-NSF	6	1/4	16	18	12.5	50.5	25	8
2F32010	R32 F-E	2F32060	R32 F-NSF	8	1/8	13	15	14	52	22.5	6
2F32011	R32 F-E	2F32061	R32 F-NSF	8	1/4	16	18	14	52	25	8
2F32012	R32 F-E	2F32062	R32 F-NSF	8	3/8	19	22	14	56	30.5	9
2F32013	R32 F-E	2F32063	R32 F-NSF	10	1/4	16	18	16.5	60.5	27	8
2F32014	R32 F-E	2F32064	R32 F-NSF	10	3/8	19	22	16.5	60.5	30.5	9

LATERAL TEE, MALE, CYLINDRICAL, ROTARY R38 F



Series F-E		Series F-NSF									
Code	Ref.	Code	Ref.	Ø	F	Ch	E	E1	L	L1	P
2F38002	R38 F-E	2F38052	R38 F-NSF	4	1/8	13	15	9.5	22.5	21	6
2F38008	R38 F-E	2F38058	R38 F-NSF	6	1/8	13	15	12.5	24.5	21	6
2F38009	R38 F-E	2F38059	R38 F-NSF	6	1/4	16	18	12.5	26	25	8
2F38010	R38 F-E	2F38060	R38 F-NSF	8	1/8	13	15	14.5	27.5	22.5	6
2F38011	R38 F-E	2F38061	R38 F-NSF	8	1/4	16	18	14.5	27.5	25	8
2F38013	R38 F-E	2F38063	R38 F-NSF	10	1/4	16	18	17	31.5	27	8
2F38014	R38 F-E	2F38064	R38 F-NSF	10	3/8	19	22	17	31.5	30.5	9

ELBOW, MALE, CONICAL R39C F



Series F-E		Series F-NSF								
Code	Ref.	Code	Ref.	Ø	F	Ch	E1	L	L1	P
2F39C02	R39/C F-E	2F39C52	R39/C F-NSF	4	1/8	10	9.5	21	16	6.2
2F39C08	R39/C F-E	2F39C58	R39/C F-NSF	6	1/8	10	11.8	23.5	16	6.2
2F39C09	R39/C F-E	2F39C59	R39/C F-NSF	6	1/4	10	11.8	24	18.5	8.5
2F39C10	R39/C F-E	2F39C60	R39/C F-NSF	8	1/8	12	14	26	17	6.2
2F39C11	R39/C F-E	2F39C61	R39/C F-NSF	8	1/4	12	14	26	20	8.5
2F39C12	R39/C F-E	2F39C62	R39/C F-NSF	8	3/8	14	14	27.5	22.5	9
2F39C13	R39/C F-E	2F39C63	R39/C F-NSF	10	1/4	14	17	30.5	22	8.5

PUSH-IN FITTINGS FOR THE PRODUCTION OF BATTERIES

SERIES BTY FITTINGS

The BTY Series is designed to meet the requirements of the battery production process, which requires to avoid any copper (Cu) and zinc (Zn) contamination.
The design of the BTY series fittings features either a stainless steel or technopolymer casing, inner technopolymer components, stainless steel springs and NBR seals, which make them the perfect choice for battery production lines.
Metal Work automatic fittings are generally lightly lubricated in the area where the tube is inserted.
Dedicated solutions are required if no lubricant is to be used at all.

TECHNICAL DATA		STEEL	TECHNOPOLYMER
Threaded port		G (BSP)*: 1/8 - 1/4	
Diameter	mm	Ø 4 - Ø 6 - Ø 8	
Temperature range	°C	– 20 to 80	– 20 to 60
	°F	– 4 to 176	– 4 to 140
Pressure range	bar	– 0.99 to 16	– 0.99 to 12
	MPa	– 0.099 to 1.6	– 0.099 to 1.2
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene	
Fluid		Vacuum - Compressed air	

N.B.: Given the possible presence of aggressive substances, we suggest consulting the compatibility table available on our website.
* Cylindrical threads according to ISO 228-1, identified with a letter G. They also correspond to BSP or more precisely to BSPP designation (P stands for Parallel).

COMPONENTS

① Release bushing: technopolymer
② Locking bushing: technopolymer
③ Body: AISI 316L stainless steel
④ Clamping spring: stainless steel
⑤ Spring supporting ring: technopolymer
⑥ Seal: NBR NBR (FKM or EPDM on request)

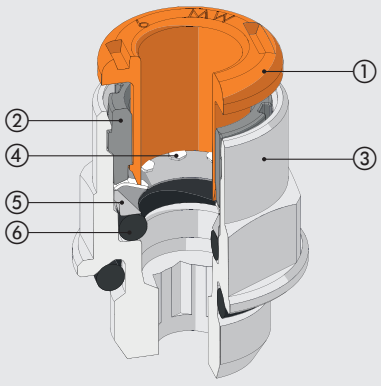

INSTALLING THE PIPE

Compressed air pipes must be used in compliance with some basic criteria in order to ensure long life and proper operation of the fitting:
- check that the conditions for the installation and use (e.g. temperature and fluid used) comply with the characteristics stated by the pipe manufacturer;
- check the pipe size; oversized pipes could not fit properly, undersized ones could not ensure pipe retention and air tightness.

The cut should be as accurate as possible at a right angle with the pipe axis.

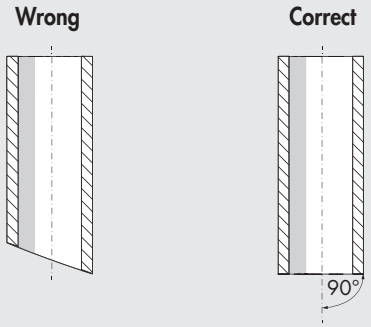

- the bending radius of the pipe installed must be as wide as possible. The fittings have been designed to ensure axial seal of the pipe; excessive curvature could considerably shorten the life of the pipe.
- the pipe must not be subjected to excessive axial stress and it must be of the right length for snugly fitting (not too long or too short).
- correct insertion of the pipe into the fitting is essential for air tightness and pipe retention. Make sure that the pipe is pushed right into the seat.
- check that the pipe does not encounter any obstacles or blockages along its way, which could cause tensile stress of the pipe in the fitting.

STRAIGHT, CYLINDRICAL, MALE R1 BTY



Code	Ref.	Ø	F	Ch	Ch1	P	L	D	E
2Y01002	R1 BTY	4	1/8	10	3	6	18	3.1	14
2Y01003	R1 BTY	4	1/4	10	3	8	19.8	3.1	18
2Y01007	R1 BTY	6	1/8	12	4	6	21.6	4.1	14
2Y01008	R1 BTY	6	1/4	12	4	8	20.3	4.1	18
2Y01009	R1 BTY	8	1/8	13	5	6	25.4	5.2	14
2Y01010	R1 BTY	8	1/4	14	6	8	24.4	6.2	18

STRAIGHT, FEMALE R2 BTY



Code	Ref.	Ø	F	Ch	P	L	D	E
2Y02001	R2 BTY	4	1/8	10	7	26.2	3	14
2Y02002	R2 BTY	4	1/4	10	8	28.6	3	17
2Y02005	R2 BTY	6	1/8	12	7	27.1	5	14
2Y02006	R2 BTY	6	1/4	12	8	29.3	5	17
2Y02007	R2 BTY	8	1/8	13	7	28.1	7	14
2Y02008	R2 BTY	8	1/4	14	8	30	7	17

ROTARY ELBOW, MALE, TECHNOPOLYMER R34 BTY



Code	Ref.	Ø	F	Ch	P	L	L1	E	E1
2Y34002	R34 BTY	4	1/8	12	6	16.4	17.2	14	9.2
2Y34003	R34 BTY	4	1/4	14	8	16.4	20.1	18	9.2
2Y34007	R34 BTY	6	1/8	12	6	19	18.3	14	11.3
2Y34008	R34 BTY	6	1/4	14	8	19	21.2	18	11.3
2Y34009	R34 BTY	8	1/8	12	6	20.2	19.5	14	13.8
2Y34010	R34 BTY	8	1/4	14	8	20.2	22.4	18	13.8

ROTARY CENTRAL TEE, MALE, TECHNOPOLYMER R35 BTY



Code	Ref.	Ø	F	Ch	P	L	L1	E	E1
2Y35002	R35 BTY	4	1/8	12	6	32.8	17.2	14	9.2
2Y35003	R35 BTY	4	1/4	14	8	32.8	20.1	18	9.2
2Y35007	R35 BTY	6	1/8	12	6	38	18.3	14	11.3
2Y35008	R35 BTY	6	1/4	14	8	38	21.2	18	11.3
2Y35009	R35 BTY	8	1/8	12	6	40.4	19.5	14	13.8
2Y35010	R35 BTY	8	1/4	14	8	40.4	22.4	18	13.8

To complete the proposal, the following list of standard fittings can be used in this sector.

STRAIGHT, INTERMEDIATE, TECHNOPOLYMER R19



Code	Ref.	Ø1	Ø2	E	L	D	F
2019001	RL19	4	4	9.2	30.4	3	3.3
2019003	R19	6	6	11.3	33	5	3.3
2019004	RL19	8	8	13.8	36.2	6.5	3.3
2019303	RL19	6	4	11.3	32.7	3	3.3
2019304	RL19	8	6	13.8	36.1	5	3.3

ELBOW, INTERMEDIATE, TECHNOPOLYMER R21



Code	Ref.	Ø	L	D	E	I	F
2L21001	RL21	4	16.7	2.5	9.2	7.2	3.3
2L21003	RL21	6	19	4.2	11.3	8.2	3.3
2L21004	RL21	8	21.4	6.2	13.8	9.6	3.3

INTERMEDIATE TEE, TECHNOPOLYMER R22



Code	Ref.	Ø	L	L1	D	E	I	I1	F
2L22001	RL22	4	16.7	33.4	2.5	9.2	7.2	14.4	3.3
2L22003	RL22	6	19	38	4.2	11.3	8.2	16.4	3.3
2L22004	RL22	8	21.4	42.8	6.2	13.8	9.6	19.2	3.3

Y TECHNOPOLYMER R23



Code	Ref.	Ø1	Ø2	L	L1	E1	ØE2	I	F	L2
2023001	RL23	4	4	32.9	5	9.2	9.2	14.8	3.3	19.2
2023003	RL23	6	6	35.5	5.8	11.3	11.3	15	3.3	22.8
2023004	RL23	8	8	39.5	7.2	13.8	13.8	15.8	3.3	28.2
2L23301	RL23	6	4	34.2	5	11.3	9.2	14.8	3.3	19.2
2L23303	RL23	8	6	37.8	5.8	13.8	11.3	15	3.3	22.8

PLUG-IN ELBOWS R46



Code	Ref.	Ø1	Ø2	L	L1	L2	E	E1
2L46001	RL46	4	4	16	22.5	8.1	6.8	9.2
2L46002	RL46	6	6	18.5	24	8.4	8	11.3
2L46003	RL46	8	8	21.2	28.5	11.3	10	13.8

NOTES

SUMMARY FITTING SERIES A, B, C, D

- **STANDARD FITTINGS SERIES A** — D2.2

- **COMPRESSION FITTINGS SERIES B** — D2.8

- **QUICK FITTINGS SERIES C** — D2.11

- **BANJO FITTINGS SERIES D** — D2.15

STANDARD FITTINGS SERIES A

- Body: nickel-plated brass
- Maximum pressure 870 psi, 6000 KPa 60 bar

NIPPLE, PARALLEL (A1)



* Washer D11 can be used

Code	Ref.	F	F1	Ch	P	P1	L
2101A00	A1	M5	M5	8	4.0	4.0	11.5
2101000	A1	M5	1/8	14	4.0	6.0	14.5
2101001	A1	1/8	1/8	14	6.0	6.0	17.0
2101002	A1	1/8	1/4	17	6.0	8.0	19.0
2101003	A1	1/8	3/8	20	6.0	9.0	20.0
2101004	A1	1/4	1/4	17	8.0	8.0	21.0
2101005	A1	1/4	3/8	20	8.0	9.0	22.0
2101006	A1	1/4	1/2	25	8.0	10.0	24.0
2101007	A1	3/8	3/8	20	9.0	9.0	24.0
2101008	A1	3/8	1/2	25	9.0	10.0	25.5
2101009	A1	1/2	1/2	25	10.0	10.0	26.5
2101010	A1	1/2	3/4	30	10.0	11.0	27.0
2101011	A1	3/4	3/4	30	11.0	11.0	28.0

NIPPLE, CONICAL (A2)



Code	Ref.	F	F1	Ch	P	P1	L
2102001	A2	1/8	1/8	12	8.0	8.0	21.0
2102002	A2	1/8	1/4	14	8.0	11.0	24.0
2102003	A2	1/8	3/8	17	8.0	11.5	25.0
2102004	A2	1/4	1/4	14	11.0	11.0	27.0
2102005	A2	1/4	3/8	17	11.0	11.5	28.0
2102006	A2	1/4	1/2	22	11.0	14.0	32.0
2102007	A2	3/8	3/8	17	11.5	11.5	29.0
2102008	A2	3/8	1/2	22	11.5	14.0	32.5
2102009	A2	1/2	1/2	22	14.0	14.0	35.0
2102010	A2	1/2	3/4	27	14.0	16.5	37.5
2102011	A2	3/4	3/4	27	16.5	16.5	40.0

SLEEVE (A3)



Code	Ref.	F	Ch	L
2103000	A3	M5	8	11.0
2103001	A3	1/8	14	15.0
2103002	A3	1/4	17	22.0
2103003	A3	3/8	22	24.0
2103004	A3	1/2	27	30.0

REDUCER, CONICAL (A4)



Code	Ref.	F	F1	Ch	P	P1	L
2104001	A4	1/4	1/8	14	11.0	7.0	16.0
2104002	A4	3/8	1/8	17	11.5	7.0	17.0
2104003	A4	3/8	1/4	17	11.5	8.0	17.0
2104004	A4	1/2	1/4	22	14.0	8.0	20.0
2104005	A4	1/2	3/8	22	14.0	10.0	20.0
2104006	A4	3/4	1/2	27	16.5	11.0	23.5

METAL WORK PNEUMATIC

REDUCER, PARALLEL (A4/Z)



* Washer D11 can be used

Code	Ref.	F	F1	Ch	P	L
2151000	A4/Z	1/8	M5	14	6.0	10.0
2151001	A4/Z	1/4	1/8	17	8.0	13.0
2151002	A4/Z	3/8	1/8	20	9.0	14.0
2151003	A4/Z	3/8	1/4	20	9.0	14.0
2151004	A4/Z	1/2	1/4	25	10.0	15.5
2151005	A4/Z	1/2	3/8	25	10.0	15.5

REDUCER, CONICAL (A5)



Code	Ref.	F	F1	Ch	P	P1	L
2105001	A5	1/8	1/8	14	8.0	7.0	20.0
2105002	A5	1/8	1/4	17	8.0	8.0	22.5
2105003	A5	1/4	1/4	17	11.0	8.0	25.0
2105004	A5	1/4	3/8	22	11.0	10.0	28.5
2105005	A5	3/8	3/8	22	11.5	10.0	28.5
2105006	A5	3/8	1/2	24	11.5	11.0	32.0
2105007	A5	1/2	1/2	24	14.0	11.0	34.0

REDUCER, PARALLEL (A5/Z)



* Washer D11 can be used

Code	Ref.	F	F1	Ch	P	P1	L
2152001	A5/Z	M5	1/8	12	4.0	7.0	17.0
2152002	A5/Z	1/8	1/8	14	6.0	7.0	18.5
2152003	A5/Z	1/8	1/4	17	6.0	8.0	21.5
2152004	A5/Z	1/4	1/4	17	8.0	8.0	22.5
2152005	A5/Z	1/4	3/8	22	8.0	10.0	26.0
2152006	A5/Z	3/8	3/8	22	9.0	10.0	26.5
2152007	A5/Z	3/8	1/2	24	9.0	11.0	29.5
2152008	A5/Z	1/2	1/2	25	10.0	11.0	29.5

REDUCER (A6)



Code	Ref.	F	F1	Ch	P	P1	L
2106001	A6	1/8	1/4	17	8.0	8.0	21.5
2106002	A6	1/8	3/8	22	7.0	10.0	23.5
2106003	A6	1/4	3/8	22	9.0	10.0	25.5
2106004	A6	1/4	1/2	24	9.0	11.0	28.5
2106005	A6	3/8	1/2	24	11.0	11.0	29.5

PLUG WITH HEXAGON EMBEDEDDED (A7)



Code	Ref.	F	Ch	P	L	E	O ring
2107000	A7	M5	2.5	4.0	6.5	8	3.5x1.2
2107005	A7	M7	3	5.0	7.4	10	5x1.5
2107001	A7	1/8	3	7.0	9.5	15	2031
2107002	A7	1/4	6	8.0	11.0	18	2043
2107003	A7	3/8	8	9.0	12.5	21	2056
2107004	A7	1/2	10	11.0	14.5	26	3068
MINIATURIZED VERSION							
2107M00	A7	M5	2.5	3.5	5.3	7.5	3.5x1.2
2107M01	A7	1/8	4	5.2	7.2	13	2031
2107M02	A7	1/4	6	6.5	8.8	16	2043
2107M03	A7	3/8	8	7.2	9.7	19.5	2056
2107M04	A7	1/2	10	9.2	12.0	24.5	3068

NUB (A8)



Code	Ref.	F	Ch	P1	L
2108001	A8	1/8	14	7.0	13.0
2108002	A8	1/4	17	8.0	15.0
2108003	A8	3/8	20	10.0	17.5
2108004	A8	1/2	24	11.0	20.0

ELBOW, FEMALE (A9)



Code	Ref.	F	Ch	P	L	E
2109001	A9	1/8	10	7.0	20.5	13.5
2109002	A9	1/4	13	8.0	26.0	17.0
2109003	A9	3/8	15	10.0	30.0	20.5
2109004	A9	1/2	20	11.0	36.0	25.5

ELBOW, MALE-FEMALE (A10)



Code	Ref.	F	F1	Ch	P	P1	L	L1	E
2110001	A10	1/8	1/8	10	8.0	7.0	16.5	20.5	13.5
2110002	A10	1/4	1/4	13	10.5	8.0	24.5	26.0	17.0
2110003	A10	3/8	3/8	15	11.0	10.0	26.0	30.0	20.5
2110004	A10	1/2	1/2	20	13.0	11.0	30.0	36.0	25.5

TEE, FEMALE (A11)



Code	Ref.	F	Ch	P	L	E
2111001	A11	1/8	10	7.0	20.5	13.5
2111002	A11	1/4	13	8.0	26.0	17.0
2111003	A11	3/8	15	10.0	30.0	20.5
2111004	A11	1/2	20	11.0	36.0	25.5

TEE, CENTRAL MALE (A12)



Code	Ref.	F	F1	Ch	P	P1	L	L1	E
2112001	A12	1/8	1/8	10	8.0	7.0	16.5	20.5	13.5
2112002	A12	1/4	1/4	13	10.5	8.0	24.5	26.0	17.0
2112003	A12	3/8	3/8	15	11.0	10.0	26.0	30.0	20.5
2112004	A12	1/2	1/2	20	13.0	11.0	30.0	36.0	25.5

TEE, LATERAL MALE (A13)



Code	Ref.	F	F1	Ch	P	P1	L	L1	E
2113001	A13	1/8	1/8	10	8.0	7.0	37.0	20.5	13.5
2113002	A13	1/4	1/4	13	10.5	8.0	50.5	26.0	17.0
2113003	A13	3/8	3/8	15	11.0	10.0	56.0	30.0	20.5
2113004	A13	1/2	1/2	20	13.0	11.0	66.0	36.0	25.5

METAL WORK PNEUMATIC

EQUAL FEMALE CROSS (A14)



Code	Ref.	F	Ch	P	L	E
2114001	A14	1/8	10	7.0	20.5	13.5
2114002	A14	1/4	13	8.0	26.0	17.0
2114003	A14	3/8	15	10.0	28.0	20.5

ELBOW, MALE (A15)



Code	Ref.	F	Ch	P	L
2115001	A15	1/8	10	8.0	16.5
2115002	A15	1/4	13	10.5	24.5
2115003	A15	3/8	15	11.0	26.0
2115004	A15	1/2	20	13.0	30.0

TEE, MALE (A16)



Code	Ref.	F	Ch	P	L
2116001	A16	1/8	10	8.0	16.5
2116002	A16	1/4	13	10.5	24.5
2116003	A16	3/8	15	11.0	26.0
2116004	A16	1/2	20	13.0	30.0

TEE, CENTRAL FEMALE (A17)



Code	Ref.	F	F1	Ch	P	P1	L	L1	E
2117001	A17	1/4	1/4	13	10.5	8.0	26.0	24.5	17.0
2117002	A17	1/8	1/8	10	8.0	7.0	20.5	16.5	13.5
2117003	A17	3/8	3/8	15	11.0	10.0	30.0	26.0	20.5
2117004	A17	1/2	1/2	20	13.0	11.0	36.0	30.0	25.5

TEE, LATERAL FEMALE (A18)



Code	Ref.	F	F1	Ch	P	P1	L	L1	E	L2
2118000	A18	1/8	1/8	10	8.0	7.0	20.5	16.5	13.5	37.0
2118001	A18	1/4	1/4	13	10.5	8.0	26.0	24.5	17.0	50.5
2118002	A18	3/8	3/8	15	11.0	10.0	30.0	26.0	20.5	56.0
2118003	A18	1/2	1/2	20	13.0	11.0	36.0	30.0	25.5	66.0

HOSE ADAPTER, PARALLEL (A19)



Code	Ref.	Ø	F	Ch	P	L	O ring
2119001	A19	7	1/8	15	6.0	31.0	2031
2119002	A19	7	1/4	18	8.0	33.0	2043
2119003	A19	8	1/8	15	6.0	31.0	2031
2119004	A19	9	1/8	15	6.0	31.0	2031
2119005	A19	9	1/4	18	8.0	33.0	2043
2119006	A19	9	3/8	21	9.0	34.0	2056
2119007	A19	12	1/4	18	8.0	33.0	2043
2119008	A19	12	3/8	21	9.0	34.0	2056
2119009	A19	12	1/2	26	11.0	36.0	3068
2119010	A19	17	3/8	21	9.0	34.0	2056
2119011	A19	17	1/2	26	11.0	36.0	3068

MALE-FEMALE EQUAL CROSS (A20)



Code	Ref.	F	F1	Ch	P	P1	L	L1	E
2120001	A20	1/8	1/8	10	8.0	7.0	16.5	20.5	13.5
2120002	A20	1/4	1/4	13	10.5	8.0	24.5	26.0	17.0

TEE CROSS (A21)



Code	Ref.	F	Ø	P	L	THICKNESS
2121001	A21	1/8	4.5	8.0	31.0	17.5
2121002	A21	1/4	5.5	9.0	40.0	24.0
2121003	A21	3/8	5.5	12.0	50.0	28.0
2121004	A21	1/2	5.5	12.0	50.0	34.0

Maximum operating conditions for the A21s are different from other A-series fittings, namely max P13 bar, max T 50°C

Y, FEMALE 90° (A23)



Code	Ref.	F	Ch	P	L	L1
2123001	A23	1/8	13	8	26.5	14.5
2123002	A23	1/4	17	11	32.0	18.0
2123003	A23	3/8	20	11.5	36.5	20.5
2123004	A23	1/2	25	14	44.5	26.5

Y, MALE 90° (A24)



Code	Ref.	F	F1	Ch	P	P1	L	L1
2124001	A24	1/8	1/8	13	8.0	8.0	32.0	14.5
2124002	A24	1/4	1/4	17	11.0	11.0	38.0	18.0
2124003	A24	3/8	3/8	20	11.5	11.5	42.0	20.5
2124004	A24	1/2	1/2	25	14.0	14.0	53.0	26.5

EXTENSION (A25)



Code	Rif.	F	Ch	P	L	P1
2150003	A25	1/8	14	6.0	22.0	8.0
2150004	A25	1/8	14	6.0	42.0	8.0
2150005	A25	1/8	14	6.0	51.0	8.0
2150006	A25	1/4	17	8.0	35.0	11.0
2150007	A25	1/4	17	8.0	51.0	11.0

TAPERED THREAD FITTINGS SERIES A WITH PTFE

Metal Work can supply fittings with a tapered thread coated in polytetrafluorethylene. This system provides the pneumatic seal between the fitting and the female thread. It is therefore not necessary to add other sealing systems during assembly, such as adhesives or Teflon tape. This significantly reduces assembly times. The physical and technical features of the material used ensure that the properties are maintained through time and in a wide range of operating temperatures.
This coating can be used with series A fittings types A2, A4, A5, A10, A12, A13, A15, A16, A17, A18 and A25 that have a 1/8" to 1/2" gas taper thread.

TECHNICAL DATA		
Temperature range for PTFE	°C	– 45 to + 80
	°F	– 49 to + 176

KEY TO CODES
Fittings with a PTFE thread have the same code as the standard fitting, with the addition of the suffix **T**.
For example A2 1/8 1/8 fitting has code **2102001**, so the PTFE version has code **2102001T**.

NOTES

COMPRESSION FITTINGS SERIES B

- Body: nickel-plated brass
- Maximum pressure 870 psi, 6000 kPa 60 bar
- For use with copper tubes

STRAIGHT, MALE CONICAL (B1)



Code	Ref.	Ø	F1	Ch	Ch1	P	L	I
2201001	B1	4/2	1/8	10	10	8.0	27.5	16.0
2201002	B1	6/4	1/8	12	12	8.0	28.0	14.5
2201003	B1	6/4	1/4	14	12	11.0	31.0	17.5
2201004	B1	8/6	1/8	12	14	8.0	30.0	16.5
2201005	B1	8/ 6	1/4	14	14	11.0	33.0	19.5
2201006	B1	8/6	3/8	17	14	11.5	33.5	20.0
2201007	B1	10/8	1/4	17	19	11.0	38.5	20.0
2201008	B1	10/8	3/8	17	19	11.5	39.0	20.5
2201009	B1	10/8	1/2	22	19	14.0	42.5	24.0
2201010	B1	12/10	3/8	19	22	11.5	38.5	20.5
2201011	B1	12/10	1/2	22	22	14.0	42.0	24.0
2201012	B1	15/12	1/2	22	27	14.0	43.5	25.0

STRAIGHT, FEMALE (B2)



Code	Ref.	Ø	F1	Ch	Ch1	P	L	I
2202001	B2	6/4	1/8	14	12	7	28.5	15.0
2202002	B2	6/4	1/4	17	12	8	31.5	18.0
2202003	B2	8/6	1/8	14	14	7	29.5	16.0
2202004	B2	8/6	1/4	17	14	8	32.0	18.5
2202005	B2	8/6	3/8	22	14	10	36.0	22.5
2202006	B2	10/8	1/4	17	19	8	37.5	19.0
2202007	B2	10/8	3/8	22	19	10	41.0	22.5

STRAIGHT, CONNECTOR (B3)



Code	Ref.	Ø	Ch	Ch1	L	I
2203001	B3	4/2	10	10	35	12.0
2203002	B3	6/4	12	12	36	9.0
2203003	B3	8/6	14	14	39	12.0
2203004	B3	10/8	17	19	50	13.0
2203005	B3	12/10	19	22	50	14.0
2203006	B3	15/12	24	27	53	16.0

BULKHEAD CONNECTOR (B4)



Code	Ref.	Ø	Ch	Ch1	L	I
2204001	B4	6/4	14	12	53.0	26
2204002	B4	8/6	16	14	56.0	29
2204003	B4	10/8	19	19	66.5	29.5
2204004	B4	12/10	22	22	67.0	31
2204005	B4	15/12	25	27	73.5	36.5

METAL WORK PNEUMATIC

ELBOW, MALE (B5)



Code	Ref.	Ø	F1	Ch	Ch1	P	L	L1	I
2205001	B5	4/2	1/8	9	10	8.0	16.0	21.5	10.0
2205002	B5	6/4	1/8	9	12	8.0	16.0	22.0	8.5
2205003	B5	6/4	1/4	11	12	11.0	20.0	23.5	10.0
2205004	B5	8/6	1/8	11	14	8.0	17.0	24.0	10.5
2205005	B5	8/6	1/4	11	14	11.0	20.0	24.0	10.5
2205006	B5	8/6	3/8	13	14	12.0	23.5	27.0	13.5
2205007	B5	10/8	1/4	13	19	11.0	22.5	32.0	13.5
2205008	B5	10/8	3/8	13	19	12.0	23.5	32.0	13.5
2205009	B5	10/8	1/2	20	19	13.0	30.0	39.0	20.5
2205010	B5	12/10	3/8	15	22	11.5	24.0	33.5	15.5
2205011	B5	12/10	1/2	20	22	13.0	30.0	38.0	20.0
2205012	B5	15/12	1/2	20	27	13.0	30.0	38.5	20.0

ELBOW, FEMALE (B6)



Code	Ref.	Ø	Ch	Ch1	L	I
2206001	B6	4/2	9	10	21.5	10.0
2206002	B6	6/4	9	12	22.0	8.5
2206003	B6	8/6	11	14	24.0	10.5
2206004	B6	10/8	13	19	32.0	13.5
2206005	B6	12/10	15	22	33.5	15.5
2206006	B6	15/12	20	27	38.5	20.0

TEE, CENTRAL MALE (B7)



Code	Ref.	Ø	F	Ch	Ch1	P	L	L1	I
2207001	B7	4/2	1/8	9	10	8.0	16.0	21.5	10.0
2207002	B7	6/4	1/8	9	12	8.0	16.0	22.0	8.5
2207003	B7	6/4	1/4	11	12	11.0	20.0	23.5	10.0
2207004	B7	8/6	1/8	11	14	8.0	17.0	24.0	10.5
2207005	B7	8/6	1/4	11	14	11.0	20.0	24.0	10.5
2207006	B7	8/6	3/8	13	14	12.0	23.5	27.0	13.5
2207007	B7	10/8	1/4	13	19	11.0	22.5	32.0	13.5
2207008	B7	10/8	3/8	13	19	12.0	23.5	32.0	13.5
2207010	B7	12/10	3/8	15	22	11.5	24.0	33.5	15.5
2207011	B7	12/10	1/2	20	22	13.0	30.0	38.0	20.0
2207012	B7	15/12	1/2	20	27	13.0	30.0	38.5	20.0

TEE, LATERAL MALE (B8)



Code	Ref.	Ø	F1	Ch	Ch1	P	L	L1	I
2208000	B8	4/2	1/8	9	10	8.0	37.5	21.5	10.0
2208001	B8	6/4	1/8	9	12	8.0	38.5	22.0	8.5
2208002	B8	6/4	1/4	11	12	11.0	43.5	23.5	10.0
2208003	B8	8/6	1/8	11	14	8.0	41.0	24.0	10.5
2208004	B8	8/6	1/4	11	14	11.0	44.0	24.0	10.5
2208005	B8	8/6	3/8	13	14	12.0	50.5	27.0	13.5
2208006	B8	10/8	1/4	13	19	11.0	54.5	32.0	13.5
2208007	B8	10/8	3/8	13	19	12.0	55.5	32.0	13.5
2208009	B8	12/10	3/8	15	22	11.5	57.5	33.5	15.5
2208010	B8	12/10	1/2	20	22	13.0	68.0	38.0	20.0
2208011	B8	15/12	1/2	20	27	13.0	68.5	38.5	20.0

TEE, MALE (B9)



Code	Ref.	Ø	Ch	Ch1	L	I
2209001	B9	4/2	9	10	21.5	10.0
2209002	B9	6/4	9	12	22.0	8.5
2209003	B9	8/6	11	14	24.0	10.5
2209004	B9	10/8	13	19	32.0	13.5
2209005	B9	12/10	15	22	33.5	15.5
2209006	B9	15/12	20	27	38.5	20.0

NUT (B10)



Code	Ref.	Ø	Ch1	L	F
2210001	B10	4/2	10	11.0	M8x1
2210002	B10	6/4	12	11.5	M10x1
2210003	B10	8/6	14	13.0	M12x1
2210004	B10	10/8	19	15.5	M16x1.5
2210005	B10	12/10	22	15.5	M18x1.5
2210006	B10	15/12	27	17.0	M22x1.5

OLIVE (B11)



Code	Ref.	Ø	L
2211001	B11	4/2	6
2211002	B11	6/4	7
2211003	B11	8/6	7
2211004	B11	10/8	10
2211005	B11	12/10	10
2211006	B11	15/12	10

INTERNAL BUSH (B12)



Code	Ref.	Ø	J	L
2212001	B12	6/4	3	12.0
2212002	B12	8/6	5	14.0
2212003	B12	10/8	7	15.0
2212004	B12	12/10	9	16.0
2212005	B12	15/12	11	17.0

TAPERED THREAD FITTINGS SERIES B WITH PTFE

Metal Work can supply fittings with a tapered thread coated in polytetrafluorethylene. This system provides the pneumatic seal between the fitting and the female thread. It is therefore not necessary to add other sealing systems during assembly, such as adhesives or Teflon tape. This significantly reduces assembly times. The physical and technical features of the material used ensure that the properties are maintained through time and in a wide range of operating temperatures.
This coating can be used with series B bicone fittings, types B1, B5, B7 and B8 that have a 1/8" to 1/2" gas taper thread.

TECHNICAL DATA		
Temperature range for PTFE	°C	– 45 to + 80
	°F	– 49 to + 176

KEY TO CODES
Fittings with a PTFE thread have the same code as the standard fitting, with the addition of the suffix **T**.
For example B1 6/4 1/8 fitting has code **2201002**, so the PTFE version has code **2201002T**.

QUICK FITTINGS SERIES C

METAL WORK PNEUMATIC

- Body: nickel-plated brass
- Maximum pressure 261 psi, 1800 kPa 18 bar
- Recommended tubes*: PA11, PA12, PTFE

* For other materials please contact our sales offices.

STRAIGHT, MALE CONICAL (C1)



Code	Ref.	Ø	F	Ch	Ch1	P	L	D
2301017	C1	5/3	1/8	12	9	8.0	26.0	2.0
2301001	C1	6/4	1/8	12	12	8.0	26.5	3.0
2301002	C1	6/4	1/4	14	12	11.0	30.0	3.0
2301003	C1	8/6	1/8	12	14	8.0	26.5	5.0
2301004	C1	8/6	1/4	14	14	11.0	30.0	5.0
2301005	C1	8/6	3/8	17	14	11.5	31.0	5.0
2301020	C1	10/8	1/8	14	16	8.0	29.0	5.0
2301006	C1	10/8	1/4	14	16	11.0	32.0	6.8
2301007	C1	10/8	3/8	17	16	11.5	33.0	6.8
2301008	C1	10/8	1/2	22	16	14.0	36.0	6.8
2301009	C1	12/10	3/8	17	19	11.5	35.0	8.5
2301010	C1	12/10	1/2	22	19	14.0	38.0	8.5
2301015	C1	15/12.5	1/2	22	22	14.0	39.5	11.0

STRAIGHT, MALE PARALLEL WITH O-RING (C1/Z)



Code	Ref.	Ø	F	Ch	Ch1	P	L	D	O ring
2351001	C1/Z	4/2	M5	9	9	4.0	23.0	1.5	4x1.5
2351002	C1/Z	6/4	M5	9	9	4.0	23.0	2.3	4x1.5
2351003	C1/Z	6/4	1/8	13	12	6.0	25.0	3.0	2031
2351004	C1/Z	6/4	1/4	16	12	8.0	27.0	3.0	2043
2351005	C1/Z	8/6	1/8	14	14	6.0	25.0	5.0	2031
2351006	C1/Z	8/6	1/4	16	14	8.0	27.0	5.0	2043
2351007	C1/Z	8/6	3/8	19	14	9.0	29.0	5.0	2056
2351008	C1/Z	10/8	1/4	16	16	8.0	29.0	6.8	2043
2351009	C1/Z	10/8	3/8	19	16	9.0	31.0	6.8	2056
2351010	C1/Z	10/8	1/2	24	16	11.0	33.0	6.8	3068
2351011	C1/Z	12/10	3/8	19	19	9.0	33.0	8.5	2056
2351012	C1/Z	12/10	1/2	24	19	11.0	35.0	8.5	3068

STRAIGHT, MALE METRIC THREAD (C1/C)



Code	Ref.	Ø	F	Ch	Ch1	P	L	D
2356001	C1/C	5/3	M5	9	9	4	23	2
2356002	C1/C	6/4	M6	9	9	5	24	3
2356003	C1/C	6/4	M12x1.5	17	12	8	27	3
2356004	C1/C	6/4	3/8	19	12	9	27	3
2356005	C1/C	8/6	M12x1.5	17	14	8	27	5

STRAIGHT, FEMALE (C2)



Code	Ref.	Ø	F	Ch	Ch1	P	L	D
2302001	C2	6/4	1/8	14	12	7.0	26.5	3.0
2302002	C2	6/4	1/4	17	12	8.0	29.5	3.0
2302012	C2	6/4	3/8	20	12	10.0	33.0	3.0
2302003	C2	8/6	1/8	14	14	7.0	26.5	5.0
2302004	C2	8/6	1/4	17	14	8.0	29.0	5.0
2302005	C2	8/6	3/8	20	14	10.0	33.0	5.0
2302006	C2	10/8	1/4	17	16	8.0	31.0	6.8
2302007	C2	10/8	3/8	20	16	10.0	35.0	6.8
2302008	C2	10/8	1/2	24	16	11.0	38.0	6.8

STRAIGHT, CONNECTOR (C3)



Code	Ref.	Ø	Ch	Ch1	L	D
2303001	C3	6/4	12	12	33.0	3.0
2303002	C3	8/6	12	14	33.0	5.0
2303003	C3	10/8	14	16	37.0	6.8
2303004	C3	12/10	17	19	42.0	8.5

BULKHEAD CONNECTOR (C4)



Code	Ref.	Ø	Ch	Ch1	L	D	F
2304001	C4	6/4	14	12	47.0	3.0	M10x1
2304002	C4	8/6	16	14	48.0	5.0	M12x1
2304003	C4	10/8	17	16	49.0	6.8	M14x1
2304004	C4	12/10	19	19	53.0	8.5	M16x1

ELBOW, MALE CONICAL (C5)



Code	Ref.	Ø	F	Ch	Ch1	P	L	L1	D
2305016	C5	5/3	1/8	8	9	8.0	17.0	22.0	2.0
2305001	C5	6/4	1/8	9	12	8.0	17.0	22.0	3.0
2305002	C5	6/4	1/4	9	12	11.0	20.0	22.0	3.0
2305003	C5	8/6	1/8	12	14	8.0	17.0	22.0	5.0
2305004	C5	8/6	1/4	12	14	11.0	20.0	22.0	5.0
2305005	C5	8/6	3/8	12	14	12.0	22.0	21.5	5.0
2305006	C5	10/8	1/4	12	16	11.0	20.5	25.0	6.8
2305007	C5	10/8	3/8	12	16	12.0	21.5	25.0	6.8
2305008	C5	10/8	1/2	17	16	14.0	26.0	28.5	6.8
2305009	C5	12/10	3/8	17	19	12.0	24.0	31.0	8.5
2305010	C5	12/10	1/2	17	19	14.0	26.0	31.0	8.5
2305017	C5	15/12.5	1/2	17	22	14.0	28.0	32.8	10.7

ELBOW FEMALE (C5/F)



Code	Ref.	Ø	F	Ch	Ch1	L	L1	D	P
2352001	C5/F	6/4	1/8	9	12	21.0	22.0	3.0	7.0
2352002	C5/F	8/6	1/4	12	14	24.0	23.5	5.0	7.0

ELBOW, MALE METRIC THREAD (C5/C)



Code	Ref.	Ø	F	Ch	CH1	P	L	L1	D
2357001	C5/C	6/4	M12x1.5	10	12	9	22	22.5	3
2357002	C5/C	8/6	M12x1.5	10	14	9	22	22.5	5

ELBOW CONNECTOR (C6)



Code	Ref.	Ø	Ch	Ch1	L	D
2306001	C6	6/4	9	12	22.0	3.0
2306002	C6	8/6	12	14	22.0	5.0
2306003	C6	10/8	12	16	25.0	6.8
2306004	C6	12/10	17	19	31.0	8.5
2306006	C6	15/12.5	18	22	32.8	10.7

TEE, CENTRAL MALE (C7)



Code	Ref.	Ø	F	Ch	Ch1	P	L	L1	D
2307015	C7	5/3	1/8	9	9	8.0	17.0	22.0	2.0
2307001	C7	6/4	1/8	9	12	8.0	17.0	22.0	3.0
2307002	C7	6/4	1/4	9	12	11.0	20.0	22.0	3.0
2307003	C7	8/6	1/8	12	14	8.0	17.0	22.0	5.0
2307004	C7	8/6	1/4	12	14	11.0	20.0	22.0	5.0
2307005	C7	8/6	3/8	12	14	12.0	22.0	23.0	5.0
2307006	C7	10/8	1/4	12	16	11.0	21.0	25.0	6.8
2307007	C7	10/8	3/8	12	16	12.0	22.0	25.0	6.8
2307008	C7	10/8	1/2	17	16	14.0	26.0	28.5	6.8
2307009	C7	12/10	3/8	17	19	12.0	24.0	31.0	8.5
2307010	C7	12/10	1/2	17	19	14.0	26.0	31.0	8.5
2307016	C7	15/12.5	1/2	18	22	14.0	28.0	32.8	10.7

TEE, LATERAL MALE (C8)



Code	Ref.	Ø	F	Ch	Ch1	P	L	L1	D
2308012	C8	5/3	1/8	9	9	8.0	39.0	22.0	2.0
2308001	C8	6/4	1/8	9	12	8.0	39.0	22.0	3.0
2308002	C8	6/4	1/4	9	12	11.0	42.0	22.0	3.0
2308003	C8	8/6	1/8	12	14	8.0	39.0	22.0	5.0
2308004	C8	8/6	1/4	12	14	11.0	42.0	22.0	5.0
2308005	C8	8/6	3/8	12	14	12.5	45.0	23.0	5.0
2308006	C8	10/8	1/4	12	16	11.5	46.0	25.0	6.8
2308007	C8	10/8	3/8	12	16	12.5	47.0	25.0	6.8
2308008	C8	10/8	1/2	17	16	13.5	54.5	28.5	6.8
2308009	C8	12/10	3/8	17	19	11.5	55.0	31.0	8.5
2308010	C8	12/10	1/2	17	19	13.5	57.0	31.0	8.5

TEE CONNECTOR (C9)



Code	Ref.	Ø	Ch	Ch1	L	D
2309001	C9	6/4	9	12	22.0	3.0
2309002	C9	8/6	12	14	22.0	5.0
2309003	C9	10/8	12	16	25.0	6.8
2309004	C9	12/10	17	19	31.0	8.5
2309007	C9	15/12.5	18	22	32.8	10.7

NUT (C10)



Code	Ref.	Ø	F	Ch1	L
2310001	C10	4/2	M7x0.5	9	9.0
2310009	C10	5/3	M7x0.5	9	9.0
2310002	C10	6/4- M5	M8x0.5	9	9.0
2310003	C10	6/4	M10x1	12	11.0
2310004	C10	8/6	M12x1	14	11.0
2310005	C10	10/8	M14x1	16	12.0
2310006	C10	12/10	M16x1	19	12.0
2310011	C10	15/12.5	M20x1	22	16.0

EQUAL CROSS CONNECTOR (C11)



Code	Ref.	Ø	Ch	Ch1	L	D
2311001	C11	6/4	10	12	21.5	3.0
2311002	C11	8/6	10	14	22.0	5.0
2311003	C11	10/8	12	16	24.5	6.8

TAPERED THREAD FITTINGS SERIES C WITH PTFE

Metal Work can supply fittings with a tapered thread coated in polytetrafluorethylene. This system provides the pneumatic seal between the fitting and the female thread. It is therefore not necessary to add other sealing systems during assembly, such as adhesives or Teflon tape. This significantly reduces assembly times. The physical and technical features of the material used ensure that the properties are maintained through time and in a wide range of operating temperatures.
This coating can be used with series C push-in fittings, types C1, C5, C7 and C8 that have a 1/8" to 1/2" gas taper thread.

TECHNICAL DATA		
Temperature range for PTFE	°C	– 45 to + 80
	°F	– 49 to + 176

KEY TO CODES
Fittings with a PTFE thread have the same code as the standard fitting, with the addition of the suffix **T**.
For example C1 6/4 1/8 fitting has code **2301001**, so the PTFE version has code **2301001T**.

BANJO FITTINGS SERIES D

METAL WORK PNEUMATIC

- Body: nickel-plated brass
- Maximum pressure 261 psi, 1800 kPa 18 bar

SINGLE BANJO BODY (D5)



Code	Ref.	Ø	F	Ch1	L	L1	D	E
2405000	D5	4/2	M5	9	9.0	20.5	1.5	9.5
2405013	D5	5/3	1/8	9	15.0	24.3	2.0	14.0
2405018	D5	5/3	M5	9	9.0	20.7	2.0	9.5
2405001	D5	6/4	M5	9	9.0	20.5	3.0	9.5
2405002	D5	6/4	1/8	12	15.0	24.5	3.0	14.0
2405003	D5	6/4	1/4	12	17.0	26.5	3.0	18.0
2405005	D5	8/6	1/8	14	15.0	24.0	5.0	14.0
2405006	D5	8/6	1/4	14	17.0	26.0	5.0	18.0
2405007	D5	8/6	3/8	14	20.0	28.5	5.0	21.0
2405009	D5	10/8	1/4	16	17.0	28.0	6.8	18.0
2405010	D5	10/8	3/8	16	20.0	29.0	6.8	21.0
2405011	D5	10/8	1/2	16	24.0	30.5	6.8	26.0
2405012	D5	12/10	1/2	19	24.0	33.5	8.5	26.0
2405017	D5	12/10	3/8	19	20.0	31.0	8.5	21.0

DOUBLE BANJO BODY (D6)



Code	Ref.	Ø	F	Ch1	L	L1	D	E
2406001	D6	6/4	1/8	12	15.0	24.5	3.0	14.0
2406002	D6	6/4	1/4	12	17.0	26.5	3.0	18.0
2406004	D6	8/6	1/8	14	15.0	24.0	5.0	14.0
2406005	D6	8/6	1/4	14	17.0	26.0	5.0	18.0
2406006	D6	8/6	3/8	14	20.0	28.5	5.0	21.0
2406008	D6	10/8	1/4	16	17.0	28.0	6.8	18.0
2406009	D6	10/8	3/8	16	20.0	29.0	6.8	21.0
2406010	D6	10/8	1/2	16	24.0	30.5	6.8	26.0
2406011	D6	12/10	1/2	19	24.0	33.5	8.5	26.0

BANJO STEM SINGLE (D7)



Code	Ref.	F	Ch	L	P
Version with washer D11 for models R13-R14-D12-D17-D5-D6					
2407001	D7 (steel)	M5	8	18.0	3
2407002	D7	1/8	14	28.0	6
2407003	D7	1/4	17	33.0	8
2407004	D7	3/8	20	37.0	9
2407005	D7	1/2	27	42.0	10
2407006	D7	M12x1.5	17	33.0	8
Version with O-ring for models R28-R29					
2407102	D7 with OR	1/8	14	28.0	6
2407103	D7 with OR	1/4	17	33.0	8
2407104	D7 with OR	3/8	20	37.0	9

BANJO STEM DOUBLE (D8)



Code	Ref.	F	Ch	L	P
Version with washer D11 for models R13-R14-D5-D6-D12-D17					
2408001	D8	1/8	14	44.5	6
2408002	D8	1/4	17	51.5	8
2408003	D8	3/8	20	58.5	9
2408004	D8	1/2	27	67.5	10
Version with O-ring for models R28-R29					
2408102	D8 with OR	1/8	14	44.5	6
2408103	D8 with OR	1/4	17	51.5	8
2408104	D8 with OR	3/8	20	58.5	9

BANJO PASSING TROUGHT SINGLE (D9)



Code	Ref.	F	F1	Ch	L	P	P1
Version with washer D11 for models R13-R14-D5-D6-D12-D17							
2409001	D9	1/8	1/8	14	36.5	6	7
2409002	D9	1/4	1/4	17	42.5	8	8
2409003	D9	3/8	3/8	20	49.5	9	10
2409004	D9	1/2	1/2	27	56.5	10	11
Version with O-ring for models R28-R29							
2409102	D9	1/8	1/8	14	36.5	6	7
2409103	D9	1/4	1/4	17	42.5	8	8
2409104	D9	3/8	3/8	20	49.5	9	10

BANJO PASSING TROUGHT STEM DOUBLE (D10)



Code	Ref.	F	F1	Ch	L	P	P1
Version with washer D11 for models R13-R14-D5-D6-D12-D17							
2410001	D10	1/8	1/8	14	53.0	6	7
2410002	D10	1/4	1/4	17	61.0	8	8
2410003	D10	3/8	3/8	20	71.0	9	10
2410004	D10	1/2	1/2	27	82.0	10	11
Version with O-ring for models R28-R29							
2410102	D10 with OR	1/8	1/8	14	53.0	6	7
2410103	D10 with OR	1/4	1/4	17	61.0	8	8
2410104	D10 with OR	3/8	3/8	20	71.0	9	10

WASHER (D11)



Code	Ref.	F	E	P
2411001	D11	M5	9	1.5 (nylon)
2411002	D11	1/8	13.8	1.5
2411003	D11	1/4	17.8	1.5
2411004	D11	3/8	21.0	1.5
2411005	D11	1/2	26.0	1.5

SINGLE BANJO PASSING TROUGHT BODY (D12)



Code	Ref.	A	G	B	C	L	L1	P
2412001	D12	1/8	1/8	14	13.5	15	21.5	7
2412002	D12	1/4	1/4	18	17.0	17	25.5	8
2412003	D12	3/8	3/8	21	20.5	20	31.0	10

SINGLE BANJO WITH "B" INTERFACE (D17)



Code	Ref.	Ø	F	Ch1	L	L1	E
2417006	D17	4/2	1/8	10	15	24.5	14
2417002	D17	6/4	1/8	12	15	26.0	14
2417003	D17	6/4	1/4	12	17	28.0	18
2417004	D17	8/6	1/8	14	15	26.0	14
2417005	D17	8/6	1/4	14	17	28.0	18

NOTES

NOTES

SUMMARY STAINLESS STEEL FITTINGS

● **PUSH-IN FITTINGS, STAINLESS STEEL** D3.2

● **SERIES XTR FITTINGS** D1.44

● **STANDARD FITTINGS SERIES XA** D3.8

● **QUICK FITTINGS SERIES XC** D3.11

PUSH-IN FITTINGS, STAINLESS STEEL

The push-in fittings in the XR can be reused thousands of times without affecting the pneumatic seal in any way.
They come in various configurations.
The XR fittings are made entirely of 316L stainless steel (EN 1.4404) and can be used to make connections in environments and conditions where the use of standard brass fittings would be incompatible.
The gasket are in FKM/FPM.

CONFORMITY DECLARATIONS

- DM 174
- DM 21/03/73
- Regulation 1935/04 EU.*
- Regulation 2023/06 EU.

* Release tests performed at 100°C for 3 successive 30-minute attacks with 4% acetic acid solution and distilled water.

CERTIFIED

- NSF/ANSI 169 standard: products in contact with food.

NSF COMPONENT

TECHNICAL DATA

Threaded coupling		M5 - 1/8" - 1/4" - 3/8" - 1/2"
Diameter	mm	Ø4 - Ø6 - Ø8 - Ø10 - Ø12
Temperature range	°C	– 20 to +150
	°F	– 4 to +302
Pressure range		– 0.99 bar to 18 bar / – 0.099 MPa to 1.8 MPa
Recommended pipe		PTFE
Fluid		Vacuum - Compressed air

COMPONENTS

① RELEASE BUSHING: AISI 316L stainless steel
② LOCKING BUSHING: AISI 316L stainless steel
③ BODY: AISI 316L stainless steel
④ CLAMPING SPRING: AISI 301 stainless steel
⑤ SPRING SUPPORTING RING: AISI 316L stainless steel
⑥ SEAL: FKM/FPM

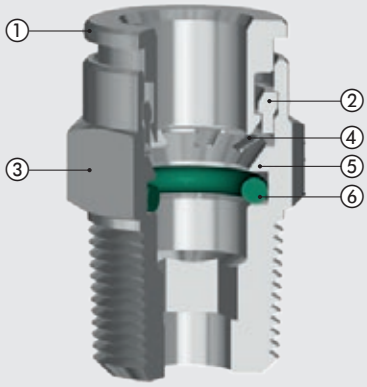

PIPE INSERTION DEPTH



Ø Pipe	L
4	13.2
6	16.1
8	16.2
10	18.3
12	19.5

SCREWING METHOD

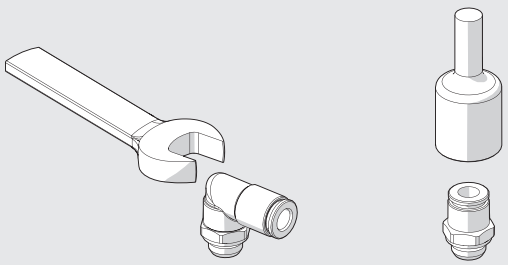



Thread	Max. Torque [Nm]
M5	1.8
G 1/8″	6
G 1/4″	8
G 3/8″	10
G 1/2″	15

CH [mm]	Max. Torque [Nm]
3	2.5
4	5
6	8
8	18
10	15

N.B.: When using a socket spanner, the torque must not exceed that of the thread (e.g. fitting XR1 Ø 4 1/8″, with a 3 mm thread, has a maximum torque of 6 Nm, highest value of the thread)

INSTALLING THE PIPE

Compressed air pipes must be used in compliance with some basic criteria in order to ensure long life and proper operation of the fitting:
- check that the conditions for the installation and use (e.g. temperature and fluid used) comply with the characteristics stated by the pipe manufacturer;
- check the pipe size; oversized pipes could not fit properly, undersized ones could not ensure pipe retention and air tightness.

The cut should be as accurate as possible at a right angle with the pipe axis.

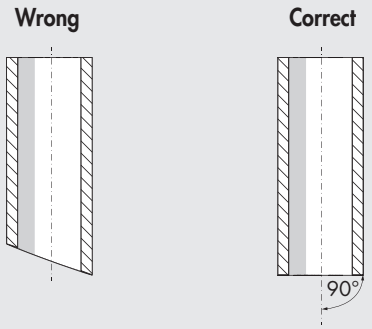

- the bending radius of the pipe installed must be as wide as possible. The fittings have been designed to ensure axial seal of the pipe; excessive curvature could considerably shorten the life of the pipe.
- the pipe must not be subjected to excessive axial stress and it must be of the right length for snugly fitting (not too long or too short).
- correct insertion of the pipe into the fitting is essential for air tightness and pipe retention. Make sure that the pipe is pushed right into the seat.
- check that the pipe does not encounter any obstacles or blockages along its way, which could cause tensile stress of the pipe in the fitting.

STRAIGHT, CYLINDRICAL, MALE (XR1)



Code	Ref.	Ø	F	Ch	Ch1	P	L	D	E
2L01001X	XR1	4	M5	9	-	4	19	2.5	10.5
2L01002X	XR1	4	1/8	13	3	5	16	3.1	14.5
2L01000X	XR1	6	M5	12	-	4	22.5	2.5	13.5
2L01007X	XR1	6	1/8	13	4	5	19	4.2	14.5
2L01008X	XR1	6	1/4	16	4	6.5	18.5	4.2	18
2L01009X	XR1	8	1/8	14	6	5	22.5	6.2	15.5
2L01010X	XR1	8	1/4	16	6	6.5	21	6.2	18
2L01012X	XR1	10	1/4	16	8	6.5	27.5	8.4	18
2L01013X	XR1	10	3/8	17	8	7	25	8.4	20
2001014X	XR1	12	3/8	21	10	7	28.5	10.4	23.5
2001015X	XR1	12	1/2	22	10	8.5	26.5	10.4	25

STRAIGHT, CONICAL, MALE (XR1C)



Code	Ref.	Ø	F	Ch	Ch1	P	L	D	E
2L01C02X	XR1C	4	1/8	10	3	7.5	15.5	3	11.5
2L01C03X	XR1C	4	1/4	14	3	11	20	3	16
2L01C07X	XR1C	6	1/8	12	4	7.4	20.5	4.2	14
2L01C08X	XR1C	6	1/4	14	4	11	20	4.2	16
2L01C09X	XR1C	8	1/8	14	6	7.1	24.5	6.2	16
2L01C10X	XR1C	8	1/4	14	6	11	23	6.2	16
2L01C13X	XR1C	10	1/4	16	8	11	30	8	18.5
2L01C14X	XR1C	10	3/8	17	8	11.5	23.5	8.4	20
2001C15X	XR1C	12	3/8	18	10	11.5	27	10.4	22
2001C16X	XR1C	12	1/2	22	10	14	27	10.4	25.5

STRAIGHT, INTERMEDIATE (XR3)



Code	Ref.	Ø 1	Ø 2	F	L	D
2L03001X	XR3	4	4	9	27	3
2L03301X	XR3	4	6	12	32.5	3
2L03003X	XR3	6	6	12	31	5
2L03303X	XR3	6	8	14	33	5
2L03004X	XR3	8	8	14	34	7
2L03005X	XR3	10	10	16	37.5	9
2003006X	XR3	12	12	19	39.5	11

ELBOW, INTERMEDIATE (XR4)



Code	Ref.	Ø	L	D	E
2L04001X	XR4	4	17	3.5	9
2L04003X	XR4	6	20	5.5	12
2L04004X	XR4	8	21	7	14
2L04005X	XR4	10	25	8	16
2L04006X	XR4	12	27	10	19

METAL WORK PNEUMATIC

TEE, INTERMEDIATE (XR5)



Code	Ref.	Ø	L	L1	D	E
2L05001X	XR5	4	17	34	3.5	9
2L05003X	XR5	6	20	40	5	12
2L05004X	XR5	8	21	42	6	14
2L05005X	XR5	10	25	50	8.5	16
2L05006X	XR5	12	27	54	10	19

REDUCER (XR8)



Code	Ref.	Ø 1	Ø 2	L	D	E
2L08002X	XR8	6	4	31	3	9
2L08006X	XR8	8	6	33	5	12
2L08008X	XR8	10	8	34.5	7	14

STRAIGHT, INTERMEDIATE, BULKMTAD (XR10)



Code	Ref.	Ø 1	Ø 2	F	Ch	L	D	I max
2L11001X	XR10	4	4	M12x1	15	27	3	11
2L11003X	XR10	6	6	M14x1	17	32.5	5	16
2L11004X	XR10	8	8	M16x1	19	33	7	17
2L11005X	XR10	10	10	M18x1	21	37.5	9	19
2L11006X	XR10	12	12	M20x1	24	39.5	11	20

SINGLE RING (XR13)



Code	Ref.	Ø	Ø 1	L	L1	E	E1
2012002X	XR13	4	1/8	19.5	15	14	9
2012005X	XR13	6	1/8	22	15	14	12
2012006X	XR13	6	1/4	23.5	17	18	12
2012007X	XR13	8	1/8	22.5	15	14	14
2012008X	XR13	8	1/4	24	17	18	14
2012010X	XR13	10	1/4	27	17	18	14
2012011X	XR13	10	3/8	29	20	22	16
2012012X	XR13	12	3/8	31	20	22	16
2012014X	XR13	12	1/2	33	24	26	19

BANJO STEM SINGLE (XD7)



Code	Ref.	F	Ch	L	P
2407002X	XD7	1/8	14	29	6
2407003X	XD7	1/4	17	32.5	6.5
2407004X	XD7	3/8	21	36	7
2407005X	XD7	1/2	26	41.5	8.5

ROTARY ELBOW, MALE, CYLINDRICAL (XR31)



Code	Ref.	Ø	F	CH	E	E1	L	L1	P
2L31001X	XR31	4	M5	9	10	9	17	14	4
2L31002X	XR31	4	1/8	13	14.5	9	17	16	5
2L31007X	XR31	6	M5	9	10	12	20.5	15.5	4
2L31008X	XR31	6	1/8	13	14.5	12	21.5	18	5
2L31009X	XR31	6	1/4	16	18	12	21.5	20	6.5
2L31010X	XR31	8	1/8	13	14.5	14	22	18	5
2L31011X	XR31	8	1/4	16	18	14	22	20	6.5
2L31013X	XR31	10	1/4	16	18	16	25.5	22.5	6.5
2L31014X	XR31	10	3/8	21	23.5	16	25.5	24	7
2031017X	XR31	12	3/8	21	23.5	19	28	26.5	7
2031018X	XR31	12	1/2	22	25	19	28	31	8.5

ROTARY ELBOW, MALE, CONICAL (XR31C)



Code	Ref.	Ø	F	CH	E	E1	L	L1	P
2L31C02X	XR31C	4	1/8	10	11.2	9	17	17.5	7.5
2L31C08X	XR31C	6	1/8	13	14.5	12	21.5	20	7.5
2L31C09X	XR31C	6	1/4	14	14.5	12	21.5	24	11
2L31C10X	XR31C	8	1/8	13	14.5	14	22	20	7.5
2L31C11X	XR31C	8	1/4	14	15.5	14	22	24	11
2L31C13X	XR31C	10	1/4	16	18	16	25.5	26.5	11
2L31C14X	XR31C	10	3/8	17	19	16	25.5	27	11.5
2031C15X	XR31C	12	3/8	21	24.5	19	28	30.5	11.5
2031C16X	XR31C	12	1/2	22	24.5	19	28	33.5	14

CENTRAL TEE, MALE, CYLINDRICAL, ROTARY (XR32)



Code	Ref.	Ø	F	CH	E	E1	L	L1	P
2L32001X	XR32	4	M5	9	10	9	34	18	4
2L32002X	XR32	4	1/8	13	14.5	9	34	20	5
2L32008X	XR32	6	1/8	13	14.5	12	42	22.5	5
2L32009X	XR32	6	1/4	16	18	12	42	24.5	6.5
2L32010X	XR32	8	1/8	13	14.5	14	43	22.5	5
2L32011X	XR32	8	1/4	16	18	14	43	24.5	6.5
2L32013X	XR32	10	1/4	16	18	16	50	25.5	6.5
2L32014X	XR32	10	3/8	21	23.5	16	50	27	7

CENTRAL TEE, MALE, CONICAL, ROTARY (XR32C)



Code	Ref.	Ø	F	CH	E	E1	L	L1	P
2L32C02X	XR32C	4	1/8	10	11.2	9	34	21.5	7.5
2L32C08X	XR32C	6	1/8	13	14.5	12	42	24.5	7.5
2L32C09X	XR32C	6	1/4	14	15.5	12	42	28.5	11
2L32C10X	XR32C	8	1/8	13	14.5	14	43	24.5	7.5
2L32C11X	XR32C	8	1/4	14	15.5	14	43	28.5	11
2L32C13X	XR32C	10	1/4	16	18	16	50	32	11
2L32C14X	XR32C	10	3/8	17	19	16	50	32.5	1.5

ELBOW, MALE, CONICAL (XR39C)



Code	Ref.	Ø	F	E1	L	L1	P
2L39C02X	XR39C	4	1/8	9	17	16	7.5
2L39C08X	XR39C	6	1/8	12	20	16	7.5
2L39C09X	XR39C	6	1/4	12	20	20	11
2L39C10X	XR39C	8	1/8	14	21	17	7.5
2L39C11X	XR39C	8	1/4	14	21	20	11
2L39C13X	XR39C	10	1/4	16	25.5	22.5	11

NOTES

STANDARD FITTINGS SERIES XA

- Body made of AISI 316L (EN 1.4404) stainless steel
- Operating temperature for fittings with O-ring seals: -20 to 200 °C / -4 to 392 °F
- Maximum pressure 200 bar - 20000 KPa - 2900 psi

CONFORMITY DECLARATIONS

- DM 174
- DM 21/03/73
- Regulation 1935/04 EU.*
- Regulation 2023/06 EU.

CERTIFIED

- NSF/ANSI 169 standard: products in contact with food.

NSF COMPONENT

* Release tests performed at 100°C for 3 successive 30-minute attacks with 4% acetic acid solution and distilled water.

NIPPLE, CONICAL (XA2)



Code	Ref.	F	F1	Ch	P	P1	L
2102001X	XA2	1/8	1/8	12	7.5	7.5	20
2102002X	XA2	1/8	1/4	14	7.5	11	23.5
2102004X	XA2	1/4	1/4	14	11	11	27
2102005X	XA2	1/4	3/8	17	11	11.5	27.5
2102007X	XA2	3/8	3/8	17	11.5	11.5	28
2102008X	XA2	3/8	1/2	22	11.5	14	31.5
2102009X	XA2	1/2	1/2	22	14	14	34

SLEEVE (XA3)



Code	Ref.	F	Ch	L
2103001X	XA3	1/8	14	15
2103002X	XA3	1/4	17	22
2103003X	XA3	3/8	22	24
2103004X	XA3	1/2	27	30

REDUCER, CONICAL (XA4)



Code	Ref.	F	F1	Ch	P	P1	L
2104001X	XA4	1/4	1/8	14	11	8	16
2104002X	XA4	3/8	1/8	17	11.5	8	16.5
2104009X	XA4	1/2	1/8	22	14	8	19.5
2104003X	XA4	3/8	1/4	17	11.5	10	16.5
2104004X	XA4	1/2	1/4	22	14	10	19.5
2104005X	XA4	1/2	3/8	22	14	10	19.5

METAL WORK PNEUMATIC

REDUCER, PARALLEL (XA4Z)



Code	Ref.	F	F1	Ch	P	P1	L
2151000X	XA4Z	1/8	M5	14	6	8	10.5
2151001X	XA4Z	1/4	1/8	17	8	8	13
2151003X	XA4Z	3/8	1/4	19	9	10	14

PLUG WITH HEXAGON EMBEDEDDED (XA7)



Code	Ref.	F	Ch	P	L	E
2107001X	XA7	1/8	5	5	7.5	13
2107002X	XA7	1/4	6	6.5	9.5	16
2107003X	XA7	3/8	8	7	10	20
2107004X	XA7	1/2	10	8.5	12	25

TAPER MALE PLUG (XA7C)



Code	Ref.	F	Ch	P	L
2107C01X	XA7C	1/8	5	5	7.5
2107C02X	XA7C	1/4	6	6.5	9.5
2107C03X	XA7C	3/8	8	7	10
2107C04X	XA7C	1/2	10	8.5	12

ELBOW, FEMALE (XA9)



Code	Ref.	F	Ch	P	L	E
2109001X	XA9	1/8	10	8	22	13
2109002X	XA9	1/4	12	10	26	16.5
2109003X	XA9	3/8	17	10	28	20
2109004X	XA9	1/2	19	13	34	25

ELBOW, MALE-FEMALE (XA10)



Code	Ref.	F	F1	Ch	P	P1	L	L1	E
2110001X	XA10	1/8	1/8	10	6	8	17	22	13
2110002X	XA10	1/4	1/4	12	9	10	21.5	26	16.5
2110003X	XA10	3/8	3/8	17	11	10	24.5	28	20
2110004X	XA10	1/2	1/2	19	13	13	30.5	34	25

TEE, FEMALE (XA11)



Code	Ref.	F	Ch	P	L	E
2111001X	XA11	1/8	10	8	22	13
2111002X	XA11	1/4	12	10	26	16.5
2111003X	XA11	3/8	17	10	28	20
2111004X	XA11	1/2	19	13	34	25

TEE, CENTRAL MALE (XA12)



Code	Ref.	F	F1	Ch	P	P1	L	L1	E
2112001X	XA12	1/8	1/8	10	6	8	17	22	13
2112002X	XA12	1/4	1/4	12	9	10	21.5	26	16.5
2112003X	XA12	3/8	3/8	17	11	10	24.5	28	20
2112004X	XA12	1/2	1/2	19	13	13	30.5	34	25

ELBOW, MALE (XA15)



Code	Ref.	F	Ch	P	L
2115001X	XA15	1/8	10	6	17
2115002X	XA15	1/4	12	9	21.5
2115003X	XA15	3/8	17	11	24.5
2115004X	XA15	1/2	19	13	30.5

SINGLE BANJO PASSING TROUGHT BODY (XD12)



Code	Ref.	A	G	B	C	L	L1	P
2412001X	XD12	1/8	1/8	14	14	15	18.5	8
2412002X	XD12	1/4	1/4	17	17	17	24	10
2412003X	XD12	3/8	3/8	22	20	20	29	10
2412004X	XD12	1/2	1/2	25	26	24	34.5	14

NOTES

QUICK FITTINGS SERIES XC

METAL WORK PNEUMATIC

- Body made of AISI 316L (EN 1.4404) stainless steel
- Operating temperature according to the type of pipe used
- Maximum pressure 25 bar - 2500 KPa - 363 psi

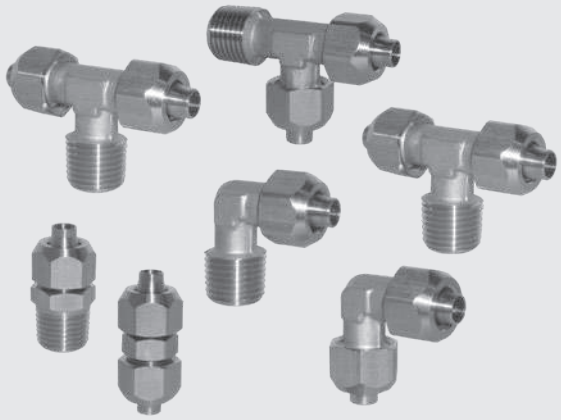

CONFORMITY DECLARATIONS

- DM 174
- DM 21/03/73
- Regulation 1935/04 EU.*
- Regulation 2023/06 EU.

* Release tests performed at 100°C for 3 successive 30-minute attacks with 4% acetic acid solution and distilled water.

CERTIFIED

- NSF/ANSI 169 standard: products in contact with food.

NSF COMPONENT

STRAIGHT, MALE CONICAL (XC1)



Code	Ref.	Ø	F	Ch	Ch1	P	L	D
2301001X	XC1	6/4	1/8	12	10	7.5	26	3
2301002X	XC1	6/4	1/4	12	14	11	29.5	3
2301003X	XC1	8/6	1/8	14	13	7.5	26.5	5
2301004X	XC1	8/6	1/4	14	14	11	30	5
2301006X	XC1	10/8	1/4	16	14	11	32.5	6.5
2301007X	XC1	10/8	3/8	16	17	11.5	33	6.5

STRAIGHT, CONNECTOR (XC3)



Code	Ref.	Ø	Ch	Ch1	L	D
2303001X	XC3	6/4	10	12	34	3
2303002X	XC3	8/6	12	14	35	5
2303003X	XC3	10/8	14	16	39	6.5

ELBOW, MALE CONICAL (XC5)



Code	Ref.	Ø	F	Ch	Ch1	P	L	L1	D
2305001X	XC5	6/4	1/8	10	12	7.5	17	23	3
2305002X	XC5	6/4	1/4	10	12	11	21.5	23	3
2305003X	XC5	8/6	1/8	10	14	7.5	17	23	5
2305004X	XC5	8/6	1/4	10	14	11	21.5	23	5
2305006X	XC5	10/8	1/4	10	16	11	21.5	25.5	6.5

ELBOW CONNECTOR (XC6)



Code	Ref.	Ø	Ch	Ch1	L	D
2306001X	XC6	6/4	10	12	22.5	3
2306002X	XC6	8/6	10	14	23	5
2306003X	XC6	10/8	10	16	25.5	6.5

TEE, CENTRAL MALE (XC7)



Code	Ref.	Ø	F	Ch	Ch1	P	L	L1	D
2307001X	XC7	6/4	1/8	10	12	8	17	23	3
2307002X	XC7	6/4	1/4	10	12	11	21.5	23	3
2307003X	XC7	8/6	1/8	10	14	8	17	23	5
2307004X	XC7	8/6	1/4	10	14	11	21.5	23	5
2307006X	XC7	10/8	1/4	10	16	11	21.5	25.5	6.5

TEE, LATERAL MALE (XC8)



Code	Ref.	Ø	F	Ch	Ch1	P	L	L1	D
2308001X	XC8	6/4	1/8	10	12	8	40	23	3
2308002X	XC8	6/4	1/4	10	12	11	44.5	23	3
2308003X	XC8	8/6	1/8	10	14	8	40	23	5
2308004X	XC8	8/6	1/4	10	14	11	44.5	23	5
2308006X	XC8	10/8	1/4	10	16	11	47	25.5	6.5

TEE CONNECTOR (XC9)



Code	Ref.	Ø	Ch	Ch1	L	D
2309001X	XC9	6/4	10	12	22.5	3
2309002X	XC9	8/6	10	14	23	5
2309003X	XC9	10/8	10	16	25.5	6.5

NUT (XC10)



Code	Ref.	Ø	F	Ch1	L
2310002X	XC10	6/4	M10x1	12	10
2310004X	XC10	8/6	M12x1	14	10
2310005X	XC10	10/8	M14x1	16	11

NOTES

NOTES

SUMMARY PUSH-IN FITTINGS UNF or NPT THREAD AND INCH PIPES

- **BRASS PUSH-IN FITTINGS FOR INCH TUBES AND UNF or NPT THREAD** — D1.19

UNF NPT

- **ADAPTORS AND PLUGS FOR G (BSPP) AND NPT THREAD** — D1.24

G BSP UNF NPT

METAL WORK PNEUMATIC

ACCESSORIES

- LINE ON LINE E1
- COUPLINGS E2
- FLOW REGULATOR E3
- AUXILIARY VALVES E4
- VARIOUS ACCESSORIES E5
- STAINLESS STEEL ACCESSORIES E6
- ACCESSORIES UNF or NPT THREAD AND INCH PIPES E7

SUMMARY lineonline®

METAL WORK PNEUMATIC

- INTRODUCTION LINE ON LINE® — E1.4

- IN-LINE PNEUMATIC VALVE SERIES PNV L — E1.7

- IN-LINE SOLENOID VALVE SERIES SOV L — E1.10

- MINIATURE REDUCER/ECONOMIZER, SERIES RML, RMC AND RMS — E1.14

- IN-LINE PRESSURE GAUGE SERIES MAN L — E1.18

- IN LINE PRESSURE SWITCH SERIES PRS L — E1.20

- IN-LINE PRESSURE INDICATOR SERIES LAM L — E1.24

- IN-LINE SHUTOFF VALVE SERIES V2V L AND V3V L — E1.26

- IN-LINE FLOW MICRO-REGULATOR SERIES RFL L — E1.29

- IN-LINE FIXED-REGULATION FLOW REGULATOR SERIE RFF L — E1.34

- IN-LINE QUICK-EXHAUST VALVES SERIES VSR L — E1.37

- IN-LINE QUICK-EXHAUST VALVE WITH REGULATED EXHAUST SERIES VSRR L — E1.39

- IN-LINE STOP VALVE SERIES STP L — E1.42

- IN-LINE CHECK VALVE SERIES VNR L — E1.45

- IN-LINE FILTER SERIES FIL L — E1.47

- LINE ON LINE® ACCESSORIES — E1.50

lineonline®

LINE OF PRODUCTS ON LINE

LINE ON LINE® is an exclusive range of products for mounting on pneumatic circuits. With these small, highly efficient components it is possible
to perform all pneumatic functions at any point of the circuit.
LINE ON LINE® is ultra-modular - the components can be connected in parallel, in series or combined parallel/series.
All LINE ON LINE® products are available for pipe-pipe connection with two push-in fittings, or for thread-pipe connection with a brass nickel-plated male ISO 228 G (BSP) thread and a push-in fitting.
The body is made of technopolymer, giving a product that is extremely lightweight and compact.
One side of the body is marked with an indelible pneumatic symbol to facilitate identification and indicate the direction of flow.
For almost every function it is available Ø1/4 and Ø 3/8" tube version.
It is also possible to use RU6 fitting to mount LINE ON LINE® on thread UNF or NPT.

CONNECTION FREE

Parallel lines



Serial line parallel fitting

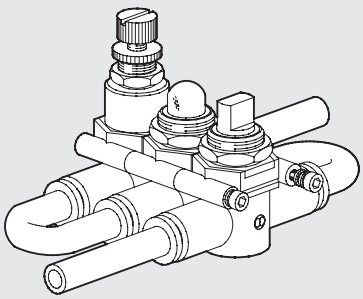

Serial line in-line fitting



FIXING FREE

Wall fixing



Plate fixing



Panel fixing



Under wall fixing



METAL WORK PNEUMATIC

ALL THE PNEUMATIC FUNCTIONS WITH THE SAME EXTERNAL DIMENSIONS

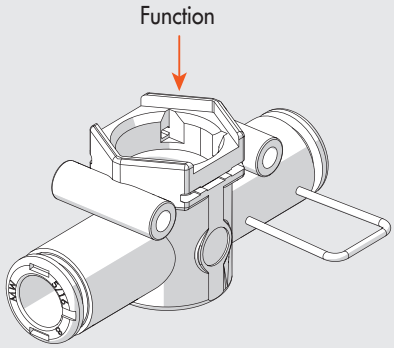

PNV	SOV		RML ●▲	MAN ●▲	PRS ●▲	LAM ●	V2V ●▲	V3V ●▲
								
3-way pneumatic valve	Solenoid valve 3-way with silenced exhaust	Solenoid valve 3-way with conveyed exhaust	Pressure regulator	Pressure gauge	Pressure switch	Pressure indicator	Shut-off valve 2-way	Shut-off valve 3-way
								
See page **E1**.7	See page **E1**.10		See page **E1**.14	See page **E1**.18	See page **E1**.20	See page **E1**.24	See page **E1**.26	See page **E1**.26

RFL ●▲		RFF		VSR ●▲		VSRR	STP	VNR ●▲	FIL ▲
									
Flow regulator unidirectional	Flow regulator bidirectional	Calibrated choke unidirectional	Calibrated choke bidirectional	Quick-exhaust valve conveyed	Quick-exhaust valve silenced	Quick-exhaust valve regulated	Stop valve	Check valve	Filter
									
See page **E1**.29		See page **E1**.34		See page **E1**.37		See page **E1**.39	See page **E1**.42	See page **E1**.45	See page **E1**.47

● Available also in tube Ø 1/4" version
▲ Available also in tube Ø 3/8" version

PIPE - PIPE



THREAD - PIPE

ISO 228 G (BSP) THREAD

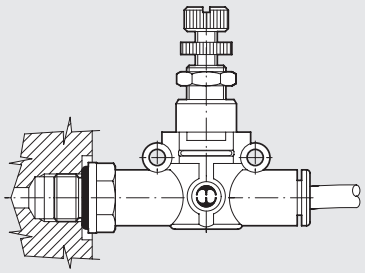

UNF or NPT THREAD

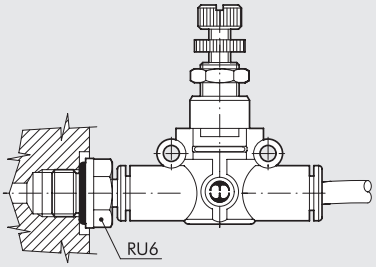

FROM TUBE - TUBE TO UNF or NPT THREAD - TUBE TRANSFORMATION

Using the RU6 fitting, it is possible to mount every Line on Line products on to the actuator or the control valve.

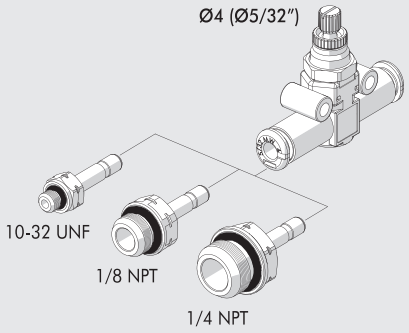

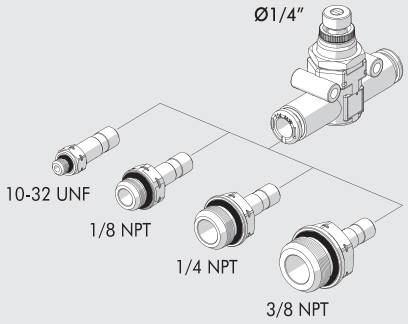

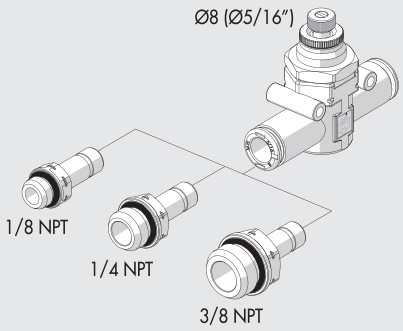

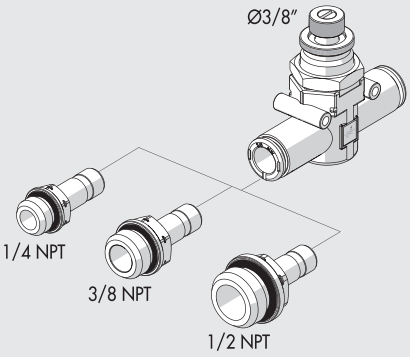

APPLICATION EXAMPLE

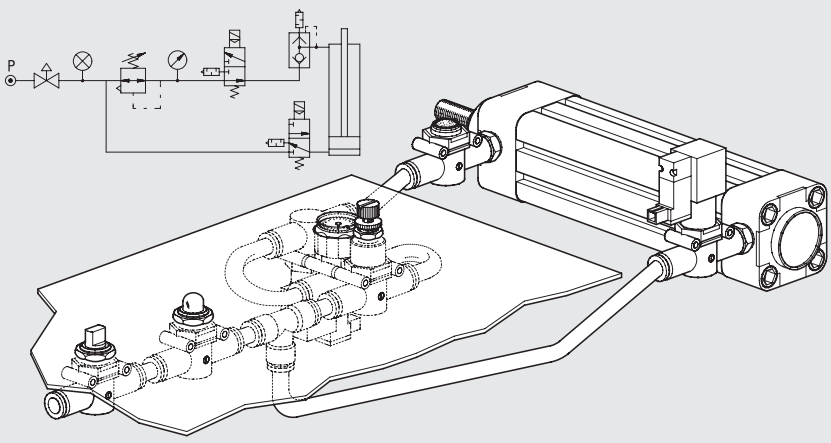

IN-LINE PNEUMATIC VALVE SERIES PNV L

The PNV L in-line pneumatic valve belongs to the LINE ON LINE® family and can be connected in series or in parallel with the other products in the same family.
It is available in a version for pipe-pipe connection, which includes two push-in fittings, and a version for thread-pipe connection, which includes a nickel-plated brass male thread and a push-in fitting.
The compressed air port is a push-in fitting for Ø 4 (Ø5/32") pipe.
The valve is the normally-closed 3/2 pipe. It is a unidirectional valve, meaning it only works properly if supplied from port 1.

TECHNICAL DATA		Ø 6	Ø 8 (Ø5/16")
Max. operating pressure	MPa	1	
	bar	10	
	psi	145	
Temperature range	°C	– 20 to + 60	
	°F	– 4 to + 140	
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene	
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous	
Compatibility with oils		See **chapter Z1**	

COMPONENTS

① Technopolymer body
② Nickel-plated brass insert
③ Nickel-plated brass pilot insert
④ AISI 303 steel rod
⑤ Stainless steel clamping spring
⑥ NBR seal
⑦ Stainless steel poppet spring
⑧ NBR seal
⑨ Technopolymer spring ring
⑩ Stainless steel clamping spring
⑪ Technopolymer stop bushing
⑫ Technopolymer release bushing

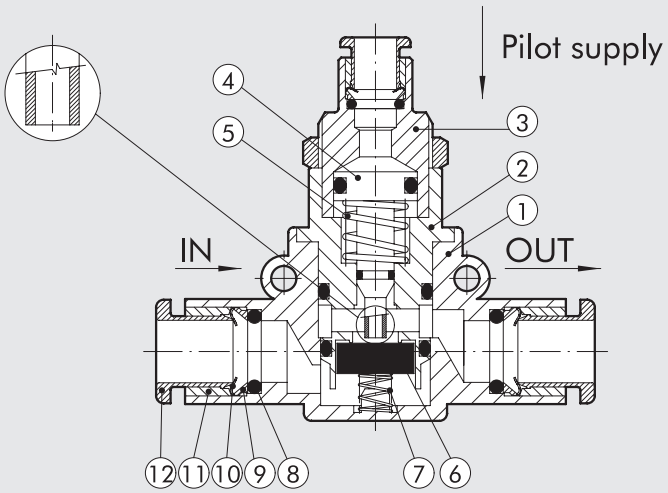

FLOW CHARTS

PNV L Ø 6

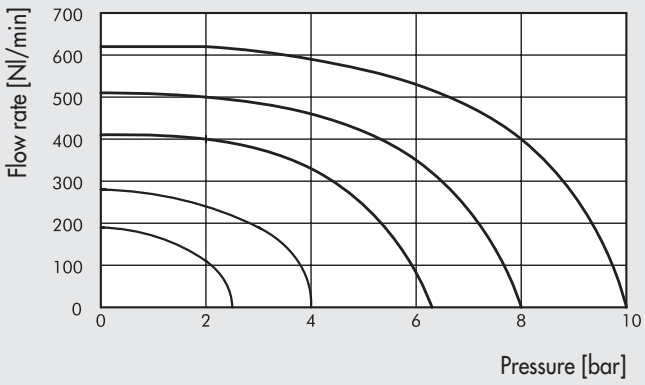

PNV L Ø 8 (Ø5/16")

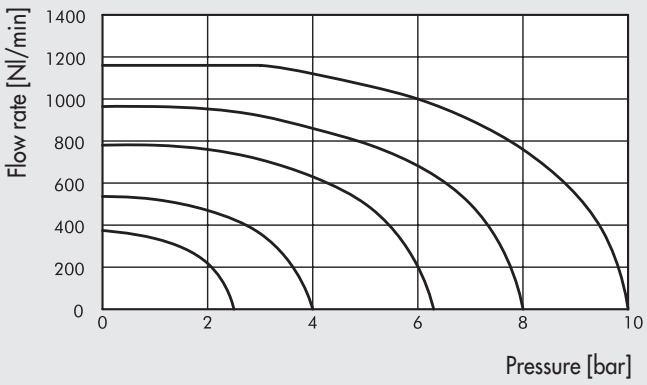

MINIMUM PILOT PRESSURE

PNV L Ø 6

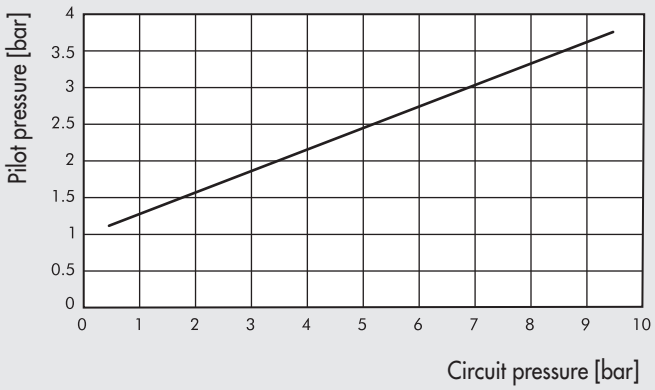

PNV L Ø 8 (Ø5/16")

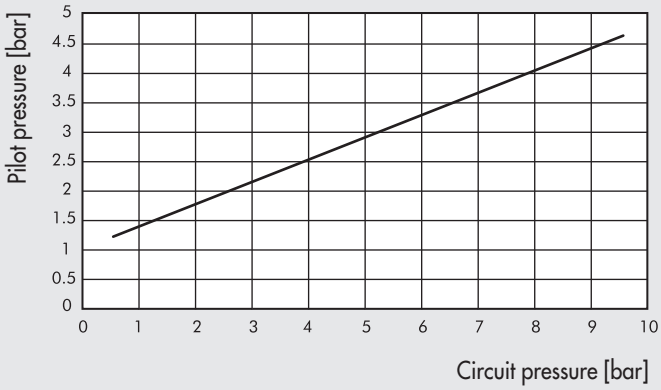

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF or NPT



Ⓑ



Ⓒ



Ⓓ



How to mount the PNV L:

- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the PNV L straight onto the actuator or the control valve.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the PNV L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the PNV L straight onto the wall.
- Fig. Ⓓ The ring nut is screwed onto the threaded metal part of the PNV L body for panel mounting.

PNV L 3/2 NC PIPE - PIPE

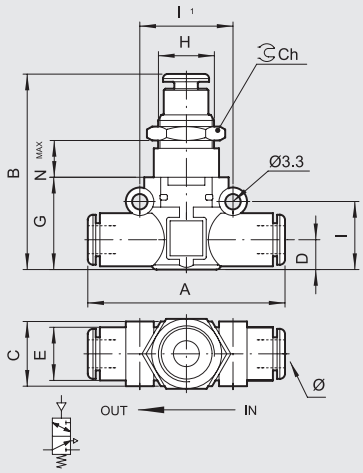

Code	Ref.	Ø	A	B	C	D	E	G	H	I	I1	Ch	Nmax
9067616	PNV L 3/2 NC Ø6-Ø6	6	49.4	43.2	14.7	6.4	11.4	20	M12x0.75	14.6	20	15	12
9067624	PNV L 3/2 NC Ø8-Ø8	8 ▲	57.3	49.7	18.7	9.1	13.8	26	M15x1	18.7	24	17	11.8

▲ **Ø8** = Ø5/16"

PNV L 3/2 NC PIPE - G (BSP) THREAD

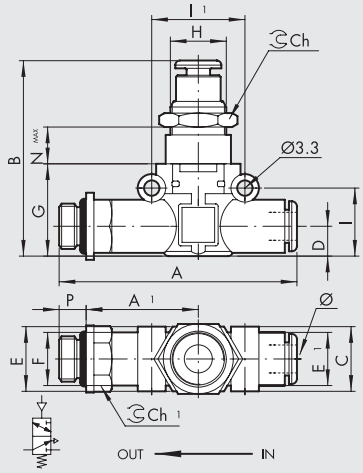

Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Nmax
9067808	PNV L 3/2 NC Ø6-1/8	1/8	6	6	58.5	27.8	43.2	14.7	6.4	14	11.4	20	M12x0.75	14.6	20	15	12
9067809	PNV L 3/2 NC Ø6-1/4	1/4	6	8	61.5	28.8	43.2	14.7	6.4	18	11.4	20	M12x0.75	14.6	20	15	12
9067810	PNV L 3/2 NC Ø8-1/8	1/8	8 ▲	6	66.2	31.8	49.7	18.7	9.1	15	13.8	26	M15x1	18.7	24	17	11.8
9067811	PNV L 3/2 NC Ø8-1/4	1/4	8 ▲	8	70.6	34.2	49.7	18.7	9.1	18	13.8	26	M15x1	18.7	24	17	11.8
9067812	PNV L 3/2 NC Ø8-3/8	3/8	8 ▲	9	72.2	34.8	49.7	18.7	9.1	22	13.8	26	M15x1	18.7	24	17	11.8

▲ **Ø8** = Ø5/16"

PNV L 3/2 NC G (BSP) THREAD - PIPE

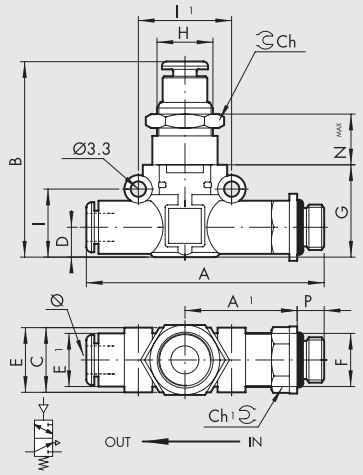

Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Nmax
9067708	PNV L 3/2 NC 1/8-Ø6	6	1/8	6	58.5	27.8	43.2	14.7	6.4	14	11.4	20	M12x0.75	14.6	20	15	12
9067709	PNV L 3/2 NC 1/4-Ø6	6	1/4	8	61.5	28.8	43.2	14.7	6.4	18	11.4	20	M12x0.75	14.6	20	15	12
9067710	PNV L 3/2 NC 1/8-Ø8	8 ▲	1/8	6	66.2	31.8	49.7	18.7	9.1	15	13.8	26	M15x1	18.7	24	17	11.8
9067711	PNV L 3/2 NC 1/4-Ø8	8 ▲	1/4	8	70.6	34.2	49.7	18.7	9.1	18	13.8	26	M15x1	18.7	24	17	11.8
9067712	PNV L 3/2 NC 3/8-Ø8	8 ▲	3/8	9	72.2	34.8	49.7	18.7	9.1	22	13.8	26	M15x1	18.7	24	17	11.8

▲ **Ø8** = Ø5/16"

IN-LINE SOLENOID VALVE SERIES SOV L

SOV L solenoid valves belong to the LINE ON LINE® family, which means they can be connected to all the other components in series or in parallel.
Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting.
Though small in size, SOV L valves are solenoid-piloted and feature very high performance.
The spool distributor is fitted with special polyurethane gaskets to ensure a very long working life.
Each valve comes complete with a monostable manual control and LED.
The electrical connection can be the PLUG-IN type or the type with an M8 3 PIN IP65 threaded fitting.
Exhaust can be damped with an annular silencer or conveyed via a pipe fitting. The fitting for conveyed exhaust can be oriented freely.

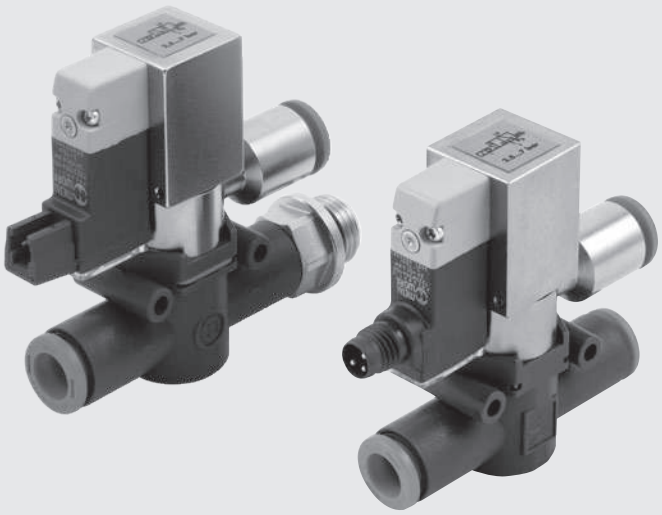

TECHNICAL DATA		Ø 6	Ø 1/4	Ø 8 (Ø5/16")
Operating pressure	MPa	0.3 to 0.7		
	bar	3 to 7		
	psi	43.5 to 101		
Temperature range	°C	5 to 50		
	°F	41 to 122		
Flow rate at 6.3 bar ΔP 0.5 bar	Nl/min	270	270	500
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	380	380	700
Conductance C	Nl/min·bar	95.8	95.8	178.1
Coefficient b	bar/bar	0.145	0.145	0.129
Voltage	VDC	24		
Power		0.9		
Recommended pipe		Rilsan PA11 - Nylon 6 - Polyamide 12 - Polypropylene		
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous		
Compatibility with oils		See **chapter Z1**		
Type of electrical connection		PLUG-IN - M8 3 PIN IP65 threaded fitting		

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF or NPT



Ⓑ



Ⓒ



How to mount the SOV L:
- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the SOV L straight onto the actuator.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the SOV L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the SOV L straight onto the wall.

SOV L 3/2 NC-NO PIPE - PIPE SILENCED EXHAUST

PLUG-IN VERSION

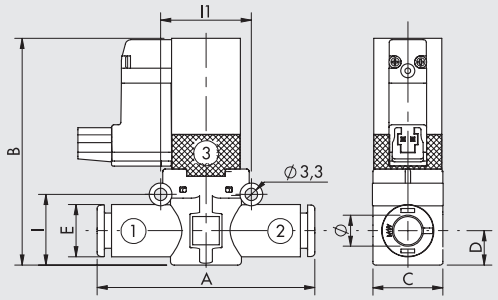

M8 VERSION

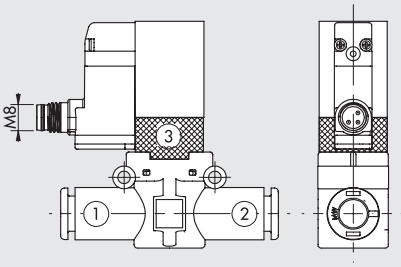

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V



Code	Ref..	Ø	A	B	C	D	E	I	I1	Electrical connection
9069016	SOV L 3/2 NC Ø6-Ø6	6	49.4	57.5	14.7	6.4	11.4	14.6	20	PLUG-IN
906M016	SOV L 3/2 NC Ø6-Ø6 M8									M8
9069116	SOV L 3/2 NO Ø6-Ø6									PLUG-IN
9069016U	SOV L 3/2 NC Ø1/4-Ø1/4	1/4	49.4	57.5	14.7	6.4	11.4	14.6	20	PLUG-IN
906M016U	SOV L 3/2 NC Ø1/4-Ø1/4 M8									M8
9069116U	SOV L 3/2 NO Ø1/4-Ø1/4									PLUG-IN
9069024	SOV L 3/2 NC Ø8-Ø8	8 ▲	57.3	63.5	18.7	9.1	13.8	18.7	24	PLUG-IN
906M024	SOV L 3/2 NC Ø8-Ø8 M8									M8
9069124	SOV L 3/2 NO Ø8-Ø8									PLUG-IN

▲ **Ø8** = Ø5/16"

SOV L 3/2 NC-NO PIPE - PIPE CONVEYED EXHAUST

PLUG-IN VERSION

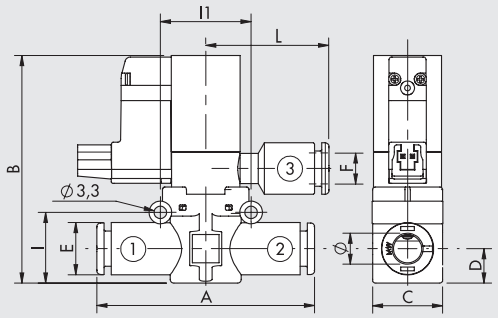

M8 VERSION

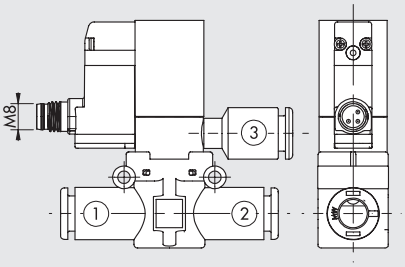

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V



Code	Ref.	Ø	A	B	C	D	E	F	I	I1	L	Electrical connection
9069216	SOV L 3/2 NC Ø6-Ø6-Ø6	6	49.4	57.5	14.7	6.4	11.4	Ø 6	14.6	20	28.3	PLUG-IN
906M216	SOV L 3/2 NC Ø6-Ø6-Ø6 M8											M8
9069316	SOV L 3/2 NO Ø6-Ø6-Ø6											PLUG-IN
9069216U	SOV L 3/2 NC Ø1/4-Ø1/4-Ø1/4	1/4	49.4	57.5	14.7	6.4	11.4	Ø1/4	14.6	20	28.3	PLUG-IN
906M216U	SOV L 3/2 NC Ø1/4-Ø1/4-Ø1/4 M8											M8
9069316U	SOV L 3/2 NO Ø1/4-Ø1/4-Ø1/4											PLUG-IN
9069224	SOV L 3/2 NC Ø8-Ø8-Ø8	8 ▲	57.3	63.5	18.7	9.1	13.8	Ø 8 ▲	18.7	24	30	PLUG-IN
906M224	SOV L 3/2 NC Ø8-Ø8-Ø8 M8											M8
9069324	SOV L 3/2 NO Ø8-Ø8-Ø8											PLUG-IN

▲ **Ø8** = Ø5/16"

SOV L 3/2 NC-NO PIPE - G (BSP) THREAD SILENCED EXHAUST

PLUG-IN VERSION

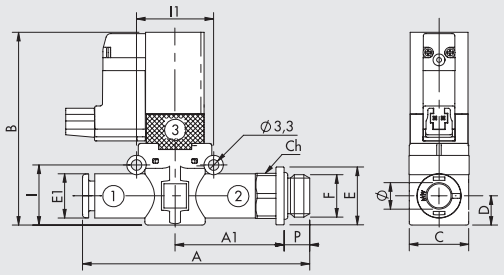

M8 VERSION

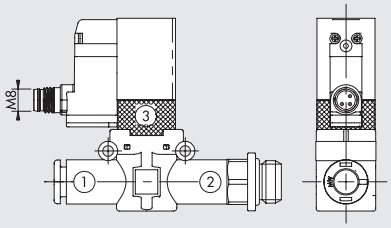

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V



Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	I	I1	Ch	Electrical connection
9069408	SOV L 3/2 NC Ø6-1/8	6	1/8	6	58.5	27.8	57.5	14.7	6.4	14	11.4	14.6	20	12	PLUG-IN
906M408	SOV L 3/2 NC Ø6-1/8 M8														M8
9069508	SOV L 3/2 NO Ø6-1/8														PLUG-IN
9069409	SOV L 3/2 NC Ø6-1/4	6	1/4	8	61.5	28.8	57.5	14.7	6.4	18	11.4	14.6	20	14	PLUG-IN
906M409	SOV L 3/2 NC Ø6-1/4 M8														M8
9069509	SOV L 3/2 NO Ø6-1/4														PLUG-IN
9069410	SOV L 3/2 NC Ø8-1/8	8 ▲	1/8	6	66.2	31.8	63.5	18.7	9.1	15	13.8	18.7	24	14	PLUG-IN
906M410	SOV L 3/2 NC Ø8-1/8 M8														M8
9069510	SOV L 3/2 NO Ø8-1/8														PLUG-IN
9069411	SOV L 3/2 NC Ø8-1/4	8 ▲	1/4	8	70.6	34.2	63.5	18.7	9.1	18	13.8	18.7	24	14	PLUG-IN
906M411	SOV L 3/2 NC Ø8-1/4 M8														M8
9069511	SOV L 3/2 NO Ø8-1/4														PLUG-IN
9069412	SOV L 3/2 NC Ø8-3/8	8 ▲	3/8	9	72.2	34.8	63.5	18.7	9.1	22	13.8	18.7	24	17	PLUG-IN
906M412	SOV L 3/2 NC Ø8-3/8 M8														M8
9069512	SOV L 3/2 NO Ø8-3/8														PLUG-IN

▲ **Ø8** = Ø5/16"

SOV L 3/2 NC-NO PIPE - G (BSP) THREAD CONVEYED EXHAUST

PLUG-IN VERSION

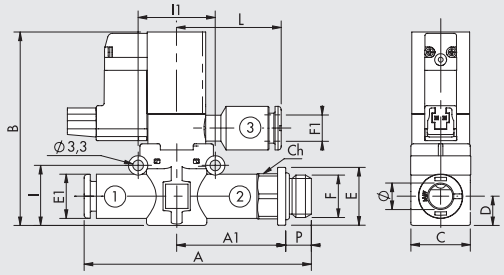

M8 VERSION

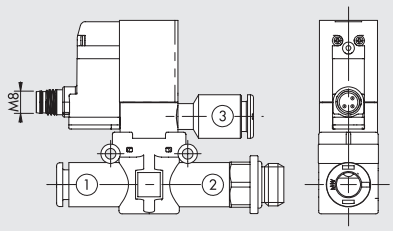

M8 CONNECTION

1 Not used
3 0 V (Operation also with reverse polarity)
4 +24V



Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	F1	I	I1	L	Ch	Electrical connection
9069608	SOV L 3/2 NC Ø6-1/8-Ø6	6	1/8	6	58.5	27.8	57.5	14.7	6.4	14	11.4	Ø 6	14.6	20	28.3	12	PLUG-IN
906M608	SOV L 3/2 NC Ø6-1/8-Ø6 M8																M8
9069708	SOV L 3/2 NO Ø6-1/8-Ø6																PLUG-IN
9069609	SOV L 3/2 NC Ø6-1/4-Ø6	6	1/4	8	61.5	28.8	57.5	14.7	6.4	18	11.4	Ø 6	14.6	20	28.3	14	PLUG-IN
906M609	SOV L 3/2 NC Ø6-1/4-Ø6 M8																M8
9069709	SOV L 3/2 NO Ø6-1/4-Ø6																PLUG-IN
9069610	SOV L 3/2 NC Ø8-1/8-Ø8	8 ▲	1/8	6	66.2	31.8	63.5	18.7	9.1	15	13.8	Ø 8 ▲	18.7	24	30	14	PLUG-IN
906M610	SOV L 3/2 NC Ø8-1/8-Ø8 M8																M8
9069710	SOV L 3/2 NO Ø8-1/8-Ø8																PLUG-IN
9069611	SOV L 3/2 NC Ø8-1/4-Ø8	8 ▲	1/4	8	70.6	34.2	63.5	18.7	9.1	18	13.8	Ø 8 ▲	18.7	24	30	14	PLUG-IN
906M611	SOV L 3/2 NC Ø8-1/4-Ø8 M8																M8
9069711	SOV L 3/2 NO Ø8-1/4-Ø8																PLUG-IN
9069612	SOV L 3/2 NC Ø8-3/8-Ø8	8 ▲	3/8	9	72.2	34.8	63.5	18.7	9.1	22	13.8	Ø 8 ▲	18.7	24	30	17	PLUG-IN
906M612	SOV L 3/2 NC Ø8-3/8-Ø8 M8																M8
9069712	SOV L 3/2 NO Ø8-3/8-Ø8																PLUG-IN

▲ **Ø8** = Ø5/16"

ACCESSORIES

PLUG-IN CONNECTOR



Code	Description
W0970512000	Plug-in connector Mach 11 L = 300 mm
W0970512007	Plug-in connector Mach 11 L = 1 m
W0970512002	Plug-in connector Mach 11 L = 2 m

M8 STRAIGHT CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

90° M8 CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

M8 M - M8 F CONNECTOR

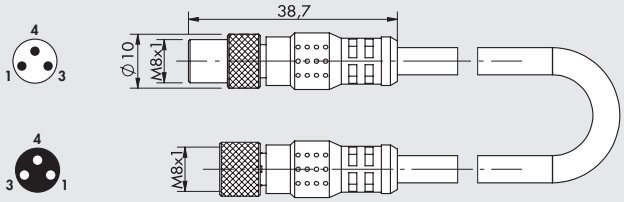

Code	Description
0240009009	M8-M8 3-pin straight connector with cable L = 3 m

Note: Can be used for direct connection to the modules with digital OUTPUT of the EB 80 valves

SPARE PARTS

PLUG-IN PILOT



Code	Description
722213541100	PLT-10 722213541100

M8 PILOT



Code	Description
7222M3541100	PLT-10 3/2 NC 0.8W 24VDC LED M8 with manual

MINIATURE REDUCER/ECONOMIZER, SERIES RML, RMC AND RMS

The RML R miniature pressure regulator belongs to the LINE ON LINE® family and can be connected in series or in parallel with all the other products.
The miniature pressure regulator is available in five different types:

- In-line with push-in input and output fitting
- In-line with threaded input port and push-in output fitting
- In-line with push-in input fitting and threaded output port
- At an angle with threaded input port and push-in output fitting
- Cartridge type for direct assembly in suitably worked slot.

The miniature pressure regulator is fitted with a relief valve for over-pressure exhaust.

- Particularly suitable for use between the valve and actuator and as a pressure regulator in secondary branches of the pneumatic system.

TECHNICAL DATA		RML					RMC			RMS		
		Ø 6	Ø 1/4"	Ø 8 (Ø 5/16")	Ø 3/8"	Ø 10	1/8	1/4	3/8	1/8	1/4	3/8
Threaded ports	G (BSP)	1/8"-1/4"	-	1/8"-1/4"-3/8"	-	1/4"-3/8"-1/2"	1/8"	1/4"	3/8"	1/8"	1/4"	3/8"
Pipe coupling	Ø	6	1/4"	8 ▲	3/8"	10	4 ▲ - 6 - 8 ▲	6 - 8 ▲ - 10	8 ▲ - 10 - 12	–	–	–
Regulation range		1 to 8 bar - 0.1 to 0.8 MPa - 14.5 to 116 psi										
Inlet pressure	MPa	0.2 to 1										
	bar	2 to 10										
	psi	29 to 145										
Flow rate at 6.3 bar (0.63 MPa - 91 psi) ΔP 1 bar	Nl/min	150		260	300	300	150	260	300	150	260	300
Flow rate on exhaust at 6.3 bar (0.63 MPa - 91 psi)	Nl/min	400		600	1000	1000	400	600	1000	400	600	1000
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous										
Max. temperature at 1 MPa; 10 bar; 145 psi	°C	– 20 to + 60										
	°F	– 4 to + 140										
Assembly position		Available										
Notes		In the miniature regulator the pressure must always be set upwards										
Compatibility with oils		See **chapter Z1**										

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

COMPONENTS

① Technopolymer body (brass for RMC)
② Nickel-plated brass insert
③ Nickel-plated brass adjusting screw
④ Steel adjusting spring
⑤ Brass piston rod
⑥ NBR shutter
⑦ Stainless steel shutter spring
⑧ Adjusting screw ring nut
⑨ Nickel-plated brass wall ring nut
⑩ Technopolymer release bushing
⑪ Technopolymer stop bushing (brass for RMC)
⑫ Stainless steel crimping spring
⑬ Technopolymer spring ring
⑭ NBR gasket
⑮ Nickel-plated brass rotating ring

RML

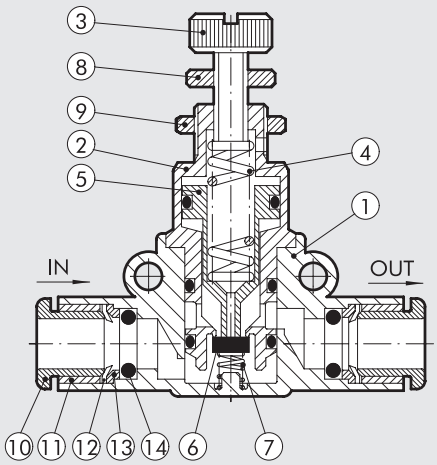

RMC

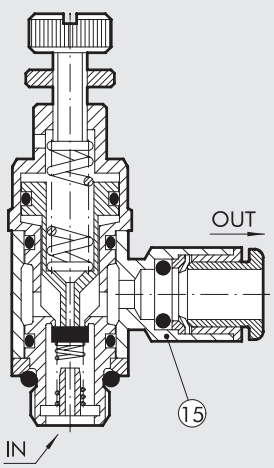

METAL WORK PNEUMATIC

ASSEMBLY OPTIONS

Ⓐ **G (BSP)**



UNF or NPT



Ⓑ



Ⓒ



Ⓓ



Ⓔ



How to assembly RML/RMC:

- Fig. Ⓐ **G (BSP)**: Thanks to the male threaded part it's possible to assembly directly on the actuator or on the valve.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the RML straight on to the actuator or the control valve.
- Fig. Ⓑ By using the ring nut screwed on the threaded body it's possible the assembling on panels.
- Fig. Ⓒ On the plastic body there are two strong ring for the direct wall assembly.
- Fig. Ⓓ Fixing on plate trought the proper small square SQU L, except for Ø3/8 and Ø10.
- Fig. Ⓔ For maintaining the tube the most parallel possible to the system , had been designed a specific version (RMC) with inlet and outlet at 90°.

POSSIBLE APPLICATIONS

ECONOMIZER

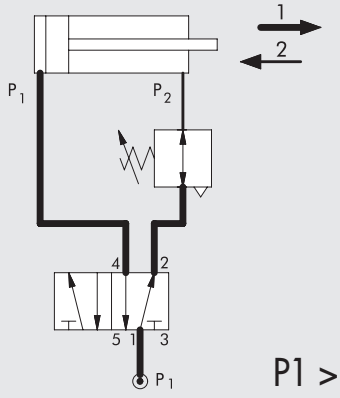

P1 > P2

If in a cylinder you require a thrust in one direction only, e.g. piston rod extension, and a lower thrust and pressure is sufficient in the oth er direction, you can save a lot of energy by mounting an economizer valve.

Example
Cylinder Ø 80 mm, stroke 200 mm, 6 bar, 12 cycles/min, 16 hours a day, 230 days a year. Consumption: 144 Nl/min => 3460 kWh/year => 880 litres of oil => 2428 kg of CO_2 => € 346/year. If you install an economizer that reduces the pressure from 6 to 2 bar, you SAVE: € 115/year.

REMOTE REDUCER



P1 > P2

CARTRIDGE REDUCER, SERIE RMS

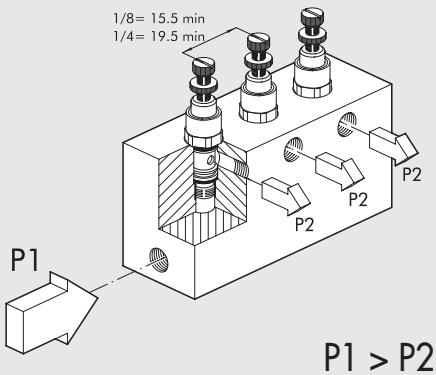

P1 > P2

The cartridge regulator can be used:

- Fitted directly into the structure or along the air supply ducting.
- Package with common feed and separate regulated outlets.

LINE-MOUNTED MINIATURE REDUCER, SERIES RML

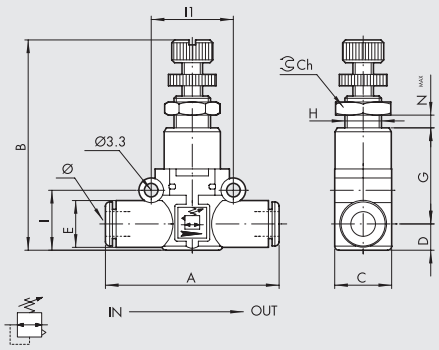

Code	Ref.	Ø	A	B	C	D	E	G	H	I	I1	Ch	Nmax
9061316	RML Ø6-Ø6	6	49.4	46÷52	14.7	6.4	11.4	24.8	M9x0.75	14.6	20	11	4.5
9061316U	RML Ø1/4-Ø1/4	1/4	49.4	46÷52	14.7	6.4	11.4	24.8	M9x0.75	14.6	20	11	4.5
9061324	RML Ø8-Ø8	8▲	57.3	52÷58	18.7	9.1	13.8	27.4	M11x1	18.7	24	13	3.8
9061332U	RML Ø3/8-Ø3/8	3/8	65	59÷66	21	10.9	16	30	M13x1	21.4	26	16	4.5
9061332	RML Ø10-Ø10	10	65	59÷66	21	10.9	16	30	M13x1	21.4	26	16	4.5

▲ **Ø8** = Ø5/16"

LINE-MOUNTED G (BSP) THREAD - PIPE MINIATURE REDUCER SERIES RML

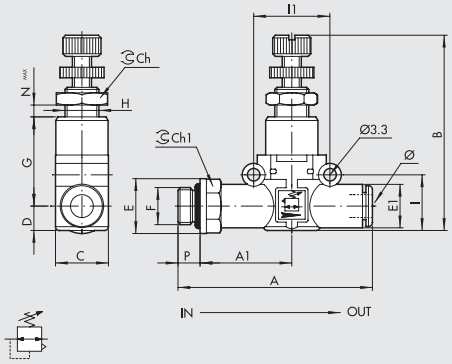

Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9061408	RML 1/8-Ø6	1/8	6	6	58.5	27.8	46÷52	14.7	6.4	14	11.4	24.8	M9x0.75	14.6	20	11	12	4.5
9061409	RML 1/4-Ø6	1/4	6	8	61.5	28.8	46÷52	14.7	6.4	18	11.4	24.8	M9x0.75	14.6	20	11	14	4.5
9061410	RML 1/8-Ø8	1/8	8▲	6	66.2	31.8	52÷58	18.7	9.1	15	13.8	27.4	M11x1	18.7	24	13	14	3.8
9061411	RML 1/4-Ø8	1/4	8▲	8	70.6	34.2	52÷58	18.7	9.1	18	13.8	27.4	M11x1	18.7	24	13	14	3.8
9061412	RML 3/8-Ø8	3/8	8▲	9	72.2	34.8	52÷58	18.7	9.1	22	13.8	27.4	M11x1	18.7	24	13	17	3.8
9061415	RML 1/4-Ø10	1/4	10	8	79.9	39.2	59÷66	21	10.9	18	16	30	M13x1	21.4	26	16	16	4.5
9061416	RML 3/8-Ø10	3/8	10	9	81.2	40.4	59÷66	21	10.9	20	16	30	M13x1	21.4	26	16	17	4.5
9061417	RML 1/2-Ø10	1/2	10	11	83.7	40	59÷66	21	10.9	26	16	30	M13x1	21.4	26	16	22	4.5

▲ **Ø8** = Ø5/16"

LINE-MOUNTED PIPE - G (BSP) THREAD MINIATURE REDUCER, SERIES RML

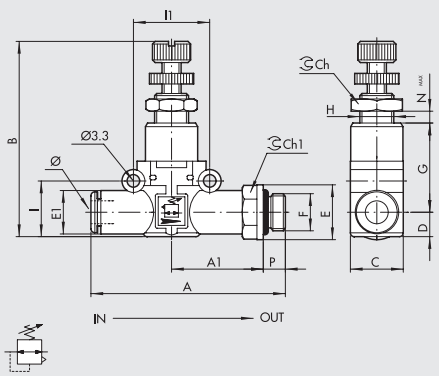

Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9061508	RML Ø6-1/8	6	1/8	6	58.5	27.8	46÷52	14.7	6.4	14	11.4	24.8	M9x0.75	14.6	20	11	12	4.5
9061509	RML Ø6-1/4	6	1/4	8	61.5	28.8	46÷52	14.7	6.4	18	11.4	24.8	M9x0.75	14.6	20	11	14	4.5
9061510	RML Ø8-1/8	8▲	1/8	6	66.2	31.8	52÷58	18.7	9.1	15	13.8	27.4	M11x1	18.7	24	13	14	3.8
9061511	RML Ø8-1/4	8▲	1/4	8	70.6	34.2	52÷58	18.7	9.1	18	13.8	27.4	M11x1	18.7	24	13	14	3.8
9061512	RML Ø8-3/8	8▲	3/8	9	72.2	34.8	52÷58	18.7	9.1	22	13.8	27.4	M11x1	18.7	24	13	17	3.8
9061515	RML Ø10-1/4	10	1/4	8	79.9	39.2	59÷66	21	10.9	18	16	30	M13x1	21.4	26	16	16	4.5
9061516	RML Ø10-3/8	10	3/8	9	81.2	40.4	59÷66	21	10.9	20	16	30	M13x1	21.4	26	16	17	4.5
9061517	RML Ø10-1/2	10	1/2	11	83.7	40	59÷66	21	10.9	26	16	30	M13x1	21.4	26	16	22	4.5

▲ **Ø8** = Ø5/16"

MINIATURE REDUCER, SERIES RMC

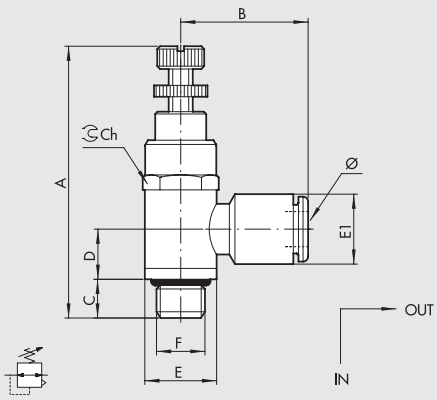

Code	Ref.	Ø	F	A	B	C	D	E	E1	Ch
9061102	RMC 1/8-Ø4	4 ▲	1/8	51÷57	20.4	7.1	12.7	14	9.5	14
9061108	RMC 1/8-Ø6	6	1/8	51÷57	23.7	7.1	12.7	14	11.3	14
9061110	RMC 1/8-Ø8	8 ▲	1/8	51÷57	25.6	7.1	12.7	14	13.8	14
9061109	RMC 1/4-Ø6	6	1/4	57÷63	25.1	9	11	18	11.3	17
9061111	RMC 1/4-Ø8	8 ▲	1/4	57÷63	27	9	11	18	13.8	17
9061112	RMC 1/4-Ø10	10	1/4	57÷63	32.2	9	11	18	16.5	17
9061113	RMC 3/8-Ø8	8 ▲	3/8	67÷74	28.5	9	13.4	21	13.8	21
9061114	RMC 3/8-Ø10	10	3/8	67÷74	32.8	9	13.4	21	16	21
9061115	RMC 3/8-Ø12	12	3/8	67÷74	35.3	9	13.4	21	19.5	21

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

CARTRIDGE REDUCER, SERIES RMS

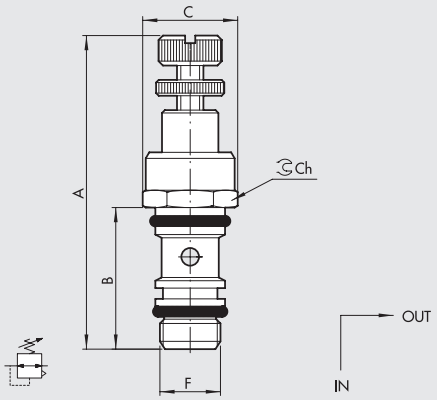

Code	Ref.	F	A	B	C	Ch
9061001	RMS 1/8	1/8	51÷57	24.3	15	14
9061002	RMS 1/4	1/4	57÷63	27.8	19	17
9061003	RMS 3/8	3/8	67÷74	33	23.5	21

SEAT OF A MINIATURE CARTRIDGE REDUCER

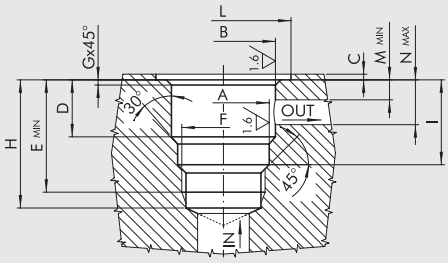

Code	F	A	B	C	D	E	G	H	I	L	M	N
SE.RMS 1/8	1/8	9.8 +0.1/-0	11.2 ±0.05	0.5 ±0.5	15.6 ±0.07	24.6	0.3	27	18.1 ±0.2	15.4	3.5	12
SE.RMS 1/4	1/4	13.5 +0.1/-0	14.4 ±0.05	0.5 ±0.5	17.5 ±0.07	28	0.4	31.2	20.8 ±0.2	19.4	3.5	13.5
SE.RMS 3/8	3/8	17 +0.1/-0	17.7 ±0.05	0.5 ±0.5	22 ±0.07	33.5	0.8	42	25.2 ±0.2	23.8	3.6	16.2

TOOL FOR RMS SEAT



Code	Ref.	Ø A	Ø B
9062001	UT.SE 1/8	16	12
9062002	UT.SE 1/4	20	15
9062003	UT.SE 3/8	26	15

IN-LINE PRESSURE GAUGE SERIES MAN L

The MAN L pressure gauge belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.
Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting.
Though small in size, this pressure gauge, which is supplied in a metal casing, ensures accurate reading. It can be angled in any direction simply by rotating manually.

TECHNICAL DATA		Ø 4 (Ø5/32")	Ø 6	Ø 1/4"	Ø 8 (Ø5/16")	Ø 3/8"	Ø 10
Operating pressure	MPa	1.2					
	bar	12					
	psi	174					
Temperature range	°C	– 20 to + 60					
	°F	– 4 to + 140					
Precision		± 4% full scale					
Recommended pipe		Rilsan PA11 - Nylon 6 - Polyamide 12 - Polypropylene					
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous					
Compatibility with oils		See **chapter Z1**					

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF or NPT



Ⓑ



Ⓒ



Ⓓ



How to mount the MAN L:
- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the MAN L straight onto the female thread.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the MAL L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket, except for Ø3/8 and Ø10.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the MAN L straight onto the wall.
- Fig. Ⓓ Use the SQL L bracket for panel mounting the MAN L.

MAN L PIPE - PIPE

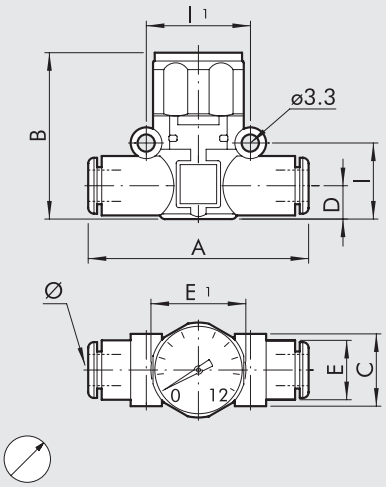

Code	Ref.	Ø	A	B	C	D	E	E1	I	I1
9067001	MAN L Ø4-Ø4	4 ▲	41.8	36.1	10.7	5.6	10	23	12.8	16
9067016	MAN L Ø6-Ø6	6	49.4	35	14.7	6.4	11.4	23	14.6	20
9067016U	MAN L Ø1/4-Ø1/4	1/4	49.4	35	14.7	6.4	11.4	23	14.6	20
9067024	MAN L Ø8-Ø8	8 ▲	57.3	41	18.7	9.1	13.8	23	18.7	24
9067032U	MAN L Ø3/8-Ø3/8	3/8	65.4	45	20.7	10.9	16	23	21.4	26
9067032	MAN L Ø10-Ø10	10	65.7	45	20.7	10.9	16	23	21.4	26

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

MAN L G (BSP) THREAD - PIPE

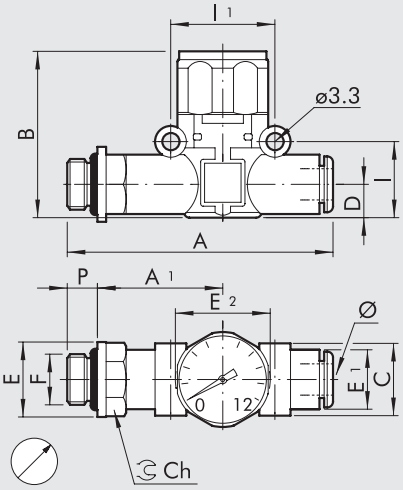

Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	E2	I	I1	Ch
9067101	MAN L M5-Ø4	M5	4 ▲	4	47.7	22.7	36.1	10.7	5.6	9.9	10	23	12.8	16	9
9067102	MAN L 1/8-Ø4	1/8	4 ▲	6	51.5	24.6	36.1	10.7	5.6	14	10	23	12.8	16	12
9067108	MAN L 1/8-Ø6	1/8	6	6	58.5	27.8	35	14.7	6.4	14	11.4	23	14.6	20	12
9067109	MAN L 1/4-Ø6	1/4	6	8	61.5	28.8	35	14.7	6.4	18	11.4	23	14.6	20	14
9067110	MAN L 1/8-Ø8	1/8	8 ▲	6	66.2	31.8	41	18.7	9.1	15	13.8	23	18.7	24	14
9067111	MAN L 1/4-Ø8	1/4	8 ▲	8	70.6	34.2	41	18.7	9.1	18	13.8	23	18.7	24	14
9067112	MAN L 3/8-Ø8	3/8	8 ▲	9	72.2	34.8	41	18.7	9.1	22	13.8	23	18.7	24	17
9067115	MAN L 1/4-Ø10	1/4	10	8	79.9	39.2	45	20.7	10.9	18	16	23	21.4	26	16
9067116	MAN L 3/8-Ø10	3/8	10	9	81.2	40.4	45	20.7	10.9	20	16	23	21.4	26	17
9067117	MAN L 1/2-Ø10	1/2	10	11	83.7	40	45	20.7	10.9	26	16	23	21.4	26	22

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

NOTES

IN LINE PRESSURE SWITCH SERIES PRS L

The PRS L pressure switch belongs to the LINE ON LINE® range and can therefore be connected in series or in parallel to all other products.
It is available in a version for tube-to-tube connection, which includes two automatic fittings, or in a version for thread-to-tube connection, which includes a nickel-plated brass male thread and an automatic fitting.
The pressure switch can be installed in any position and orientation.
It is supplied pre-assembled and complete with an electrical cable to save wiring time. You can choose between a 2-metre cable or an M8 connector with a 300-mm cable. It is a switchover contact, which means that both normally open and normally closed signals are provided.
Adjustment is by means of a knurled knob with a push-lock system.

TECHNICAL DATA		Ø 6	Ø 1/4"	Ø 8 (Ø5/16")	Ø 3/8"	Ø 10
Maximum pressure	MPa	1				
	bar	10				
	psi	145				
Operating temperature range at: 1 MPa; 10 bar;145 psi	°C	50				
	°F	122				
Adjustable pressure interval	bar	0.5 to 10				
Hysteresis (not adjustable)	bar	From 0.4 to 0.8 (see diagram following pages)				
Maximum current	A	2				
Maximum voltage	V	250				
Outside diameter of cable	mm	4.9				
Number of wires and cross section		3 x 0.5 mm^2				
Contacts		Normally-Open (NO) and Normally-Closed (NC)				
Protection		IP65				
Number of switchings		5 x 10^6				
Recommended pipe		Rilsan PA11 - Nylon 6 - Polyamide 12 - Polypropylene				
Fluid		Filtered lubricated or unlubricated compressed air. Lubrication, if used, must be continuous.				
Mounting position		In any position				

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF or NPT



Ⓑ



Ⓒ



Ⓓ



How to mount the PRS L:
- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the PRS L straight onto the female thread.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the PRS L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket, except for Ø3/8 and Ø10.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the PRS L straight onto the wall.
- Fig. Ⓓ Use the SQU L bracket for panel mounting the PRS L.

METAL WORK PNEUMATIC

PRS L PIPE - PIPE

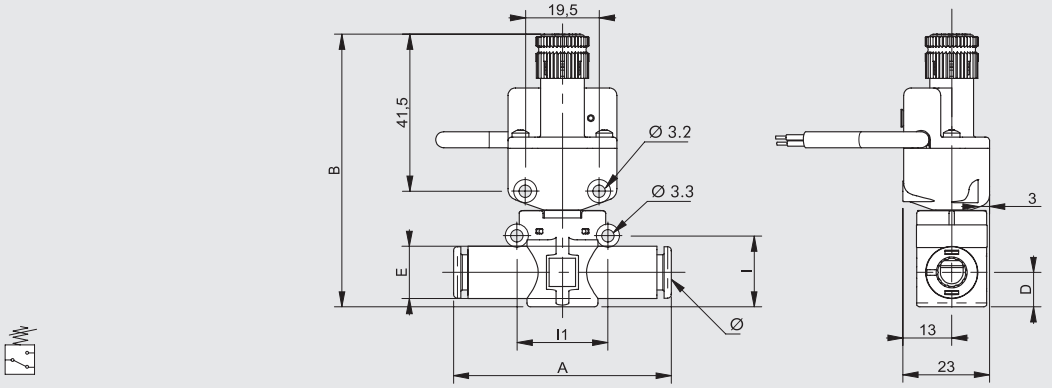

Code	Ref.	Ø	A	B	D	E	I	I1
9070016	PRS L Ø6-Ø6 2 metres cable	6	49.4	~ 72	6.4	11.4	14.6	20
9070116	PRS L Ø6-Ø6 M8 connector	6	49.4	~ 72	6.4	11.4	14.6	20
9070016U	PRS L Ø1/4-Ø1/4 2 metres cable	1/4	49.4	~ 72	6.4	11.4	14.6	20
9070116U	PRS L Ø1/4-Ø1/4 M8 connector	1/4	49.4	~ 72	6.4	11.4	14.6	20
9070024	PRS L Ø8-Ø8 2 metres cable	8 ▲	57.3	~ 73	9.1	13.8	18.7	24
9070124	PRS L Ø8-Ø8 M8 connector	8 ▲	57.3	~ 73	9.1	13.8	18.7	24
9070032U	PRS L Ø3/8-Ø3/8 2 metres cable	3/8	65.4	~ 76	10.9	16	21.4	26
9070132U	PRS L Ø3/8-Ø3/8 M8 connector	3/8	65.4	~ 76	10.9	16	21.4	26
9070032	PRS L Ø10-Ø10 2 metres cable	10	65.7	~ 76	10.9	16	21.4	26
9070132	PRS L Ø10-Ø10 M8 connector	10	65.7	~ 76	10.9	16	21.4	26

▲ **Ø8** = Ø5/16"

PRS L THREAD - PIPE

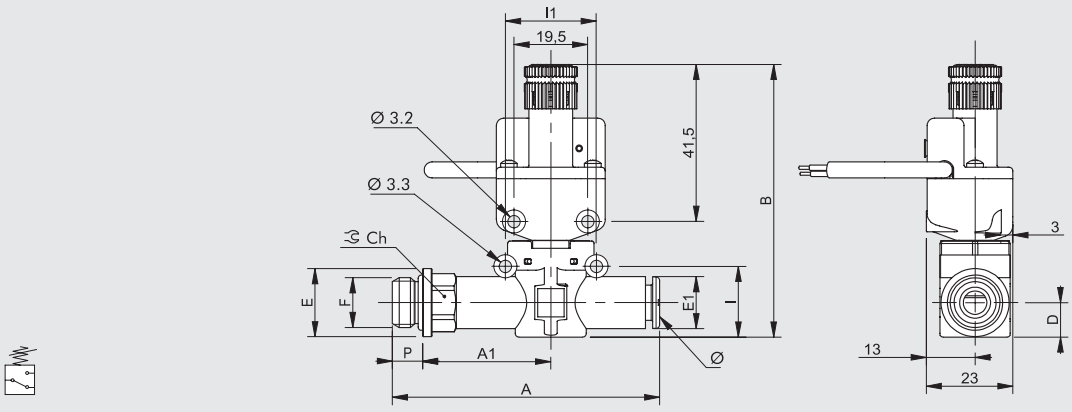

Code	Ref.	F	Ø	P	A	A1	B	D	E	E1	I	I1	Ch
9070208	PRS L 1/8-Ø6 2 metres cable	1/8	6	6	58.5	27.8	~ 72	6.4	14	11.4	14.6	20	12
9070308	PRS L 1/8-Ø6 M8 connector	1/8	6	6	58.5	27.8	~ 72	6.4	14	11.4	14.6	20	12
9070209	PRS L 1/4-Ø6 2 metres cable	1/4	6	8	61.5	28.8	~ 72	6.4	18	11.4	14.6	20	14
9070309	PRS L 1/4-Ø6 M8 connector	1/4	6	8	61.5	28.8	~ 72	6.4	18	11.4	14.6	20	14
9070210	PRS L 1/8-Ø8 2 metres cable	1/8	8 ▲	6	66.2	31.8	~ 73	9.1	15	13.8	18.7	24	12
9070310	PRS L 1/8-Ø8 M8 connector	1/8	8 ▲	6	66.2	31.8	~ 73	9.1	15	13.8	18.7	24	12
9070211	PRS L 1/4-Ø8 2 metres cable	1/4	8 ▲	8	70.6	34.2	~ 73	9.1	18	13.8	18.7	24	14
9070311	PRS L 1/4-Ø8 M8 connector	1/4	8 ▲	8	70.6	34.2	~ 73	9.1	18	13.8	18.7	24	14
9070212	PRS L 3/8-Ø8 2 metres cable	3/8	8 ▲	9	72.2	34.8	~ 73	9.1	22	13.8	18.7	24	17
9070312	PRS L 3/8-Ø8 M8 connector	3/8	8 ▲	9	72.2	34.8	~ 73	9.1	22	13.8	18.7	24	17
9070215	PRS L 1/4-Ø10 2 metres cable	1/4	10	8	79.9	39.2	~ 76	10.9	18	16	21.4	26	16
9070315	PRS L 1/4-Ø10 M8 connector	1/4	10	8	79.9	39.2	~ 76	10.9	18	16	21.4	26	16
9070216	PRS L 3/8-Ø10 2 metres cable	3/8	10	9	81.2	40.4	~ 76	10.9	20	16	21.4	26	17
9070316	PRS L 3/8-Ø10 M8 connector	3/8	10	9	81.2	40.4	~ 76	10.9	20	16	21.4	26	17
9070217	PRS L 1/2-Ø10 2 metres cable	1/2	10	11	83.7	40	~ 76	10.9	26	16	21.4	26	22
9070317	PRS L 1/2-Ø10 M8 connector	1/2	10	11	83.7	40	~ 76	10.9	26	16	21.4	26	22

▲ **Ø8** = Ø5/16"

WIRING DIAGRAM

VERSION WITH CABLE



VERSION WITH M8 CONNECTOR



HYSTERESIS GRAPH

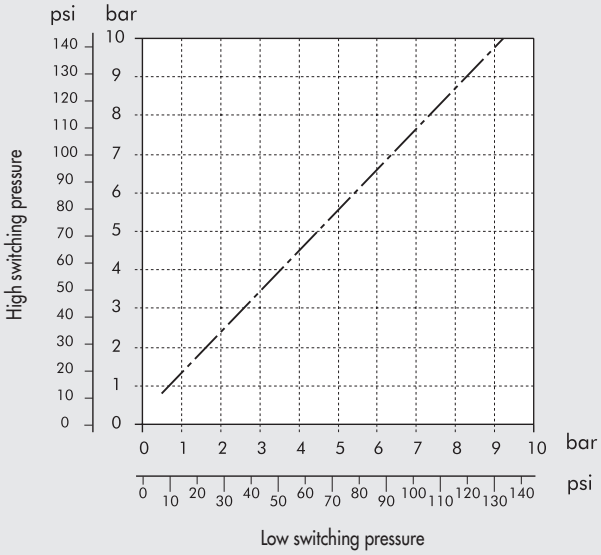

ACCESSORIES

SECURITY KNOB



Code	Description
9200703	Security knob APR / pressure switch

Note: Pull outwards to remove the knob from the pressure switch on the unit.
Insert the security knob and regulate the pressure switch.
Then press the handle firmly to lock it in position. If the pressure switch needs to be reset, remove the security knob by forcing it laterally with a screwdriver.

M8 STRAIGHT CONNECTOR WITH CABLE



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Very flexible cables, class 6 according to IEC 60228

M8 ADAPTER CABLE FOR CONNECTING THE PRESSURE SWITCH TO THE EB 80 E CM DIGITAL INPUTS MODULE



Code	Description
0240010501	M8-M, M8-F 3-pole adapter with cable L = 0.3 m

Note: Can be used to connect the pressure switch to the module of digital INPUT **S01** of the EB 80 valves, to the additional M8 INPUT module of the CM valves and to the Profibus-DP IP67 M8 input. Contact type NO (Normally open)

M8F	M8M	Function
pin 1	pin 1	Power supply +
pin 3	pin 4	Signal NO
pin 4	pin 3	Disconnect

NOTES

NOTES

IN-LINE PRESSURE INDICATOR SERIES LAM L

The LAM L pneumatic light indicator belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.
Available in the version for pipe-pipe connection with two FOX push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting.
When there is no pressure, the clear technopolymer bell looks empty.
When there is pressure, a red signal appears.
The clear bell can be cleaned using normal detergents or ethyl alcohol, as the technopolymer used is fully compatible.

TECHNICAL DATA		Ø 6	Ø 1/4"	Ø 8 (Ø5/16")
Operating pressure	MPa	0.2 to 1		
	bar	2 to 10		
	psi	29 to 145		
Temperature range	°C	– 20 to + 60		
	°F	– 4 to + 140		
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	420	420	800
Colour with pressure		Orange - Green		
Recommended pipe		Rilsan PA11 - Nylon 6 - Polyamide 12 - Polypropylene		
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous		
Compatibility with oils		See **chapter Z1**		

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF or NPT



Ⓑ



Ⓒ



Ⓓ



How to mount the LAM L:
- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the LAM L straight onto the female thread.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the LAM L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the LAM L straight onto the wall.
- Fig. Ⓓ The ring nut is screwed onto the threaded metal part of the LAM L body for panel mounting.

LAM L PIPE - PIPE

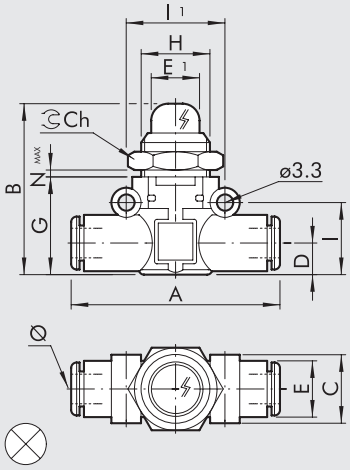

Code	Ref.	Ø	A	B	C	D	E	E1	G	H	I	I1	Ch	Nmax
9068016	LAM L Ø6-Ø6-A	6	49.4	37	14.7	6.4	11.4	10.6	21	M15x1	14.6	20	17	4.5
9068216	LAM L Ø6-Ø6-V													
9068016U	LAM L Ø1/4-Ø1/4-A	1/4	49.4	37	14.7	6.4	11.4	10.6	21	M15x1	14.6	20	17	4.5
9068216U	LAM L Ø1/4-Ø1/4-V													
9068024	LAM L Ø8-Ø8-A	8 ▲	57.3	41	18.7	9.1	13.8	10.6	26	M15x1	18.7	24	17	4.5
9068224	LAM L Ø8-Ø8-V													

A = Orange; **V** = Green
▲ **Ø8** = Ø5/16"

LAM L G (BSP) THREAD - PIPE

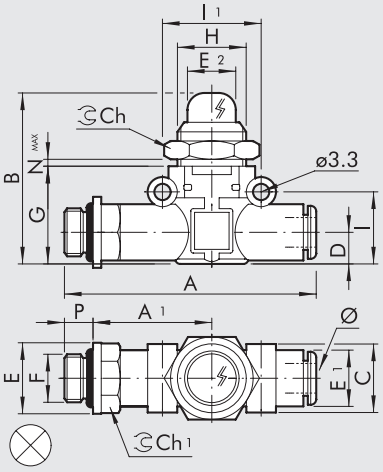

Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	E2	G	H	I	I1	Ch	Ch1	Nmax
9068108	LAM L 1/8-Ø6-A	1/8	6	6	58.5	27.8	37	14.7	6.4	14	11.4	10.6	21	M15x1	14.6	20	17	12	4.5
9068308	LAM L 1/8-Ø6-V																		
9068109	LAM L 1/4-Ø6-A	1/4	6	8	61.5	28.8	37	14.7	6.4	18	11.4	10.6	21	M15x1	14.6	20	17	14	4.5
9068309	LAM L 1/4-Ø6-V																		
9068110	LAM L 1/8-Ø8-A	1/8	8 ▲	6	66.2	31.8	41	18.7	9.1	15	13.8	10.6	26	M15x1	18.7	24	17	14	4.5
9068310	LAM L 1/8-Ø8-V																		
9068111	LAM L 1/4-Ø8-A	1/4	8 ▲	8	70.6	34.2	41	18.7	9.1	18	13.8	10.6	26	M15x1	18.7	24	17	14	4.5
9068311	LAM L 1/4-Ø8-V																		
9068112	LAM L 3/8-Ø8-A	3/8	8 ▲	9	72.2	34.8	41	18.7	9.1	22	13.8	10.6	26	M15x1	18.7	24	17	17	4.5
9068312	LAM L 3/8-Ø8-V																		

A = Orange; **V** = Green
▲ **Ø8** = Ø5/16"

IN-LINE SHUTOFF VALVE SERIES V2V L AND V3V L

V2V L and V3V L shutoff valves belong to the LINE ON LINE® family which means they can be connected to all the other components in series or in parallel. Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting.
V2V is a two-way unidirectional valve, while V3V is a three-way valve with free discharge in the area around the control knob.
The locked version is probably the smallest available on the market.
A lock is provided to ensure the valve is kept in the closed position during machine maintenance. The valve is supplied complete with a lock and two keys.

TECHNICAL DATA		Ø 6	Ø 1/4"	Ø 8 (Ø5/16")	Ø 3/8"	Ø 10
Operating pressure	MPa	1				
	bar	10				
	psi	145				
Temperature range	°C	– 20 to + 60				
	°F	– 4 to + 140				
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	280	280	470	600	600
Exhaust flow rate at 6.3 bar	Nl/min	110	110	110	110	110
Recommended pipe		Rilsan PA11 - Nylon 6 - Polyamide 12 - Polypropylene				
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous				
Compatibility with oils		See **chapter Z1**				

COMPONENTS

① Technopolymer body
② Nickel-plated brass insert
③ Brass rod
④ Technopolymer knob
⑤ NBR valve
⑥ Stainless steel valve compression spring
⑦ Nickel-plated brass wall-mount ring nut
⑧ NBR gasket
⑨ Technopolymer spring ring
⑩ Stainless steel folding spring
⑪ Technopolymer locking bushing
⑫ Technopolymer release bushing

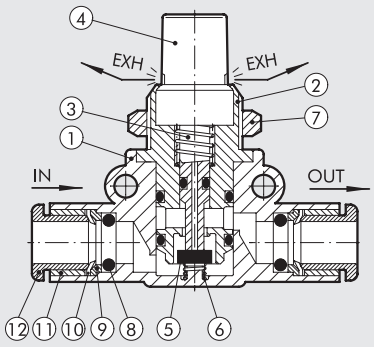

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF or NPT



Ⓑ



Ⓒ



Ⓓ



How to mount the V2V/V3V L:
- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the V2V/V3V L straight onto the female thread.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the V2V/V3V L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket, except for Ø3/8 and Ø10.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the V2V/V3V L straight onto the wall.
- Fig. Ⓓ The rig nut is screwed onto the threaded metal part of the V2V/V3V L body for panel mounting.

V2V/V3V L PIPE - PIPE

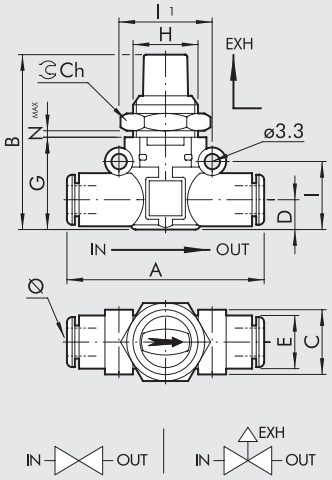

Code	Ref.	Ø	A	B	C	D	E	G	H	I	I1	Ch	Nmax
9065016	V2V L Ø6-Ø6	6	49.4	41	14.7	6.4	11.4	21	M15x1	14.6	20	17	5.5
9066016	V3V L Ø6-Ø6												
9065016U	V2V L Ø1/4-Ø1/4	1/4	49.4	41	14.7	6.4	11.4	21	M15x1	14.6	20	17	5.5
9066016U	V3V L Ø1/4-Ø1/4												
9065024	V2V L Ø8-Ø8	8 ▲	57.3	46	18.7	9.1	13.8	26	M15x1	18.7	24	17	5.5
9066024	V3V L Ø8-Ø8												
9065032U	V2V L Ø3/8-Ø3/8	3/8	65	52	21	10.9	16	30	M18x1.5	21.4	26	22	5
9066032U	V3V L Ø3/8-Ø3/8												
9065032	V2V L Ø10-Ø10	10	65	52	21	10.9	16	30	M18x1.5	21.4	26	22	5
9066032	V3V L Ø10-Ø10												

▲ **Ø8** = Ø5/16"

V2V/V3V L PIPE - PIPE PADLOCKED

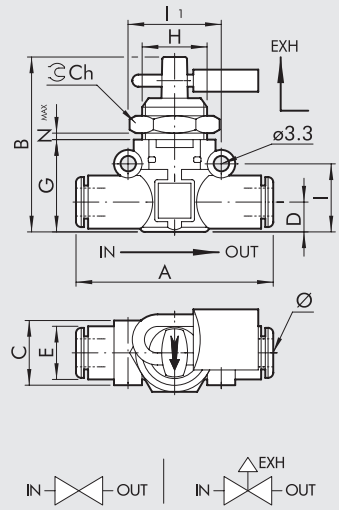

Code	Ref.	Ø	A	B	C	D	E	G	H	I	I1	Ch	Nmax
9065116	V2V L Ø6-Ø6 KEY	6	49.4	41	14.7	6.4	11.4	21	M15x1	14.6	20	17	5.5
9066116	V3V L Ø6-Ø6 KEY												
9065116U	V2V L Ø1/4-Ø1/4 KEY	1/4	49.4	41	14.7	6.4	11.4	21	M15x1	14.6	20	17	5.5
9066116U	V3V L Ø1/4-Ø1/4 KEY												
9065124	V2V L Ø8-Ø8 KEY	8 ▲	57.3	46	18.7	9.1	13.8	26	M15x1	18.7	24	17	5.5
9066124	V3V L Ø8-Ø8 KEY												
9065132U	V2V L Ø3/8-Ø3/8 KEY	3/8	65	52	21	10.9	16	30	M18x1.5	21.4	26	22	5
9066132U	V3V L Ø3/8-Ø3/8 KEY												
9065132	V2V L Ø10-Ø10 KEY	10	65	52	21	10.9	16	30	M18x1.5	21.4	26	22	5
9066132	V3V L Ø10-Ø10 KEY												

▲ **Ø8** = Ø5/16"

V2V/V3V L PIPE - G (BSP) THREAD

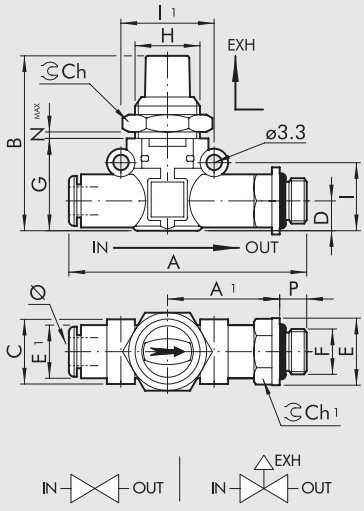

Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9065208	V2V L Ø6-1/8	6	1/8	6	58.5	27.8	41	14.7	6.4	14	11.4	21	M15x1	14.6	20	17	12	5.5
9066208	V3V L Ø6-1/8																	
9065209	V2V L Ø6-1/4	6	1/4	8	61.5	28.8	41	14.7	6.4	18	11.4	21	M15x1	14.6	20	17	14	5.5
9066209	V3V L Ø6-1/4																	
9065210	V2V L Ø8-1/8	8 ▲	1/8	6	66.2	31.8	46	18.7	9.1	15	13.8	26	M15x1	18.7	24	17	14	5.5
9066210	V3V L Ø8-1/8																	
9065211	V2V L Ø8-1/4	8 ▲	1/4	8	70.6	34.2	46	18.7	9.1	18	13.8	26	M15x1	18.7	24	17	14	5.5
9066211	V3V L Ø8-1/4																	
9065212	V2V L Ø8-3/8	8 ▲	3/8	9	72.2	34.8	46	18.7	9.1	22	13.8	26	M15x1	18.7	24	17	17	5.5
9066212	V3V L Ø8-3/8																	
9065215	V2V L Ø10-1/4	10	1/4	8	79.9	39.2	52	20.7	10.9	18	16	30	M18x1.5	21.4	26	22	16	5
9066215	V3V L Ø10-1/4																	
9065216	V2V L Ø10-3/8	10	3/8	9	81.2	40.4	52	20.7	10.9	20	16	30	M18x1.5	21.4	26	22	17	5
9066216	V3V L Ø10-3/8																	
9065217	V2V L Ø10-1/2	10	1/2	11	83.7	40	52	20.7	10.9	26	16	30	M18x1.5	21.4	26	22	22	5
9066217	V3V L Ø10-1/2																	

▲ **Ø8** = Ø5/16"

V2V/V3V L PIPE - G (BSP) THREAD PADLOCKED

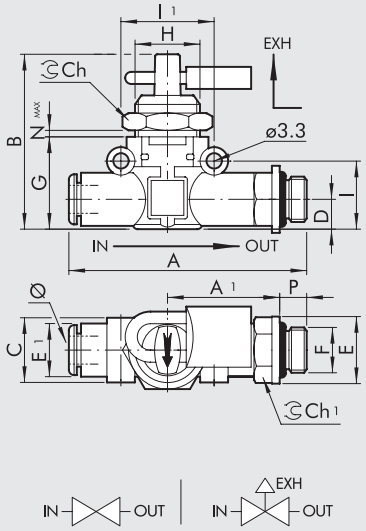

Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9065308	V2V L Ø6-1/8 KEY	6	1/8	6	58.5	27.8	41	14.7	6.4	14	11.4	21	M15x1	14.6	20	17	12	5.5
9066308	V3V L Ø6-1/8 KEY																	
9065309	V2V L Ø6-1/4 KEY	6	1/4	8	61.5	28.8	41	14.7	6.4	18	11.4	21	M15x1	14.6	20	17	14	5.5
9066309	V3V L Ø6-1/4 KEY																	
9065310	V2V L Ø8-1/8 KEY	8▲	1/8	6	66.2	31.8	46	18.7	9.1	15	13.8	26	M15x1	18.7	24	17	14	5.5
9066310	V3V L Ø8-1/8 KEY																	
9065311	V2V L Ø8-1/4 KEY	8▲	1/4	8	70.6	34.2	46	18.7	9.1	18	13.8	26	M15x1	18.7	24	17	14	5.5
9066311	V3V L Ø8-1/4 KEY																	
9065312	V2V L Ø8-3/8 KEY	8▲	3/8	9	72.2	34.8	46	18.7	9.1	22	13.8	26	M15x1	18.7	24	17	17	5.5
9066312	V3V L Ø8-3/8 KEY																	
9065315	V2V L Ø10-1/4 KEY	10	1/4	8	79.9	39.2	52	20.7	10.9	18	16	30	M18x1.5	21.4	26	22	16	5
9066315	V3V L Ø10-1/4 KEY																	
9065316	V2V L Ø10-3/8 KEY	10	3/8	9	81.2	40.4	52	20.7	10.9	20	16	30	M18x1.5	21.4	26	22	17	5
9066316	V3V L Ø10-3/8 KEY																	
9065317	V2V L Ø10-1/2 KEY	10	1/2	11	83.7	40	52	20.7	10.9	26	16	30	M18x1.5	21.4	26	22	22	5
9066317	V3V L Ø10-1/2 KEY																	

▲ **Ø8** = Ø5/16"

V2V/V3V L G (BSP) THREAD - PIPE

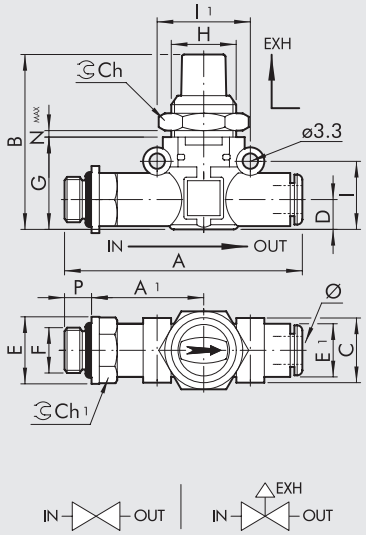

Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9065408	V2V L 1/8-Ø6	1/8	6	6	58.5	27.8	41	14.7	6.4	14	11.4	21	M15x1	14.6	20	17	12	5.5
9066408	V3V L 1/8-Ø6																	
9065409	V2V L 1/4-Ø6	1/4	6	8	61.5	28.8	41	14.7	6.4	18	11.4	21	M15x1	14.6	20	17	14	5.5
9066409	V3V L 1/4-Ø6																	
9065410	V2V L 1/8-Ø8	1/8	8▲	6	66.2	31.8	46	18.7	9.1	15	13.8	26	M15x1	18.7	24	17	14	5.5
9066410	V3V L 1/8-Ø8																	
9065411	V2V L 1/4-Ø8	1/4	8▲	8	70.6	34.2	46	18.7	9.1	18	13.8	26	M15x1	18.7	24	17	14	5.5
9066411	V3V L 1/4-Ø8																	
9065412	V2V L 3/8-Ø8	3/8	8▲	9	72.2	34.8	46	18.7	9.1	22	13.8	26	M15x1	18.7	24	17	17	5.5
9066412	V3V L 3/8-Ø8																	
9065415	V2V L 1/4-Ø10	1/4	10	8	79.9	39.2	52	20.7	10.9	18	16	30	M18x1.5	21.4	26	22	16	5
9066415	V3V L 1/4-Ø10																	
9065416	V2V L 3/8-Ø10	3/8	10	9	81.2	40.4	52	20.7	10.9	20	16	30	M18x1.5	21.4	26	22	17	5
9066416	V3V L 3/8-Ø10																	
9065417	V2V L 1/2-Ø10	1/2	10	11	83.7	40	52	20.7	10.9	26	16	30	M18x1.5	21.4	26	22	22	5
9066417	V3V L 1/2-Ø10																	

▲ **Ø8** = Ø5/16"

V2V/V3V L G (BSP) THREAD - PIPE PADLOCKED

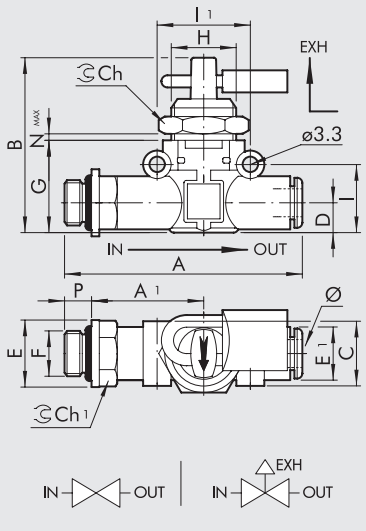

Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9065508	V2V L 1/8-Ø6 KEY	1/8	6	6	58.5	27.8	41	14.7	6.4	14	11.4	21	M15x1	14.6	20	17	12	5.5
9066508	V3V L 1/8-Ø6 KEY																	
9065509	V2V L 1/4-Ø6 KEY	1/4	6	8	61.5	28.8	41	14.7	6.4	18	11.4	21	M15x1	14.6	20	17	14	5.5
9066509	V3V L 1/4-Ø6 KEY																	
9065510	V2V L 1/8-Ø8 KEY	1/8	8▲	6	66.2	31.8	46	18.7	9.1	15	13.8	26	M15x1	18.7	24	17	14	5.5
9066510	V3V L 1/8-Ø8 KEY																	
9065511	V2V L 1/4-Ø8 KEY	1/4	8▲	8	70.6	34.2	46	18.7	9.1	18	13.8	26	M15x1	18.7	24	17	14	5.5
9066511	V3V L 1/4-Ø8 KEY																	
9065512	V2V L 3/8-Ø8 KEY	3/8	8▲	9	72.2	34.8	46	18.7	9.1	22	13.8	26	M15x1	18.7	24	17	17	5.5
9066512	V3V L 3/8-Ø8 KEY																	
9065515	V2V L 1/4-Ø10 KEY	1/4	10	8	79.9	39.2	52	20.7	10.9	18	16	30	M18x1.5	21.4	26	22	16	5
9066515	V3V L 1/4-Ø10 KEY																	
9065516	V2V L 3/8-Ø10 KEY	3/8	10	9	81.2	40.4	52	20.7	10.9	20	16	30	M18x1.5	21.4	26	22	17	5
9066516	V3V L 3/8-Ø10 KEY																	
9065517	V2V L 1/2-Ø10 KEY	1/2	10	11	83.7	40	52	20.7	10.9	26	16	30	M18x1.5	21.4	26	22	22	5
9066517	V3V L 1/2-Ø10 KEY																	

▲ **Ø8** = Ø5/16"

IN-LINE FLOW MICRO-REGULATOR SERIES RFL L

The RFL L flow micro-regulator belongs to the LINE ON LINE® family and can be connected in series or in parallel with all the other products.
The RFL L regulates the air input and thus the speed in pneumatic actuators.
Type U (unidirectional) regulates the flow only in one of the two directions of air flow and is available in the types with:
- push-in input and output fitting;
- push-in input fitting and threaded port on the exhaust (cylinder type);
- input threaded port and push-in fitting on the exhaust (valve type).

Type B (bidirectional) regulates the flow in both directions of air flow and is available in the types with:
- push-in input and output fitting;
- threaded port and push-in fitting.

TECHNICAL DATA		Ø 4 (Ø5/32")	Ø 6	Ø 1/4"	Ø 8 (Ø5/16")	Ø 3/8" *	Ø 10 *
Max. operating pressure	MPa	1					
	bar	10					
	psi	145					
Temperature range	°C	– 20 to + 60					
	°F	– 4 to + 140					
Max flow rate on regulation at 6.3 bar	Nl/min	155	450	450	850	1400	1400
Flow rate on exhaust at 6.3 bar	Nl/min	160	550	550	950	1500	1500
Adjustment		Manual or using a screwdriver					
Internal system		Tapered needle					
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene					
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous					
Compatibility with oils		See **chapter Z1**					

***** To completely close the air flow in the PUSH-LOCK version, it is recommended to remove the plastic knob and tighten the pin with a screwdriver.

COMPONENTS

① Technopolymer body
② Nickel-plated brass seal support
③ NBR gasket
④ Brass adjusting needle
⑤ Nickel-plated brass needle ring nut
⑥ Wall fixing ring nut
⑦ NBR seal
⑧ Technopolymer spring ring
⑨ Stainless steel clip-on spring
⑩ Technopolymer stop bushing
⑪ Technopolymer release bushing
⑫ Technopolymer knob

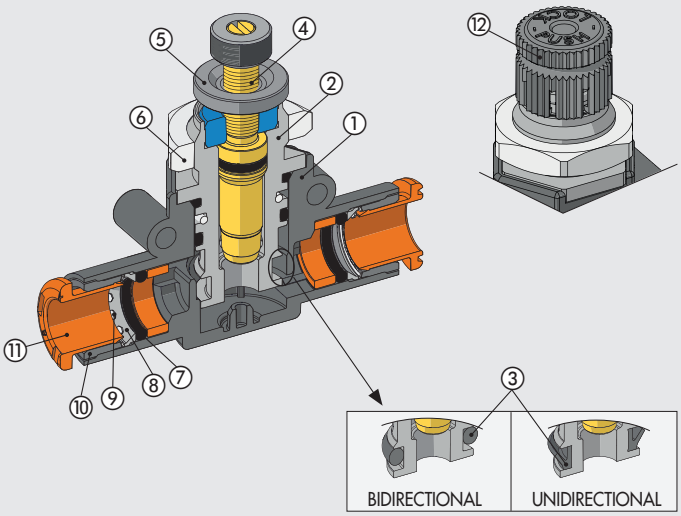

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF o NPT



Ⓑ



Ⓒ



Ⓓ



How to mount the RFL L:

- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the RFL L straight onto the actuator or the control valve.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the RFL L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket, except for Ø3/8 and Ø10.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the RFL L straight onto the wall.
- Fig. Ⓓ The ring nut is screwed onto the threaded metal part of the RFL L body for panel mounting.

FLOW RATE CHARTS AT 6.3 bar DEPENDING ON THE TURNS EFFECTED BY THE REGULATION SCREW

RFL L Ø 4 (Ø5/32")

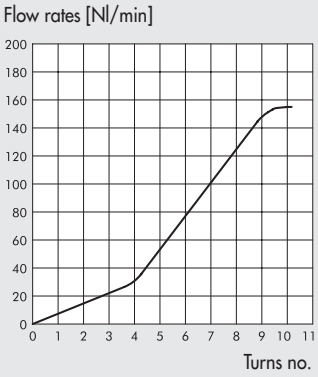

RFL L Ø 6 - RFL L Ø 1/4"

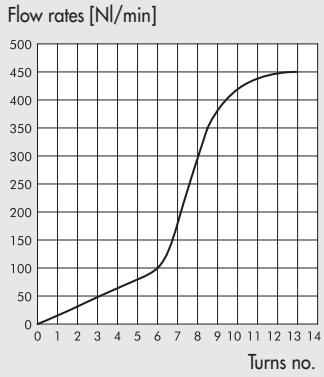

RFL L Ø 8 (Ø5/16")

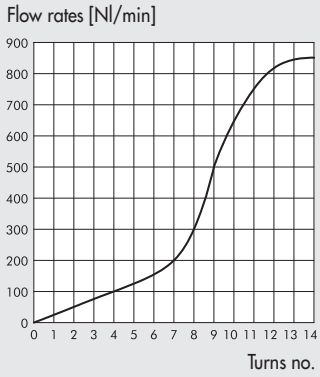

RFL L Ø 10 - RFL L Ø 3/8"

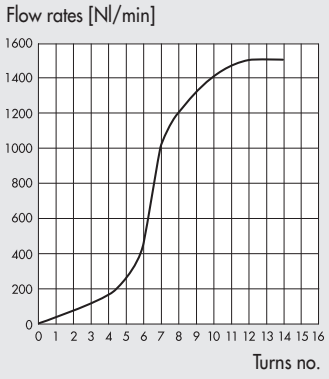

RFL L PIPE - PIPE UNIDIRECTIONAL



Code	Ref.	Ø	A	B	C	D	E	G	H	I	I1	Ch	Nmax
9041301	RFL L U Ø4-Ø4	4 ▲	42	35.5÷38.5	10.7	5.6	10	17.5	M9x0.75	12.8	16	11	4
9041316	RFL L U Ø6-Ø6	6	49.4	36÷41	14.7	6.4	11.4	20	M12x0.75	14.6	20	15	4
9041316U	RFL L U Ø1/4-Ø1/4	1/4	49.4	36÷41	14.7	6.4	11.4	20	M12x0.75	14.6	20	15	4
9041324	RFL L U Ø8-Ø8	8 ▲	57.3	44÷49	18.7	9.1	13.8	26	M15x1	18.7	24	20	4.5
9041332U	RFL L U Ø3/8-Ø3/8	3/8	65	51.5÷60	21	10.9	16	30	M18x1.5	21.4	26	22	5.5
9041332	RFL L U Ø10-Ø10	10	65	51.5÷60	21	10.9	16	30	M18x1.5	21.4	26	22	5.5

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

RFL L PIPE - PIPE UNIDIRECTIONAL PUSH-LOCK



Code	Ref.	Ø	A	B	C	D	E	G	H	I	I1	Ch	Nmax
9041366	RFL L U Ø6-Ø6 PL	6	49.4	42.3÷44.5	14.7	6.4	11.4	20	M15x1	14.6	20	15	4
9041366U	RFL L U Ø1/4-Ø1/4 PL	1/4	49.4	42.3÷44.5	14.7	6.4	11.4	20	M15x1	14.6	20	15	4
9041374	RFL L U Ø8-Ø8 PL	8 ▲	57.3	47.2÷49.4	18.7	9.1	13.8	26	M15x1	18.7	24	20	4.5
9041382U	RFL L U Ø3/8-Ø3/8 PL	3/8	65	53.5÷55.8	21	10.9	16	30	M18x1.5	21.4	26	22	5.5
9041382	RFL L U Ø10-Ø10 PL	10	65	53.5÷55.8	21	10.9	16	30	M18x1.5	21.4	26	22	5.5

▲ **Ø8** = Ø5/16"

RFL L G (BSP) THREAD - PIPE UNIDIRECTIONAL CYLINDER VERSION



Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9041401	RFL L U M5-Ø4	M5	4 ▲	4	47.7	22.7	35.5÷38.5	10.7	5.6	9.9	10	17.5	M9x0.75	12.8	16	11	9	4
9041402	RFL L U 1/8-Ø4	1/8	4 ▲	6	51.6	24.6	35.5÷38.5	10.7	5.6	14	10	17.5	M9x0.75	12.8	16	11	12	4
9041408	RLF L U 1/8-Ø6	1/8	6	6	58.5	27.8	36÷41	14.7	6.4	14	11.4	20	M12x0.75	14.6	20	15	12	4
9041409	RFL L U 1/4-Ø6	1/4	6	8	61.5	28.8	36÷41	14.7	6.4	18	11.4	20	M12x0.75	14.6	20	15	14	4
9041410	RFL L U 1/8-Ø8	1/8	8 ▲	6	66.2	31.8	44÷49	18.7	9.1	15	13.8	26	M15x1	18.7	24	20	14	4.5
9041411	RFL L U 1/4-Ø8	1/4	8 ▲	8	70.6	34.2	44÷49	18.7	9.1	18	13.8	26	M15x1	18.7	24	20	14	4.5
9041412	RFL L U 3/8-Ø8	3/8	8 ▲	9	72.2	34.8	44÷49	18.7	9.1	22	13.8	26	M15x1	18.7	24	20	17	4.5
9041415	RFL L U 1/4-Ø10	1/4	10	8	79.9	39.2	51.5÷60	20.7	10.9	18	16	30	M18x1.5	21.4	26	22	16	5.5
9041416	RFL L U 3/8-Ø10	3/8	10	9	81.2	40.4	51.5÷60	20.7	10.9	20	16	30	M18x1.5	21.4	26	22	17	5.5
9041417	RFL L U 1/2-Ø10	1/2	10	11	83.7	40	51.5÷60	20.7	10.9	26	16	30	M18x1.5	21.4	26	22	22	5.5

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

RFL L G (BSP) THREAD - PIPE UNIDIRECTIONAL CYLINDER VERSION PUSH-LOCK



Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9041458	RFL L U 1/8-Ø6 PL	1/8	6	6	58.5	27.8	42.3÷44.5	14.7	6.4	14	11.4	20	M15x1	14.6	20	15	12	4
9041459	RFL L U 1/4-Ø6 PL	1/4	6	8	61.5	28.8	42.3÷44.5	14.7	6.4	18	11.4	20	M15x1	14.6	20	15	14	4
9041460	RFL L U 1/8-Ø8 PL	1/8	8 ▲	6	66.2	31.8	47.2÷49.4	18.7	9.1	15	13.8	26	M15x1	18.7	24	20	14	4.5
9041461	RFL L U 1/4-Ø8 PL	1/4	8 ▲	8	70.6	34.2	47.2÷49.4	18.7	9.1	18	13.8	26	M15x1	18.7	24	20	14	4.5
9041462	RFL L U 3/8-Ø8 PL	3/8	8 ▲	9	72.2	34.8	47.2÷49.4	18.7	9.1	22	13.8	26	M15x1	18.7	24	20	17	4.5
9041465	RFL L U 1/4-Ø10 PL	1/4	10	8	79.9	39.2	53.5÷55.8	20.7	10.9	18	16	30	M18x1.5	21.4	26	22	16	5.5
9041466	RFL L U 3/8-Ø10 PL	3/8	10	9	81.2	40.4	53.5÷55.8	20.7	10.9	20	16	30	M18x1.5	21.4	26	22	17	5.5
9041467	RFL L U 1/2-Ø10 PL	1/2	10	11	83.7	40	53.5÷55.8	20.7	10.9	26	16	30	M18x1.5	21.4	26	22	22	5.5

▲ **Ø8** = Ø5/16"

RFL L PIPE - G (BSP) THREAD UNIDIRECTIONAL VALVE VERSION



Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9041501	RFL L U Ø4-M5	4 ▲	M5	4	47.7	22.7	35.5÷38.5	10.7	5.6	9.9	10	17.5	M9x0.75	12.8	16	11	9	4
9041502	RFL L U Ø4-1/8	4 ▲	1/8	6	51.6	24.6	35.5÷38.5	10.7	5.6	14	10	17.5	M9x0.75	12.8	16	11	12	4
9041508	RFL L U Ø6-1/8	6	1/8	6	58.5	27.8	36÷41	14.7	6.4	14	11.4	20	M12x0.75	14.6	20	15	12	4
9041509	RFL L U Ø6-1/4	6	1/4	8	61.5	28.8	36÷41	14.7	6.4	18	11.4	20	M12x0.75	14.6	20	15	14	4
9041510	RFL L U Ø8-1/8	8 ▲	1/8	6	66.2	31.8	44÷49	18.7	9.1	15	13.8	26	M15x1	18.7	24	20	14	4.5
9041511	RFL L U Ø8-1/4	8 ▲	1/4	8	70.6	34.2	44÷49	18.7	9.1	18	13.8	26	M15x1	18.7	24	20	14	4.5
9041512	RFL L U Ø8-3/8	8 ▲	3/8	9	72.2	34.8	44÷49	18.7	9.1	22	13.8	26	M15x1	18.7	24	20	17	4.5
9041515	RFL L U Ø10-1/4	10	1/4	8	79.9	39.2	51.5÷60	20.7	10.9	18	16	30	M18x1.5	21.4	26	22	16	5.5
9041516	RFL L U Ø10-3/8	10	3/8	9	81.2	40.4	51.5÷60	20.7	10.9	20	16	30	M18x1.5	21.4	26	22	17	5.5
9041517	RFL L U Ø10-1/2	10	1/2	11	83.7	40	51.5÷60	20.7	10.9	26	16	30	M18x1.5	21.4	26	22	22	5.5

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

RFL L PIPE - G (BSP) THREAD UNIDIRECTIONAL VALVE VERSION PUSH-LOCK



Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9041558	RFL L U Ø6-1/8 PL	6	1/8	6	58.5	27.8	42.3÷44.5	14.7	6.4	14	11.4	20	M15x1	14.6	20	15	12	4
9041559	RFL L U Ø6-1/4 PL	6	1/4	8	61.5	28.8	42.3÷44.5	14.7	6.4	18	11.4	20	M15x1	14.6	20	15	14	4
9041560	RFL L U Ø8-1/8 PL	8 ▲	1/8	6	66.2	31.8	47.2÷49.4	18.7	9.1	15	13.8	26	M15x1	18.7	24	20	14	4.5
9041561	RFL L U Ø8-1/4 PL	8 ▲	1/4	8	70.6	34.2	47.2÷49.4	18.7	9.1	18	13.8	26	M15x1	18.7	24	20	14	4.5
9041562	RFL L U Ø8-3/8 PL	8 ▲	3/8	9	72.2	34.8	47.2÷49.4	18.7	9.1	22	13.8	26	M15x1	18.7	24	20	17	4.5
9041565	RFL L U Ø10-1/4 PL	10	1/4	8	79.9	39.2	53.5÷55.8	20.7	10.9	18	16	30	M18x1.5	21.4	26	22	16	5.5
9041566	RFL L U Ø10-3/8 PL	10	3/8	9	81.2	40.4	53.5÷55.8	20.7	10.9	20	16	30	M18x1.5	21.4	26	22	17	5.5
9041567	RFL L U Ø10-1/2 PL	10	1/2	11	83.7	40	53.5÷55.8	20.7	10.9	26	16	30	M18x1.5	21.4	26	22	22	5.5

▲ **Ø8** = Ø5/16"

RFL L PIPE - PIPE BIDIRECTIONAL



Code	Ref.	Ø	A	B	C	D	E	G	H	I	I1	Ch	Nmax
9041601	RFL L B Ø4-Ø4	4 ▲	42	35.5÷38.5	10.7	5.6	10	17.5	M9x0.75	12.8	16	11	4
9041616	RFL L B Ø6-Ø6	6	49.4	36÷41	14.7	6.4	11.4	20	M12x0.75	14.6	20	15	4
9041616U	RFL L B Ø1/4-Ø1/4	1/4	49.4	36÷41	14.7	6.4	11.4	20	M12x0.75	14.6	20	15	4
9041624	RFL L B Ø8-Ø8	8 ▲	57.3	44÷49	18.7	9.1	13.8	26	M15x1	18.7	24	20	4.5
9041632U	RFL L B Ø3/8-Ø3/8	3/8	65	51.5÷60	21	10.9	16	30	M18x1.5	21.4	26	22	5.5
9041632	RFL L B Ø10-Ø10	10	65	51.5÷60	21	10.9	16	30	M18x1.5	21.4	26	22	5.5

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

RFL L PIPE - PIPE BIDIRECTIONAL PUSH-LOCK

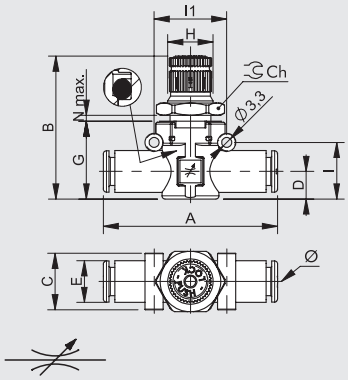

Code	Ref.	Ø	A	B	C	D	E	G	H	I	I1	Ch	Nmax
9041666	RFL L B Ø6-Ø6 PL	6	49.4	42.3÷44.5	14.7	6.4	11.4	20	M15x1	14.6	20	15	4
9041666U	RFL L B Ø1/4-Ø1/4 PL	1/4	49.4	42.3÷44.5	14.7	6.4	11.4	20	M15x1	14.6	20	15	4
9041674	RFL L B Ø8-Ø8 PL	8▲	57.3	47.2÷49.4	18.7	9.1	13.8	26	M15x1	18.7	24	20	4.5
9041682U	RFL L B Ø3/8-Ø3/8 PL	3/8	65	53.5÷55.8	21	10.9	16	30	M18x1.5	21.4	26	22	5.5
9041682	RFL L B Ø10-Ø10 PL	10	65	53.5÷55.8	21	10.9	16	30	M18x1.5	21.4	26	22	5.5

▲ **Ø8** = Ø5/16"

RFL L G (BSP) THREAD - PIPE BIDIRECTIONAL

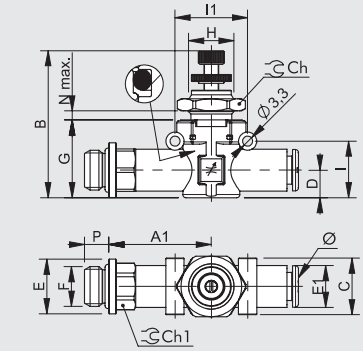

Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9041701	RFL L B M5-Ø4	M5	4▲	4	47.7	22.7	35.5÷38.5	10.7	5.6	9.9	10	17.5	M9x0.75	12.8	16	11	9	4
9041702	RFL L B 1/8-Ø4	1/8	4▲	6	51.6	24.6	35.5÷38.5	10.7	5.6	14	10	17.5	M9x0.75	12.8	16	11	12	4
9041708	RFL L B 1/8-Ø6	1/8	6	6	58.5	27.8	36÷41	14.7	6.4	14	11.4	20	M12x0.75	14.6	20	15	12	4
9041709	RFL L B 1/4-Ø6	1/4	6	8	61.5	28.8	36÷41	14.7	6.4	18	11.4	20	M12x0.75	14.6	20	15	14	4
9041710	RFL L B 1/8-Ø8	1/8	8▲	6	66.2	31.8	44÷49	18.7	9.1	15	13.8	26	M15x1	18.7	24	20	14	4.5
9041711	RFL L B 1/4-Ø8	1/4	8▲	8	70.6	34.2	44÷49	18.7	9.1	18	13.8	26	M15x1	18.7	24	20	14	4.5
9041712	RFL L B 3/8-Ø8	3/8	8▲	9	72.2	34.8	44÷49	18.7	9.1	22	13.8	26	M15x1	18.7	24	20	17	4.5
9041715	RFL L B 1/4-Ø10	1/4	10	8	79.9	39.2	51.5÷60	20.7	10.9	18	16	30	M18x1.5	21.4	26	22	16	5.5
9041716	RFL L B 3/8-Ø10	3/8	10	9	81.2	40.4	51.5÷60	20.7	10.9	20	16	30	M18x1.5	21.4	26	22	17	5.5
9041717	RFL L B 1/2-Ø10	1/2	10	11	83.7	40	51.5÷60	20.7	10.9	26	16	30	M18x1.5	21.4	26	22	22	5.5

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

RFL L G (BSP) THREAD - PIPE BIDIRECTIONAL PUSH-LOCK



Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9041758	RFL L B 1/8-Ø6 PL	1/8	6	6	58.5	27.8	42.3÷44.5	14.7	6.4	14	11.4	20	M15x1	14.6	20	15	12	4
9041759	RFL L B 1/4-Ø6 PL	1/4	6	8	61.5	28.8	42.3÷44.5	14.7	6.4	18	11.4	20	M15x1	14.6	20	15	14	4
9041760	RFL L B 1/8-Ø8 PL	1/8	8▲	6	66.2	31.8	47.2÷49.4	18.7	9.1	15	13.8	26	M15x1	18.7	24	20	14	4.5
9041761	RFL L B 1/4-Ø8 PL	1/4	8▲	8	70.6	34.2	47.2÷49.4	18.7	9.1	18	13.8	26	M15x1	18.7	24	20	14	4.5
9041762	RFL L B 3/8-Ø8 PL	3/8	8▲	9	72.2	34.8	47.2÷49.4	18.7	9.1	22	13.8	26	M15x1	18.7	24	20	17	4.5
9041765	RFL L B 1/4-Ø10 PL	1/4	10	8	79.9	39.2	53.5÷55.8	20.7	10.9	18	16	30	M18x1.5	21.4	26	22	16	5.5
9041766	RFL L B 3/8-Ø10 PL	3/8	10	9	81.2	40.4	53.5÷55.8	20.7	10.9	20	16	30	M18x1.5	21.4	26	22	17	5.5
9041767	RFL L B 1/2-Ø10 PL	1/2	10	11	83.7	40	53.5÷55.8	20.7	10.9	26	16	30	M18x1.5	21.4	26	22	22	5.5

▲ **Ø8** = Ø5/16"

ACCESSORIES RFL PUSH-LOCK

ANTI-TAMPERING KNOB



Code	Description
9200703	Anti-tampering knob

NOTE: Remove the knob on the Push-Lock RFL by pulling outwards.
Fit on the anti-tampe ring knob and make the necessary settings.
When the RFL has been set, press the knob firmly until it locks in position.
If the RFL needs to be recalibrated, remove the anti-tampering knob and push laterally using a screwdriver.

IN-LINE FIXED-REGULATION FLOW REGULATOR SERIES RFF L

The in-line fixed regulation flow regulator belongs to the LINE ON LINE® family and can be connected in series or in parallel with the other products in the same family. The RFF L regulates the flow of air, and hence the rate of operation of pneumatic actuators. Air flow is regulated by means of a choke with a calibrated diameter. A full range of diameters is available. The advantage of the RFF L over other adjustable versions is that there is no need for regulation during machine installation. Subsequent adjustments are not required either. Two versions are available. Version U (unidirectional) regulates the flow in one direction only. Version B (bidirectional) regulates the air flow in both directions.

TECHNICAL DATA		Ø 4 (Ø5/32")	Ø 6	Ø 8 (Ø5/16")
Max. operating pressure	MPa	1		
	bar	10		
	psi	145		
Temperature range	°C	– 20 to + 60		
	°F	– 4 to + 140		
Choke flow rate	Nl/min	See table below		
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene		
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous		
Compatibility with oils		See **chapter Z1**		

COMPONENTS

① Technopolymer body
② Nickel-plated brass gasket holding insert
③ NBR gasket
④ Brass choke cartridge
⑤ NBR seal
⑥ Technopolymer spring ring
⑦ Stainless steel clip-on spring
⑧ Technopolymer stop bushing
⑨ Technopolymer release bushing

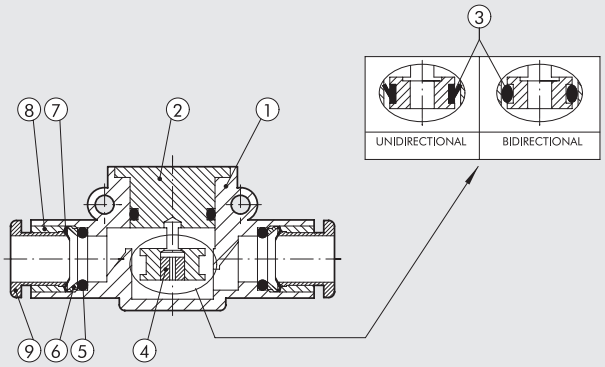

EXHAUST FLOW RATE AT 6.3 bar FOR VERSIONS C-U-V [Nl/min]

Choke [mm]	Ø 4 (Ø5/32")	Ø 6	Ø 8 (Ø5/16")
Ø 0.2	142	552	912
Ø 0.3	144	554	914
Ø 0.4	147	557	917
Ø 0.5	153	563	923
Ø 0.6	155	565	925
Ø 0.8	172	582	942
Ø 1.0	190	600	960
Ø 1.3	225	635	995
Ø 1.5	250	660	1020

CHOKE FLOW-RATE AT 6 bar WITH RELIEF VALVE OPEN

Choke [mm]	Flow rate [Nl/min]
Ø 0.2	2
Ø 0.3	4
Ø 0.4	7
Ø 0.5	13
Ø 0.6	15
Ø 0.8	32
Ø 1.0	50
Ø 1.3	85
Ø 1.5	110

METAL WORK PNEUMATIC

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF or NPT



Ⓑ



Ⓒ



How to mount the RFF L:

- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the RFF L straight onto the actuator or the control valve.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the RFF L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the RFF L straight onto the wall.

RFF L PIPE - PIPE UNIDIRECTIONAL



Code	Ref.	Ø	A	B	C	D	E	I	I1
9070U11_ _*	RFF-U L Ø4-Ø4	4 ▲	42	17.5	10.7	5.6	10	12.8	16
9070U22_ _*	RFF-U L Ø6-Ø6	6	49.4	20	14.7	6.4	11.4	14.6	20
9070U33_ _*	RFF-U L Ø8-Ø8	8 ▲	57.3	25.5	18.7	9.1	13.8	18.7	24

* The last two digits indicate the narrowing Ø. To complete the code please look at the key to codes.
▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

RFF L G (BSP) THREAD - PIPE UNIDIRECTIONAL CYLINDER VERSION

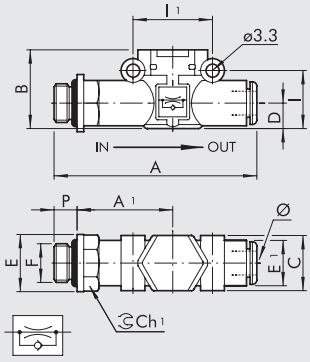

Code	Ref.	F	Ø	P	A	A1	B	C	E	E1	I	I1	Ch1
9070C51_ _*	RFF-C L M5 - Ø4	M5	4 ▲	4	47.7	22.7	17.5	10.7	9.9	10	12.8	16	9
9070C61_ _*	RFF-C L 1/8 - Ø4	1/8	4 ▲	6	51.6	24.6	17.5	10.7	14	10	12.8	16	12
9070C62_ _*	RFF-C L 1/8 - Ø6	1/8	6	6	58.5	27.8	20	14.7	14	11.4	14.6	20	12
9070C72_ _*	RFF-C L 1/4 - Ø6	1/4	6	8	61.5	28.8	20	14.7	18	11.4	14.6	20	14
9070C63_ _*	RFF-C L 1/8 - Ø8	1/8	8 ▲	6	66.2	31.8	25.5	18.7	15	13.8	18.7	24	14
9070C73_ _*	RFF-C L 1/4 - Ø8	1/4	8 ▲	8	70.6	34.2	25.5	18.7	18	13.8	18.7	24	14
9070C83_ _*	RFF-C L 3/8 - Ø8	3/8	8 ▲	9	72.2	34.8	25.5	18.7	22	13.8	18.7	24	17

* The last two digits indicate the narrowing Ø. To complete the code please look at the key to codes.
▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

RFF L PIPE - G (BSP) THREAD UNIDIRECTIONAL VALVE VERSION

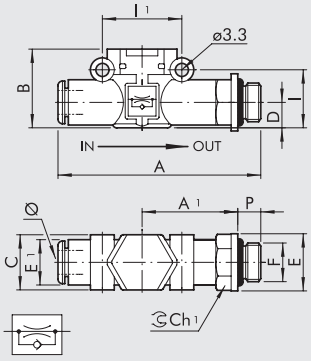

Code	Ref.	Ø	F	P	A	A1	B	C	E	E1	I	I1	Ch1
9070V15_ _*	RFF-V L Ø4 - M5	4 ▲	M5	4	47.7	22.7	17.5	10.7	9.9	10	12.8	16	9
9070V16_ _*	RFF-V L Ø4 - 1/8	4 ▲	1/8	6	51.6	24.6	17.5	10.7	14	10	12.8	16	12
9070V26_ _*	RFF-V L Ø6 - 1/8	6	1/8	6	58.5	27.8	20	14.7	14	11.4	14.6	20	12
9070V27_ _*	RFF-V L Ø6 - 1/4	6	1/4	8	61.5	28.8	20	14.7	18	11.4	14.6	20	14
9070V36_ _*	RFF-V L Ø8 - 1/8	8 ▲	1/8	6	66.2	31.8	25.5	18.7	15	13.8	18.7	24	14
9070V37_ _*	RFF-V L Ø8 - 1/4	8 ▲	1/4	8	70.6	34.2	25.5	18.7	18	13.8	18.7	24	14
9070V38_ _*	RFF-V L Ø8 - 3/8	8 ▲	3/8	9	72.2	34.8	25.5	18.7	22	13.8	18.7	24	17

* The last two digits indicate the narrowing Ø. To complete the code please look at the key to codes.
▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

RFF L PIPE - PIPE BIDIRECTIONAL

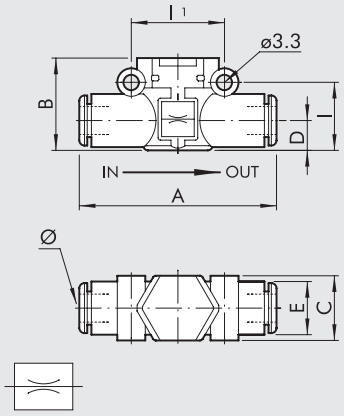

Code	Ref.	Ø	A	B	C	D	E	I	I1
9070B11_ _*	RFF-B L Ø4-Ø4	4 ▲	42	17.5	10.7	5.6	10	12.8	16
9070B22_ _*	RFF-B L Ø6-Ø6	6	49.4	20	14.7	6.4	11.4	14.6	20
9070B33_ _*	RFF-B L Ø8-Ø8	8 ▲	57.3	25.5	18.7	9.1	13.8	18.7	24

* The last two digits indicate the narrowing Ø. To complete the code please look at the key to codes.
▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

RFF L G (BSP) THREAD - PIPE BIDIRECTIONAL

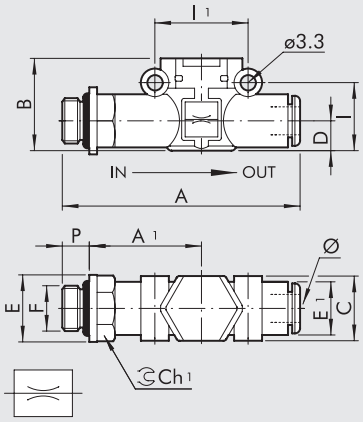

Code	Ref.	F	Ø	P	A	A1	B	C	E	E1	I	I1	Ch1
9070B51_ _*	RFF-B L M5 - Ø4	M5	4 ▲	4	47.7	22.7	17.5	10.7	9.9	10	12.8	16	9
9070B61_ _*	RFF-B L 1/8 - Ø4	1/8	4 ▲	6	51.6	24.6	17.5	10.7	14	10	12.8	16	12
9070B62_ _*	RFF-B L 1/8 - Ø6	1/8	6	6	58.5	27.8	20	14.7	14	11.4	14.6	20	12
9070B72_ _*	RFF-B L 1/4 - Ø6	1/4	6	8	61.5	28.8	20	14.7	18	11.4	14.6	20	14
9070B63_ _*	RFF-B L 1/8 - Ø8	1/8	8 ▲	6	66.2	31.8	25.5	18.7	15	13.8	18.7	24	14
9070B73_ _*	RFF-B L 1/4 - Ø8	1/4	8 ▲	8	70.6	34.2	25.5	18.7	18	13.8	18.7	24	14
9070B83_ _*	RFF-B L 3/8 - Ø8	3/8	8 ▲	9	72.2	34.8	25.5	18.7	22	13.8	18.7	24	17

* The last two digits indicate the narrowing Ø. To complete the code please look at the key to codes.
▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

KEY TO CODES

9070	B	11	02
TYPE	**FUNCTION**	**Ø IN - Ø OUT**	**Ø CHOKE**
9070 RFF L	**B** Bidirectional	▲■ **11** = Ø 4 - Ø 4	**02** = Ø 0.2
	C For cylinder	▲✱ **15** = Ø 4 - M5	**03** = Ø 0.3
	U Unidirectional	▲✱ **16** = Ø 4 - 1/8"	**04** = Ø 0.4
	V For valve	■ **22** = Ø 6 - Ø 6	**05** = Ø 0.5
		✱ **26** = Ø 6 - 1/8"	**06** = Ø 0.6
		✱ **27** = Ø 6 - 1/4"	**08** = Ø 0.8
		▲■ **33** = Ø 8 - Ø 8	**10** = Ø 1.0
		▲✱ **36** = Ø 8 - 1/8"	**13** = Ø 1.3
		▲✱ **37** = Ø 8 - 1/4"	**15** = Ø 1.5
		▲✱ **38** = Ø 8 - 3/8"	
		▲● **51** = M5 - Ø 4	
		▲● **61** = 1/8" - Ø 4	
		● **62** = 1/8" - Ø 6	
		▲● **63** = 1/8" - Ø 8	
		● **72** = 1/4" - Ø 6	
		▲● **73** = 1/4" - Ø 8	
		▲● **83** = 3/8" - Ø 8	

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"
■ Only for **B** (bidirectional) and **U** (unidirectional) versions
✱ Only for **V** (valve) versions
● Only for **C** (cylinder) and **B** (bidirectional) versions

IN-LINE QUICK-EXHAUST VALVES SERIES VSR L

The VSR L quick-exhaust valve belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.
Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting.
Exhaust can be silenced using a STAINLESS steel wire silencer, or conveyed using a push-in fitting.

TECHNICAL DATA		Ø 4 (Ø5/32")	Ø 6	Ø 1/4"	Ø 8 (Ø5/16")	Ø3/8"	Ø10
Inlet pressure	MPa	0.1 to 1					
	bar	1 to 10					
	psi	14.5 to 145					
Temperature range	°C	– 20 to + 60					
	°F	– 4 to + 140					
Inlet flow rate at 6.3 bar ΔP 1 bar	Nl/min	50	270	270	400	530	530
Exhaust flow rate at 6.3 bar	Nl/min	100	700	700	1000	1400	1400
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene					
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous					
Compatibility with oils		See **chapter Z1**					

COMPONENTS

① Technopolymer body
② Nickel-plated brass insert
③ NBR valve
④ NBR gasket
⑤ Technopolymer spring ring
⑥ Stainless steel folding spring
⑦ Brass or technopolymer locking bushing
⑧ Technopolymer release bushing
⑨ Stainless steel wire silencer

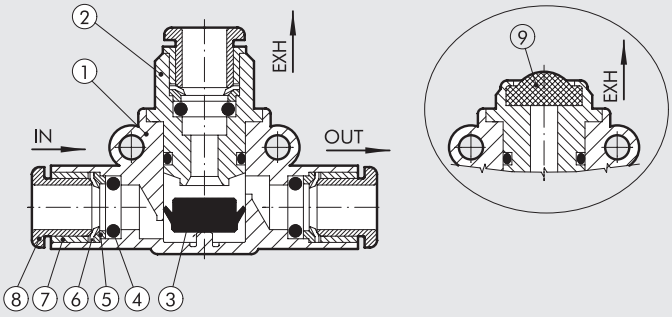

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF or NPT



Ⓑ



Ⓒ



How to mount the VSR L:
- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the VSR L straight onto the actuator.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the VSR L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket, except for Ø3/8 and Ø10.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the VSR L straight onto the wall.

VSR L PIPE - PIPE, CONVEYED EXHAUST

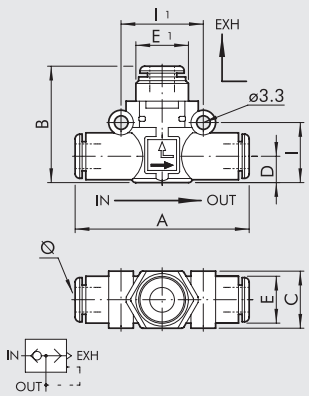

Code	Ref.	Ø	A	B	C	D	E	E1	I	I1
9063001	VSR L Ø4-Ø4-Ø4	4 ▲	41.8	25.8	10.7	5.6	10	9.7	12.8	16
9063016	VSR L Ø6-Ø6-Ø6	6	49.4	30.2	14.7	6.4	11.4	13	14.6	20
9063016U	VSR L Ø1/4-Ø1/4-Ø1/4	1/4	49.4	30.2	14.7	6.4	11.4	13	14.6	20
9063024	VSR L Ø8-Ø8-Ø8	8 ▲	57.3	35.9	18.7	9.1	13.8	15	18.7	24
9063032U	VSR L Ø3/8-Ø3/8-Ø3/8	3/8	65	41.5	21	10.9	16	17	21.4	26
9063032	VSR L Ø10-Ø10-Ø10	10	65	41.5	21	10.9	16	17	21.4	26

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

VSR L PIPE - PIPE, SILENCED EXHAUST

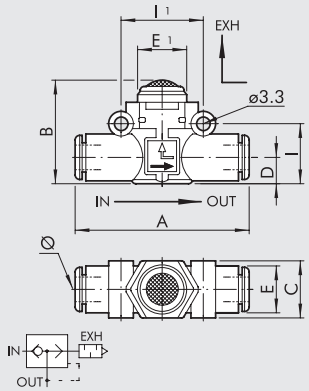

Code	Ref.	Ø	A	B	C	D	E	E1	I	I1
9063101	VSR L Ø4-Ø4-SIL	4 ▲	41.8	19.8	10.7	5.6	10	10	12.8	16
9063116	VSR L Ø6-Ø6-SIL	6	49.4	25.5	14.7	6.4	11.4	14	14.6	20
9063116U	VSR L Ø1/4-Ø1/4-SIL	1/4	49.4	25.5	14.7	6.4	11.4	14	14.6	20
9063124	VSR L Ø8-Ø8-SIL	8 ▲	57.3	31.5	18.7	9.1	13.8	18	18.7	24
9063132U	VSR L Ø3/8-Ø3/8-SIL	3/8	65	37	21	10.9	16	17	21.4	26
9063132	VSR L Ø10-Ø10-SIL	10	65	37	21	10.9	16	17	21.4	26

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

VSR L PIPE - G (BSP) THREAD, CONVEYED EXHAUST

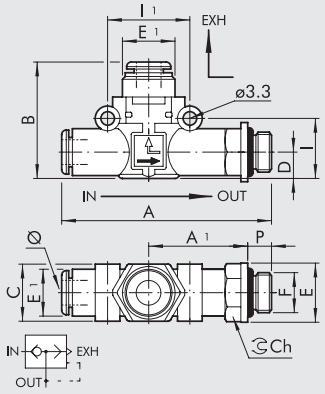

Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	E2	I	I1	Ch
9063201	VSR L Ø4-M5-Ø4	4 ▲	M5	4	47.7	22.7	25.8	10.7	5.6	9.9	10	9.7	12.8	16	9
9063202	VSR L Ø4-1/8-Ø4	4 ▲	1/8	6	50.6	24.6	25.8	10.7	5.6	14	10	9.7	12.8	16	12
9063208	VSR L Ø6-1/8-Ø6	6	1/8	6	58.5	27.8	30.2	14.7	6.4	14	11.4	13	14.6	20	12
9063209	VSR L Ø6-1/4-Ø6	6	1/4	8	61.5	28.8	30.2	14.7	6.4	18	11.4	13	14.6	20	14
9063210	VSR L Ø8-1/8-Ø8	8 ▲	1/8	6	66.2	31.8	35.9	18.7	9.1	15	13.8	15	18.7	24	14
9063211	VSR L Ø8-1/4-Ø8	8 ▲	1/4	8	70.6	34.2	35.9	18.7	9.1	18	13.8	15	18.7	24	14
9063212	VSR L Ø8-3/8-Ø8	8 ▲	3/8	9	72.2	34.8	35.9	18.7	9.1	22	13.8	15	18.7	24	17
9063215	VSR L Ø10-1/4-Ø10	10	1/4	8	79.9	39.2	41.5	21	10.9	18	16	17	21.4	26	16
9063216	VSR L Ø10-3/8-Ø10	10	3/8	9	81.2	40.4	41.5	21	10.9	20	16	17	21.4	26	17
9063217	VSR L Ø10-1/2-Ø10	10	1/2	11	83.7	40	41.5	21	10.9	26	16	17	21.4	26	22

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

VSR L PIPE - G (BSP) THREAD, SILENCED EXHAUST

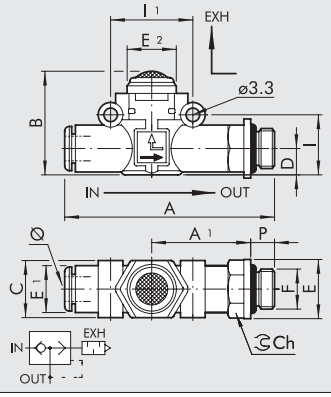

Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	E2	I	I1	Ch
9063301	VSR L Ø4-M5-SIL	4 ▲	M5	4	46.7	22.7	19.8	10.7	5.6	9.9	10	10	12.8	16	9
9063302	VSR L Ø4-1/8-SIL	4 ▲	1/8	6	50.6	24.6	19.8	10.7	5.6	14	10	10	12.8	16	12
9063308	VSR L Ø6-1/8-SIL	6	1/8	6	58.5	27.8	25.5	14.7	6.4	14	11.4	14	14.6	20	12
9063309	VSR L Ø6-1/4-SIL	6	1/4	8	61.5	28.8	25.5	14.7	6.4	18	11.4	14	14.6	20	14
9063310	VSR L Ø8-1/8-SIL	8 ▲	1/8	6	66.2	31.8	31.5	18.7	9.1	15	13.8	18	18.7	24	14
9063311	VSR L Ø8-1/4-SIL	8 ▲	1/4	8	70.6	34.2	31.5	18.7	9.1	18	13.8	18	18.7	24	14
9063312	VSR L Ø8-3/8-SIL	8 ▲	3/8	9	72.2	34.8	31.5	18.7	9.1	22	13.8	18	18.7	24	17
9063315	VSR L Ø10-1/4-SIL	10	1/4	8	79.9	39.2	37	21	10.9	18	16	17	21.4	26	16
9063316	VSR L Ø10-3/8-SIL	10	3/8	9	81.2	40.4	37	21	10.9	20	16	17	21.4	26	17
9063317	VSR L Ø10-1/2-SIL	10	1/2	11	83.7	40	37	21	10.9	26	16	17	21.4	26	22

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

IN-LINE QUICK-EXHAUST VALVE WITH REGULATED EXHAUST SERIES VSRR L

The VSRR L quick-exhaust valve with regulated exhaust belongs to the LINE ON LINE® family of products and can be linked in series or in parallel to all the other products.
It comes in a version for pipe-pipe connection, which includes two push-in fittings, and a version for thread-pipe connection, which includes a nickel-plated brass taper thread and push-in fitting.
The main feature of these valves is that the discharge flow can be adjusted via a pin regulator. This allows you to control the speed of the actuator connected to the valve, giving a higher speed than with an MRF regulator.

TECHNICAL DATA		Ø 4 (Ø5/32")	Ø 6	Ø 8 (Ø5/16")
Max. operating pressure	MPa		1	
	bar		10	
	psi		145	
Temperature range	°C		–20 to +60	
	°F		–4 to +140	
Max flow rate on regulation at 6.3 bar ΔP 1 bar	Nl/min	50	270	400
Flow rate on exhaust at 6.3 bar	Nl/min	170	460	960
Adjustment			Manual or using a screwdriver	
Internal system			Tapered needle	
Recommended pipe			Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene	
Fluid			Lubricated or unlubricated filtered compressed air; if used, must be continuous	
Compatibility with oils			See **chapter Z1**	

COMPONENTS

① Technopolymer body
② Nickel-plated brass seal support
③ NBR gasket
④ Brass adjusting needle
⑤ Nickel-plated brass needle ring nut
⑥ Nickel-plated brass wall fixing ring nut
⑦ NBR seal
⑧ Technopolymer spring ring
⑨ Stainless steel clip-on spring
⑩ Technopolymer stop bushing
⑪ Technopolymer release bushing
⑫ Sintered bronze silencer

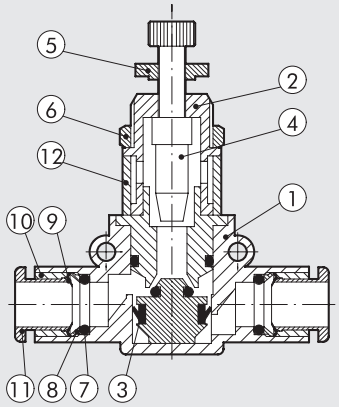

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF or NPT



Ⓑ



Ⓒ



Ⓓ



How to mount the VSRR L:

- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the VSRR L straight onto the actuator or the control valve.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the VSRR L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the VSRR L straight onto the wall.
- Fig. Ⓓ The ring nut is screwed onto the threaded metal part of the VSRR L body for panel mounting.

EXHAUST FLOW CHARTS VSRR L

VSRR L Ø 4 (Ø5/32")

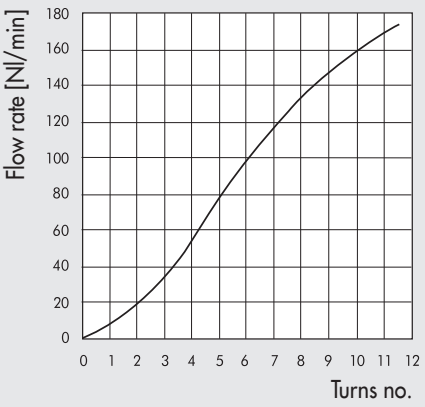

VSRR L Ø 6

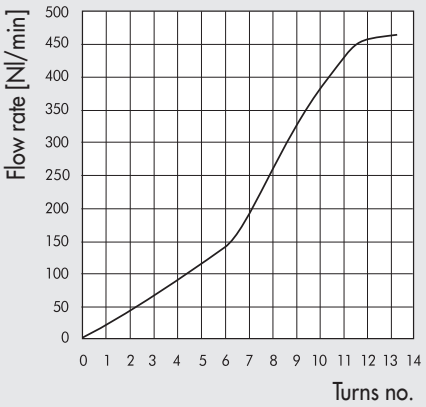

VSRR L Ø 8 (Ø5/16")

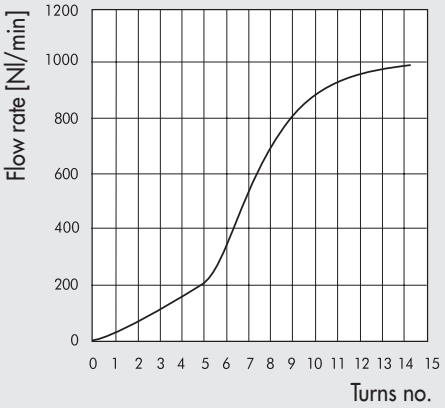

VSRR L PIPE - PIPE

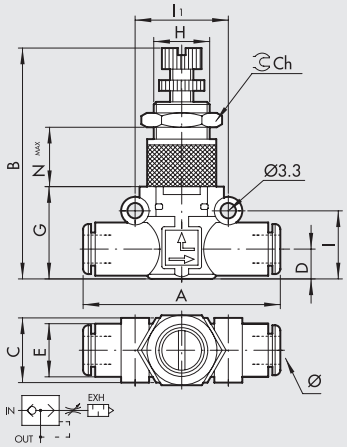

Code	Ref.	Ø	A	B	C	D	E	G	H	I	I1	Ch	Nmax
9063501	VSRR L Ø4-Ø4	4 ▲	42	39.5-43.5	10.7	5.6	10	17.5	M9x0.75	12.8	16	11	11.5
9063516	VSRR L Ø6-Ø6	6	49.4	47-52	14.7	6.4	11.4	20	M12x0.75	14.6	20	15	15.5
9063524	VSRR L Ø8-Ø8	8 ▲	57.3	56-61.2	18.7	9.1	13.8	26	M15x1	18.7	24	17	18.5

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

VSRR L G (BSP) THREAD - PIPE

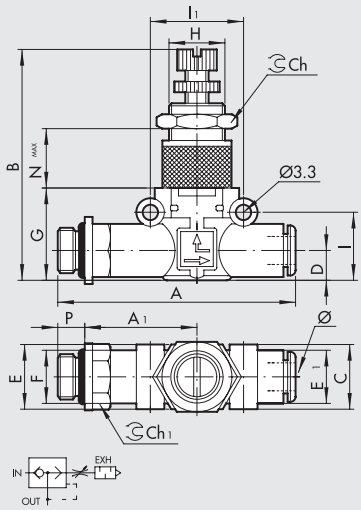

Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9063601	VSRR L M5-Ø4	M5	4 ▲	4	47.7	22.7	39.5-43.5	10.7	5.6	9.9	10	17.5	M9x0.75	12.8	16	11	9	11.5
9063602	VSRR L 1/8-Ø4	1/8	4 ▲	6	51.6	24.6	39.5-43.5	10.7	5.6	14	10	17.5	M9x0.75	12.8	16	11	12	11.5
9063608	VSRR L 1/8-Ø6	1/8	6	6	58.5	27.8	47-52	14.7	6.4	14	11.4	20	M12x0.75	14.6	20	15	12	15.5
9063609	VSRR L 1/4-Ø6	1/4	6	8	61.5	28.8	47-52	14.7	6.4	18	11.4	20	M12x0.75	14.6	20	15	14	15.5
9063610	VSRR L 1/8-Ø8	1/8	8 ▲	6	66.2	31.8	56-61.2	18.7	9.1	15	13.8	26	M15x1	18.7	26	17	14	18.5
9063611	VSRR L 1/4-Ø8	1/4	8 ▲	8	70.6	34.2	56-61.2	18.7	9.1	18	13.8	26	M15x1	18.7	26	17	14	18.5
9063612	VSRR L 3/8-Ø8	3/8	8 ▲	9	72.2	34.8	56-61.2	18.7	9.1	22	13.8	26	M15x1	18.7	26	17	17	18.5

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

VSRR L PIPE - G (BSP) THREAD

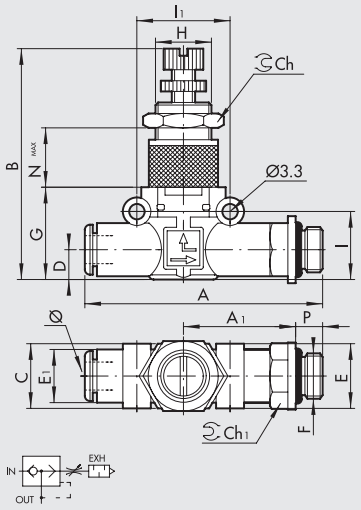

Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9063701	VSRR L Ø4-M5	4 ▲	M5	4	47.7	22.7	39.5-43.5	10.7	5.6	9.9	10	17.5	M9x0.75	12.8	16	11	9	11.5
9063702	VSRR L Ø4-1/8	4 ▲	1/8	6	51.6	24.6	39.5-43.5	10.7	5.6	14	10	17.5	M9x0.75	12.8	16	11	12	11.5
9063708	VSRR L Ø6-1/8	6	1/8	6	58.5	27.8	47-52	14.7	6.4	14	11.4	20	M12x0.75	14.6	20	15	12	15.5
9063709	VSRR L Ø6-1/4	6	1/4	8	61.5	28.8	47-52	14.7	6.4	18	11.4	20	M12x0.75	14.6	20	15	14	15.5
9063710	VSRR L Ø8-1/8	8 ▲	1/8	6	66.2	31.8	56-61.2	18.7	9.1	15	13.8	26	M15x1	18.7	26	17	14	18.5
9063711	VSRR L Ø8-1/4	8 ▲	1/4	8	70.6	34.2	56-61.2	18.7	9.1	18	13.8	26	M15x1	18.7	26	17	14	18.5
9063712	VSRR L Ø8-3/8	8 ▲	3/8	9	72.2	34.8	56-61.2	18.7	9.1	22	13.8	26	M15x1	18.7	26	17	17	18.5

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

NOTES

IN-LINE STOP VALVE SERIES STP L

The STP L stop valve belongs to the LINE ON LINE® family and can be connected in series or in parallel with the other products in the same family. It is available in a version for pipe-pipe connection, which includes two push-in fittings, and a version for thread-pipe connection, which includes a nickel-plated brass male thread and a push-in fitting. The stop valve is normally mounted on the inlet port of cylinders and allows the flow of air only in the presence of a pneumatic pilot.
Cylinder movement ceases if there is a drop in pneumatic pilot pressure.
The compressed air port is a push-in fitting for Ø 4 (Ø5/32") pipe.
This stop valve is available in a unidirectional version, so the flow can be interrupted in one direction, but remains free in the other direction.
This valve can also be used as a unidirectional normally-closed 2/2 pneumatic control valve.

TECHNICAL DATA		Ø 6	Ø 8 (Ø5/16")
Max. operating pressure	MPa	1	
	bar	10	
	psi	145	
Temperature range	°C	–20 to +60	
	°F	–4 to +140	
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene	
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous	
Compatibility with oils		See **chapter Z1**	

COMPONENTS

① Technopolymer body
② Nickel-plated brass insert
③ Nickel-plated brass pilot insert
④ AISI 303 steel rod
⑤ Stainless steel clamping spring
⑥ NBR seal
⑦ Stainless steel poppet spring
⑧ NBR seal
⑨ Technopolymer spring ring
⑩ Stainless steel clip-on spring
⑪ Technopolymer stop bushing
⑫ Technopolymer release bushing

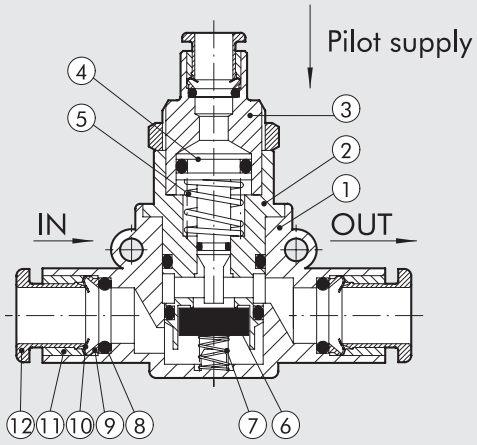

FLOW CHARTS

STP L Ø 6

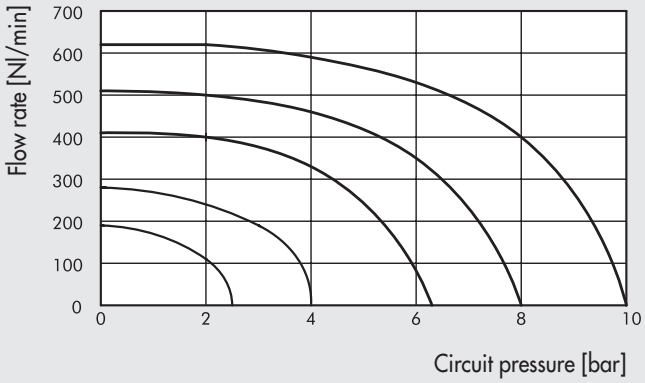

STP L Ø 8 (Ø5/16")

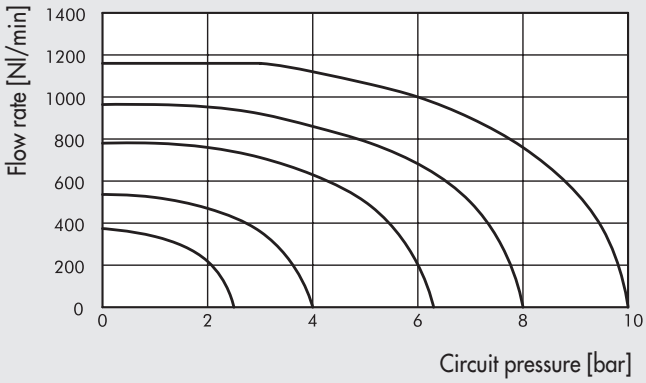

MINIMUM PILOT PRESSURE

STP L Ø 6

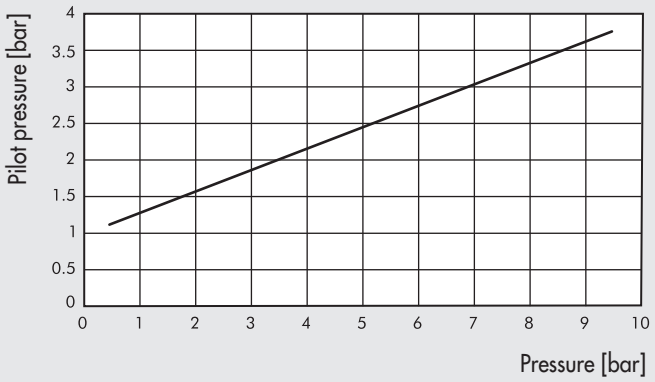

STP L Ø 8 (Ø5/16")

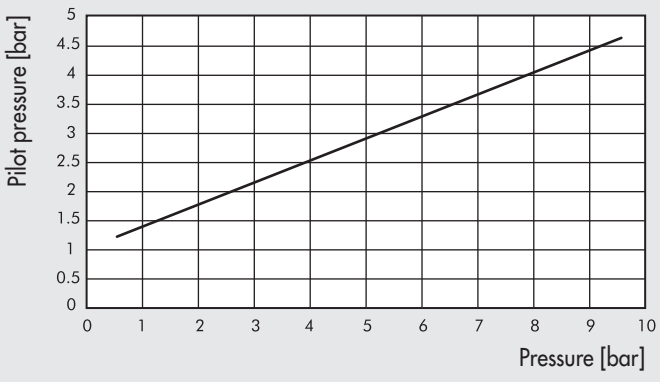

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF or NPT



Ⓑ



Ⓒ



Ⓓ



How to mount the STP L:

- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the STP L straight onto the actuator or the control valve.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the STP L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the STP L straight onto the wall.
- Fig. Ⓓ The ring nut is screwed onto the threaded metal part of the STP L body for panel mounting.

STP L 2/2 PIPE - PIPE

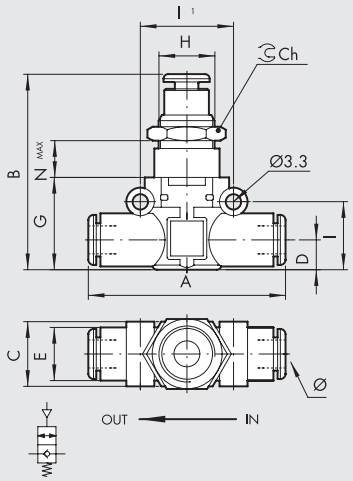

Code	Ref.	Ø	A	B	C	D	E	G	H	I	I1	Ch	Nmax
9065616	STP L 2/2 Ø6 - Ø6	6	49.4	43.2	14.7	6.4	11.4	20	M12x0.75	14.6	20	15	12
9065624	STP L 2/2 Ø8 - Ø8	8 ▲	57.3	49.7	18.7	9.1	13.8	26	M15x1	18.7	24	17	11.8

▲ **Ø8** = Ø5/16"

STP L 2/2 PIPE - G (BSP) THREAD

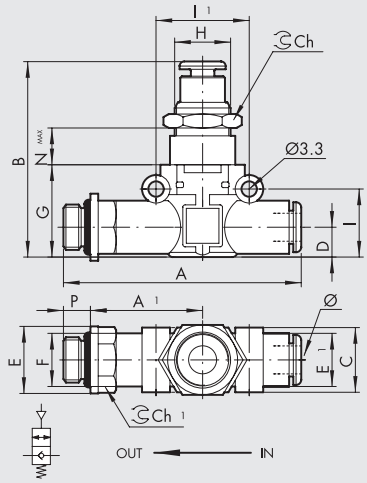

Code	Ref.	Ø	F	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9065808	STP L 2/2 Ø6 - 1/8	6	1/8	6	58.5	27.8	43.2	14.7	6.4	14	11.4	20	M12x0.75	14.6	20	15	12	12
9065809	STP L 2/2 Ø6 - 1/4	6	1/4	8	61.5	28.8	43.2	14.7	6.4	18	11.4	20	M12x0.75	14.6	20	15	14	12
9065810	STP L 2/2 Ø8 - 1/8	8 ▲	1/8	6	66.2	31.8	49.7	18.7	9.1	15	13.8	26	M15x1	18.7	24	17	14	11.8
9065811	STP L 2/2 Ø8 - 1/4	8 ▲	1/4	8	70.6	34.2	49.7	18.7	9.1	18	13.8	26	M15x1	18.7	24	17	14	11.8
9065812	STP L 2/2 Ø8 - 3/8	8 ▲	3/8	9	72.2	34.8	49.7	18.7	9.1	22	13.8	26	M15x1	18.7	24	17	17	11.8

▲ **Ø8** = Ø5/16"

STP L 2/2 G (BSP) THREAD - PIPE

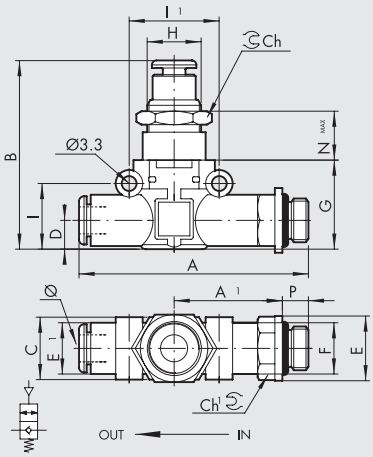

Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	G	H	I	I1	Ch	Ch1	Nmax
9065708	STP L 2/2 1/8 - Ø6	1/8	6	6	58.5	27.8	43.2	14.7	6.4	14	11.4	20	M12x0.75	14.6	20	15	12	12
9065709	STP L 2/2 1/4 - Ø6	1/4	6	8	61.5	28.8	43.2	14.7	6.4	18	11.4	20	M12x0.75	14.6	20	15	14	12
9065710	STP L 2/2 1/8 - Ø8	1/8	8 ▲	6	66.2	31.8	49.7	18.7	9.1	15	13.8	26	M15x1	18.7	24	17	14	11.8
9065711	STP L 2/2 1/4 - Ø8	1/4	8 ▲	8	70.6	34.2	49.7	18.7	9.1	18	13.8	26	M15x1	18.7	24	17	14	11.8
9065712	STP L 2/2 3/8 - Ø8	3/8	8 ▲	9	72.2	34.8	49.7	18.7	9.1	22	13.8	26	M15x1	18.7	24	17	17	11.8

▲ **Ø8** = Ø5/16"

IN-LINE CHECK VALVE SERIES VNR L

The VNR L check valve belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.
Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting.
It is still the only check valve with holes for wall mounting.

TECHNICAL DATA		Ø 4 (Ø5/32")	Ø 6	Ø 1/4"	Ø 8 (Ø5/16")	Ø 3/8"	Ø 10
Operating pressure	MPa	0.05 to 1.2					
	bar	0.5 to 12					
	psi	7.2 to 174					
Temperature range	°C	–20 to +60					
	°F	–4 to +140					
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	80	320	320	480	750	750
Recommended pipe		Rilsan PA11 - Nylon 6 - Polyamide 12 - Polypropylene					
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous					

COMPONENTS

① Technopolymer body
② Nickel-plated brass insert
③ NBR valve
④ Stainless steel valve compression spring
⑤ NBR gasket
⑥ Technopolymer spring ring
⑦ Stainless steel folding spring
⑧ Technopolymer locking bushing
⑨ Technopolymer release bushing

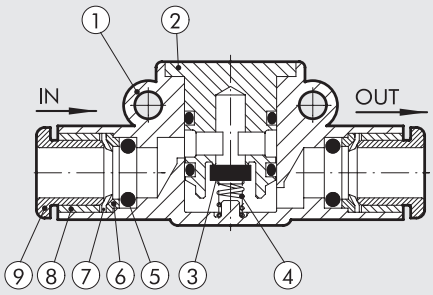

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF or NPT



Ⓑ



Ⓒ



How to mount the VNR L:
- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the VNR L straight onto the female thread.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the VNR L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket, except for Ø3/8 and Ø10.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the VNR L straight onto the wall.

VNR L PIPE - PIPE

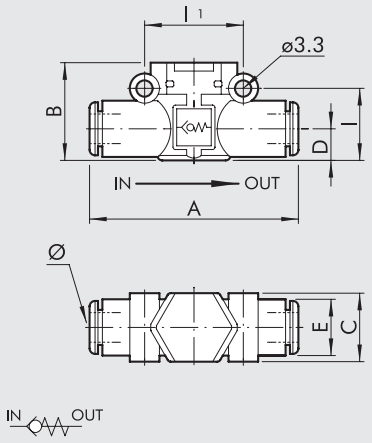

Code	Ref.	Ø	A	B	C	D	E	I	I1
9064001	VNR L Ø4-Ø4	4 ▲	41.8	17.5	10.7	5.6	10	12.8	16
9064016	VNR L Ø6-Ø6	6	49.4	20	14.7	6.4	11.4	14.6	20
9064016U	VNR L Ø1/4-Ø1/4	1/4	49.4	20	14.7	6.4	11.4	14.6	20
9064024	VNR L Ø8-Ø8	8 ▲	57.3	25.5	18.7	9.1	13.8	18.7	24
9064032U	VNR L Ø3/8-Ø3/8	3/8	65	30	21	10.9	16	21.4	26
9064032	VNR L Ø10-Ø10	10	65	30	21	10.9	16	21.4	26

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

VNR L G (BSP) THREAD - PIPE

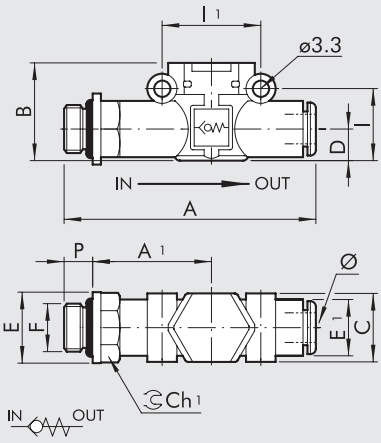

Code	Ref.	F	Ø	P	A	A1	B	C	E	E1	I	I1	Ch1
9064101	VNR L M5-Ø4	M5	4 ▲	4	47.7	22.7	17.5	10.7	9.9	10	12.8	16	9
9064102	VNR L 1/8-Ø4	1/8	4 ▲	6	50.6	24.6	17.5	10.7	14	10	12.8	16	12
9064108	VNR L 1/8-Ø6	1/8	6	6	58.5	27.8	20	14.7	14	11.4	14.6	20	12
9064109	VNR L 1/4-Ø6	1/4	6	8	61.5	28.8	20	14.7	18	11.4	14.6	20	14
9064110	VNR L 1/8-Ø8	1/8	8 ▲	6	66.2	31.8	25.5	18.7	15	13.8	18.7	24	14
9064111	VNR L 1/4-Ø8	1/4	8 ▲	8	70.6	34.2	25.5	18.7	18	13.8	18.7	24	14
9064112	VNR L 3/8-Ø8	3/8	8 ▲	9	72.2	34.8	25.5	18.7	22	13.8	18.7	24	17
9064115	VNR L 1/4-Ø10	1/4	10	8	79.9	39.2	30	20.7	18	16	21.4	26	16
9064116	VNR L 3/8-Ø10	3/8	10	9	81.2	40.4	30	20.7	20	16	21.4	26	17
9064117	VNR L 1/2-Ø10	1/2	10	11	83.7	40	30	20.7	26	16	21.4	26	22

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

VNR L PIPE - G (BSP) THREAD

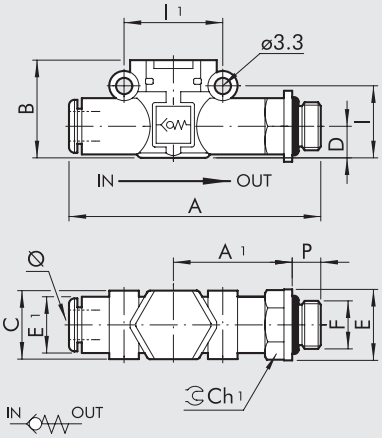

Code	Ref.	Ø	F	P	A	A1	B	C	E	E1	I	I1	Ch1
9064201	VNR L Ø4-M5	4 ▲	M5	4	47.7	22.7	17.5	10.7	9.9	10	12.8	16	9
9064202	VNR L Ø4-1/8	4 ▲	1/8	6	50.6	24.6	17.5	10.7	14	10	12.8	16	12
9064208	VNR L Ø6-1/8	6	1/8	6	58.5	27.8	20	14.7	14	11.4	14.6	20	12
9064209	VNR L Ø6-1/4	6	1/4	8	61.5	28.8	20	14.7	18	11.4	14.6	20	14
9064210	VNR L Ø8-1/8	8 ▲	1/8	6	66.2	31.8	25.5	18.7	15	13.8	18.7	24	14
9064211	VNR L Ø8-1/4	8 ▲	1/4	8	70.6	34.2	25.5	18.7	18	13.8	18.7	24	14
9064212	VNR L Ø8-3/8	8 ▲	3/8	9	72.2	34.8	25.5	18.7	22	13.8	18.7	24	17
9064215	VNR L Ø10-1/4	10	1/4	8	79.9	39.2	30	20.7	18	16	21.4	26	16
9064216	VNR L Ø10-3/8	10	3/8	9	81.2	40.4	30	20.7	20	16	21.4	26	17
9064217	VNR L Ø10-1/2	10	1/2	11	83.7	40	30	20.7	26	16	21.4	26	22

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

IN-LINE FILTER SERIES FIL L

The FIL L filter is part of the LINE ON LINE® family, which means it can be connected in series or in parallel with all other products of the same line. Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting.
The sintered filter cartridge, which can be easily inspected and replaced by simply opening a removable cap, is available in 3 filtering grades of a different colour for easy identification: 5 µm (yellow), 20 µm (white) and 50 µm (blue).

TECHNICAL DATA		Ø 8 (Ø5/16")	Ø 3/8"	Ø 10
Inlet pressure	MPa	0.05 to 1.2		
	bar	0.5 to 12		
	psi	7.2 to 174		
Temperature range	°C	-20 to +60		
	°F	-4 to +140		
Flow rate at 6.3 bar ΔP 0.5 bar	Nl/min	200		
Flow rate at 6.3 bar ΔP 1 bar	Nl/min	280		
Recommended pipe		Rilsan PA 11 - Nylon 6 - Polyamide 12 - Polypropylene		
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous		
Compatibility with oils		See **chapter Z1**		

COMPONENTS

① Technopolymer body
② Nickel-plated brass filter insert
③ Nickel-plated brass filter cap
④ Sintered HDPE filter cartridge
⑤ NBR gasket
⑥ Technopolymer spring ring
⑦ Stainless steel clip-on spring
⑧ Technopolymer locking bushing
⑨ Technopolymer release bushing

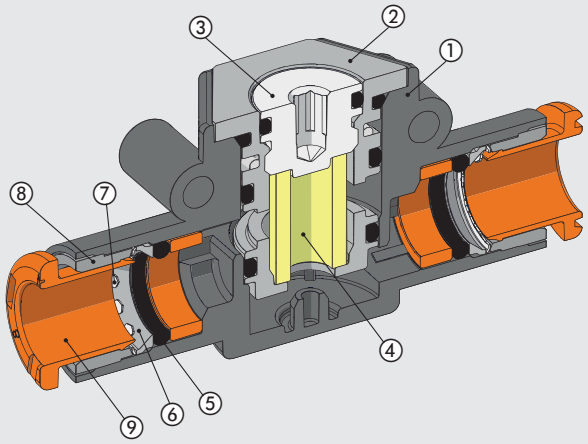

FLOW CHART

FIL L Ø 8 (Ø 5/16") 20 µm - FIL L Ø 3/8" 20 µm - FIL L Ø 10 20 µm

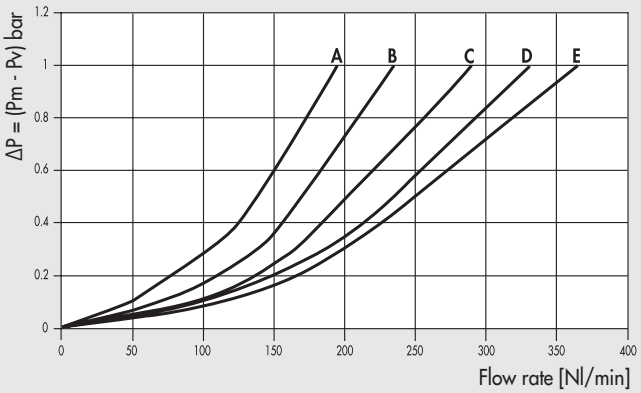

A = 2.5 bar
B = 4 bar
C = 6.3 bar
D = 8 bar
E = 10 bar

ASSEMBLY OPTIONS

Ⓐ

G (BSP)



UNF o NPT



Ⓑ



Ⓒ



How to mount the FIL L:

- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the FIL L straight onto the female thread.
  UNF or NPT: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the FIL L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket (only for Ø8).
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the FIL L straight onto the wall.

FIL L PIPE - PIPE

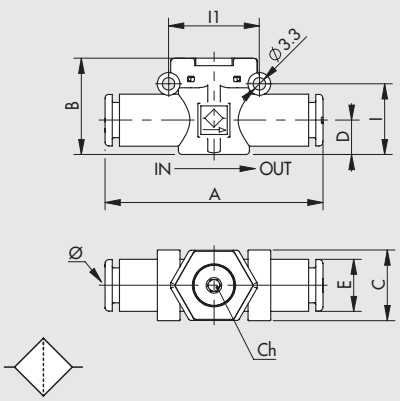

Code	Ref.	Ø	A	B	C	D	E	I	I1	Ch
9070424	FIL L Ø8-Ø8 5 µm	8 ▲	57.3	25.5	18.7	9.1	13.8	18.7	24	3
9070444	FIL L Ø8-Ø8 20 µm	8 ▲	57.3	25.5	18.7	9.1	13.8	18.7	24	3
9070464	FIL L Ø8-Ø8 50 µm	8 ▲	57.3	25.5	18.7	9.1	13.8	18.7	24	3
9070432U	FIL L Ø3/8-Ø3/8 5 µm	3/8	65.4	29.7	20.7	10.9	16	21.4	26	3
9070452U	FIL L Ø3/8-Ø3/8 20 µm	3/8	65.4	29.7	20.7	10.9	16	21.4	26	3
9070472U	FIL L Ø3/8-Ø3/8 50 µm	3/8	65.4	29.7	20.7	10.9	16	21.4	26	3
9070432	FIL L Ø10-Ø10 5 µm	10	65.7	29.7	20.7	10.9	16	21.4	26	3
9070452	FIL L Ø10-Ø10 20 µm	10	65.7	29.7	20.7	10.9	16	21.4	26	3
9070472	FIL L Ø10-Ø10 50 µm	10	65.7	29.7	20.7	10.9	16	21.4	26	3

▲ **Ø8** = Ø5/16"

FIL L G (BSP) THREAD - PIPE

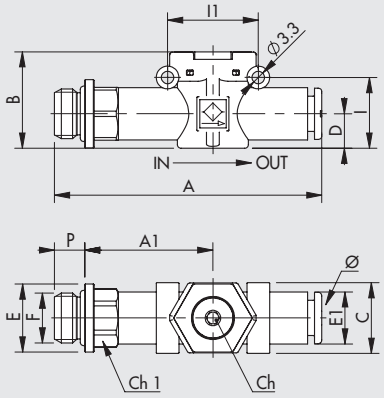

Code	Ref.	F	Ø	P	A	A1	B	C	D	E	E1	I	I1	Ch	Ch1
9070510	FIL L 1/8-Ø8 5 µm	1/8	8▲	6	66.2	31.8	25.5	18.7	9.1	15	13.8	18.7	24	3	14
9070530	FIL L 1/8-Ø8 20 µm	1/8	8▲	6	66.2	31.8	25.5	18.7	9.1	15	13.8	18.7	24	3	14
9070550	FIL L 1/8-Ø8 50 µm	1/8	8▲	6	66.2	31.8	25.5	18.7	9.1	15	13.8	18.7	24	3	14
9070511	FIL L 1/4-Ø8 5 µm	1/4	8▲	8	70.6	34.2	25.5	18.7	9.1	18	13.8	18.7	24	3	14
9070531	FIL L 1/4-Ø8 20 µm	1/4	8▲	8	70.6	34.2	25.5	18.7	9.1	18	13.8	18.7	24	3	14
9070551	FIL L 1/4-Ø8 50 µm	1/4	8▲	8	70.6	34.2	25.5	18.7	9.1	18	13.8	18.7	24	3	14
9070512	FIL L 3/8-Ø8 5 µm	3/8	8▲	9	72.2	34.8	25.5	18.7	9.1	22	13.8	18.7	24	3	17
9070532	FIL L 3/8-Ø8 20 µm	3/8	8▲	9	72.2	34.8	25.5	18.7	9.1	22	13.8	18.7	24	3	17
9070552	FIL L 3/8-Ø8 50 µm	3/8	8▲	9	72.2	34.8	25.5	18.7	9.1	22	13.8	18.7	24	3	17
9070515	FIL L 1/4-Ø10 5 µm	1/4	10	8	79.9	39.2	29.7	20.7	10.9	18	16	21.4	26	3	16
9070535	FIL L 1/4-Ø10 20 µm	1/4	10	8	79.9	39.2	29.7	20.7	10.9	18	16	21.4	26	3	16
9070555	FIL L 1/4-Ø10 50 µm	1/4	10	8	79.9	39.2	29.7	20.7	10.9	18	16	21.4	26	3	16
9070516	FIL L 3/8-Ø10 5 µm	3/8	10	9	81.2	40.4	29.7	20.7	10.9	20	16	21.4	26	3	17
9070536	FIL L 3/8-Ø10 20 µm	3/8	10	9	81.2	40.4	29.7	20.7	10.9	20	16	21.4	26	3	17
9070556	FIL L 3/8-Ø10 50 µm	3/8	10	9	81.2	40.4	29.7	20.7	10.9	20	16	21.4	26	3	17
9070517	FIL L 1/2-Ø10 5 µm	1/2	10	11	83.7	40	29.7	20.7	10.9	26	16	21.4	26	3	22
9070537	FIL L 1/2-Ø10 20 µm	1/2	10	11	83.7	40	29.7	20.7	10.9	26	16	21.4	26	3	22
9070557	FIL L 1/2-Ø10 50 µm	1/2	10	11	83.7	40	29.7	20.7	10.9	26	16	21.4	26	3	22

▲ **Ø8** = Ø5/16"

SPARE PARTS

FILTERING ELEMENT



Code	Description
9062500	Filtering element 5 µm (yellow) LOL
9062501	Filtering element 20 µm (white) LOL
9062502	Filtering element 50 µm (blue) LOL

NOTES

lineonline® ACCESSORIES

FIXING SQUARE KIT

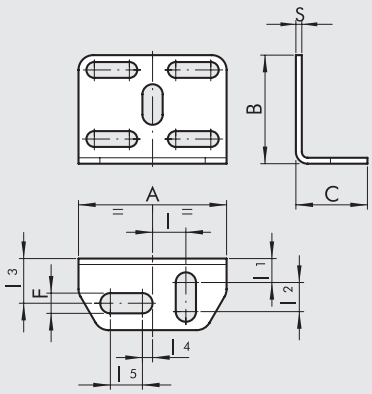

Code	Description	A	B	C	F	l	l1	l2	l3	l4	l5	S
9062110	SQU L	30	22	14.5	4.2	6.8	4.8	5.9	9.1	2	6.5	1.2

NOTE: comes with two M3x16 screws (for L.O.L. Ø 4▲), two M3x25 screws (for L.O.L. Ø 6-Ø1/4-Ø 8▲), two M3 hexagonal nuts, 2 groovers, 4 washers.

NOT COMPATIBLE WITH Ø3/8 AND Ø10

▲ **Ø4** = Ø5/32"; **Ø8** = Ø5/16"

U-BOLT



Code	Description
9062216	TUB L Ø6-Ø6
9062216U	TUB L Ø1/4-Ø1/4
9062224	TUB L Ø8-Ø8 ▲

▲ **Ø8** = Ø5/16"

RU6 - STEM ADAPTORS UNF or NPT



Code	Ref.	Ø	F	Ch		P	L	D	E
				Inc	mm				
2U06001	RU6	5/32	10-32 UNF	5/16	8	4	25.2	2	9
2U06002	RU6	5/32	1/8 NPT	0.472	12	6	27.7	2.5	13
2U06003	RU6	5/32	1/4 NPT	0.551	14	8	30.2	2.5	16.4
2U06000	RU6	1/4	10-32 UNF	5/16	8	4	25.7	2	9
2U06007	RU6	1/4	1/8 NPT	0.472	12	6	28.2	4	13
2U06008	RU6	1/4	1/4 NPT	0.551	14	8	30.5	4	16.4
2U06020	RU6	1/4	3/8 NPT	0.669	17	9	33.3	4	20
2U06009	RU6	5/16	1/8 NPT	0.472	12	6	29.2	5.5	13
2U06010	RU6	5/16	1/4 NPT	0.551	14	8	31.5	6	16.4
2U06011	RU6	5/16	3/8 NPT	0.669	17	9	34.3	6	20
2U06012	RU6	3/8	1/4 NPT	0.551	14	8	34.8	7.3	16.4
2U06013	RU6	3/8	3/8 NPT	0.669	17	9	37.6	7.3	20
2U06022	RU6	3/8	1/2 NPT	0.748	19	11	41.2	7.3	24.5

SUMMARY COUPLINGS

- **COMPRESSED AIR QUICK-FIT COUPLING SERIES IAC** E2.2

- **QUICK-FIT COUPLING FOR MOULD CONDITIONING SERIES ICS** E2.6

COMPRESSED AIR QUICK-FIT COUPLING SERIES IAC

The compressed air quick-fit coupling by Metal Work allows quick replacement of pneumatic equipment (drills, milling machines, screwers and actuators in general) without having to set the line pressure to zero each time. Rapid tool changeover can be easily obtained by fitting a female body on the branch under pressure and the male coupling on the actuator. The presence of a female coupling with a safety valve on the branch under pressure prevents air dispersion during disconnection.

TECHNICAL DATA		MINI		100	200	300
Threaded coupling		1/8″	1/4″	1/4″	3/8″	1/2″
Maximum inlet pressure	MPa	3			3	
	bar	30			30	
	psi	435			435	
Flow rate at 6 bar (0.6 MPa - 87 psi) ΔP 1 bar (0.1 MPa - 14 psi)	Nl/min	480		750	1450	1750
Maximum temperature	°C	80			80	
	°F	176			176	

COMPONENTS

① Body: nickel-plated brass
② Ring nut: nickel-plated brass
③ Valve: nickel-plated brass
④ Coupling: carbonitrured and zinc-plated steel
⑤ Ball: stainless steel
⑥ Ring nut spring: AISI 302
⑦ Valve spring: AISI 302

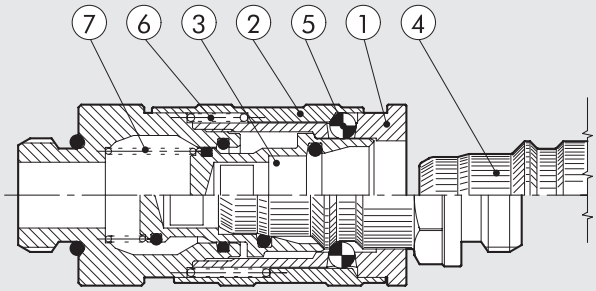

The actual male couplings don't have lateral holes. They cannot be coupled with the manual ports old production.

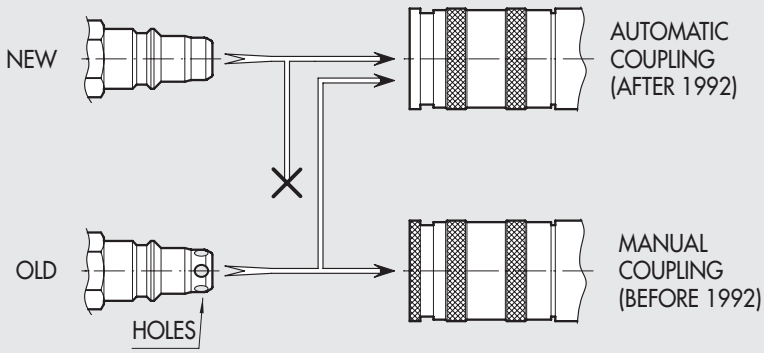

FLOW CHARTS

CURVE WITH ΔP = 1 bar

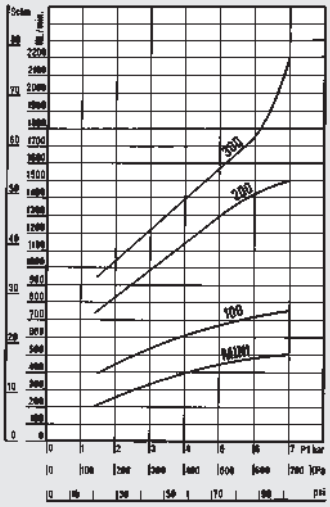

CURVE WITH FREE EXHAUST

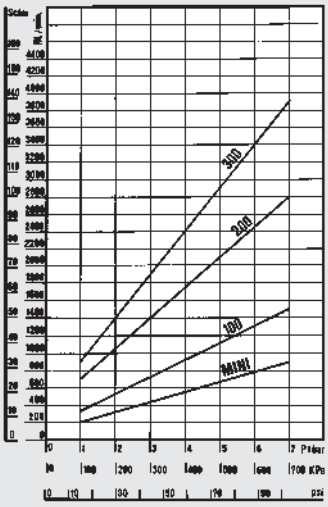

FLOW TEST DIAGRAMS

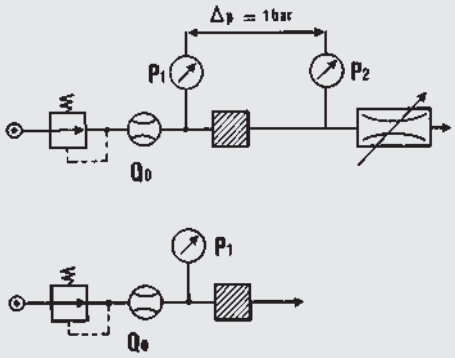

TYPICAL ASSEMBLIES

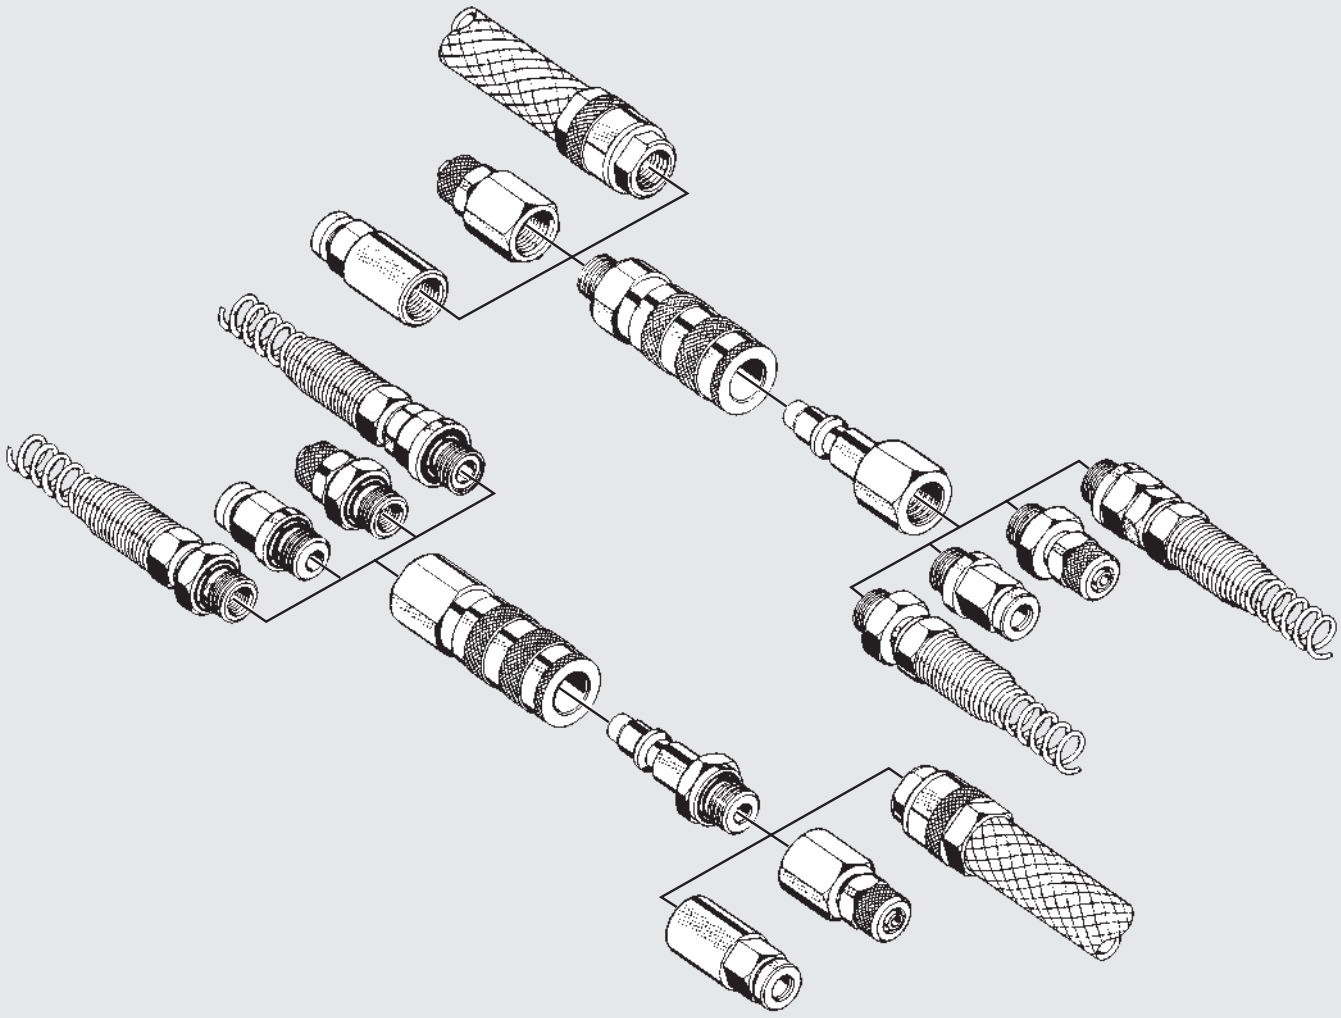

OVERALL DIMENSIONS AND ORDERING CODES

QUICK-FIT PORT, MALE



Code	Ref.	Mod.	F	Ch1	P	L	E	O-ring
0101001	01	mini	1/8	16	6.0	38.0	18.8	2031
0101002	02	mini	1/4	16	8.0	40.0	18.8	2043
0201101	101	100	1/4	21	8.0	50.0	24.4	2043
0301201	201	200	3/8	23	9.0	57.6	26.4	2056
0300202	201/A	200	1/4	23	8.0	56.6	26.4	2043
0401301	301	300	1/2	30	11.0	70.8	33.0	3068

QUICK-FIT PORT, FEMALE



Code	Ref.	Mod.	F	Ch1	P	L	E
0101003	03	mini	1/8	16	7.0	40.5	18.8
0101004	04	mini	1/4	16	8.0	42.0	18.8
0201102	102	100	1/4	21	8.0	52.0	24.4
0301202	202	200	3/8	23	10.0	60.7	26.4
0401302	302	300	1/2	30	11.0	73.8	33.0

QUICK-FIT PORT, NYLON PIPE

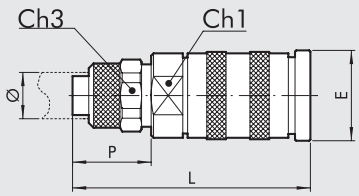

Code	Ref.	Mod.	Ø	Ch1	Ch3	P	L	E
0101005	05	mini	6/4	16	12	14.0	46.0	18.8
0101006	06	mini	8/6	16	14	14.0	46.0	18.8

QUICK-FIT PORT, NYLON PIPE WITH SPRING



Code	Ref.	Mod.	Ø	Ch1	Ch3	E
0101007	07	mini	6/4	16	12	18.8
0101008	08	mini	8/6	16	14	18.8

QUICK-FIT COUPLING, MALE



Code	Ref.	Mod.	F	Ch1	P	L	M	O-ring
0102011	11	mini	1/8	13	6.0	29.3	15	2031
0102012	12	mini	1/4	14	8.0	32.7	18	2043
0202111	111	100	1/4	14	8.0	42.2	18	2043
0302211	211	200	3/8	17	9.0	45.8	20	2056
0303205	211/A	200	1/4	16	8.0	46.2	18	2043
0402311	311	300	1/2	22	11.0	55.2	26	3068

QUICK-FIT COUPLING, FEMALE



Code	Ref.	Mod.	F	Ch1	P	L
0102013	13	mini	1/8	14	7.0	29.5
0102014	14	mini	1/4	17	8.0	30.5
0202112	112	100	1/4	17	8.0	42.0
0302212	212	200	3/8	20	10.0	48.0
0402312	312	300	1/2	24	11.0	55.0

METAL WORK PNEUMATIC

QUICK-FIT COUPLING, NYLON PIPE



Code	Ref.	Mod.	Ø	Ch1	Ch2	L
0102015	15	mini	6/4	12	12	35.5
0102016	16	mini	8/6	14	14	35.5

QUICK-FIT COUPLING, NYLON PIPE WITH SPRING



Code	Ref.	Mod.	Ø	Ch1	Ch2
0102017	17	mini	6/4	12	12
0102018	18	mini	8/6	14	14

NYLON PIPE FITTING WITH SPRING

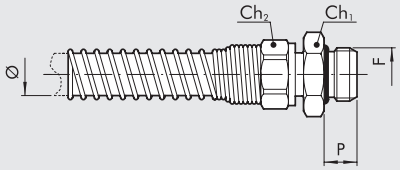

Code	Ref.	F	Ø	Ch1	Ch2	P
0010001	C1/Z	1/4	8/6	18	14	8
0010002	C1/Z	3/8	8/6	21	14	9
0010003	C1/Z	1/4	10/8	18	17	8
0010004	C1/Z	3/8	10/8	21	17	9
0010005	C1/Z	3/8	12/10	21	19	9

HOSE FITTING

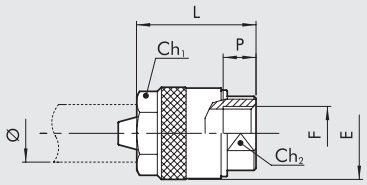

Code	Ref.	F	Ø	Ch1	Ch2	P	L	E
2601001	40	1/4	6x14	18	16	8.0	29.0	23.0
2601002	41	1/4	8x17	21	16	8.0	31.0	25.0
2601003	42	1/4	10x19	23	17	8.0	31.0	27.0
2601004	43	1/2	13x23	27	24	11.0	35.5	31.0

SWIVEL NYLON PIPE FITTING WITH SPRING

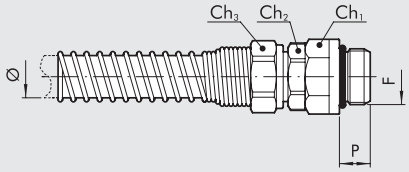

Code	Ref.	F	Ø	Ch1	Ch2	Ch3	P	O-ring
2501010	50	1/4	6/4	16	14	12	8.0	2043
2501011	51	1/4	8/6	16	14	14	8.0	2043
2501012	52	3/8	10/8	19	17	17	9.0	2056
2501013	53	3/8	12/10	19	17	19	9.0	2056

NOTES

QUICK-FIT COUPLING FOR MOULD CONDITIONING SERIES ICS

The mould conditioning coupling was specifically designed to speed up and facilitate the replacement of moulds in injection moulding machines. Rapid mould changeover can be easily obtained by fitting a female body at the end of the pipes conveying the thermoregulating fluid and a male coupling to the moulds. With this configuration, each mould can be connected and disconnected from the thermoregulation circuit rapidly. The presence of a female coupling with a safety valve on the pipework prevents the outflow of fluid when coupling with or releasing from the mould.

TECHNICAL DATA		501 V with valve	401 V with valve	503 V without valve	403 V without valve
Threaded coupling		1/8"	1/4"	1/8"	1/4"
Maximum temperature at: 1.8 MPa; 18 bar; 261 psi	°F	+248			
	°C	+120			
Minimum temperature at: 1.8 MPa; 18 bar; 261 psi	°F	–68			
	°C	–20			
Maximum pressure	MPa	1.8			
	bar	18			
	psi	261			
Type of gasket		FKM/FPM			

COMPONENTS

① Body: nickel-plated brass
② Ring nut: nickel-plated brass
③ Valve: nickel-plated brass
④ Coupling: nickel-plated brass
⑤ Ball: stainless steel
⑥ Ring nut spring: AISI 302
⑦ Valve spring: AISI 302

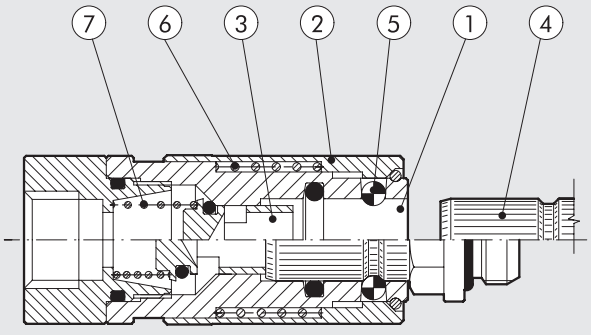

ICS WATER FLOW CHARTS WITH SAFETY VALVE

ICS/500 1/8"

ΔP - Pressure

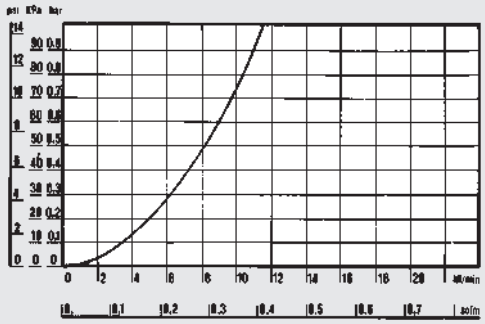

Flow rate

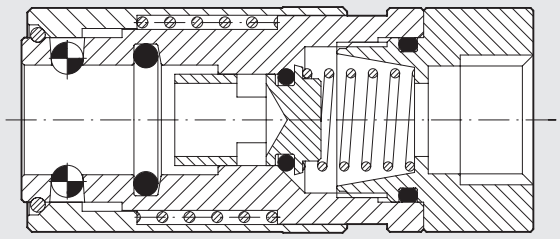

ICS/400 1/4"

ΔP - Pressure

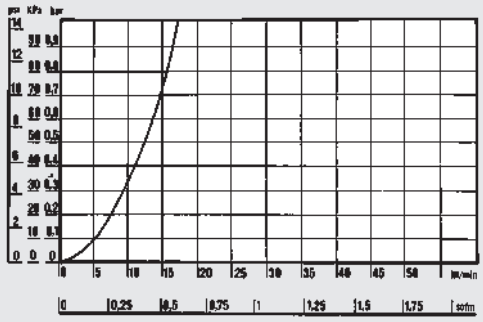

Flow rate

WITH SAFETY VALVE
The female body with safety valve prevents the outflow of thermoregulator fluid when coupling with or releasing from the mould.

ICS WATER FLOW CHARTS WITHOUT SAFETY VALVE

ICS/500 1/8"

ΔP - Pressure

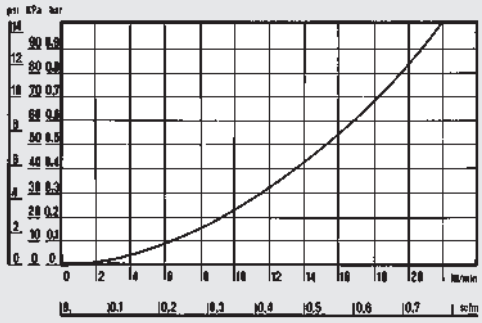

Flow rate

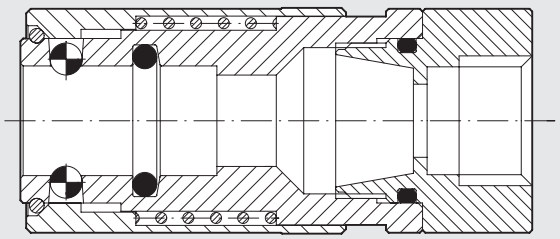

ICS/400 1/4"

ΔP - Pressure

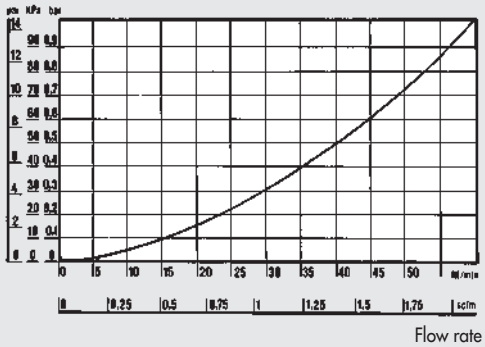

Flow rate

WITHOUT SAFETY VALVE
A version having a female body without a safety valve is available for when a high flow rate is required. This version allows a greater thermoregulator fluid flow rate but does not act as a fluid check valve when coupling with or releasing from the mould.

GENERAL FEATURES



Female body plus conventional hose fitting (pipe locked with metal circlip).



Female body plus self-locking hose fitting patented by Metal Work. When the outer ring nut is tightened, the gripper locks on the pipe.

FIG. A

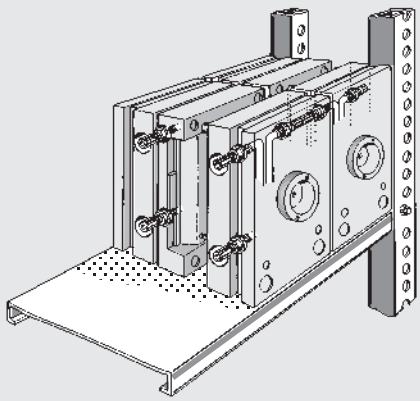

FIG. 1



FIG. 2



The male fitting should be coupled with the mould so that it remains embedded (Fig. 2-4). This saves space and protects the coupling. The mould has no projecting parts, which would occupy more space on the storage shelving (Fig. A).

d	G	H1	Ch	D	H
4/6	1/8	7	13	20	23
7/9	1/4	9	14	26	30

FIG. B

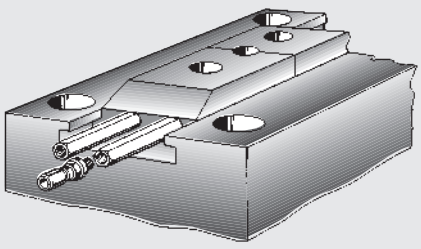

FIG. 3



FIG. 4



The Extension (see A25 fittings) is available as an accessory. It is extremely useful when parts inside the moulds need to be thermoregulated or when the presence of trucks makes it impossible to connect the moulds to the rubber pipe. (Fig. B).

d	G	H1	Ch	D	H	D1
4/6	1/8	7	13	20	23	17
7/9	1/4	9	14	26	30	21

OVERALL DIMENSIONS AND ORDERING CODES

FEMALE PORT

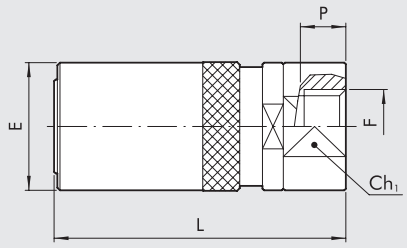

Code	Ref.	F	Safety valve	Ch1	P	L	E
0601040	501V	1/8	yes	16	7.0	45.0	19.0
0501040	401V	1/4	yes	21	8.0	56.0	25.0
0600040	503V	1/8	no	16	7.0	45.0	19.0
0500040	403V	1/4	no	21	8.0	56.0	25.0

MALE COUPLING



Code	Ref.	F	Ch1	P	L	E	O-ring FKM/FPM
0602001	511	1/8	13	6.0	28.5	15.0	2031
0502001	411	1/4	14	8.0	37.0	18.0	2043

FEMALE COUPLING



Code	Ref.	F	Ch1	P	L	E
0602002	512	1/8	12	7.0	28.0	14
0502002	412	1/4	14	8.0	37.5	17

NOTES

NOTES

SUMMARY FLOW REGULATOR

- **INTRODUCTION FLOW MICRO-REGULATOR** E3.2

- **FLOW MICRO-REGULATOR SERIES MRF COMPACT N and COMPACT O** E3.4

- **FLOW MICRO-REGULATOR SERIES MRF HIGH-FLOW** E3.14

- **FLOW MICRO-REGULATOR SERIES MRF PUSH-LOCK** E3.16

- **IN-LINE FLOW MICRO-REGULATOR SERIES RFL L** E1.29

- **IN-LINE FLOW REGULATOR SERIES RFL** E3.18

INTRODUCTION FLOW MICRO-REGULATOR

The job of flow microregulators is to regulate speed in the pneumatic cylinders. The configuration of both type C (to be mounted on the cylinder inlet) and type V (to be mounted on the valve port) is such as to ensure full flow on feed and regulated flow on discharge. Type B (bidirectional) can be used to regulate the flow both on feed and discharge. Flow microregulators are divided into 4 series:

- **MRF COMPACT O**: can be adjusted using a screwdriver; the regulation pin is lubrified with a particular antivivration grease; it has reduced dimensions and fine adjustment in the first turns; adjustgment can be prevented by assembling a disposable cap (supplied separately) that can be removed using a tool.
- **MRF COMPACT N**: can be adjusted using the knob and/or screwdriver; adjustment can be prevented by tightening the ring nut; it has the same regulation curve as those in series O.
- **MRF HIGH-FLOW**: can be adjusted using the knob and/or screwdriver; adjustment can be prevented by tightening the ring nut; it is ideal for use in installations requiring high flow rates both on regulation and discharge. Available in G1/8 and G1/4 and with a technopolymer ring.
- **MRF PUSH-LOCK**: it is the only one in the MRF series with a PUSH-LOCK knob, that can be replaced by an anti-tampering knob (supplied separately). Available in G1/8 and G1/4 and with a technopolymer ring.

All the MRF with a pipe engage-release system of the latest generation that facilitates detachment of the pipe even under difficult operating conditions.

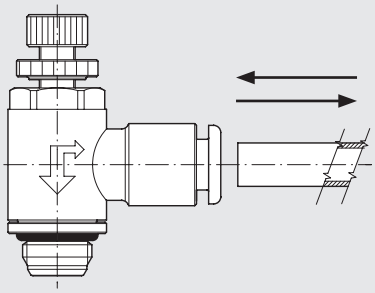

The rings can be rotated even with the MRF installed, which means that they can be mounted with the pipe facing towards any direction.



Special focus has been placed on miniaturisation of the components (mainly for COMPACT MRF series O), which saves considerable space.



FLOW CHARTS

Flow rate [Nl/min]

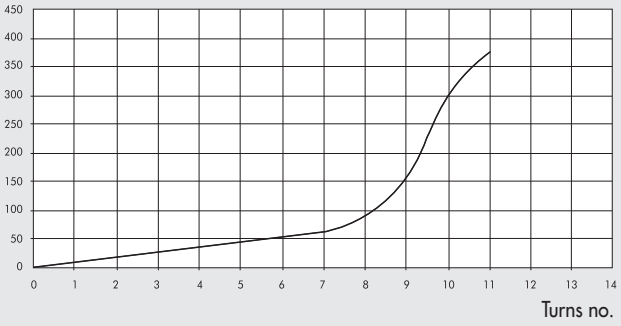

The regulation curve in the MRF series COMPACT N, COMPACT O and PUSH-LOCK takes place in two sections: in the first half of the flash pin stroke for very fine regulation and relatively low flow rates; in the second half, the flash pin quickly opens the passage so as to reach the maximum flow rate quickly.

Flow rate [Nl/min]

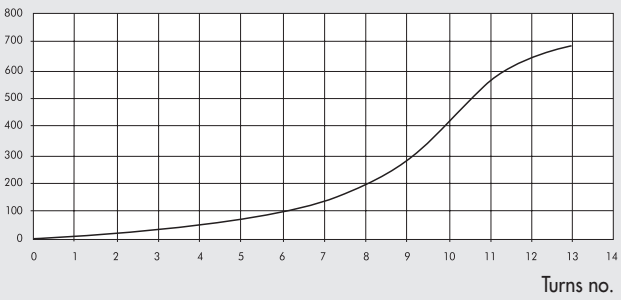

The regulation curve in the MRF series HIGH-FLOW is divided into 3 sections: regulation is particularly accurate along the entire flash pin stroke and the maximum flow rate is reached at a good steady rate; in this way, the user can choose the solution which best fits the specific application.

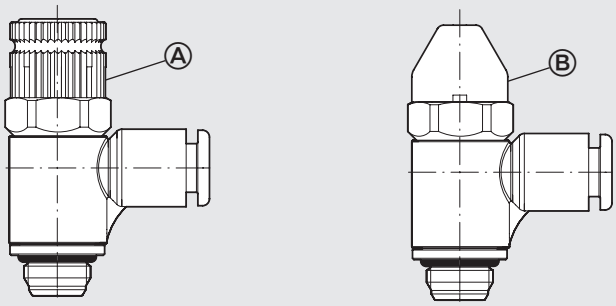

A major innovative aspect of the new MRF is the possibility of using the PUSH-LOCK series that can be mounted with either a push-lock (A) or an anti-tampering knob (B). The push-lock knob prevents decalibration of the MRF due to vibration or incorrect torque. With the anti-tampering knob there is no way to change the position unless you remove the knob using a special tool.

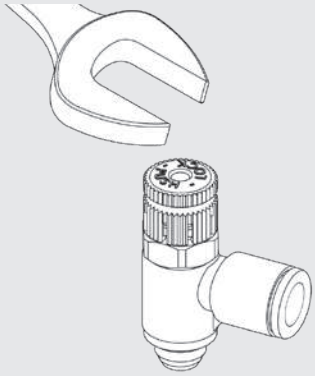

All the new MRF can be fixed from the top using a universal wrench, a pipe wrench or an automatic screwer.

Thread	Maximum torque [Nm]*
M5	max 1.8
G1/8-1/8 NPT	max 6
G1/4-1/4 NPT	max 8
G3/8-3/8 NPT	max 10
G1/2-1/2 NPT	max 15

* measured on a metal female thread

FLOW MICROREGULATOR SERIES MRF COMPACT N and COMPACT O

Main features:
- reduced dimensions
- excellent regulation
- regulation with a screwdriver and disposable anti-tampering cap (COMPACT O)
- regulation with either a screwdriver and/or a knob, can be fixed with a ring nut (COMPACT N)
- available in all sizes (from M5 to G1/2) with a brass or a technopolymer ring
- available (from 10-32 UNF to 1/2 NPT) only with brass ring version COMPACT N
- can be mounted with an automatic screwdriver
- comes with a ring that can rotate even with the MRF mounted in position.

TECHNICAL DATA METRIC or G (BSP)		M5			G1/8				G1/4				G3/8			G1/2	
Pipe		Ø 4	Ø 5*	Ø 6	Ø 4	Ø 5*	Ø 6	Ø 8	Ø 6	Ø 8	Ø 10	Ø 12	Ø 8	Ø 10	Ø 12	Ø 12	Ø 14
Max input pressure	MPa	1															
	bar	10															
	psi	145															
Temperature range: Technopolymer ring	°C	– 10 to + 50															
	°F	+ 14 to + 122															
Brass ring	°C	– 10 to + 70															
	°F	+ 14 to +158															
Max flow rate on regulation at 6.3 bar	Nl/min	150	155	155	350	360	380	400	750	850	950	1000	1250	1300	1400	2000	
Max flow rate on exhaust at 6.3 bar with closed needle	Nl/min	140	145	150	300	320	350	390	450	500	500	550	1030	1050	1250	1750	
Max flow rate on exhaust at 6.3 bar with open needle	Nl/min	240	245	245	450	510	600	650	850	1050	1150	1250	1700	1700	2100	2700	
Regulation		Manual (COMPACT N only) or using a screwdriver															
Internal system		Tapered needle															
Fluid		Filtered, lubricated or unlubricated compressed air															
* Pipe Ø 5 is only available with a brass ring																	

TECHNICAL DATA UNF or NPT		10-32 UNF		1/8 NPT				1/4 NPT						3/8 NPT		1/2 NPT
Pipe		Ø 5/32	Ø 1/4	Ø 5/32	Ø 1/4	Ø 5/16	Ø 3/8	Ø 1/4	Ø 5/16	Ø 3/8	Ø 1/2			Ø 3/8	Ø 1/2	Ø 1/2
Max input pressure	MPa	1														
	bar	10														
	psi	145														
Temperature range: Brass ring	°C	– 10 to + 70														
	°F	+ 14 to +158														
Max flow rate on regulation at 6.3 bar	Nl/min	150	155	350	380	400	400	750	850	950	1000	1300	1400	2000		
Max flow rate on exhaust at 6.3 bar with closed needle	Nl/min	140	150	300	350	390	390	450	275	500	550	1050	1250	1750		
Max flow rate on exhaust at 6.3 bar with open needle	Nl/min	240	245	450	600	650	650	850	1050	1150	1250	1700	2100	2700		
Regulation		Manual or using a screwdriver														
Internal system		Tapered needle														
Fluid		Filtered, lubricated or unlubricated compressed air														

TYPE N COMPONENTS - M5 THREAD - 10-32 UNF

① Nichel-plated brass knob
② Nickel-plated brass securing ring nut
③ Brass needle
④ Nickel-plated brass bush
⑤ Nickel-plated brass body
⑥ Nickel-plated brass retaining ring
⑦ NBR gasket
⑧ Nickel-plated or technopolymer brass revolving ring
⑨ NBR gasket
⑩ Technopolymer spring supporting ring
⑪ Stainless steel grabbing spring
⑫ Technopolymer retaining bush
⑬ Technopolymer release bush

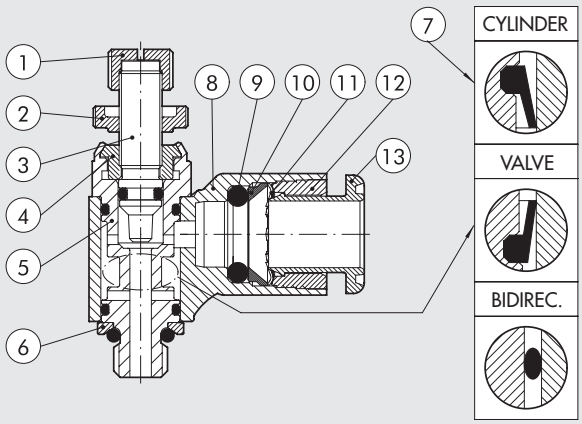

TYPE O COMPONENTS - M5 THREAD

① Brass needle
② Nickel-plated brass bush
③ Nickel-plated brass body
④ Nickel-plated brass retaining ring
⑤ NBR gasket
⑥ Nickel-plated or technopolymer brass revolving ring
⑦ NBR gasket
⑧ Technopolymer spring supporting ring
⑨ Stainless steel grabbing spring
⑩ Technopolymer retaining bush
⑪ Technopolymer release bush

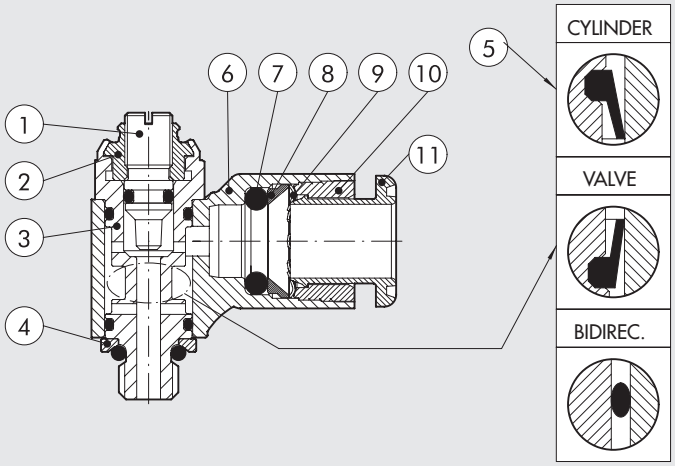

TYPE N COMPONENTS - THREAD FROM G1/8 TO G1/2 - FROM 1/8 NPT TO 1/2 NPT

① Nickel-plated brass knob
② Nickel-plated brass securing ring nut
③ Brass needle
④ Nickel-plated brass body
⑤ Nickel-plated brass retaining ring
⑥ Brass gasket holding insert
⑦ NBR gasket
⑧ Nickel-plated or technopolymer brass revolving ring
⑨ NBR gasket
⑩ Technopolymer spring supporting ring
⑪ Stainless steel grabbing spring
⑫ Technopolymer retaining bush
⑬ Technopolymer release bush

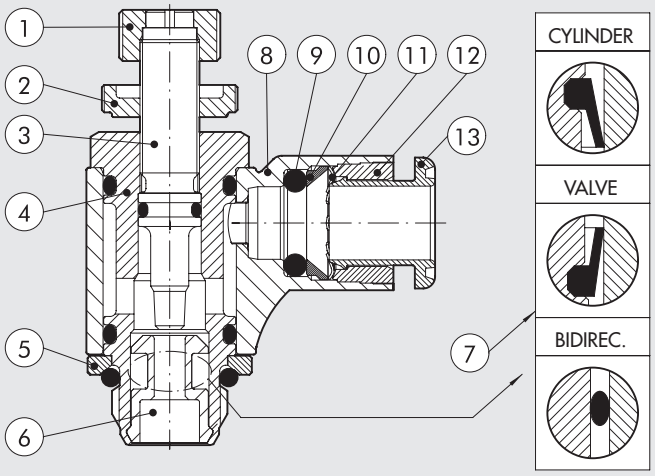

TYPE O COMPONENTS - THREAD FROM G1/8 TO G1/2

① Brass needle
② Nickel-plated brass body
③ Nickel-plated brass retaining ring
④ Brass gasket holding insert
⑤ NBR gasket
⑥ Nickel-plated or technopolymer brass revolving ring
⑦ NBR gasket
⑧ Technopolymer spring supporting ring
⑨ Stainless steel grabbing spring
⑩ Technopolymer retaining bush
⑪ Technopolymer release bush

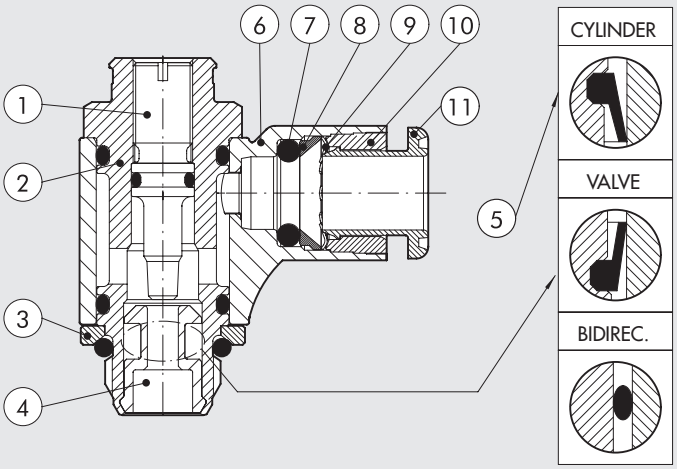

FLOW CHARTS

MRF M5 - 10-32 UNF

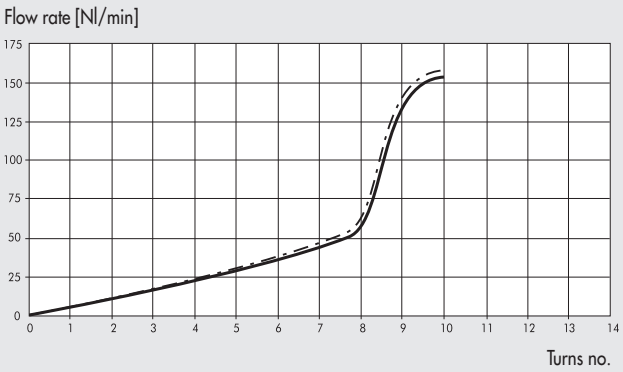

MRF G1/8 - 1/8 NPT

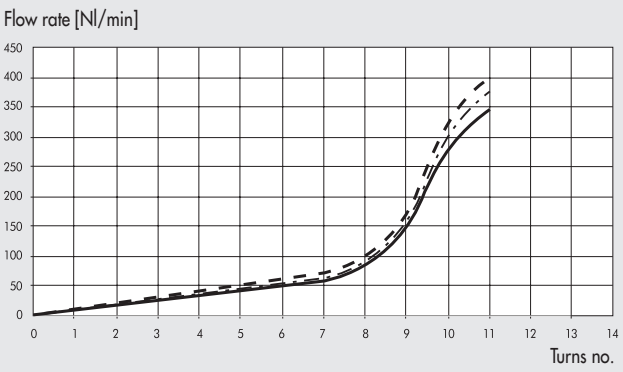

MRF G1/4 - 1/4 NPT

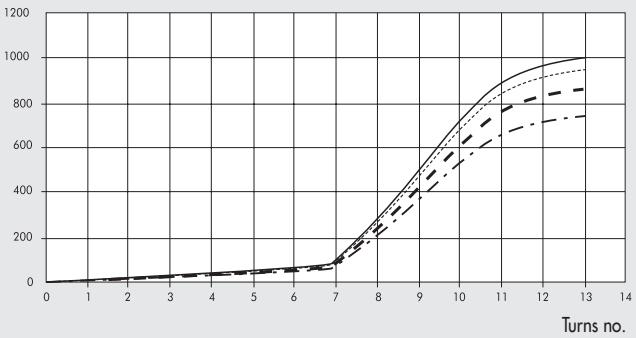

MRF G3/8 - 3/8 NPT

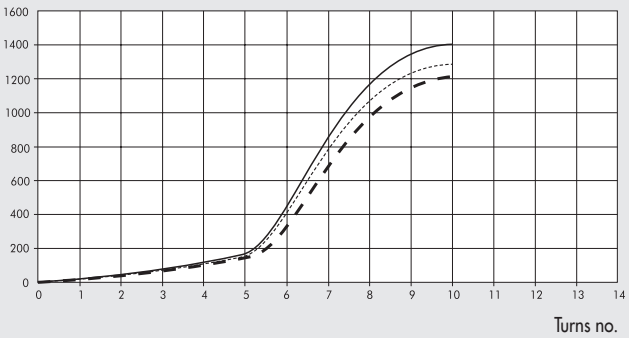

MRF G1/2 - 1/2 NPT

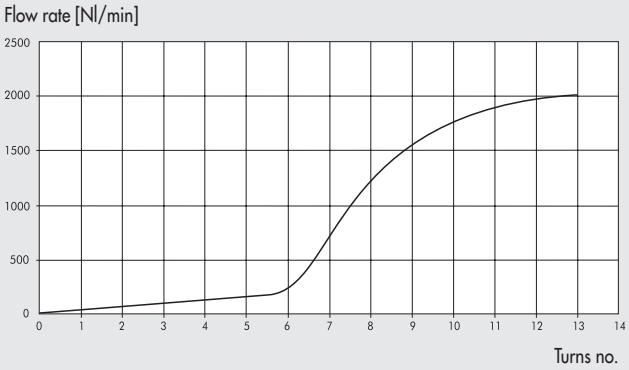



SYNOPTIC, SIZES AND VERSIONS

M R F	N	M	C	4	M5
FAMILY	**TYPE**	**RING**	**FUNCTION**	**Ø TUBE / THREAD**	**THREAD**
Flow microregulator	**N** With knob and ring nut **O** Flash needle	**M** Nickel-plated brass with push-in fitting **T** Technopolymer with push-in fitting **F** Nickel-plated brass with female thread	**C** For cylinder **V** For valve **B** Bidirectional	**MILLIMETER TUBE** **4** Ø 4 (5/32") **5** Ø 5 **6** Ø 6 **8** Ø 8 (5/16") **10** Ø 10 **12** Ø 12 **14** Ø 14 **G (BSP) THREAD** **1/8** G1/8 Female **1/4** G1/4 Female **3/8** G3/8 Female **1/2** G1/2 Female **INCH TUBES ▲** **1/4** Ø 1/4" **3/8** Ø 3/8" **1/2** Ø 1/2"	**MTERIC or G (BSP)** **M5** M5 **1/8** G1/8 **1/4** G1/4 **3/8** G3/8 **1/2** G1/2 **UNF or NPT ▲** **10-32 UNF** 10-32 UNF **1/8 NPT** 1/8 NPT **1/4 NPT** 1/4 NPT **3/8 NPT** 3/8 NPT **1/2 NPT** 1/2 NPT

▲ Available only for version MRF compact "N" with brass ring.

METAL WORK PNEUMATIC

MRF COMPACT "O" BRASS RING

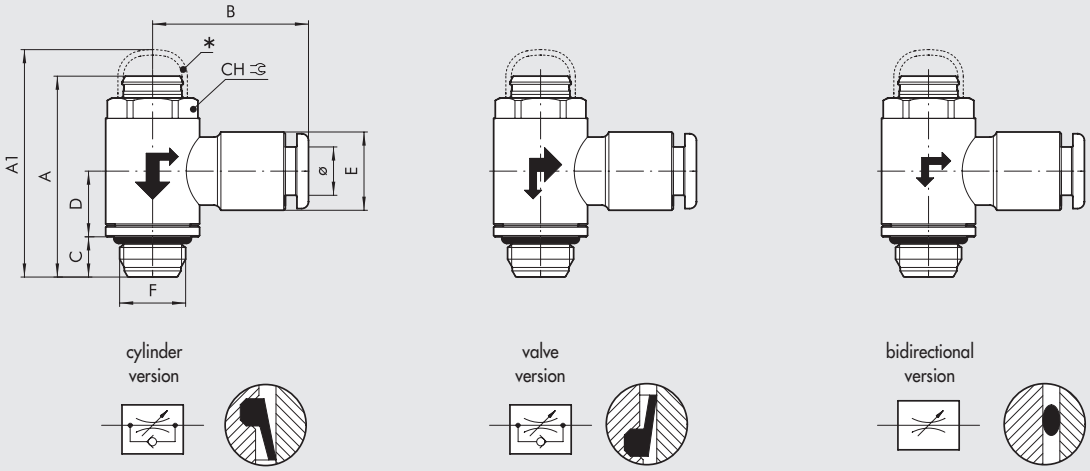

* OPTIONAL ANTI-TAMPERING CAP

Code	Description	F	Ø	CH	A min	A max	A1	B	C	D	E
9001001C	MRF O M C 4 M5	M5	4	9	23.9	25	26.5	20.2	4	9.2	9.5
9001110V	MRF O M V 4 M5	M5	4	9	23.9	25	26.5	20.2	4	9.2	9.5
9001601B	MRF O M B 4 M5	M5	4	9	23.9	25	26.5	20.2	4	9.2	9.5
9001002C	MRF O M C 5 M5	M5	5	9	23.9	25	26.5	23.8	4	9.2	12
9001113V	MRF O M V 5 M5	M5	5	9	23.9	25	26.5	23.8	4	9.2	12
9001603B	MRF O M B 5 M5	M5	5	9	23.9	25	26.5	23.8	4	9.2	12
9001007C	MRF O M C 6 M5	M5	6	9	23.9	25	26.5	23.5	4	9.2	11.3
9001105V	MRF O M V 6 M5	M5	6	9	23.9	25	26.5	23.5	4	9.2	11.3
9001612B	MRF O M B 6 M5	M5	6	9	23.9	25	26.5	23.5	4	9.2	11.3
9001011C	MRF O M C 4 1/8	1/8	4	12	29.8	30.9	34	21.3	6	9.8	9.5
9001111V	MRF O M V 4 1/8	1/8	4	12	29.8	30.9	34	21.3	6	9.8	9.5
9001602B	MRF O M B 4 1/8	1/8	4	12	29.8	30.9	34	21.3	6	9.8	9.5
9001012C	MRF O M C 5 1/8	1/8	5	12	29.8	30.9	34	24.8	6	9.8	12
9001112V	MRF O M V 5 1/8	1/8	5	12	29.8	30.9	34	24.8	6	9.8	12
9001604B	MRF O M B 5 1/8	1/8	5	12	29.8	30.9	34	24.8	6	9.8	12
9001003C	MRF O M C 6 1/8	1/8	6	12	29.8	30.9	34	23	6	9.8	11.5
9001101V	MRF O M V 6 1/8	1/8	6	12	29.8	30.9	34	23	6	9.8	11.5
9001605B	MRF O M B 6 1/8	1/8	6	12	29.8	30.9	34	23	6	9.8	11.5
9001005C	MRF O M C 8 1/8	1/8	8	12	29.8	30.9	34	24.8	6	9.8	13.8
9001103V	MRF O M V 8 1/8	1/8	8	12	29.8	30.9	34	24.8	6	9.8	13.8
9001607B	MRF O M B 8 1/8	1/8	8	12	29.8	30.9	34	24.8	6	9.8	13.8
9001004C	MRF O M C 6 1/4	1/4	6	15	35.4	37	38.9	24.5	8	11.1	11.5
9001102V	MRF O M V 6 1/4	1/4	6	15	35.4	37	38.9	24.5	8	11.1	11.5
9001606B	MRF O M B 6 1/4	1/4	6	15	35.4	37	38.9	24.5	8	11.1	11.5
9001006C	MRF O M C 8 1/4	1/4	8	15	35.4	37	38.9	26.5	8	11.1	13.8
9001104V	MRF O M V 8 1/4	1/4	8	15	35.4	37	38.9	26.5	8	11.1	13.8
9001608B	MRF O M B 8 1/4	1/4	8	15	35.4	37	38.9	26.5	8	11.1	13.8
9001010C	MRF O M C 8 3/8	3/8	8	19	42.7	42.7	49.5	28.5	9	13.4	13.8
9001115V	MRF O M V 8 3/8	3/8	8	19	42.7	42.7	49.5	28.5	9	13.4	13.8
9001611B	MRF O M B 8 3/8	3/8	8	19	42.7	42.7	49.5	28.5	9	13.4	13.8
9001008C	MRF O M C 10 1/4	1/4	10	15	35.4	37	38.9	31.4	8	11.1	16.5
9001106V	MRF O M V 10 1/4	1/4	10	15	35.4	37	38.9	31.4	8	11.1	16.5
9001609B	MRF O M B 10 1/4	1/4	10	15	35.4	37	38.9	31.4	8	11.1	16.5
9001014C	MRF O M C 12 1/4	1/4	12	15	35.4	37	38.9	33	8	11.1	19.5
9001123V	MRF O M V 12 1/4	1/4	12	15	35.4	37	38.9	33	8	11.1	19.5
9001623B	MRF O M B 12 1/4	1/4	12	15	35.4	37	38.9	33	8	11.1	19.5
9001009C	MRF O M C 10 3/8	3/8	10	19	42.7	42.7	49.5	32.8	9	13.4	16
9001114V	MRF O M V 10 3/8	3/8	10	19	42.7	42.7	49.5	32.8	9	13.4	16
9001610B	MRF O M B 10 3/8	3/8	10	19	42.7	42.7	49.5	32.8	9	13.4	16
9001015C	MRF O M C 12 3/8	3/8	12	19	42.7	42.7	49.5	35.3	9	13.4	19.5
9001124V	MRF O M V 12 3/8	3/8	12	19	42.7	42.7	49.5	35.3	9	13.4	19.5
9001624B	MRF O M B 12 3/8	3/8	12	19	42.7	42.7	49.5	35.3	9	13.4	19.5
9001016C	MRF O M C 12 1/2	1/2	12	22	50.6	51.4	55.3	37	11	15.9	19.5
9001125V	MRF O M V 12 1/2	1/2	12	22	50.6	51.4	55.3	37	11	15.9	19.5
9001625B	MRF O M B 12 1/2	1/2	12	22	50.6	51.4	55.3	37	11	15.9	19.5
9001019C	MRF O M C 14 1/2	1/2	14	22	50.6	51.4	55.3	35	11	15.9	22
9001128V	MRF O M V 14 1/2	1/2	14	22	50.6	51.4	55.3	35	11	15.9	22
9001628B	MRF O M B 14 1/2	1/2	14	22	50.6	51.4	55.3	35	11	15.9	22

MRF COMPACT "O" TECHNOPOLYMER RING

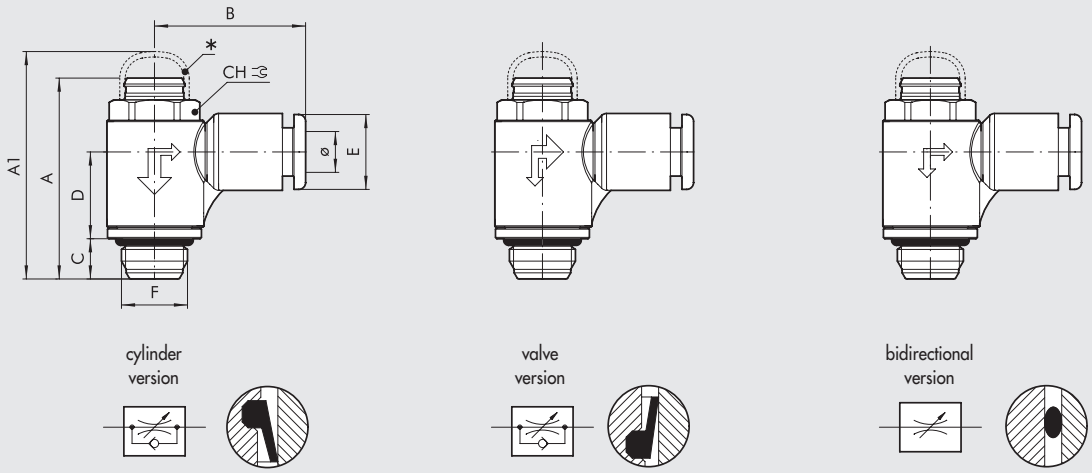

* OPTIONAL ANTI-TAMPERING CAP

Code	Description	F	Ø	CH	A min	A max	A1	B	C	D	E
9011001C	MRF O T C 4 M5	M5	4	9	23.9	25	26.5	19.1	4	9.5	9.2
9011110V	MRF O T V 4 M5	M5	4	9	23.9	25	26.5	19.1	4	9.5	9.2
9011601B	MRF O T B 4 M5	M5	4	9	23.9	25	26.5	19.1	4	9.5	9.2
9011007C	MRF O T C 6 M5	M5	6	9	23.9	25	26.5	20.8	4	9.5	11.3
9011105V	MRF O T V 6 M5	M5	6	9	23.9	25	26.5	20.8	4	9.5	11.3
9011612B	MRF O T B 6 M5	M5	6	9	23.9	25	26.5	20.8	4	9.5	11.3
9011011C	MRF O T C 4 1/8	1/8	4	12	29.8	30.9	34	21	6	12.9	9.2
9011111V	MRF O T V 4 1/8	1/8	4	12	29.8	30.9	34	21	6	12.9	9.2
9011602B	MRF O T B 4 1/8	1/8	4	12	29.8	30.9	34	21	6	12.9	9.2
9011003C	MRF O T C 6 1/8	1/8	6	12	29.8	30.9	34	22.3	6	12.9	11.3
9011101V	MRF O T V 6 1/8	1/8	6	12	29.8	30.9	34	22.3	6	12.9	11.3
9011605B	MRF O T B 6 1/8	1/8	6	12	29.8	30.9	34	22.3	6	12.9	11.3
9011005C	MRF O T C 8 1/8	1/8	8	12	29.8	30.9	34	25.6	6	12.9	13.8
9011103V	MRF O T V 8 1/8	1/8	8	12	29.8	30.9	34	25.6	6	12.9	13.8
9011607B	MRF O T B 8 1/8	1/8	8	12	29.8	30.9	34	25.6	6	12.9	13.8
9011004C	MRF O T C 6 1/4	1/4	6	15	35.4	37	38.9	24.3	8	15	11.3
9011102V	MRF O T V 6 1/4	1/4	6	15	35.4	37	38.9	24.3	8	15	11.3
9011606B	MRF O T B 6 1/4	1/4	6	15	35.4	37	38.9	24.3	8	15	11.3
9011006C	MRF O T C 8 1/4	1/4	8	15	35.4	37	38.9	27.2	8	15	13.8
9011104V	MRF O T V 8 1/4	1/4	8	15	35.4	37	38.9	27.2	8	15	13.8
9011608B	MRF O T B 8 1/4	1/4	8	15	35.4	37	38.9	27.2	8	15	13.8
9011008C	MRF O T C 10 1/4	1/4	10	15	35.4	37	38.9	28.6	8	15	16
9011106V	MRF O T V 10 1/4	1/4	10	15	35.4	37	38.9	28.6	8	15	16
9011609B	MRF O T B 10 1/4	1/4	10	15	35.4	37	38.9	28.6	8	15	16
9011014C	MRF O T C 12 1/4	1/4	12	15	35.4	37	38.9	31	8	15	19.5
9011123V	MRF O T V 12 1/4	1/4	12	15	35.4	37	38.9	31	8	15	19.5
9011623B	MRF O T B 12 1/4	1/4	12	15	35.4	37	38.9	31	8	15	19.5
9011009C	MRF O T C 10 3/8	3/8	10	19	42.7	42.7	49.5	30.3	9	17.9	16
9011114V	MRF O T V 10 3/8	3/8	10	19	42.7	42.7	49.5	30.3	9	17.9	16
9011610B	MRF O T B 10 3/8	3/8	10	19	42.7	42.7	49.5	30.3	9	17.9	16
9011015C	MRF O T C 12 3/8	3/8	12	19	42.7	42.7	49.5	32.4	9	17.9	19.5
9011124V	MRF O T V 12 3/8	3/8	12	19	42.7	42.7	49.5	32.4	9	17.9	19.5
9011624B	MRF O T B 12 3/8	3/8	12	19	42.7	42.7	49.5	32.4	9	17.9	19.5
9011016C	MRF O T C 12 1/2	1/2	12	22	50.6	51.4	55.3	34	11	20.1	19.5
9011125V	MRF O T V 12 1/2	1/2	12	22	50.6	51.4	55.3	34	11	20.1	19.5
9011625B	MRF O T B 12 1/2	1/2	12	22	50.6	51.4	55.3	34	11	20.1	19.5

MRF COMPACT "O" THREADED BRASS RING

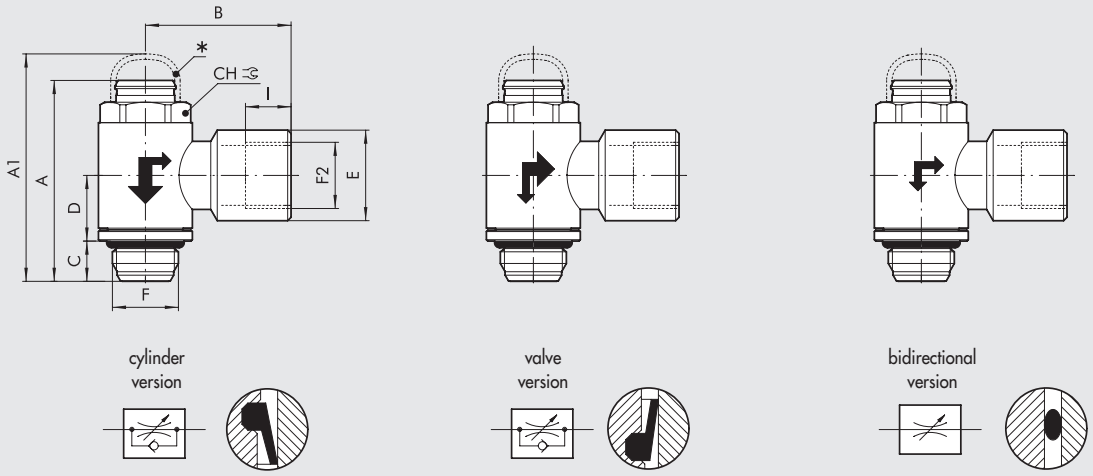

* OPTIONAL ANTI-TAMPERING CAP

Code	Description	F	F2	CH	A min	A max	A1	B	C	D	E	I
9001020C	MRF O F C 1/8 1/8	1/8	1/8	12	29.8	30.9	34	21.4	6	9.8	13.3	6.7
9001120V	MRF O F V 1/8 1/8	1/8	1/8	12	29.8	30.9	34	21.4	6	9.8	13.3	6.7
9001620B	MRF O F B 1/8 1/8	1/8	1/8	12	29.8	30.9	34	21.4	6	9.8	13.3	6.7
9001021C	MRF O F C 1/4 1/4	1/4	1/4	15	35.4	37	38.9	25.5	8	11.1	16.7	8
9001121V	MRF O F V 1/4 1/4	1/4	1/4	15	35.4	37	38.9	25.5	8	11.1	16.7	8
9001621B	MRF O F B 1/4 1/4	1/4	1/4	15	35.4	37	38.9	25.5	8	11.1	16.7	8
9001022C	MRF O F C 3/8 3/8	3/8	3/8	19	42.7	42.7	49.5	31.5	9	13.4	20.2	10
9001122V	MRF O F V 3/8 3/8	3/8	3/8	19	42.7	42.7	49.5	31.5	9	13.4	20.2	10
9001622B	MRF O F B 3/8 3/8	3/8	3/8	19	42.7	42.7	49.5	31.5	9	13.4	20.2	10
9001023C	MRF O F C 1/2 1/2	1/2	1/2	22	50.6	51.4	55.3	36	11	15.9	25.5	11
9001126V	MRF O F V 1/2 1/2	1/2	1/2	22	50.6	51.4	55.3	36	11	15.9	25.5	11
9001626B	MRF O F B 1/2 1/2	1/2	1/2	22	50.6	51.4	55.3	36	11	15.9	25.5	11

ACCESSORIES MRF COMPACT "O"

ANTI-TAMPERING CAP



Code	Description
9090001	Cap MRF O M5
9090002	Cap MRF O 1/8-1/4
9090003	Cap MRF O 3/8-1/2

NOTE: Adjust the flow rate via the regulating pin.
Apply the anti-tampering cap and press on firmly to prevent access to the regulation pin.
If the MRF needs to be recalibrated, remove the cap using the grippers provided.
IMPORTANT: The cap cannot be re-used after it has been removed.

MRF COMPACT "N" BRASS RING

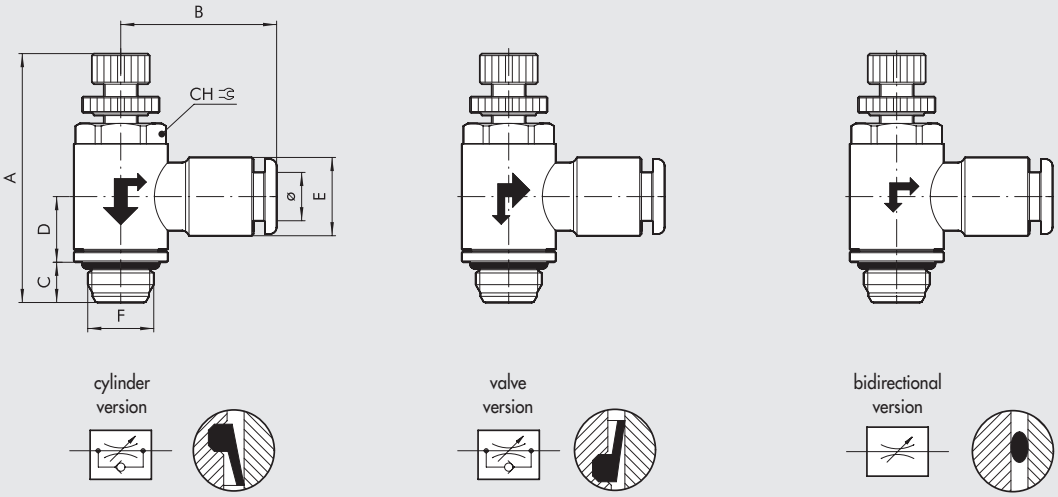

Code	Description	F	Ø	CH	A min	A max	B	C	D	E
9031001C	MRF N M C 4 M5	M5	4	9	27.7	31	20.2	4	9.2	9.5
9031101V	MRF N M V 4 M5	M5	4	9	27.7	31	20.2	4	9.2	9.5
9031201B	MRF N M B 4 M5	M5	4	9	27.7	31	20.2	4	9.2	9.5
9031003C	MRF N M C 5 M5	M5	5	9	27.7	31	23.8	4	9.2	12
9031103V	MRF N M V 5 M5	M5	5	9	27.7	31	23.8	4	9.2	12
9031203B	MRF N M B 5 M5	M5	5	9	27.7	31	23.8	4	9.2	12
9031005C	MRF N M C 6 M5	M5	6	9	27.7	31	23.5	4	9.2	11.3
9031105V	MRF N M V 6 M5	M5	6	9	27.7	31	23.5	4	9.2	11.3
9031205B	MRF N M B 6 M5	M5	6	9	27.7	31	23.5	4	9.2	11.3
9031002C	MRF N M C 4 1/8	1/8	4	12	33.5	37.6	21.3	6	9.8	9.5
9031102V	MRF N M V 4 1/8	1/8	4	12	33.5	37.6	21.3	6	9.8	9.5
9031202B	MRF N M B 4 1/8	1/8	4	12	33.5	37.6	21.3	6	9.8	9.5
9031004C	MRF N M C 5 1/8	1/8	5	12	33.5	37.6	24.8	6	9.8	12
9031104V	MRF N M V 5 1/8	1/8	5	12	33.5	37.6	24.8	6	9.8	12
9031204B	MRF N M B 5 1/8	1/8	5	12	33.5	37.6	24.8	6	9.8	12
9031006C	MRF N M C 6 1/8	1/8	6	12	33.5	37.6	23	6	9.8	11.5
9031106V	MRF N M V 6 1/8	1/8	6	12	33.5	37.6	23	6	9.8	11.5
9031206B	MRF N M B 6 1/8	1/8	6	12	33.5	37.6	23	6	9.8	11.5
9031008C	MRF N M C 8 1/8	1/8	8	12	33.5	37.6	24.8	6	9.8	13.8
9031108V	MRF N M V 8 1/8	1/8	8	12	33.5	37.6	24.8	6	9.8	13.8
9031208B	MRF N M B 8 1/8	1/8	8	12	33.5	37.6	24.8	6	9.8	13.8
9031007C	MRF N M C 6 1/4	1/4	6	15	38.8	43.7	24.5	8	11.1	11.5
9031107V	MRF N M V 6 1/4	1/4	6	15	38.8	43.7	24.5	8	11.1	11.5
9031207B	MRF N M B 6 1/4	1/4	6	15	38.8	43.7	24.5	8	11.1	11.5
9031009C	MRF N M C 8 1/4	1/4	8	15	38.8	43.7	26.5	8	11.1	13.8
9031109V	MRF N M V 8 1/4	1/4	8	15	38.8	43.7	26.5	8	11.1	13.8
9031209B	MRF N M B 8 1/4	1/4	8	15	38.8	43.7	26.5	8	11.1	13.8
9031010C	MRF N M C 8 3/8	3/8	8	19	47.2	52	28.5	9	13.4	13.8
9031110V	MRF N M V 8 3/8	3/8	8	19	47.2	52	28.5	9	13.4	13.8
9031210B	MRF N M B 8 3/8	3/8	8	19	47.2	52	28.5	9	13.4	13.8
9031011C	MRF N M C 10 1/4	1/4	10	15	38.8	43.7	31.4	8	11.1	16.5
9031111V	MRF N M V 10 1/4	1/4	10	15	38.8	43.7	31.4	8	11.1	16.5
9031211B	MRF N M B 10 1/4	1/4	10	15	38.8	43.7	31.4	8	11.1	16.5
9031014C	MRF N M C 12 1/4	1/4	12	15	38.8	43.7	33	8	11.1	19.5
9031114V	MRF N M V 12 1/4	1/4	12	15	38.8	43.7	33	8	11.1	19.5
9031214B	MRF N M B 12 1/4	1/4	12	15	38.8	43.7	33	8	11.1	19.5
9031012C	MRF N M C 10 3/8	3/8	10	19	47.2	52	32.8	9	13.4	16
9031112V	MRF N M V 10 3/8	3/8	10	19	47.2	52	32.8	9	13.4	16
9031212B	MRF N M B 10 3/8	3/8	10	19	47.2	52	32.8	9	13.4	16
9031015C	MRF N M C 12 3/8	3/8	12	19	47.2	52	35.3	9	13.4	19.5
9031115V	MRF N M V 12 3/8	3/8	12	19	47.2	52	35.3	9	13.4	19.5
9031215B	MRF N M B 12 3/8	3/8	12	19	47.2	52	35.3	9	13.4	19.5
9031016C	MRF N M C 12 1/2	1/2	12	22	53	59.8	37	11	15.9	19.5
9031116V	MRF N M V 12 1/2	1/2	12	22	53	59.8	37	11	15.9	19.5
9031216B	MRF N M B 12 1/2	1/2	12	22	53	59.8	37	11	15.9	19.5
9031019C	MRF N M C 14 1/2	1/2	14	22	53	59.8	35	11	15.9	22
9031119V	MRF N M V 14 1/2	1/2	14	22	53	59.8	35	11	15.9	22
9031219B	MRF N M B 14 1/2	1/2	14	22	53	59.8	35	11	15.9	22

UNF NPT

METAL WORK PNEUMATIC

MRF COMPACT "N" BRASS RING - INCH TUBES AND UNF or NPT THREAD

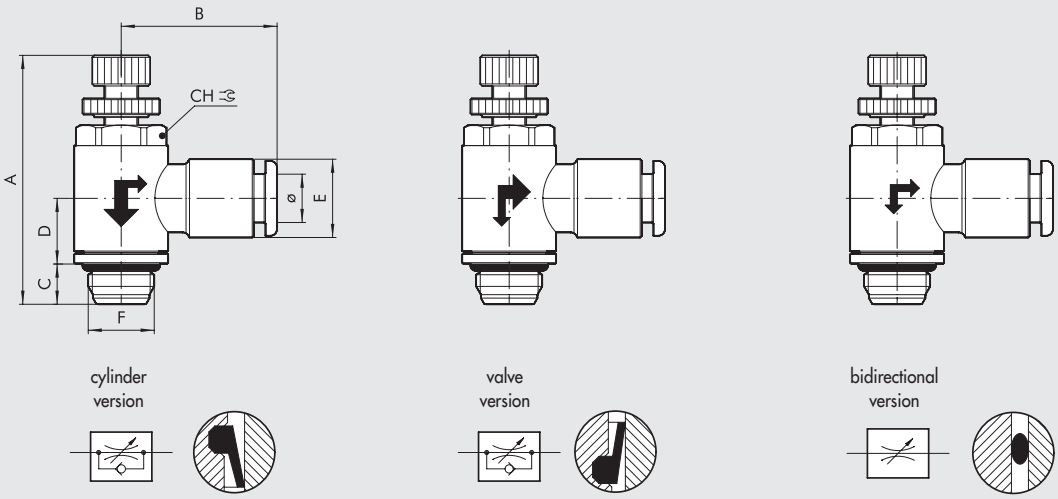

Code	Description	F	Ø	Ch		A min	A max	B	C	D	E
				Inc	mm						
9U31001C	MRF N M C 5/32 10-32 UNF	10-32 UNF	5/32"	0.354	9	27.7	31	20.2	4	9.2	9.5
9U31101V	MRF N M V 5/32 10-32 UNF	10-32 UNF	5/32"	0.354	9	27.7	31	20.2	4	9.2	9.5
9U31201B	MRF N M B 5/32 10-32 UNF	10-32 UNF	5/32"	0.354	9	27.7	31	20.2	4	9.2	9.5
9U31005C	MRF N M C 1/4 10-32 UNF	10-32 UNF	1/4"	0.354	9	27.7	31	21.3	4	9.2	11.8
9U31105V	MRF N M V 1/4 10-32 UNF	10-32 UNF	1/4"	0.354	9	27.7	31	21.3	4	9.2	11.8
9U31205B	MRF N M B 1/4 10-32 UNF	10-32 UNF	1/4"	0.354	9	27.7	31	21.3	4	9.2	11.8
9U31002C	MRF N M C 5/32 1/8 NPT	1/8 NPT	5/32"	0.472	12	33.5	37.6	21.3	6	9.8	9.5
9U31102V	MRF N M V 5/32 1/8 NPT	1/8 NPT	5/32"	0.472	12	33.5	37.6	21.3	6	9.8	9.5
9U31202B	MRF N M B 5/32 1/8 NPT	1/8 NPT	5/32"	0.472	12	33.5	37.6	21.3	6	9.8	9.5
9U31006C	MRF N M C 1/4 1/8 NPT	1/8 NPT	1/4"	0.472	12	33.5	37.6	21.3	6	9.8	11.8
9U31106V	MRF N M V 1/4 1/8 NPT	1/8 NPT	1/4"	0.472	12	33.5	37.6	21.3	6	9.8	11.8
9U31206B	MRF N M B 1/4 1/8 NPT	1/8 NPT	1/4"	0.472	12	33.5	37.6	21.3	6	9.8	11.8
9U31008C	MRF N M C 5/16 1/8 NPT	1/8 NPT	5/16"	0.472	12	33.5	37.6	24.8	6	9.8	13.8
9U31108V	MRF N M V 5/16 1/8 NPT	1/8 NPT	5/16"	0.472	12	33.5	37.6	24.8	6	9.8	13.8
9U31208B	MRF N M B 5/16 1/8 NPT	1/8 NPT	5/16"	0.472	12	33.5	37.6	24.8	6	9.8	13.8
9U31010C	MRF N M C 3/8 1/8 NPT	1/8 NPT	3/8"	0.472	12	33.5	37.6	27.8	6	9.8	16.5
9U31110V	MRF N M V 3/8 1/8 NPT	1/8 NPT	3/8"	0.472	12	33.5	37.6	27.8	6	9.8	16.5
9U31210B	MRF N M B 3/8 1/8 NPT	1/8 NPT	3/8"	0.472	12	33.5	37.6	27.8	6	9.8	16.5
9U31007C	MRF N M C 1/4 1/4 NPT	1/4 NPT	1/4"	0.591	15	38.8	43.7	23	8	11.1	13.8
9U31107V	MRF N M V 1/4 1/4 NPT	1/4 NPT	1/4"	0.591	15	38.8	43.7	23	8	11.1	13.8
9U31207B	MRF N M B 1/4 1/4 NPT	1/4 NPT	1/4"	0.591	15	38.8	43.7	23	8	11.1	13.8
9U31009C	MRF N M C 5/16 1/4 NPT	1/4 NPT	5/16"	0.591	15	38.8	43.7	26.5	8	11.1	13.8
9U31109V	MRF N M V 5/16 1/4 NPT	1/4 NPT	5/16"	0.591	15	38.8	43.7	26.5	8	11.1	13.8
9U31209B	MRF N M B 5/16 1/4 NPT	1/4 NPT	5/16"	0.591	15	38.8	43.7	26.5	8	11.1	13.8
9U31011C	MRF N M C 3/8 1/4 NPT	1/4 NPT	3/8"	0.591	15	38.8	43.7	29.8	8	11.1	16.5
9U31111V	MRF N M V 3/8 1/4 NPT	1/4 NPT	3/8"	0.591	15	38.8	43.7	29.8	8	11.1	16.5
9U31211B	MRF N M B 3/8 1/4 NPT	1/4 NPT	3/8"	0.591	15	38.8	43.7	29.8	8	11.1	16.5
9U31014C	MRF N M C 1/2 1/4 NPT	1/4 NPT	1/2"	0.591	15	38.8	43.7	34.3	8	11.1	21
9U31114V	MRF N M V 1/2 1/4 NPT	1/4 NPT	1/2"	0.591	15	38.8	43.7	34.3	8	11.1	21
9U31214B	MRF N M B 1/2 1/4 NPT	1/4 NPT	1/2"	0.591	15	38.8	43.7	34.3	8	11.1	21
9U31012C	MRF N M C 3/8 3/8 NPT	3/8 NPT	3/8"	3/4	19	47.2	52	30.6	9	13.4	16
9U31112V	MRF N M V 3/8 3/8 NPT	3/8 NPT	3/8"	3/4	19	47.2	52	30.6	9	13.4	16
9U31212B	MRF N M B 3/8 3/8 NPT	3/8 NPT	3/8"	3/4	19	47.2	52	30.6	9	13.4	16
9U31015C	MRF N M C 1/2 3/8 NPT	3/8 NPT	1/2"	3/4	19	47.2	52	36.5	9	13.4	20.2
9U31115V	MRF N M V 1/2 3/8 NPT	3/8 NPT	1/2"	3/4	19	47.2	52	36.5	9	13.4	20.2
9U31215B	MRF N M B 1/2 3/8 NPT	3/8 NPT	1/2"	3/4	19	47.2	52	36.5	9	13.4	20.2
9U31016C	MRF N M C 1/2 1/2 NPT	1/2 NPT	1/2"	7/8	22	53	59.8	37.8	11	15.9	20.2
9U31116V	MRF N M V 1/2 1/2 NPT	1/2 NPT	1/2"	7/8	22	53	59.8	37.8	11	15.9	20.2
9U31216B	MRF N M B 1/2 1/2 NPT	1/2 NPT	1/2"	7/8	22	53	59.8	37.8	11	15.9	20.2

MRF COMPACT "N" TECHNOPOLYMER RING

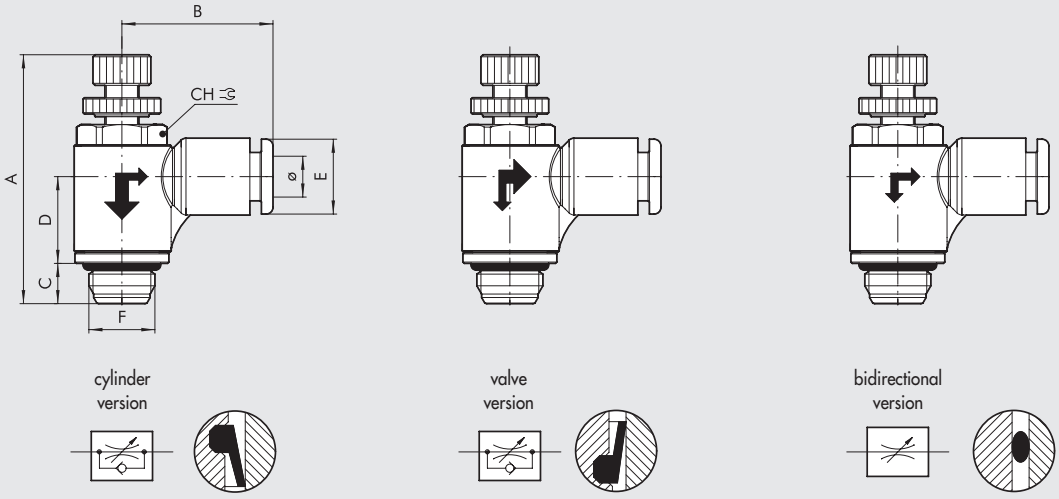

Code	Description	F	Ø	CH	A min	A max	B	C	D	E
9021001C	MRF N T C 4 M5	M5	4	9	27.7	31	19.1	4	9.5	9.2
9021101V	MRF N T V 4 M5	M5	4	9	27.7	31	19.1	4	9.5	9.2
9021201B	MRF N T B 4 M5	M5	4	9	27.7	31	19.1	4	9.5	9.2
9021005C	MRF N T C 6 M5	M5	6	9	27.7	31	20.8	4	9.5	11.3
9021105V	MRF N T V 6 M5	M5	6	9	27.7	31	20.8	4	9.5	11.3
9021205B	MRF N T B 6 M5	M5	6	9	27.7	31	20.8	4	9.5	11.3
9021002C	MRF N T C 4 1/8	1/8	4	12	33.5	37.6	21	6	12.9	9.2
9021102V	MRF N T V 4 1/8	1/8	4	12	33.5	37.6	21	6	12.9	9.2
9021202B	MRF N T B 4 1/8	1/8	4	12	33.5	37.6	21	6	12.9	9.2
9021006C	MRF N T C 6 1/8	1/8	6	12	33.5	37.6	22.3	6	12.9	11.3
9021106V	MRF N T V 6 1/8	1/8	6	12	33.5	37.6	22.3	6	12.9	11.3
9021206B	MRF N T B 6 1/8	1/8	6	12	33.5	37.6	22.3	6	12.9	11.3
9021008C	MRF N T C 8 1/8	1/8	8	12	33.5	37.6	25.6	6	12.9	13.8
9021108V	MRF N T V 8 1/8	1/8	8	12	33.5	37.6	25.6	6	12.9	13.8
9021208B	MRF N T B 8 1/8	1/8	8	12	33.5	37.6	25.6	6	12.9	13.8
9021007C	MRF N T C 6 1/4	1/4	6	15	38.8	43.7	24.3	8	15	11.3
9021107V	MRF N T V 6 1/4	1/4	6	15	38.8	43.7	24.3	8	15	11.3
9021207B	MRF N T B 6 1/4	1/4	6	15	38.8	43.7	24.3	8	15	11.3
9021009C	MRF N T C 8 1/4	1/4	8	15	38.8	43.7	27.2	8	15	13.8
9021109V	MRF N T V 8 1/4	1/4	8	15	38.8	43.7	27.2	8	15	13.8
9021209B	MRF N T B 8 1/4	1/4	8	15	38.8	43.7	27.2	8	15	13.8
9021011C	MRF N T C 10 1/4	1/4	10	15	38.8	43.7	28.6	8	15	16
9021111V	MRF N T V 10 1/4	1/4	10	15	38.8	43.7	28.6	8	15	16
9021211B	MRF N T B 10 1/4	1/4	10	15	38.8	43.7	28.6	8	15	16
9021014C	MRF N T C 12 1/4	1/4	12	15	38.8	43.7	31	8	15	19.5
9021114V	MRF N T V 12 1/4	1/4	12	15	38.8	43.7	31	8	15	19.5
9021214B	MRF N T B 12 1/4	1/4	12	15	38.8	43.7	31	8	15	19.5
9021012C	MRF N T C 10 3/8	3/8	10	19	47.2	52	30.3	9	17.9	16
9021112V	MRF N T V 10 3/8	3/8	10	19	47.2	52	30.3	9	17.9	16
9021212B	MRF N T B 10 3/8	3/8	10	19	47.2	52	30.3	9	17.9	16
9021015C	MRF N T C 12 3/8	3/8	12	19	47.2	52	32.4	9	17.9	19.5
9021115V	MRF N T V 12 3/8	3/8	12	19	47.2	52	32.4	9	17.9	19.5
9021215B	MRF N T B 12 3/8	3/8	12	19	47.2	52	32.4	9	17.9	19.5
9021016C	MRF N T C 12 1/2	1/2	12	22	53	59.8	34	11	20.1	19.5
9021116V	MRF N T V 12 1/2	1/2	12	22	53	59.8	34	11	20.1	19.5
9021216B	MRF N T B 12 1/2	1/2	12	22	53	59.8	34	11	20.1	19.5

MRF COMPACT "N" THREADED BRASS RING

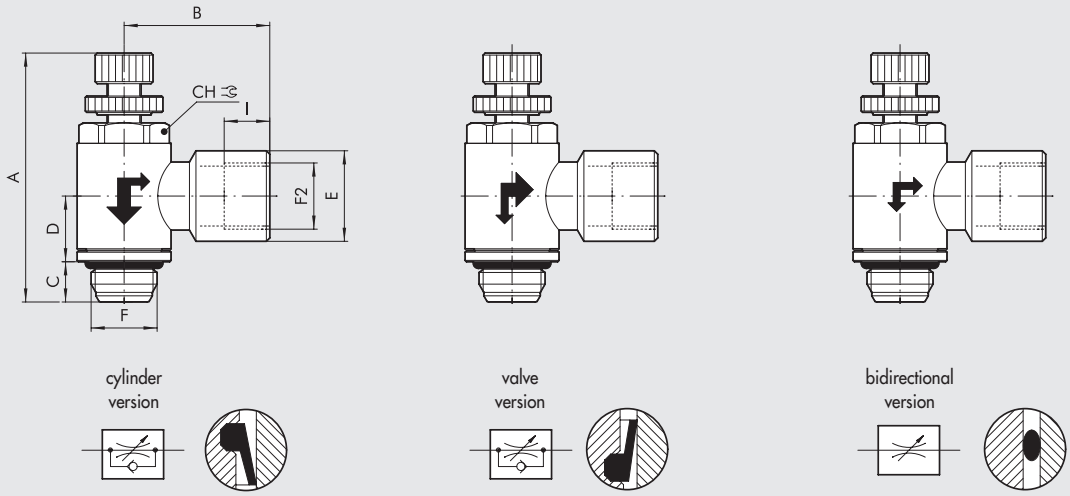

Code	Description	F	F2	CH	A min	A max	B	C	D	E	I
9031301C	MRF N F C 1/8 1/8	1/8	1/8	12	33.5	37.6	21.4	6	9.8	13.3	6.7
9031401V	MRF N F V 1/8 1/8	1/8	1/8	12	33.5	37.6	21.4	6	9.8	13.3	6.7
9031501B	MRF N F B 1/8 1/8	1/8	1/8	12	33.5	37.6	21.4	6	9.8	13.3	6.7
9031302C	MRF N F C 1/4 1/4	1/4	1/4	15	38.8	43.7	25.5	8	11.1	16.7	8
9031402V	MRF N F V 1/4 1/4	1/4	1/4	15	38.8	43.7	25.5	8	11.1	16.7	8
9031502B	MRF N F B 1/4 1/4	1/4	1/4	15	38.8	43.7	25.5	8	11.1	16.7	8
9031303C	MRF N F C 3/8 3/8	3/8	3/8	19	47.2	52	31.5	9	13.4	20.2	10
9031403V	MRF N F V 3/8 3/8	3/8	3/8	19	47.2	52	31.5	9	13.4	20.2	10
9031503B	MRF N F B 3/8 3/8	3/8	3/8	19	47.2	52	31.5	9	13.4	20.2	10
9031304C	MRF N F C 1/2 1/2	1/2	1/2	22	53	59.8	36	11	15.9	25.5	11
9031404V	MRF N F V 1/2 1/2	1/2	1/2	22	53	59.8	36	11	15.9	25.5	11
9031504B	MRF N F B 1/2 1/2	1/2	1/2	22	53	59.8	36	11	15.9	25.5	11

FLOW MICRO-REGULATOR SERIES MRF HIGH-FLOW

Main features:
- high flow rate during regulation and discharge
- excellent regulation features
- regulation using a screwdriver and/or a knob and fixing using a ring nut
- available in sizes 1/8 and 1/4 only with a technopolymer ring
- can be mounted with an automatic screwdriver
- fitted with a swivel ring with the MRF mounted in position.

TECHNICAL DATA

		1/8			1/4			
Pipe		Ø 4	Ø 6	Ø 8	Ø 6	Ø 8	Ø 10	Ø 12
Max input pressure	MPa	1						
	bar	10						
	psi	145						
Temperature range: technopolymer ring	°C	– 10 to + 50						
	°F	+ 14 to + 122						
Max flow rate on regulation at 6.3 bar	Nl/min	500	600	650	850	900	1150	1200
Max flow rate on exhaust at 6.3 bar with closed needle	Nl/min	400	500	600	700	850	875	950
Max flow rate on exhaust at 6.3 bar with open needle	Nl/min	500	750	900	1000	1250	1350	1450
Regulation		Manual or via screwdriver						
Internal system		Tapered needle						
Fluid		Filtered, lubricated or unlubricated compressed air						

COMPONENTS

① Nickel-plated brass knob
② Nickel-plated brass securing ring nut
③ Brass needle
④ Nickel-plated brass bush
⑤ Nickel-plated brass body
⑥ Nickel-plated brass retaining ring
⑦ NBR gasket
⑧ Technopolymer swivel ring
⑨ NBR gasket
⑩ Technopolymer spring supporting ring
⑪ Stainless steel grabbing spring
⑫ Technopolymer retaining bush
⑬ Technopolymer release bush

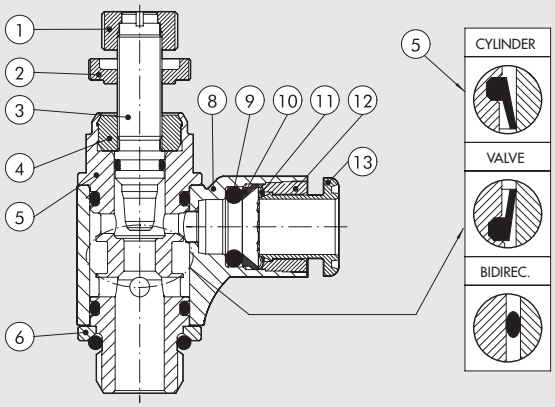

FLOW CHARTS

MRF 1/8

Flow rate [Nl/min]

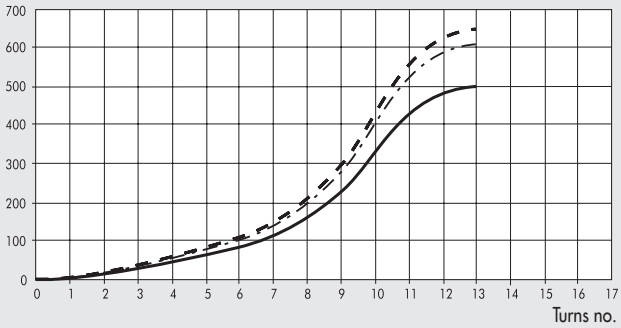

MRF 1/4

Flow rate [Nl/min]

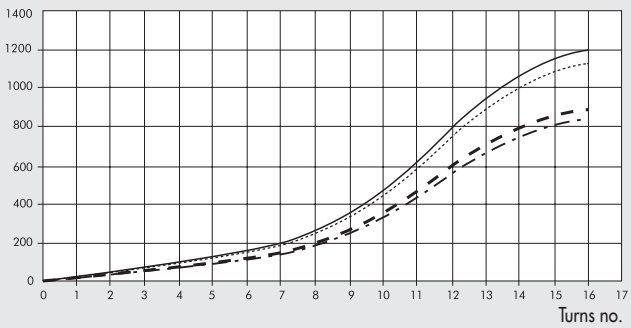

Ø4 (5/32″)
Ø6 - Ø1/4″
Ø8 (5/16″)
Ø10 - Ø3/8″
Ø12 - Ø1/2″

MRF HIGH-FLOW

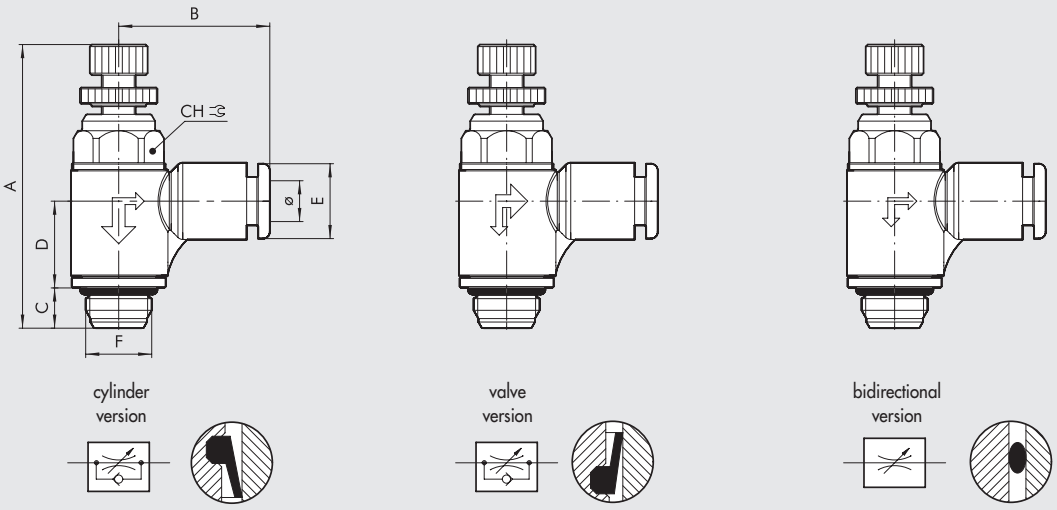

Code	Description	F	Ø	CH	A min	A max	B	C	D	E
9025002C	MRF H T C 4 1/8	1/8	4	12	38.5	43.3	21	6	12.9	9.2
9025102V	MRF H T V 4 1/8	1/8	4	12	38.5	43.3	21	6	12.9	9.2
9025602B	MRF H T B 4 1/8	1/8	4	12	38.5	43.3	21	6	12.9	9.2
9025006C	MRF H T C 6 1/8	1/8	6	12	38.5	43.3	22.3	6	12.9	11.3
9025106V	MRF H T V 6 1/8	1/8	6	12	38.5	43.3	22.3	6	12.9	11.3
9025606B	MRF H T B 6 1/8	1/8	6	12	38.5	43.3	22.3	6	12.9	11.3
9025008C	MRF H T C 8 1/8	1/8	8	12	38.5	43.3	25.6	6	12.9	13.8
9025108V	MRF H T V 8 1/8	1/8	8	12	38.5	43.3	25.6	6	12.9	13.8
9025608B	MRF H T B 8 1/8	1/8	8	12	38.5	43.3	25.6	6	12.9	13.8
9025007C	MRF H T C 6 1/4	1/4	6	15	44.3	49.8	24.3	8	15	11.3
9025107V	MRF H T V 6 1/4	1/4	6	15	44.3	49.8	24.3	8	15	11.3
9025607B	MRF H T B 6 1/4	1/4	6	15	44.3	49.8	24.3	8	15	11.3
9025009C	MRF H T C 8 1/4	1/4	8	15	44.3	49.8	27.2	8	15	13.8
9025109V	MRF H T V 8 1/4	1/4	8	15	44.3	49.8	27.2	8	15	13.8
9025609B	MRF H T B 8 1/4	1/4	8	15	44.3	49.8	27.2	8	15	13.8
9025011C	MRF H T C 10 1/4	1/4	10	15	44.3	49.8	28.6	8	15	16
9025111V	MRF H T V 10 1/4	1/4	10	15	44.3	49.8	28.6	8	15	16
9025611B	MRF H T B 10 1/4	1/4	10	15	44.3	49.8	28.6	8	15	16
9025014C	MRF H T C 12 1/4	1/4	12	15	44.3	49.8	31	8	15	19.5
9025114V	MRF H T V 12 1/4	1/4	12	15	44.3	49.8	31	8	15	19.5
9025614B	MRF H T B 12 1/4	1/4	12	15	44.3	49.8	31	8	15	19.5

SYNOPTIC, SIZES AND VERSIONS

M R F	H	T	C	4	1/8
FAMILY	**TYPE**	**RING**	**FUNCTION**	**Ø PIPE**	**Ø THREAD**
Flow microregulator	**H** High flow	**T** Technopolymer with push-in fitting	**C** For cylinder **V** For valve **B** Bidirectional	**4:** Ø 4 **6:** Ø 6 **8:** Ø 8 **10:** Ø 10 **12:** Ø 12	**1/8:** 1/8 **1/4:** 1/4

FLOW MICRO-REGULATOR SERIES MRF PUSH-LOCK

Main features:
- excellent regulation
- regulation with a push-lock knob: when the desired position has been reached, the knob can moved to the lock position to maintain the set regulation
- possibility of purchasing the anti-tampering cap that, when pushed into the lock position, prevents the MRF from being operated and any undesired regulation
- available in the sizes 1/8 and 1/4 only with a technopolymer ring
- can be fitted with an automatic screwdriver
- come with a swivel ring with the MRF mounted in position.

TECHNICAL DATA

		1/8			1/4			
Pipe		Ø 4	Ø 6	Ø 8	Ø 6	Ø 8	Ø 10	Ø 12
Max. input pressure	MPa	1						
	bar	10						
	psi	145						
Temperature range: technopolymer ring	°C	– 10 to + 50						
	°F	+ 14 to + 122						
Max. flow rate on regulation at 6.3 bar	Nl/min	350	380	400	750	850	950	1000
Max. flow rate on exhaust at 6.3 with closed needle	Nl/min	300	350	390	450	475	500	550
Max. flow rate on exhaust at 6.3 with open needle	Nl/min	450	600	650	850	1050	1150	1250
Regulation		Manual with Push-Lock knob						
Internal system		Tapered needle						
Fluid		Filtered, lubricated or unlubricated compressed air						

COMPONENTS

① Technopolymer knob
② Brass needle
③ Nickel-plated brass body
④ Nickel-plated brass retaining ring
⑤ Brass gasket holder insert
⑥ NBR gasket
⑦ Technopolymer revolving ring
⑧ NBR gasket
⑨ Technopolymer spring supporting ring
⑩ Stainless steel grabbing spring
⑪ Technopolymer retaining bush
⑫ Technopolymer release bush

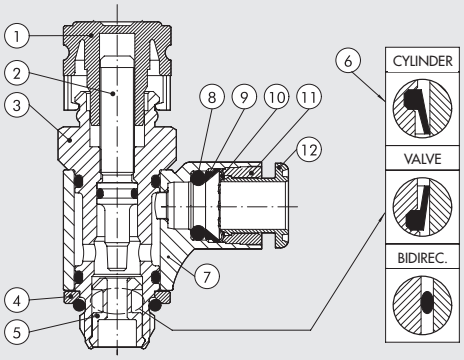

FLOW CHARTS

MRF 1/8

Flow rate [Nl/min]

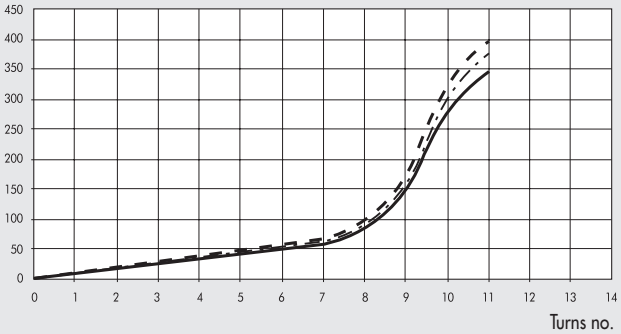

MRF 1/4

Flow rate [Nl/min]

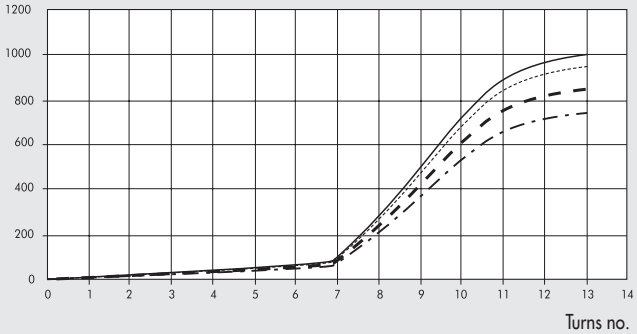

Ø4 (5/32″)
Ø6 - Ø1/4″
Ø8 (5/16″)
Ø10 - Ø3/8″
Ø12 - Ø1/2″

METAL WORK PNEUMATIC

MRF PUSH-LOCK

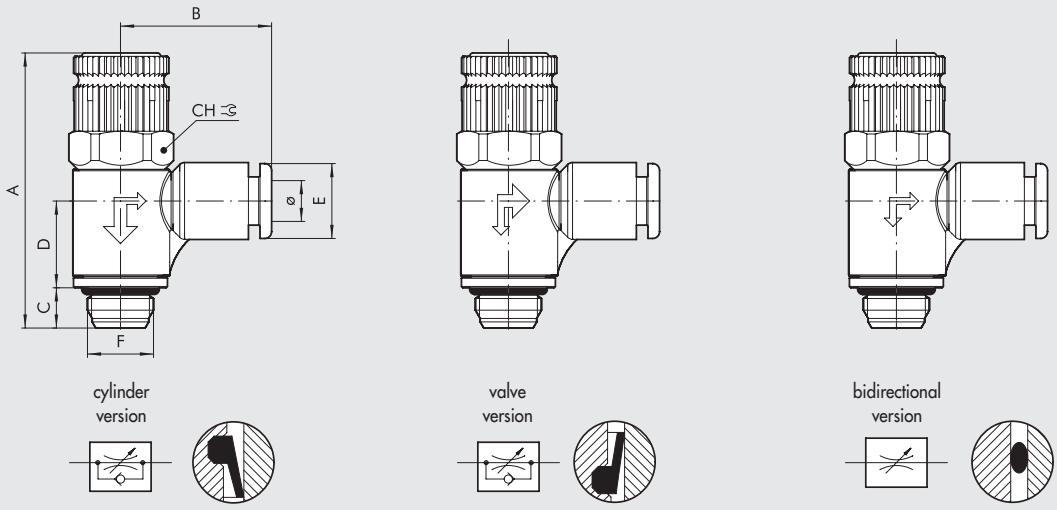

Code	Description	F	Ø	CH	A min	A max	B	C	D	E
9026002C	MRF P T C 4 1/8	1/8	4	14	41.2	43.4	21	6	12.9	9.2
9026102V	MRF P T V 4 1/8	1/8	4	14	41.2	43.4	21	6	12.9	9.2
9026602B	MRF P T B 4 1/8	1/8	4	14	41.2	43.4	21	6	12.9	9.2
9026006C	MRF P T C 6 1/8	1/8	6	14	41.2	43.4	22.3	6	12.9	11.3
9026106V	MRF P T V 6 1/8	1/8	6	14	41.2	43.4	22.3	6	12.9	11.3
9026606B	MRF P T B 6 1/8	1/8	6	14	41.2	43.4	22.3	6	12.9	11.3
9026008C	MRF P T C 8 1/8	1/8	8	14	41.2	43.4	25.6	6	12.9	13.8
9026108V	MRF P T V 8 1/8	1/8	8	14	41.2	43.4	25.6	6	12.9	13.8
9026608B	MRF P T B 8 1/8	1/8	8	14	41.2	43.4	25.6	6	12.9	13.8
9026007C	MRF P T C 6 1/4	1/4	6	15	46.6	48.8	24.3	8	15	11.3
9026107V	MRF P T V 6 1/4	1/4	6	15	46.6	48.8	24.3	8	15	11.3
9026607B	MRF P T B 6 1/4	1/4	6	15	46.6	48.8	24.3	8	15	11.3
9026009C	MRF P T C 8 1/4	1/4	8	15	46.6	48.8	27.2	8	15	13.8
9026109V	MRF P T V 8 1/4	1/4	8	15	46.6	48.8	27.2	8	15	13.8
9026609B	MRF P T B 8 1/4	1/4	8	15	46.6	48.8	27.2	8	15	13.8
9026011C	MRF P T C 10 1/4	1/4	10	15	46.6	48.8	28.6	8	15	16
9026111V	MRF P T V 10 1/4	1/4	10	15	46.6	48.8	28.6	8	15	16
9026611B	MRF P T B 10 1/4	1/4	10	15	46.6	48.8	28.6	8	15	16
9026014C	MRF P T C 12 1/4	1/4	12	15	46.6	48.8	31	8	15	19.5
9026114V	MRF P T V 12 1/4	1/4	12	15	46.6	48.8	31	8	15	19.5
9026614B	MRF P T B 12 1/4	1/4	12	15	46.6	48.8	31	8	15	19.5

SYNOPTIC, SIZES AND VERSIONS

M R F	P	T	C	4	1/8
FAMILY	TYPE	RING	RING	Ø PIPE	Ø THREAD
Flow microregulator	**P** Push-look	**T** Technopolymer with push-in fitting	**C** For cylinder **V** For valve **B** Bidirectional	**4:** Ø 4 **6:** Ø 6 **8:** Ø 8 **10:** Ø 10 **12:** Ø 12	**1/8:** 1/8 **1/4:** 1/4

ACCESSORIES MRF PUSH-LOCK

ANTI-TAMPERING KNOB



Code	Description
9200703	Anti-tampering knob

NOTE: Remove the knob on the Push-Lock MRF by pulling outwards. Fit on the anti-tampering knob and make the necessary settings.
When the MRF has been set, press the knob firmly until it locks in position. If the MRF needs to be recalibrated, remove the anti-tampering knob and push laterally using a screwdriver.

IN-LINE FLOW REGULATOR SERIES RFL

The in-line flow regulator regulates the speed of the piston rod in the pneumatic cylinders.
Two versions are available:
- type U (unidirectional) regulates the flow only in one of the two directions of air flow.
- type B (bidirectional) regulates the flow in both directions of air flow.

Regulation: manual or with a screwdriver.
Max. temperature 70°C (158°F)
Max. pressure: 10 bar (1MPa-145 psi)

COMPONENTS

① Aluminium block
② Brass adjusting knob
③ Brass knob locking ring nut
④ Brass wall locking ring nut
⑤ Brass nipple
⑥ Brass regulation needle
⑦ Technopolymer gasket insert
⑧ NBR gasket
⑨ Part of needle
⑩ Flow window

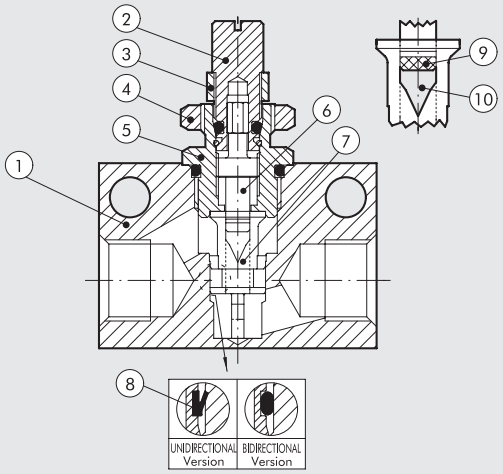

DIMENSIONS

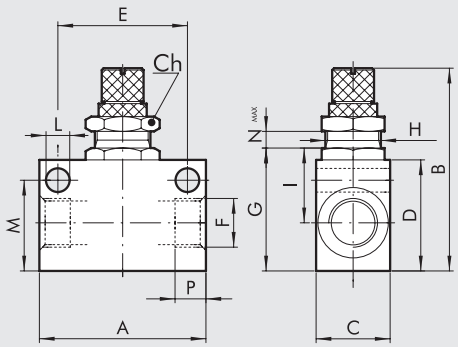

THREAD F	M5	1/8	1/4	3/8	1/2
P	4.2	7	8	10	11
E	15	25	35	35	44
H	M10x0.75	M12x1	M12x1	M15x1	M15x1
Nmax	3.3	5.5	5	7.5	7.5
A	21	31	45	50	59
B	37	48	53.5	59	67
C	14	16	20	25	30
G	18	25	33	34	43.5
I	11.6	15	22	22	24
D	16	22	30	30	40
M	12.5	18.2	24.5	25.5	35
Ch	12	16	16	20	20
L	4.2	4.2	6.5	6.5	6.5

FLOW CHARTS Pm = 6 bar

RFL M5

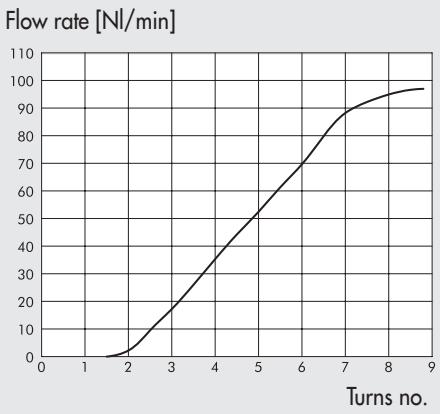

RFL 1/8

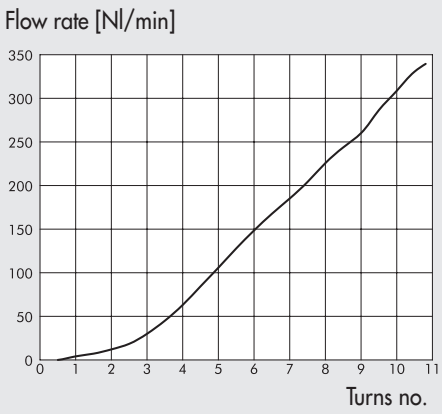

RFL 1/4

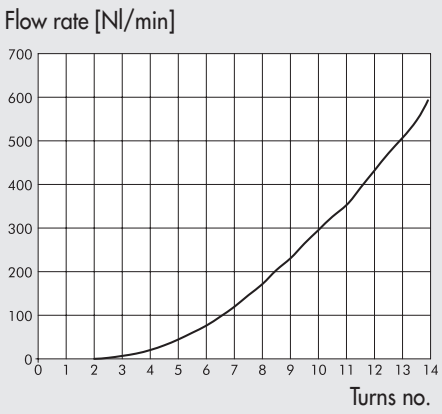

RFL 3/8

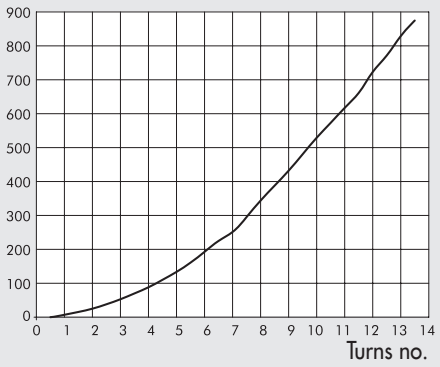

RFL 1/2

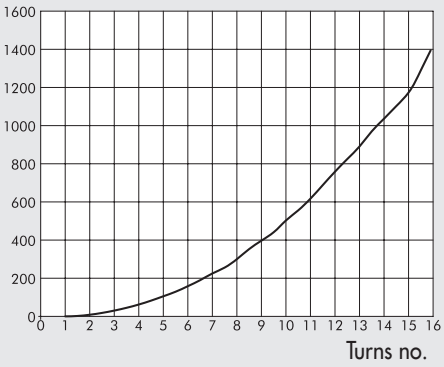

ORDERING CODES

RFL U (UNIDIRECTIONAL)



Code	Ref.
9041001	RFL U M5
9041002	RFL U 1/8
9041003	RFL U 1/4
9041004	RFL U 3/8
9041005	RFL U 1/2

RFL B (BIDIRECTIONAL)



Code	Ref.
9041201	RFL B M5
9041202	RFL B 1/8
9041203	RFL B 1/4
9041204	RFL B 3/8
9041205	RFL B 1/2

NOTES

SUMMARY AUXILIARY VALVES

- **QUICK EXHAUST VALVE SERIES VSR** — E4.2

- **STOP VALVE SERIES STP** — E4.3

- **SLIDE VALVE SERIES VCS** — E4.6

- **CIRCUIT SELECTOR VALVE SERIES VOR** — E4.7

- **CHECK VALVE SERIES VNR** — E4.8

- **PNEUMATIC LOGIC** — E4.9
- **TIMER** — E4.11

QUICK EXHAUST VALVE SERIES VSR

New, more compact and lighter version.
Used to evacuate air in the cylinder quickly, which increases cylinder speed.

- Temperature 0-80°C (32°-176°F)
- Max. pressure 12 bar (1200 KPa)
- Min. pressure 0.5 bar (50 KPa)

Nominal flow rate (P → A) ΔP = 1 bar [Nl/min]:

Pm [bar]	1/8	1/4	1/2
2.5	550	800	2400
4	700	1200	2800
6.3	900	1400	3600

Empty flow rate (A → R) [Nl/min]:

Pm [bar]	1/8	1/4	1/2
2.5	800	1500	4400
4	1200	2450	6300
6.3	1800	3500	8000

COMPONENTS

① Cap: nickel-plated brass for 1/8-1/4
anodized aluminium for 1/2
② O-ring: NBR
③ Lip-seal: Polyurethane
④ Body: nickel-plated brass

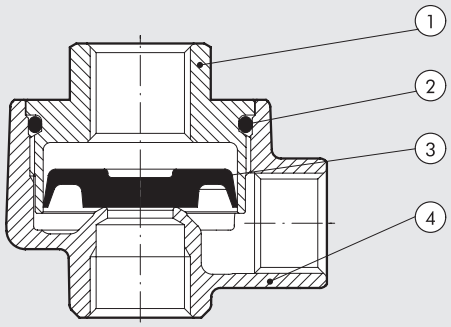

OVERALL DIMENSIONS AND ORDERING CODES

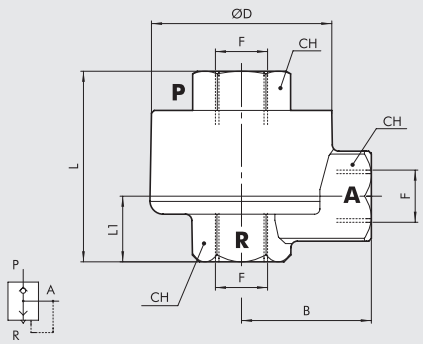

Code	Ref.	F	B	D	CH	L	L1	Weight [g]
9101201	VSR 1/8	1/8	18.5	29.5	14	32.5	13.4	80
9201201	VSR 1/4	1/4	23.3	34	17	40.5	16.9	115
9401201	VSR 1/2	1/2	35	47	27	45.7	16.2	230

SPARE GASKETS



Code	Ref.
9151501	Spare gaskets VSR 1/8
9251501	Spare gaskets VSR 1/4
9451501	Spare gaskets VSR 1/2

STOP VALVE SERIES STP

Stop valves mounted on the cylinder inlets allow a flow of air only in the presence of pneumatic pilot. The valves are available in both unidirectional and bidirectional versions; the bidirectional versions also include a solution with a manual button to vent the air in the circuit. This item is mainly used as a safety valve. When pressure drops in the pneumatic pilot, all cylinder movement is halted.

TECHNICAL DATA		UNIDIRECTIONAL				BIDIRECTIONAL				
		1/8″	1/4″	3/8″	1/2″	1/8″	1/4″	3/8″	1/2″	3/4″
Operating pressure	bar	0.5 to 10								
	MPa	0.05 to 1								
Operating temperature	°C	–10 to 60								
	°F	14 to 148								
Fluid		Lubricated or unlubricated filtered air								
Flow rate (6 bar)	Nl/min	250	350	950	1450	320	700	1200	2100	7000
Connection type		Female threaded - R automatic cartridge								Female threaded
Installation		In any position								

UNIDIRECTIONAL STOP VALVE COMPONENTS

① Body: nickel-plated brass
② Piston rod: steel
③ Rotary ring: nickel-plated brass
④ Valve: steel
⑤ Gasket: technopolymer
⑥ Gasket O-Ring: NBR

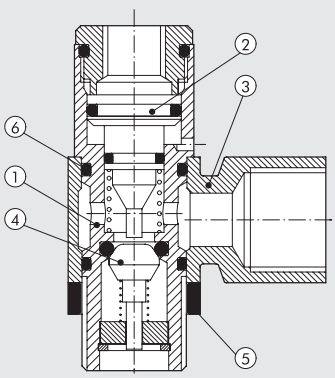

BIDIRECTIONAL STOP VALVE COMPONENTS

1/8″ - 1/4″ - 3/8″ - 1/2″
① Pilot ring: nickel-plated brass
② Piston rod: nickel-plated brass
③ Rotary ring: nickel-plated brass
④ Stem with valve: brass
⑤ Body: nickel-plated brass
⑥ Gasket O-Ring: NBR

3/4″
① Pilot ring: nickel-plated brass
② Piston rod: anodized aluminium
③ Rotary ring: anodized aluminium
④ Stem with valve: anodized aluminium
⑤ Body: anodized aluminium
⑥ Gasket O-Ring: NBR

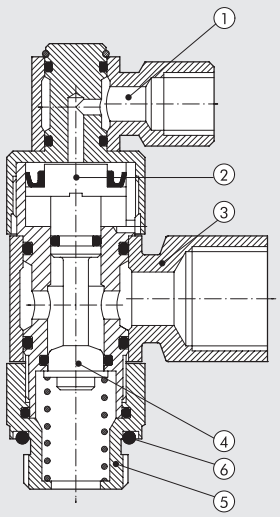

STARTING PRESSURE

UNIDIRECTIONAL VALVE

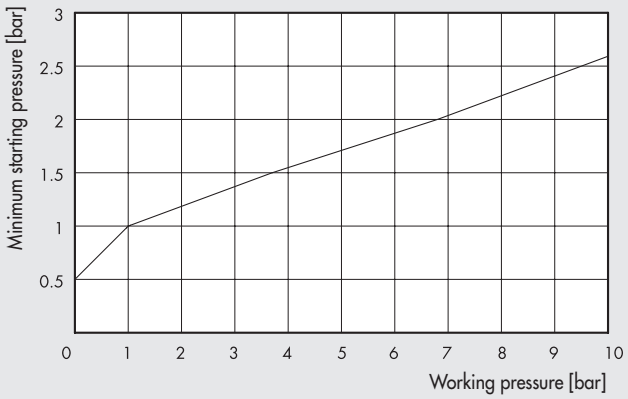

BIDIRECTIONAL VALVE

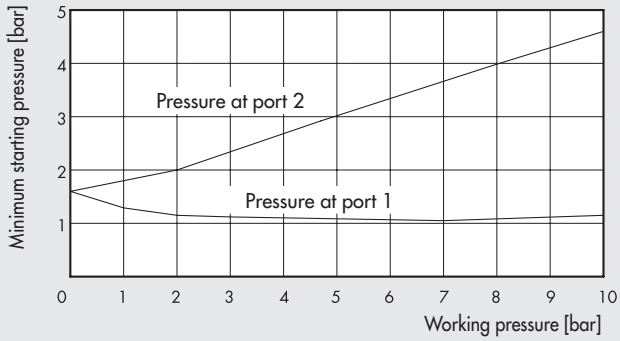

BIDIRECTIONAL THREADED STOP VALVE

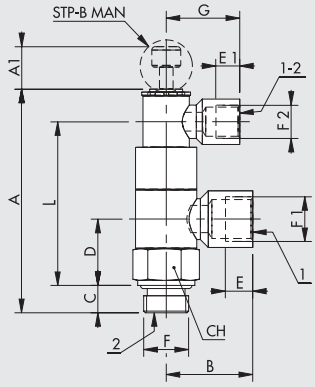

Code	Description	F	F1	F2	A	A1	B	C	D	E	E1	G	L	CH
W6001101001	STP-B 1/8-1/8-1/8	G 1/8	G 1/8	G 1/8	57.5	-	21.5	6	16	7	7	21.5	41.9	14
W6001111011	STP-B 1/4-1/4-1/8	G 1/4	G 1/4	G 1/8	65.7	-	25.5	8	19.5	8	7	21.5	48.1	17
W6001121021	STP-B 3/8-3/8-1/8	G 3/8	G 3/8	G 1/8	70.9	-	31	8	22.3	10	7	21.5	53.3	22
W6001131031	STP-B 1/2-1/2-1/8	G 1/2	G 1/2	G 1/8	83.5	-	40	12	27	14	7	21	61.5	27
W6001141041	STP-B 3/4-3/4-1/8	G 3/4	G 3/4	G 1/8	93.5	-	39	12	32.5	16	7	21	74	32
VERSION WITH RELEASE BUTTON														
W6001201001	STP-B 1/8-1/8-1/8 MAN	G1/8	G1/8	G1/8	57.5	12.5	21.5	6	16	7	7	21.5	41.9	14
W6001211011	STP-B 1/4-1/4-1/8 MAN	G1/4	G1/4	G1/8	65.7	12.5	25.5	8	19.5	8	7	21.5	48.1	17

STP-B



STP-B MAN



THREAD + PIPE BIDIRECTIONAL STOP VALVE

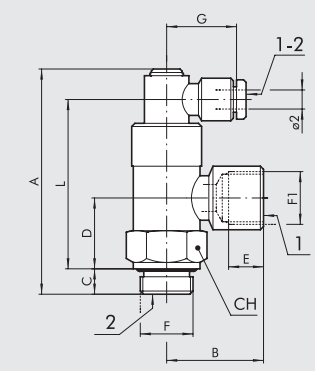

Code	Description	F	F1	Ø 2	A	B	C	D	E	G	L	CH
W6001101002	STP-B 1/8-1/8-Ø4	G 1/8	G 1/8	4	57.5	21.5	6	16	7	25	41.9	14
W6001111012	STP-B 1/4-1/4-Ø4	G 1/4	G 1/4	4	65.7	25.5	8	19.5	8	25	48.1	17
W6001121022	STP-B 3/8-3/8-Ø4	G 3/8	G 3/8	4	70.9	31	8	22.3	10	25	53.3	22



METAL WORK PNEUMATIC

PIPE BIDIRECTIONAL STOP VALVE





Code	Description	F	Ø 1	Ø 2	A	B	C	D	G	L	CH
W6001101106	STP-B 1/8-Ø6-Ø4	G 1/8	6	4	57.5	25	6	16	25	41.9	14
W6001111106	STP-B 1/4-Ø6-Ø4	G 1/4	6	4	65.7	27.5	8	19.5	25	48.1	17
W6001111108	STP-B 1/4-Ø8-Ø4	G 1/4	8	4	65.7	32	8	19.5	25	48.1	17
W6001121108	STP-B 3/8-Ø8-Ø4	G 3/8	8	4	70.9	31.5	8	22.3	25	53.3	22
W6001121110	STP-B 3/8-Ø10-Ø4	G 3/8	10	4	70.9	36.5	8	22.3	25	53.3	22
W6001131112	STP-B 1/2-Ø12-Ø4	G 1/2	12	4	83.5	41.5	12	27	25	71.5	27

UNIDIRECTIONAL THREADED STOP VALVE

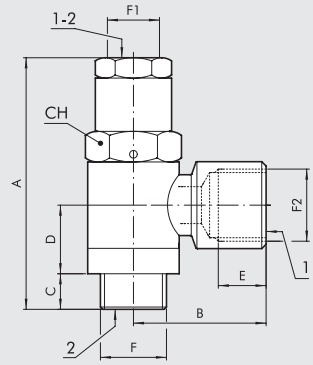



Code	Description	F	F1	F2	A	B	C	D	E	F1	CH
W6001001001	STP-U 1/8-1/8	G 1/8	M5	G 1/8	43.5	21.5	6	13	7	M5	14
W6001011011	STP-U 1/4-1/4	G 1/4	G 1/8	G 1/4	49.5	25.5	7	13.5	8	G 1/8	17
W6001021021	STP-U 3/8-3/8	G 3/8	G 1/8	G 3/8	54.9	31	9	15	10	G 1/8	19
W6001031031	STP-U 1/2-1/2	G 1/2	G 1/8	G 1/2	61.5	40	10	17	14	G 1/8	24
W6001041041	STP-U 3/4-3/4	G 3/4	G 1/8	G 3/4	69	39	12	18.5	14	G 1/8	36

UNIDIRECTIONAL PIPE STOP VALVE

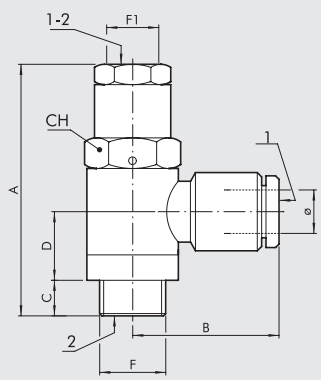



Code	Description	F	F1	Ø	A	B	C	D	F1	CH
W6001001106	STP-U 1/8-Ø6	G 1/8	M5	6	43.5	25	6	13	M5	14
W6001011106	STP-U 1/4-Ø6	G 1/4	G 1/8	6	49.5	27.5	7	13.5	G 1/8	17
W6001011108	STP-U 1/4-Ø8	G 1/4	G 1/8	8	49.5	32	7	13.5	G 1/8	17
W6001021108	STP-U 3/8-Ø8	G 3/8	G 1/8	8	54.9	31.5	9	15	G 1/8	19
W6001021110	STP-U 3/8-Ø10	G 3/8	G 1/8	10	54.9	36.5	9	15	G 1/8	19
W6001031112	STP-U 1/2-Ø12	G 1/2	G 1/8	12	61.4	41.5	10	17	G 1/8	24

SLIDE VALVE SERIES VCS

The 3/2 slide valve is normally used as a circuit on-off valve. When the ring nut is moved back, the system downstream is relieved; when the ring nut is moved forward, the system is supplied with compressed air.

TECHNICAL DATA		1/8″	1/4″	3/8″	1/2″
Operating pressure		0 - 10 bar (0 - 1 MPa)			
Operating temperature range	°C	–10 to + 80			
Fluid		Lubricated or unlubricated filtered air			
Flow rate at 6.3 bar (0.63 MPa - 91 psi) ΔP 0.5 bar	Nl/min	430	680	1400	2200
Flow rate at 6.3 bar (0.63 MPa - 91 psi) ΔP 1bar	Nl/min	630	1040	2070	3330
Conductance C	Nl/min · bar	170	247	537	833
Critical ratio b	bar/bar	0.2	0.3	0.1	0.2

COMPONENTS

① Body: chromium-plated brass
② Ring nut: anodized aluminium
③ Seals: NBR

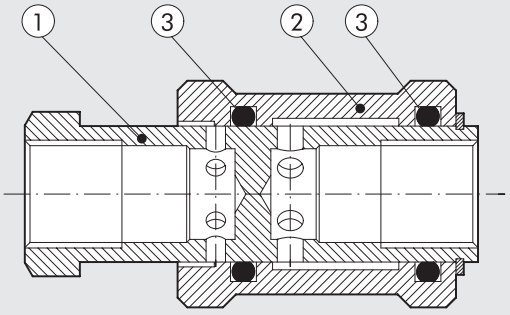

DIMENSIONS AND ORDERING CODES

Code	Description	F	Ø	I	L	CH
W0970050001	Slide valves 3/2	1/8″	25	10	48	11
W0970050002	Slide valves 3/2	1/4″	30	12	58	19
W0970050003	Slide valves 3/2	3/8″	35	12	68	22
W0970050004	Slide valves 3/2	1/2″	40	15	80	27

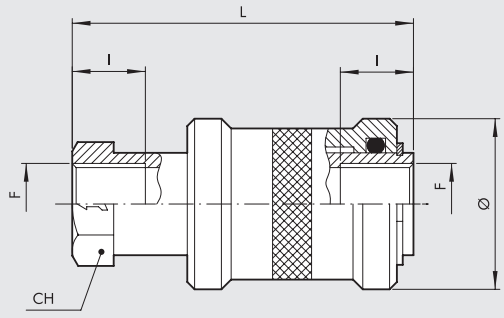

CIRCUIT SELECTOR VALVE SERIES VOR

Circuit selector valves select two separate input signal without creating reciprocal interference, giving a single output signal.

TECHNICAL DATA		1/8"	1/4"
Nominal flow rate at 6.3 bar ΔP 1 bar	Nl/min	500	1300
Operating temperature range	°C	–10 to + 80	
	°F	14 to 176	
Operating pressure	bar	2 - 10	
	MPa	0.2 - 1	
Fluid		Lubricated or unlubricated filtered air	

COMPONENTS

① Body: passivated aluminium
② Insert: brass
③ Seal: NBR
④ Ball: stainless steel

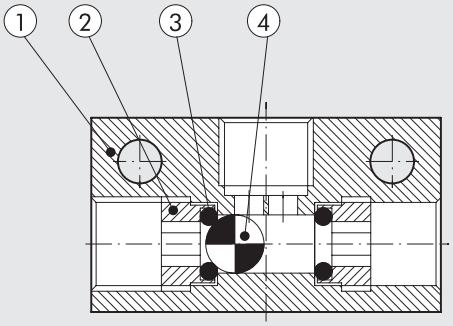

DIMENSIONS AND ORDERING CODES

Code	Description	A	C	G	H	E	B	F	Ø
W3603000001	VOR 1/8	36	20	15	7.5	4	25	G 1/8	4.5
W3603000002	VOR 1/4	43	25	20	8.5	6.5	25	G 1/4	4.5

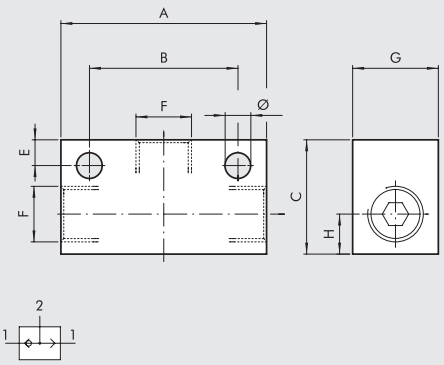

CHECK VALVE SERIES VNR

This allow air flow in only one of the two directions.

TECHNICAL DATA		1/8"	1/4"
Ports		G 1/8"	G 1/4"
Nominal diameter	mm	5.2	7
Nominal flow rate	Nl/min	900	1100
Operating temperature range	°C	−10 to + 70	
	°F	14 to 158	
Operating pressure	bar	2 - 10	
	MPa	0.2 - 1	
Opening pressure	bar	0.05 (5 KPa)	
Fluid		Lubricated or unlubricated filtered air	

COMPONENTS

① Body: OT58 brass
② Valve spring: steel
③ Seal: NBR for 1/8"; FKM/FPM for 1/4"
④ Stem with OT58 brass valve
⑤ Stem insert: OT58 brass

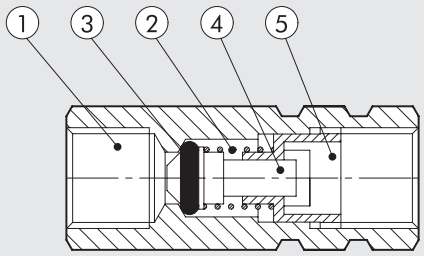

DIMENSIONS AND ORDERING CODES

Code	Description	F	L	CH
W3601000001	VNR 1/8	1/8	35	13
W3601000002	VNR 1/4	1/4	41	17

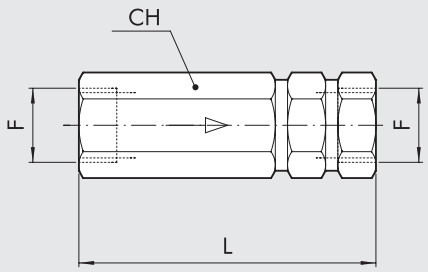

PNEUMATIC LOGIC

Metal Work logic elements are available with 5 different functions: OR, AND, NOT, YES, MEMORY.
Main features common to all elements:
- Adaptor for Ω bar (DIN EN 50022) integral with the body.
- Built-in pressure indicator.
- Pipe locking system using Ø 4 built-in fittings.

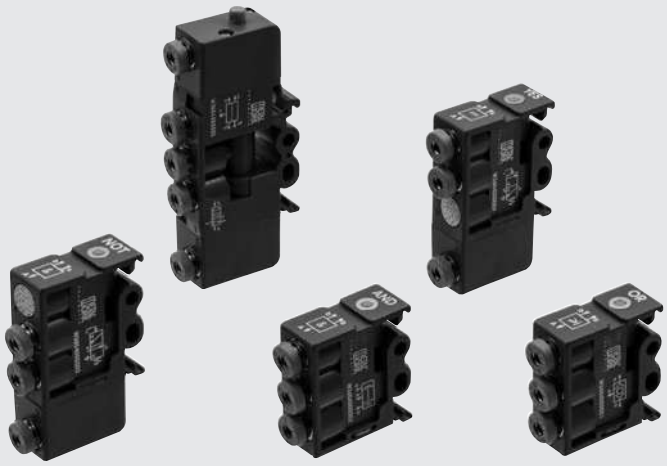

TECHNICAL DATA		
Operating temperature	°C	– 10 to + 60
Valve fitting		Push-in fitting for Ø 4 pipe
Pressure range	bar	OR - AND: from 1.5 to 8 bar
		YES-NOT -MEMORY: from 0 to 8 bar, pilot pressure from 1.5 to 8 bar
		NOT: 6 bar switching thereshold = 0.4
Nominal diameter	mm	2.7
Flow rate at 6 bar (0.6 MPa-87 psi) ΔP 1 bar (0.1 Mpa-14.5 psi)	Nl/min	100
Fluid		Lubricated or unlubricated filtered compressed air; must be uninterrupted when lubricated
Recommended lubricant		ISO and UNI FD22
Actionament		Via compressed air
Reset		AND-OR: via compressed air
		YES-NOT via mechanical spring
		MEMORY: via compressed air
Installation		In any position
Mounted		On Omega bar (DIN EN 50022) size 35 x 7 or 35 x 15
		Wall-mounted with Ø 4.2 holes
MATERIALS		
Body		Technopolymer
Spool		Aluminium
Seal		NBR

LOGIC ELEMENT: OR

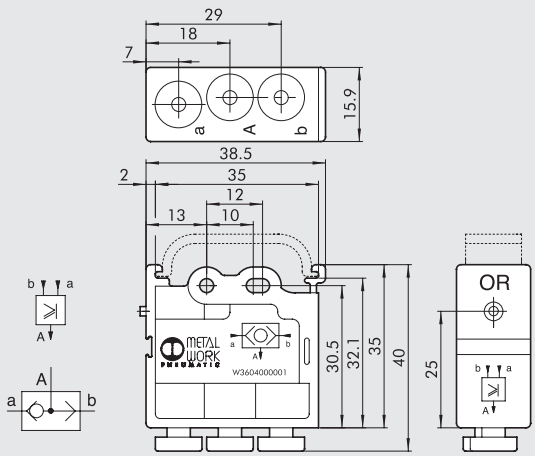

Code	Description
W3604000001	OR - logic sum

LOGIC ELEMENT: AND

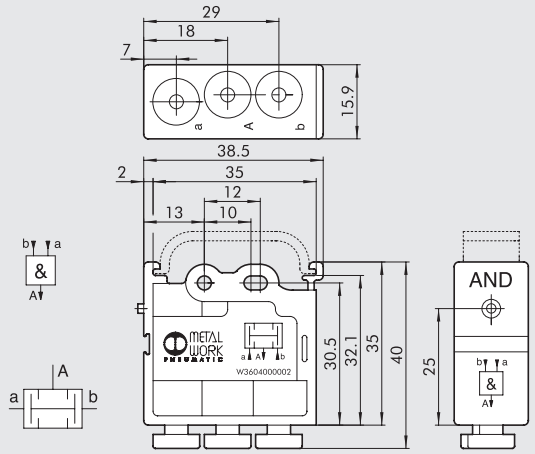

Code	Description
W3604000002	AND - logic product

LOGIC ELEMENT: NOT

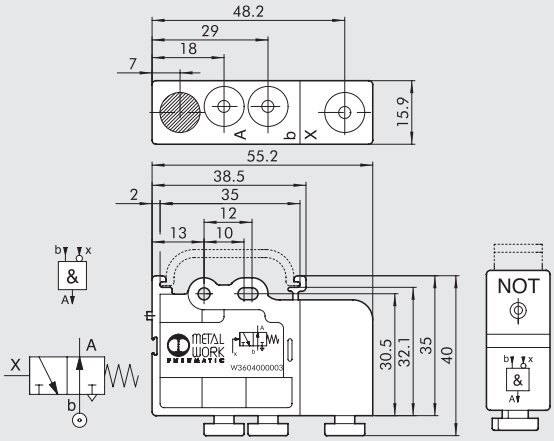

Code	Description
W3604000003	NOT - Negation

LOGIC ELEMENT: YES

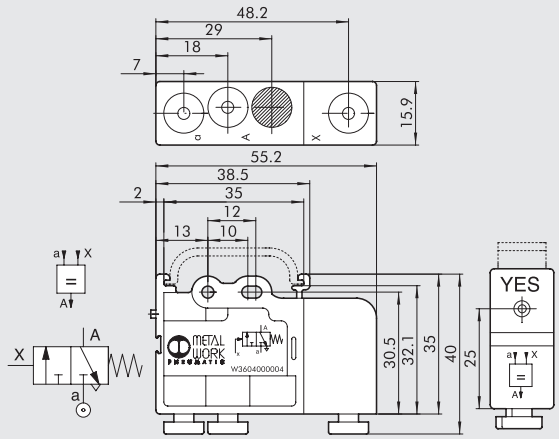

Code	Description
W3604000004	YES - Affirmation

LOGIC ELEMENT: MEMORY

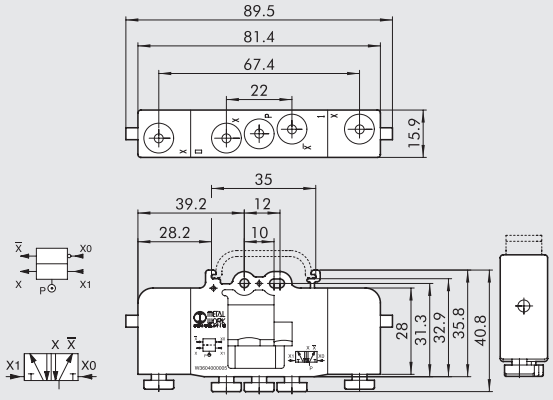

Code	Description
W3604000005	Memory

NOTES

TIMER

The Timer is part of Metal Work range of logic elements, which also includes OR, AND, NOT, YES, MEMORY.
The value of the signal output delay is set by rotating a knob. It can work both as 3/2 NC and 3/2 NO, depending on whether feeding is through port "a" or port "b".
The maximum delay time can be increased by unscrewing a plug and connecting the port to an external auxiliary tank.

- Adaptor for Ω bar (DIN EN 50022) integrated in the body.
- Pressure indicator via an orange pin
- Pipe clamping system using Ø 4 built-in push-on fittings.

TECHNICAL DATA

Temperature range	°C	– 10 to + 60
Valve coupling	mm	Push-in fitting for Ø 4 pipe
Pressure range	bar	From 2.5 to 8
Minimum pilot pressure	bar	2.5
Nominal diameter	mm	2.7
Flow rate at 6 bar (0.6 Mpa, 87 psi) ΔP 1 bar (0.1 Mpa, 14.5 psi)	Nl/min	100
Delay setting range	s	From 0 to 30, at 6 bar
Signal shutoff time	s	< 0.1
Repeatability	s	± 0.4
Fluid		Filtered, lubricated or unlubricated compressed air. If used, must be continuous
Operating		By compressed air
Repositioning		By mechanical spring
Installation		In any direction
Assembly		On Ω bar (DIN EN 50022) size 35 x 7 o 35 x 15 - Wall mounting using Ø 4.2 holes
MATERIALS		
Body		Anodized aluminium / Technopolymer
Internal parts		Brass / Technopolymer
Gaskets		NBR
Spring		Spring steel

DIMENSIONS AND ORDERING CODES

Code	Description
W3604000006	Timer

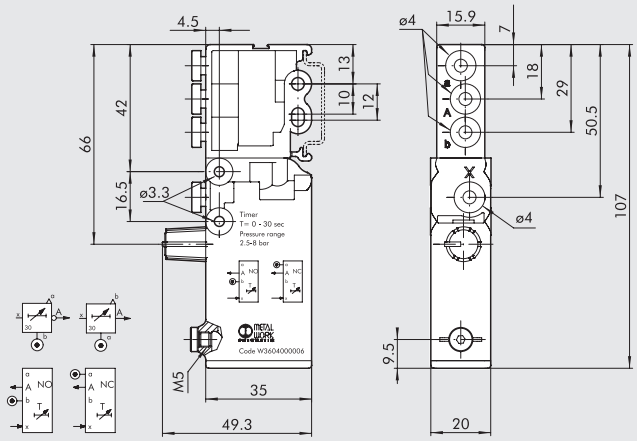

NORMALLY OPEN AND NORMALLY CLOSED OPERATION

NO



NC



CHANGE IN THE DELAY WITH CHANGE IN PRESSURE AND KNOB POSITION

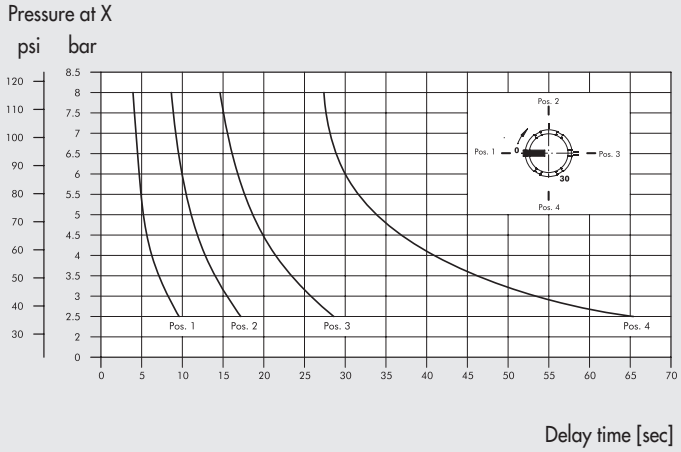

HOW TO INCREASE THE DELAY

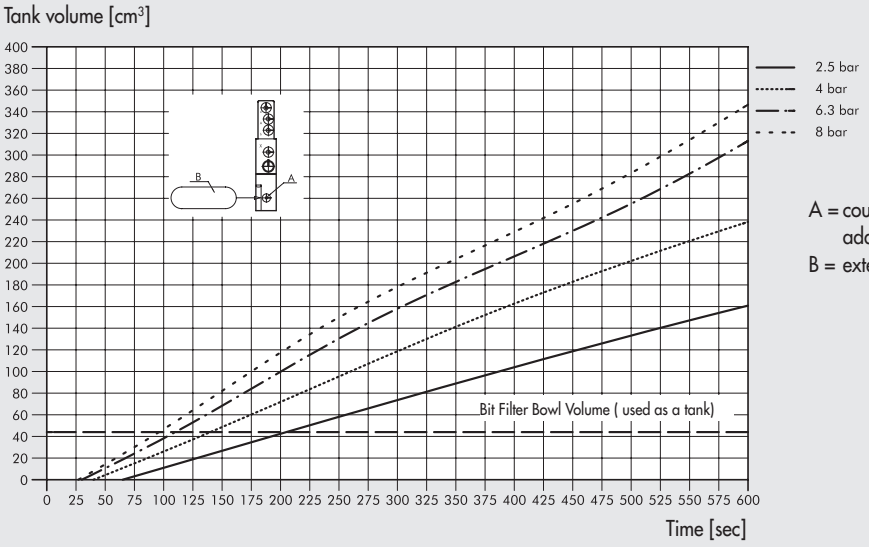

A = coupling (plugged) for external additional tanks
B = external tank

NOTES

SUMMARY VARIOUS ACCESSORIES

- **AIR-AIR PRESSURE MULTIPLIER (BOOSTER)** — E5.2

- **IN-LINE PROGRESSIVE STARTER VAP 1/4" AND 1/2"** — E5.11

- **ROTARY JOINTS AND DISTRIBUTION FRAMES** — DISTRIBUTION FRAMES, ROTARY JOINTS — E5.13

- **SILENCERS AND EXHAUST REGULATOR** — E5.17

- **PNEUMO-POWER** — E5.22

AIR-AIR PRESSURE MULTIPLIER (BOOSTER)

The air-air pressure multiplier, or booster, is an automatic device that compresses air to give an outlet pressure that is double the inlet pressure. It is normally used to locally intensify the input pressure of one or more actuators. As it is entirely pneumatic it can be used when electric devices are not recommended. The booster can be supplied with or without a pressure regulator. It is fitted with check valves that maintain the outlet pressure even when the supply of compressed air is switched off.
This means it is necessary to interrupt the supply and relieve the circuit before intervening on the device in any way.
It is advisable to install a tank after the booster to prevent fluctuations in outlet pressure.

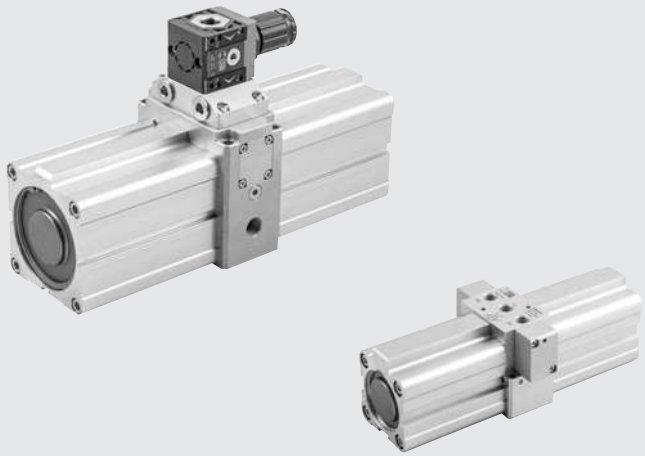

TECHNICAL DATA		BOOSTER Ø40		BOOSTER Ø63		BOOSTER Ø100	
		without regulator	with regulator	without regulator	with regulator	without regulator	with regulator
Fluid		Filtered unlubricated compressed air, Lubrication, if used, must be continuous.					
Threaded port		1/8″		3/8″		1/2″	
Inlet pressure	MPa	0.2 - 1					
	bar	2 - 10					
	psi	29 - 145					
Outlet pressure	MPa	max 2	max 1.6 (regulated)	max 2	max 1.6 (regulated)	max 2	max 1.6 (regulated)
	bar	max 20	max 16 (regulated)	max 20	max 16 (regulated)	max 20	max 16 (regulated)
	psi	max 290	max 232 (regulated)	max 290	max 232 (regulated)	max 290	max 232 (regulated)
Operating temperature	°C	-10 to +60	-10 to +50	-10 to +60	-10 to +50	-10 to +60	-10 to +50
	°F	14 to 140	14 to 122	14 to 140	14 to 122	14 to 140	14 to 122
Weight	g	1.380	1.600	4.240	5.350	13.100	14.050
Mounting		Wall or panel				Wall	
Installation		In any position					

OPERATING LAYOUT

The pressure booster is comprised of a central body (with one 3-2 valve, one 5-2 valve and four check valves), two side liners and a through rod on which two pistons are mounted.
The supply air is compressed alternately by the two pistons in one of the two central chambers (B and C); the other central chamber and one of the two side chambers (A and D) operate the pistons; the external chamber, which is not involved in compression, is relieved.
Air compressed at a ratio of 2:1 passes through a check valve that maintains the output pressure even when compressed air is no longer supplied.
The valves in the central body, which are operated by mechanical pusher pistons, switch the function of the two pairs of chambers (A and D, B and C) at each piston stroke.

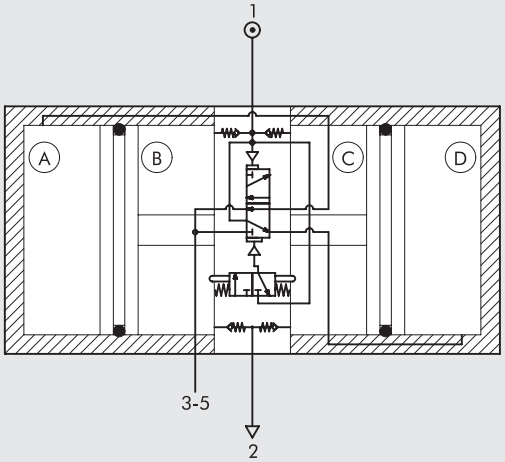

METAL WORK PNEUMATIC

COMPONENTS

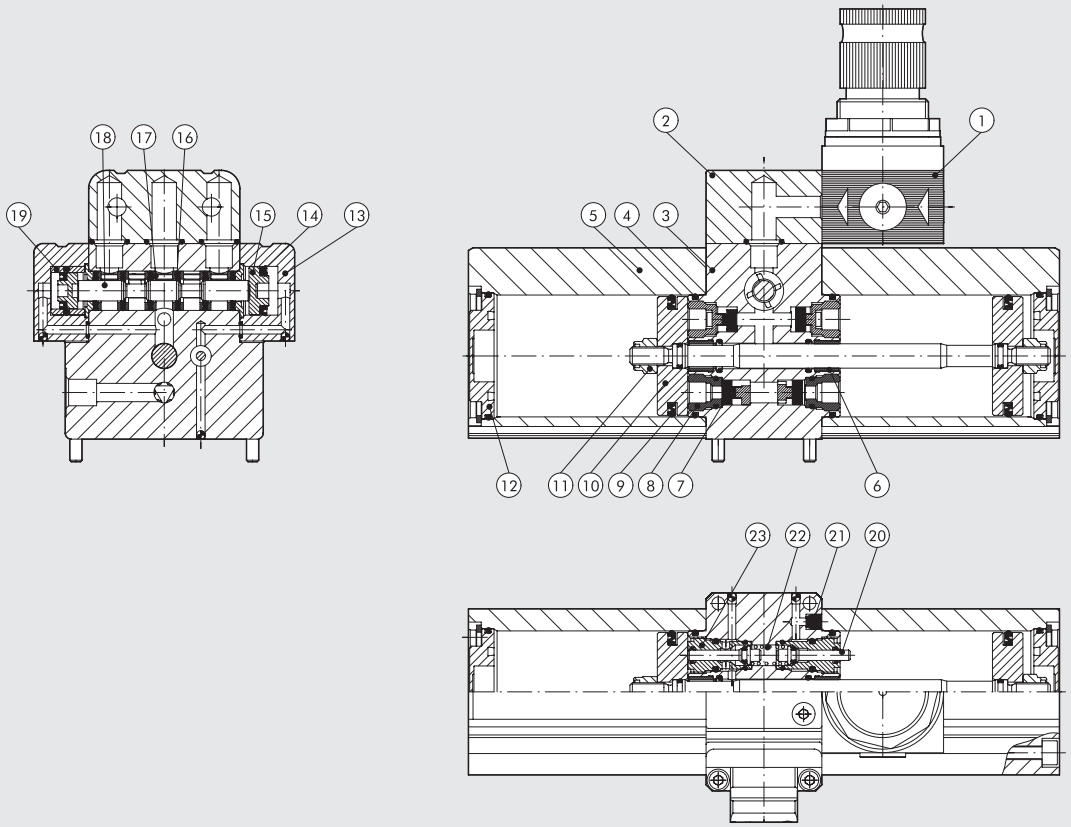

① PRESSURE REGULATOR (only for version with regulator)
② INTERFACE BLOCK (only for version with regulator): anodized aluminium
③ CENTRAL BODY: anodized aluminium
④ OR SEAL: NBR rubber
⑤ BARREL: anodized aluminium alloy section
⑥ GUIDE BUSHING: steel strip with bronze and PTFE insert
⑦ POPPET: NBR rubber
⑧ CHECK VALVE: brass
⑨ PISTON GASKET: NBR rubber
⑩ PISTON: aluminium
⑪ SELF-LOCKING NUT: stainless steel
⑫ CYLINDER BASE: anodized aluminium
⑬ VALVE CONTROL: anodized aluminium
⑭ VALVE CONTROL GASKET: NBR rubber
⑮ VALVE PISTON: technopolymer
⑯ GASKET: NBR rubber
⑰ SPACER: technopolymer
⑱ SPOOL: nickel-plated aluminium
⑲ DIFFERENTIAL BUSHING: brass
⑳ PUSHER: stainless steel
㉑ SILENCER: technopolymer
㉒ SPRING: stainless steel
㉓ GUIDE BUSHING: brass

MOUNTING

On a wall using the screws provided with the Booster.



	Ø40	Ø63	Ø100
A	8	12	11.5
M	M4	M6	M10

On a panel using screws (only for Ø40 and Ø63).



	Ø40	Ø63
A	8	10
M	M5	M8

TANK FILLING CURVES

WITHOUT REGULATOR

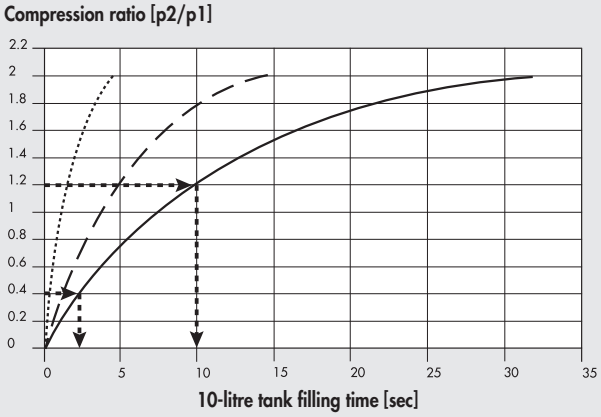

WITH REGULATOR

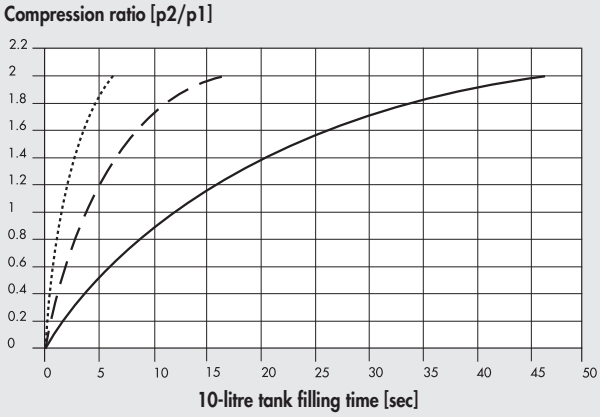

——— Ø40
— — — Ø63
····· Ø100

The graphs refer to the filling of a 10-litre tank and show the ratio of outlet to inlet pressure (= p2:p1) as a function of time (sec).
The graphs are valid for any inlet pressure between 2 and 10 bar.
The following formula can be used to calculate the time t (sec) required to switch from pressure ratio 1 to pressure ratio 2 in a tank of volume V (litres):

$$t = \frac{V\,(t2 - t1)}{10}$$

where t1 and t2 are the times shown on the x-axis, corresponding to ratios 1 and 2.

E.g.
1 = 0.4 = > t1 = 2.5 sec
2 = 1.2 = > t2 = 10 sec

The time required to switch from 1 to 2 with a 25-litre tank is:

$$t = \frac{25\,(10 - 2.5)}{10}\ \text{sec} = 18.75\ \text{sec}$$

METAL WORK PNEUMATIC

FLOW CHARTS

WITHOUT REGULATOR Ø40

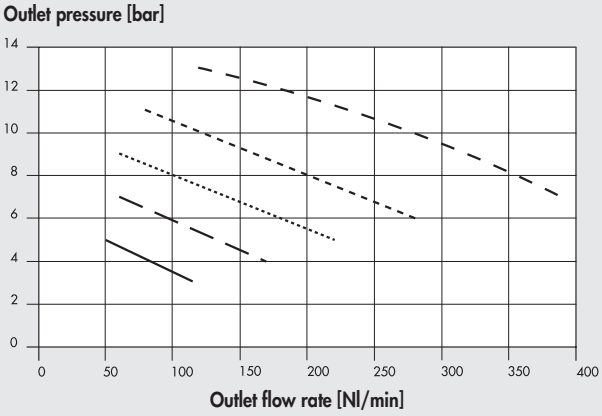

WITH REGULATOR Ø40

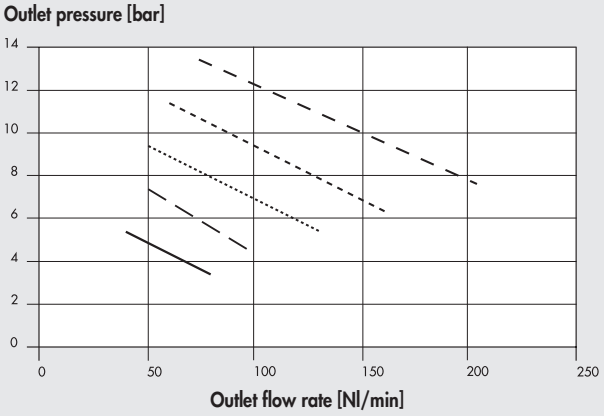

WITHOUT REGULATOR Ø63

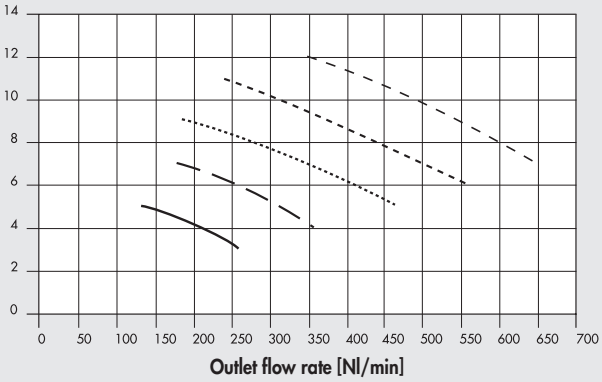

WITH REGULATOR Ø63

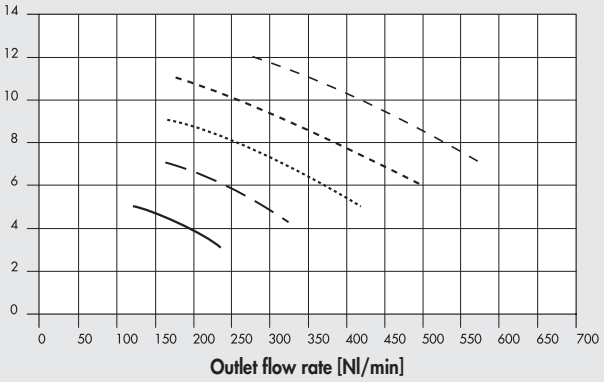

WITHOUT REGULATOR Ø100

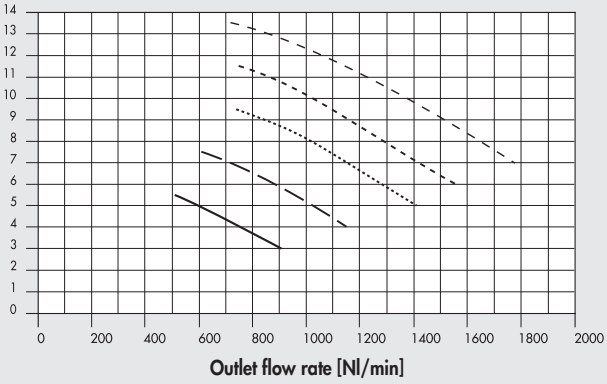

WITH REGULATOR Ø100

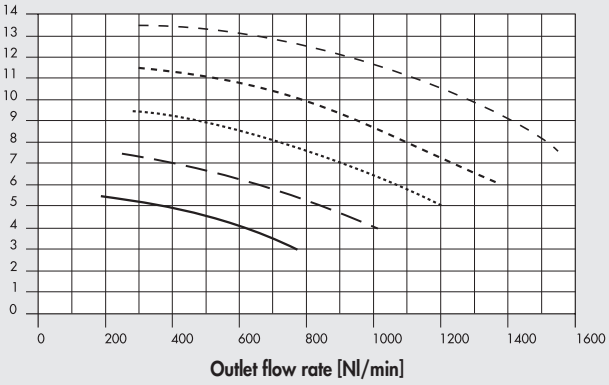

INLET PRESSURE

– – – – p1 = 7 bar -------- p1 = 6 bar ..... p1 = 5 bar — — — p1 = 4 bar ——— p1 = 3 bar

DIMENSIONS PRESSURE MULTIPLIER Ø40 (BOOSTER)

WITHOUT REGULATOR

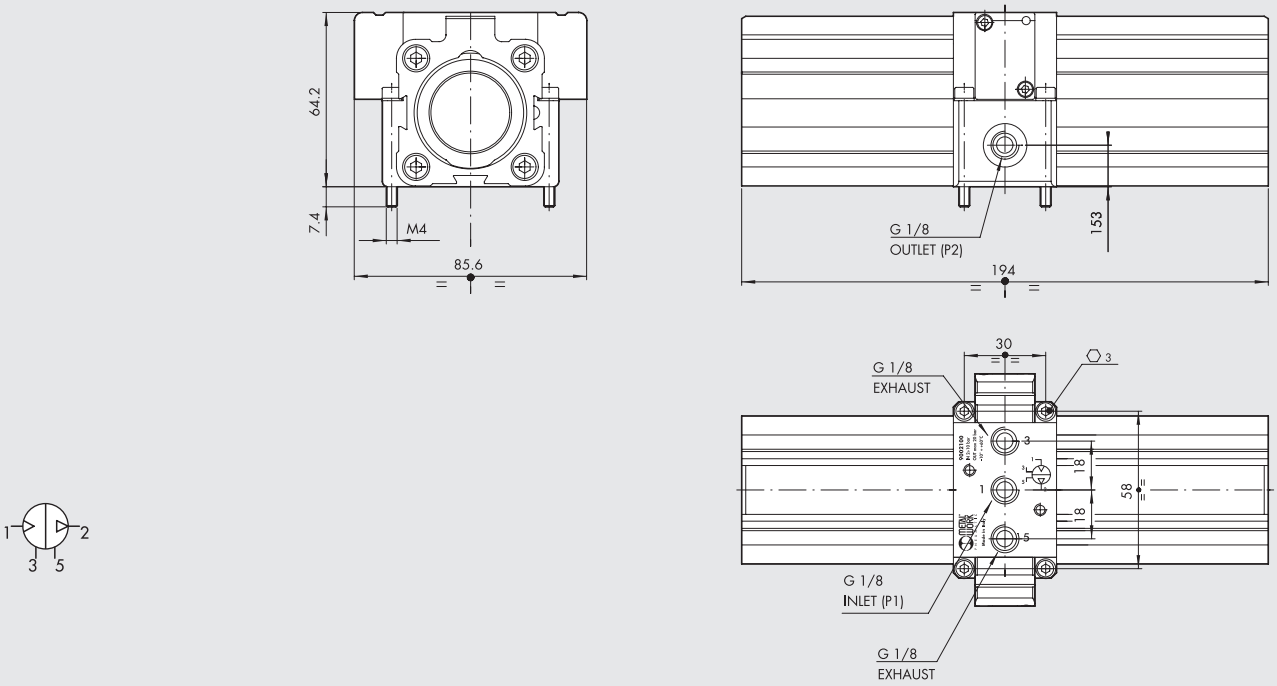

WITH REGULATOR

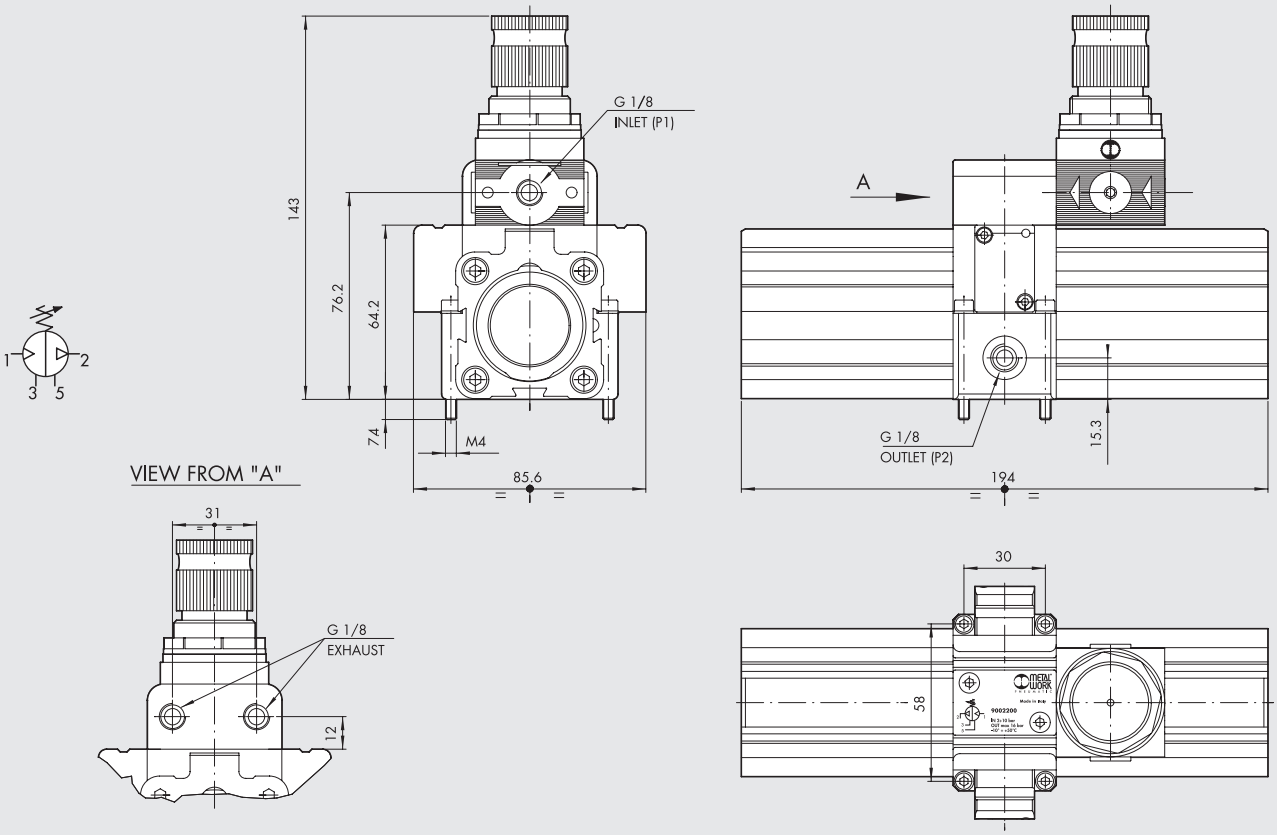

Code	Description
9002100	Booster Ø40
9002200	Booster Ø40 with regulator

DIMENSIONS PRESSURE MULTIPLIER Ø63 (BOOSTER)

WITHOUT REGULATOR

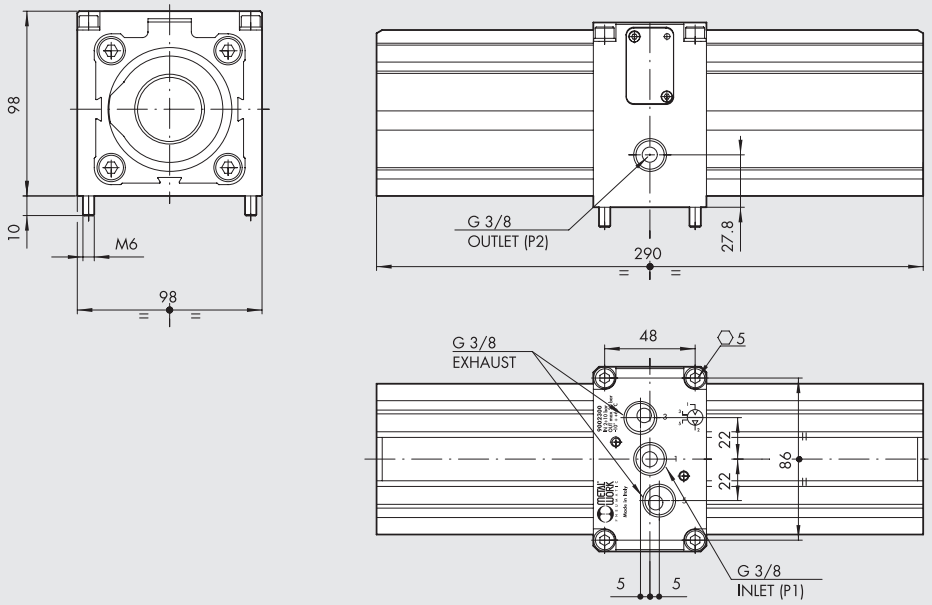

WITH REGULATOR

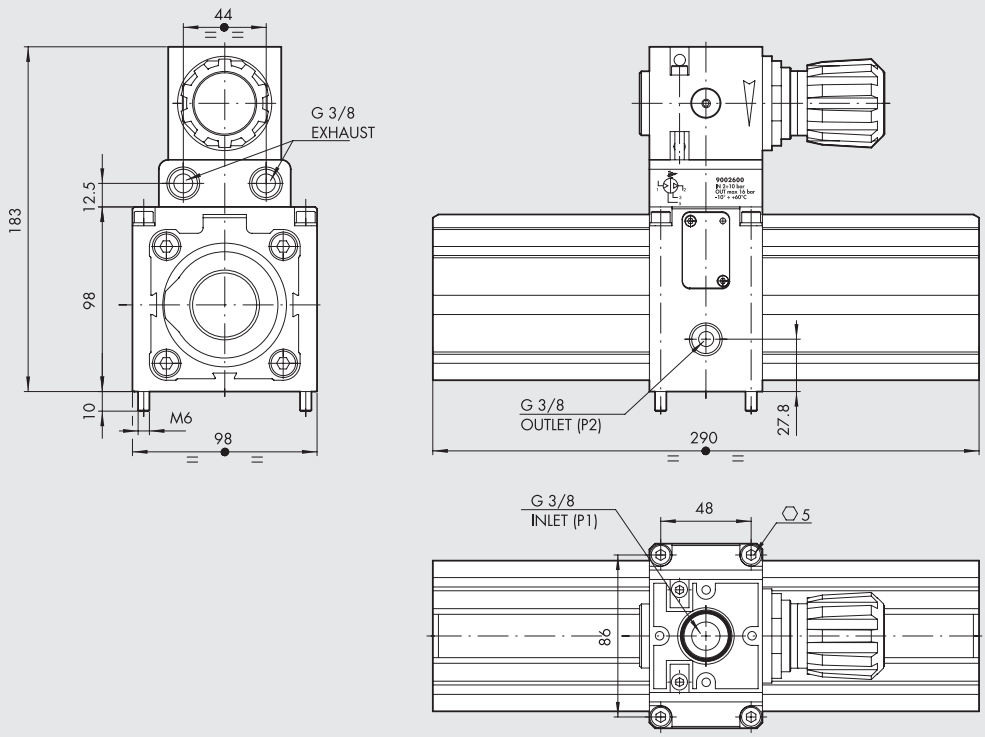



Code	Description
9002300	Booster Ø63
9002600	Booster Ø63 with regulator

DIMENSIONS PRESSURE MULTIPLIER Ø100 (BOOSTER)

WITHOUT REGULATOR



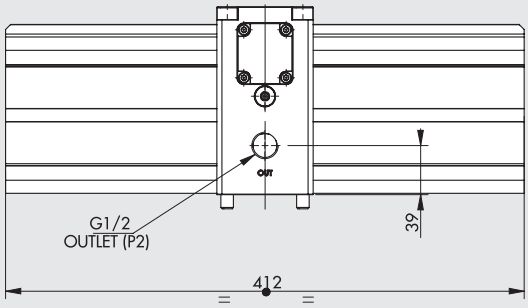

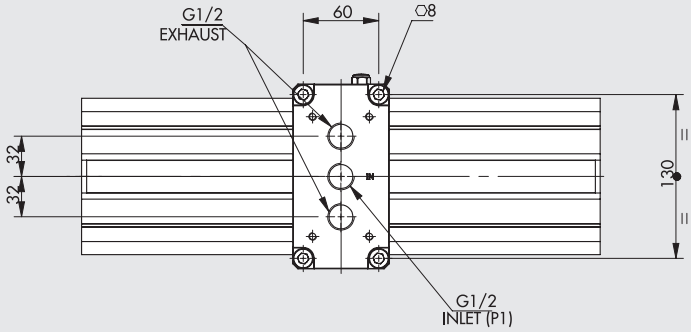

WITH REGULATOR

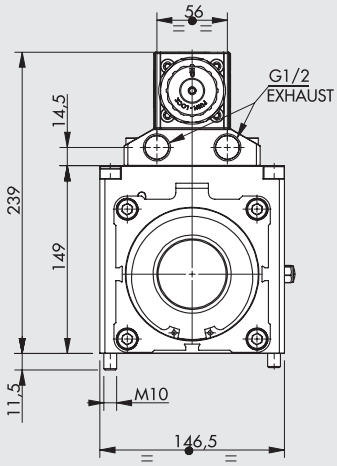

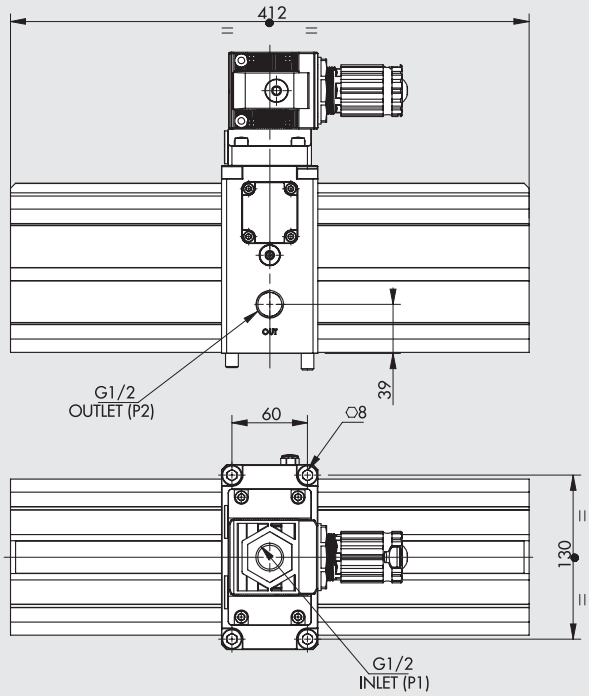



Code	Description
9002700	Booster Ø100
9002800	Booster Ø100 with regulator

ACCESSORIES

REGULATOR UNIT

Ø40



Code	Description
9002180	Ø40 regulator unit

Note: Supplied with 2 screws, 3 O-ring

Ø63



Code	Description
9002380	Ø63 regulator unit

Note: Supplied with 4 screws, 4 O-ring

Ø100

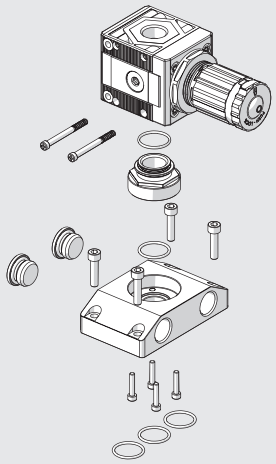

Code	Description
9002780	Ø100 regulator unit

Note: Supplied with 10 screws, 5 O-ring

ACCESSORY FOR ASSEMBLING Ø100 BOOSTER VALVE GASKETS AND SPACERS



Code	Description
9002791	Accessory for assembling Ø100 Booster valve gaskets

PRESSURE GAUGE





Code	Description
9700101	M 40 1/8 012
9700110	M 40x40 1/8 012

N.B.: In case of use of the pressure gauge with Booster Ø100 it is necessary to purchase the appropriate adapter cod. 9210005

SILENCER

Ø40

Ø63

Ø100

Code	Description
W0970530072	MW SPL-F silencer for Booster Ø40
W0970530014	MW SCQ silencer for Booster Ø63
W0970530055	MW SFE silencer for Booster Ø100

NOTES

SPARE PARTS

SET OF GASKETS

Ø40



Ø63



Ø100

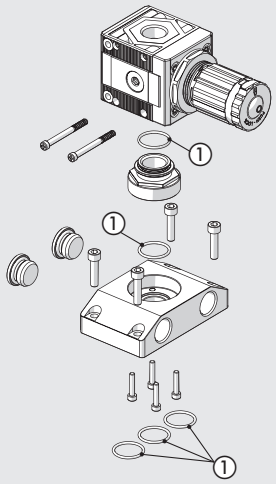



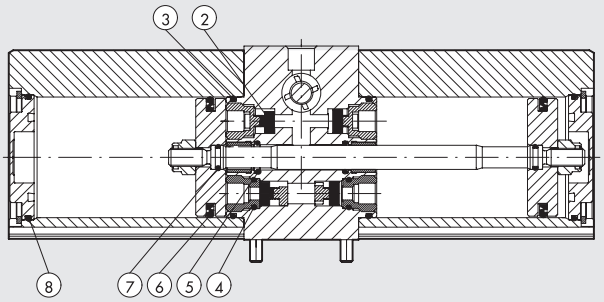

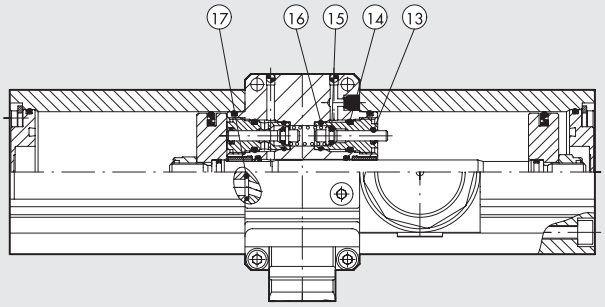

Code	Description
9002190	Set of gaskets for Ø40 Booster (includes all indicated gaskets)
9002390	Set of gaskets for Ø63 Booster (includes all indicated gaskets)
9002790	Set of gaskets for Ø100 Booster (includes all indicated gaskets)

IN-LINE PROGRESSIVE STARTER VAP 1/4" AND 1/2"

The in-line progressive starter is a valve that regulates the flow of air until the outlet pressure reaches a certain value, at which the valve opens and allows air to flow at full rate.
This valve can be used to control a group of valves or a single valve, or it can be mounted between another valve and an actuator.
The air that enters inlet 1 passes through a choke that has a knob adjustment to control the flow. The valve opens completely when the outlet pressure reaches about 60% of the inlet pressure.
If the air supply is switched off, the valve discharges air from outlet 2 to inlet 1.

TECHNICAL DATA		VAP 1/4	VAP 1/2
Threaded ports		1/4"	1/2"
Type of valve		2/2 NC	
Minimum operating pressure	bar	2	
	psi	29	
	MPa	0.2	
Maximum operating pressure	bar	10	
	psi	145	
	MPa	1	
Switching pressure		About 60% of inlet pressure	
Operating frequency	Hz	max 5	
Flow rate at 6.3 bar, ΔP=0.5 bar:	Nl/min	1050	2350
	scfm	37	83
Flow rate at 6.3 bar, ΔP=1 bar:	Nl/min	1500	3100
	scfm	53	110
Maximum flow rate through flow regulator at 6.3 bar:	Nl/min	200	300
	scfm	7	11
Operating temperature	°C	from -10 to 70	
	°F	from 14 to 158	
Fluid		Filtered, lubricated or unlubricated, compressed air. Lubrication, if used, must be continuous.	
Weight	g	90	220
Wall fixing screws		Min. M4x25	Min. M4x35
Mounting		In any position	

COMPONENTS

① BODY: anodized aluminium
② BALL: steel
③ INSERT: nickel-plated brass
④ O-Ring: NBR
⑤ POPPET: NBR
⑥ PISTON: anodized aluminium
⑦ PISTON GASKET: NBR
⑧ O-Ring: NBR
⑨ SPRING : steel
⑩ PIN: nickel-plated brass
⑪ NUT: nickel-plated brass
⑫ PIN HOLDER: nickel-plated brass
⑬ SNAP RING: zinc-plated steel
⑭ SILENCER

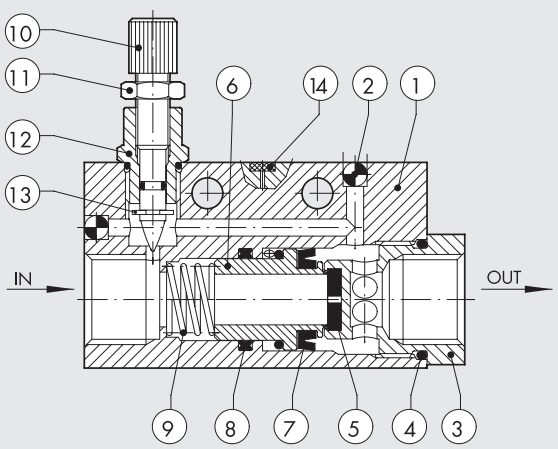

OPERATION

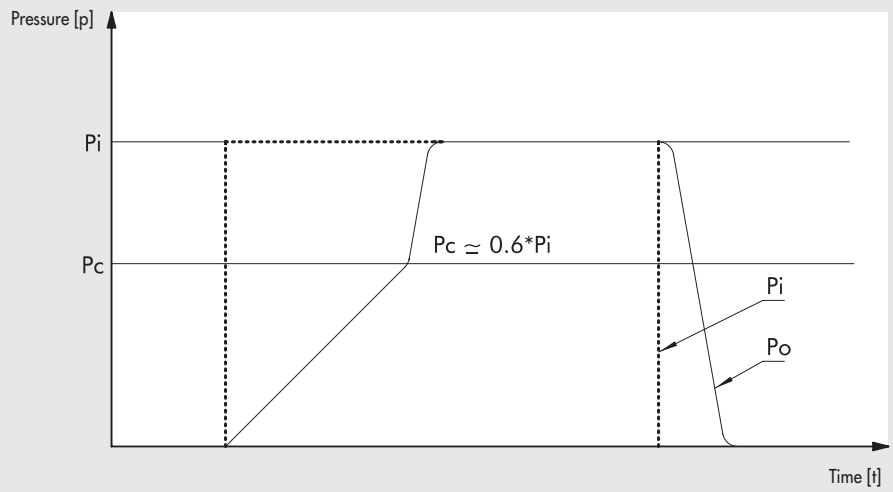

Pi = inlet pressure
Po = outlet pressure
Pc = switching pressure

DIMENSION

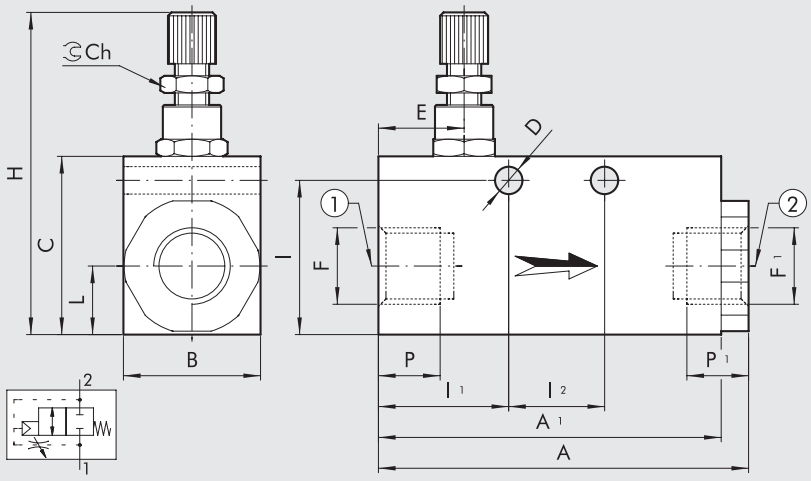

Code	Description	F	F¹	A	A¹	B	C	Ch	D	E	H	I	I¹	I²	L	P	P¹
W3606000002	VAP 1/4	G1/4	G1/4	56	50	20	30	8	4.5	10	49-52	25.5	18	16	10	9	9
W3606000004	VAP 1/2	G1/2	G1/2	75.8	65	30	40	8	4.5	13	59-62	35.5	26.5	16	15	12	12

NOTES

ROTARY JOINTS AND DISTRIBUTION FRAMES

METAL WORK PNEUMATIC

TECHNICAL DATA

Threaded ports		1/8	1/4	3/8	1/2
Max pressure	bar	0 - 12			
	MPa	0 - 1.2			
Operating temperature	°C	–10 - 80			
Fluid		Lubricated or unlubricated filtered air			
Body		Rotary joints: Nickel-plated brass			
		Distribution frame: Anodized aluminium			
Gaskets		NBR			

DISTRIBUTION FRAME

4-WAYS DISTRIBUTION FRAME

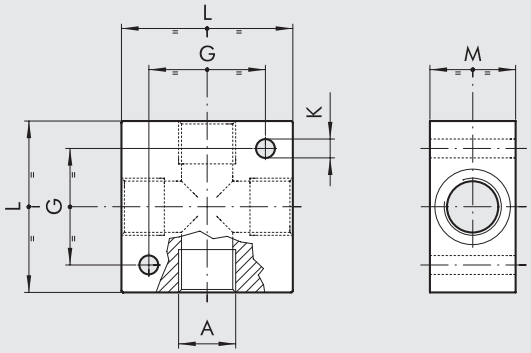

Code	A	G	K	L	M
W0501101001	G 1/8	17	4.5	25	15
W0501111002	G 1/4	26	5.5	40	20
W0501121003	G 3/8	34	5.5	50	25
W0501131004	G 1/2	34	5.5	50	30

DISTRIBUTION FRAM 2-WAYS LINEAR 1/8" - 1/4" OUTLETS

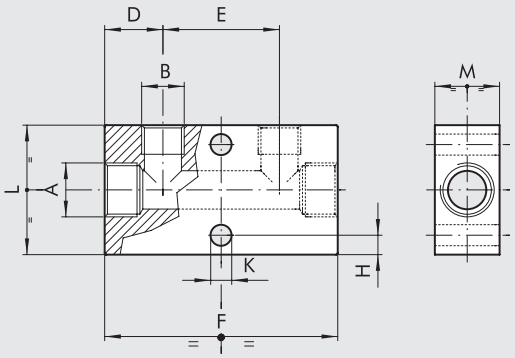

	INLETS		OUTLETS								
Code	N°	A	N°	B	D	E	F	H	K	L	M
W0502111001	2	G 1/4	2	G 1/8	15	30	60	4.5	5.3	30	20
W0502121002	2	G 3/8	2	G 1/4	18	36	72	6	6.5	40	20
W0502131002	2	G 1/2	2	G 1/4	22	36	80	6	6.5	40	30

DISTRIBUTION FRAME WITH MULTIPLE STRAIGHT 1/4" OUTLETS

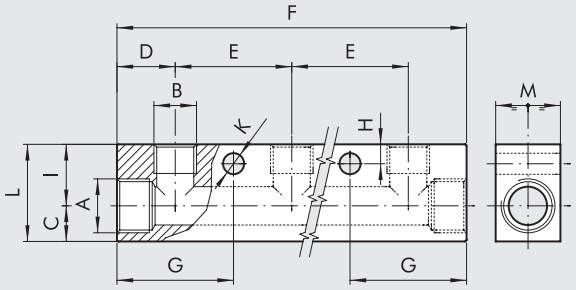

	INLETS		OUTLETS											
Code	N°	A	N°	B	D	E	F	G	H	K	I	C	L	M
W0502121006	2	G 3/8	3	G 1/4	18	36	108	36	6	6.5	19	11	30	20
W0502121008	2	G 3/8	4	G 1/4	18	36	144	36	6	6.5	19	11	30	20
W0502121010	2	G 3/8	5	G 1/4	18	36	180	36	6	6.5	19	11	30	20
W0502121012	2	G 3/8	6	G 1/4	18	36	216	36	6	6.5	19	11	30	20
W0502131006	2	G 1/2	3	G 1/4	18	36	108	36	6	6.5	24	16	40	30
W0502131008	2	G 1/2	4	G 1/4	18	36	144	36	6	6.5	24	16	40	30
W0502131010	2	G 1/2	5	G 1/4	18	36	180	36	6	6.5	24	16	40	30
W0502131012	2	G 1/2	6	G 1/4	18	36	216	36	6	6.5	24	16	40	30

DISTRIBUTION FRAME WITH MULTIPLE STRAIGHT 1/8" OUTLETS

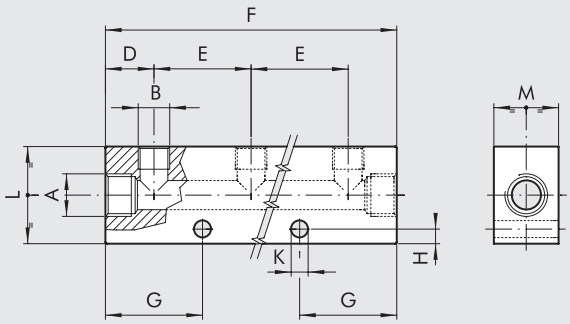

	INLETS		OUTLETS									
Code	N°	A	N°	B	D	E	F	G	H	K	L	M
W0502111005	2	G 1/4	3	G 1/8	15	30	90	30	4.5	5.3	30	20
W0502111007	2	G 1/4	4	G 1/8	15	30	120	30	4.5	5.3	30	20
W0502111009	2	G 1/4	5	G 1/8	15	30	150	30	4.5	5.3	30	20
W0502111011	2	G 1/4	6	G 1/8	15	30	180	30	4.5	5.3	30	20

DISTRIBUTION FRAME WITH 2 OPPOSED OULETS

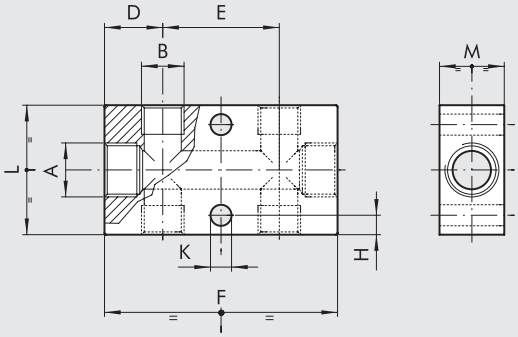

	INLETS		OUTLETS								
Code	N°	A	N°	B	D	E	F	H	K	L	M
W0503111013	2	G 1/4	2 + 2	G 1/8	15	30	60	4.5	5.3	30	20
W0503121014	2	G 3/8	2 + 2	G 1/4	18	36	72	6	6.5	40	20
W0503131014	2	G 1/2	2 + 2	G 1/4	22	36	80	6	6.5	40	30

DISTRIBUTION FRAME WITH 1/8"-1/4" OPPOSED OUTLETS

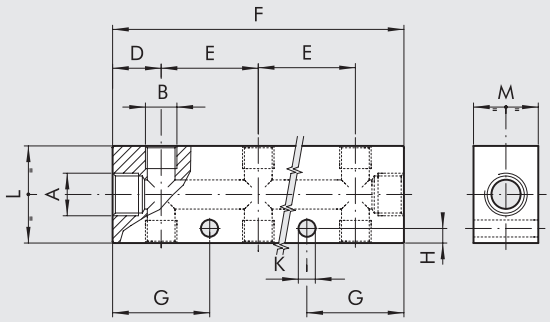

	INLETS		OUTLETS									
Code	N°	A	N°	B	D	E	F	G	H	K	L	M
W0503111015	2	G 1/4	3 + 3	G 1/8	15	30	90	30	4.5	5.3	30	20
W0503111017	2	G 1/4	4 + 4	G 1/8	15	30	120	30	4.5	5.3	30	20
W0503111019	2	G 1/4	5 + 5	G 1/8	15	30	150	30	4.5	5.3	30	20
W0503121016	2	G 3/8	3 + 3	G 1/4	18	36	108	36	6	6.5	40	20
W0503121018	2	G 3/8	4 + 4	G 1/4	18	36	144	36	6	6.5	40	20
W0503121020	2	G 3/8	5 + 5	G 1/4	18	36	180	36	6	6.5	40	20
W0503131016	2	G 1/2	3 + 3	G 1/4	22	36	116	40	6	6.5	40	30
W0503131018	2	G 1/2	4 + 4	G 1/4	22	36	152	40	6	6.5	40	30
W0503131020	2	G 1/2	5 + 5	G 1/4	22	36	188	40	6	6.5	40	30

DISTRIBUTOR, Ø 4-6-8 mm

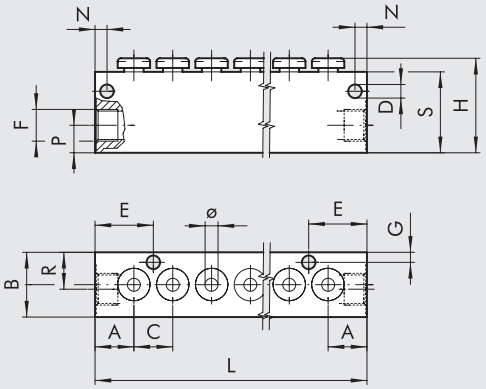

Code	N. positions	Ø	F	A	B	C	D	E	G	H	L	M	N	P	R	S
7304106	6	4	1/8	12	20	12	4.2	3.7	3.1	29	84	6	3.7	8.5	11.4	25
7304112	12	4									156					
7306206	6	6	1/4	14	20	14.6	4.2	21.3	3.1	34	101	6	3.7	10	11	30
7306212	12	6									188.6					
7308306	6	8	3/8	18	25	16.6	4.2	26.3	4.2	39	119	5	5	14	14	35
7308312	12	8									218.6					

ROTARY JOINT

SINGLE ROTARY JOINT



Code	A	B	C	D	E	F	G	H	I	CH	r.p.m.
W0511101101	32.5	30	G 1/8	G 1/8	16	22	–	16	8	16	550
W0511121121	32.5	30	G 1/4	G 1/4	16	22	–	16	8	16	550
W0511131131	44	40	G 3/8	G 3/8	25	28.5	G 1/8	25	12.5	22	300
W0511141141	55	65	G 1/2	G 1/2	30	35	G 3/8	40	20	30	200
W0511151151	70	65	G 3/4	G 3/4	40	45	G 1/2	40	20	36	160
W0511161161	80	80	G 1	G 1	45	52.5	G 3/4	50	26	45	140

MULTIPLE ROTARY JOINT

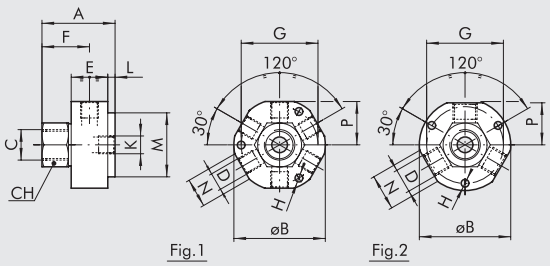

				INLETS		OUTLETS												
Code	Figure	A	B	N°	C	N°	D	E	F	G	H	K	L	M	N	P	CH	r.p.m.
W0513131101	1	45	49	1	G 3/8	6	G 1/8	25	28.5	42	4.2	G 1/8	4	35	17	22.6	22	300
W0512131121	2	45	49	1	G 3/8	3	G 1/4	25	28.5	42	4.2	G 1/8	4	35	19	23	22	300

2 INDEPENDENT WAY ROTARY JOINTS

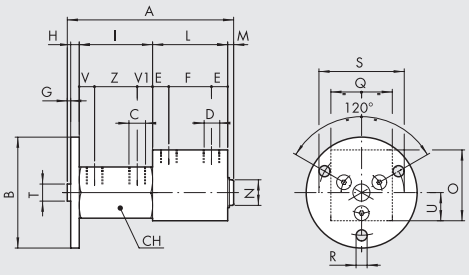

			INLETS		OUTLETS																			
Code	A	B	N°	C	N°	D	E	F	G	H	I	L	M	N	O	Q	R	S	T	U	V	V1	Z	CH	r.p.m.
W0514101101	97	65	2	G 1/8	2	G 1/8	12	20	2	5	43	44	3	15	40	25	6.3	50	10	20	11.5	11.5	20	30	300
W0514121121	128	65	2	G 1/4	2	G 1/4	15	30	2	5	56	60	5	24	50	40	6.3	50	10	25	15	12	30	36	200

3 INDEPENDENT WAY ROTARY JOINTS

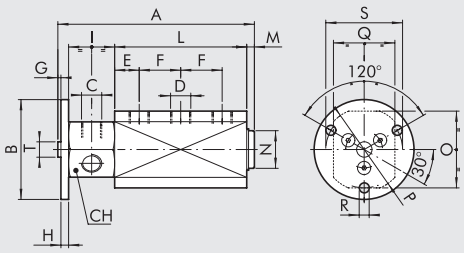

			INLETS		OUTLETS																
Code	A	B	N°	C	N°	D	E	F	G	H	I	L	M	N	O	P	Q	R	S	T	CH	r.p.m.
W0515121121	128	64	3	G 1/4	3	G 1/4	16	27	2	5	30	86	5	29	50	54	45	6.3	50	10	36	200

SILENCERS AND EXHAUST REGULATOR

METAL WORK PNEUMATIC

SILENCER MW SC



	Code	A	B ±0.2	F	L ±3%
Materials:	W0970530001	M5	6	4.5 ±0.5	10
Nickel-plated brass	W0970530002	G 1/8	12	6 ±0.5	15
Sintered nickel-plated bronze	W0970530003	G 1/4	15	6.7 ±0.5	19
	W0970530004	G 3/8	19	8.5 ±0.5	28.5
	W0970530005	G 1/2	23	8.7 ±0.5	33
Features:	W0970530006	G 3/4	29	11 ±1	40.5
Pmax: 12 bar	W0970530007	G 1	36	11.5 ±1	50.5
Temp.: –10°C - +80°C					

SILENCER MW SCQ



	Code	A	B ±0.2	F	L ±3%	CH
Materials:	W0970530012	G 1/8	12	6 ±0.5	15	7
Nickel-plated brass	W0970530013	G 1/4	15	7.5 ±0.5	19	8
Sintered nickel-plated bronze	W0970530014	G 3/8	19	8.5 ±0.5	29.2	10
	W0970530015	G 1/2	23	9 ±0.5	31.5	14
	W0970530016	G 3/4	29	10 ±1	41.5	17
Features:	W0970530017	G 1	36	12 ±1	51.2	23
Pmax: 12 bar						
Temp.: –10°C - +80°C						

SILENCER MW SE



	Code	A	B ±0.5	F	L ±5%	CH
Materials:	W0970530021	M5	4	4 ±0.5	13	8
Nickel-plated brass	W0970530020	M7	5	5 ±0.5	21	10
Sintered nickel-plated bronze	W0970530022	G 1/8	7	6 ±0.5	21	13
	W0970530023	G 1/4	8.5	8 ±0.5	23.5	16
	W0970530024	G 3/8	11	8 ±0.5	33	19
Features:	W0970530025	G 1/2	15	9 ±0.5	37	24
Pmax: 12 bar	W0970530026	G 3/4	21.5	9 ±1	43.5	30
Temp.: –10°C - +80°C	W0970530027	G 1	27	10 ±1	56	36

HIGH-CAPACITY SILENCER MW SL



	Code	A	B ±1	F	L ±5%	CH
Materials:	W0970530036	G 3/4	37	12±1	215	50
Nickel-plated brass	W0970530037	G 1	37	12±1	215	50
Sintered nickel-plated bronze	W0970530038	G 1 1/4	37	15±1.5	215	50
	W0970530039	G 1 1/2	37	15±1.5	215	50
	W0970530040	G 2	37	17±1.5	220	65
Features:						
Pmax: 12 bar						
Temp.: –10°C - +80°C						

SILENCER MW STT



	Code	A	B ±0.2	F	L ±3%	C
Materials:	W0970530042	G 1/8	9.5	6.5 ±0.5	6	2
Nickel-plated brass	W0970530043	G 1/4	12.6	6 ±0.5	7	1.5
Sintered nickel-plated bronze	W0970530044	G 3/8	16.2	7.5 ±0.5	8.5	1.5
	W0970530045	G 1/2	20.5	10 ±0.5	9.6	2.5
	W0970530046	G 3/4	26	11 ±1	12	1.5
Features:	W0970530047	G 1	33	13 ±1	11	–
Pmax: 12 bar						
Temp.: –10°C - +80°C						

SILENCER MW SFE



	Code	A	F	L ±3%	CH
Materials:	W0970530051	M5	3.7 ±0.5	4.7	8
Nickel-plated brass	W0970530052	G 1/8	6.2 ±0.5	8.2	13
Stainless steel wire	W0970530053	G 1/4	7.7 ±0.5	11.3	16
	W0970530054	G 3/8	8 ±0.5	11.5	19
	W0970530055	G 1/2	9 ±0.5	13	24
Features:	W0970530056	G 3/4	9 ±1	15	30
Pmax: 12 bar	W0970530057	G 1	10 ±1	18	36
Temp.: –10°C - +80°C					

DYNAMIC SILENCER MW SPL



	Code	A	B ±0.2	F	L ±3%
Materials:	W0970530062	G 1/8	15.4	6.2 ±0.5	27
Black acetal resin	W0970530063	G 1/4	19.6	8 ±0.5	35
Acoustic insulation	W0970530064	G 3/8	24.7	11.3 ±0.5	47
	W0970530065	G 1/2	24.7	10.7 ±0.5	47
	W0970530066	G 3/4	48	18 ±1	96
Features:	W0970530067	G 1	48	18 ±1	97
Pmax: 6 bar					
Temp.: –10°C - +60°C					

SILENCER MW SPL-F



	Code	A	B ±0.2	F ±0.5	L ±3%	CH
Materials:	W0970530072	G 1/8	16.3	5.5	29	10
Black acetal resin	W0970530073	G 1/4	20	7.4	36.5	13
Felt	W0970530074	G 3/8	24.8	11	47	17
	W0970530075	G 1/2	24.8	11	47	17
Features:						
Pmax: 12 bar						
Temp.: –10°C - +60°C						

SILENCED EXHAUST REGULATOR MW SVE



	Code	A	F	L ±0.5	CH
Materials:	W0970520001	G 1/8	6.7 ±0.5	19 - 23	13
Nickel-plated brass	W0970520002	G 1/4	7.4 ±0.5	21 - 24.5	15
Sintered nickel-plated bronze	W0970520003	G 3/8	9.7 ±0.5	23.5 - 29.5	22
Stainless steel spring	W0970520004	G 1/2	10.6 ±0.5	23 - 28	22
	W0970520005	G 3/4	12 ±1	29 - 35	30
Features:	W0970520006	G 1	13.8 ±1	27 - 34	36
Pmax: 12 bar					
Temp.: –10°C - +80°C					

SILENCED EXHAUST REGULATOR MW SVL



	Code	A	F	L ±0.5	CH	CH1
Materials:	W0970520010	M5	4 ±0.5	17 ÷ 27	8	6
Nickel-plated brass	W0970520009	M7	4.5 ±0.5	19 ÷ 31	8	5.5
Sintered nickel-plated bronze	W0970520011	G 1/8	7 ±0.5	31 ÷ 40	16	9
	W0970520012	G 1/4	7.5 ±0.5	30 ÷ 37.5	16	9
	W0970520013	G 3/8	10.5 ±0.5	37.5 ÷ 51.5	22	9
Features:	W0970520014	G 1/2	12.4 ±0.5	39.5 ÷ 47.5	22	9
Pmax: 12 bar	W0970520015	G 3/4	12.4 ±1	56.5 ÷ 81	30	13
Temp.: –10°C - +80°C	W0970520016	G 1	12.4 ±1	58.5 ÷ 84.5	36	13

EXHAUST REGULATOR MW DSN



	Code	A	B	CH	CH1
Materials:	W0970520021	G 1/8	G1/8	12	12
Nickel-plated brass	W0970520022	G 1/4	G1/8	14	16
	W0970520023	G 3/8	G1/4	19	17
	W0970520024	G 1/2	G1/4	24	22
Features:					
Pmax: 12 bar					
Temp.: –10°C - +80°C					

EXHAUST REGULATOR MW DSE



	Code	A	F	L ±0.5	CH
Materials:	W0970520031	G 1/8	7.5 ±0.5	16.8 - 20	14
Nickel-plated brass	W0970520032	G 1/4	10 ±0.5	21.5 - 29	17
Features:					
Pmax: 12 bar					
Temp.: –10°C - +80°C					

METAL WORK PNEUMATIC

FLOW CHARTS

SILENCER MW SC

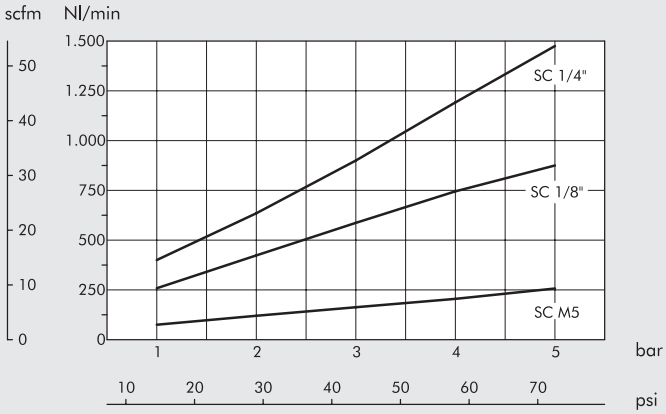

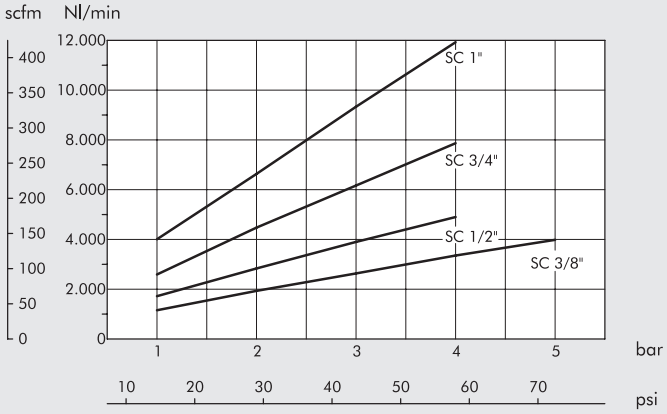

SILENCER MW SCQ

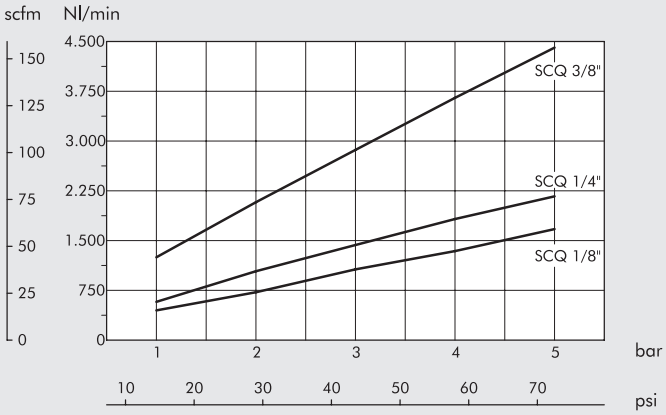

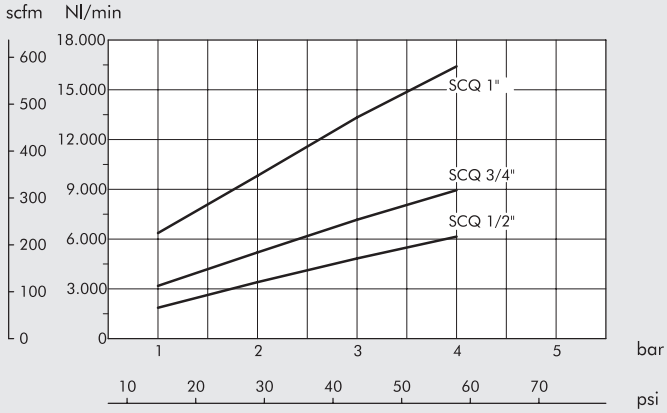

SILENCER MW SE

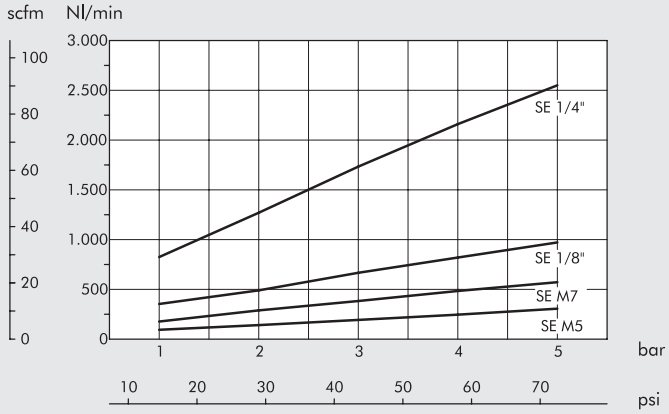

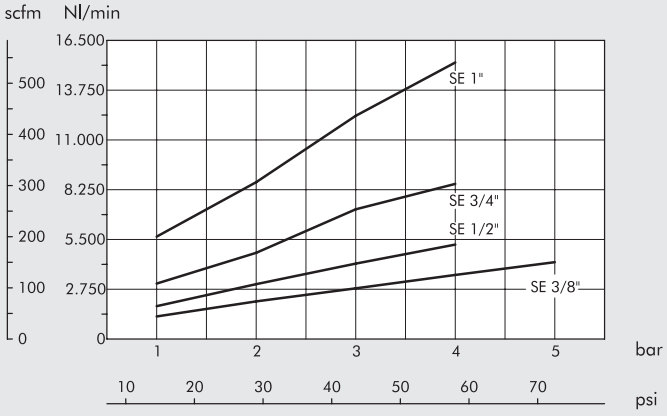

FLOW CHARTS

SILENCER MW STT

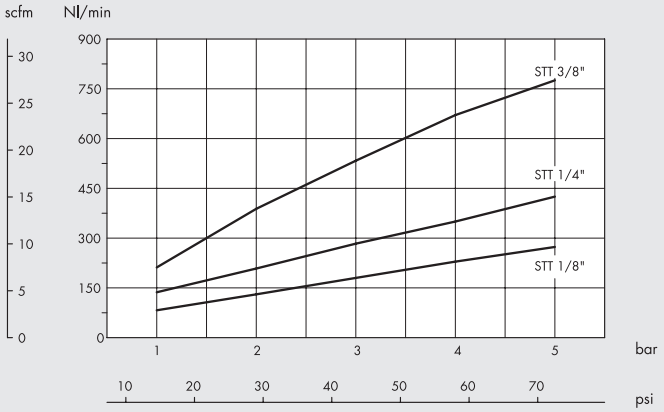

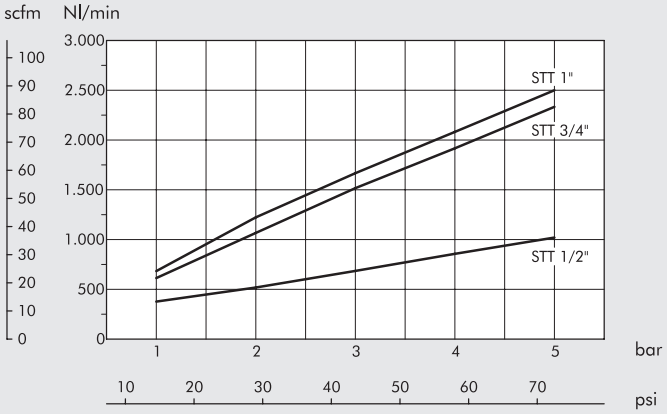

SILENCER MW SFE

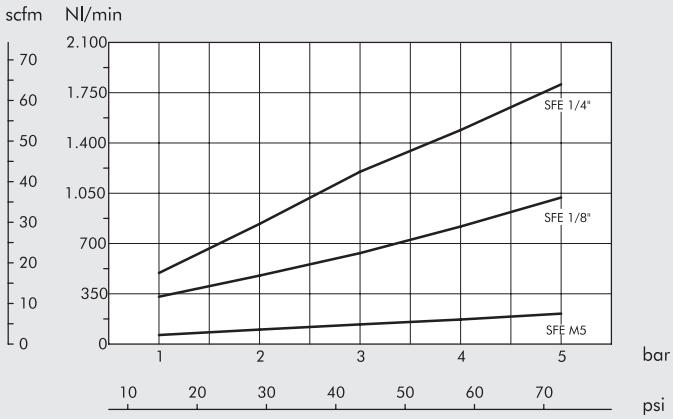

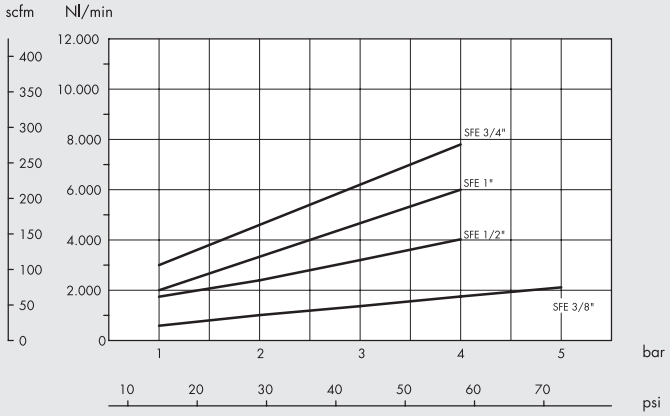

SILENCER MW SPL

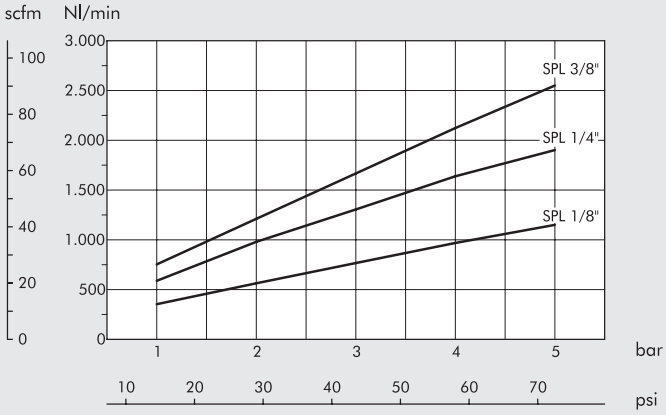

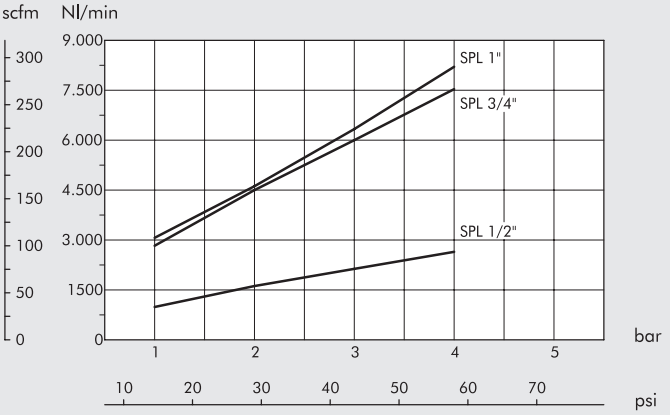

FLOW CHARTS

SILENCER MW SPL-F

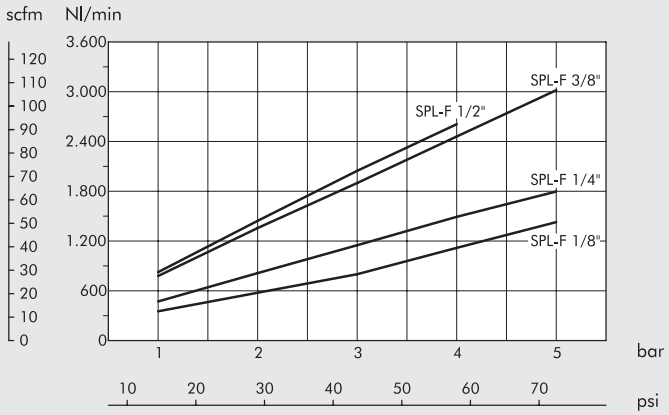

SILENCER MW SVE

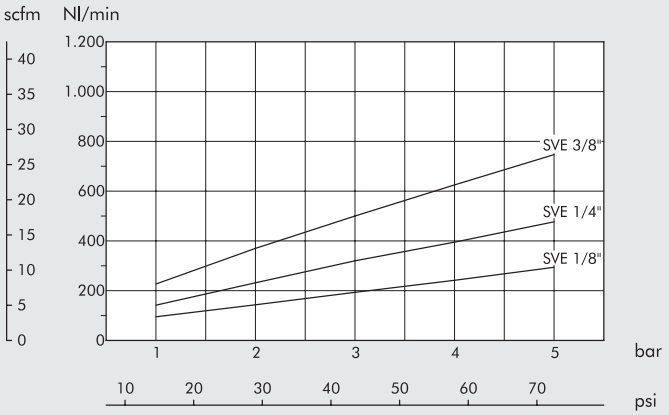

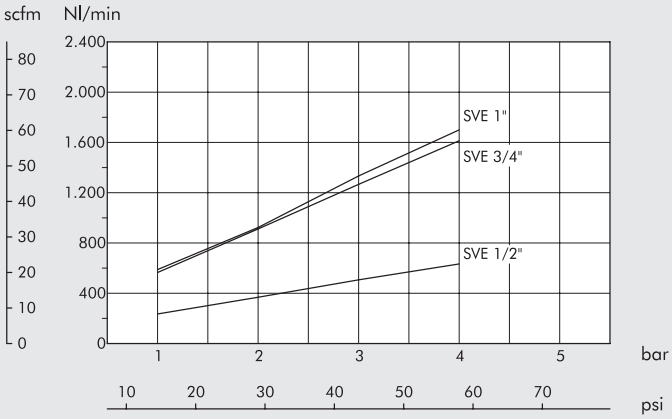

SILENCER MW SVL

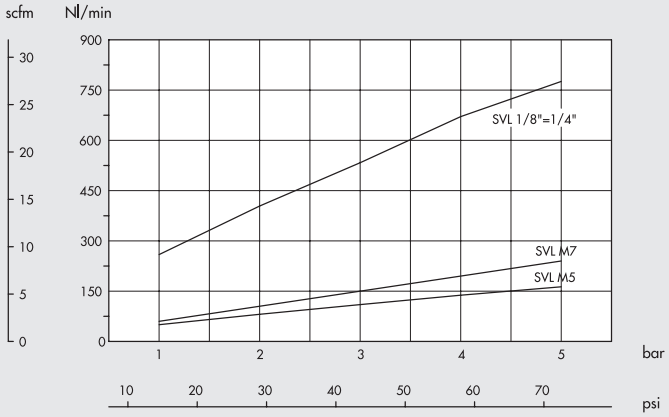

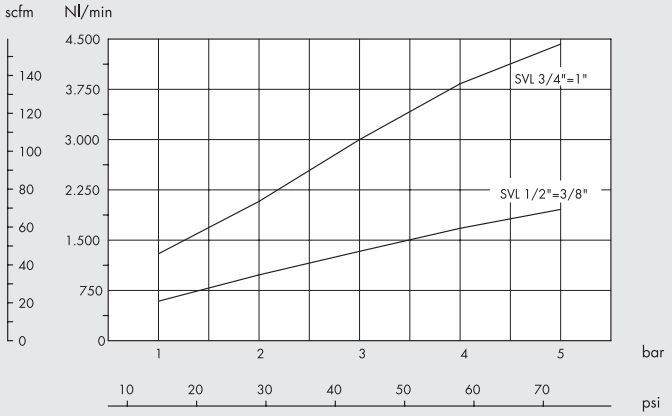

NOISE ABATEMENT

Reduction of the noise that you obtain mounting a silencer on a compressed air exhaust, measured by feeding at 5 bar, at a distance of 1 m with 45° angle to the axis of the silencer (for SFE model at 90° in order to avoid the direct jet).

Middle values in the sizes.

MW SC	- 35 dB
MW SCQ	- 35 dB
MW SE	- 28 dB
MW STT	- 32 dB
MW SFE	- 30 dB
MW SPL	- 30 dB
MW SPL-F	- 35 dB
MW SVE	- 25 dB
MW SVL	- 25 dB

PNEUMO-POWER

Supplies 24V electric power via an M8 connector. Compressed air to power the generator can be supplied merely by connecting a pipe to the 1/8" threaded port. To interrupt energy production, all you have to do is to switch off the compressed air supply by means of a cock or solenoid valve. Voltage remains constant irrespective of changes in input pressure or the load applied (within the limits specified in the catalogue). An easy-to-read light display shows the status of the appliance at all times.

TECHNICAL DATA		50-1	50-2	50-3
Maximum power at 7 bar	W	3	7.5	12
Nominal voltage supplied		24 VDC		
Voltage tolerance		±3%		
		Including line regulation, load regulation and factory setup		
Ripple and Noise		mMax 250 mV p-p o 79 mV rms		
		Measured at 20Mhz bandwidth by using a pair-wire terminated with a 0.1µF and 47µF load capacitor		
Rise time at 7 bar at max. load	sec	2.5	1.5	1
		See graph on page **E5**.25		
Hold time at 7 bar at 50% of load	sec	1.3	0.9	0.8
		See graph on page **E5**.25		
Electrical connector		M8 - 3 poles		
Overload protection and short-circuit		"Hiccup mode" with automatic recovery upon cessation of overload		
Overvoltage protection		Intervention if output voltage > 120% than nominal value		
Electromagnetic compatibility		In compliance with the following standards:		
		EN 61000-2: Part 6-2: Generic standards - Immunity for industrial environments		
		EN 61000-2: Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments		
Life at 6.3 bar	h	20.000		
Signals		LED diagnostics.		
		Visual signals are flanked by a diagnostic pin on the M8 connector, which closet a GND contact when the voltage is 24 VDC ±3%		
Index of protection for electronic devices		IP 65		
Input fluid		Filter unlubricated air		
Minimum input pressure	bar	4	3	3
Maximum input pressure	bar	7	7	7
Max air consumption at 7 bar (Leq)	Nl/min	32	50	75
Air ports		Input: G1/8"		
		Exhaust: G1/8"		
Temperature range	°C	0 - 50		
Max noise level at 7 bar		75 dB		
Casing material		Painted aluminium		
Assembly position		Any		
Fixing		Using 3 M4x10 screws		
		The device can be stabilised using rubber vibration dampers forniti in dotazione		
Weight	g	330		

LED DIAGNOSTICS OVERVIEW

LED off or red LED flashing	Temporarily on start-up: the output voltage has not yet reached 24V
	It this condition persists, the applied load is probably excessive with respect to the input pressure.
Green LED fixed	Normal operation: the output voltage has reached 24V
	Optimal use of the compressed air supply.
Green LED flashing	Normal operation: the output voltage has reached 24V but the generator is used below capacity
	(can supply more power at the same compressed air supply)
Red and Green LED flashing	Charge short-circuited: output voltage is automatically cut off. It will return within the tolerance range upon elimination of overload.
Red LED fixed	The maximum supply pressure has been exceeded and the device risks getting damaged.

METAL WORK PNEUMATIC

COMPONENTS

① Aluminium body, treated and painted
② Aluminium body, treated and painted
③ Aluminium base, treated and painted
④ Brass nozzle
⑤ Turbine and electrical generator unit
⑥ M8 3-pin connector
⑦ NBR gaskets
⑧ Electronic board
⑨ Vibration dampers
⑩ Silencer

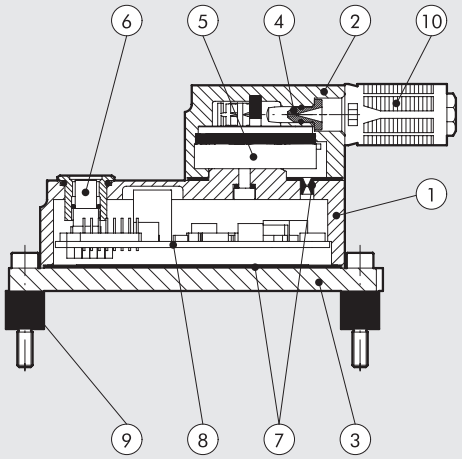

FUNCTION DIAGRAM

The compressed air is supplied via a nozzle that converts pressure energy into kinetic energy. The supersonic jet of air strikes the blades of a micro-turbine, which is integral with an electrical generator. An electronic power management unit ensures constant voltage output at varying input pressures and applied electrical loads. The electrical power thus generated can supply any type of utility.

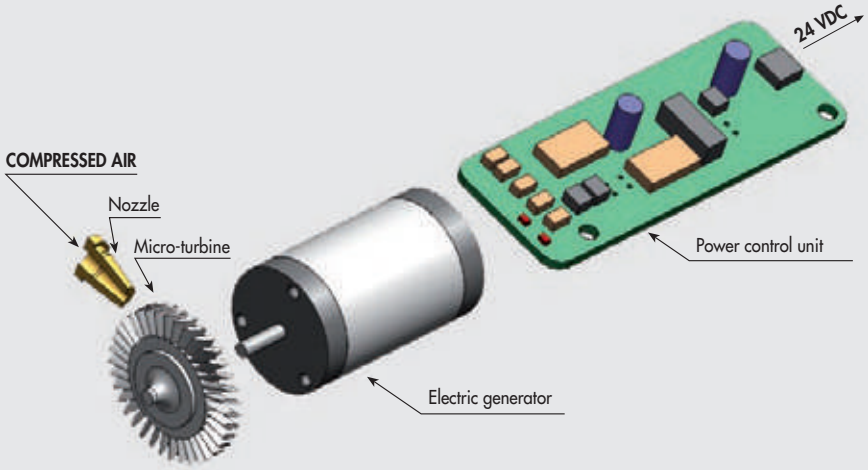

FIXING

The generator can be fixed on a flat surface using the 3 M4x10 screws ① (fig Ⓐ), and the 3 vibration dampers ② supplied with the device (fig. Ⓑ)

Ⓐ



Ⓑ

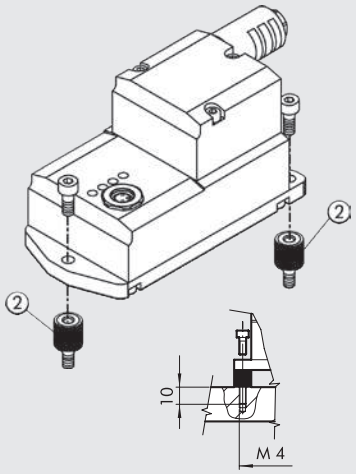

PRESSURE / AVAILABLE POWER

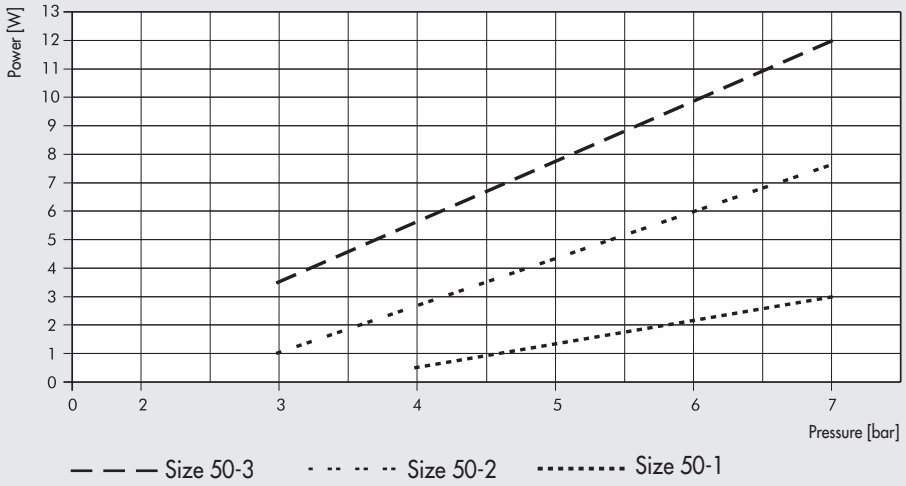

Important: if the input pressure is not sufficient to generate the power required by the electric load, the generator keeps switching on and off (intermittently).
You only need to increase the air pressure (as shown in the chart) to get the required power.

PRESSURE / AIR CONSUMPTION

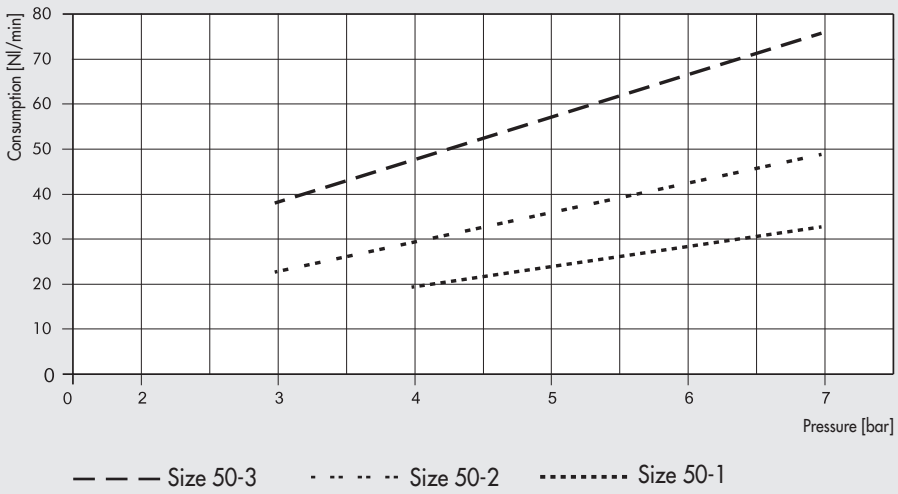

PRESSURE AND ACTUATION TIME WITH ELECTRICAL LOAD

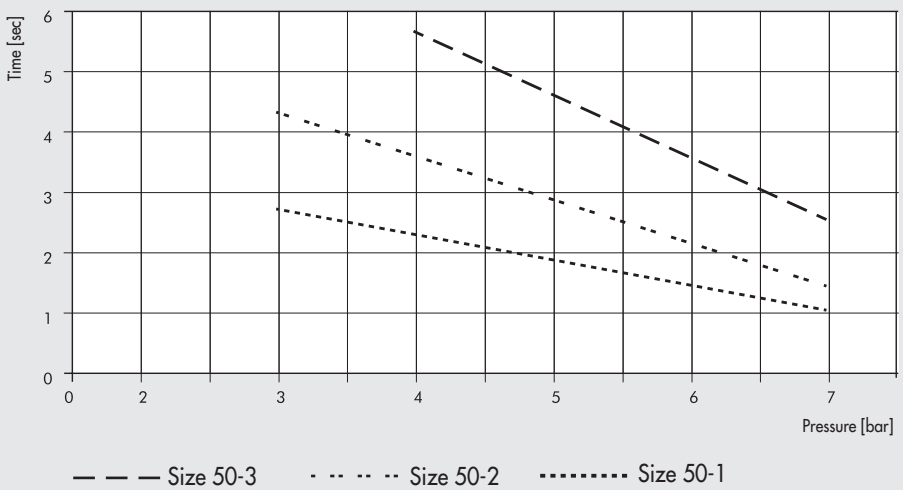

The above graph shows, for a set input pressure, the maximum time required to reach the rated output voltage (with maximum electrical load applicable for this pressure) as the size of the device changes.
For example, with a size 50-2 device having an input pressure of 5.2 bar, a 24VDC output voltage will be available about two seconds after start-up.

AVAILABLE AIR / POWER CONSUMPTION

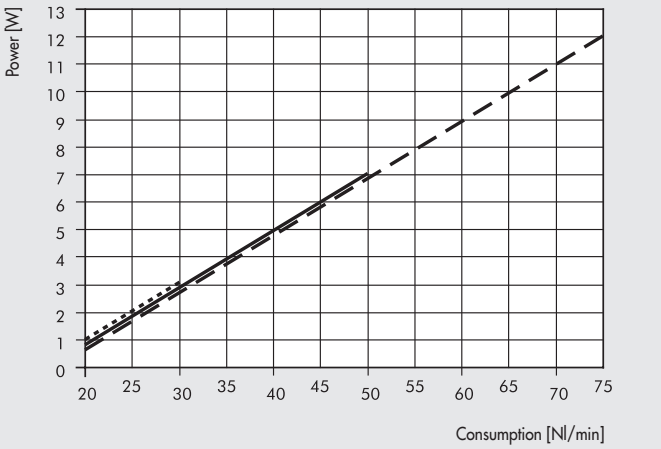

— — — Size 50-3 ——— Size 50-2 ····· Size 50-1

RISE TIME AND HOLD TIME GRAPH

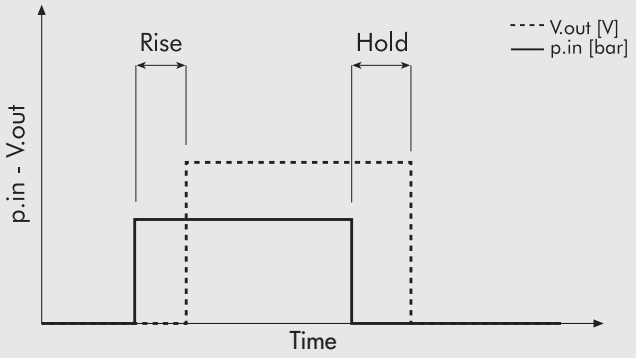

Rise time: the delay from activation of the compressed air supply to 24V power supply to the M8 connector.
Hold time: the time for which 24V is maintained after the compressed air supply has been switched off.

DIMENSIONS

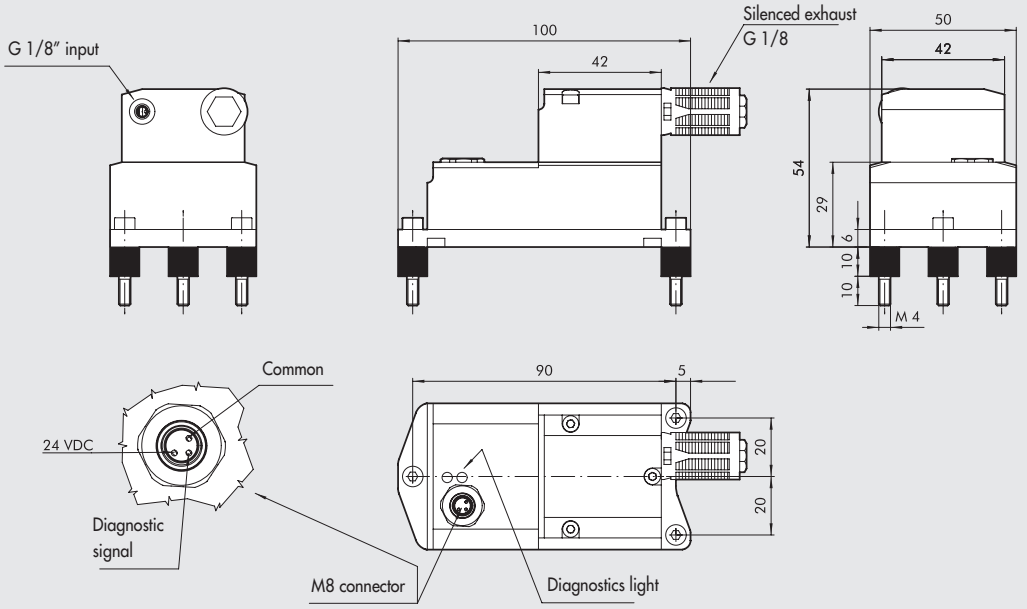

Code	Description
0251530000	PNEUMO POWER 50-1 3 W 24 VDC
0251550000	PNEUMO POWER 50-2 7.5 W 24 VDC
0251570000	PNEUMO POWER 50-3 12 W 24 VDC

ACCESSORIES

M8 CONNECTOR WITH CABLE



Pin	Wire color	
1	Brown	+ 24V
3	Blue	GND
4	Black	Diagnostics

Code	Description
0240009053	M8 male 3-pin connector with 2.5 metres of cable

NOTES

STAINLESS STEEL ACCESSORIES

- **FLOW MICRO-REGULATOR SERIES MRFX** — E6.2

- **IN-LINE FLOW REGULATOR SERIES RFLX** — E6.4

- **CHECK VALVE SERIES VNRX** — E6.6

FLOW MICRO-REGULATOR SERIES MRFX

Main features:
- AISI 316L (EN 1.4404) stainless steel body and FKM/FPM seals
- reduced dimensions
- excellent regulation
- adjustment using an Allen wrench
- available in Ø4 - Ø6 - Ø8 - Ø10 and 1/8" - 1/4" - 3/8" threaded ports
- comes with a ring that can rotate even with the MRF mounted in position.

CERTIFIED

- NSF/ANSI 169 standard: products in contact with food.

NSF COMPONENT

TECHNICAL DATA		1/8"			1/4"			3/8"
Pipe		Ø4	Ø6	Ø8	Ø6	Ø8	Ø10	Ø10
Max input pressure	MPa	1						
	bar	10						
	psi	145						
Temperature range	°C	-20 to 150						
	°F	-4 to 302						
Max flow rate on regulation at 6.3 bar	Nl/min	150	190	200	380	430	500	1000
Max flow rate on exhaust at 6.3 bar with closed needle	Nl/min	60	110	110	190	250	300	470
Max flow rate on exhaust at 6.3 bar with open needle	Nl/min	80	200	250	250	350	380	1000
Regulation		Allen wrench						
Internal system		Tapered needle						
Fluid		Filtered, lubricated or unlubricated compressed air						

COMPONENTS

① REGULATION NEEDLE: AISI 316L stainless steel
② BODY: AISI 316L stainless steel
③ REVOLVING RING: AISI 316L stainless steel
④ GASKET: FKM/FPM
⑤ RELEASE BUSHING: AISI 316L stainless steel

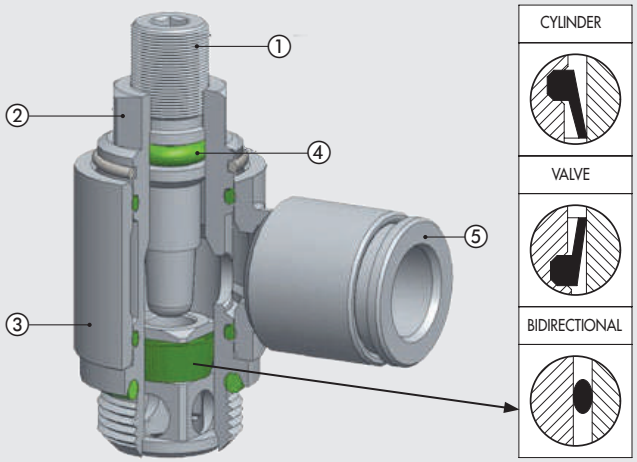

FLOW CHARTS

MRFX 1/8" - PIPE Ø 4 - Ø 6 - Ø 8

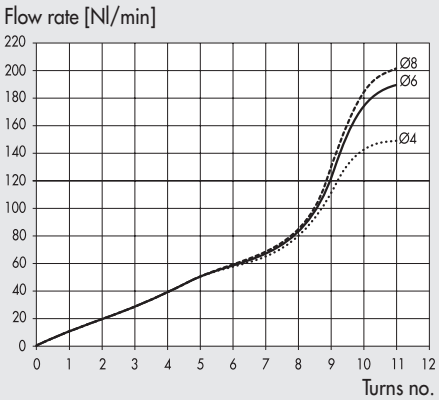

MRFX 1/4" - PIPE Ø 6 - Ø 8 - Ø 10

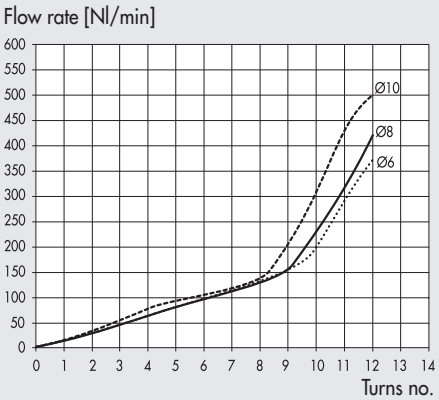

MRFX 3/8" - PIPE Ø 10

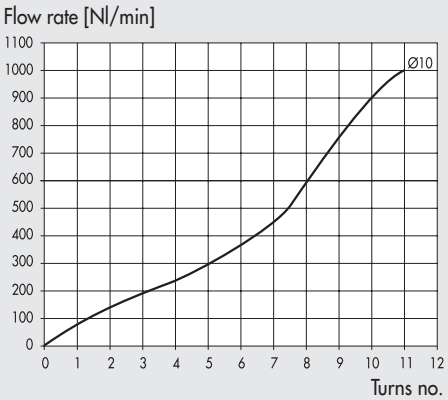

SYNOPTIC, SIZES AND VERSIONS

M R F	O	X	C	4	1/8
FAMILY	TYPE	MATERIAL	FUNCTION	Ø PIPE	Ø THREAD
Flow micro-regulator	**O** Needle with hexagon socket	**X** AISI 316L stainless steel	**C** For cylinder **V** For valve **B** Bidirectional	**4** Ø 4 **6** Ø 6 **8** Ø 8 **10** Ø 10	**1/8** G 1/8" **1/4** G 1/4" **3/8** G 3/8"

DIMENSIONS AND ORDERING CODES

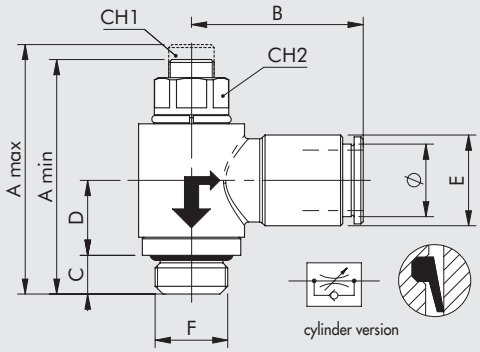

cylinder version



valve version

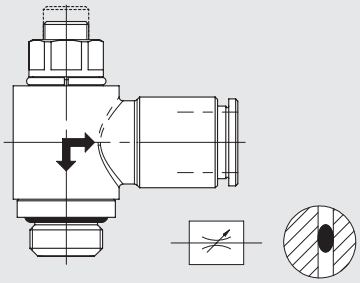

bidirectional version

Code	Description	F	Ø	CH1	CH2	A min	A max	B	C	D	E
9001011CX	MRF O X C 4 1/8	1/8	4	2	9	29	32	19.5	5	10.5	9
9001011VX	MRF O X V 4 1/8	1/8	4	2	9	29	32	19.5	5	10.5	9
9001011BX	MRF O X B 4 1/8	1/8	4	2	9	29	32	19.5	5	10.5	9
9001003CX	MRF O X C 6 1/8	1/8	6	2	9	29	32	22	5	10.5	12
9001003VX	MRF O X V 6 1/8	1/8	6	2	9	29	32	22	5	10.5	12
9001003BX	MRF O X B 6 1/8	1/8	6	2	9	29	32	22	5	10.5	12
9001004CX	MRF O X C 6 1/4	1/4	6	3	10	35	40	23.5	6.5	11.5	12
9001004VX	MRF O X V 6 1/4	1/4	6	3	10	35	40	23.5	6.5	11.5	12
9001004BX	MRF O X B 6 1/4	1/4	6	3	10	35	40	23.5	6.5	11.5	12
9001005CX	MRF O X C 8 1/8	1/8	8	2	9	29	32	22.5	5	10.5	14
9001005VX	MRF O X V 8 1/8	1/8	8	2	9	29	32	22.5	5	10.5	14
9001005BX	MRF O X B 8 1/8	1/8	8	2	9	29	32	22.5	5	10.5	14
9001006CX	MRF O X C 8 1/4	1/4	8	3	10	35	40	24	6.5	11.5	14
9001006VX	MRF O X V 8 1/4	1/4	8	3	10	35	40	24	6.5	11.5	14
9001006BX	MRF O X B 8 1/4	1/4	8	3	10	35	40	24	6.5	11.5	14
9001008CX	MRF O X C 10 1/4	1/4	10	3	10	35	40	26.5	6.5	11.5	16
9001008VX	MRF O X V 10 1/4	1/4	10	3	10	35	40	26.5	6.5	11.5	16
9001008BX	MRF O X B 10 1/4	1/4	10	3	10	35	40	26.5	6.5	11.5	16
9001009CX	MRF O X C 10 3/8	3/8	10	4	14	42	52	28	9	13	16
9001009VX	MRF O X V 10 3/8	3/8	10	4	14	42	52	28	9	13	16
9001009BX	MRF O X B 10 3/8	3/8	10	4	14	42	52	28	9	13	16

IN-LINE FLOW REGULATOR SERIES RFLX

The in-line flow regulator regulates the speed of the piston rod in the pneumatic cylinders.
Two versions are available:
- type U (unidirectional) regulates the flow only in one of the two directions of air flow.
- type B (bidirectional) regulates the flow in both directions of air flow.

Regulation: manual or with box wrench.
AISI 316L (EN 1.4404) stainless steel body
The gasket are in FKM/FPM.

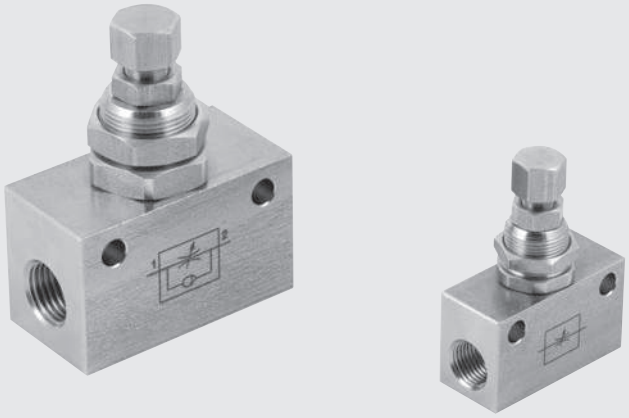

CERTIFIED
- NSF/ANSI 169 standard: products in contact with food.

NSF COMPONENT

TECHNICAL DATA		1/8"	1/4"
Max input pressure	MPa	1	
	bar	10	
	psi	145	
Temperature range	°C	0 to 150	
	°F	32 to 302	
Max flow rate on regulation at 6.3 bar	Nl/min	110	650
Max flow rate on exhaust at 6.3 bar with closed needle	Nl/min	130	500
Max flow rate on exhaust at 6.3 bar with open needle	Nl/min	140	670
Regulation		Box wrench	
Internal system		Tapered needle	
Fluid		Filtered, lubricated or unlubricated compressed air	

COMPONENTS

① BLOCK: AISI 316L stainless steel
② REGULATION NEEDLE: AISI 316L stainless steel
③ WALL LOCKING RING NUT: AISI 316L stainless steel
④ GASKET: FKM/FPM
⑤ NIPPLE: AISI 316L stainless steel

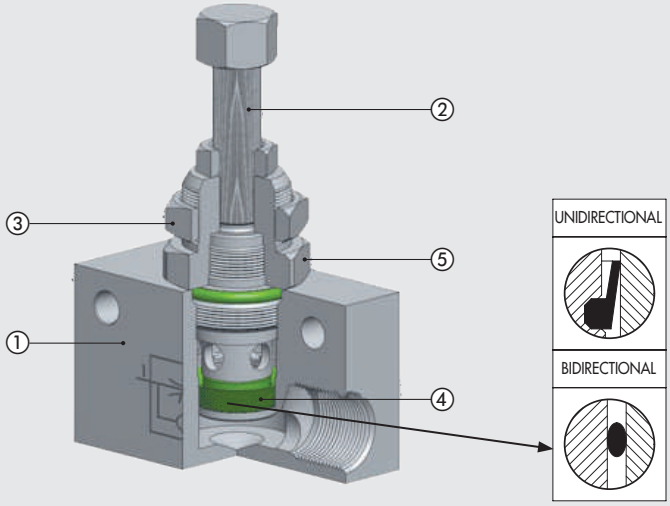

FLOW CHARTS

RFLX 1/8"

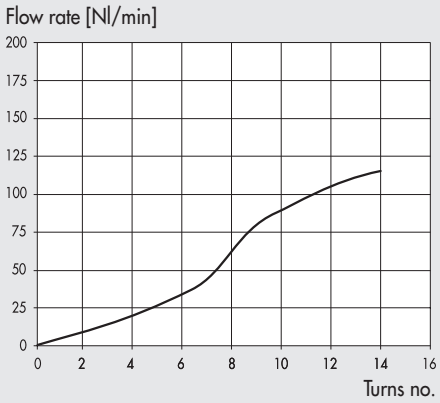

RFLX 1/4"

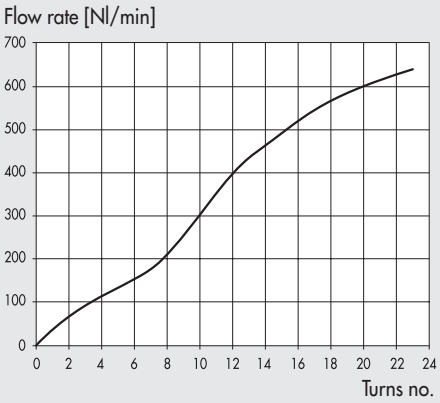

SYNOPTIC, SIZES AND VERSIONS

R F L	X	U	1/8
FAMILY	**MATERIAL**	**FUNCTION**	**Ø THREAD**
In-line flow regulator	**X** AISI 316L stainless steel	**U** Unidirectional **B** Bidirectional	**1/8** G 1/8" **1/4** G 1/4"

DIMENSIONS AND ORDERING CODES

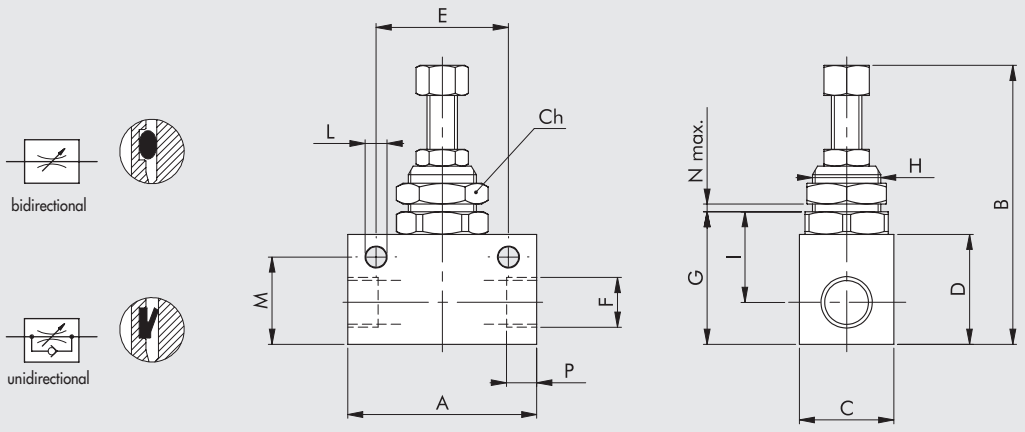

Code	Description	F	P	E	H	N max	A	B max	C	G	I	D	M	Ch	L
9041002X	RFL X U 1/8	1/8	8.5	24	M12x0.75	4.5	34	56	15	23	13	20	16	14	4.5
9041003X	RFL X U 1/4	1/4	7	35	M18x1.5	4.5	50	75	25	35	20	30	23	22	5.5
9041202X	RFL X B 1/8	1/8	8.5	24	M12x0.75	4.5	34	56	15	23	13	20	16	14	4.5
9041203X	RFL X B 1/4	1/4	7	35	M18x1.5	4.5	50	75	25	35	20	30	23	22	5.5

CHECK VALVE SERIES VNRX

This allow air flow in only one of the two directions.
AISI 316L (EN 1.4404) stainless steel body.
The gasket are in FKM/FPM.

CERTIFIED
- NSF/ANSI 169 standard: products in contact with food.

NSF
COMPONENT

TECHNICAL DATA		1/8"	1/4"	3/8"	1/2"
Ports		G 1/8"	G 1/4"	G 3/8"	G 1/2"
Nominal diameter	mm	5	8	10	12
Nominal flow rate	Nl/min	650	1250	1950	2600
Operating temperature range	°C	-10 to 150			
	°F	14 to 302			
Operating pressure	bar	2 to 10			
	MPa	0.2 to 1			
Opening pressure	bar	0.2 (20 KPa)			
Fluid		Lubricated or unlubricated filtered air			

COMPONENTS

① BODY: AISI 316L stainless steel
② VALVE SPRING: AISI 302 stainless steel
③ GASKET: FKM/FPM
④ POPPET: AISI 316L stainless steel

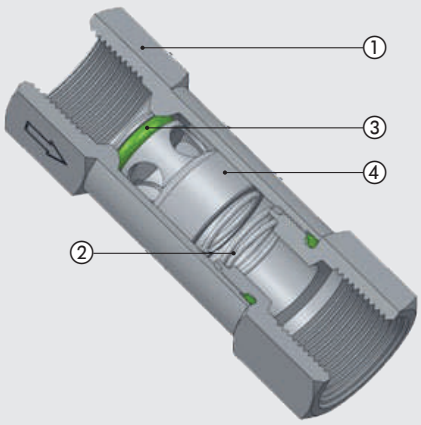

FLOW CHARTS

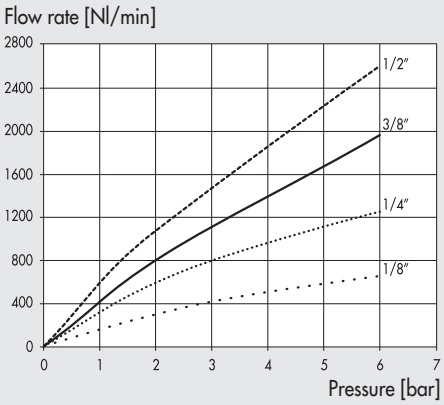

DIMENSIONS AND ORDERING CODES

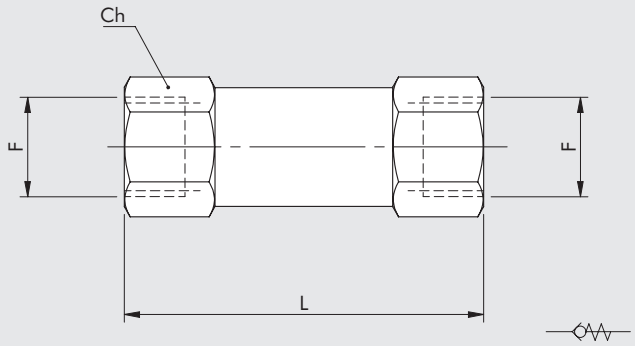

Code	Description	F	L	Ch
W3601000001X	VNR X 1/8	1/8	40	13
W3601000002X	VNR X 1/4	1/4	48	16
W3601000003X	VNR X 3/8	3/8	51	21
W3601000004X	VNR X 1/2	1/2	62	24

NOTES

NOTES

SUMMARY ACCESSORIES UNF or NPT THREAD AND INCH PIPES

- **MRF COMPACT "N" BRASS RING - INCH TUBES AND UNF or NPT THREAD** E3.11

UNF NPT

CUSTOM PRODUCTS

These products were designed and developed to meet customer specific requirements.

Among the many custom products made by Metal Work, we have selected a few that may have a more general value.

They differ from standard products mainly in that they are produced according to a specific order, are subject to a minimum order batch and the delivery time and price vary from case to case.

Please contact our sales offices for further information and quotation.

- KIT PNEUMATIC MOTION® G1
- CUSTOM ACTUATORS G2
- CUSTOM VALVES G3
- CUSTOM UNITS G4
- CUSTOM FITTINGS AND ACCESSORIES G5

KIT PNEUMATIC MOTION® SUMMARY

● **KIT PNEUMATIC MOTION® CONFIGURABLE (KIT PMC)** G1.4

● **KIT PNEUMATIC MOTION® READY (KIT PMR)** G1.5

● **KIT PNEUMATIC MOTION® CUSTOM** G1.11

KIT PNEUMATIC MOTION® CONFIGURABLE (KIT PMC)

KIT PMR®
KIT PMC

An on-line configurator is provided for the ease-and-quick selection of the cylinder, the valve and the accessories in a "basket" of frequently used products.
ISO Ø 12 to Ø 200 cylinders of any stroke, electric or hand-operated valves, cylinder accessories, sensors, fittings, flow regulators and the pipe are currently available.
With the KIT PMC, you can reduce the search and selection times and use the right amount of each component. The delivery time is short and depends, however on the type of products chosen.

TECHNICAL DATA														
Max operating pressure	bar	10												
	MPa	1												
	psi	145												
Temperature range	°C	–10 to +60												
	°F	14 to 140												
Fluid		Unlubricated air												
Cylinder version		Magnetic double-acting cushioned (Ø12 is not cushioned), C45 chromed and ground piston rod, NBR gaskets												
Cylinder bore	mm	12, 16, 20, 25 to ISO 6432;												
	mm	32, 40, 50, 63, 80, 100, 125, 160, 200 to ISO 15552												
Strokes	mm	for bore 12: strokes from 1 to 200;												
		for bore 16: strokes from 1 to 300;												
		for bores 20 and 25: strokes from 1 to 500;												
		for bores from 32 to 80: strokes from 1 to 2800;												
		for bores 100 and 125: strokes from 1 to 2600;												
		for bores 160 and 200: strokes from 1 to 2800.												
		N.B. Cylinders with stroke 50, 100 and 200 are normally available from stock.												
		Ø 12	Ø 16	Ø 20	Ø 25	Ø 32	Ø 40	Ø 50	Ø 63	Ø 80	Ø 100	Ø 125	Ø 160	Ø 200
Inrush pressure	bar	0.8	0.6	0.6	0.6	0.4	0.4	0.3	0.3	0.2	0.2	0.2	0.15	0.1
Theoretic force at 6 bar:														
in thrust	N	68	121	188	295	483	754	1178	1870	3016	4712	7363	12064	18850
	kg force	6.9	12.3	19	30	49	77	120	191	307	480	751	1230	1922
in traction	N	51	104	158	247	415	633	990	1682	2721	4418	6881	11310	18096
	kg force	5.2	10.6	16	25	42	65	101	171	277	450	701	1153	1845
Accessories for cylinders		Accessories for piston rods and cylinder body selectable via the configurator												
Valve versions Valve versions		A 90° lever and 24V DC electro-pneumatic valve in the following configurations:												
		3/2 normally closed; monostable 5/2; bistable 5/2; 5/3 closed centres												
Fittings		Push-in; pipe Ø and thread are chosen by the configurator to fit the selected cylinder or valve.												
Flow regulator		Taper pin with push-in fitting, can be adjusted either manually or with a screwdriver.												
		Pipe Ø and thread are chosen by the configurator according to the cylinder selected.												
Coil		22 mm side, 2W, 24VDC												
Position sensors		T7 Series SQUARE, REED with 2 wires 2.5 m or HALL with 3 wires 2.5 m												
Pipe		Ø chosen by the configurator according to the cylinder selected. Freely settable length [m]												

N.B.: For detailed information of each individual component, see the specific chapters.

KIT PNEUMATIC MOTION® READY (KIT PMR)

KIT PMR®
KIT PMC

METAL WORK PNEUMATIC

This kit provides an extremely simple and easy way to make a pneumatic movement.
Each pack contains a pneumatic cylinder, a valve and all the components required for connection.
The main strengths of this solution are:
- a drastic reduction of search activities and the choice of the most suitable components that have already been selected by Metal Work;
- the components are provided in the correct amount, while for some of them, such as the fittings, usually the sales package contains many pieces;
- very short delivery time.

The kit is available in two versions:
- the JOYSTICK version with manual cylinder control;
- the ELECTRIC version, with electric cylinder control and the checking of the piston rod position via sensors.

These kits are the result of a statistical sales analysis and meet the requirements of a very wide range of applications.
For those who are interested in a ready-packed kit but require a different composition, the Metal Work sales network is available to provide customized kits with loose component parts or ready-assembled and tested assemblies.

TECHNICAL DATA

Max operating pressure	bar	10		
	psi	145		
Temperature range	°C	−10 to +60		
	°F	14 to 140		
Fluid		Unlubricated air		
Cylinder version		Magnetic double-acting cushioned, C45 chromed and ground piston rod, NBR gaskets		
Cylinder bore	mm	25	32	50
Strokes	mm	50; 100	50; 100; 200	50; 100; 200
Inrush pressure	bar	0.6	0.4	0.3
Theoretic force at 6 bar:				
in thrust	N	295	483	1178
	kg force	30	49	120
in traction	N	247	415	1057
	kg force	25	42	108
Valve versions		With 90° lever, 5/2 1/8"; electropneumatic, monostable 5/2 1/8", 24VDC		
Fittings		Push-in for Ø 6 pipe, 1/8" thread		
Flow regulator		With taper pin, push-in fitting for Ø 6 pipe, regulation by hand or with a screwdriver		
Coil		Side 22 mm, 2W, 24VDC		
Position sensors		T7 Series SQUARE, REED with 2 wires 2.5 m		
Pipe		Outside Ø 6 mm, inside Ø 4 mm, polyurethane		

INSTRUCTIONS

A video explains how to assemble and adjust the components:

Tutorial in English

Tutorial in Italian

COMPONENTS OF THE JOYSTICK VERSION, WITH MANUAL LEVER CONTROL

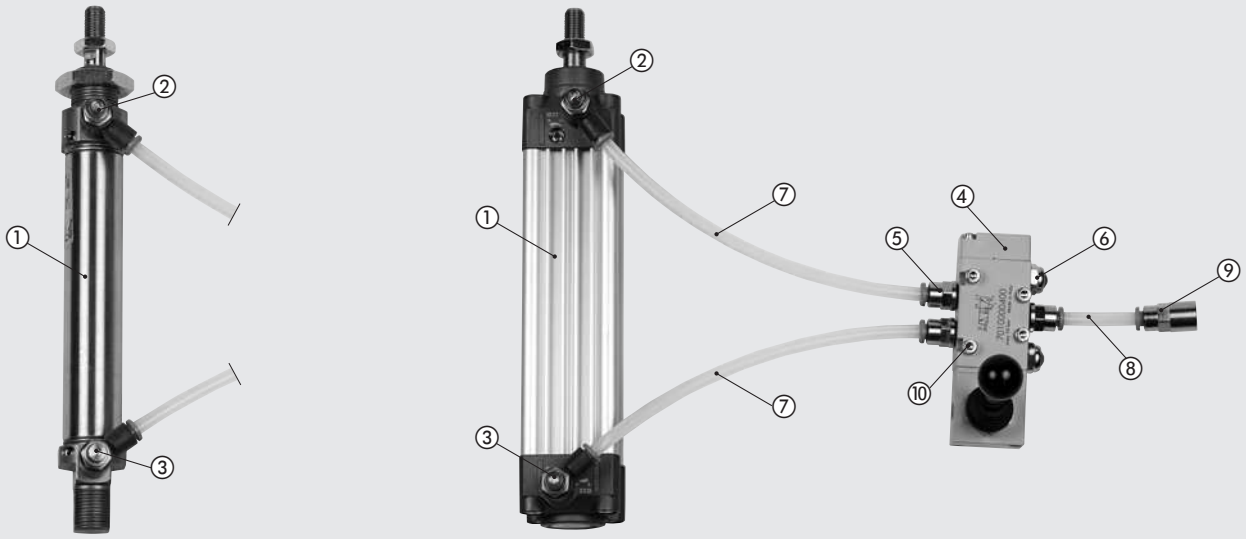

① CYLINDER: magnetic double-acting, cushioned
② FLOW REGULATOR: regulates the piston rod extension speed
③ FLOW REGULATOR: regulates the piston rod retraction speed
④ VALVE LEVER-OPERATED
⑤ FITTING: push-in, straight with cylindrical thread
⑥ SILENCER: in stainless steel wire
⑦ PIPE: connection between valve and cylinder
⑧ PIPE: connection between valve and compressor
⑨ FITTING: push-in, straight with cylindrical female thread
⑩ SCREWS: for valve fixing

N.B.: For detailed information of each individual component, see the specific chapters.
The codes of individual components are shown in the following pages, with the kit ordering codes.

COMPONENTS OF THE ELECTRIC VERSION, WITH ELECTRIC CONTROL AND POSITION SENSORS

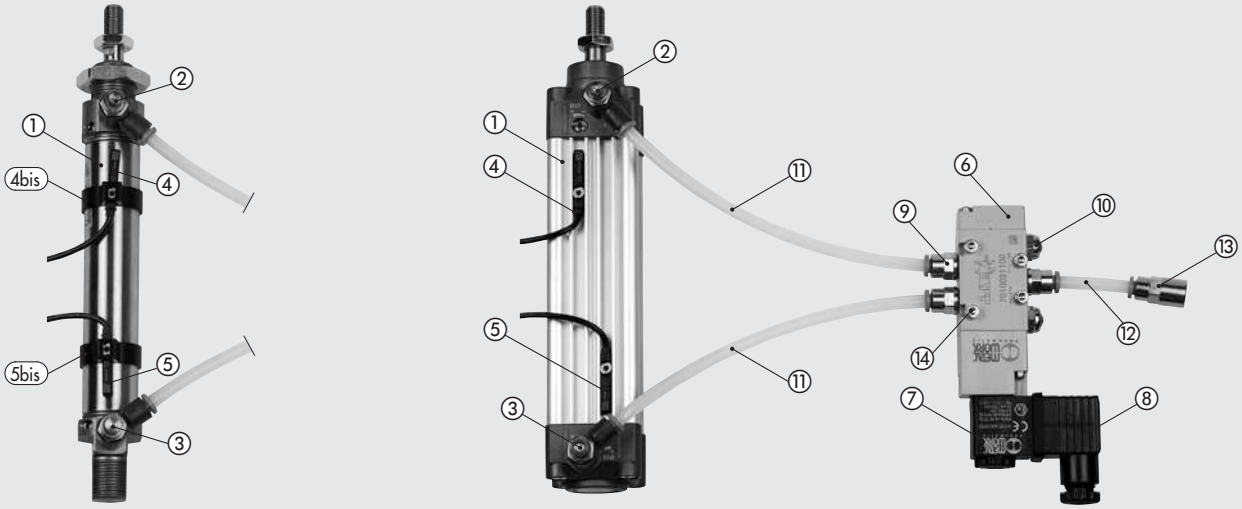

① CYLINDER: magnetic double-acting, cushioned
② FLOW REGULATOR: regulates the piston rod extension speed
③ FLOW REGULATOR: regulates the piston rod retraction speed
④ POSITION SENSOR: for extended piston rod
(4bis) BRACKET: for fixing the sensor to Ø ≤25 cylinder
⑤ POSITION SENSOR: for retracted piston rod
(5bis) BRACKET: for fixing the sensor to Ø ≤25 cylinder
⑥ SOLENOID VALVE: type 5/2 1/8"
⑦ COIL: 2W 24VDC
⑧ CONNECTOR: with screw-on clamps
⑨ FITTING: push-in, straight with cylindrical thread
⑩ SILENCER: in stainless steel wire
⑪ PIPE: connection between solenoid valve and cylinder
⑫ PIPE: connection between solenoid valve and compressor
⑬ FITTING: push-in, straight with cylindrical female thread
⑭ SCREWS: for valve fixing

N.B.: For detailed information of each individual component, see the specific chapters.
The codes of individual components are shown in the following pages, with the kit ordering codes.

FIXING OPTIONS

ISO 6432 Ø25

Ⓐ Insert the front head or the rear head of the cylinder in a perforated sheet metal
Ⓑ Insert a steel pin into the hole of the rear cylinder head
Ⓒ The fixing accessories see chapter "Accessories for ISO 6432 mini-cylinders"

Ⓐ

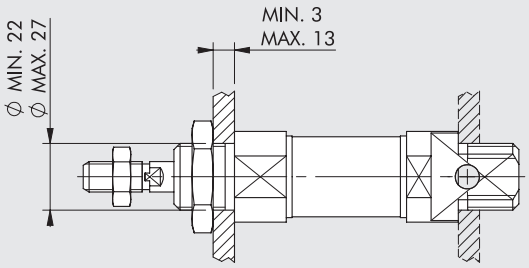

Ⓑ

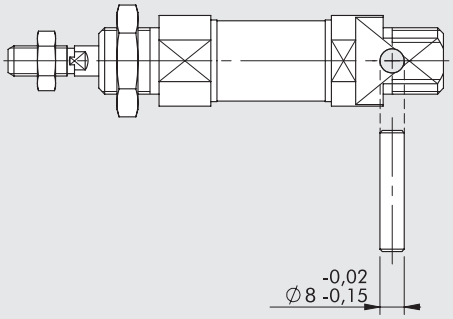

Ⓒ

ISO 15552 Ø32; Ø50

Ⓐ With 4 screws in the threaded holes of the front head or the rear head
Ⓑ The fixing accessories see chapter "Accessories for ISO 15552 cylinders"

Ⓐ

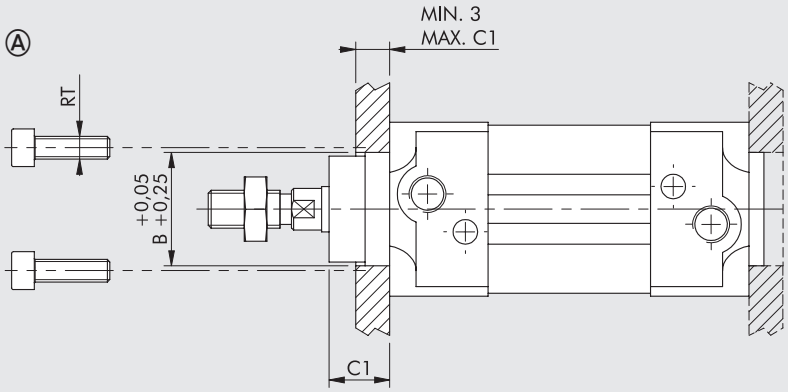

Ⓑ

For the dimensions RT, B, C1, TG, refer to the cylinder dimensions in the following pages.

VALVES

Ⓐ With four M4 screws inserted into the kit; use at least two of them
Ⓑ For the lever-operated valve, panel mounting

Ⓐ

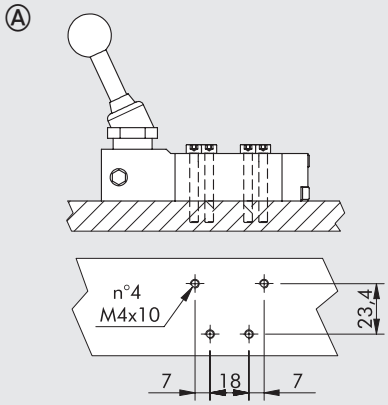

Ⓑ



DIMENSIONS

CYLINDER ISO 6432

+ = ADD STROKE

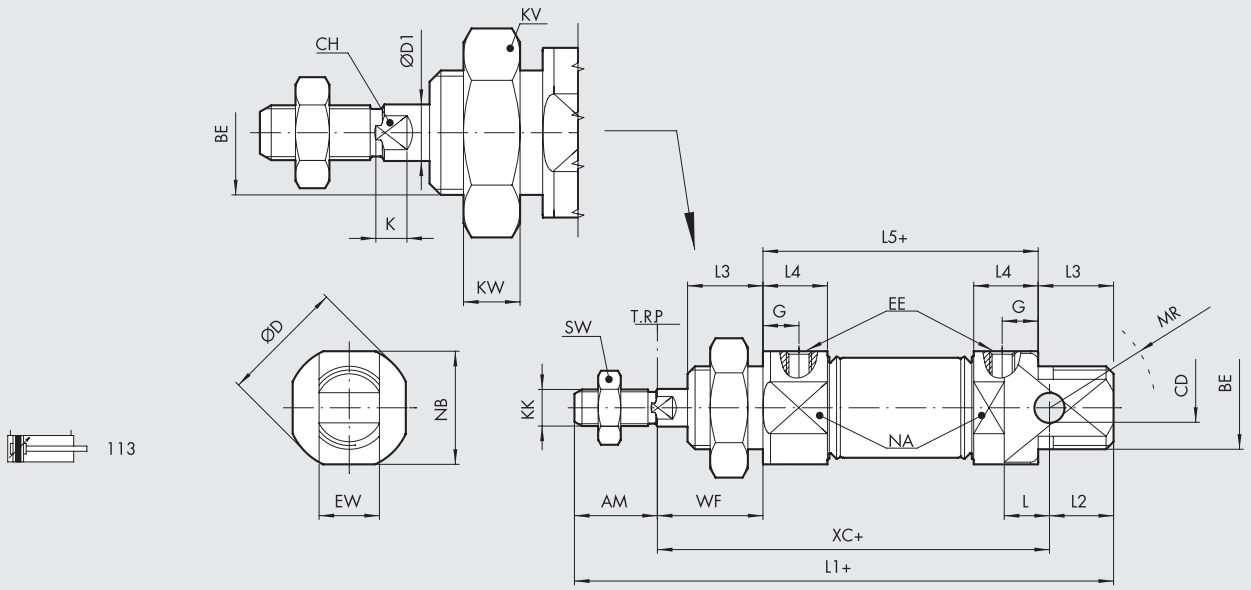

Code	Ø	AM $^{+0.0;-2.0}$	BE	øCD ^{H9}	øD	øD1	G	EE	EW ^{d13}	L	L1	L2	L3	L4	L5	KK	XC $^{\pm1}$	WF $^{\pm1,2}$	KW	KV	MR	NA	NB	SW	CH	K
1130250 _ _ _CN	25	22	M22x1.5	8	33	10	9	G 1/8	16	12	143	17	20	17.1	73	M10x1.25	104	28	7	32	21	30	30	17	8	5

_ _ _ = Enter the stroke in mm to complete the code (see next page).

CYLINDER ISO 15552

+ = ADD STROKE

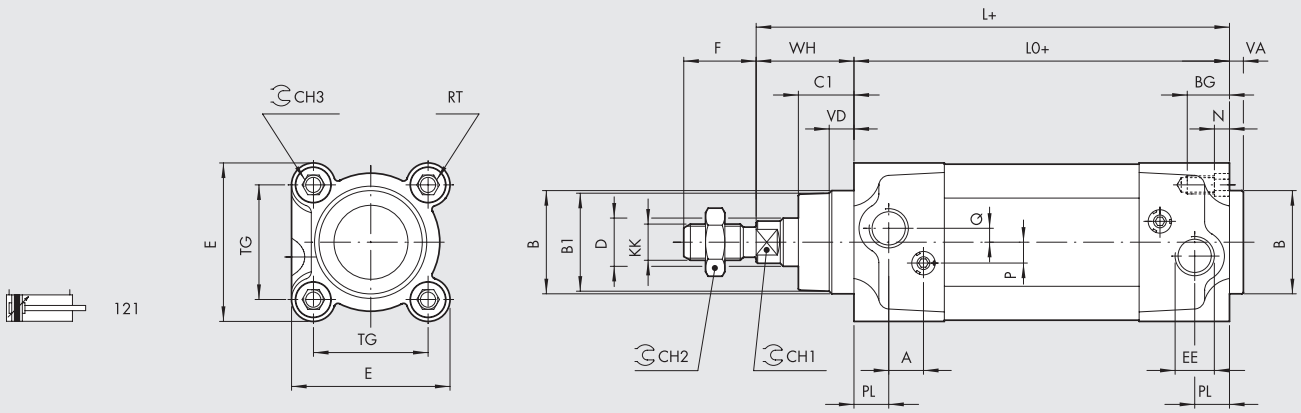

Code	Ø	PL	VD	A	B	B_1	WH	C_1	CH_1	CH_2	CH_3	KK	D	TG	VA	F	EE	RT	E	L	L_0	BG	N	P	Q
1213320 _ _ _CN	32	10	6.5	10	30	28	26	16	10	17	6	M10x1.25	12	32.5	4	22	G1/8	M6	46	120	94	14.5	4.5	6	4
1213500 _ _ _CN	50	14	13	10	40	38	37	25	17	24	8	M16x1.5	20	46.5	4	32	G1/4	M8	64.5	143	106	17.5	5.5	6	6

_ _ _ = Enter the stroke in mm to complete the code (see next page).

VALVES SERIES 70, HAND OPERATED

90° LEVER 5/2 1/8"

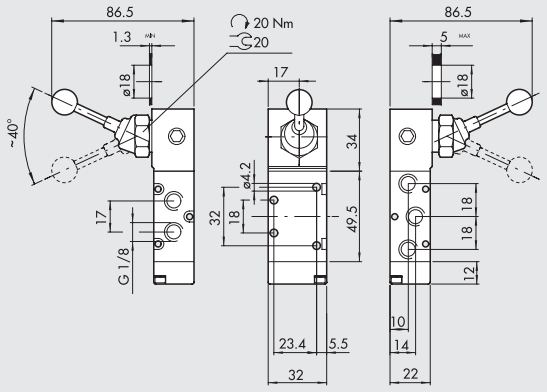

Symbol	Code	Abbrev.	Weight [g]
	7010000400	MAV 25 LEB OO	197

VALVES SERIES 70, SOLENOID/PNEUMATIC

MONOSTABLE 5/2,1/8"

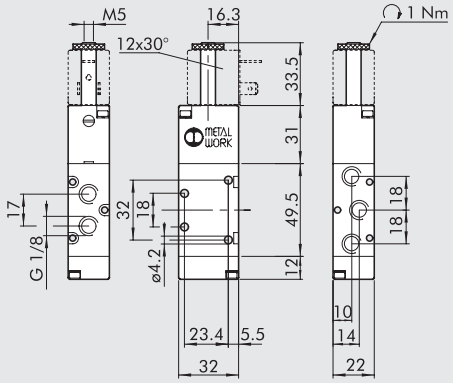

Symbol	Code	Abbrev.	Weight [g]
	7010021100	SOV 25 SOS OO	128

ORDERING CODES

JOYSTICK VERSION, WITH MANUAL LEVER CONTROL

		KIT COMPONENTS		
Code	**Description**	**Description**	**Code**	**Quantity**
9004102520000001	Pneu Kit, Joystick Ø 25 c50, 5/2 1/8 valve	ISO 6432 cylinder Ø 25, stroke 50, magnetic, cushioned	1130250050CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/8	9021006C	2
		+ parts common to all Joystick kits *	See below	
9004102520000002	Pneu Kit, Joystick Ø 25 c100, 5/2 1/8 valve	ISO 6432 cylinder Ø 25, stroke 100, magnetic, cushioned	1130250100CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/8	9021006C	2
		+ parts common to all Joystick kits *	See below	
9004103220000001	Pneu Kit, Joystick Ø 32 c50, 5/2 1/8 valve	ISO 15552 cylinder Ø 32, stroke 50, magnetic, cushioned	1213320050CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/8	9021006C	2
		+ parts common to all Joystick kits *	See below	
9004103220000002	Pneu Kit, Joystick Ø 32 c100, 5/2 1/8 valve	ISO 15552 cylinder Ø 32, stroke 100, magnetic, cushioned	1213320100CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/8	9021006C	2
		+ parts common to all Joystick kits *	See below	
9004103220000003	Pneu Kit, Joystick Ø 32 c200, 5/2 1/8 valve	ISO 15552 cylinder Ø 32, stroke 200, magnetic, cushioned	1213320200CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/8	9021006C	2
		+ parts common to all Joystick kits *	See below	
9004105020000001	Pneu Kit, Joystick Ø 50 c50, 5/2 1/8 valve	ISO 15552 cylinder Ø 50, stroke 50, magnetic, cushioned	1213500050CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/4	9021007C	2
		+ parts common to all Joystick kits *	See below	
9004105020000002	Pneu Kit, Joystick Ø 50 c100, 5/2 1/8 valve	ISO 15552 cylinder Ø 50, stroke 100, magnetic, cushioned	1213500100CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/4	9021007C	2
		+ parts common to all Joystick kits *	See below	
9004105020000003	Pneu Kit, Joystick Ø 50 c200, 5/2 1/8 valve	ISO 15552 cylinder Ø 50, stroke 200, magnetic, cushioned	1213500200CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/4	9021007C	2
		+ parts common to all Joystick kits *	See below	
		*** Parts common to all Joystick kits**		
		- Valve with 90° lever 5/2 1/8, MAV 25 LEB OO	7010000400	1
		- Straight push-in fitting RL1 6 1/8	2L01007	3
		- Silencer series MWSFE 1/8	W0970530052	2
		- Straight push-in fitting RL2 6 1/4 female	2L02006	1
		- TCE M4x30 screw to UNI 5931/8.8, zinc-plated	-	4
		- C98 polyurethane pipe, outside Ø 6, inside Ø 4	-	4 m

ELECTRIC VERSION, WITH SOLENOID VALVE CONTROL AND POSITION SENSORS

		KIT COMPONENTS		
Code	**Description**	**Description**	**Code**	**Quantity**
9004102510000001	Pneu Kit, Electric Ø 25 c50, 5/2 1/8 valve	ISO 6432 cylinder Ø 25, stroke 50, magnetic, cushioned	1130250050CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/8	9021006C	2
		Sensor clamp for Ø 25 cylinder	W0950000625	2
		+ parts common to all Electric kits *	See below	
9004102510000002	Pneu Kit, Electric Ø 25 c100, 5/2 1/8 valve	ISO 6432 cylinder Ø 25, stroke 100, magnetic, cushioned	1130250100CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/8	9021006C	2
		Sensor clamp for Ø 25 cylinder	W0950000625	2
		+ parts common to all Electric kits *	See below	
9004103210000001	Pneu Kit, Electric Ø 32 c50, 5/2 1/8 valve	ISO 15552 cylinder Ø 32, stroke 50, magnetic, cushioned	1213320050CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/8	9021006C	2
		+ parts common to all Electric kits *	See below	
9004103210000002	Pneu Kit, Electric Ø 32 c100, 5/2 1/8 valve	ISO 15552 cylinder Ø 32, stroke 100, magnetic, cushioned	1213320100CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/8	9021006C	2
		+ parts common to all Electric kits *	See below	
9004103210000003	Pneu Kit, Electric Ø 32 c200, 5/2 1/8 valve	ISO 15552 cylinder Ø 32, stroke 200, magnetic, cushioned	1213320200CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/8	9021006C	2
		+ parts common to all Electric kits *	See below	
9004105010000001	Pneu Kit, Electric Ø 50 c50, 5/2 1/8 valve	ISO 15552 cylinder Ø 50, stroke 50, magnetic, cushioned	1213500050CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/4	9021007C	2
		+ parts common to all Electric kits *	See below	
9004105010000002	Pneu Kit, Electric Ø 50 c100, 5/2 1/8 valve	ISO 15552 cylinder Ø 50, stroke 100, magnetic, cushioned	1213500100CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/4	9021007C	2
		+ parts common to all Electric kits *	See below	
9004105010000003	Pneu Kit, Electric Ø 50 c200, 5/2 1/8 valve	ISO 15552 cylinder Ø 50, stroke 200, magnetic, cushioned	1213500200CN	1
		MRF flow regulator, Compact N, technopolymer C 6 1/4	9021007C	2
		+ parts common to all Electric kits *	See below	
		*** Parts common to all Electric kits Electric**		
		- Solenoid valve 5/2, monostable 1/8, SOV 25 SOS OO	7010021100	1
		- Straight push-in fitting RL1 6 1/8	2L01007	3
		- Silencer series MWSFE 1/8	W0970530052	2
		- Coil 22 mm 2W 24VDC	W0215000101	1
		- Connector 22 mm	W0970510011	1
		- Sensor T7 square Reed 2 wires, 2.5 m	W095414	2
		- Straight push-in fitting RL2 6 1/4 female	2L02006	1
		- TCE M4x30 screw to UNI 5931/8.8, zinc-plated	-	4
		- C98 polyurethane pipe, outside Ø 6, inside Ø 4	-	4 m

NOTES

KIT PNEUMATIC MOTION® CUSTOM

The Metal Work sales network can provide customized kits for both individual loose components and complete ready-assembled and tested electro-pneumatic panels.
This service is convenient for use in many applications:

- the customer prepares a list of materials required to equip a machine assembly or subassembly; the components can be delivered in a one-time supply ready for the machine assembly line;
- pneumatic or electro-pneumatic panels can be supplied with air treatment units, valves, terminal boards, couplings and other components;
- automation sub-assemblies, such as axles complete with cable carrier chain, connector block and sensors, can be supplied.

Metal Work experts can provide advice in the choice and size of components. Upon receipt of the order, Metal Work or the local P Service will prepare and deliver "Kit pneumatic motion® custom".

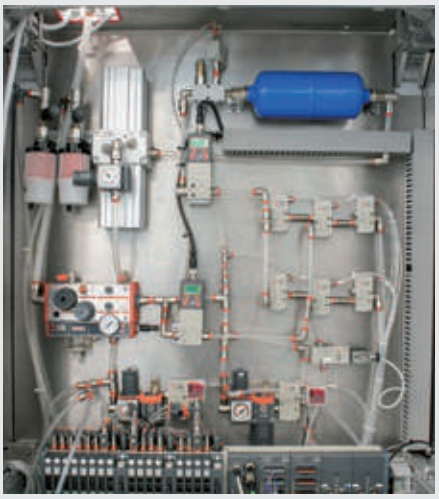

EXAMPLES

ASSEMBLED PLATES

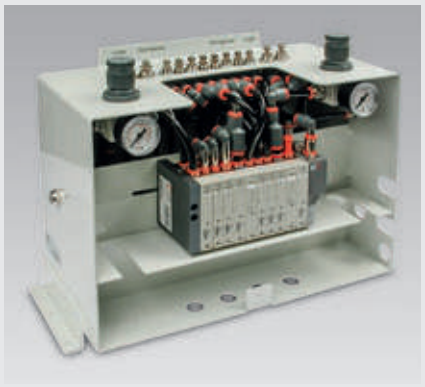

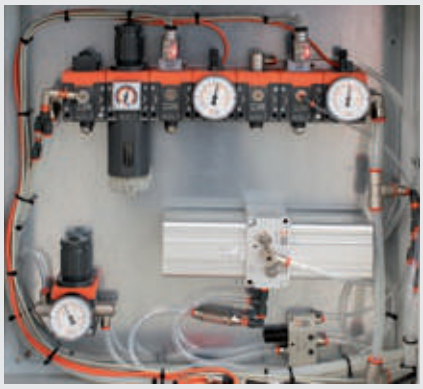

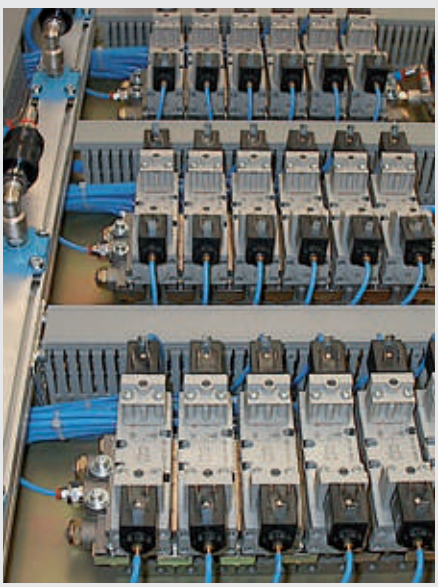

CONTROL CABINETS

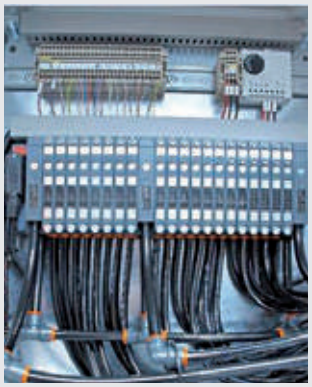

ACTUATORS WITH ASSEMBLED ACCESSORIES

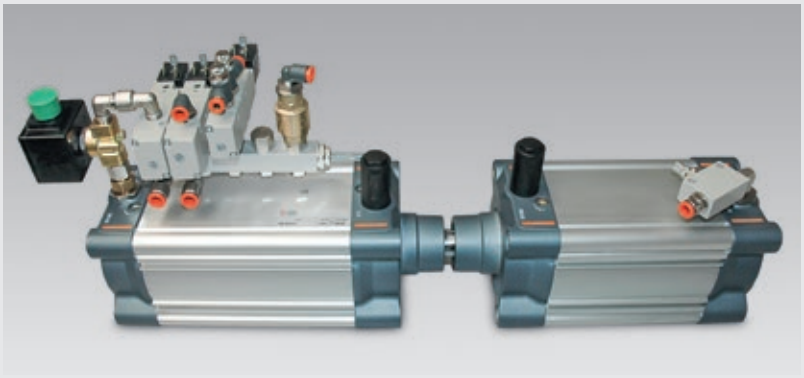

NOTES

METAL WORK PNEUMATIC

NOTES

CUSTOM ACTUATORS SUMMARY

CYLINDERS ACCORDING TO STANDARDS AND VARIANTS

ISO 6432 MINI-CYLINDERS

- ISO 6432 MINI-CYLINDER WITH LIMITED REAR HEAD — G2.4
- ISO 6432 MINI-CYLINDER OPPOSING — G2.5

- ISO 6432 MINI-CYLINDER PERFORATED THROUGH-ROD — G2.6

- ISO 6432 MINI-CYLINDERS TWO-FLAT Ø 25 — G2.7

ISO 15552 CYLINDERS

- ISO 15552 CYLINDER MULTI-POSITION — G2.9

- ISO 15552 CYLINDER LONG INTERNAL CUSHIONING — G2.10

- TANK DERIVED FROM CYLINDER ISO 15552 STD — G2.11
- ISO 15552 CYLINDER WITH MECHANICALLY ADJUSTABLE STROKE RETRACTION TYPE — G2.13

- ISO 15552 CYLINDER WITH MECHANICALLY ADJUSTABLE STROKE EXTENSION TYPE — G2.14

- ISO 15552 CYLINDER COMMON OPPOSING PISTON ROD — G2.16

- ISO 15552 CYLINDER WITH THROUGH-ROD AND LOCK — G2.18

- ISO 15552 CYLINDER PERFORATED THROUGH-ROD — G2.19

- ISO 15552 CYLINDER TANDEM THROUGH-ROD — G2.20

- ISO 15552 CYLINDER Ø 160-200 LOW-FRICTION — G2.21

COMPACT CYLINDERS

- COMPACT CYLINDER SERIES CMPC WITH CENTRING RING — G2.23
- COMPACT CYLINDER SERIES CMPC WITH BUILT-IN MALE HINGE — G2.24

- SHORT-STROKE CYLINDER SERIES SSCY ANTI-ROTATION WITH EXTENDED COLUMNS — G2.25
- SHORT-STROKE CYLINDER SERIES SSCY WITH THREADS IN THE LINER — G2.26

METAL WORK PNEUMATIC

- SHORT-STROKE CYLINDER SERIES SSCY SINGLE ACTING WITH HINGES G2.27

- SHORT-STROKE CYLINDER SERIES SSCY THROUGH-ROD ANTI-ROTATION G2.28

OTHER CYLINDERS

- ROUND CYLINDER SERIES SHORT RNDC G2.30

- ROUND CYLINDER SERIES RNDC WITH REDUCED HEAD G2.36

- ROUND CYLINDER SERIES RNDC PERFORATED THROUGH-ROD G2.37

- ROUND CYLINDER SERIES E G2.38

ACCESSORIES

- SHOCK ABSORBERS G2.40

- SPECIAL PISTON RODS G2.43

ROTARY ACTUATORS

- ISO 15552 CYLINDER ROTARY G2.46

V-Lock

- COMPACT PRECISION SLIDE SERIES S14K, WITH INDUCTIVE SENSOR G2.47

HYDRAULIC BRAKE

- HYDRAULIC BRAKE SERIES BRK Ø 40 mm WITH FIXING HOLES TO DISTANCE 40 mm G2.48

ELECTRIC CYLINDER

- ELECTRIC CYLINDER SERIES ELEKTRO ISO 15552 WITH ACME SCREW (ACME) G2.49

- ELECTRIC CYLINDER SERIES ELEKTRO ISO 15552 EK WITH DIRECT CURRENT MOTOR G2.51

- STEPPING MOTORS WITH IP65 ENCODER (WITH OR WITHOUT BRAKE) G2.53

- FIELDBUS DRIVES FOR STEPPING MOTORS G2.55

ISO 6432 MINI-CYLINDER WITH LIMITED REAR HEAD

The threaded part of the rear head is removed to save space. But this means there is no way to fix the cylinder using the rear head since there is no threaded part or hole for mounting the accessories.

N.B.: For technical data refer to the standard version.

DIMENSIONS

+ = ADD THE STROKE

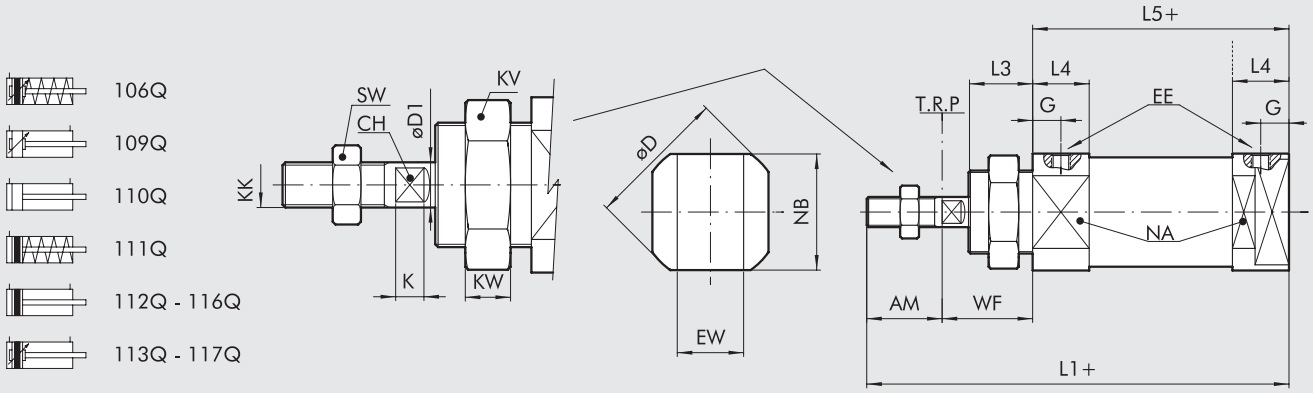

Ø	AM +0.0;-2.0	øD	øD1	E	G	EE	EW d13	L1	L3	L4	L5	L6	KK	XC ±1	WF ±1,2	KW	KV	NA	NB	SW	CH	K
8	12	16.7	4	M5	6	M5	8	74	12	10	46	46	M4	64	16	7	19	15	15	7	3	3
10	12	16.7	4	M5	6	M5	8	74	12	10	46	46	M4	64	16	7	19	15	15	7	3	3
12	16	19	6	M5	6	M5	12	87	17	10	49	47	M6	75	22	8	24	17	17	10	5	3.5
16	16	19.7	6	1/8	6	M5	12	94	17	10	56	53	M6	82	22	8	24	18	18	10	5	3.5
20	20	27.9	8	1/8	8	G 1/8	16	112	17	15	68	61	M8	95	24	7	32	24	24	13	7	4.6
25	22	33	10	1/8	9	G 1/8	16	123	20	18	73	66.5	M10x1.25	104	28	7	32	30	30	17	8	5

KEY TO CODES

CYL	1 1 2 TYPE	Q	1 6 BORE	_	0 2 0 STROKE	C MATERIAL	P GASKETS
	■ **106** SE cushioned ■ **109** DEA **110** DE **111** SE **112** DEM ■ **113** DEMA ◆ **116** DEM for mechanical lock ■ **117** DEMA for mechanical lock	**Q** Special head	▼ 08 ▼ 10 ▼ 12 16 20 25	Progressive letter assigned by Metal Work	Ø 8 to 10 stroke 0 to 100 mm Ø 12 to 16 stroke 0 to 200 mm Ø 20 to 25 stroke 0 to 500 mm	**A** C45 chrome rod, aluminium piston rod **C** C45 chrome rod, technopolymer piston rod **Z** Stainless steel piston rod and nut aluminium piston **X** Stainless steel piston rod and nut technopolymer piston	**P** Polyurethane **N** NBR ● **V** FKM/FPM ● **B** Low temperature

DE: Double-acting (non-cushioned, not magnetic)
DEM: Magnetic double-acting (non-cushioned)
DEMA: Magnetic double-acting (cushioned)
DEA: Cushioned double-acting (non-magnetic)
SE: Single-acting (magnetic)

● Only available for non-magnetic versions and with aluminium piston (A or Z)
▼ Stainless steel piston rod
■ Available from Ø 16
◆ Available from Ø 12
N.B.: Specify in the comment area whether **non-magnetic** or **non-stick slip**.

Please contact our sales offices for further information and quotation.

ISO 6432 MINI-CYLINDER OPPOSING

The two cylinders come with a single common rear head.
This type of cylinder is available with diameter 12 DEM, 16 DEM and Ø 25 DEMA.

N.B.: For technical data refer to the standard version.

DIMENSIONS

X1 = CYLINDER 1 STROKE
X2 = CYLINDER 2 STROKE

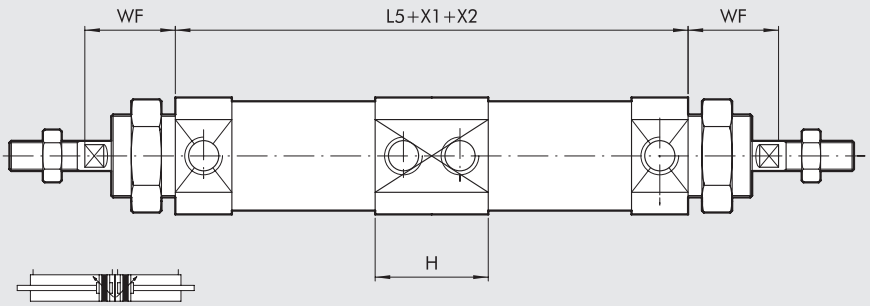

For other dimensions, refer to the standard version.

Ø	H	L5	WF ±1,2
8	-	-	16
10	-	-	16
12	20	98	22
16	20	112	22
20	-	-	24
25	36	146	28

KEY TO CODES

CYL	107 TYPE	0	16 BORE	0020 STROKE	C MATERIAL	P GASKETS
	107 Opposing	**0** Standard **V** Without head mut **S** Non-magnetic ▲ **G** No stick slip	▼ 08 ▼ 10 ▼ 12 16 20 25	Ø 8 to 10 stroke 0 to 100 mm Ø 12 to 16 stroke 0 to 200 mm Ø 20 to 25 stroke 0 to 500 mm	**A** C45 chrome rod, aluminium piston rod **C** C45 chrome rod, technopolymer piston rod **Z** Stainless steel piston rod and nut aluminium piston **X** Stainless steel piston rod and nut technopolymer piston	**P** Polyurethane **N** NBR ● **V** FKM/FPM ● **B** Low temperature

N.B.: Specify in the comment area whether without **DEM** or **DEMA**.
DEM: Magnetic double-acting (non-cushioned)
DEMA: Magnetic double-acting (cushioned)

● Only available for non-magnetic versions (S) and with aluminium piston (A or Z)
▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only**
▼ Stainless steel piston rod

ISO 6432 MINI-CYLINDER PERFORATED THROUGH-ROD

N.B.: For technical data refer to the standard version.

DIMENSIONS

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

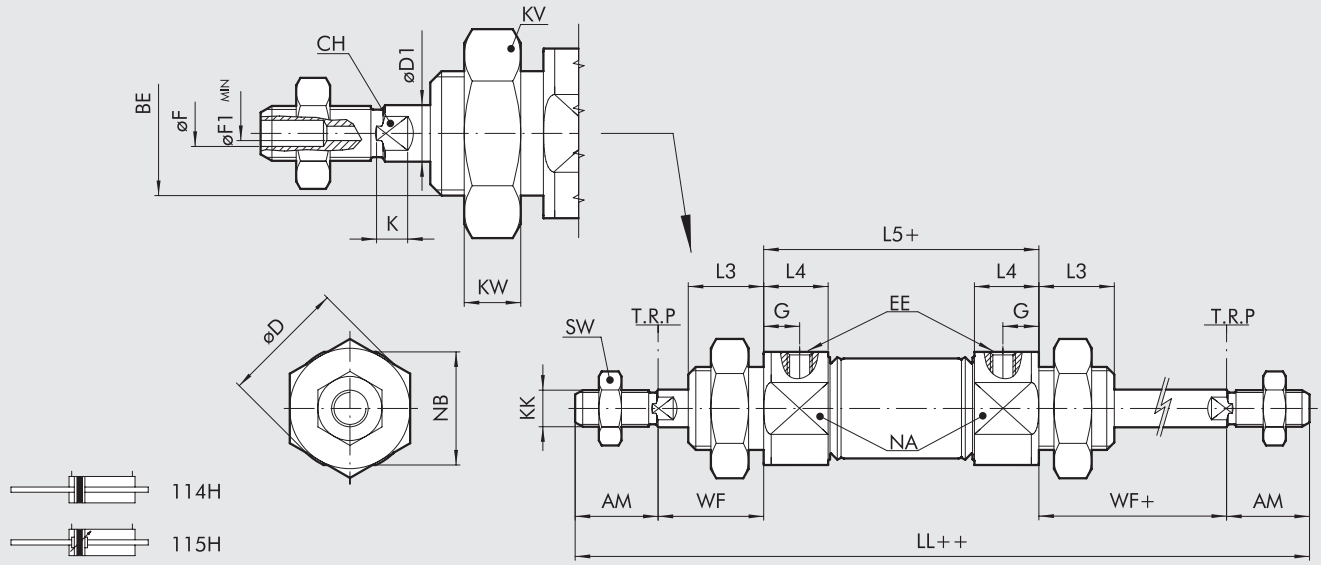

Ø	AM +0.0;-2.0	BE	øD	øD1	øF	øF1	G	EE	LL	L3	L4	L5	KK	WF ±1,2	KW	KV	NA	NB	SW	CH	K
20	20	M22x1.5	33	8	5	2.5	8	G 1/8	156	17	15	68	M8	24	7	32	28	28	13	7	4.6
25	22	M22x1.5	33	10	5	3	9	G 1/8	173	20	18	73	M10x1.25	28	7	32	30	30	17	8	5

KEY TO CODES

CYL	1 1 5 TYPE	H	2 0 BORE	0 0 2 0 STROKE	Z MATERIAL	P GASKETS
	114 DEM through-rod **115** DEMA through-rod	**H** Perforated rod	20 25	Max 125 mm	**C** C45 chrome piston rod, technopolymer piston **Z** Stainless steel piston rod and nut aluminium piston	**P** Polyurethane **N** NBR ● **V** FKM/FPM ● **B** Low temperature

DEM: Magnetic double-acting (non-cushioned)
DEMA: Magnetic double-acting (cushioned)

● Only available for non-magnetic versions and with aluminium piston

N.B.: Specify in the comment area whether **non-magnetic** or **non-stick slip.**
The non-stick slip version is to be used with speeds lower than 0.2 m/s in order to prevent surging. Use no-lubricated air only.

Please contact our sales offices for further information and quotation.

ISO 6432 MINI-CYLINDERS TWO-FLAT Ø 25

This version is used to maintain objects fixed to the piston rod angularly and apply torques with the limits specified in the technical characteristics. The piston rod of two-flat cylinders features two opposite longitudinal surfaces. It is made of stainless steel. The cylinder front head, which is made of two parts, includes a sintered bronze bush that prevents the piston rod from rotating on its axis. A special polyurethane gasket ensures airtightness and the scraping of any deposit of dirt.
The double-acting magnetic version with end-of-stroke cushioning is available. Pneumatic cushioning on the rear head only is available on specific request, i.e. for piston rod retraction.
The piston rod has a Ø of 12 mm, which is greater than that stated in ISO 6432 (Ø 10), to the advantage of robustness.
The cylinder length is greater than the ISO 6432 standard.

TECHNICAL DATA		Ø25
Max operating pressure	bar	10
	MPa	1
	psi	145
Temperature range	°C	70
Fluid		Unlubricated air. Lubrication, if used, must be continuous
Design		Chamfered stainless steel barrel
Standard strokes ✚	mm	from 1 to 300
Versions		Magnetic double-acting; Single piston rod or through piston rod; No stick-slip
Inrush pressure	bar	0.8
Max torque on piston rod	Nm	0.2
Maximum rotation on the rod	degrees	1° 30 '
Forces generated at 6 bar thrust/retraction	N	280/170
Single piston rod weights		
stroke = 0	g	294
each mm stroke	g	1.32
Through-rod weights		
stroke = 0	g	390
each mm stroke	g	1.94
Notes		**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**
		✚ Maximum recommended strokes. Higher values can create operating problems

KEY TO CODE

CYL	1 1 2	0	2 5	0 0 5 0	F	P
	TYPE		BORE	STROKE	MATERIAL	GASKETS
	112 DEM **114** DEM through-rod	**0** Standard ▲ **G** No stick-slip	25	Stroke 1 to 300 mm	**F** "Two-Flat" piston rod AISI 303 stainless steel nut	**P** Polyurethane

DEM: Magnetic double-acting (non-cushioned)

▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.**

DIMENSIONS

STANDARD VERSION

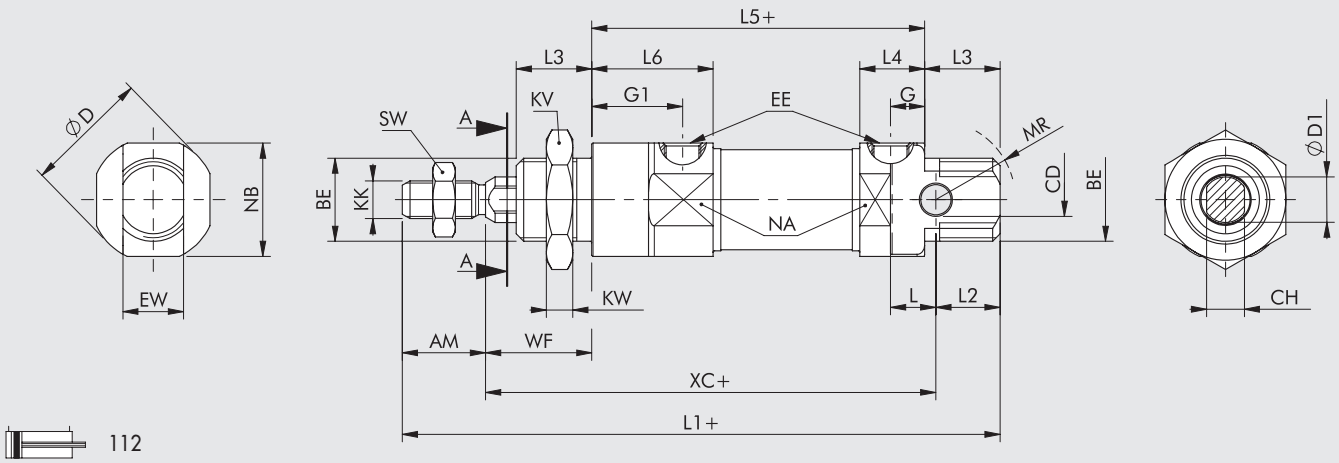

112

THROUGH-ROD VERSION

+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

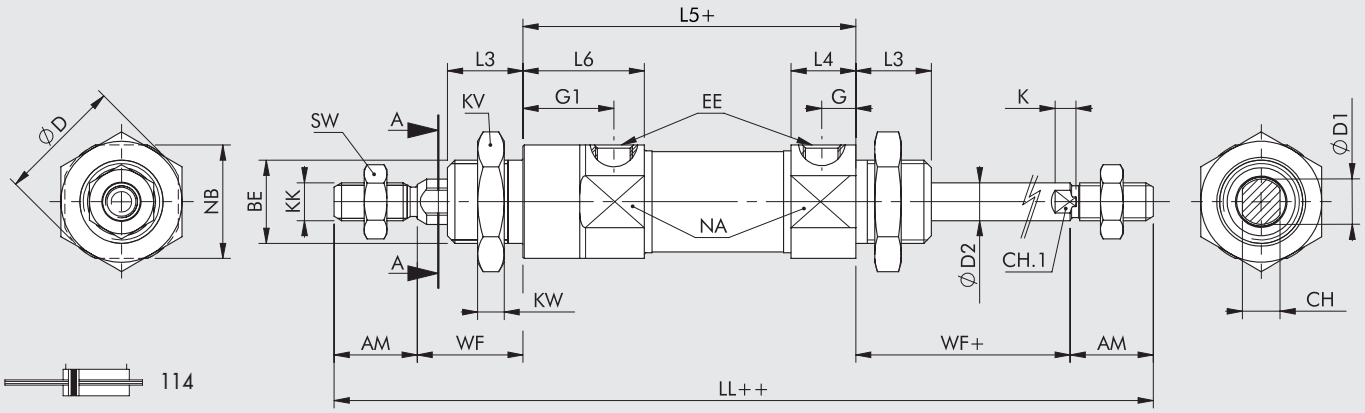

114

Ø	AM +0.0;-2.0	BE	øCD H9	øD	øD1	øD2	G	G1	EE	EW d13	L	LL	L1	L2	L3	L4	L5	L6	KK	XC ±1	WF ±1,2	KW	KV	MR	NA	NB	SW	CH	CH1	K
25	22	M22x1.5	8	33	12	10	9	24	G 1/8	16	12	188	158.1	17	20	17.1	88	32.1	M10x1.25	119.1	28	7	32	21	30	30	17	10	8	5

ACCESSORIES

All the accessories of ISO 6432 cylinders can be used, with the exception of the piston rod lock.

NOTES

ISO 15552 CYLINDER MULTI-POSITION

Two paired cylinders. The first stage defines the shorter stroke and the second one the total stroke.

DIMENSIONS

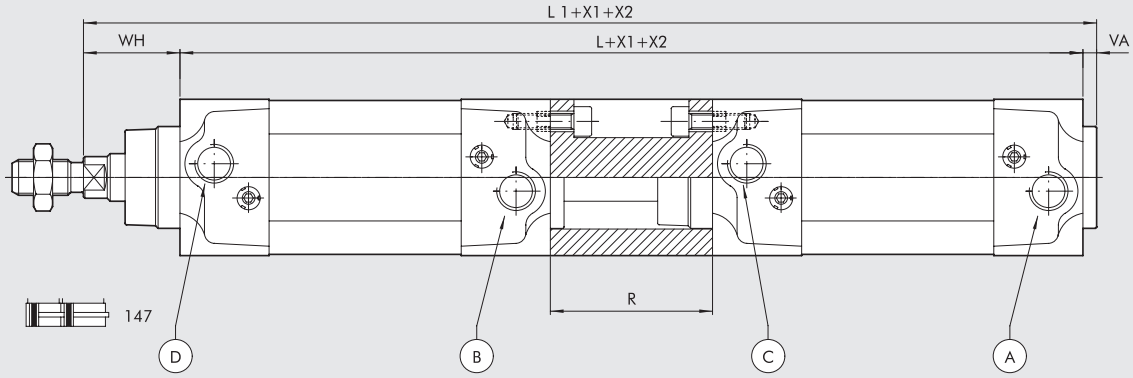



X1 = CYLINDER 1 STROKE
X2 = CYLINDER 2 STROKE

A = CYLINDER 1 OUT
B = CYLINDER 2 OUT
C = CYLINDER 1 IN
D = CYLINDER 2 IN

For other dimensions, refer to the standard version

1 = STAGE 1
2 = STAGE 2

Ø	WH	VA	R	L	L_1
32	26	4	55	243	273
40	30	4	55	265	299
50	37	4	68	280	321
63	37	4	68	310	351
80	46	4	92	348	398
100	51	4	92	368	423
125	65	6	120	440	511

KEY TO CODES

CYL	147 TYPE	0	32 BORE	_	050 STROKE	C MATERIAL	P GASKETS
	147 Multi-position	**0** Standard **S** Non-magnetic ▲ **G** No stick slip **A** Type A **3** Serie 3	32 40 50 63 80 ■ 100 ■ 125	Progressive letter assigned by Metal Work	from 25 to 2800 mm (stroke X2 to be specified)	**A** C45 chromed rod, aluminium piston rod: standard for all cylinders with ≥ 1000 mm-stroke cylinders and for cylinder with Ø 80 mm and over **C** C45 chromed rod, technopolymer piston: standard for cylinders of Ø 32 to 63 mm with <1000 mm strokes **Z** Stainless steel piston rod and nut aluminium piston **X** Stainless steel piston rod and nut technopolymer piston	**P** Polyurethane gaskets **N** NBR gaskets **V** FKM/FPM gaskets **B** Low temperature

▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.**
■ In the code of cylinder with letter in fourth position Ø 100 becomes A1; Ø 125 becomes A2

N.B.: Specify stroke X1 and stroke X2 in the description

ORDERING EXAMPLE: Cylinder 147032_ _ _ CP with stroke X1 = 30 mm, stroke X2 = 50 mm. Metal Work will generate its own special product code according to the key to code.

ISO 15552 CYLINDER
LONG INTERNAL CUSHIONING

This special version can be provided if, for aesthetic reasons or requirements in assembling the fixing accessories, the long cushioning specified in the catalogue is not required.
The following versions are currently available:
- Ø 50, 63 and 80 cushioning length 100 mm
- Ø 63, cushioning length 150 mm
- Ø 100, cushioning length 80 mm

N.B.: For technical data refer to the standard version.

COMPONENTS

① CUSHIONING EXTENSION: aluminium
② CUSHIONING GASKET: polyurethane, NBR or FKM/FPM
③ CUSHIONING CONE: OT 58
④ STATIC O-rings: NBR

Refer to standard ISO 15552 cylinder for the parts not specified in the drawing.

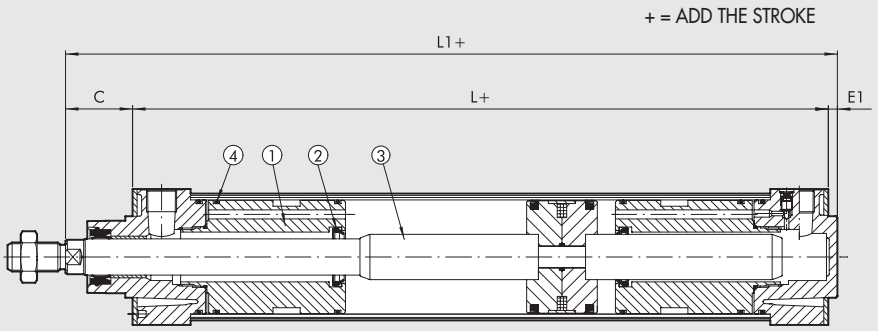

Ø	Cushioning Length	C	E1	L	L1
50	100	37	5	305	342
63	100	37	5	331	368
	150	37	5	431	468
80	100	46	8	316	362
100	80	51	8	242	293

For other dimensions, refer to the standard version.

KEY TO CODES

CYL	131	Z	32	_	050	A	P
	TYPE		**BORE**		**STROKE**	**MATERIAL**	**GASKETS**
	131 Long Cushioning	**Z** Special	32 40 50 63 80 A1 = 100 A2 = 125	Progressive letter assigned by Metal Work	Max 2500 mm	**A** C45 chromed rod, aluminium piston rod: standard for all cylinders with ≥ 1000 mm-stroke cylinders and for cylinder with Ø 80 mm and over	**P** Polyurethane gaskets **N** NBR gaskets **V** FKM/FPM gaskets **B** Low temperature

N.B.: Specify in the comment area whether **magnetic** or **non-stick slip.**
The non-stick slip version is to be used with speeds lower than 0.2 m/s in order to prevent surging. Use no-lubricated air only.

NOTES

TANK DERIVED FROM CYLINDER ISO 15552 STD

These tanks are derived by fixing two rear heads of an ISO 15552 cylinder to a liner. For management requirements associated with the liner production system, the code shows a fictitious stroke that is obtained by subtracting the basic value L from the total length of the liner (Ltot). **These products are not PED-certified**. This certification is not required when the product of pressure in the tank (expressed in bar) and the volume (expressed in litres) is less than 50.

TECHNICAL DATA

Operating pressure	bar	max 10 (max 1 MPa - 145 psi)
Temperature range	°C	–25 to +80
Bore	mm	32 to 200

CALCULATION OF THE LINER LENGTH

V (Litres) = Requested volume
D (mm) = Cylinder bore
L_{tot} (mm) = Jacket length

$$L_{tot} = \frac{4V \times 10^6}{3.14 \times D^2}$$

Example

V = 3,5 l
D = 100 mm

$$L_{tot} = \frac{(4 \times 3.5) \times 10^6}{3.14 \times 100^2} = 446 \text{ mm}$$

In order to determine the cylinder code, you need to calculate the "fictitious stroke" Z of the relevant pneumatic cylinder.
See dimensions on the following page:
$Z = L_{tot} - L$
For D100 L = 58
Z = 446 - 58 = 388 mm

KEY TO CODES

CYL	1 2 8 TYPE		B	3 2 BORE	0 0 5 0 FICTITIOUS STROKE *	O P MATERIAL
	128	Execution special	**B** Tank	32 40 50 63 80 A1 = 100 A2 = 125	Ø 32 - 63 Max 2800 mm Ø 80 - 125 Max 2600 mm	**OP**
	W128	Execution special	**B** Tank	A3 = 160 A4 = 200	Max 2800 mm	**OP**

* Fictitious stroke Z = L_{tot} (jacket length) - L (basic value)

DIMENSIONS 32 to 125

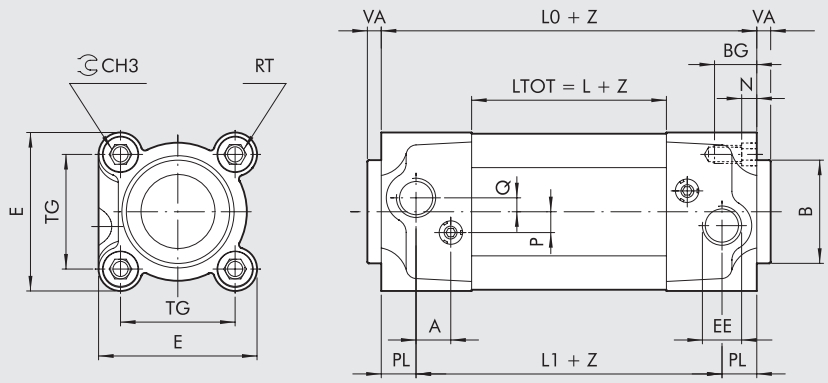

128B

Z = Fictitious stroke

Ø	PL	A	B	CH_3	TG	VA	EE	RT	E	L	L_1	L_0	BG	N	P	Q
32	10	10	30	6	32.5	4	G1/8	M6	46	42	74	94	14.5	4.5	6	4
40	12	10	35	6	38	4	G1/4	M6	54	49	81	105	14.5	4.5	6	4
50	14	10	40	8	46.5	4	G1/4	M8	64.5	46	78	106	17.5	5.5	6	6
63	16	10	45	8	56.5	4	G3/8	M8	75.5	57	89	121	17.5	5.5	6	6
80	18	12	45	10	72	4	G3/8	M10	94	52	92	128	21.5	5.5	10	7
100	20	12	55	10	89	4	G1/2	M10	111	58	98	138	21.5	5.5	10	7
125	25	10	60	12	110	6	G1/2	M12	135	70	110	160	25.5	6.5	12	8

DIMENSIONS 160 to 200

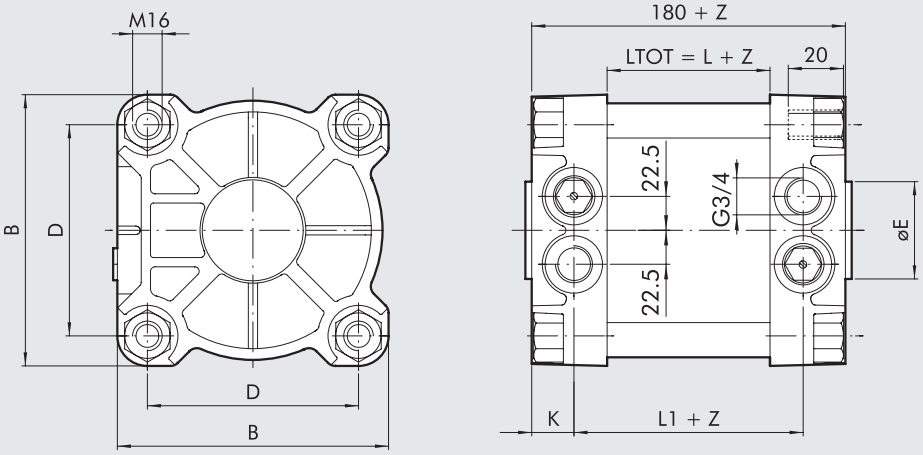

W128B

Z = Fictitious stroke

Ø	B	ØE	D	L	L_1	K
160	180	65	140	80	124	28
200	200	75	175	80	122	29

ISO 15552 CYLINDER WITH MECHANICALLY ADJUSTABLE STROKE RETRACTION TYPE

This cylinder originates from the through-rod version with a bolt to adjust the piston rod retraction stroke.
A plastic pad is mounted on the piston rod to reduce noise.
The adjustment may involve part or whole of the stroke.
Note that the rear cushioning loses efficiency as the stroke is reduced.
The flange or rear leg accessories cannot be attached.

N.B.: Existing types: Ø 32; Ø 40; Ø 50; Ø 63; Ø 80; Ø 100 mm
For technical data refer to the standard version.

COMPONENTS

① ALUMINIUM SCREW SUPPORT
② LOCKING NUT
③ STROKE-ADJUSTING SCREW
④ SOUND-DAMPENING PAD

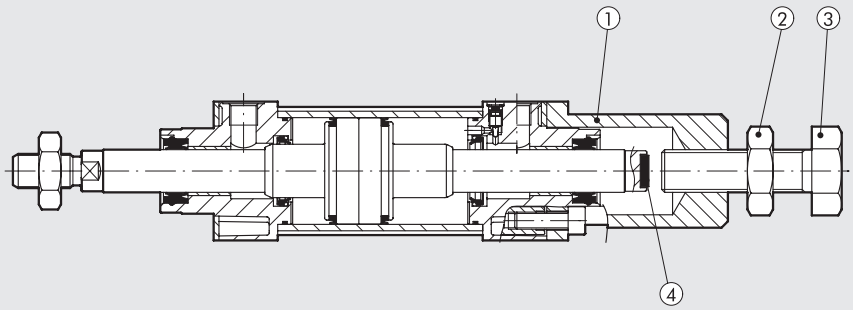

Coding 122Z_ _ _

NOTES

When making an inquiry, please specify the reference cylinder data, including the stroke and the length of adjustment.
For example: cylinder obtained from 1213500200CN with a stroke adjustment of 40 mm.

ISO 15552 CYLINDER WITH MECHANICALLY ADJUSTABLE STROKE EXTENSION TYPE

Cylinder derived from the through-rod version, fitted with a threaded bushing to adjust the extension stroke.
A bumper is fitted to the bushing to cushion the impact against the rear cylinder head, thereby minimising noise.
Two setting ranges are provided: 0-25 mm and 0-50 mm.
Unlike the version with adjustable stroke retraction type, the rear air cushioning doesn't lose efficiency.
All fixing accessories (feet, flanges, etc.) compatible with the standard series can also be fitted.

N.B.: Operating temperature range: -25°C to 80 °C.
Refer to the standard version for additional technical data.

COMPONENTS

① BUMPER SEAL: polyurethane
② STOPPER BUSHING: anodized aluminium alloy
③ LOCKING NUT

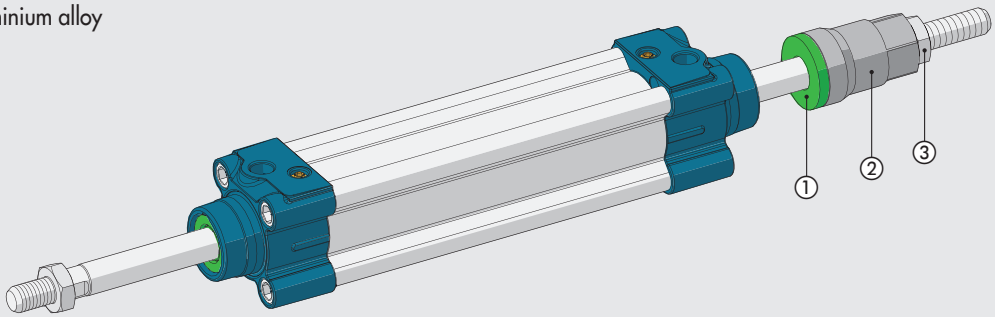

DIMENSIONS

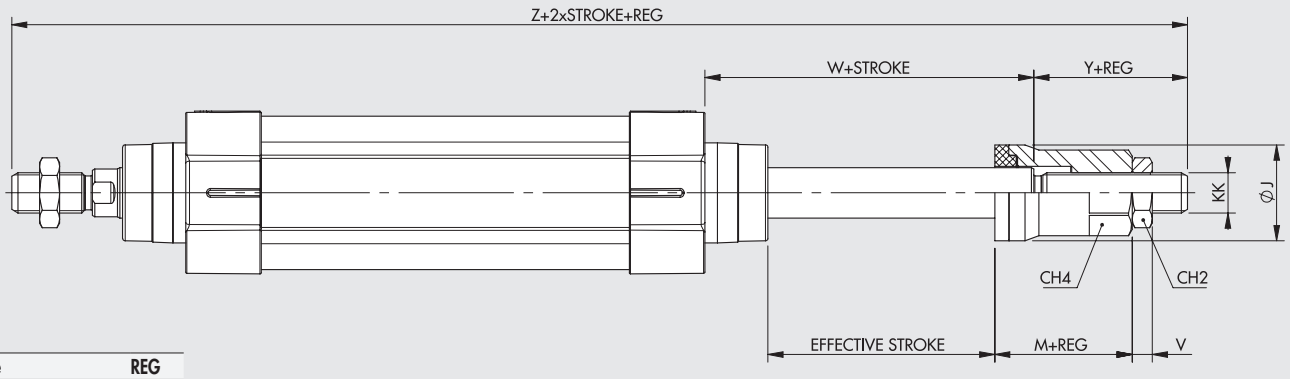

Code	REG
122E_____A	**25**
122E_____B	**50**

Ø	KK	Ø J	CH2	CH4	M	V	W	Y	Z
32	M10x1.25	28	17	22	19	6	20	24	186
40	M12x1.25	33	19	27	23	7	25	28	212
50	M16x1.5	38	24	30	29.5	8	30.5	36	241.5
63	M16x1.5	40	24	32	30	8	31	36	257
80	M20x1.5	43	30	36	36	9	39	43	296
100	M20x1.5	49	30	41	37	9	44.5	43	316.5
125	M27x2	54	41	46	48	12	53	56	388

For other dimensions, refer to the standard version.

Please contact our sales offices for further information and quotation.

NOTES

When requesting a quote, please specify the cylinder reference data and the adjustment length.
For manufacturing reasons, the maximum adjustable length is 50 mm.
Two basic adjustment classes are available.

Codes ending with a letter A: 122E_____A - adjustment from 0 to 25 mm (reduced dimensions)
Codes ending with a letter B: 122E_____B - adjustment from 0 to 50 mm (maximum adjustment length)

Other settings shall be assessed upon request.

PRECAUTIONS / WARNINGS

When the cylinder is in operation, the presence of foreign objects between the stopper bushing ② and the cylinder head can create hazardous conditions, with a potential risk of injury to persons and damage to nearby equipment.
An assessment of the risks associated with the application is therefore necessary and, if appropriate, adequate protective measures should be implemented, such as the installation of a protective cover.
When adjusting the stroke, before loosening the locking nut ③, make sure to secure the stopper bushing ② using a suitable wrench. Loosening the locking nut ③ without first securing the bushing ② may cause the load applied to the rod to loosen, with consequent risk of accidents or system malfunctions.

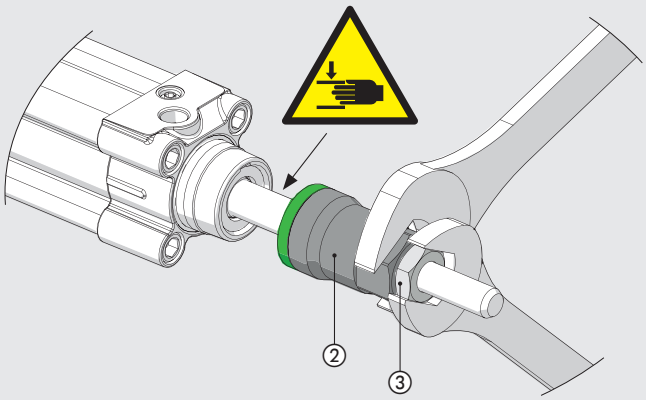

ISO 15552 CYLINDER
COMMON OPPOSING PISTON ROD

Two cylinders with a single common piston rod. The total length varies with the port supplied. This allows 4 different positions to be obtained.

N.B.: For technical data refer to the standard version.

DIMENSIONS

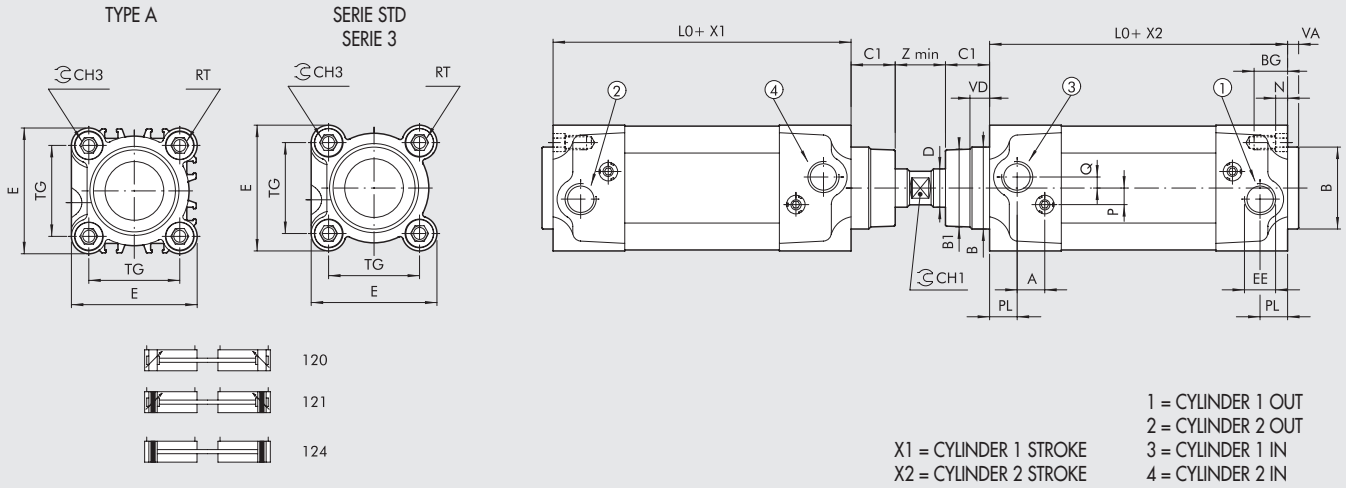

Ø	PL	VD	A	B	B_1	C_1	CH_1	CH_3	D	TG	VA	EE	RT	E	L_0	BG	N	P	Q	Z
32	10	6.5	10	30	28	16	10	6	12	32.5	4	G1/8	M6	46	94	14.5	4.5	6	4	14
40	12	8	10	35	33	20	13	6	16	38	4	G1/4	M6	54	105	14.5	4.5	6	4	14
50	14	13	10	40	38	25	17	8	20	46.5	4	G1/4	M8	64.5	106	17.5	5.5	6	6	16
63	16	14	10	45	40	25	17	8	20	56.5	4	G3/8	M8	75.5	121	17.5	5.5	6	6	16
80	18	12	12	45	43	33	22	10	25	72	4	G3/8	M10	94	128	21.5	5.5	10	7	17
100	20	14	12	55	49	38	22	10	25	89	4	G1/2	M10	111	138	21.5	5.5	10	7	17
125	25	20	10	60	54	45	27	12	32	110	6	G1/2	M12	135	160	25.5	6.5	12	8	26

KEY TO CODES

CYL	1 2 1 TYPE	Z	3 2 BORE	_	0 0 5 0 STROKE	C MATERIAL	P GASKETS
	120 Single-acting cushioned, non-magnetic **121** Double-acting, cushioned **124** Double-acting, non-cushioned	**Z** Special **A** Type A **3** Serie 3	32 40 50 63 80 A1 = 100 A2 = 125	Progressive letter assigned by Metal Work	from 25 to 2800 mm (stroke X2 to be specified)	**A** C45 chromed rod, aluminium piston rod: standard for all cylinders with ≥ 1000 mm-stroke cylinders and for cylinder with Ø 80 mm and over **C** C45 chromed rod, technopolymer piston: standard for cylinders of Ø 32 to 63 mm with <1000 mm strokes **Z** Stainless steel piston rod and nut aluminium piston **X** Stainless steel piston rod and nut technopolymer piston	**P** Polyurethane gaskets **N** NBR gaskets **V** FKM/FPM gaskets ● **B** Low temperature

N.B.: Specify in the comment area whether **non-magnetic** or **non-stick slip.**
The non-stick slip version is to be used with speeds lower than 0.2 m/s in order to prevent surging. Use no-lubricated air only.

● Only available for versions with aluminium piston (A or Z)

In the order description, specify in sequence stroke X1, stroke X2 and value Z, and non-stick slip if necessary (**the sum of strokes X1 + X2 + Z must not exceed 2800 mm**).
ORDERING EXAMPLE: Cylinder with common opposing piston rod 121Z32_ _ _ CP with stroke X1 = 30 mm, stroke X2 = 50 mm, Z = 15 mm. Metal Work will create its own special product code according to the following key to codes.

Please contact our sales offices for further information and quotation.

METAL WORK PNEUMATIC

NOTES

ISO 15552 CYLINDER WITH THROUGH-ROD AND LOCK

One or both piston rods are extended to hold one or two rod locks.

N.B.: For technical data refer to the standard version.

DIMENSIONS

VERSION FOR ONE ROD LOCK

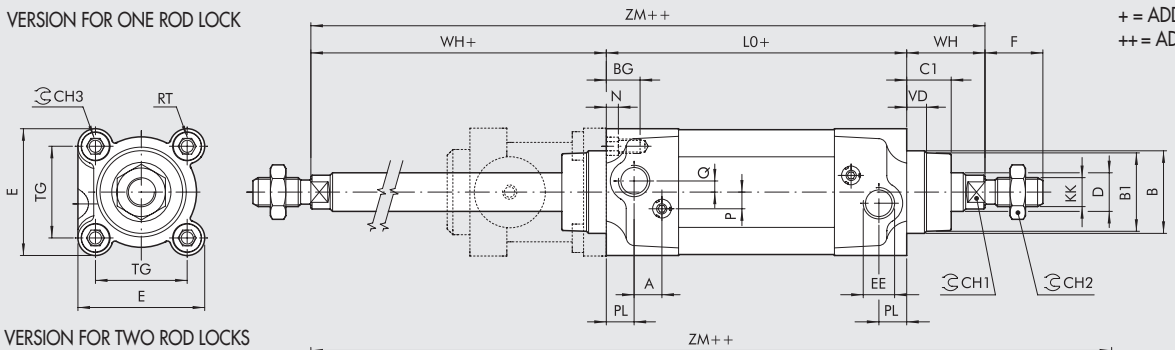

+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

VERSION FOR TWO ROD LOCKS

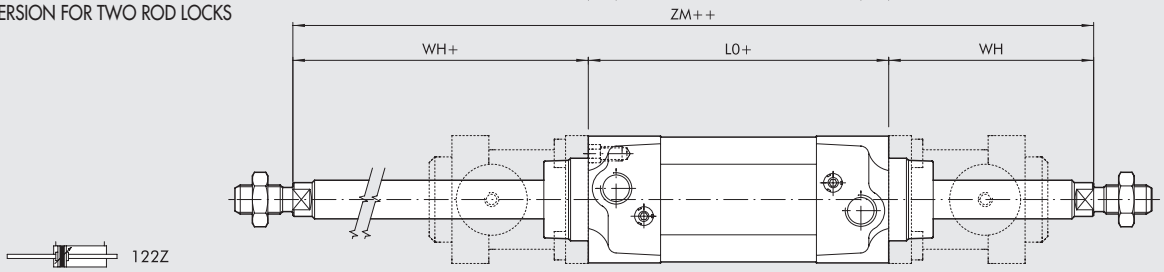

122Z

Ø	PL	VD	A	B	B_1	WH	C_1	CH_1	CH_2	CH_3	KK	D	TG	VA	F	EE	RT	E	L	L_0	ZM	BG	N	P	Q
32	10	6.5	10	30	28	68	16	10	17	6	M10x1.25	12	32.5	4	22	G1/8	M6	46	120	94	188	14.5	4.5	6	4
40	12	8	10	35	33	75	20	13	19	6	M12x1.25	16	38	4	24	G1/4	M6	54	135	105	200	14.5	4.5	6	4
50	14	13	10	40	38	94	25	17	24	8	M16x1.5	20	46.5	4	32	G1/4	M8	64.5	143	106	237	17.5	5.5	6	6
63	16	14	10	45	40	94	25	17	24	8	M16x1.5	20	56.5	4	32	G3/8	M8	75.5	158	121	252	17.5	5.5	6	6
80	18	12	12	45	43	123	33	22	30	10	M20x1.5	25	72	4	40	G3/8	M10	94	174	128	297	21.5	5.5	10	7
100	20	14	12	55	49	128	38	22	30	10	M20x1.5	25	89	4	40	G1/2	M10	111	189	138	317	21.5	5.5	10	7
125	25	20	10	60	54	187	45	27	41	12	M27x2	32	110	6	54	G1/2	M12	135	225	160	412	25.5	6.5	12	8

KEY TO CODES

CYL	122	Z	32	_	050	C	P
	TYPE		**BORE**		**STROKE**	**MATERIAL**	**GASKETS**
	122 Through-rod	**Z** Special	32 40 50 63 80 A1 = 100 A2 = 125	Progressive letter assigned by Metal Work	from 25 to 2600 mm	**A** C45 chromed rod, aluminium piston rod **Z** Stainless steel piston rod and nut aluminium piston	**P** Polyurethane gaskets **N** NBR gaskets **V** FKM/FPM gaskets **B** Low temperature

N.B.: Specify in the comment area whether **non-magnetic** or **non-stick slip. The non-stick slip version is to be used with speeds lower than 0.2 m/s in order to prevent surging. Use no-lubricated air only.**

ORDERING EXAMPLE: Cylinder 122040100CP with 1 piston rod lock. Metal Work will create its own special product code according to the following key to codes:

Please contact our sales offices for further information and quotation.

ISO 15552 CYLINDER
PERFORATED THROUGH-ROD

METAL WORK PNEUMATIC

DIMENSIONS

+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

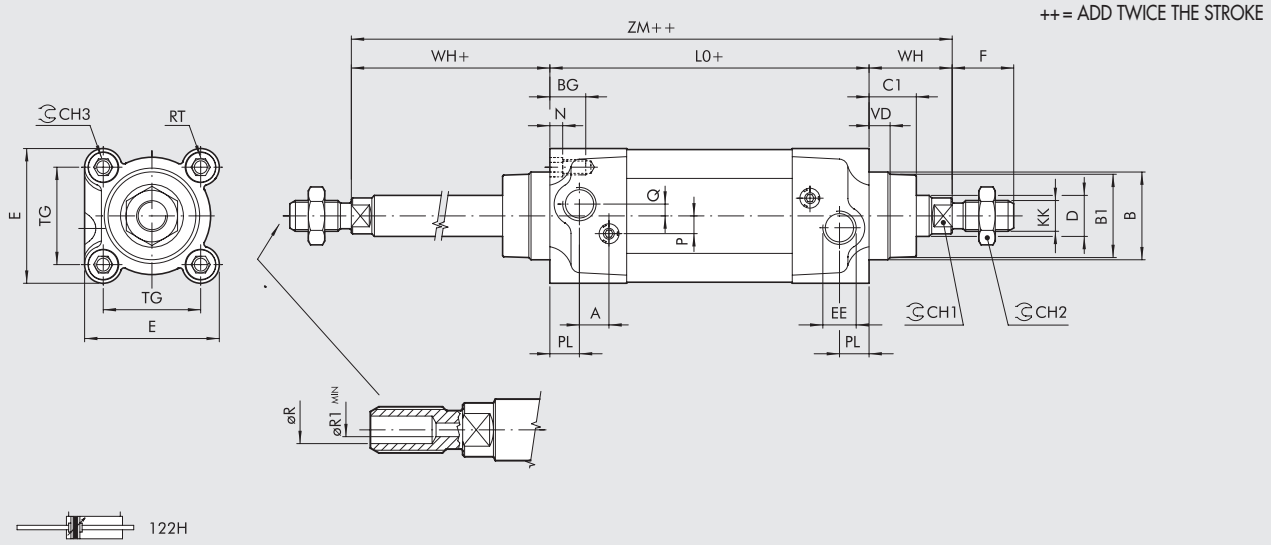

Ø	PL	VD	A	B	B_1	WH	C_1	CH_1	CH_2	CH_3	KK	D	TG	VA	F	EE	RT	E	L	L_0	ZM	BG	N	P	Q	ØR	ØR1
32	10	6.5	10	30	28	26	16	10	17	6	M10x1.25	12	32.5	4	22	G1/8	M6	46	120	94	146	14.5	4.5	6	4	5.5	4
40	12	8	10	35	33	30	20	13	19	6	M12x1.25	16	38	4	24	G1/4	M6	54	135	105	165	14.5	4.5	6	4	7	5
50	14	13	10	40	38	37	25	17	24	8	M16x1.5	20	46.5	4	32	G1/4	M8	64.5	143	106	180	17.5	5.5	6	6	8.5	7
63	16	14	10	45	40	37	25	17	24	8	M16x1.5	20	56.5	4	32	G3/8	M8	75.5	158	121	195	17.5	5.5	6	6	8.5	7
80	18	12	12	45	43	46	33	22	30	10	M20x1.5	25	72	4	40	G3/8	M10	94	174	128	220	21.5	5.5	10	7	10	8
100	20	14	12	55	49	51	38	22	30	10	M20x1.5	25	89	4	40	G1/2	M10	111	189	138	240	21.5	5.5	10	7	10	8
125	25	20	10	60	54	65	45	27	41	12	M27x2	32	110	6	54	G1/2	M12	135	225	160	290	25.5	6.5	12	8	14	10

KEY TO CODES

CYL	122 TYPE	H	32 BORE	0050 STROKE	C MATERIAL	P GASKETS
	122 Through-rod	**H** Perforated rod	32 40 50 63 80 A1 = 100 A2 = 125	Ø32 max 100 Ø40 max 150 Ø50 max 190 Ø63 max 200 Ø80 max 220 Ø100 max 225 Ø125 max 250	**A** C45 chromed rod, aluminium piston rod **Z** Stainless steel piston rod and nut aluminium piston	**P** Polyurethane gaskets **N** NBR gaskets **V** FKM/FPM gaskets **B** Low temperature

N.B.: Specify in the comment area whether **non-magnetic** or **non-stick slip. The non-stick slip version is to be used with speeds lower than 0.2 m/s in order to prevent surging. Use no-lubricated air only.**

ISO 15552 CYLINDER TANDEM THROUGH-ROD

N.B.: For technical data refer to the standard version.

DIMENSIONS

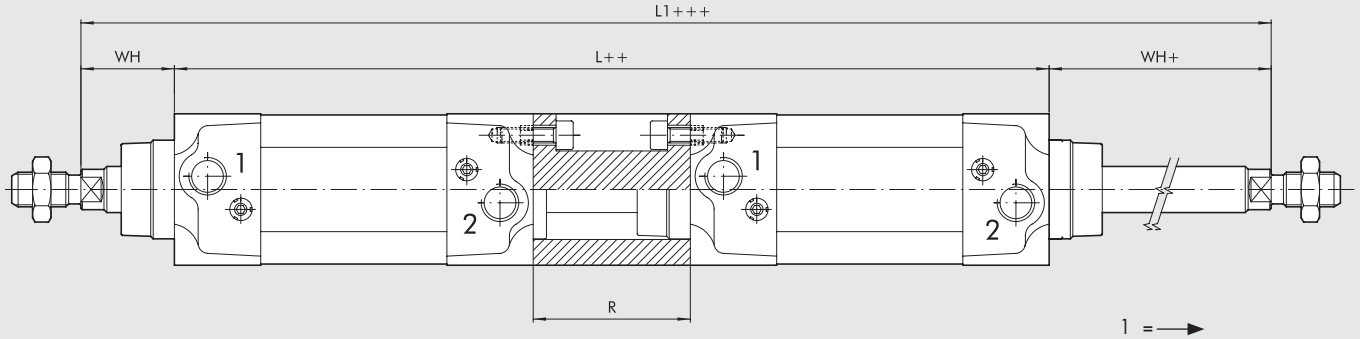

1 = ⟶
2 = ⟵

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE
+++ = ADD THREE THE STROKE

Ø	WH	R	L	L_1
32	26	55	243	295
40	30	55	265	325
50	37	68	280	354
63	37	68	310	384
80	46	92	348	440
100	51	92	368	470
125	65	120	440	570

For other dimensions, refer to the standard version.

KEY TO CODES

CYL	1 2 7	0	3 2	_	0 5 0	C	P
	TYPE		**BORE**		**STROKE**	**MATERIAL**	**GASKETS**
	127 Through-rod	**0** Diameter **S** Non-magnetic ▲ **G** No stick slip	32 40 50 63 80 A1 = 100 A2 = 125	Progressive letter assigned by Metal Work	from 25 to 2800 mm	**A** C45 chromed rod, aluminium piston rod **Z** Stainless steel piston rod and nut aluminium piston	**P** Polyurethane gaskets **N** NBR gaskets **V** FKM/FPM gaskets **B** Low temperature

▲ **For speeds lower than 0.2 m/s, to prevent surging. Use no-lubricated air only.**

Please contact our sales offices for further information and quotation.

ISO 15552 CYLINDER Ø 160-200 LOW-FRICTION

Typically used in pneumatic lifters, this cylinder is characterised by a number of special machining, the use of fewer gaskets and a special grease, all with the aim of mitigating friction and avoiding the stick-slip effect.
Indeed, you can choose either the version operating with piston rod extension or piston rod retraction, which means that only the pressure chamber gaskets are fitted, except for the piston rod gasket, which is always present for the purpose of scraping the piston rod.
In fact, it is a single-acting cylinder without a return spring, where the piston rod is repositioned by forces external to the cylinder.
The grease grade chosen has characteristics that remain constant over time, even in the event of accidental contact with water. It is thus recommended not to use lubricated air as oil could remove the grease and reduce cylinder performance.

TECHNICAL DATA

Max operating pressure	bar	10
	MPa	1
	psi	145
Temperature range	°C	–20 to +80
Fluid		Unlubricated air
Bore	mm	160, 200
Design		Round barrel with tie rods
Strokes	mm	from 25 to 1200
Versions		Single-acting when the piston rod extends or retracts, without a return spring; magnetic or non-magnetic; cushioned
Inrush pressure	bar	0.05
Forces generated		See cylinder "**General technical data**" at the beginning of the chapter **A1**
Weight		See cylinder "**General technical data**" at the beginning of the chapter **A1**

COMPONENTS

① Piston gasket, NBR
② Cushioning gasket, polyurethane
③ Piston rod gasket, NBR

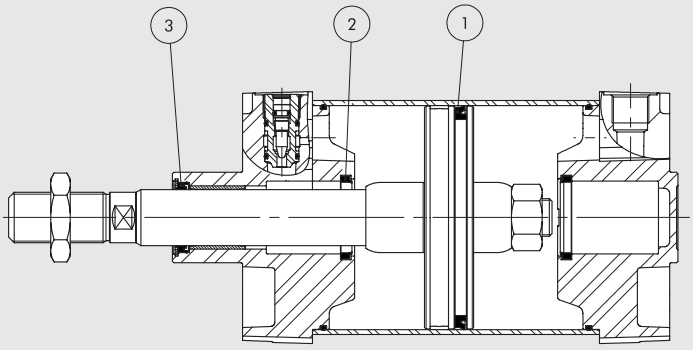





KEY TO CODES

CYL	W 1 2 1	D	A 3	0 0 5 0
	TYPE	**LOW-FRICTION, VERSION**	**BORES**	**STROKE**
	W120 Non magnetic **W121** Magnetic	**D** Rear chamber pressure, cushioning and piston rod gaskets **F** Front chamber pressure and cushioning	**A3** 160 **A4** 200	0025 to 1200 mm

NOTES

COMPACT CYLINDER SERIES CMPC WITH CENTRING RING

The face of the front head contains a circular groove in which a centring ring can be inserted. The Ø 80 cylinder is currently available.

DIMENSIONS Ø80

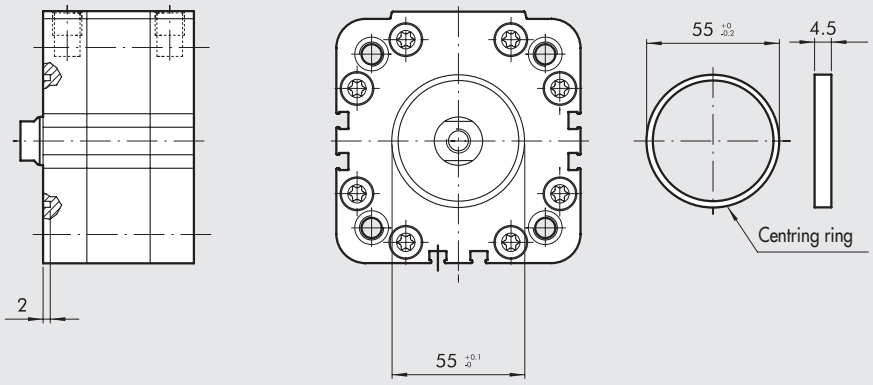

SE-DE MALE PISTON ROD



SE EXTENDED PISTON ROD

SE MALE EXTENDED PISTON ROD



250Z-260Z

253Z-263Z

254Z-264Z

For other dimensions, refer to the standard version

ORDERING CODES

Code	Description
82873M4	Centring ring D55
260Z80A___CP	ISO cylinder series CMPC ø 80 double-acting, centre distance female piston rod with centring slot

COMPACT CYLINDER SERIES CMPC WITH BUILT-IN MALE HINGE

The rear head of the cylinder is integral with a male hinge.
This unit is particularly compact compared to the standard version, in which the male hinge is screwed onto the head.
This version is designed for the Ø 40 mm cylinder with ISO centre distance.

DIMENSIONS Ø 40 CYLINDER

+ = ADD THE STROKE

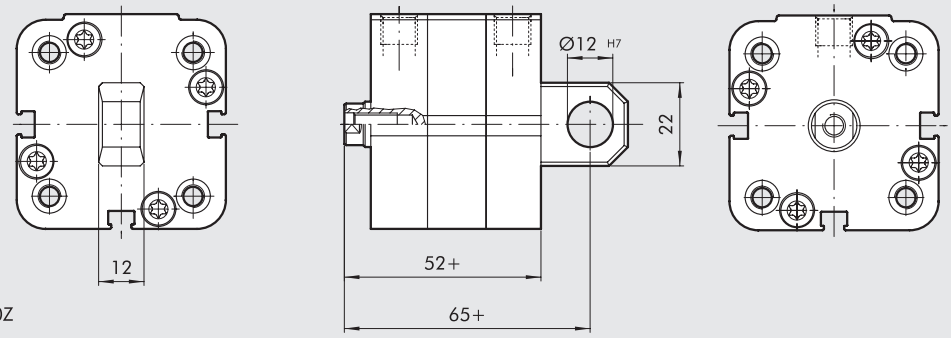

250Z-260Z

253Z-263Z

254Z-264Z

For other dimensions, refer to the standard version

KEY TO CODES

CYL	25	1	Z	32	_	050	C	P
	TYPE			**BORE**		**STROKE**	**MATERIAL**	**GASKETS**
	25 Compact cylinder centre distances to ISO male piston rod **26** Compact cylinder centre distances to ISO female piston rod	**0** Double-acting ● **3** Single-acting retracting piston rod ● **4** Single-acting extended piston rod	**Z** Special	32 40 50 63 80 A1=100	Progressive letter assigned by Metal Work		▷ **C** C45 piston rod chromium-plated ▷ **X** Stainless steel piston rod ○ **A** C45 chromed rod, aluminium piston ○ **Z** Stainless steel piston rod and nut aluminium piston	**P** Polyurethane ▶ **V** FKM/FPM

● Can also be used as double-acting with spring return
▶ Only for standard double acting and standard through rod double acting version
N.B.: Specify in the comment area whether **magnetic** or **non-stick slip.**
The non-stick slip version is to be used with speeds lower than 0.2 m/s in order to prevent surging. Use no-lubricated air only.

▷ Only for P version (Polyurethane gaskets)
○ Only for Ø 32 to 100 V version (FKM/FPM gaskets) and for Ø 80 and 100 P version (Polyurethane gaskets)

STROKES

Standard stroke for single-acting cylinders	Standard stroke for double-acting cylinders	Max. recommended strokes for double-acting cylinders
Ø 32 to 100 → 25 mm	Ø 32 to 100 → from 5 to 80 mm	Ø 32; Ø 40 → 300 mm
		Ø 50; Ø 63 → 400 mm
		Ø 80; Ø 100 → 500 mm

Maximum recommended strokes. Higher values can create operating problems

Please contact our sales offices for further information and quotation.

SHORT-STROKE CYLINDER SERIES SSCY ANTI-ROTATION WITH EXTENDED COLUMNS

The jacket contains two guide bushes, one at the front and oneat the rear. The columns have been extended, so they are guided better and have less radial play.



DIMENSIONS

+ = ADD THE STROKE

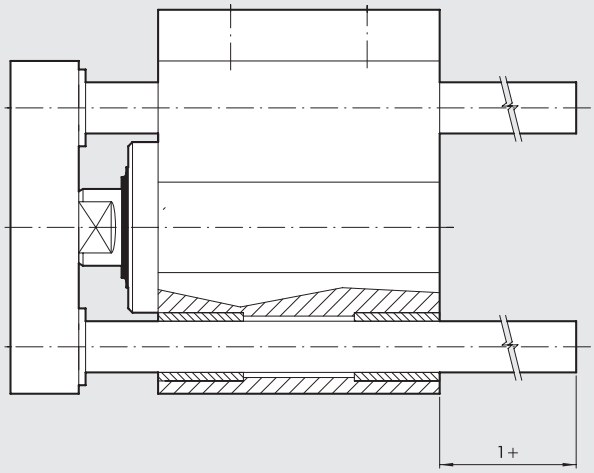

For other dimensions, refer to the standard version.

KEY TO CODES

CYL	217	Z	16	_	020	C	P
	TYPE		BORE		STROKE	MATERIAL	GASKETS
	217 Double acting, anti-rotation	**Z** Special	12 16 20 25 32 40 50 63 80 ◆ 100	Progressive letter assigned by Metal Work	Ø 12 - 63 stroke from 5 to 120 mm Ø 80 - 100 stroke from 5 to 150 mm	**C** C45 chrome rod, technopolymer piston rod Ø 12 to 63 mm **A** C45 chrome rod, aluminium piston rod (standard Ø 80 to 100 mm) **X** Stainless steel piston rod and nut technopolymer piston Ø 12 to 63 mm **Z** Stainless steel piston rod and nut aluminium piston (standard Ø 80 to 100 mm)	**P** Polyurethane **N** NBR ● **V** FKM/FPM ● **B** Low temperature

◆ In the code of cylinder with letter in fourth position Ø 100 becomes A1
● Only available for non-magnetic versions and with aluminium piston (A or Z)

N.B.: Specify in the comment area whether **non-magnetic** or **non-stick slip.** **The non-stick slip version is to be used with speeds lower than 0.2 m/s in order to prevent surging. Use no-lubricated air only.**

NOTES

SHORT-STROKE CYLINDER SERIES SSCY WITH THREADS IN THE LINER

These threads can be made for the longitudinal holes in the liner.
The threads can be made from the piston rod side or the opposite side.

RECOMMENDED THREADS

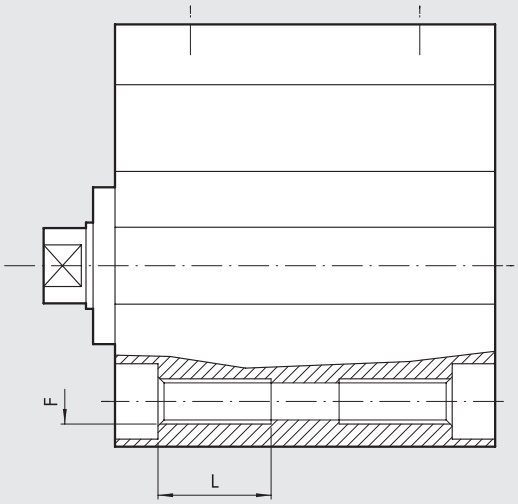

Ø	F	L
12	M5	10
16	M5	10
20	M6	12
25	M6	12
32	M8	12
40	M8	12
50	M8	16
63	M10	20
80	M10	20
100	M14	28

Note: It is preferable to leave the existing spot-facing in standard cylinder liners.

NOTES

ORDERING EXAMPLE: Cylinder 2120400050CP with threads M6x12 in the cylinder liner, piston rod side.

SHORT-STROKE CYLINDER SERIES SSCY SINGLE ACTING WITH HINGES

These are SSCY single-acting cylinders with pre-assembled male (model BA) or female (model B) rocking hinge.

DIMENSIONS FOR SER VERSIONS

+ = ADD THE STROKE

Rocking version Female (model B)

Rocking version Male (model BA)

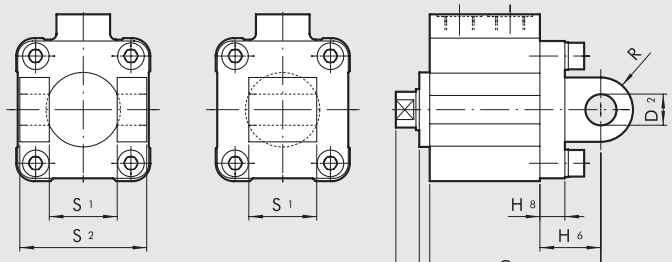

208

210

Ø	Stroke	D_2	G	G_1	H_6	H_8	N	R	S_1	S_2
32	5 - 25	10	59	62.8	22	10	70.3	11	26	45
	> 25 - 50		67	70.8						
40	5 - 25	12	64.5	69.7	25	10	78.2	13	28	52
	> 25 - 50		72.5	77.5						
50	5 - 25	12	66.5	73.2	27	12	80.2	13	32	60
	> 25 - 50		74.5	81.2						
63	5 - 25	16	74	80.7	32	12	89.7	17	40	70
	> 25 - 50		82	88.7						

Note: For other dimensions, refer to the standard version.

DIMENSIONS FOR SSE VERSIONS

+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

Rocking version Female (model B)

Rocking version Male (model BA)

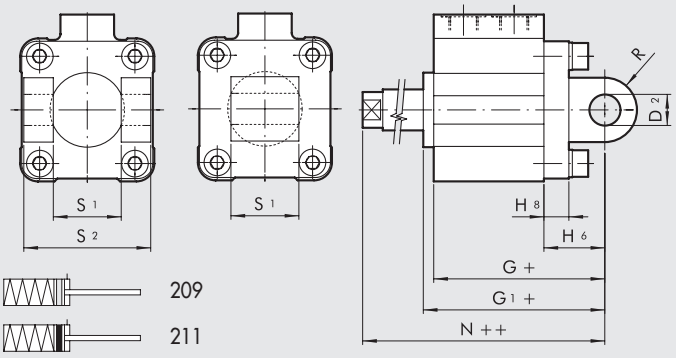

209

211

Ø	Stroke	D_2	G	G_1	H_6	H_8	N	R	S_1	S_2
32	5 - 50	10	59	62.8	22	10	70.3	11	26	45
	> 25 - 50		67	70.8						
40	5 - 50	12	64.5	69.7	25	10	78.2	13	28	52
	> 25 - 50		72.5	77.5						
50	5 - 50	12	66.5	73.2	27	12	80.2	13	32	60
	> 25 - 50		74.5	81.2						
63	5 - 50	16	74	80.7	32	12	89.7	17	40	70
	> 25 - 50		82	88.7						

Note: For other dimensions, refer to the standard version.

KEY TO CODES

CYL	208	Z	32	_	015	C	P
	TYPE		**BORE**		**STROKE**	**MATERIAL**	**GASKETS**
	208 Single-acting retracted rod, non-magnetic **209** Single-acting extended rod, non-magnetic **210** Single-acting, retracted rod **211** Single acting, extended rod	**Z** Special	32 40 50 63	Progressive letter assigned by Metal Work	See above	**C** C45 chrome piston rod, technopolymer piston Ø 12 to 63 mm **A** C45 chrome piston rod, aluminium piston (standard Ø 80 to 100 mm) **X** Stainless steel piston rod and nut technopolymer piston Ø 12 to 63 mm **Z** Stainless steel piston rod and nut aluminium piston (standard Ø 80 to 100 mm)	**P** Polyurethane gaskets **N** NBR gaskets ● **V** FKM/FPM gaskets ● **B** Low temperature

● Only available for versions with aluminium piston (A or Z)

SHORT-STROKE CYLINDER SERIES SSCY
THROUGH-ROD ANTI-ROTATION

KEY TO CODES

CYL	2 1 4 TYPE	Z	1 6 BORE	_	0 0 2 0 STROKE	C MATERIAL	P GASKETS
	214 Double acting, through-rod	**Z** Special	12 16 20 25 32 40 50 63 80 ◆ 100	Progressive letter assigned by Metal Work	Ø12 - 63 stroke from 5 to 120 mm Ø80 - 100 stroke from 5 to 150 mm	**C** C45 chrome rod, technopolymer piston rod Ø 12 to 63 mm **A** C45 chrome rod, aluminium piston rod (standard Ø 80 to 100 mm) **X** Stainless steel piston rod and nut technopolymer piston Ø 12 to 63 mm **Z** Stainless steel piston rod and nut aluminium piston (standard Ø 80 to 100 mm)	**P** Polyurethane **N** NBR ● **V** FKM/FPM ● **B** Low temperature

◆ In the code of cylinder with letter in fourth position Ø 100 becomes A1
● Only available for non-magnetic versions and with aluminium piston (A or Z)

N.B.: Specify in the comment area whether **non-magnetic** or **non-stick slip.**
The non-stick slip version is to be used with speeds lower than 0.2 m/s in order to prevent surging. Use no-lubricated air only.

DIMENSIONS Ø 12

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

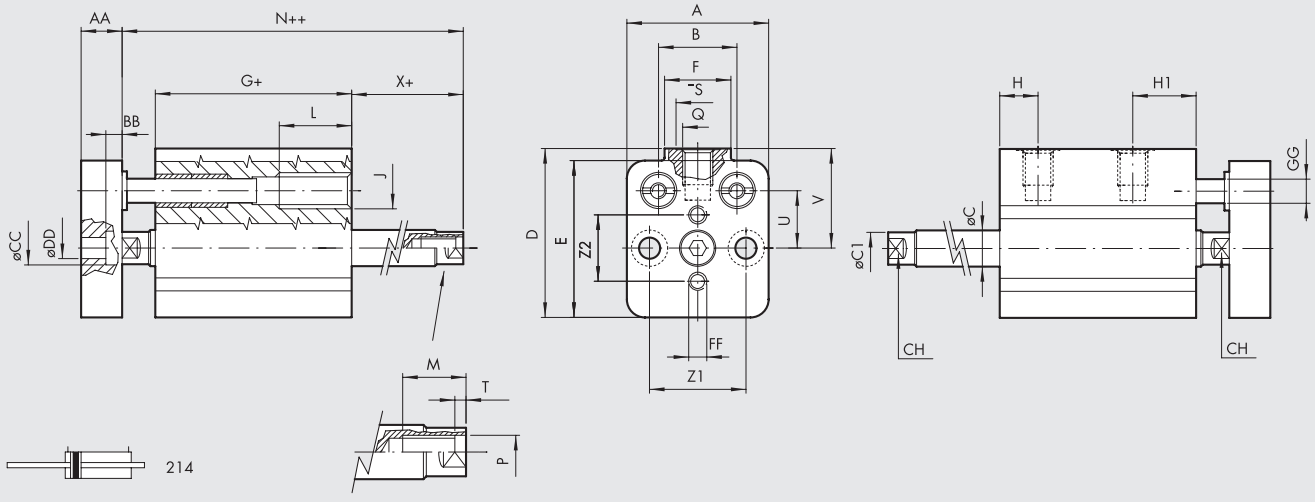

Ø	A	B	øC	ø C_1	CH	D	E	F	G	H	H_1	J	L	M	N	P	T	Z_1	Z_2	Q	øS	U	V	AA	BB	øCC	øDD	FF	øGG	X
12	23.5	13	6	5.5	5	28	26	11	32.5	6.5	10.5	M6	12	7	43.5	M3	2	16	11	M5	8	9.5	16.5	8	3.5	6	3.5	M3	4	5.5

METAL WORK PNEUMATIC

DIMENSIONS Ø16 to Ø100

+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

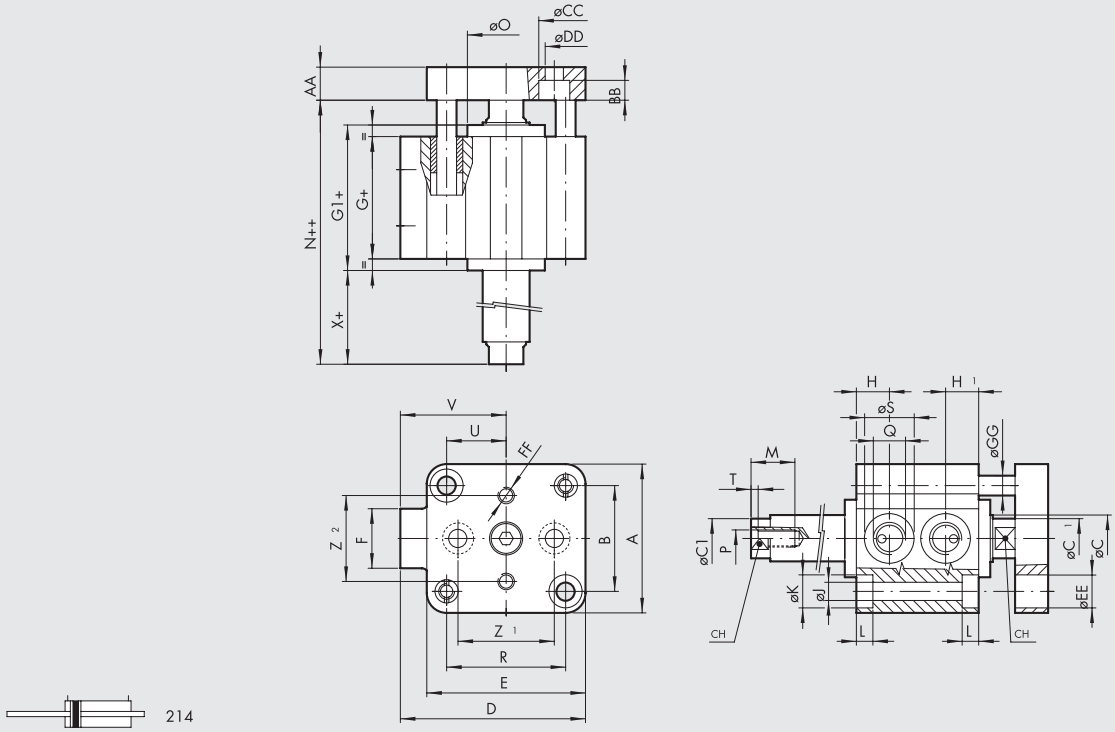

Ø	A	B	øC	øC1	D	E	F	G	G1	H	H1	J	K	L	N	Z1	Z2	Q	R	øS	CH	U	V	AA	BB	øCC	øDD	øEE	FF	øGG	øO
16	28	20	8	7.5	33	28	11	36.8	-	6.7	10.5	3.7	6	3.7	45.8	20	15	M5	20	8	7	10	19	8	3.5	6	3.5	6	M3	4	-
20	32	22	10	9	37	32	11	36	-	6.5	10.5	4.6	7.5	4.6	45	22	18	M5	22	8	8	11	21	8	5	7.5	4.5	7.5	M4	6	-
25	37	26	10	9	47.5	39	18	35.7	42.7	8.5	8.5	4.6	7.5	4.6	54.7	22	22	G1/8	28	15	8	14	28	8	5	7.5	4.5	8	M4	6	20
32	45	32	12	11	56	48	18	37	44.5	10	10	5.5	10	5.7	59.5	26	26	G1/8	36	15	10	18	32	10	6	10	5.5	10	M5	8	25
40	54.5	40	12	11	62.7	54.5	18	39.5	49.9	10	10	5.5	10	5.7	66.9	34	34	G1/8	40	15	10	20	35.5	10	6	10	5.5	10	M5	8	30
50	66	50	16	15	73	66	18	39.5	52.9	11	11	6.6	11	6.8	66.9	43	43	G1/8	50	15	13	25	40	12	7	11	6.5	11	M6	10	35
63	80	62	16	15	88	80	23	42	55.4	12	12	9	15	9	73.4	55	55	G1/8	62	15	13	31	48	12	9	14	9	15	M6	10	35
80	100	82	20	19	110	100	26	57	77.4	14	14	9	15	9	93.4	70	70	G1/4	82	19	17	41	60	14	9	14	9	15	M8	12	44
100	124	103	25	24	134	124	26	64	85.4	15	15	11	18	11	104.6	94	94	G1/4	103	19	22	51.5	72	17	9	14	9	18	M8	12	56

Ø	X	P	M	T
16	4.5	M5	10	2
20	4.5	M5	10	2
25	6	M5	10	2
32	7.5	M6	15	2.5
40	8.5	M6	15	2.5
50	7	M8	18	3.5
63	9	M8	18	3.5
80	8	M10	18	4
100	9.6	M12	20	5

NOTES

ROUND CYLINDER
SERIES SHORT RNDC

Short clean profile cylinders with hinge built into the rear head.
Available in different versions:

- configuration with or without magnet
- single- and double-acting - single or through-rod
- with pneumatic cushioning or sound-proof version
- range of gaskets available in NBR, POLYURETHANE, FKM/FPM (for high temperatures) and low-temperature gaskets.

TECHNICAL DATA			Ø32	Ø40	Ø50	Ø63
Max operating pressure		bar	10			
		MPa	1			
		psi	145			
Temperature range	POLYURETHANE	°C	–25 to +80			
	NBR	°C	–10 to +80			
	FKM/FPM	°C	–10 to +150 (non-magnetic cylinders)			
	Low temperature	°C	–35 to +80			
Design			Screwed heads			
Fluid			Unlubricated air. Lubrication, if used, must be continuous			
Standard strokes ✚	single-acting	mm	1 to 250			
	double-acting	mm	1 to 500			
Versions			Double-acting, Double-acting through-rod, Double-acting cushioned, Double-acting through-rod cushioned, Single-acting retracted, No stick-slip.			
Magnet for sensors			Available magnetic and non-magnetic versions.			
Inrush pressure		bar	0.4		0.3	
Forces generated at 6 bar thrust/retraction			See cylinder "**General technical data**" at the beginning of the chapter			
Notes			**For speeds lower than 0.2 m/s to prevent surging, use the version No stick-slip and non-lubricated air.**			
			✚ Maximum recommended strokes. Higher values can create operating problems.			

COMPONENTS

① PISTON ROD: C45 steel or stainless steel, thick chromed
② PISTON ROD GASKET: polyurethane, NBR or FKM/FPM
③ GUIDE BUSHING: steel strip with bronze and PTFE insert
④ FRONT CYLINDER HEAD: anodized aluminium alloy
⑤ CUSHIONING GASKET: polyurethane, NBR or FKM/FPM
⑥ PISTON: aluminium alloy
⑦ PISTON GASKET: polyurethane, NBR or FKM/FPM
⑧ MAGNET: plastoferrite
⑨ GUIDE RING: technopolymer
⑩ CUSHIONING CONE: brass
⑪ BARREL: anodized aluminium alloy
⑫ REAR CYLINDER HEAD: anodized aluminium alloy
⑬ CUSHIONING NEEDLE: brass, with needle out movement safety system even when fully open
⑭ REAR BUSHING: steel strip with bronze and PTFE insert
⑮ Static O-rings: NBR or FKM/FPM

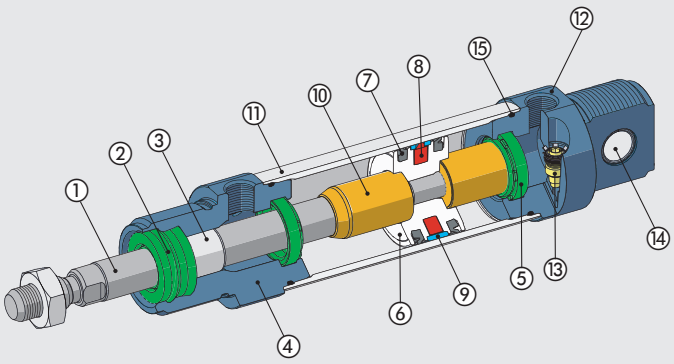

METAL WORK PNEUMATIC

DIMENSIONS

STANDARD VERSION

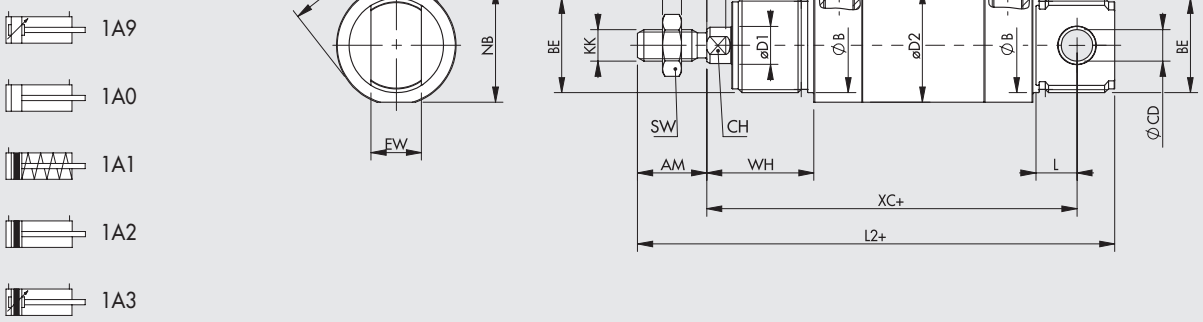

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

THROUGH-ROD VERSION

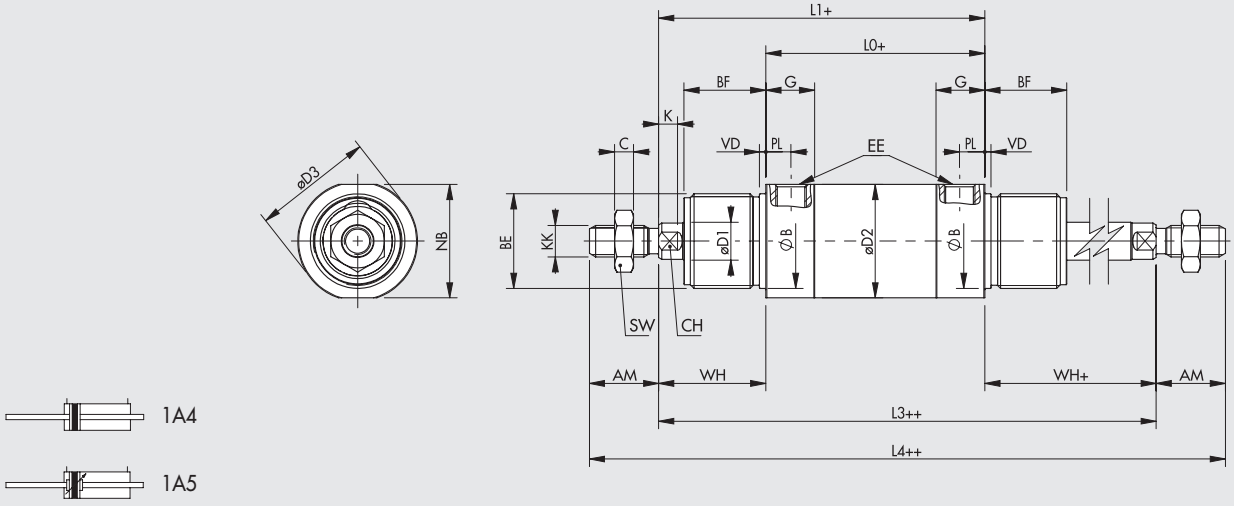

Ø	AM	WH	BE	BF	KK	Ø CD (H10)	EW	Ø D1	Ø D2	Ø D3	NB	Ø B (h9)	VD	G	PL	EE	L	L0	L1	L2	L3	L4	XC±1	SW	C	CH	K
32	22	34	M30x1.5	26	M10x1.25	10	16	12	36	38	36	30	2	15.5	8	G1/8	13	69.5	103.5	151.5	137.5	181.5	117.5	17	6	10	6
40	24	39	M38x1.5	30	M12x1.25	12	18	16	45	46	43	38	3	21	10	G1/4	15	84.6	123.6	177.6	162.6	210.6	139.6	19	7	13	6
50	32	44	M45x1.5	33	M16x1.5	16	21	20	55	57	54	45	3	19.6	9.8	G1/4	16	86.2	130.2	195.2	174.2	238.2	147.2	24	8	17	8
63	32	45	M45x1.5	33	M16x1.5	16	21	20	68	70	67	45	3	24	11.5	G3/8	16	94.2	139.2	204.2	184.2	248.2	156.2	24	8	17	8

VERSION 1A1... (SINGLE-ACTING)

	L0				L1				L2				XC			
Stroke	**Ø 32**	**Ø 40**	**Ø 50**	**Ø 63**	**Ø 32**	**Ø 40**	**Ø 50**	**Ø 63**	**Ø 32**	**Ø 40**	**Ø 50**	**Ø 63**	**Ø 32**	**Ø 40**	**Ø 50**	**Ø 63**
0 - 50	69.5	84.6	86.2	94.2	103.5	123.6	130.2	139.2	151.5	177.6	195.2	204.2	117.5	139.6	147.2	156.2
51 - 100	98.5	113.6	121.7	130.7	132.5	156.1	165.7	175.7	180.5	210.1	230.7	240.7	146.5	172.1	182.7	192.7
101 - 150	127.5	146.1	157.2	167.2	161.5	188.6	201.2	212.2	209.5	242.6	266.2	277.2	175.5	204.6	218.2	229.2
151 - 200	156.5	178.6	192.7	203.7	190.5	221.1	236.7	248.7	238.5	275.1	301.7	313.7	204.5	237.1	253.7	265.7
201 - 250	185.5	211.1	228.2	240.2	219.5	253.6	272.2	285.2	267.5	307.6	337.2	350.2	233.5	269.6	289.2	302.2

For all the other values, see previous table.

KEY TO CODES

CYL	1 A 0 TYPE	0	3 2 BORE	0 0 5 0 STROKE	A MATERIAL	P GASKETS
	1A9 Cushioned double-acting **1A0** Double-acting **1A1** Magnetic single-acting **1A2** Magnetic double-acting **1A3** Magnetic double-acting cushioned **1A4** Magnetic double-acting through-rod **1A5** Magnetic double-acting cushioned, through-rod	**0** Standard ▲ **G** No stick-slip **S** Non-magnetic	32 40 50 63	For the maximum suppliable strokes, look at the technical data	**A** C45 chrome piston rod, aluminium piston **Z** Stainless steel piston rod and nut aluminium piston	**P** Polyurethane **N** NBR ● **V** FKM/FPM ● **B** Low temperature

▲ **For speeds lower than 0.2m/s, to prevent surging. Use no-lubricated air only**
● Only available for non-magnetic versions (S)

ACCESSORIES FOR ROUND CYLINDER SERIES SHORT RNDC: FIXINGS

FOOT MODEL AC

+ = ADD STROKE

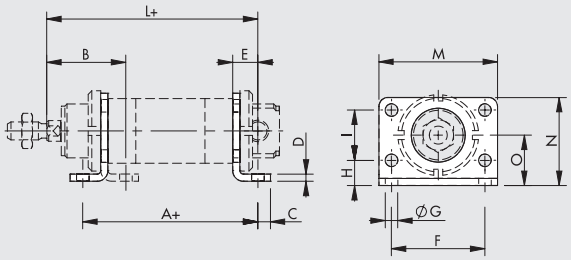

Code	Ø	A	B	C	D	E	F	ØG	H	I	L	M	N	O	Weight [g]
W0950320002	**32**	97.5	44	7	4	14	52	7	14	28	117.5	66	49	28	104
W0950400002	**40**	124.6	49	10	5	20	60	9	18	30	138.6	80	58	33	190
W0950500002	**50**	126.2	58	10	6	20	70	9	20	40	150.2	90	70	40	296
W0950500002	**63***	134.2	59	10	6	20	70	9	20	40	159.2	90	70	40	296

* On Ø 63, it can be used only if mounted outwards
Note: Individually packed

COUNTER-HINGE MODEL BCS

+ = ADD STROKE

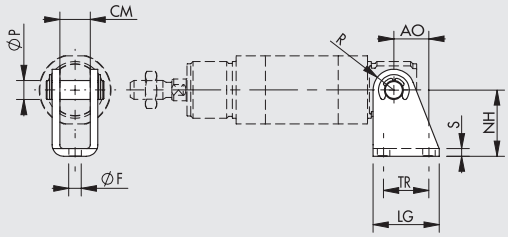

Code	Ø	AO	TR js13	ØF H13	ØP f7	CM	R	S	NH	LG	Weight [g]
W0950320022	**32**	18.5	24	6.6	10	16.1	11	4	$35^{+0.40}_{-0.20}$	35	105
W0950400022	**40**	24.5	30	9	12	18.1	13	5	$40^{+0.40}_{-0.20}$	45	185
W0950500022	**50 - 63**	28	34	9	16	21.1	14	6	$45^{+0.50}_{-0.20}$	50	290

Note: Supplied complete with pin and 2 snap rings

HEAD LOCK RING MODEL G

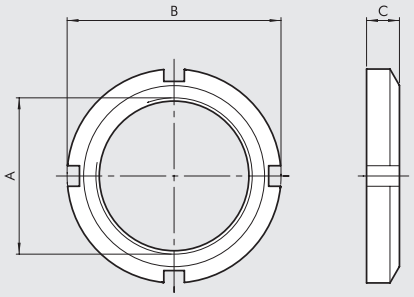

Code	Ø	A	B	C	Weight [g]
W0950320010	**32**	M30x1.5	45	7	46
W0950400010	**40**	M38x1.5	50	8	56
W0950500010	**50 - 63**	M45x1.5	58	9	124

Note: Individually packed

Please contact our sales offices for further information and quotation.

FORK MODEL GK-M

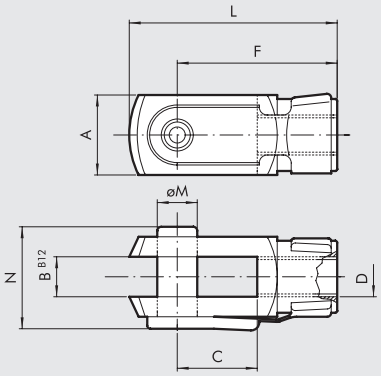

Code	Ø	Ø M	C	B	A	L	F	D	N	Weight [g]
W0950322020	32	10	20	10	20	52	40	M10x1.25	26	92
W0950402020	40	12	24	12	24	62	48	M12x1.25	32	148
W0950502020	50 - 63	16	32	16	32	83	64	M16x1.5	40	340

Note: Individually packed

SPHERICAL JOINT MODEL GA-M

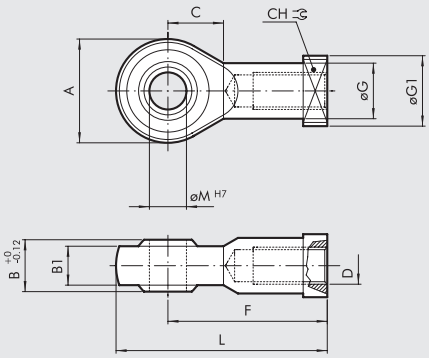

Code	Ø	øM	C	B1	B	A	L	F	D	øG	ØG1	CH	Weight [g]
W0950322025	32	10	15	10.5	14	28	57	43	M10x1.25	15	19	17	70
W0950402025	40	12	17	12	16	32	66.5	50	M12x1.25	17.5	22	19	108
W0950502025	50 - 63	16	22	15	21	42	85	64	M16x1.5	22	27	22	216

Note: Individually packed

ARTICULATED JOINT MODEL GA-K

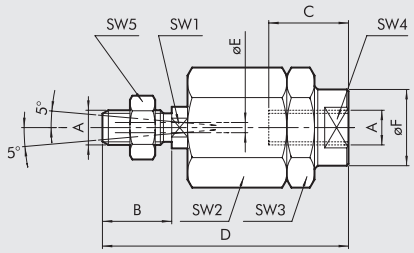

Code	Ø	A	B	C	D	øE	øF	SW1	SW2	SW3	SW4	SW5	Weight [g]
W0950322030	32	M10x1.25	20	20	71	4	22	12	30	30	19	17	216
W0950402030	40	M12x1.25	24	20	75	4	22	12	30	30	19	19	220
W0950502030	50 - 63	M16x1.5	32	32	103	4	32	20	41	41	30	24	620

Note: Individually packed

FLEXIBLE COLLAR - MODEL GA

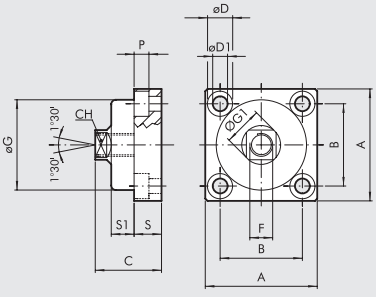

Code	Ø	A	B	C	CH	øD	øD1	F	øG	ØG1	P	S	S1	Weight [g]
W0950326021	32	49	36	30	13	11	6.5	M10x1.25	39.5	17	6.5	12	10	172
W0950406021	40	59	42	36	15	14	8.5	M12x.125	44	19	8.5	15	13.5	286
W0950506021	50 - 63	79	58	44	22	17	10.5	M16x1.5	59	26	10.5	20	15	628

Note: Individually packed

ACCESSORIES FOR ROUND CYLINDER SERIES SHORT RNDC: MAGNETIC SENSORS

SENSOR SERIES DSM - Ø 32-50



For codes and technical data, see **chapter A6**.

SENSOR BRACKET - Ø 32-50



Code	Bore	Model	Ø	A	B
W0950000132	32	Bracket DXF 36-32	36	29.5	10
W0950000140	40	Bracket DXF 45-40	45	34.5	10
W0950000150	50	Bracket DXF 52-50	55	38.5	10

FOR MOUNTING ON THE CYLINDER Ø 50 INSERT
THE ALUMINIUM SPACER ① YOU FIND IN THE PACKAGE

RETRACTABLE SENSOR - Ø 63

SENSOR, SQUARE TYPE
Latest generation,
secure fixing



SENSOR, OVAL TYPE
Traditional



For codes and technical data, see **chapter A6**.

UNIVERSAL SENSOR BRACKET - Ø 63



Code	Bore	Model
W0950001103	63	Sensor bracket 8 to 63

Note: Individually packed

MATERIAL

Bracket: stainless steel

Sensor holder: zamak

NOTES

METAL WORK PNEUMATIC

NOTES

ROUND CYLINDER SERIES RNDC WITH REDUCED HEAD

The rear head does not have a threaded nose, which gives a shorter overall length compared to a standard cylinder.

DIMENSIONS

\+ = ADD THE STROKE

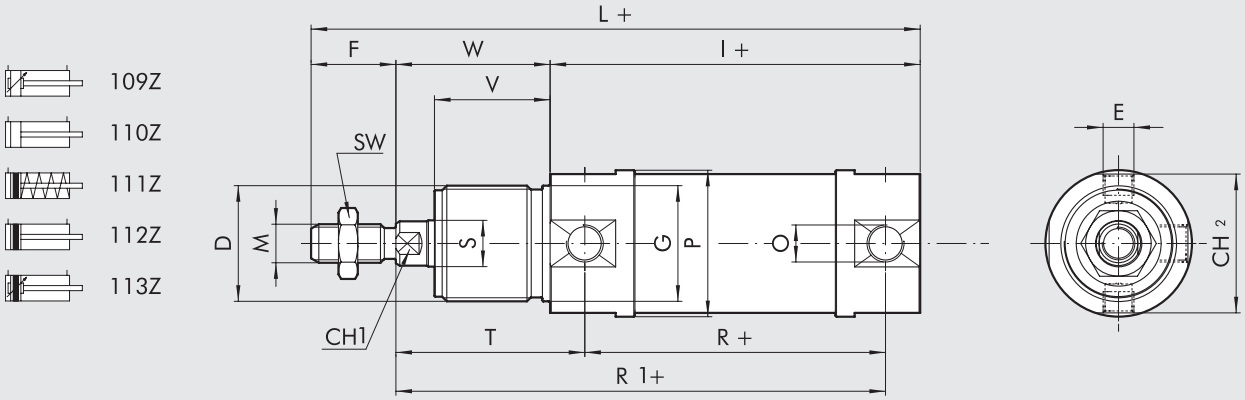

DIMENSIONS OF DOUBLE-ACTING

Ø	D	E	F	Ø G	CH1	I	L	M	N	O	Ø P	R	Ø S	SW	T	CH2	V	W	L1
32	M30x1.5	M8x1	22	30	10	96	158	M10x1.25	14	G1/8	38	78	12	17	49	36	30	40	220
40	M38x1.5	M10x1	24	38	13	113	182	M12x1.25	16	G1/4	46	89	16	19	57	43	35	45	251
50	M45x1.5	M12x1.5	32	45	17	120	202	M16x1.5	18	G1/4	57	96	20	24	62	54	38	50	284

DIMENSIONS OF SINGLE-ACTING

			I			L			R1		
Lower limit	**Stroke**	**Upper limit**	**Ø 32**	**Ø 40**	**Ø 50**	**Ø 32**	**Ø 40**	**Ø 50**	**Ø 32**	**Ø 40**	**Ø 50**
0	< C ≤	50	96	113	120	172	198	220	127	146	158
50	< C ≤	100	125	145.5	155.5	201	230.5	255.5	156	178.5	193.5
100	< C ≤	150	154	178	191	230	263	291	185	211	229
150	< C ≤	200	183	210.5	226.5	259	295.5	326.5	214	243.5	264.5
200	< C ≤	250	212	243	262	288	328	362	243	276	300

For all the other values, see previous table, except for "T" and "R" which are both replaced by "R1"

KEY TO CODES

CYL	1 1 2	Z	3 2	_	0 2 5	C	P
	TYPE		**BORE**		**STROKE**	**MATERIAL**	**GASKETS**
	109 DEA **110** DE ■ **111** SE **112** DEM **113** DEMA	**Z** Special	32 40 50	Progressive letter assigned by Metal Work	25 to 500 mm	**A** C45 chrome rod, aluminium piston rod **C** C45 chrome rod, technopolymer piston rod **Z** Stainless steel piston rod and nut aluminium piston **X** Stainless steel piston rod and nut technopolymer piston	**P** Polyurethane **N** NBR ● **V** FKM/FPM ● **B** Low temperature

DE: Double-acting (non-cushioned, not magnetic)
DEM: Magnetic double-acting (non-cushioned)
DEMA: Magnetic double-acting (cushioned)
DEA: Cushioned double-acting (non-magnetic)
SE: Single-acting (magnetic)

● Only available for non-magnetic versions and with aluminium piston (A or Z)
■ Only available for versions with aluminium piston (A or Z)
N.B.: Specify in the comment area whether **magnetic** or **non-stick slip.**
The non-stick slip version is to be used with speeds lower than 0.2 m/s in order to prevent surging. Use no-lubricated air only.

Please contact our sales offices for further information and quotation.

ROUND CYLINDER SERIES RNDC
PERFORATED THROUGH-ROD

DIMENSIONS

\+ = ADD THE STROKE
++ = ADD TWICE THE STROKE

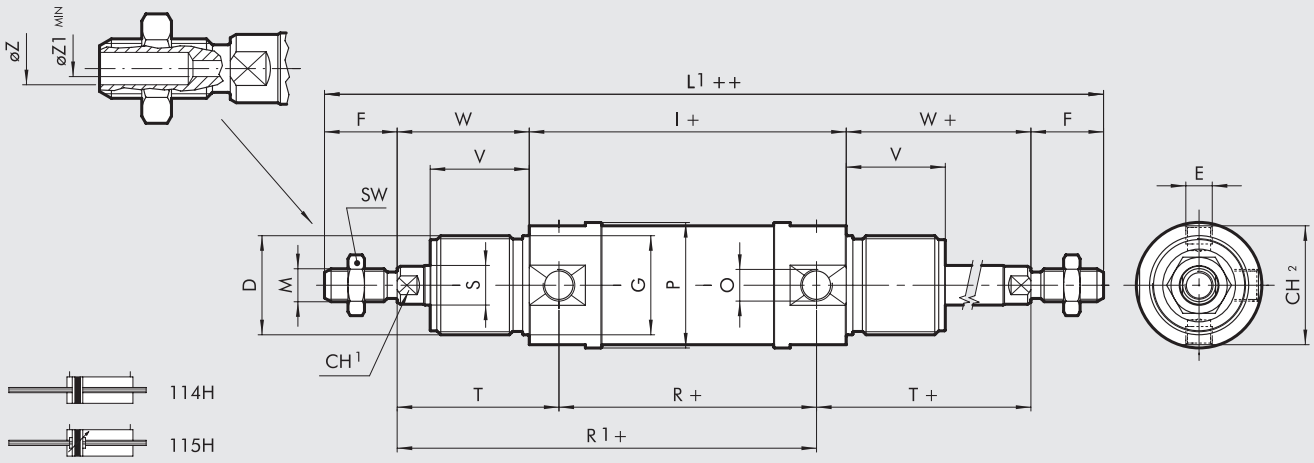

Ø	D	E	F	øG	CH1	I	L	M	N	O	øP	R	øS	SW	T	CH2	V	W	L1	øZ	øZ1
32	M30x1.5	M8x1	22	30	10	96	172	M10x1.25	14	G1/8	38	78	12	17	47	36	30	40	220	5.5	4
40	M38x1.5	M10x1	24	38	13	113	198	M12x1.25	16	G1/4	46	89	16	19	57	43	35	45	251	7	5
50	M45x1.5	M12x1.5	32	45	17	120	220	M16x1.5	18	G1/4	57	96	20	24	62	54	38	50	284	8.5	7

KEY TO CODES

CYL	1 1 4	H	3 2	_	0 2 5	C	P
	TYPE		**BORE**		**STROKE**	**MATERIAL**	**GASKETS**
	114 DEM through-rod **115** DEMA through-rod	**H** Perforated rod	32 40 50	Progressive letter assigned by Metal Work	Ø 32 max 110 Ø 40 max 120 Ø 50 max 170	**A** C45 chrome rod, aluminium piston rod **C** C45 chrome rod, technopolymer piston rod **Z** Stainless steel piston rod and nut aluminium piston **X** Stainless steel piston rod and nut technopolymer piston	**P** Polyurethane **N** NBR ● **V** FKM/FPM ● **B** Low temperature

DEM: Magnetic double-acting (non-cushioned)
DEMA: Magnetic double-acting (cushioned)

● Only available for non-magnetic versions and with aluminium piston (A or Z)

N.B.: Specify in the comment area whether **non-magnetic** or **non-stick slip.**
The non-stick slip version is to be used with speeds lower than 0.2 m/s in order to prevent surging. Use no-lubricated air only.

ROUND CYLINDER SERIES E

Cylinders with small axes compared to the "RNDC" series.
No threaded noses of the front and rear heads are provided.

TECHNICAL DATA

Operating pressure	bar	10
Temperature range	°C	–20 to +80
Lubrication		The cylinders are prelubricated
Available versions		Double-acting / Double-acting not magnetic
Standard strokes	mm	0 to 500
Supplying conditions		The cylinders are supplied with plastic cups on the threaded ports and protected by a plastic net On request the cylinders can be supplied with nuts muonted on piston rod, with labels printed with customer's logo and code number
Materials	Jacket	AISI 304
	Piston rod	AISI 303
	Head	Aluminium anodyzed
	Gaskets	NBR for piston
	Pistons	Aluminium
	Guide bushing	Technopolymer

DIMENSIONS

\+ = ADD THE STROKE

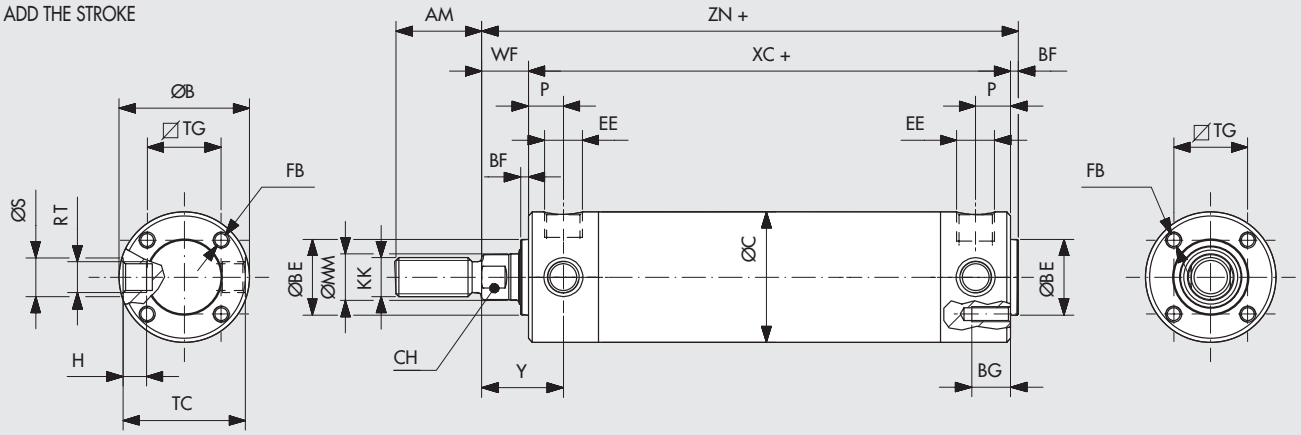

Ø	AM	ØBE	BG	H	ØB	EE	FB	KK	ØMM	P	RT	ØS	CH	TG	TC	BF	WF	ZN	Y	XC	ØC
32	22	19.5	10	6	33.5	G 1/8	M4	M10x1.25	12	9	M8x1	10	10	19	31.5	2	12	86	21	74	33.6
40	23	22.5	10	7.5	41.5	G 1/8	M5	M12x1.25	16	10	M10x1	12	13	23.5	39	2	12	92	22	80	41.6
50	23	28	12	10	52.3	G 1/4	M6	M12x1.25	16	13	M12x1.5	14	13	28.5	49	2	13	97	26	84	52.4
63	30	35	12	10	65	G 1/4	M8	M16x1.5	20	13	M12x1.5	14	17	35.5	62	2	13	99	26	86	65.4

KEY TO CODES

CYL	W 1 1 6	0 3 2	0 0 5 0
	TYPE	**BORE**	**STROKE**
	W116 Non-magnetic double-acting **W117** Magnetic double-acting	032 040 050 063	From 0 to 500 mm

Please contact our sales offices for further information and quotation.

ACCESSORIES FOR ROUND CYLINDER SERIES E

HINGE

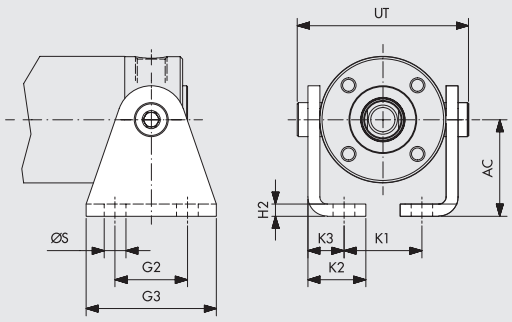

Code	Ø	ØS	G2	G3	H2	K1	K2	K3	AC	UT
W0950320052	32	7	20	35	4	15.5	20	13	25	47
W0950400052	40	7	28	42	4	23.5	20	13	28	57
W0950500052	50	9	30	54	5	32.3	24	15	40	71
W0950630052	63	9	40	64	5	40.5	26.5	17.5	47	84

Note: the cod corresponds to 2 piece

FOOT FLANGE

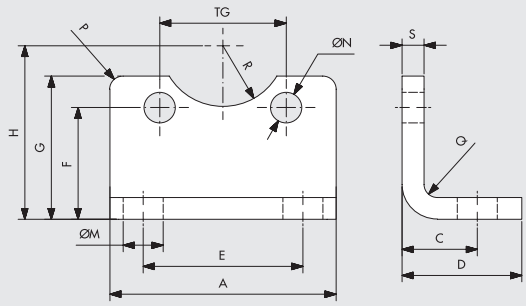

Code	Ø	D	C	ØM	E	A	S	G	H	F	R	TG	ØN	P	Q
W0950320051	32	16	7.5	7	18	32	4	22	25	16	10	19	5	2	2
W0950400051	40	16	7	7	27	40	4	23	28	16	11.5	23.5	6	2	2
W0950500051	50	17	10	9	36	51	5	33	40	17	14	28.5	7	3	3
W0950630051	63	19	10	9	45	61	5	38	47	19	17.5	35.5	9	4	3

Note: Individually packed

NOTES

SHOCK ABSORBERS

These shock absorbers are supplied on rodless cylinders, and on slides and on rotaring actuators. This description is a guide to the identification of the features for ordering spare parts.
Slides S9, S11 and S12 without a shock absorbers are designed to hold one at a later stage.

DIMENSIONS AND ORDERING CODES

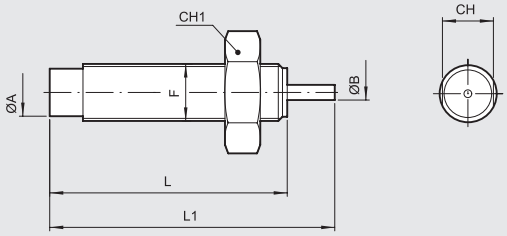

ECO125

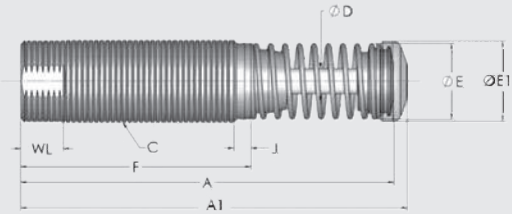

Code	Description	ØA	ØB	F	L	L1	CH	CH1	Stroke	Ek/ cycle	Ek/ hour	Me	S*	Use on standard products	Notes
0950004020	Shock abs. MC30EU M1-NB+nut M8X1	-	2.5	M8x1	40.9	52	-	10	8	3.5	5600	0.4-1.9	1		
W0950005300	Shock abs. MC30EU M2-NB+nut M8X1	-	2.5	M8x1	40.9	52	-	10	8	3.5	5600	1.8-5.4	2	S14 ø8	
0950004001	Shock abs. ECO8 MC2+nut M8X1	6.6	2.5	M8x1	40.9	47	-	12	6.4	3	5650	-	2	S11-S12 ø12	
0950004021	Shock abs. MC30EU M3-NB+nut M8X1	-	2.5	M8x1	40.9	52	-	10	8	3.5	5600	5-15	3		
0950004022	Shock abs. ECO10 MF1+nut M10X1	8.6	3	M10x1	46.5	54	-	13	7	6	12400	-	1		
0950004002	Shock abs. ECO10 MF2+nut M10X1	8.6	3	M10x1	46.5	54	-	13	7	6	12400	-	2	S11-S12 ø16-ø20	
W0950005301	Shock abs. RT-10+nut M10X1	8.6	3	M10x1	46.5	54	-	13	7	6	18000	5-15	3	S14 ø16 GD_K, ø12-ø16 DAPK1	
0950004009	Shock abs. ECO10-MF3+nut M10X1	8.6	3	M10x1	46.5	54	-	13	7	6	12400	-	3	R3 ø16 external shock absorbers	
0950004003	Shock abs. ECO15 MF1+nut M12X1	9.9	3	M12x1	62.2	72.4	11	15	10.4	10	28200	-	1	Rodless ø16, S11-S12 ø25	
0950004023	Shock abs. ECO15 MF2+nut M12X1	9.9	3	M12x1	62.2	72.4	11	15	10.4	10	28200	-	2		
0950004010	Shock abs. ECO15 MF4+nut M12X1	9.9	3	M12x1	62.2	72.4	11	15	10.4	10	28200	-	4	R3 ø20-ø22 external shock absorbers	
0950004012	Shock abs. MC150EUMH+nut M14X1.5	-	4.8	M14x1.5	69.1	86.6	-	17	12.5	20	34000	8.6-86	1	DAPK2	
0950004013	Shock abs. MC150EUMH2+nut M14X1.5	-	4.8	M14x1.5	69.1	86.6	-	17	12.5	20	34000	70-200	2	DAPK2	
0950004004	Shock abs. ECO25 MC2+nut M14X1.5	10.9	4	M14x1.5	81.3	97.5	12	17	16	26	34000	-	2	Rodless ø25, S11-S12 ø30, GD_K ø20-ø25	
W0950005303	Shock abs. SC190EU M3-NB+ nut M14X1.5	-	4	M14x1.5	87.7	110.1	12	17	16	25	34000	9-45	3	S14 ø25	Use on standard products
0950004008	Shock abs. ECO25-MC4+nut M14X1.5	10.9	4	M14x1.5	81.3	97.5	12	17	16	26	34000	-	4	R3 ø30	
0950004014	Shock abs. SC190EUM7+nut M14X1.5	-	4	M14x1.5	87.7	110.1	12	17	16	25	34000	136-1550	7	DAPK2	Do not use in pressurised vessels
0950004015	Shock abs. ECO S 25 MC2+nut M14X1.5	10.9	4	M14x1.5	69.5	82.7	12	17	12.7	20	34000	-	2	R3 ø25 and R3 ø25-ø30 external shock absorbers	
0950004025	Shock abs. ECO50 MC1+nut M20X1.5	16.3	4.8	M20x1.5	95.5	118.4	18	24	22	54	53700	-	1		
0950004005	Shock abs. ECO50 MC2+nut M20X1.5	16.3	4.8	M20x1.5	95.5	118.4	18	24	22	54	53700	-	2	Rodless ø32, R3 ø40 and R3 external shock absorbers, GD_K ø32	
0950004026	Shock abs. ECO50 MC3+nut M20X1.5	16.3	4.8	M20x1.5	95.5	118.4	18	24	22	54	53700	-	3		
0950004027	Shock abs. ECO100 MF1+nut M25X1.5	22	6.4	M25x1.5	128.8	102.6	23	32	25	90	70000	-	1		
0950004006	Shock abs. ECO100 MF2+nut M25X1.5	22	6.4	M25x1.5	128.8	102.6	23	32	25	90	70000	-	2	Rodless ø40-ø50, GD_K ø40	
0950004028	Shock abs. ECO100 MF3+nut M25X1.5	22	6.4	M25x1.5	128.8	102.6	23	32	25	90	70000	-	3		

Code	Description	A	A1	C	D	E	E1	F	J	WF	WL	Me	S*	Use on standard products	Notes
0950004029	Shock abs. ECO125 MF1+nut M36X1.5	140.2	145.3	M36x1.5	9.5	29	30.5	87	25	160	91000	-	1		
0950004030	Shock abs. ECO125 MF2+nut M36X1.5	140.2	145.3	M36x1.5	9.5	29	30.5	87	25	160	91000	-	2		
0950004007	Shock abs. ECO125 MF3+nut M36X1.5	140.2	145.3	M36x1.5	9.5	29	30.5	87	25	160	91000	-	3	Rodless ø63	

S* = CUSHIONING (low = high speeds, low masses, SOFT shock absorber / high = low speeds, high masses, HARD shock absorber)

Please contact our sales offices for further information and quotation.

SHOCK ABSORBERS CHOICE DIAGRAMS

M8x1

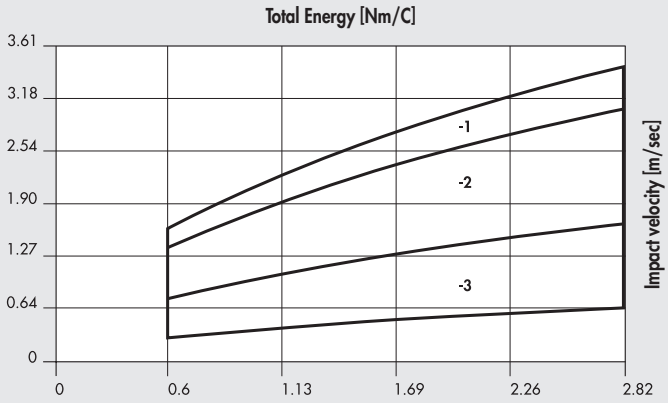

M10x1

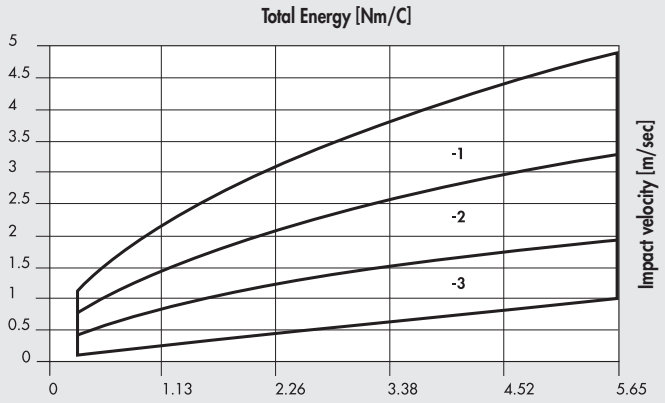

M12x1

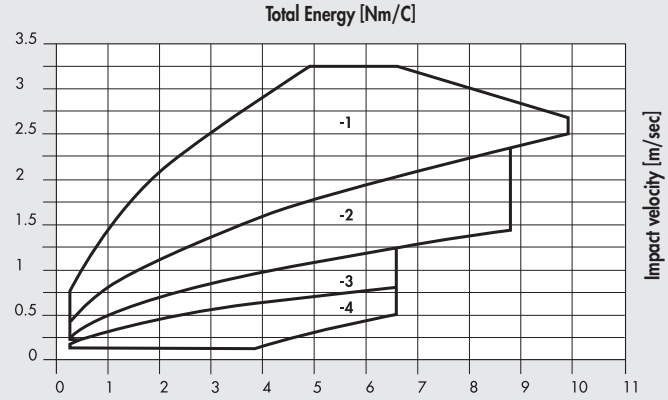

M14x1.5

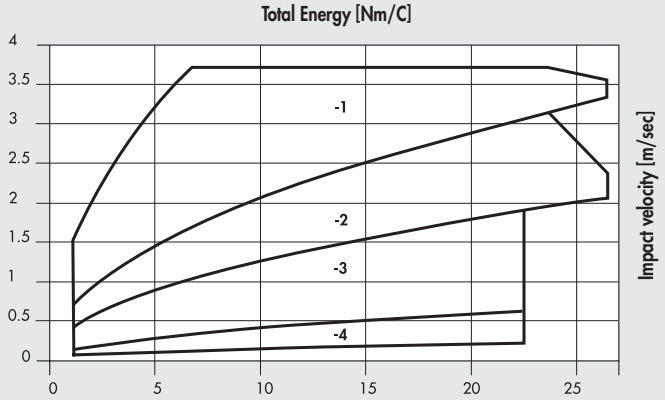

M14x1.5 L = 69.5

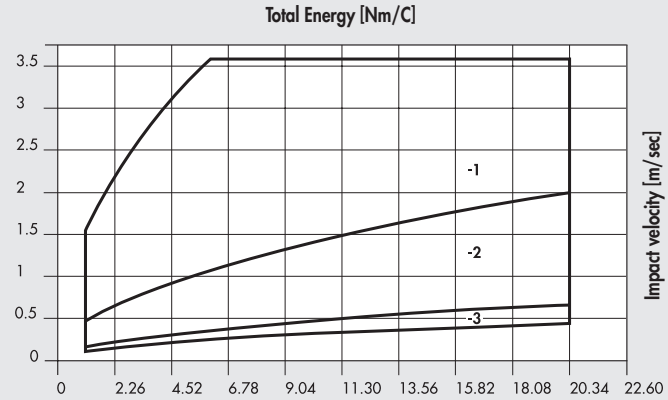

M14x1.5 S = 7

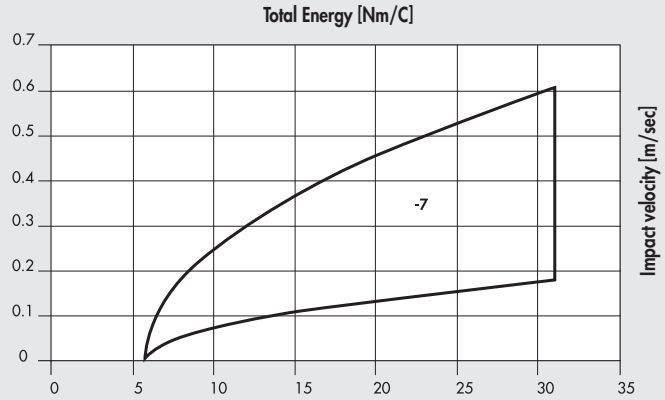

M20x1.5

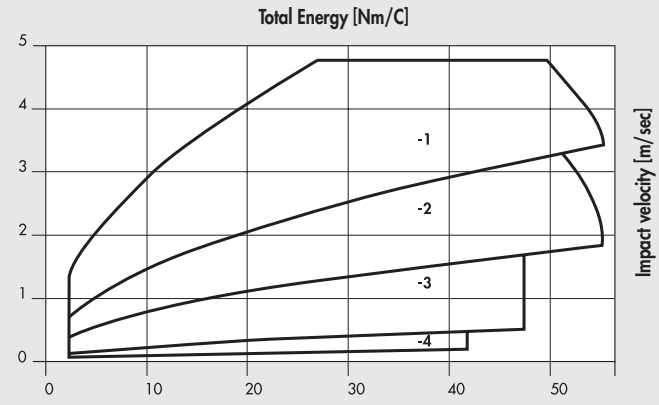

M25x1.5

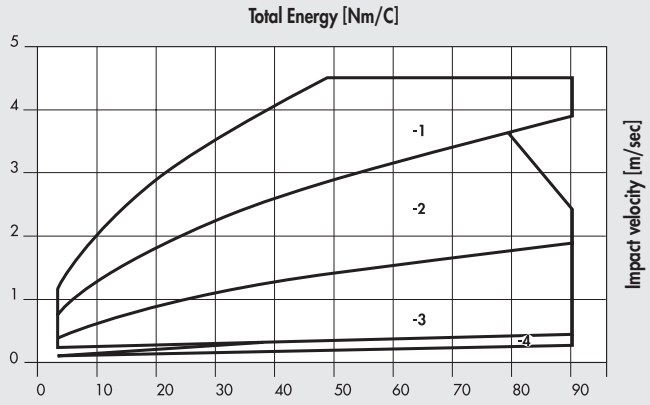

M36x1.5

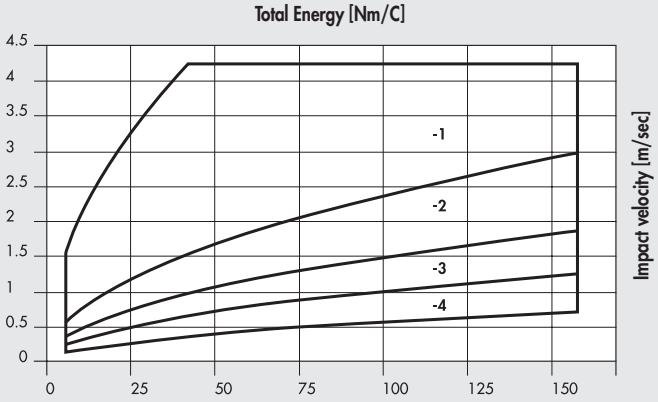

NOTES

Please contact our sales offices for further information and quotation.

SPECIAL PISTON RODS

The main types of special piston rod have been classified in order to highlight the difference compared to standard piston rods. In general, all types of Metal Work cylinders can be supplied with special piston rods unless problems of dimensions or production process are encountered.
Below is a list of cylinders available with a special piston rod:

- ISO 6432 mini-cylinder, series STD and series TP
- ISO 15552 cylinder series STD, type A, series 3, with "Combi" piston rod gasket and TWO-FLAT
- ISO 15552 cylinder Ø160-200
- ISO 21287 cylinder series LINER
- Compact cylinder series CMPC, series CMPC TWO-FLAT
- Round cylinder series RNDC
- Short-stroke cylinder series SSCY

N.B.: Taking the order codes specified by the customer, Metal Work will generate its own special product code each time.

PISTON ROD WITH ENHANCED PROJECTION

TYPE Ⓐ

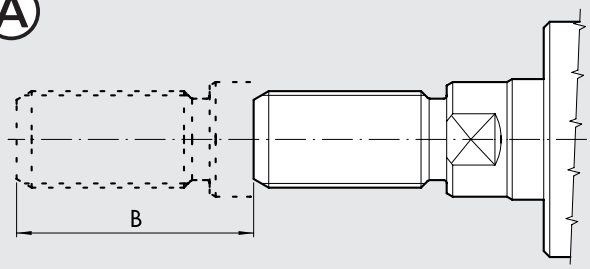

Sample configuration:
Cil 1210400100CP extended piston rod type A: B = 50

Price: please contact our sales offices
Delivery: 3 working days
Minminum quantity: 1 piece

PISTON ROD WITH SPECIAL THREAD

TYPE Ⓑ

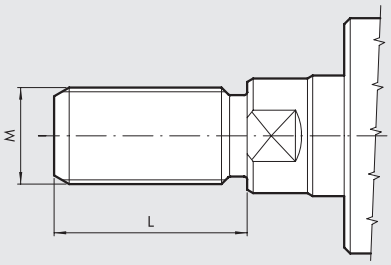

- The nut for the piston rod in not included
- Applies to L ≤ 3 x M
- Applies to metric threads
- The thread diameter must be less than the piston rod diameter

Sample configuration:
Cil 1210400100CP special thread type B: M = M10 x 1.25 L = 30

Price: please contact our sales offices
Delivery: 3 working days
Minimum quantity: 1 piece

PISTON ROD WITH EXTRA-LONG THREAD

TYPE Ⓒ

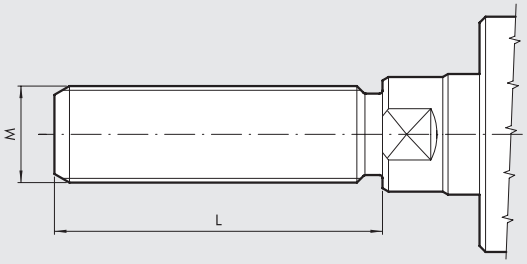

- Not included in the nut of the piston rod
- Applies to L > 3 x M
- Applies to metric threads
- The thread diameter must be less than the piston rod diameter

Sample configuration:
Cil 1210400100CP special thread type C: M = 12 x 1.25 L = 50

Price: please contact our sales offices
Delivery: 5 working days
Minimum quantity: 1 piece

PISTON ROD WITH THREAD WITHOUT UNDERCUT

TYPE D

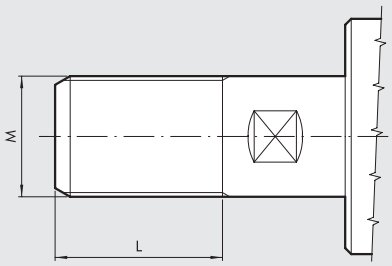

- The nut of the piston rod is only included if the thread is standard for that cylinder.
- Applies to L ≤ 3 x M
- Applies to metric threads

Sample configuration:
Cil 1210400100CP thread without undercut type D: M = M12 x 1.25 L = 24

Price: please contact our sales offices
Delivery: 3 working days
Minimum quantity: 1 piece

PISTON ROD WITH FEMALE THREAD

TYPE E



- L1 ≤ 4 times M
- Applies to metric threads

The standard L1 value for Metal Work is:

M	M3	M4	M5	M6	M8	M10	M12
L1	8	10	12	14	16	20	24

Sample configuration:
Cil 1210400100CP female thread type E: M = M8, L1 = 16, L = 10

Price: please contact our sales offices
Delivery: 3 working days
Minimum quantity: 1 piece

PISTON ROD WITHOUT KEY PLANE

TYPE F



Sample configuration:
Cil 1210400100CP without key plain type F: L = 5

Price: please contact our sales offices
Delivery: 3 working days
Minimum quantity: 1 piece

UNTHREADED PISTON ROD

TYPE G



Sample configuration:
Cil 1210400100CP without thread type G: L = 10

Price: please contact our sales offices
Delivery: 3 working days
Minimum quantity: 1 piece

Please contact our sales offices for further information and quotation.

SPECIAL PISTON RODS TO DRAWING

TYPE
(S)

EXAMPLES

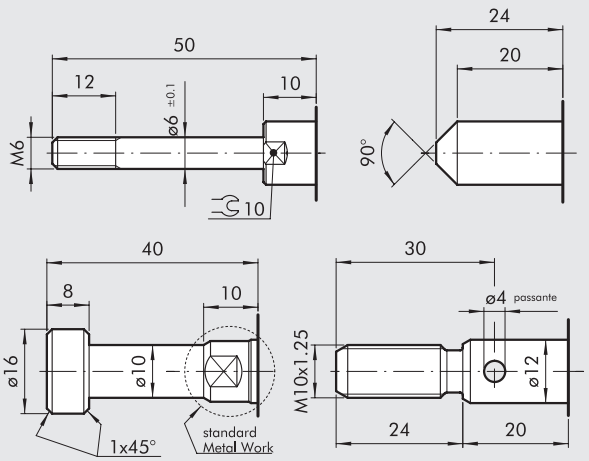

- A drawing with values, and work tolerances if necessary, must be provided.

A few examples are shown here.

Price / Delivery / Minimum quantity: please contact our sales offices

NOTES

ISO 15552 CYLINDER ROTARY

Fitted with a visible rack for coupling to a pinion provided by the customer.
The cylinder diameter is 50 mm.
The total stroke is 70 mm with possible end-of-stroke adjustment.
The rack has module m = 2 . Retracting sensors can be fixed to the cylinder liner.

COMPONENTS

① HEAD: made of die-cast aluminium
② JACKET: made of anodized and calibrated aluminium sections
③ RACK: UNI 6588 made of steel
④ CUSHIONING GASKET: polyurethane
⑤ HALF-PISTON: self-lubricating technopolymer with built-in cushioning ogives
⑥ PISTON ROD GASKET: made of NBR
⑦ LOCKING NUT: made of steel
⑧ STROKE ADJUSTING SCREW: made of AISI 303 steel
⑨ A4/Z 1/8" ADAPTOR: made of nickel-plated brass

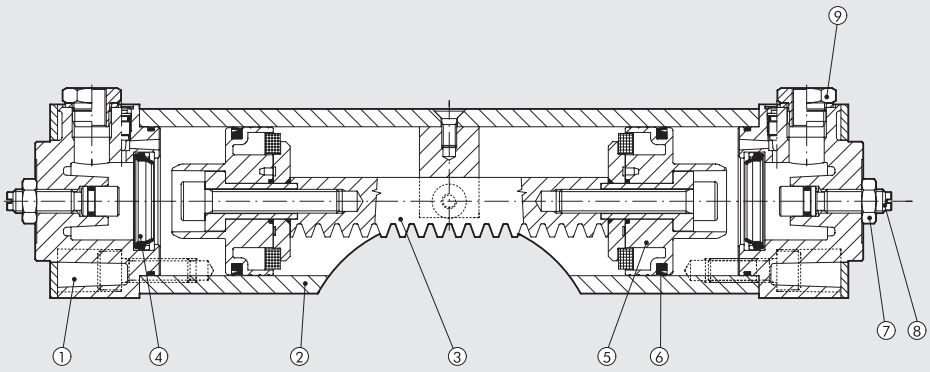

ORDERING CODES

128Z50A070CN Cylinder Ø 50 stroke 70 rotary

NOTES

Please contact our sales offices for further information and quotation.

COMPACT PRECISION SLIDE SERIES S14K, WITH INDUCTIVE SENSOR

Flat, compact precision slides with two cylinders.
The fixed and moving parts are moved by a sturdy ball recirculation carriage running on hardened guides. Elastic mechanical stop or shock absorbers are used to achieve adjustable stop at the end of the stroke.
A three-position version is available allowing an intermediate stop.
Slots are provided in the body for end-of-stroke sensors.
Provision for housing two M8 inductive sensors detecting the slide (out-in) limit switches is available for size 25 only. The sensors are screwed onto the fixed body by means of two sensor-holding blocks, while two more blocks with a metal stop are fixed to the mobile part; the dimensions at the sides are slightly larger.

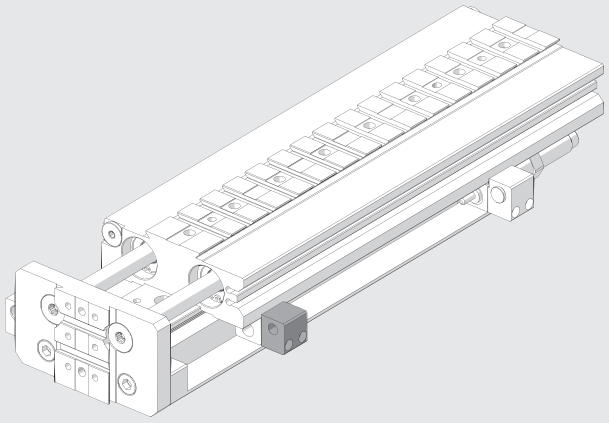

TECHNICAL DATA		S14K-25
Operating pressure	bar	2 to 8
	psi	29 to 116
Temperature range	°C	–10 to +80
Fluid		Dry or lubricated 10 µm filtered compressed air. Lubrication, if used, must be continuous
Maximum speed	m/s	0.8
Versions		With shock absorbers – With elastic mechanical stop
Bore		2 x Ø 25
Piston rod diameter	mm	12
Strokes	mm	10, 20, 30, 40, 50, 80, 100, 125, 150, 200
Stroke reduction by adjusting the decelerators retraction	mm	30 extension / 30 retraction
Stroke reduction by adjusting the buffers retraction	mm	15 extension / 15 retraction
Maximum impact energy with hydraulic decelerators	J	20
Maximum impact energy with buffers	J	0.5
Sensors		Sensors Magnetic Hall or Reed or M8 inductive proximity
Theoretical thrust force at 6 bar	N	589
Theoretical pull force at 6 bar	N	453
Repeatability in stop positions	mm	0.02 (with shock absorbers); 0.02 (with buffers and 5 bar minimum pressure)
Monitoring position		Any
Notes		Lubrication recommended: every 2 million cycles for strokes below 100 mm and 1 million for longer strokes (grease code 9910506)

DIMENSIONS

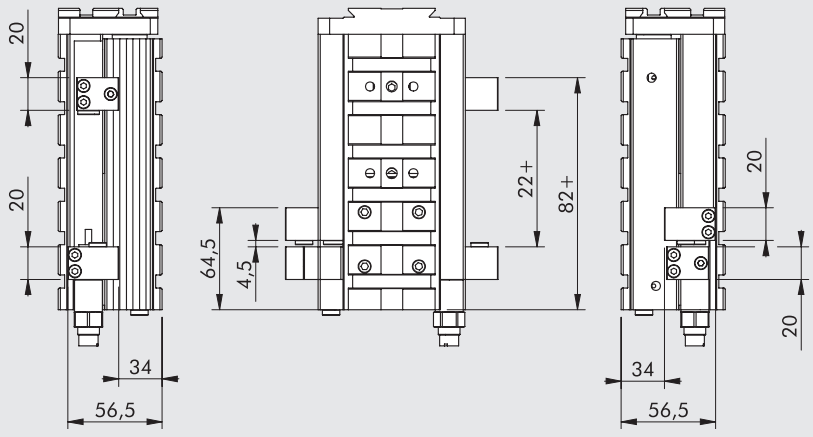

HYDRAULIC BRAKE SERIES BRK Ø 40 mm WITH FIXING HOLES TO DISTANCE 40 mm

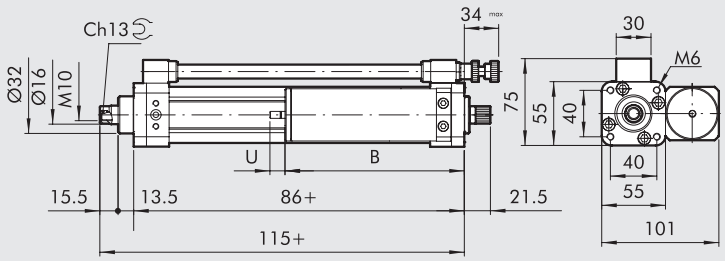

\+ = ADD THE STROKE

The drawing is illustrative of a type of brakes.
The differences compared to the standard are:
- Length 86 + (instead of 84 +)
- Length 115 + (instead of 114 +)
- Length 13.5 (instead of 14.5)
- Length 21.5 (instead of 22.5)
- Length 34 max (instead of 35 max)

NOTES

ELECTRIC CYLINDER SERIES ELEKTRO ISO 15552 WITH ACME SCREW (ACME)

An electric cylinder with a connection interface in accordance with ISO 15552.
The piston rod is moved forwards by a lead screw and nut with a trapezoidal outline (Acme): this is an irreversible system that can be used to move the loads vertically. If the motor power supply fails, the load is supported by the screw. The piston has a gauged driving band that minimises the clearance with the jacket (the screw is made of steel while the nut is in brass).
The cylinder can be equipped with a built-in non-rotating system featuring two opposing slides that run in separate longitudinal slots in the barrel. The piston comes with magnets and the barrel has longitudinal slots for housing sensors. The piston rod has increased outside diameter and thickness to make it extra rigid and more resistant to radial and peak loads.
A system for greasing the screws is included. Numerous standard accessories for pneumatic cylinders, including intermediate hinge, can be used for mounting the cylinder.
The motor can be selected from an optimised range.
There is a version for in-line assembly, where the drive shaft is jointed directly onto the screw. There is also a geared motor version, where transmission is provided by pulleys and a cog belt standard 1:1.
Suitable motor drives are provided.
Special adaptor flanges and joints can be provided if the customer wishes to use a particular make of motor.
It is advisable to lubricate the cylinder every 50 km or at least once a year (preferably with MOBILITH SHC 460 grease).

in-line version

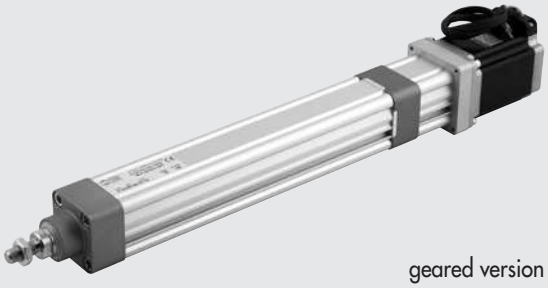

geared version

TECHNICAL DATA			Ø 32	Ø 50	Ø 63	Ø 80
Piston rod thread			M10x1.25	M16x1.5	M16x1.5	M20x1.5
Temperature range	WITH MOTOR	°C	see single motor data sheet			
	ONLY MECHANICS	°C	from -10 to +50			
Electrical protection rating with	STEPPING motors		IP40 or IP55 (see key to codes)			
Maximum stroke		mm	500	1500		
Positioning repeatability		mm	± 0.1			
Positioning accuracy		mm	± 0.5 **			
Overall radial oscillation of the piston rod (without load) for 100 mm of stroke		mm	0.4			
Versions			With or without piston rod non-rotating			
Uncontrolled impact at the end of stroke			NOT ALLOWED (it provides an extra-stroke minimum 5 mm)			
Sensor magnet			YES			
Maximum angle of twist of the piston rod for non-rotating version			0°45'			
Work position			Any			
Duty cycle			20%			

** indicative average data that gets influenced by various factors such as the stroke, the type of motor, the cylinder version, etc ...

MECHANICAL FEATURES		Ø 32	Ø 50	Ø 63	Ø 80
Screw pitch (p)	mm	4			
Screw diameter	mm	14	16	20	30
Maximum liftable load	kg	100	200	400	800
	N	1000	2000	4000	8000
Maximum speed (V_{max})	mm/s	25			

PISTON ROD SPEED AS A FUNCTION OF rpm

The graph shows the direct correspondence between the number of turns (1/min) and the translation speed of the stem (mm/s).
In any case all the other conditions and limitations of each specific cylinder will have to be complied.

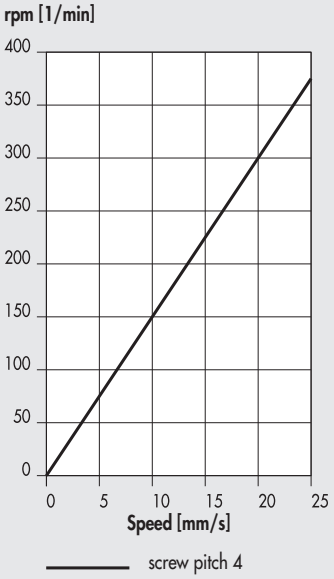

DRIVE TORQUE AS A FUNCTION OF THE AXIAL LOAD APPLIED TO THE PISTON ROD

The friction generated in the mechanical system is taken into account.

Ø 32, Ø 50, Ø 63, Ø 80

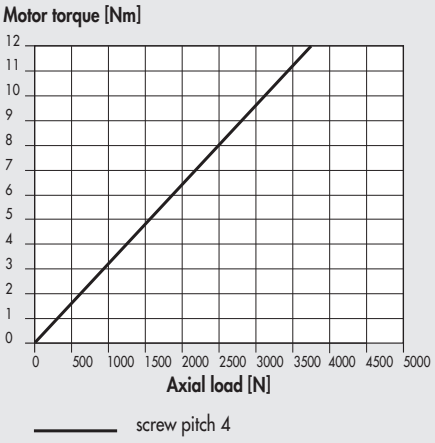

CYLINDER DIMENSIONS (WITHOUT MOTOR)

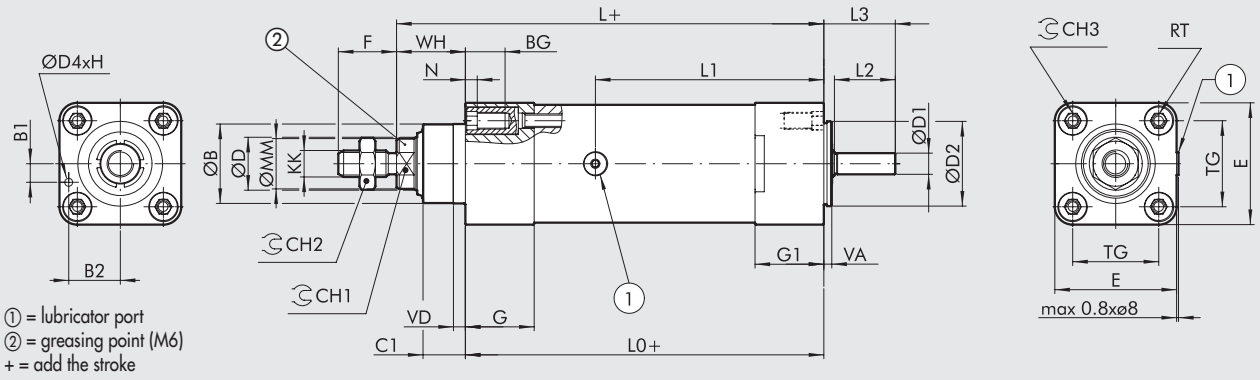

Ø	ØB (d11)	B1	B2	BG	C1	CH1	CH2	CH3	ØD (f7)	ØD1 (h7)	ØD2	ØD4 (h7)	E	F	G	G1	H	KK	L	L0
32	30	7	19.5	14.5	16	17	17	6	20	8	32	3	46	22	26	26	9	M10x1.25	168.4	134
50	40	7	28	17.5	25	21	24	8	25	9	50	3	64.5	32	30	30	9	M16x1.5	201.4	157
63	45	9	34.5	17.5	25	26	24	8	30	14	63	3	75.5	32	32	46	9	M16x1.5	227.4	183
80	60	15	42.5	21	31	40	30	10	45	19	80	3	93	40	38	67	9	M20x1.5	331.4	248

Ø	L1	L2	L3	ØMM	N	RT	TG	VA	VD	WH
32	86.3	23	27	19	4.5	M6	32.5	3	4.5	34.4
50	100.8	24	28.4	24	5.5	M8	46.5	5.5	5.5	44.4
63	122.3	34	39.5	29.5	5.5	M8	56.5	5.5	6.5	44.4
80	181.1	41.7	47.2	44	5	M10	72	5.5	17.5	53.4

KEY TO CODES CYLINDER (WITHOUT MOTOR)

CYL	37	1	V	32	0100	1	5
	TYPE			BORE	STROKE	SCREW PITCH	VERSION
	37 Electric actuators	**1** ISO 15552 electric cylinder	**V** Acme screw	32 50 63 80		**1** Screw pitch 4	**5** Without antirotation IP40 **6** With antirotation IP40 **7** Without antirotation IP55/IP65 **8** With antirotation IP55/IP65

Please contact our sales offices for further information and quotation.

ELECTRIC CYLINDER SERIES ELEKTRO ISO 15552 EK WITH DIRECT CURRENT MOTOR

Electric cylinders in the ELEKTRO ISO 15552 EK series (with ISO 15552 interface) can also be supplied with a DC motor for simplified control of the movement and reduced costs in terms of product and management system at the same time.
For the new line with DC motors, the forward movement of the piston rod can be obtained either with a trapezoidal screw and nut or a screw.
The cylinder incorporates an anti-rotation system obtained from two engineering polymer pads that run in the special slots inside the cylinder liner. On request, a version without anti-rotation is also available.
The piston comes complete with a magnet and the liner has slots for mounting magnetic sensors.
A system for greasing the screw/nut is included.
The motor supplied is ready equipped with an incorporated gearbox, it is axially connected to the cylinder and includes a pair of "Hall" sensors for possible position control.
Can be coupled with 37D3112000 drive.

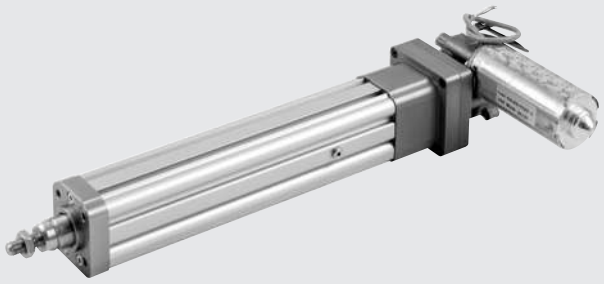

TECHNICAL DATA		Lead screw	Trapezoidal screw
Screw pitch	mm	5	4
Screw diameter	mm	12	14
Piston rod thread		Male, M10x1.25	
Ambient temperature	°C	0 ÷ 40	
Degree of protection with motor mounted		IP40	
Minimum stroke	mm	At least 2 times the screw pitch	
Maximum stroke	mm	500	
Versions		In line, with or without anti-rotation of the piston rod	
Uncontrolled impact at the end of stroke		NOT ALLOWED (it provides an extra-stroke minimum 5 mm)	
Sensor magnet		YES	
Work position		Any	
Duty Cycle		20% **	
Motor		Direct current DC	
Supply voltage	VDC	24	
Input power with MAX torque	W	48	
Input current with MAX torque	A	2	
Max axial load	N	See graphic on next page	
Maximum speed	mm/s	See graphic on next page	
Maximum load in vertical position and motor powered off (reversibility)	N	100	Irreversible (max recommended 1000)
Interference suppression		LC circuit	
Direction of rotation		According to polarity	
Encoder		Two-channel, three motor pulses/revolution per channel, NPN.	
Resolution	mm/imp.	0.085	0.068

** maximum motor temperature, measured on the outer surface, must NOT exceed 70°C

CYLINDER CONNECTION AND WIRING DIAGRAM



Function	Corresponding wire colour
Motor power supply +	Red
Motor power supply -	Blue
ENCODER Power supply r V+ 5 ÷ 20 VDC	Brown
Encoder 0 V supply	White
Encoder channel A (NPN)	Green
Encoder channel B (NPN)	Yellow

DIMENSIONS

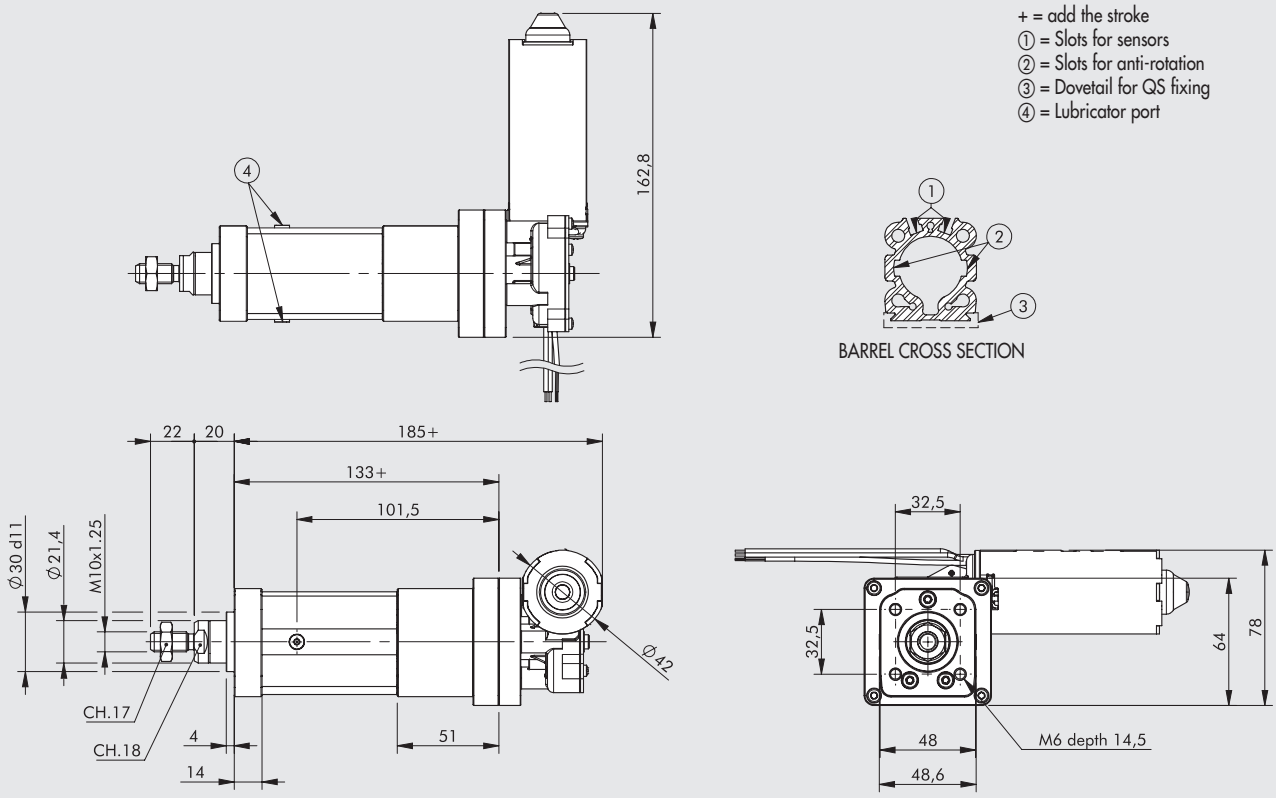

AXIAL LOAD CURVES AS A FUNCTION OF SPEED

Ø32 with gearmotor CC 1/19.67 24VDC / max 2A

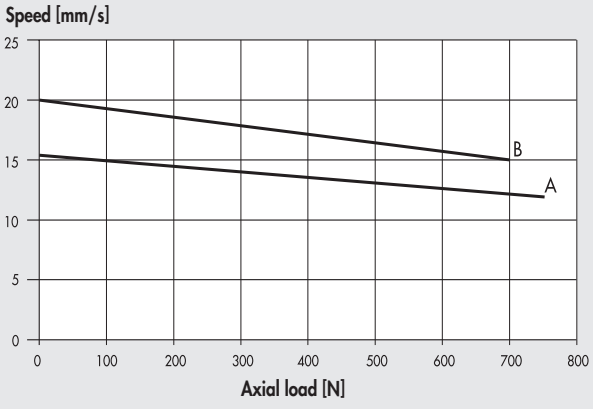

A = with trapezoidal screw 14x4
B = with lead screw 12x5

ACCESSORIES

The accessories of the ELEKTRO ISO 15552 EK series electric cylinders can be used, with the exception of the rear clamps.

STEPPING MOTORS WITH IP65 ENCODER (WITH OR WITHOUT BRAKE)

METAL WORK PNEUMATIC

For the ELEKTRO series actuators, Metal Work offers a range of stepping motors other than the standard one.
In case of interest, you can send a new specific request of actuator sizing that will be examined by our engineers given that such parameters as performance, features and dimensions may vary.

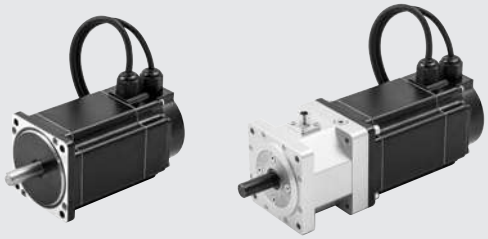

TECHNICAL DATA		MOTOR 37M8230002	MOTOR 37M8470002	MOTOR 37M8470003	MOTOR 37M3230002	MOTOR 37M3470002	MOTOR 37M3470003
Motor type		STEPPING + ENCODER			STEPPING with BRAKE + ENCODER		
Nominal torque	Nm	**2.3**	**7.4**	**9.2**	**2.3**	**7.4**	**9.2**
Coupling flange		**NEMA 24**	**NEMA 34**	**NEMA 34**	**NEMA 24**	**NEMA 34**	**NEMA 34**
Base step angle		1.8°±0.09°			1.8°±0.09°		
Bipolar current	A	5	6	6	5	6	6
Resistance	Ω	0.45	0.54	0.72	0.45	0.54	0.72
Inductance	mH	1.8	5	7.3	1.8	5	7.3
Bipolar holding torque	Nm	3	8.5	12	3	8.5	12
Rotor inertia	kgmm²	69	360	540	69	360	540
Mass	kg	1.4	3.6	5	1.4	3.6	5
Temperature range	°C	from -10 to +50					
Degree of protection		IP65					
Motor encoder		Incremental					
Type of output circuit		Differential					
Output signal channels		2 channels (NO zero mark)					
Resolution	positions per rev	1000					
Encoder supply voltage	VDC	5					
BRAKE							
Braking torque	Nm		-		2	9	9
Supply voltage	VDC		-		24	24	24
Power consumption	W		-		11	18	18
Connecting time	ms		-		6	7	7
Delay time	ms		-		2	2	2
Connecting time	ms		-		25	40	40

DIMENSIONS OF VERSION WITHOUT BRAKE

Motors are supplied with 1-metre long ready-wired cables, with free wires to the drive.
1 = access for power cable and brake
2 = access for encoder cable

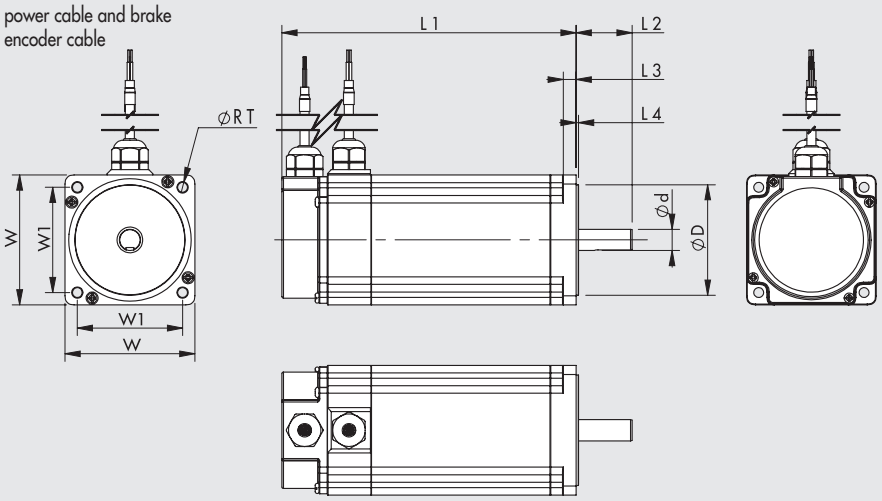

WIRING DIAGRAM



Encoder	Color	Function
1	Black	GND
2	Red	VCC
3	Blue/White	EA–
4	Blue	EA+
5	Orange/White	EB–
6	Orange	EB+

Motor type	Motor code	Motor torque [Nm]	Coupling flange	ød 0/-0.013	øD ±0.05	L1 ±1	L2 ±1	L3	L4 ±0.2	RT	W	W1
STEPPING + ENCODER	**37M8230002**	2.3	NEMA 24	10	36	107.2	21	5	1.6	5	60	50
	37M8470002	7.4	NEMA 34	14	73	156.5	37	9	1.6	6.5	85.85	69.58
	37M8470003	9.2	NEMA 34	14	73	194.5	37	9	1.6	6.5	85.85	69.58

Please contact our sales offices for further information and quotation.

DIMENSION OF VERSION WITH BRAKE

Motors are supplied with 1-metre long ready-wired cables, with free wires to the drive.
1 = access for power cable and brake
2 = access for encoder cable

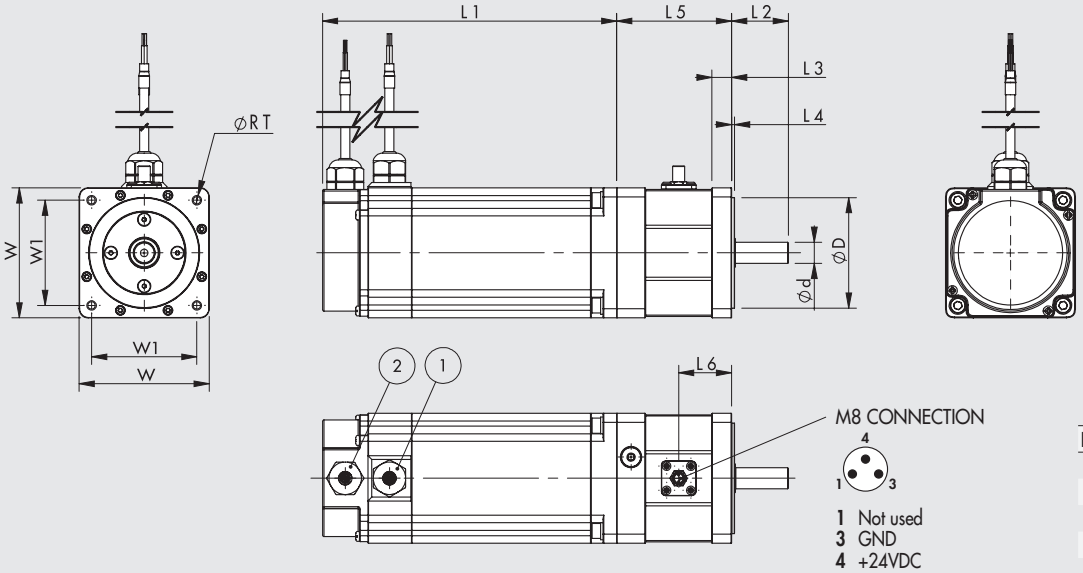

WIRING DIAGRAM



M8 CONNECTION

1 Not used
3 GND
4 +24VDC

Encoder	Color	Function
1	Black	GND
2	Red	VCC
3	Blue/White	EA–
4	Blue	EA+
5	Orange/White	EB–
6	Orange	EB+

Motor type	Motor code	Motor torque [Nm]	Braking torque [Nm]	ød 0/-0.013	øD ±0.25	L1 ±1	L2 ±1	L3	L4 ±0.2	L5	L6	RT	W	W1
STEPPING	**37M3230002**	2.3	2	8	38.1	107.2	21	15	1.6	65.8	32.9	4.25	60	47.16
+ ENCODER	**37M3470002**	7.4	9	14	73	156.5	37.5	13	1.6	76	35	6.25	86	69.58
+ BRAKE	**37M3470003**	9.2	9	14	73	194.5	37.5	13	1.6	76	35	6.25	86	69.58

STANDARD AND ALTERNATIVE SYNOPTIC

Motor type	Standard code	Alternative (with encoder)
STEPPING	**37M1470000**	**37M8470003**
	37M1220000	**37M8230002**

Motor type	Standard code	Alternative
STEPPING	**37M8220000**	**37M8230002**
+ ENCODER	**37M8230000**	**37M8230002**
	37M8470000	**37M8470003**

Motor type	Standard code	Alternative
STEPPING	**37M3220000**	**37M3230002**
+ ENCODER	**37M3230000**	**37M3230002**
+ BRAKE	**37M3430000**	**37M3470002**
	37M3460000	**37M3470002**
	37M3450000	**37M3470002**
	37M3470000	**37M3470003**

ACCESSORIES FOR BRAKE

CABLE WITH STRAIGHT CONNECTOR



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400A0100	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 1 m
02400A0250	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 2.5 m
02400A0500	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 5 m
02400A1000	M8 female 3 PIN HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

CABLE WITH 90° CONNECTOR



Pin	Cable color
1	Brown
3	Blue
4	Black

Code	Description
02400B0100	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 1 m
02400B0250	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 2.5 m
02400B0500	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 5 m
02400B1000	M8 female 3 PIN 90° HIGH FLEX CL6 connector with cable L = 10 m

Note: Very flexible cables, class 6 according to IEC 60228

Please contact our sales offices for further information and quotation.

FIELDBUS DRIVES FOR STEPPING MOTORS

This range comprises mini-step bipolar chopper drives of up to 1/128 steps, with a fieldbus interface for driving STEPPING motors of all sizes, with a rated current of up to 12A.
The fieldbuses available are Profinet IO, EtherCAT, Ethernet/IP.
These drives consist of a board housed in a metal box, and they are fitted with removable screw connectors with separate logic and power.
Each drive:

- features digital and analogue I/O;
- can control differential and single-ended encoders;
- can control the parking brake and perform reset procedures by means of limit switches;
- can handle power supply voltages of up to 125VDC and up to 90VAC;
- is space saving;
- offers high versatility in use;
- provides automatic and configurable power reductions.

DRIVE TECHNICAL DATA

Drive code		37D1442001	37D1442002	37D1442003	37D1642000	37D1642004	37D1642005
Model		HT721			HT 741		
STEPPING motor drive		Metal box					
Dimensions	mm	170 x 139 x 49					
Connectors		Screw type					
Onboard power supply		NO					
Control (fieldbus)		Profinet IO	EtherCAT	Ethernet/IP	Profinet IO	EtherCAT	Ethernet/IP
Operating voltage range (power)	VDC	24 - 90			24 - 140		
	VAC	18 - 60			18 - 100		
Operating voltage range (logic)	VDC	24					
Current range	A	1 - 7			1 - 12		
Pulses per rev values selected by dip-switch	pulse/rev	200, 400, 800, 1000, 1600, 3200, 6400, 12800, 25600					
Encoder control		Differential 5V, Single Ended 12 - 24V					
Automatic current reduction with motor off	%	YES (0, 25, 50, 100%)					
Type of inputs/analogue outputs	VDC	0 - 10					
Type of inputs/digital outputs		PNP - NPN configurable opto-insulated					
Protections		Overtemperature, overvoltage, undervoltage, short-circuit protection at digital outputs					
Weight	g	720					

OVERALL DIMENSIONS

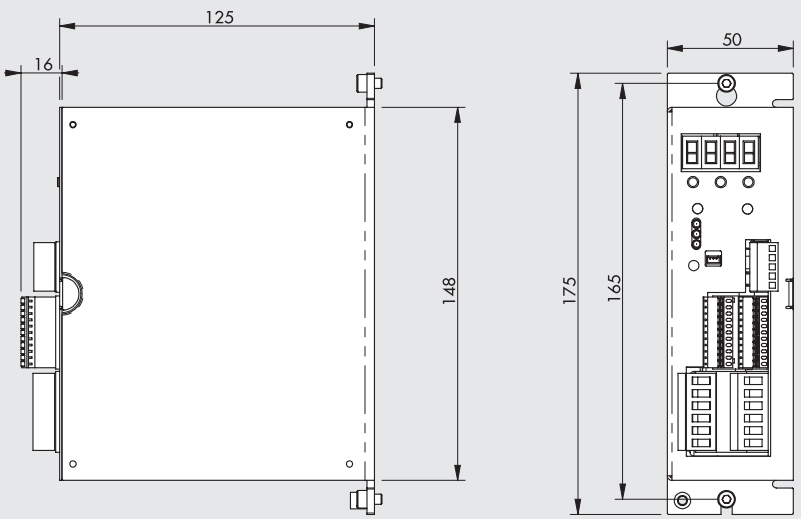

WIRING DIAGRAM FOR STEPPING MOTOR DRIVES

① 4-DIGIT DISPLAY and PROGRAMMING KEYS: to set some system operating parameters.
② ENCODER- DIGITAL INPUT CONNECTORS: push-pull, line-driver and open-collector encoders can be connected.
There are 3 PNP and NPN user configurable digital inputs.
③ DIGITAL OUTPUT TO ANALOG INPUT CONNECTOR: there are 3 user configurable digital outputs and three 0-10V analogue inputs.
④ DC MOTOR PHASE AND POWER SUPPLY STAGE CONNECTOR.
⑤ AC POWER SUPPLY STAGE AND LOGIC STAGE CONNECTOR.
⑥ Profinet IO, EtherCAT, EtherNet/IP FIELDBUS CONNECTION

Log on to www.metalwork.it to view the instruction manual.

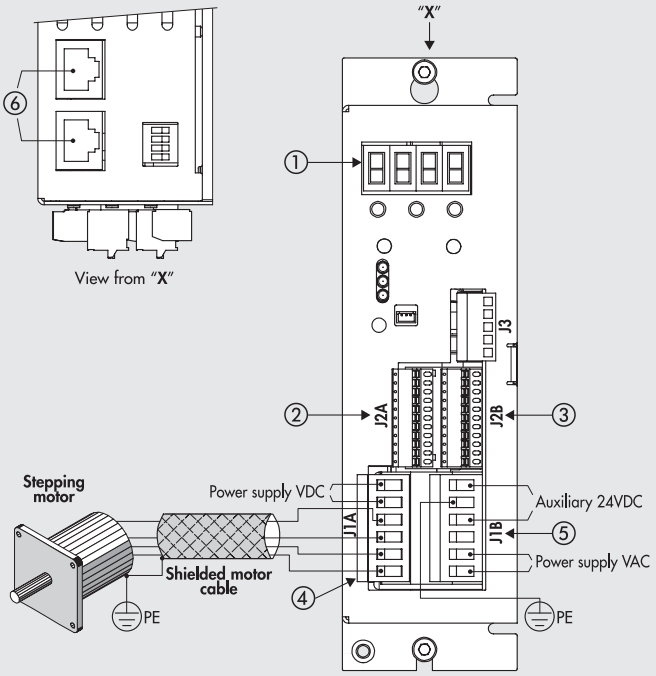

NOTES

METAL WORK PNEUMATIC

NOTES

CUSTOM VALVES SUMMARY

VALVES

- MINIVALVES SERIES VME, MECHANICALLY HAND OPERATED — G3.4

- VALVES SERIES 70, HAND OPERATED — G3.6

- VALVES SERIES 70, MECHANICALLY OPERATED, 1/8" — G3.9

- VALVES SERIES 70 PNEUMATIC — G3.12

- VALVES SERIES 70, SOLENOID/PNEUMATIC — G3.13
- REPOSITIONING FOR VALVES SERIES 70 — G3.18

- PILOT WITH THROUGH BASE — G3.19

- SOLENOID VALVE CNOMO WITH HAND LEVER OPERATOR — G3.20



- MULTIPLE BASES FOR MACH 18 VALVES — G3.21

- VALVES ISO 5599/1, PNEUMATIC SERIES IPV — G3.22

- VALVES ISO 5599/1, SOLENOID/PNEUMATIC, SERIES ISV — G3.23

VALVE ISLANDS AND FIELDBUS

- **HDM FOR THE SPLASH AREA** G3.25

- **MULTIMACH WITH FRONT ATTACHMENT** G3.27

MINIVALVES SERIES VME, MECHANICALLY HAND OPERATED

- Minivalves with 2/2 or 3/2 NO NC poppet
- Installation in any position
- Push-in fittings for pipe Ø 4, Ø 6 mm and M5 on the valve body
- Low actuation force
- Rapid, accurate signal
- Mechanical actuation
- The 2 places adapter allows manual actuation of 1 or 2 VME valves with manual Ø 22 panel actuators. Thus it is possible to obtain 3/2, 5/2, 5/3 open centre and 5/3 pressure centre pneumatic functions.
- On request, it is possible to place a NC-NO electric switch next to a VME valve for mixed solenoid/pneumatic signals.

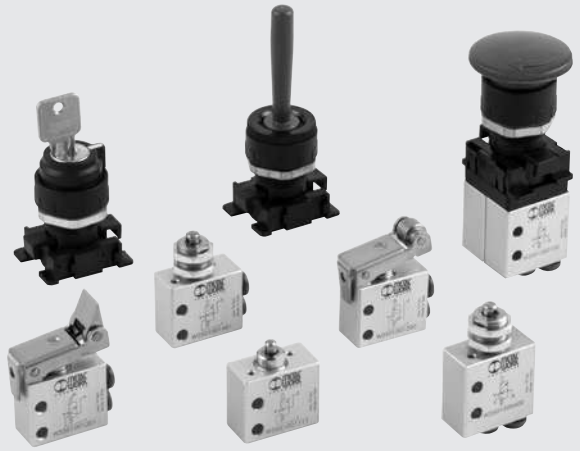

TECHNICAL DATA

Valve fitting port		Push-in fitting for pipe Ø 4 or Ø 6 and M5 (axial or side)
Fluid		Filtered air without lubrication; lubrication, if used, must be continuous
Type		With poppet
Versions		Mechanical and manual
Operators:		
• mechanical		With Plunger – Plunger for wall-mounting – Roller lever – Unidirectional roller lever
• manual		Depending on the type of actuation panel selected
Operating pressure	bar	from 0.5 to 10
Operating temperature range	°C	from -10 to +60
Nominal diameter	mm	2.5
Conductance C	Nl/min · bar	16.5
Critical ratio b	bar/bar	0.03
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	35
Flow rate at 6 bar ΔP 1 bar	Nl/min	60
Actuation force – Plunger at 6 bar	N	8
Recommended lubricant		ISO and UNI FD22
Installation		In any position
Compatibility with oils		See **chapter Z1**

COMPONENTS

① VALVE BODY: Aluminium
② BUTTON: chemically nickel-plated brass
③ DISTANCE PLATES: Brass
④ GASKETS: NBR
⑤ PUSH-IN FITTING CARTRIDGES: stainless steel, brass and plastic
⑥ SPRINGS: stainless steel

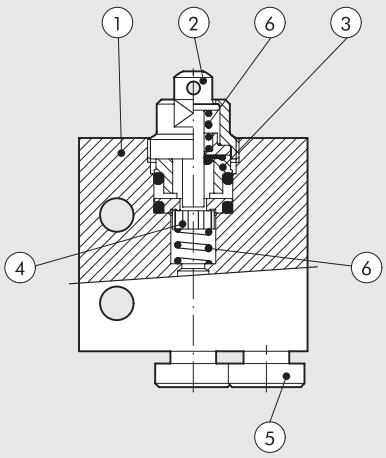

Please contact our sales offices for further information and quotation.

ROLLER LEVER 2/2 NC Ø 4 - SIDE FITTINGS



Symbol	Code	Description	Weight [g]
	8286919	VME2-0S NC Ø4	42

PLUNGER 3/2 NO Ø 6 - AXIAL FITTINGS



Symbol	Code	Description	Weight [g]
	W3501000130	VME1-30 NO Ø6	51

PLUNGER 3/2 NC Ø 6 - AXIAL FITTINGS



Symbol	Code	Description	Weight [g]
	W3501000131	VME1-31 NC Ø6	51

VALVES SERIES 70, HAND OPERATED

TECHNICAL DATA		1/8"	1/4"	1/2"
Operating pressure range:				
• version with direct control	bar	Vacuum ÷ 10		
• Pilot-assisted version	bar	from 2.5 to 10		
Operating temperature range	°C	from -10 to +60		
Nominal diameter	mm	5	7.5	15
Conductance C	Nl/min · bar	121.43	264.26	971.43
Critical ratio b	bar/bar	0.32	0.27	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	400	750	3200
Flow rate at 6 bar ΔP 1 bar	Nl/min	550	1100	4600

SYNOPTIC, SIZES AND VERSION

M A V	2	3	P P	S	N C
FAMILY	DIMENSIONS	FUNCTION	OPERATION 14	REPEATED OPERATION (12)	FURTHER DETAILS
MAV manual valves	**2** 1/8"	**3** 3/2	**PP** drawer	**A** pneumatic/ mechanical spring*	**NC** normally closed
	3 1/4"	**5** 5/2	**VL** axial lever	**S** mechanical spring	**NO** normally open
	4 1/2"	**6** 5/3	**LE** 90° lever	**B** bistable	**OO** no indication
		8 2 x 3/2	**BRE** arranged for manual panel actuators	**D** differential	**CC** closed centres
			SP special	**O** stable for 5/3	**OC** open centres
				P pneumatic	**PC** pressure centres
				*on demand	**SP** special

VALVES SERIES 70, HAND OPERATED, 1/8"

FRONT LEVER 3/2, 1/8" MONOSTABLE

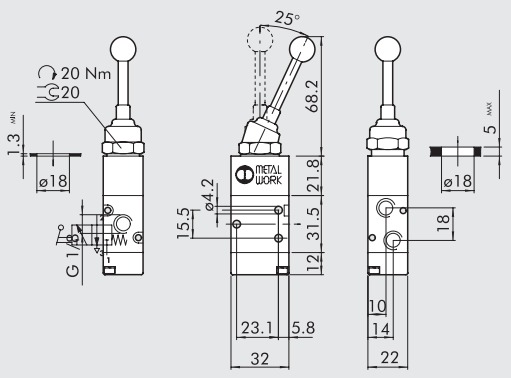

Symbol	Code	Abbrev.	Weight [g]
	8800801	MAV 23 VLS NC	130

FRONT LEVER 5/2, 1/8" MONOSTABLE

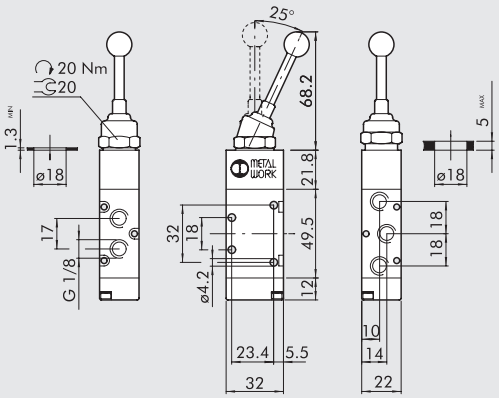

Symbol	Code	Abbrev.	Weight [g]
	8826334	MAV 25 VLS OO	156

Please contact our sales offices for further information and quotation.

90° ANGULAR LEVER 5/3, 1/8" WITH 2 STABLE POSITIONS

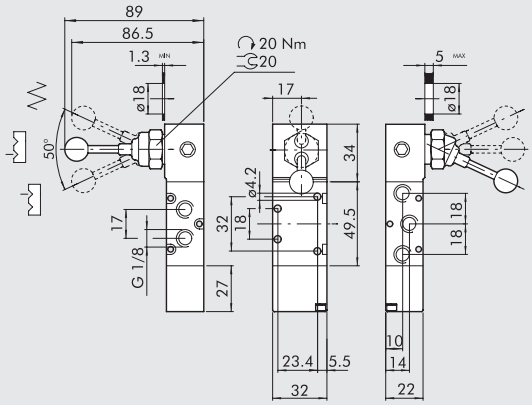

Symbol	Code	Abbrev.	Weight [g]
	8829106	MAV 26 SPB CC	242
	8294569	MAV 26 SPB OC	242

RED DRAWER 3/2, 1/8"

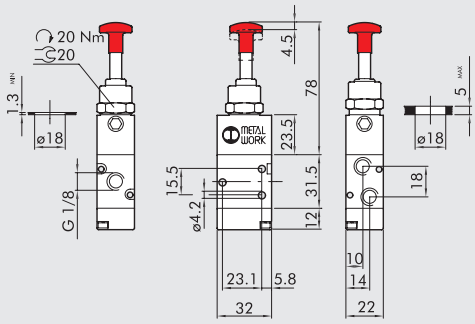

Symbol	Code	Abbrev.	Weight [g]
	7010001301	MAV 23 PPB OO	134
	7010001201	MAV 23 PPS NC	134

RED DRAWER 5/2, 1/8"

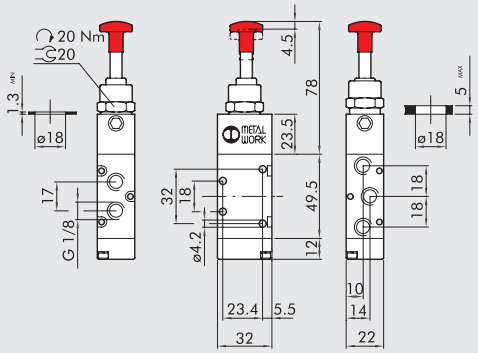

Symbol	Code	Abbrev.	Weight [g]
	7010001601	MAV 25 PPB OO	160
	7010001501	MAV 25 PPS OO	160

DRAWER 3/2, 1/8" PNEUMATIC RETURN

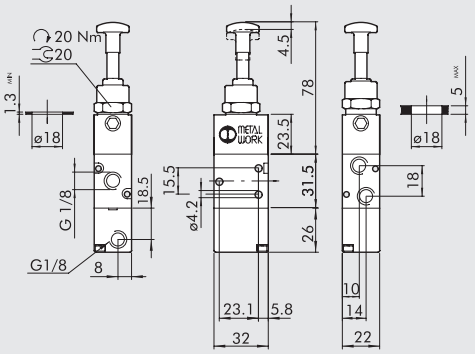

Symbol	Code	Abbrev.	Weight [g]
	8826503	MAV 23 PPP NC	148

DRAWER 5/2, 1/8" PNEUMATIC RETURN

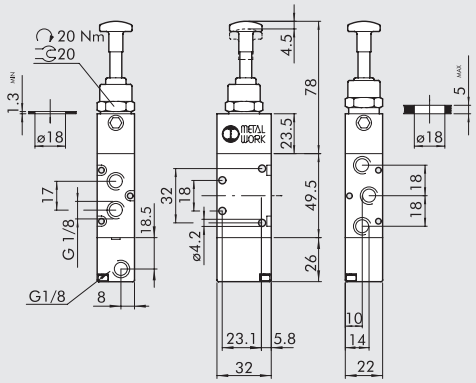

Symbol	Code	Abbrev.	Weight [g]
	8287369	MAV 25 PPP NC	174

NOTES

VALVES SERIES 70, HAND OPERATED, 1/4"

FRONT LEVER 5/2, 1/4" MONOSTABLE

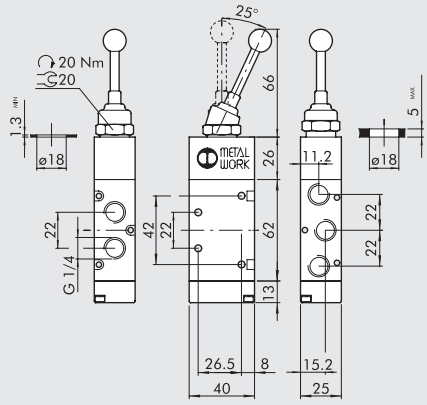

Symbol	Code	Abbrev.	Weight [g]
	8826332	MAV 35 VLS OO	194

90° ANGULAR LEVER 5/3, 1/4" WITH PRESSURISED PORT 2 AT THE CENTRE

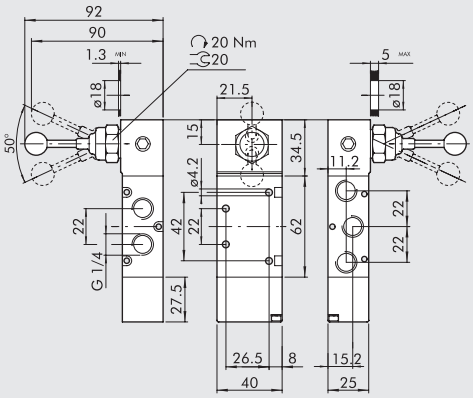

Symbol	Code	Abbrev.	Weight [g]
	**8826526**	MAV 36 LES SP	354

90° ANGULAR LEVER 5/3, 1/4" WITH 2 STABLE POSITIONS

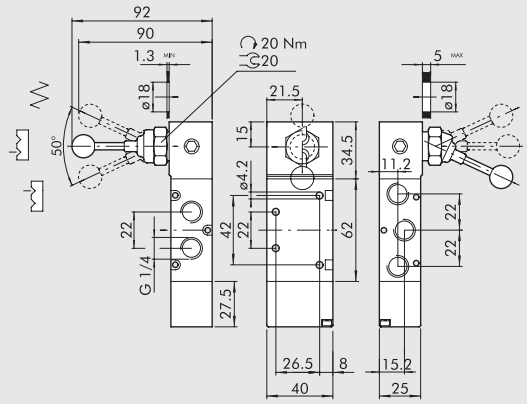

Symbol	Code	Abbrev.	Weight [g]
	**8396201**	MAV 36 LES SP	354

NOTES

Please contact our sales offices for further information and quotation.

VALVES SERIES 70, MECHANICALLY OPERATED, 1/8"

METAL WORK PNEUMATIC

TECHNICAL DATA

Thread at valve ports		1/8"
Operation force at 6 bar:		
• Version with direct control	N	50
• Pilot-assisted Version	N	6
Operating pressure:		
• Version with direct control	bar	from vacuum to 10
• Pilot-assisted version	bar	from 2.5 to 10
Operating temperature range	°C	from -10 to +60
Nominal diameter	mm	5
Conductance C	Nl/min · bar	121.43
Critical ratio b	bar/bar	0.32
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	400
Flow rate at6 bar ΔP 1 bar	Nl/min	550

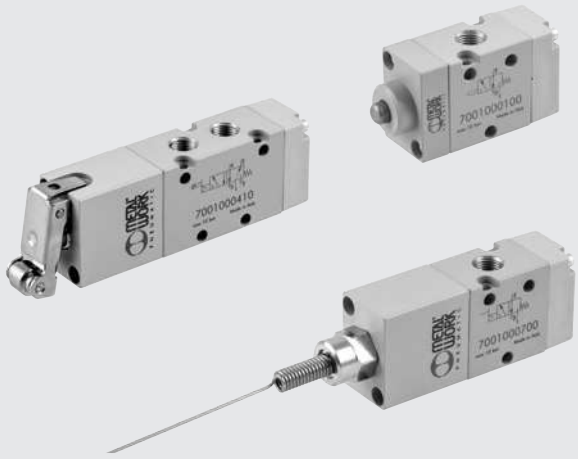

SYNOPTIC, SIZES AND VERSION

MEV FAMILY	2 DIMENSIONS	3 FUNCTION	TA OPERATORS 14	S RESETTING (12)	NC FURTHER DETAILS
MEV mechanically operated valves	**2** 1/8"	**3** 3/2 **5** 5/2	**TA** plunger **BR** bidirectional roller **UR** unidirectional roller **TS** sensitive plunger **RS** sensitive roller **AS** sensitive aerial **LL** frontal roller lever **LV** unidirectional lever **LS** sensitive lever **LR** extended roller lever	**S** mechanical springs **A** pneumatic/mechanical spring* **P** pneumatic **B** bistable *on demand	**NC** normally closed **OO** 5/2 **SP** special

PLUNGER 3/2, 1/8" PNEUMATIC RETURN

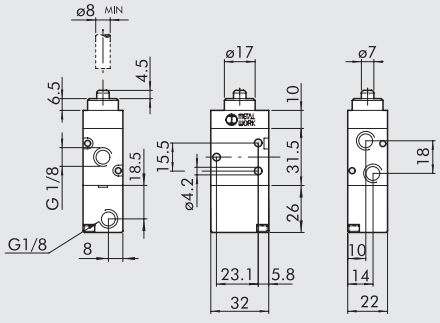

Symbol	Code	Abbrev.	Weight [g]
	8825961	MEV 23 TAP OO	102

PLUNGER 3/2, 1/8" FOR FIXING TO PANEL

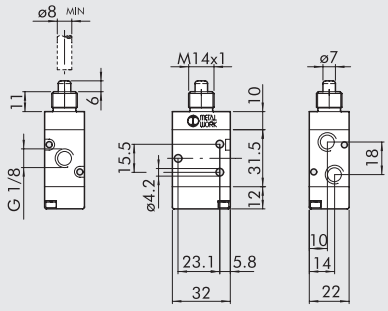

Symbol	Code	Abbrev.	Weight [g]
	8829123	MEV 23 TAS SP	102

PILOT-ASSISTED PLUNGER 5/2, 1/8" PNEUMATIC RETURN

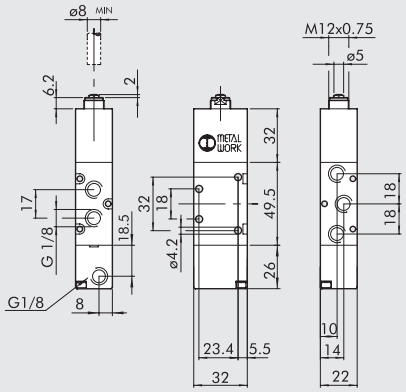

Symbol	Code	Abbrev.	Weight [g]
	7010001902	MAV 25 BTP OO	166

DOUBLE PLUNGER 5/2, 1/8"

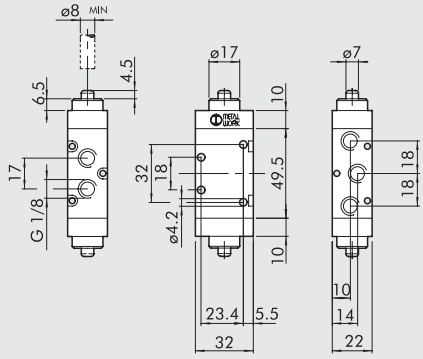

Symbol	Code	Abbrev.	Weight [g]
	7001000130	MEV 25 TAB OO	143

PILOT-ASSISTED DOUBLE PLUNGER 5/2, 1/8"

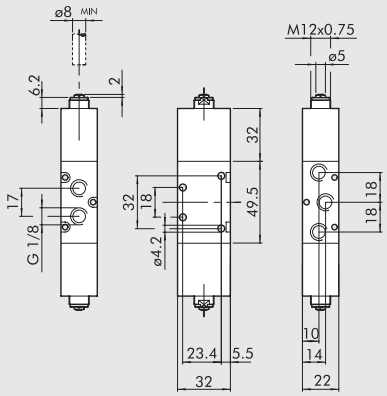

Symbol	Code	Abbrev.	Weight [g]
	7001000230	MEV 25 TSB OO	233

PILOT-ASSISTED UNIDIRECTIONAL ROLLER LEVER 5/2, 1/8"

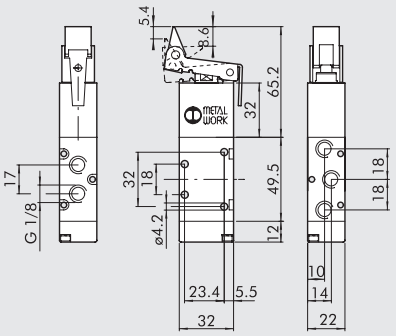

Symbol	Code	Abbrev.	Weight [g]
	7001000413	MEV 25 LUS OO	189

ROLLER LEVER 3/2, 1/8" PNEUMATIC RETURN

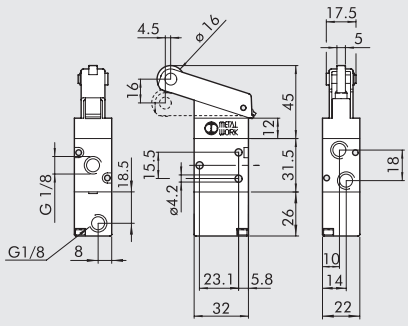

Symbol	Code	Abbrev.	Weight [g]
	8293308	MEV 23 BRP NC	144

ROLLER LEVER 5/2, 1/8" PNEUMATIC RETURN

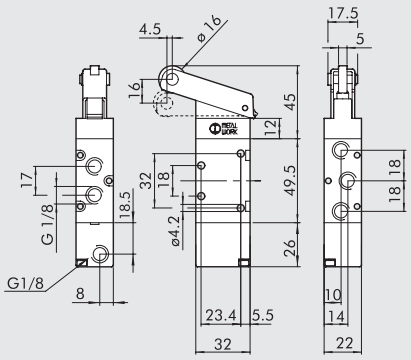

Symbol	Code	Abbrev.	Weight [g]
	88301P4	MEV 25 BRP OO	170

Please contact our sales offices for further information and quotation.

DOUBLE ROLLER LEVER 3/2, 1/8"

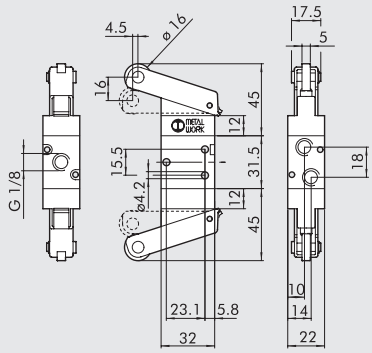

Symbol	Code	Abbrev.	Weight [g]
	7001000530	MEV 23 BRB OO	223

DOUBLE ROLLER LEVER 5/2, 1/8"

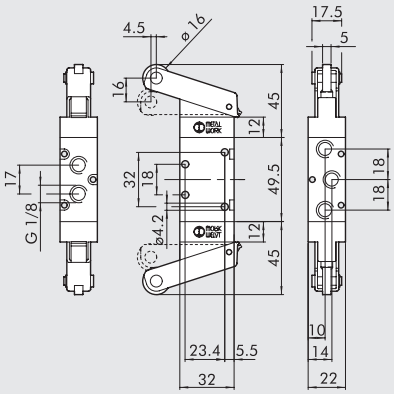

Symbol	Code	Abbrev.	Weight [g]
	7001000540	MEV 25 BRB OO	285

PILOT-ASSISTED DOUBLE ROLLER LEVER 5/2, 1/8"

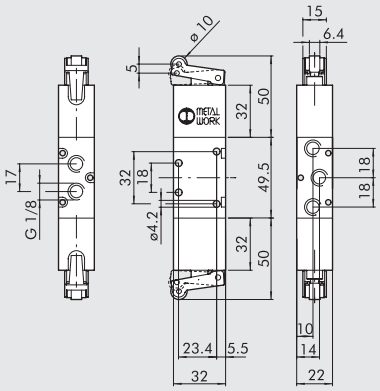

Symbol	Code	Abbrev.	Weight [g]
	7001000430	MEV 23 RSB OO	255

PILOT-ASSISTED LEVER WITHOUT ROLLER 5/2, 1/8"

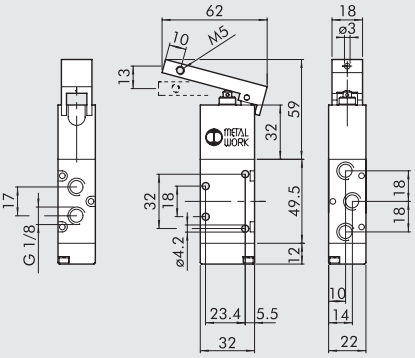

Symbol	Code	Abbrev.	Weight [g]
	7001000411	MEV 25 LSS OO	209

EXTENDED PILOT-ASSISTED ROLLER LEVER 5/2, 1/8"

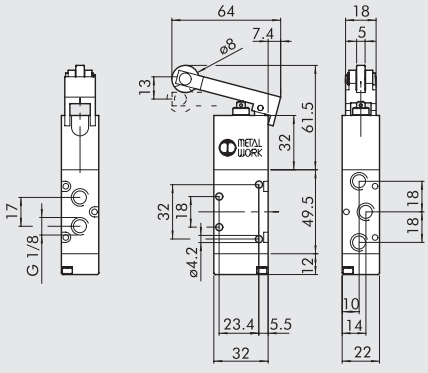

Symbol	Code	Abbrev.	Weight [g]
	7001000412	MEV 25 LRS OO	213

NOTES

VALVES SERIES 70, PNEUMATIC

TECHNICAL DATA		1/8"	1/4"	1/2"
Operating pressure	bar	from vacuum to 10		
Minimum pilot pressure				
• monostable	bar	2.5		
• bistable	bar	1		
Operating temperature range	°C	from -10 to +60		
Nominal diameter	mm	5	7.5	15
Conductance C	Nl/min · bar	121.43	264.26	971.43
Critical ratio b	bar/bar	0.32	0.27	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	400	750	3200
Flow rate at bar ΔP 1 bar	Nl/min	550	1100	4600
TRA / TRR monostable at 6 bar	ms	6/15	7/15	16/46
TRA / TRR bistable at 6 bar	ms	7/7	7/7	16/16

SYNOPTIC, SIZES AND VERSION

P N V	2	3	P N	S	N C
FAMILY	DIMENSIONS	FUNCTION	OPERATORS 14	RESETTING (12)	FURTHER DETAILS
PNV pneumatic valves	**2** 1/8"	**3** 3/2	**PN** pneumatic	**S** mechanical springs	**OO** 5/2
	3 1/4"	**5** 5/2		**B** bistable	**NC** normally closed
	4 1/2"	**6** 5/3		**D** differential	**NO** normally open
				O stable for 5/3	**CC** closed centres
				A pneumatic/mechanical spring*	**OC** open centres
				*on demand	**PC** pressure centres

VALVES SERIES 70 PNEUMATIC 1/8"

MONOSTABLE 3/2, NC 1/8" FOR HIGH TEMPERATURE

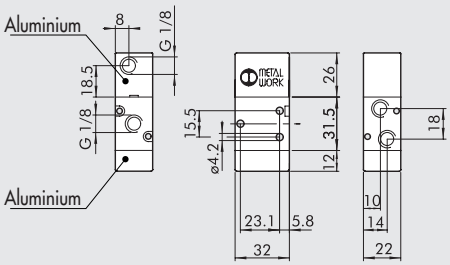

Working temperature: -10° to +80°C / Use ethylic alcohol anti-freeze

Symbol	Code	Abbrev.	Weight [g]
	8000211	PNV 23 PNS	148

DIFFERENTIAL BISTABLE 3/2, 1/8"

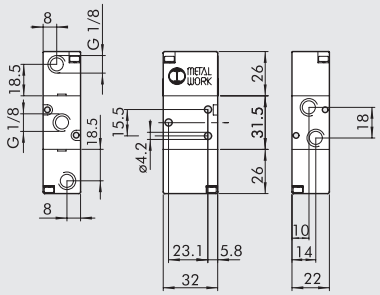

Symbol	Code	Abbrev.	Weight [g]
	8830196	PNV 23 PND NC	96

VALVES SERIES 70 PNEUMATIC 1/4"

DIFFERENTIAL BISTABLE 3/2, 1/4"

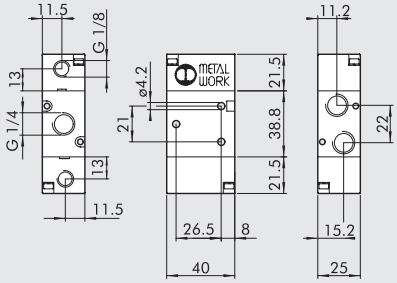

Symbol	Code	Abbrev.	Weight [g]
	8829108	PNV 33 PND NC	134

NOTES

Please contact our sales offices for further information and quotation.

VALVES SERIES 70, SOLENOID/PNEUMATIC

TECHNICAL DATA		1/8"	1/4"	3/8"	1/2"
Operating pressure:					
• monostable	bar	from 2.5 to 10			
• bistable	bar	from 1 to 10			
• asserved	bar	from vacuum to 10			
Minimum pilot pressure	bar	2.5			
Operating temperature range	°C	from -10 to +60			
Nominal diameter	mm	5	7.5	13.3	15
Conductance C	Nl/min · bar	121.43	264.26	505.52	971.43
Critical ratio b	bar/bar	0.32	0.27	0.32	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	400	750	1560	3200
Flow rate at 6 bar ΔP 1 bar	Nl/min	550	1100	2150	4600
TRA / TRR monostable at 6 bar	ms	15/35	19/45	21/72	36/60
TRA / TRR bistable at 6 bar	ms	20/20	21/21	18/18	30/30
Hand operator		bistable			
Coil voltage values		12; 24 VDC - 24; 110; 220 VAC 50/60Hz			
Power		2 W (DC) 3VA (AC)			
Voltage tolerance	%	from -10 to +15			
Insulation class		F 155			
Maximum coil nut torque	Nm	1			

SYNOPTIC, SIZES AND VERSION

S O V	2	3	S O	S	N C
FAMILY	DIMENSIONS	FUNCTION	OPERATORS 14	RESETTING (12)	FURTHER DETAILS
SOV solenoid/ pneumatic	**2** 1/8"	**3** 3/2	**SO** solenoid	**S** mechanical springs	**NC** normally closed
	3 1/4"	**5** 5/2	**SE** solenoid assisted	**B** bistable	**NO** normally open
	C 3/8"	**6** 5/3		**D** differential	**CC** closed centres
	4 1/2"			**P** pneumatic	**OC** open centres
				◆ **A** pneumatic/mechanical spring	**PC** pressure centres
				L pneumatic spring	**OO** no indication
					SP special
					▲ **ML** hand lever operator

◆ On demand
▲ Only available for size 1/8", 1/4" and 3/8"

VALVES SERIES 70, SOLENOID/PNEUMATIC, PILOT-ASSISTED SOLENOID/PNEUMATIC, 1/8"

MONOSTABLE 3/2 NC, 1/8" PNEUMATIC RETURN

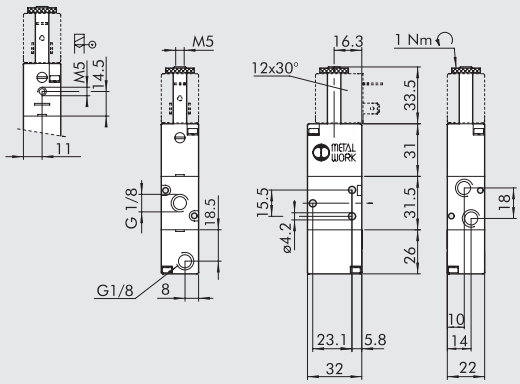

Symbol	Code	Abbrev.	Weight [g]
	7010020800	SOV 23 SOP NC	114
	7010020510	SOV 23 SEP NC	114

MONOSTABLE 5/2, 1/8" PNEUMATIC RETURN

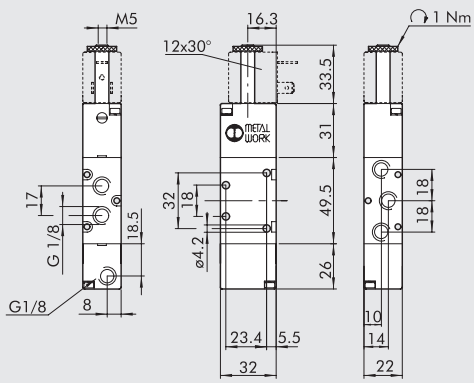

Symbol	Code	Abbrev.	Weight [g]
	7010021S01	SOV 25 SOP OO	142

MONOSTABLE 5/3, 1/8" PNEUMATIC RETURN

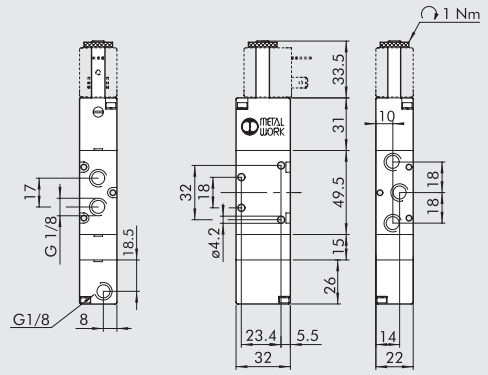

Symbol	Code	Abbrev.	Weight [g]
	7010022800	SOV 26 SOP CC	204

BISTABLE DIFFERENTIAL 3/2, 1/8"

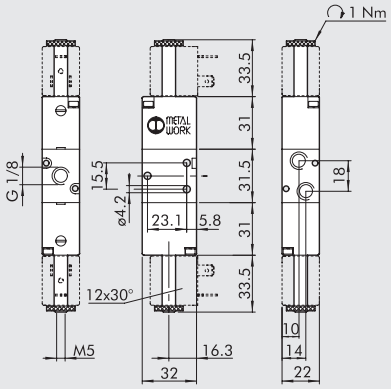

Symbol	Code	Abbrev.	Weight [g]
	8287210	SOV 23 SOD NC	135

MONOSTABLE 3/2, NC 1/8" HAND-OPERATED ON THE FEED SIDE

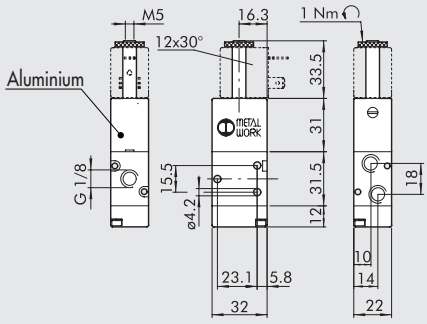

Symbol	Code	Abbrev.	Weight [g]
	8830195	SOV 23 SOS NC SP	100

MONOSTABLE 5/2, 1/8" HAND-OPERATED ON THE FEED SIDE

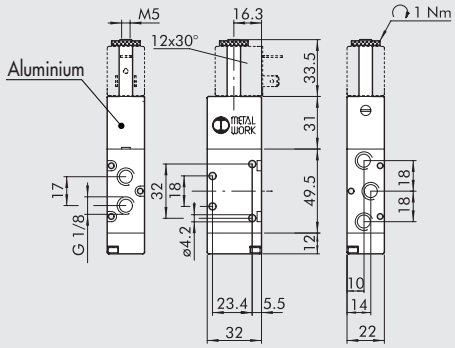

Symbol	Code	Abbrev.	Weight [g]
	8286807	SOV 25 SOS SP	128

BISTABLE 5/2, 1/8" HAND-OPERATED ON THE FEED SIDE

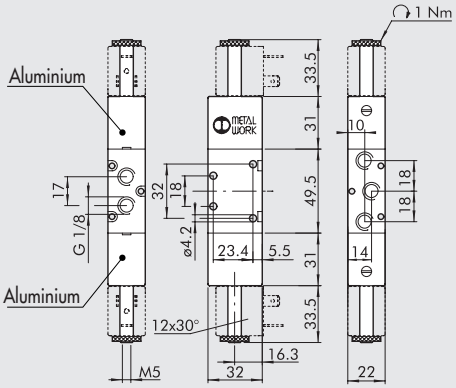

Symbol	Code	Abbrev.	Weight [g]
	8286808	SOV 25 SOB SP	160

MONOSTABLE 5/3, 1/8" HAND-OPERATED ON THE FEED SIDE

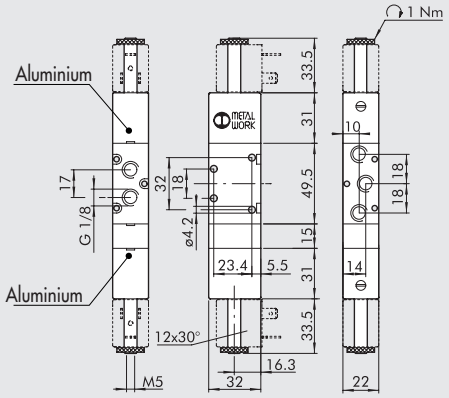

Symbol	Code	Abbrev.	Weight [g]
	8286911	SOV 26 SOS SP	190

Please contact our sales offices for further information and quotation.

MONOSTABLE 5/2 1/8" HAND LEVER OPERATOR

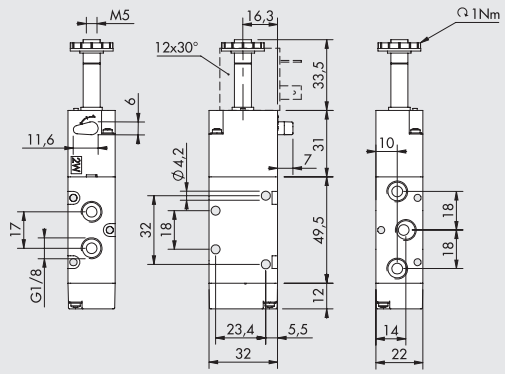

Symbol	Code	Abbrev.	Weight [g]
	88291AT	SOV 25 SOS ML	128

BISTABLE 5/2 1/8" HAND LEVER OPERATOR

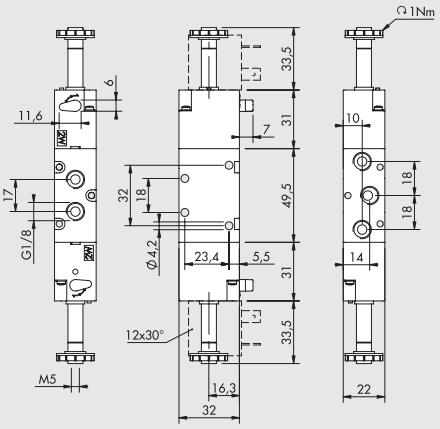

Symbol	Code	Abbrev.	Weight [g]
	88291AV	SOV 25 SOB ML	160

VALVES SERIES 70, SOLENOID/PNEUMATIC, PILOT-ASSISTED SOLENOID/PNEUMATIC, 1/4"

MONOSTABLE 3/2 NC, 1/4" PNEUMATIC RETURN

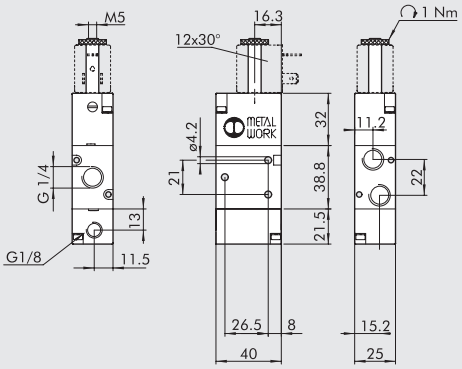

Symbol	Code	Abbrev.	Weight [g]
	7020020800	SOV 33 SOP OO	166

MONOSTABLE 5/2, 1/4" PNEUMATIC RETURN

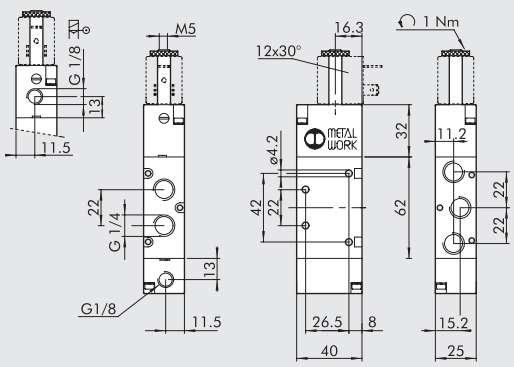

Symbol	Code	Abbrev.	Weight [g]
	7020021700	SOV 35 SOP OO	214
	7020021800	SOV 35 SEP OO	214

MONOSTABLE 3/2 NC 1/4" HAND LEVER OPERATOR



Symbol	Code	Abbrev.	Weight [g]
	88291C1	SOV 33 SOS NC ML	152

MONOSTABILE 5/2 1/4" HAND LEVER OPERATOR

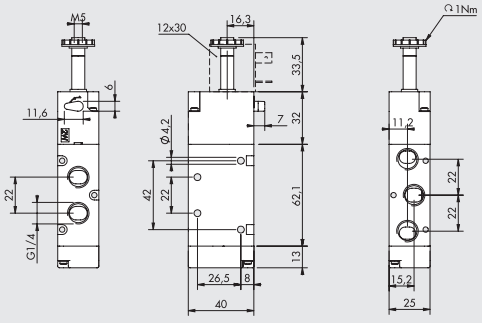

Symbol	Code	Abbrev.	Weight [g]
	88291AR	SOV 35 SOS ML	200

BISTABLE 5/2 1/4" HAND LEVER OPERATOR

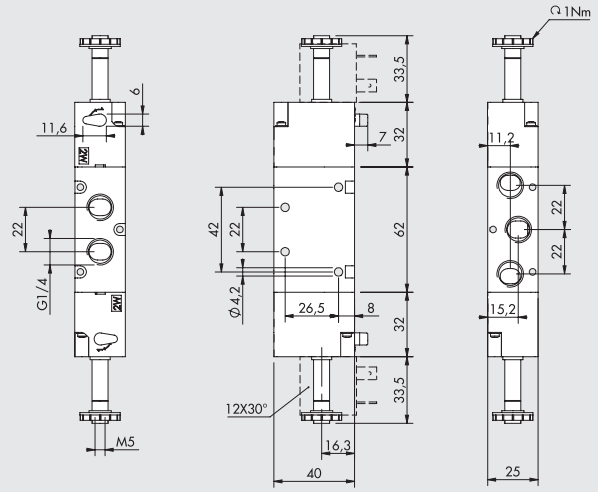

Symbol	Code	Abbrev.	Weight [g]
	**88291AS**	SOV 35 SOB ML	236

NOTES

VALVES SERIES 70, SOLENOID/PNEUMATIC, 3/8"

MONOSTABLE 5/2 3/8" HAND LEVER OPERATOR

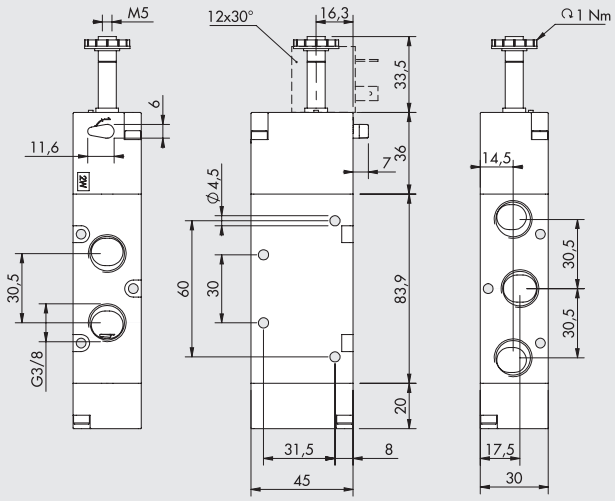

Symbol	Code	Abbrev.	Weight [g]
	**8827298**	SOV C5 SOS ML	361

BISTABLE 5/2 3/8" HAND LEVER OPERATOR

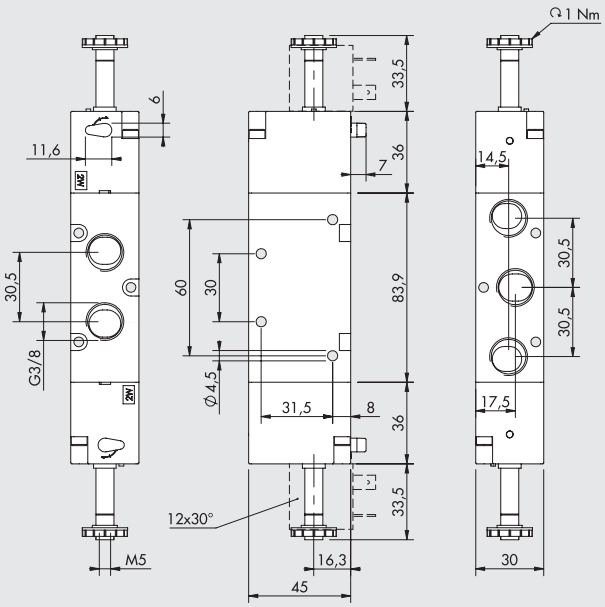

Symbol	Code	Abbrev.	Weight [g]
	**88272A5**	SOV C5 SOB ML	400

Please contact our sales offices for further information and quotation.

VALVES SERIES 70, SOLENOID/PNEUMATIC, 1/2"

MONOSTABLE 3/2 NO, 1/2" PNEUMATIC SPRING

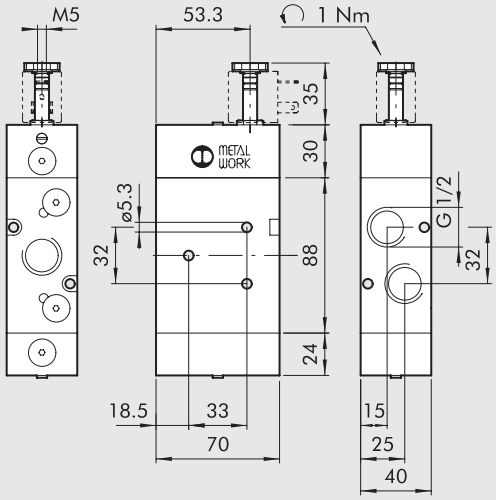

Symbol	Code	Abbrev.	Weight [g]
	7030020820	SOV 43 SOL NO	940

MONOSTABLE 5/2, 1/2" PNEUMATIC SPRING

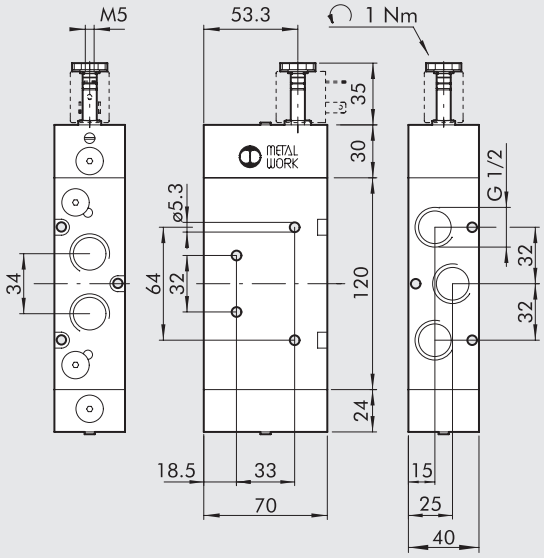

Symbol	Code	Abbrev.	Weight [g]
	7030021820	SOV 45 SOL OO	1120

MONOSTABLE 3/2 NC, 1/2" PNEUMATIC RETURN

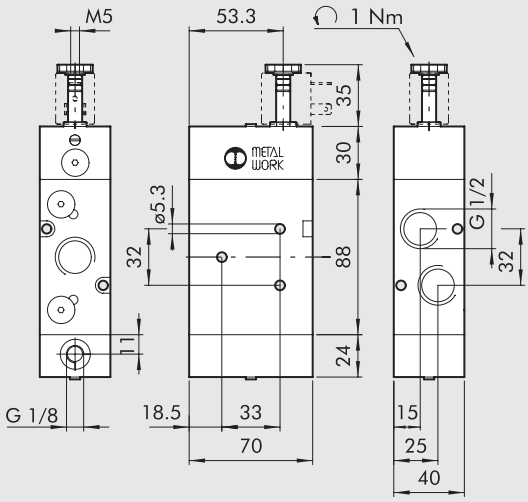

Symbol	Code	Abbrev.	Weight [g]
	7030020201	SOV 43 SOP NC	930

NOTES

REPOSITIONING FOR VALVES SERIES 70

MONOSTABLE WITH "S" MECHANICAL SPRING RETURN

When the solenoid pilot deactivates, the valve is switched by a mechanically-operated spring.

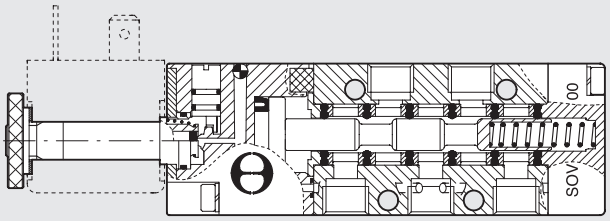

MONOSTABLE WITH "L" PNEUMATIC SPRING RETURN

When the solenoid valve is actuated, the valve switches when the diameter of the control piston is greater than that of the pneumatic spring piston.

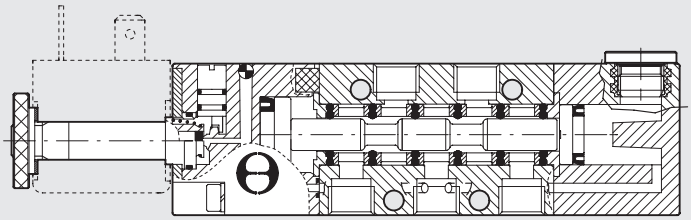

BISTABLE WITH SOLENOID CONTROL AND "P" PNEUMATIC CONTROL

When the solenoid valve is actuated, the valve only switches when pressure is cut out from the pneumatic control, because both pistons have the same diameter.

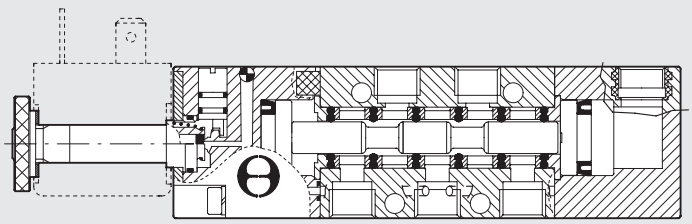

PILOT WITH THROUGH BASE

The base has a through hole with push-in fittings for a Ø 8 pipe.
A 3/2 NC solenoid pilot is mounted on the base, and the output port is connected to a push-in fitting for a Ø 6 pipe. A silencer is mounted on the pilot drain side. The unit comes complete with a 22-mm coil.

DIMENSIONS AND ORDERING CODES

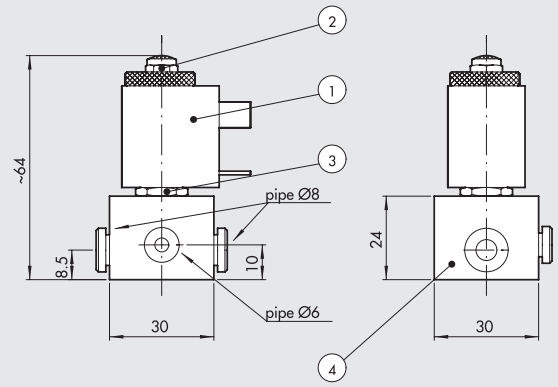

Code	Description
8826323	Special 3/2 pilot

① 22 mm coil, Ø 8 5W-24 VDC
② Silencer
③ 3/2 Pilot, NC 5W: • Bore 1.1 mm
• Max application pressure 10 Bar
④ Body made of anodized aluminium

PNEUMATIC SYSTEM DIAGRAM

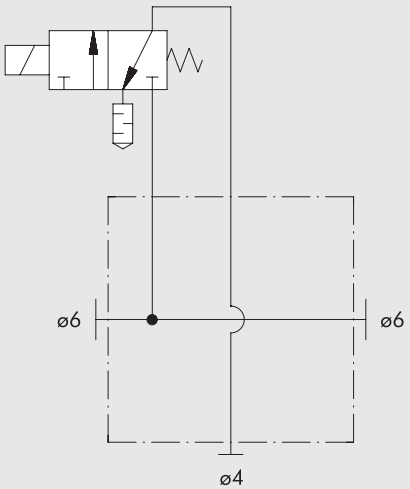

NOTES

SOLENOID VALVE CNOMO WITH HAND LEVER OPERATOR

Solenoid valve to CNOMO 060580.
- 3/2 version normally closed.
- Assembly on manifold base.

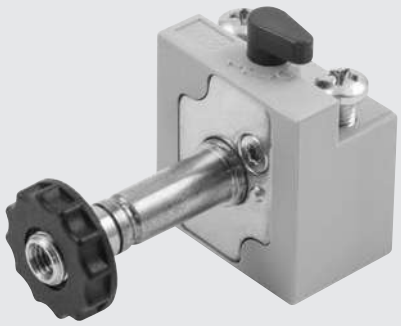

TECHNICAL DATA

Operating pressure	bar	Max 10
Operating temperature range	°C	–10 to 60
Solenoid rating		100% ED
Fluid		Filtered lubricated or unlubricated air
System		With poppet
Nominal flow rate	Nl/min	40
TRA/TRR at 6 bar	ms	22/32
Maximum coil nut torque	Nm	1
Tightening torque for M4 fixing screws	Nm	1

DIMENSIONS AND ORDERING CODES

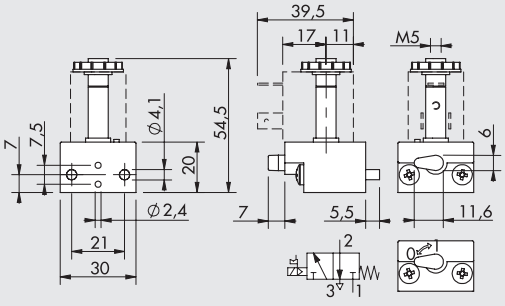

Code	Description
88291B9	Cnomo 3/2 with bistable hand lever operator

NOTES

Please contact our sales offices for further information and quotation.

MULTIPLE BASES FOR MACH 18 VALVES

These multiple bases come complete with cartridges and push-in fitting for Ø 6 pipes on all output ports.

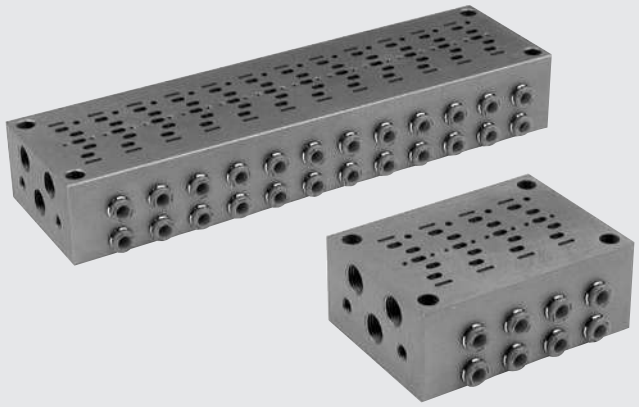

DIMENSIONS AND ORDERING CODES

4 POSITIONS

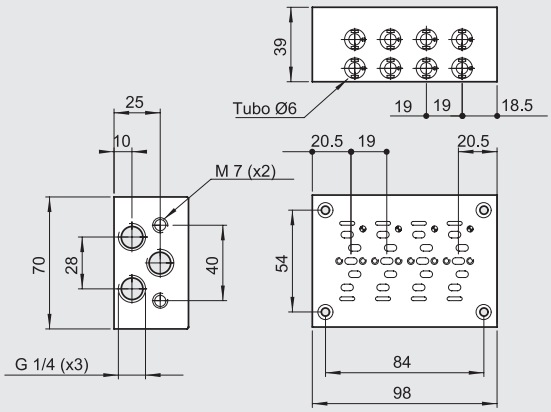

8 POSITIONS

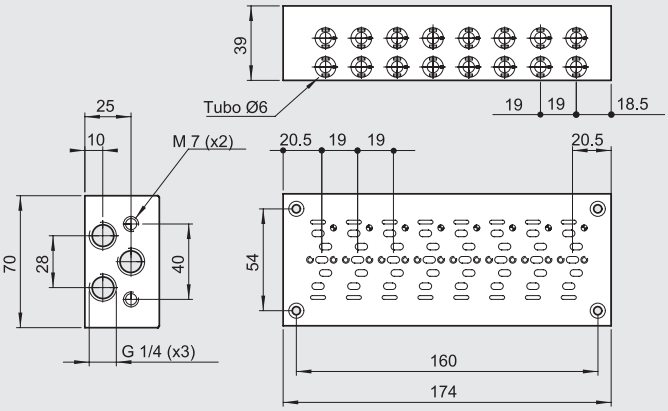

12 POSITIONS

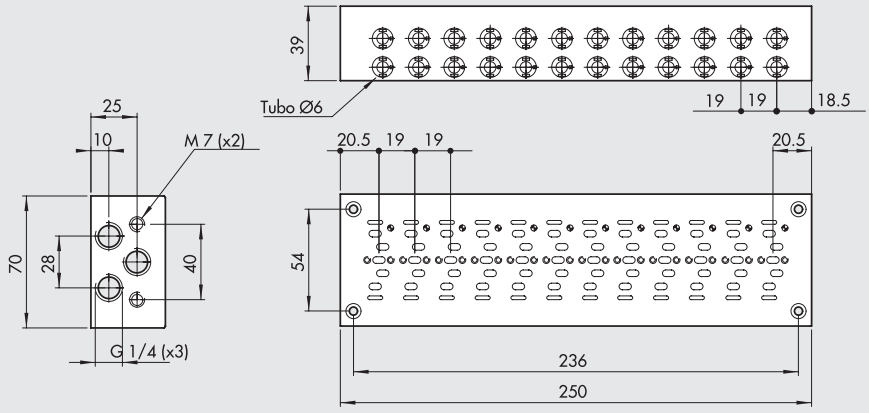

Code	Description	Weight [g]
8826176	4-position base	660
8826177	8-position base	1190
8826178	12-position base	1720

VALVES ISO 5599/1, PNEUMATIC SERIES IPV

TECHNICAL DATA		ISO 1	ISO 2	ISO 3
Operating pressure	bar	from vacuum to 10		
Minimum operation pressure:				
• monostable	bar	2.5		
• bistable	bar	1		
Operating temperature range	°C	from -10 to +60		
Nominal diameter	mm	7.5	12	15
Conductance C	Nl/min · bar	250	657.14	971.43
Critical ratio b	bar/bar	0.36	0.25	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	700	1800	3200
Flow rate at 6 bar ΔP 1 bar	Nl/min	1100	2700	4600
Response times at 6 bar:				
• monostable	ms	12	24	35
• bistable	ms	20	30	45
Repositioning response times at 6 bar:				
• monostable	ms	30	43	55
• bistable	ms	20	30	45
Hand operator		Monostable on valve body		

SYNOPTIC, SIZES AND VERSION

I P V	5	5	P N	S	O O
FAMILY	DIMENSIONS	FUNCTION	OPERATORS 14	RESETTING (12)	FURTHER DETAILS
IPV ISO pneumatic	**5** ISO 1 **6** ISO 2 **7** ISO 3	**5** 5/2 **6** 5/3	**PN** pneumatic	**S** mechanical springs **B** bistable **D** differential **L** pneumatic spring	**OO** 5/2 **CC** closed centres **OC** open centres **PC** pressure centres **SP** special

PNEUMATIC ACTUATION - ISO 1 PNEUMATIC SPRING



Symbol	Code	Abbrev.	Weight [g]
	7051011420	IPV 55 PNL OO	310

PNEUMATIC ACTUATION - ISO 2 PNEUMATIC SPRING

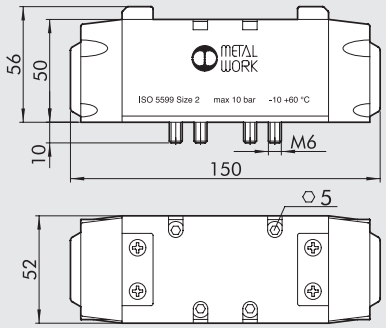

Symbol	Code	Abbrev.	Weight [g]
	7052011420	IPV 65 PNL OO	705

ANTI-STALL PNEUMATIC ACTUATION



Symbol	Code	Abbrev.	Weight [g]
	**8294645**	IPV 55 PNB SP	310

The valve normally switches when it is actuated, irrespective of the spool position.
N.B.: M4 screws are not to ISO 5599
A typical application is for the control of reciprocating pumps.

Please contact our sales offices for further information and quotation.

VALVES ISO 5599/1, SOLENOID/PNEUMATIC, SERIES ISV

TECHNICAL DATA		ISO 1	ISO 2	ISO 3
Operating pressure:	bar			
• monostable	bar	from 2.5 to 10		
• bistable	bar	from 1 to 10		
• pilot-assisted	bar	from vacuum to 10		
Minimum pilot pressure	bar	2.5		
Operating temperature range	°C	from -10 to +60		
Nominal diameter	mm	7.5	12	15
Conductance C	Nl/min · bar	250	657.14	971.43
Critical ratio b	bar/bar	0.36	0.25	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min	700	1800	3200
Flow rate at 6 bar ΔP 1 bar	Nl/min	1100	2700	4600
TRA / TRR monostable at 6 bar	ms	24 / 50	39 / 60	50 / 120
TRA / TRR bistable at 6 bar	ms	20 / 20	25 / 25	35 / 35
Solenoid pilot		Standards CNOMO		
Hand operator		Bistable on solenoid pilot		
		Monostable on valve body		
Coils		30 mm side DIN 43650 Form A - ISO 4400		
		22 mm side		
Maximum coil nut torque	Nm	1		

SYNOPTIC, SIZES AND VERSION

ISV	5	3	SO	S	OO
FAMILY	DIMENSIONS	FUNCTION	OPERATORS 14	RESETTING (12)	FURTHER DETAILS
ISV solenoid/pneumatic	**5** ISO 1	**5** 5/2	**SO** solenoid	**S** mechanical springs	**OO** 5/2
	6 ISO 2	**6** 5/3	**SE** solenoid assisted	**B** bistable	**CC** closed centres
	7 ISO 3			**D** differential	**OC** open centres
				L pneumatic spring	**PC** pressure centres
				P pneumatic control	**SP** special
					◆ **ML** hand lever operator

◆ Only available for size ISO 3

MONOSTABLE 5/2, ISO 1 PNEUMATIC RETURN – PNEUMATIC SPRING

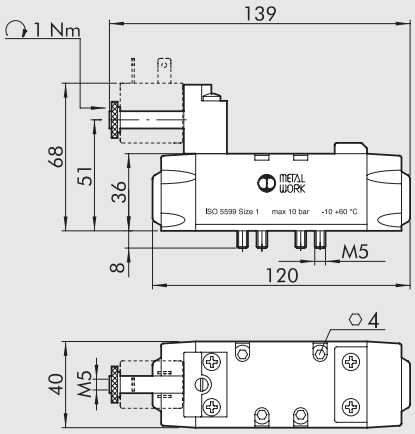

Symbol	Code	Abbrev.	Weight [g]
	7051021700	ISV 55 SOP OO	344
	8293307	ISV 55 SOL OO	344

MONOSTABLE 5/2, ISO 2 PNEUMATIC RETURN

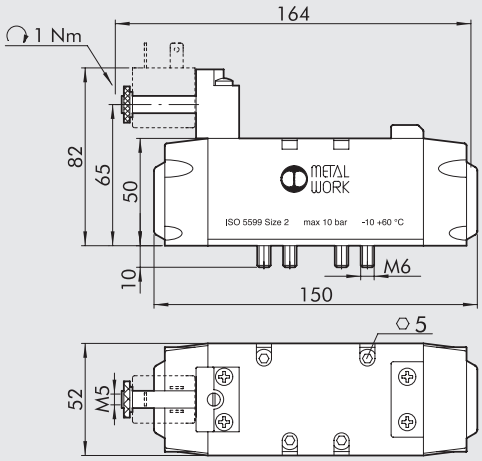

Symbol	Code	Abbrev.	Weight [g]
	7052021700	ISV 65 SOP OO	715

BISTABLE 5/2, ISO 3 WITH HAND LEVER OPERATOR

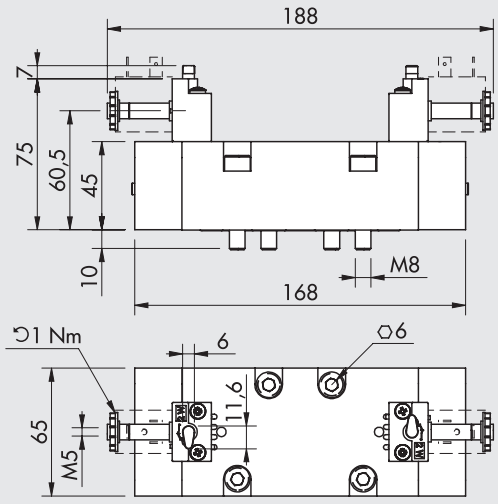

Symbol	Code	Abbrev.	Weight [g]
	88291B2	ISV 75 SOB ML	1230

NOTES

Please contact our sales offices for further information and quotation.

HDM FOR THE SPLASH AREA

A flange made of technopolymer with an EPDM foam gasket separates the fitting area, called the splash area, from the valves.
The valves are standard HDM for Ø 6mm pipes. The input end plate and the blind end plate are designed to be fixed onto the base.
For technical data refer to the standard version.

Islands with 4, 6 or 8 valves can be provided.
The dimensions of the base are the same in all cases.

AVAILABLE COMPONENTS

- **End plate 1-25D spec**: end plate with supply port, Ø 10 mm pipe and 25-pin connector.
- **End plate 1 + pilot-25D spec**.: end plate with supply port, Ø 10 mm pipe, separate pilot (Ø 4 mm pipe) and 25-pin connector.
- **End plate 1 Profibus-DP spec**.: end plate with supply port, Ø 10 mm pipe and Profibus connection.
- **End plate 1 + Profibus -DP pilot spec**.: end plate with supply port, Ø 10 mm pipe, separate pilot (Ø 4 mm pipe) and Profibus connection.
- **Valves**: the solenoid valves are standard HDM with Ø 6 mm pipe.
- **Special blind end plate**: special blind end plate for fixing to the plate.
- **Intermediate blind 7R**: blind intermediate end plate with separate supply and discharge ports, Ø 6 mm pipes, width 11.5 mm.
  The intermediat end plate is installed instead of a valve, so there can be 3, 5 or 7 valves.

EXAMPLE OF AN ORDERING CODE

HDM for splash area; End plate 1+ Profibus-DP pilot; V6-V6-V6-7R-I6-I6-5.

An island will be supplied with an input end plate with separate supply and pilot, Profibus connection, three 5/2 monostable valves, one blind intermediate end plate, two 3/2 NC dual valves and one blind end plate.

DIMENSIONS

HDM

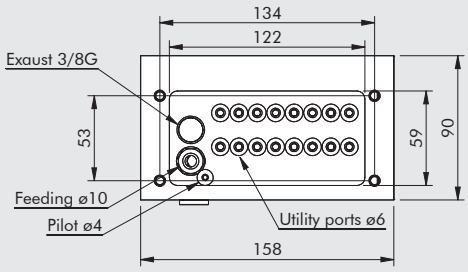



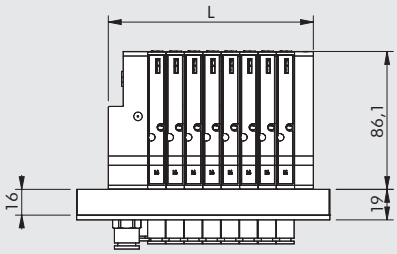

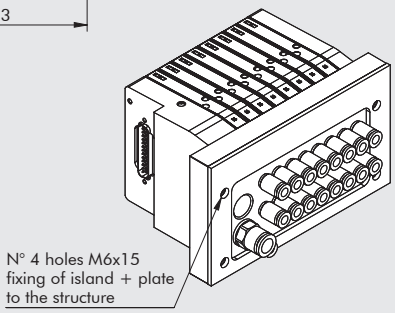

No. valves	L
4	82.4
6	105.2
8	128

HDM + PROFIBUS

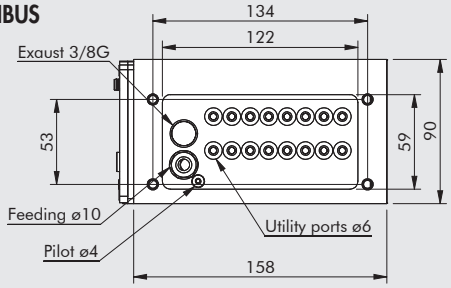



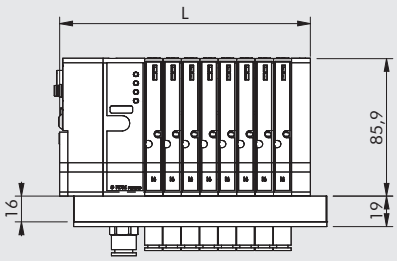

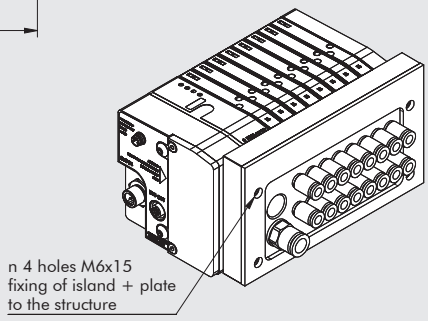

No. valves	L
4	110.9
6	133.7
8	156.5

AVAILABLE ISLANDS

8 positions

6 positions



4 positions

Please contact our sales offices for further information and quotation.

MULTIMACH WITH FRONT ATTACHMENT

There are M5 threaded holes at the front of terminal 1-11 and the blind terminal that allow the panel-type unit to be mounted as shown in the photo.

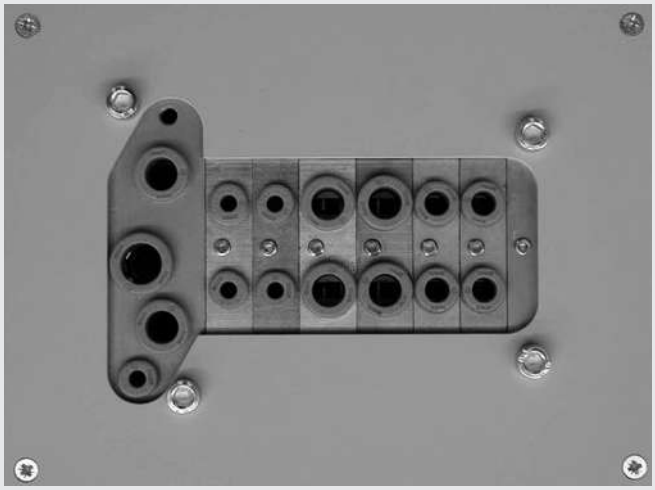

TERMINAL 1-11 FRONT ATTACHMENT

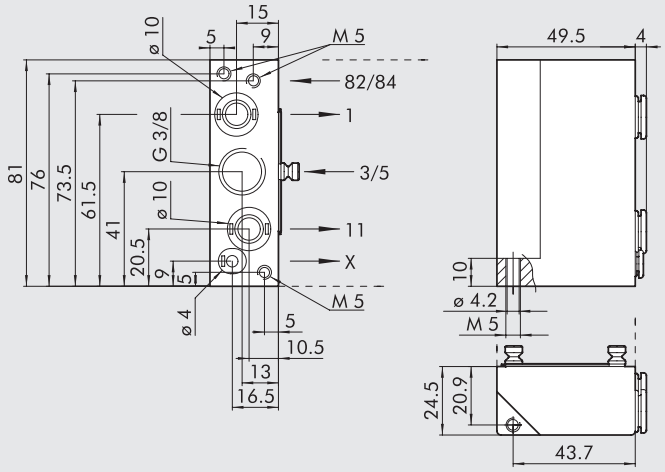

Code	Description
0227300202	Kit terminal 1-11 front attachment

BLIND TERMINAL – FRONT ATTACHMENT

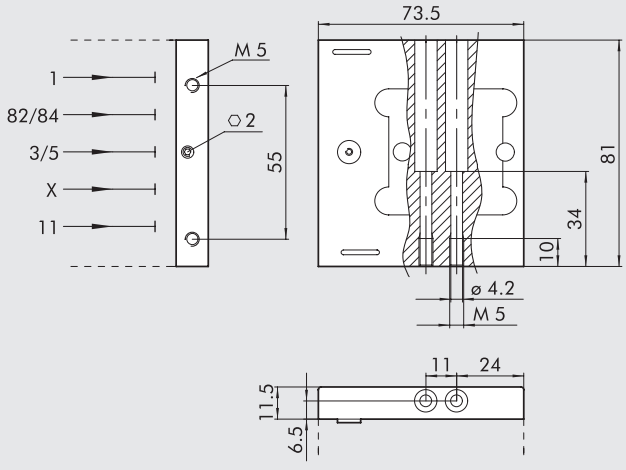

Code	Description
0227300501	Blind terminal and front attachment kit

CUSTOM UNITS SUMMARY

Syntesi®

- Syntesi® PROGRESSIVE START VALVE — G4.4

bit

- bit FILTER WITHOUT FILTERING ELEMENT — G4.6

- bit MICRO-REGULATORS WITH SPECIAL GREASE — G4.7

- bit MICRO-REGULATORS WITH SOME PARTS MISSING — G4.8

- bit MICRO-REGULATORS WITH SAFETY VALVE LOCK — G4.9

- R-FR bit BRACKET CENTRE DISTANCE 40 mm — G4.10

Skillair®

- Skillair® 300 CLEANER WITHOUT FILTERING ELEMENT — G4.12
- Skillair® 200 FILTER-REGULATOR WITH METAL BOWL — G4.13

- Skillair® REGULATOR WITH FOOD INDUSTRY SUITABLE GREASE — G4.14

- Skillair® REGULATORS WITH SPECIAL GREASE — G4.15

- Skillair® SERVO PILOTED PILOT REGULATOR — G4.16

- Skillair® 100 5-POSITION SUB-BASE — G4.17

- Skillair® SHUT-OFF VALVE LOCKABLEIN 2 POSITIONS — G4.18

- OIL CHECK VALVE WITH DRAIN Skillair® 100 — G4.19

- OIL CHECK VALVE Skillair® 200 — G4.20

- OIL CHECK VALVE Skillair® 300 — G4.21

METAL WORK PNEUMATIC

New deal

- New deal 1/4" FILTER-REGULATOR WITH NON-REGULATED AIR INTAKE G4.22

- New deal FILTERS WITHOUT FILTERING ELEMENT G4.23

- New deal 3/8" LUBRICATOR WITH OIL FILLING FROM THE TOP G4.24

- New deal BOTTON OIL FILLING LUBRICATOR G4.25

- New deal 1/4" AIR INTAKE WITH WALL FIXING G4.26

- New deal AIR INTAKE 3/8" - 1/2" SPECIAL G4.27

- New deal 1" REGULATOR WITH SPECIAL GREASE G4.28

- TANK-BOWL R1/2" G4.29

- OIL CHECK VALVE WITH DRAIN New deal 1/4" G4.30

- OIL CHECK VALVE New deal 3/8"-1/2" G4.31

- OIL CHECK VALVE New deal - ASSEMBLY G4.32

ONE

- ONE SERIE SAFE AIR® G4.34

PRECISION REGULATION AND PRESSURE CONTROL

- PRE-SET bit G4.38

- PRE-SET New deal AND Skillair® G4.39

- PRESSURE SWITCH WITH TWO ELECTRIC SIGNALS G4.40

- PRESSURE SWITCHES G4.41

SYNTESI® PROGRESSIVE START VALVE

The progressive start valve (VAP) is a pneumatic component that allows air enter the circuit gradually, thereby avoiding excessive pressure bursts. A sophisticated system of internal valves allows two separate stages of operation. During the first stage, a quantity of air that can be regulated via a pin flows from the VAP. The second stage starts when the downstream pressure reached 40 to 60% of the upstream pressure, during which full-port flow is achieved.
When the supply pressure is cut off, the VAP still remains open to allow the system to be relieved downstream.
In the final relief stage, part of the downstream pressure is relieved by the VAP itself.
The progressive start valve (VAP) is particularly useful on machinery where it is important to prevent actuators from moving rapidly and out of control, or where, for safety reasons, the air in-feed needs to be gentle and gradual.
It, however, there is a major leak in the downstream system, it may never be possible to achieve the pressure required to open the valve completely.

TECHNICAL DATA		VAP SY1			VAP SY2			
Threaded port		1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
Threaded discharge port		1/8"			1/4"			
Inlet pressure	bar	3 - 15			3 - 13			
	MPa	0.3 - 1.5			0.3 - 1.3			
	psi	43 - 217			43 - 188			
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 0.5 bar (0.05 MPa; 7 psi)	Nl/min	900	1000	1100	2800	3600	3600	
	scfm	32	39	39	99	127	127	
Flow rate at 6.3 bar (0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	Nl/min	1250	1500	1600	4400	4800	4800	
	scfm	44	53	57	156	170	170	
Drain flow rate at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	500			2700			
	scfm	18			96			
Maximum flow rate start-up, at 6.3 bar (0.63 MPa; 91 psi)	Nl/min	170			700			
with regulation pin completely unscrewed	scfm	6			25			
Min/max temperature at 10 bar; 1 MPa; 145 psi	°C	From -10 to +50			From -10 to +50			
Weight	g	193	185	179	477	452	448	437
Fluid		Compressed air or other inert gases						
Mounting position		In any position						
Additional air take-off, for pressure gauges or fittings		1/8", front and rear			1/4", front and rear			
Additional air take-off flow rate at 6.3 bar	Nl/min	500			1500			
(0.63 MPa; 91 psi) ΔP 1 bar (0.1 MPa; 14 psi)	scfm	18			53			
Wall fixing screws		No. 2 M4 screws			No. 2 M5 screws			

COMPONENTS

① OT58 nickel-plated brass cap
② Anodized aluminium upper block
③ Technopolymer flange
④ Technopolymer body
⑤ IN/OUT bushing made of OT58 nickel-plated brass or passivated aluminium for 3/4" - 1"
⑥ O-ring NBR gasket
⑦ Stainless steel valve spring
⑧ Technopolymer bottom plug
⑨ OT58 brass progressive start regulation pin
⑩ OT58 brass internal valve
⑪ Stainless steel spring stem recoveryng
⑫ OT58 brass stem
⑬ OT58 brass main valve with vulcanized gasket
⑭ OT58 brass threaded insert

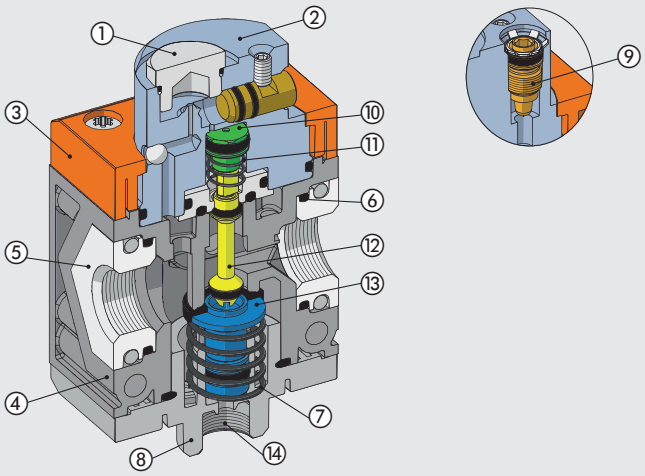

Please contact our sales offices for further information and quotation.

METAL WORK PNEUMATIC

DIMENSIONS

SY1

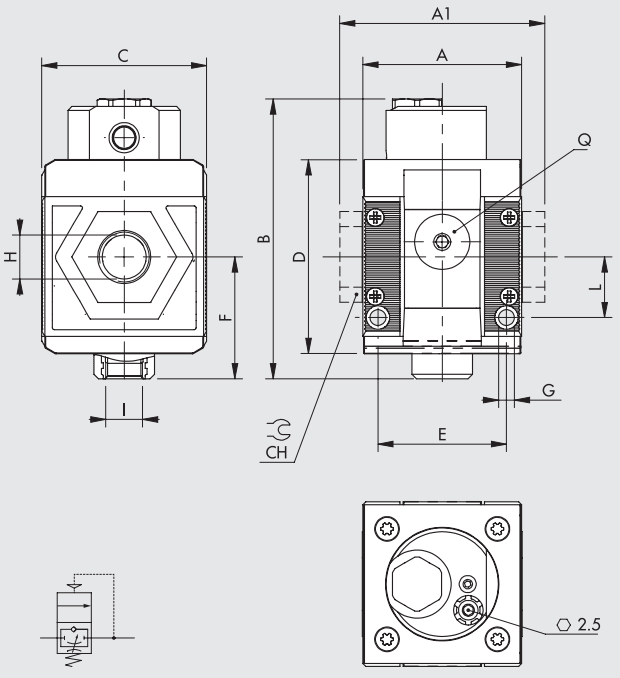

SY2

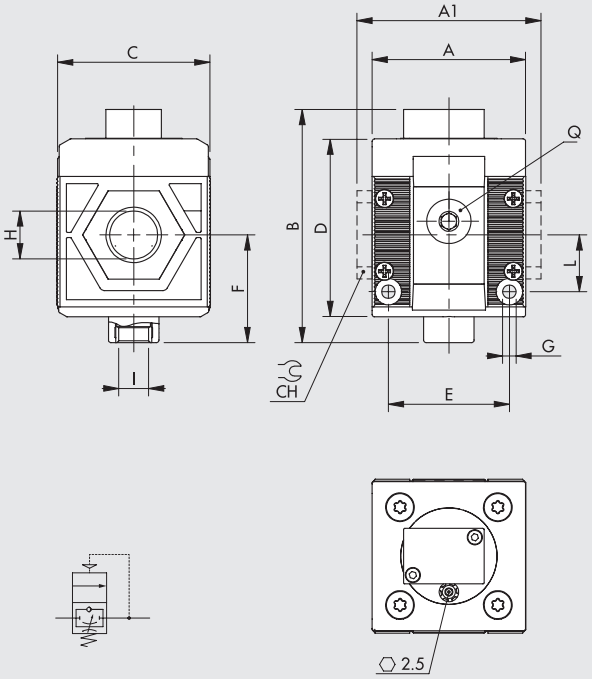

	VAP SY1			VAP SY2			
H (threaded port)	1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"
A	42			60.5			
A1	-	-	44	-	-	95	95
B	74			92.5			
C	44			61			
CH	-			-	-	32	36
D	51.5			70.5			
E	33.5			47.5			
F	32.2			42.7			
G	Hole for M4 screws			Hole for M5 screws			
I (exhaust))	1/8"			1/4"			
L	16			22.5			
Q (additional air takes-off)	1/8"			1/4"			

ORDERING CODES

Code	Description
82950D9	VAP SY1 without bushings
82950D8	VAP SY2 without bushings

ACCESSORIES

THREADED PORT



Code	Description
9210001	Kit IN OUT 1/8 SY1
9210002	Kit IN OUT 1/4 SY1
9210003	Kit IN OUT 3/8 SY1
9210011	Kit IN OUT 3/8 SY2
9210012	Kit IN OUT 1/2 SY2
9210013	Kit IN OUT 3/4 SY2
9210014	Kit IN OUT 1 SY2

Max torque 0.4 Nm for SY1
Max torque 2.5 Nm for SY2

NOTES

bit FILTER WITHOUT FILTERING ELEMENT

This is a standard filter without a filtering element that can be used as a tank.
Instead of the RMSA there is a plastic cap similar to the one used for lubricator bowls.

N.B.: For technical data refer to the standard version.

DIMENSIONS

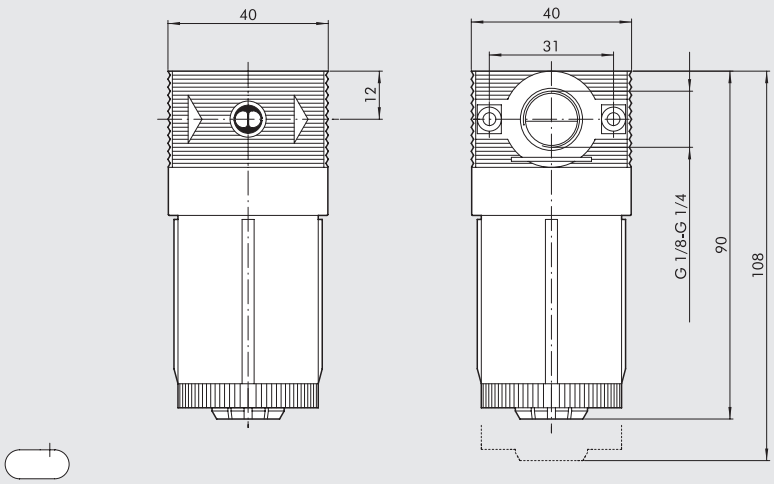

ORDERING CODES

Code	Description
8292109	Fil BIT 1/8 without filtering element
8292111	Fil BIT 1/4 without filtering element

N.B.: Capacity: ~ 30 cm^3.

bit MICRO-REGULATORS WITH SPECIAL GREASE

BERULUB OX 40 is used to lubricate the inner parts that come into contact with the flow of air oxygen-compatible grease.
In this case, the compressed air that may come into contact with oxygen is not polluted.

N.B.: MW regulators have been designed and tested for use with compressed air. No claims can be made by the user if they are used with other fluids.

N.B.: For technical data refer to the standard version.

DIMENSIONS

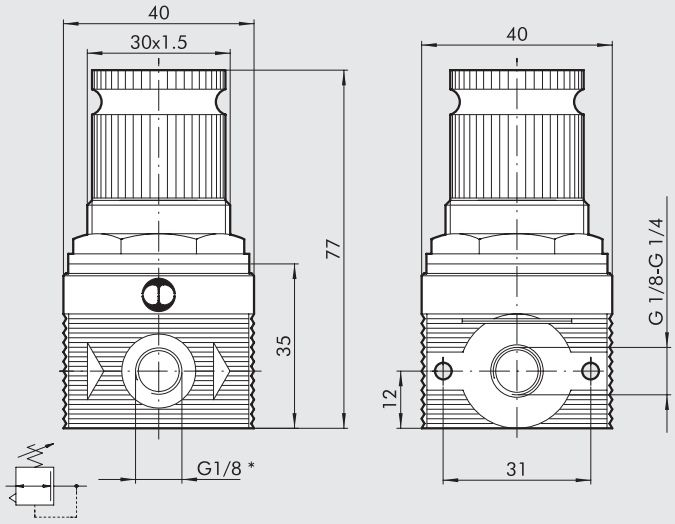

* Pressure gauge port

ORDERING CODES

Code	Description
8826701	MR Bit 1/8 02 with special grease

NOTES

BERULUB OX 40 EP: is a white silicone-based oil for oxygen installations, used as a lubricant in pressure reducers, valves and other equipment in healthcare sectors and for the lubrication of O-ring seals in autogenous welding systems.
At an operating temperature of 60° C, the grease pressure limit is 60 bar.
The grease temperature range is from -40 to +200°C.
Suitable for lubricating sliding and rolling elements made of metal (steel and non-ferrous metal) or synthetic material.

bit MICRO-REGULATORS WITH SOME PARTS MISSING

These bit micro-regulators are supplied incomplete for installation requirements.

N.B.: For technical data refer to the standard version.

WITHOUT RING NUT AND BOX

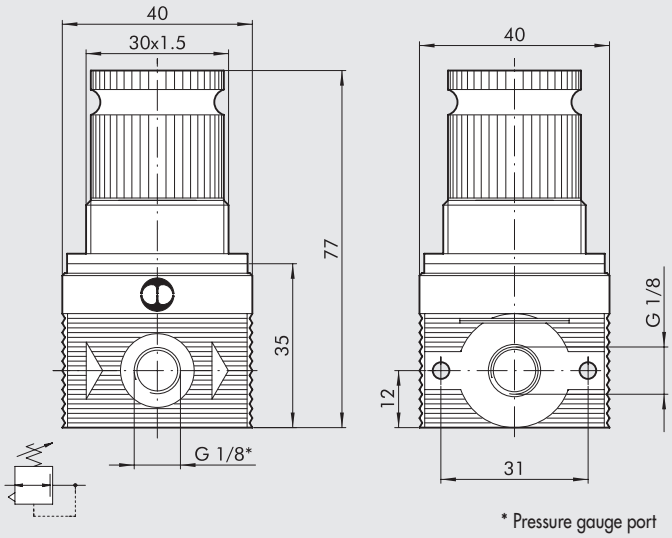

* Pressure gauge port

ORDERING CODES

Code	Description
8286801	MR BIT 1/8 04 without ring nut

N.B.: Supplied unpacked and without ring nut.

WITHOUT RING NUT AND KNOB

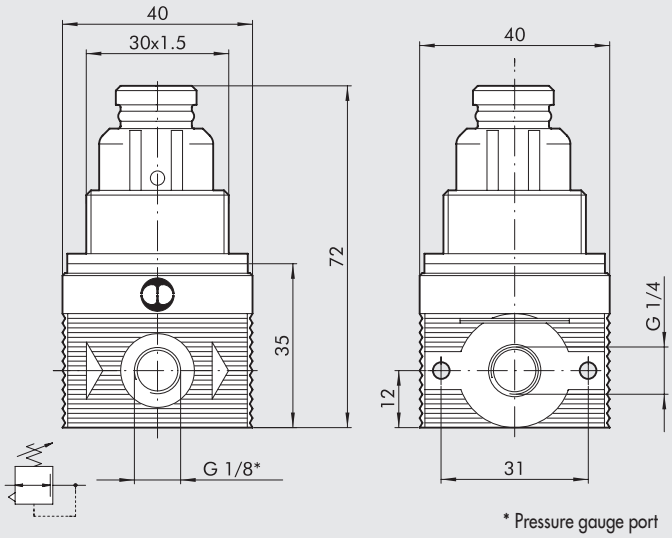

* Pressure gauge port

ORDERING CODES

Code	Description
8384501	MR BIT 1/4 02 without ring nut and knob
8384502	MR BIT 1/4 08 without ring nut and knob

N.B.: Supplied without fixed ring nut and without adjusting knob.

Please contact our sales offices for further information and quotation.

bit MICRO-REGULATORS WITH SAFETY VALVE LOCK

This comprises a bit unit that has been preset at max. 4 bar, a ball cock valve, a 0 to 4 bar pressure gauge and two safety valves set at 3.8 bar +0 / −10%.
It is used to supply compressed air to mixers and other devices where it is important for the pressure not to exceed the maximum value even when the regulator is faulty.

DIMENSIONS

① MR Bit 1/4 04 max 4 bar
② Ball tap
③ Painted aluminium body
④ Pressure gauge 04 Ø 40
⑤ Valve drain
⑥ Safety valves

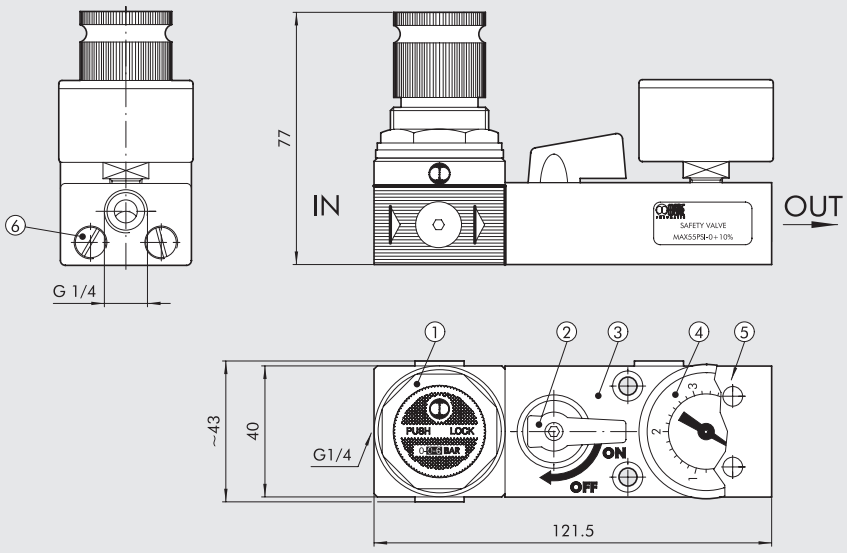

ORDERING CODES

Code	Description
8825970	MR Bit + safety valve lock + ball cock valve

R-FR bit BRACKET
CENTRE DISTANCE 40 mm

The centre distance of the fixing holes on this bracket is 40 mm.

DIMENSIONS

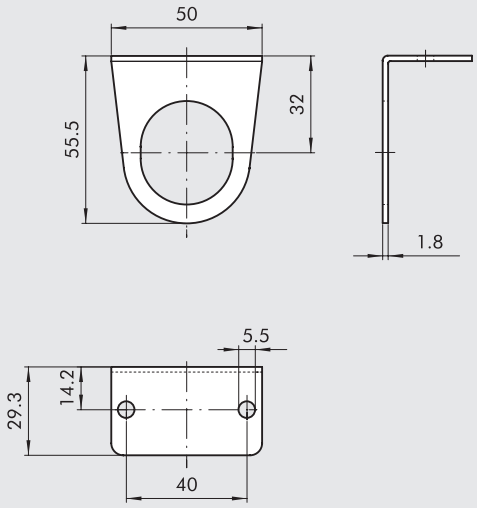

ORDERING CODES

Code	Description
8000210	R-FR fixing bracket centre distance 40

Material: white zinc-plated steel.

Please contact our sales offices for further information and quotation.

METAL WORK PNEUMATIC

NOTES

Skillair® 300 CLEANER WITHOUT FILTERING ELEMENT

This is an STD cleaner without a filtering element that can be used as a tank.

N.B.: For technical data refer to the standard version.

DIMENSIONS

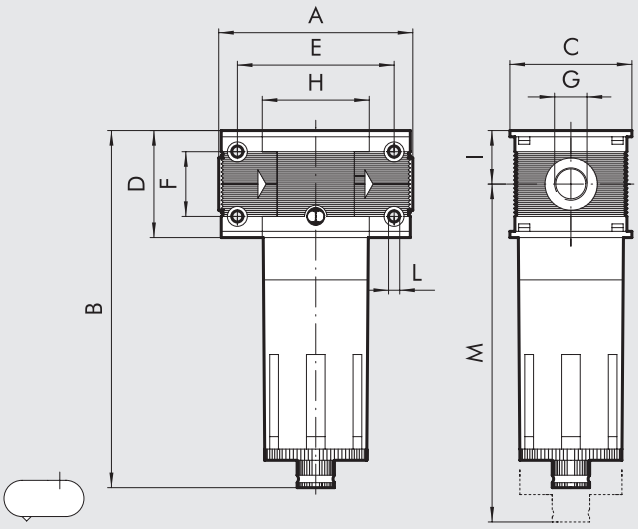

	DEP 300
Threaded port G	1/2"
A	110
B	195
C	72
D	65
E	92
F	42
H	65
I	32.5
L	M5 hole
M	215

ORDERING CODES

Code	Description
8825975	Dep 300 1/2 without filtering element

N.B.: The cup inside the bowl is made of nickel-plated OT58 brass.

NOTES

Please contact our sales offices for further information and quotation.

Skillair® 200 FILTER-REGULATOR WITH METAL BOWL

This is a FR with black painted aluminium bowl.
The inner cup is made of clear plastic.

N.B.: For technical data refer to the standard version.

DIMENSIONS

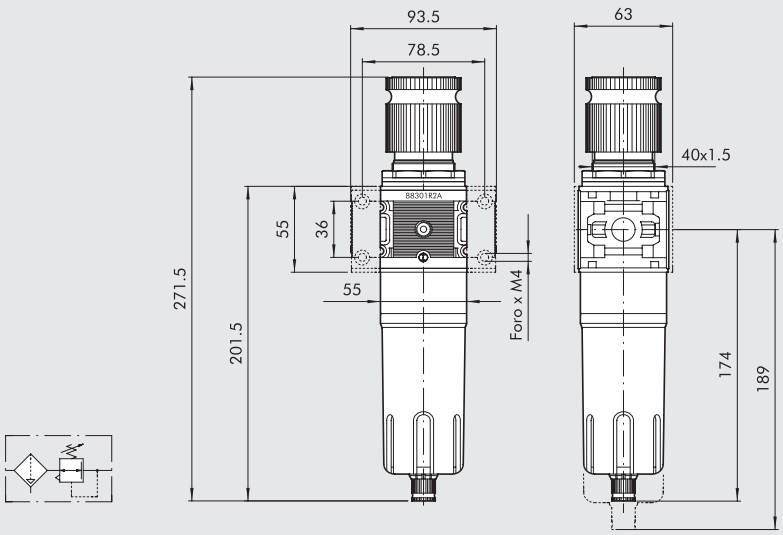

ORDERING CODES

Code	Description
88301R2A	FR 200 20 08 with metal bowl without end plates

N.B.: The plates on the regulator body are marked with the part code.

NOTES

Skillair® REGULATOR WITH FOOD INDUSTRY SUITABLE GREASE

As it is compatible for use in the food industry, Molycote 111 grease is used to lubricate internal parts that come into contact with the air flow.

N.B.: For technical data refer to the standard version.

DIMENSIONS

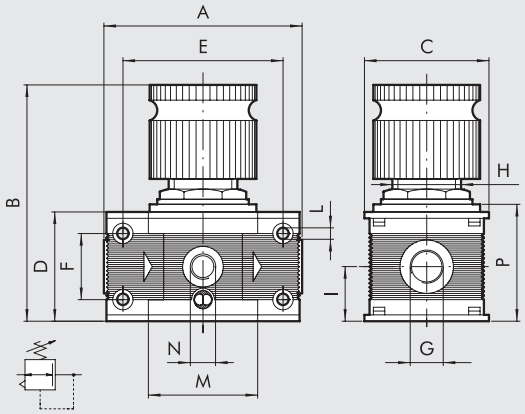

	REG 100		REG 200		
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″
A	78		93.5		
B	98		125		
C	50		63		
D	43		55		
E	63		78.5		
F	26		36		
H	30 x 1.5		40 x 1.5		
I	21.5		27.5		
L	M4 hole		M5 hole		
M	43		55.5		
N (pressure gauge port)	1/8″		1/8″		
P	46		58		

ORDERING CODES

Code	Description
8825935	Reg 100 1/4 08 Molykote
8825960	Reg 200 1/2 08 Molykote

NOTES

Molykote 111: is a clear, high-viscosity white silicon grease approved by the British Standard WRC. **It is important not to mix it with other types of grease**.

Please contact our sales offices for further information and quotation.

Skillair® REGULATORS WITH SPECIAL GREASE

METAL WORK PNEUMATIC

BERULUB OX 40 EP is used to lubricate the inner parts that come into contact with the flow of air oxygen-compatible grease.
In this case, the compressed air that may come into contact with oxygen is not polluted.

N.B.: MW regulators have been designed and tested for use with compressed air. No claims can be made by the user if they are used with other fluids.

N.B.: For technical data refer to the standard version.

DIMENSIONS

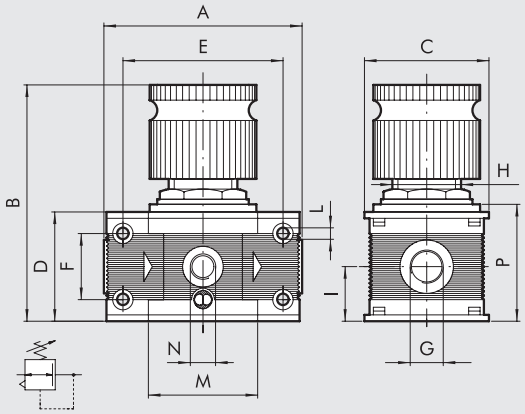

	REG 100		REG 300		
Threaded port G	1/4″	3/8″	1/2″	3/4″	1″
A	78		110		112
B	98		148		
C	50		72		
D	43		65		
E	63		92		
F	26		42		
H	30 x 1.5		48 x 1.5		
I	21.5		32.5		
L	M4 hole		M5 hole		
M	43		65		
N (pressure gauge port)	1/8″		1/8″		
P	46		69		

ORDERING CODES

Code	Description
8826185	Reg 100 3/8 012 with special grease
8826186A	Reg 300 012 with special grease without end plates

NOTES

BERULUB OX 40 EP: is a white silicone-based oil for oxygen installations, used as a lubricant in pressure reducers, valves and other equipment in healthcare sectors and for the lubrication of O-ring seals in autogenous welding systems.
At an operating temperature of 60° C, the grease pressure limit is 60 bar.
The grease temperature range is from -40 to +200° C.
Suitable for lubricating sliding and rolling elements made of metal (steel and non-ferrous metal) or synthetic material.

Skillair® SERVO PILOTED PILOT REGULATOR

This is made by combining the bottom of the pilot regulator and the top of the Skillair® pilot regulator.

- Double rolling diaphragm to ensure maximum stroke and flow rate.
- Low load losses.
- High in pressure setting accuracy.
- High sensitivity during relieving.

A slight air leak is required for correct operation of the regulator and is not to be considered as a malfunction.

TECHNICAL DATA		PILOT REGULATOR
Threaded port		1/4"
Setting range	bar	Depending on the pilot
Max. input pressure	MPa	1.3
	bar	13
	psi	188
Flow rate at 6.3 bar (0.63 MPa to 91psi) ΔP 0.5 bar (0.05 MPa to 7psi)		120 Nl/min - 4.3 scfm
Flow rate at 6.3 bar (0.63 MPa to 91psi) ΔP 1 bar (0.1 MPa to 14psi)		140 Nl/min - 5 scfm
Fluid		Filtered, lubricated or unlubricated compressed air.
		Lubrication, if used, must be continuous.
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50
	°F	122
Weight	kg	0.6
Mounting position		In any position
Pressure gauge port		1/8"
Notes on use		The regulator pressure must always be set upwards
		For increased sensitivity, use a pressure regulator with a rated pressure as close as possible to the required value.
		Do not take air from the pressure gauge ports. Mount directly on Reg 400.

DIMENSIONS

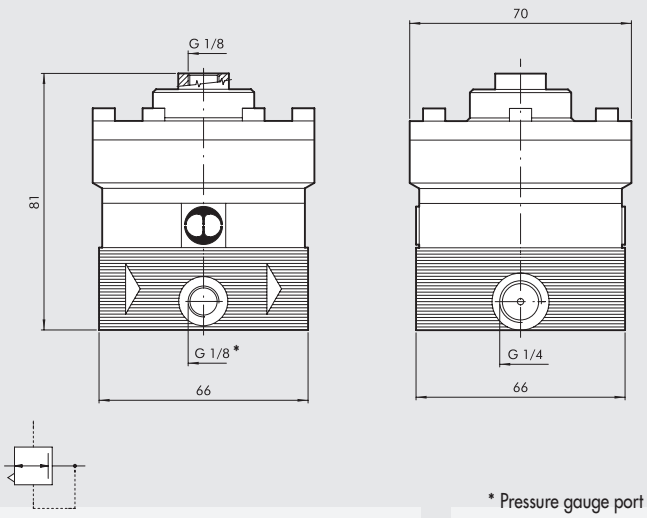

* Pressure gauge port

ORDERING CODES

Code	Description
8293317	Reg P 1/4 pilot

Please contact our sales offices for further information and quotation.

Skillair® 100
5-POSITION SUB-BASE

METAL WORK PNEUMATIC

A 5-position sub-base for the Skillair® 100.
The 4th position can be used for the Skillair® 200.

DIMENSIONS

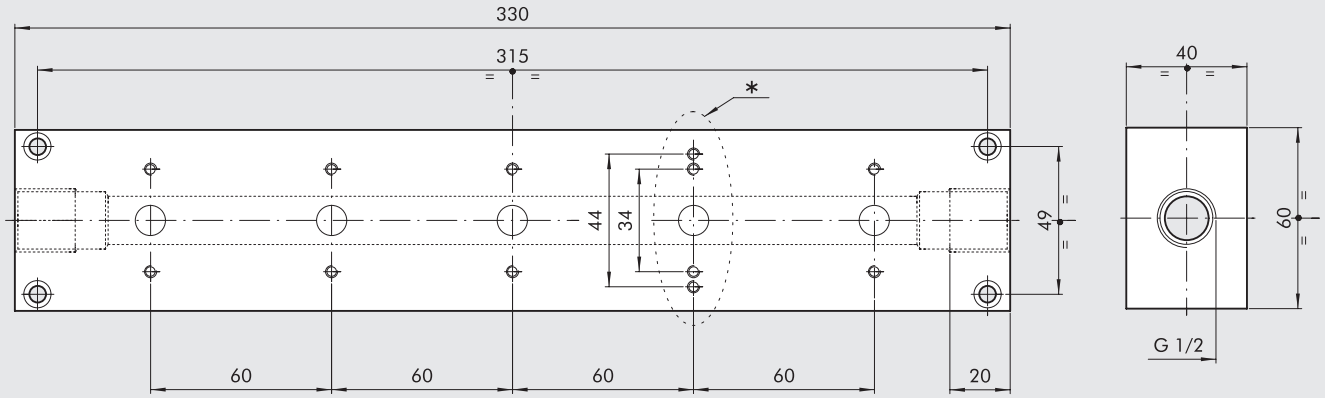

* Position also compatible with Skillair® 200

ORDERING CODES

Code	Description
8000209	SK 100 5-position sub-base

N.B.: The code does not include adaptor bases.

NOTES

Skillair® SHUT-OFF VALVE LOCKABLEIN 2 POSITIONS

Unlike the standard V3V, which can only be locked in the closed position, this version can be locked during operation.

N.B.: For technical data refer to the standard version.

DIMENSIONS

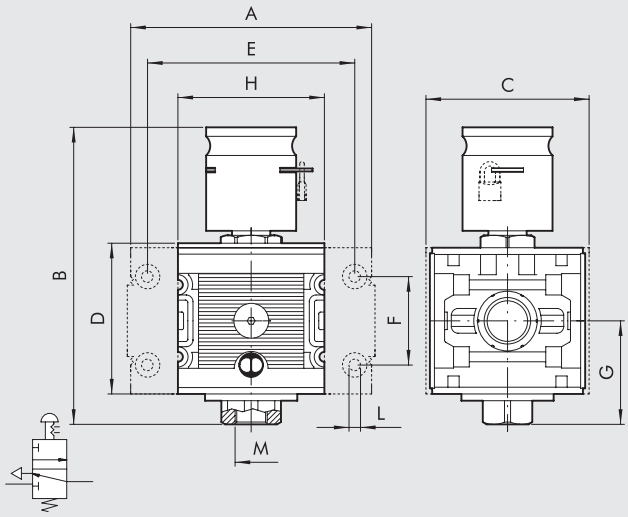

	V3V 100		V3V 200			V3V 300		
Threaded port G	1/4″	3/8″	1/4″	3/8″	1/2″	1/2″	3/4″	1″
A	78		93.5			110		112
B	106		119			132		
C	50		63			72		
D	43		55			65		
E	63		78.5			92		
F	26		36			42		
H	43		55.5			65		
I	33.5		40			46.5		
L	M4 hole		M5 hole			M5 hole		
M (relief)	1/8″		1/4″			3/8″		

ORDERING CODES

Code	Description
8286464A	V3V 100 lockable in 2 positions without end plates
8286465A	V3V 200 lockable in 2 positions without end plates
8286466A	V3V 300 lockable in 2 positions without end plates

OPERATION

DE-ACTIVATED

ACTIVATED

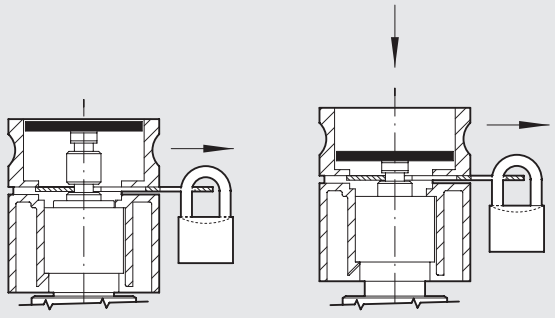

Please contact our sales offices for further information and quotation.

OIL CHECK VALVE WITH DRAIN
Skillair® 100

This module can be inserted between two Skillair® 100 elements (e.g. a filter and a lubricator) to prevent the oil from returning due to back pressure. In this case oil is drained out via a 1/8" (R) threaded coupling.

COMPONENTS

① Black anodised aluminium body
② Anodised aluminium input plate
③ Anodised aluminium output plate
④ Adiprene lip seal
⑤ Adaptor base made of zamak
⑥ NBR seals

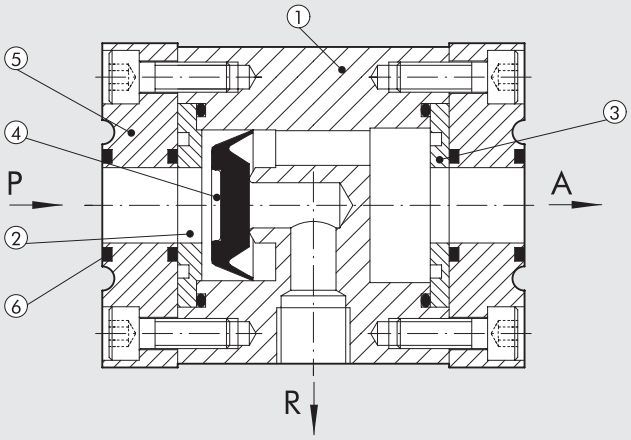

DIMENSIONS

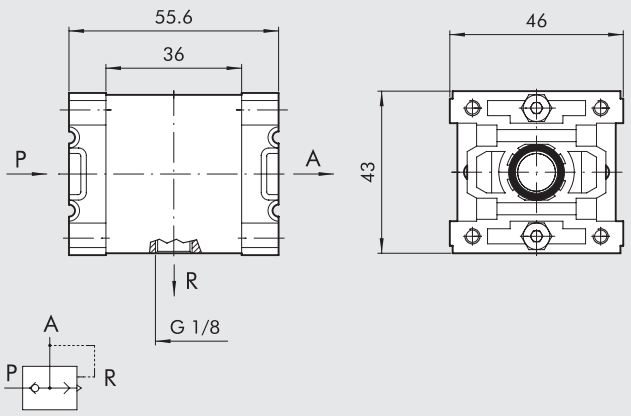

ORDERING CODES

Code	Description
8282717	VNRO 100

OIL CHECK VALVE
Skillair® 200

This module can be inserted between two Skillair® 200 elements (e.g. a filter and a lubricator) to prevent the oil from returning due to back pressure.
1/4" couplings (A1) to be used as air intakes are mounted before the VNRO.

COMPONENTS

① Body made of black anodised aluminium
② Input spacer ring made of OT58 nickel-plated brass
③ Output spacer ring made of OT58 nickel-plated brass
④ Adiprene lip gasket
⑤ Adaptor base made of zamak

A1 = air intakes before VNRO

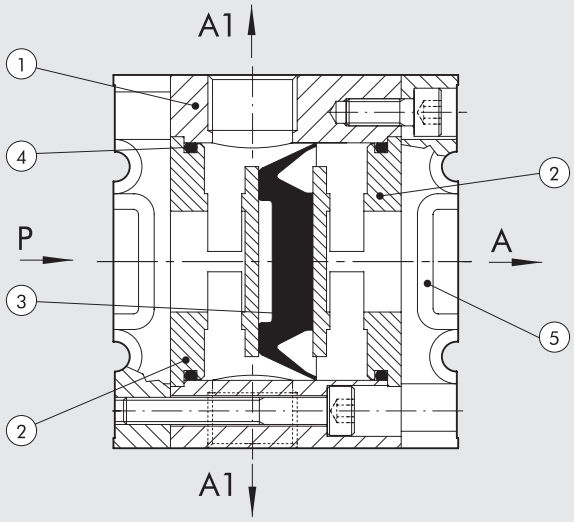

DIMENSIONS

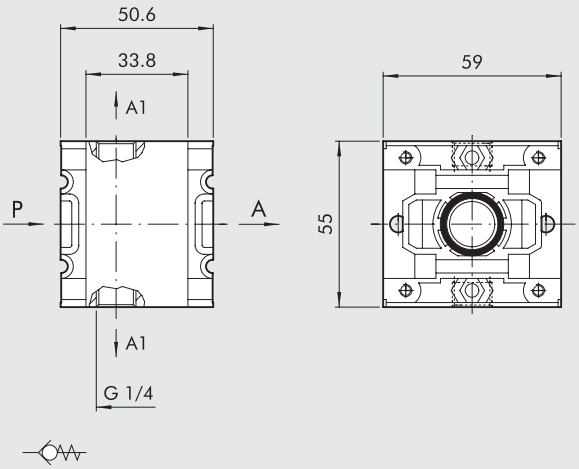

ORDERING CODES

Code	Description
8331521	VNRO 200

OIL CHECK VALVE
Skillair® 300

METAL WORK PNEUMATIC

This module can be inserted between two Skillair® 300 elements (e.g. a filter and a lubricator) to prevent the oil from returning due to back pressure.

COMPONENTS

① Body made of black anodised aluminium
② spacer ring made of OT58 nickel-plated brass
③ Valve with NBR vulcanized gasket
④ Adaptor base made of zamak
⑤ NBR seals
⑥ Stainless steel valve spring

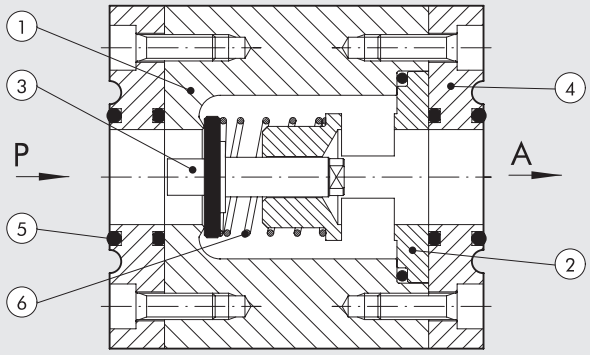

DIMENSIONS

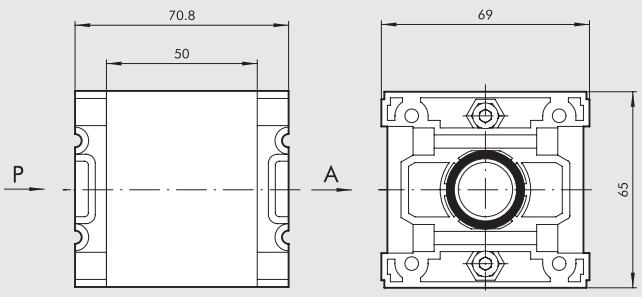

ORDERING CODES

Code	Description
8149903	VNRO 300

Newdeal 1/4" FILTER-REGULATOR WITH NON-REGULATED AIR INTAKE

The main feature of this filter-regulator is that the 1/8" front port (2) is connected to the filtered non-regulated air pipe, while the rear port (4) is connected to the filtered and regulated air pipe, as with standard ports.

N.B.: For technical data refer to the standard version.

DIMENSIONS

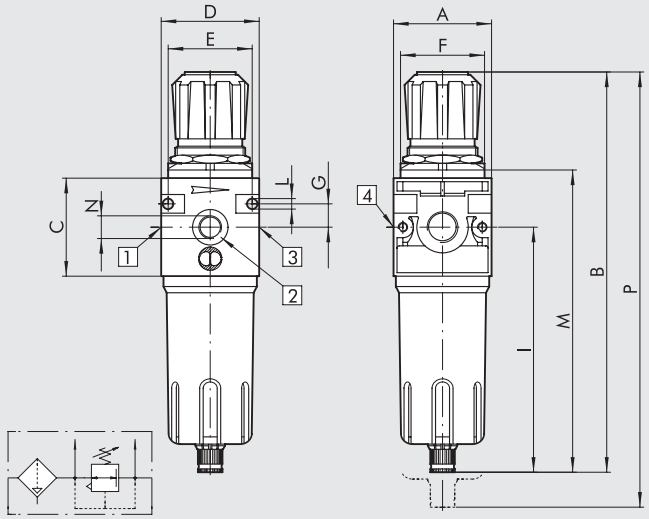

	FR ND 1/4"
Threaded port	1/4"
A	42
B	190
C	42
D	42
E	36
F	30 x 1.5
G	10
I	121
L	M4 hole
M	145
N	1/8"
P	233

ORDERING CODES

Code	Description
8293155	FR ND 1/4 20 08 RMSA

OPERATING SCHEME

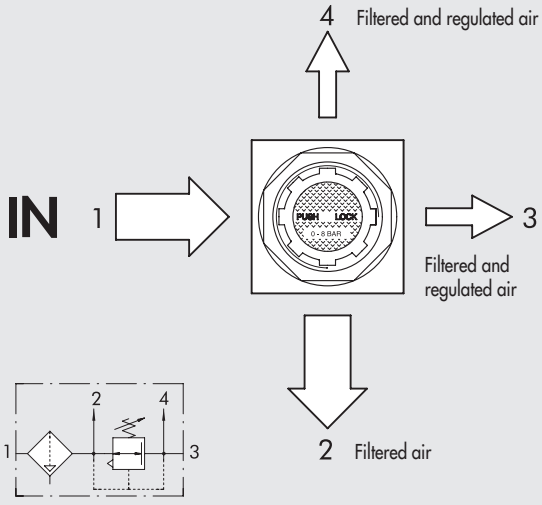

Newdeal FILTERS
WITHOUT FILTERING ELEMENT

METAL WORK PNEUMATIC

These are standard filters without a filtering element that can be used as tanks.

N.B.: For technical data refer to the standard version.

DIMENSIONS

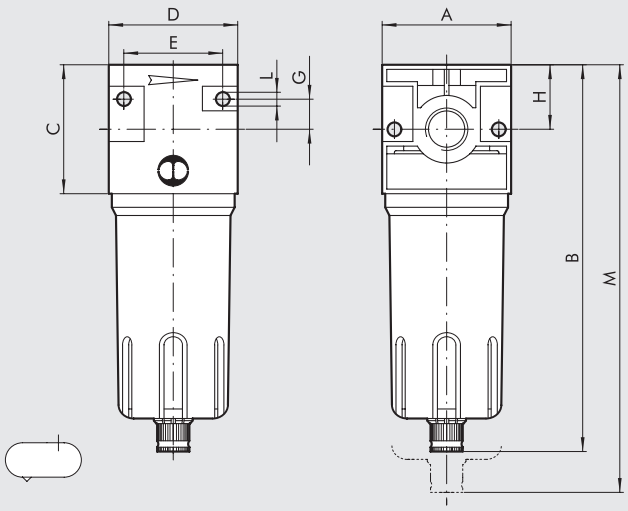

	FIL ND 3/8"	FIL ND 1/2"	FIL ND 3/4"	FIL ND 1"
Threaded port	3/8"	1/2"	3/4"	1"
A	60		80	
B	180		235	
C	60		80	
D	60		80	
E	46		66	
G	14		22	
H	30		40	
L	M4 hole		M6 hole	
M	230		325	

ORDERING CODES

Code	Description
8842323	Fil ND 3/8 without filtering element
8826446	Fil ND 1/2 without filtering element
8826449	Fil ND 1 without filtering element

Bowl capacity: ND 3/8-1/2 = ~ 200 cm^3
ND 1 = ~ 490 cm^3

NOTES

Newdeal 3/8" LUBRICATOR WITH OIL FILLING FROM THE TOP

This is a lubricator with a 1/8" hole at the top of the body to allow oil filling from the top without the need to remove the bowl. During use, the hole in the lubricator is plugged by an A7 fitting.

N.B.: For technical data refer to the standard version.

DIMENSIONS

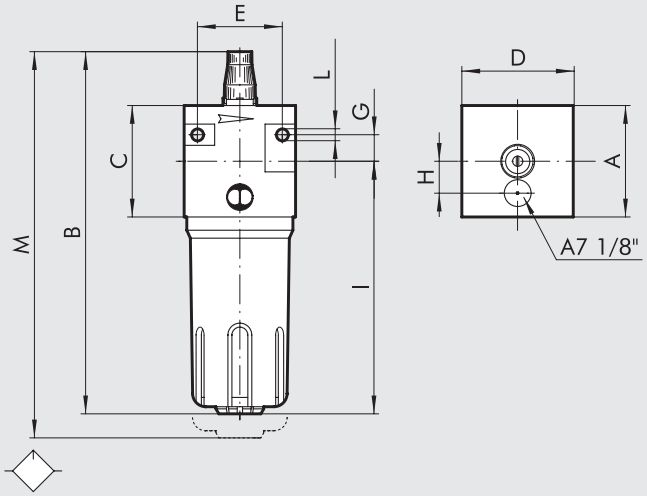

	LUB ND 3/8"
Threaded port	3/8"
A	60
B	195
C	60
D	60
E	46
G	14
H	17.2
I	136
L	M4 hole
M	220

ORDERING CODES

Code	Description
8283110	Lub ND 3/8 with oil filling from the top

N.B.: Disconnect the pressure feed before filling the system with oil.
The body is painted grey.

OPERATING SCHEME

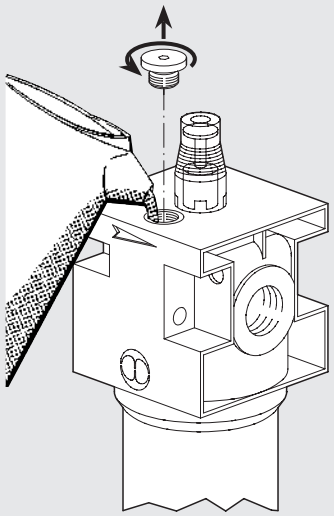

Please contact our sales offices for further information and quotation.

Newdeal BOTTON OIL FILLING LUBRICATOR

METAL WORK PNEUMATIC

At the bottom of the bowl is a 1/4" fitting for oil filling without having to remove the bowl.
During use, the 1/4" hole in the lubricator is plugged by an A7 fitting, supplied with the lubricator.

N.B.: For technical data refer to the standard version.

DIMENSIONS

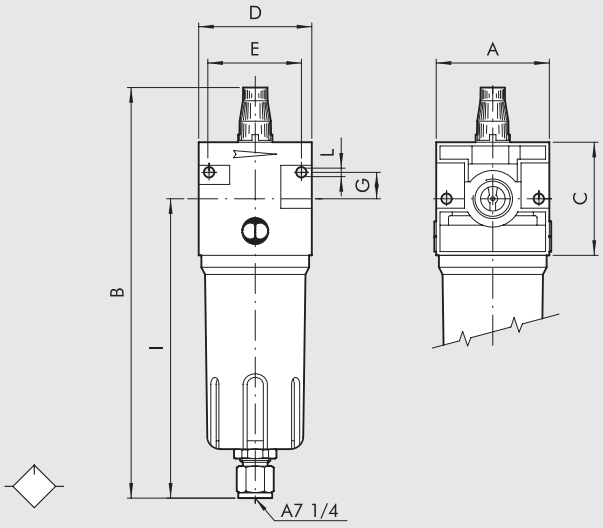

	LUB ND 1/4"	LUB ND 1/2"	LUB ND 1"
Threaded port	1/4"	1/2"	1"
A	42	60	80
B	~179	~221	~286
C	42	60	80
D	42	60	80
E	32	46	66
G	10	14	22
I	~133	~162	~208
L	M4 hole	M4 hole	M6 hole

ORDERING CODES

Code	Description
8826439	Lub ND 1/4 with oil filling
8826440	Lub ND 1/2 with oil filling
8826441	Lub ND 1 with oil filling

N.B.: Supplied with 2 screws.
Disconnect the pressure feed before filling the system with oil.

NOTES

Newdeal 1/4"
AIR INTAKE WITH WALL FIXING

The air intake has a depth of 60 mm to allow an New Deal 1/4" group to be fixed to the wall yet detached from it.

N.B.: With M4 fixing holes, the air intake cannot be connected directly to a regulator or filter-regulator.

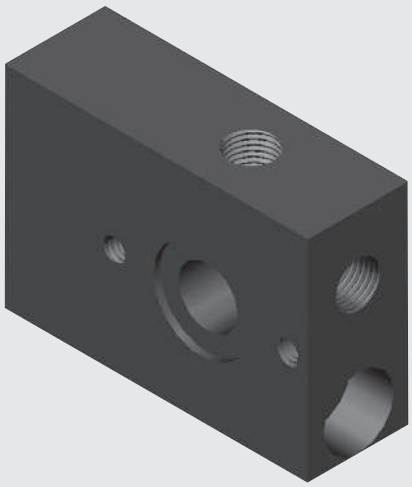

DIMENSIONS

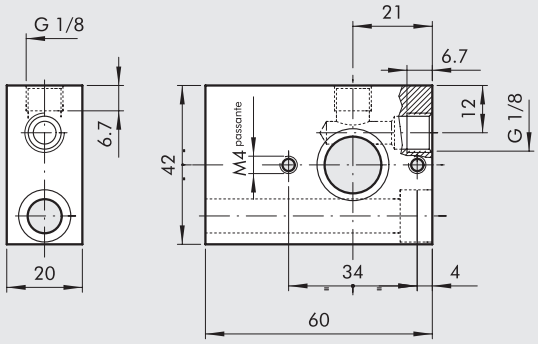

ORDERING CODES

Code	Description
8286810	New Deal 1/4 air intake L = 60

N.B.: Supplied complete with 4 M4x35 (①) securing screws and seal.
Material: black anodised aluminium.

TYPICAL ASSEMBLY

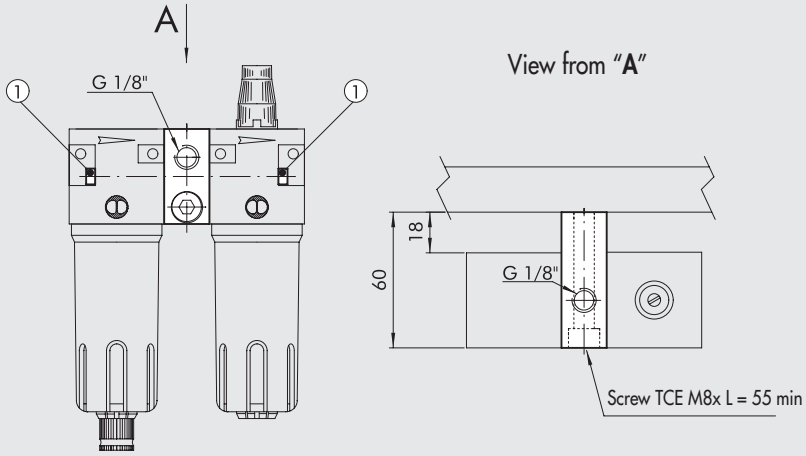

Please contact our sales offices for further information and quotation.

New deal AIR INTAKE 3/8" - 1/2" SPECIAL

Due to its special design, the PA can be inserted between 2 regulators using four M5x10 screws.
The air outlets are situated on opposite sides, so that can be one at the front and one at the rear (Fig. 1), or one at the top and one at the bottom by rotating PA by 90° (Fig. 2).

DIMENSIONS

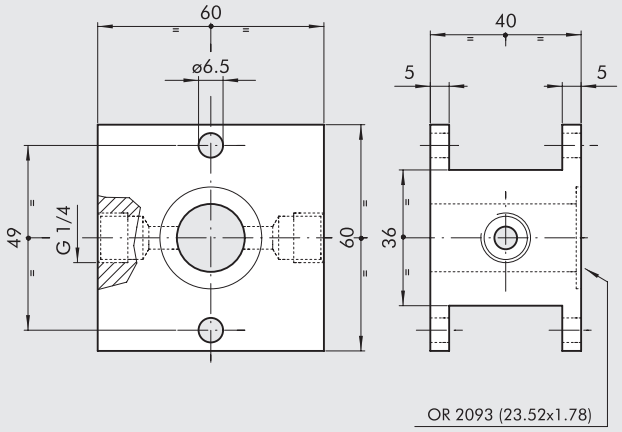

ORDERING CODES

Code	Description
8096902	New Deal air intake 3/8-1/2 special

N.B.: Supplied complete with one O-ring seal.
Material: black anodised aluminium.

TYPICAL ASSEMBLY

Fig. **1**

View from "**A**"

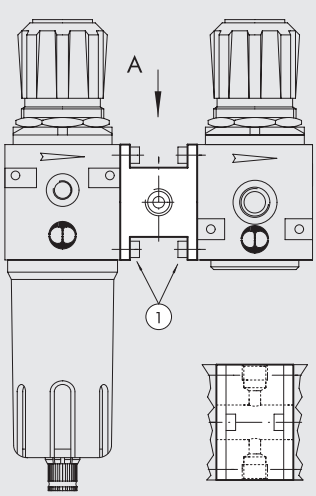

Fig. **2**

View from "**B**"

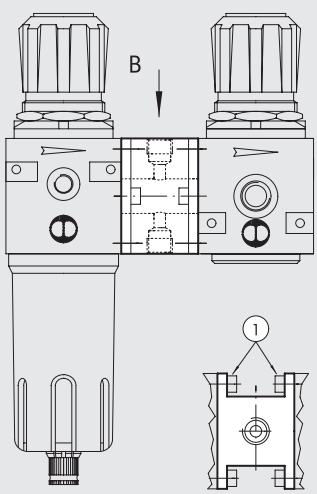

① Screws TCE M5x10

Newdeal 1" REGULATOR WITH SPECIAL GREASE

BERULUB OX 40 EP is used to lubricate the inner parts that come into contact with the flow of air oxygen-compatible grease.
In this case, the compressed air that may come into contact with oxygen is not polluted.

N.B.: MW regulators have been designed and tested for use with compressed air. No claims can be made by the user if they are used with other fluids.

N.B.: For technical data refer to the standard version.

DIMENSIONS

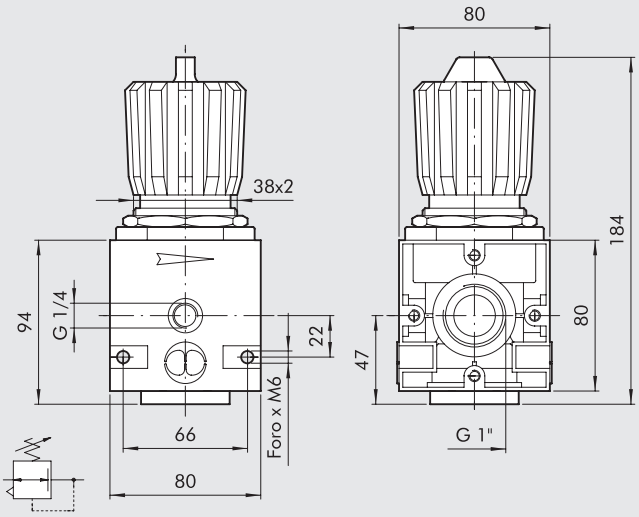

ORDERING CODES

Code	Description
88301P3	Reg ND 1 012 with special grease

IDENTIFICATION LABEL

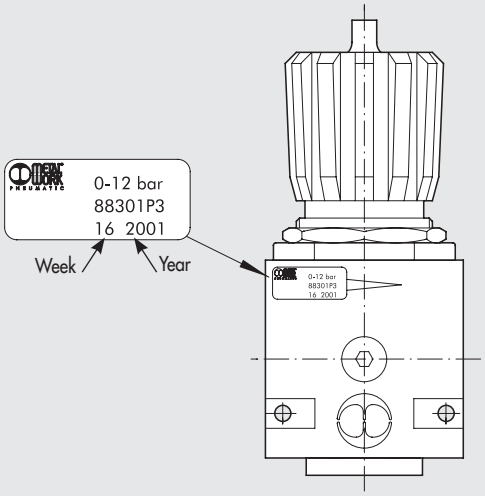

NOTES

BERULUB OX 40 EP: is a white silicone-based oil for oxygen installations, used as a lubricant in pressure reducers, valves and other equipment in healthcare sectors and for the lubrication of O-ring seals in autogenous welding systems.
At an operating temperature of 60°C, the grease pressure limit is 60 bar.
The grease temperature range is from -40 to +200° C.
Suitable for lubricating sliding and rolling elements made of metal (steel and non-ferrous metal) or synthetic material.

Please contact our sales offices for further information and quotation.

TANK-BOWL R1/2"

The SCAL bowl is made of clear plastic and used as a tank.
The cap is made of orange painted brass.

DIMENSIONS

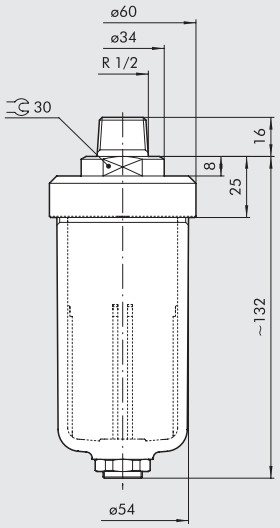

ORDERING CODES

Code	Description
8261112	R1/2 tank-bowl

N.B.: The capacity is about 164 cm^3.

NOTES

OIL CHECK VALVE WITH DRAIN Newdeal 1/4"

This module can be inserted between two New Deal 1/4" elements (e.g. a filter and a lubricator) to prevent the oil from returning due to back pressure. In this case oil is drained out via a 1/8" (R) threaded coupling.

N.B.: Use M4x75 screws to connect a regulator or filter-regulator to the lubricator.

COMPONENTS

① Black anodised aluminium body
② Anodised aluminium input plate
③ Anodised aluminium output plate
④ Adiprene lip seal
⑤ NBR seals

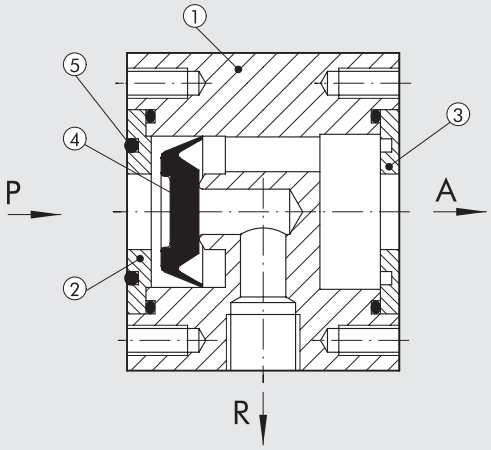

DIMENSIONS

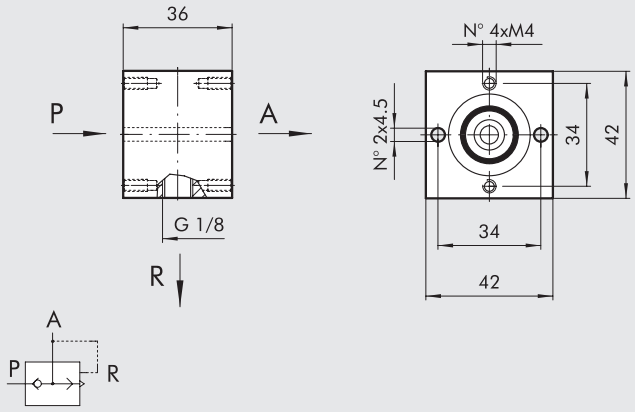

ORDERING CODES

Code	Description
8293138	VNRO New Deal 1/4

N.B.: Comes complete with 2 M4x82 tie rods and 2 connecting bushings.

Please contact our sales offices for further information and quotation.

OIL CHECK VALVE
Newdeal 3/8"-1/2"

This module can be inserted between two New Deal 3/8"-1/2" elements (e.g. a filter and a lubricator) to prevent the oil from returning due to back pressure.
1/4" (A1) couplings to be used as air intakes are mounted before the VNRO.

N.B.: Use M5x90 screws to connect a regulator or filter-regulator to the lubricator.

COMPONENTS

① Body made of black anodised aluminium
② Input spacer ring made of OT58 nickel-plated brass
③ Output spacer ring made of OT58 nickel-plated brass
④ Adiprene lip gasket
⑤ NBR seal

A1 = air intakes before VNRO

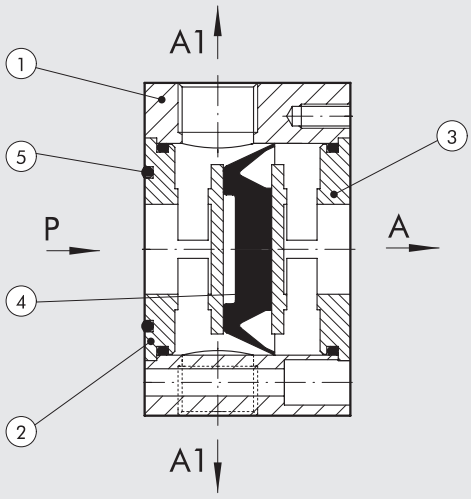

DIMENSIONS

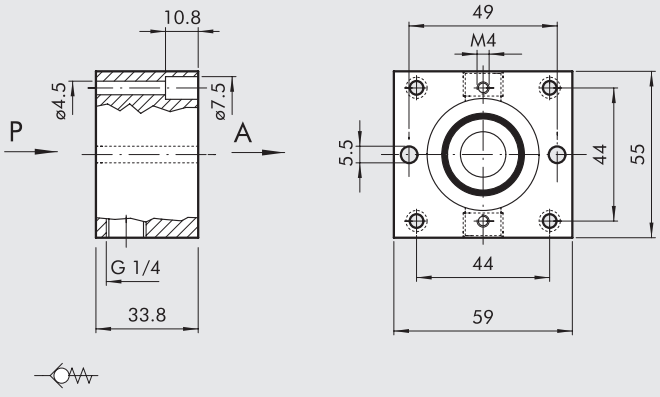

ORDERING CODES

Code	Description
8286727	VNRO New Deal 3/8-1/2

N.B.: Supplied complete with 2 M5x90 hex screws.

OIL CHECK VALVE Newdeal - ASSEMBLY

ASSEMBLY

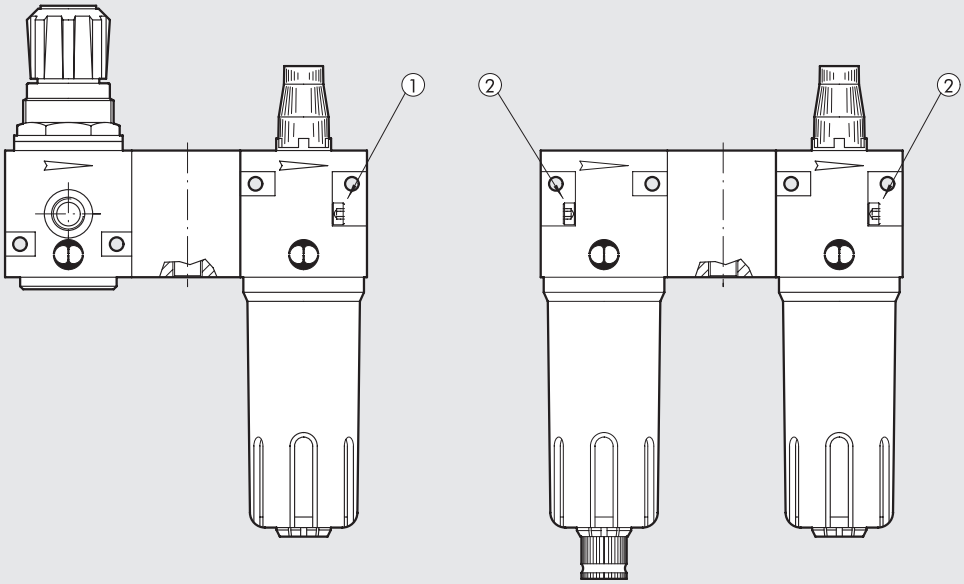

① M4x75 for ND 1/4"
M5x90 for ND 3/8"-1/2"

② M4x40 for ND 1/4"
M5x55 for ND 3/8"-1/2"

NOTES

Please contact our sales offices for further information and quotation.

METAL WORK PNEUMATIC

NOTES

SERIE SAFE AIR®

ONE SAFE AIR® is a pneumatic safety component consisting of a ONE air treatment unit arranged in series with a 3/2 electro-pneumatic valve with spool monitoring.
A pressure switch is placed between the ONE unit and the monitored valve to indicate the presence of pressure.
The safety function consists of discharging the circuit downstream the component.
A maximum pressure valve is installed after the monitored valve.
ONE SAFE AIR® comes in various configurations, all based on electric ONE units.
ONE SAFE AIR® is a component classified in category 4 according to ISO EN 13849 and is suitable for use in safety circuits up to PL = e.
The product come with:

- a voluntary examination certificate no. BVI-24-MAC-CV-0009 issued by Bureau Veritas in accordance with EN ISO 1384.

TECHNICAL DATA		
Operation	mm	Dual 3/2 monostable valve with pressure regulation
Fluid		Filtered unlubricated air (50 µm)
Operating temperature range	°C	-10 to +50
Operating pressure	bar	2.5 to 10
Delivery flow rate at 6.3 bar Δp 0.5 bar (with 1/2" input thread)	Nl/min	2900
Delivery flow rate at 6.3 bar Δp 1 bar (with 1/2" input thread)	Nl/min	3600
Flow rate on free exhaust silencer (ONE) at 6.3 bar	Nl/min	1600
Flow rate on free exhaust silencer (valve) at 6.3 bar	Nl/min	4600
TRA/TRR at 6.3 bar (safety valve)	ms/ms	36/60
TRA/TRR at 6.3 bar	ms/ms	Depending on the APR/60
Solenoid pilot		According Cnomo
Manual actuator		Monostable on solenoid pilot
Coils		30 mm side, Ø 8 hole
		2 W - 24 VDC; 3.5 VA - 24, 110, 220 VAC 50/60 Hz
		22 mm side, Ø 8 hole
		2 W - 12, 24 VDC; 3.5 VA - 24, 110, 220 VAC 50/60 Hz
		Certified EN 60204.1 and VDE 0580*
Max coil ring nut torque	Nm	1
Maximum safety pressure switch current	A	2
Maximum safety pressure switch voltage	V	250
Pressure switch contacts		Normally open (NO) and normally closed (NC)
Insulation class of the solenoid ONE		F155
Switching time		100% ED
Electrical connector		M12x1, 5-PIN 90°, according to CEI IEC 60947-5-2 *
Power solenoid ONE	W	3/0.3
Voltage solenoid ONE	V	24VDC ±10%
Type of sensor used		Hall effect
Wall fixing (max. panel thickness 10 mm)		Front, with M5x75 screws or back, with M6x70 screws.
		The screws are included in the supply.
Maximum torque screws ONE	Nm	3.5 ±0.5
Mounting position		Vertical
Direction of flow		From left to right
Weigth	kg	2.5
Compatibility with oils		See **chapter Z1**
Class of protection		IP65 with coil and connector mounted
Noise level		Max. 78 dBA with silenced relief
B10d		20 x 10^6 cycles
Categoria - ISO EN 13849		4
DC Low		High (>99 %)
CCF		90
PL - ISO EN 13849		Suitable for use in safety circuits up to PL=e

* To avoid malfunctions, we recommend using Metal Work accessories.

Please contact our sales offices for further information and quotation.

DIMENSIONS

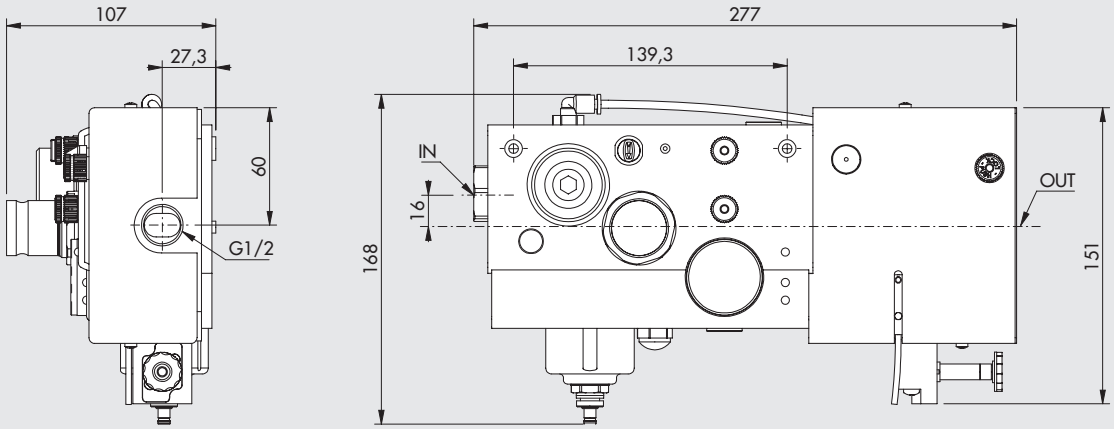

OVERALL DIAGRAM

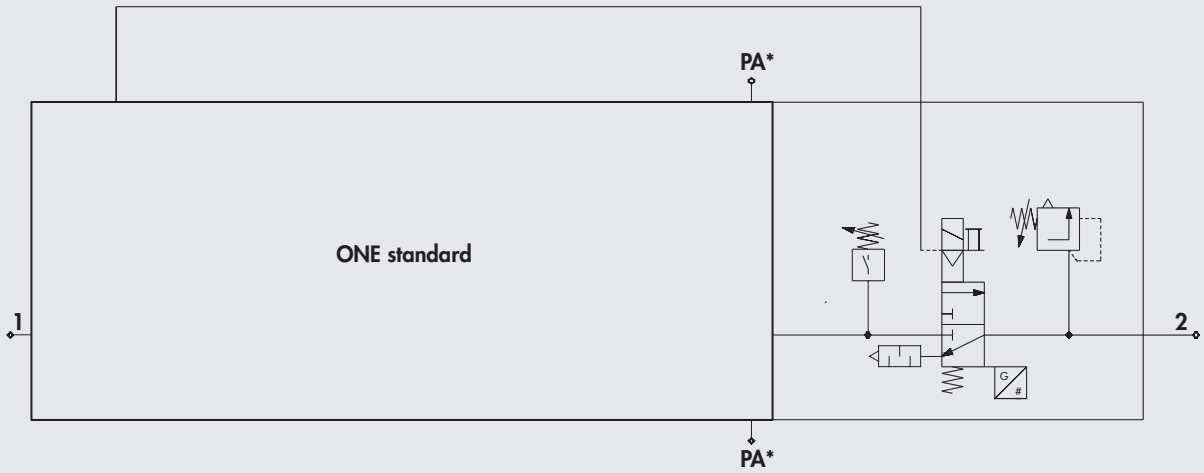

* No safety function is provided for PA.

NOTES

ORDERING CODES

	A	B	C	D	E	F	G	H	I	L	M
	ONE electric	Air intake	Degree of filtration	Clogged filter signal	Condensate drain	Pressure regulation	Valves	Pressure switch	Air outlet	Various	
EXAMPLE	54	3	2	1	1	8	7	1	0	S	1
	54 ONE electric	**3** 1/2″	**2** 20 µm	**0** NO	**0** RMSA	**4** 0.5 to 4 bar	**5** V3V manual and V3V electric	**0** NO	**0** Without bushing	**S** Safe air®	**1** M8 pressure switch (0.3 m) + M8 sensor (0.3 m)
		4 3/4″	**5** 5 µm	**1** YES	**1** auto-matic (RA)	**8** 0.5 to 8 bar	**6** V3V manual with padlock and V3V electric	**1** YES			**3** M8 pressure switch (0.3 m) + 3 wire sensor (2 m)
		5 1″					**7** V3V manual and APR electric				**6** 2 m pressure switch + M8 sensor (0.3 m)
							8 V3V manual with padlock and APR electric				**8** 2 m pressure switch + 3 wire sensor (2 m)
							9 only V3V electric				
							A only APR electric				

Please contact our sales offices for further information and quotation.

METAL WORK PNEUMATIC

A **ONE electric**

B **Air intake**
There are 3 different gas cylindrical threads: 1/2", 3/4" and 1".

C **Degree of filtration**
A cartridge with a degree of filtering of 5 µm (yellow) or 20 µm (white) is available. This value is marked on the plug.

D **Clogged filter signal**
If the filter gets so clogged up that it causes an excessive drop in pressure as the air passes through, the orange indicator will project from the body by a few millimetres.

E **Condensate drain**
RMSA: the condensate is drained out automatically only by relieving the air pull the knurled knob for having the same result.
Automatic (RA): a floating system that automatically drains the condensate out whenever the level of water in the bowl reaches the set value.

F **Pressure regulation**
There are 2 possible regulation fields.
The value is marked on the regulation knob.

G **Valves**
There are 6 different combinations.

- 5 - V3V manual and V3V electric: two V3V in series are present, one is manual the other electrical. By operating both the valve the air flow is allowed. If one or two are switched OFF, the air downstream is relieved. The electrical one can also be operated manually by reefing pushed the "TEST" button.
- 6 - V3V manual with padlock and V3V electric: like the previous, with the padlock device in "OFF" position.
- 7 - V3V manual and APR electric: One manual V3V and one soft start valve are present. When both are operated, the pressure starts to increase slowly, with a fine adjustable ramp, and when it reaches about 30-40% of the set value, the valve opens completely and the pressure rises to the set value.
- 8 - V3V manual with padlock and APR electric: like the previous, with the padlock device on the manual V3V in "OFF" position.
- 9 - V3V elettric: It's present only the electrical V3V. The valve will open if it is powered on. When the power supply is switched off, the valve closes and air downstream is relieved. The valve can also be operated manually by keeping pushed the test button.
- A - APR elettric: It's present only the electric soft start valve. Whent it is powered ON, the pressure starts to increase slowly,with a fine adjustable ramp, and when it reaches about 30-40% of the set value, the valve opens completely and the pressure rises to the set value.

H **Pressure switch**
The pressure switch has a switching contact, which means you can have a normally-open signal or a normally-close signal. It is also connected to the NC and NO LEDs which come on if the actual pressure is less or greater than the set pressure, respectively. The LEDs only come on if an electric charge is connected to them.

I **Air outlet without bushings**

L **Safe air® versions**

M **Type sensors**

PRE-SET bit

The following two types are available:

- **Regulators with fixed setting**: that can be set and locked with pressure at a fixed value. The adjusting screw can be fixed with Loctite to lock regulation.
- **Regulators with maximum pressure setting**: pressure can be regulated up to the maximum preset value. A spacer can be inserted on the adjusting screw to limit pressure.

Both types can be supplied with a standard knob or a blank unserigraphed knob.

MR regulators and FR filters-regulators can also be supplied.

N.B.: For technical data refer to the standard version.

The table below lists some of the versions currently available:

Code	Description	Type of setting	PM	PR	Notes
8295005	MR BIT 1/8 02 TF 2	TF	6	2	Without knob
8286723	MR BIT 1/8 04 TF 3	TF	6	3	Unserigraphed knob
8801703	MRA BIT 1/4 04 TF 4	TF	6	4	For water – unserigraphed knob
8286862	MR BIT 1/4 08 TF 8	TF	10	8	Unserigraphed knob
8849233	MRA BIT 1/8 01TM 1	TM	6	1	For water – unserigraphed knob
8286783	MR BIT 1/4 02 TM 1.5	TM	6	1.2	Unserigraphed knob
8295007	MR BIT 1/4 02 FC TM 1.8	TM	6	1.8	02 FC standard knob
8825972	MR BIT 1/8 04 TM 4	TM	6	4	04 standard knob
8825936	MR BIT 1/4 04 TM 4	TM	6	4	04 standard knob
8238506	MR BIT 1/4 04 TM 5	TM	6	5	Unserigraphed knob
8292123	MR BIT 1/8 08 TM 6	TM	7.5	6	06 knob
88301N3	MR BIT 1/4 08 TM 6	TM	7.5	6	06 knob

TF = fixed setting
TM = maximum setting
PM = upstream pressure
PR = regulated pressure

NOTES

The fixed or maximum upstream pressure and regulated pressure must always be defined.
The regulators must have a tolerance on the nominal value, measured without flow rate, as follows:

- for fixed setting: ± 0.1 bar
- for max pressure setting: ± 15% of the maximum regulated pressure, and in no case less than ± 0.4 bar.

PRE-SET
New deal AND Skillair®

METAL WORK PNEUMATIC

The following two types are available:

- **Regulators with fixed setting**: that can be set and locked with pressure at a fixed value.
  The adjusting screw can be fixed with Loctite to lock regulation.
- **Regulators with maximum pressure setting**: pressure can be regulated up to the maximum preset value.
  A spacer can be inserted on the adjusting screw to limit pressure.

Both types can be supplied with a standard knob or a blank unserigraphed knob.

MR regulators and FR filters-regulators can also be supplied.

N.B.: For technical data refer to the standard version.

NOTES

The fixed or maximum upstream pressure and regulated pressure must always be defined
The regulators must have a tolerance on the nominal value, measured without flow rate, as follows:
- for fixed setting: ± 0.1 bar
- for max pressure setting: ± 15% of the maximum regulated pressure, and in no case less than ± 0.4 bar.

PRESSURE SWITCH WITH TWO ELECTRIC SIGNALS

This pressure switch has two separate electric signals for opening and closing. The pressure difference for opening and closing can be regulated. The pressure switch comes with connector and fairlead.

DIMENSIONS

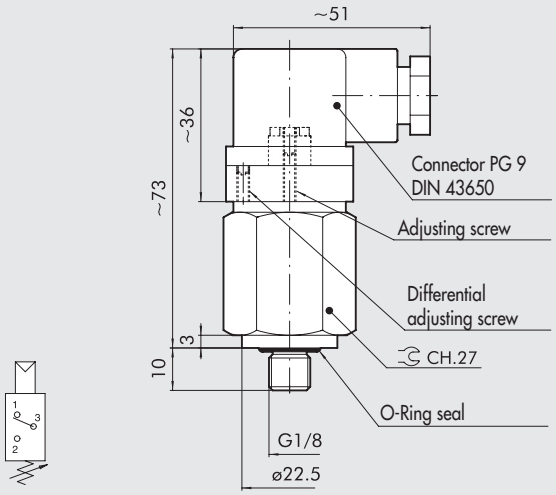

TECHNICAL DATA

Operating pressure	bar	from 1 to 10
Maximum static pressure	bar	80
Switching tolerance at 25 °C	bar	±0.4
Differential		min 10% - max 30% actual value
Temperature range	°C	from -5 to +90
Maximum voltage	VAC	250
Max. current intensity	A	6 (resistive) - 2 (inductive)
Degree of protection		IP65 DIN40050
Body		brass
Connector and fairlead	PA	6.6
Electric contacts		silver-coated copper 3µm
Diaphragm		NBR
Max. no. of switching at 25° (diaphragm)		120 cycles/1'
Max. no. of switching at 25° (piston)		60 cicli/1'
Mechanical life		1000000 cycles
Torque	Nm	17
Weight	g	140

ORDERING CODES

Code	Description
9000301	Adjustable pressure switch 1/8" PSM 10 R18 NA-NC

NOTES

PRESSURE SWITCHES

These pressure switches send an electric signal when they reach a pressure that can be adjusted by means of a screw.
The NO version sends a signal if the pressure exceeds the set value.
The NC version sends a signal if the pressure is below the set value.

DIMENSIONS

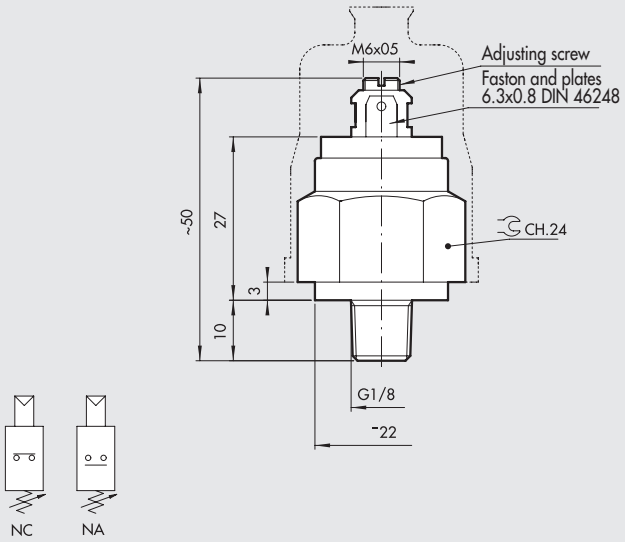

TECHNICAL DATA

Operating pressure	bar	from 1 to 10
Maximum static pressure	bar	80
Switching tolerance at 25 °C	bar	±0.5
Fixed differential at 25 °C	bar	0.2
Temperature range	°C	from -5 to +120
Type of contact		NA o NC
Maximum voltage	V AC/DC	48
Maximum working power	VA	20
Max. current intensity	A	0.5 (resistive) - 0.2 (inductive)
Rigidity test		1500 V - 10 mA -10 s
Degree of protection		IP00
Degree of protection with CAP1		IP54
Body		brass
Faston contact holding frame	PA	6.6 charged
Electric contacts		silver-coated copper 3µm
Diaphragm		FKM
Max. no. of switching at 25°		200 cycles/1'
Mechanical life		1000000 cycles
Torque	Nm	17
Weight	g	65

SAFETY CAP



ORDERING CODES

Code	Description
9000101	Adjustable pressure switch 1/8" PMN 10 NA
9000201	Adjustable pressure switch 1/8" PMN 10 NC
9000901	Safety cap CAP1

NOTES

CUSTOM FITTINGS AND ACCESSORIES SUMMARY

METAL WORK PNEUMATIC

FITTINGS

PUSH-IN FITTINGS

- RL1 Ø6 M7 Ø EXTERNAL 9.95 — G5.2

- RL34 Ø6 1/8" STAINLESS STEEL — G5.3

FITTING SERIE A, B, C, D

- FITTINGS SERIE A SPECIAL — G5.4

- FITTINGS SERIE B SPECIAL — G5.7

- FITTINGS SERIE C SPECIAL — G5.8

- FITTINGS SERIE D SPECIAL — G5.10

ACCESSORIES

DISTRIBUTOR 14x4/2 - 2x8/6 — G5.11



3+1 WAY DISTRIBUTION FRAME 1/8" — G5.12

4-WAY DISTRIBUTION FRAME M12x1.5 — G5.13

MINIATURE PRESSURE GAUGES — G5.14

RL1 Ø6 M7 Ø EXTERNAL 9.95

This fitting can be mounted on valve units that are 10 mm thick.
The pipe is retained by means of a brass clamp.

DIMENSIONS

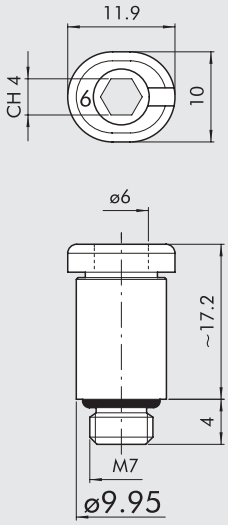

ORDERING CODES

Code	Description
2M01011	RL1 Ø6 M7 Ø external 9.95

NOTES

RL34 Ø6 1/8" STAINLESS STEEL

This fitting is ideal for corrosive environments, such as in washing systems using detergents containing nitric acid.
The coupling is made of AISI 316 stainless steel, the plastic parts are made of PBT and the gaskets of NBR.
Available also with black body and red release bush.

DIMENSIONS

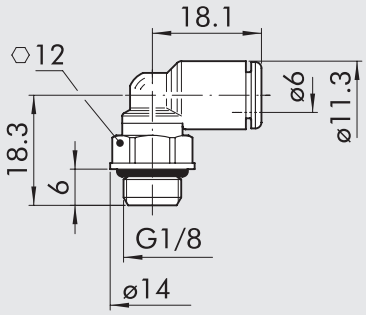

ORDERING CODES

Code	Description
8826146	RL34 Ø6 1/8

NOTES

FITTINGS SERIE A SPECIAL

The figure shows a sample application of custom-made fittings.
Owing to the fitting construction technology, the minimum production batch is 1000 pieces per order.

A4/Z M3-M5



Code	Description
8000204	A4/Z M3-M5

A4/Z 1/4-1/8 WITH OR

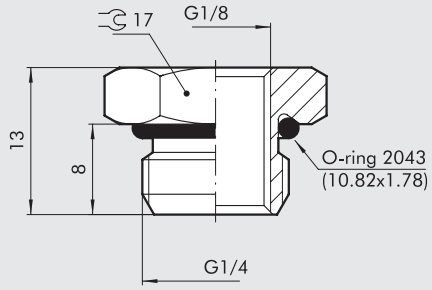

Code	Description
88259F2	A4/Z 1/4-1/8 with OR

A4/Z 3/4-1/2

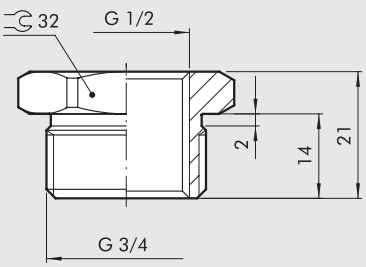

Code	Description
2151007	A4/Z 3/4-1/2

N.B.: Not nickelled

A4/Z 1-1/4

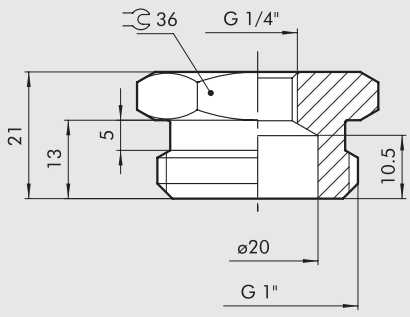

Code	Description
2151008	A4/Z 1-1/4

Please contact our sales offices for further information and quotation.

A5/Z 1/4-1/4 WITH OR

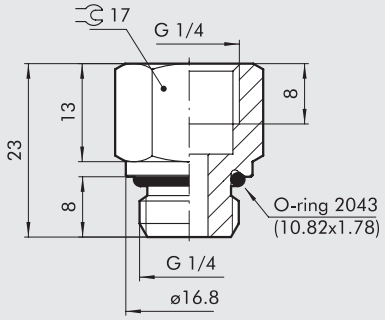

Code	Description
8825951	A5/Z 1/4-1/4 with OR

N.B.: Not nickelled

A7 M5 WITH HOLE Ø1.5

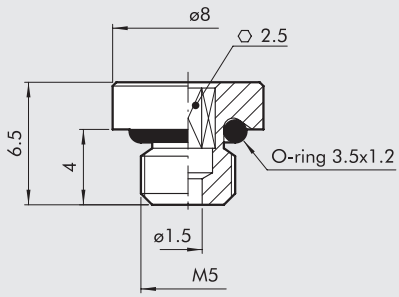

Code	Description
8000205	A7 M5 with hole Ø1.5

A7 M8

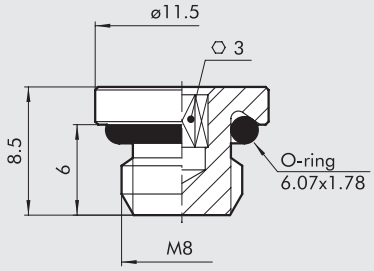

Code	Description
8286772	A7 M8

A7 M12x1.5

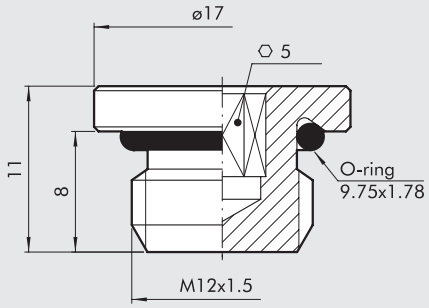

Code	Description
8826326	A7 M12x1.5

A7 3/8 WITH HOLE Ø2

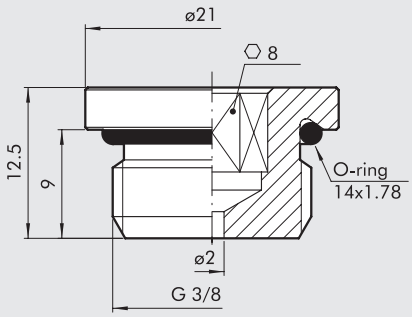

Code	Description
8000206	A7 3/8 with hole Ø2

A8 1/8-M5



Code	Description
8204738	A8 1/8-M5

A9 M8x1-1/4

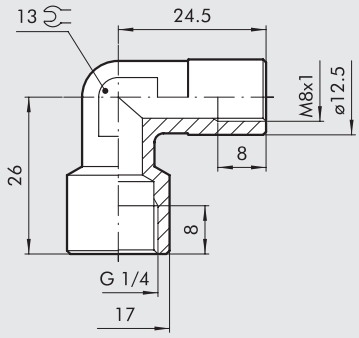

Code	Description
8000207	A9 M8x1-1/4

N.B.: Not nickelled

A9 3/8-1/2

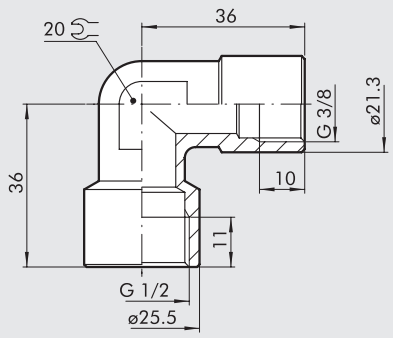

Code	Description
2109106	A9 3/8-1/2

N.B.: Not nickelled

A10 G3/8-R1/4



Code	Description
8000208	A10 G3/8-R1/4

A10 3/8-1/2



Code	Description
8849239	A10 3/8-1/2

NOTES

Please contact our sales offices for further information and quotation.

FITTINGS SERIE B SPECIAL

The figure shows a sample application of custom-made fittings.
Owing to the fitting construction technology, the minimum production batch is 1000 pieces per order.

B1/Z 4/2-1/8



Code	Description
8821206	B1/Z 4/2-1/8

B1/Z 6/4-1/8



Code	Description
8821201	B1/Z 6/4-1/8

B1/Z 8/6-M12x1.5 WITH OR

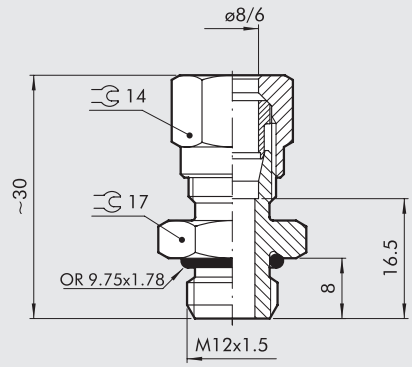

Code	Description
8826329	B1/Z 8/6-M12x1.5 with OR

NOTES

FITTINGS SERIE C SPECIAL

The figure shows a sample application of custom-made fittings.
Owing to the fitting construction technology, the minimum production batch is 1000 pieces per order.

C1 6/4 M12x1 CONICAL



Code	Description
2353002	C1 6/4 M12x1 conical

C1 6/4 M12x1.25 CONICAL



Code	Description
2353001	C1 6/4 M12x1 conical

C1/Z 8/6 M12x1.5

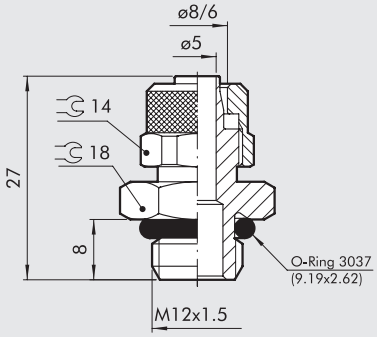

Code	Description
8826362	C1/Z 8/6 M12x1.5

C5 6/4 M12x1.25 CONICAL



Code	Description
2354001	C5 6/4 M12x1.25 conical

Please contact our sales offices for further information and quotation.

C5/F 6/4 M12x1

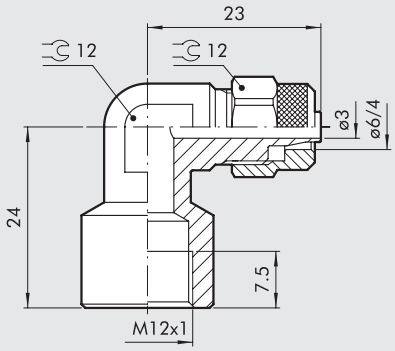

Code	Description
8826539	C5/F 6/4 M12x1

C5/F 8/6 M12x1

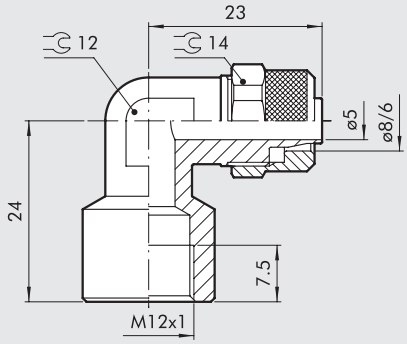

Code	Description
8826524	C5/F 8/6 M12x1

C9 8/6 - 6/4

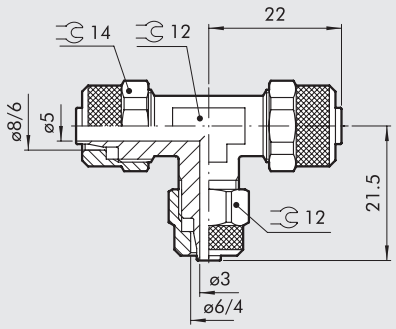

Code	Description
8260401	C9 8/6 - 6/4

C9 10/8 - 6/4

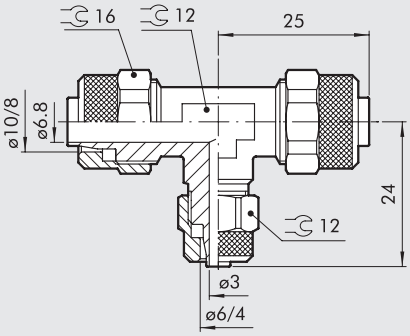

Code	Description
8849208	C9 10/8 - 6/4

NOTES

FITTINGS SERIE D SPECIAL

The figure shows a sample application of custom-made fittings.
Owing to the fitting construction technology, the minimum production batch is 1000 pieces per order.

D8/3 1/8 WITH OR

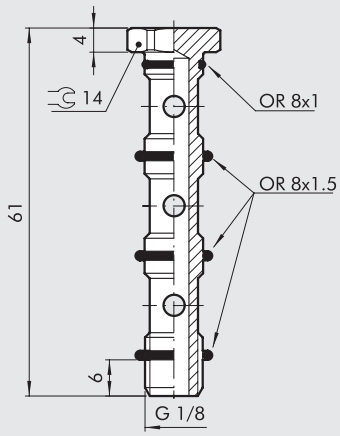

Code	Description
8045526	D8/3 1/8 with OR

N.B.: For models R28-R29

D8 M12x1.5 WITH WASHER

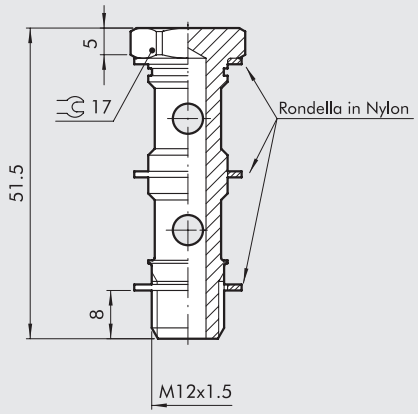

Code	Description
8294629	D8 M12x1.5 with washer

N.B.: For models R13-R14-D5-D6-D12-D17

D12 1/4 M12x1.5

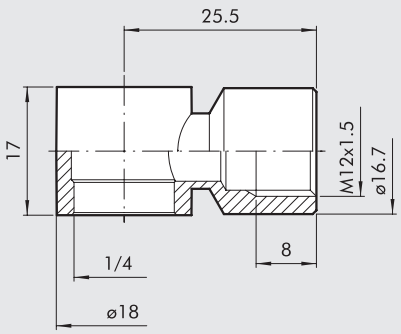

Code	Description
8826330	D12 1/4 M12x1.5

D17 (UNLOSABLE OLIVE)



Code	Ref.	Ø	F	Ch1	L	L1	E
2417103	D17	6/4	1/4	12	17	28	18

Please contact our sales offices for further information and quotation.

DISTRIBUTOR 14x4/2 - 2x8/6

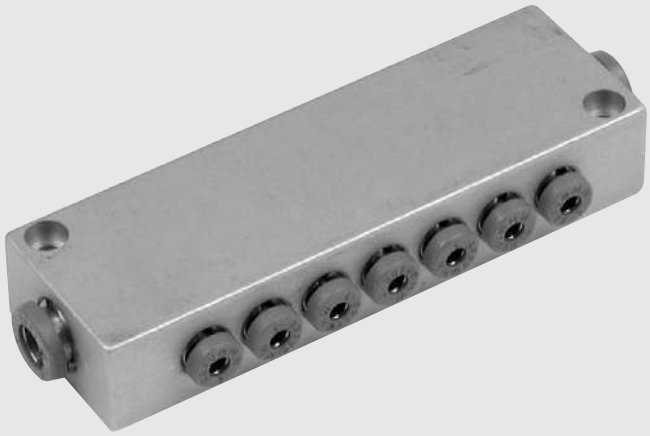

DIMENSIONS

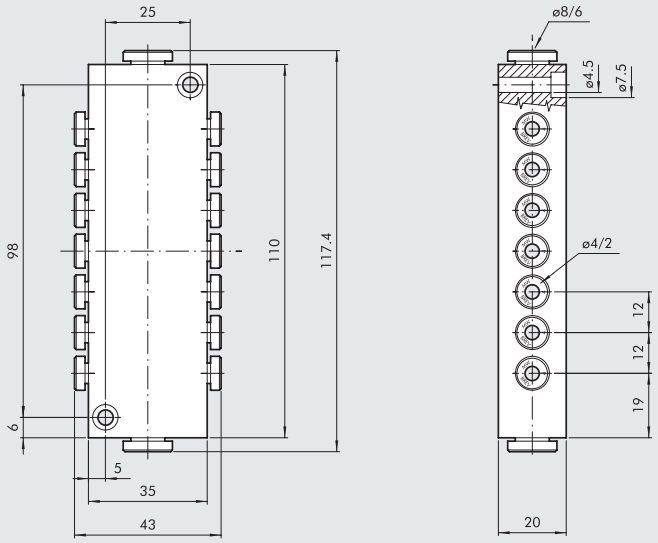

ORDERING CODES

Code	Description
8294572	Distributor 14x4/2 - 2x8/6

N.B.: Anodised aluminium

3+1 WAY DISTRIBUTION FRAME 1/8”

The A7 can be moved to another position and the desired output plugged, or it can be removed completely to give a 4-way manifold.

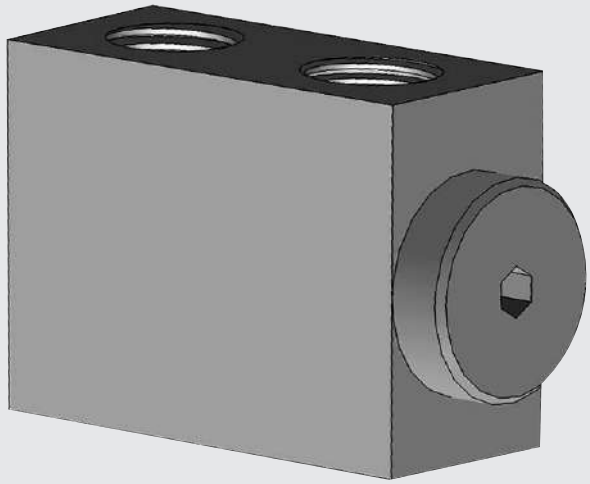

DIMENSIONS

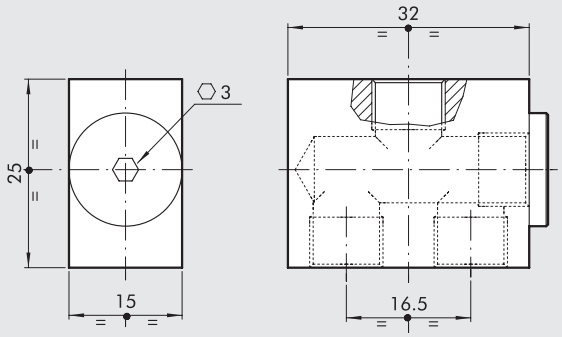

ORDERING CODES

Code	Description
8045527	Distributor 3+1 way 1/8

N.B.: Anodised aluminium

4-WAY DISTRIBUTION FRAME M12x1.5

DIMENSIONS

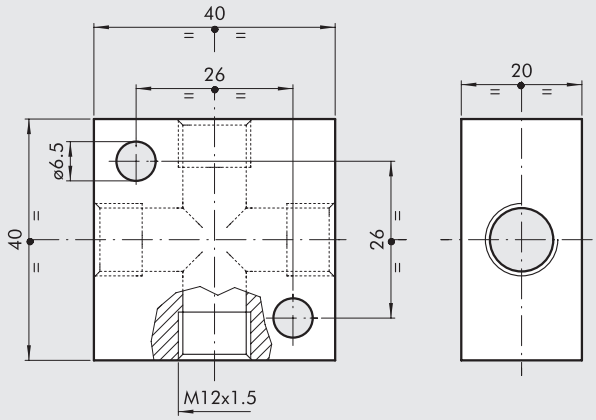

ORDERING CODES

Code	Description
8826328	4-way distribution frame M12x1.5

N.B.: Anodised aluminium

MINIATURE PRESSURE GAUGES

Despite their reduced dimensions, these miniature pressure gauges ensure high precision reading.



M5 PRESSURE SWITCH DIMENSIONS

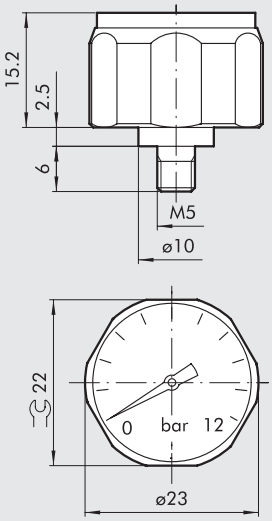

1/8" PRESSURE SWITCH DIMENSIONS

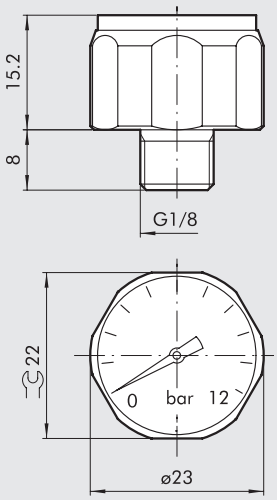

ORDERING CODES

Code	Description
9062101	Pressure switch 0-12 Ø23 M5

ORDERING CODES

Code	Description
9062100	Pressure switch 0-12 Ø23 1/8

NOTES

- Nickel-plated brass box
- Accuracy ±4% full scale
- Maximum operating pressure 12 bar (1.2 MPa)

Please contact our sales offices for further information and quotation.

METAL WORK PNEUMATIC

NOTES

NOTES

DOCUMENTATION

TECHNICAL DOCUMENTATION Z1

TECHNICAL DOCUMENTATION

PRINCIPLES OF PNEUMATICS

PRESSURE:

The ratio between a force and the surface on which it acts.

$$P = \frac{F\ (N)}{S\ (m^2)} = Pa$$

ATMOSPHERIC PRESSURE:

Equivalent to the pressure exerted on a surface at sea level at 20°C and with 65% humidity: 10.33 m H_2O; 760 mm Hg; 1.013 x 10^5 Pa.

ABSOLUTE PRESSURE:

The pressure above the absolute zero value - pressure 0 = absolute vacuum.

GAUGE PRESSURE:

The pressure referring to ambient atmospheric pressure: it is normally indicated by the pressure gauges used in pneumatic circuits.

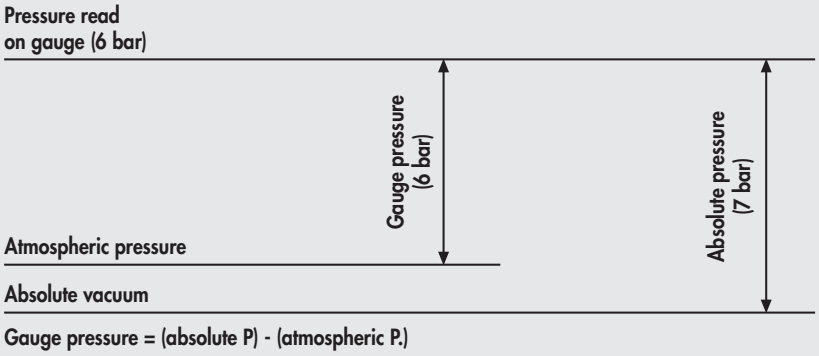

Gauge pressure = (absolute P) - (atmospheric P.)

UPSTREAM PRESSURE:

Pressure of the compressed air at the pneumatic component inlet.

DOWNSTREAM PRESSURE:

Pressure of the compressed air at the pneumatic component outlet.

ΔP PRESSURE DROP:

Difference between upstream and downstream pressure.

FLOW RATE:

The volume of air passing through a given section in a unit of time.
In pneumatics, the volume unit of measurement is Nl (Normal litre).
In practice it represents the volumetric capacity of the air referring to ambient atmospheric pressure. E.g. in a conduit of a given section, there is a mass flow of 1 litre of air (1 dm^3) at 7 bar absolute pressure. This value expressed as volume of air corresponds to 7 litres of air (7 dm^3) at the ambient atmospheric pressure (1 bar).

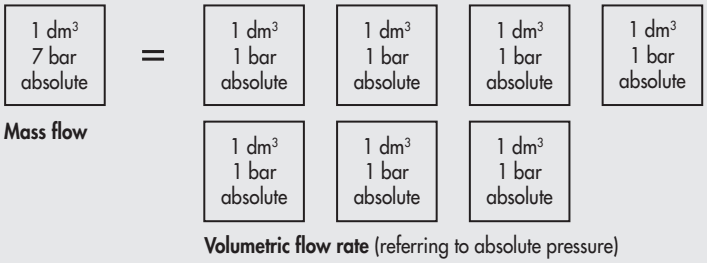

- With the same pressure, the flow rate is directly proportional to the port cross section.
- With the same cross section, the pressure is directly proportional to the flow rate.
- Without a ΔP (difference between upstream and downstream pressure), there can be no flow rate.

PASCAL'S LAW:

A confined fluid transmits externally applied pressure uniformly in all directions.



Density of air, measured to 20°C to the atmospheric pressure: 1.275 $\frac{kg}{m^3}$

METAL WORK PNEUMATIC

CALCULATING THE FLOW RATE OF A VALVE USING FLOW COEFFICIENT k_V

Coefficient k_V gives approximate values when used for compressed air.
The flow rate Q_N at a normal volume through a valve is:

Subsonic flow: $P_2 > \frac{P_1}{2}$

$$Q_N = 28{,}6 \cdot k_v \cdot \sqrt{P_2 \cdot \Delta P} \sqrt{\frac{293}{273 + t}}$$

Supersonic flow: $P_2 < \frac{P_1}{2}$

$$Q^*_N = 14{,}3 \cdot k_v \cdot P_1 \cdot \sqrt{\frac{293}{273 + t}}$$

where
Q_N = flow rate at a normal volume [Nl/min]
Q_N^* = critical flow rate at a normal volume [Nl/min]
k_V = hydraulic coefficient in $\frac{l}{min}\left(\frac{kg}{dm^3 \cdot bar}\right)^{1/2}$
P_1 = absolute upstream pressure [bar]
P_2 = absolute downstream pressure [bar]
ΔP = difference in pressure $P_1 - P_2$ [bar]
t = input air temperature [°C]

CALCULATING THE FLOW RATE OF A VALVE USING FLOW COEFFICIENTS C AND B

The flow rate Q_N at a normal volume through a valve is:

Subsonic flow: $P2 > b \cdot P_1$

$$Q_N = C \cdot P_1 \cdot \sqrt{1 - \left(\frac{r - b}{1 - b}\right)^2} \cdot \sqrt{\frac{293}{273 + t}}$$

Supersonic flow: $P2 < b \cdot P_1$

$$Q^*_N = C \cdot P_1 \cdot \sqrt{\frac{293}{273 + t}}$$

where
Q_N = flow rate at a normal volume [Nl/min]
Q_N^* = critical flow rate at a normal volume [Nl/min]
C = conductance in [Nl/min · bar]
P_1 = absolute upstream pressure [bar]
P_2 = absolute downstream pressure [bar]
r = downstream pressure ratio: upstream pressure P_2 / P_1
b = critical pressure ratio $b = P_2^* / P_1$
t = input air temperature [°C]

CALCULATING THE FLOW RATE OF A VALVE USING FLOW COEFFICIENTS C_V

The flow rate Q_N at a normal volume through a valve is:

Subsonic flow: $P_2 > 0.528 \cdot P_1$

$$Q_N = 400 \cdot C_V \cdot \sqrt{P_2 \Delta P} \cdot \sqrt{\frac{273}{273 + t}}$$

Supersonic flow: $P_2 < 0.528 \cdot P_1$

$$Q^*_N = 200 \cdot C_V \cdot P_1 \cdot \sqrt{\frac{273}{273 + t}}$$

where
Q_N = flow rate at a normal volume [Nl/min]
Q_N^* = critical flow rate at a normal volume [Nl/min]
C_V = coefficient of flow [US · GPM / p.s.i.]
P_1 = absolute upstream pressure [bar]
P_2 = absolute downstream pressure [bar]
t = input air temperature [°C]

CALCULATING THE NOMINAL FLOW RATE

The nominal flow rate Q_{Nm} of a valve, i.e. the flow at normal volume passing through a valve with (P_1 = 6 [bar] (P_1 = 7 [bar] absolute) and ΔP = 1 [bar], can be obtained from the previous formula as follows:

$$Q_{Nn} = 66 \cdot k_v$$

$$Q_{Nn} = 943.8 \cdot C_V$$

$$Q_{Nn} = 7 \cdot C \cdot \sqrt{1 - \left(\frac{0{,}857 - b}{1 - b}\right)^2}$$

Equalising the first two formulae gives: $k_v = 14.3 \cdot C_V$

• REACTIONS BETWEEN Q_{Nn} - C_V - k_v - K_V - S - de^2

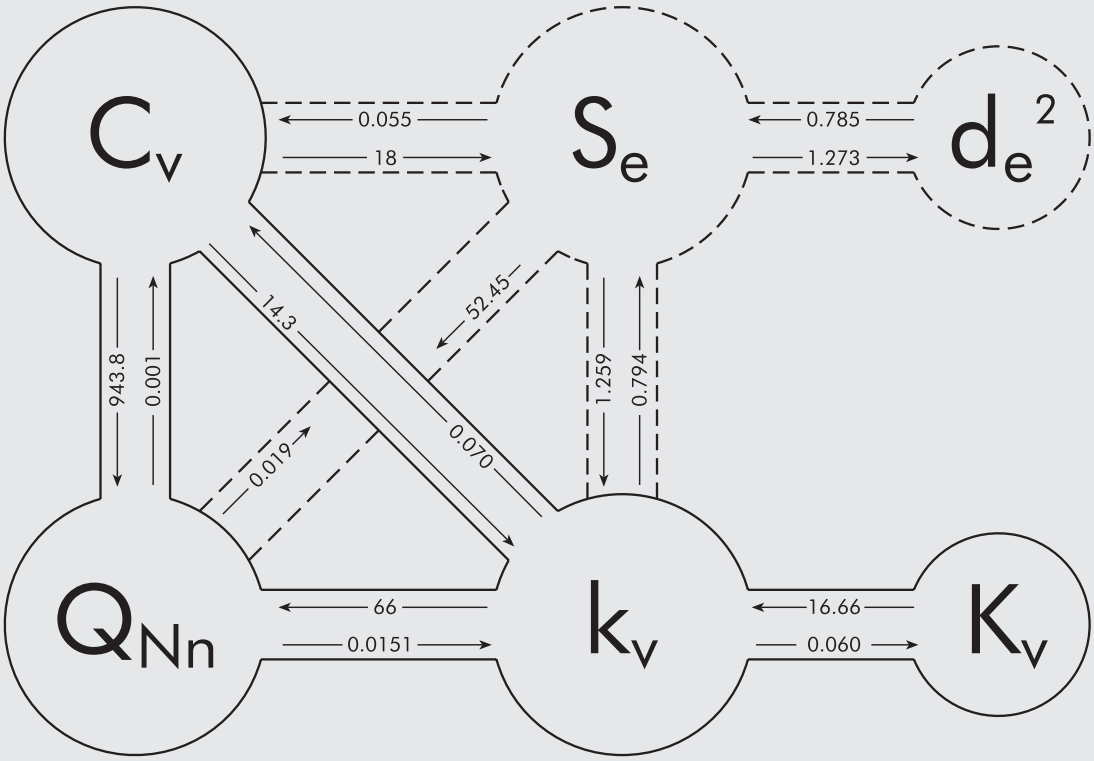

Q_{Nn} = flow rate in [Nl/min] with p_1 = 6 [bar] (P_1 = 7 [bar] absolute) and ΔP = 1 [bar]

k_v hydraulic coefficient in $\frac{l}{min}\left(\frac{kg}{dm^3 \cdot bar}\right)^{1/2}$

K_V hydraulic coefficient in $\frac{m^3}{h}\left(\frac{kg}{dm^3 \cdot bar}\right)^{1/2}$

C_V coefficient of flow [US · GPM / p.s.i.]

S_e equivalent cross section [mm^2]

$d_e^2 = S \cdot \frac{4}{\pi}$ through diameter^2 in [mm^2] obtained from the equivalent cross section

CONVERSION TABLES

TABLE 1 - CONVERSION BETWEEN SYSTEMS OF MEASUREMENT

	Technical system and CGS system	→ Multiply by	International system	← Multiply by	British system
Length	m	1	m	0.0254	in (inch)
			m	0.3048	ft (foot)
Time	s	1	s	1	s
Area	m^2	1	m^2	0.000645	in^2
			m^2	0.0929	ft^2
Volume	m^3	1	m^3	$16.39 \cdot 10^{-4}$	in^2
			m^3	0.02832	ft^2
Speed	$m \cdot s^{-1}$	1	$m \cdot s^{-1}$	0.3048	$ft \cdot s^{-1}$
Acceleration	$m \cdot s^{-2}$	1	$m \cdot s^{-2}$	0.3048	$ft \cdot s^{-2}$
Mass	$kg \cdot s^2 \cdot m^{-1}$	9.81	kg	0.4536	lb (pound)
			kg	14.594	slug = lb $f \cdot s^2 \cdot ft^{-1}$
Force	kg o kp	9.81	N	4.4483	lb f (pound)
	kg	0.981	da N = 10 N		
Torque	$kg \cdot m$	9.81	$N \cdot m$	1.356	lb $f \cdot ft$
Density	$kg \cdot s^2 \cdot m^{-1}$	9.81	$kg \cdot m^{-3}$	16.02	$lb \cdot ft^{-3}$
Specific weight	$kg \cdot m^{-1}$	9.81	$N \cdot m^{-3}$	157.16	lb $f \cdot ft^{-3}$
Work, energy	$kg \cdot m$	9.81	J	1.356	lb $f \cdot ft$
			KWh = $3.6 \cdot 10^6$ J		
Heat	Cal	4186	J	1055.1	BTU
Power	$kg \cdot m \cdot s^{-1}$	9.81	W	1.3558	lb $f \cdot ft \cdot s^{-1}$
	CV	735	W	745.7	HP
Pressure	$kg \cdot m^{-2}$	9.81	Pa	6.8948·10	p.s.i.=lb $f \cdot in^{-2}$
	$kg \cdot cm^{-2}$	$9.81 \cdot 10$	Pa		
	$kg \cdot cm^{-2}$	0.981	bar = 10^5 Pa		
Mass flow	$kg \cdot s \cdot m^{-1}$	9.81	$kg \cdot s^{-1}$	0.4536	$lb \cdot s^{-2}$
Volume flow	$m^3 \cdot s^{-1}$	1	$m^3 \cdot s^{-1}$	0.02832	$ft \cdot s^{-1}$
	Nl/min^{-1}	0.0000167	$Nm^3 \cdot S^{-1}$	0.000472	scfm
Dynamic viscosity	$kg \cdot s \cdot m^{-2}$	9.81	Pa·s	6.896	lb $f \cdot s \cdot in^{-2}$
	Po (poise-system CGS)	0.1	Pa·s		
Kinematic viscosity	$m^2 \cdot s^{-2}$	1	$m^2 \cdot s^{-2}$	0.0929	$ft^2 \cdot s^{-1}$
	St (stokes-system CGS)	10^{-4}	$m^2 \cdot s^{-2}$		
	Technical system and CGS system	← **Divide by**	**International system**	→ **Divide by**	**British system**

TABLE 2 - TEMPERATURE CONVERSION

°F = [1.8 · °C] + 32
°C = [°F - 32] · 0.55
K = °C + 273

°C = degrees Celsius

K = degrees Kelvin

°F = degrees Fahrenheit

TABLE 3 - MULTIPLES AND SUB-MULTIPLES

Name	Symbol	Value
tera	T	10^{12}
giga	G	10^9
mega	M	10^6
kilo	k	10^3
etto	h	10^2
deca	da	10
deci	d	10^{-1}
centi	c	10^{-2}
milli	m	10^{-3}
micro	μ	10^{-6}
nano	n	10^{-9}
pico	p	10^{-12}

TABLE 4 - PRESSURE UNIT CONVERSION FACTORS

To obtain the pressure for the following units, multiply the number given for the source units by the coefficient shown.

Source units	Pa	kPa	MPa	bar	mbar	kp/cm²	cm H_2O	mm H_2O	mm Hg	p.s.i.
Pa	1	10^{-3}	10^{-5}	10^{-5}	10^{-2}	$10.1972 \cdot 10^{-6}$	$10.1972 \cdot 10^{-3}$	$101.972 \cdot 10^{-3}$	$7.50062 \cdot 10^{-3}$	$0.145038 \cdot 10^{-3}$
kPa	10^3	1	10^{-3}	10^{-2}	10	$10.1972 \cdot 10^{-3}$	10.1972	101.972	7.50062	0.145038
MPa	10^6	10^3	1	10	10^4	10.1972	$10.1972 \cdot 10^3$	$101.972 \cdot 10^3$	$7.50062 \cdot 10^3$	$0.145038 \cdot 10^3$
bar	10^5	10^2	10^{-1}	1	10^3	1.01972	$1.01972 \cdot 10^3$	$10.1972 \cdot 10^3$	750.062	14.5038
mbar	100	0.1	10^{-4}	10^{-3}	1	$1.01972 \cdot 10^{-3}$	1.01972	10.1972	0.750062	$14.5038 \cdot 10^{-3}$
kp/cm²	98066.5	98.0665	$98.0665 \cdot 10^{-3}$	0.989665	980.665	1	1000	10.000	735.559	14.2233
cm H_2O	98.0665	$98.0665 \cdot 10^{-3}$	$98.0665 \cdot 10^{-6}$	$0.98665 \cdot 10^{-3}$	0.98665	10^{-3}	1	10	0.735559	$14.2233 \cdot 10^{-3}$
mm H_2O	9.80665	$9.80665 \cdot 10^{-3}$	$9.80665 \cdot 10^{-6}$	$98.0665 \cdot 10^{-6}$	$98.0665 \cdot 10^{-3}$	10^{-4}	0.1	1	$73.5559 \cdot 10^{-3}$	$14.2233 \cdot 10^{-3}$
mm Hg	133.322	$133.322 \cdot 10^{-3}$	$133.322 \cdot 10^{-3}$	$1.33322 \cdot 10^{-3}$	1.33322	$1.35951 \cdot 10^{-3}$	1.35951	13.5951	1	$19.3368 \cdot 10^{-3}$
p.s.i.	6894.76	6.89476	$6.89476 \cdot 10^{-3}$	$68.9476 \cdot 10^{-3}$	68.9476	$70.307 \cdot 10^{-3}$	70.307	703.07	51.7149	1

TABLE 5 - AIR CONSTANTS

Entity	Symbol	Value	
Dynamic viscosity	μ	$17.89 \cdot 10^{-6}$	Pa s
Kinematic viscosity	γ	$14.61 \cdot 10^{-6}$	$m^2 s^{-1}$
Density	ρ	1.225	$kg\ m^{-3}$
Specific heat at constant pressure	Cp	1.004	$KJ\ kg^{-1}\ K^{-1}$
Speed of sound	a	340.29	$m\ s^{-1}$
Gas constant	R	287.1	$J\ kg^{-1}\ K^{-1}$

TABLE 6 - CONTENT OF WATER VAPOUR IN SATURATED COMPRESSED AIR

Grams of water vapour per cubic metre (g/m^3) of air at ambient atmospheric pressure 1.013 bar (0 bar gauge pressure), saturated and compressed at the given pressures and temperatures.

	Pressure - bar												
Temperature °C	0	0.4	0.63	1	1.6	2.5	4	6.3	8	10	12.5	16	20
0	4.82	3.45	2.97	2.42	1.87	1.39	0.97	0.67	0.54	0.44	0.36	0.29	0.23
5	6.88	4.93	4.24	3.46	2.68	1.99	1.39	0.95	0.77	0.63	0.52	0.41	0.33
10	9.41	6.74	5.80	4.73	3.66	2.72	1.90	1.30	1.06	0.87	0.70	0.56	0.45
15	12.7	9.08	7.83	6.39	4.94	3.67	2.56	1.76	1.43	1.17	0.95	0.76	0.61
20	17.4	12.5	10.7	8.75	6.77	5.02	3.51	2.41	1.95	1.60	1.30	1.04	0.84
25	23.6	16.9	14.6	11.9	9.18	6.82	4.77	3.27	2.65	2.17	1.77	1.40	1.14
30	30.5	21.8	18.8	15.3	11.9	8.81	6.16	4.22	3.43	2.81	2.29	1.81	1.47
35	39	27.9	24	19.6	15.2	11.3	7.87	5.40	4.38	3.59	2.92	2.32	1.88
40	49.6	35.5	30.6	24.9	19.3	14.3	10	6.87	5.57	4.55	3.72	2.95	2.39
45	63.5	45.45	39.2	31.9	24.7	18.3	12.8	8.79	7.13	5.84	4.76	3.77	3.06
50	81	58	49.9	40.7	31.5	23.4	16.4	11.2	9.10	7.45	6.07	4.82	3.90

TABLE 7 - VOLUME FLOW UNIT CONVERSION FACTORS

To obtain volume flow for the following units, multiply the number given for the source units by the coefficient shown.

Source units	m_3/s	l/s	cm^3/s	m^3/h	m^3/min	l/h	l/min	ft^3/min (scfm)	gallone/min UK	gallone/min USA
m^3/s	1	10^3	10^6	3600	60	$3.6 \cdot 10^3$	$60 \cdot 10^3$	$2.1188 \cdot 10^3$	$13.198 \cdot 10^3$	$15.850 \cdot 10^3$
l/s	10^{-3}	1	10^3	3.6	$60 \cdot 10^{-3}$	$3.6 \cdot 10^3$	60	2.1188	13.198	15.850
cm^3/s	10^{-6}	10^{-3}	1	$3600 \cdot 10^{-6}$	$60 \cdot 10^{-6}$	3.6	$60 \cdot 10^{-3}$	$2.1188 \cdot 10^{-3}$	$13.198 \cdot 10^{-3}$	$15.850 \cdot 10^{-3}$
m^3/h	$0.277778 \cdot 10^{-3}$	0.27778	$0.277778 \cdot 10^3$	1	$16.667 \cdot 10^{-3}$	10^3	16.667	0.58856	3.6661	4.4028
m^3/min	$16.667 \cdot 10^{-3}$	16.667	$16.667 \cdot 10^3$	60	1	$6 \cdot 10^4$	10^3	35.313	219.97	264.17^{-3}
l/h	$0.27778 \cdot 10^{-6}$	$0.27778 \cdot 10^{-3}$	0.27778	10^{-3}	$16.667 \cdot 10^{-6}$	1	$16.667 \cdot 10^{-3}$	$0.58856 \cdot 10^{-3}$	$3.6661 \cdot 10^{-3}$	$4.4028 \cdot 10^{-3}$
l/min	$16.667 \cdot 10^{-6}$	$16.667 \cdot 10^{-3}$	16.667^{-6}	$60 \cdot 10^{-3}$	10^{-3}	60^{-3}	1	$35.313 \cdot 10^{-3}$	$219.97 \cdot 10^{-3}$	$264.17 \cdot 10^{-3}$
ft^3/min	$0.47195 \cdot 10^{-3}$	0.47195	$0.47195 \cdot 10^3$	1.6990	$28.317 \cdot 10^{-3}$	$1.6990 \cdot 10^3$	28.317	1	6.2288	7.4804
UK gallon/min	$75.768 \cdot 10^{-6}$	75.768^{-3}	75.768	0.27276	$4.5461 \cdot 10^{-3}$	272.76	4.5461	0.16054	1	1.2009
US gallon/min	$63.090 \cdot 10^{-6}$	$63.090 \cdot 10^{-3}$	63.090	0.22712	$3.7854 \cdot 10^{-3}$	227.12	3.7854	0.13368	0.83266	1

TABLE 8 - RECOMMENDED FLOW RATE

Maximum recommended flow rate in Nl/min for pneumatic circuit piping. Flow rate values are calculated as follows:
- pipes Ø 2 to Ø 12 with a pressure drop equal to 0.3% of operating pressure per metre of pipe.
- pipes Ø 15 to Ø 40 with a pressure drop equal to 0.15% of the operating pressure per metre of pipe.

	Inside diameter in mm - Nominal diameter in gas inches										
Pressure bar	Ø 2	Ø 4	1/8" Ø 6	1/4" Ø 8	3/8" Ø 10	Ø 12	1/2" Ø 15	3/4" Ø 20	1" Ø 25	1 1/4" Ø 32	1 1/2" Ø 40
2	3.5	19	53	110	190	300	370	750	1350	2500	4300
4	6.2	35	97	200	350	550	700	1400	2400	4500	7800
6	9	50	140	290	500	800	1000	2000	3500	6500	11500
8	11.8	66	185	380	660	1050	1300	2600	4500	8500	15000
10	14.5	82	230	470	820	1300	1600	3250	5700	10500	18500

METAL WORK PNEUMATIC

TABLE 9 - INDICATIVE AIR CONSUMPTION FOR DIFFERENT TYPES OF EQUIPMENT

Type of equipment	Consumption at full load Nl/min.	Type of equipment	Consumption at full load Nl/min.
6 mm Ø drill	300	Bench tamper	350
12 mm Ø drill	500	8 kg tamper	700
20 mm Ø drill	1150	10 mm Ø riveting machine	450
45 mm Ø drill	1650	20 mm Ø riveting machine	1000
M6 screwdriver or bolt screwer	300	4 kg chisel	380
M10 screwdriver or bolt screwer	400	6 kg chisel	500
M16 impulse screwer	1150	Small paint-spray gun	160
M25 impulse screwer	1650	Industrial paint-spray gun	500
1" Ø wheel grinder	350	1 mm Ø cleaning bellows	65
6" Ø disk grinder	1500	2 mm Ø cleaning bellows	250
9" Ø disk grinder	2100	5 mm Ø nozzle sandblasting machine	1600
Polishing machine	1200	8 mm Ø nozzle sandblasting machine	4200
1000 kg hoist	2150	Plaster sprayer	500
Spot welder	300	Heavy-duty concrete vibrator	2500
		35 kg concrete breaker	1650
		18 kg breaker	1850
		30 kg breaker	2850

DEGREE OF PROTECTION

NORMA EN 60529 E CEI 529

IP 6 5

- 6 — DEGREE OF PROTECTION AGAINST THE PENETRATION OF FOREIGN BODIES COMING INTO CONTACT WITH LIVE PARTS.
- 5 — DEGREE OF PROTECTION AGAINST THE PENETRATION OF LIQUIDS

1nd No.	DESCRIPTION	2nd No.	DESCRIPTION
0	Not protected	0	Not protected
1	Protected against solid bodies greater than Ø 50 mm	1	Protected against water falling vertically (condensate)
2	Protected against solid bodies greater than Ø 12 mm	2	Protected against drops of water falling up to 15° off the vertical
3	Protected against solid bodies greater than Ø 2.5 mm	3	Protected against rain water up to 60° off the vertical
4	Protected against solid bodies greater than Ø 1 mm	4	Protected against sprays of water from any direction.
5	Protected against dust	5	Protected against jets of water fired from any direction
6	Totally protected against dust	6	Protected against sea waves or the like
		7	Protected against the effects of immersion

CHECK COMPATIBILITY

Pneumatic products include elastomer gaskets that are made of acryl-nitrile butadiene (NBR), polyurethane or fluorocarbon rubber (FKM/FPM).
It is important for them not to come into contact with incompatible substances, which could cause them to swell or crack and subsequently malfunction.

In particular, it is necessary to check compatibility of:
- the oil used in the air compressor
- any oil used in the lubricator
- the oil or cutting fluids used on the machine, which could get into the cylinders and from there the valves.

We have drawn up a compatibility table containing a list of chemicals and elastomers, and also Hostaform®, the technopolymer most commonly used in our products. Please refer to the English webpage **https://www.metalwork.it/pneumatic-components/compatibility-materials-0001408.html** or the Italian webpage **https://www.metalwork.it/componenti-pneumatici/materiali-compatibilita-0001407.html**

The website **http://divapps.parker.com/divapps/seal/mobile/FluidCompatibility/Desktop/** of Parker Pradifa, one of our gasket suppliers, contains an interactive table defining incompatibility.

Below are some the oils that are definitely compatible with all the elastomers used with our products:
- UNI and ISO FD 22 lubricants (Energol HPL, Spinesso, Mobil DTE, Tellus Oil).
- low pressure compressor oil: SHELL CORENA OIL D 46
- high pressure compressor oil: SHELL RIMULA X OIL 40.

Please note that some ester-based synthetic oils used in compressors are extremely incompatible with NBR and polyurethane. ROTOROIL 8000 F2 is one of them.

Metal Work can provide you with further information or carry out research and tests if required.

AIR PURITY CLASS

The ISO 8573-1 standard establishes the level of air quality in terms of solid particles, humidity and oil concentration.

Example:

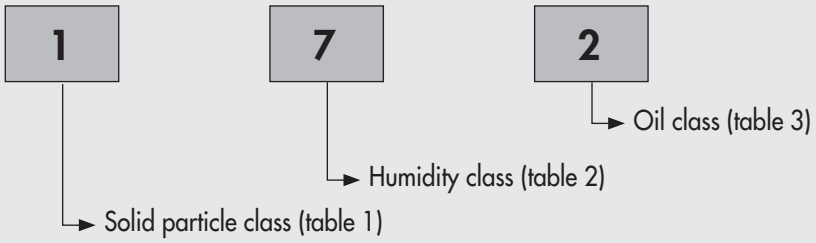

TABLE 1 - SOLID PARTICLE CLASSES

Class	Maximum number of particles for m³ Particle size, d [µm]		
	0.1 < d ≤ 0.5	0.5 < d ≤ 1.0	1.0 < d ≤ 5.0
0	As specified by the equipment user or supplier and more stringent than class 1		
1	≤ 20000	≤ 400	≤ 10
2	≤ 400000	≤ 6000	≤ 100
3	Not specified	≤ 90000	≤ 1000
4	Not specified	Not specified	≤ 10000
5	Not specified	Not specified	≤ 100000

Class	Concentration, C_p [mg/m³]
6	$0 < C_p \leq 5$
7	$5 < C_p \leq 10$
X	$C_p > 10$

TABLE 2 – HUMIDITY CLASSES

Class	Pressure dewpoint [°C]
0	As specified by the equipment user or supplier and more stringent than class 1
1	≤ -70
2	≤ -40
3	≤ -20
4	≤ +3
5	≤ +7
6	≤ +10

Class	Concentration of liquid water, C_W [g/m³]
7	$C_W \leq 0.5$
8	$0.5 < C_W \leq 5$
9	$5 < C_W \leq 10$
X	$C_W > 10$

TABLE 3 – OIL CLASSES

Class	Oil concentration (aerosol, liquid, vapour) [mg/m³]
0	As specified by the equipment user or supplier and more stringent than class 1
1	≤ 0.01
2	≤ 0.1
3	≤ 1
4	≤ 5
X	> 5

PNEUMATIC SYMBOL

DISTRIBUTION AND REGULATION

	2-way/2 positions valve (2/2) normally closed
	2-way/2 positions valve (2/2) normally open
	3-way/2 positions valve (3/2) normally closed
	3-way/2 positions valve (3/2) normally open
	3-way/2 positions valve (3/2) NC-NO
	5-way/2 positions valve (5/2)
	5-way/3 positions valve (5/3) pressurized centres
	5-way/3 positions valve (5/3) open centres
	5-way/3 positions valve (5/3) closed centres
	Unidirectional valve
	Check valve with spring
	Circuit selector valve (OR element)
	Quick-release valve
	Flow regulator with variable choke
	Unidirectional flow regulator with variable throat

	Sequence valve
	Pressure reducer without blowoff valve
	Pressure reducer with blowoff relief valve
	Pressure piloted reducer with blowoff relief valve
	Shutoff valve
	Dual pressure valve (AND element)
	Progressive pneumatic starter (APR)
	Progressive solenoid starter (APR)
	Progressive pneumatic starter (APR) (SK 100 only)
	Progressive solenoid starter (APR) (SK 100 only)
	3-way shutoff valve (V3V) with lockable control
	3-way shutoff valve (V3V) with pneumatic control
	3-way shutoff valve (V3V) with solenoid control
	2/2 progressive pneumatic valve (VAP) (SK 100 only)
	2/2 progressive solenoid valve (VAP) (SK 100 only)

CONTROLS

	Manual control
	Manual pushbutton control
	Manual lever control
	Manual control with 2-position lever
	Manual control with 3-position lever
	Manual pedal-operated control
	Mechanical control with ferrule
	Mechanical control with sensitive ferrule
	Mechanical control with spring
	Mechanical control with roller lever

	Mechanical control with sensitive roller lever
	Mechanical control with unidirectional roller lever
	Mechanical control with drawer
	Electrical control
	Solenoid control
	Solenoid, pilot-assisted control
	Piezoelectric control
	Pneumatic control
	Mechanical stop
	Release device

METAL WORK PNEUMATIC

TRANSMISSION AND PREPARATION

	Pneumatic pressure source
	Operating line
	Pilot line
	Discharge line
	Flexible line connection
	Electric cable
	Line connection (welding, screwing)
	Line connection (welding, screwing)
	Crossing of unconnected lines
	Discharge point
	Discharge hole without connection
	Discharge hole with connection
	Power pick-up point with closing cap
	Power pick-up point with port
	Quick-fit coupling without unidirectional valve
	Quick-fit coupling with unidirectional valve
	Quick-fit coupling (de-coupling with open terminal section)
	Quick-fit (de-coupling with closed terminal section)
	1-way swivel coupling
	3-way swivel coupling
	Silencer
	Tank
	Filter
	Condensate separator with manual discharge
	Condensate separator with automatic discharge
	Filter with condensate separator with manual discharge
	Filter with condensate separator with automatic discharge
	Lubricator
	Pressure gauge
	Pressure switch
	Optical tester
	FRL+pressure gauge maintenance unit
	FRL+pressure gauge simplified maintenance unit
	FR+pressure gauge maintenance unit

TRANSFORMATION

	DE magnetic cylinder with adjustable bilateral cushioning		SE magnetic cylinder
	DE magnetic twin-rod cylinder with adjustable bilateral cushioning		Hydraulic brake with adjustment in one direction only
	DE magnetic twin-rod cylinder with adjustable bilateral cushioning		Hydraulic brake with adjustment in both directions
	DE magnetic twin-rod cylinder with adjustable bilateral cushioning-single through rod		Cushion
	DE magnetic cylinder with adjustable bilateral cushioning + DZB mechanical lock		Pressure multiplier for fluids with identical characteristics
	DE magnetic cylinder with adjustable bilateral cushioning + DZBA mechanical lock		Pressure multiplier for fluids with different characteristics
	DE cylinder with adjustable bilateral cushioning, through-rod		Pneumatic/hydraulic transducer
	DE through-rod cylinder		Constant volume compressor
	DE magnetic cylinder with adjustable bilateral cushioning, through-rod		Constant volume pneumatic motor, unidirectional flow
	DE magnetic cylinder, through-rod		Constant volume pneumatic motor, bidirectional flow
	DE cylinder		Variable volume pneumatic motor, unidirectional flow
	DE cylinder with cushioning		Variable volume pneumatic motor, bi-directional flow
	DE magnetic cylinder		Rotary pneumatic motor
	SE cylinder		Cylinder with adjustable single cushioning

NOTES

ENVIRONMENT AND ENERGY SAVING

Metal Work SpA has always placed great emphasis on environmental issues, and now – following creation of the Environmental Management System and receipt of UNI EN ISO 14001 certification in 2000 – we wish to make our commitment public.

Metal Work is fully committed to:

A. complying with all the applicable laws and regulations
B. continuously seeking to reduce emissions and waste
C. continuously seeking to reduce the consumption of water, energy and raw materials
D. adopting technological processes having the lowest environmental impact
E. training all employees in order to encourage the adoption of measures to safeguard the environment.

Metal Work products are sold all over the world. Being pneumatic products, they intrinsically consume large amounts of energy. We are aware of this and we feel it our responsibility to provide our customers with information to help them reduce energy wastage.

At the end of their working life, our products have to be disposed of. Even at this final stage, it is important to note that most of their parts can be recycled, which is why we provide you with information to help you to dispose of them correctly.

MATERIALS USED IN METAL WORK PRODUCTS

Nearly all Metal Work **products** are designed so that at the end of their working life they can be taken apart to separate the constituents. Only certain small subassemblies are difficult to dismantle, so they have to be disposed of still assembled. The materials of which our products are made are listed in detail on the first page of the catalogue for each family, under the heading "Component Parts". There is a full list and a cutaway drawing of a typical product in each family. The choice of using selected materials and lubricants has contributed to position Metal Work products in the class of NON-HAZARDOUS SPECIAL WASTE at the end of their useful life, in accordance with Directive 91/689/CE. This condition only applies if the products have not been contaminated during operation by pollutants included in the list of hazardous substances.

Product **packaging** adopts the following criteria:

- Each product comes in a cardboard box. The cardboard is corrugated and made of recycled material. The printed words cover a small area to save as much ink as possible.
- When cardboard boxes cannot be used as they do not provide enough protection or the right shape is unavailable, some products are protected by sheets of polyethylene bubble wrap.
- Small products are contained in clear polyethylene bags.
- Gaskets are contained in black polyethylene bags as they are sensitive to light.
- Pneumatic cylinders are protected by polyethylene mesh.
- The single products are then placed in larger boxes, which are also made of recycled corrugated cardboard and have a white paper film on the outside.
- The boxes and loose products are held in position inside the larger box by means of crumbled sheets of paper which are fully recycled and can be reused.
  As a result of this policy, 95% of the packaging material is comprised of cardboard, and 80% of this is obtained from recycled paper.

CONAI

Metal Work is a member of CONAI, the Italian Packaging Consortium, set up to promote the recovery and recycling of packaging material. It must be highlighted that Metal Work is required by law to pay CONAI an environmental contribution of € 30/tonne for paper and cardboard, and € 72.30/tonne for plastic packaging (2008 figures). Clearly, it is in the interest of all of us to reduce the weight of packaging, recycle it and prefer paper to plastic.

Below is a list of materials and general indications on how to dispose of them.

METAL
- Aluminium
- Cast aluminium alloy
- Cast zamak
- Steel
- Brass
- Sintered bronze

These materials can be taken to a recycling plant as scrap.

PLASTIC
- POM - Acetal Polyoxymethylene Copolymer: Hostaform® and others
- PA - Polyamide polymer/Nylon: Grilamid, Durethaned, Zytel and others
- ABS - Acrylonitrile butadiene styrene polymer: Novodur and others
- PET - Polyester resin: Rynite® and others
- PPS - Poly-Phenylene Sulphide: Fortron®
- PTFE - Polytetrefluoroethene

These materials can be taken to a recycling plant.

ELASTOMERS
- NBR
- Polyurethane
- FKM/FPM

Since they are only used in our products in small quantities, are greasy and, after long use, are also covered in metal filings, these materials are not taken to a recycling plant but are classified as **non-hazardous special waste.**

OTHERS
- Magnets (neodymium, plastoferrite, plasto-neodymium)
- PC boards
- Magnetic sensors
- Coils (PA+steel+copper)
- Power cables (PA or PU + copper)

These materials, which are generally present in our products in small quantities, are classified as **non-hazardous special waste** and are normally accepted as **urban waste.**
Large amount of power cables and coils can be **sold** as **scrap** to companies specialised in recycling power cables.

PACKAGING
- Cardboard
- Polyethylene bubble wrap – LDPE
- Polyethylene mesh – LDPE
- Clear or black polyethylene bags

These materials can be **fully recycable** and can be **taken to disposal centres** for paper and plastic.

SYMBOLS LABELLING OF MATERIALS AND PACKAGING

Labelling to identify the packaging material is optional, and is a self-declared statement by the manufacturer.
The normative reference for handling used packaging is Directive 94/62/CE as revised by Directive 2004/12/CE.
Other interesting international standards are:

- EN ISO 1043:2002: Plastics – Symbols and abbreviations
- EN ISO 11469:2001: Plastics – Identification and marking of plastic products
- EN ISO 14021:2002: Environmental labels and declarations – Self-declared environmental claims.

Mobius cycle. This means the material can be recycled.

X %

This means that the material, which can be recycled, contains X % by mass of recycled material.

The RESY symbol, together with the manufacturer's identification code, certifies that the cardboard packaging possesses the requirements to be recycled by the Paper Mills Association.

Marks indicating the material used for packaging and liquid containers.
NO LONGER USED.

Material identification abbreviation and number (Resolution 97/129/CE) + graphic symbol (CR 14311:2002)

MATERIAL	ABBREVIATION	NUMBER	SYMBOL
Polyethylene terephthalate	PET	1	
High-density polyethylene	HDPE	2	
Polyvinyl chloride	PVC	3	
Low-density polyethylene	LDPE	4	
Polypropylene	PP	5	
Polystyrene	PS	6	
Other technopolymers		7	
Corrugated cardboard	PAP	20	
Non-corrugated cardboard	PAP	21	
Paper	PAP	22	
Steel FE	40		
Aluminium	ALU	41	
Other metals		42	
Wood	FOR	50	
Colourless glass	GL	70	
Green glass	GL	71	
Brown glass	GL	72	
Paper and cardboard/various metals	C/*	80	
Paper and cardboard/plastic	C/*	81	
Paper and cardboard/aluminium	C/*	82	
Paper and cardboard/tin	C/*	83	
Paper and cardboard/plastic/aluminium	C/*	84	
Paper and cardboard/plastic/aluminium/tin	C/*	85	
Plastic/aluminium	C/*	90	
Plastic/tin	C/*	91	
Plastic/various metals	C/*	92	
Glass/plastic	C/*	95	
Glass/aluminium	C/*	96	
Glass/tin	C/*	97	
Glass/various metals	C/*	98	

*: Abbreviation of predominant material. Examples:
C/PAP 84: material comprised of paper or cardboard, plastic and aluminium, with a predominance of paper or cardboard (brick).
C/LPDE 90: material comprised of plastic and aluminium, with a predominance of plastic (coffee pack).

METAL WORK PNEUMATIC

ENERGY SAVING

Compressed air is clean energy but producing it requires electricity, which costs money and consumes environmental resources.
Below are some indicative averages of the energy ratio of compressed air to its sources.
The values vary as a function of the output of the compressor and other factors.

Specific power:	6.5	W/Nl/min	i.e. it takes 6.5 W to generate 1 normal litre per minute of compressed air.
Oil factor:	0.254	lit oil/kWh	i.e. 0.254 litres of oil are burnt to produce 1 kW/h.
	0.00165	lit oil/Nl/min/h	i.e. 0.00165 litres of oil are burnt to produce 1 Nl/min of compressed air.
CO_2 factor:	0.702	kg/kWh	i.e. 0.702 kg of carbon dioxide is dispersed into the environment to produce 1 kWh.
	0.00456	kg/Nl/min/h	i.e. 0.00456 kg of carbon dioxide is dispersed into the environment to produce 1 Nl/min. for 1 hour.
Cost of air:	0.00065	€/Nl/min/h	i.e. it cost € 0.00065 to generate 1 normal litre/minute of compressed air for one hour.

EXAMPLE:

Flow rate 100 Nl/min, for **10 hours a day** for **230 days** a year:

Power:	6.5 x 100 Nl/min = **650 W**
Electricity consumption:	650 W x 10 hours/day x 230 days/year = 1495.000 Wh = **1495 KWh/year**
Oil burnt equivalent:	0.254 l/kWh x 1495 kWh = **380 litres/year**
Carbon dioxide emissions:	0.702 kg/kWh x 1495 kWh = **1050 kg/year**

THE 4 PILLARS OF SAVING

Considerable energy savings can be achieved by following four simple rules

1 Choose the correct cylinder size

Pneumatic actuators, especially cylinders, consume at each stroke an amount of air that depends on the pressure and the bore.
Using the right cylinder at the right pressure allows considerable saving.
A cylinder that requires a smaller flow enables you to associate valves, fittings and pipes of a smaller size, thereby saving on the cost of the products.
Example
Cylinder Ø 80 mm, stroke 200 mm, 6 bar,
12 cycles/min, 16 hours a day, 230 days a year.
Consumption: 144 Nl/min → 940 W → 3460 kWh/year → 880 litres of oil → 2428 kg of CO_2.
If you pay € 0.10/kWh: → € 346/year.
If the cylinder has been oversized by mistake and a 63 mm cylinder could be used in its place, the figure would be:
Consumption: 90 Nl/min → 584W → 2140 kWh/year → 546 litres of oil → 1502 kg of CO_2.
If you pay € 0.10/kWh: → € 214/year.
SAVE: € 132 a year.

2 Use economizers

If in a cylinder you require a thrust in one direction only, e.g. piston rod extension, and a lower thrust and pressure is sufficient in the other direction, you can save a lot of energy by mounting an economizer valve.
It reduces feed pressure to the cylinder chamber and allows air to flow freely during discharge.
Example
If, in the previous example, you install on one of the ports of the Ø 80 cylinder an econimizer that reduces the pressure from 6 to 12 bar,
you **SAVE: € 115 a year.**

METAL WORK PNEUMATIC

provides easy-to-use software called **EASY SIZER...**

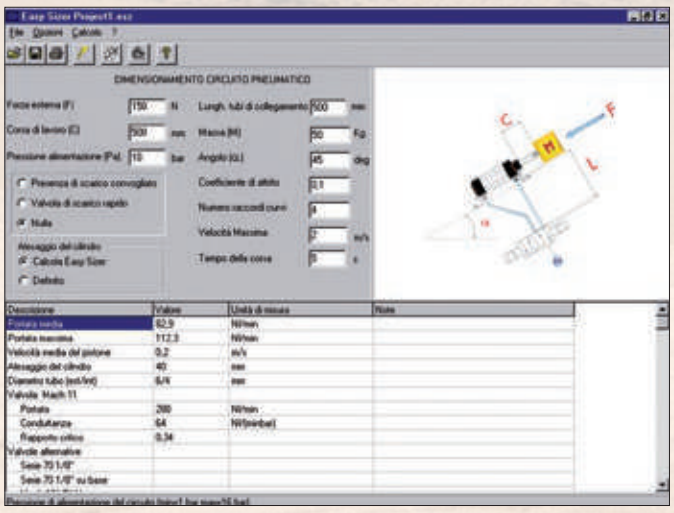

...for sizing pneumatic cylinders, valves, pipes and units.
You can download it from www.metalwork.it

METAL WORK PNEUMATIC

proposes a series of **miniature economizers...**

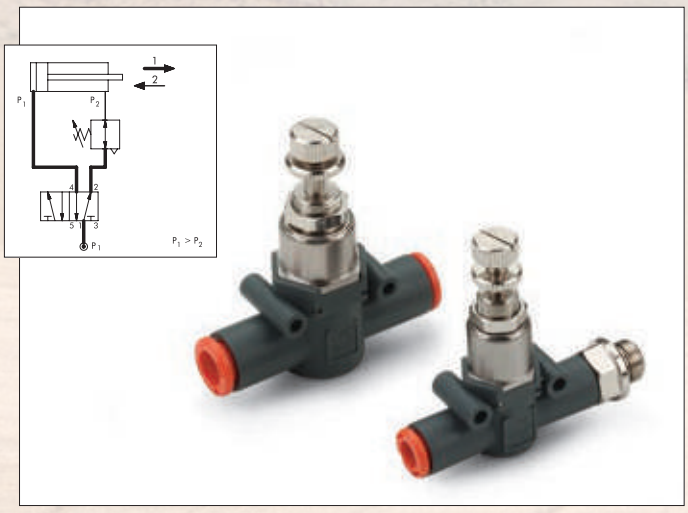

...to mount straight onto the cylinder port or in line on the pipe.
See the line-on-line catalogue, series RML-RMS-RMC.

3 Eliminate air leaks

Compressed air leaks in the system waste a large amount of money.
The problem is that, besides electricity consumption, the compressor undergoes more stress than necessary, even when the machine is not in operation.
Two things can be done to reduce this wastage.
• Periodically check for air leaks.
This should be done when the machinery is not running, so that the leaks can be heard.
So-called sniffers can be bought from the trade to help you detect even small leaks.
• Fit solenoid valves on each machine.
These cutout devices seal off the flow of air when the machine is off.
This prevents accidental leaks and wastage for production requirements when cleaning using compressed air.
Example
In a system operating at 6 bar, there is a leak equivalent to that of a 2 mm hole.
The air flow, in this case, is 220 Nl/min.
The leak is 24 hours a day all year round.
Consumption:
220 Nl/min → 1430 W → 12526 kWh/year → 3180 litres of oil → 8.8 tonnes CO_2.
If electricity costs € 0.10/kWh → you **WASTE € 1252 a year**.

4 Design and operate the air distribution system correctly

The rules of good practice must be followed when designing, developing and operating a pneumatic system.
The followings aspects should be taken into consideration.
• Size pipes so as not to have excessive load losses.
See Table 8 – RECOMMENDED FLOW RATE on page **Z1**.6 in the catalogue.
• Size the compressor and the system for the minimum required pressure - pressure that is too high requires additional energy, which is then lost.
If a system contains a few components requiring a higher pressure, you can use a pressure multiplier, or booster, for them only.
• Deactivate compressors when not used.
Even when not in use, they consume 30-40% of the full power.
Example
A system operates at 7 bar. The average air consumption is 10 Nm^3/min for 16 hours a day for 230 days a year.
But it would be enough to use air at 6 bar.
Reducing the pressure from 7 to 6 bar gives the following:
Air saving of:
1.42 Nm^3/min. → 9.29 kW => 34100 kWh/year → 8680 litres of oil → 24 tonnes CO_2.
If electricity costs 0.10 €/kWh: → you **SAVE € 3410 a year**.

METAL WORK PNEUMATIC

offers shut-off **solenoid valves...**

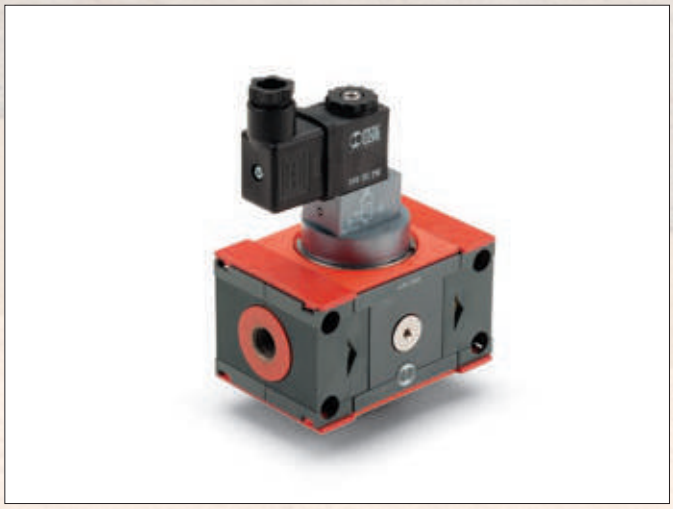

...of the V3V type, with instant opening, or the APR type, with progressive start up.
Refer to the catalogue of Skillair, New Deal and One units.

METAL WORK PNEUMATIC

proposes high-efficiency pressure multipliers **boosters...**

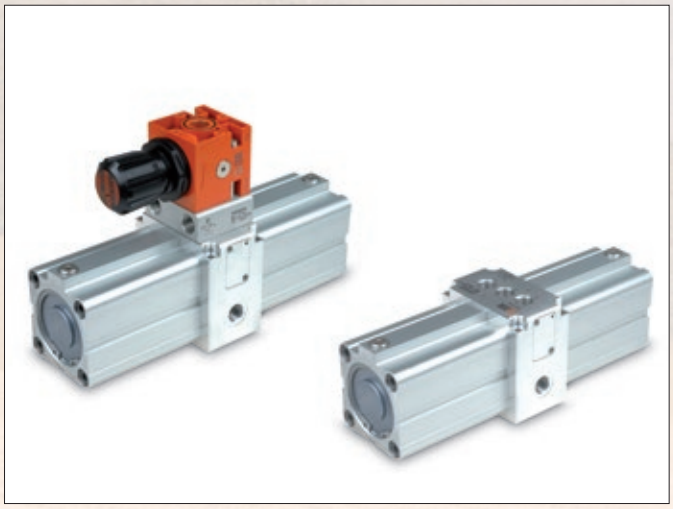

...that can be used to increase the air pressure only for components that effectively require it.

PNEUMATICS AND POTENTIALLY EXPLOSIVE ATMOSPHERES: EUROPEAN DIRECTIVE 2014/34/EU (ATEX)

As from 1st July 2003, all products marketed in the European Union and intended for use in potentially explosive atmospheres must be approved in compliance with European Directive 2014/34/EU, also known as ATEX.

This new directive also applies to non-electrical components, such as pneumatic controls, for which approval is mandatory.

The main innovations introduced by the new directive 2014/34/EU are:

- Inclusion of non-electrical equipment and devices, such as pneumatic cylinders.
- Each device is assigned a category associated to certain potentially explosive atmospheres.
- All products must bear the CE marking.
- Instructions for use and declarations of conformity must be supplied for each product sold for use in potentially explosive atmospheres.
- Products intended for use in potentially explosive atmospheres due to the presence of dust come under this directive, as do products destined for areas in which hazardous gases are present.

A potentially explosive atmosphere may contain gases, mists, vapours or dust that form in factories or other areas in which flammable substances are continuously or occasionally present.
An explosion can occur when flammable substances and a source of ignition are present simultaneously in a potentially explosive atmosphere.

A source of ignition can be:

- of electrical origin (electric arcs, induced currents, heat generated by the Joule effect)
- of mechanical origin (hot surfaces generated by friction, sparks generated by impact between metal bodies, electrostatic discharge, adiabatic compression)
- of chemical origin (exothermic reactions between materials)
- a naked flame

Products subject to approval are all those which, during normal use or due to a malfunction, present one or more sources of ignition for potentially explosive atmospheres.

Responsibility lies both with the manufacturer of the device and whoever installs it in equipment that is to operate in a hazardous atmosphere. This requires co-operation between the parties to ensure correspondence between the category of device and the hazardous area in which it is to operate.

The manufacturer of the device must comply with the specifications and classify the product according to directive 2014/34/EU. The manufacturer of the equipment, who knows the area in which the device will be operating, must select a suitable device according to the category, pursuant to directive 99/92/CE.

THE COMBINATION OF ELECTRICAL AND MECHANICAL PARTS

According to Directive 2014/34/EU, both electrical and mechanical devices are subject to approval.
It is important to note that the component which is classified in the lowest category defines the category of the entire device of which it is a part.
If, for example, the coil is marked Ex II 2 ... and the valve is marked Ex II 3... the coil + valve assembly must not be put into service in zone 1 or 21, only in zone 2 or 22.

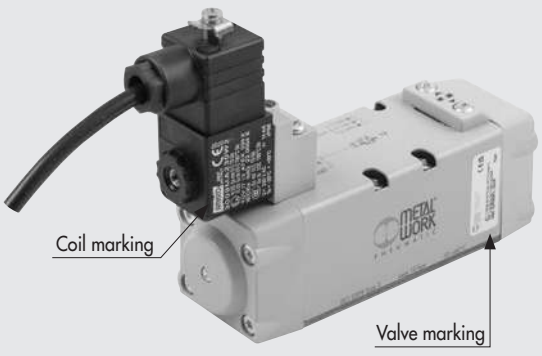

GROUPS AND CATEGORIES

Devices for use in potentially explosive areas are divided into the following groups:
- GROUP I: devices used in mines
- GROUP II: devices used in surface installations

DEVICES FOR MINES GROUP I

Explosive gas content	No limit	Below a set limit
Category of device to be used according to 2014/34/EU	M1	M2

DEVICES FOR SURFACE INSTALLATIONS GROUP II

ZONES	0	20	1	21	2	22
Type of atmosphere	G GAS	D DUST	G GAS	D DUST	G GAS	D DUST
Presence of hazardous atmosphere	Continuously (>1000 h/year)*		Not present during normal operation (>10 <1000 h/year)*		Accidental presence (>0.1<10 h/year)*	
Category of devices to use according to 2014/34/EU	1		2		3	

*indicative

CORRESPONDENCE BETWEEN ZONES AND CATEGORIES ACCORDING TO 2014/34/EU.

ZONE 0/ZONE 20 → CATEGORY 1: Devices in this category ensure an adequate degree of safety even in the presence of rare malfunctions.
These devices are used in zones in which an explosive atmosphere is present continuously for long periods.

ZONE 1/ZONE 21 → CATEGORY 2: Devices in this category ensure an adequate degree of safety even in the presence of a probable malfunction.
These devices are used in zones in which an explosive atmosphere is present occasionally.

ZONE 2/ZONE 22 → CATEGORY 3: Devices in this category ensure an adequate degree of safety during normal operation.
These devices are used in zones in which an explosive atmosphere is rarely present and only for brief periods.

MARKING: HOW TO READ IT

MARKING ON ELECTRICAL EQUIPMENT (EN 60079)

	A	B	C	D	E	F	G	H	L	M	N	O
EXAMPLE	Ex	II	3	G	Ex	nA	IIC	T4	Gc	/	X	20°C<Ta<60°C
		II	3	D	Ex	tc	IIIC	T120°C	Dc	IP65	X	20°C<Ta<60°C

(A) Means the equipment can be used in an ATEX zone

(B) Group: mining or other industries

(C) Category: indicates use in various zones

(D) Type of explosive atmosphere:
G = gas
D = dust

(E) Means the equipment may be used in an ATEX zone

(F) Method of protection from ignition sources (more than one possible)
tc = protection by enclosures
nA = non-sparking protection
mA, **mB** = protection by encapsulation
ia, **ib, ic** = sintrinsic safety

(G) Division of the explosivity group
IIC: explosive subgroup that comprises all types of gas
IIIC: explosive subgroup that includes combustible particles, conductive dust and not

(H) Temperature class:
maximum surface temperature in atmosphere with gas
maximum surface temperature in atmospheres with dust

(L) **Gc** = explosive atmospheres due to the presence of gas
Dc = explosive atmospheres due to the presence of dust

(M) Index of protection

(N) Presence of specific operating conditions

(O) Ambient temperature for use of the equipmento

MARKING ON NON-ELECTRICAL EQUIPMENT (UNI CEI EN ISO 80079-36 and UNI CEI EN ISO 80079-37) *FROM 1 NOVEMBER 2019*

	A	B	C	D	E	G	H	L	N	O
EXAMPLE	Ex	II	2	G	Ex h	IIC	T5	Gb	X	-10°C<Ta<80°C
		II	2	D	Ex h	IIIC	T100°C	Db	X	-10°C<Ta<80°C

(A) Means the equipment can be used in an ATEX zone

(B) Group: mining or other industries

(C) Category: indicates use in various zones

(D) Type of explosive atmosphere:
G = gas
D = dust

(E) Means the equipment may be used in an ATEX zone

(G) Division of the explosivity group
IIC: explosive subgroup that comprises all types of gas
IIIC: explosive subgroup that includes combustible particles, conductive dust and not

(H) Temperature class:
maximum surface temperature in atmosphere with gas
maximum surface temperature in atmospheres with dust

(L) **Gb** = explosive atmospheres due to the presence of gas
Db = explosive atmospheres due to the presence of dust

(N) Presence of specific operating conditions

(O) Ambient temperature for use of the equipmento

MARKING ON NON-ELECTRICAL EQUIPMENT (UNI EN 13463) *UNTIL OCTOBER 31, 2019*

EXAMPLE

A	B	C	D	E	F	G	H	L
Ex	II	2	GD	c	T4	T120°C	X	20°C<aT<60°C

- (A) Means the equipment can be used in an ATEX zone
- (B) Group: mining or other industries
- (C) Category: indicates use in various zones
- (D) Type of explosive atmosphere:
  G = gas
  D = dust
- (E) Method of protection from ignition sources:
  c = protection by constructional safety
- (F) Temperature class:
  maximum surface temperature in atmosphere with gas
- (G) Maximum surface temperature in atmospheres with dust
- (H) Presence of specific operating conditions
- (L) Ambient temperature for use of the equipmento

TYPE OF PROTECTION AGAINST SOURCES OF IGNITION

Protection symbol		Zones 0	20	1	21	2	22	Description
c				X	X	X	X	Protection through constructional safety (UNI CEI EN ISO 80079-37)
d				X	X	X	X	**Flameproof enclosure.** Type of protection of an electrical apparatus that contains parts capable of triggering an explosion in an enclosure able to withstand the pressures generated by internal explosions.
e				X	X	X	X	**Enhanced safety.** Electrical appliance with a high safety coefficient.
i	ia	X	X	X	X	X	X	**Intrinsic safety.** Electrical circuit in which neither sparks nor temperatures can trigger an explosion during normal operation or a malfunction.
	ib			X	X	X	X	
m				X	X	X	X	**Encapsulation.** Special casing in which the parts that could trigger an explosion are immersed in a substance that prevents contact with the explosive atmosphere.
n						X	X	Type of protection for electrical appliances designed so that they do not ignite the surrounding explosive atmosphere during normal operation and in specific conditions of malfunction. There are 5 categories: **nA** (non-scintillating); **nC** (hermetic seal); **nR** (limited respiration); **nL** (limited energy); **nP** (pressurisation).
o				X	X	X	X	**Immersion.** Electrical appliance immersed in oil.
p				X	X	X	X	**Pressurised enclosure.** Pressurisation with respect to the external pressure is maintained by means of an inert gas.
q				X	X	X	X	Enclosure containing filling powder.

TEMPERATURE CLAS

GROUP I: Temperature ≤ 150 °C or ≤ 450 °C according to the layer of dust accumulated on the device.

GROUP II:

Temperature classes for gas (G)	Admissible surface temperature
T1	450 °C
T2	300 °C
T3	200 °C
T4	135 °C
T5	100 °C
T6	85 °C

USER AND SUPPLIER: OBLIGATIONS AND RESPONSIBILITIES

It is important to highlight the need for the user and supplier to collaborate and to exchange all the information required to define the types of products that can be used in full compliance with the safety standards.

USER: after performing a company-wide risk analysis (pursuant to directive 99/92/EC) and identifying the risk zone in which the purchased part will be operating, the user must inform the SUPPLIER, who must check that the products supplied are compatible with the zone indicated and that the environmental conditions are within the set operating range for the parts.
It is also important to make sure that the operating instructions are always attached to the products supplied.

CONFORMITY DECLARATIONS, CERTIFICATES, INSTRUCTIONS

Please look at our website **https://www.metalwork.it/pneumatic-components/certificates-products/cert-8**

SAFETY COMPONENTS: OVERVIEW OF THE STANDARDS

INTRODUCTION

The issue of safety in the workplace is of absolute importance and over the years the standard setters have developed a series of continuously evolving standards, the focal point of which remains the Machinery Directive.
In order to ensure conformity of the machine, the manufacturer must verify that it meets the safety requirements listed in the directive and guarantee compliance with the harmonised standards published in the European Union's Official Journal and relating to the product in question.
There are three types of safety standard for machinery:

- type **A**, which establish general principles applying to the design of all machinery
- type **B**, which deal with one or more safety aspects for a wide range of machinery
- type **C**, which deal in detail with the specific category of machines

Type **A** standards include EN ISO 12100, which cover the basic concepts and general principles for the design of safe machinery, and EN ISO 14121, which describe a hazard identification and risk assessment method.

Type **B** standards include EN ISO 13840, which provides the tools for designing parts of control systems linked to machine safety, mainly the control systems, which are made of components featuring various kinds of technology to reduce risks associated with use of the machine, and IEC 62061, which only refers to systems using electrical and electronic technologies.
One of the main affinities between EN ISO 13849 and IEC 62061 is that the former establishes as the desired safety parameter an index called PL (performance level) and the latter identifies a similar parameter called SIL (safety integrity level). Both indices represent the machine's reliability in terms of the probability of a dangerous failure. The table below shows their relationship:

PL	SIL
a	No correspondence
b	1
c	1
d	2
e	3

EN 982 and EN 983 are also type B standards and both deal with safety, but unlike the previous standards they concern components (hydraulic and pneumatic respectively) rather than controlled devices.

When type **C** standards exist for a particular machine, the manufacturer can adopt them directly to achieve the presumption of compliance with the Machinery Directive; if no type C standard exists, it is still necessary to implement a risk-reduction strategy like the one described in harmonised standards type A and B.
Since revision 98/37/EC, the Machinery Directive has dealt not only with machines but also with safety components, namely components made and sold specifically to achieve a safety function and the breakage or malfunction of which jeopardizes personal health and safety.

EN ISO 13849

When type C standards do not exist for a particular machine, the manufacturer can adopt the risk-reduction strategy indicated in EN ISO 13849. This standard is divided into two parts: the first part sets out the general principles and the method to follow; the second part is dedicated to validation of the results.
According to the first part of the standard, a machine designer can reduce the risk by designing special safety-related parts of control systems (SRP/CS) that perform one or more safety functions, such as emergency stops, prevention of unexpected start-up, isolation and energy dissipation.
We quote the example of a function comprising three SRP/CSs: a safety barrier (input – sensor), a PLC (processing - logic) and a valve (output - actuator). In the event of intrusion, the barrier relays a signal to the PLC, which activates the valve, the job of which is to relieve a section of the pressurized pneumatic circuit, thereby providing isolation and energy dissipation.

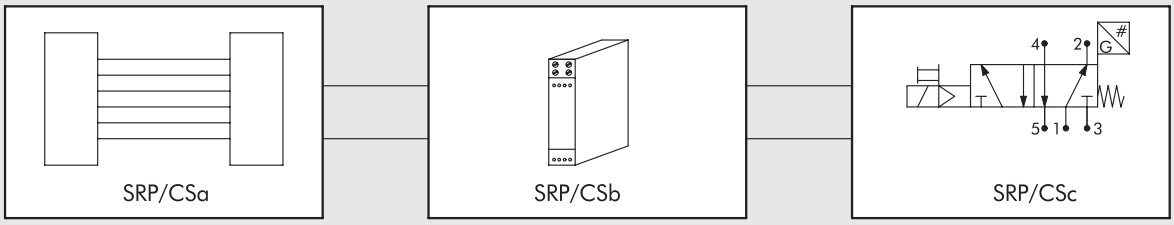

For each safety function it is necessary to determine the Performance Level requested (PLr), according to the procedure indicated in Annexe A to the standard. The following are assessed:

- the severity of the lesion (S), resulting from the failure
- the hazard exposure frequency (F)
- the possibility of avoiding the hazard (P)

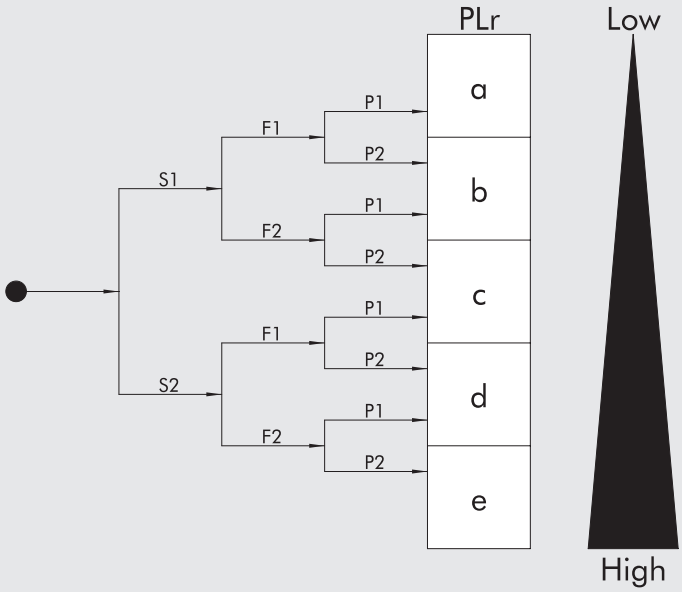

If, for example, the severity of a lesion resulting from a failure is low and/or the hazard exposure frequency is low and/or the hazard avoidance possibility is high, the PLr will be low. On the contrary, if the severity and/or exposure frequency is/are high and/or the hazard avoidance possibility is low, then the PLr for that safety function will be high.
Therefore, for each SRP/CS or combination of SRP/CSs performing a safety function, the machine designer must determine the achievable performance level PL.
Certain parameters including the following must be used for this calculation:

- MTTFd (Mean Time to dangerous Failure) of the single components
- DC (Diagnostic Coverage)
- CCF (Common Cause Failure)
- function structure
- compliance of the components used with the basic and/or proven safety principles.

The **MTTFd**, which is the mean time between two dangerous failures, can be obtained from values referring to the operating cycles of the safety function and the B10d of the components, namely the number of cycles 10 percent of the components suffer a dangerous failure. The B10d is equal to double B10, which in turn is an index of the reliability of the component obtainable by following the instructions in EN ISO 19973.
The B10d values of Metal Work products are published on the company's website:
https://www.metalwork.it/pneumatic-components/safety-directive-0001162.html

DC (diagnostic coverage) and **CCF** (common cause failure) are obtained using the appendices to EN ISO 13849-1; DC can be determined using failure mode and effects analysis (FMEA) or a similar method.

The structure of the function depends on the architecture. One possible kind is unmonitored single-channel architecture:

Were:
im: interconnection means
I: input device, e.g. sensor
L: logic
O: output device, e.g. valve

Then comes single-channel architecture with diagnostics. In this case, a module called Test Equipment (TE) provides an output (OTE) in some way linked to the status of the safety function:

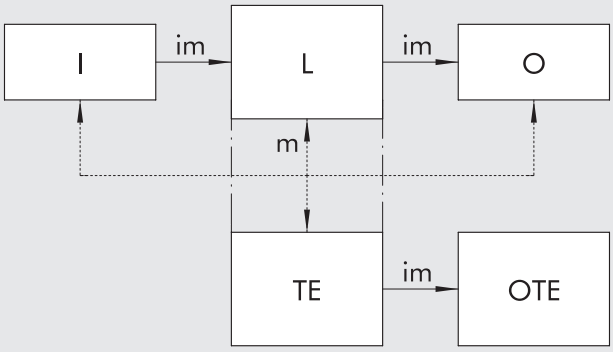

Were:
im: interconnection means
I: input device, e.g. sensor
L: logic
m: means of surveillance
O: output device, e.g. valve
OTE: Test Equipment OUTPUT
TE: Test Equipment

A third example is double-channel architecture, which exploits the redundancy of a function – if one channel fails the other remains active:

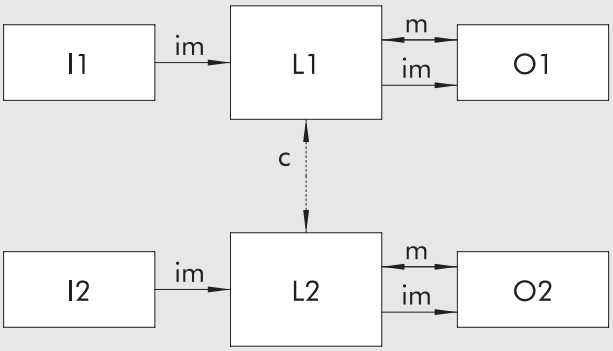

Were:
im: interconnection means
I1, I2: input device, e.g. sensor
L1, L2: logic
m: means of surveillance
O1, O2: output device, e.g. valve
c: crossed check

As regards the conformity of components used to the basic and/or proven safety principles, reference should be made to a series of considerations presented in EN ISO 13849 standards, which guarantee that the SRP/CS and related components comply with the design, construction and assembly principles.
With these data, the machine designer can determine the safety function category (B, 1, 2, 3 or 4, in increasing order of importance) and the PL achieved; It is important therefore to check it is equal to or greater than the PLr required.

UL AND CSA STANDARDS

UL is an independent organisation involved in the safety certification of products for the North American market. The coils are certified to UL standard 429 - electrically-operated valves.
The UR mark concerns UL-recognised components and is used for the components that are part of a larger product or system. This is why UR can be read on the coil.
The certification of these components is only valid if they are used under the manufacturer's stated conditions (e.g. in our case, voltage +10%).
Companies manufacturing certified components are included in the UL-list of certified manufacturers.
The list does not include the name Metal Work but rather the name AMISCO (UL file E343908), with which we have an agreement for the supply and customisation of coils.
The use of approved coils does not automatically certify its application on a specific machine or plant. Such approval will therefore be up to the manufacturer of the machine or plant.
CSA (Canadian Standard Association) safety standards are applicable in Canada. The coil complies with CSA 22.2.

Metal Work S.p.A. Copyright 2026
All rights reserved. All images, products, decorations, text and signs contained in this catalogue and graphic layout are the exclusive industrial and intellectual property of Metal Work S.p.A. Any unauthorised reproduction and/or use of any kind or for any reason and in any form or by any means is forbidden, with the sole exception of uses for technical reasons as required under any supply agreements entered into with Metal Work S.p.A.

The dimensions shown in this catalogue are subject to variations at any time without prior notice.

Cod. 9910204 - IM36 - 02/2026
Stampa: Euroteam (Bs)